



**FCC PART 15C
TEST REPORT
No. I19Z62195-IOT02**

for

Xiaomi Communications Co., Ltd.

Mobile Phone

Model Name: M2001J2G,M2001J1G

FCC ID: 2AFZZJAG

with

Hardware Version: P2.2

Software Version: MIUI 11

Issued Date: 2020-3-3

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@caict.ac.cn, website: www.chinattl.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z62195-IOT02	Rev.0	1st edition	2020-2-21
I19Z62195-IOT02	Rev.1	1. Update results of Peak Output Power - Conducted. 2. Add Antenna gain in chapter 3.1.	2020-3-3

CONTENTS

1. TEST LABORATORY.....	5
1.1. INTRODUCTION & ACCREDITATION.....	5
1.2. TESTING LOCATION.....	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATA.....	6
1.5. SIGNATURE.....	6
2. CLIENT INFORMATION.....	7
2.1. APPLICANT INFORMATION.....	7
2.2. MANUFACTURER INFORMATION.....	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	8
3.1. ABOUT EUT.....	8
3.2. INTERNAL IDENTIFICATION OF EUT.....	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. NORMAL ACCESSORY SETTING.....	9
3.5. GENERAL DESCRIPTION.....	9
4. REFERENCE DOCUMENTS.....	10
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	10
4.2. REFERENCE DOCUMENTS FOR TESTING.....	10
5. TEST RESULTS.....	11
5.1. SUMMARY OF EUT MODE.....	11
5.2. SUMMARY OF TEST RESULTS.....	11
5.3. STATEMENTS.....	11
6. TEST FACILITIES UTILIZED.....	12
7. MEASUREMENT UNCERTAINTY.....	13
7.1. PEAK OUTPUT POWER - CONDUCTED.....	13
7.2. FREQUENCY BAND EDGES - CONDUCTED.....	13
7.3. FREQUENCY BAND EDGES - RADIATED.....	13
7.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	13
7.5. TRANSMITTER SPURIOUS EMISSION - RADIATED.....	13
7.6. TIME OF OCCUPANCY (DWELL TIME).....	13
7.7. 20dB BANDWIDTH.....	14
7.8. CARRIER FREQUENCY SEPARATION.....	14
7.9. AC POWERLINE CONDUCTED EMISSION.....	14
ANNEX A: DETAILED TEST RESULTS.....	15
A.1. MEASUREMENT METHOD.....	15
A.2. PEAK OUTPUT POWER – CONDUCTED.....	16



A.3. FREQUENCY BAND EDGES – CONDUCTED..... 23

A.4. FREQUENCY BAND EDGES –RADIATED.....30

A.5. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....39

A.6. TRANSMITTER SPURIOUS EMISSION - RADIATED..... 64

A.7. TIME OF OCCUPANCY (DWELL TIME).....80

A.8. 20DB BANDWIDTH..... 91

A.9. CARRIER FREQUENCY SEPARATION.....97

A.10. NUMBER OF HOPPING CHANNELS..... 100

A.11. AC POWERLINE CONDUCTED EMISSION..... 104

ANNEX B: ACCREDITATION CERTIFICATE..... 110



1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191


1.3. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2019-12-18
Testing End Date: 2020-2-20

1.5. Signature



Wu Le
(Prepared this test report)



Sun Zhenyu
(Reviewed this test report)



Li Zhuofang
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Xiaomi Communications Co., Ltd.
Address /Post: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District,
Beijing, China, 100085
City: Beijing
Postal Code: 100085
Country: China
Telephone: 010-60606666-8088
Fax: 010-60606666-1101

2.2. Manufacturer Information

Company Name: Xiaomi Communications Co., Ltd.
Address /Post: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District,
Beijing, China, 100085
City: Beijing
Postal Code: 100085
Country: China
Telephone: 010-60606666-8088
Fax: 010-60606666-1101

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Mobile Phone
Model Name	M2001J2G\M2001J1G
FCC ID	2AFZZJAG
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
Power Supply	3.85V (M2001J2G)\3.87V(M2001J1G)
Antenna 3 gain	-0.90dBi
Antenna 4 gain	-5.70dBi

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT3 (M2001J2G)	860211040055024	P2.2	MIUI 11
EUT4 (M2001J2G)	860211040054548	P2.2	MIUI 11
EUT5 (M2001J1G)	861543040045269	P2.2	MIUI 11
EUT2 (M2001J2G)	860211040037477/ 860211040037485	P2.2	MIUI 11

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	SN	Remarks
AE1	battery	/	/
AE3	Travel charger	/	/
AE6	USB Cable	/	/
AE7	USB Cable	/	/
AE11	battery	/	/
AE13	Travel charger	/	/
AE16	USB Cable	/	/

AE1

Model	BM4N
Manufacturer	/
Capacitance	4680 mAh
Nominal voltage	3.85V

AE3

Model	MDY-11-EL
-------	-----------

Manufacturer	Xiaomi Communications Co., Ltd.
Length of cable	/
AE6	
Model	L63312
Manufacturer	LUXSHARE Precision Industry Co., Ltd.
Length of cable	/
AE7	
Model	K63312
Manufacturer	SU ZHOU KELI SCIENCE&TECHNOLOGY DEVELOPMENT CO.,LTD.
Length of cable	/
AE11	
Model	BM4M
Manufacturer	/
Capacitance	4400 mAh
Nominal voltage	3.87V
AE13	
Model	MDY-11-EC
Manufacturer	Huizhou BYD Electronic Co.,Ltd.
Length of cable	/
AE16	
Model	L63512
Manufacturer	LUXSHARE Precision Industry Co., Ltd.
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery should be used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of Mobile Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	2018
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

5. Test Results

5.1. Summary of EUT Mode

Two modes are provided:

Mode	Conditions
Mode A	Antenna3
Mode B	Antenna4

*For the test results, the EUT had been tested all conditions. But only the worst case(Mode A) was shown in test report except the " RF output power"test was shown all conditions.

5.2. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	P
Frequency Band Edges- Conducted	15.247 (d)	P
Frequency Band Edges- Radiated	15.247, 15.205, 15.209	P
Transmitter Spurious Emission - Conducted	15.247 (d)	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	P
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	P
20dB Bandwidth	15.247 (a)(1)	NA
Carrier Frequency Separation	15.247 (a)(1)	P
Number of hopping channels	15.247 (a)(b)(iii)	P
AC Powerline Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.3. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

The M2001J2G is a new product for this testing. The M2001J1G is a variant product of M2001J2G and shares the M2001J2G results.

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2020-11-29
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	1 year	2020-11-29
3	LISN	ENV216	101200	Rohde & Schwarz	1 year	2020-04-27
4	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2020-03-14
5	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	R&S	1 year	2021-03-05
2	BiLog Antenna	VULB9163	1222	Schwarzbeck	1 year	2020-03-14
3	Dual-Ridge Waveguide Horn Antenna	3117	00139065	ETS-Lindgren	1 year	2020-11-10
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	1 year	2020-06-18
5	Vector Signal Analyzer	FSV	101047	Rohde & Schwarz	1 year	2020-05-16
6	Bluetooth Tester	CBT	101042	Rohde & Schwarz	1 year	2021-01-01

7. Measurement Uncertainty

7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.2. Frequency Band Edges - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

7.3. Frequency Band Edges - Radiated

Measurement Uncertainty:

Measurement Uncertainty (k=2)	/
-------------------------------	---

7.4. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

7.5. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty(dBm) (k=2)
9kHz-30MHz	/
30MHz ≤ f ≤ 1GHz	5.40
1GHz ≤ f ≤ 18GHz	4.32
18GHz ≤ f ≤ 40GHz	5.26

7.6. Time of Occupancy (Dwell Time)

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.88ms
-------------------------------	--------

7.7. 20dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

7.8. Carrier Frequency Separation

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

7.9. AC Powerline Conducted Emission

Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.38dB
-------------------------------	--------


ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

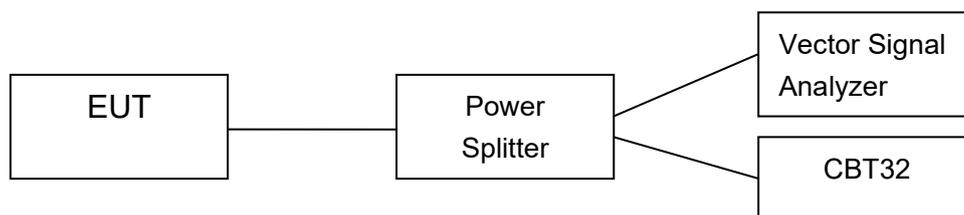

A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

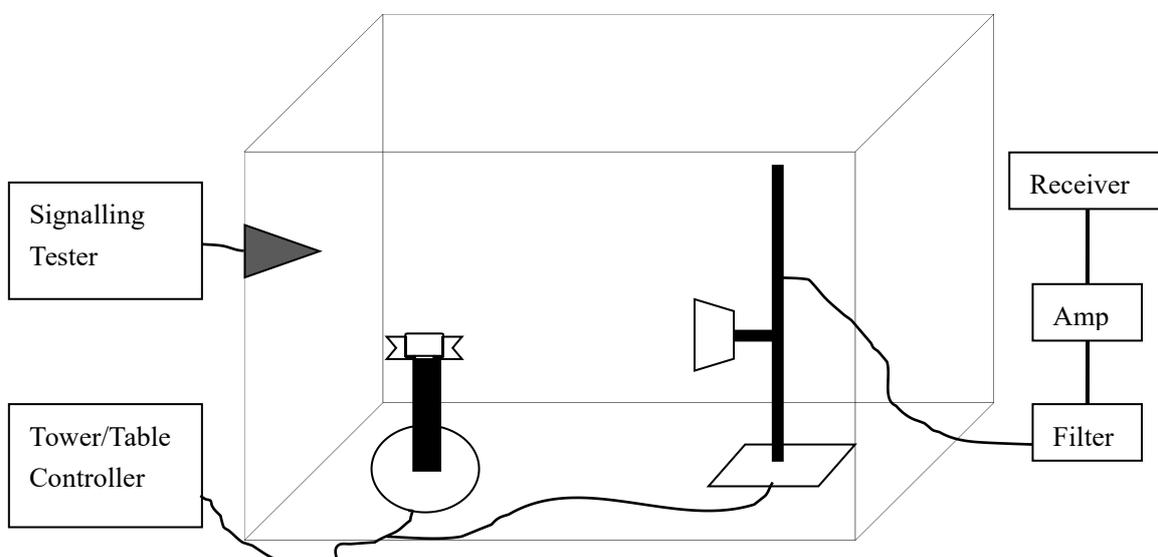

A.2. Peak Output Power – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 4s
- Detector function: peak
- Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

Measurement Limit:

Standard	Limits	
FCC Part 15.247 (b)(1)	Bandwidth \leq 1MHz	30dBm (1W)
	Bandwidth $>$ 1MHz	21dBm (125mW)

Measurement Results:

Antenna 3

For GFSK

Channel	Ch 0 2402 MHz		Ch 39 2441 MHz		Ch 78 2480 MHz		Conclusion
Peak Output Power -Conducted (dBm)	Fig.1	17.77	Fig.2	18.79	Fig.3	17.44	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz		Ch 39 2441 MHz		Ch 78 2480 MHz		Conclusion
Peak Output Power -Conducted (dBm)	Fig.4	17.16	Fig.5	17.88	Fig.6	17.21	P

For 8DPSK

Channel	Ch 0 2402 MHz		Ch 39 2441 MHz		Ch 78 2480 MHz		Conclusion
Peak Output Power -Conducted (dBm)	Fig.7	17.49	Fig.8	18.16	Fig.9	17.48	P

Conclusion: PASS

Antenna 4
For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power -Conducted (dBm)	16.04	16.85	16.47	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power -Conducted (dBm)	15.51	16.46	15.97	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power -Conducted (dBm)	15.74	16.59	16.16	P

Note: only the worst case plot (Antenna 3) was shown in this chapter.

Conclusion: PASS

The Peak Output Power –Radiated is listed below:

Antenna 3 gain = -0.90 dBi

Antenna 4 gain = -5.70 dBi

Antenna 3
For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power –Radiated (dBm)	16.87	17.89	16.54	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power –Radiated (dBm)	16.26	16.98	16.31	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power –Radiated (dBm)	16.59	17.26	16.58	P

Note: These *values are calculated with the antenna gain.

Conclusion: PASS

Antenna 4
For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power -Radiated (dBm)	10.34	11.15	10.77	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power -Radiated (dBm)	9.81	10.76	10.27	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Output Power -Radiated (dBm)	10.04	10.89	10.46	P

Note: These *values are calculated with the antenna gain.

Conclusion: PASS

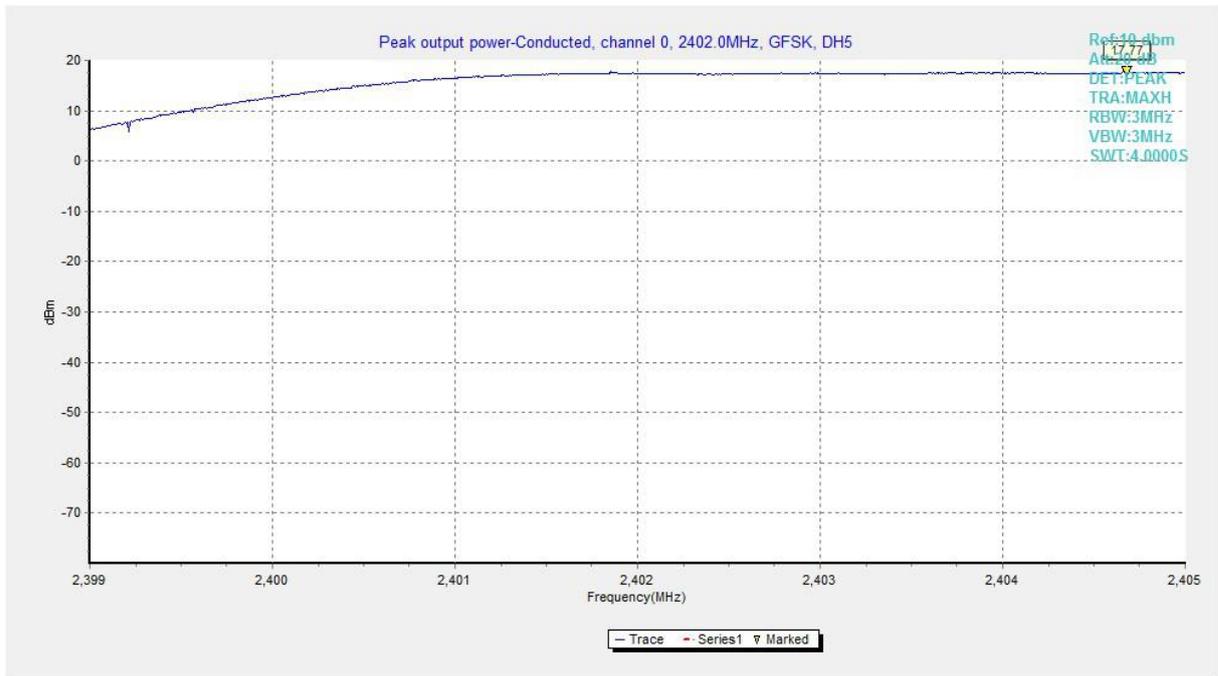


Fig.1. Peak Output Power -Conducted: Antenna 3, GFSK, Channel 0,

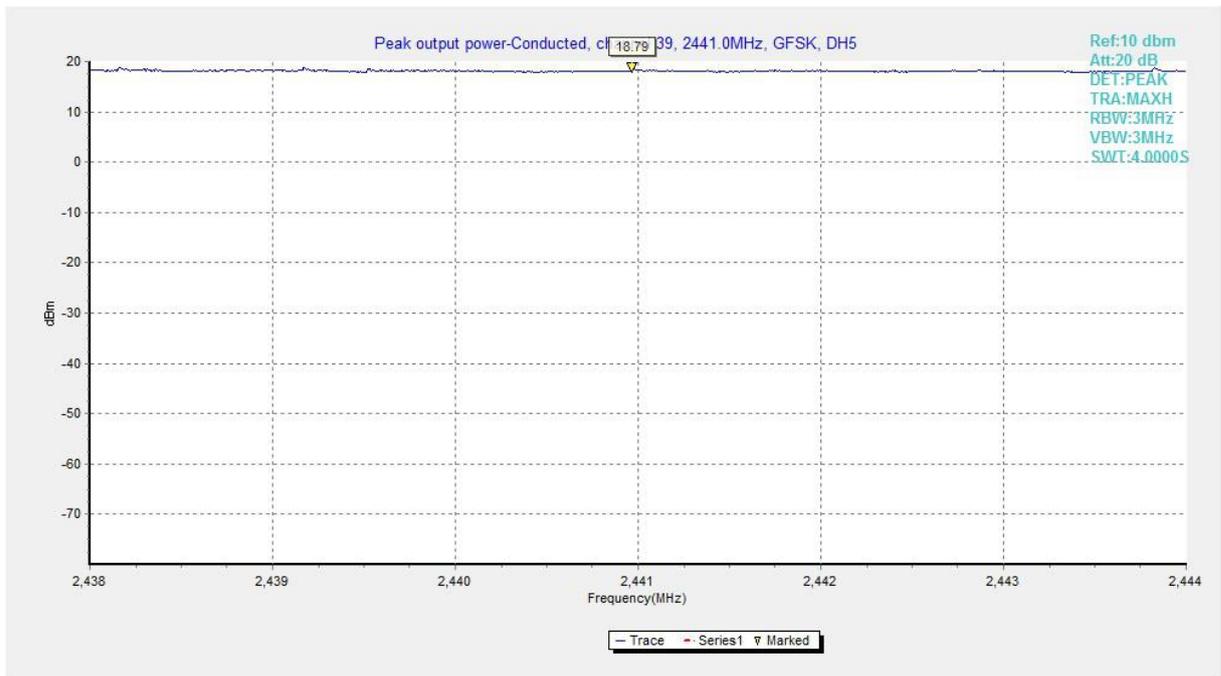


Fig.2. Peak Output Power -Conducted: Antenna 3, GFSK, Channel 39,

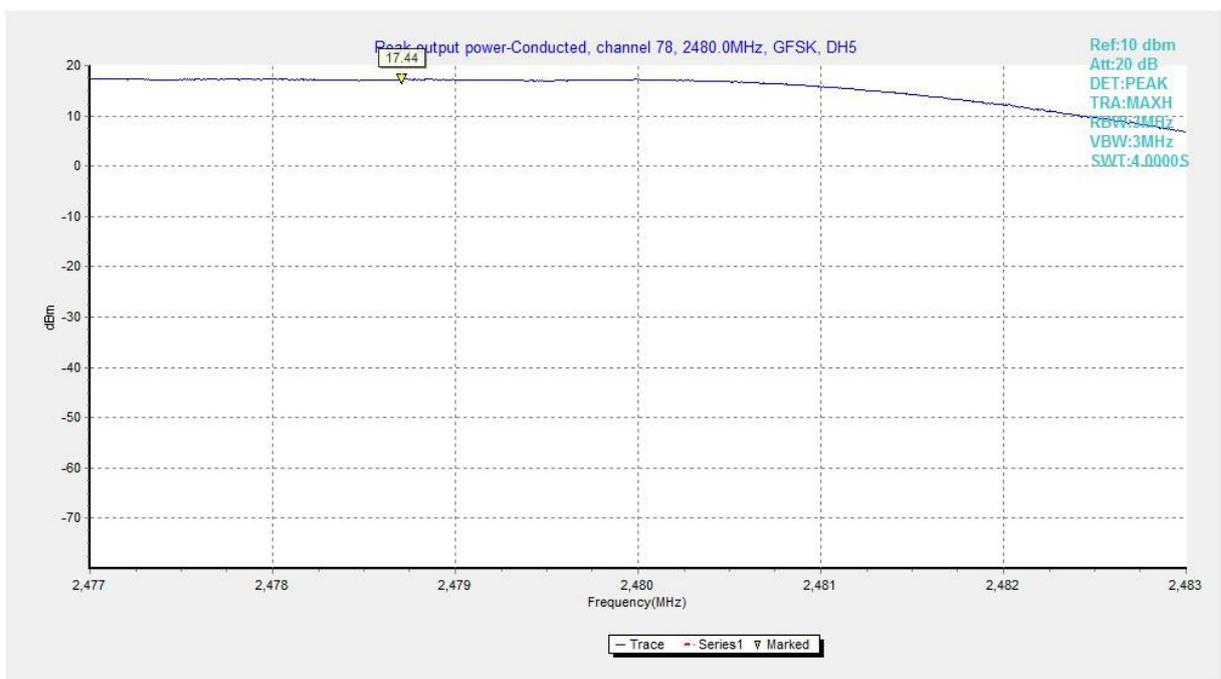


Fig.3. Peak Output Power -Conducted: Antenna 3, GFSK, Channel 78,

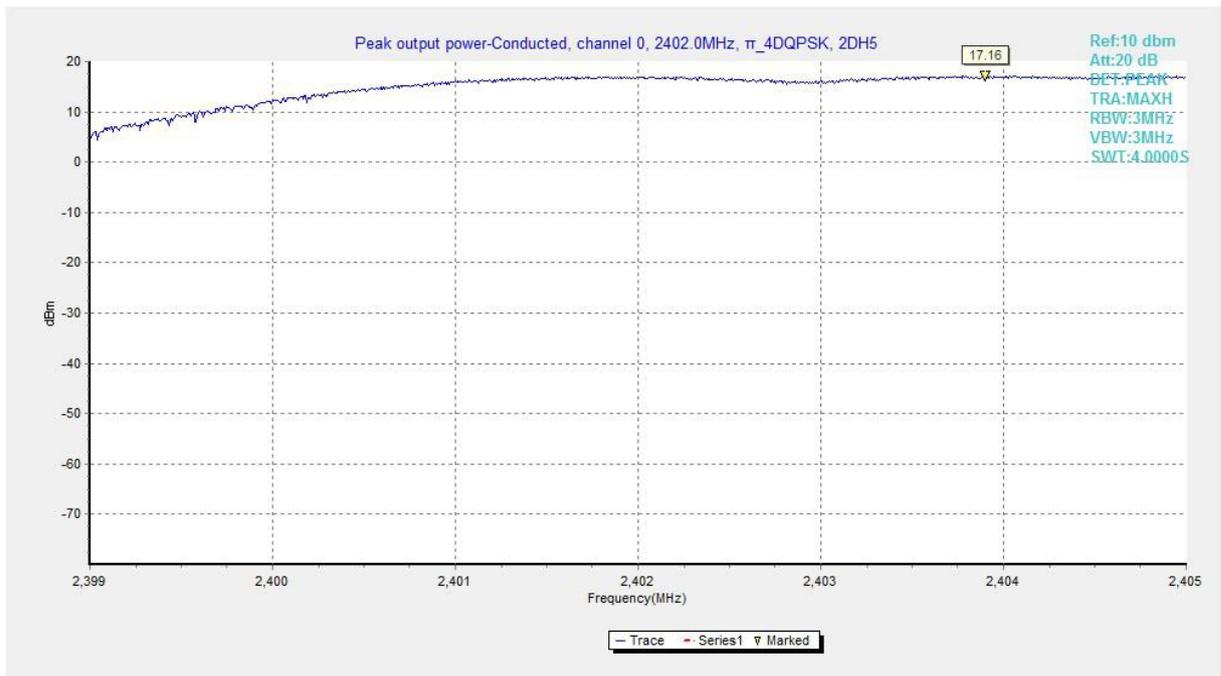


Fig.4. Peak Output Power -Conducted: Antenna 3, $\pi/4$ DQPSK, Channel 0,

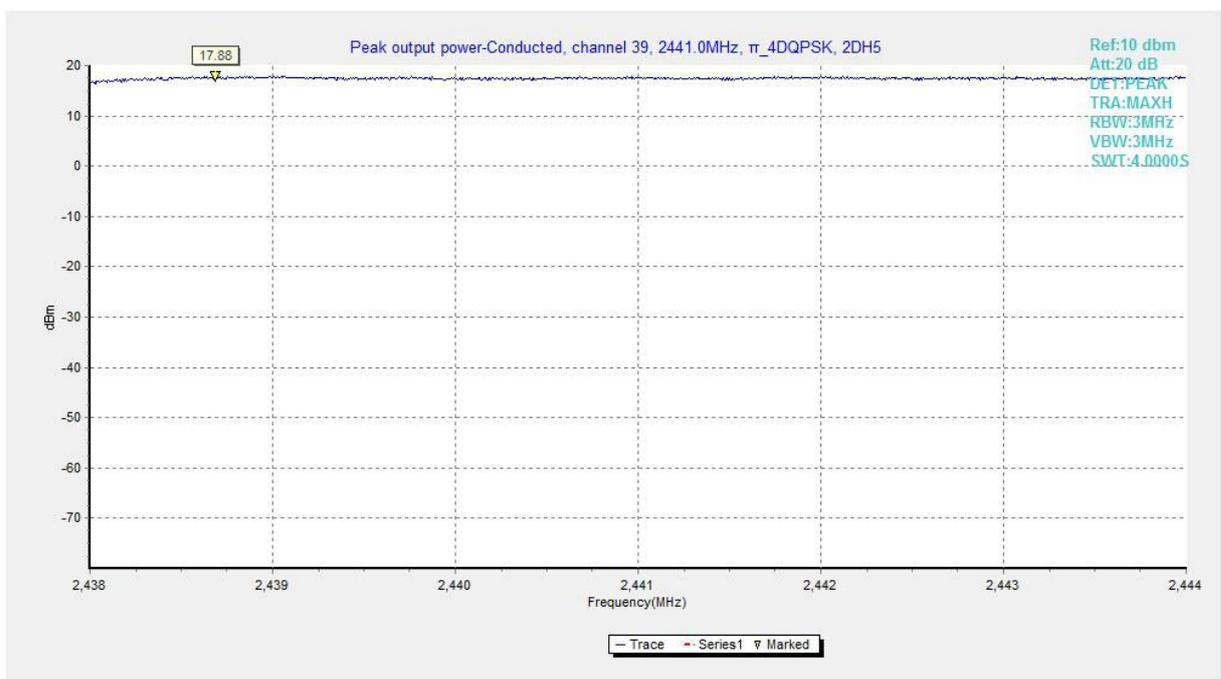


Fig.5. Peak Output Power -Conducted: Antenna 3, $\pi/4$ DQPSK, Channel 39,

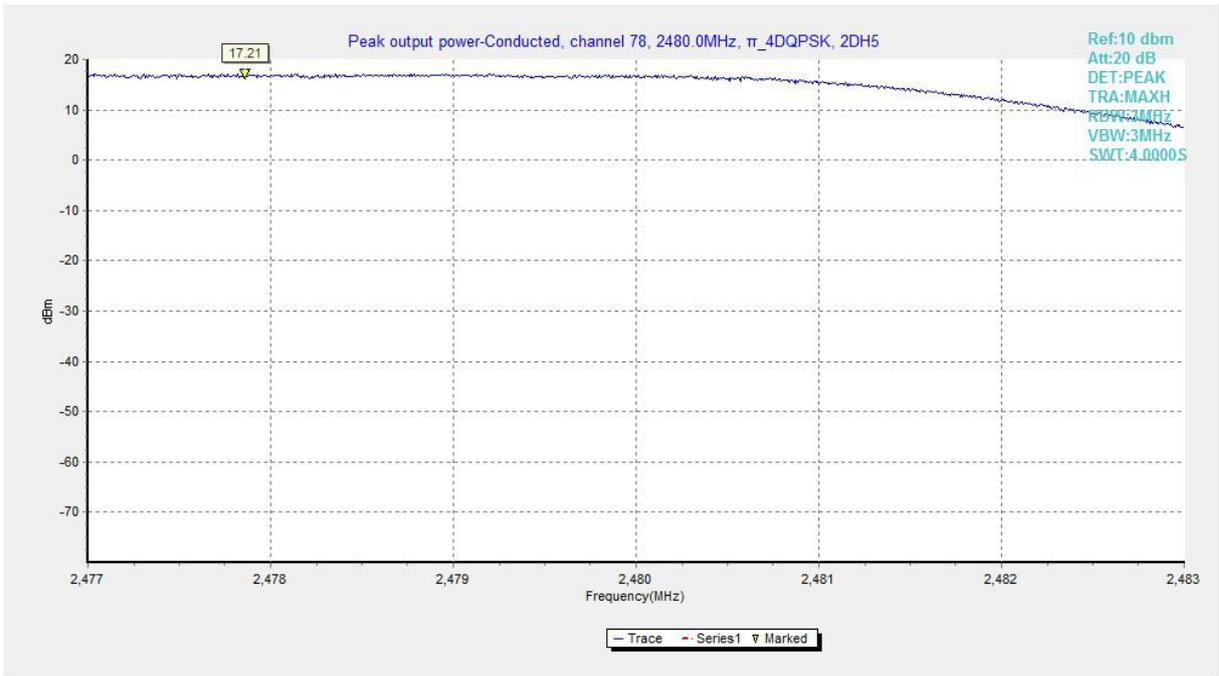


Fig.6. Peak Output Power -Conducted: Antenna 3, $\pi/4$ DQPSK, Channel 78,

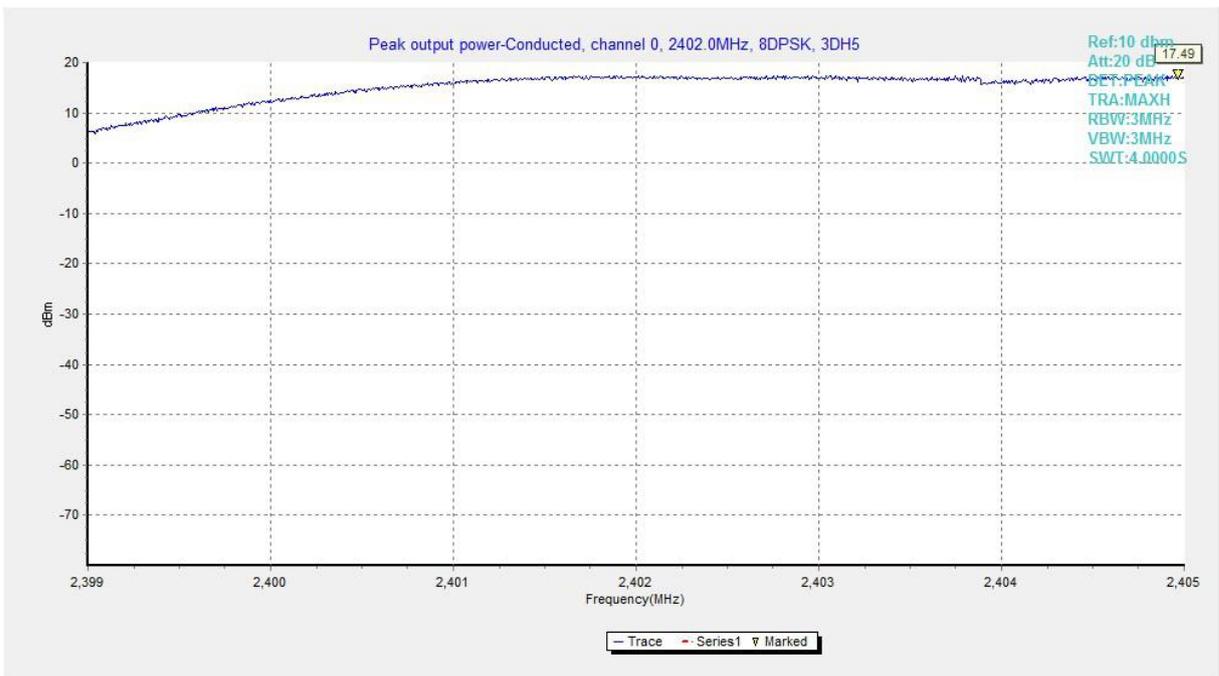


Fig.7. Peak Output Power -Conducted: Antenna 3, 8DPSK, Channel 0,

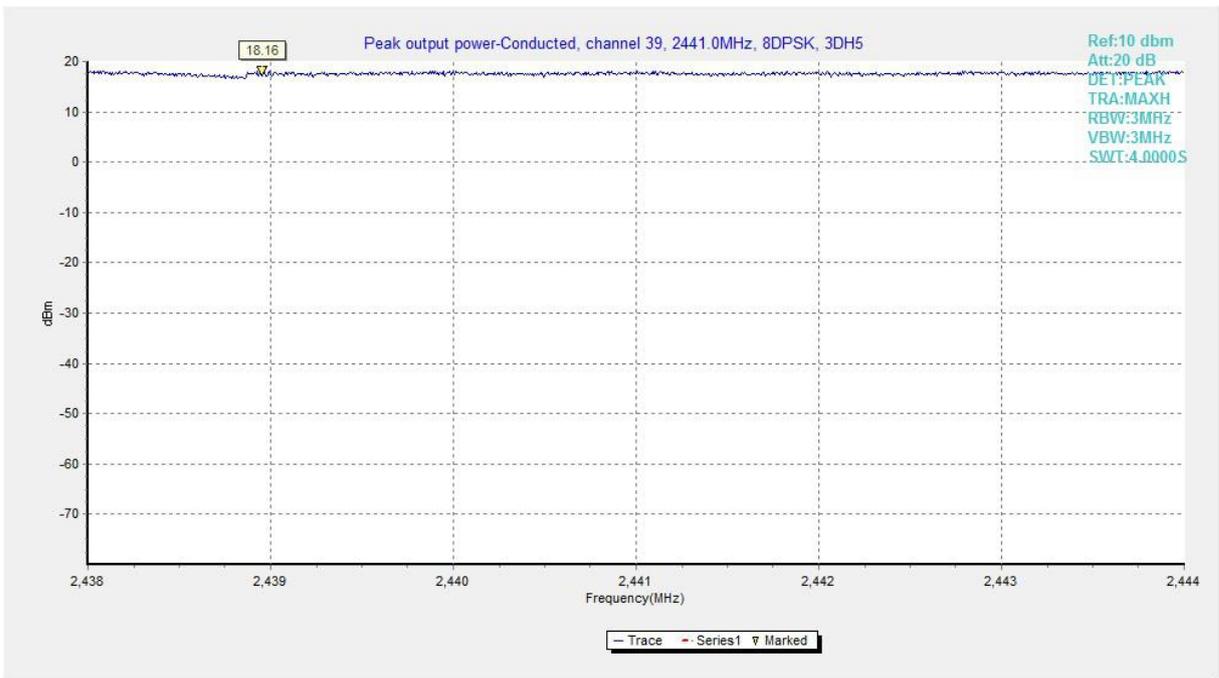


Fig.8. Peak Output Power -Conducted: Antenna 3, 8DPSK, Channel 39,

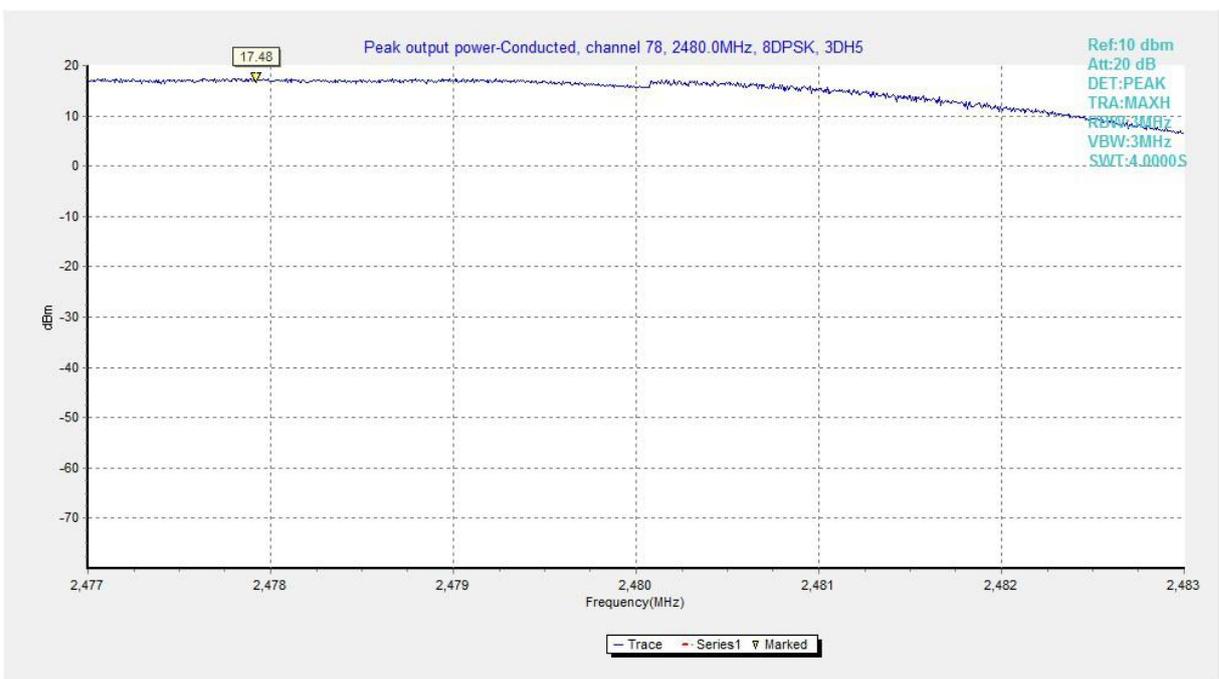


Fig.9. Peak Output Power -Conducted: Antenna 3, 8DPSK, Channel 78,

A.3. Frequency Band Edges – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: 10 MHz
- Resolution Bandwidth: 100 kHz
- Video Bandwidth: 300 kHz
- Sweep Time:Auto
- Detector: Peak
- Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.10	-64.14	P
	Hopping ON	Fig.11	-68.88	P
78	Hopping OFF	Fig.12	-68.88	P
	Hopping ON	Fig.13	-71.00	P

For $\pi/4$ DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.14	-63.32	P
	Hopping ON	Fig.15	-67.76	P
78	Hopping OFF	Fig.16	-69.38	P
	Hopping ON	Fig.17	-66.77	P

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.18	-60.67	P
	Hopping ON	Fig.19	-66.71	P

78	Hopping OFF	Fig.20	-68.77	P
	Hopping ON	Fig.21	-69.54	P

Conclusion: PASS

Test graphs as below

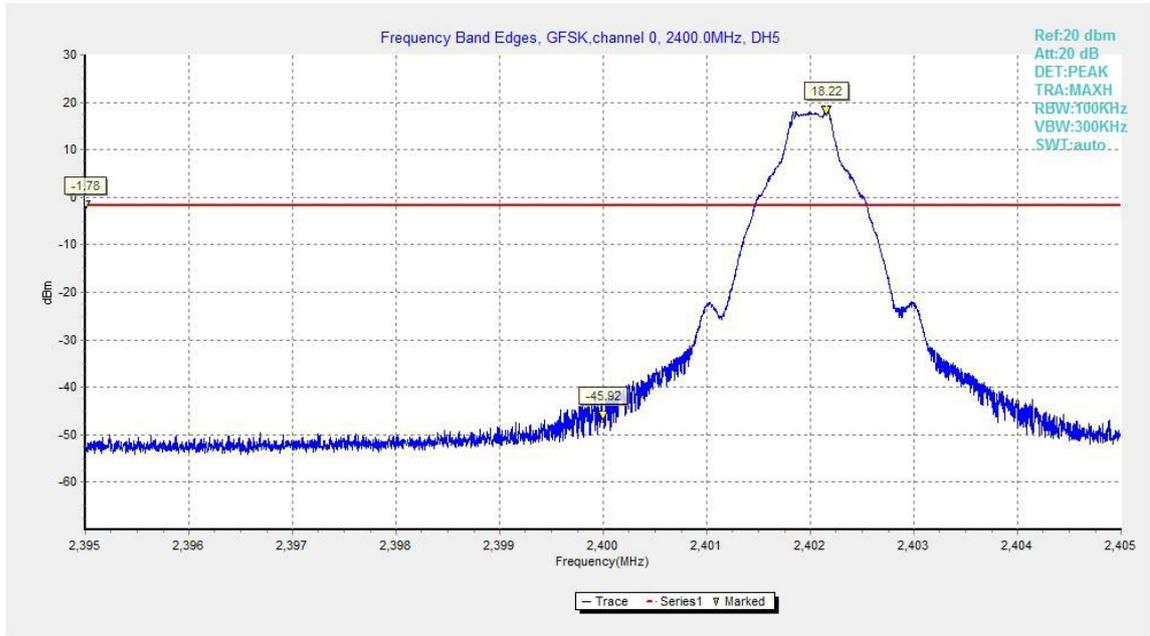


Fig.10. Frequency Band Edges: GFSK, Channel 0, Hopping Off

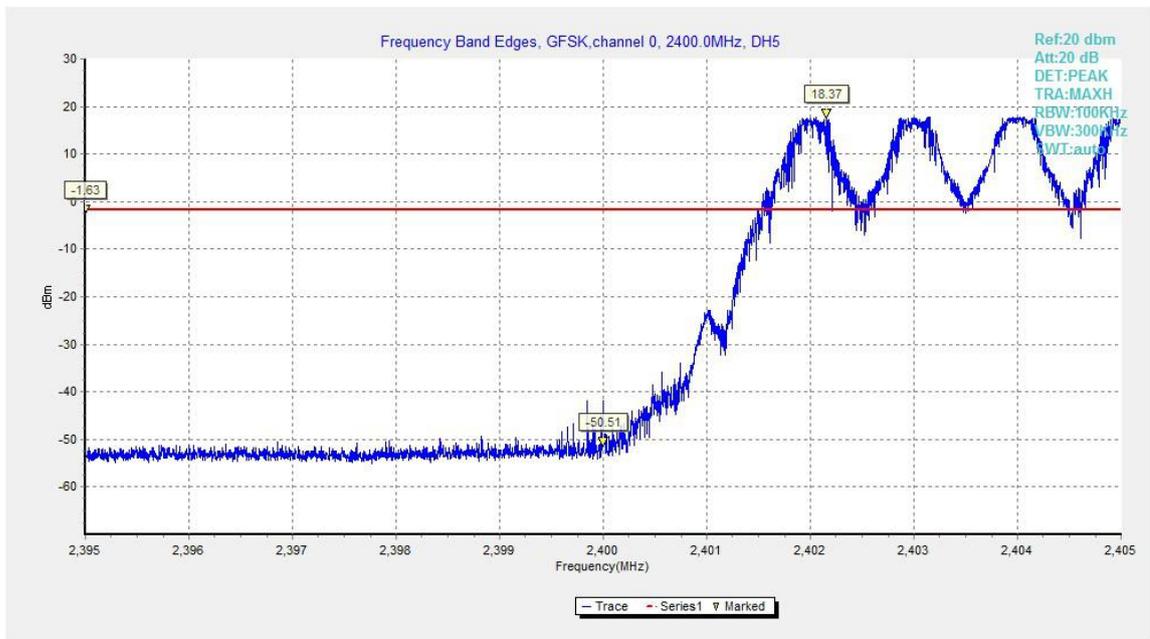


Fig.11. Frequency Band Edges: GFSK, Channel 0, Hopping On

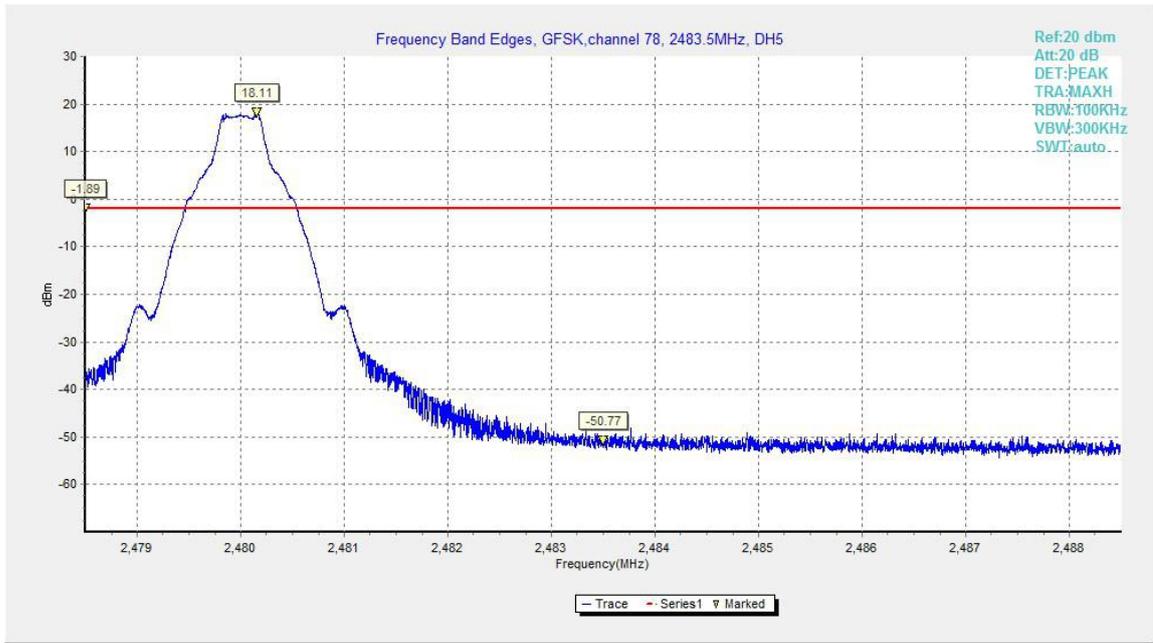


Fig.12. Frequency Band Edges: GFSK, Channel 78, Hopping Off

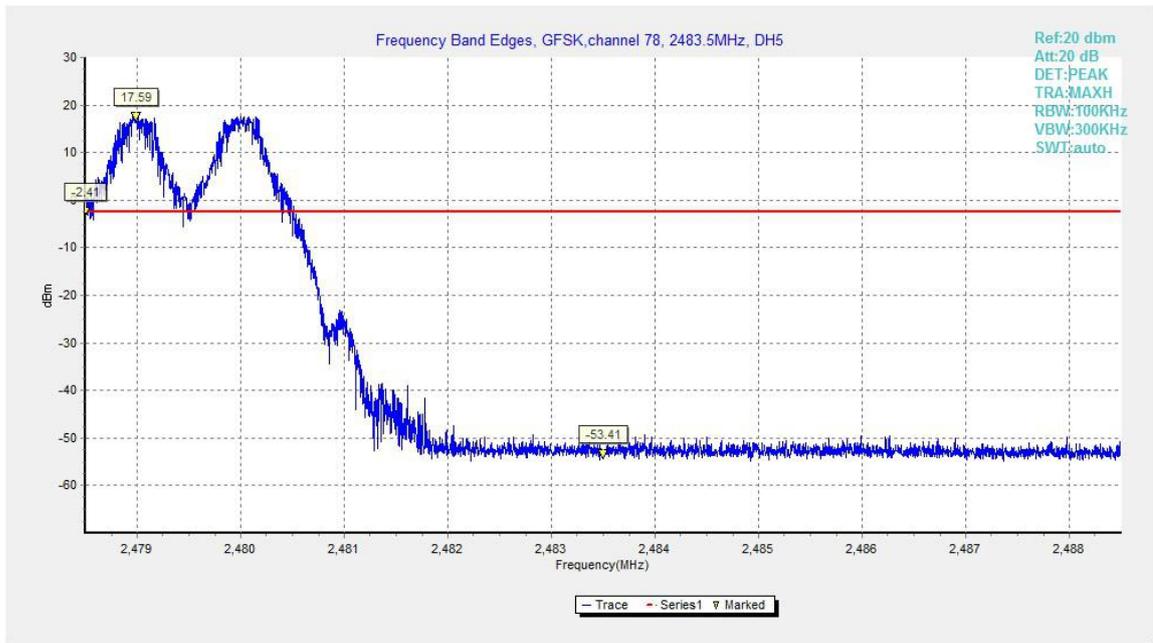


Fig.13. Frequency Band Edges: GFSK, Channel 78, Hopping On

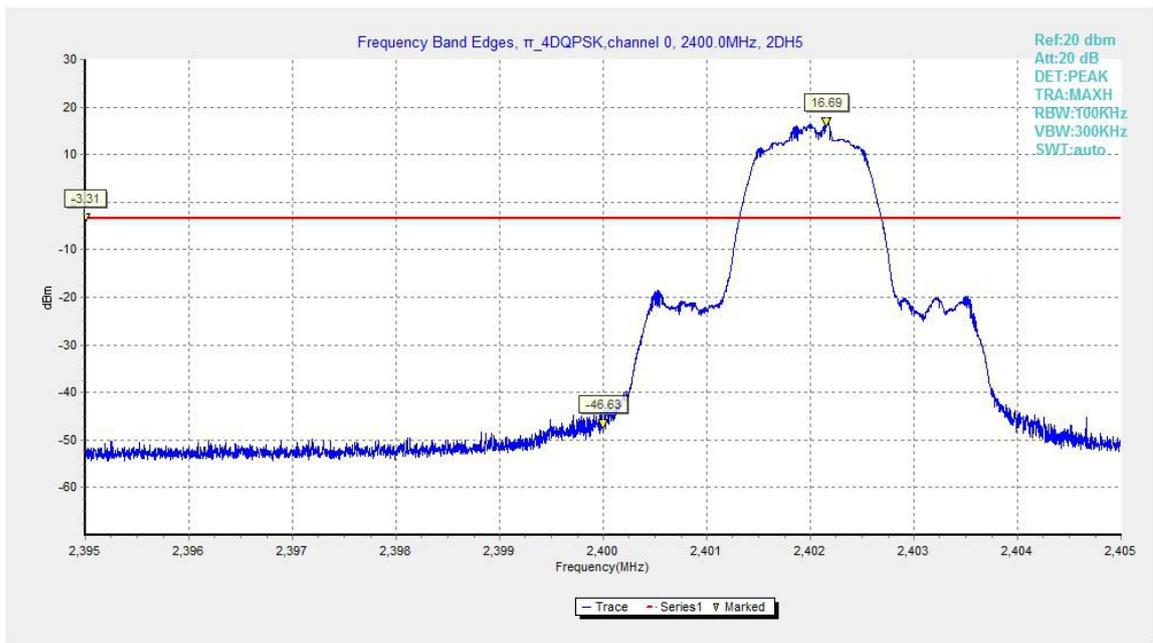


Fig.14. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off

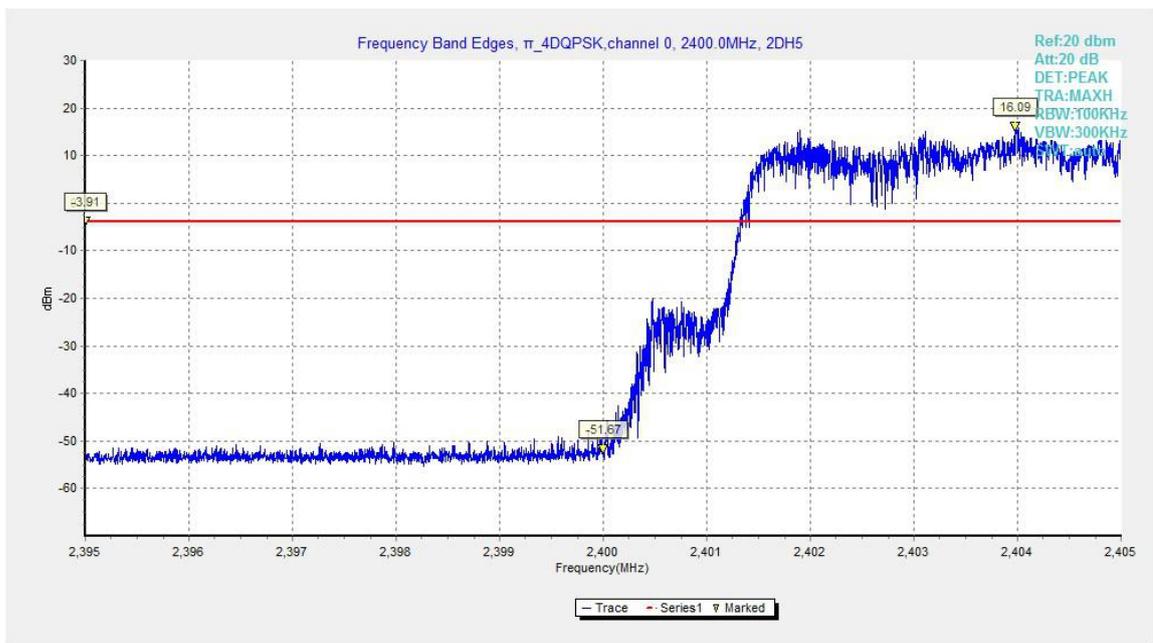


Fig.15. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping On

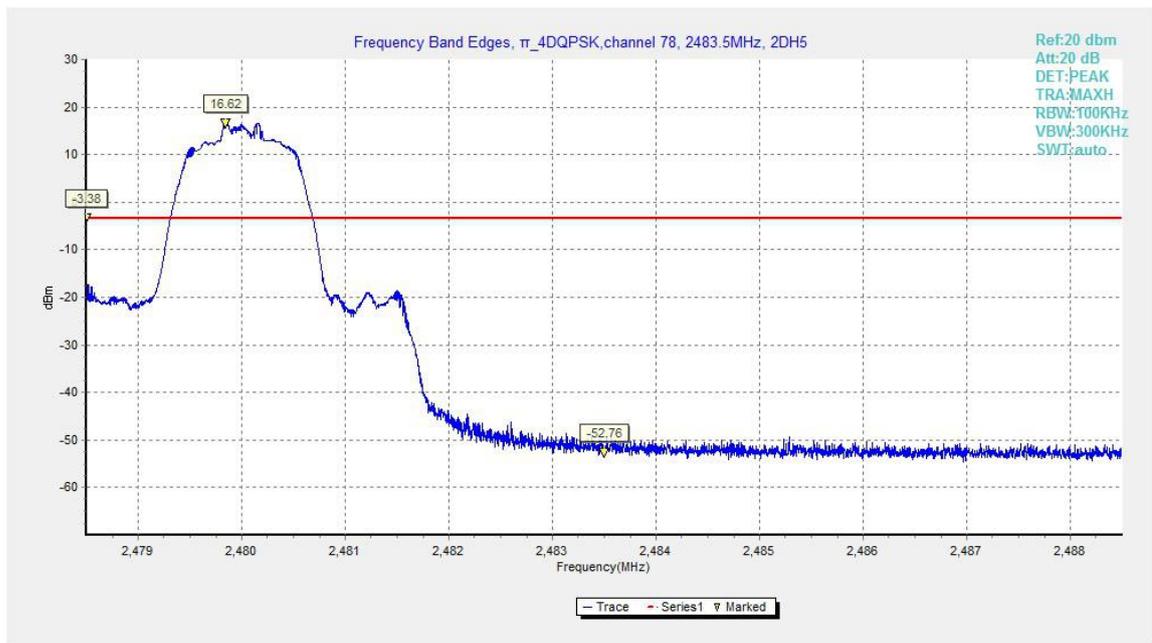


Fig.16. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off

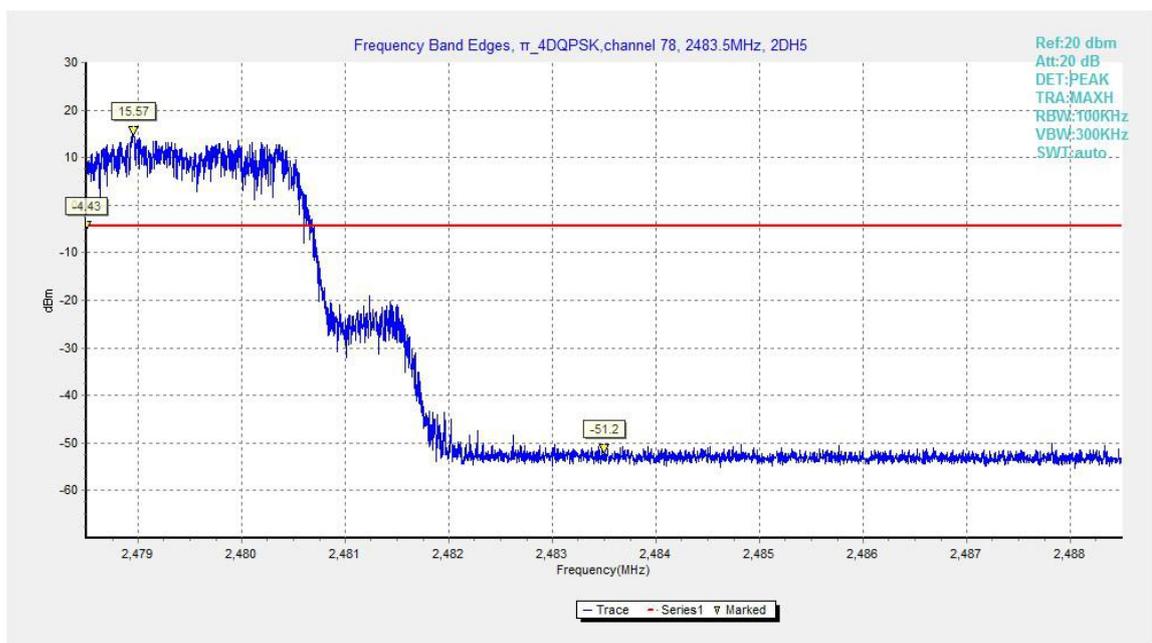


Fig.17. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping On

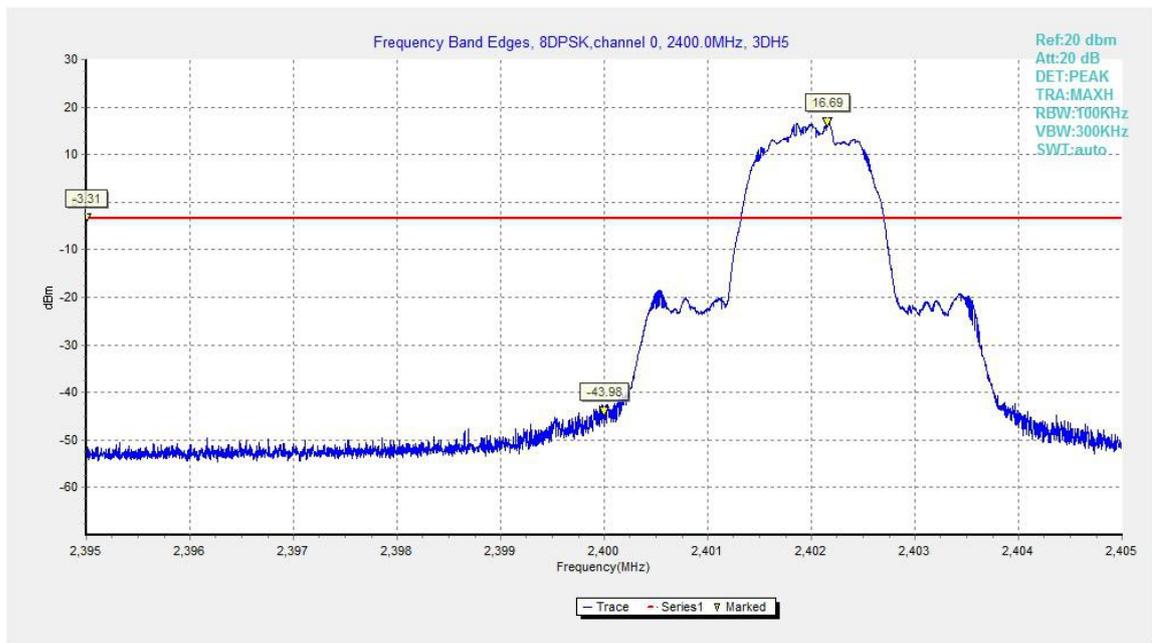


Fig.18. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

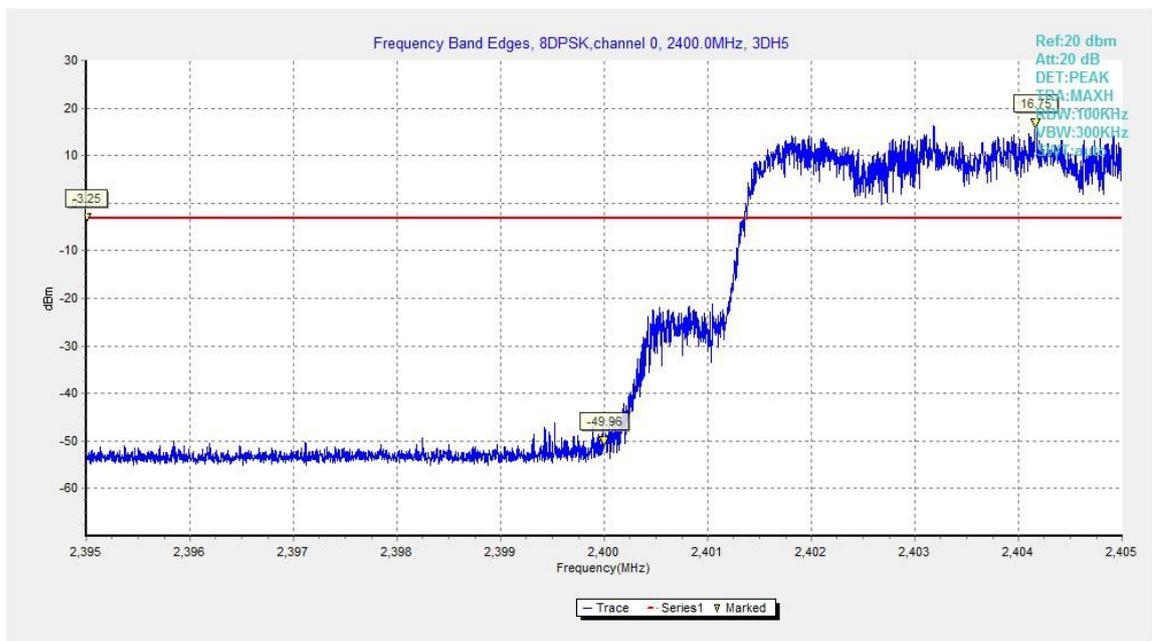


Fig.19. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

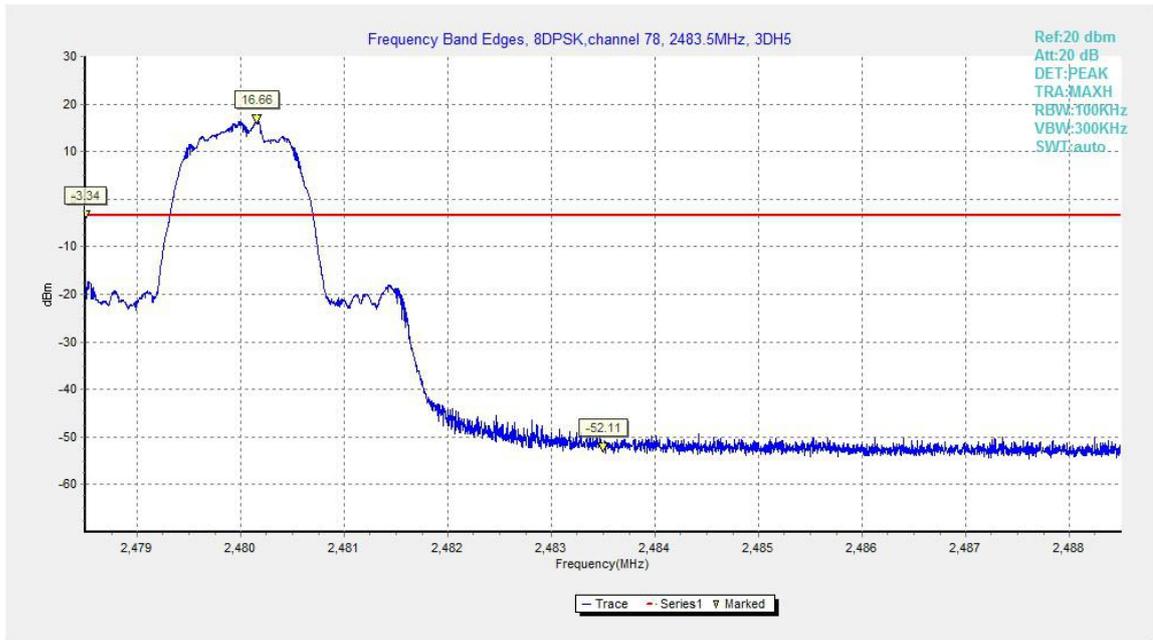


Fig.20. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

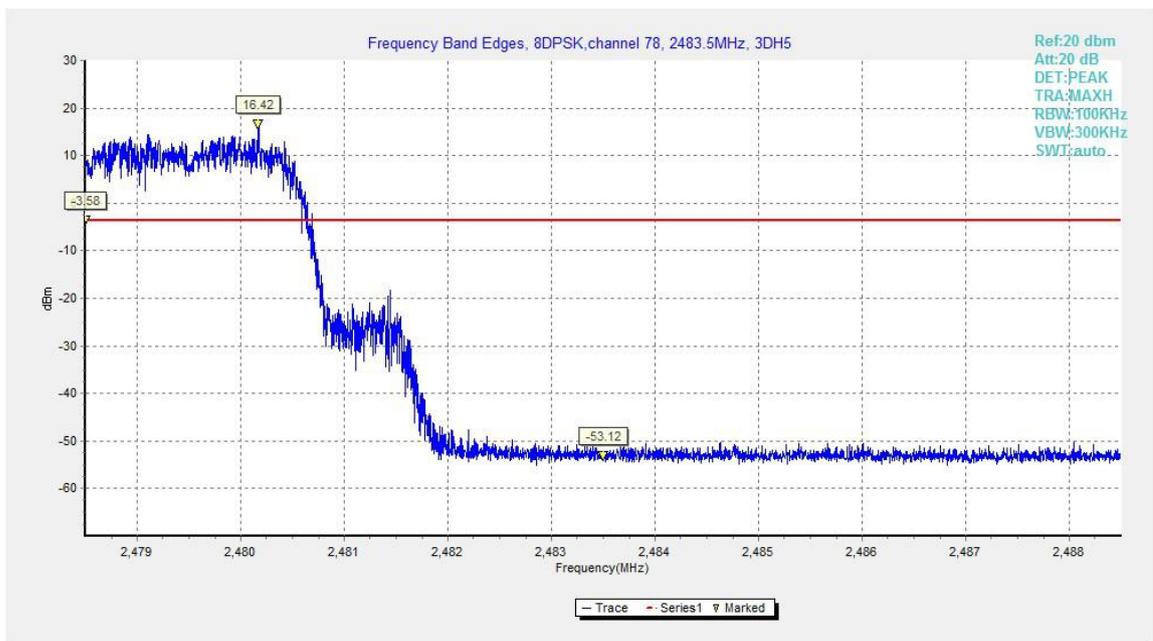


Fig.21. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

A.4. Frequency Band Edges –Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m and the table height shall be 1.5 m.

The EUT and transmitting antenna shall be centered on the turntable.

Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close

to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Measurement Results:
EUT ID: EUT3 ANT3

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.38GHz ~2.45GHz	Fig.22	P
	78	2.45GHz ~2.5GHz	Fig.23	P

Mode	Channel	Frequency Range	Test Results	Conclusion
$\pi/4$ DQPSK	0	2.38GHz ~2.43GHz	Fig.24	P
	78	2.45GHz ~2.5GHz	Fig.25	P

Mode	Channel	Frequency Range	Test Results	Conclusion
8DPSK	0	2.38GHz ~2.45GHz	Fig.26	P
	78	2.45GHz ~2.5GHz	Fig.27	P

EUT ID: EUT4 ANT4

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.38GHz ~2.45GHz	Fig.28	P
	78	2.45GHz ~2.5GHz	Fig.29	P

Mode	Channel	Frequency Range	Test Results	Conclusion
$\pi/4$ DQPSK	0	2.38GHz ~2.43GHz	Fig.30	P
	78	2.45GHz ~2.5GHz	Fig.31	P

Mode	Channel	Frequency Range	Test Results	Conclusion
8DPSK	0	2.38GHz ~2.45GHz	Fig.32	P
	78	2.45GHz ~2.5GHz	Fig.33	P

Conclusion: PASS

Test graphs as below

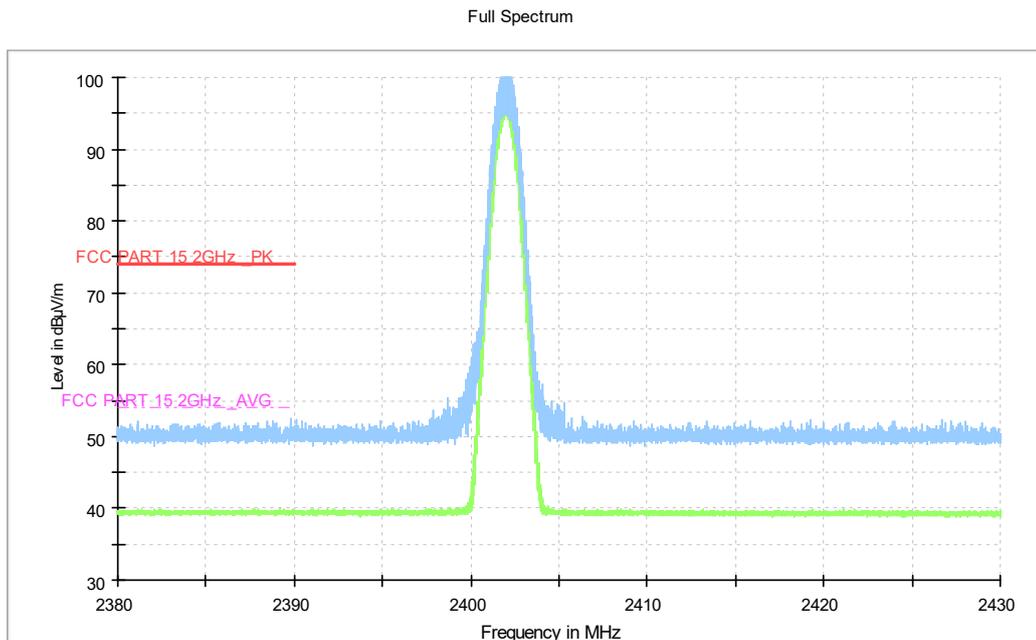


Fig.22. Frequency Band Edges: EUT3 ANT3 GFSK, Channel 0, Hopping Off, 2.38 GHz – 2.45GHz

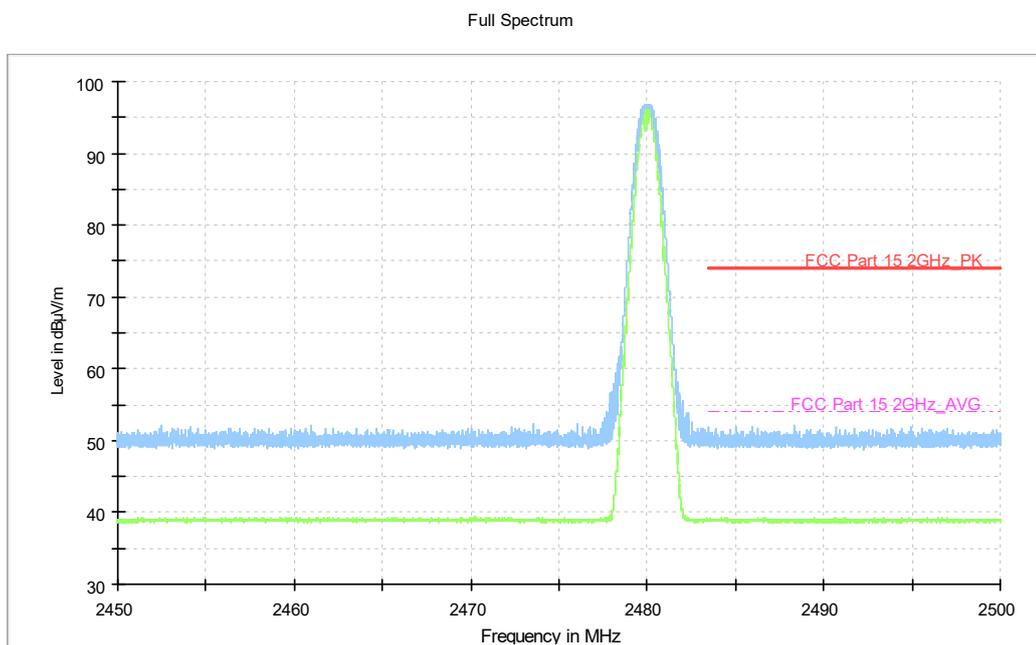


Fig.23. Frequency Band Edges: EUT3 ANT3 GFSK, Channel 78, Hopping Off, ch11, 2.45 GHz - 2.50GHz

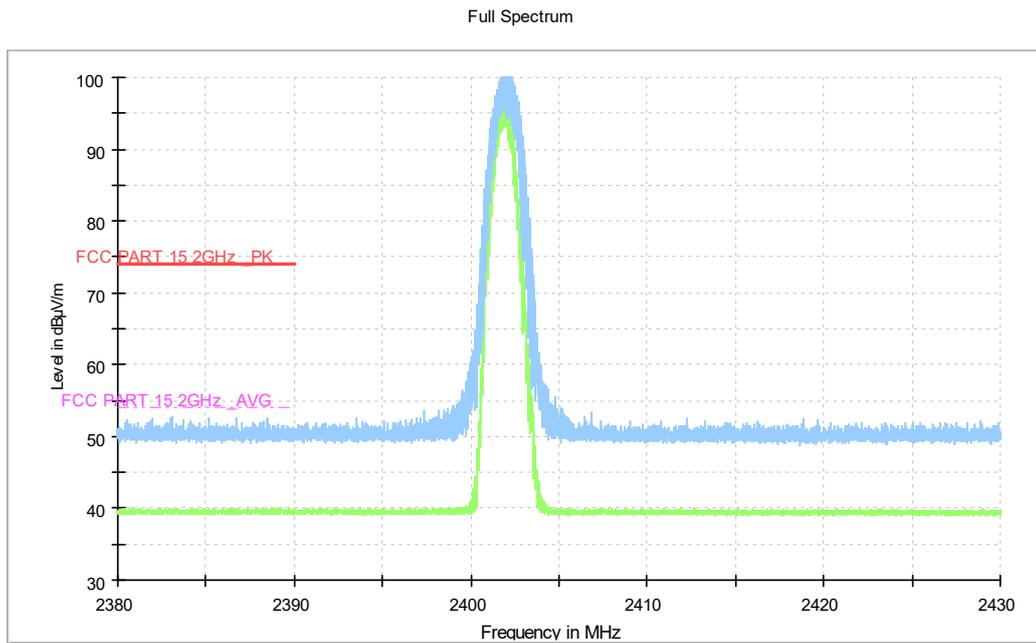


Fig.24. Frequency Band Edges: EUT3 ANT3 $\pi/4$ DQPSK, Channel 0, Hopping Off, 2.38 GHz - 2.45GHz

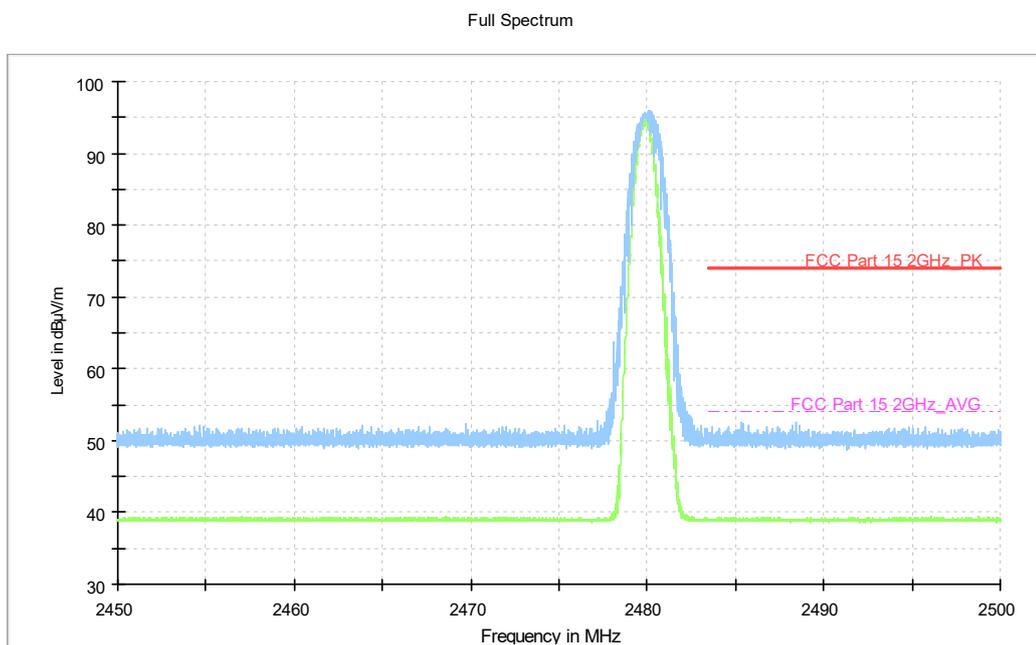


Fig.25. Frequency Band Edges: EUT3 ANT3 $\pi/4$ DQPSK, Channel 78, Hopping Off, 2.38 GHz - 2.45GHz

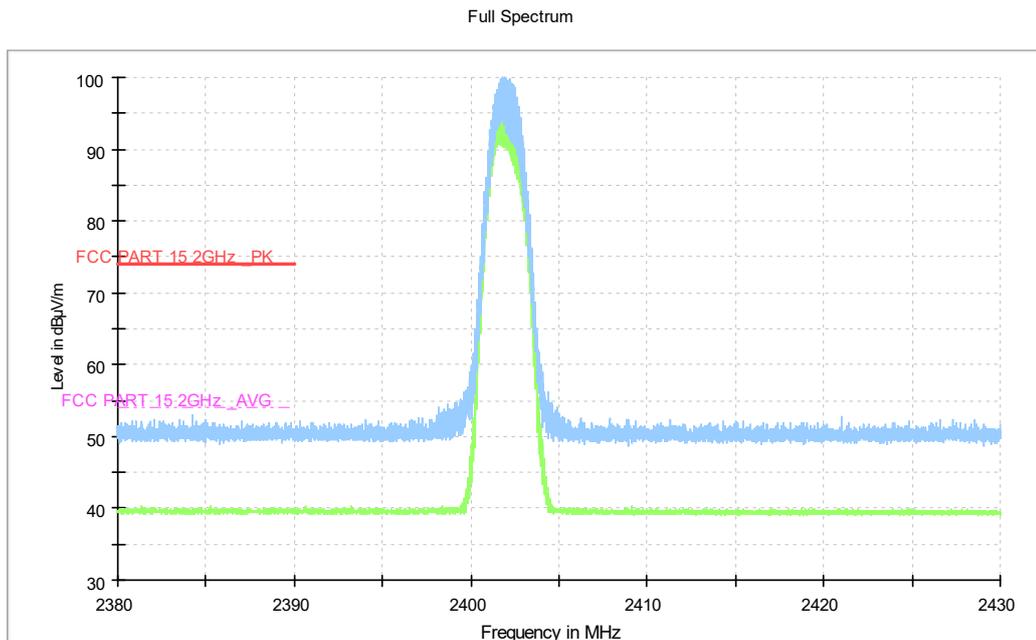


Fig.26. Frequency Band Edges: EUT3 ANT3 DPSK, Channel 0, 2.38 GHz - 2.45GHz

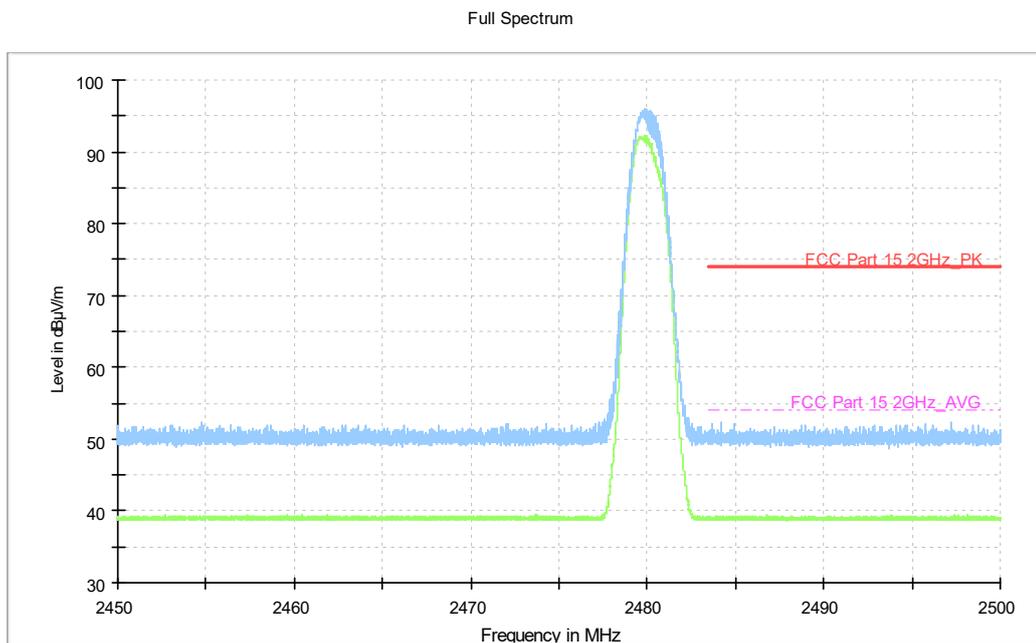


Fig.27. Frequency Band Edges: EUT3 ANT3 8DPSK, Channel 78, 2.38 GHz - 2.45GHz

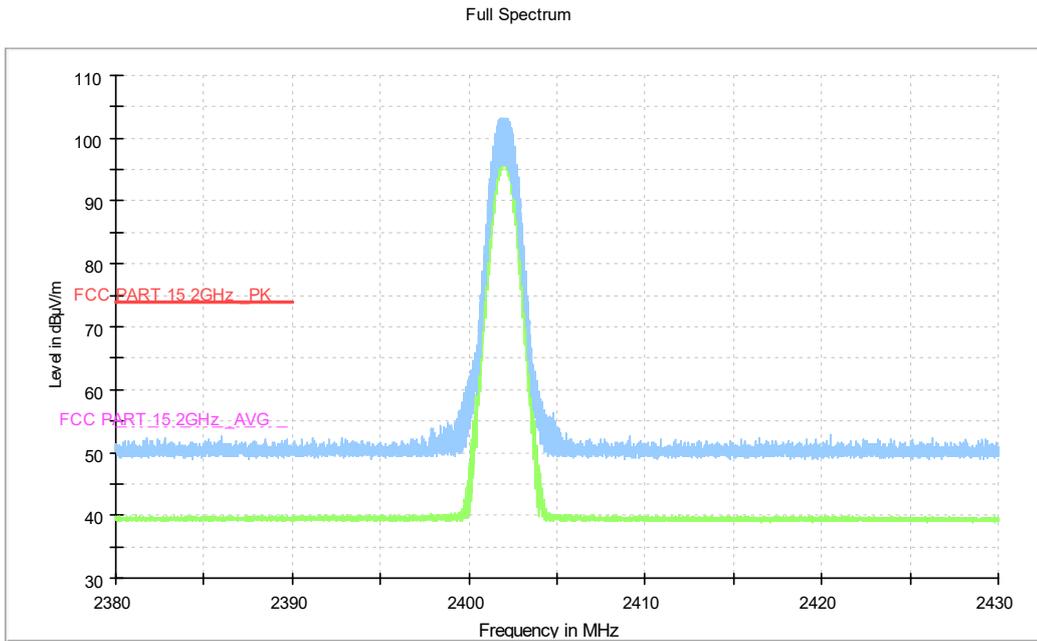


Fig.28. Frequency Band Edges: EUT4 ANT4 GFSK, Channel 0, Hopping Off, 2.38 GHz – 2.45GHz

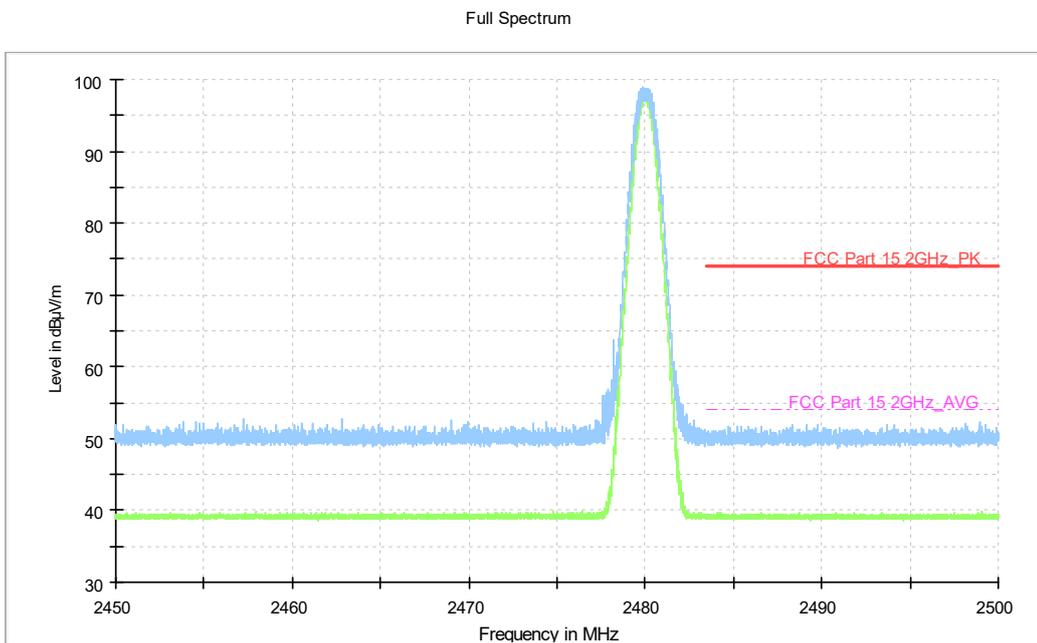


Fig.29. Frequency Band Edges: EUT4 ANT4 GFSK, Channel 78, Hopping Off, ch11, 2.45 GHz - 2.50GHz

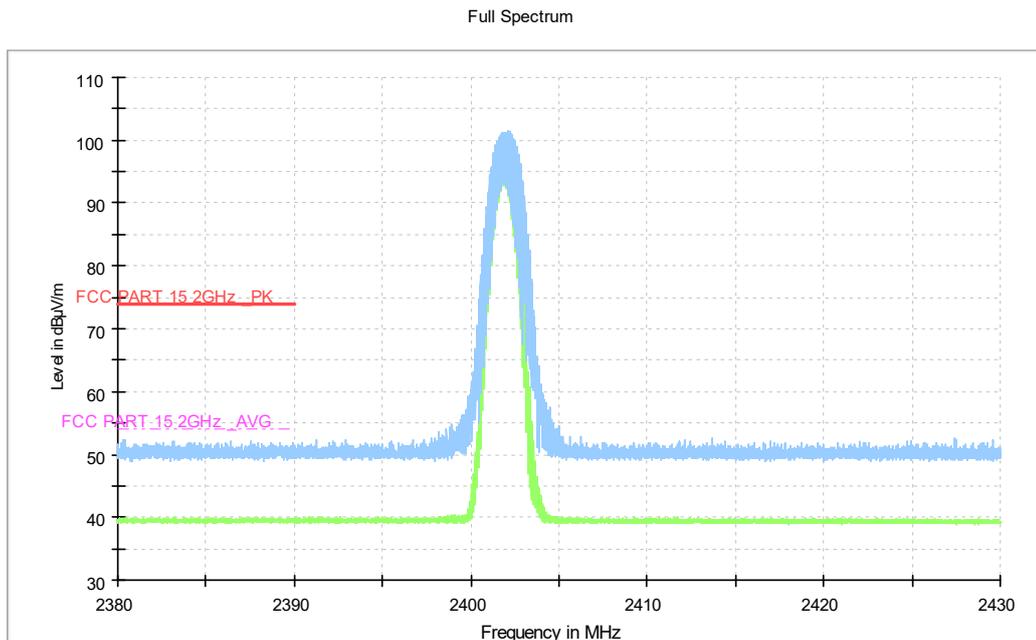


Fig.30. Frequency Band Edges: EUT4 ANT4 $\pi/4$ DQPSK, Channel 0, Hopping Off, 2.38 GHz - 2.45GHz

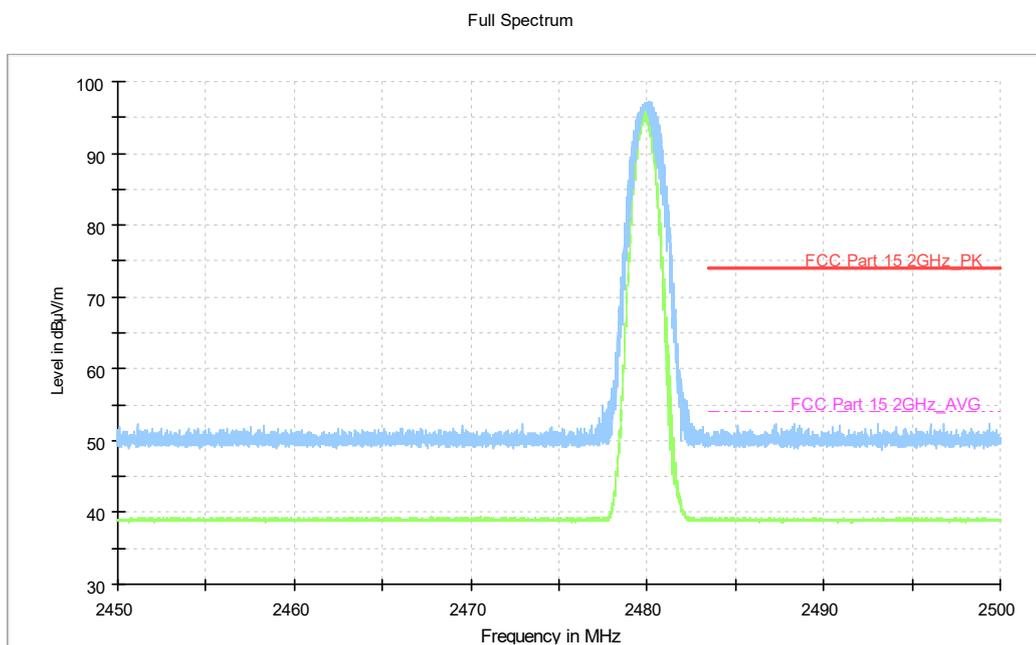


Fig.31. Frequency Band Edges: EUT4 ANT4 $\pi/4$ DQPSK, Channel 78, Hopping Off, 2.38 GHz - 2.45GHz

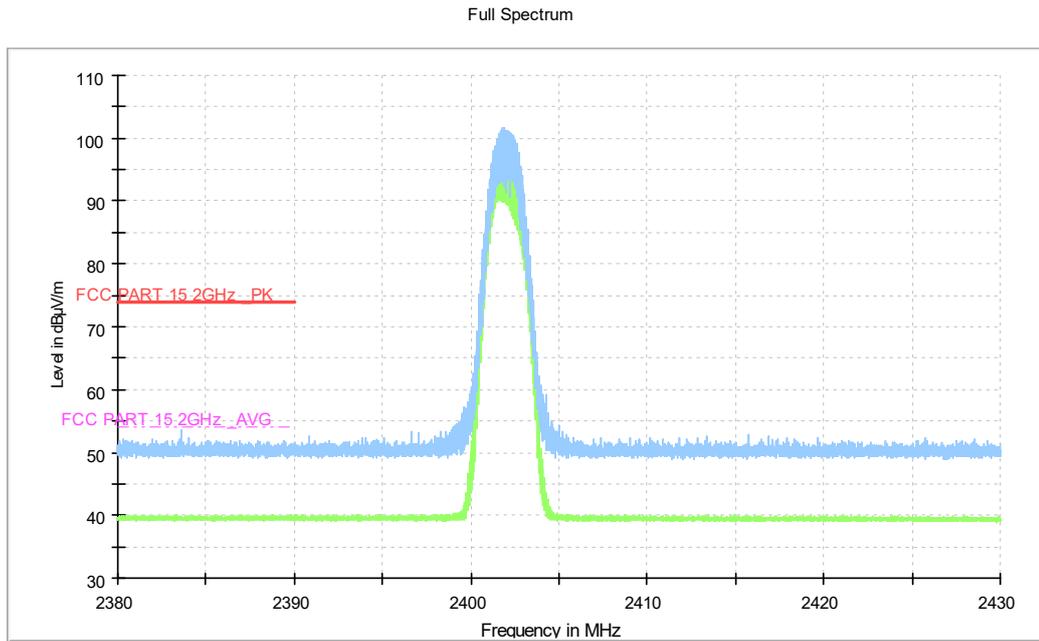


Fig.32. Frequency Band Edges: EUT4 ANT4 DPSK, Channel 0, 2.38 GHz - 2.45GHz

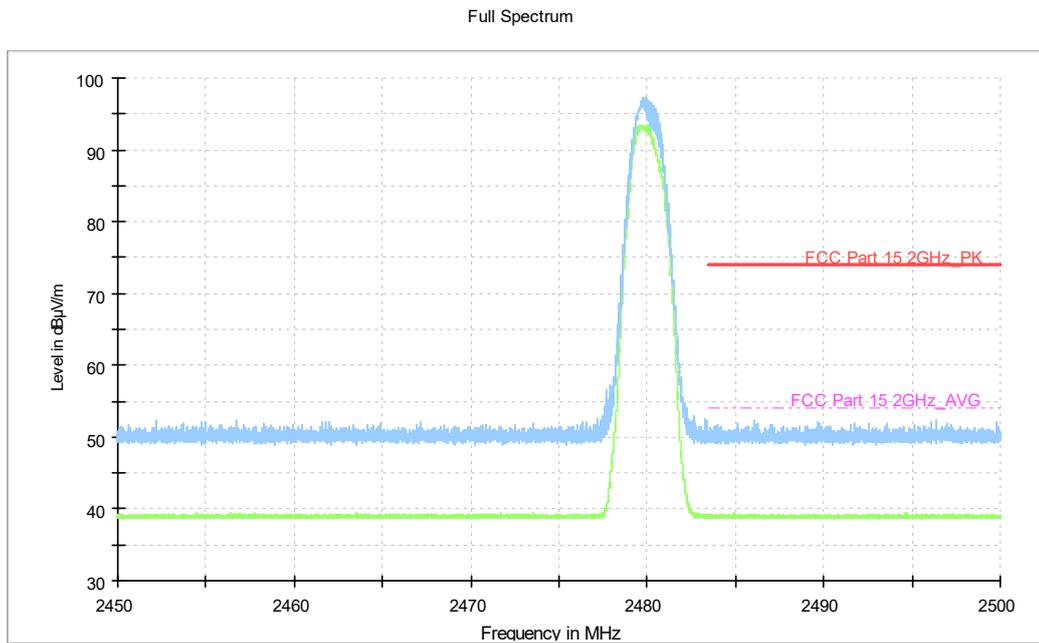


Fig.33. Frequency Band Edges: EUT4 ANT4 8DPSK, Channel 78, 2.38 GHz - 2.45GHz

A.5. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.34	P

2402 MHz	30 MHz ~ 1 GHz	Fig.35	P
	1 GHz ~ 3 GHz	Fig.36	P
	3 GHz ~ 10 GHz	Fig.37	P
	10 GHz ~ 26 GHz	Fig.38	P
Ch 39 2441 MHz	Center Frequency	Fig.39	P
	30 MHz ~ 1 GHz	Fig.40	P
	1 GHz ~ 3 GHz	Fig.41	P
	3 GHz ~ 10 GHz	Fig.42	P
	10 GHz ~ 26 GHz	Fig.43	P
Ch 78 2480 MHz	Center Frequency	Fig.44	P
	30 MHz ~ 1 GHz	Fig.45	P
	1 GHz ~ 3 GHz	Fig.46	P
	3 GHz ~ 10 GHz	Fig.47	P
	10 GHz ~ 26 GHz	Fig.48	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.49	P
	30 MHz ~ 1 GHz	Fig.50	P
	1 GHz ~ 3 GHz	Fig.51	P
	3 GHz ~ 10 GHz	Fig.52	P
	10 GHz ~ 26 GHz	Fig.53	P
Ch 39 2441 MHz	Center Frequency	Fig.54	P
	30 MHz ~ 1 GHz	Fig.55	P
	1 GHz ~ 3 GHz	Fig.56	P
	3 GHz ~ 10 GHz	Fig.57	P
	10 GHz ~ 26 GHz	Fig.58	P
Ch 78 2480 MHz	Center Frequency	Fig.59	P
	30 MHz ~ 1 GHz	Fig.60	P
	1 GHz ~ 3 GHz	Fig.61	P
	3 GHz ~ 10 GHz	Fig.62	P
	10 GHz ~ 26 GHz	Fig.63	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.64	P
	30 MHz ~ 1 GHz	Fig.65	P
	1 GHz ~ 3 GHz	Fig.66	P
	3 GHz ~ 10 GHz	Fig.67	P
	10 GHz ~ 26 GHz	Fig.68	P

Ch 39 2441 MHz	Center Frequency	Fig.69	P
	30 MHz ~ 1 GHz	Fig.70	P
	1 GHz ~ 3 GHz	Fig.71	P
	3 GHz ~ 10 GHz	Fig.72	P
	10 GHz ~ 26 GHz	Fig.73	P
Ch 78 2480 MHz	Center Frequency	Fig.74	P
	30 MHz ~ 1 GHz	Fig.75	P
	1 GHz ~ 3 GHz	Fig.76	P
	3 GHz ~ 10 GHz	Fig.77	P
	10 GHz ~ 26 GHz	Fig.78	P

Conclusion: PASS

Test graphs as below

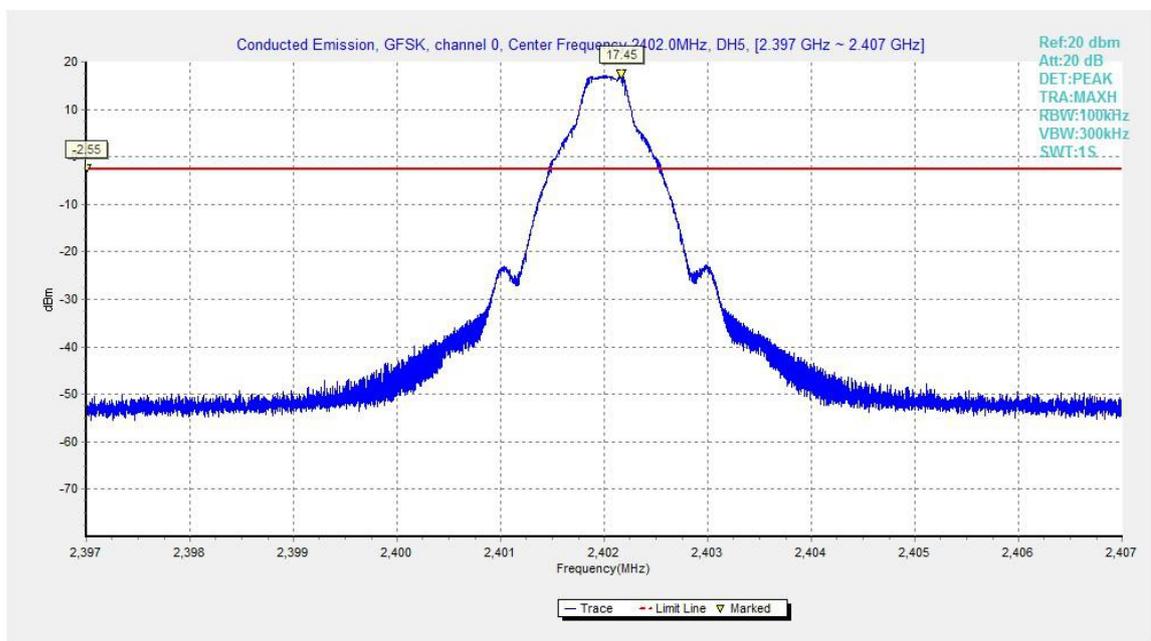


Fig.34. Conducted spurious emission: GFSK, Channel 0,2402MHz

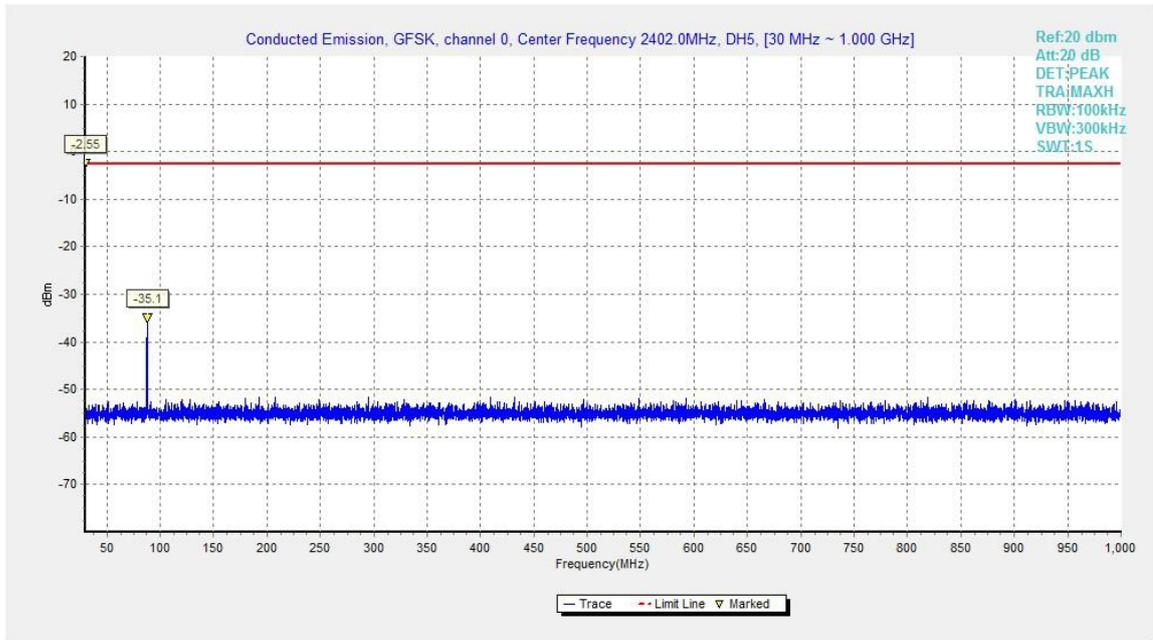


Fig.35. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

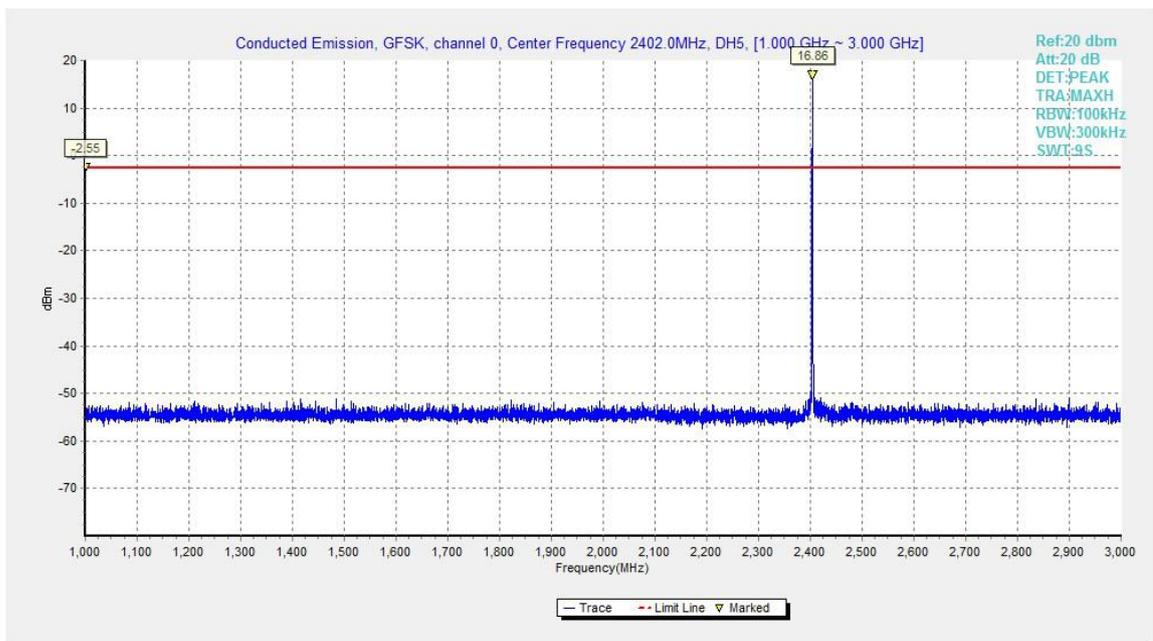


Fig.36. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

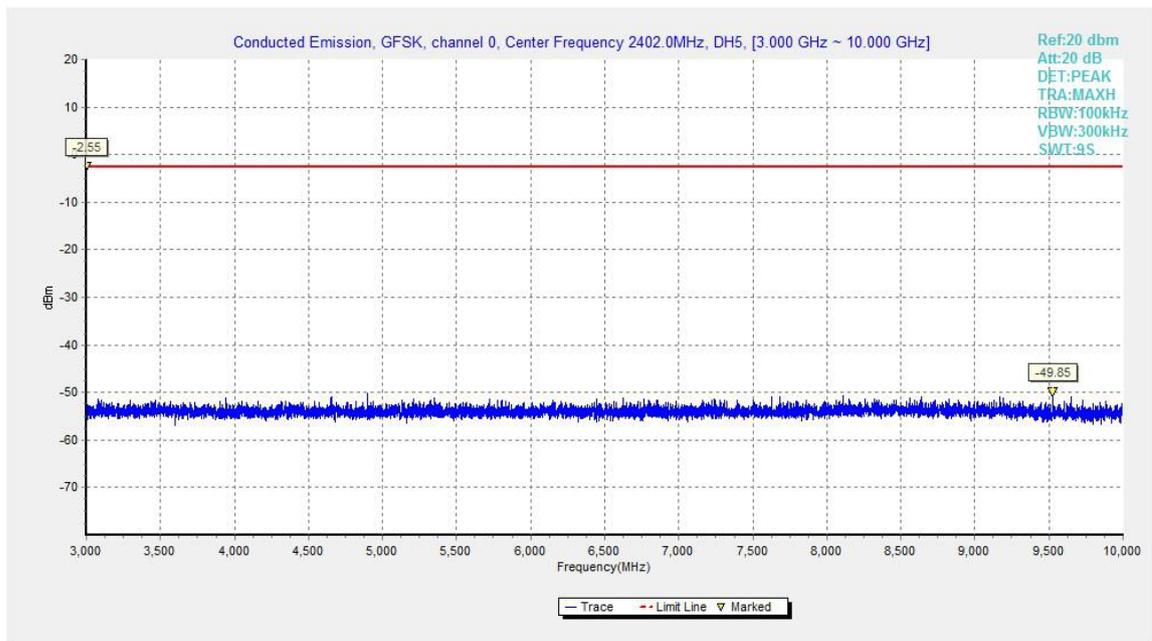


Fig.37. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

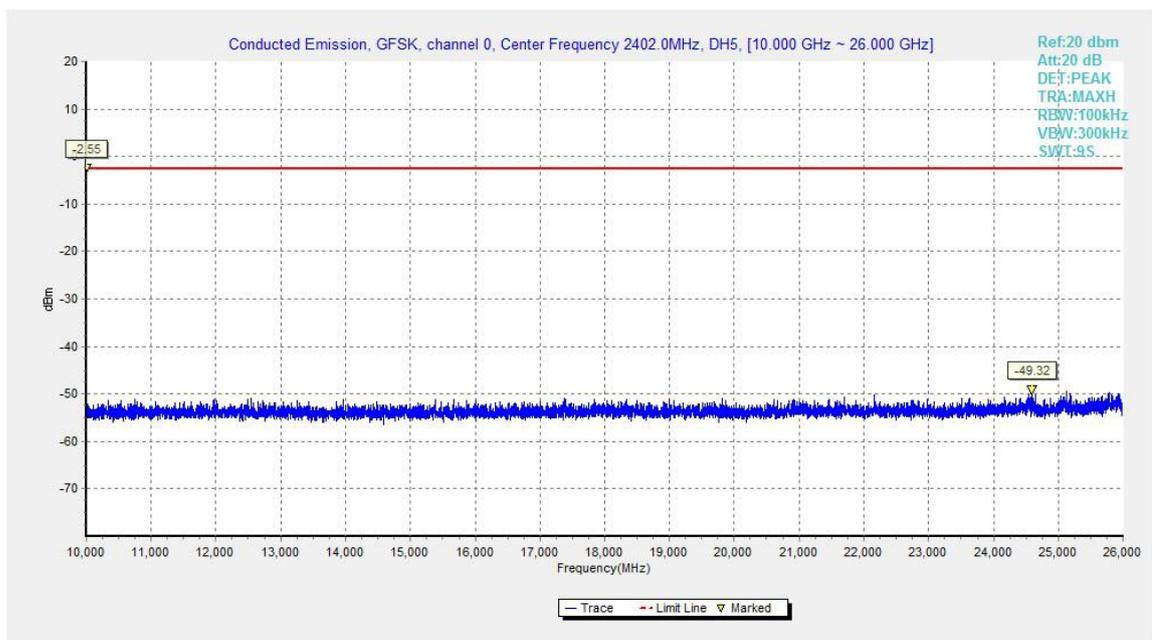


Fig.38. Conducted spurious emission: GFSK, Channel 0, 10GHz - 26GHz

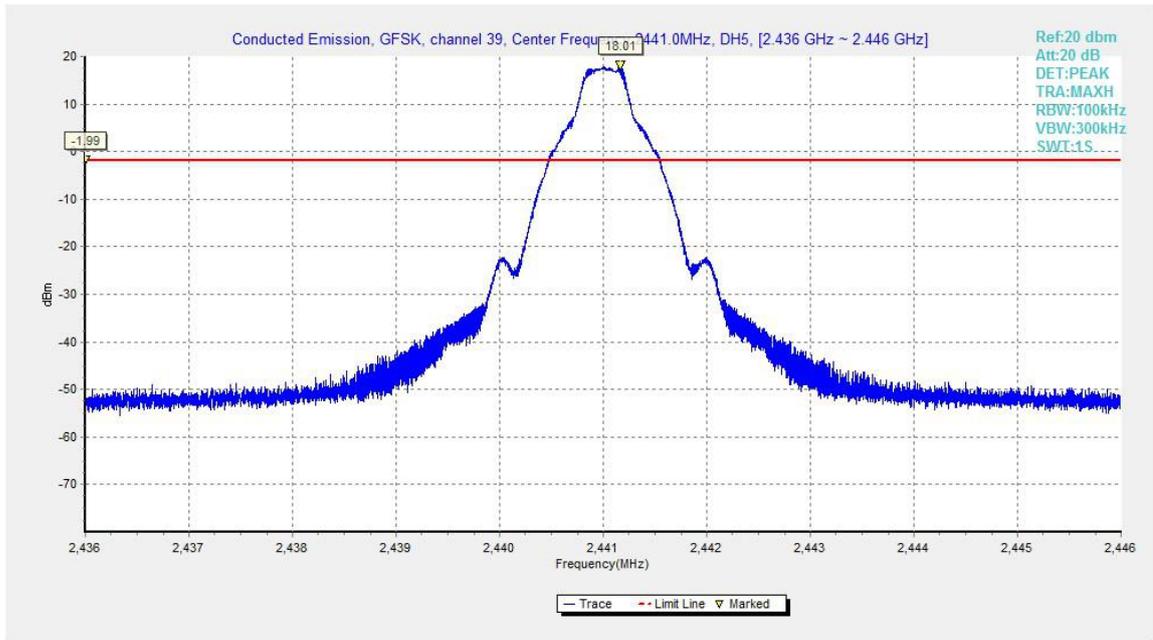


Fig.39. Conducted spurious emission: GFSK, Channel 39, 2441MHz

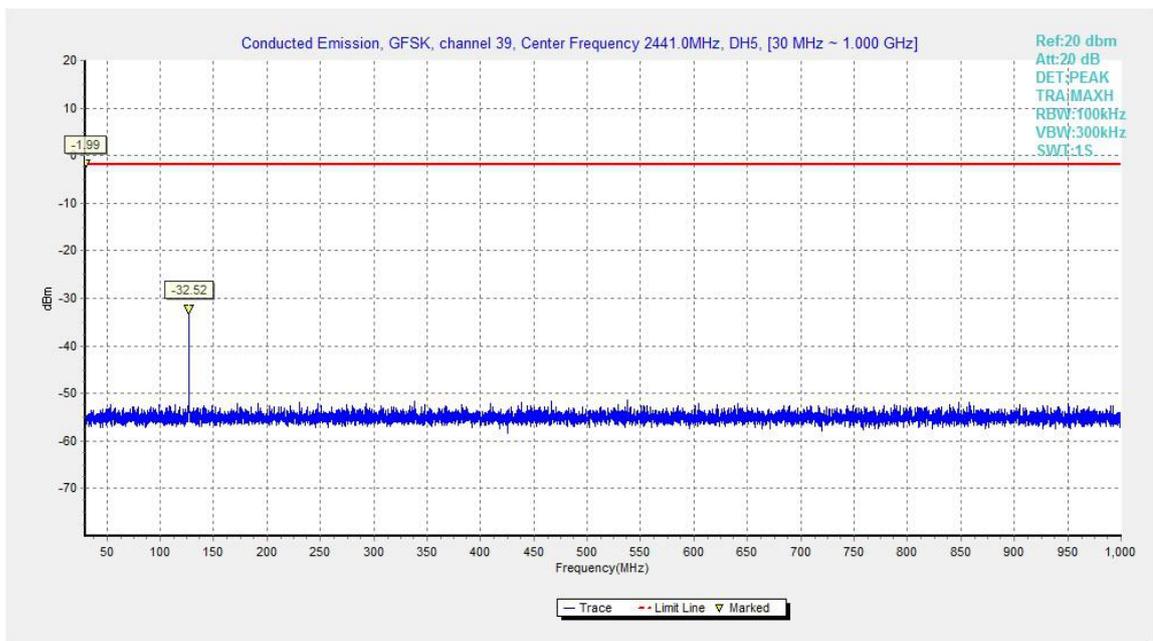


Fig.40. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

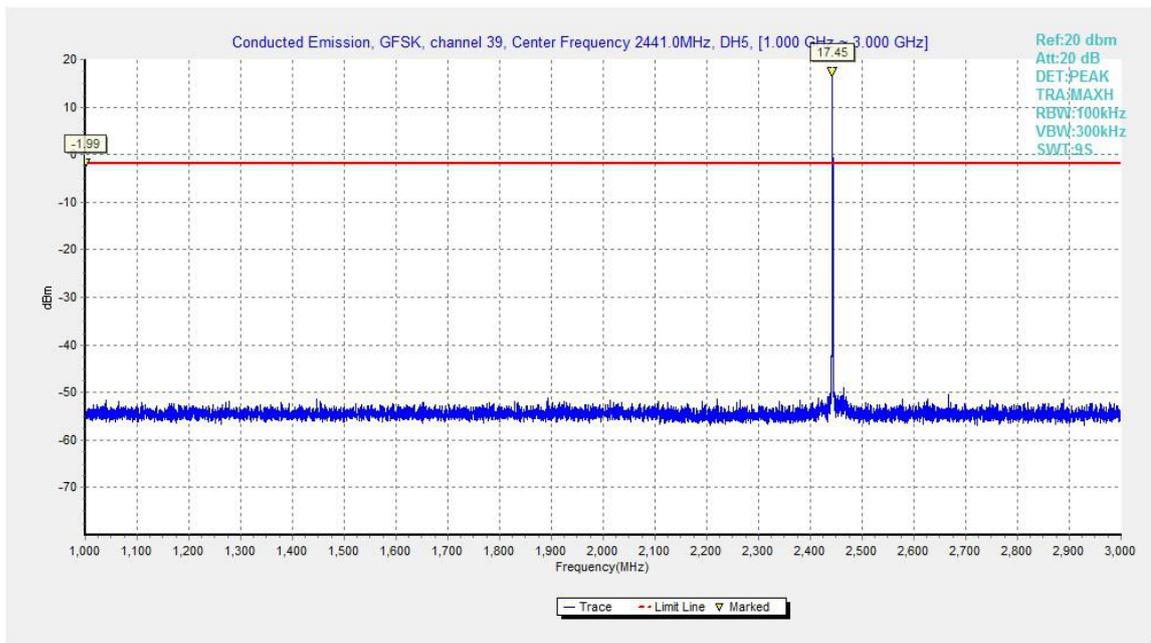


Fig.41. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

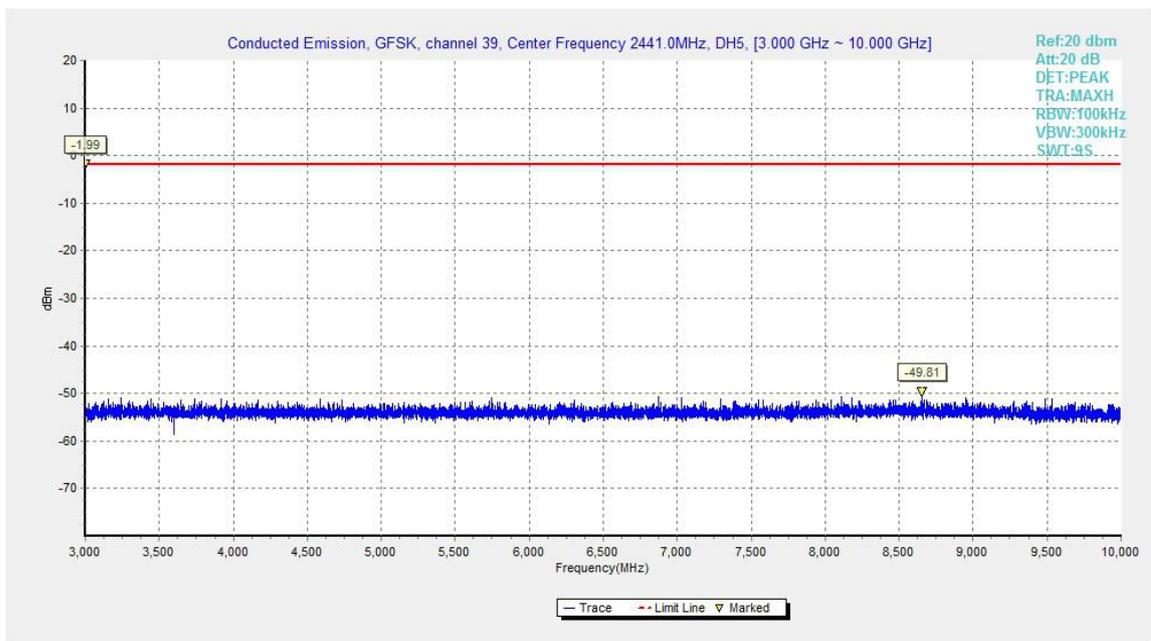


Fig.42. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

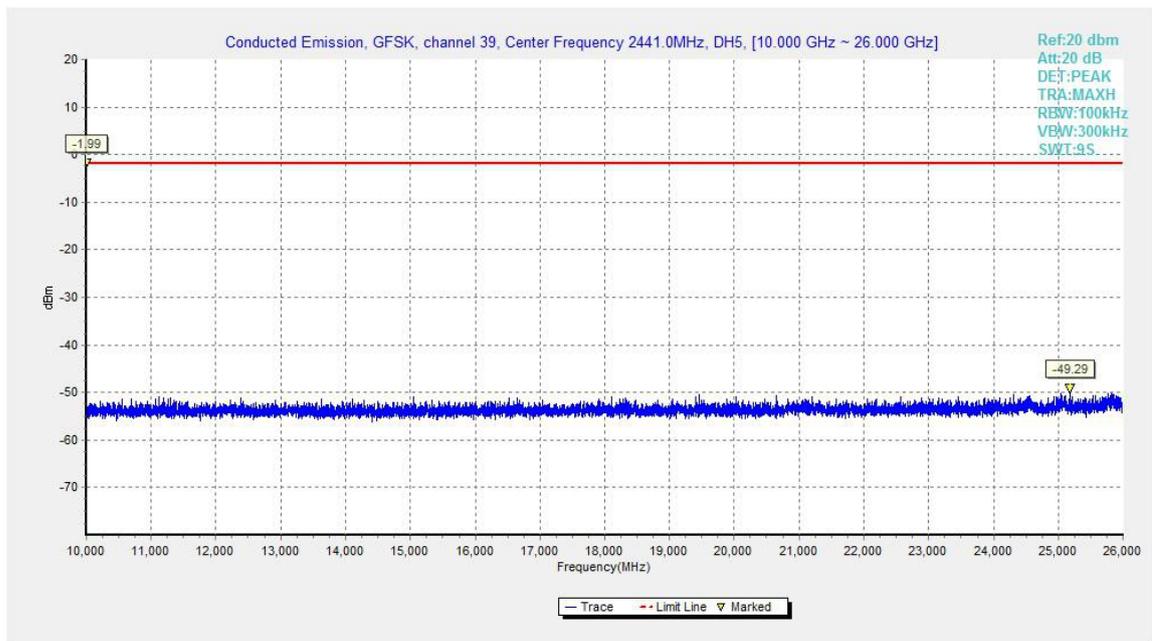


Fig.43. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

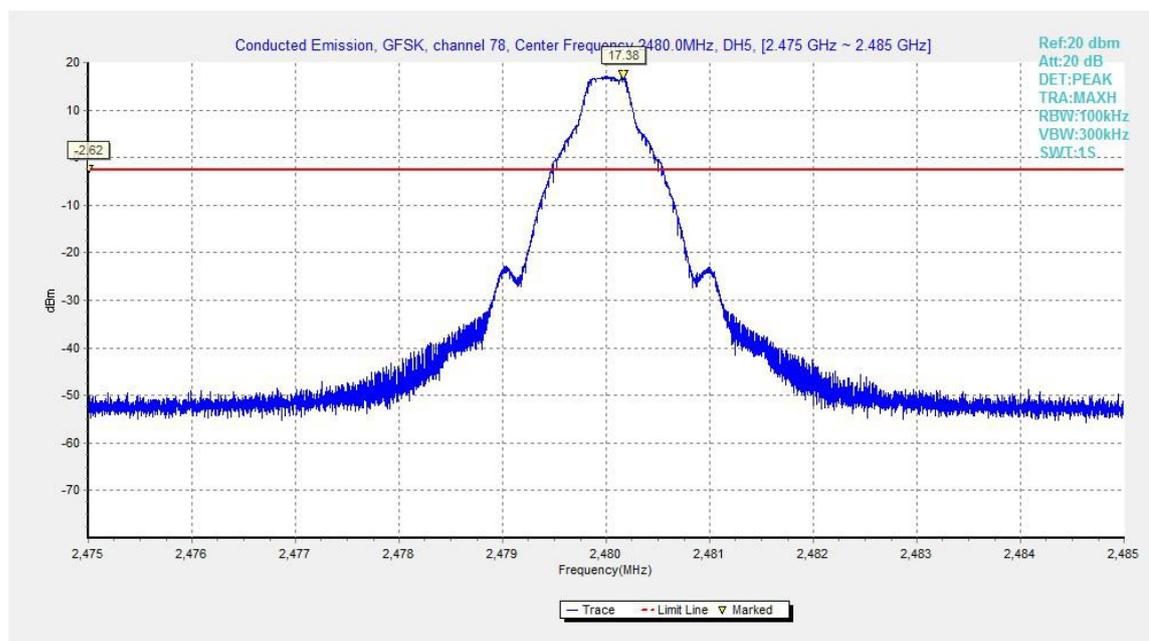


Fig.44. Conducted spurious emission: GFSK, Channel 78, 2480MHz

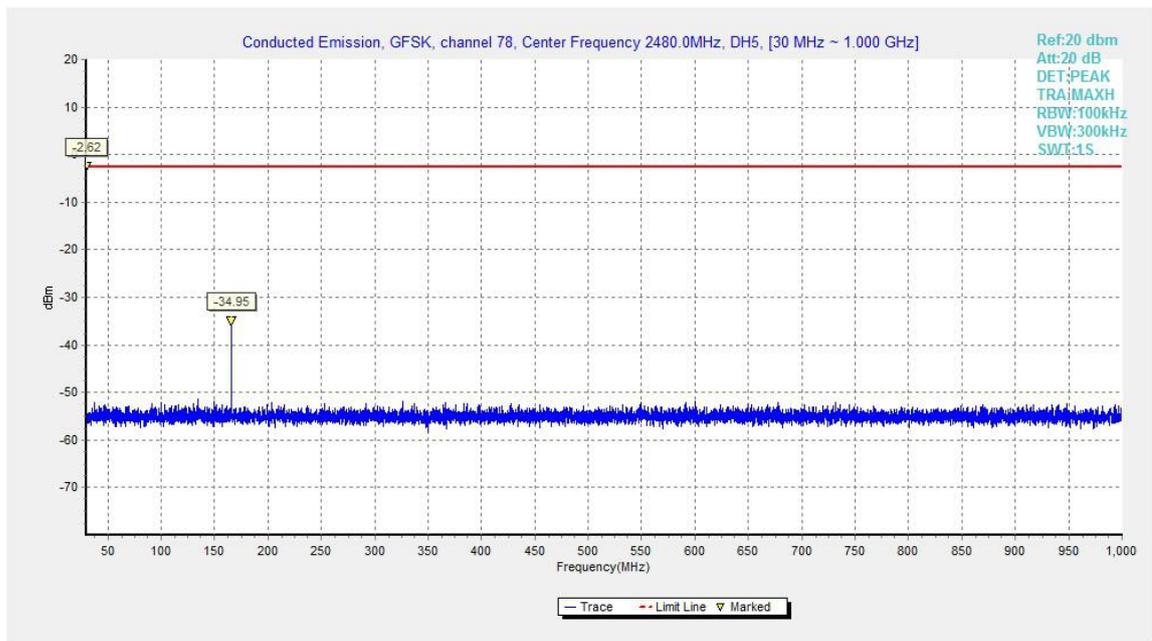


Fig.45. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

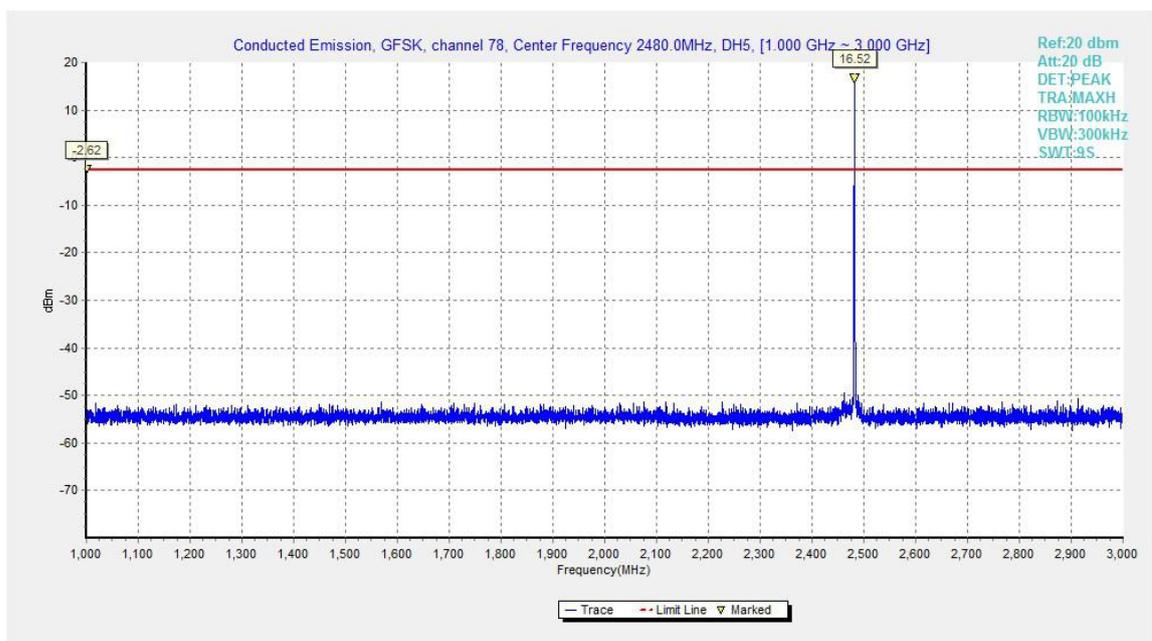


Fig.46. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

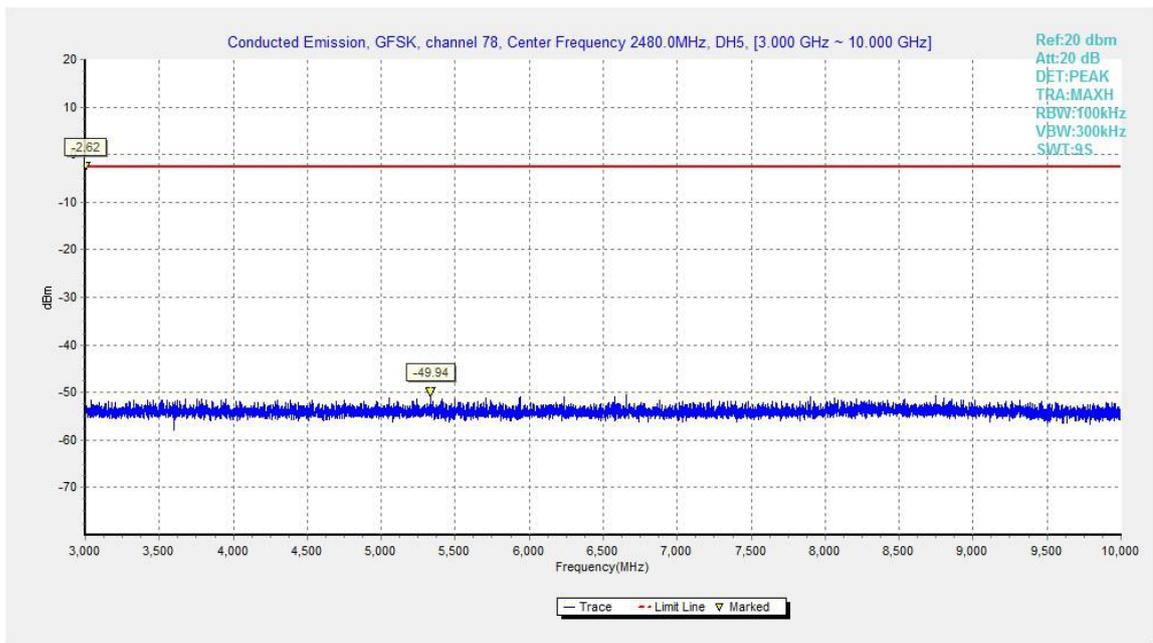


Fig.47. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

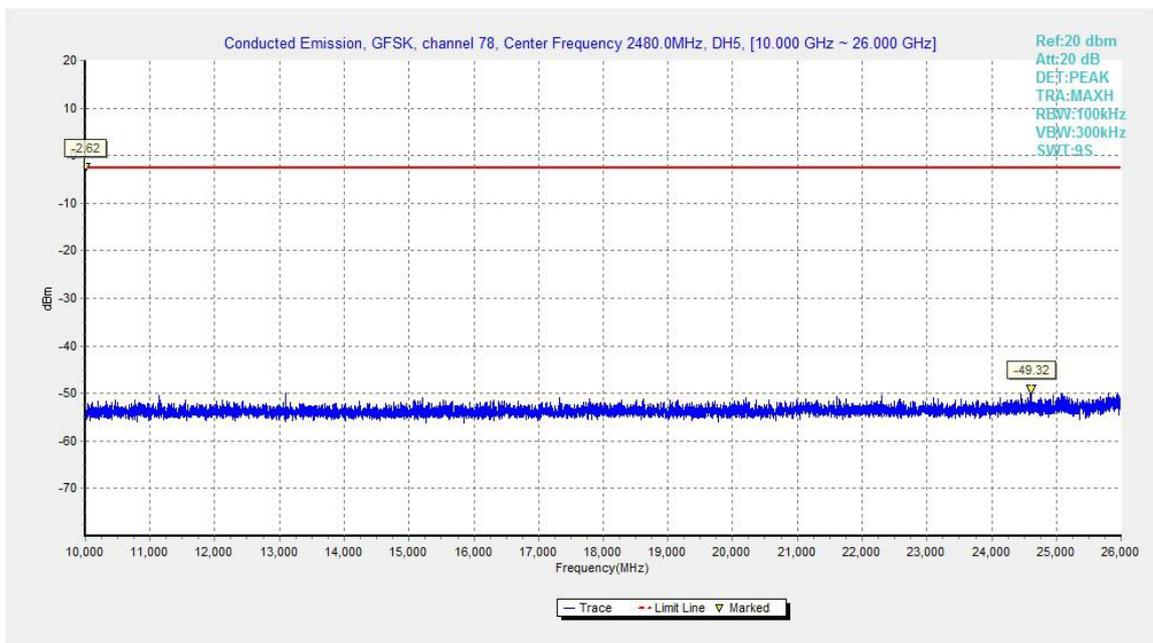


Fig.48. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

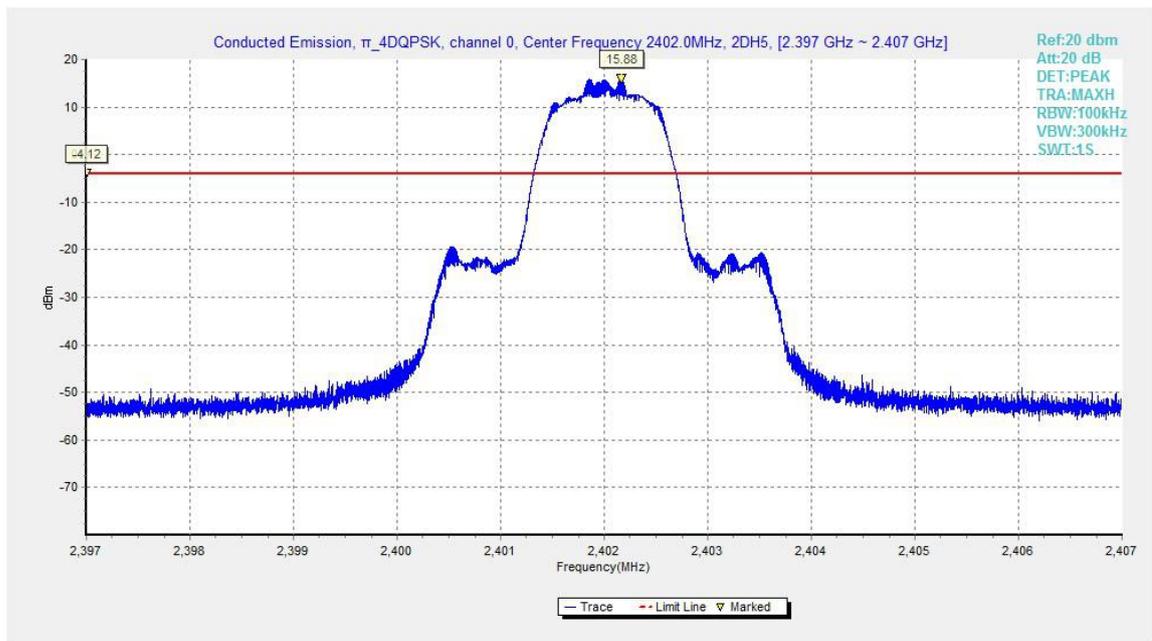


Fig.49. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,2402MHz

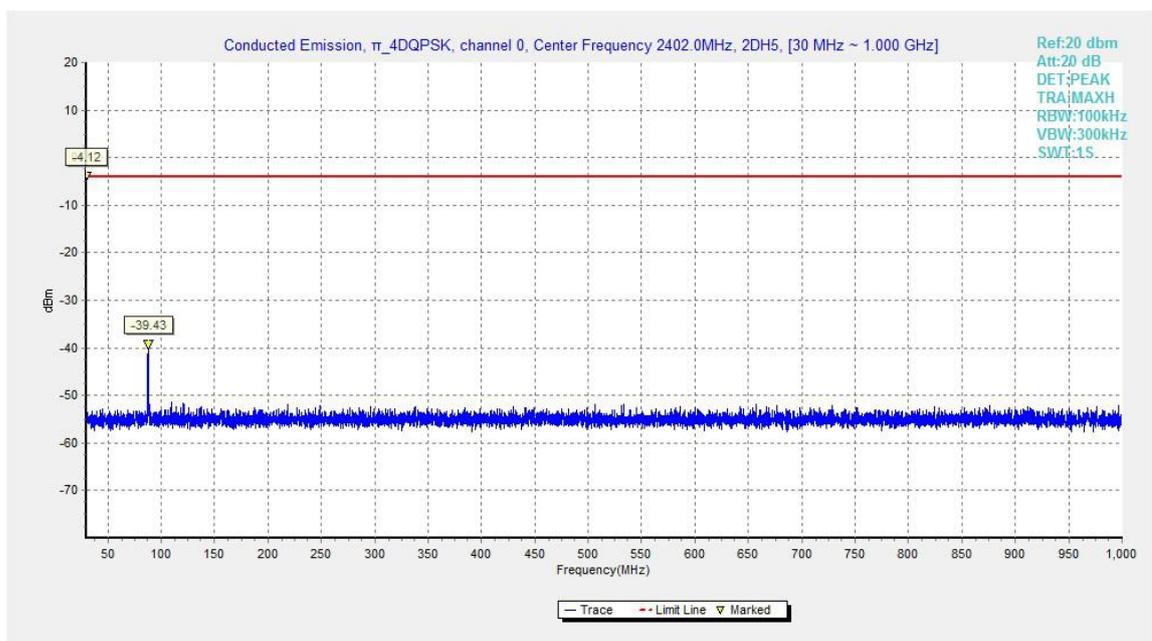


Fig.50. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 30MHz - 1GHz

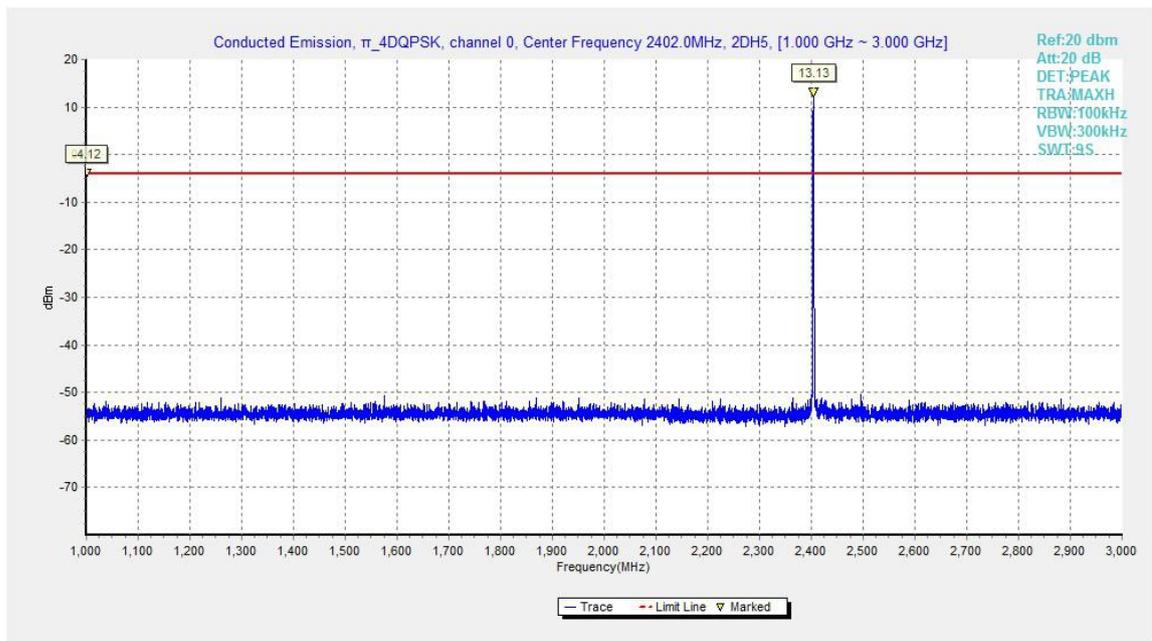


Fig.51. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 1GHz - 3GHz

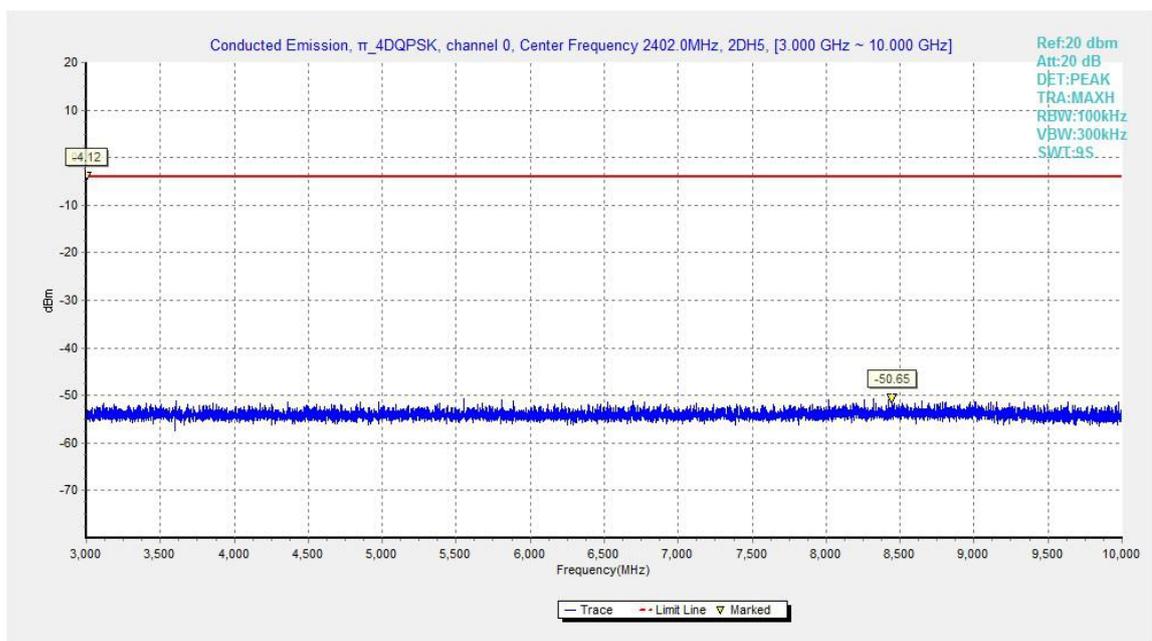


Fig.52. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 3GHz - 10GHz

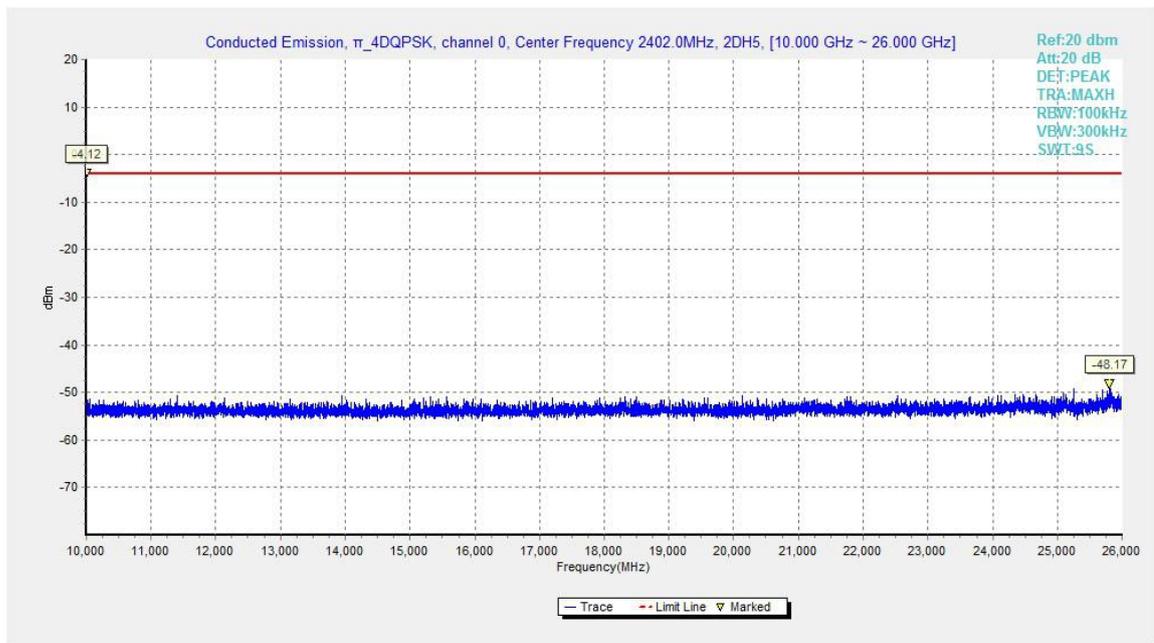


Fig.53. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 10GHz - 26GHz

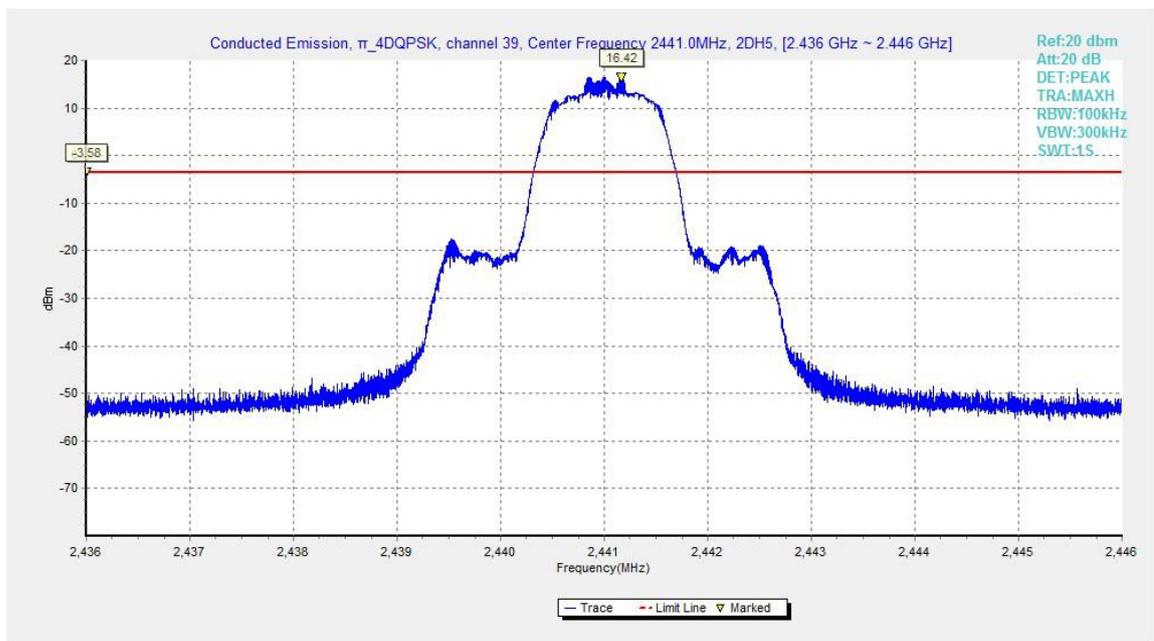


Fig.54. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 2441MHz

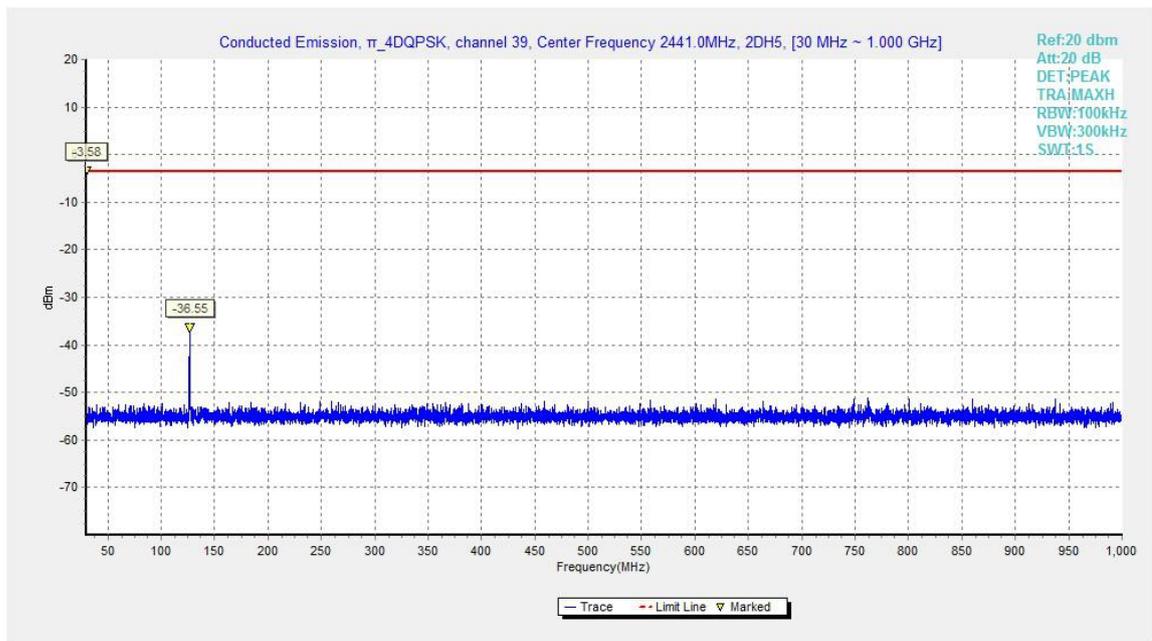


Fig.55. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 30MHz - 1GHz

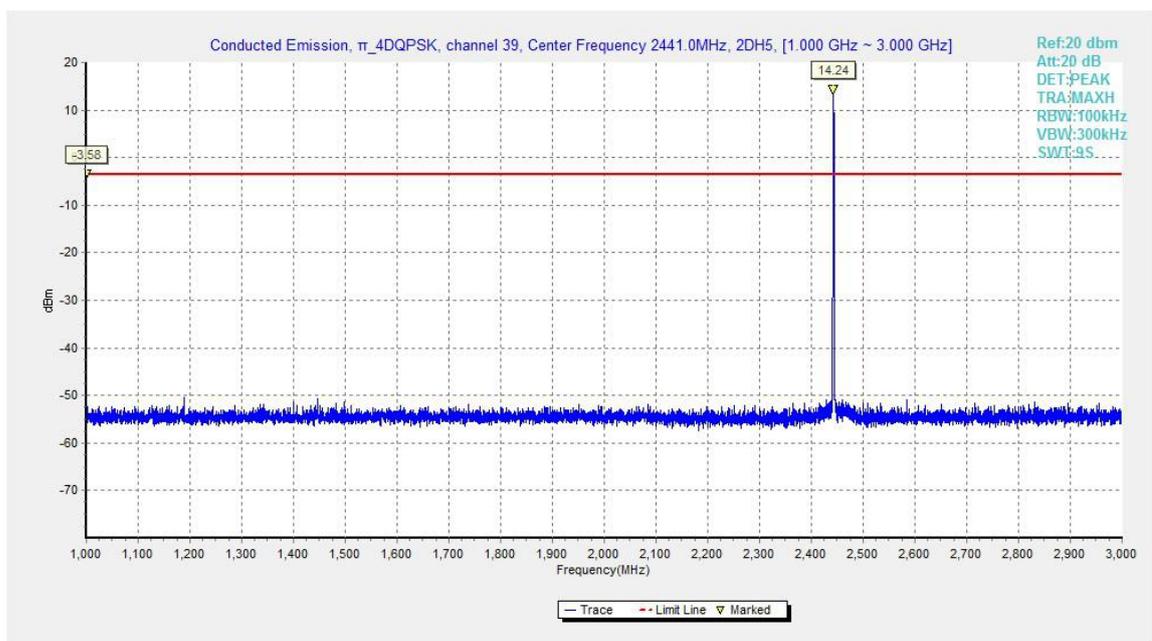


Fig.56. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 1GHz - 3GHz

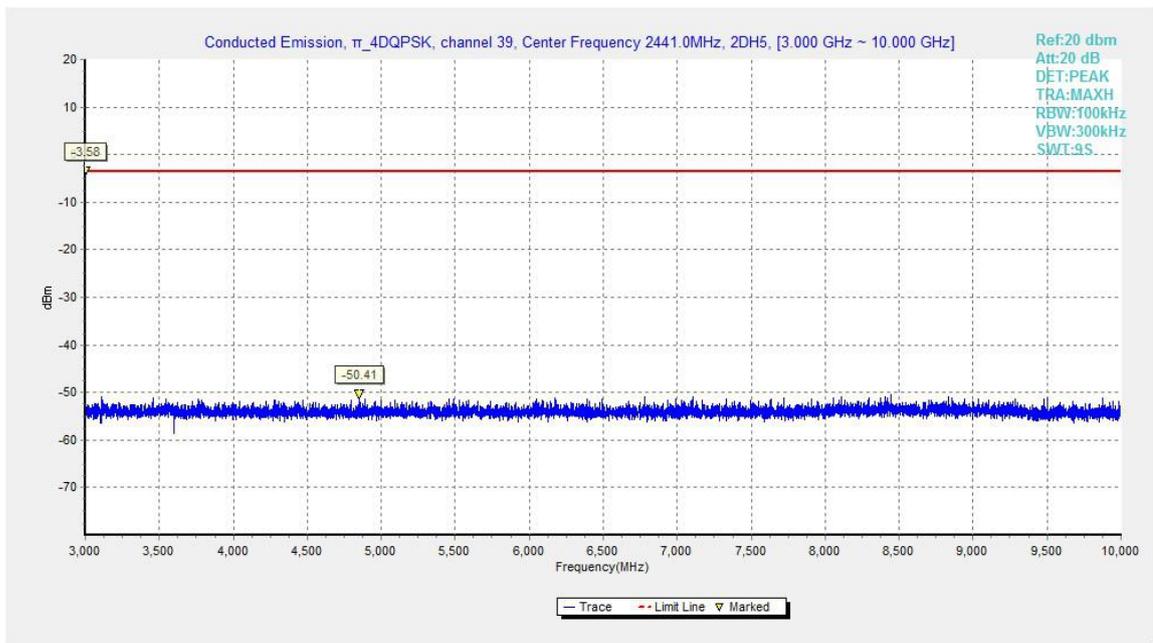


Fig.57. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 3GHz - 10GHz

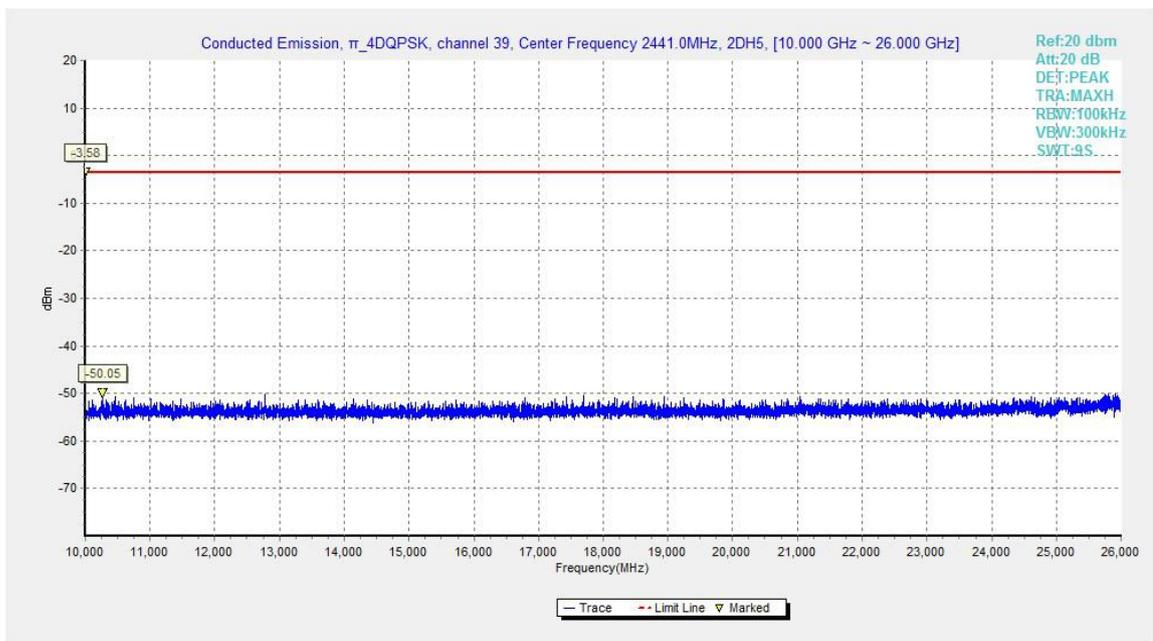


Fig.58. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 10GHz – 26GHz

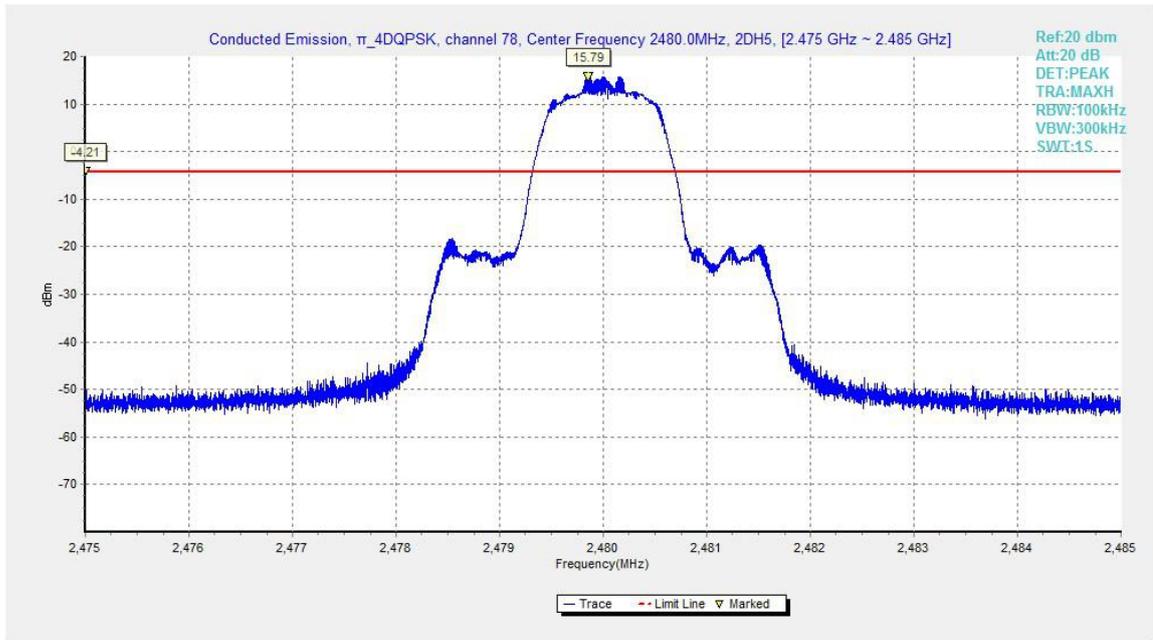


Fig.59. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 2480MHz

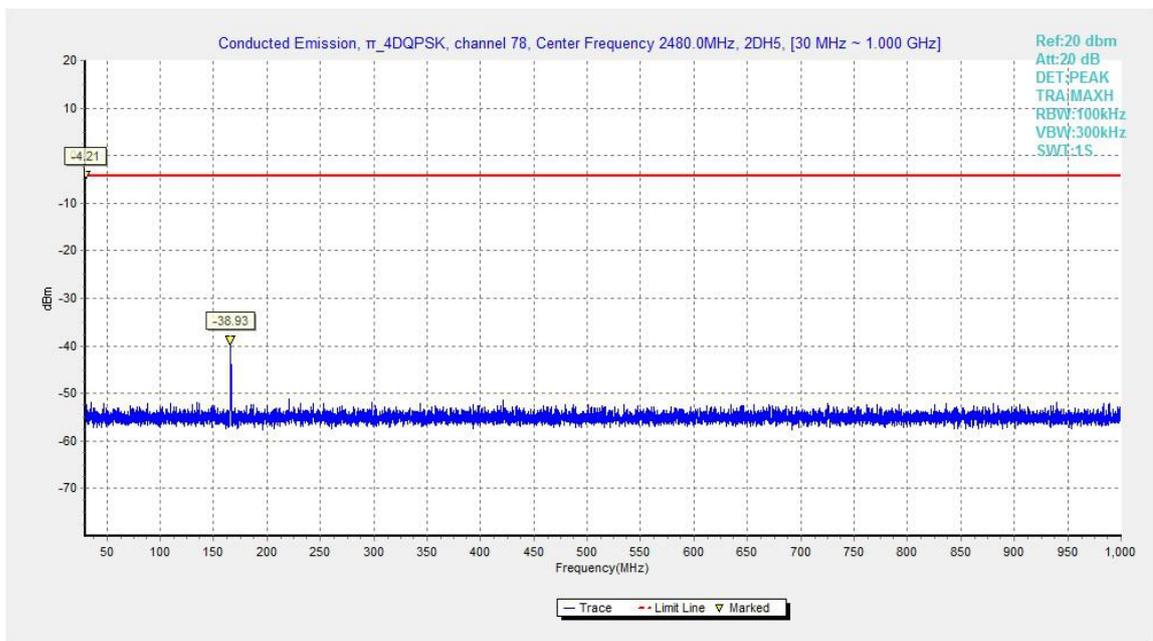


Fig.60. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 30MHz - 1GHz

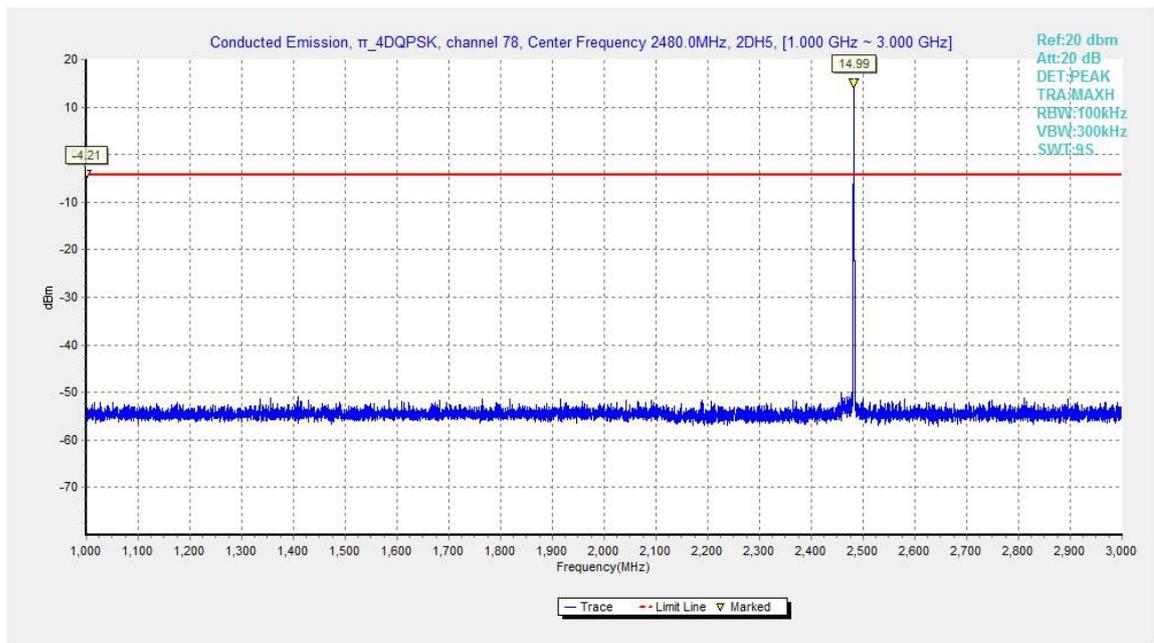


Fig.61. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

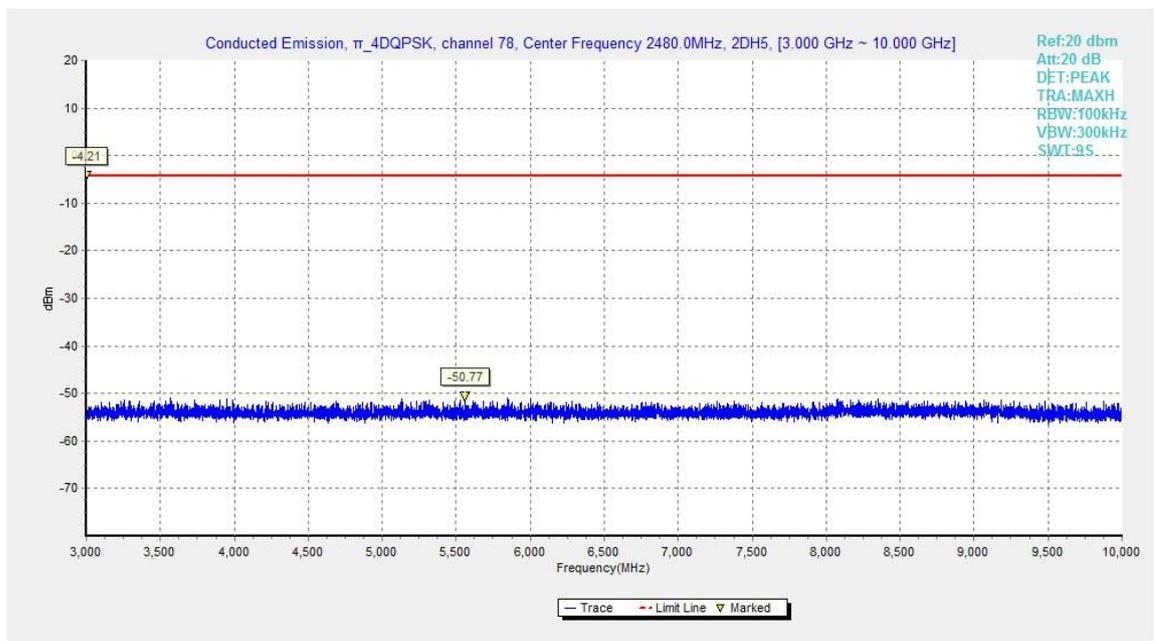


Fig.62. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 3GHz - 10GHz

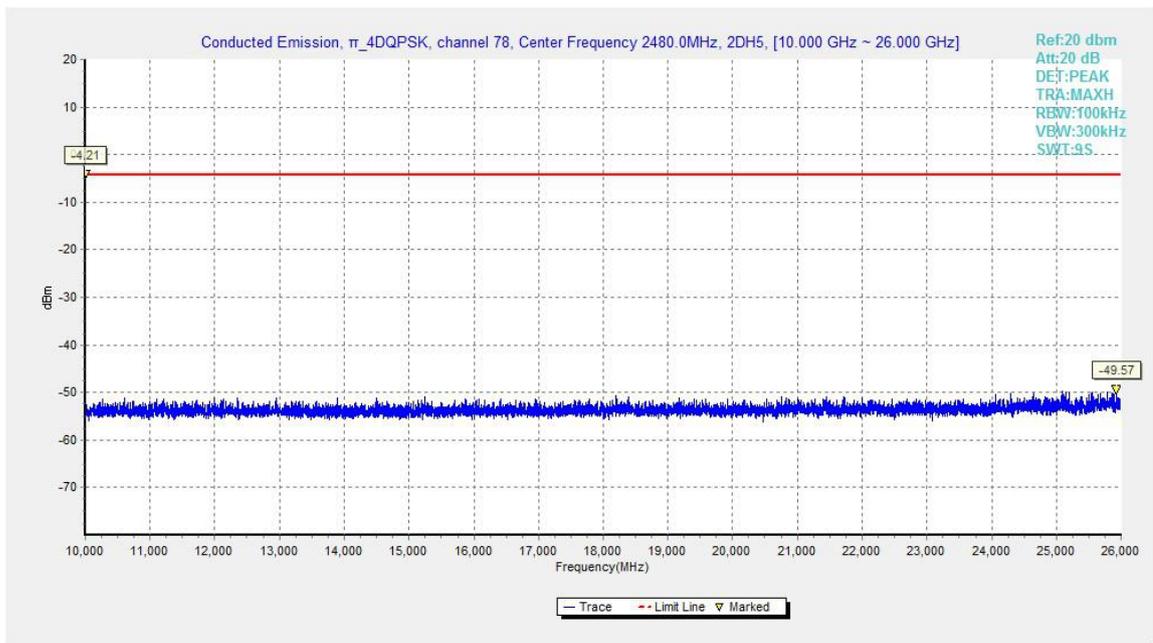


Fig.63. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 10GHz - 26GHz

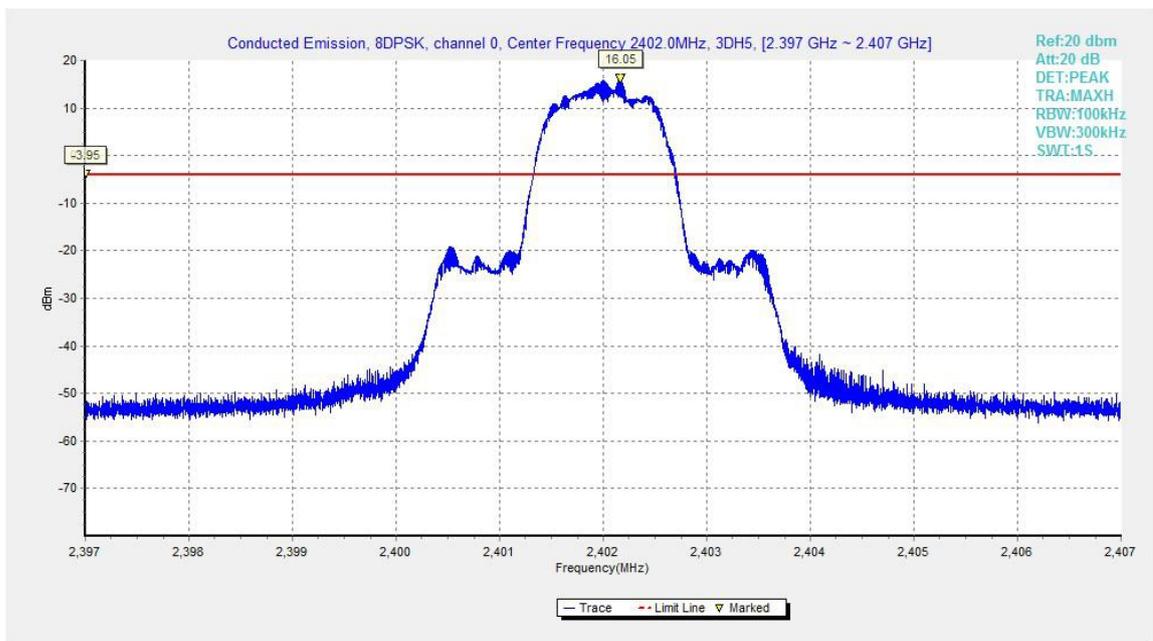


Fig.64. Conducted spurious emission: 8DPSK, Channel 0, 2402MHz

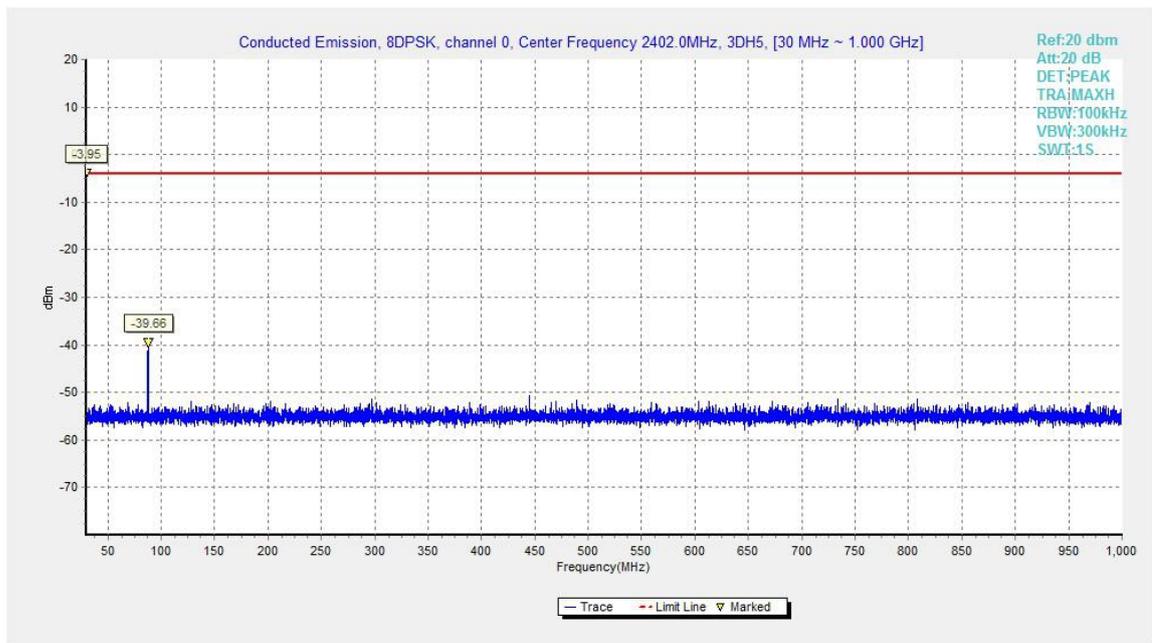


Fig.65. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

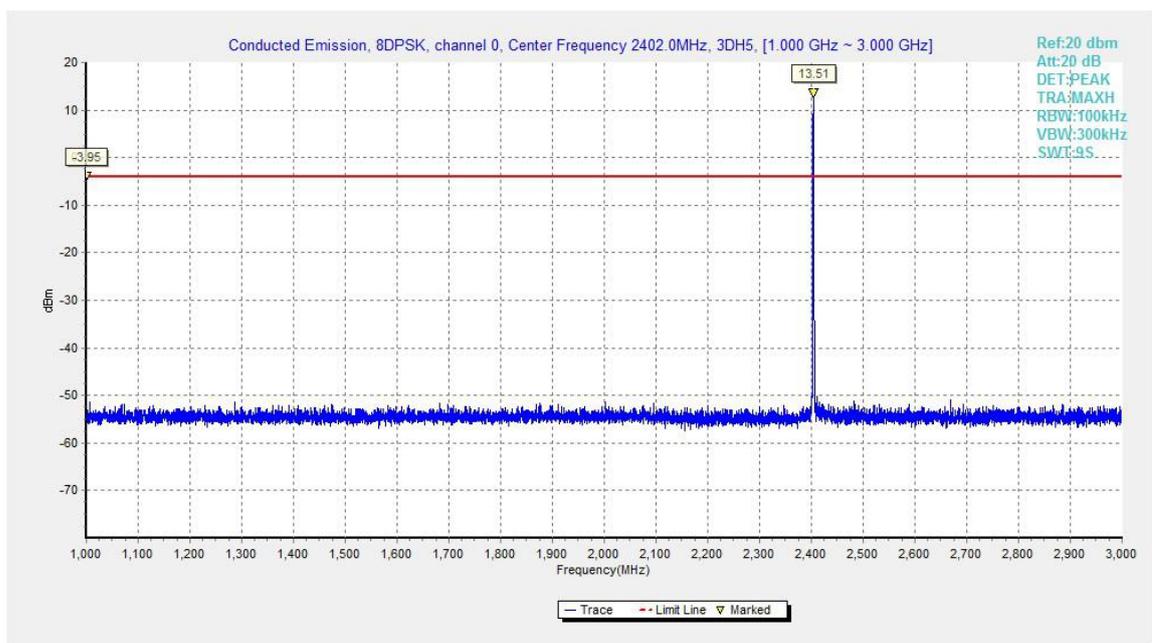


Fig.66. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz