


FCC SAR Test Report


APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : M2011K2G
FCC ID : 2AFZZK2G
STANDARD : FCC 47 CFR Part 2 (2.1093)

The product was received on Oct. 23, 2020 and testing was started from Nov. 02, 2020 and completed on Dec. 14, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	8
5. Maximum Tune-up Limit	10
6. Proximity Sensor Triggering Test	17
6.1 Proximity sensor triggering distances(Per KDB616217\$6.2)	17
7. RF Exposure Limits	18
7.1 Uncontrolled Environment	18
7.2 Controlled Environment	18
8. Specific Absorption Rate (SAR)	19
8.1 Introduction	19
8.2 SAR Definition	19
9. System Description and Setup	20
9.1 E-Field Probe	21
9.2 Data Acquisition Electronics (DAE)	21
9.3 Phantom	22
9.4 Device Holder	23
10. Measurement Procedures	24
10.1 Spatial Peak SAR Evaluation	24
10.2 Power Reference Measurement	25
10.3 Area Scan	25
10.4 Zoom Scan	26
10.5 Volume Scan Procedures	26
10.6 Power Drift Monitoring	26
11. Test Equipment List	27
12. System Verification	28
12.1 Tissue Simulating Liquids	28
12.2 Tissue Verification	29
12.3 System Performance Check Results	30
13. RF Exposure Positions	31
13.1 Ear and handset reference point	31
13.2 Definition of the cheek position	32
13.3 Definition of the tilt position	33
13.4 Body Worn Accessory	34
13.5 Product Specific 10g SAR Exposure	35
13.6 Wireless Router	35
14. Conducted RF Output Power (Unit: dBm)	36
15. Antenna Location	51
16. SAR Test Results	52
16.1 Head SAR	55
16.2 Hotspot SAR	65
16.3 Body Worn Accessory SAR	79
16.4 Product specific 10g SAR	86
16.5 Repeated SAR Measurement	86
17. Simultaneous Transmission Analysis	87
17.1 Head Exposure Conditions	89
17.2 Hotspot Exposure Conditions	97
17.3 Body-Worn Accessory Exposure Conditions	108
18. Uncertainty Assessment	116
19. References	117
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	



Sporton International (Kunshan) Inc.

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, M2011K2G**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.62	0.26	0.20	1.59
		GSM1900	0.50	0.51	0.20	
	WCDMA	Band II	0.67	0.75	0.65	
		Band IV	0.95	0.43	0.38	
		Band V	0.74	0.42	0.28	
	LTE	Band 2	0.64	0.63	0.54	
		Band 5	0.69	0.30	0.20	
		Band 7	0.63	0.71	0.55	
		Band 12/Band 17	0.24	0.26	0.21	
		Band 66/4	0.78	0.75	0.26	
		Band 41/Band 38	0.68	0.71	0.44	
	5G NR	n5	0.30	0.31	0.15	
		n7	0.68	0.70	0.47	
		n41	0.61	0.52	0.44	
		n77	0.72	0.45	0.24	
DTS	WLAN	2.4GHz WLAN	0.72	0.73	0.23	1.59
NII		5GHz WLAN	0.45	0.42	0.35	1.59
DSS	Bluetooth	2.4GHz Bluetooth	0.21	0.16	0.12	1.58

Highest 10g SAR Summary			
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)
NII	WLAN	5GHz WLAN	1.12
Date of Testing:			2020/11/02 ~ 2020/12/14

Remark: This device supports LTE B4 / B17 / B38 and B66 / B12 / B41. Since the supported frequency span for LTE B4 / B17 / B38 falls completely within the supports frequency span for LTE B66 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66 / B12 / B41. For LTE band 4 performed SAR testing separately for antenna 3/antenna 7 without LTE band66.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Xiaomi
Model Name	M2011K2G
FCC ID	2AFZZK2G
IMEI Code	SIM1: 868285059998581 SIM2: 868285059998599
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n77: 3700 MHz ~ 3980 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5805 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz WPC: 110 KHz ~ 148 KHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz : 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz : 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC:ASK WPC:ASK
HW Version	P2
SW Version	MIUI12
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE	

- operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 33.
5. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
6. There are two types of EUT, the sample 1 is 6+128GB capacity and the sample 2 is 8+256GB capacity. According to the difference, we only choose sample 1 to perform full SAR testing.
7. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table. Full power table and reduced power table (DSI 1: receiver on reduced power for head; DSI 2/3: handheld on reduced power for extremity; DSI 5: hotspot on reduced power for hotspot).
8. For WLAN when transmit simultaneous with WWAN LAT or UAT, power reduction will be activated to head.
9. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
10. 5G NR n77 supports HPUE, HPUE power and SAR testing performed separately, 5G NR n77 HUPE with higher power, 5G NR n77 HUPE SAR can represent power class 3 level SAR.
11. 5G NR n41/n77 supports MIMO mode, MIMO SAR base on standalone SAR summed together as MIMO SAR. MIMO mode limited to CP-OFDM, using DFT-s-OFDM SAR is more conservatively than CP-OFDM mode.
12. For 5G NR EN-DC mode, the simultaneous transmission analysis is used standalone SAR at total power level to show compliance.
13. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so NSA standalone total power level SAR can represent SA mode SAR.
14. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
15. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
16. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
17. This device supports 5G NR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.
18. RF exposure report for WPC (Wireless power charging) will be separately submitted.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40, 50
SA	n7	FDD	15	5, 10, 15, 20, 25, 30, 40, 50
	n41	TDD	30	20, 30, 40, 50, 60, 80, 90, 100
	n77	TDD	30	20, 30, 40, 50, 60, 80, 90, 100

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05									
FCC ID		2AFZZK2G							
Equipment Name		Mobile Phone							
Operating Frequency Range of each LTE transmission band		LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz							
Channel Bandwidth		LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used		QPSK / 16QAM / 64QAM /256QAM							
LTE Voice / Data requirements		Voice and Data							
LTE Release Version		R15, Cat18							
CA Support		Supported, Uplink and Downlink							
LTE MPR permanently built-in by design		Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
		Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})					MPR (dB)	
			1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz		20 MHz
		QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
		16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
		16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
		64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
		64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
		256 QAM					≥ 1	≤ 5	
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance		Yes, head/body-worn/ hotspot/extremity will trigger reduced power for some LTE bands, the detail please referred to section 14.							
LTE Carrier Aggregation Combinations		Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 14.							
LTE Carrier Aggregation Additional Information		1. This device supports LTE Carrier Aggregation (CA) in the uplink for 7C/38C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 4 carriers in the downlink and 2 carriers in the uplink.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

5. Maximum Tune-up Limit

<WWAN Tune-up Limit>

- For each cellular band, the device has several WWAN antennas, the antenna selection is based on the connection quality condition, and only one antenna will transmit at a time.
- The device implements the power management and sensor detection for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) by DSI and the device will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description.
DSI 1: Receiver on reduced power for head.
DSI 2/3: Handheld on proximity reduced power for extremity.
DSI 5: Hotspot on reduced power for hotspot.
- Below table shows maximum tune up output power configured for this EUT for various transmit conditions (Device State Index DSI) by manufacturer, and the detail power measurement and tune-up limit refer to appendix E.
- For 5G NR n41:
 - 5G NR n41 antenna can have two power amplifiers to access separately and transmit different power level.
 - PA1 (power amplify 1) means the first porthole to antenna.
 - PA2 (power amplify 2) means the second porthole to antenna.
 - 5G NR n41 MIMO with PA base on antenna information component have been evaluated including power and SAR testing.
 - It is special declared that 5G NR n41 antenna 7 only have PA1 and antenna 12 have PA2. Other antennas which n41 located can have PA1 or PA2.
 - 5G NR MIMO for n41 on page 15, mentioned MIMO- PA 1 or MIMO-PA2, it is per chain maximum tune up power of MIMO mode. MIMO power is summed from per chain power and MIMO SAR using per chain SAR summed together.
 - 5G NR MIMO SAR for n41, if per chain using higher power level from standalone NR power, it is very more conservatively summed per chain SAR and can represent MIMO SAR. (e.g. Ant 12 MIMO SA-PA2 per chain tune up power is 21.5dBm, we using SAR data with standalone SA power level 23.5dBm power can represent this per chain SAR testing and using it to summed another chain SAR as MIMO SAR conservatively).
- For 5G NR n7_ant 7 NSA mode using receiver detect mechanism triggered reduced power for head SAR, for perform full power SAR can tested pass, no need to consider reduced power level.

Mode	Ant 1 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
GSM850 GSM 1 Tx slot	33.50	33.50	33.50	33.50	33.50
GSM850 GPRS 1 Tx slot	33.50	33.50	33.50	33.50	33.50
GSM850 GPRS 2 Tx slots	30.00	30.00	30.00	30.00	30.00
GSM850 GPRS 3 Tx slots	28.00	28.00	28.00	28.00	28.00
GSM850 GPRS 4 Tx slots	26.50	26.50	26.50	26.50	26.50
GSM850 EDGE 1 Tx slot	27.50	27.50	27.50	27.50	27.50
GSM850 EDGE 2 Tx slots	24.00	24.00	24.00	24.00	24.00
GSM850 EDGE 3 Tx slots	22.50	22.50	22.50	22.50	22.50
GSM850 EDGE 4 Tx slots	21.00	21.00	21.00	21.00	21.00
WCDMA V	25.00	25.00	25.00	25.00	25.00
LTE Band 5	25.50	25.50	25.50	25.50	25.50
LTE Band12	24.00	24.00	24.00	24.00	24.00
LTE Band17	24.00	24.00	24.00	24.00	24.00



Mode	Ant 2 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
GSM1900 GSM 1 Tx slot	30.50	30.50	30.50	30.50	30.50
GSM1900 GPRS 1 Tx slot	30.50	30.50	30.50	30.50	30.50
GSM1900 GPRS 2 Tx slots	27.50	27.50	27.50	27.50	27.50
GSM1900 GPRS 3 Tx slots	25.50	25.50	25.50	25.50	25.50
GSM1900 GPRS 4 Tx slots	24.00	24.00	24.00	24.00	24.00
GSM1900 EDGE 1 Tx slot	27.00	27.00	27.00	27.00	27.00
GSM1900 EDGE 2 Tx slots	23.50	23.50	23.50	23.50	23.50
GSM1900 EDGE 3 Tx slots	21.50	21.50	21.50	21.50	21.50
GSM1900 EDGE 4 Tx slots	20.00	20.00	20.00	20.00	20.00
WCDMA II	25.00	25.00	22.00	25.00	23.00
WCDMA IV	25.00	25.00	21.00	25.00	21.00
LTE Band 2	25.50	25.50	21.50	25.50	24.50
LTE Ban 4	25.50	25.50	21.50	25.50	22.50
LTE Band 7	25.50	25.50	20.50	25.50	20.50
LTE Band 66	25.50	25.50	21.50	25.50	22.50
LTE Band 38	25.50	25.50	21.00	25.50	21.00
LTE Band 41	25.50	25.50	21.00	25.50	21.00
FR1 n7	25.50	25.50	19.50	25.50	19.50
FR1 n41 SA-PA1	25.50	25.50	21.50	25.50	21.50

Mode	Ant 3 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
GSM850 GSM 1 Tx slot	32.50	32.50	32.50	32.50	32.50
GSM850 GPRS 1 Tx slot	32.50	32.50	32.50	32.50	32.50
GSM850 GPRS 2 Tx slots	29.50	29.50	29.50	29.50	29.50
GSM850 GPRS 3 Tx slots	27.50	27.50	27.50	27.50	27.50
GSM850 GPRS 4 Tx slots	26.50	26.50	26.50	26.50	26.50
GSM850 EDGE 1 Tx slot	26.50	26.50	26.50	26.50	26.50
GSM850 EDGE 2 Tx slots	23.50	23.50	23.50	23.50	23.50
GSM850 EDGE 3 Tx slots	21.50	21.50	21.50	21.50	21.50
GSM850 EDGE 4 Tx slots	20.00	20.00	20.00	20.00	20.00
WCDMA V	24.00	23.00	23.00	24.00	24.00
LTE Band 5	24.50	23.50	23.50	24.50	24.50
LTE Band 7	23.50	16.50	16.50	23.50	18.50
LTE Band12	23.00	23.00	23.00	23.00	23.00
LTE Band17	23.00	23.00	23.00	23.00	23.00
LTE Band38	23.50	18.50	18.50	23.50	21.50
LTE Band41	23.50	18.50	18.50	23.50	21.50
FR1 n7	24.00	15.00	15.00	24.00	17.00
FR1 n41 SA-PA1	24.00	16.00	16.00	24.00	18.00
LTE Band 4	24.00	21.50	24.00	24.00	24.00

Mode	Ant 4 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
GSM1900 GSM 1 Tx slot	30.50	29.50	27.50	30.50	27.50
GSM1900 GPRS 1 Tx slot	30.50	29.50	27.50	30.50	27.50
GSM1900 GPRS 2 Tx slots	27.00	26.00	24.00	27.00	24.00
GSM1900 GPRS 3 Tx slots	25.50	24.50	22.50	25.50	22.50
GSM1900 GPRS 4 Tx slots	24.50	23.50	21.50	24.50	21.50
GSM1900 EDGE 1 Tx slot	27.00	26.00	24.00	27.00	24.00
GSM1900 EDGE 2 Tx slots	23.00	22.00	20.00	23.00	20.00
GSM1900 EDGE 3 Tx slots	21.00	20.00	18.00	21.00	18.00
GSM1900 EDGE 4 Tx slots	19.00	18.00	16.00	19.00	16.00
WCDMA II	25.00	21.00	21.00	25.00	23.00
WCDMA IV	25.00	22.00	22.00	25.00	24.00
LTE Band 2	25.50	20.50	20.50	25.50	23.50
LTE Ban 4	25.50	21.50	21.50	25.50	24.50
LTE Band 7	25.50	19.00	19.00	25.50	19.50
LTE Band 66	25.50	21.50	21.50	25.50	24.50
LTE Band 38	25.50	20.50	20.50	25.50	21.50
LTE Band 41	25.50	20.50	20.50	25.50	21.50
FR1 n7	25.50	17.50	17.50	25.50	17.50
FR1 n41 SA-PA1	25.50	17.50	17.50	25.50	17.50

Mode	Ant 6 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n77 PC3	25.50	22.50	22.50	25.50	22.50
FR1 n77 HPUE	27.50	22.50	22.50	27.50	22.50

Mode	Ant 7 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
LTE Band 4	20.50	20.50	20.50	20.50	20.50
LTE Band 7	20.50	20.50	20.50	20.50	20.50
LTE Band 38	20.50	20.50	20.50	20.50	20.50
LTE Band 41	20.50	20.50	20.50	20.50	20.50
FR1 n7	20.50	20.50	18.50	20.50	18.50
FR1 n41 SA-PA1	20.50	20.50	19.50	20.50	19.50

Mode	Ant 9 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n77 PC3	21.50	21.50	21.00	21.50	21.00
FR1 n77 HPUE	22.00	22.00	21.00	22.00	21.00

Mode	Ant 12 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n77 PC3	21.50	17.00	17.00	21.50	17.00
FR1 n77 HPUE	22.00	17.00	17.00	22.00	17.00

Mode	Ant 14 Standalone				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n77 PC3	21.50	16.00	16.00	21.50	18.00
FR1 n77 HPUE	22.00	16.00	16.00	22.00	18.00

Mode	Ant 1 NSA				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n5	25.50	25.50	25.50	25.50	25.50

Mode	Ant 2				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n7 NSA	23.50	23.50	15.50	23.50	16.50
FR1 N41 SA-PA2	23.00	23.00	19.00	23.00	19.00

Mode	Ant 3				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n5 NSA	24.50	20.40	20.40	24.50	24.50
FR1 n7 NSA	25.50	16.50	16.50	25.50	18.50
FR1 n41 SA-PA2	25.50	18.50	18.50	25.50	19.50

Mode	Ant 4				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n7 NSA	23.50	14.50	14.50	23.50	15.50
FR1 n41 SA-PA2	22.50	14.50	14.50	22.50	14.50

Mode	Ant 7 NSA				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n7	22.50	17.50	17.50	22.50	21.50

Mode	Ant 12 SA-PA2				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n41	23.50	23.50	23.50	23.50	23.50

Mode	Ant 6 UL MIMO				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n77 PC3	21.00	17.00	17.00	21.00	18.00
FR1 n77 HPUE	23.00	17.00	17.00	23.00	18.00

Mode	Ant 9 UL MIMO				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n77 PC3	18.00	14.00	14.00	18.00	15.00
FR1 n77 HPUE	20.00	14.00	14.00	20.00	15.00

Mode	Ant 12 UL MIMO				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n77 PC3	18.00	14.00	14.00	18.00	15.00
FR1 n77 HPUE	20.00	14.00	14.00	20.00	15.00

Mode	Ant 14 UL MIMO				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n77 PC3	21.00	17.00	17.00	21.00	18.00
FR1 n77 HPUE	23.00	17.00	17.00	23.00	18.00

Mode	Ant 2 MIMO SA-PA1				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n41	21.50	17.50	17.50	21.50	17.50

Mode	Ant 4 MIMO SA-PA1				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n41	21.50	17.50	17.50	21.50	17.50

Mode	Ant 3 MIMO SA-PA1				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n41	21.50	16.00	16.00	21.50	18.00

Mode	Ant 2 MIMO SA-PA2				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n41	21.50	15.00	15.00	21.50	15.00

Mode	Ant 4 MIMO SA-PA2				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n41	21.50	14.50	14.50	21.50	14.50

Mode	Ant 3 MIMO SA-PA2				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n41	21.50	17.50	17.50	21.50	17.50

Mode	Ant 12MIMO SA-PA2				
	Default	Head	Hotspot	Body Worn	Extremity
	Full Power	DSI-1	DSI-5	Full Power	DSI-2/3
FR1 n41	21.50	21.50	21.50	21.50	21.50

< Bluetooth and WLAN Tune-up Limit>


Mode	Full power	WLAN MIMO Ant							
		Head		Body-Worn		Hotspot		Handheld	
		Receiver On Standalone	Receiver On Simultaneous transmission	Standalone	Simultaneous transmission	Standalone	Simultaneous transmission	Standalone	Simultaneous transmission
WLAN2.4G Ant5+Ant7	23.00	21.00	18.00	23.00	23.00	23.00	23.00	23.00	23.00
WLAN5.2GHz Ant8+Ant10	20.50	18.50	18.50	20.50	20.50	19.50	19.50	20.50	20.50
WLAN5.3GHz Ant8+Ant10	20.50	18.50	18.50	20.50	20.50			20.50	20.50
WLAN5.5GHz Ant8+Ant10	20.50	18.50	18.50	20.50	20.50			20.50	20.50
WLAN5.8GHz Ant8+Ant10	20.50	18.50	16.00	20.50	20.50	19.50	19.50	20.50	20.50

Frequency	Mode	Ant 5 Maximum Average Power (dBm)	Ant 7 Maximum Average Power (dBm)
Bluetooth	BDR/EDR	18.00	16.00
	V4.2 LE	8.00	7.00
	V5.0 LE	8.00	7.00

6. Proximity Sensor Triggering Test

6.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (3900MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the top/bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back or bottom or left side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. P-sensor can detect handheld state, WCDMA band II/IV, LTE band 2/4/7/66/38/41 and 5GNR n7 / n41 / n77 / n77HPUE for front/back/bottom/left sides of product specific 10g SAR condition reduced powers will be active for handheld SAR base on different antenna. The proximity sensors trigger distance can refer to the following table.

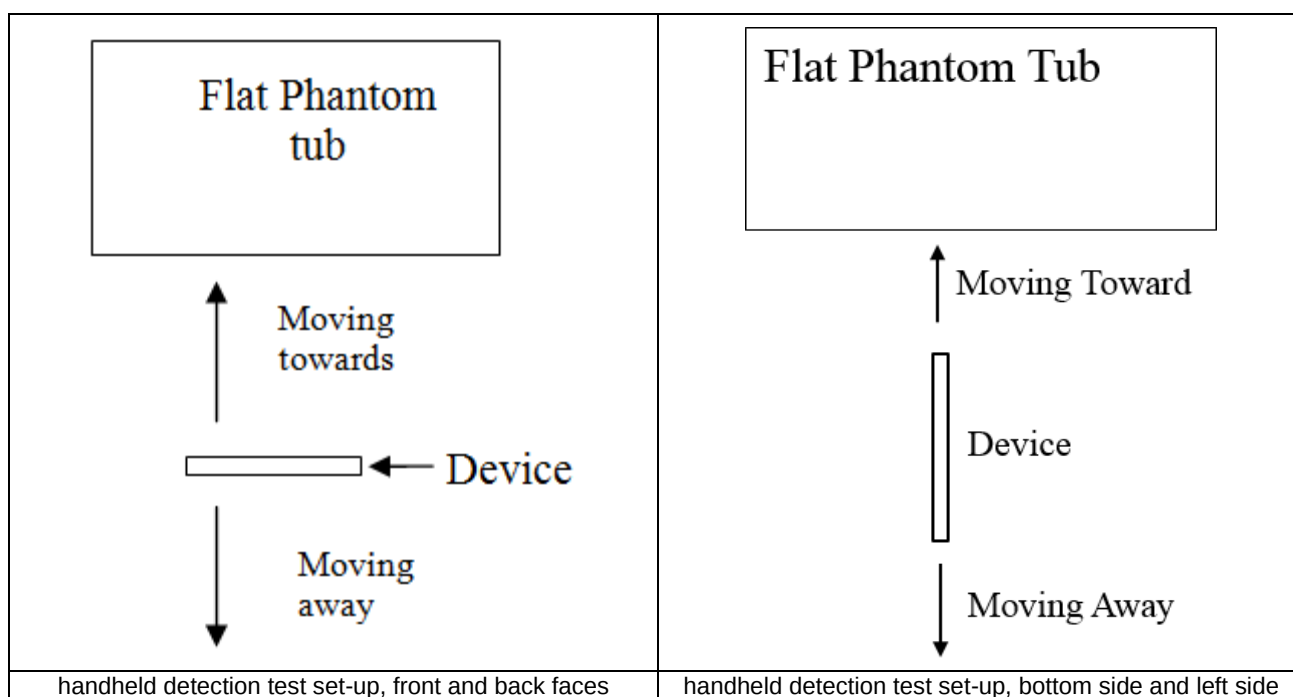

<Handheld>

Antenna 2:

Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving towards	Moving towards	Moving away
Minimum	16	16	16	16	16	16

Antenna 4/6/12:

Position	Back		Left Side	
	Moving towards	Moving towards	Moving towards	Moving away
Minimum	6	6	6	6

7. RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

9. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

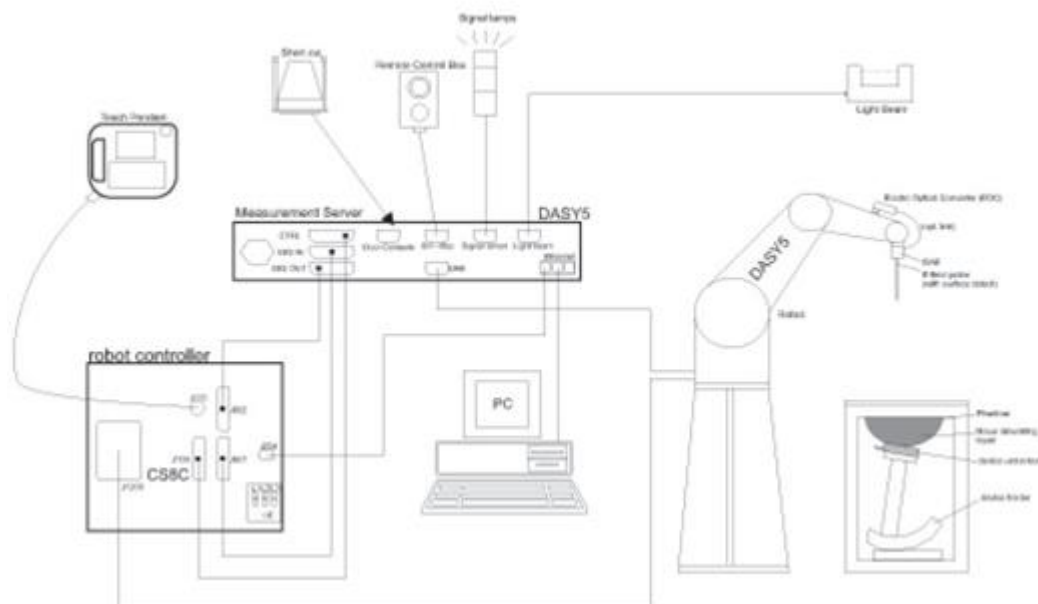

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

9.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

9.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

9.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

9.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

10.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

10.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

11. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2022/3/26
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2022/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2022/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2022/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2022/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1070	2018/12/7	2021/12/6
SPEAG	3700MHz System Validation Kit	D3700V2	1037	2019/4/29	2022/4/28
SPEAG	3900MHz System Validation Kit	D3900V2	1048	2020/5/14	2021/5/13
SPEAG	5000MHz System Validation Kit	D5GHzV2	1128	2019/12/16	2020/12/15
SPEAG	Data Acquisition Electronics	DAE4	1279	2020/8/25	2021/8/24
SPEAG	Data Acquisition Electronics	DAE4	1338	2019/11/20	2020/11/19
SPEAG	Data Acquisition Electronics	DAE4	1303	2020/7/7	2021/7/6
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2020/9/25	2021/9/24
SPEAG	Dosimetric E-Field Probe	EX3DV4	3843	2020/9/23	2021/9/22
SPEAG	Dosimetric E-Field Probe	ES3DV3	3293	2020/9/23	2021/9/22
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1753	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1754	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BB	TP-1503	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2020/4/16	2021/4/15
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2020/4/16	2021/4/15
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2020/4/16	2021/4/15
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2020/10/27	2021/10/26
Anritsu	Vector Signal Generator	MG3710A	6201682672	2020/1/8	2021/1/7
Rohde & Schwarz	Power Meter	NRVD	102081	2020/8/14	2021/8/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2020/8/13	2021/8/12
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2020/8/13	2021/8/12
R&S	CBT BLUETOOTH TESTER	CBT	101641	2020/1/8	2021/1/7
EXA	Spectrum Analyzer	FSV7	101631	2020/1/8	2021/1/7
Testo	Hygrometer	608-H1	1241332088	2020/1/8	2021/1/7
FLUKE	DIGITAC THERMOMETER	51II	97240029	2020/8/14	2021/8/13
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

12. System Verification

12.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

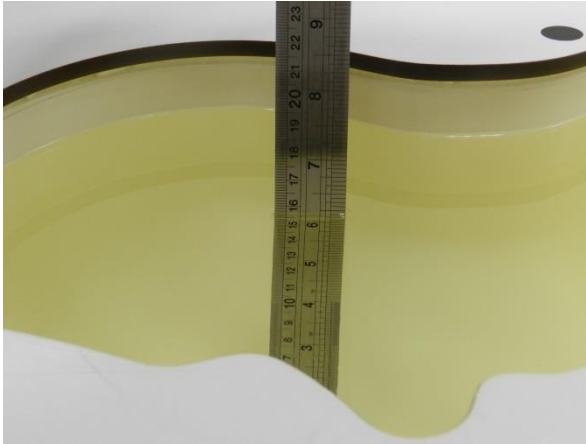


Fig 11.1 Photo of Liquid Height for Head SAR

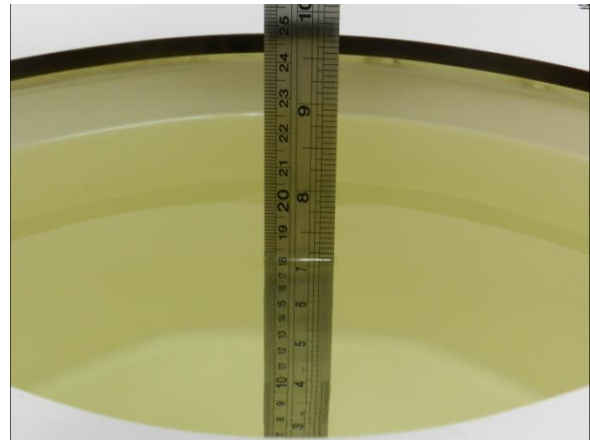


Fig 11.2 Photo of Liquid Height for Body SAR

12.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.7	0.904	42.297	0.89	41.90	1.57	0.95	±5	2020/11/2
835	Head	22.6	0.910	41.571	0.90	41.50	1.11	0.17	±5	2020/11/4
1750	Head	22.8	1.348	40.300	1.37	40.10	-1.61	0.50	±5	2020/11/6
1900	Head	22.9	1.424	39.391	1.40	40.00	1.71	-1.52	±5	2020/11/8
2450	Head	22.7	1.869	38.392	1.80	39.20	3.83	-2.06	±5	2020/11/12
2600	Head	22.6	2.048	37.773	1.96	39.00	4.49	-3.15	±5	2020/11/10
5250	Head	22.8	4.683	35.318	4.71	35.90	-0.57	-1.62	±5	2020/11/14
5600	Head	22.6	5.029	34.778	5.07	35.50	-0.81	-2.03	±5	2020/11/16
5750	Head	22.8	5.190	34.530	5.22	35.40	-0.57	-2.46	±5	2020/11/18
835	Head	22.6	0.896	41.125	0.90	41.50	-0.44	-0.90	±5	2020/12/2
2600	Head	22.7	1.956	40.043	1.96	39.00	-0.20	2.67	±5	2020/12/10
3700	Head	22.9	3.043	38.221	3.12	37.70	-2.47	1.38	±5	2020/12/12
3900	Head	22.8	3.247	37.812	3.32	37.50	-2.20	0.83	±5	2020/12/14

12.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/11/2	750	Head	250	1087	3843	1338	2.05	8.36	8.2	-1.91
2020/11/4	835	Head	250	4d151	3843	1338	2.20	9.30	8.8	-5.38
2020/11/6	1750	Head	250	1090	3843	1338	9.06	36.40	36.24	-0.44
2020/11/8	1900	Head	250	5d170	3843	1338	9.27	39.00	37.08	-4.92
2020/11/12	2450	Head	250	908	3843	1338	13.30	52.80	53.2	0.76
2020/11/10	2600	Head	250	1070	3843	1338	15.00	58.10	60	3.27
2020/11/14	5250	Head	100	1128	3843	1338	7.34	80.00	73.4	-8.25
2020/11/16	5600	Head	100	1128	3843	1338	8.60	82.40	86	4.37
2020/11/18	5750	Head	100	1128	3843	1338	8.15	79.10	81.5	3.03
2020/12/2	835	Head	250	4d151	3293	1303	2.35	9.30	9.4	1.08
2020/12/10	2600	Head	250	1070	3293	1303	13.50	58.10	54	-7.06
2020/12/12	3700	Head	100	1037	3857	1279	6.46	68.50	64.6	-5.69
2020/12/14	3900	Head	100	1048	3857	1279	6.62	70.20	66.2	-5.70

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/11/14	5250	Head	100	1128	3843	1338	2.08	22.90	20.8	-9.17
2020/11/16	5600	Head	100	1128	3843	1338	2.47	23.60	24.7	4.66
2020/11/18	5750	Head	100	1128	3843	1338	2.35	22.60	23.5	3.98

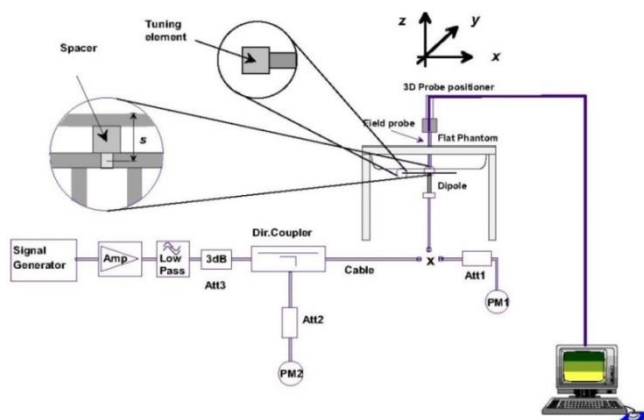


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

13. RF Exposure Positions

13.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

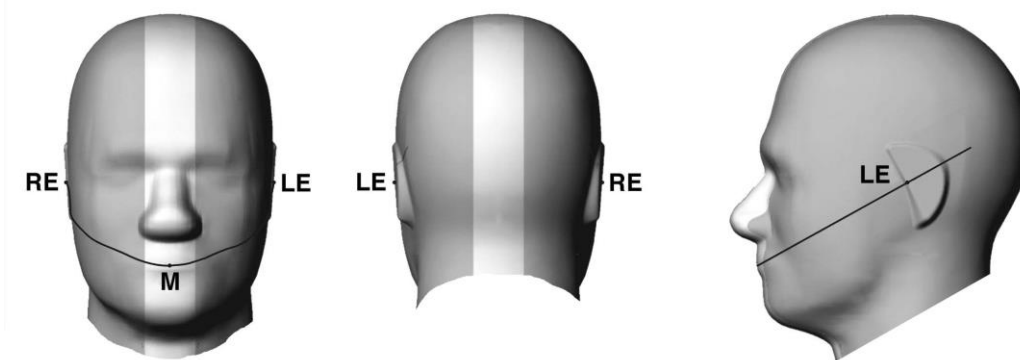


Fig 12.1.1 Front, back, and side views of SAM twin phantom

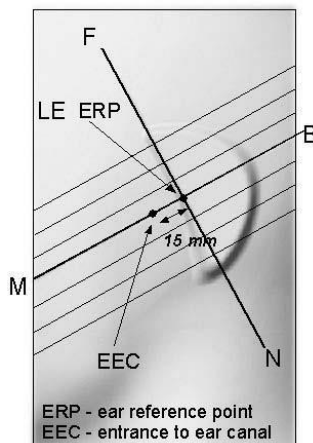


Fig 12.1.2 Close-up side view of phantom showing the ear region.

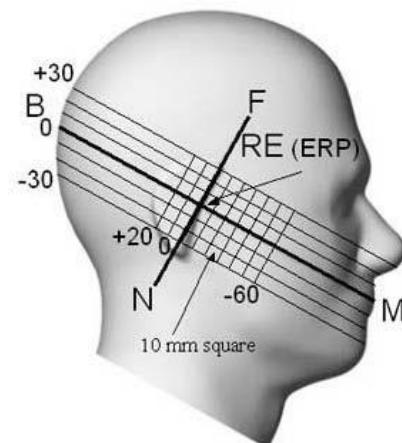


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

13.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

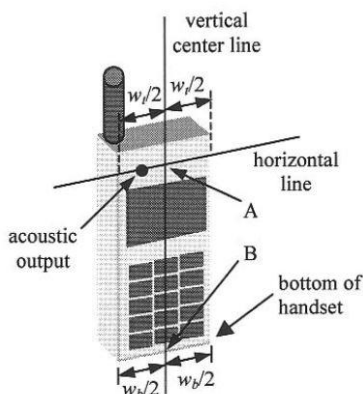


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

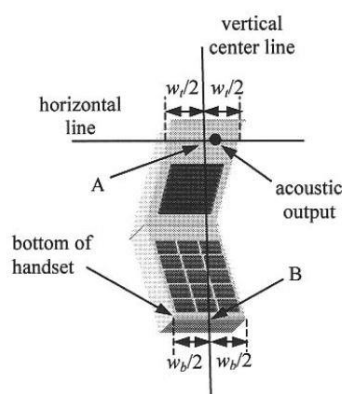


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

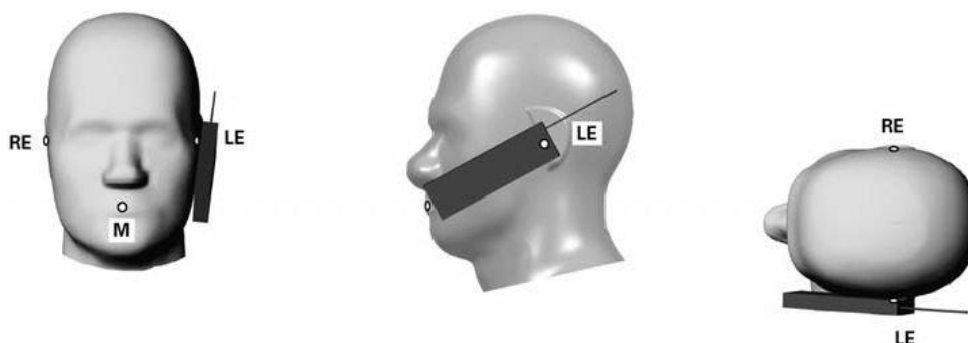


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

13.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

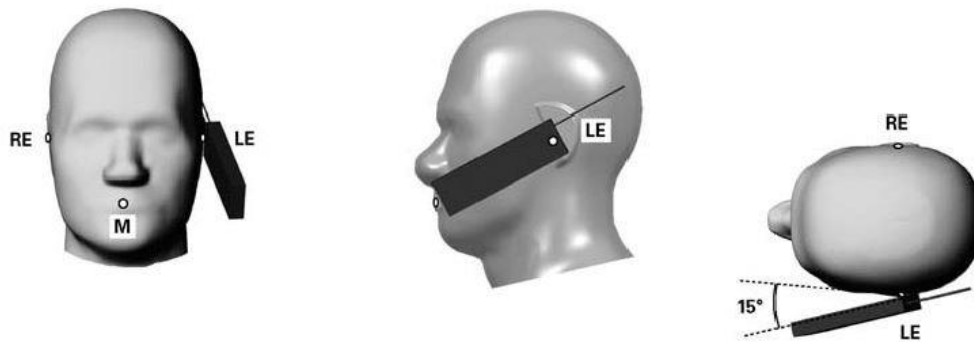


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

13.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

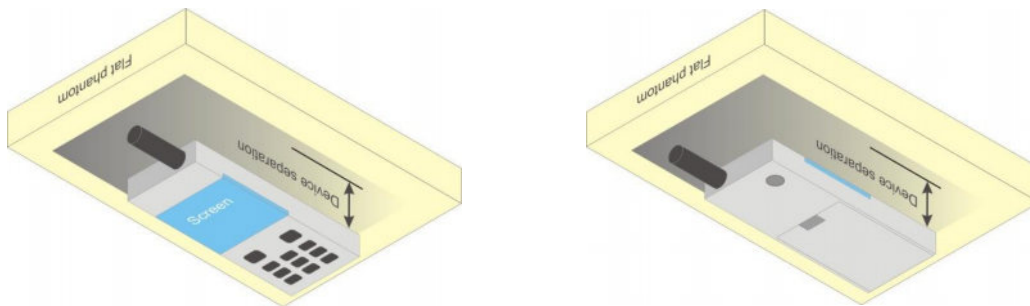


Fig 12.4 Body Worn Position

13.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

13.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

14. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850 (Ant.3)/GSM1900 (Ant.4), GPRS 1Tx slots for GSM850 (Ant.1) and GPRS 2Tx slots for GSM1900 (Ant.2) are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

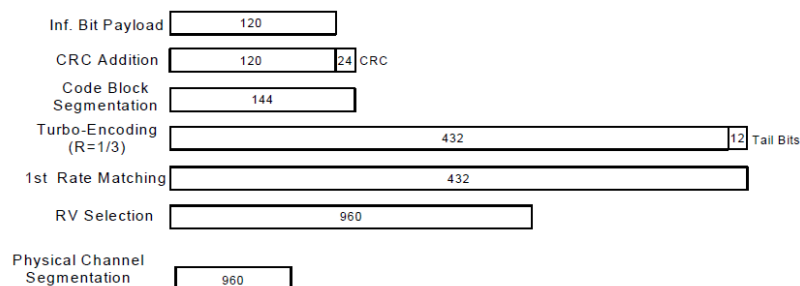


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

<WCDMA Conducted Power>


General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4 / B17 / B38 SAR test was covered by B66 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

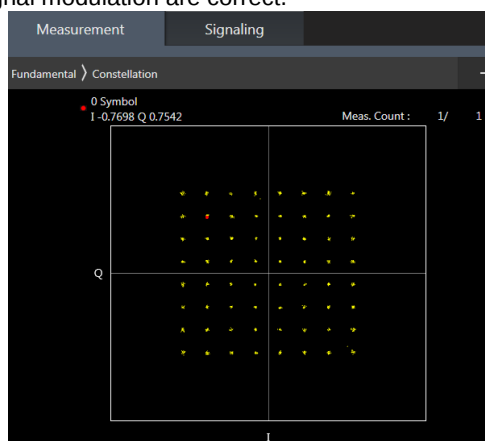

64QAM

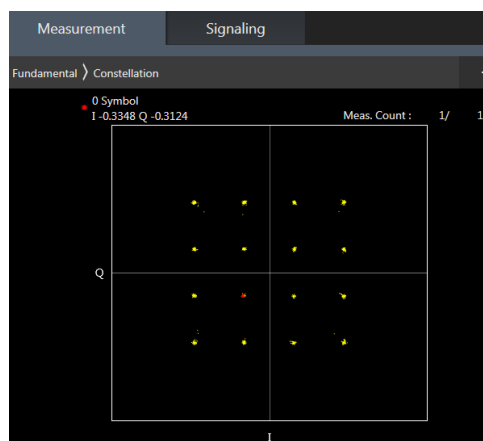

16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

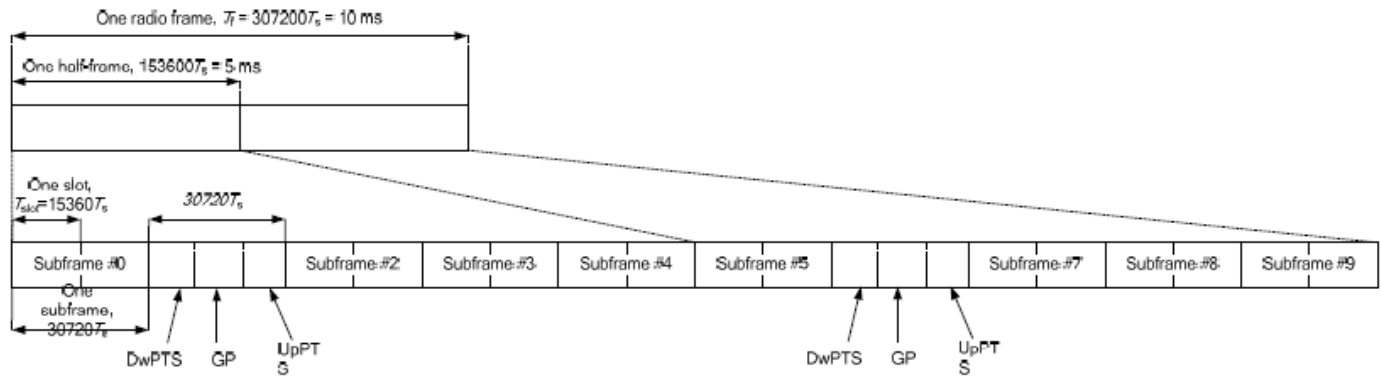


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE Band 41 Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset
2CC #1	CA_2A-7A	3CC #1	3CC #1	CA_2A-7C	
2CC #2	CA_4A-5A		3CC #2	CA_2A-4A-7A	
2CC #3	CA_4A-7A	3CC #2	3CC #3	CA_4A-7C	
2CC #4	CA_5A-7A	3CC #8	3CC #4	CA_7A-66A-66A	4CC #1
2CC #5	CA_5A-66A	3CC #7	3CC #5	CA_2A-7A-7A	
2CC #6	CA_7A-7A	3CC #1	3CC #6	CA_5A-7C	
2CC #7	CA_66A-66A	3CC #7	3CC #7	CA_5A-66A-66A	4CC #2
2CC #8	CA_2A-4A	3CC #2	3CC #8	CA_5A-7A-66A	4CC #2
2CC #9	CA_2C				
2CC #10	CA_7C				
2CC #11	CA_38C				

4CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset
4CC #1	CA_7C-66A-66A	
4CC #2	CA_5A-7A-66A-66A	

4X4 MIMO	WWAN Band	
	LTE Band: B4 / B7 / B38 / B41	


LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_7C, LTE CA_38C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.

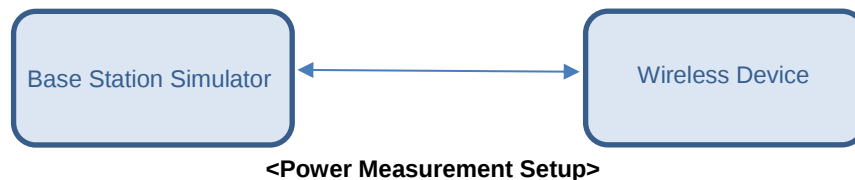

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n5 limited to NSA mode and supported SCS 15KHz DFT/CP-OFDM, PI/2 BPSK/QPSK/ 16QAM/ 64QAM/ 256QAM, Bandwidth 5M/10M/15M/20M.
2. 5G NR n7 supported SA/NSA and SCS 15KHz DFT/CP-OFDM, PI/2 BPSK/QPSK/16QAM/64QAM/ 256QAM, Bandwidth 5M/10M/15M/20M/25M/30M/40M/50M.
3. 5G NR n41/77 limited to SA mode and supported SCS 15KHz DFT/CP-OFDM, PI/2 BPSK /QPSK/ 16QAM/ 64QAM/256QAM, Bandwidth 20M/30M/40M/50M/60M/80M/90M/100M.
4. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QMA/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QMA/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for PI/2 BPSK SAR testing follows 1RB PI/2 BPSK allocation procedure
 - e. PI/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
5. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.
6. 5GNR n77 supports HPUE, HPUE power and SAR testing performed separately.
7. 5GNR n41/n77 supports MIMO mode, MIMO SAR base on standalone SAR summed together as MIMO SAR. MIMO mode limited to CP-OFDMA, using DFT-s-OFDM SAR is more conservatively than CP-OFDMA mode.
8. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so NSA standalone total power level SAR can represent SA mode SAR.
9. 5GNR NSA mode, the power level is the same as 5GNR SA mode, so 5GNR NSA mode and SA mode power table only show one time.
10. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
11. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.

<3GPP 38.101 MPR for EN-DC>
Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

ENDC				Component list 1		Component list 2		Component list 3		Component list 5		Component list 10		Component list 11		Component list 13		Component list 18	
FR 1	EN-DC	4G UL	5G-NRUL	4G Ant 1	5G NR Ant2	4G Ant 1	5G NR Ant3	4G Ant 1	5G NR Ant4	4G Ant1	5G NR Ant7	4G Ant2	5G NR Ant1	4G Ant2	5G NR Ant3	4G Ant2	5G NR Ant7	4G Ant3	5G NR Ant1
n5	DC_7A_n5A	7A--Ant2&3&4&7	n5A--Ant1&3									Ant 2	Ant 1	Ant 2	Ant 3			Ant 3	Ant 1
n7	DC_2A_n7A	2A--Ant2&4	n7A--Ant3&7											Ant 2	Ant 3	Ant 2	Ant 7		
	DC_5A_n7A	5A--Ant1&3	n7A--Ant2&3&4&7	Ant 1	Ant 2	Ant 1	Ant 3	Ant 1	Ant 4	Ant 1	Ant 7								

ENDC				Component list 19		Component list 20		Component list 22		Component list 27		Component list 28		Component list 30		Component list 36	
FR 1	EN-DC	4G UL	5G-NRUL	4G Ant3	5G NR Ant2	4G Ant3	5G NR Ant4	4G Ant3	5G NR Ant7	4G Ant4	5G NR Ant1	4G Ant4	5G NR Ant3	4G Ant4	5G NR Ant7	4G Ant7	5G NR Ant3
n5	DC_7A_n5A	7A--Ant2&3&4&7	n5A--Ant1&3							Ant 4	Ant 1	Ant 4	Ant 3			Ant 7	Ant 3
n7	DC_2A_n7A	2A--Ant2&4	n7A--Ant3&7									Ant 4	Ant 3	Ant 4	Ant 7		
	DC_5A_n7A	5A--Ant1&3	n7A--Ant2&3&4&7	Ant 3	Ant 2	Ant 3	Ant 4	Ant 3	Ant 7								

FR 1	Ant	UL MIMO		UL MIMO		UL MIMO		UL MIMO		UL MIMO	
n41	Ant2&4&3&12	Ant 2 SA_PA 1	Ant 3 SA_PA 2	Ant 2 SA_PA 1	Ant 4 SA_PA 2	Ant 2 SA_PA 1	Ant 12 SA_PA 2	Ant 3 SA_PA 1	Ant 4 SA_PA 2	Ant 4 SA_PA 1	Ant 12 SA_PA 2
n77	Ant6&9&12&14	Ant 6	Ant 12	Ant 6	Ant 14	Ant 9	Ant 12	Ant 9	Ant 14		

Note:

1. 5GNR n41 and 5GNR n77 are limited to SA mode.
2. 5GNR n41 antenna can have two Power Amplify to access separately and transmit different power level.
3. PA1 (power amplify 1) means the first porthole to antenna.
4. PA2 (power amplify 2) means the second porthole to antenna.
5. Above 5GNR n41 MIMO with PA base on antenna information component have been evaluated including power and SAR testing.


<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. 802.11ax full tone size and partial tone size, for full tone size with higher power level, So only chose full tone size to perform SAR testing.

<2.4GHz Bluetooth>
General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.83 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation

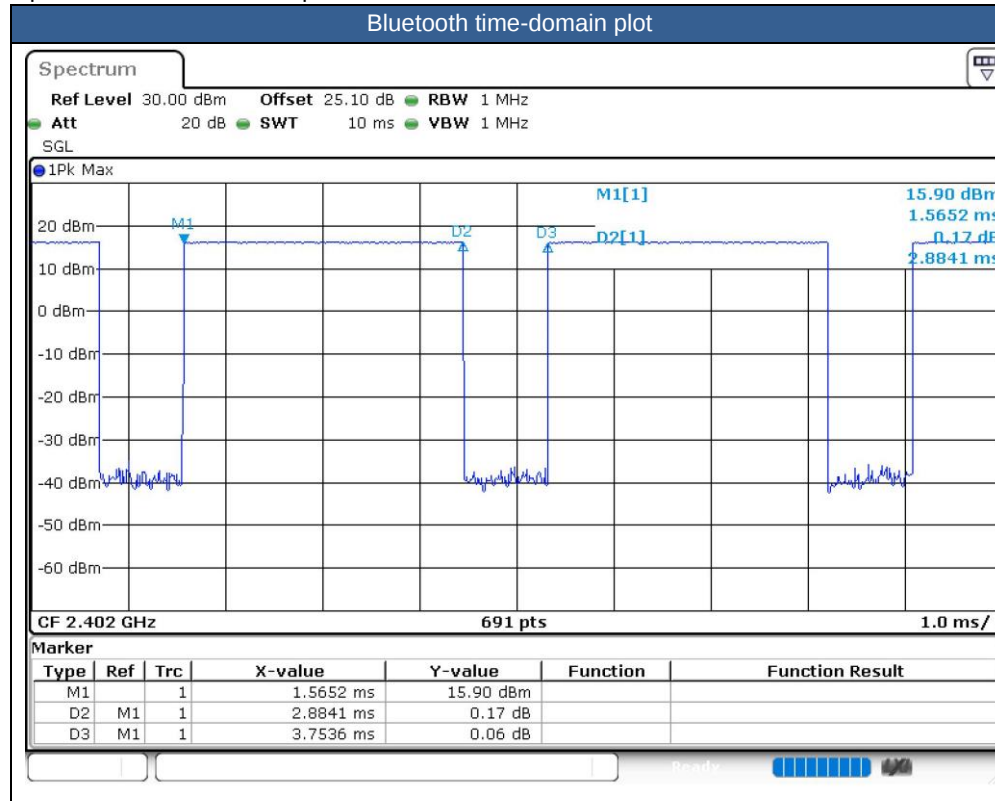



15. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
5. There are two types of EUT, the sample 1 is 6+128GB capacity and the sample 2 is 8+256GB capacity. According to the difference, we only choose sample 1 to perform full SAR testing.
6. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table. Full power table and reduced power table (DSI 1: receiver on reduced power for head; DSI 2/3: handheld on reduced power for extremity; DSI 5: hotspot on reduced power for hotspot).
7. For WLAN when transmit simultaneous with WWAN LAT or UAT, power reduction will be activated to head.
8. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
9. 5GNR n77 supports HPUE, HPUE power and SAR testing performed separately, 5GNR n77 HUPE with higher power, 5GNR n77 HUPE SAR can represent power class 3 level SAR.
10. 5GNR n41/n77 supports MIMO mode, MIMO SAR base on standalone SAR summed together as MIMO SAR. MIMO mode limited to CP-OFDMA, using DFT-s-OFDM SAR is more conservatively than CP-OFDMA mode.
11. 5GNR n41 and 5GNR n77 are limited to SA mode.
 - a) 5GNR n41 antenna can have two power amplifiers to access separately and transmit different power level.
 - b) PA1 (power amplify 1) means the first porthole to antenna.
 - c) PA2 (power amplify 2) means the second porthole to antenna.
 - d) 5GNR n41 MIMO with PA base on antenna information component have been evaluated including power and SAR testing.
 - e) It is special declared that 5GNR n41 antenna 7 only have PA1 and antenna 12 have PA2. Other antennas which n41 located can have PA1 or PA2.
12. For 5GNR EN-DC mode, the simultaneous transmission analysis is used standalone SAR at total power level to show compliance.
13. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so NSA standalone total power level SAR can represent SA mode SAR.
14. 5GNR NSA mode, the power level is the same as 5GNR SA mode, so 5GNR NSA mode and SA mode power table only show one time.
15. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
16. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
17. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2

W/kg SAR test reduction threshold.

- a. All WWAN/WLAN/BT bands hotspot SAR scaled to full power state (for handheld on state, the maximum full power means sensor on reduced power for some bands) are all less than 1.2W/Kg, no need to perform handheld SAR testing.
- b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
- c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850 (Ant.3)/GSM1900 (Ant.4), GPRS 1Tx slots for GSM850 (Ant.1) and GPRS 2Tx slots for GSM1900 (Ant.2) are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq$ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq$ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is $\leq$ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq$ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is $>$ 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is $\leq$ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is $\leq$ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. This device supports HPUE for LTE band 41 with class 2 level, so HPUE SAR has been performed.
7. For LTE B4 / B5 / B12 / B17/ B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE B4 / B17 / B38 SAR test was covered by LTE B66 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz, for SISO mode power is less than per chain power of MIMO mode,
7. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of antenna 1 and antenna 2 respectively to calculate sum of the power for MIMO mode
8. Only chose MIMO power to perform SAR testing.

16.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 1	GPRS 1 Tx slot	Right Cheek	Full	128	824.2	32.34	33.50	1.306	0.01	0.026	0.034
	GSM850_Ant 1	GPRS 1 Tx slot	Right Tilted	Full	128	824.2	32.34	33.50	1.306	0.03	0.019	0.025
	GSM850_Ant 1	GPRS 1 Tx slot	Left Cheek	Full	128	824.2	32.34	33.50	1.306	-0.07	0.060	0.078
	GSM850_Ant 1	GPRS 1 Tx slot	Left Tilted	Full	128	824.2	32.34	33.50	1.306	-0.05	0.020	0.026
	GSM850_Ant 3	GPRS 4 Tx slots	Right Cheek	Full	189	836.4	25.36	26.50	1.300	0.03	0.452	0.588
01	GSM850_Ant 3	GPRS 4 Tx slots	Right Tilted	Full	189	836.4	25.36	26.50	1.300	-0.09	0.474	0.621
	GSM850_Ant 3	GPRS 4 Tx slots	Left Cheek	Full	189	836.4	25.36	26.50	1.300	0.02	0.378	0.491
	GSM850_Ant 3	GPRS 4 Tx slots	Left Tilted	Full	189	836.4	25.36	26.50	1.300	0.05	0.340	0.442
	GSM1900_Ant 2	GPRS 2 Tx slots	Right Cheek	Full	661	1880	26.54	27.50	1.247	0.08	0.037	0.046
	GSM1900_Ant 2	GPRS 2 Tx slots	Right Tilted	Full	661	1880	26.54	27.50	1.247	0.06	0.029	0.036
	GSM1900_Ant 2	GPRS 2 Tx slots	Left Cheek	Full	661	1880	26.54	27.50	1.247	-0.09	0.032	0.040
	GSM1900_Ant 2	GPRS 2 Tx slots	Left Tilted	Full	661	1880	26.54	27.50	1.247	0.03	0.024	0.030
02	GSM1900_Ant 4	GPRS 4 Tx slots	Right Cheek	Reduced	661	1880	22.75	23.50	1.189	-0.09	0.420	0.499
	GSM1900_Ant 4	GPRS 4 Tx slots	Right Tilted	Reduced	661	1880	22.75	23.50	1.189	0.04	0.103	0.122
	GSM1900_Ant 4	GPRS 4 Tx slots	Left Cheek	Reduced	661	1880	22.75	23.50	1.189	0.01	0.085	0.101
	GSM1900_Ant 4	GPRS 4 Tx slots	Left Tilted	Reduced	661	1880	22.75	23.50	1.189	-0.02	0.032	0.038

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 2	RMC 12.2Kbps	Right Cheek	Full	9400	1880	24.20	25.00	1.202	-0.03	0.088	0.106
	WCDMA II_Ant 2	RMC 12.2Kbps	Right Tilted	Full	9400	1880	24.20	25.00	1.202	0.06	0.071	0.085
	WCDMA II_Ant 2	RMC 12.2Kbps	Left Cheek	Full	9400	1880	24.20	25.00	1.202	-0.09	0.076	0.091
	WCDMA II_Ant 2	RMC 12.2Kbps	Left Tilted	Full	9400	1880	24.20	25.00	1.202	0.03	0.065	0.078
03	WCDMA II_Ant 4	RMC 12.2Kbps	Right Cheek	Reduced	9400	1880	20.23	21.00	1.194	-0.06	0.559	0.667
	WCDMA II_Ant 4	RMC 12.2Kbps	Right Tilted	Reduced	9400	1880	20.23	21.00	1.194	0.04	0.339	0.405
	WCDMA II_Ant 4	RMC 12.2Kbps	Left Cheek	Reduced	9400	1880	20.23	21.00	1.194	0.08	0.169	0.202
	WCDMA II_Ant 4	RMC 12.2Kbps	Left Tilted	Reduced	9400	1880	20.23	21.00	1.194	0.01	0.077	0.092
	WCDMA IV_Ant 2	RMC 12.2Kbps	Right Cheek	Full	1413	1732.6	24.05	25.00	1.245	0.07	0.069	0.086
	WCDMA IV_Ant 2	RMC 12.2Kbps	Right Tilted	Full	1413	1732.6	24.05	25.00	1.245	-0.06	0.055	0.068
	WCDMA IV_Ant 2	RMC 12.2Kbps	Left Cheek	Full	1413	1732.6	24.05	25.00	1.245	-0.05	0.067	0.083
	WCDMA IV_Ant 2	RMC 12.2Kbps	Left Tilted	Full	1413	1732.6	24.05	25.00	1.245	0.03	0.047	0.058
	WCDMA IV_Ant 4	RMC 12.2Kbps	Right Cheek	Reduced	1413	1732.6	21.36	22.00	1.159	0.09	0.724	0.839
	WCDMA IV_Ant 4	RMC 12.2Kbps	Right Cheek	Reduced	1312	1712.4	21.34	22.00	1.164	0.07	0.658	0.766
04	WCDMA IV_Ant 4	RMC 12.2Kbps	Right Cheek	Reduced	1513	1752.6	21.34	22.00	1.164	0.04	0.813	0.946
	WCDMA IV_Ant 4	RMC 12.2Kbps	Right Tilted	Reduced	1413	1732.6	21.36	22.00	1.159	-0.06	0.362	0.419
	WCDMA IV_Ant 4	RMC 12.2Kbps	Left Cheek	Reduced	1413	1732.6	21.36	22.00	1.159	0.05	0.230	0.267
	WCDMA IV_Ant 4	RMC 12.2Kbps	Left Tilted	Reduced	1413	1732.6	21.36	22.00	1.159	-0.01	0.094	0.109
	WCDMA V_Ant 1	RMC 12.2Kbps	Right Cheek	Full	4182	836.4	24.00	25.00	1.259	-0.07	0.049	0.062
	WCDMA V_Ant 1	RMC 12.2Kbps	Right Tilted	Full	4182	836.4	24.00	25.00	1.259	0.02	0.033	0.042
	WCDMA V_Ant 1	RMC 12.2Kbps	Left Cheek	Full	4182	836.4	24.00	25.00	1.259	-0.03	0.087	0.110
	WCDMA V_Ant 1	RMC 12.2Kbps	Left Tilted	Full	4182	836.4	24.00	25.00	1.259	0.06	0.035	0.044
05	WCDMA V_Ant 3	RMC 12.2Kbps	Right Cheek	Reduced	4182	836.4	22.51	23.00	1.119	-0.01	0.657	0.735
	WCDMA V_Ant 3	RMC 12.2Kbps	Right Tilted	Reduced	4182	836.4	22.51	23.00	1.119	0.04	0.587	0.657
	WCDMA V_Ant 3	RMC 12.2Kbps	Left Cheek	Reduced	4182	836.4	22.51	23.00	1.119	-0.03	0.493	0.552
	WCDMA V_Ant 3	RMC 12.2Kbps	Left Tilted	Reduced	4182	836.4	22.51	23.00	1.119	0.02	0.581	0.650



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 2	20M	QPSK	1	0	Right Cheek	Full	18900	1880	24.39	25.50	1.291	-0.05	0.095	0.123
	LTE Band 2_Ant 2	20M	QPSK	50	0	Right Cheek	Full	18900	1880	23.21	24.50	1.346	-0.04	0.083	0.112
	LTE Band 2_Ant 2	20M	QPSK	1	0	Right Tilted	Full	18900	1880	24.39	25.50	1.291	0.03	0.057	0.074
	LTE Band 2_Ant 2	20M	QPSK	50	0	Right Tilted	Full	18900	1880	23.21	24.50	1.346	-0.07	0.048	0.065
	LTE Band 2_Ant 2	20M	QPSK	1	0	Left Cheek	Full	18900	1880	24.39	25.50	1.291	0.02	0.073	0.094
	LTE Band 2_Ant 2	20M	QPSK	50	0	Left Cheek	Full	18900	1880	23.21	24.50	1.346	-0.03	0.054	0.073
	LTE Band 2_Ant 2	20M	QPSK	1	0	Left Tilted	Full	18900	1880	24.39	25.50	1.291	0.06	0.055	0.071
	LTE Band 2_Ant 2	20M	QPSK	50	0	Left Tilted	Full	18900	1880	23.21	24.50	1.346	0.08	0.042	0.057
06	LTE Band 2_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	18900	1880	19.74	20.50	1.191	0.06	0.493	0.587
	LTE Band 2_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	18900	1880	19.23	20.50	1.340	0.03	0.481	0.644
	LTE Band 2_Ant 4	20M	QPSK	1	0	Right Tilted	Reduced	18900	1880	19.74	20.50	1.191	-0.07	0.160	0.191
	LTE Band 2_Ant 4	20M	QPSK	50	0	Right Tilted	Reduced	18900	1880	19.23	20.50	1.340	0.02	0.162	0.217
	LTE Band 2_Ant 4	20M	QPSK	1	0	Left Cheek	Reduced	18900	1880	19.74	20.50	1.191	-0.03	0.111	0.132
	LTE Band 2_Ant 4	20M	QPSK	50	0	Left Cheek	Reduced	18900	1880	19.23	20.50	1.340	0.06	0.115	0.154
	LTE Band 2_Ant 4	20M	QPSK	1	0	Left Tilted	Reduced	18900	1880	19.74	20.50	1.191	0.08	0.055	0.066
	LTE Band 2_Ant 4	20M	QPSK	50	0	Left Tilted	Reduced	18900	1880	19.23	20.50	1.340	0.02	0.055	0.074
07	LTE Band 5_Ant 1	10M	QPSK	1	0	Right Cheek	Full	20525	836.5	25.34	25.50	1.038	-0.07	0.039	0.040
	LTE Band 5_Ant 1	10M	QPSK	25	0	Right Cheek	Full	20525	836.5	24.47	24.50	1.007	0.02	0.034	0.034
	LTE Band 5_Ant 1	10M	QPSK	1	0	Right Tilted	Full	20525	836.5	25.34	24.50	1.038	-0.03	0.033	0.034
	LTE Band 5_Ant 1	10M	QPSK	25	0	Right Tilted	Full	20525	836.5	24.47	24.50	1.007	0.06	0.026	0.026
	LTE Band 5_Ant 1	10M	QPSK	1	0	Left Cheek	Full	20525	836.5	25.34	25.50	1.038	0.13	0.069	0.072
	LTE Band 5_Ant 1	10M	QPSK	25	0	Left Cheek	Full	20525	836.5	24.47	24.50	1.007	0.08	0.061	0.061
	LTE Band 5_Ant 1	10M	QPSK	1	0	Left Tilted	Full	20525	836.5	25.34	25.50	1.038	0.02	0.034	0.035
	LTE Band 5_Ant 1	10M	QPSK	25	0	Left Tilted	Full	20525	836.5	24.47	24.50	1.007	0.06	0.031	0.031
	LTE Band 5_Ant 3	10M	QPSK	1	0	Right Cheek	Reduced	20525	836.5	22.58	23.50	1.236	-0.05	0.557	0.688
	LTE Band 5_Ant 3	10M	QPSK	25	0	Right Cheek	Reduced	20525	836.5	22.42	23.50	1.282	0.06	0.460	0.590
	LTE Band 5_Ant 3	10M	QPSK	1	0	Right Tilted	Reduced	20525	836.5	22.58	23.50	1.236	0.08	0.433	0.535
	LTE Band 5_Ant 3	10M	QPSK	25	0	Right Tilted	Reduced	20525	836.5	22.42	23.50	1.282	0.07	0.477	0.612
	LTE Band 5_Ant 3	10M	QPSK	1	0	Left Cheek	Reduced	20525	836.5	22.58	23.50	1.236	0.09	0.404	0.499
	LTE Band 5_Ant 3	10M	QPSK	25	0	Left Cheek	Reduced	20525	836.5	22.42	23.50	1.282	0.11	0.437	0.560
	LTE Band 5_Ant 3	10M	QPSK	1	0	Left Tilted	Reduced	20525	836.5	22.58	23.50	1.236	0.06	0.406	0.502
	LTE Band 5_Ant 3	10M	QPSK	25	0	Left Tilted	Reduced	20525	836.5	22.42	23.50	1.282	0.07	0.438	0.562
08	LTE Band 7_Ant 2	20M	QPSK	1	0	Right Cheek	Full	21100	2535	23.86	25.50	1.459	0.07	0.103	0.150
	LTE Band 7_Ant 2	20M	QPSK	50	0	Right Cheek	Full	21100	2535	23.01	24.50	1.409	-0.06	0.080	0.113
	LTE Band 7_Ant 2	20M	QPSK	1	0	Right Tilted	Full	21100	2535	23.86	25.50	1.459	-0.05	0.110	0.160
	LTE Band 7_Ant 2	20M	QPSK	50	0	Right Tilted	Full	21100	2535	23.01	24.50	1.409	0.03	0.089	0.125
	LTE Band 7_Ant 2	20M	QPSK	1	0	Left Cheek	Full	21100	2535	23.86	25.50	1.459	-0.03	0.178	0.260
	LTE Band 7_Ant 2	20M	QPSK	50	0	Left Cheek	Full	21100	2535	23.01	24.50	1.409	-0.09	0.150	0.211
	LTE Band 7_Ant 2	20M	QPSK	1	0	Left Tilted	Full	21100	2535	23.86	25.50	1.459	0.01	0.057	0.083
	LTE Band 7_Ant 2	20M	QPSK	50	0	Left Tilted	Full	21100	2535	23.01	24.50	1.409	0.06	0.044	0.062
	LTE Band 7C_Ant 2	20M	QPSK	1	0	Left Cheek	Full	21100+20902	2535+2515.2	23.75	25.50	1.496	0.09	0.142	0.212
	LTE Band 7_Ant 3	20M	QPSK	1	0	Right Cheek	Reduced	21100	2535	15.83	16.50	1.167	0.03	0.523	0.610
	LTE Band 7_Ant 3	20M	QPSK	50	0	Right Cheek	Reduced	21100	2535	15.79	16.50	1.178	0.19	0.531	0.625
	LTE Band 7_Ant 3	20M	QPSK	1	0	Right Tilted	Reduced	21100	2535	15.83	16.50	1.167	0.11	0.171	0.200
	LTE Band 7_Ant 3	20M	QPSK	50	0	Right Tilted	Reduced	21100	2535	15.79	16.50	1.178	0.09	0.179	0.211
	LTE Band 7_Ant 3	20M	QPSK	1	0	Left Cheek	Reduced	21100	2535	15.83	16.50	1.167	0.06	0.112	0.131
	LTE Band 7_Ant 3	20M	QPSK	50	0	Left Cheek	Reduced	21100	2535	15.79	16.50	1.178	-0.05	0.108	0.127
	LTE Band 7_Ant 3	20M	QPSK	1	0	Left Tilted	Reduced	21100	2535	15.83	16.50	1.167	0.14	0.078	0.091
	LTE Band 7_Ant 3	20M	QPSK	50	0	Left Tilted	Reduced	21100	2535	15.79	16.50	1.178	-0.04	0.071	0.084
	LTE Band 7C_Ant 3	20M	QPSK	50	0	Right Cheek	Reduced	21100+20902	2535+2515.2	16.37	16.50	1.030	0.03	0.501	0.516
	LTE Band 7_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	21100	2535	18.42	19.00	1.143	0.01	0.524	0.599
	LTE Band 7_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	21100	2535	18.40	19.00	1.148	0.06	0.537	0.617
	LTE Band 7_Ant 4	20M	QPSK	1	0	Right Tilted	Reduced	21100	2535	18.42	19.00	1.143	0.07	0.234	0.267
	LTE Band 7_Ant 4	20M	QPSK	50	0	Right Tilted	Reduced	21100	2535	18.40	19.00	1.148	-0.06	0.234	0.269
	LTE Band 7_Ant 4	20M	QPSK	1	0	Left Cheek	Reduced	21100	2535	18.42	19.00	1.143	-0.05	0.147	0.168
	LTE Band 7_Ant 4	20M	QPSK	50	0	Left Cheek	Reduced	21100	2535	18.40	19.00	1.148	0.07	0.148	0.170
	LTE Band 7_Ant 4	20M	QPSK	1	0	Left Tilted	Reduced	21100	2535	18.42	19.00	1.143	-0.06	0.100	0.114
	LTE Band 7_Ant 4	20M	QPSK	50	0	Left Tilted	Reduced	21100	2535	18.40	19.00	1.148	-0.05	0.098	0.113
	LTE Band 7C_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	21100+20902	2535+2515.2	18.89	19.00	1.026	0.02	0.498	0.511
	LTE Band 7_Ant 7	20M	QPSK	1	0	Right Cheek	Full	21100	2535	20.13	20.50	1.089	0.08	0.529	0.576
	LTE Band 7_Ant 7	20M	QPSK	50	50	Right Cheek	Full	21100	2535	19.06	19.50	1.107	0.09	0.419	0.464
	LTE Band 7_Ant 7	20M	QPSK	1	0	Right Tilted	Full	21100	2535	20.13	20.50	1.089	0.08	0.086	0.094
	LTE Band 7_Ant 7	20M	QPSK	50	50	Right Tilted	Full	21100	2535	19.06	19.50	1.107	0.03	0.067	0.074
	LTE Band 7_Ant 7	20M	QPSK	1	0	Left Cheek	Full	21100	2535	20.13	20.50	1.089	0.06	0.507	0.552
	LTE Band 7_Ant 7	20M	QPSK	50	50	Left Cheek	Full	21100	2535	19.06	19.50	1.107	-0.01	0.429	0.475
	LTE Band 7_Ant 7	20M	QPSK	1	0	Left Tilted	Full	21100	2535	20.13	20.50	1.089	-0.14	0.197	0.215
	LTE Band 7_Ant 7	20M	QPSK	50	50	Left Tilted	Full	21100	2535	19.06	19.50	1.107	0.01	0.153	0.169
	LTE Band 7C_Ant 7	20M	QPSK	50	0	Left Cheek	Full	21100+20902	2535+2515.2	20.01	20.50	1.119	0.09	0.507	0.568



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 1	10M	QPSK	1	0	Right Cheek	Full	23095	707.5	22.66	24.00	1.361	0.01	0.035	0.048
	LTE Band 12_Ant 1	10M	QPSK	25	0	Right Cheek	Full	23095	707.5	21.73	23.00	1.340	0.04	0.028	0.038
	LTE Band 12_Ant 1	10M	QPSK	1	0	Right Tilted	Full	23095	707.5	22.66	24.00	1.361	0.05	0.019	0.026
	LTE Band 12_Ant 1	10M	QPSK	25	0	Right Tilted	Full	23095	707.5	21.73	23.00	1.340	0.02	0.016	0.021
	LTE Band 12_Ant 1	10M	QPSK	1	0	Left Cheek	Full	23095	707.5	22.66	24.00	1.361	0.13	0.055	0.075
	LTE Band 12_Ant 1	10M	QPSK	25	0	Left Cheek	Full	23095	707.5	21.73	23.00	1.340	0.13	0.048	0.064
	LTE Band 12_Ant 1	10M	QPSK	1	0	Left Tilted	Full	23095	707.5	22.66	24.00	1.361	0.08	0.021	0.029
	LTE Band 12_Ant 1	10M	QPSK	25	0	Left Tilted	Full	23095	707.5	21.73	23.00	1.340	0.02	0.017	0.023
	LTE Band 12_Ant 3	10M	QPSK	1	0	Right Cheek	Full	23095	707.5	21.62	23.00	1.374	0.04	0.170	0.234
	LTE Band 12_Ant 3	10M	QPSK	25	0	Right Cheek	Full	23095	707.5	20.67	22.00	1.358	0.02	0.149	0.202
09	LTE Band 12_Ant 3	10M	QPSK	1	0	Right Tilted	Full	23095	707.5	21.62	23.00	1.374	0.04	0.177	0.243
	LTE Band 12_Ant 3	10M	QPSK	25	0	Right Tilted	Full	23095	707.5	20.67	22.00	1.358	0.17	0.156	0.212
	LTE Band 12_Ant 3	10M	QPSK	1	0	Left Cheek	Full	23095	707.5	21.62	23.00	1.374	0.05	0.166	0.228
	LTE Band 12_Ant 3	10M	QPSK	25	0	Left Cheek	Full	23095	707.5	20.67	22.00	1.358	0.06	0.143	0.194
	LTE Band 12_Ant 3	10M	QPSK	1	0	Left Tilted	Full	23095	707.5	21.62	23.00	1.374	-0.05	0.157	0.216
	LTE Band 12_Ant 3	10M	QPSK	25	0	Left Tilted	Full	23095	707.5	20.67	22.00	1.358	0.14	0.138	0.187
	LTE Band 66_Ant 2	20M	QPSK	1	0	Right Cheek	Full	132322	1745	24.15	25.50	1.365	0.13	0.068	0.093
	LTE Band 66_Ant 2	20M	QPSK	50	0	Right Cheek	Full	132322	1745	23.24	24.50	1.337	0.04	0.055	0.074
	LTE Band 66_Ant 2	20M	QPSK	1	0	Right Tilted	Full	132322	1745	24.15	25.50	1.365	0.02	0.046	0.063
	LTE Band 66_Ant 2	20M	QPSK	50	0	Right Tilted	Full	132322	1745	23.24	24.50	1.337	0.01	0.039	0.052
	LTE Band 66_Ant 2	20M	QPSK	1	0	Left Cheek	Full	132322	1745	24.15	25.50	1.365	0.02	0.055	0.075
	LTE Band 66_Ant 2	20M	QPSK	50	0	Left Cheek	Full	132322	1745	23.24	24.50	1.337	-0.04	0.043	0.057
	LTE Band 66_Ant 2	20M	QPSK	1	0	Left Tilted	Full	132322	1745	24.15	25.50	1.365	0.14	0.043	0.059
	LTE Band 66_Ant 2	20M	QPSK	50	0	Left Tilted	Full	132322	1745	23.24	24.50	1.337	0.06	0.037	0.049
	LTE Band 66_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	132322	1745	20.77	21.50	1.183	0.07	0.570	0.674
10	LTE Band 66_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	132322	1745	20.64	21.50	1.219	-0.06	0.574	0.700
	LTE Band 66_Ant 4	20M	QPSK	1	0	Right Tilted	Reduced	132322	1745	20.77	21.50	1.183	-0.05	0.194	0.230
	LTE Band 66_Ant 4	20M	QPSK	50	0	Right Tilted	Reduced	132322	1745	20.64	21.50	1.219	-0.11	0.198	0.241
	LTE Band 66_Ant 4	20M	QPSK	1	0	Left Cheek	Reduced	132322	1745	20.77	21.50	1.183	0.08	0.146	0.173
	LTE Band 66_Ant 4	20M	QPSK	50	0	Left Cheek	Reduced	132322	1745	20.64	21.50	1.219	0.01	0.149	0.182
	LTE Band 66_Ant 4	20M	QPSK	1	0	Left Tilted	Reduced	132322	1745	20.77	21.50	1.183	0.11	0.076	0.090
	LTE Band 66_Ant 4	20M	QPSK	50	0	Left Tilted	Reduced	132322	1745	20.64	21.50	1.219	0.08	0.075	0.091
	LTE Band 4_Ant 3	20M	QPSK	1	0	Right Cheek	Reduced	20175	1732.5	20.37	21.50	1.297	-0.02	0.383	0.497
	LTE Band 4_Ant 3	20M	QPSK	50	0	Right Cheek	Reduced	20175	1732.5	20.22	21.50	1.343	0.01	0.324	0.435
11	LTE Band 4_Ant 3	20M	QPSK	1	0	Right Tilted	Reduced	20175	1732.5	20.37	21.50	1.297	-0.02	0.598	0.776
	LTE Band 4_Ant 3	20M	QPSK	50	0	Right Tilted	Reduced	20175	1732.5	20.22	21.50	1.343	0.06	0.467	0.627
	LTE Band 4_Ant 3	20M	QPSK	1	0	Left Cheek	Reduced	20175	1732.5	20.37	21.50	1.297	0.09	0.260	0.337
	LTE Band 4_Ant 3	20M	QPSK	50	0	Left Cheek	Reduced	20175	1732.5	20.22	21.50	1.343	-0.03	0.221	0.297
	LTE Band 4_Ant 3	20M	QPSK	1	0	Left Tilted	Reduced	20175	1732.5	20.37	21.50	1.297	0.01	0.399	0.518
	LTE Band 4_Ant 3	20M	QPSK	50	0	Left Tilted	Reduced	20175	1732.5	20.22	21.50	1.343	0.07	0.336	0.451
	LTE Band 4_Ant 7	20M	QPSK	1	0	Right Cheek	Full	20175	1732.5	20.32	20.50	1.042	0.08	0.202	0.211
	LTE Band 4_Ant 7	20M	QPSK	50	0	Right Cheek	Full	20175	1732.5	19.35	19.50	1.035	-0.03	0.176	0.182
	LTE Band 4_Ant 7	20M	QPSK	1	0	Right Tilted	Full	20175	1732.5	20.32	20.50	1.042	0.02	0.012	0.013
	LTE Band 4_Ant 7	20M	QPSK	50	0	Right Tilted	Full	20175	1732.5	19.35	19.50	1.035	0.05	0.010	0.010
	LTE Band 4_Ant 7	20M	QPSK	1	0	Left Cheek	Full	20175	1732.5	20.32	20.50	1.042	0.09	0.270	0.281
	LTE Band 4_Ant 7	20M	QPSK	50	0	Left Cheek	Full	20175	1732.5	19.35	19.50	1.035	0.01	0.236	0.244
	LTE Band 4_Ant 7	20M	QPSK	1	0	Left Tilted	Full	20175	1732.5	20.32	20.50	1.042	-0.03	0.046	0.048
	LTE Band 4_Ant 7	20M	QPSK	50	0	Left Tilted	Full	20175	1732.5	19.35	19.50	1.035	0.08	0.035	0.036



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Cheek	Full	40620	2593	24.41	25.50	1.285	62.9	1.006	0.07	0.056	0.072
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Cheek	Full	40620	2593	23.48	24.50	1.265	62.9	1.006	0.16	0.044	0.056
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Tilted	Full	40620	2593	24.41	25.50	1.285	62.9	1.006	-0.06	0.051	0.066
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Tilted	Full	40620	2593	23.48	24.50	1.265	62.9	1.006	0.09	0.040	0.051
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Cheek	Full	40620	2593	24.41	25.50	1.285	62.9	1.006	0.06	0.130	0.168
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Cheek	Full	40620	2593	23.48	24.50	1.265	62.9	1.006	0.09	0.071	0.090
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Tilted	Full	40620	2593	24.41	25.50	1.285	62.9	1.006	-0.05	0.026	0.034
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Tilted	Full	40620	2593	23.48	24.50	1.265	62.9	1.006	0.06	0.012	0.015
	LTE Band 38C_Ant 2	20M	QPSK	1	0	Left Cheek	Full	37901+38099	2585.1+2604.9	23.99	25.50	1.416	62.9	1.006	0.03	0.102	0.145
	LTE Band 41_Ant 3	20M	QPSK	1	0	Right Cheek	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	-0.05	0.448	0.507
	LTE Band 41_Ant 3	20M	QPSK	50	0	Right Cheek	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	0.1	0.450	0.511
	LTE Band 41_Ant 3	20M	QPSK	1	0	Right Tilted	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	0.04	0.173	0.196
	LTE Band 41_Ant 3	20M	QPSK	50	0	Right Tilted	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	0.06	0.173	0.197
	LTE Band 41_Ant 3	20M	QPSK	1	0	Left Cheek	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	-0.16	0.117	0.132
	LTE Band 41_Ant 3	20M	QPSK	50	0	Left Cheek	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	0.08	0.120	0.136
	LTE Band 41_Ant 3	20M	QPSK	1	0	Left Tilted	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	0.05	0.076	0.086
	LTE Band 41_Ant 3	20M	QPSK	50	0	Left Tilted	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	0.06	0.070	0.080
	LTE Band 38C_Ant 3	20M	QPSK	50	0	Right Cheek	Reduced	37901+38099	2585.1+2604.9	17.84	18.50	1.164	62.9	1.006	0.03	0.389	0.456
	LTE Band 41_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	0.04	0.479	0.569
	LTE Band 41_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	39750	2506	19.46	20.50	1.271	62.9	1.006	-0.16	0.432	0.552
	LTE Band 41_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	40185	2549.5	19.50	20.50	1.259	62.9	1.006	0.08	0.489	0.619
12	LTE Band 41_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	41055	2636.5	19.49	20.50	1.262	62.9	1.006	-0.01	0.534	0.678
	LTE Band 41_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	41490	2680	19.64	20.50	1.219	62.9	1.006	-0.04	0.460	0.564
	LTE Band 41_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	0.11	0.481	0.583
	LTE Band 41_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	39750	2506	19.36	20.50	1.300	62.9	1.006	0.16	0.447	0.585
	LTE Band 41_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	40185	2549.5	19.45	20.50	1.274	62.9	1.006	0.06	0.504	0.646
	LTE Band 41_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	41055	2636.5	19.56	20.50	1.242	62.9	1.006	0.16	0.535	0.668
	LTE Band 41_Ant 4	20M	QPSK	50	0	Right Cheek	Reduced	41490	2680	19.64	20.50	1.219	62.9	1.006	-0.09	0.452	0.554
	LTE Band 41_Ant 4	20M	QPSK	100	0	Right Cheek	Reduced	40620	2593	19.67	20.50	1.211	62.9	1.006	0.06	0.487	0.593
	LTE Band 41_Ant 4	20M	QPSK	1	0	Right Tilted	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	0.11	0.211	0.251
	LTE Band 41_Ant 4	20M	QPSK	50	0	Right Tilted	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	0.11	0.213	0.258
	LTE Band 41_Ant 4	20M	QPSK	1	0	Left Cheek	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	0.06	0.139	0.165
	LTE Band 41_Ant 4	20M	QPSK	50	0	Left Cheek	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	0.05	0.141	0.171
	LTE Band 41_Ant 4	20M	QPSK	1	0	Left Tilted	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	-0.06	0.087	0.103
	LTE Band 41_Ant 4	20M	QPSK	50	0	Left Tilted	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	0.01	0.088	0.107
	LTE Band 38C_Ant 4	20M	QPSK	1	0	Right Cheek	Reduced	37901+38099	2585.1+2604.9	20.55	21.50	1.245	62.9	1.006	0.05	0.488	0.611
	LTE Band 41_Ant 7	20M	QPSK	1	0	Right Cheek	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	0.06	0.094	0.120
	LTE Band 41_Ant 7	20M	QPSK	50	0	Right Cheek	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.08	0.073	0.091
	LTE Band 41_Ant 7	20M	QPSK	1	0	Right Tilted	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	0.07	0.019	0.024
	LTE Band 41_Ant 7	20M	QPSK	50	0	Right Tilted	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.09	0.015	0.019
	LTE Band 41_Ant 7	20M	QPSK	1	0	Left Cheek	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	0.11	0.121	0.154
	LTE Band 41_Ant 7	20M	QPSK	50	0	Left Cheek	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.06	0.094	0.117
	LTE Band 41_Ant 7	20M	QPSK	1	0	Left Tilted	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	0.07	0.039	0.050
	LTE Band 41_Ant 7	20M	QPSK	50	0	Left Tilted	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.02	0.029	0.036
	LTE Band 38C_Ant 7	20M	QPSK	1	0	Left Cheek	Full	37901+38099	2585.1+2604.9	19.65	20.50	1.265	62.9	1.006	0.01	0.103	0.131



<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Right Cheek	Full	167300	836.5	24.54	25.50	1.247	0.06	0.044	0.055
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Right Cheek	Full	167300	836.5	24.45	25.50	1.274	0.04	0.039	0.050
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Right Tilted	Full	167300	836.5	24.54	25.50	1.247	-0.01	0.032	0.040
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Right Tilted	Full	167300	836.5	24.45	25.50	1.274	0.05	0.033	0.042
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Left Cheek	Full	167300	836.5	24.54	25.50	1.247	0.02	0.061	0.076
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Left Cheek	Full	167300	836.5	24.45	25.50	1.274	0.02	0.050	0.064
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Left Tilted	Full	167300	836.5	24.54	25.50	1.247	0.05	0.032	0.040
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Left Tilted	Full	167300	836.5	24.45	25.50	1.274	0.02	0.035	0.045
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Right Cheek	Reduced	167300	836.5	19.86	20.40	1.132	-0.05	0.190	0.215
	FR1 n5_Ant 3 NSA	20M	QPSK	50	28	DFT-15KHz	Right Cheek	Reduced	167300	836.5	19.64	20.40	1.191	0.1	0.233	0.278
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Right Tilted	Reduced	167300	836.5	19.86	20.40	1.132	0.04	0.179	0.203
	FR1 n5_Ant 3 NSA	20M	QPSK	50	28	DFT-15KHz	Right Tilted	Reduced	167300	836.5	19.64	20.40	1.191	0.06	0.246	0.293
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Left Cheek	Reduced	167300	836.5	19.86	20.40	1.132	-0.16	0.167	0.189
13	FR1 n5_Ant 3 NSA	20M	QPSK	50	28	DFT-15KHz	Left Cheek	Reduced	167300	836.5	19.64	20.40	1.191	-0.07	0.253	0.301
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Left Tilted	Reduced	167300	836.5	19.86	20.40	1.132	0.05	0.190	0.215
	FR1 n5_Ant 3 NSA	20M	QPSK	50	28	DFT-15KHz	Left Tilted	Reduced	167300	836.5	19.64	20.40	1.191	0.06	0.237	0.282



FCC SAR Test Report

Report No. : FA002312

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Right Cheek	Full	507000	2535	24.48	25.50	1.265	0.09	0.072	0.091
	FR1 n7_Ant 2 SA	50M	QPSK	135	69	DFT-15KHz	Right Cheek	Full	507000	2535	24.09	25.50	1.384	0.01	0.061	0.084
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Right Tilted	Full	507000	2535	24.48	25.50	1.265	0.06	0.063	0.080
	FR1 n7_Ant 2 SA	50M	QPSK	135	69	DFT-15KHz	Right Tilted	Full	507000	2535	24.09	25.50	1.384	0.17	0.050	0.069
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Left Cheek	Full	507000	2535	24.48	25.50	1.265	0.05	0.113	0.143
	FR1 n7_Ant 2 SA	50M	QPSK	135	69	DFT-15KHz	Left Cheek	Full	507000	2535	24.09	25.50	1.384	0.06	0.098	0.136
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Left Tilted	Full	507000	2535	24.48	25.50	1.265	-0.05	0.053	0.067
	FR1 n7_Ant 2 SA	50M	QPSK	135	69	DFT-15KHz	Left Tilted	Full	507000	2535	24.09	25.50	1.384	0.14	0.042	0.058
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Right Cheek	Full	507000	2535	22.23	23.50	1.340	0.11	0.098	0.131
	FR1 n7_Ant 2 NSA	50M	QPSK	135	69	DFT-15KHz	Right Cheek	Full	507000	2535	22.21	23.50	1.346	0.09	0.067	0.090
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Right Tilted	Full	507000	2535	22.23	23.50	1.340	0.06	0.080	0.107
	FR1 n7_Ant 2 NSA	50M	QPSK	135	69	DFT-15KHz	Right Tilted	Full	507000	2535	22.21	23.50	1.346	-0.05	0.043	0.058
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Left Cheek	Full	507000	2535	22.23	23.50	1.340	0.14	0.178	0.238
	FR1 n7_Ant 2 NSA	50M	QPSK	135	69	DFT-15KHz	Left Cheek	Full	507000	2535	22.21	23.50	1.346	-0.04	0.104	0.140
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Left Tilted	Full	507000	2535	22.23	23.50	1.340	0.05	0.061	0.082
	FR1 n7_Ant 2 NSA	50M	QPSK	135	69	DFT-15KHz	Left Tilted	Full	507000	2535	22.21	23.50	1.346	0.07	0.039	0.052
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Right Cheek	Reduced	507000	2535	13.72	15.00	1.343	0.01	0.271	0.364
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Right Cheek	Reduced	507000	2535	13.63	15.00	1.371	0.03	0.259	0.355
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Right Tilted	Reduced	507000	2535	13.72	15.00	1.343	0.06	0.379	0.509
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Right Tilted	Reduced	507000	2535	13.63	15.00	1.371	0.08	0.391	0.536
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Left Cheek	Reduced	507000	2535	13.72	15.00	1.343	0.15	0.180	0.242
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Left Cheek	Reduced	507000	2535	13.63	15.00	1.371	-0.05	0.193	0.265
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Left Tilted	Reduced	507000	2535	13.72	15.00	1.343	-0.11	0.267	0.359
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Left Tilted	Reduced	507000	2535	13.63	15.00	1.371	0.06	0.229	0.314
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Right Cheek	Reduced	507000	2535	15.93	16.50	1.140	0.01	0.370	0.422
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Right Cheek	Reduced	507000	2535	15.79	16.50	1.178	0.03	0.431	0.508
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Right Tilted	Reduced	507000	2535	15.93	16.50	1.140	0.04	0.480	0.547
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Right Tilted	Reduced	507000	2535	15.79	16.50	1.178	0.06	0.517	0.609
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Left Cheek	Reduced	507000	2535	15.93	16.50	1.140	0.13	0.246	0.281
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Left Cheek	Reduced	507000	2535	15.79	16.50	1.178	-0.02	0.322	0.379
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Left Tilted	Reduced	507000	2535	15.93	16.50	1.140	-0.04	0.352	0.401
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Left Tilted	Reduced	507000	2535	15.79	16.50	1.178	0.06	0.289	0.340
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Right Cheek	Reduced	507000	2535	16.72	17.50	1.197	0.08	0.125	0.150
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Right Cheek	Reduced	507000	2535	16.64	17.50	1.219	0.01	0.110	0.134
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Right Tilted	Reduced	507000	2535	16.72	17.50	1.197	0.11	0.057	0.068
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Right Tilted	Reduced	507000	2535	16.64	17.50	1.219	0.08	0.140	0.171
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Left Cheek	Reduced	507000	2535	16.72	17.50	1.197	0.06	0.049	0.059
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Left Cheek	Reduced	507000	2535	16.64	17.50	1.219	-0.11	0.070	0.085
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Left Tilted	Reduced	507000	2535	16.72	17.50	1.197	0.08	0.033	0.039
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Left Tilted	Reduced	507000	2535	16.64	17.50	1.219	0.01	0.088	0.107
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Right Cheek	Reduced	507000	2535	14.06	14.50	1.107	0.06	0.208	0.230
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Right Cheek	Reduced	507000	2535	13.97	14.50	1.130	-0.12	0.290	0.328
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Right Tilted	Reduced	507000	2535	14.06	14.50	1.107	-0.16	0.145	0.160
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Right Tilted	Reduced	507000	2535	13.97	14.50	1.130	-0.15	0.143	0.162
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Left Cheek	Reduced	507000	2535	14.06	14.50	1.107	0.08	0.080	0.089
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Left Cheek	Reduced	507000	2535	13.97	14.50	1.130	-0.09	0.083	0.094
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Left Tilted	Reduced	507000	2535	14.06	14.50	1.107	0.08	0.065	0.072
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Left Tilted	Reduced	507000	2535	13.97	14.50	1.130	0.02	0.064	0.072
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Right Cheek	Full	507000	2535	19.78	20.50	1.180	0.02	0.223	0.263
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Right Cheek	Full	507000	2535	19.37	20.50	1.297	0.16	0.423	0.549
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Right Tilted	Full	507000	2535	19.78	20.50	1.180	0.19	0.069	0.081
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Right Tilted	Full	507000	2535	19.37	20.50	1.297	0.05	0.093	0.121
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Left Cheek	Full	507000	2535	19.78	20.50	1.180	-0.11	0.296	0.349
14	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Left Cheek	Full	507000	2535	19.37	20.50	1.297	-0.08	0.527	0.684
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Left Tilted	Full	507000	2535	19.78	20.50	1.180	0.11	0.151	0.178
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Left Tilted	Full	507000	2535	19.37	20.50	1.297	0.06	0.200	0.259
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Right Cheek	Full	507000	2535	22.17	22.50	1.079	-0.04	0.199	0.215
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Right Cheek	Full	507000	2535	22.04	22.50	1.112	0.11	0.174	0.193
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Right Tilted	Full	507000	2535	22.17	22.50	1.079	0.16	0.047	0.051
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Right Tilted	Full	507000	2535	22.04	22.50	1.112	0.08	0.039	0.043
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Left Cheek	Full	507000	2535	22.17	22.50	1.079	0.06	0.290	0.313
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Left Cheek	Full	502000	2510	22.04	22.50	1.112	0.16	0.285	0.317
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Left Tilted	Full	507000	2535	22.17	22.50	1.079	-0.09	0.081	0.087
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Left Tilted	Full	507000	2535	22.04	22.50	1.112	0.06	0.080	0.089



FCC SAR Test Report

Report No. : FA002312

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Full	518598	2592.99	24.88	25.50	1.153	0.11	0.044	0.051
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Full	518598	2592.99	24.67	25.50	1.211	0.11	0.029	0.035
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Full	518598	2592.99	24.88	25.50	1.153	0.06	0.036	0.042
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Full	518598	2592.99	24.67	25.50	1.211	0.05	0.021	0.025
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Full	518598	2592.99	24.88	25.50	1.153	-0.06	0.066	0.076
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Full	518598	2592.99	24.67	25.50	1.211	0.01	0.046	0.056
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Full	518598	2592.99	24.88	25.50	1.153	0.11	0.025	0.029
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Full	518598	2592.99	24.67	25.50	1.211	0.16	0.014	0.017
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	16.71	17.50	1.199	0.19	0.006	0.007
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	16.57	17.50	1.239	0.05	0.006	0.007
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	16.71	17.50	1.199	-0.11	0.006	0.007
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	16.57	17.50	1.239	-0.14	0.003	0.004
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	16.71	17.50	1.199	0.03	0.008	0.009
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	16.57	17.50	1.239	0.11	0.007	0.009
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	16.71	17.50	1.199	0.06	0.004	0.005
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	16.57	17.50	1.239	0.01	0.005	0.006
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	14.01	15.00	1.256	0.06	0.004	0.005
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	13.87	15.00	1.297	-0.06	0.003	0.004
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	14.01	15.00	1.256	0.11	0.004	0.005
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	13.87	15.00	1.297	0.19	0.003	0.004
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	14.01	15.00	1.256	0.03	0.005	0.006
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	13.87	15.00	1.297	0.02	0.004	0.005
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	14.01	15.00	1.256	-0.11	0.003	0.004
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	13.87	15.00	1.297	0.08	0.002	0.003
15	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	14.72	16.00	1.343	0.02	0.452	0.607
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	14.61	16.00	1.377	0.19	0.304	0.419
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	14.72	16.00	1.343	0.03	0.200	0.269
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	14.61	16.00	1.377	0.02	0.373	0.514
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	14.72	16.00	1.343	-0.11	0.112	0.150
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	14.61	16.00	1.377	0.08	0.206	0.284
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	14.72	16.00	1.343	-0.02	0.090	0.121
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	14.61	16.00	1.377	0.01	0.294	0.405
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	18.08	18.50	1.102	0.09	0.167	0.184
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	17.80	18.50	1.175	-0.02	0.137	0.161
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	18.08	18.50	1.102	0.19	0.179	0.197
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	17.80	18.50	1.175	0.16	0.184	0.216
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	18.08	18.50	1.102	0.05	0.141	0.155
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	17.80	18.50	1.175	-0.02	0.096	0.113
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	18.08	18.50	1.102	0.11	0.205	0.226
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	17.80	18.50	1.175	0.07	0.150	0.176
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	17.19	17.50	1.074	0.09	0.133	0.143
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	16.91	17.50	1.146	-0.02	0.109	0.125
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	17.19	17.50	1.074	0.19	0.142	0.153
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	16.91	17.50	1.146	0.16	0.146	0.167
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	17.19	17.50	1.074	0.05	0.112	0.120
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	16.91	17.50	1.146	-0.02	0.076	0.087
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	17.19	17.50	1.074	0.11	0.163	0.175
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	16.91	17.50	1.146	0.07	0.119	0.136
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	16.44	17.50	1.276	0.04	0.163	0.208
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	16.25	17.50	1.334	0.06	0.436	0.581
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	16.44	17.50	1.276	0.04	0.170	0.217
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	16.25	17.50	1.334	-0.11	0.134	0.179
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	16.44	17.50	1.276	-0.04	0.098	0.125
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	16.25	17.50	1.334	0.07	0.075	0.100

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZK2G

Page 61 of 117

Issued Date : Dec. 18, 2020

Form version. : 200414



FCC SAR Test Report

Report No. : FA002312

FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	16.44	17.50	1.276	0.06	0.086	0.110
FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	16.25	17.50	1.334	0.08	0.073	0.097
FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	14.15	14.50	1.084	0.08	0.250	0.271
FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	518598	2592.99	14.06	14.50	1.107	0.07	0.219	0.242
FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	14.15	14.50	1.084	0.08	0.121	0.131
FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	518598	2592.99	14.06	14.50	1.107	0.04	0.091	0.101
FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	14.15	14.50	1.084	0.11	0.098	0.106
FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	518598	2592.99	14.06	14.50	1.107	0.06	0.066	0.073
FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	14.15	14.50	1.084	-0.03	0.095	0.103
FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	518598	2592.99	14.06	14.50	1.107	0.08	0.081	0.090
FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Full	518598	2592.99	20.00	20.50	1.122	0.06	0.261	0.293
FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Full	518598	2592.99	19.23	20.50	1.340	0.08	0.312	0.418
FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Full	518598	2592.99	20.00	20.50	1.122	-0.04	0.060	0.067
FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Full	518598	2592.99	19.23	20.50	1.340	0.11	0.075	0.100
FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Full	518598	2592.99	20.00	20.50	1.122	0.06	0.359	0.403
FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Full	518598	2592.99	19.23	20.50	1.340	0.08	0.345	0.462
FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Full	518598	2592.99	20.00	20.50	1.122	0.01	0.161	0.181
FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Full	518598	2592.99	19.23	20.50	1.340	0.01	0.194	0.260
FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Full	518598	2592.99	23.15	23.50	1.084	0.09	0.261	0.283
FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Full	518598	2592.99	22.93	23.50	1.140	0.06	0.312	0.356
FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Full	518598	2592.99	23.15	23.50	1.084	0.01	0.060	0.065
FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Full	518598	2592.99	22.93	23.50	1.140	0.09	0.075	0.086
FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Full	518598	2592.99	23.15	23.50	1.084	0.05	0.359	0.389
FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Full	518598	2592.99	22.93	23.50	1.140	0.14	0.345	0.393
FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Full	518598	2592.99	23.15	23.50	1.084	0.03	0.161	0.175
FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Full	518598	2592.99	22.93	23.50	1.140	0.02	0.194	0.221



FCC SAR Test Report

Report No. : FA002312

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	656000	3840	21.32	22.50	1.312	0.06	0.300	0.394
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	656000	3840	21.24	22.50	1.337	0.16	0.280	0.374
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	656000	3840	21.32	22.50	1.312	0.01	0.115	0.151
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	656000	3840	21.24	22.50	1.337	0.05	0.112	0.150
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	656000	3840	21.32	22.50	1.312	0.01	0.159	0.209
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	656000	3840	21.24	22.50	1.337	0.06	0.145	0.194
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	656000	3840	21.32	22.50	1.312	0.01	0.071	0.093
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	656000	3840	21.24	22.50	1.337	-0.03	0.073	0.098
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	656000	3840	16.65	17.00	1.084	-0.04	0.258	0.280
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	656000	3840	16.53	17.00	1.114	0.11	0.225	0.251
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	656000	3840	16.65	17.00	1.084	0.06	0.114	0.124
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	656000	3840	16.53	17.00	1.114	0.18	0.108	0.120
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	656000	3840	16.65	17.00	1.084	0.06	0.104	0.113
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	656000	3840	16.53	17.00	1.114	0.08	0.114	0.127
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	656000	3840	16.65	17.00	1.084	0.05	0.061	0.066
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	656000	3840	16.53	17.00	1.114	0.15	0.058	0.065
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Full	656000	3840	21.12	22.00	1.225	0.18	0.054	0.066
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Full	656000	3840	20.95	22.00	1.274	0.02	0.053	0.067
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Full	656000	3840	21.12	22.00	1.225	0.09	0.032	0.039
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Full	656000	3840	20.95	22.00	1.274	-0.14	0.028	0.036
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Full	656000	3840	21.12	22.00	1.225	0.08	0.032	0.039
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Full	656000	3840	20.95	22.00	1.274	0.07	0.028	0.036
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Full	656000	3840	21.12	22.00	1.225	0.06	0.015	0.018
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Full	656000	3840	20.95	22.00	1.274	0.09	0.010	0.013
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	656000	3840	13.41	14.00	1.146	0.03	0.018	0.021
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	656000	3840	13.40	14.00	1.148	0.09	0.016	0.018
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	656000	3840	13.41	14.00	1.146	0.06	0.012	0.014
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	656000	3840	13.40	14.00	1.148	0.08	0.011	0.013
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	656000	3840	13.41	14.00	1.146	0.04	0.008	0.009
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	656000	3840	13.40	14.00	1.148	0.02	0.009	0.010
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	656000	3840	13.41	14.00	1.146	-0.09	0.002	0.002
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	656000	3840	13.40	14.00	1.148	0.07	0.002	0.002
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Full	656000	3840	21.27	22.00	1.183	0.05	0.021	0.025
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Full	656000	3840	20.81	22.00	1.315	0.01	0.020	0.026
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Full	656000	3840	21.27	22.00	1.183	0.06	0.011	0.013
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Full	656000	3840	20.81	22.00	1.315	0.08	0.009	0.012
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Full	656000	3840	21.27	22.00	1.183	0.07	0.017	0.020
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Full	656000	3840	20.81	22.00	1.315	0.09	0.011	0.014
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Full	656000	3840	21.27	22.00	1.183	0.08	0.009	0.011
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Full	656000	3840	20.81	22.00	1.315	0.04	0.009	0.012
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	656000	3840	13.42	14.00	1.143	0.05	0.081	0.093
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	656000	3840	13.38	14.00	1.153	0.01	0.077	0.089
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	656000	3840	13.42	14.00	1.143	0.02	0.032	0.037
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	656000	3840	13.38	14.00	1.153	-0.13	0.021	0.024
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	656000	3840	13.42	14.00	1.143	0.09	0.032	0.037
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	656000	3840	13.38	14.00	1.153	0.04	0.028	0.032
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	656000	3840	13.42	14.00	1.143	-0.03	0.021	0.024
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	656000	3840	13.38	14.00	1.153	0.02	0.019	0.022
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	656000	3840	15.21	16.00	1.199	-0.04	0.044	0.053
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	656000	3840	14.90	16.00	1.288	-0.02	0.041	0.053
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	656000	3840	15.21	16.00	1.199	0.03	0.039	0.047
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	656000	3840	14.90	16.00	1.288	0.04	0.038	0.049
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	656000	3840	15.21	16.00	1.199	0.02	0.162	0.194
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	656000	3840	14.90	16.00	1.288	0.01	0.158	0.204
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	656000	3840	15.21	16.00	1.199	0.05	0.066	0.079
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	656000	3840	14.90	16.00	1.288	0.08	0.061	0.079
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Cheek	Reduced	656000	3840	15.86	17.00	1.300	0.06	0.138	0.179

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZK2G

Page 63 of 117

Issued Date : Dec. 18, 2020

Form version. : 200414



FCC SAR Test Report

Report No. : FA002312

	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Cheek	Reduced	656000	3840	15.80	17.00	1.318	-0.06	0.129	0.170
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right Tilted	Reduced	656000	3840	15.86	17.00	1.300	0.11	0.067	0.087
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right Tilted	Reduced	656000	3840	15.80	17.00	1.318	0.19	0.065	0.086
16	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Cheek	Reduced	656000	3840	15.86	17.00	1.300	-0.03	0.556	0.723
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Cheek	Reduced	656000	3840	15.80	17.00	1.318	0.06	0.505	0.666
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left Tilted	Reduced	656000	3840	15.86	17.00	1.300	0.16	0.152	0.198
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left Tilted	Reduced	656000	3840	15.80	17.00	1.318	-0.09	0.148	0.195

<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Ant 5+7	Reduced	1	2412	19.68	21.00	1.355	100	1.000	0.04	0.147	0.199
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Ant 5+7	Reduced	1	2412	19.68	21.00	1.355	100	1.000	0.06	0.144	0.195
17	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Ant 5+7	Reduced	1	2412	19.68	21.00	1.355	100	1.000	-0.01	0.534	0.724
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Ant 5+7	Reduced-Simultaneous	1	2412	16.53	18.00	1.403	100	1.000	0.06	0.278	0.390
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Ant 5+7	Reduced	1	2412	19.68	21.00	1.355	100	1.000	0.08	0.343	0.465

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11ac-VHT160 MCS0	Right Cheek	Ant 8+10	Reduced	50	5250	17.57	18.50	1.239	100	1.000	0.06	0.194	0.240
	WLAN5.3GHz	802.11ac-VHT160 MCS0	Right Tilted	Ant 8+10	Reduced	50	5250	17.57	18.50	1.239	100	1.000	0.08	0.094	0.116
18	WLAN5.3GHz	802.11ac-VHT160 MCS0	Left Cheek	Ant 8+10	Reduced	50	5250	17.57	18.50	1.239	100	1.000	0.01	0.195	0.242
	WLAN5.3GHz	802.11ac-VHT160 MCS0	Left Tilted	Ant 8+10	Reduced	50	5250	17.57	18.50	1.239	100	1.000	0.11	0.192	0.238
	WLAN5.5GHz	802.11ac-VHT160 MCS0	Right Cheek	Ant 8+10	Reduced	114	5570	18.21	18.50	1.069	100	1.000	-0.04	0.048	0.051
	WLAN5.5GHz	802.11ac-VHT160 MCS0	Right Tilted	Ant 8+10	Reduced	114	5570	18.21	18.50	1.069	100	1.000	0.11	0.050	0.053
	WLAN5.5GHz	802.11ac-VHT160 MCS0	Left Cheek	Ant 8+10	Reduced	114	5570	18.21	18.50	1.069	100	1.000	0.06	0.123	0.131
19	WLAN5.5GHz	802.11ac-VHT160 MCS0	Left Tilted	Ant 8+10	Reduced	114	5570	18.21	18.50	1.069	100	1.000	0.05	0.145	0.155
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	Ant 8+10	Reduced	155	5775	17.43	18.50	1.279	100	1.000	0.08	0.082	0.105
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	Ant 8+10	Reduced	155	5775	17.43	18.50	1.279	100	1.000	0.04	0.127	0.162
20	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	Ant 8+10	Reduced	155	5775	17.43	18.50	1.279	100	1.000	0.07	0.354	0.453
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	Ant 8+10	Reduced-Simultaneous	155	5775	14.10	16.00	1.549	100	1.000	-0.08	0.199	0.308
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	Ant 8+10	Reduced	155	5775	17.43	18.50	1.279	100	1.000	0.09	0.200	0.256

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	Ant 5	Full	39	2441	17.79	18.00	1.050	76.83	1.302	0.07	0.100	0.137
	Bluetooth	1Mbps	Right Tilted	Ant 5	Full	39	2441	17.79	18.00	1.050	76.83	1.302	0.09	0.024	0.033
21	Bluetooth	1Mbps	Left Cheek	Ant 5	Full	39	2441	17.79	18.00	1.050	76.83	1.302	-0.04	0.156	0.213
	Bluetooth	1Mbps	Left Tilted	Ant 5	Full	39	2441	17.79	18.00	1.050	76.83	1.302	0.04	0.044	0.060
	Bluetooth	1Mbps	Right Cheek	Ant 7	Full	39	2441	15.74	16.00	1.062	76.83	1.302	-0.01	0.138	0.191
	Bluetooth	1Mbps	Right Tilted	Ant 7	Full	39	2441	15.74	16.00	1.062	76.83	1.302	0.07	0.038	0.053
	Bluetooth	1Mbps	Left Cheek	Ant 7	Full	39	2441	15.74	16.00	1.062	76.83	1.302	-0.12	0.145	0.200
	Bluetooth	1Mbps	Left Tilted	Ant 7	Full	39	2441	15.74	16.00	1.062	76.83	1.302	0.03	0.038	0.052

16.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 1	GPRS 1 Tx slot	Front	10mm	Full	128	824.2	32.34	33.50	1.306	0.08	0.116	0.152
22	GSM850_Ant 1	GPRS 1 Tx slot	Back	10mm	Full	128	824.2	32.34	33.50	1.306	-0.08	0.202	0.264
	GSM850_Ant 1	GPRS 1 Tx slot	Left Side	10mm	Full	128	824.2	32.34	33.50	1.306	0.08	0.055	0.072
	GSM850_Ant 1	GPRS 1 Tx slot	Right Side	10mm	Full	128	824.2	32.34	33.50	1.306	0.07	0.063	0.082
	GSM850_Ant 1	GPRS 1 Tx slot	Bottom Side	10mm	Full	128	824.2	32.34	33.50	1.306	0.09	0.137	0.179
	GSM850_Ant 3	GPRS 4 Tx slots	Front	10mm	Full	189	836.4	25.36	26.50	1.300	0.08	0.125	0.163
	GSM850_Ant 3	GPRS 4 Tx slots	Back	10mm	Full	189	836.4	25.36	26.50	1.300	0.05	0.105	0.137
	GSM850_Ant 3	GPRS 4 Tx slots	Left Side	10mm	Full	189	836.4	25.36	26.50	1.300	0.11	0.041	0.053
	GSM850_Ant 3	GPRS 4 Tx slots	Right Side	10mm	Full	189	836.4	25.36	26.50	1.300	0.01	0.007	0.009
	GSM850_Ant 3	GPRS 4 Tx slots	Top Side	10mm	Full	189	836.4	25.36	26.50	1.300	0.09	0.183	0.238
	GSM1900_Ant 2	GPRS 2 Tx slots	Front	10mm	Full	661	1880	26.54	27.50	1.247	0.02	0.196	0.244
	GSM1900_Ant 2	GPRS 2 Tx slots	Back	10mm	Full	661	1880	26.54	27.50	1.247	-0.13	0.239	0.298
	GSM1900_Ant 2	GPRS 2 Tx slots	Left Side	10mm	Full	661	1880	26.54	27.50	1.247	0.09	0.098	0.122
	GSM1900_Ant 2	GPRS 2 Tx slots	Right Side	10mm	Full	661	1880	26.54	27.50	1.247	0.04	0.036	0.045
23	GSM1900_Ant 2	GPRS 2 Tx slots	Bottom Side	10mm	Full	661	1880	26.54	27.50	1.247	0.09	0.411	0.513
	GSM1900_Ant 4	GPRS 4 Tx slots	Front	10mm	Reduced	810	1909.8	20.30	21.50	1.318	0.03	0.056	0.074
	GSM1900_Ant 4	GPRS 4 Tx slots	Back	10mm	Reduced	810	1909.8	20.30	21.50	1.318	0.11	0.103	0.136
	GSM1900_Ant 4	GPRS 4 Tx slots	Left Side	10mm	Reduced	810	1909.8	20.30	21.50	1.318	0.01	0.124	0.163
	GSM1900_Ant 4	GPRS 4 Tx slots	Right Side	10mm	Reduced	810	1909.8	20.30	21.50	1.318	0.04	0.013	0.017
	GSM1900_Ant 4	GPRS 4 Tx slots	Top Side	10mm	Reduced	810	1909.8	20.30	21.50	1.318	0.03	0.008	0.011

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 2	RMC 12.2Kbps	Front	10mm	Reduced	9400	1880	21.32	22.00	1.169	0.08	0.288	0.337
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	Reduced	9400	1880	21.32	22.00	1.169	0.02	0.407	0.476
	WCDMA II_Ant 2	RMC 12.2Kbps	Left Side	10mm	Reduced	9400	1880	21.32	22.00	1.169	-0.01	0.128	0.150
	WCDMA II_Ant 2	RMC 12.2Kbps	Right Side	10mm	Reduced	9400	1880	21.32	22.00	1.169	0.07	0.055	0.064
24	WCDMA II_Ant 2	RMC 12.2Kbps	Bottom Side	10mm	Reduced	9400	1880	21.32	22.00	1.169	-0.05	0.644	0.753
	WCDMA II_Ant 4	RMC 12.2Kbps	Front	10mm	Reduced	9400	1880	20.23	21.00	1.194	0.08	0.106	0.127
	WCDMA II_Ant 4	RMC 12.2Kbps	Back	10mm	Reduced	9400	1880	20.23	21.00	1.194	0.02	0.129	0.154
	WCDMA II_Ant 4	RMC 12.2Kbps	Left Side	10mm	Reduced	9400	1880	20.23	21.00	1.194	0.11	0.284	0.339
	WCDMA II_Ant 4	RMC 12.2Kbps	Right Side	10mm	Reduced	9400	1880	20.23	21.00	1.194	0.01	0.058	0.069
	WCDMA II_Ant 4	RMC 12.2Kbps	Top Side	10mm	Reduced	9400	1880	20.23	21.00	1.194	0.03	0.028	0.033
	WCDMA IV_Ant 2	RMC 12.2Kbps	Front	10mm	Reduced	1413	1732.6	20.28	21.00	1.180	0.05	0.143	0.169
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	10mm	Reduced	1413	1732.6	20.28	21.00	1.180	-0.02	0.214	0.253
	WCDMA IV_Ant 2	RMC 12.2Kbps	Left Side	10mm	Reduced	1413	1732.6	20.28	21.00	1.180	0.01	0.057	0.067
	WCDMA IV_Ant 2	RMC 12.2Kbps	Right Side	10mm	Reduced	1413	1732.6	20.28	21.00	1.180	-0.03	0.019	0.022
25	WCDMA IV_Ant 2	RMC 12.2Kbps	Bottom Side	10mm	Reduced	1413	1732.6	20.28	21.00	1.180	-0.17	0.363	0.428
	WCDMA IV_Ant 4	RMC 12.2Kbps	Front	10mm	Reduced	1413	1732.6	21.36	22.00	1.159	0.01	0.178	0.206
	WCDMA IV_Ant 4	RMC 12.2Kbps	Back	10mm	Reduced	1413	1732.6	21.36	22.00	1.159	0.01	0.115	0.133
	WCDMA IV_Ant 4	RMC 12.2Kbps	Left Side	10mm	Reduced	1413	1732.6	21.36	22.00	1.159	0.03	0.358	0.415
	WCDMA IV_Ant 4	RMC 12.2Kbps	Right Side	10mm	Reduced	1413	1732.6	21.36	22.00	1.159	0.01	0.028	0.032
	WCDMA IV_Ant 4	RMC 12.2Kbps	Top Side	10mm	Reduced	1413	1732.6	21.36	22.00	1.159	0.02	0.108	0.125
	WCDMA V_Ant 1	RMC 12.2Kbps	Front	10mm	Full	4182	836.4	24.00	25.00	1.259	0.01	0.216	0.272
26	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	Full	4182	836.4	24.00	25.00	1.259	-0.1	0.330	0.415
	WCDMA V_Ant 1	RMC 12.2Kbps	Left Side	10mm	Full	4182	836.4	24.00	25.00	1.259	0.03	0.075	0.094
	WCDMA V_Ant 1	RMC 12.2Kbps	Right Side	10mm	Full	4182	836.4	24.00	25.00	1.259	0.05	0.104	0.131
	WCDMA V_Ant 1	RMC 12.2Kbps	Bottom Side	10mm	Full	4182	836.4	24.00	25.00	1.259	0.06	0.228	0.287
	WCDMA V_Ant 3	RMC 12.2Kbps	Front	10mm	Full	4182	836.4	23.41	24.00	1.146	0.05	0.174	0.199
	WCDMA V_Ant 3	RMC 12.2Kbps	Back	10mm	Full	4182	836.4	23.41	24.00	1.146	-0.02	0.147	0.168
	WCDMA V_Ant 3	RMC 12.2Kbps	Left Side	10mm	Full	4182	836.4	23.41	24.00	1.146	0.01	0.063	0.072
	WCDMA V_Ant 3	RMC 12.2Kbps	Right Side	10mm	Full	4182	836.4	23.41	24.00	1.146	-0.03	0.002	0.002
	WCDMA V_Ant 3	RMC 12.2Kbps	Top Side	10mm	Full	4182	836.4	23.41	24.00	1.146	-0.01	0.246	0.282



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 2	20M	QPSK	1	0	Front	10mm	Reduced	18900	1880	20.70	21.50	1.202	0.08	0.219	0.263
	LTE Band 2_Ant 2	20M	QPSK	50	0	Front	10mm	Reduced	18900	1880	20.63	21.50	1.222	0.06	0.230	0.281
	LTE Band 2_Ant 2	20M	QPSK	1	0	Back	10mm	Reduced	18900	1880	20.70	21.50	1.202	0.01	0.298	0.358
	LTE Band 2_Ant 2	20M	QPSK	50	0	Back	10mm	Reduced	18900	1880	20.63	21.50	1.222	0.05	0.304	0.371
	LTE Band 2_Ant 2	20M	QPSK	1	0	Left Side	10mm	Reduced	18900	1880	20.70	21.50	1.202	0.01	0.090	0.108
	LTE Band 2_Ant 2	20M	QPSK	50	0	Left Side	10mm	Reduced	18900	1880	20.63	21.50	1.222	0.01	0.230	0.281
	LTE Band 2_Ant 2	20M	QPSK	1	0	Right Side	10mm	Reduced	18900	1880	20.70	21.50	1.202	0.03	0.041	0.049
	LTE Band 2_Ant 2	20M	QPSK	50	0	Right Side	10mm	Reduced	18900	1880	20.63	21.50	1.222	0.01	0.044	0.054
	LTE Band 2_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	Reduced	18900	1880	20.70	21.50	1.202	0.06	0.480	0.577
27	LTE Band 2_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	Reduced	18900	1880	20.63	21.50	1.222	-0.15	0.513	0.627
	LTE Band 2_Ant 4	20M	QPSK	1	0	Front	10mm	Reduced	18900	1880	19.74	20.50	1.191	0.03	0.107	0.127
	LTE Band 2_Ant 4	20M	QPSK	50	0	Front	10mm	Reduced	18900	1880	19.23	20.50	1.340	0.01	0.110	0.147
	LTE Band 2_Ant 4	20M	QPSK	1	0	Back	10mm	Reduced	18900	1880	19.74	20.50	1.191	0.08	0.112	0.133
	LTE Band 2_Ant 4	20M	QPSK	50	0	Back	10mm	Reduced	18900	1880	19.23	20.50	1.340	0.03	0.113	0.151
	LTE Band 2_Ant 4	20M	QPSK	1	0	Left Side	10mm	Reduced	18900	1880	19.74	20.50	1.191	0.05	0.238	0.284
	LTE Band 2_Ant 4	20M	QPSK	50	0	Left Side	10mm	Reduced	18900	1880	19.23	20.50	1.340	0.06	0.243	0.326
	LTE Band 2_Ant 4	20M	QPSK	1	0	Right Side	10mm	Reduced	18900	1880	19.74	20.50	1.191	0.12	0.001	0.001
	LTE Band 2_Ant 4	20M	QPSK	50	0	Right Side	10mm	Reduced	18900	1880	19.23	20.50	1.340	0.03	0.001	0.001
	LTE Band 2_Ant 4	20M	QPSK	1	0	Top Side	10mm	Reduced	18900	1880	19.74	20.50	1.191	0.01	0.007	0.009
	LTE Band 2_Ant 4	20M	QPSK	50	0	Top Side	10mm	Reduced	18900	1880	19.23	20.50	1.340	0.05	0.003	0.004
	LTE Band 5_Ant 1	10M	QPSK	1	0	Front	10mm	Full	20525	836.5	25.34	25.50	1.038	-0.02	0.180	0.187
	LTE Band 5_Ant 1	10M	QPSK	25	0	Front	10mm	Full	20525	836.5	24.47	24.50	1.007	0.01	0.166	0.167
28	LTE Band 5_Ant 1	10M	QPSK	1	0	Back	10mm	Full	20525	836.5	25.34	25.50	1.038	-0.12	0.290	0.301
	LTE Band 5_Ant 1	10M	QPSK	25	0	Back	10mm	Full	20525	836.5	24.47	24.50	1.007	0.01	0.262	0.264
	LTE Band 5_Ant 1	10M	QPSK	1	0	Left Side	10mm	Full	20525	836.5	25.34	25.50	1.038	-0.01	0.066	0.068
	LTE Band 5_Ant 1	10M	QPSK	25	0	Left Side	10mm	Full	20525	836.5	24.47	24.50	1.007	0.03	0.060	0.060
	LTE Band 5_Ant 1	10M	QPSK	1	0	Right Side	10mm	Full	20525	836.5	25.34	25.50	1.038	0.05	0.090	0.093
	LTE Band 5_Ant 1	10M	QPSK	25	0	Right Side	10mm	Full	20525	836.5	24.47	24.50	1.007	0.01	0.070	0.070
	LTE Band 5_Ant 1	10M	QPSK	1	0	Bottom Side	10mm	Full	20525	836.5	25.34	25.50	1.038	0.01	0.230	0.239
	LTE Band 5_Ant 1	10M	QPSK	25	0	Bottom Side	10mm	Full	20525	836.5	24.47	24.50	1.007	0.03	0.184	0.185
	LTE Band 5_Ant 3	10M	QPSK	1	0	Front	10mm	Full	20525	836.5	22.90	24.50	1.445	-0.07	0.203	0.293
	LTE Band 5_Ant 3	10M	QPSK	25	0	Front	10mm	Full	20525	836.5	21.96	23.50	1.426	-0.05	0.055	0.078
	LTE Band 5_Ant 3	10M	QPSK	1	0	Back	10mm	Full	20525	836.5	22.90	24.50	1.445	-0.02	0.054	0.078
	LTE Band 5_Ant 3	10M	QPSK	25	0	Back	10mm	Full	20525	836.5	21.96	23.50	1.426	0.01	0.046	0.066
	LTE Band 5_Ant 3	10M	QPSK	1	0	Left Side	10mm	Full	20525	836.5	22.90	24.50	1.445	0.06	0.019	0.027
	LTE Band 5_Ant 3	10M	QPSK	25	0	Left Side	10mm	Full	20525	836.5	21.96	23.50	1.426	0.01	0.049	0.070
	LTE Band 5_Ant 3	10M	QPSK	1	0	Right Side	10mm	Full	20525	836.5	22.90	24.50	1.445	0.05	0.007	0.010
	LTE Band 5_Ant 3	10M	QPSK	25	0	Right Side	10mm	Full	20525	836.5	21.96	23.50	1.426	0.03	0.006	0.009
	LTE Band 5_Ant 3	10M	QPSK	1	0	Top Side	10mm	Full	20525	836.5	22.90	24.50	1.445	0.01	0.073	0.106
	LTE Band 5_Ant 3	10M	QPSK	25	0	Top Side	10mm	Full	20525	836.5	21.96	23.50	1.426	0.01	0.061	0.087



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant 2	20M	QPSK	1	0	Front	10mm	Reduced	21100	2535	19.58	20.50	1.236	0.03	0.171	0.211
	LTE Band 7_Ant 2	20M	QPSK	50	0	Front	10mm	Reduced	21100	2535	19.41	20.50	1.285	0.08	0.165	0.212
	LTE Band 7_Ant 2	20M	QPSK	1	0	Back	10mm	Reduced	21100	2535	19.58	20.50	1.236	0.06	0.255	0.315
	LTE Band 7_Ant 2	20M	QPSK	50	0	Back	10mm	Reduced	21100	2535	19.41	20.50	1.285	0.09	0.263	0.338
	LTE Band 7_Ant 2	20M	QPSK	1	0	Left Side	10mm	Reduced	21100	2535	19.58	20.50	1.236	0.08	0.098	0.121
	LTE Band 7_Ant 2	20M	QPSK	50	0	Left Side	10mm	Reduced	21100	2535	19.41	20.50	1.285	0.06	0.097	0.125
	LTE Band 7_Ant 2	20M	QPSK	1	0	Right Side	10mm	Reduced	21100	2535	19.58	20.50	1.236	-0.08	0.058	0.072
	LTE Band 7_Ant 2	20M	QPSK	50	0	Right Side	10mm	Reduced	21100	2535	19.41	20.50	1.285	0.11	0.046	0.059
	LTE Band 7_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	Reduced	21100	2535	19.58	20.50	1.236	0.04	0.557	0.688
29	LTE Band 7_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	Reduced	21100	2535	19.41	20.50	1.285	-0.06	0.551	0.708
	LTE Band 7C_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	Reduced	21100+20902	2535+2515.2	19.43	20.50	1.279	0.02	0.523	0.669
	LTE Band 7_Ant 3	20M	QPSK	1	0	Front	10mm	Reduced	21100	2535	15.83	16.50	1.167	0.03	0.113	0.132
	LTE Band 7_Ant 3	20M	QPSK	50	0	Front	10mm	Reduced	21100	2535	15.79	16.50	1.178	0.01	0.119	0.140
	LTE Band 7_Ant 3	20M	QPSK	1	0	Back	10mm	Reduced	21100	2535	15.83	16.50	1.167	-0.02	0.106	0.124
	LTE Band 7_Ant 3	20M	QPSK	50	0	Back	10mm	Reduced	21100	2535	15.79	16.50	1.178	-0.03	0.119	0.140
	LTE Band 7_Ant 3	20M	QPSK	1	0	Left Side	10mm	Reduced	21100	2535	15.83	16.50	1.167	0.03	0.330	0.385
	LTE Band 7_Ant 3	20M	QPSK	50	0	Left Side	10mm	Reduced	21100	2535	15.79	16.50	1.178	0.01	0.057	0.067
	LTE Band 7_Ant 3	20M	QPSK	1	0	Right Side	10mm	Reduced	21100	2535	15.83	16.50	1.167	0.08	0.034	0.040
	LTE Band 7_Ant 3	20M	QPSK	50	0	Right Side	10mm	Reduced	21100	2535	15.79	16.50	1.178	0.01	0.031	0.037
	LTE Band 7_Ant 3	20M	QPSK	1	0	Top Side	10mm	Reduced	21100	2535	15.83	16.50	1.167	-0.17	0.349	0.407
	LTE Band 7_Ant 3	20M	QPSK	50	0	Top Side	10mm	Reduced	21100	2535	15.79	16.50	1.178	0.01	0.379	0.446
	LTE Band 7C_Ant 3	20M	QPSK	50	0	Top Side	10mm	Reduced	21100+20902	2535+2515.2	16.77	17.50	1.183	0.09	0.329	0.389
	LTE Band 7_Ant 4	20M	QPSK	1	0	Front	10mm	Reduced	21100	2535	18.42	19.00	1.143	0.05	0.160	0.183
	LTE Band 7_Ant 4	20M	QPSK	50	0	Front	10mm	Reduced	21100	2535	18.40	19.00	1.148	0.06	0.163	0.187
	LTE Band 7_Ant 4	20M	QPSK	1	0	Back	10mm	Reduced	21100	2535	18.42	19.00	1.143	0.01	0.148	0.169
	LTE Band 7_Ant 4	20M	QPSK	50	0	Back	10mm	Reduced	21100	2535	18.40	19.00	1.148	-0.01	0.146	0.168
	LTE Band 7_Ant 4	20M	QPSK	1	0	Left Side	10mm	Reduced	21100	2535	18.42	19.00	1.143	0.03	0.396	0.453
	LTE Band 7_Ant 4	20M	QPSK	50	0	Left Side	10mm	Reduced	21100	2535	18.40	19.00	1.148	0.05	0.386	0.443
	LTE Band 7_Ant 4	20M	QPSK	1	0	Right Side	10mm	Reduced	21100	2535	18.42	19.00	1.143	0.01	0.038	0.043
	LTE Band 7_Ant 4	20M	QPSK	50	0	Right Side	10mm	Reduced	21100	2535	18.40	19.00	1.148	0.01	0.005	0.006
	LTE Band 7_Ant 4	20M	QPSK	1	0	Top Side	10mm	Reduced	21100	2535	18.42	19.00	1.143	0.03	0.038	0.043
	LTE Band 7_Ant 4	20M	QPSK	50	0	Top Side	10mm	Reduced	21100	2535	18.40	19.00	1.148	0.01	0.031	0.036
	LTE Band 7C_Ant 4	20M	QPSK	1	0	Left Side	10mm	Reduced	21100+20902	2535+2515.2	18.89	19.50	1.151	0.01	0.338	0.389
	LTE Band 7_Ant 7	20M	QPSK	1	0	Front	10mm	Full	21100	2535	20.13	20.50	1.089	0.01	0.233	0.254
	LTE Band 7_Ant 7	20M	QPSK	50	50	Front	10mm	Full	21100	2535	19.06	19.50	1.107	0.03	0.182	0.201
	LTE Band 7_Ant 7	20M	QPSK	1	0	Back	10mm	Full	21100	2535	20.13	20.50	1.089	0.03	0.403	0.439
	LTE Band 7_Ant 7	20M	QPSK	50	50	Back	10mm	Full	21100	2535	19.06	19.50	1.107	0.08	0.245	0.271
	LTE Band 7_Ant 7	20M	QPSK	1	0	Left Side	10mm	Full	21100	2535	20.13	20.50	1.089	0.06	0.035	0.038
	LTE Band 7_Ant 7	20M	QPSK	50	50	Left Side	10mm	Full	21100	2535	19.06	19.50	1.107	0.09	0.181	0.200
	LTE Band 7_Ant 7	20M	QPSK	1	0	Right Side	10mm	Full	21100	2535	20.13	20.50	1.089	0.08	0.499	0.543
	LTE Band 7_Ant 7	20M	QPSK	50	50	Right Side	10mm	Full	21100	2535	19.06	19.50	1.107	0.06	0.460	0.509
	LTE Band 7_Ant 7	20M	QPSK	1	0	Top Side	10mm	Full	21100	2535	20.13	20.50	1.089	-0.08	0.048	0.052
	LTE Band 7_Ant 7	20M	QPSK	50	50	Top Side	10mm	Full	21100	2535	19.06	19.50	1.107	0.11	0.039	0.043
	LTE Band 7C_Ant 7	20M	QPSK	1	0	Right Side	10mm	Full	21100+20902	2535+2515.2	20.01	20.50	1.119	0.02	0.434	0.486



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
30	LTE Band 12_Ant 1	10M	QPSK	1	0	Front	10mm	Full	23095	707.5	22.66	24.00	1.361	0.01	0.131	0.178
	LTE Band 12_Ant 1	10M	QPSK	25	0	Front	10mm	Full	23095	707.5	21.73	23.00	1.340	0.06	0.131	0.175
	LTE Band 12_Ant 1	10M	QPSK	1	0	Back	10mm	Full	23095	707.5	22.66	24.00	1.361	-0.18	0.189	0.257
	LTE Band 12_Ant 1	10M	QPSK	25	0	Back	10mm	Full	23095	707.5	21.73	23.00	1.340	0.03	0.167	0.224
	LTE Band 12_Ant 1	10M	QPSK	1	0	Left Side	10mm	Full	23095	707.5	22.66	24.00	1.361	0.08	0.069	0.094
	LTE Band 12_Ant 1	10M	QPSK	25	0	Left Side	10mm	Full	23095	707.5	21.73	23.00	1.340	0.06	0.056	0.075
	LTE Band 12_Ant 1	10M	QPSK	1	0	Right Side	10mm	Full	23095	707.5	22.66	24.00	1.361	0.09	0.091	0.124
	LTE Band 12_Ant 1	10M	QPSK	25	0	Right Side	10mm	Full	23095	707.5	21.73	23.00	1.340	0.08	0.067	0.090
	LTE Band 12_Ant 1	10M	QPSK	1	0	Bottom Side	10mm	Full	23095	707.5	22.66	24.00	1.361	0.06	0.186	0.253
	LTE Band 12_Ant 1	10M	QPSK	25	0	Bottom Side	10mm	Full	23095	707.5	21.73	23.00	1.340	-0.08	0.157	0.210
	LTE Band 12_Ant 3	10M	QPSK	1	0	Front	10mm	Full	23095	707.5	21.62	23.00	1.374	0.03	0.046	0.063
	LTE Band 12_Ant 3	10M	QPSK	25	0	Front	10mm	Full	23095	707.5	20.67	22.00	1.358	0.05	0.047	0.064
	LTE Band 12_Ant 3	10M	QPSK	1	0	Back	10mm	Full	23095	707.5	21.62	23.00	1.374	0.13	0.049	0.067
	LTE Band 12_Ant 3	10M	QPSK	25	0	Back	10mm	Full	23095	707.5	20.67	22.00	1.358	0.03	0.046	0.062
	LTE Band 12_Ant 3	10M	QPSK	1	0	Left Side	10mm	Full	23095	707.5	21.62	23.00	1.374	0.01	0.021	0.029
	LTE Band 12_Ant 3	10M	QPSK	25	0	Left Side	10mm	Full	23095	707.5	20.67	22.00	1.358	0.03	0.022	0.030
	LTE Band 12_Ant 3	10M	QPSK	1	0	Right Side	10mm	Full	23095	707.5	21.62	23.00	1.374	0.05	0.009	0.012
	LTE Band 12_Ant 3	10M	QPSK	25	0	Right Side	10mm	Full	23095	707.5	20.67	22.00	1.358	0.05	0.008	0.011
	LTE Band 12_Ant 3	10M	QPSK	1	0	Top Side	10mm	Full	23095	707.5	21.62	23.00	1.374	0.01	0.055	0.076
	LTE Band 12_Ant 3	10M	QPSK	25	0	Top Side	10mm	Full	23095	707.5	20.67	22.00	1.358	0.03	0.049	0.067
	LTE Band 66_Ant 2	20M	QPSK	1	0	Front	10mm	Reduced	132322	1745	20.50	21.50	1.259	0.02	0.167	0.210
	LTE Band 66_Ant 2	20M	QPSK	50	0	Front	10mm	Reduced	132322	1745	20.44	21.50	1.276	0.01	0.137	0.175
	LTE Band 66_Ant 2	20M	QPSK	1	0	Back	10mm	Reduced	132322	1745	20.50	21.50	1.259	0.13	0.232	0.292
	LTE Band 66_Ant 2	20M	QPSK	50	0	Back	10mm	Reduced	132322	1745	20.44	21.50	1.276	0.04	0.195	0.249
	LTE Band 66_Ant 2	20M	QPSK	1	0	Left Side	10mm	Reduced	132322	1745	20.50	21.50	1.259	0.05	0.066	0.083
	LTE Band 66_Ant 2	20M	QPSK	50	0	Left Side	10mm	Reduced	132322	1745	20.44	21.50	1.276	0.04	0.055	0.070
	LTE Band 66_Ant 2	20M	QPSK	1	0	Right Side	10mm	Reduced	132322	1745	20.50	21.50	1.259	-0.06	0.030	0.038
	LTE Band 66_Ant 2	20M	QPSK	50	0	Right Side	10mm	Reduced	132322	1745	20.44	21.50	1.276	0.04	0.025	0.032
	LTE Band 66_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	Reduced	132322	1745	20.50	21.50	1.259	0.01	0.135	0.170
	LTE Band 66_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	Reduced	132322	1745	20.44	21.50	1.276	0.06	0.158	0.202
31	LTE Band 66_Ant 4	20M	QPSK	1	0	Front	10mm	Reduced	132322	1745	20.77	21.50	1.183	0.05	0.138	0.163
	LTE Band 66_Ant 4	20M	QPSK	50	0	Front	10mm	Reduced	132322	1745	20.64	21.50	1.219	0.01	0.142	0.173
	LTE Band 66_Ant 4	20M	QPSK	1	0	Back	10mm	Reduced	132322	1745	20.77	21.50	1.183	0.03	0.129	0.153
	LTE Band 66_Ant 4	20M	QPSK	50	0	Back	10mm	Reduced	132322	1745	20.64	21.50	1.219	0.03	0.130	0.158
	LTE Band 66_Ant 4	20M	QPSK	1	0	Left Side	10mm	Reduced	132322	1745	20.77	21.50	1.183	0.07	0.303	0.358
	LTE Band 66_Ant 4	20M	QPSK	50	0	Left Side	10mm	Reduced	132322	1745	20.64	21.50	1.219	0.06	0.305	0.372
	LTE Band 66_Ant 4	20M	QPSK	1	0	Right Side	10mm	Reduced	132322	1745	20.77	21.50	1.183	0.03	0.053	0.063
	LTE Band 66_Ant 4	20M	QPSK	50	0	Right Side	10mm	Reduced	132322	1745	20.64	21.50	1.219	0.05	0.045	0.055
	LTE Band 66_Ant 4	20M	QPSK	1	0	Top Side	10mm	Reduced	132322	1745	20.77	21.50	1.183	0.01	0.084	0.099
	LTE Band 66_Ant 4	20M	QPSK	50	0	Top Side	10mm	Reduced	132322	1745	20.64	21.50	1.219	0.05	0.087	0.106



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 3	20M	QPSK	1	0	Front	10mm	Full	20175	1732.5	22.29	24.00	1.483	-0.05	0.252	0.374
	LTE Band 4_Ant 3	20M	QPSK	50	0	Front	10mm	Full	20175	1732.5	21.24	23.00	1.500	0.04	0.217	0.325
	LTE Band 4_Ant 3	20M	QPSK	1	0	Back	10mm	Full	20175	1732.5	22.29	24.00	1.483	0.09	0.230	0.341
	LTE Band 4_Ant 3	20M	QPSK	50	0	Back	10mm	Full	20175	1732.5	21.24	23.00	1.500	-0.03	0.191	0.286
	LTE Band 4_Ant 3	20M	QPSK	1	0	Left Side	10mm	Full	20175	1732.5	22.29	24.00	1.483	0.05	0.057	0.085
	LTE Band 4_Ant 3	20M	QPSK	50	0	Left Side	10mm	Full	20175	1732.5	21.24	23.00	1.500	0.02	0.049	0.073
	LTE Band 4_Ant 3	20M	QPSK	1	0	Right Side	10mm	Full	20175	1732.5	22.29	24.00	1.483	0.01	0.011	0.016
	LTE Band 4_Ant 3	20M	QPSK	50	0	Right Side	10mm	Full	20175	1732.5	21.24	23.00	1.500	-0.05	0.011	0.016
32	LTE Band 4_Ant 3	20M	QPSK	1	0	Top Side	10mm	Full	20175	1732.5	22.29	24.00	1.483	0.08	0.507	0.752
	LTE Band 4_Ant 3	20M	QPSK	50	0	Top Side	10mm	Full	20175	1732.5	21.24	23.00	1.500	0.09	0.422	0.633
	LTE Band 4_Ant 7	20M	QPSK	1	0	Front	10mm	Full	20175	1732.5	20.32	20.50	1.042	0.05	0.081	0.084
	LTE Band 4_Ant 7	20M	QPSK	50	0	Front	10mm	Full	20175	1732.5	19.35	19.50	1.035	-0.01	0.069	0.071
	LTE Band 4_Ant 7	20M	QPSK	1	0	Back	10mm	Full	20175	1732.5	20.32	20.50	1.042	-0.09	0.096	0.100
	LTE Band 4_Ant 7	20M	QPSK	50	0	Back	10mm	Full	20175	1732.5	19.35	19.50	1.035	0.08	0.082	0.085
	LTE Band 4_Ant 7	20M	QPSK	1	0	Right Side	10mm	Full	20175	1732.5	20.32	20.50	1.042	-0.05	0.269	0.328
	LTE Band 4_Ant 7	20M	QPSK	50	0	Right Side	10mm	Full	20175	1732.5	19.35	19.50	1.035	0.08	0.232	0.318
	LTE Band 4_Ant 7	20M	QPSK	1	0	Top Side	10mm	Full	20175	1732.5	20.32	20.50	1.042	-0.01	0.003	0.003
	LTE Band 4_Ant 7	20M	QPSK	50	0	Top Side	10mm	Full	20175	1732.5	19.35	19.50	1.035	-0.09	0.002	0.002



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	Reduced	40620	2593	20.12	21.00	1.225	62.9	1.006	-0.13	0.168	0.207
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	Reduced	40620	2593	20.10	21.00	1.230	62.9	1.006	0.06	0.168	0.208
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	Reduced	40620	2593	20.12	21.00	1.225	62.9	1.006	0.05	0.282	0.347
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	Reduced	40620	2593	20.10	21.00	1.230	62.9	1.006	0.03	0.279	0.345
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Side	10mm	Reduced	40620	2593	20.12	21.00	1.225	62.9	1.006	-0.02	0.098	0.121
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Side	10mm	Reduced	40620	2593	20.10	21.00	1.230	62.9	1.006	0.07	0.107	0.132
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	Reduced	40620	2593	20.12	21.00	1.225	62.9	1.006	0.12	0.044	0.054
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Side	10mm	Reduced	40620	2593	20.10	21.00	1.230	62.9	1.006	0.01	0.043	0.053
33	LTE Band 41_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	Reduced	40620	2593	20.12	21.00	1.225	62.9	1.006	-0.06	0.577	0.711
	LTE Band 41_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	Reduced	40620	2593	20.10	21.00	1.230	62.9	1.006	0.02	0.570	0.705
	LTE Band 38C_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	Reduced	37901+38099	2585.1+2604.9	23.74	24.50	1.191	62.9	1.006	0.01	0.536	0.642
	LTE Band 41_Ant 3	20M	QPSK	1	0	Front	10mm	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	0.08	0.147	0.166
	LTE Band 41_Ant 3	20M	QPSK	50	0	Front	10mm	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	-0.13	0.143	0.163
	LTE Band 41_Ant 3	20M	QPSK	1	0	Back	10mm	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	0.06	0.147	0.166
	LTE Band 41_Ant 3	20M	QPSK	50	0	Back	10mm	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	0.05	0.138	0.157
	LTE Band 41_Ant 3	20M	QPSK	1	0	Left Side	10mm	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	0.03	0.051	0.058
	LTE Band 41_Ant 3	20M	QPSK	50	0	Left Side	10mm	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	-0.02	0.048	0.055
	LTE Band 41_Ant 3	20M	QPSK	1	0	Right Side	10mm	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	0.07	0.032	0.036
	LTE Band 41_Ant 3	20M	QPSK	50	0	Right Side	10mm	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	0.12	0.032	0.036
	LTE Band 41_Ant 3	20M	QPSK	1	0	Top Side	10mm	Reduced	40620	2593	17.99	18.50	1.125	62.9	1.006	0.01	0.453	0.513
	LTE Band 41_Ant 3	20M	QPSK	50	0	Top Side	10mm	Reduced	40620	2593	17.97	18.50	1.130	62.9	1.006	0.12	0.435	0.494
	LTE Band 38C_Ant 3	20M	QPSK	1	0	Top Side	10mm	Reduced	37901+38099	2585.1+2604.9	17.84	18.50	1.164	62.9	1.006	0.09	0.412	0.482
	LTE Band 41_Ant 4	20M	QPSK	1	0	Front	10mm	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	0.06	0.181	0.215
	LTE Band 41_Ant 4	20M	QPSK	50	0	Front	10mm	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	0.07	0.180	0.218
	LTE Band 41_Ant 4	20M	QPSK	1	0	Back	10mm	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	-0.01	0.186	0.221
	LTE Band 41_Ant 4	20M	QPSK	50	0	Back	10mm	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	0.05	0.181	0.219
	LTE Band 41_Ant 4	20M	QPSK	1	0	Left Side	10mm	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	0.05	0.495	0.588
	LTE Band 41_Ant 4	20M	QPSK	50	0	Left Side	10mm	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	0.05	0.493	0.598
	LTE Band 41_Ant 4	20M	QPSK	1	0	Right Side	10mm	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	0.05	0.023	0.027
	LTE Band 41_Ant 4	20M	QPSK	50	0	Right Side	10mm	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	-0.03	0.006	0.007
	LTE Band 41_Ant 4	20M	QPSK	1	0	Top Side	10mm	Reduced	40620	2593	19.78	20.50	1.180	62.9	1.006	0.08	0.055	0.065
	LTE Band 41_Ant 4	20M	QPSK	50	0	Top Side	10mm	Reduced	40620	2593	19.69	20.50	1.205	62.9	1.006	-0.13	0.063	0.076
	LTE Band 38C_Ant 4	20M	QPSK	50	0	Left Side	10mm	Reduced	37901+38099	2585.1+2604.9	19.55	20.50	1.245	62.9	1.006	0.06	0.488	0.611
	LTE Band 41_Ant 7	20M	QPSK	1	0	Front	10mm	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	0.12	0.112	0.143
	LTE Band 41_Ant 7	20M	QPSK	50	0	Front	10mm	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.06	0.085	0.106
	LTE Band 41_Ant 7	20M	QPSK	1	0	Back	10mm	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	0.07	0.195	0.248
	LTE Band 41_Ant 7	20M	QPSK	50	0	Back	10mm	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	-0.01	0.113	0.141
	LTE Band 41_Ant 7	20M	QPSK	1	0	Left Side	10mm	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	0.05	0.032	0.041
	LTE Band 41_Ant 7	20M	QPSK	50	0	Left Side	10mm	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.05	0.089	0.111
	LTE Band 41_Ant 7	20M	QPSK	1	0	Right Side	10mm	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	0.05	0.344	0.438
	LTE Band 41_Ant 7	20M	QPSK	50	0	Right Side	10mm	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.05	0.225	0.280
	LTE Band 41_Ant 7	20M	QPSK	1	0	Top Side	10mm	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	-0.03	0.018	0.023
	LTE Band 41_Ant 7	20M	QPSK	50	0	Top Side	10mm	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.07	0.035	0.044
	LTE Band 38C_Ant 7	20M	QPSK	1	0	Right Side	10mm	Full	37901+38099	2585.1+2604.9	19.65	20.50	1.216	62.9	1.006	0.09	0.318	0.389



<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Front	10mm	Full	167300	836.5	24.54	25.50	1.247	0.07	0.145	0.181
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Front	10mm	Full	167300	836.5	24.45	25.50	1.274	-0.01	0.122	0.155
34	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Back	10mm	Full	167300	836.5	24.54	25.50	1.247	0.15	0.246	0.307
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Back	10mm	Full	167300	836.5	24.45	25.50	1.274	0.08	0.230	0.293
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Right side	10mm	Full	167300	836.5	24.54	25.50	1.247	-0.13	0.065	0.081
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Right side	10mm	Full	167300	836.5	24.45	25.50	1.274	0.06	0.065	0.083
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Left side	10mm	Full	167300	836.5	24.54	25.50	1.247	0.05	0.065	0.081
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Left side	10mm	Full	167300	836.5	24.45	25.50	1.274	0.03	0.064	0.082
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Bottom side	10mm	Full	167300	836.5	24.54	25.50	1.247	-0.02	0.173	0.216
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Bottom side	10mm	Full	167300	836.5	24.45	25.50	1.274	0.07	0.189	0.241
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	167300	836.5	19.86	20.40	1.132	0.02	0.081	0.092
	FR1 n5_Ant 3 NSA	20M	QPSK	135	69	DFT-15KHz	Front	10mm	Reduced	167300	836.5	19.64	20.40	1.191	0.01	0.109	0.130
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	167300	836.5	19.86	20.40	1.132	0.03	0.112	0.127
	FR1 n5_Ant 3 NSA	20M	QPSK	135	69	DFT-15KHz	Back	10mm	Reduced	167300	836.5	19.64	20.40	1.191	0.06	0.092	0.110
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	167300	836.5	19.86	20.40	1.132	0.06	0.005	0.006
	FR1 n5_Ant 3 NSA	20M	QPSK	135	69	DFT-15KHz	Right side	10mm	Reduced	167300	836.5	19.64	20.40	1.191	0.03	0.005	0.006
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	167300	836.5	19.86	20.40	1.132	0.05	0.028	0.032
	FR1 n5_Ant 3 NSA	20M	QPSK	135	69	DFT-15KHz	Left side	10mm	Reduced	167300	836.5	19.64	20.40	1.191	0.06	0.035	0.042
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Top side	10mm	Reduced	167300	836.5	19.86	20.40	1.132	0.07	0.090	0.102
	FR1 n5_Ant 3 NSA	20M	QPSK	135	69	DFT-15KHz	Top side	10mm	Reduced	167300	836.5	19.64	20.40	1.191	0.03	0.108	0.129
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	507000	2535	18.09	19.50	1.384	0.05	0.111	0.154
	FR1 n7_Ant 2 SA	50M	QPSK	135	0	DFT-15KHz	Front	10mm	Reduced	507000	2535	17.98	19.50	1.419	0.03	0.090	0.128
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	507000	2535	18.09	19.50	1.384	0.01	0.224	0.310
	FR1 n7_Ant 2 SA	50M	QPSK	135	0	DFT-15KHz	Back	10mm	Reduced	507000	2535	17.98	19.50	1.419	0.02	0.158	0.224
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	507000	2535	18.09	19.50	1.384	0.07	0.035	0.048
	FR1 n7_Ant 2 SA	50M	QPSK	135	0	DFT-15KHz	Right side	10mm	Reduced	507000	2535	17.98	19.50	1.419	0.07	0.031	0.044
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	507000	2535	18.09	19.50	1.384	0.08	0.060	0.083
	FR1 n7_Ant 2 SA	50M	QPSK	135	0	DFT-15KHz	Left side	10mm	Reduced	507000	2535	17.98	19.50	1.419	0.09	0.069	0.098
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Bottom side	10mm	Reduced	507000	2535	18.09	19.50	1.384	0.01	0.370	0.512
	FR1 n7_Ant 2 SA	50M	QPSK	135	0	DFT-15KHz	Bottom side	10mm	Reduced	507000	2535	17.98	19.50	1.419	0.06	0.373	0.529
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	507000	2535	14.25	15.50	1.334	-0.08	0.062	0.083
	FR1 n7_Ant 2 NSA	50M	QPSK	135	0	DFT-15KHz	Front	10mm	Reduced	507000	2535	14.23	15.50	1.340	0.09	0.063	0.084
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	507000	2535	14.25	15.50	1.334	0.04	0.106	0.141
	FR1 n7_Ant 2 NSA	50M	QPSK	135	0	DFT-15KHz	Back	10mm	Reduced	507000	2535	14.23	15.50	1.340	0.11	0.118	0.158
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	507000	2535	14.25	15.50	1.334	0.02	0.023	0.031
	FR1 n7_Ant 2 NSA	50M	QPSK	135	0	DFT-15KHz	Right side	10mm	Reduced	507000	2535	14.23	15.50	1.340	0.01	0.023	0.031
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	507000	2535	14.25	15.50	1.334	-0.06	0.038	0.051
	FR1 n7_Ant 2 NSA	50M	QPSK	135	0	DFT-15KHz	Left side	10mm	Reduced	507000	2535	14.23	15.50	1.340	0.08	0.022	0.029
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Bottom side	10mm	Reduced	507000	2535	14.25	15.50	1.334	0.16	0.191	0.255
	FR1 n7_Ant 2 NSA	50M	QPSK	135	0	DFT-15KHz	Bottom side	10mm	Reduced	507000	2535	14.23	15.50	1.340	-0.13	0.284	0.380
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	507000	2535	13.72	15.00	1.343	0.05	0.093	0.125
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Front	10mm	Reduced	507000	2535	13.63	15.00	1.371	0.04	0.103	0.141
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	507000	2535	13.72	15.00	1.343	0.06	0.121	0.162
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Back	10mm	Reduced	507000	2535	13.63	15.00	1.371	-0.06	0.122	0.167
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	507000	2535	13.72	15.00	1.343	-0.08	0.023	0.031
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Right side	10mm	Reduced	507000	2535	13.63	15.00	1.371	0.06	0.019	0.026
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	507000	2535	13.72	15.00	1.343	-0.02	0.066	0.089
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Left side	10mm	Reduced	507000	2535	13.63	15.00	1.371	-0.06	0.063	0.086
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Top side	10mm	Reduced	507000	2535	13.72	15.00	1.343	0.07	0.235	0.316
	FR1 n7_Ant 3 SA	50M	QPSK	135	0	DFT-15KHz	Top side	10mm	Reduced	507000	2535	13.63	15.00	1.371	-0.03	0.240	0.329
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	507000	2535	15.93	16.50	1.140	0.06	0.086	0.098
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Front	10mm	Reduced	507000	2535	15.79	16.50	1.178	-0.07	0.131	0.154

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZK2G

Page 72 of 117

Issued Date : Dec. 18, 2020

Form version. : 200414



FCC SAR Test Report

Report No. : FA002312

	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	507000	2535	15.93	16.50	1.140	0.03	0.146	0.166
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Back	10mm	Reduced	507000	2535	15.79	16.50	1.178	0.04	0.142	0.167
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	507000	2535	15.93	16.50	1.140	0.02	0.018	0.021
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Right side	10mm	Reduced	507000	2535	15.79	16.50	1.178	0.03	0.016	0.019
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	507000	2535	15.93	16.50	1.140	-0.02	0.036	0.041
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Left side	10mm	Reduced	507000	2535	15.79	16.50	1.178	0.09	0.037	0.044
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Top side	10mm	Reduced	507000	2535	15.93	16.50	1.140	0.08	0.273	0.311
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Top side	10mm	Reduced	507000	2535	15.79	16.50	1.178	-0.01	0.249	0.293
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	507000	2535	16.72	17.50	1.197	-0.05	0.073	0.087
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Front	10mm	Reduced	507000	2535	16.64	17.50	1.219	0.01	0.075	0.091
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	507000	2535	16.72	17.50	1.197	0.04	0.073	0.087
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Back	10mm	Reduced	507000	2535	16.64	17.50	1.219	-0.03	0.064	0.078
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	507000	2535	16.72	17.50	1.197	0.05	0.206	0.247
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Left side	10mm	Reduced	507000	2535	16.64	17.50	1.219	0.01	0.187	0.228
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	507000	2535	16.72	17.50	1.197	0.05	0.021	0.025
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Right side	10mm	Reduced	507000	2535	16.64	17.50	1.219	-0.03	0.017	0.021
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Top side	10mm	Reduced	507000	2535	16.72	17.50	1.197	-0.13	0.031	0.037
	FR1 n7_Ant 4 SA	50M	QPSK	135	0	DFT-15KHz	Top side	10mm	Reduced	507000	2535	16.64	17.50	1.219	0.09	0.030	0.037
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	507000	2535	14.07	14.50	1.104	-0.08	0.051	0.056
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Front	10mm	Reduced	507000	2535	13.99	14.50	1.125	0.09	0.054	0.061
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	507000	2535	14.07	14.50	1.104	0.04	0.056	0.062
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Back	10mm	Reduced	507000	2535	13.99	14.50	1.125	0.02	0.045	0.051
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	507000	2535	14.07	14.50	1.104	0.01	0.139	0.153
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Left side	10mm	Reduced	507000	2535	13.99	14.50	1.125	-0.06	0.133	0.150
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	507000	2535	14.07	14.50	1.104	0.08	0.027	0.030
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Right side	10mm	Reduced	507000	2535	13.99	14.50	1.125	0.16	0.001	0.001
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Top side	10mm	Reduced	507000	2535	14.07	14.50	1.104	-0.13	0.033	0.036
	FR1 n7_Ant 4 NSA	50M	QPSK	135	0	DFT-15KHz	Top side	10mm	Reduced	507000	2535	13.99	14.50	1.125	0.09	0.012	0.013
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	507000	2535	18.23	18.50	1.064	-0.08	0.122	0.130
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Front	10mm	Reduced	507000	2535	17.89	18.50	1.151	0.04	0.106	0.122
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	507000	2535	18.23	18.50	1.064	0.09	0.154	0.164
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Back	10mm	Reduced	507000	2535	17.89	18.50	1.151	0.08	0.144	0.166
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	507000	2535	18.23	18.50	1.064	0.01	0.013	0.014
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Left side	10mm	Reduced	507000	2535	17.89	18.50	1.151	0.18	0.012	0.014
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	507000	2535	18.23	18.50	1.064	0.09	0.292	0.311
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Right side	10mm	Reduced	507000	2535	17.89	18.50	1.151	0.06	0.303	0.349
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Top side	10mm	Reduced	507000	2535	18.23	18.50	1.064	0.07	0.034	0.036
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Top side	10mm	Reduced	507000	2535	17.89	18.50	1.151	0.06	0.012	0.014
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Front	10mm	Reduced	507000	2535	20.12	21.50	1.374	0.12	0.199	0.273
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Front	10mm	Reduced	507000	2535	19.78	21.50	1.486	0.06	0.219	0.325
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Back	10mm	Reduced	507000	2535	20.12	21.50	1.374	0.07	0.254	0.349
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Back	10mm	Reduced	507000	2535	19.78	21.50	1.486	-0.01	0.274	0.407
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Left side	10mm	Reduced	507000	2535	20.12	21.50	1.374	0.05	0.041	0.056
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Left side	10mm	Reduced	507000	2535	19.78	21.50	1.486	0.05	0.007	0.010
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Right side	10mm	Reduced	507000	2535	20.12	21.50	1.374	0.05	0.504	0.693
35	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Right side	10mm	Reduced	507000	2535	19.78	21.50	1.486	-0.09	0.470	0.698
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Top side	10mm	Reduced	507000	2535	20.12	21.50	1.374	0.05	0.062	0.085
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Top side	10mm	Reduced	507000	2535	19.78	21.50	1.486	-0.03	0.057	0.085



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	20.57	21.5	1.239	0.05	0.085	0.105
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	20.39	21.5	1.291	0.04	0.103	0.133
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	20.57	21.5	1.239	0.06	0.199	0.247
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	20.39	21.5	1.291	-0.02	0.263	0.340
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	20.57	21.5	1.239	0.04	0.018	0.022
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	20.39	21.5	1.291	-0.03	0.025	0.032
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	20.57	21.5	1.239	0.03	0.057	0.071
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	20.39	21.5	1.291	0.08	0.050	0.065
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Bottom side	10mm	Reduced	518598	2592.99	20.57	21.5	1.239	0.09	0.171	0.212
	FR1 n41_Ant 2 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Bottom side	10mm	Reduced	518598	2592.99	20.39	21.5	1.291	0.06	0.220	0.284
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	16.71	17.50	1.199	0.02	0.030	0.036
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	16.57	17.50	1.239	-0.06	0.028	0.035
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	16.71	17.50	1.199	0.08	0.090	0.108
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	16.57	17.50	1.239	0.07	0.091	0.113
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	16.71	17.50	1.199	0.11	0.007	0.008
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	16.57	17.50	1.239	0.06	0.080	0.099
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	16.71	17.50	1.199	-0.06	0.026	0.031
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	16.57	17.50	1.239	0.08	0.021	0.026
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Bottom side	10mm	Reduced	518598	2592.99	16.71	17.50	1.199	0.01	0.050	0.060
	FR1 n41_Ant 2 SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Bottom side	10mm	Reduced	518598	2592.99	16.57	17.50	1.239	0.06	0.054	0.067
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	18.18	19.00	1.208	0.06	0.103	0.124
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	18.12	19.00	1.225	0.15	0.123	0.151
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	18.18	19.00	1.208	0.05	0.239	0.289
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	18.12	19.00	1.225	0.06	0.314	0.385
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	18.18	19.00	1.208	0.15	0.020	0.024
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	18.12	19.00	1.225	-0.06	0.030	0.037
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	18.18	19.00	1.208	0.08	0.068	0.082
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	18.12	19.00	1.225	-0.08	0.060	0.073
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Bottom side	10mm	Reduced	518598	2592.99	18.18	19.00	1.208	0.07	0.203	0.245
	FR1 n41_Ant 2 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Bottom side	10mm	Reduced	518598	2592.99	18.12	19.00	1.225	0.11	0.264	0.323
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	14.01	15.00	1.256	0.06	0.041	0.051
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	13.87	15.00	1.297	0.15	0.049	0.064
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	14.01	15.00	1.256	0.05	0.095	0.119
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	13.87	15.00	1.297	0.06	0.125	0.162
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	14.01	15.00	1.256	0.15	0.008	0.010
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	13.87	15.00	1.297	-0.06	0.012	0.016
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	14.01	15.00	1.256	0.08	0.027	0.034
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	13.87	15.00	1.297	-0.08	0.024	0.031
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Bottom side	10mm	Reduced	518598	2592.99	14.01	15.00	1.256	0.07	0.081	0.102
	FR1 n41_Ant 2 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Bottom side	10mm	Reduced	518598	2592.99	13.87	15.00	1.297	0.11	0.105	0.136
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	14.72	16.00	1.343	0.08	0.060	0.081
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	14.61	16.00	1.377	0.04	0.074	0.102
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	14.72	16.00	1.343	0.03	0.099	0.133
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	14.61	16.00	1.377	0.09	0.115	0.158
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	14.72	16.00	1.343	0.07	0.010	0.013
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	14.61	16.00	1.377	-0.04	0.010	0.014
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	14.72	16.00	1.343	-0.09	0.031	0.042
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	14.61	16.00	1.377	0.06	0.029	0.040
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	14.72	16.00	1.343	-0.09	0.211	0.283
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	14.61	16.00	1.377	0.06	0.208	0.286
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	18.08	18.50	1.102	0.07	0.039	0.043
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	17.80	18.50	1.175	0.06	0.045	0.053
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	18.08	18.50	1.102	0.18	0.045	0.050
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	17.80	18.50	1.175	0.08	0.037	0.043
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	18.08	18.50	1.102	0.05	0.021	0.023



FCC SAR Test Report

Report No. : FA002312

	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	17.80	18.50	1.175	0.09	0.019	0.022
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	18.08	18.50	1.102	0.08	0.014	0.015
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	17.80	18.50	1.175	0.07	0.015	0.018
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	18.08	18.50	1.102	-0.04	0.132	0.145
	FR1 n41_Ant 3 SA_PA 2	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	17.80	18.50	1.175	0.06	0.154	0.181
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	17.19	17.50	1.074	0.07	0.031	0.033
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	16.91	17.50	1.146	0.06	0.036	0.041
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	17.19	17.50	1.074	0.18	0.036	0.039
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	16.91	17.50	1.146	0.08	0.029	0.033
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	17.19	17.50	1.074	0.05	0.017	0.018
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	16.91	17.50	1.146	0.09	0.015	0.017
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	17.19	17.50	1.074	0.08	0.011	0.012
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	16.91	17.50	1.146	0.07	0.012	0.014
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	17.19	17.50	1.074	-0.04	0.105	0.113
	FR1 n41_Ant 3 SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	16.91	17.50	1.146	0.06	0.122	0.140
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	16.44	17.50	1.276	0.01	0.095	0.121
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	16.25	17.50	1.334	0.08	0.095	0.127
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	16.44	17.50	1.276	0.13	0.083	0.106
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	16.25	17.50	1.334	0.06	0.094	0.125
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	16.44	17.50	1.276	-0.08	0.001	0.001
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	16.25	17.50	1.334	0.06	0.002	0.003
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	16.44	17.50	1.276	0.15	0.239	0.305
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	16.25	17.50	1.334	0.05	0.268	0.357
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	16.44	17.50	1.276	0.07	0.040	0.051
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	16.25	17.50	1.334	0.09	0.042	0.056
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	14.15	14.50	1.084	0.09	0.061	0.066
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	14.06	14.50	1.107	0.08	0.062	0.069
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	14.15	14.50	1.084	0.06	0.061	0.066
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	14.06	14.50	1.107	0.19	0.056	0.062
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	14.15	14.50	1.084	-0.06	0.025	0.027
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	14.06	14.50	1.107	0.08	0.026	0.029
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	14.15	14.50	1.084	0.07	0.173	0.188
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	14.06	14.50	1.107	0.16	0.188	0.208
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	14.15	14.50	1.084	0.09	0.037	0.040
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	14.06	14.50	1.107	-0.09	0.039	0.043
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	18.48	19.50	1.265	0.03	0.174	0.220
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	518598	2592.99	18.45	19.50	1.274	0.06	0.139	0.177
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	18.48	19.50	1.265	0.06	0.211	0.267
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	518598	2592.99	18.45	19.50	1.274	0.03	0.177	0.225
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	18.48	19.50	1.265	0.05	0.046	0.058
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	518598	2592.99	18.45	19.50	1.274	0.06	0.043	0.055
36	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	18.48	19.50	1.265	0.15	0.407	0.515
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	518598	2592.99	18.45	19.50	1.274	0.02	0.361	0.460
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	18.48	19.50	1.265	0.07	0.035	0.044
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	518598	2592.99	18.45	19.50	1.274	0.07	0.039	0.050
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Full	518598	2592.99	23.15	23.50	1.084	0.03	0.023	0.025
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Full	518598	2592.99	22.93	23.50	1.140	0.01	0.033	0.038
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Full	518598	2592.99	23.15	23.50	1.084	0.02	0.045	0.049
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Full	518598	2592.99	22.93	23.50	1.140	0.01	0.043	0.049
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Full	518598	2592.99	23.15	23.50	1.084	0.03	0.027	0.029
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Full	518598	2592.99	22.93	23.50	1.140	-0.12	0.027	0.031
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Full	518598	2592.99	23.15	23.50	1.084	0.03	0.037	0.040
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Full	518598	2592.99	22.93	23.50	1.140	-0.05	0.032	0.036
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Full	518598	2592.99	23.15	23.50	1.084	0.04	0.042	0.046
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Full	518598	2592.99	22.93	23.50	1.140	0.06	0.041	0.047



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	656000	3840	21.32	22.50	1.312	0.05	0.072	0.094
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	656000	3840	21.24	22.50	1.337	0.16	0.072	0.096
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	656000	3840	21.32	22.50	1.312	-0.09	0.093	0.122
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	656000	3840	21.24	22.50	1.337	0.08	0.095	0.127
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	656000	3840	21.32	22.50	1.312	0.03	0.007	0.009
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	656000	3840	21.24	22.50	1.337	0.04	0.006	0.008
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	656000	3840	21.32	22.50	1.312	0.06	0.212	0.278
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	656000	3840	21.24	22.50	1.337	0.08	0.188	0.251
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	656000	3840	21.32	22.50	1.312	0.09	0.013	0.017
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	656000	3840	21.24	22.50	1.337	0.03	0.013	0.017
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	656000	3840	16.65	17.00	1.084	0.06	0.088	0.095
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	656000	3840	16.53	17.00	1.114	-0.07	0.085	0.095
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	656000	3840	16.65	17.00	1.084	0.03	0.110	0.119
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	656000	3840	16.53	17.00	1.114	0.04	0.113	0.126
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	656000	3840	16.65	17.00	1.084	0.02	0.010	0.011
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	656000	3840	16.53	17.00	1.114	-0.02	0.007	0.008
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	656000	3840	16.65	17.00	1.084	0.09	0.254	0.275
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	656000	3840	16.53	17.00	1.114	0.08	0.223	0.248
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	656000	3840	16.65	17.00	1.084	-0.01	0.016	0.017
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	656000	3840	16.53	17.00	1.114	0.04	0.016	0.018
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	656000	3840	20.19	21.00	1.205	-0.12	0.075	0.090
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	656000	3840	20.17	21.00	1.211	0.06	0.079	0.096
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	656000	3840	20.19	21.00	1.205	-0.02	0.105	0.127
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	656000	3840	20.17	21.00	1.211	0.09	0.107	0.130
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	656000	3840	20.19	21.00	1.205	0.06	0.208	0.251
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	656000	3840	20.17	21.00	1.211	0.07	0.184	0.223
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	656000	3840	20.19	21.00	1.205	0.06	0.008	0.010
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	656000	3840	20.17	21.00	1.211	-0.03	0.010	0.012
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Bottom side	10mm	Reduced	656000	3840	20.19	21.00	1.205	0.07	0.164	0.198
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Bottom side	10mm	Reduced	656000	3840	20.17	21.00	1.211	0.04	0.172	0.208
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	656000	3840	13.41	14.00	1.146	0.06	0.023	0.026
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	656000	3840	13.40	14.00	1.148	-0.02	0.023	0.026
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	656000	3840	13.41	14.00	1.146	0.09	0.031	0.036
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	656000	3840	13.40	14.00	1.148	0.06	0.031	0.036
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	656000	3840	13.41	14.00	1.146	0.07	0.061	0.070
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	656000	3840	13.40	14.00	1.148	0.06	0.054	0.062
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	656000	3840	13.41	14.00	1.146	-0.03	0.003	0.003
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	656000	3840	13.40	14.00	1.148	0.07	0.003	0.003
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Bottom side	10mm	Reduced	656000	3840	13.41	14.00	1.146	0.08	0.048	0.055
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Bottom side	10mm	Reduced	656000	3840	13.40	14.00	1.148	0.01	0.051	0.059
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	656000	3840	16.36	17.00	1.159	0.05	0.038	0.044
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	656000	3840	16.08	17.00	1.236	-0.07	0.037	0.046
37	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	656000	3840	16.36	17.00	1.159	-0.02	0.392	0.454
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	656000	3840	16.08	17.00	1.236	0.02	0.322	0.398
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	656000	3840	16.36	17.00	1.159	0.03	0.094	0.109
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	656000	3840	16.08	17.00	1.236	0.06	0.091	0.112
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	656000	3840	16.36	17.00	1.159	0.05	0.032	0.037
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	656000	3840	16.08	17.00	1.236	0.01	0.034	0.042
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	656000	3840	16.36	17.00	1.159	-0.02	0.067	0.078
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	656000	3840	16.08	17.00	1.236	0.03	0.061	0.075
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	656000	3840	13.42	14.00	1.143	-0.07	0.038	0.043
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	656000	3840	13.38	14.00	1.153	-0.02	0.064	0.074
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	656000	3840	13.42	14.00	1.143	0.02	0.349	0.399



FCC SAR Test Report

Report No. : FA002312

FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	656000	3840	13.38	14.00	1.153	0.03	0.381	0.439
FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	656000	3840	13.42	14.00	1.143	0.06	0.062	0.071
FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	656000	3840	13.38	14.00	1.153	0.05	0.062	0.072
FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	656000	3840	13.42	14.00	1.143	0.01	0.182	0.208
FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	656000	3840	13.38	14.00	1.153	-0.02	0.144	0.166
FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	656000	3840	13.42	14.00	1.143	0.19	0.034	0.039
FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	656000	3840	13.38	14.00	1.153	0.01	0.058	0.067
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	656000	3840	15.21	16.00	1.199	0.01	0.097	0.116
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	656000	3840	14.90	16.00	1.288	-0.03	0.088	0.113
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	656000	3840	15.21	16.00	1.199	0.19	0.311	0.373
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	656000	3840	14.90	16.00	1.288	0.01	0.299	0.385
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	656000	3840	15.21	16.00	1.199	0.05	0.008	0.010
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	656000	3840	14.90	16.00	1.288	-0.19	0.008	0.010
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	656000	3840	15.21	16.00	1.199	0.08	0.010	0.012
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	656000	3840	14.90	16.00	1.288	0.07	0.009	0.012
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	656000	3840	15.21	16.00	1.199	0.09	0.059	0.071
FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	656000	3840	14.90	16.00	1.288	-0.09	0.015	0.019
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	10mm	Reduced	656000	3840	15.86	17.00	1.300	-0.05	0.081	0.105
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	10mm	Reduced	656000	3840	15.80	17.00	1.318	0.01	0.086	0.113
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	10mm	Reduced	656000	3840	15.86	17.00	1.300	0.04	0.091	0.118
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	10mm	Reduced	656000	3840	15.80	17.00	1.318	-0.03	0.092	0.121
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Right side	10mm	Reduced	656000	3840	15.86	17.00	1.300	0.05	0.217	0.282
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Right side	10mm	Reduced	656000	3840	15.80	17.00	1.318	0.01	0.205	0.270
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Left side	10mm	Reduced	656000	3840	15.86	17.00	1.300	-0.03	0.019	0.025
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Left side	10mm	Reduced	656000	3840	15.80	17.00	1.318	0.08	0.021	0.028
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Top side	10mm	Reduced	656000	3840	15.86	17.00	1.300	0.09	0.031	0.040
FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Top side	10mm	Reduced	656000	3840	15.80	17.00	1.318	0.08	0.016	0.021



<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 5+7	Full	1	2412	21.37	23.00	1.455	100	1.000	0.01	0.191	0.278
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 5+7	Full	1	2412	21.37	23.00	1.455	100	1.000	0.03	0.196	0.285
38	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 5+7	Full	1	2412	21.37	23.00	1.455	100	1.000	-0.07	0.503	0.732
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 5+7	Full	1	2412	21.37	23.00	1.455	100	1.000	0.06	0.187	0.272

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 8+10	Reduced	42	5210	18.33	19.50	1.309	100	1.000	0.04	0.019	0.025
39	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 8+10	Reduced	42	5210	18.33	19.50	1.309	100	1.000	-0.01	0.318	0.416
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 8+10	Reduced	42	5210	18.33	19.50	1.309	100	1.000	-0.06	0.019	0.025
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 8+10	Reduced	42	5210	18.33	19.50	1.309	100	1.000	0.04	0.028	0.037
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 8+10	Reduced	155	5775	18.43	19.50	1.279	100	1.000	0.01	0.001	0.001
40	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 8+10	Reduced	155	5775	18.43	19.50	1.279	100	1.000	0.09	0.065	0.083
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 8+10	Reduced	155	5775	18.43	19.50	1.279	100	1.000	0.13	0.046	0.059
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 8+10	Reduced	155	5775	18.43	19.50	1.279	100	1.000	0.04	0.057	0.073

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 5	39	2441	17.79	18.00	1.050	76.83	1.302	0.08	0.053	0.072
	Bluetooth	1Mbps	Back	10mm	Ant 5	39	2441	17.79	18.00	1.050	76.83	1.302	0.07	0.084	0.115
	Bluetooth	1Mbps	Right Side	10mm	Ant 5	39	2441	17.79	18.00	1.050	76.83	1.302	0.09	0.058	0.079
	Bluetooth	1Mbps	Top Side	10mm	Ant 5	39	2441	17.79	18.00	1.050	76.83	1.302	-0.09	0.007	0.010
	Bluetooth	1Mbps	Front	10mm	Ant 7	39	2441	15.74	16.00	1.062	76.83	1.302	0.05	0.044	0.060
	Bluetooth	1Mbps	Back	10mm	Ant 7	39	2441	15.74	16.00	1.062	76.83	1.302	0.03	0.095	0.132
41	Bluetooth	1Mbps	Right Side	10mm	Ant 7	39	2441	15.74	16.00	1.062	76.83	1.302	0.03	0.118	0.163
	Bluetooth	1Mbps	Top Side	10mm	Ant 7	39	2441	15.74	16.00	1.062	76.83	1.302	-0.02	0.009	0.012

16.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 1	GPRS 1 Tx slot	Front	15mm	Full	128	824.2	32.34	33.50	1.306	0.01	0.104	0.136
42	GSM850_Ant 1	GPRS 1 Tx slot	Back	15mm	Full	128	824.2	32.34	33.50	1.306	-0.19	0.149	0.195
	GSM850_Ant 3	GPRS 4 Tx slots	Front	15mm	Full	189	836.4	25.36	26.50	1.300	-0.08	0.076	0.099
	GSM850_Ant 3	GPRS 4 Tx slots	Back	15mm	Full	189	836.4	25.36	26.50	1.300	0.04	0.068	0.088
	GSM1900_Ant 2	GPRS 2 Tx slots	Front	15mm	Full	661	1880	26.54	27.50	1.247	-0.06	0.144	0.180
43	GSM1900_Ant 2	GPRS 2 Tx slots	Back	15mm	Full	661	1880	26.54	27.50	1.247	0.05	0.160	0.200
	GSM1900_Ant 4	GPRS 4 Tx slots	Front	15mm	Full	661	1880	23.43	24.50	1.279	0.01	0.056	0.072
	GSM1900_Ant 4	GPRS 4 Tx slots	Back	15mm	Full	661	1880	23.43	24.50	1.279	0.04	0.073	0.093

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 2	RMC 12.2Kbps	Front	15mm	Full	9400	1880	24.20	25.00	1.202	0.01	0.281	0.338
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	15mm	Full	9400	1880	24.20	25.00	1.202	0.02	0.404	0.486
	WCDMA II_Ant 4	RMC 12.2Kbps	Front	15mm	Full	9400	1880	24.21	25.00	1.199	0.03	0.291	0.349
44	WCDMA II_Ant 4	RMC 12.2Kbps	Back	15mm	Full	9400	1880	24.21	25.00	1.199	-0.02	0.538	0.645
	WCDMA IV_Ant 2	RMC 12.2Kbps	Front	15mm	Full	1413	1732.6	24.05	25.00	1.245	0.07	0.122	0.152
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	15mm	Full	1413	1732.6	24.05	25.00	1.245	0.09	0.182	0.227
	WCDMA IV_Ant 4	RMC 12.2Kbps	Front	15mm	Full	1413	1732.6	24.14	25.00	1.219	0.08	0.230	0.280
45	WCDMA IV_Ant 4	RMC 12.2Kbps	Back	15mm	Full	1413	1732.6	24.14	25.00	1.219	-0.09	0.313	0.382
	WCDMA V_Ant 1	RMC 12.2Kbps	Front	15mm	Full	4182	836.4	24.00	25.00	1.259	0.09	0.149	0.188
46	WCDMA V_Ant 1	RMC 12.2Kbps	Back	15mm	Full	4182	836.4	24.00	25.00	1.259	-0.11	0.223	0.281
	WCDMA V_Ant 3	RMC 12.2Kbps	Front	15mm	Full	4182	836.4	23.41	24.00	1.146	-0.11	0.118	0.135
	WCDMA V_Ant 3	RMC 12.2Kbps	Back	15mm	Full	4182	836.4	23.41	24.00	1.146	0.06	0.104	0.119



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 2	20M	QPSK	1	0	Front	15mm	Full	18900	1880	24.39	25.50	1.291	0.05	0.297	0.383
	LTE Band 2_Ant 2	20M	QPSK	50	0	Front	15mm	Full	18900	1880	23.21	24.50	1.346	0.04	0.309	0.416
	LTE Band 2_Ant 2	20M	QPSK	1	0	Back	15mm	Full	18900	1880	24.39	25.50	1.291	-0.06	0.383	0.495
47	LTE Band 2_Ant 2	20M	QPSK	50	0	Back	15mm	Full	18900	1880	23.21	24.50	1.346	-0.11	0.402	0.541
	LTE Band 2_Ant 4	20M	QPSK	1	0	Front	15mm	Full	18900	1880	24.40	25.50	1.288	-0.05	0.156	0.201
	LTE Band 2_Ant 4	20M	QPSK	50	0	Front	15mm	Full	18900	1880	23.51	24.50	1.256	0.01	0.158	0.198
	LTE Band 2_Ant 4	20M	QPSK	1	0	Back	15mm	Full	18900	1880	24.40	25.50	1.288	0.04	0.184	0.237
	LTE Band 2_Ant 4	20M	QPSK	50	0	Back	15mm	Full	18900	1880	23.51	24.50	1.256	-0.03	0.198	0.249
	LTE Band 5_Ant 1	10M	QPSK	1	0	Front	15mm	Full	20525	836.5	25.34	25.50	1.038	0.04	0.121	0.126
	LTE Band 5_Ant 1	10M	QPSK	25	0	Front	15mm	Full	20525	836.5	24.47	24.50	1.007	0.02	0.109	0.110
48	LTE Band 5_Ant 1	10M	QPSK	1	0	Back	15mm	Full	20525	836.5	25.34	25.50	1.038	-0.18	0.192	0.199
	LTE Band 5_Ant 1	10M	QPSK	25	0	Back	15mm	Full	20525	836.5	24.47	24.50	1.007	-0.09	0.165	0.166
	LTE Band 5_Ant 3	10M	QPSK	1	0	Front	15mm	Full	20525	836.5	22.90	24.50	1.445	0.08	0.095	0.137
	LTE Band 5_Ant 3	10M	QPSK	25	0	Front	15mm	Full	20525	836.5	21.96	23.50	1.426	0.01	0.083	0.118
	LTE Band 5_Ant 3	10M	QPSK	1	0	Back	15mm	Full	20525	836.5	22.90	24.50	1.445	-0.03	0.081	0.117
	LTE Band 5_Ant 3	10M	QPSK	25	0	Back	15mm	Full	20525	836.5	21.96	23.50	1.426	0.08	0.073	0.104
	LTE Band 7_Ant 2	20M	QPSK	1	0	Front	15mm	Full	21100	2535	23.86	25.50	1.459	0.08	0.231	0.337
	LTE Band 7_Ant 2	20M	QPSK	50	0	Front	15mm	Full	21100	2535	23.01	24.50	1.409	-0.01	0.252	0.355
	LTE Band 7_Ant 2	20M	QPSK	1	0	Back	15mm	Full	21100	2535	23.86	25.50	1.459	-0.02	0.323	0.471
	LTE Band 7_Ant 2	20M	QPSK	50	0	Back	15mm	Full	21100	2535	23.01	24.50	1.409	0.11	0.303	0.427
	LTE Band 7_Ant 2	20M	QPSK	1	0	Back	15mm	Full	21100+20902	2535+2515.2	23.75	25.50	1.496	0.09	0.311	0.465
	LTE Band 7_Ant 3	20M	QPSK	1	0	Front	15mm	Full	21100	2535	22.76	23.50	1.186	0.03	0.149	0.177
	LTE Band 7_Ant 3	20M	QPSK	50	0	Front	15mm	Full	21100	2535	21.82	22.50	1.169	-0.01	0.157	0.184
	LTE Band 7_Ant 3	20M	QPSK	1	0	Back	15mm	Full	21100	2535	22.76	23.50	1.186	0.07	0.184	0.218
	LTE Band 7_Ant 3	20M	QPSK	50	0	Back	15mm	Full	21100	2535	21.82	22.50	1.169	-0.08	0.176	0.206
	LTE Band 7_Ant 3	20M	QPSK	1	0	Back	15mm	Full	21100+20902	2535+2515.2	22.74	23.50	1.191	0.01	0.168	0.200
	LTE Band 7_Ant 4	20M	QPSK	1	0	Front	15mm	Full	21100	2535	24.33	25.50	1.309	0.03	0.396	0.518
	LTE Band 7_Ant 4	20M	QPSK	50	0	Front	15mm	Full	21100	2535	23.44	24.50	1.276	0.02	0.389	0.497
	LTE Band 7_Ant 4	20M	QPSK	1	0	Back	15mm	Full	21100	2535	24.33	25.50	1.309	0.01	0.411	0.538
49	LTE Band 7_Ant 4	20M	QPSK	50	0	Back	15mm	Full	21100	2535	23.44	24.50	1.276	-0.08	0.427	0.545
	LTE Band 7_Ant 4	20M	QPSK	50	0	Back	15mm	Full	21100+20902	2535+2515.2	24.35	25.50	1.303	0.02	0.412	0.537
	LTE Band 7_Ant 7	20M	QPSK	1	0	Front	15mm	Full	21100	2535	20.13	20.50	1.089	-0.05	0.174	0.189
	LTE Band 7_Ant 7	20M	QPSK	50	50	Front	15mm	Full	21100	2535	19.06	19.50	1.107	0.15	0.140	0.155
	LTE Band 7_Ant 7	20M	QPSK	1	0	Back	15mm	Full	21100	2535	20.13	20.50	1.089	-0.11	0.247	0.269
	LTE Band 7_Ant 7	20M	QPSK	50	50	Back	15mm	Full	21100	2535	19.06	19.50	1.107	0.16	0.194	0.215
	LTE Band 7_Ant 7	20M	QPSK	1	0	Back	15mm	Full	21100+20902	2535+2515.2	20.01	20.50	1.119	0.03	0.228	0.255
	LTE Band 12_Ant 1	10M	QPSK	1	0	Front	15mm	Full	23095	707.5	22.66	24.00	1.361	0.15	0.107	0.146
	LTE Band 12_Ant 1	10M	QPSK	25	0	Front	15mm	Full	23095	707.5	21.73	23.00	1.340	0.03	0.101	0.135
50	LTE Band 12_Ant 1	10M	QPSK	1	0	Back	15mm	Full	23095	707.5	22.66	24.00	1.361	-0.11	0.155	0.211
	LTE Band 12_Ant 1	10M	QPSK	25	0	Back	15mm	Full	23095	707.5	21.73	23.00	1.340	-0.02	0.133	0.178
	LTE Band 12_Ant 3	10M	QPSK	1	0	Front	15mm	Full	23095	707.5	21.62	23.00	1.374	0.06	0.016	0.022
	LTE Band 12_Ant 3	10M	QPSK	25	0	Front	15mm	Full	23095	707.5	20.67	22.00	1.358	-0.07	0.020	0.027
	LTE Band 12_Ant 3	10M	QPSK	1	0	Back	15mm	Full	23095	707.5	21.62	23.00	1.374	-0.02	0.024	0.033
	LTE Band 12_Ant 3	10M	QPSK	25	0	Back	15mm	Full	23095	707.5	20.67	22.00	1.358	-0.02	0.020	0.027
	LTE Band 66_Ant 2	20M	QPSK	1	0	Front	15mm	Full	132322	1745	24.15	25.50	1.365	0.09	0.123	0.168
	LTE Band 66_Ant 2	20M	QPSK	50	0	Front	15mm	Full	132322	1745	23.24	24.50	1.337	0.08	0.112	0.150
51	LTE Band 66_Ant 2	20M	QPSK	1	0	Back	15mm	Full	132322	1745	24.15	25.50	1.365	-0.04	0.193	0.263
	LTE Band 66_Ant 2	20M	QPSK	50	0	Back	15mm	Full	132322	1745	23.24	24.50	1.337	0.13	0.159	0.213
	LTE Band 66_Ant 4	20M	QPSK	1	0	Front	15mm	Full	132322	1745	24.66	25.50	1.213	-0.05	0.137	0.166
	LTE Band 66_Ant 4	20M	QPSK	50	0	Front	15mm	Full	132322	1745	23.79	24.50	1.178	0.06	0.131	0.154
	LTE Band 66_Ant 4	20M	QPSK	1	0	Back	15mm	Full	132322	1745	24.66	25.50	1.213	-0.05	0.186	0.226
	LTE Band 66_Ant 4	20M	QPSK	50	0	Back	15mm	Full	132322	1745	23.79	24.50	1.178	0.06	0.129	0.152
52	LTE Band 4_Ant 3	20M	QPSK	1	0	Front	15mm	Full	20175	1732.5	22.29	24.00	1.483	0.09	0.114	0.169
	LTE Band 4_Ant 3	20M	QPSK	50	0	Front	15mm	Full	20175	1732.5	21.24	23.00	1.500	0.02	0.097	0.145
	LTE Band 4_Ant 3	20M	QPSK	1	0	Back	15mm	Full	20175	1732.5	22.29	24.00	1.483	0.01	0.109	0.162
	LTE Band 4_Ant 3	20M	QPSK	50	0	Back	15mm	Full	20175	1732.5	21.24	23.00	1.500	-0.02	0.093	0.139
	LTE Band 4_Ant 7	20M	QPSK	1	0	Front	15mm	Full	20175	1732.5	20.32	20.50	1.042	0.06	0.014	0.015
	LTE Band 4_Ant 7	20M	QPSK	50	0	Front	15mm	Full	20175	1732.5	19.35	19.50	1.035	-0.03	0.010	0.010
	LTE Band 4_Ant 7	20M	QPSK	1	0	Back	15mm	Full	20175	1732.5	20.32	20.50	1.042	-0.04	0.047	0.049
	LTE Band 4_Ant 7	20M	QPSK	50	0	Back	15mm	Full	20175	1732.5	19.35	19.50	1.035	-0.02	0.036	0.037



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	15mm	Full	40620	2593	24.41	25.50	1.285	62.9	1.006	0.05	0.081	0.105
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	15mm	Full	40620	2593	23.48	24.50	1.265	62.9	1.006	-0.01	0.092	0.117
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	15mm	Full	40620	2593	24.41	25.50	1.285	62.9	1.006	-0.04	0.137	0.177
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	15mm	Full	40620	2593	23.48	24.50	1.265	62.9	1.006	0.06	0.136	0.173
	LTE Band 38C_Ant 2	20M	QPSK	1	0	Back	15mm	Full	37901+38099	2585.1+2604.9	23.99	25.50	1.416	62.9	1.006	-0.02	0.118	0.168
	LTE Band 41_Ant 3	20M	QPSK	1	0	Front	15mm	Full	40620	2593	22.87	23.50	1.156	62.9	1.006	0.12	0.050	0.058
	LTE Band 41_Ant 3	20M	QPSK	50	0	Front	15mm	Full	40620	2593	21.88	22.50	1.153	62.9	1.006	0.05	0.048	0.056
	LTE Band 41_Ant 3	20M	QPSK	1	0	Back	15mm	Full	40620	2593	22.87	23.50	1.156	62.9	1.006	-0.01	0.058	0.067
	LTE Band 41_Ant 3	20M	QPSK	50	0	Back	15mm	Full	40620	2593	21.88	22.50	1.153	62.9	1.006	-0.06	0.060	0.070
	LTE Band 38C_Ant 3	20M	QPSK	50	0	Back	15mm	Full	37901+38099	2585.1+2604.9	22.67	23.50	1.211	62.9	1.006	0.01	0.048	0.058
	LTE Band 41_Ant 4	20M	QPSK	1	0	Front	15mm	Full	40620	2593	24.29	25.50	1.321	62.9	1.006	0.12	0.318	0.423
	LTE Band 41_Ant 4	20M	QPSK	50	0	Front	15mm	Full	40620	2593	23.33	24.50	1.309	62.9	1.006	0.02	0.293	0.386
53	LTE Band 41_Ant 4	20M	QPSK	1	0	Back	15mm	Full	40620	2593	24.29	25.50	1.321	62.9	1.006	-0.08	0.328	0.436
	LTE Band 41_Ant 4	20M	QPSK	50	0	Back	15mm	Full	40620	2593	23.33	24.50	1.309	62.9	1.006	-0.03	0.325	0.428
	LTE Band 38C_Ant 4	20M	QPSK	1	0	Back	15mm	Full	37901+38099	2585.1+2604.9	23.98	25.50	1.419	62.9	1.006	0.05	0.301	0.430
	LTE Band 41_Ant 7	20M	QPSK	1	0	Front	15mm	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	-0.01	0.094	0.120
	LTE Band 41_Ant 7	20M	QPSK	50	0	Front	15mm	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.07	0.063	0.078
	LTE Band 41_Ant 7	20M	QPSK	1	0	Back	15mm	Full	40620	2593	19.48	20.50	1.265	62.9	1.006	-0.08	0.125	0.159
	LTE Band 41_Ant 7	20M	QPSK	50	0	Back	15mm	Full	40620	2593	18.58	19.50	1.236	62.9	1.006	0.06	0.105	0.131
	LTE Band 38C_Ant 7	20M	QPSK	1	0	Back	15mm	Full	37901+38099	2585.1+2604.9	19.65	20.50	1.216	62.9	1.006	0.01	0.098	0.120

<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	167300	836.5	24.54	25.50	1.247	0.04	0.078	0.097
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Front	15mm	Full	167300	836.5	24.45	24.50	1.012	0.02	0.073	0.074
54	FR1 n5_Ant 1 NSA	20M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	167300	836.5	24.54	25.50	1.247	-0.05	0.116	0.145
	FR1 n5_Ant 1 NSA	20M	QPSK	50	28	DFT-15KHz	Back	15mm	Full	167300	836.5	24.45	24.50	1.012	-0.03	0.092	0.093
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	167300	836.5	23.53	24.50	1.250	0.05	0.091	0.114
	FR1 n5_Ant 3 NSA	20M	QPSK	50	28	DFT-15KHz	Front	15mm	Full	167300	836.5	23.38	24.50	1.294	-0.01	0.091	0.118
	FR1 n5_Ant 3 NSA	20M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	167300	836.5	23.53	24.50	1.250	-0.04	0.105	0.131
	FR1 n5_Ant 3 NSA	20M	QPSK	50	28	DFT-15KHz	Back	15mm	Full	167300	836.5	23.38	24.50	1.294	0.12	0.102	0.132



FCC SAR Test Report

Report No. : FA002312

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	507000	2535	24.48	25.50	1.265	0.06	0.250	0.316
	FR1 n7_Ant 2 SA	50M	QPSK	135	69	DFT-15KHz	Front	15mm	Full	507000	2535	24.09	25.50	1.384	0.08	0.250	0.346
	FR1 n7_Ant 2 SA	50M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	507000	2535	24.48	25.50	1.265	0.07	0.297	0.376
	FR1 n7_Ant 2 SA	50M	QPSK	135	69	DFT-15KHz	Back	15mm	Full	507000	2535	24.09	25.50	1.384	-0.03	0.338	0.468
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	507000	2535	22.23	23.50	1.340	0.08	0.084	0.113
	FR1 n7_Ant 2 NSA	50M	QPSK	135	69	DFT-15KHz	Front	15mm	Full	507000	2535	22.21	23.50	1.346	0.09	0.089	0.120
	FR1 n7_Ant 2 NSA	50M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	507000	2535	22.23	23.50	1.340	0.08	0.151	0.202
	FR1 n7_Ant 2 NSA	50M	QPSK	135	69	DFT-15KHz	Back	15mm	Full	507000	2535	22.21	23.50	1.346	0.03	0.116	0.156
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	507000	2535	22.76	24.00	1.330	-0.01	0.130	0.173
	FR1 n7_Ant 3 SA	50M	QPSK	135	69	DFT-15KHz	Front	15mm	Full	507000	2535	22.56	24.00	1.393	0.06	0.144	0.201
	FR1 n7_Ant 3 SA	50M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	507000	2535	22.76	24.00	1.330	-0.08	0.221	0.294
	FR1 n7_Ant 3 SA	50M	QPSK	135	69	DFT-15KHz	Back	15mm	Full	507000	2535	22.56	24.00	1.393	-0.05	0.262	0.365
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	507000	2535	24.93	25.50	1.140	0.05	0.265	0.302
	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Front	15mm	Full	507000	2535	24.68	25.50	1.208	0.05	0.281	0.339
	FR1 n7_Ant 3 NSA	50M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	507000	2535	24.93	25.50	1.140	-0.03	0.318	0.363
55	FR1 n7_Ant 3 NSA	50M	QPSK	135	69	DFT-15KHz	Back	15mm	Full	507000	2535	24.68	25.50	1.208	-0.08	0.391	0.472
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	507000	2535	24.88	25.50	1.153	0.06	0.200	0.231
	FR1 n7_Ant 4 SA	50M	QPSK	135	69	DFT-15KHz	Front	15mm	Full	507000	2535	24.48	25.50	1.265	-0.01	0.215	0.272
	FR1 n7_Ant 4 SA	50M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	507000	2535	24.88	25.50	1.153	-0.14	0.293	0.338
	FR1 n7_Ant 4 SA	50M	QPSK	135	69	DFT-15KHz	Back	15mm	Full	507000	2535	24.48	25.50	1.265	-0.06	0.298	0.377
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	507000	2535	22.55	23.00	1.109	0.11	0.164	0.182
	FR1 n7_Ant 4 NSA	50M	QPSK	135	69	DFT-15KHz	Front	15mm	Full	507000	2535	22.42	23.00	1.143	0.13	0.148	0.169
	FR1 n7_Ant 4 NSA	50M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	507000	2535	22.55	23.00	1.109	0.04	0.224	0.248
	FR1 n7_Ant 4 NSA	50M	QPSK	135	69	DFT-15KHz	Back	15mm	Full	507000	2535	22.42	23.00	1.143	-0.14	0.219	0.250
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	507000	2535	19.78	20.50	1.180	0.01	0.228	0.269
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Front	15mm	Full	507000	2535	19.37	20.50	1.297	0.04	0.207	0.269
	FR1 n7_Ant 7 SA	50M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	507000	2535	19.78	20.50	1.180	0.05	0.306	0.361
	FR1 n7_Ant 7 SA	50M	QPSK	135	69	DFT-15KHz	Back	15mm	Full	507000	2535	19.37	20.50	1.297	0.06	0.309	0.401
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Front	15mm	Full	507000	2535	22.17	22.50	1.079	0.02	0.222	0.240
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Front	15mm	Full	507000	2535	22.04	22.50	1.112	0.01	0.234	0.260
	FR1 n7_Ant 7 NSA	50M	QPSK	1	1	DFT-15KHz	Back	15mm	Full	507000	2535	22.17	22.50	1.079	0.02	0.323	0.348
	FR1 n7_Ant 7 NSA	50M	QPSK	135	69	DFT-15KHz	Back	15mm	Full	507000	2535	22.04	22.50	1.112	-0.04	0.344	0.382



FCC SAR Test Report

Report No. : FA002312

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n41_Ant 2 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	518598	2592.99	24.88	25.50	1.153	0.08	0.088	0.102
	FR1 n41_Ant 2 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	518598	2592.99	24.67	25.50	1.211	0.06	0.096	0.116
	FR1 n41_Ant 2 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	518598	2592.99	24.88	25.50	1.153	0.01	0.145	0.167
	FR1 n41_Ant 2 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	518598	2592.99	24.67	25.50	1.211	0.05	0.181	0.219
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	518598	2592.99	21.90	23.00	1.288	0.04	0.092	0.119
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	518598	2592.99	21.65	23.00	1.365	0.02	0.133	0.181
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	518598	2592.99	21.90	23.00	1.288	0.06	0.145	0.187
	FR1 n41_Ant 2 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	518598	2592.99	21.65	23.00	1.365	0.02	0.155	0.212
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	518598	2592.99	22.86	24.00	1.300	-0.06	0.175	0.228
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	518598	2592.99	22.66	24.00	1.361	0.09	0.167	0.227
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	518598	2592.99	22.86	24.00	1.300	0.06	0.291	0.378
	FR1 n41_Ant 3 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	518598	2592.99	22.66	24.00	1.361	0.09	0.261	0.355
	FR1 n41_Ant 3 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	518598	2592.99	24.89	25.50	1.151	0.01	0.171	0.197
	FR1 n41_Ant 3 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	518598	2592.99	24.61	25.50	1.227	0.08	0.177	0.217
	FR1 n41_Ant 3 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	518598	2592.99	24.89	25.50	1.151	0.02	0.237	0.273
	FR1 n41_Ant 3 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	518598	2592.99	24.61	25.50	1.227	0.09	0.231	0.284
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	518598	2592.99	24.68	25.50	1.208	-0.13	0.256	0.309
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	518598	2592.99	24.16	25.50	1.361	0.06	0.256	0.349
56	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	518598	2592.99	24.68	25.50	1.208	-0.07	0.360	0.435
	FR1 n41_Ant 4 SA&SA MIMO_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	518598	2592.99	24.16	25.50	1.361	0.02	0.285	0.388
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	518598	2592.99	21.93	22.50	1.140	0.07	0.230	0.262
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	518598	2592.99	21.88	22.50	1.153	-0.02	0.220	0.254
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	518598	2592.99	21.93	22.50	1.140	0.05	0.344	0.392
	FR1 n41_Ant 4 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	518598	2592.99	21.88	22.50	1.153	0.01	0.289	0.333
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	518598	2592.99	20.00	20.50	1.122	0.07	0.063	0.071
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	518598	2592.99	19.23	20.50	1.340	0.02	0.059	0.079
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	518598	2592.99	20.00	20.50	1.122	0.06	0.093	0.104
	FR1 n41_Ant 7 SA_PA 1	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	518598	2592.99	19.23	20.50	1.340	0.09	0.089	0.119
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	518598	2592.99	23.15	23.50	1.084	0.03	0.032	0.035
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	518598	2592.99	22.93	23.50	1.140	-0.05	0.024	0.027
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	518598	2592.99	23.15	23.50	1.084	0.06	0.159	0.172
	FR1 n41_Ant 12 SA&SA MIMO_PA 2	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	518598	2592.99	22.93	23.50	1.140	0.11	0.143	0.163



FCC SAR Test Report

Report No. : FA002312

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	656000	3840	26.38	27.50	1.294	-0.01	0.045	0.058
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	656000	3840	26.23	27.50	1.340	0.05	0.104	0.139
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	656000	3840	26.38	27.50	1.294	0.02	0.101	0.131
	FR1 n77_Ant 6 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	656000	3840	26.23	27.50	1.340	0.02	0.098	0.131
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	656000	3840	22.48	23.00	1.127	0.02	0.019	0.021
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	656000	3840	22.27	23.00	1.183	0.09	0.018	0.021
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	656000	3840	22.48	23.00	1.127	0.01	0.041	0.046
	FR1 n77_Ant 6 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	656000	3840	22.27	23.00	1.183	0.06	0.031	0.037
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	656000	3840	21.12	22.00	1.225	0.02	0.028	0.034
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	656000	3840	20.95	22.00	1.274	0.06	0.028	0.036
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	656000	3840	21.12	22.00	1.225	0.04	0.042	0.051
	FR1 n77_Ant 9 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	656000	3840	20.95	22.00	1.274	0.02	0.041	0.052
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	656000	3840	18.79	20.00	1.321	0.06	0.020	0.026
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	656000	3840	18.77	20.00	1.327	0.04	0.020	0.027
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	656000	3840	18.79	20.00	1.321	-0.01	0.030	0.040
	FR1 n77_Ant 9 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	656000	3840	18.77	20.00	1.327	0.02	0.029	0.038
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	656000	3840	21.27	22.00	1.183	0.17	0.015	0.018
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	656000	3840	20.81	22.00	1.315	0.05	0.011	0.014
57	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	656000	3840	21.27	22.00	1.183	0.06	0.205	0.243
	FR1 n77_Ant 12 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	656000	3840	20.81	22.00	1.315	0.05	0.172	0.226
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	656000	3840	19.88	20.00	1.028	0.01	0.029	0.030
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	656000	3840	19.73	20.00	1.064	0.05	0.027	0.029
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	656000	3840	19.88	20.00	1.028	0.01	0.116	0.119
	FR1 n77_Ant 12 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	656000	3840	19.73	20.00	1.064	-0.03	0.186	0.198
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	656000	3840	21.22	22.00	1.197	0.01	0.105	0.126
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	656000	3840	20.85	22.00	1.303	0.06	0.105	0.137
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	656000	3840	21.22	22.00	1.197	0.17	0.131	0.157
	FR1 n77_Ant 14 SA_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	656000	3840	20.85	22.00	1.303	0.05	0.130	0.169
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Front	15mm	Full	656000	3840	21.76	23.00	1.330	0.11	0.066	0.088
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Front	15mm	Full	656000	3840	21.18	23.00	1.521	0.09	0.074	0.113
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	1	1	DFT-30KHz	Back	15mm	Full	656000	3840	21.76	23.00	1.330	0.06	0.098	0.130
	FR1 n77_Ant 14 MIMO_HPUE	100M	QPSK	135	69	DFT-30KHz	Back	15mm	Full	656000	3840	21.18	23.00	1.521	0.06	0.092	0.140



<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 5+7	Reduced	1	2412	21.37	23.00	1.455	100	1.000	0.07	0.149	0.217
58	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 5+7	Reduced	1	2412	21.37	23.00	1.455	100	1.000	0.01	0.158	0.230

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 8+10	Reduced	58	5290	19.68	20.50	1.208	100	1.000	0.01	0.055	0.066
59	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 8+10	Reduced	58	5290	19.68	20.50	1.208	100	1.000	-0.07	0.287	0.347
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 8+10	Reduced	122	5610	19.51	20.50	1.256	100	1.000	0.03	0.068	0.085
60	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 8+10	Reduced	122	5610	19.51	20.50	1.256	100	1.000	0.01	0.187	0.235
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 8+10	Reduced	155	5775	19.57	20.50	1.239	100	1.000	0.08	0.122	0.151
61	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 8+10	Reduced	155	5775	19.57	20.50	1.239	100	1.000	0.04	0.238	0.295

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	15mm	Ant 5	Full	39	2441	17.79	18.00	1.050	76.83	1.302	0.03	0.026	0.036
62	Bluetooth	1Mbps	Back	15mm	Ant 5	Full	39	2441	17.79	18.00	1.050	76.83	1.302	0.03	0.084	0.115
	Bluetooth	1Mbps	Front	15mm	Ant 7	Full	39	2441	15.74	16.00	1.062	76.83	1.302	0.09	0.001	0.001
	Bluetooth	1Mbps	Back	15mm	Ant 7	Full	39	2441	15.74	16.00	1.062	76.83	1.302	-0.03	0.021	0.029



16.4 Product specific 10g SAR

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 8+10	Full	58	5290	19.68	20.50	1.208	100	1.000	0.07	0.210	0.254
63	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 8+10	Full	58	5290	19.68	20.50	1.208	100	1.000	0.01	0.930	1.123
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 8+10	Full	58	5290	19.68	20.50	1.208	100	1.000	0.06	0.108	0.130
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 8+10	Full	58	5290	19.68	20.50	1.208	100	1.000	0.03	0.549	0.663
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 8+10	Full	122	5610	19.51	20.50	1.256	100	1.000	0.01	0.324	0.407
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 8+10	Full	122	5610	19.51	20.50	1.256	100	1.000	0.05	0.210	0.264
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 8+10	Full	122	5610	19.51	20.50	1.256	100	1.000	0.07	0.068	0.085
64	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 8+10	Full	122	5610	19.51	20.50	1.256	100	1.000	0.01	0.468	0.588

16.5 Repeated SAR Measurement

<1g>

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA IV_Ant 4	RMC 12.2Kbps	Right Cheek	0mm	Reduced	1513	1752.6	21.34	22.00	1.164	0.04	0.813	1	0.946
2nd	WCDMA IV_Ant 4	RMC 12.2Kbps	Right Cheek	0mm	Reduced	1513	1752.6	21.34	22.00	1.164	0.01	0.798	1.018	0.929

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

17. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN+BT1	Yes	Yes	Yes	Yes
2.	WWAN+BT2	Yes	Yes	Yes	Yes
3.	WWAN+WIFI 2.4G SISO	Yes	Yes	Yes	Yes
4.	WWAN+WIFI 2.4G MIMO	Yes	Yes	Yes	Yes
5.	WWAN+ WLAN5.3/5.5GHz SISO	Yes	Yes		Yes
6.	WWAN + WLAN5.2/5.8GHz SISO	Yes	Yes	Yes	Yes
7.	WWAN+ WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
8.	WWAN + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
9.	WWAN+WIFI 2.4G SISO+ WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
10.	WWAN+WIFI 2.4G SISO+ WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
11.	WWAN+WIFI 2.4G MIMO+ WLAN5.3/5.5GHz SISO	Yes	Yes		Yes
12.	WWAN+WIFI 2.4G MIMO+ WLAN5.2/5.8GHz SISO	Yes	Yes	Yes	Yes
13.	WWAN+WIFI 2.4G MIMO+ WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
14.	WWAN+WIFI 2.4G MIMO+ WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
15.	WWAN+BT1+ WLAN5.3/5.5GHz SISO	Yes	Yes		Yes
16.	WWAN+BT1+ WLAN5.2/5.8GHz SISO	Yes	Yes	Yes	Yes
17.	WWAN+BT1+ WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
18.	WWAN+BT1+ WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
19.	WWAN+BT2+ WLAN 5.3/5.5GHz SISO	Yes	Yes		Yes
20.	WWAN+BT2+ WLAN 5.2/5.8GHz SISO	Yes	Yes	Yes	Yes
21.	WWAN+BT2+ WLAN 5.3/5.5GHz MIMO	Yes	Yes		Yes
22.	WWAN+BT2+ WLAN 5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
23.	WIFI 2.4G SISO+ WLAN 5.3/5.5GHz MIMO	Yes	Yes		Yes
24.	WIFI 2.4G SISO+ WLAN 5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
25.	WIFI 2.4G MIMO+ WLAN 5.3/5.5GHz SISO	Yes	Yes		Yes
26.	WIFI 2.4G MIMO+ WLAN 5.2/5.8GHz SISO	Yes	Yes	Yes	Yes
27.	WIFI 2.4G MIMO+ WLAN 5.3/5.5GHz MIMO	Yes	Yes		Yes
28.	WIFI 2.4G MIMO+ WLAN 5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
29.	BT1+ WLAN 5.3/5.5GHz SISO	Yes	Yes		Yes
30.	BT1+ WLAN 5.2/5.8GHz SISO	Yes	Yes	Yes	Yes
31.	BT1+ WLAN 5.3/5.5GHz MIMO	Yes	Yes		Yes
32.	BT1+ WLAN 5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
33.	BT2+ WLAN 5.3/5.5GHz SISO	Yes	Yes		Yes
34.	BT2+ WLAN 5.2/5.8GHz SISO	Yes	Yes	Yes	Yes
35.	BT2+ WLAN 5.3/5.5GHz MIMO	Yes	Yes		Yes
36.	BT2+ WLAN 5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes

General Note:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA, LTE and 5GNR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
4. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
5. WLAN2.4GHz and Bluetooth share the same antenna, so can't transmit simultaneously.
6. According to the character of EUT, WLAN5GHz and Bluetooth can transmit simultaneously.
7. WLAN2.4GHz/WLAN5GHz MIMO SAR can represent SISO SAR to do co-located SAR analysis.
8. For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2

- transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
9. The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
 10. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
 11. The reported SAR summation is calculated based on the same configuration and test position.
 12. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 13. The following chapter 17.1 to 17.3 for transmission simultaneously analysis always base on antenna.
 14. For EN-DC mode, Inter Band EN-DC Configuration at chapter 14 give the detail LTE and 5GNR component list based on different antenna. EN-DC SAR summed the standalone 5GNR SAR and LTE standalone SAR more conservatively.
 15. When EN-DC SAR co-located with WLAN/Bluetooth, chose the worst SAR among all LTE bands within the same antenna per each test position and also the worst SAR of 5GNR within the selected antenna to do co-located with WLAN/Bluetooth. This is the worst co-located analysis and can represent each LTE bands and each 5GNR bands.
 16. For example, Component list1 LTE Ant1+FR1 Ant 2+WLAN+Bluetooth, which can refer to Inter Band EN-DC Configuration table at chapter 14. Always chose all the worst SAR of all LTE bands located at antenna 1 per each position, and the worst SAR among all 5GNR bands located antenna 2 to do co-located with WLAN/Bluetooth.



17.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM850_Ant 1	Right Cheek	0.034	0.199	0.240	0.137	0.191	0.47	0.41	0.47
	Right Tilted	0.025	0.195	0.162	0.033	0.053	0.38	0.22	0.24
	Left Cheek	0.078	0.390	0.308	0.213	0.200	0.78	0.60	0.59
	Left Tilted	0.026	0.465	0.256	0.060	0.052	0.75	0.34	0.33
GSM850_Ant 3	Right Cheek	0.588	0.199	0.240	0.137	0.191	1.03	0.97	1.02
	Right Tilted	0.621	0.195	0.162	0.033	0.053	0.98	0.82	0.84
	Left Cheek	0.491	0.390	0.308	0.213	0.200	1.19	1.01	1.00
	Left Tilted	0.442	0.465	0.256	0.060	0.052	1.16	0.76	0.75
GSM1900_Ant 2	Right Cheek	0.046	0.199	0.240	0.137	0.191	0.49	0.42	0.48
	Right Tilted	0.036	0.195	0.162	0.033	0.053	0.39	0.23	0.25
	Left Cheek	0.040	0.390	0.308	0.213	0.200	0.74	0.56	0.55
	Left Tilted	0.030	0.465	0.256	0.060	0.052	0.75	0.35	0.34
GSM1900_Ant 4	Right Cheek	0.499	0.199	0.240	0.137	0.191	0.94	0.88	0.93
	Right Tilted	0.122	0.195	0.162	0.033	0.053	0.48	0.32	0.34
	Left Cheek	0.101	0.390	0.308	0.213	0.200	0.80	0.62	0.61
	Left Tilted	0.038	0.465	0.256	0.060	0.052	0.76	0.35	0.35
WCDMA II_Ant 2	Right Cheek	0.106	0.199	0.240	0.137	0.191	0.55	0.48	0.54
	Right Tilted	0.085	0.195	0.162	0.033	0.053	0.44	0.28	0.30
	Left Cheek	0.091	0.390	0.308	0.213	0.200	0.79	0.61	0.60
	Left Tilted	0.078	0.465	0.256	0.060	0.052	0.80	0.39	0.39
WCDMA II_Ant 4	Right Cheek	0.667	0.199	0.240	0.137	0.191	1.11	1.04	1.10
	Right Tilted	0.405	0.195	0.162	0.033	0.053	0.76	0.60	0.62
	Left Cheek	0.202	0.390	0.308	0.213	0.200	0.90	0.72	0.71
	Left Tilted	0.092	0.465	0.256	0.060	0.052	0.81	0.41	0.40
WCDMA IV_Ant 2	Right Cheek	0.086	0.199	0.240	0.137	0.191	0.53	0.46	0.52
	Right Tilted	0.068	0.195	0.162	0.033	0.053	0.43	0.26	0.28
	Left Cheek	0.083	0.390	0.308	0.213	0.200	0.78	0.60	0.59
	Left Tilted	0.058	0.465	0.256	0.060	0.052	0.78	0.37	0.37
WCDMA IV_Ant 4	Right Cheek	0.946	0.199	0.240	0.137	0.191	1.39	1.32	1.38
	Right Tilted	0.419	0.195	0.162	0.033	0.053	0.78	0.61	0.63
	Left Cheek	0.267	0.390	0.308	0.213	0.200	0.97	0.79	0.78
	Left Tilted	0.109	0.465	0.256	0.060	0.052	0.83	0.43	0.42
WCDMA V_Ant 1	Right Cheek	0.062	0.199	0.240	0.137	0.191	0.50	0.44	0.49
	Right Tilted	0.042	0.195	0.162	0.033	0.053	0.40	0.24	0.26
	Left Cheek	0.110	0.390	0.308	0.213	0.200	0.81	0.63	0.62
	Left Tilted	0.044	0.465	0.256	0.060	0.052	0.77	0.36	0.35
WCDMA V_Ant 3	Right Cheek	0.735	0.199	0.240	0.137	0.191	1.17	1.11	1.17
	Right Tilted	0.657	0.195	0.162	0.033	0.053	1.01	0.85	0.87
	Left Cheek	0.552	0.390	0.308	0.213	0.200	1.25	1.07	1.06
	Left Tilted	0.650	0.465	0.256	0.060	0.052	1.37	0.97	0.96
LTE Band 2_Ant 2	Right Cheek	0.123	0.199	0.240	0.137	0.191	0.56	0.50	0.55
	Right Tilted	0.074	0.195	0.162	0.033	0.053	0.43	0.27	0.29
	Left Cheek	0.094	0.390	0.308	0.213	0.200	0.79	0.62	0.60
	Left Tilted	0.071	0.465	0.256	0.060	0.052	0.79	0.39	0.38
LTE Band 2_Ant 4	Right Cheek	0.644	0.199	0.240	0.137	0.191	1.08	1.02	1.08
	Right Tilted	0.217	0.195	0.162	0.033	0.053	0.57	0.41	0.43
	Left Cheek	0.154	0.390	0.308	0.213	0.200	0.85	0.68	0.66
	Left Tilted	0.074	0.465	0.256	0.060	0.052	0.80	0.39	0.38



FCC SAR Test Report

Report No. : FA002312

LTE Band 5_Ant 1	Right Cheek	0.040	0.199	0.240	0.137	0.191	0.48	0.42	0.47
	Right Tilted	0.034	0.195	0.162	0.033	0.053	0.39	0.23	0.25
	Left Cheek	0.072	0.390	0.308	0.213	0.200	0.77	0.59	0.58
	Left Tilted	0.035	0.465	0.256	0.060	0.052	0.76	0.35	0.34
LTE Band 5_Ant 3	Right Cheek	0.688	0.199	0.240	0.137	0.191	1.13	1.07	1.12
	Right Tilted	0.612	0.195	0.162	0.033	0.053	0.97	0.81	0.83
	Left Cheek	0.560	0.390	0.308	0.213	0.200	1.26	1.08	1.07
	Left Tilted	0.562	0.465	0.256	0.060	0.052	1.28	0.88	0.87
LTE Band 7_Ant 2	Right Cheek	0.150	0.199	0.240	0.137	0.191	0.59	0.53	0.58
	Right Tilted	0.160	0.195	0.162	0.033	0.053	0.52	0.36	0.38
	Left Cheek	0.260	0.390	0.308	0.213	0.200	0.96	0.78	0.77
	Left Tilted	0.083	0.465	0.256	0.060	0.052	0.80	0.40	0.39
LTE Band 7_Ant 3	Right Cheek	0.625	0.199	0.240	0.137	0.191	1.06	1.00	1.06
	Right Tilted	0.211	0.195	0.162	0.033	0.053	0.57	0.41	0.43
	Left Cheek	0.131	0.390	0.308	0.213	0.200	0.83	0.65	0.64
	Left Tilted	0.091	0.465	0.256	0.060	0.052	0.81	0.41	0.40
LTE Band 7_Ant 4	Right Cheek	0.617	0.199	0.240	0.137	0.191	1.06	0.99	1.05
	Right Tilted	0.269	0.195	0.162	0.033	0.053	0.63	0.46	0.48
	Left Cheek	0.170	0.390	0.308	0.213	0.200	0.87	0.69	0.68
	Left Tilted	0.114	0.465	0.256	0.060	0.052	0.84	0.43	0.42
LTE Band 7_Ant 7	Right Cheek	0.576	0.199	0.240	0.137	0.191	1.02	0.95	1.01
	Right Tilted	0.094	0.195	0.162	0.033	0.053	0.45	0.29	0.31
	Left Cheek	0.568	0.390	0.308	0.213	0.200	1.27	1.09	1.08
	Left Tilted	0.215	0.465	0.256	0.060	0.052	0.94	0.53	0.52
LTE Band 12_Ant 1	Right Cheek	0.048	0.199	0.240	0.137	0.191	0.49	0.43	0.48
	Right Tilted	0.026	0.195	0.162	0.033	0.053	0.38	0.22	0.24
	Left Cheek	0.075	0.390	0.308	0.213	0.200	0.77	0.60	0.58
	Left Tilted	0.029	0.465	0.256	0.060	0.052	0.75	0.35	0.34
LTE Band 12_Ant 3	Right Cheek	0.234	0.199	0.240	0.137	0.191	0.67	0.61	0.67
	Right Tilted	0.243	0.195	0.162	0.033	0.053	0.60	0.44	0.46
	Left Cheek	0.228	0.390	0.308	0.213	0.200	0.93	0.75	0.74
	Left Tilted	0.216	0.465	0.256	0.060	0.052	0.94	0.53	0.52
LTE Band 66_Ant 2	Right Cheek	0.093	0.199	0.240	0.137	0.191	0.53	0.47	0.52
	Right Tilted	0.063	0.195	0.162	0.033	0.053	0.42	0.26	0.28
	Left Cheek	0.075	0.390	0.308	0.213	0.200	0.77	0.60	0.58
	Left Tilted	0.059	0.465	0.256	0.060	0.052	0.78	0.38	0.37
LTE Band 66_Ant 4	Right Cheek	0.700	0.199	0.240	0.137	0.191	1.14	1.08	1.13
	Right Tilted	0.241	0.195	0.162	0.033	0.053	0.60	0.44	0.46
	Left Cheek	0.182	0.390	0.308	0.213	0.200	0.88	0.70	0.69
	Left Tilted	0.091	0.465	0.256	0.060	0.052	0.81	0.41	0.40
LTE Band 4_Ant 3	Right Cheek	0.497	0.199	0.240	0.137	0.191	0.94	0.87	0.93
	Right Tilted	0.776	0.195	0.162	0.033	0.053	1.13	0.97	0.99
	Left Cheek	0.337	0.390	0.308	0.213	0.200	1.04	0.86	0.85
	Left Tilted	0.518	0.465	0.256	0.060	0.052	1.24	0.83	0.83
LTE Band 4_Ant 7	Right Cheek	0.211	0.199	0.240	0.137	0.191	0.65	0.59	0.64
	Right Tilted	0.013	0.195	0.162	0.033	0.053	0.37	0.21	0.23
	Left Cheek	0.281	0.390	0.308	0.213	0.200	0.98	0.80	0.79
	Left Tilted	0.048	0.465	0.256	0.060	0.052	0.77	0.36	0.36

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 41_Ant 2	Right Cheek	0.072	0.199	0.240	0.137	0.191	0.51	0.45	0.50
	Right Tilted	0.066	0.195	0.162	0.033	0.053	0.42	0.26	0.28
	Left Cheek	0.168	0.390	0.308	0.213	0.200	0.87	0.69	0.68
	Left Tilted	0.034	0.465	0.256	0.060	0.052	0.76	0.35	0.34
LTE Band 41_Ant 3	Right Cheek	0.511	0.199	0.240	0.137	0.191	0.95	0.89	0.94
	Right Tilted	0.197	0.195	0.162	0.033	0.053	0.55	0.39	0.41
	Left Cheek	0.136	0.390	0.308	0.213	0.200	0.83	0.66	0.64
	Left Tilted	0.086	0.465	0.256	0.060	0.052	0.81	0.40	0.39
LTE Band 41_Ant 4	Right Cheek	0.678	0.199	0.240	0.137	0.191	1.12	1.06	1.11
	Right Tilted	0.258	0.195	0.162	0.033	0.053	0.62	0.45	0.47
	Left Cheek	0.171	0.390	0.308	0.213	0.200	0.87	0.69	0.68
	Left Tilted	0.107	0.465	0.256	0.060	0.052	0.83	0.42	0.42
LTE Band 41_Ant 7	Right Cheek	0.120	0.199	0.240	0.137	0.191	0.56	0.50	0.55
	Right Tilted	0.024	0.195	0.162	0.033	0.053	0.38	0.22	0.24
	Left Cheek	0.154	0.390	0.308	0.213	0.200	0.85	0.68	0.66
	Left Tilted	0.050	0.465	0.256	0.060	0.052	0.77	0.37	0.36



<5G NR mode>

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
FR1 n7_Ant 2 SA	Right Cheek	0.091	0.199	0.240	0.137	0.191	0.53	0.47	0.52
	Right Tilted	0.080	0.195	0.162	0.033	0.053	0.44	0.28	0.30
	Left Cheek	0.143	0.390	0.308	0.213	0.200	0.84	0.66	0.65
	Left Tilted	0.067	0.465	0.256	0.060	0.052	0.79	0.38	0.38
FR1 n7_Ant 3 SA	Right Cheek	0.364	0.199	0.240	0.137	0.191	0.80	0.74	0.80
	Right Tilted	0.536	0.195	0.162	0.033	0.053	0.89	0.73	0.75
	Left Cheek	0.265	0.390	0.308	0.213	0.200	0.96	0.79	0.77
	Left Tilted	0.359	0.465	0.256	0.060	0.052	1.08	0.68	0.67
FR1 n7_Ant 4 SA	Right Cheek	0.150	0.199	0.240	0.137	0.191	0.59	0.53	0.58
	Right Tilted	0.171	0.195	0.162	0.033	0.053	0.53	0.37	0.39
	Left Cheek	0.085	0.390	0.308	0.213	0.200	0.78	0.61	0.59
	Left Tilted	0.107	0.465	0.256	0.060	0.052	0.83	0.42	0.42
FR1 n7_Ant 7 SA	Right Cheek	0.549	0.199	0.240	0.137	0.191	0.99	0.93	0.98
	Right Tilted	0.121	0.195	0.162	0.033	0.053	0.48	0.32	0.34
	Left Cheek	0.684	0.390	0.308	0.213	0.200	1.38	1.21	1.19
	Left Tilted	0.259	0.465	0.256	0.060	0.052	0.98	0.58	0.57
FR1 n41_Ant 2 SA	Right Cheek	0.051	0.199	0.240	0.137	0.191	0.49	0.43	0.48
	Right Tilted	0.042	0.195	0.162	0.033	0.053	0.40	0.24	0.26
	Left Cheek	0.076	0.390	0.308	0.213	0.200	0.77	0.60	0.58
	Left Tilted	0.029	0.465	0.256	0.060	0.052	0.75	0.35	0.34
FR1 n41_Ant 3 SA	Right Cheek	0.607	0.199	0.240	0.137	0.191	1.05	0.98	1.04
	Right Tilted	0.514	0.195	0.162	0.033	0.053	0.87	0.71	0.73
	Left Cheek	0.284	0.390	0.308	0.213	0.200	0.98	0.81	0.79
	Left Tilted	0.405	0.465	0.256	0.060	0.052	1.13	0.72	0.71
FR1 n41_Ant 4 SA	Right Cheek	0.581	0.199	0.240	0.137	0.191	1.02	0.96	1.01
	Right Tilted	0.217	0.195	0.162	0.033	0.053	0.57	0.41	0.43
	Left Cheek	0.125	0.390	0.308	0.213	0.200	0.82	0.65	0.63
	Left Tilted	0.110	0.465	0.256	0.060	0.052	0.83	0.43	0.42
FR1 n41_Ant 7 SA	Right Cheek	0.418	0.199	0.240	0.137	0.191	0.86	0.80	0.85
	Right Tilted	0.100	0.195	0.162	0.033	0.053	0.46	0.30	0.32
	Left Cheek	0.462	0.390	0.308	0.213	0.200	1.16	0.98	0.97
	Left Tilted	0.260	0.465	0.256	0.060	0.052	0.98	0.58	0.57
FR1 n77_Ant 6 SA	Right Cheek	0.394	0.199	0.240	0.137	0.191	0.83	0.77	0.83
	Right Tilted	0.151	0.195	0.162	0.033	0.053	0.51	0.35	0.37
	Left Cheek	0.209	0.390	0.308	0.213	0.200	0.91	0.73	0.72
	Left Tilted	0.098	0.465	0.256	0.060	0.052	0.82	0.41	0.41
FR1 n77_Ant 9 SA	Right Cheek	0.067	0.199	0.240	0.137	0.191	0.51	0.44	0.50
	Right Tilted	0.039	0.195	0.162	0.033	0.053	0.40	0.23	0.25
	Left Cheek	0.039	0.390	0.308	0.213	0.200	0.74	0.56	0.55
	Left Tilted	0.018	0.465	0.256	0.060	0.052	0.74	0.33	0.33
FR1 n77_Ant 12 SA	Right Cheek	0.026	0.199	0.240	0.137	0.191	0.47	0.40	0.46
	Right Tilted	0.013	0.195	0.162	0.033	0.053	0.37	0.21	0.23
	Left Cheek	0.020	0.390	0.308	0.213	0.200	0.72	0.54	0.53
	Left Tilted	0.012	0.465	0.256	0.060	0.052	0.73	0.33	0.32
FR1 n77_Ant 14 SA	Right Cheek	0.053	0.199	0.240	0.137	0.191	0.49	0.43	0.48
	Right Tilted	0.049	0.195	0.162	0.033	0.053	0.41	0.24	0.26
	Left Cheek	0.204	0.390	0.308	0.213	0.200	0.90	0.73	0.71
	Left Tilted	0.079	0.465	0.256	0.060	0.052	0.80	0.40	0.39



WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+4 Summed 1g SAR (W/kg)	1+2+4+5 Summed 1g SAR (W/kg)	1+2+4+6 Summed 1g SAR (W/kg)
		WWAN	FR1	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
Component list 1 LTE Ant1+FR1 Ant 2	Right Cheek	0.040	0.131	0.199	0.240	0.137	0.191	0.61	0.55	0.60
	Right Tilted	0.034	0.107	0.195	0.162	0.033	0.053	0.50	0.34	0.36
	Left Cheek	0.072	0.238	0.390	0.308	0.213	0.200	1.01	0.83	0.82
	Left Tilted	0.035	0.082	0.465	0.256	0.060	0.052	0.84	0.43	0.43
Component list 2 LTE Ant1+FR1 Ant 3	Right Cheek	0.040	0.508	0.199	0.240	0.137	0.191	0.99	0.93	0.98
	Right Tilted	0.034	0.609	0.195	0.162	0.033	0.053	1.00	0.84	0.86
	Left Cheek	0.072	0.379	0.390	0.308	0.213	0.200	1.15	0.97	0.96
	Left Tilted	0.035	0.401	0.465	0.256	0.060	0.052	1.16	0.75	0.74
Component list 3 LTE Ant1+FR1 Ant 4	Right Cheek	0.040	0.328	0.199	0.240	0.137	0.191	0.81	0.75	0.80
	Right Tilted	0.034	0.162	0.195	0.162	0.033	0.053	0.55	0.39	0.41
	Left Cheek	0.072	0.094	0.390	0.308	0.213	0.200	0.86	0.69	0.67
	Left Tilted	0.035	0.072	0.465	0.256	0.060	0.052	0.83	0.42	0.42
Component list 5 LTE Ant1+FR1 Ant 7	Right Cheek	0.040	0.215	0.199	0.240	0.137	0.191	0.69	0.63	0.69
	Right Tilted	0.034	0.051	0.195	0.162	0.033	0.053	0.44	0.28	0.30
	Left Cheek	0.072	0.317	0.390	0.308	0.213	0.200	1.09	0.91	0.90
	Left Tilted	0.035	0.089	0.465	0.256	0.060	0.052	0.85	0.44	0.43
Component list 10 LTE Ant2+FR1 Ant 1	Right Cheek	0.150	0.055	0.199	0.240	0.137	0.191	0.64	0.58	0.64
	Right Tilted	0.160	0.042	0.195	0.162	0.033	0.053	0.56	0.40	0.42
	Left Cheek	0.260	0.076	0.390	0.308	0.213	0.200	1.03	0.86	0.84
	Left Tilted	0.083	0.045	0.465	0.256	0.060	0.052	0.85	0.44	0.44
Component list 11 LTE Ant2+FR1 Ant 3	Right Cheek	0.150	0.508	0.199	0.240	0.137	0.191	1.10	1.04	1.09
	Right Tilted	0.160	0.609	0.195	0.162	0.033	0.053	1.13	0.96	0.98
	Left Cheek	0.260	0.379	0.390	0.308	0.213	0.200	1.34	1.16	1.15
	Left Tilted	0.083	0.401	0.465	0.256	0.060	0.052	1.21	0.80	0.79
Component list 13 LTE Ant2+FR1 Ant 7	Right Cheek	0.123	0.215	0.199	0.240	0.137	0.191	0.78	0.72	0.77
	Right Tilted	0.074	0.051	0.195	0.162	0.033	0.053	0.48	0.32	0.34
	Left Cheek	0.094	0.317	0.390	0.308	0.213	0.200	1.11	0.93	0.92
	Left Tilted	0.071	0.089	0.465	0.256	0.060	0.052	0.88	0.48	0.47
Component list 18 LTE Ant3+FR1 Ant 1	Right Cheek	0.625	0.055	0.199	0.240	0.137	0.191	1.12	1.06	1.11
	Right Tilted	0.211	0.042	0.195	0.162	0.033	0.053	0.61	0.45	0.47
	Left Cheek	0.131	0.076	0.390	0.308	0.213	0.200	0.91	0.73	0.72
	Left Tilted	0.091	0.045	0.465	0.256	0.060	0.052	0.86	0.45	0.44
Component list 19 LTE Ant3+FR1 Ant 2	Right Cheek	0.688	0.131	0.199	0.240	0.137	0.191	1.26	1.20	1.25
	Right Tilted	0.612	0.107	0.195	0.162	0.033	0.053	1.08	0.91	0.93
	Left Cheek	0.560	0.238	0.390	0.308	0.213	0.200	1.50	1.32	1.31
	Left Tilted	0.562	0.082	0.465	0.256	0.060	0.052	1.37	0.96	0.95
Component list 20 LTE Ant3+FR1 Ant 4	Right Cheek	0.688	0.328	0.199	0.240	0.137	0.191	1.46	1.39	1.45
	Right Tilted	0.612	0.162	0.195	0.162	0.033	0.053	1.13	0.97	0.99
	Left Cheek	0.560	0.094	0.390	0.308	0.213	0.200	1.35	1.18	1.16
	Left Tilted	0.562	0.072	0.465	0.256	0.060	0.052	1.36	0.95	0.94
Component list 22 LTE Ant3+FR1 Ant 7	Right Cheek	0.688	0.215	0.199	0.240	0.137	0.191	1.34	1.28	1.33
	Right Tilted	0.612	0.051	0.195	0.162	0.033	0.053	1.02	0.86	0.88
	Left Cheek	0.560	0.317	0.390	0.308	0.213	0.200	1.58	1.40	1.39
	Left Tilted	0.562	0.089	0.465	0.256	0.060	0.052	1.37	0.97	0.96
Component list 27 LTE Ant4+FR1 Ant 1	Right Cheek	0.617	0.055	0.199	0.240	0.137	0.191	1.11	1.05	1.10
	Right Tilted	0.269	0.042	0.195	0.162	0.033	0.053	0.67	0.51	0.53
	Left Cheek	0.170	0.076	0.390	0.308	0.213	0.200	0.94	0.77	0.75
	Left Tilted	0.114	0.045	0.465	0.256	0.060	0.052	0.88	0.48	0.47
Component list 28 LTE Ant4+FR1 Ant	Right Cheek	0.644	0.508	0.199	0.240	0.137	0.191	1.59	1.53	1.58
	Right Tilted	0.269	0.609	0.195	0.162	0.033	0.053	1.24	1.07	1.09



FCC SAR Test Report

Report No. : FA002312

3	Left Cheek	0.170	0.379	0.390	0.308	0.213	0.200	1.25	1.07	1.06
	Left Tilted	0.114	0.401	0.465	0.256	0.060	0.052	1.24	0.83	0.82
Component list 30 LTE Ant4+FR1 Ant 7	Right Cheek	0.644	0.215	0.199	0.240	0.137	0.191	1.30	1.24	1.29
	Right Tilted	0.217	0.051	0.195	0.162	0.033	0.053	0.63	0.46	0.48
	Left Cheek	0.154	0.317	0.390	0.308	0.213	0.200	1.17	0.99	0.98
Component list 36 LTE Ant7+FR1 Ant 3	Left Tilted	0.074	0.089	0.465	0.256	0.060	0.052	0.88	0.48	0.47
	Right Cheek	0.576	0.278	0.199	0.240	0.137	0.191	1.29	1.23	1.29
	Right Tilted	0.094	0.293	0.195	0.162	0.033	0.053	0.74	0.58	0.60
	Left Cheek	0.568	0.301	0.390	0.308	0.213	0.200	1.57	1.39	1.38
	Left Tilted	0.215	0.282	0.465	0.256	0.060	0.052	1.22	0.81	0.81

<5G NR MIMO mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n41_Ant 2 SA MIMO_PA 1 1g SAR (W/kg)			
FR1 n41_Ant 3 SA MIMO_PA 2	Right Cheek	0.143	0.199	0.240	0.137	0.191	0.007	0.59	0.53	0.58
	Right Tilted	0.167	0.195	0.162	0.033	0.053	0.007	0.53	0.37	0.39
	Left Cheek	0.120	0.390	0.308	0.213	0.200	0.009	0.83	0.65	0.64
	Left Tilted	0.175	0.465	0.256	0.060	0.052	0.006	0.90	0.50	0.49
FR1 n41_Ant 4 SA&SA MIMO_PA 2	Right Cheek	0.271	0.199	0.240	0.137	0.191	0.007	0.72	0.66	0.71
	Right Tilted	0.131	0.195	0.162	0.033	0.053	0.007	0.50	0.33	0.35
	Left Cheek	0.106	0.390	0.308	0.213	0.200	0.009	0.81	0.64	0.62
	Left Tilted	0.103	0.465	0.256	0.060	0.052	0.006	0.83	0.43	0.42
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Right Cheek	0.356	0.199	0.240	0.137	0.191	0.007	0.80	0.74	0.79
	Right Tilted	0.086	0.195	0.162	0.033	0.053	0.007	0.45	0.29	0.31
	Left Cheek	0.393	0.390	0.308	0.213	0.200	0.009	1.10	0.92	0.91
	Left Tilted	0.221	0.465	0.256	0.060	0.052	0.006	0.95	0.54	0.54

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n41_Ant 3 SA MIMO_PA 1 1g SAR (W/kg)			
FR1 n41_Ant 2 SA&SA MIMO_PA 2	Right Cheek	0.005	0.199	0.240	0.137	0.191	0.607	1.05	0.99	1.04
	Right Tilted	0.005	0.195	0.162	0.033	0.053	0.514	0.88	0.71	0.73
	Left Cheek	0.006	0.390	0.308	0.213	0.200	0.284	0.99	0.81	0.80
	Left Tilted	0.004	0.465	0.256	0.060	0.052	0.405	1.13	0.73	0.72
FR1 n41_Ant 4 SA&SA MIMO_PA 2	Right Cheek	0.271	0.199	0.240	0.137	0.191	0.607	1.32	1.26	1.31
	Right Tilted	0.131	0.195	0.162	0.033	0.053	0.514	1.00	0.84	0.86
	Left Cheek	0.106	0.390	0.308	0.213	0.200	0.284	1.09	0.91	0.90
	Left Tilted	0.103	0.465	0.256	0.060	0.052	0.405	1.23	0.82	0.82
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Right Cheek	0.356	0.199	0.240	0.137	0.191	0.607	1.40	1.34	1.39
	Right Tilted	0.086	0.195	0.162	0.033	0.053	0.514	0.96	0.80	0.82
	Left Cheek	0.393	0.390	0.308	0.213	0.200	0.284	1.38	1.20	1.19
	Left Tilted	0.221	0.465	0.256	0.060	0.052	0.405	1.35	0.94	0.93

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n41_Ant 4 SA MIMO_PA 1 1g SAR (W/kg)			
FR1 n41_Ant 2 SA&SA MIMO_PA 2	Right Cheek	0.005	0.199	0.240	0.137	0.191	0.581	1.03	0.96	1.02
	Right Tilted	0.005	0.195	0.162	0.033	0.053	0.217	0.58	0.42	0.44
	Left Cheek	0.006	0.390	0.308	0.213	0.200	0.125	0.83	0.65	0.64
	Left Tilted	0.004	0.465	0.256	0.060	0.052	0.110	0.84	0.43	0.42
FR1 n41_Ant 3 SA MIMO_PA 2	Right Cheek	0.143	0.199	0.240	0.137	0.191	0.581	1.16	1.10	1.16
	Right Tilted	0.167	0.195	0.162	0.033	0.053	0.217	0.74	0.58	0.60
	Left Cheek	0.120	0.390	0.308	0.213	0.200	0.125	0.94	0.77	0.75
	Left Tilted	0.175	0.465	0.256	0.060	0.052	0.110	1.01	0.60	0.59
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Right Cheek	0.356	0.199	0.240	0.137	0.191	0.581	1.38	1.31	1.37
	Right Tilted	0.086	0.195	0.162	0.033	0.053	0.217	0.66	0.50	0.52
	Left Cheek	0.393	0.390	0.308	0.213	0.200	0.125	1.22	1.04	1.03
	Left Tilted	0.221	0.465	0.256	0.060	0.052	0.110	1.05	0.65	0.64



WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n77 MIMO	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7	FR1 n77_Ant 6 MIMO			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
FR1 n77_Ant 12 MIMO	Right Cheek	0.093	0.199	0.240	0.137	0.191	0.280	0.81	0.75	0.80
	Right Tilted	0.037	0.195	0.162	0.033	0.053	0.124	0.52	0.36	0.38
	Left Cheek	0.037	0.390	0.308	0.213	0.200	0.127	0.86	0.69	0.67
	Left Tilted	0.024	0.465	0.256	0.060	0.052	0.066	0.81	0.41	0.40
FR1 n77_Ant 14 MIMO	Right Cheek	0.179	0.199	0.240	0.137	0.191	0.280	0.90	0.84	0.89
	Right Tilted	0.087	0.195	0.162	0.033	0.053	0.124	0.57	0.41	0.43
	Left Cheek	0.723	0.390	0.308	0.213	0.200	0.127	1.55	1.37	1.36
	Left Tilted	0.198	0.465	0.256	0.060	0.052	0.066	0.99	0.58	0.57
FR1 n77_Ant 6 MIMO	Right Cheek	0.280	0.199	0.240	0.137	0.191	0.280	1.00	0.94	0.99
	Right Tilted	0.124	0.195	0.162	0.033	0.053	0.124	0.61	0.44	0.46
	Left Cheek	0.127	0.390	0.308	0.213	0.200	0.127	0.95	0.78	0.76
	Left Tilted	0.066	0.465	0.256	0.060	0.052	0.066	0.85	0.45	0.44

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6	1+3+4+6	1+3+5+6
		FR1 n77 MIMO	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7	FR1 n77_Ant 9 MIMO	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
FR1 n77_Ant 12 MIMO	Right Cheek	0.093	0.199	0.240	0.137	0.191	0.021	0.55	0.49	0.55
	Right Tilted	0.037	0.195	0.162	0.033	0.053	0.014	0.41	0.25	0.27
	Left Cheek	0.037	0.390	0.308	0.213	0.200	0.010	0.75	0.57	0.56
	Left Tilted	0.024	0.465	0.256	0.060	0.052	0.002	0.75	0.34	0.33
FR1 n77_Ant 14 MIMO	Right Cheek	0.179	0.199	0.240	0.137	0.191	0.021	0.64	0.58	0.63
	Right Tilted	0.087	0.195	0.162	0.033	0.053	0.014	0.46	0.30	0.32
	Left Cheek	0.723	0.390	0.308	0.213	0.200	0.010	1.43	1.25	1.24
	Left Tilted	0.198	0.465	0.256	0.060	0.052	0.002	0.92	0.52	0.51
FR1 n77_Ant 9 MIMO	Right Cheek	0.021	0.199	0.240	0.137	0.191	0.021	0.48	0.42	0.47
	Right Tilted	0.014	0.195	0.162	0.033	0.053	0.014	0.39	0.22	0.24
	Left Cheek	0.010	0.390	0.308	0.213	0.200	0.010	0.72	0.54	0.53
	Left Tilted	0.002	0.465	0.256	0.060	0.052	0.002	0.73	0.32	0.31



17.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM850_Ant 1	Front	0.152	0.278	0.025	0.072	0.060	0.46	0.25	0.24
	Back	0.264	0.285	0.416	0.115	0.132	0.97	0.80	0.81
	Left side	0.072					0.07	0.07	0.07
	Right side	0.082	0.732	0.059	0.079	0.163	0.87	0.22	0.30
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.179					0.18	0.18	0.18
GSM850_Ant 3	Front	0.163	0.278	0.025	0.072	0.060	0.47	0.26	0.25
	Back	0.137	0.285	0.416	0.115	0.132	0.84	0.67	0.69
	Left side	0.053					0.05	0.05	0.05
	Right side	0.009	0.732	0.059	0.079	0.163	0.80	0.15	0.23
	Top side	0.238	0.272	0.073	0.010	0.012	0.58	0.32	0.32
	Bottom side						0.00	0.00	0.00
GSM1900_Ant 2	Front	0.244	0.278	0.025	0.072	0.060	0.55	0.34	0.33
	Back	0.298	0.285	0.416	0.115	0.132	1.00	0.83	0.85
	Left side	0.122					0.12	0.12	0.12
	Right side	0.045	0.732	0.059	0.079	0.163	0.84	0.18	0.27
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.513					0.51	0.51	0.51
GSM1900_Ant 4	Front	0.074	0.278	0.025	0.072	0.060	0.38	0.17	0.16
	Back	0.136	0.285	0.416	0.115	0.132	0.84	0.67	0.68
	Left side	0.163					0.16	0.16	0.16
	Right side	0.017	0.732	0.059	0.079	0.163	0.81	0.16	0.24
	Top side	0.011	0.272	0.073	0.010	0.012	0.36	0.09	0.10
	Bottom side						0.00	0.00	0.00
WCDMA II_Ant 2	Front	0.337	0.278	0.025	0.072	0.060	0.64	0.43	0.42
	Back	0.476	0.285	0.416	0.115	0.132	1.18	1.01	1.02
	Left side	0.150					0.15	0.15	0.15
	Right side	0.064	0.732	0.059	0.079	0.163	0.86	0.20	0.29
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.753					0.75	0.75	0.75
WCDMA II_Ant 4	Front	0.127	0.278	0.025	0.072	0.060	0.43	0.22	0.21
	Back	0.154	0.285	0.416	0.115	0.132	0.86	0.69	0.70
	Left side	0.339					0.34	0.34	0.34
	Right side	0.069	0.732	0.059	0.079	0.163	0.86	0.21	0.29
	Top side	0.033	0.272	0.073	0.010	0.012	0.38	0.12	0.12
	Bottom side						0.00	0.00	0.00
WCDMA IV_Ant 2	Front	0.169	0.278	0.025	0.072	0.060	0.47	0.27	0.25
	Back	0.253	0.285	0.416	0.115	0.132	0.95	0.78	0.80
	Left side	0.067					0.07	0.07	0.07
	Right side	0.022	0.732	0.059	0.079	0.163	0.81	0.16	0.24
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.428					0.43	0.43	0.43
WCDMA IV_Ant 4	Front	0.206	0.278	0.025	0.072	0.060	0.51	0.30	0.29
	Back	0.133	0.285	0.416	0.115	0.132	0.83	0.66	0.68
	Left side	0.415					0.42	0.42	0.42
	Right side	0.032	0.732	0.059	0.079	0.163	0.82	0.17	0.25
	Top side	0.125	0.272	0.073	0.010	0.012	0.47	0.21	0.21
	Bottom side						0.00	0.00	0.00



FCC SAR Test Report

Report No. : FA002312

WCDMA V_Ant 1	Front	0.272	0.278	0.025	0.072	0.060	0.58	0.37	0.36
	Back	0.415	0.285	0.416	0.115	0.132	1.12	0.95	0.96
	Left side	0.094					0.09	0.09	0.09
	Right side	0.131	0.732	0.059	0.079	0.163	0.92	0.27	0.35
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.287					0.29	0.29	0.29
WCDMA V_Ant 3	Front	0.199	0.278	0.025	0.072	0.060	0.50	0.30	0.28
	Back	0.168	0.285	0.416	0.115	0.132	0.87	0.70	0.72
	Left side	0.072					0.07	0.07	0.07
	Right side	0.002	0.732	0.059	0.079	0.163	0.79	0.14	0.22
	Top side	0.282	0.272	0.073	0.010	0.012	0.63	0.37	0.37
	Bottom side						0.00	0.00	0.00
LTE Band 2_Ant 2	Front	0.281	0.278	0.025	0.072	0.060	0.58	0.38	0.37
	Back	0.371	0.285	0.416	0.115	0.132	1.07	0.90	0.92
	Left side	0.281					0.28	0.28	0.28
	Right side	0.054	0.732	0.059	0.079	0.163	0.85	0.19	0.28
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.627					0.63	0.63	0.63
LTE Band 2_Ant 4	Front	0.147	0.278	0.025	0.072	0.060	0.45	0.24	0.23
	Back	0.151	0.285	0.416	0.115	0.132	0.85	0.68	0.70
	Left side	0.326					0.33	0.33	0.33
	Right side	0.001	0.732	0.059	0.079	0.163	0.79	0.14	0.22
	Top side	0.009	0.272	0.073	0.010	0.012	0.35	0.09	0.09
	Bottom side						0.00	0.00	0.00
LTE Band 5_Ant 1	Front	0.187	0.278	0.025	0.072	0.060	0.49	0.28	0.27
	Back	0.301	0.285	0.416	0.115	0.132	1.00	0.83	0.85
	Left side	0.068					0.07	0.07	0.07
	Right side	0.093	0.732	0.059	0.079	0.163	0.88	0.23	0.32
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.239					0.24	0.24	0.24
LTE Band 5_Ant 3	Front	0.293	0.278	0.025	0.072	0.060	0.60	0.39	0.38
	Back	0.078	0.285	0.416	0.115	0.132	0.78	0.61	0.63
	Left side	0.070					0.07	0.07	0.07
	Right side	0.010	0.732	0.059	0.079	0.163	0.80	0.15	0.23
	Top side	0.106	0.272	0.073	0.010	0.012	0.45	0.19	0.19
	Bottom side						0.00	0.00	0.00
LTE Band 7_Ant 2	Front	0.212	0.278	0.025	0.072	0.060	0.52	0.31	0.30
	Back	0.338	0.285	0.416	0.115	0.132	1.04	0.87	0.89
	Left side	0.125					0.13	0.13	0.13
	Right side	0.072	0.732	0.059	0.079	0.163	0.86	0.21	0.29
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.708					0.71	0.71	0.71
LTE Band 7_Ant 3	Front	0.140	0.278	0.025	0.072	0.060	0.44	0.24	0.23
	Back	0.140	0.285	0.416	0.115	0.132	0.84	0.67	0.69
	Left side	0.385					0.39	0.39	0.39
	Right side	0.040	0.732	0.059	0.079	0.163	0.83	0.18	0.26
	Top side	0.446	0.272	0.073	0.010	0.012	0.79	0.53	0.53
	Bottom side						0.00	0.00	0.00
LTE Band 7_Ant 4	Front	0.187	0.278	0.025	0.072	0.060	0.49	0.28	0.27
	Back	0.169	0.285	0.416	0.115	0.132	0.87	0.70	0.72
	Left side	0.453					0.45	0.45	0.45
	Right side	0.043	0.732	0.059	0.079	0.163	0.83	0.18	0.27
	Top side	0.043	0.272	0.073	0.010	0.012	0.39	0.13	0.13
	Bottom side						0.00	0.00	0.00
LTE Band 7_Ant 7	Front	0.254	0.278	0.025	0.072	0.060	0.56	0.35	0.34
	Back	0.439	0.285	0.416	0.115	0.132	1.14	0.97	0.99

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZK2G

Page 98 of 117

Issued Date : Dec. 18, 2020

Form version. : 200414



FCC SAR Test Report

Report No. : FA002312

	Left side	0.200					0.20	0.20	0.20
	Right side	0.543	0.732	0.059	0.079	0.163	1.33	0.68	0.77
	Top side	0.052	0.272	0.073	0.010	0.012	0.40	0.14	0.14
	Bottom side						0.00	0.00	0.00
LTE Band 12_Ant 1	Front	0.178	0.278	0.025	0.072	0.060	0.48	0.28	0.26
	Back	0.257	0.285	0.416	0.115	0.132	0.96	0.79	0.81
	Left side	0.094					0.09	0.09	0.09
	Right side	0.124	0.732	0.059	0.079	0.163	0.92	0.26	0.35
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.253					0.25	0.25	0.25
LTE Band 12_Ant 3	Front	0.064	0.278	0.025	0.072	0.060	0.37	0.16	0.15
	Back	0.067	0.285	0.416	0.115	0.132	0.77	0.60	0.62
	Left side	0.030					0.03	0.03	0.03
	Right side	0.012	0.732	0.059	0.079	0.163	0.80	0.15	0.23
	Top side	0.076	0.272	0.073	0.010	0.012	0.42	0.16	0.16
	Bottom side						0.00	0.00	0.00
LTE Band 66_Ant 2	Front	0.210	0.278	0.025	0.072	0.060	0.51	0.31	0.30
	Back	0.292	0.285	0.416	0.115	0.132	0.99	0.82	0.84
	Left side	0.083					0.08	0.08	0.08
	Right side	0.038	0.732	0.059	0.079	0.163	0.83	0.18	0.26
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.202					0.20	0.20	0.20
LTE Band 66_Ant 4	Front	0.173	0.278	0.025	0.072	0.060	0.48	0.27	0.26
	Back	0.158	0.285	0.416	0.115	0.132	0.86	0.69	0.71
	Left side	0.372					0.37	0.37	0.37
	Right side	0.063	0.732	0.059	0.079	0.163	0.85	0.20	0.29
	Top side	0.106	0.272	0.073	0.010	0.012	0.45	0.19	0.19
	Bottom side						0.00	0.00	0.00
LTE Band 4_Ant 3	Front	0.374	0.278	0.025	0.072	0.060	0.68	0.47	0.46
	Back	0.341	0.285	0.416	0.115	0.132	1.04	0.87	0.89
	Left side	0.085					0.09	0.09	0.09
	Right side	0.016	0.732	0.059	0.079	0.163	0.81	0.15	0.24
	Top side	0.752	0.272	0.073	0.010	0.012	1.10	0.84	0.84
	Bottom side						0.00	0.00	0.00
LTE Band 4_Ant 7	Front	0.084	0.278	0.025	0.072	0.060	0.39	0.18	0.17
	Back	0.100	0.285	0.416	0.115	0.132	0.80	0.63	0.65
	Left side						0.00	0.00	0.00
	Right side	0.328	0.732	0.059	0.079	0.163	1.12	0.47	0.55
	Top side	0.003	0.272	0.073	0.010	0.012	0.35	0.09	0.09
	Bottom side						0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 41_Ant 2	Front	0.208	0.278	0.025	0.072	0.060	0.51	0.31	0.29
	Back	0.347	0.285	0.416	0.115	0.132	1.05	0.88	0.90
	Left side	0.132					0.13	0.13	0.13
	Right side	0.054	0.732	0.059	0.079	0.163	0.85	0.19	0.28
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.711					0.71	0.71	0.71
LTE Band 41_Ant 3	Front	0.166	0.278	0.025	0.072	0.060	0.47	0.26	0.25
	Back	0.166	0.285	0.416	0.115	0.132	0.87	0.70	0.71
	Left side	0.058					0.06	0.06	0.06
	Right side	0.036	0.732	0.059	0.079	0.163	0.83	0.17	0.26
	Top side	0.513	0.272	0.073	0.010	0.012	0.86	0.60	0.60
	Bottom side						0.00	0.00	0.00
LTE Band 41_Ant 4	Front	0.218	0.278	0.025	0.072	0.060	0.52	0.32	0.30
	Back	0.221	0.285	0.416	0.115	0.132	0.92	0.75	0.77
	Left side	0.598					0.60	0.60	0.60
	Right side	0.027	0.732	0.059	0.079	0.163	0.82	0.17	0.25
	Top side	0.076	0.272	0.073	0.010	0.012	0.42	0.16	0.16
	Bottom side						0.00	0.00	0.00
LTE Band 41_Ant 7	Front	0.143	0.278	0.025	0.072	0.060	0.45	0.24	0.23
	Back	0.248	0.285	0.416	0.115	0.132	0.95	0.78	0.80
	Left side	0.111					0.11	0.11	0.11
	Right side	0.438	0.732	0.059	0.079	0.163	1.23	0.58	0.66
	Top side	0.044	0.272	0.073	0.010	0.012	0.39	0.13	0.13
	Bottom side						0.00	0.00	0.00



<5G NR mode>

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
FR1 n7_Ant 2 SA	Front	0.154	0.278	0.025	0.072	0.060	0.46	0.25	0.24
	Back	0.310	0.285	0.416	0.115	0.132	1.01	0.84	0.86
	Left side	0.098					0.10	0.10	0.10
	Right side	0.048	0.732	0.059	0.079	0.163	0.84	0.19	0.27
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.529					0.53	0.53	0.53
FR1 n7_Ant 3 SA	Front	0.141	0.278	0.025	0.072	0.060	0.44	0.24	0.23
	Back	0.167	0.285	0.416	0.115	0.132	0.87	0.70	0.72
	Left side	0.089					0.09	0.09	0.09
	Right side	0.031	0.732	0.059	0.079	0.163	0.82	0.17	0.25
	Top side	0.329	0.272	0.073	0.010	0.012	0.67	0.41	0.41
	Bottom side						0.00	0.00	0.00
FR1 n7_Ant 4 SA	Front	0.091	0.278	0.025	0.072	0.060	0.39	0.19	0.18
	Back	0.087	0.285	0.416	0.115	0.132	0.79	0.62	0.64
	Left side	0.247					0.25	0.25	0.25
	Right side	0.025	0.732	0.059	0.079	0.163	0.82	0.16	0.25
	Top side	0.037	0.272	0.073	0.010	0.012	0.38	0.12	0.12
	Bottom side						0.00	0.00	0.00
FR1 n7_Ant 7 SA	Front	0.130	0.278	0.025	0.072	0.060	0.43	0.23	0.22
	Back	0.166	0.285	0.416	0.115	0.132	0.87	0.70	0.71
	Left side	0.014					0.01	0.01	0.01
	Right side	0.349	0.732	0.059	0.079	0.163	1.14	0.49	0.57
	Top side	0.036	0.272	0.073	0.010	0.012	0.38	0.12	0.12
	Bottom side						0.00	0.00	0.00
FR1 n41_Ant 2 SA	Front	0.133	0.278	0.025	0.072	0.060	0.44	0.23	0.22
	Back	0.340	0.285	0.416	0.115	0.132	1.04	0.87	0.89
	Left side	0.071					0.07	0.07	0.07
	Right side	0.032	0.732	0.059	0.079	0.163	0.82	0.17	0.25
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.284					0.28	0.28	0.28
FR1 n41_Ant 3 SA	Front	0.102	0.278	0.025	0.072	0.060	0.41	0.20	0.19
	Back	0.158	0.285	0.416	0.115	0.132	0.86	0.69	0.71
	Left side	0.042					0.04	0.04	0.04
	Right side	0.014	0.732	0.059	0.079	0.163	0.81	0.15	0.24
	Top side	0.286	0.272	0.073	0.010	0.012	0.63	0.37	0.37
	Bottom side						0.00	0.00	0.00
FR1 n41_Ant 4 SA	Front	0.127	0.278	0.025	0.072	0.060	0.43	0.22	0.21
	Back	0.125	0.285	0.416	0.115	0.132	0.83	0.66	0.67
	Left side	0.357					0.36	0.36	0.36
	Right side	0.003	0.732	0.059	0.079	0.163	0.79	0.14	0.23
	Top side	0.056	0.272	0.073	0.010	0.012	0.40	0.14	0.14
	Bottom side						0.00	0.00	0.00
FR1 n41_Ant 7 SA	Front	0.220	0.278	0.025	0.072	0.060	0.52	0.32	0.31
	Back	0.267	0.285	0.416	0.115	0.132	0.97	0.80	0.82
	Left side	0.058					0.06	0.06	0.06
	Right side	0.515	0.732	0.059	0.079	0.163	1.31	0.65	0.74
	Top side	0.050	0.272	0.073	0.010	0.012	0.40	0.13	0.14
	Bottom side						0.00	0.00	0.00
FR1 n77_Ant 6 SA	Front	0.096	0.278	0.025	0.072	0.060	0.40	0.19	0.18
	Back	0.127	0.285	0.416	0.115	0.132	0.83	0.66	0.68



FCC SAR Test Report

Report No. : FA002312

	Left side	0.278					0.28	0.28	0.28
	Right side	0.009	0.732	0.059	0.079	0.163	0.80	0.15	0.23
	Top side	0.017	0.272	0.073	0.010	0.012	0.36	0.10	0.10
	Bottom side						0.00	0.00	0.00
FR1 n77_Ant 9 SA	Front	0.096	0.278	0.025	0.072	0.060	0.40	0.19	0.18
	Back	0.130	0.285	0.416	0.115	0.132	0.83	0.66	0.68
	Left side	0.012					0.01	0.01	0.01
	Right side	0.251	0.732	0.059	0.079	0.163	1.04	0.39	0.47
	Top side		0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.208					0.21	0.21	0.21
FR1 n77_Ant 12 SA	Front	0.046	0.278	0.025	0.072	0.060	0.35	0.14	0.13
	Back	0.454	0.285	0.416	0.115	0.132	1.16	0.99	1.00
	Left side	0.042					0.04	0.04	0.04
	Right side	0.112	0.732	0.059	0.079	0.163	0.90	0.25	0.33
	Top side	0.078	0.272	0.073	0.010	0.012	0.42	0.16	0.16
	Bottom side						0.00	0.00	0.00
FR1 n77_Ant 14 SA	Front	0.116	0.278	0.025	0.072	0.060	0.42	0.21	0.20
	Back	0.385	0.285	0.416	0.115	0.132	1.09	0.92	0.93
	Left side	0.012					0.01	0.01	0.01
	Right side	0.010	0.732	0.059	0.079	0.163	0.80	0.15	0.23
	Top side	0.071	0.272	0.073	0.010	0.012	0.42	0.15	0.16
	Bottom side						0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+4 Summed 1g SAR (W/kg)	1+2+4+5 Summed 1g SAR (W/kg)	1+2+4+6 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)			
Component list 1 LTE Ant1+FR1 Ant 2	Front	0.187	0.084	0.278	0.025	0.072	0.060	0.57	0.37	0.36
	Back	0.301	0.158	0.285	0.416	0.115	0.132	1.16	0.99	1.01
	Left side	0.068	0.051					0.12	0.12	0.12
	Right side	0.093	0.031	0.732	0.059	0.079	0.163	0.92	0.26	0.35
	Top side			0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.239	0.380					0.62	0.62	0.62
Component list 2 LTE Ant1+FR1 Ant 3	Front	0.187	0.154	0.278	0.025	0.072	0.060	0.64	0.44	0.43
	Back	0.301	0.167	0.285	0.416	0.115	0.132	1.17	1.00	1.02
	Left side	0.068	0.021					0.09	0.09	0.09
	Right side	0.093	0.044	0.732	0.059	0.079	0.163	0.93	0.28	0.36
	Top side		0.311	0.272	0.073	0.010	0.012	0.66	0.39	0.40
	Bottom side	0.239						0.24	0.24	0.24
Component list 3 LTE Ant1+FR1 Ant 4	Front	0.187	0.061	0.278	0.025	0.072	0.060	0.55	0.35	0.33
	Back	0.301	0.062	0.285	0.416	0.115	0.132	1.06	0.89	0.91
	Left side	0.068	0.153					0.22	0.22	0.22
	Right side	0.093	0.030	0.732	0.059	0.079	0.163	0.91	0.26	0.35
	Top side		0.036	0.272	0.073	0.010	0.012	0.38	0.12	0.12
	Bottom side	0.239						0.24	0.24	0.24
Component list 5 LTE Ant1+FR1 Ant 7	Front	0.187	0.325	0.278	0.025	0.072	0.060	0.82	0.61	0.60
	Back	0.301	0.407	0.285	0.416	0.115	0.132	1.41	1.24	1.26
	Left side	0.068	0.056					0.12	0.12	0.12
	Right side	0.093	0.698	0.732	0.059	0.079	0.163	1.58	0.93	1.01
	Top side		0.085	0.272	0.073	0.010	0.012	0.43	0.17	0.17
	Bottom side	0.239						0.24	0.24	0.24
Component list 10 LTE Ant2+FR1 Ant 1	Front	0.212	0.181	0.278	0.025	0.072	0.060	0.70	0.49	0.48
	Back	0.338	0.307	0.285	0.416	0.115	0.132	1.35	1.18	1.19
	Left side	0.125	0.082					0.21	0.21	0.21
	Right side	0.072	0.083	0.732	0.059	0.079	0.163	0.95	0.29	0.38
	Top side			0.272	0.073	0.010	0.012	0.35	0.08	0.09
	Bottom side	0.708	0.241					0.95	0.95	0.95
Component list 11 LTE Ant2+FR1 Ant 3	Front	0.281	0.154	0.278	0.025	0.072	0.060	0.74	0.53	0.52
	Back	0.371	0.167	0.285	0.416	0.115	0.132	1.24	1.07	1.09
	Left side	0.281	0.042					0.32	0.32	0.32
	Right side	0.072	0.044	0.732	0.059	0.079	0.163	0.91	0.25	0.34
	Top side		0.311	0.272	0.073	0.010	0.012	0.66	0.39	0.40
	Bottom side	0.708						0.71	0.71	0.71
Component list 13 LTE Ant2+FR1 Ant 7	Front	0.281	0.325	0.278	0.025	0.072	0.060	0.91	0.70	0.69
	Back	0.371	0.407	0.285	0.416	0.115	0.132	1.48	1.31	1.33
	Left side	0.281	0.056					0.34	0.34	0.34
	Right side	0.054	0.698	0.732	0.059	0.079	0.163	1.54	0.89	0.97
	Top side		0.085	0.272	0.073	0.010	0.012	0.43	0.17	0.17
	Bottom side	0.627						0.63	0.63	0.63
Component list 18 LTE Ant3+FR1 Ant 1	Front	0.140	0.181	0.278	0.025	0.072	0.060	0.62	0.42	0.41
	Back	0.140	0.307	0.285	0.416	0.115	0.132	1.15	0.98	1.00
	Left side	0.385	0.082					0.47	0.47	0.47
	Right side	0.040	0.083	0.732	0.059	0.079	0.163	0.91	0.26	0.35
	Top side	0.446		0.272	0.073	0.010	0.012	0.79	0.53	0.53
	Bottom side		0.241					0.24	0.24	0.24
Component list 19 LTE Ant3+FR1 Ant	Front	0.293	0.084	0.278	0.025	0.072	0.060	0.68	0.47	0.46
	Back	0.078	0.158	0.285	0.416	0.115	0.132	0.94	0.77	0.78



FCC SAR Test Report

Report No. : FA002312

2	Left side	0.070	0.051					0.12	0.12	0.12
	Right side	0.010	0.031	0.732	0.059	0.079	0.163	0.83	0.18	0.26
	Top side	0.106		0.272	0.073	0.010	0.012	0.45	0.19	0.19
	Bottom side		0.380					0.38	0.38	0.38
Component list 20 LTE Ant3+FR1 Ant 4	Front	0.293	0.061	0.278	0.025	0.072	0.060	0.66	0.45	0.44
	Back	0.078	0.062	0.285	0.416	0.115	0.132	0.84	0.67	0.69
	Left side	0.070	0.153					0.22	0.22	0.22
	Right side	0.010	0.030	0.732	0.059	0.079	0.163	0.83	0.18	0.26
	Top side	0.106	0.036	0.272	0.073	0.010	0.012	0.49	0.23	0.23
	Bottom side							0.00	0.00	0.00
Component list 22 LTE Ant3+FR1 Ant 7	Front	0.293	0.325	0.278	0.025	0.072	0.060	0.92	0.72	0.70
	Back	0.078	0.407	0.285	0.416	0.115	0.132	1.19	1.02	1.03
	Left side	0.070	0.056					0.13	0.13	0.13
	Right side	0.010	0.698	0.732	0.059	0.079	0.163	1.50	0.85	0.93
	Top side	0.106	0.085	0.272	0.073	0.010	0.012	0.54	0.27	0.28
	Bottom side							0.00	0.00	0.00
Component list 27 LTE Ant4+FR1 Ant 1	Front	0.187	0.181	0.278	0.025	0.072	0.060	0.67	0.47	0.45
	Back	0.169	0.307	0.285	0.416	0.115	0.132	1.18	1.01	1.02
	Left side	0.453	0.082					0.54	0.54	0.54
	Right side	0.043	0.083	0.732	0.059	0.079	0.163	0.92	0.26	0.35
	Top side	0.043		0.272	0.073	0.010	0.012	0.39	0.13	0.13
	Bottom side		0.241					0.24	0.24	0.24
Component list 28 LTE Ant4+FR1 Ant 3	Front	0.187	0.154	0.278	0.025	0.072	0.060	0.64	0.44	0.43
	Back	0.169	0.167	0.285	0.416	0.115	0.132	1.04	0.87	0.88
	Left side	0.453	0.042					0.50	0.50	0.50
	Right side	0.043	0.044	0.732	0.059	0.079	0.163	0.88	0.23	0.31
	Top side	0.043	0.311	0.272	0.073	0.010	0.012	0.70	0.44	0.44
	Bottom side							0.00	0.00	0.00
Component list 30 LTE Ant4+FR1 Ant 7	Front	0.147	0.325	0.278	0.025	0.072	0.060	0.78	0.57	0.56
	Back	0.151	0.407	0.285	0.416	0.115	0.132	1.26	1.09	1.11
	Left side	0.326	0.056					0.38	0.38	0.38
	Right side	0.001	0.698	0.732	0.059	0.079	0.163	1.49	0.84	0.92
	Top side	0.009	0.085	0.272	0.073	0.010	0.012	0.44	0.18	0.18
	Bottom side							0.00	0.00	0.00
Component list 36 LTE Ant7+FR1 Ant 3	Front	0.254	0.130	0.278	0.025	0.072	0.060	0.69	0.48	0.47
	Back	0.439	0.127	0.285	0.416	0.115	0.132	1.27	1.10	1.11
	Left side	0.200	0.042					0.24	0.24	0.24
	Right side	0.543	0.006	0.732	0.059	0.079	0.163	1.34	0.69	0.77
	Top side	0.052	0.129	0.272	0.073	0.010	0.012	0.53	0.26	0.27
	Bottom side							0.00	0.00	0.00



<5G NR MIMO mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n41_Ant 2 SA MIMO_PA 1 1g SAR (W/kg)			
FR1 n41_Ant 3 SA MIMO_PA 2	Front	0.041	0.278	0.025	0.072	0.060	0.036	0.38	0.17	0.16
	Back	0.039	0.285	0.416	0.115	0.132	0.113	0.85	0.68	0.70
	Left side	0.014					0.031	0.05	0.05	0.05
	Right side	0.018	0.732	0.059	0.079	0.163	0.099	0.91	0.26	0.34
	Top side	0.140	0.272	0.073	0.010	0.012		0.49	0.22	0.23
	Bottom side						0.067	0.07	0.07	0.07
FR1 n41_Ant 4 SA&SA MIMO_PA 2	Front	0.069	0.278	0.025	0.072	0.060	0.036	0.41	0.20	0.19
	Back	0.066	0.285	0.416	0.115	0.132	0.113	0.88	0.71	0.73
	Left side	0.208					0.031	0.24	0.24	0.24
	Right side	0.029	0.732	0.059	0.079	0.163	0.099	0.92	0.27	0.35
	Top side	0.043	0.272	0.073	0.010	0.012		0.39	0.13	0.13
	Bottom side						0.067	0.07	0.07	0.07
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Front	0.038	0.278	0.025	0.072	0.060	0.036	0.38	0.17	0.16
	Back	0.049	0.285	0.416	0.115	0.132	0.113	0.86	0.69	0.71
	Left side	0.031					0.031	0.06	0.06	0.06
	Right side	0.040	0.732	0.059	0.079	0.163	0.099	0.93	0.28	0.36
	Top side	0.047	0.272	0.073	0.010	0.012		0.39	0.13	0.13
	Bottom side						0.067	0.07	0.07	0.07

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n41_Ant 3 SA MIMO_PA 1 1g SAR (W/kg)			
FR1 n41_Ant 2 SA MIMO_PA 2	Front	0.064	0.278	0.025	0.072	0.060	0.102	0.47	0.26	0.25
	Back	0.162	0.285	0.416	0.115	0.132	0.158	1.02	0.85	0.87
	Left side	0.034					0.042	0.08	0.08	0.08
	Right side	0.016	0.732	0.059	0.079	0.163	0.014	0.82	0.17	0.25
	Top side		0.272	0.073	0.010	0.012	0.286	0.63	0.37	0.37
	Bottom side	0.136						0.14	0.14	0.14
FR1 n41_Ant 4 SA&SA MIMO_PA 2	Front	0.069	0.278	0.025	0.072	0.060	0.102	0.47	0.27	0.26
	Back	0.066	0.285	0.416	0.115	0.132	0.158	0.93	0.76	0.77
	Left side	0.208					0.042	0.25	0.25	0.25
	Right side	0.029	0.732	0.059	0.079	0.163	0.014	0.83	0.18	0.27
	Top side	0.043	0.272	0.073	0.010	0.012	0.286	0.67	0.41	0.41
	Bottom side							0.00	0.00	0.00
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Front	0.038	0.278	0.025	0.072	0.060	0.102	0.44	0.24	0.23
	Back	0.049	0.285	0.416	0.115	0.132	0.158	0.91	0.74	0.76
	Left side	0.031					0.042	0.07	0.07	0.07
	Right side	0.040	0.732	0.059	0.079	0.163	0.014	0.85	0.19	0.28
	Top side	0.047	0.272	0.073	0.010	0.012	0.286	0.68	0.42	0.42
	Bottom side							0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7	FR1 n41_Ant 4 SA MIMO_PA 1			
FR1 n41_Ant 2 SA MIMO_PA 2	Front	0.064	0.278	0.025	0.072	0.060	0.127	0.49	0.29	0.28
	Back	0.162	0.285	0.416	0.115	0.132	0.125	0.99	0.82	0.84
	Left side	0.034					0.357	0.39	0.39	0.39
	Right side	0.016	0.732	0.059	0.079	0.163	0.003	0.81	0.16	0.24
	Top side		0.272	0.073	0.010	0.012	0.056	0.40	0.14	0.14
	Bottom side	0.136						0.14	0.14	0.14
FR1 n41_Ant 3 SA MIMO_PA 2	Front	0.041	0.278	0.025	0.072	0.060	0.127	0.340	0.140	0.130
	Back	0.039	0.285	0.416	0.115	0.132	0.125	0.740	0.570	0.590
	Left side	0.014					0.357	0.010	0.010	0.010
	Right side	0.018	0.732	0.059	0.079	0.163	0.003	0.810	0.160	0.240
	Top side	0.140	0.272	0.073	0.010	0.012	0.056	0.490	0.220	0.230
	Bottom side							0.000	0.000	0.000
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Front	0.038	0.278	0.025	0.072	0.060	0.127	0.340	0.140	0.120
	Back	0.049	0.285	0.416	0.115	0.132	0.125	0.750	0.580	0.600
	Left side	0.031					0.357	0.030	0.030	0.030
	Right side	0.040	0.732	0.059	0.079	0.163	0.003	0.830	0.180	0.260
	Top side	0.047	0.272	0.073	0.010	0.012	0.056	0.390	0.130	0.130
	Bottom side							0.000	0.000	0.000

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n77 MIMO	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7	FR1 n77_Ant 6 MIMO			
FR1 n77_Ant 12 MIMO	Front	0.074	0.278	0.025	0.072	0.060	0.095	0.47	0.27	0.25
	Back	0.439	0.285	0.416	0.115	0.132	0.126	1.27	1.10	1.11
	Left side	0.208					0.275	0.48	0.48	0.48
	Right side	0.072	0.732	0.059	0.079	0.163	0.011	0.87	0.22	0.31
	Top side	0.067	0.272	0.073	0.010	0.012	0.018	0.43	0.17	0.17
	Bottom side							0.00	0.00	0.00
FR1 n77_Ant 14 MIMO	Front	0.113	0.278	0.025	0.072	0.060	0.095	0.51	0.31	0.29
	Back	0.121	0.285	0.416	0.115	0.132	0.126	0.95	0.78	0.80
	Left side	0.028					0.275	0.30	0.30	0.30
	Right side	0.282	0.732	0.059	0.079	0.163	0.011	1.08	0.43	0.52
	Top side	0.040	0.272	0.073	0.010	0.012	0.018	0.40	0.14	0.14
	Bottom side							0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6	1+3+4+6	1+3+5+6
		FR1 n77 MIMO	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7	FR1 n77_Ant 9 MIMO	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
FR1 n77_Ant 12 MIMO	Front	0.074	0.278	0.025	0.072	0.060	0.026	0.40	0.20	0.19
	Back	0.439	0.285	0.416	0.115	0.132	0.036	1.18	1.01	1.02
	Left side	0.208					0.003	0.21	0.21	0.21
	Right side	0.072	0.732	0.059	0.079	0.163	0.070	0.93	0.28	0.36
	Top side	0.067	0.272	0.073	0.010	0.012		0.41	0.15	0.15
	Bottom side						0.059	0.06	0.06	0.06
FR1 n77_Ant 14 MIMO	Front	0.113	0.278	0.025	0.072	0.060	0.026	0.44	0.24	0.22
	Back	0.121	0.285	0.416	0.115	0.132	0.036	0.86	0.69	0.71
	Left side	0.028					0.003	0.03	0.03	0.03
	Right side	0.282	0.732	0.059	0.079	0.163	0.070	1.14	0.49	0.57
	Top side	0.040	0.272	0.073	0.010	0.012		0.39	0.12	0.13
	Bottom side						0.059	0.06	0.06	0.06



17.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)			
GSM850_Ant 1	Front	0.136	0.217	0.151	0.036	0.001	0.50	0.32	0.29
	Back	0.195	0.230	0.347	0.115	0.029	0.77	0.66	0.57
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
GSM850_Ant 3	Front	0.099	0.217	0.151	0.036	0.001	0.47	0.29	0.25
	Back	0.088	0.230	0.347	0.115	0.029	0.67	0.55	0.46
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
GSM1900_Ant 2	Front	0.180	0.217	0.151	0.036	0.001	0.55	0.37	0.33
	Back	0.200	0.230	0.347	0.115	0.029	0.78	0.66	0.58
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
GSM1900_Ant 4	Front	0.072	0.217	0.151	0.036	0.001	0.44	0.26	0.22
	Back	0.093	0.230	0.347	0.115	0.029	0.67	0.56	0.47
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
WCDMA II_Ant 2	Front	0.338	0.217	0.151	0.036	0.001	0.71	0.53	0.49
	Back	0.486	0.230	0.347	0.115	0.029	1.06	0.95	0.86
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
WCDMA II_Ant 4	Front	0.349	0.217	0.151	0.036	0.001	0.72	0.54	0.50
	Back	0.645	0.230	0.347	0.115	0.029	1.22	1.11	1.02
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
WCDMA IV_Ant 2	Front	0.152	0.217	0.151	0.036	0.001	0.52	0.34	0.30
	Back	0.227	0.230	0.347	0.115	0.029	0.80	0.69	0.60
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
WCDMA IV_Ant 4	Front	0.280	0.217	0.151	0.036	0.001	0.65	0.47	0.43
	Back	0.382	0.230	0.347	0.115	0.029	0.96	0.84	0.76
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
WCDMA V_Ant 1	Front	0.188	0.217	0.151	0.036	0.001	0.56	0.38	0.34
	Back	0.281	0.230	0.347	0.115	0.029	0.86	0.74	0.66
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
WCDMA V_Ant 3	Front	0.135	0.217	0.151	0.036	0.001	0.50	0.32	0.29
	Back	0.119	0.230	0.347	0.115	0.029	0.70	0.58	0.50
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 2_Ant 2	Front	0.416	0.217	0.151	0.036	0.001	0.78	0.60	0.57
	Back	0.541	0.230	0.347	0.115	0.029	1.12	1.00	0.92
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 2_Ant 4	Front	0.201	0.217	0.151	0.036	0.001	0.57	0.39	0.35
	Back	0.249	0.230	0.347	0.115	0.029	0.83	0.71	0.63
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00



FCC SAR Test Report

Report No. : FA002312

LTE Band 5_Ant 1	Front	0.126	0.217	0.151	0.036	0.001	0.49	0.31	0.28
	Back	0.199	0.230	0.347	0.115	0.029	0.78	0.66	0.58
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 5_Ant 3	Front	0.137	0.217	0.151	0.036	0.001	0.51	0.32	0.29
	Back	0.117	0.230	0.347	0.115	0.029	0.69	0.58	0.49
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 7_Ant 2	Front	0.355	0.217	0.151	0.036	0.001	0.72	0.54	0.51
	Back	0.471	0.230	0.347	0.115	0.029	1.05	0.93	0.85
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 7_Ant 3	Front	0.184	0.217	0.151	0.036	0.001	0.55	0.37	0.34
	Back	0.218	0.230	0.347	0.115	0.029	0.80	0.68	0.59
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 7_Ant 4	Front	0.518	0.217	0.151	0.036	0.001	0.89	0.71	0.67
	Back	0.545	0.230	0.347	0.115	0.029	1.12	1.01	0.92
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 7_Ant 7	Front	0.189	0.217	0.151	0.036	0.001	0.56	0.38	0.34
	Back	0.269	0.230	0.347	0.115	0.029	0.85	0.73	0.65
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 12_Ant 1	Front	0.146	0.217	0.151	0.036	0.001	0.51	0.33	0.30
	Back	0.211	0.230	0.347	0.115	0.029	0.79	0.67	0.59
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 12_Ant 3	Front	0.027	0.217	0.151	0.036	0.001	0.40	0.21	0.18
	Back	0.033	0.230	0.347	0.115	0.029	0.61	0.50	0.41
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 66_Ant 2	Front	0.168	0.217	0.151	0.036	0.001	0.54	0.36	0.32
	Back	0.263	0.230	0.347	0.115	0.029	0.84	0.73	0.64
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 66_Ant 4	Front	0.166	0.217	0.151	0.036	0.001	0.53	0.35	0.32
	Back	0.226	0.230	0.347	0.115	0.029	0.80	0.69	0.60
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 4_Ant 3	Front	0.169	0.217	0.151	0.036	0.001	0.54	0.36	0.32
	Back	0.162	0.230	0.347	0.115	0.029	0.74	0.62	0.54
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 4_Ant 7	Front	0.015	0.217	0.151	0.036	0.001	0.38	0.20	0.17
	Back	0.049	0.230	0.347	0.115	0.029	0.63	0.51	0.43
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 41_Ant 2	Front	0.117	0.217	0.151	0.036	0.001	0.49	0.30	0.27
	Back	0.177	0.230	0.347	0.115	0.029	0.75	0.64	0.55
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 41_Ant 3	Front	0.058	0.217	0.151	0.036	0.001	0.43	0.25	0.21
	Back	0.070	0.230	0.347	0.115	0.029	0.65	0.53	0.45
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 41_Ant 4	Front	0.423	0.217	0.151	0.036	0.001	0.79	0.61	0.58
	Back	0.436	0.230	0.347	0.115	0.029	1.01	0.90	0.81
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 41_Ant 7	Front	0.120	0.217	0.151	0.036	0.001	0.49	0.31	0.27
	Back	0.159	0.230	0.347	0.115	0.029	0.74	0.62	0.54
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00



<5G NR mode>

WWAN Band	Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 5+7	5GHz WLAN Ant 8+10	Bluetooth Ant 5	Bluetooth Ant 7			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
FR1 n7_Ant 2 SA	Front	0.346	0.217	0.151	0.036	0.001	0.71	0.53	0.50
	Back	0.468	0.230	0.347	0.115	0.029	1.05	0.93	0.84
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n7_Ant 3 SA	Front	0.201	0.217	0.151	0.036	0.001	0.57	0.39	0.35
	Back	0.365	0.230	0.347	0.115	0.029	0.94	0.83	0.74
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n7_Ant 4 SA	Front	0.272	0.217	0.151	0.036	0.001	0.64	0.46	0.42
	Back	0.377	0.230	0.347	0.115	0.029	0.95	0.84	0.75
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n7_Ant 7 SA	Front	0.269	0.217	0.151	0.036	0.001	0.64	0.46	0.42
	Back	0.401	0.230	0.347	0.115	0.029	0.98	0.86	0.78
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n41_Ant 2 SA	Front	0.116	0.217	0.151	0.036	0.001	0.48	0.30	0.27
	Back	0.219	0.230	0.347	0.115	0.029	0.80	0.68	0.60
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n41_Ant 3 SA	Front	0.228	0.217	0.151	0.036	0.001	0.60	0.42	0.38
	Back	0.378	0.230	0.347	0.115	0.029	0.96	0.84	0.75
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n41_Ant 4 SA	Front	0.349	0.217	0.151	0.036	0.001	0.72	0.54	0.50
	Back	0.435	0.230	0.347	0.115	0.029	1.01	0.90	0.81
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n41_Ant 7 SA	Front	0.079	0.217	0.151	0.036	0.001	0.45	0.27	0.23
	Back	0.119	0.230	0.347	0.115	0.029	0.70	0.58	0.50
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n77_Ant 6 SA	Front	0.139	0.217	0.151	0.036	0.001	0.51	0.33	0.29
	Back	0.131	0.230	0.347	0.115	0.029	0.71	0.59	0.51
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n77_Ant 9 SA	Front	0.036	0.217	0.151	0.036	0.001	0.40	0.22	0.19
	Back	0.052	0.230	0.347	0.115	0.029	0.63	0.51	0.43
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n77_Ant 12 SA	Front	0.018	0.217	0.151	0.036	0.001	0.39	0.21	0.17
	Back	0.243	0.230	0.347	0.115	0.029	0.82	0.71	0.62
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n77_Ant 14 SA	Front	0.137	0.217	0.151	0.036	0.001	0.51	0.32	0.29
	Back	0.169	0.230	0.347	0.115	0.029	0.75	0.63	0.55
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00



WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+4 Summed 1g SAR (W/kg)	1+2+4+5 Summed 1g SAR (W/kg)	1+2+4+6 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)			
Component list 1 LTE Ant1+FR1 Ant 2	Front	0.126	0.120	0.217	0.151	0.036	0.001	0.61	0.43	0.40
	Back	0.199	0.202	0.230	0.347	0.115	0.029	0.98	0.86	0.78
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 2 LTE Ant1+FR1 Ant 3	Front	0.126	0.339	0.217	0.151	0.036	0.001	0.83	0.65	0.62
	Back	0.199	0.472	0.230	0.347	0.115	0.029	1.25	1.13	1.05
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 3 LTE Ant1+FR1 Ant 4	Front	0.126	0.182	0.217	0.151	0.036	0.001	0.68	0.50	0.46
	Back	0.199	0.250	0.230	0.347	0.115	0.029	1.03	0.91	0.83
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 5 LTE Ant1+FR1 Ant 7	Front	0.126	0.260	0.217	0.151	0.036	0.001	0.75	0.57	0.54
	Back	0.199	0.382	0.230	0.347	0.115	0.029	1.16	1.04	0.96
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 10 LTE Ant2+FR1 Ant 1	Front	0.355	0.097	0.217	0.151	0.036	0.001	0.82	0.64	0.60
	Back	0.471	0.145	0.230	0.347	0.115	0.029	1.19	1.08	0.99
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 11 LTE Ant2+FR1 Ant 3	Front	0.416	0.339	0.217	0.151	0.036	0.001	1.12	0.94	0.91
	Back	0.541	0.472	0.230	0.347	0.115	0.029	1.59	1.48	1.39
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 13 LTE Ant2+FR1 Ant 7	Front	0.416	0.260	0.217	0.151	0.036	0.001	1.04	0.86	0.83
	Back	0.541	0.382	0.230	0.347	0.115	0.029	1.50	1.39	1.30
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 18 LTE Ant3+FR1 Ant 1	Front	0.184	0.097	0.217	0.151	0.036	0.001	0.65	0.47	0.43
	Back	0.218	0.145	0.230	0.347	0.115	0.029	0.94	0.83	0.74
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 19 LTE Ant3+FR1 Ant 2	Front	0.137	0.120	0.217	0.151	0.036	0.001	0.63	0.44	0.41
	Back	0.117	0.202	0.230	0.347	0.115	0.029	0.90	0.78	0.70
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 20 LTE Ant3+FR1 Ant 4	Front	0.137	0.182	0.217	0.151	0.036	0.001	0.69	0.51	0.47
	Back	0.117	0.250	0.230	0.347	0.115	0.029	0.94	0.83	0.74
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 22 LTE Ant3+FR1 Ant 7	Front	0.137	0.260	0.217	0.151	0.036	0.001	0.77	0.58	0.55
	Back	0.117	0.382	0.230	0.347	0.115	0.029	1.08	0.96	0.88
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 27 LTE Ant4+FR1 Ant 1	Front	0.518	0.097	0.217	0.151	0.036	0.001	0.98	0.80	0.77
	Back	0.545	0.145	0.230	0.347	0.115	0.029	1.27	1.15	1.07
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 28	Front	0.518	0.339	0.217	0.151	0.036	0.001	1.23	1.04	1.01
	Back	0.545	0.472	0.230	0.347	0.115	0.029	1.59	1.48	1.39



FCC SAR Test Report

Report No. : FA002312

LTE Ant4+FR1 Ant 3	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 30	Front	0.201	0.260	0.217	0.151	0.036	0.001	0.83	0.65	0.61
	Back	0.249	0.382	0.230	0.347	0.115	0.029	1.21	1.09	1.01
LTE Ant4+FR1 Ant 7	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
Component list 36	Front	0.189	0.118	0.217	0.151	0.036	0.001	0.68	0.49	0.46
	Back	0.269	0.132	0.230	0.347	0.115	0.029	0.98	0.86	0.78
LTE Ant7+FR1 Ant 3	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00



<5G NR MIMO mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n41_Ant 2 SA MIMO_PA 1 1g SAR (W/kg)			
FR1 n41_Ant 3 SA&SA MIMO_PA 2	Front	0.217	0.217	0.151	0.036	0.001	0.116	0.70	0.52	0.49
	Back	0.284	0.230	0.347	0.115	0.029	0.219	1.08	0.97	0.88
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
FR1 n41_Ant 4 SA&SA MIMO_PA 2	Front	0.262	0.217	0.151	0.036	0.001	0.116	0.75	0.57	0.53
	Back	0.392	0.230	0.347	0.115	0.029	0.219	1.19	1.07	0.99
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Front	0.035	0.217	0.151	0.036	0.001	0.116	0.52	0.34	0.30
	Back	0.172	0.230	0.347	0.115	0.029	0.219	0.97	0.85	0.77
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n41_Ant 3 SA MIMO_PA 1 1g SAR (W/kg)			
FR1 n41_Ant 2 SA&SA MIMO_PA 2	Front	0.181	0.217	0.151	0.036	0.001	0.228	0.78	0.60	0.56
	Back	0.212	0.230	0.347	0.115	0.029	0.378	1.17	1.05	0.97
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
FR1 n41_Ant 4 SA&SA MIMO_PA 2	Front	0.262	0.217	0.151	0.036	0.001	0.228	0.86	0.68	0.64
	Back	0.392	0.230	0.347	0.115	0.029	0.378	1.35	1.23	1.15
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Front	0.035	0.217	0.151	0.036	0.001	0.228	0.63	0.45	0.42
	Back	0.172	0.230	0.347	0.115	0.029	0.378	1.13	1.01	0.93
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n41_ NSA MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n41_Ant 4 SA MIMO_PA 1 1g SAR (W/kg)			
FR1 n41_Ant 2 SA&SA MIMO_PA 2	Front	0.181	0.217	0.151	0.036	0.001	0.349	0.90	0.72	0.68
	Back	0.212	0.230	0.347	0.115	0.029	0.435	1.22	1.11	1.02
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
FR1 n41_Ant 3 SA&SA MIMO_PA 2	Front	0.217	0.217	0.151	0.036	0.001	0.349	0.93	0.75	0.72
	Back	0.284	0.230	0.347	0.115	0.029	0.435	1.30	1.18	1.10
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
FR1 n41_Ant 12 SA&SA MIMO_PA 2	Front	0.035	0.217	0.151	0.036	0.001	0.349	0.75	0.57	0.54
	Back	0.172	0.230	0.347	0.115	0.029	0.435	1.18	1.07	0.98
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n77 MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n77_Ant 6 MIMO 1g SAR (W/kg)			
FR1 n77_Ant 12 MIMO	Front	0.030	0.217	0.151	0.036	0.001	0.021	0.42	0.24	0.20
	Back	0.198	0.230	0.347	0.115	0.029	0.046	0.82	0.71	0.62
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
FR1 n77_Ant 14 MIMO	Front	0.113	0.217	0.151	0.036	0.001	0.021	0.50	0.32	0.29
	Back	0.140	0.230	0.347	0.115	0.029	0.046	0.76	0.65	0.56
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	3	4	5	6	1+2+3+6 Summed 1g SAR (W/kg)	1+3+4+6 Summed 1g SAR (W/kg)	1+3+5+6 Summed 1g SAR (W/kg)
		FR1 n77 MIMO 1g SAR (W/kg)	2.4GHz WLAN Ant 5+7 1g SAR (W/kg)	5GHz WLAN Ant 8+10 1g SAR (W/kg)	Bluetooth Ant 5 1g SAR (W/kg)	Bluetooth Ant 7 1g SAR (W/kg)	FR1 n77_Ant 9 MIMO 1g SAR (W/kg)			
FR1 n77_Ant 12 MIMO	Front	0.030	0.217	0.151	0.036	0.001	0.027	0.43	0.24	0.21
	Back	0.198	0.230	0.347	0.115	0.029	0.040	0.82	0.70	0.61
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00
FR1 n77_Ant 14 MIMO	Front	0.113	0.217	0.151	0.036	0.001	0.027	0.51	0.33	0.29
	Back	0.140	0.230	0.347	0.115	0.029	0.040	0.76	0.64	0.56
	Front with Headset							0.00	0.00	0.00
	Back with Headset							0.00	0.00	0.00

Test Engineer : Nick Hu, John Liu, Hank Chang, Yuankai Kong

18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz

DUT: D750V3 - SN:1087

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.297$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.06, 9.06, 9.06); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2019.11.20
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.77 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.40 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.36 W/kg

Maximum value of SAR (measured) = 2.74 W/kg

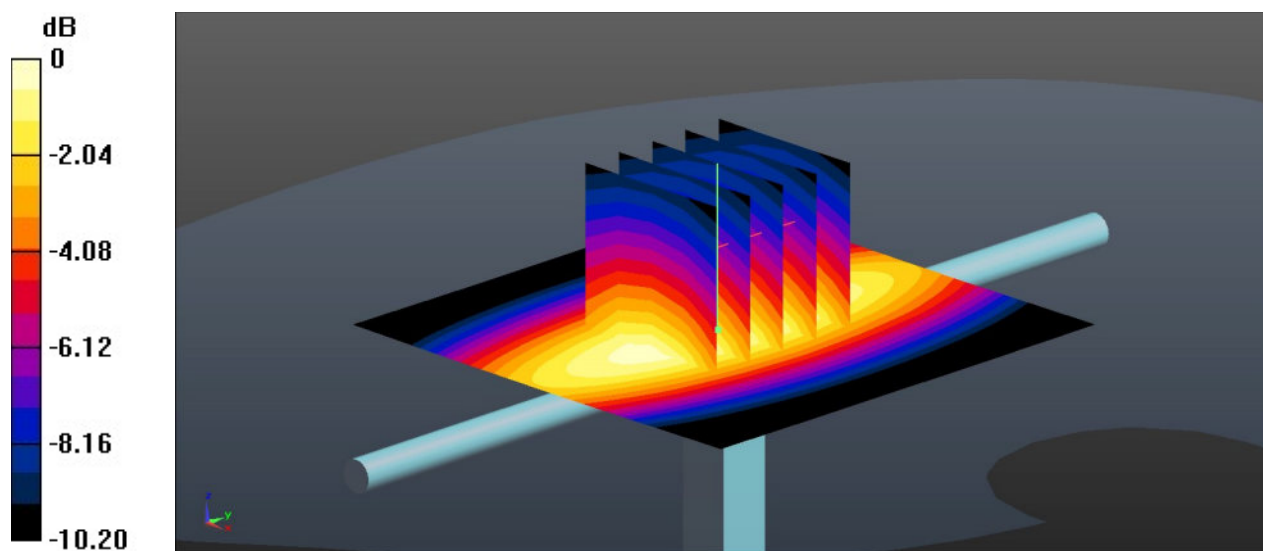

0 dB = 2.74 W/kg = 4.38 dBW/kg

System Check_Head_835MHz**DUT: D835V2 - SN:4d151**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.571$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(8.69, 8.69, 8.69); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2019.11.20
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.78 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.86 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

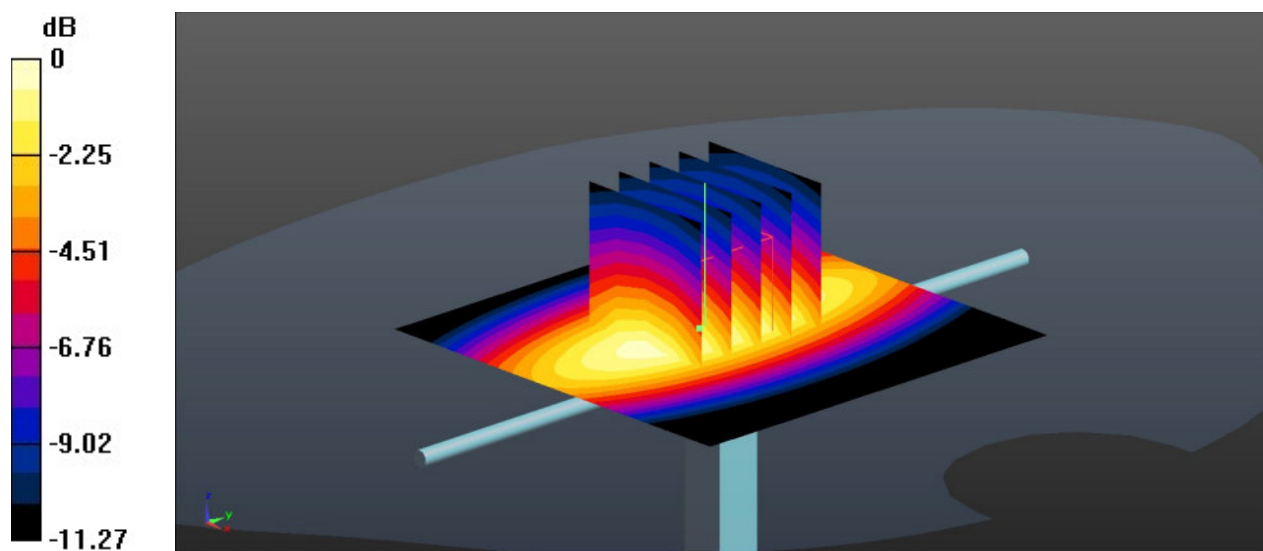

0 dB = 2.81 W/kg = 4.49 dBW/kg

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.72, 7.72, 7.72); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2019.11.20
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.9 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 102.5 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.06 W/kg; SAR(10 g) = 4.83 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

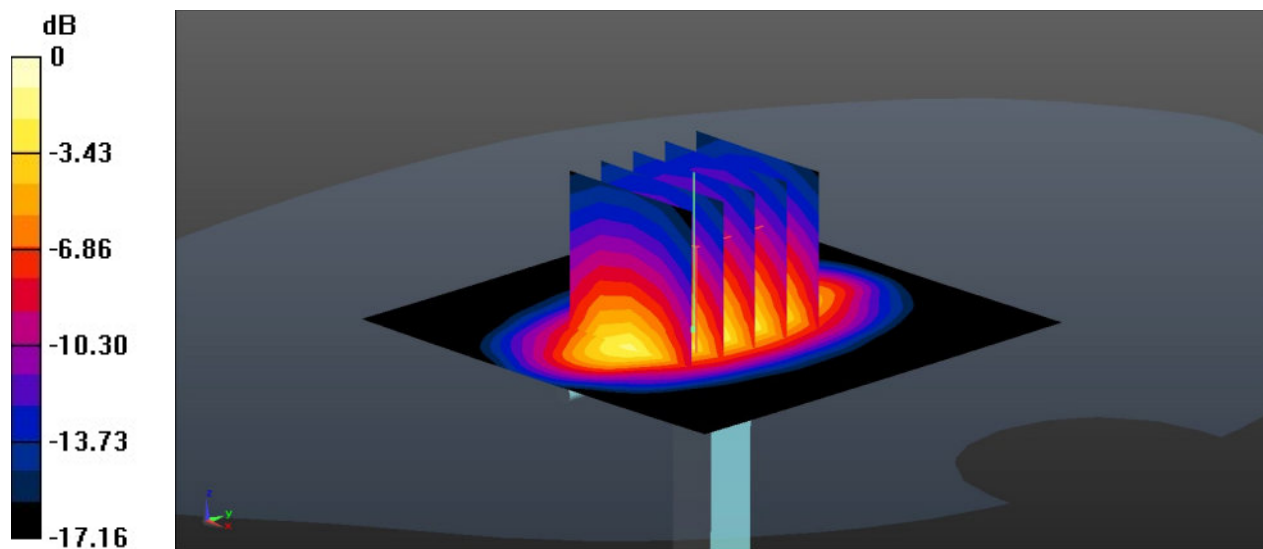

System Check_Head_1900MHz**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 39.391$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.41, 7.41, 7.41); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2019.11.20
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.3 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 82.23 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 9.27 W/kg; SAR(10 g) = 4.76 W/kg

Maximum value of SAR (measured) = 13.5 W/kg

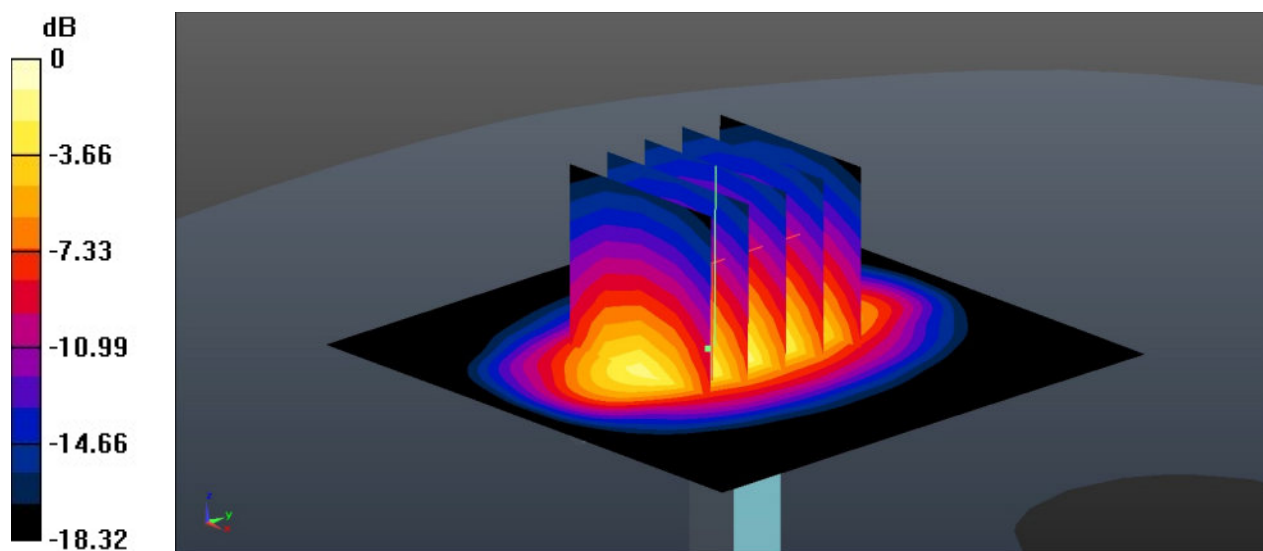

0 dB = 13.5 W/kg = 11.30 dBW/kg

System Check_Head_2450MHz**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 38.392$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.85, 6.85, 6.85); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2019.11.20
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 18.7 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.9 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.01 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

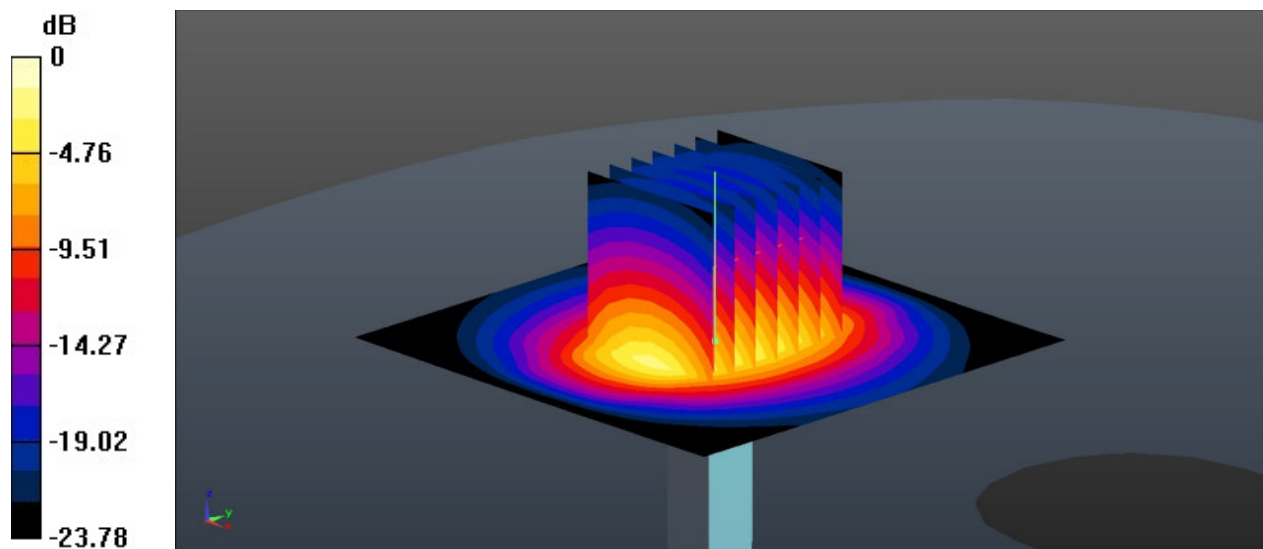

System Check_Head_2600MHz**DUT: D2600V2 - SN:1070**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.048$ S/m; $\epsilon_r = 37.773$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.76, 6.76, 6.76); Calibrated: 2020.9.23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2019.11.20
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 25.0 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.4 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 15 W/kg; SAR(10 g) = 6.79 W/kg

Maximum value of SAR (measured) = 25.5 W/kg

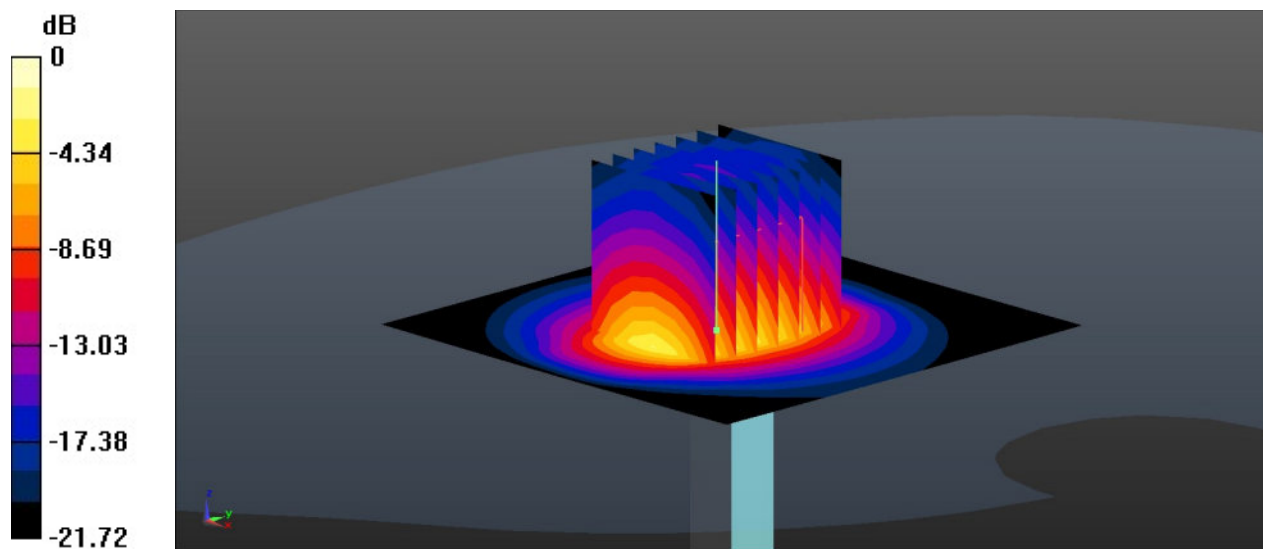

0 dB = 25.5 W/kg = 14.07 dBW/kg