




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

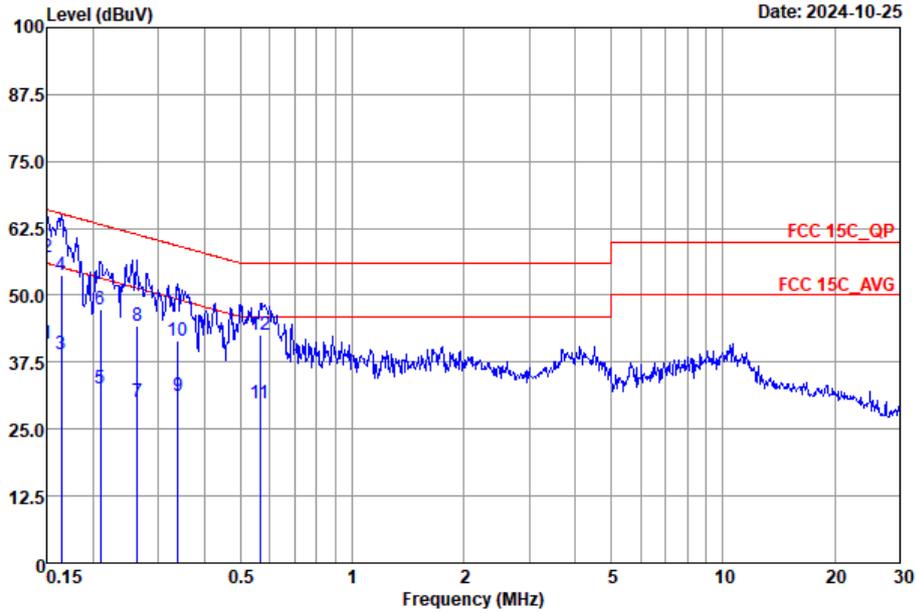


Site : CO02-SZ
 Condition : FCC 15C_QP LISN_2024-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	41.00	-15.00	56.00	20.70	10.14	10.16	Average
2 *	0.15	57.20	-8.80	66.00	36.90	10.14	10.16	QP
3	0.16	38.97	-16.28	55.25	18.70	10.11	10.16	Average
4	0.16	53.77	-11.48	65.25	33.50	10.11	10.16	QP
5	0.21	32.71	-20.52	53.23	12.49	10.06	10.16	Average
6	0.21	47.31	-15.92	63.23	27.09	10.06	10.16	QP
7	0.26	29.98	-21.36	51.34	9.80	10.03	10.15	Average
8	0.26	44.28	-17.06	61.34	24.10	10.03	10.15	QP
9	0.34	31.07	-18.15	49.22	10.90	10.01	10.16	Average
10	0.34	41.37	-17.85	59.22	21.20	10.01	10.16	QP
11	0.56	29.89	-16.11	46.00	9.70	9.98	10.21	Average
12	0.56	42.49	-13.51	56.00	22.30	9.98	10.21	QP



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

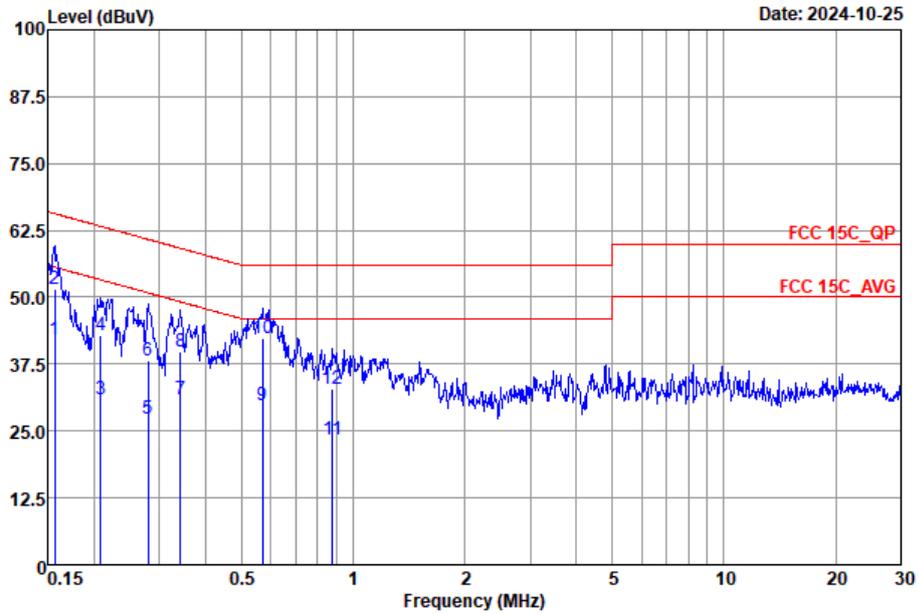

Site : CO02-SZ
 Condition : FCC 15C_QP LISN_2024-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	42.17	-13.48	55.65	21.90	10.11	10.16	Average
2	0.16	51.47	-14.18	65.65	31.20	10.11	10.16	QP
3	0.21	30.89	-22.38	53.27	10.70	10.03	10.16	Average
4	0.21	42.89	-20.38	63.27	22.70	10.03	10.16	QP
5	0.28	27.35	-23.46	50.81	7.20	10.00	10.15	Average
6	0.28	38.15	-22.66	60.81	18.00	10.00	10.15	QP
7	0.34	30.94	-18.19	49.13	10.80	9.98	10.16	Average
8	0.34	39.74	-19.39	59.13	19.60	9.98	10.16	QP
9	0.57	29.88	-16.12	46.00	9.71	9.96	10.21	Average
10 *	0.57	42.28	-13.72	56.00	22.11	9.96	10.21	QP
11	0.88	23.49	-22.51	46.00	3.30	9.96	10.23	Average
12	0.88	32.89	-23.11	56.00	12.70	9.96	10.23	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24-25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	17	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	17	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	17	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	17	Bluetooth-LE_GSKF	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	17	Bluetooth-LE_GSKF	38	2478	2Mbps	-	-
Mode 6	2400-2483.5	17	Bluetooth-LE_GSKF-LF	38	2478	2Mbps	-	LF
Mode 7	CO-TX	17	Bluetooth-LE_GSKF	38	2478	2Mbps	-	-
		6	LTE Band 48	-	-	-	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	00	2389.21	39.37	54.00	-14.63	V	AVERAGE	Pass	Band Edge
1	Bluetooth-LE_GSKF	00	4804.00	43.33	74.00	-30.67	H	Peak	Pass	Harmonic
2	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
		19	7320.00	44.51	74.00	-29.49	V	Peak	Pass	Harmonic
3	Bluetooth-LE_GSKF	39	2483.86	43.21	54.00	-10.79	H	AVERAGE	Pass	Band Edge
		39	7440.00	44.07	74.00	-29.93	V	Peak	Pass	Harmonic
4	Bluetooth-LE_GSKF	01	2387.55	41.83	54.00	-12.17	H	AVERAGE	Pass	Band Edge
		01	4808.00	43.70	74.00	-30.30	H	Peak	Pass	Harmonic
5	Bluetooth-LE_GSKF	38	2484.67	63.24	74.00	-10.76	H	PEAK	Pass	Band Edge
		38	7434.00	44.37	74.00	-29.63	V	Peak	Pass	Harmonic
6	Bluetooth-LE_GSKF-LF	38	854.5	30.52	46	-15.48	V	Peak	Pass	LF
7	CO-TX	-	2493.58	42.56	54.00	-11.44	V	AVERAGE	Pass	Band Edge
		-	7434.00	42.97	74.00	-31.03	V	Peak	Pass	Harmonic



Mode	1																																																																											
	Band Edge																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																											
ANT	17																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2375.14</td> <td>49.85</td> <td>74.00</td> <td>-24.15</td> <td>48.01</td> <td>30.64</td> <td>4.78</td> <td>33.58</td> <td>400</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2375.14	49.85	74.00	-24.15	48.01	30.64	4.78	33.58	400	360	PEAK	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>106.18</td> <td>-----</td> <td>-----</td> <td>104.31</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>400</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	106.18	-----	-----	104.31	30.62	4.81	33.56	400	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2375.14	49.85	74.00	-24.15	48.01	30.64	4.78	33.58	400	360	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2402.00	106.18	-----	-----	104.31	30.62	4.81	33.56	400	360	PEAK																																																																	
Avg	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.57</td> <td>39.36</td> <td>54.00</td> <td>-14.64</td> <td>37.53</td> <td>30.61</td> <td>4.79</td> <td>33.57</td> <td>400</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2388.57	39.36	54.00	-14.64	37.53	30.61	4.79	33.57	400	360	AVERAGE	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>104.93</td> <td>-----</td> <td>-----</td> <td>103.06</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>400</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	104.93	-----	-----	103.06	30.62	4.81	33.56	400	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2388.57	39.36	54.00	-14.64	37.53	30.61	4.79	33.57	400	360	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2402.00	104.93	-----	-----	103.06	30.62	4.81	33.56	400	360	AVERAGE																																																																	

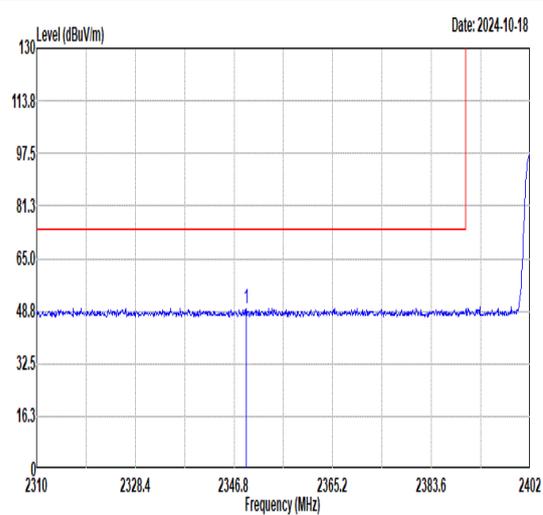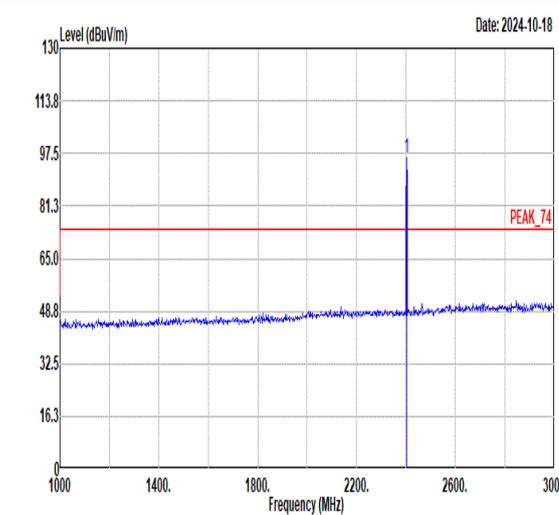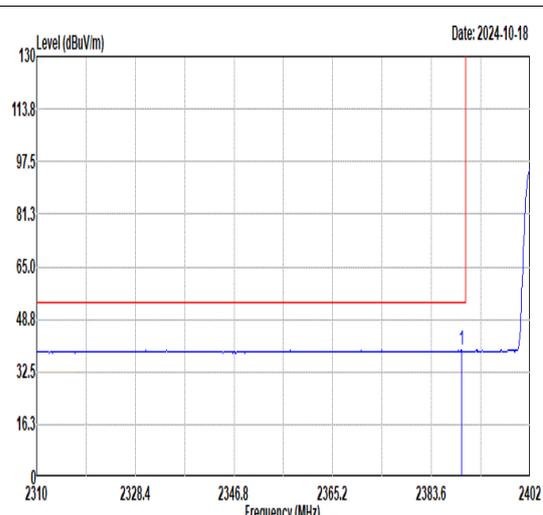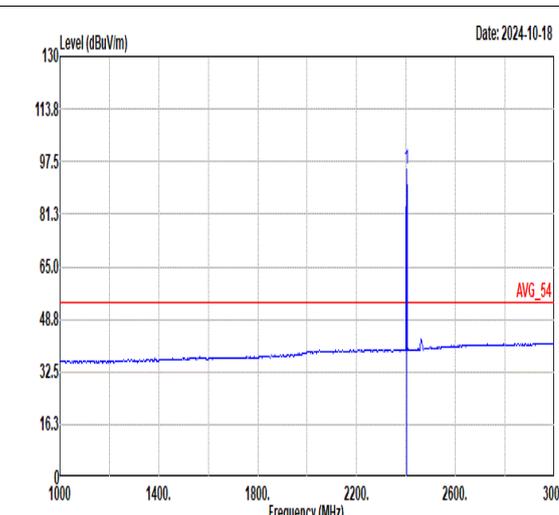

Mode	1																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																									
ANT	17																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2349.10</td> <td>49.75</td> <td>74.00</td> <td>-24.25</td> <td>47.90</td> <td>30.69</td> <td>4.75</td> <td>33.59</td> <td>400</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2349.10	49.75	74.00	-24.25	47.90	30.69	4.75	33.59	400	29	PEAK	 <p>Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.35</td> <td>-----</td> <td>-----</td> <td>94.48</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>400</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2402.00	96.35	-----	-----	94.48	30.62	4.81	33.56	400	29	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2349.10	49.75	74.00	-24.25	47.90	30.69	4.75	33.59	400	29	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2402.00	96.35	-----	-----	94.48	30.62	4.81	33.56	400	29	PEAK																																																															
Avg	 <p>Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.21</td> <td>39.37</td> <td>54.00</td> <td>-14.63</td> <td>37.54</td> <td>30.61</td> <td>4.79</td> <td>33.57</td> <td>400</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.21	39.37	54.00	-14.63	37.54	30.61	4.79	33.57	400	29	AVERAGE	 <p>Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>95.08</td> <td>-----</td> <td>-----</td> <td>93.21</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>400</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2402.00	95.08	-----	-----	93.21	30.62	4.81	33.56	400	29	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2389.21	39.37	54.00	-14.63	37.54	30.61	4.79	33.57	400	29	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2402.00	95.08	-----	-----	93.21	30.62	4.81	33.56	400	29	AVERAGE																																																															



Mode	1																																																																														
	Harmonic																																																																														
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																														
ANT	17																																																																														
Pol.	Horizontal	Horizontal																																																																													
Peak Avg																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>43.33</td> <td>74.00</td> <td>-30.67</td> <td>66.58</td> <td>34.23</td> <td>7.74</td> <td>65.22</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	43.33	74.00	-30.67	66.58	34.23	7.74	65.22	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>43.33</td> <td>74.00</td> <td>-30.67</td> <td>66.58</td> <td>34.23</td> <td>7.74</td> <td>65.22</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	43.33	74.00	-30.67	66.58	34.23	7.74	65.22	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	4804.00	43.33	74.00	-30.67	66.58	34.23	7.74	65.22	--	Peak																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	4804.00	43.33	74.00	-30.67	66.58	34.23	7.74	65.22	--	Peak																																																																					



Mode	2																																																																																																
	Harmonic																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																
ANT	17																																																																																																
Pol.	Horizontal	Horizontal																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>41.19</td> <td>74.00</td> <td>-32.81</td> <td>64.33</td> <td>34.34</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>43.39</td> <td>74.00</td> <td>-30.61</td> <td>63.63</td> <td>35.44</td> <td>8.96</td> <td>64.64</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	4880.00	41.19	74.00	-32.81	64.33	34.34	7.77	65.25	--	--	Peak	2	7320.00	43.39	74.00	-30.61	63.63	35.44	8.96	64.64	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>41.19</td> <td>74.00</td> <td>-32.81</td> <td>64.33</td> <td>34.34</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>43.39</td> <td>74.00</td> <td>-30.61</td> <td>63.63</td> <td>35.44</td> <td>8.96</td> <td>64.64</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	4880.00	41.19	74.00	-32.81	64.33	34.34	7.77	65.25	--	--	Peak	2	7320.00	43.39	74.00	-30.61	63.63	35.44	8.96	64.64	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	4880.00	41.19	74.00	-32.81	64.33	34.34	7.77	65.25	--	--	Peak																																																																																						
2	7320.00	43.39	74.00	-30.61	63.63	35.44	8.96	64.64	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	4880.00	41.19	74.00	-32.81	64.33	34.34	7.77	65.25	--	--	Peak																																																																																						
2	7320.00	43.39	74.00	-30.61	63.63	35.44	8.96	64.64	--	--	Peak																																																																																						



Mode	3																																																																					
	Band Edge																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																					
ANT	17																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2483.38</td> <td>50.25</td> <td>74.00</td> <td>-23.75</td> <td>47.99</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>300</td> <td>37 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2483.38	50.25	74.00	-23.75	47.99	30.85	4.92	33.51	300	37 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>102.11</td> <td>-----</td> <td>-----</td> <td>99.86</td> <td>30.84</td> <td>4.92</td> <td>33.51</td> <td>300</td> <td>37 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2480.00	102.11	-----	-----	99.86	30.84	4.92	33.51	300	37 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 2483.38	50.25	74.00	-23.75	47.99	30.85	4.92	33.51	300	37 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 2480.00	102.11	-----	-----	99.86	30.84	4.92	33.51	300	37 PEAK																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2483.86</td> <td>43.21</td> <td>54.00</td> <td>-10.79</td> <td>40.95</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>300</td> <td>37 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2483.86	43.21	54.00	-10.79	40.95	30.85	4.92	33.51	300	37 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>100.75</td> <td>-----</td> <td>-----</td> <td>98.50</td> <td>30.84</td> <td>4.92</td> <td>33.51</td> <td>300</td> <td>37 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2480.00	100.75	-----	-----	98.50	30.84	4.92	33.51	300	37 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 2483.86	43.21	54.00	-10.79	40.95	30.85	4.92	33.51	300	37 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 2480.00	100.75	-----	-----	98.50	30.84	4.92	33.51	300	37 AVERAGE																																																													



Mode	3																																																																					
	Band Edge																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																					
ANT	17																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2485.08</td> <td>51.81</td> <td>74.00</td> <td>-22.19</td> <td>49.54</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>400</td> <td>269 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2485.08	51.81	74.00	-22.19	49.54	30.86	4.92	33.51	400	269 PEAK	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>104.86</td> <td>-----</td> <td>-----</td> <td>102.61</td> <td>30.84</td> <td>4.92</td> <td>33.51</td> <td>400</td> <td>269 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2480.00	104.86	-----	-----	102.61	30.84	4.92	33.51	400	269 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 2485.08	51.81	74.00	-22.19	49.54	30.86	4.92	33.51	400	269 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 2480.00	104.86	-----	-----	102.61	30.84	4.92	33.51	400	269 PEAK																																																													
Avg	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2483.74</td> <td>40.99</td> <td>54.00</td> <td>-13.01</td> <td>38.73</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>400</td> <td>269 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2483.74	40.99	54.00	-13.01	38.73	30.85	4.92	33.51	400	269 AVERAGE	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>103.30</td> <td>-----</td> <td>-----</td> <td>101.05</td> <td>30.84</td> <td>4.92</td> <td>33.51</td> <td>400</td> <td>269 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2480.00	103.30	-----	-----	101.05	30.84	4.92	33.51	400	269 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 2483.74	40.99	54.00	-13.01	38.73	30.85	4.92	33.51	400	269 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 2480.00	103.30	-----	-----	101.05	30.84	4.92	33.51	400	269 AVERAGE																																																													



Mode	3																																																																																																								
	Harmonic																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																								
ANT	17																																																																																																								
Pol.	Horizontal	Horizontal																																																																																																							
Peak Avg																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.53</td> <td>74.00</td> <td>-33.47</td> <td>63.56</td> <td>34.45</td> <td>7.81</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>43.23</td> <td>74.00</td> <td>-30.77</td> <td>63.17</td> <td>35.41</td> <td>9.19</td> <td>64.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.53	74.00	-33.47	63.56	34.45	7.81	65.29	--	--	Peak	2	7440.00	43.23	74.00	-30.77	63.17	35.41	9.19	64.54	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.53</td> <td>74.00</td> <td>-33.47</td> <td>63.56</td> <td>34.45</td> <td>7.81</td> <td>65.29</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>43.23</td> <td>74.00</td> <td>-30.77</td> <td>63.17</td> <td>35.41</td> <td>9.19</td> <td>64.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.53	74.00	-33.47	63.56	34.45	7.81	65.29	--	--	Peak	2	7440.00	43.23	74.00	-30.77	63.17	35.41	9.19	64.54	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	4960.00	40.53	74.00	-33.47	63.56	34.45	7.81	65.29	--	--	Peak																																																																																														
2	7440.00	43.23	74.00	-30.77	63.17	35.41	9.19	64.54	--	--	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	4960.00	40.53	74.00	-33.47	63.56	34.45	7.81	65.29	--	--	Peak																																																																																														
2	7440.00	43.23	74.00	-30.77	63.17	35.41	9.19	64.54	--	--	Peak																																																																																														



Mode	4																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																									
ANT	17																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2380.97</td> <td>50.58</td> <td>74.00</td> <td>-23.42</td> <td>48.73</td> <td>30.63</td> <td>4.79</td> <td>33.57</td> <td>400</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2380.97	50.58	74.00	-23.42	48.73	30.63	4.79	33.57	400	169	PEAK	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>103.03</td> <td>-----</td> <td>-----</td> <td>101.16</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>400</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2404.00	103.03	-----	-----	101.16	30.62	4.81	33.56	400	169	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2380.97	50.58	74.00	-23.42	48.73	30.63	4.79	33.57	400	169	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2404.00	103.03	-----	-----	101.16	30.62	4.81	33.56	400	169	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.55</td> <td>41.83</td> <td>54.00</td> <td>-12.17</td> <td>40.00</td> <td>30.61</td> <td>4.79</td> <td>33.57</td> <td>400</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2387.55	41.83	54.00	-12.17	40.00	30.61	4.79	33.57	400	169	AVERAGE	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>100.97</td> <td>-----</td> <td>-----</td> <td>99.10</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>400</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2404.00	100.97	-----	-----	99.10	30.62	4.81	33.56	400	169	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2387.55	41.83	54.00	-12.17	40.00	30.61	4.79	33.57	400	169	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2404.00	100.97	-----	-----	99.10	30.62	4.81	33.56	400	169	AVERAGE																																																															







Mode	4																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																									
ANT	17																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2351.55</td> <td>49.81</td> <td>74.00</td> <td>-24.19</td> <td>47.96</td> <td>30.68</td> <td>4.76</td> <td>33.59</td> <td>282</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2351.55	49.81	74.00	-24.19	47.96	30.68	4.76	33.59	282	0	PEAK	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>92.66</td> <td>-----</td> <td>-----</td> <td>90.79</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>282</td> <td>0</td> <td>PEAK_74</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2404.00	92.66	-----	-----	90.79	30.62	4.81	33.56	282	0	PEAK_74
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2351.55	49.81	74.00	-24.19	47.96	30.68	4.76	33.59	282	0	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2404.00	92.66	-----	-----	90.79	30.62	4.81	33.56	282	0	PEAK_74																																																															
Avg	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2315.92</td> <td>41.57</td> <td>54.00</td> <td>-12.43</td> <td>39.71</td> <td>30.75</td> <td>4.72</td> <td>33.61</td> <td>282</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2315.92	41.57	54.00	-12.43	39.71	30.75	4.72	33.61	282	0	AVERAGE	<p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>83.18</td> <td>-----</td> <td>-----</td> <td>81.31</td> <td>30.62</td> <td>4.81</td> <td>33.56</td> <td>282</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2404.00	83.18	-----	-----	81.31	30.62	4.81	33.56	282	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2315.92	41.57	54.00	-12.43	39.71	30.75	4.72	33.61	282	0	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2404.00	83.18	-----	-----	81.31	30.62	4.81	33.56	282	0	AVERAGE																																																															



Mode	4																																																																				
	Harmonic																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																				
ANT	17																																																																				
Pol.	Horizontal	Horizontal																																																																			
Peak Avg	<p>Date: 2024-10-19</p>	<p>Date: 2024-10-19</p>																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4808.00</td> <td>43.70</td> <td>74.00</td> <td>-30.30</td> <td>66.95</td> <td>34.23</td> <td>7.74</td> <td>65.22</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 4808.00	43.70	74.00	-30.30	66.95	34.23	7.74	65.22	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4808.00</td> <td>43.70</td> <td>74.00</td> <td>-30.30</td> <td>66.95</td> <td>34.23</td> <td>7.74</td> <td>65.22</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 4808.00	43.70	74.00	-30.30	66.95	34.23	7.74	65.22
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																													
1 4808.00	43.70	74.00	-30.30	66.95	34.23	7.74	65.22	-- -- Peak																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																													
1 4808.00	43.70	74.00	-30.30	66.95	34.23	7.74	65.22	-- -- Peak																																																													

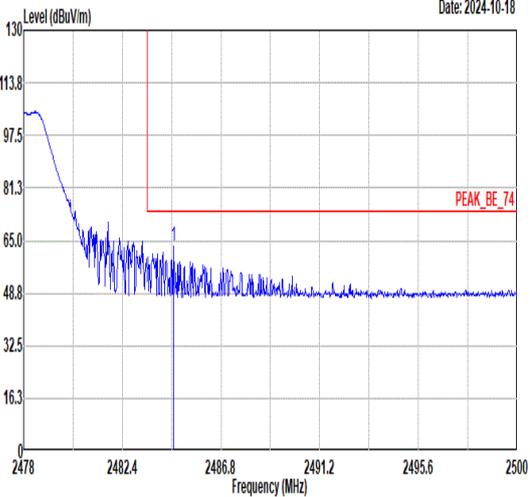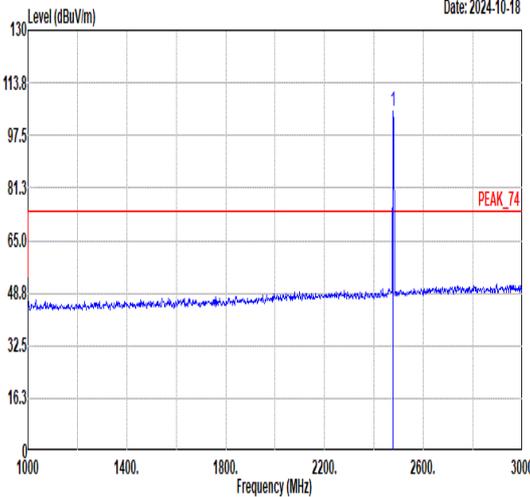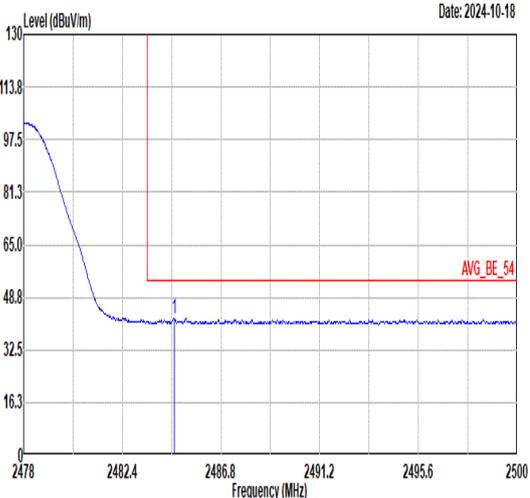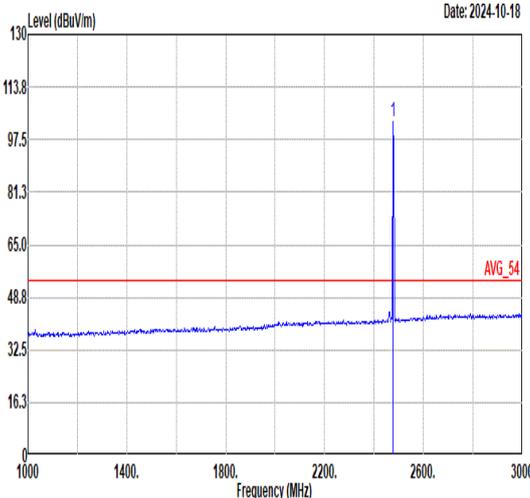

Mode	5																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																									
ANT	17																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.67</td> <td>63.24</td> <td>74.00</td> <td>-10.76</td> <td>60.97</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>300</td> <td>320</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.67	63.24	74.00	-10.76	60.97	30.86	4.92	33.51	300	320	PEAK	 <p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>104.76</td> <td>-----</td> <td>-----</td> <td>102.54</td> <td>30.83</td> <td>4.91</td> <td>33.52</td> <td>300</td> <td>320</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2478.00	104.76	-----	-----	102.54	30.83	4.91	33.52	300	320	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2484.67	63.24	74.00	-10.76	60.97	30.86	4.92	33.51	300	320	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2478.00	104.76	-----	-----	102.54	30.83	4.91	33.52	300	320	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.71</td> <td>42.27</td> <td>54.00</td> <td>-11.73</td> <td>40.00</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>300</td> <td>320</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.71	42.27	54.00	-11.73	40.00	30.86	4.92	33.51	300	320	AVERAGE	 <p style="text-align: right;">Date: 2024-10-18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>102.99</td> <td>-----</td> <td>-----</td> <td>100.77</td> <td>30.83</td> <td>4.91</td> <td>33.52</td> <td>300</td> <td>320</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2478.00	102.99	-----	-----	100.77	30.83	4.91	33.52	300	320	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2484.71	42.27	54.00	-11.73	40.00	30.86	4.92	33.51	300	320	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2478.00	102.99	-----	-----	100.77	30.83	4.91	33.52	300	320	AVERAGE																																																															



Mode	5																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																	
ANT	17																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2493.69</td> <td>50.12</td> <td>74.00</td> <td>-23.88</td> <td>47.81</td> <td>30.89</td> <td>4.93</td> <td>33.51</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200</td> <td>306 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2493.69	50.12	74.00	-23.88	47.81	30.89	4.93	33.51							200	306 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2478.00</td> <td>100.62</td> <td>74.00</td> <td>26.62</td> <td>98.40</td> <td>30.83</td> <td>4.91</td> <td>33.52</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200</td> <td>306 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2478.00	100.62	74.00	26.62	98.40	30.83	4.91	33.52							200	306 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 2493.69	50.12	74.00	-23.88	47.81	30.89	4.93	33.51																																																																											
						200	306 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 2478.00	100.62	74.00	26.62	98.40	30.83	4.91	33.52																																																																											
						200	306 PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2499.56</td> <td>41.80</td> <td>54.00</td> <td>-12.20</td> <td>39.44</td> <td>30.92</td> <td>4.94</td> <td>33.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200</td> <td>306 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2499.56	41.80	54.00	-12.20	39.44	30.92	4.94	33.50							200	306 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 2478.00</td> <td>99.12</td> <td>54.00</td> <td>45.12</td> <td>96.90</td> <td>30.83</td> <td>4.91</td> <td>33.52</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>200</td> <td>306 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 2478.00	99.12	54.00	45.12	96.90	30.83	4.91	33.52							200	306 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 2499.56	41.80	54.00	-12.20	39.44	30.92	4.94	33.50																																																																											
						200	306 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 2478.00	99.12	54.00	45.12	96.90	30.83	4.91	33.52																																																																											
						200	306 AVERAGE																																																																											



Mode	5																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																															
ANT	17																																																																																															
Pol.	Horizontal	Horizontal																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>40.35</td> <td>74.00</td> <td>-33.65</td> <td>63.39</td> <td>34.44</td> <td>7.80</td> <td>65.28</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>42.55</td> <td>74.00</td> <td>-31.45</td> <td>62.50</td> <td>35.41</td> <td>9.19</td> <td>64.55</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4956.00	40.35	74.00	-33.65	63.39	34.44	7.80	65.28	--	--	Peak	2	7434.00	42.55	74.00	-31.45	62.50	35.41	9.19	64.55	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>40.35</td> <td>74.00</td> <td>-33.65</td> <td>63.39</td> <td>34.44</td> <td>7.80</td> <td>65.28</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>42.55</td> <td>74.00</td> <td>-31.45</td> <td>62.50</td> <td>35.41</td> <td>9.19</td> <td>64.55</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4956.00	40.35	74.00	-33.65	63.39	34.44	7.80	65.28	--	--	Peak	2	7434.00	42.55	74.00	-31.45	62.50	35.41	9.19	64.55	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4956.00	40.35	74.00	-33.65	63.39	34.44	7.80	65.28	--	--	Peak																																																																																					
2	7434.00	42.55	74.00	-31.45	62.50	35.41	9.19	64.55	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	4956.00	40.35	74.00	-33.65	63.39	34.44	7.80	65.28	--	--	Peak																																																																																					
2	7434.00	42.55	74.00	-31.45	62.50	35.41	9.19	64.55	--	--	Peak																																																																																					



Mode	6																																																																																																																																																																																																	
	LF																																																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF-LF_CH38_2478MHz																																																																																																																																																																																																	
ANT	17																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
QP/ Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>56.19</td><td>20.60</td><td>40.00</td><td>-19.40</td><td>35.48</td><td>19.26</td><td>0.76</td><td>34.90</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>118.27</td><td>21.38</td><td>43.50</td><td>-22.12</td><td>38.60</td><td>16.39</td><td>1.15</td><td>34.76</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>196.84</td><td>22.47</td><td>43.50</td><td>-21.03</td><td>39.53</td><td>16.17</td><td>1.47</td><td>34.70</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>345.25</td><td>27.63</td><td>46.00</td><td>-18.37</td><td>40.19</td><td>20.11</td><td>1.93</td><td>34.60</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>580.96</td><td>25.51</td><td>46.00</td><td>-20.49</td><td>32.15</td><td>25.36</td><td>2.56</td><td>34.56</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>848.68</td><td>29.95</td><td>46.00</td><td>-16.05</td><td>32.37</td><td>28.78</td><td>3.10</td><td>34.30</td><td>--</td><td>Peak</td></tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	56.19	20.60	40.00	-19.40	35.48	19.26	0.76	34.90	--	Peak	2	118.27	21.38	43.50	-22.12	38.60	16.39	1.15	34.76	--	Peak	3	196.84	22.47	43.50	-21.03	39.53	16.17	1.47	34.70	--	Peak	4	345.25	27.63	46.00	-18.37	40.19	20.11	1.93	34.60	--	Peak	5	580.96	25.51	46.00	-20.49	32.15	25.36	2.56	34.56	--	Peak	6	848.68	29.95	46.00	-16.05	32.37	28.78	3.10	34.30	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>33.88</td><td>24.08</td><td>40.00</td><td>-15.92</td><td>39.92</td><td>18.46</td><td>0.57</td><td>34.87</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>141.55</td><td>25.36</td><td>43.50</td><td>-18.14</td><td>40.56</td><td>18.27</td><td>1.25</td><td>34.72</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>197.81</td><td>23.50</td><td>43.50</td><td>-20.00</td><td>40.62</td><td>16.11</td><td>1.47</td><td>34.70</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>367.56</td><td>23.32</td><td>46.00</td><td>-22.68</td><td>35.25</td><td>20.64</td><td>2.00</td><td>34.57</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>467.47</td><td>26.65</td><td>46.00</td><td>-19.35</td><td>35.91</td><td>22.96</td><td>2.28</td><td>34.50</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>854.50</td><td>30.52</td><td>46.00</td><td>-15.48</td><td>32.94</td><td>28.78</td><td>3.10</td><td>34.30</td><td>--</td><td>Peak</td></tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	33.88	24.08	40.00	-15.92	39.92	18.46	0.57	34.87	--	Peak	2	141.55	25.36	43.50	-18.14	40.56	18.27	1.25	34.72	--	Peak	3	197.81	23.50	43.50	-20.00	40.62	16.11	1.47	34.70	--	Peak	4	367.56	23.32	46.00	-22.68	35.25	20.64	2.00	34.57	--	Peak	5	467.47	26.65	46.00	-19.35	35.91	22.96	2.28	34.50	--	Peak	6	854.50	30.52	46.00	-15.48	32.94	28.78	3.10	34.30	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																									
1	56.19	20.60	40.00	-19.40	35.48	19.26	0.76	34.90	--	Peak																																																																																																																																																																																								
2	118.27	21.38	43.50	-22.12	38.60	16.39	1.15	34.76	--	Peak																																																																																																																																																																																								
3	196.84	22.47	43.50	-21.03	39.53	16.17	1.47	34.70	--	Peak																																																																																																																																																																																								
4	345.25	27.63	46.00	-18.37	40.19	20.11	1.93	34.60	--	Peak																																																																																																																																																																																								
5	580.96	25.51	46.00	-20.49	32.15	25.36	2.56	34.56	--	Peak																																																																																																																																																																																								
6	848.68	29.95	46.00	-16.05	32.37	28.78	3.10	34.30	--	Peak																																																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																									
1	33.88	24.08	40.00	-15.92	39.92	18.46	0.57	34.87	--	Peak																																																																																																																																																																																								
2	141.55	25.36	43.50	-18.14	40.56	18.27	1.25	34.72	--	Peak																																																																																																																																																																																								
3	197.81	23.50	43.50	-20.00	40.62	16.11	1.47	34.70	--	Peak																																																																																																																																																																																								
4	367.56	23.32	46.00	-22.68	35.25	20.64	2.00	34.57	--	Peak																																																																																																																																																																																								
5	467.47	26.65	46.00	-19.35	35.91	22.96	2.28	34.50	--	Peak																																																																																																																																																																																								
6	854.50	30.52	46.00	-15.48	32.94	28.78	3.10	34.30	--	Peak																																																																																																																																																																																								



Mode	7																																																																									
	Band Edge																																																																									
	CO-TX																																																																									
ANT	CDD 17+7																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.11</td> <td>50.73</td> <td>74.00</td> <td>-23.27</td> <td>48.46</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>300</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2485.11	50.73	74.00	-23.27	48.46	30.86	4.92	33.51	300	202	PEAK	<p style="text-align: right;">Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>105.82</td> <td>-----</td> <td>-----</td> <td>103.60</td> <td>30.83</td> <td>4.91</td> <td>33.52</td> <td>300</td> <td>202</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2478.00	105.82	-----	-----	103.60	30.83	4.91	33.52	300	202	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2485.11	50.73	74.00	-23.27	48.46	30.86	4.92	33.51	300	202	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2478.00	105.82	-----	-----	103.60	30.83	4.91	33.52	300	202	Peak																																																															
Avg	<p style="text-align: right;">Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.35</td> <td>42.18</td> <td>54.00</td> <td>-11.82</td> <td>39.83</td> <td>30.91</td> <td>4.94</td> <td>33.50</td> <td>300</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2498.35	42.18	54.00	-11.82	39.83	30.91	4.94	33.50	300	202	AVERAGE	<p style="text-align: right;">Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>103.90</td> <td>-----</td> <td>-----</td> <td>101.68</td> <td>30.83</td> <td>4.91</td> <td>33.52</td> <td>300</td> <td>202</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2478.00	103.90	-----	-----	101.68	30.83	4.91	33.52	300	202	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2498.35	42.18	54.00	-11.82	39.83	30.91	4.94	33.50	300	202	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2478.00	103.90	-----	-----	101.68	30.83	4.91	33.52	300	202	Peak																																																															



Mode	7																																																																									
	Band Edge																																																																									
	CO-TX																																																																									
ANT	CDD 17+7																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.63</td> <td>60.42</td> <td>74.00</td> <td>-13.58</td> <td>58.16</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>121</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.63	60.42	74.00	-13.58	58.16	30.85	4.92	33.51	121	0	PEAK	<p style="text-align: right;">Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>90.36</td> <td>-----</td> <td>-----</td> <td>88.14</td> <td>30.83</td> <td>4.91</td> <td>33.52</td> <td>121</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2478.00	90.36	-----	-----	88.14	30.83	4.91	33.52	121	0	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2483.63	60.42	74.00	-13.58	58.16	30.85	4.92	33.51	121	0	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2478.00	90.36	-----	-----	88.14	30.83	4.91	33.52	121	0	Peak																																																															
Avg	<p style="text-align: right;">Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2493.58</td> <td>42.56</td> <td>54.00</td> <td>-11.44</td> <td>40.25</td> <td>30.89</td> <td>4.93</td> <td>33.51</td> <td>121</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2493.58	42.56	54.00	-11.44	40.25	30.89	4.93	33.51	121	0	AVERAGE	<p style="text-align: right;">Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>88.27</td> <td>-----</td> <td>-----</td> <td>86.05</td> <td>30.83</td> <td>4.91</td> <td>33.52</td> <td>121</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2478.00	88.27	-----	-----	86.05	30.83	4.91	33.52	121	0	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2493.58	42.56	54.00	-11.44	40.25	30.89	4.93	33.51	121	0	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2478.00	88.27	-----	-----	86.05	30.83	4.91	33.52	121	0	Peak																																																															



Mode	7																																																																																													
	Harmonic																																																																																													
	CO-TX																																																																																													
ANT	17																																																																																													
Pol.	Horizontal	Vertical																																																																																												
Peak Avg	<p>Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>41.00</td> <td>74.00</td> <td>-33.00</td> <td>64.04</td> <td>34.44</td> <td>7.80</td> <td>65.28</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>42.38</td> <td>74.00</td> <td>-31.62</td> <td>62.33</td> <td>35.41</td> <td>9.19</td> <td>64.55</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4956.00	41.00	74.00	-33.00	64.04	34.44	7.80	65.28	--	Peak	2	7434.00	42.38	74.00	-31.62	62.33	35.41	9.19	64.55	--	Peak	<p>Date: 2024-10-21</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>41.36</td> <td>74.00</td> <td>-32.64</td> <td>64.40</td> <td>34.44</td> <td>7.80</td> <td>65.28</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>42.97</td> <td>74.00</td> <td>-31.03</td> <td>62.92</td> <td>35.41</td> <td>9.19</td> <td>64.55</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4956.00	41.36	74.00	-32.64	64.40	34.44	7.80	65.28	--	Peak	2	7434.00	42.97	74.00	-31.03	62.92	35.41	9.19	64.55	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																							
1	4956.00	41.00	74.00	-33.00	64.04	34.44	7.80	65.28	--	Peak																																																																																				
2	7434.00	42.38	74.00	-31.62	62.33	35.41	9.19	64.55	--	Peak																																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																							
1	4956.00	41.36	74.00	-32.64	64.40	34.44	7.80	65.28	--	Peak																																																																																				
2	7434.00	42.97	74.00	-31.03	62.92	35.41	9.19	64.55	--	Peak																																																																																				


Remark: In co-location mode, the signals exceeding the limit are all the fundamental frequency which can be ignored



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	61.90	0.39	2.564	3KHz
Bluetooth LE 2Mbps	33.33	0.21	4.762	10KHZ

Bluetooth LE 1Mbps

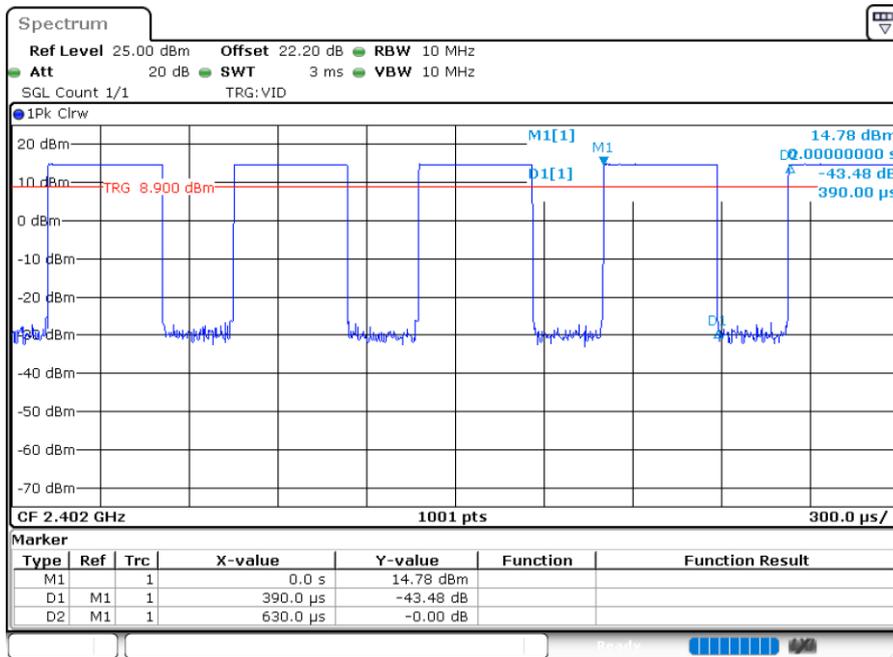



Bluetooth LE 2Mbps

