

FCC SAR Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : 24129PN74G
FCC ID : 2AFZZPN74G
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied 6
4. Equipment Under Test (EUT) Information 7
4.1 General Information 7
4.2 General LTE SAR Test and Reporting Considerations 10
4.3 General 5G NR SAR Test and Reporting Considerations 13
5. Smart Transmit feature for RF Exposure compliance 16
6. Proximity Sensor Triggering Test 20
7. RF Exposure Limits 22
7.1 Uncontrolled Environment 22
7.2 Controlled Environment 22
8. Specific Absorption Rate (SAR) 23
8.1 Introduction 23
8.2 SAR Definition 23
9. System Description and Setup 24
9.1 E-Field Probe 25
9.2 Data Acquisition Electronics (DAE) 25
9.3 Phantom 26
9.4 Device Holder 27
10. Measurement Procedures 28
10.1 Spatial Peak SAR Evaluation 28
10.2 Power Reference Measurement 29
10.3 Area Scan 29
10.4 Zoom Scan 30
10.5 Volume Scan Procedures 30
10.6 Power Drift Monitoring 30
11. Test Equipment List 31
12. System Verification 32
12.1 Tissue Simulating Liquids 32
12.2 Tissue Verification 32
12.3 System Performance Check Results 34
13. RF Exposure Positions 36
13.1 Ear and handset reference point 36
13.2 Definition of the cheek position 37
13.3 Definition of the tilt position 38
13.4 Body Worn Accessory 39
13.5 Product Specific 10g SAR Exposure 40
13.6 Wireless Router 40
14. Conducted RF Output Power (Unit: dBm) 41
15. Antenna Location 57
16. SAR Test Results 58
16.1 Head SAR 61
16.2 Hotspot SAR 80
16.3 Body Worn Accessory SAR 96
16.4 Product specific 10g SAR 105
16.5 Repeated SAR Measurement 106
16.6 TDD 5GNR Linearity Data Analysis 107
17. Simultaneous Transmission Analysis 112
17.1 MIMO SAR Test condition and verification 113
17.2 Sub6 Antenna Groups 114
17.3 Head Exposure Conditions 115
17.4 Hotspot Exposure Conditions 116
17.5 Body-Worn Accessory Exposure Conditions 117
17.6 Product specific 10g SAR Exposure Conditions 118
17.7 SPLSR Evaluation and Analysis 119
17.8 Maximum Reported SAR and SAR Peak Locations 122
18. Uncertainty Assessment 126
19. References 127
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



- Appendix E. Conducted RF Output Power Table
- Appendix F. LTE Carrier Aggregation Conducted RF Output Power Table
- Appendix G. Power reduction mechanism verification
- Appendix H. Verify MIMO SAR analysis results

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA482619	Rev. 01	Initial issue of report.	Oct. 17, 2024



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, 24129PN74G**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.74	0.48	0.46	1.57
		GSM1900	0.87	0.66	0.32	
	WCDMA	WCDMA II	0.69	0.42	0.79	
		WCDMA IV	0.81	0.38	0.71	
		WCDMA V	0.97	0.83	0.53	
	LTE	LTE Band 2	0.74	0.43	0.71	
		LTE Band 4	0.75	1.02	0.82	
		LTE Band 5	0.77	0.98	0.49	
		LTE Band 7	0.98	1.08	0.91	
		LTE Band 12/17	0.70	0.72	0.35	
		LTE Band 13	0.77	1.09	0.48	
		LTE Band 25	0.85	0.31	0.39	
		LTE Band 26	0.65	0.92	0.51	
		LTE Band 66	0.97	0.96	0.76	
		LTE Band 38	1.05	0.89	0.55	
		LTE Band 41	1.09	0.99	0.47	
	LTE Band 42	1.09	0.49	0.71		
	LTE Band 48	1.09	0.42	0.45		
	5G NR	FR1 n2	0.82	0.35	0.79	
		FR1 n5	0.68	0.78	0.57	
		FR1 n7	0.97	0.87	0.97	
		FR1 n12	0.94	1.09	0.45	
		FR1 n25	0.88	0.28	0.57	
FR1 n26		0.83	0.82	0.59		
FR1 n66		1.01	1.00	0.69		
FR1 n38		1.09	0.68	0.84		
FR1 n41		1.04	0.61	0.99		
FR1 n48		0.86	0.45	0.91		
FR1 n77	1.08	0.62	1.06			
FR1 n78	1.08	0.56	1.04			
DTS	WLAN	2.4GHz WLAN	0.90	1.01	0.32	1.57
NII		5GHz WLAN	1.09	0.55	0.33	1.57
DSS	Bluetooth	2.4GHz Bluetooth	0.80	0.36	0.10	1.57

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
NII	WLAN	5GHz WLAN	2.46	2.46
Date of Testing:			2024/8/28~ 2024/10/16	

Remark:
 1. This device supports LTE B17 and B12. Since the supported frequency span for LTE B17 falls completely within the supports frequency span for LTE B12, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B12.



Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Table with 4 columns: Test Firm, Test Site Location, Sporton Site No., FCC Designation No., FCC Test Firm Registration No.

Table with 2 columns: Applicant, Company Name, Address

Table with 2 columns: Manufacturer, Company Name, Address



3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Xiaomi
Model Name	24129PN74G
FCC ID	2AFZZPN74G
IMEI Code	IMEI1: 864868070042580 IMEI2: 864868070042598
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n12: 699 MHz ~ 716 MHz 5G NR n25: 1850 MHz ~ 1915 MHz 5G NR n26: 814 MHz ~ 849 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n48: 3550 MHz ~ 3700 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN 6GHz U-NII-5: 5925 MHz ~ 6425 MHz WLAN 6GHz U-NII-6: 6425 MHz ~ 6525 MHz WLAN 6GHz U-NII-7: 6525 MHz ~ 6875 MHz WLAN 6GHz U-NII-8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz WPT: 111 kHz~144 kHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA/HSUPA DC-HSDPA HSPA+(16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM



	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax/be HE20/HE40/EHT20/EHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 5GHz 802.11be EHT20/EHT40/EHT80/EHT160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11be EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE NFC: ASK WPT: ASK
HW Version	1352000O3
SW Version	Xiaomi HyperOS 2.0
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
<ol style="list-style-type: none"> 1. This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5G NR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. 3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). WLAN6GHz has no hotspot function. 4. The 2.4GHz/5GHz/6GHz WLAN can transmit in SISO/MIMO antenna mode. 5. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 33. 6. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests. 7. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table. 8. 5G NR n41/n77/n78 supports HPUE mode, HPUE power and SAR testing performed separately. 9. 5G NR n41/n77/n78 HPUE with higher power. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR. 10. For 5G NR n41/n77/n78 HPUE, 5G NR n41/n77/n78 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands, using FTM to perform SAR with default 100% transmission. 11. For 5G NR, the simultaneous transmission analysis is used standalone SAR at total power level to show compliance. 12. 5G NR n7/n38/n41 supports UL MIMO mode. 13. Bluetooth BR/EDR supports Beamforming mode, and BLE don't supports Beamforming. 14. This device has NFC function and the NFC SAR report will be separately submitted. 15. RF exposure report for WPC (Wireless power charging) will be separately submitted. 16. SAR and Power density test report for WLAN 6GHz U-NII-5/6/7/8 will be separately submitted. About co-located SAR with WWAN/Bluetooth always chose higher SAR of WLAN5GHz U-NII-1/2A/2C/3 and WLAN 6GHz U-NII-5/6/7/8. 17. There are two samples. The difference between them is memory capacity: sample 1 with 12+256G capacity, Sample 2 with 12+512G capacity. According to the difference, sample 1 was chosen to perform full SAR testing. 18. This device supports 5G NR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately. 	



<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n66	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n38	TDD	30	10, 15, 20, 25, 30, 40
	n41	TDD	30	10, 15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100
	n77	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
SA	n2	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 35, 40, 50
	n12	FDD	15	5, 10, 15
	n25	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n26	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 25, 30, 35, 40, 45
	n38	TDD	30	10, 15, 20, 25, 30, 40
	n41	TDD	30	10, 15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100
	n48	TDD	30	10, 15, 20, 30, 40
	n77	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	2AFZZPN74G																																																														
Equipment Name	Mobile Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 42: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R16																																																														
CA Support	Supported, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 14.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 14.																																																														
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band and inter-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 3 carriers in the downlink and 2 carriers in the uplink.																																																														

Transmission (H, M, L) channel numbers and frequencies in each LTE band																
LTE Band 2																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860				
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880				
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900				
LTE Band 4																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720				
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5				
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745				
LTE Band 5																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844				
LTE Band 7																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560				
LTE Band 12																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711				
LTE Band 13																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		784.5		23280		787	
M	23230		782		23255		784.5		23280		787		23305		789.5	
H	23255		784.5		23280		787		23305		789.5		23330		792	
LTE Band 17																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23755		706.5		23780		709		23805		712		23830		715	
M	23790		710		23815		714		23840		718		23865		722	
H	23825		713.5		23850		717		23875		721		23900		725	
LTE Band 25																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860				
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880				
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905				
LTE Band 26																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26790	824				
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5				
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	842	26940	840				

LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 42												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	42115	3452.5	42140	3455	42165	3457.5	42190	3460				
M	42590	3500	42590	3500	42590	3500	42590	3500				
H	43065	3547.5	43040	3545	43015	3542.5	42990	3540				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
LM	55810	3607	55815	3607.5	55820	3608	55830	3609				
MH	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 17			Yes	Yes		
LTE Band 12	Yes	Yes	Yes	Yes		

2) LTE Bands tune up:

Band	Antenna	Default	DSI1	DSI3	DSI4	DSI5
		Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit
LTE Band 17	Ant 0	25.5	25.5	25.5	25.5	25.5
LTE Band 12		25.5	25.5	25.5	25.5	25.5
LTE Band 17	Ant 1	25	24	25	24	25
LTE Band 12		25	24	25	24	25

4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
Operating Frequency Range of each 5G NR transmission band	5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n12: 699 MHz ~ 716 MHz 5G NR n25: 1850 MHz ~ 1915 MHz 5G NR n26: 814 MHz ~ 849 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n48: 3550 MHz ~ 3700 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz
Channel Bandwidth	The detail please refers to section 4.1 5G NR FR1 bands table.
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n5	LTE B7
LTE Anchor Bands for n7	LTE B4/5/66
LTE Anchor Bands for n38	LTE B4/66
LTE Anchor Bands for n41	LTE B4/66
LTE Anchor Bands for n66	LTE B2/5/7
LTE Anchor Bands for n77	LTE B2
LTE Anchor Bands for n78	LTE B2/4/5/7/26/38/41/66

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band																
NR Band 2																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860	372500	1862.5	373000	1865	373500	1867.5	374000	1870
M	376000	1880	376000	1880	376000	1880	376000	1880	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900	379500	1897.5	379000	1895	378500	1892.5	378000	1890

NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 7																		
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz		Bandwidth 50MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	503500	2517.5	504000	2520	505000	2525
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510500	2552.5	510000	2550	509000	2545

NR Band 12						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	140300	701.5	140800	704	141300	706.5
M	141500	707.5	141500	707.5	141500	707.5
H	142700	713.5	142200	711	141700	708.5

NR Band 25 SCS15KHz																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860	372500	1862.5	373000	1865	373500	1867.5	374000	1870
M	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5
H	382500	1912.5	382000	1910	381500	1907.5	381000	1905	380500	1902.5	380000	1900	379500	1897.5	379000	1895



NR Band 26								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	163300	816.5	163800	819	164300	821.5	164800	824
M	166300	831.5	166300	831.5	166300	831.5	166300	831.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 66																		
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz		Bandwidth 45MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	344500	1722.5	345000	1725	345500	1727.5	346000	1730	346500	1732.5
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353500	1767.5	353000	1765	352500	1762.5	352000	1760	351500	1757.5

NR Band 38												
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	515000	2575	515500	2577.5	516000	2580	516500	2582.5	517000	2585	518000	2590
M	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595
H	523000	2615	522500	2612.5	522000	2610	521500	2607.5	521000	2605	5210000	2600

NR Band 41																														
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz		Bandwidth 45MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	500202	2501.01	500700	2503.5	501204	2506.02	501702	2508.51	502200	2511	502704	2513.52	503202	2516.01	503700	2518.5	504204	2521.02	505200	2526	506202	2531.01	507204	2536.02	508200	2541	509202	2546.01		
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	537000	2685	536496	2682.48	535998	2679.99	535500	2677.5	534996	2674.98	534498	2672.49	534000	2670	533498	2667.48	532998	2664.99	531996	2659.98	537000	2685	529998	2649.99	528996	2644.98	528000	2640		

NR Band 48										
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	637000	3555	637168	3557.52	637334	3560.01	637668	3565.02	638000	3570
M	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99
H	646332	3694.98	646166	3692.49	646000	3690	645666	3684.99	645332	3679.98

NR Band 77																									
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	647000	3705	647168	3707.52	647334	3710.01	647500	3712.5	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750	
M	656000	3840	656000	3840	656000	3840	656000	3840.00	656000	3840.00	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	
H	665000	3975	664832	3972.48	664666	3969.99	664500	3967.50	664332	3964.98	664000	3960	663666	3954.99	663332	3949.98	663000	3945	662666	3939.99	662332	3934.98	662000	3930	

NR Band 78																									
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	647000	3705	647168	3707.52	647334	3710.01	647500	3712.5	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750	
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	
H	653000	3795	652834	3792.51	652668	3790.02	652500	3787.5	652334	3785.01	652000	3780	651668	3775.02	651334	3770.01	651000	3765	650668	3760.02	650334	3755.01	650000	3750	



For <3450 MHz ~ 3550 MHz >

NR Band 77																								
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630334	3455.01	630500	3457.5	630668	3460.02	630834	3462.51	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98
H	636332	3544.98	636166	3542.49	636000	3540	635832	3537.48	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

NR Band 78																								
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630334	3455.01	630500	3457.5	630668	3460.02	630834	3462.51	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98
H	636332	3544.98	636166	3542.49	636000	3540	635832	3537.48	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

5. Smart Transmit feature for RF Exposure compliance

The Qualcomm® Smart Transmit™ 5.0 of Smart Transmit (GEN2) Feature operates based on pre-defined sub6 antenna groups (AG). This Device is enabled with the Qualcomm® Smart Transmit Gen2 feature. The RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN and WLAN/BT transmitter to ensure the product in compliance with RF exposure limit over a defined time window. To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) version 23 to enable the Smart Transmit GEN2 Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory SAR limit to account for all device design related uncertainty.
SAR char	P _{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at WWAN and WLAN/BT bands. It will then be used as input for Smart Transmit to control and manage RF exposure for WWAN and WLAN/BT bands.

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

Antenna Group:

Antenna Group 0 (AG0)	ANT1 & ANT4 & ANT5 & ANT6 & ANT8 & ANT9 & ANT15 & ANT12 & ANT16
Antenna Group 1 (AG1)	ANT0 & ANT3

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as P_{max}, when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit}. Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (Device State Index DSI).

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Antenna	Head DSI1	Extremity DSI3	Bodyworn DSI4	Hotspot DSI5	Pmax*	Total Uncertainty dB (k=2)
GSM850	Ant 0	28.2	23.0	31.1	26.7	23.0	1.00
GSM850	Ant 1	18.2	21.7	21.7	18.2	22.7	1.20
GSM1900	Ant 4	19.0	21.5	26.8	19.0	21.5	1.00
GSM1900	Ant 5	18.2	21.2	29.6	18.2	21.2	1.20
WCDMA V	Ant 0	27.1	24.0	29.2	25.2	24.0	1.00
WCDMA V	Ant 1	19.5	22.0	22.0	19.5	23.5	1.20
WCDMA IV	Ant 4	17.0	21.0	25.9	17.0	24.0	1.00
WCDMA IV	Ant 5	17.5	21.5	21.5	17.5	23.5	1.20
WCDMA II	Ant 4	17.0	20.0	25.4	17.0	24.0	1.00
WCDMA II	Ant 5	17.0	21.5	21.5	17.0	23.5	1.20
LTE Band 12	Ant 0	30.4	24.5	29.5	26.3	24.5	1.00
LTE Band 12	Ant 1	23.0	24.0	29.9	23.0	24.0	1.00
LTE Band 13	Ant 0	28.9	25.0	29.2	25.0	25.0	0.70
LTE Band 13	Ant 1	21.0	23.5	23.5	21.0	24.5	1.00
LTE Band 5	Ant 0	27.9	25.0	30.0	25.5	25.0	0.70
LTE Band 5	Ant 1	19.5	22.0	22.0	19.5	24.5	1.00
LTE Band 26	Ant 0	28.3	25.0	29.9	25.8	25.0	0.70
LTE Band 26	Ant 1	19.5	22.5	22.5	19.5	24.5	1.00
LTE Band 4	Ant 4	17.5	22.0	26.7	17.5	25.0	0.70
LTE Band 4	Ant 5	19.0	23.0	23.0	19.0	24.5	1.00
LTE Band 4_Other PA	Ant 3	31.0	22.5	26.3	22.0	25.0	0.70
LTE Band 4_Other PA	Ant 6	15.5	21.0	21.0	15.5	23.5	1.00
LTE Band 66	Ant 4	18.0	21.0	26.3	18.0	24.0	1.00
LTE Band 66	Ant 5	16.0	22.0	22.0	16.0	23.5	1.00
LTE Band 66_Other PA	Ant 3	30.4	22.0	25.6	21.5	24.0	1.00
LTE Band 66_Other PA	Ant 6	17.0	22.0	22.0	17.0	23.5	1.00
LTE Band 2	Ant 4	17.5	21.5	25.9	17.5	24.0	1.00
LTE Band 2	Ant 5	15.6	21.6	21.6	15.6	23.6	1.00
LTE Band 25	Ant 4	18.5	22.0	28.5	18.5	24.0	1.00
LTE Band 25	Ant 5	15.7	20.2	20.2	15.7	23.7	1.00
LTE Band 7	Ant 4	17.0	21.0	25.9	17.0	25.0	0.70
LTE Band 7	Ant 5	19.1	18.6	18.6	18.6	24.6	1.00
LTE Band 7_Other PA	Ant 3	29.9	22.0	26.5	22.0	24.5	1.00
LTE Band 7_Other PA	Ant 6	14.8	19.3	19.3	14.8	22.8	1.00
LTE Band 38	Ant 4	17.5	21.5	26.1	17.5	23.0	0.70
LTE Band 38	Ant 5	18.0	18.5	18.5	18.0	22.5	1.00
LTE Band 38_Other PA	Ant 3	29.2	22.0	26.7	22.9	22.0	1.00
LTE Band 38_Other PA	Ant 6	15.4	20.4	20.4	15.4	21.4	1.00
LTE Band 41	Ant 4	17.5	20.5	26.7	17.5	23.0	0.70
LTE Band 41	Ant 5	18.4	18.4	18.4	18.4	22.4	1.00
LTE Band 41_Other PA	Ant 3	29.3	22.0	26.8	22.5	22.0	1.00
LTE Band 41_Other PA	Ant 6	15.4	20.4	20.4	15.4	21.4	1.00
LTE Band 42	Ant 4	16.0	20.5	26.7	16.0	23.0	0.70
LTE Band 42	Ant 5	17.0	18.5	18.5	17.0	22.5	1.00
LTE Band 42	Ant 9	28.6	16.0	24.4	16.0	22.5	1.00
LTE Band 42	Ant 8	15.6	18.6	18.6	15.6	19.1	1.00
LTE Band 48	Ant 4	15.0	19.5	27.0	15.0	21.5	1.00
LTE Band 48	Ant 5	15.4	16.9	16.9	15.4	21.4	1.00
LTE Band 48	Ant 9	32.4	15.9	25.3	15.9	21.4	1.00
LTE Band 48	Ant 8	14.2	17.7	17.7	14.2	18.2	1.00
FR1 n12	Ant 0	29.9	24.5	28.4	24.5	24.5	1.00
FR1 n12	Ant 1	23.0	24.0	30.2	23.0	24.0	1.00



FR1 n5	Ant 0	27.8	25.0	30.6	26.5	25.0	0.70
FR1 n5	Ant 1	19.0	22.5	22.5	19.0	24.5	1.00
FR1 n26	Ant 0	28.4	25.0	29.6	26.3	25.0	0.70
FR1 n26	Ant 1	20.0	22.0	22.0	20.0	24.5	1.00
FR1 n66	Ant 4	17.5	20.5	26.2	17.5	24.0	1.00
FR1 n66	Ant 5	18.9	28.9	28.9	18.9	23.4	1.00
FR1 n66_Other PA	Ant 3	30.1	21.5	26.0	21.5	24.0	1.00
FR1 n66_Other PA	Ant 6	16.9	21.9	21.9	16.9	23.4	1.00
FR1 n2	Ant 4	17.0	20.0	25.4	17.0	24.0	1.00
FR1 n2	Ant 5	17.8	21.8	21.8	17.8	23.8	1.00
FR1 n25	Ant 4	18.0	23.0	26.8	18.0	24.0	1.00
FR1 n25	Ant 5	15.8	21.8	21.8	15.8	23.8	1.00
FR1 n7	Ant 4	15.5	20.0	25.6	15.5	25.0	0.70
FR1 n7	Ant 5	20.1	19.1	19.1	19.1	24.6	1.00
FR1 n7_Other PA	Ant 3	29.7	21.5	26.8	21.5	24.0	1.00
FR1 n7_Other PA	Ant 6	15.1	21.6	21.6	15.1	23.1	1.00
FR1 n38	Ant 4	17.0	20.5	26.2	17.0	25.0	0.70
FR1 n38	Ant 5	20.0	18.5	18.5	18.5	24.5	1.00
FR1 n38_Other PA	Ant 3	28.3	20.0	27.0	20.0	24.0	1.00
FR1 n38_Other PA	Ant 6	14.8	20.8	20.8	14.8	23.3	1.00
FR1 n41 PC3	Ant 4	16.0	20.0	25.5	16.0	25.0	0.70
FR1 n41 PC2	Ant 4	16.0	20.0	25.5	16.0	23.0	1.00
FR1 n41 PC3	Ant 5	19.7	18.2	18.2	18.2	24.7	1.00
FR1 n41 PC2	Ant 5	19.7	18.2	18.2	18.2	22.7	1.00
FR1 n41_Other PA	Ant 3	28.3	19.5	25.8	19.5	24.0	1.00
FR1 n41_Other PA	Ant 6	14.7	20.7	20.7	14.7	23.2	1.00
FR1 n48	Ant 4	15.5	19.0	26.1	15.5	23.5	1.00
FR1 n48	Ant 5	16.0	17.5	17.5	16.0	23.5	1.00
FR1 n48	Ant 9	32.7	16.2	24.0	16.2	23.2	1.00
FR1 n48	Ant 8	14.2	16.7	16.7	14.2	20.2	1.00
FR1 n77 PC3	Ant 4	14.5	17.5	26.4	14.5	25.0	0.70
FR1 n77 PC2	Ant 4	14.5	17.5	26.4	14.5	25.0	1.00
FR1 n77 PC3	Ant 5	16.0	18.5	18.5	16.0	24.5	1.00
FR1 n77 PC2	Ant 5	16.0	18.5	18.5	16.0	24.5	1.50
FR1 n77 PC3	Ant 9	27.3	16.4	23.4	16.4	24.4	1.00
FR1 n77 PC2	Ant 9	27.3	16.4	23.4	16.4	24.4	1.50
FR1 n77 PC3	Ant 8	15.8	18.8	18.8	15.8	21.8	1.00
FR1 n77 PC2	Ant 8	15.8	18.8	18.8	15.8	21.8	1.50
FR1 n78 PC3	Ant 4	14.5	18.5	26.2	14.5	25.0	0.70
FR1 n78 PC2	Ant 4	14.5	18.5	26.2	14.5	25.0	1.00
FR1 n78 PC3	Ant 5	16.5	19.0	19.0	16.5	24.5	1.00
FR1 n78 PC2	Ant 5	16.5	19.0	19.0	16.5	24.5	1.50
FR1 n78 PC3	Ant 9	27.0	16.4	23.4	16.4	24.4	1.00
FR1 n78 PC2	Ant 9	27.0	16.4	23.4	16.4	24.4	1.50
FR1 n78 PC3	Ant 8	15.7	18.2	18.2	15.7	21.7	1.00
FR1 n78 PC2	Ant 8	15.7	18.2	18.2	15.7	21.7	1.50



Band	Antenna	Head DSI1	Body worn /Extremity DSI4	Hotspot DSI5	Pmax*	Total Uncertainty dB (k=2)
WLAN2.4GHz	Ant 15	11.90	17.90	18.20	17.90	2.00
WLAN2.4GHz	Ant 5	11.90	17.90	18.20	17.90	2.00
WLAN2.4GHz	Ant 15+8	11.90	17.90	18.20	20.90	2.00
Bluetooth	ANT 8	12.90	14.40	19.50	14.40	2.00
Bluetooth	ANT 15	15.60	13.90	42.50	13.90	2.00
WLAN5GHz(B1)	Ant 16	11.50	17.10	20.50	17.00	2.00
WLAN5GHz(B1)	Ant 12	11.50	17.10	20.50	17.00	2.00
WLAN5GHz(B1)	Ant 16+12	11.50	17.10	20.50	20.00	2.00
WLAN5GHz(B2)	Ant 16	11.50	17.10		17.00	2.00
WLAN5GHz(B2)	Ant 12	11.50	17.10		17.00	2.00
WLAN5GHz(B2)	Ant 16+12	11.50	17.10		20.00	2.00
WLAN5GHz(B3)	Ant 16	11.50	18.40		18.00	2.00
WLAN5GHz(B3)	Ant 12	11.50	18.40		18.00	2.00
WLAN5GHz(B3)	Ant 16+12	11.50	18.40		21.00	2.00
WLAN5GHz(B4)	Ant 16	13.00	18.50	22.80	18.50	2.00
WLAN5GHz(B4)	Ant 12	13.00	18.50	22.80	18.50	2.00
WLAN5GHz(B4)	Ant 16+12	13.00	18.50	22.80	21.50	2.00
WLAN6GHz(B5)	Ant 16	13.50	13.50		13.50	2.00
WLAN6GHz(B5)	Ant 12	13.50	13.50		13.50	2.00
WLAN6GHz(B5)	Ant 16+12	13.50	13.50		16.50	2.00
WLAN6GHz(B6)	Ant 16	14.00	12.50		14.00	2.00
WLAN6GHz(B6)	Ant 12	14.00	12.50		14.00	2.00
WLAN6GHz(B6)	Ant 16+12	14.00	12.50		17.00	2.00
WLAN6GHz(B7)	Ant 16	14.50	13.50		14.50	2.00
WLAN6GHz(B7)	Ant 12	14.50	13.50		14.50	2.00
WLAN6GHz(B7)	Ant 16+12	14.50	13.50		17.50	2.00
WLAN6GHz(B8)	Ant 16	14.50	13.00		14.50	2.00
WLAN6GHz(B8)	Ant 12	14.50	13.00		14.50	2.00
WLAN6GHz(B8)	Ant 16+12	14.50	13.00		17.50	2.00

Note: 1) *P_{max} is used for RF tune up procedure. The maximum allowed output power is equal to P_{max} + Total uncertainty.

2) All P_{limit} power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD & WLAN/BT).


3) The max allowed output power is the P_{limit} + Total uncertainty, and if P_{limit} is higher than P_{max}, the device output power will be P_{max} instead.

4) GSM/WCDMA applies force peak method, and in single active Tx scenario, Smart Transmit can guarantee Tx power level of P_{limit} at all times.

6. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (3980MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body or finger or hand at the front or back or bottom or right or top side of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. The sensors can use to detect the proximity of the user's body or handheld states at the front or back or bottom or right or top side of the device use a detection threshold distance. When front/back/right/top/bottom sides of body or handheld condition is detected reduced power will be active. The trigger distance shown in the sections below.
4. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

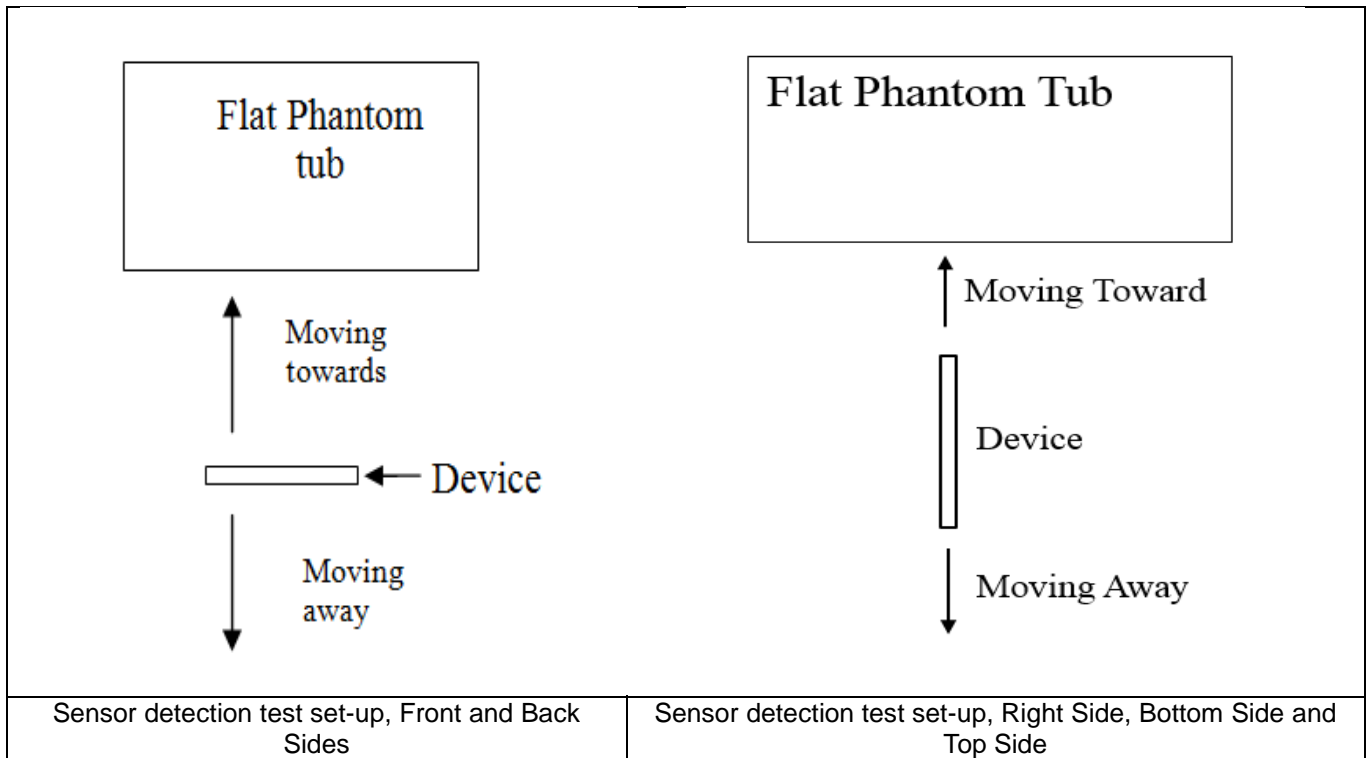

< Sensor for Ant 3 >

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	16	16	16	16	16	16	16

< Sensor for Ant 4/9 >

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	6	6	6	6	6

7. RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

9. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

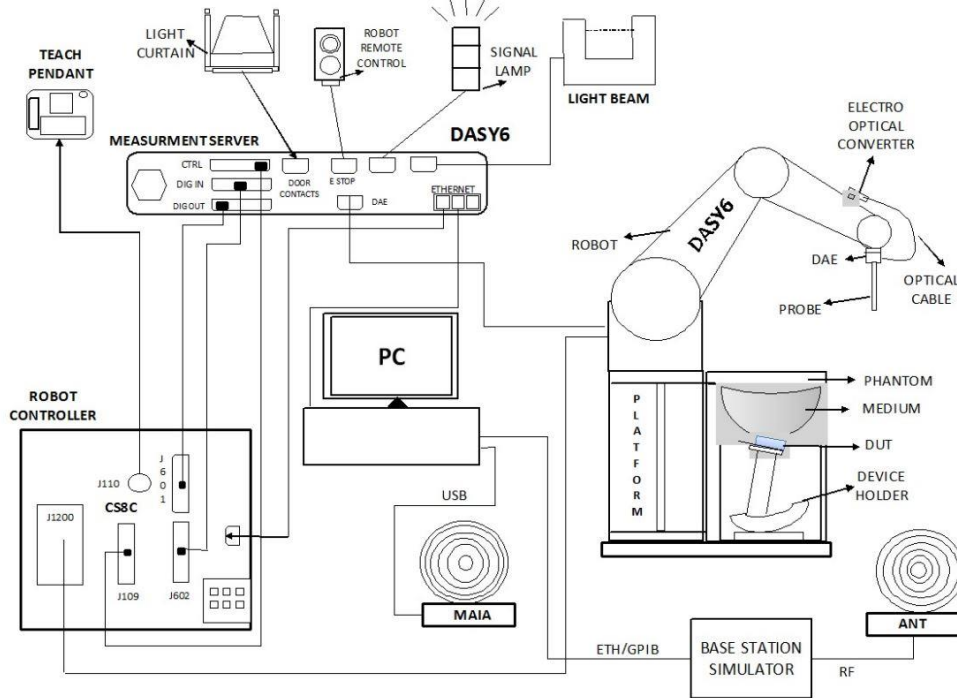


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 or DASY6/8 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

9.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ±0.2 dB (30 MHz – 10 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

9.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


9.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

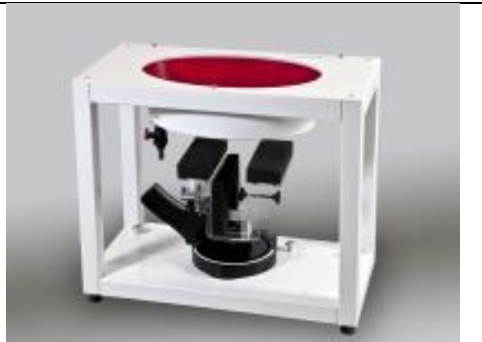Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

9.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

10.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

10.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



11. Test Equipment List

Table with 6 columns: Manufacturer, Name of Equipment, Type/Model, Serial Number, Last Cal., Due Date. Rows include various test equipment like System Validation Kits, Data Acquisition Electronics, Dosimetric E-Field Probes, SAM Twin Phantom, Thermo-Hygrometer, Phone Positioner, Radio Communication Analyzer, ENA Series Network Analyzer, Dielectric Probe Kit, Vector Signal Generator, Power Meter, Power Sensor, BLUETOOTH TESTER, Spectrum Analyzer, DIGITAC THERMOMETER, Power Divider, Attenuation, POWER AMPLIFIER, Dual Directional Coupler.

Note:

- 1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

12. System Verification

12.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

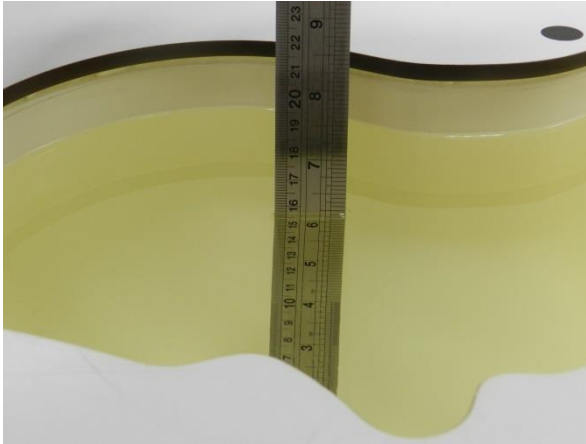


Fig 11.1 Photo of Liquid Height for Head SAR

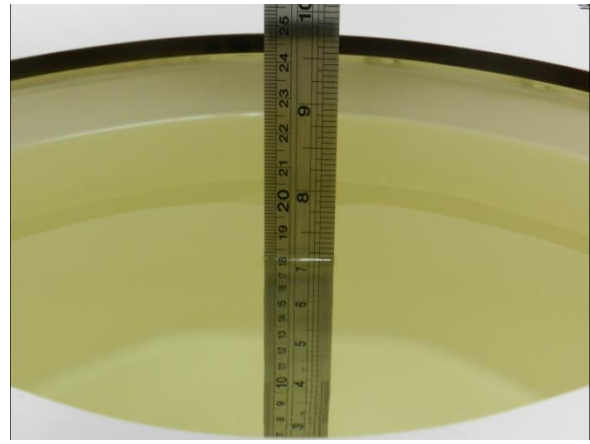


Fig 11.2 Photo of Liquid Height for Body SAR

12.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.6	0.889	42.282	0.89	41.90	-0.11	0.91	±5	2024/9/3
835	Head	22.7	0.912	41.936	0.90	41.50	1.33	1.05	±5	2024/9/4
1750	Head	22.6	1.317	40.225	1.37	40.10	-3.87	0.31	±5	2024/9/5
1900	Head	22.9	1.407	40.215	1.40	40.00	0.50	0.54	±5	2024/9/6
2450	Head	22.8	1.744	39.267	1.80	39.20	-3.11	0.17	±5	2024/9/7
2600	Head	22.7	2.030	40.355	1.96	39.00	3.57	3.47	±5	2024/9/8
3500	Head	22.8	2.813	38.735	2.91	37.90	-3.33	2.20	±5	2024/9/9
3700	Head	22.8	2.991	38.382	3.12	37.70	-4.13	1.81	±5	2024/9/10
3900	Head	22.6	3.175	38.058	3.32	37.50	-4.37	1.49	±5	2024/9/11
5250	Head	22.8	4.573	35.720	4.71	35.90	-2.91	-0.50	±5	2024/9/11
5600	Head	22.7	4.997	35.371	5.07	35.50	-1.44	-0.36	±5	2024/9/12
5750	Head	22.8	5.105	34.869	5.22	35.40	-2.20	-1.50	±5	2024/9/12
750	Head	22.6	0.904	42.7	0.89	41.90	1.57	1.91	±5	2024/8/28
835	Head	22.9	0.924	41.4	0.90	41.50	2.67	-0.24	±5	2024/8/29
1750	Head	22.7	1.35	40.1	1.37	40.10	-1.46	0.00	±5	2024/8/30
1900	Head	22.8	1.43	39.8	1.40	40.00	2.14	-0.50	±5	2024/8/31
2450	Head	22.6	1.86	38.4	1.80	39.20	3.33	-2.04	±5	2024/9/1
2600	Head	22.9	1.96	40.4	1.96	39.00	0.00	3.59	±5	2024/9/3
3500	Head	22.7	2.88	38.5	2.91	37.90	-1.03	1.58	±5	2024/9/5
3700	Head	22.6	3.08	38.0	3.12	37.70	-1.28	0.80	±5	2024/9/7
3900	Head	22.8	3.28	37.6	3.32	37.50	-1.20	0.27	±5	2024/9/9
5250	Head	22.9	4.57	35.4	4.71	35.90	-2.97	-1.39	±5	2024/9/11
5600	Head	22.6	4.95	34.8	5.07	35.50	-2.37	-1.97	±5	2024/9/13
5750	Head	22.8	5.13	34.6	5.22	35.40	-1.72	-2.26	±5	2024/9/15
750	Head	22.7	0.926	42.5	0.89	41.90	4.04	1.43	±5	2024/8/31
835	Head	22.8	0.930	40.9	0.90	41.50	3.33	-1.45	±5	2024/9/1
1750	Head	22.6	1.380	40.3	1.37	40.10	0.73	0.50	±5	2024/9/2
1900	Head	22.9	1.450	40.0	1.40	40.00	3.57	0.00	±5	2024/9/3
2450	Head	22.7	1.840	39.3	1.80	39.20	2.22	0.26	±5	2024/9/4
2600	Head	22.6	1.940	39.1	1.96	39.00	-1.02	0.26	±5	2024/9/5
3500	Head	22.8	2.830	39.0	2.91	37.90	-2.75	2.90	±5	2024/9/7
3700	Head	22.6	3.020	38.7	3.12	37.70	-3.21	2.65	±5	2024/9/9
3900	Head	22.9	3.220	38.4	3.32	37.50	-3.01	2.40	±5	2024/9/11
5250	Head	22.7	4.560	35.0	4.71	35.90	-3.18	-2.51	±5	2024/9/12
5600	Head	22.8	4.950	34.4	5.07	35.50	-2.37	-3.10	±5	2024/9/13
5750	Head	22.7	5.120	34.1	5.22	35.40	-1.92	-3.67	±5	2024/9/14
1900	Head	22.8	1.43	39.8	1.40	40.00	2.14	-0.50	±5	2024/10/16
1900	Head	22.9	1.398	41.444	1.40	40.00	-0.14	3.61	±5	2024/10/16

12.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024/9/3	750	Head	50	1087	3857	1650	0.462	8.58	9.24	7.69
2024/9/4	835	Head	50	4d298	3857	1650	0.477	9.89	9.54	-3.54
2024/9/5	1750	Head	50	1090	3857	1650	1.770	37.00	35.4	-4.32
2024/9/6	1900	Head	50	5d118	3857	1650	1.850	39.30	37	-5.85
2024/9/7	2450	Head	50	1095	3857	1650	2.670	52.60	53.4	1.52
2024/9/8	2600	Head	50	1112	3857	1650	2.690	55.10	53.8	-2.36
2024/9/9	3500	Head	50	1037	3857	1650	3.120	65.40	62.4	-4.59
2024/9/10	3700	Head	50	1008	3857	1650	3.170	67.20	63.4	-5.65
2024/9/11	3900	Head	50	1048	3857	1650	3.650	69.10	73	5.64
2024/9/11	5250	Head	50	1113	3857	1650	4.170	81.50	83.4	2.33
2024/9/12	5600	Head	50	1113	3857	1650	4.420	82.60	88.4	7.02
2024/9/12	5750	Head	50	1113	3857	1650	4.080	80.80	81.6	0.99
2024/8/28	750	Head	50	1087	7706	1649	0.399	8.58	7.98	-6.99
2024/8/29	835	Head	50	4d298	7706	1649	0.480	9.89	9.6	-2.93
2024/8/30	1750	Head	50	1090	7706	1649	1.88	37.00	37.6	1.62
2024/8/31	1900	Head	50	5d118	7706	1649	2.08	39.30	41.6	5.85
2024/9/1	2450	Head	50	1095	7706	1649	2.76	52.60	55.2	4.94
2024/9/3	2600	Head	50	1112	7706	1649	2.82	55.10	56.4	2.36
2024/9/5	3500	Head	50	1037	7706	1649	3.15	65.40	63	-3.67
2024/9/7	3700	Head	50	1008	7706	1649	3.40	67.20	68	1.19
2024/9/9	3900	Head	50	1048	7706	1649	3.51	69.10	70.2	1.59
2024/9/11	5250	Head	50	1113	7706	1649	3.93	81.50	78.6	-3.56
2024/9/13	5600	Head	50	1113	7706	1649	3.91	82.60	78.2	-5.33
2024/9/15	5750	Head	50	1113	7706	1649	3.84	80.80	76.8	-4.95
2024/8/31	750	Head	50	1087	7627	1691	0.422	8.58	8.44	-1.63
2024/9/1	835	Head	50	4d298	7627	1691	0.495	9.89	9.9	0.10
2024/9/2	1750	Head	50	1090	7627	1691	1.940	37.00	38.8	4.86
2024/9/3	1900	Head	50	5d118	7627	1691	2.110	39.30	42.2	7.38
2024/9/4	2450	Head	50	1095	7627	1691	2.820	52.60	56.4	7.22
2024/9/5	2600	Head	50	1112	7627	1691	2.640	55.10	52.8	-4.17
2024/9/7	3500	Head	50	1037	7729	1691	3.250	65.40	65	-0.61
2024/9/9	3700	Head	50	1008	7729	1691	3.360	67.20	67.2	0.00
2024/9/11	3900	Head	50	1048	7729	1691	3.420	69.10	68.4	-1.01
2024/9/12	5250	Head	50	1113	7627	1691	4.130	81.50	82.6	1.35
2024/9/13	5600	Head	50	1113	7627	1691	4.060	82.60	81.2	-1.69
2024/9/14	5750	Head	50	1113	7627	1691	4.180	80.80	83.6	3.47
2024/10/16	1900	Head	50	5d118	7706	1649	2.07	39.30	41.4	5.34
2024/10/16	1900	Head	50	5d118	3857	1649	2.02	39.30	40.4	2.80



<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2024/9/3	750	Head	50	1087	3857	1650	0.298	5.65	5.96	5.49
2024/9/4	835	Head	50	4d298	3857	1650	0.313	6.45	6.26	-2.95
2024/9/5	1750	Head	50	1090	3857	1650	0.946	19.50	18.92	-2.97
2024/9/6	1900	Head	50	5d118	3857	1650	0.956	20.40	19.12	-6.27
2024/9/7	2450	Head	50	1095	3857	1650	1.260	24.70	25.2	2.02
2024/9/8	2600	Head	50	1112	3857	1650	1.240	24.80	24.8	0.00
2024/9/9	3500	Head	50	1037	3857	1650	1.200	24.70	24	-2.83
2024/9/10	3700	Head	50	1008	3857	1650	1.190	24.40	23.8	-2.46
2024/9/11	3900	Head	50	1048	3857	1650	1.230	24.10	24.6	2.07
2024/9/11	5250	Head	50	1113	3857	1650	1.220	23.30	24.4	4.72
2024/9/12	5600	Head	50	1113	3857	1650	1.200	23.70	24	1.27
2024/9/12	5750	Head	50	1113	3857	1650	1.180	23.00	23.6	2.61
2024/8/28	750	Head	50	1087	7706	1649	0.273	5.65	5.46	-3.36
2024/8/29	835	Head	50	4d298	7706	1649	0.321	6.45	6.42	-0.47
2024/8/30	1750	Head	50	1090	7706	1649	1.01	19.50	20.2	3.59
2024/8/31	1900	Head	50	5d118	7706	1649	1.10	20.40	22	7.84
2024/9/1	2450	Head	50	1095	7706	1649	1.31	24.70	26.2	6.07
2024/9/3	2600	Head	50	1112	7706	1649	1.29	24.80	25.8	4.03
2024/9/5	3500	Head	50	1037	7706	1649	1.22	24.70	24.4	-1.21
2024/9/7	3700	Head	50	1008	7706	1649	1.28	24.40	25.6	4.92
2024/9/9	3900	Head	50	1048	7706	1649	1.27	24.10	25.4	5.39
2024/9/11	5250	Head	50	1113	7706	1649	1.16	23.30	23.2	-0.43
2024/9/13	5600	Head	50	1113	7706	1649	1.12	23.70	22.4	-5.49
2024/9/15	5750	Head	50	1113	7706	1649	1.13	23.00	22.6	-1.74
2024/8/31	750	Head	50	1087	7627	1691	0.283	5.65	5.66	0.18
2024/9/1	835	Head	50	4d298	7627	1691	0.330	6.45	6.6	2.33
2024/9/2	1750	Head	50	1090	7627	1691	1.040	19.50	20.8	6.67
2024/9/3	1900	Head	50	5d118	7627	1691	1.090	20.40	21.8	6.86
2024/9/4	2450	Head	50	1095	7627	1691	1.330	24.70	26.6	7.69
2024/9/5	2600	Head	50	1112	7627	1691	1.190	24.80	23.8	-4.03
2024/9/7	3500	Head	50	1037	7729	1691	1.320	24.70	26.4	6.88
2024/9/9	3700	Head	50	1008	7729	1691	1.310	24.40	26.2	7.38
2024/9/11	3900	Head	50	1048	7729	1691	1.270	24.10	25.4	5.39
2024/9/12	5250	Head	50	1113	7627	1691	1.200	23.30	24	3.00
2024/9/13	5600	Head	50	1113	7627	1691	1.150	23.70	23	-2.95
2024/9/14	5750	Head	50	1113	7627	1691	1.210	23.00	24.2	5.22
2024/10/16	1900	Head	50	5d118	7706	1649	1.05	20.40	21	2.94
2024/10/16	1900	Head	50	5d118	3857	1649	1.07	20.40	21.4	4.90

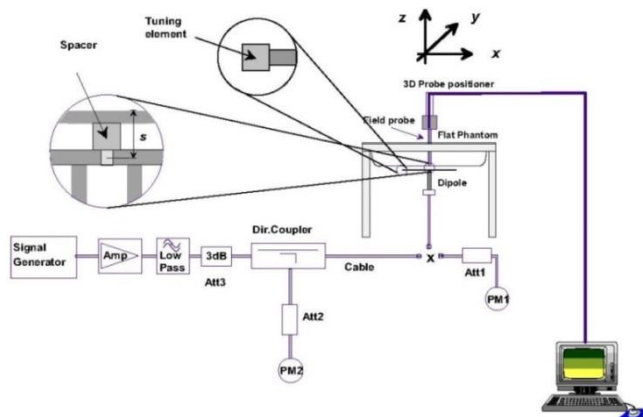


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

13. RF Exposure Positions

13.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

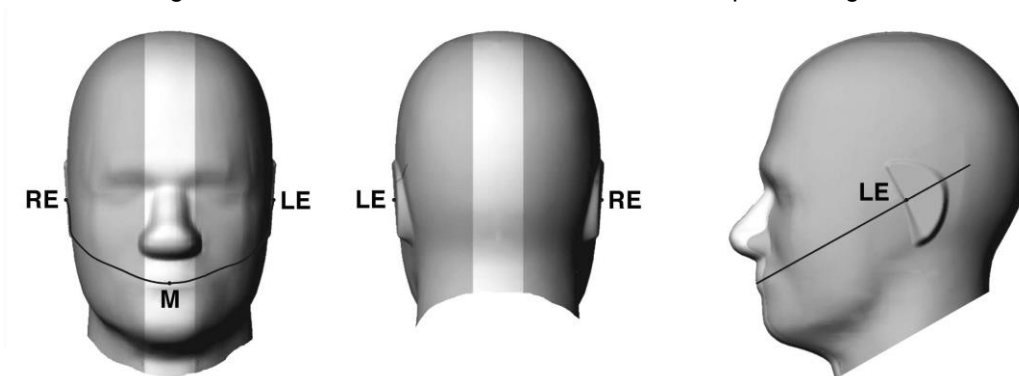


Fig 12.1.1 Front, back, and side views of SAM twin phantom

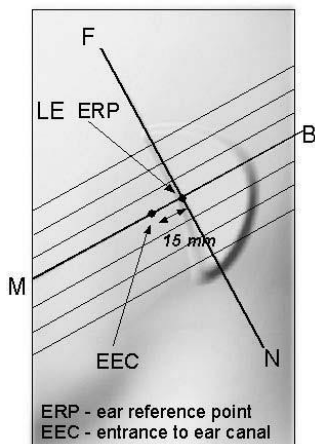


Fig 12.1.2 Close-up side view of phantom showing the ear region.

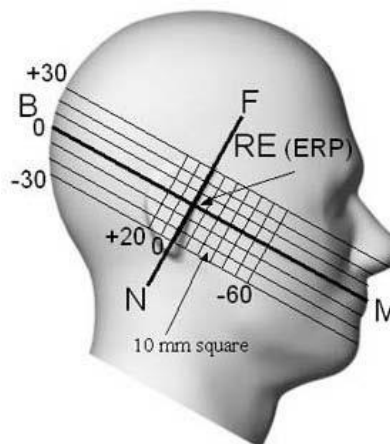


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

13.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

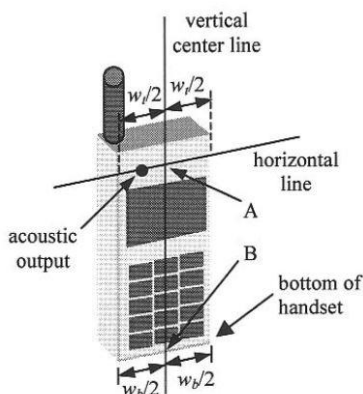


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

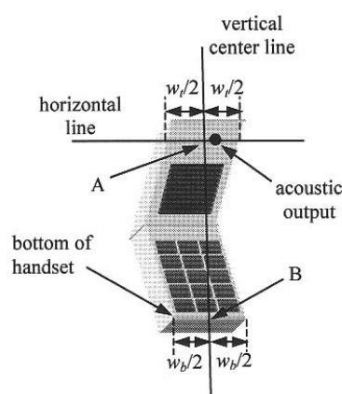


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

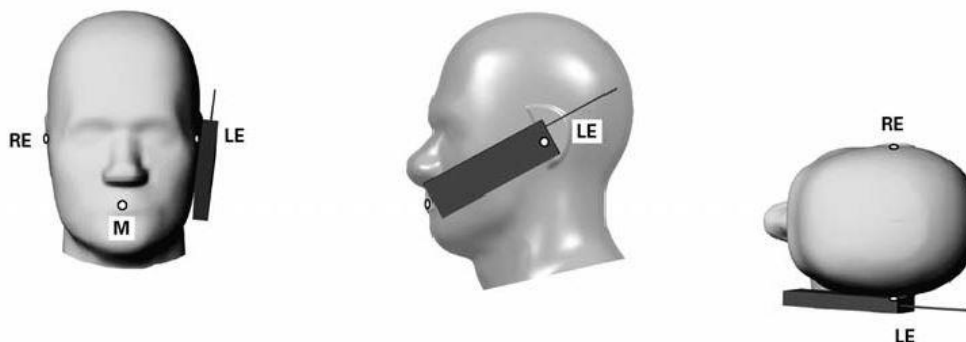


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

13.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

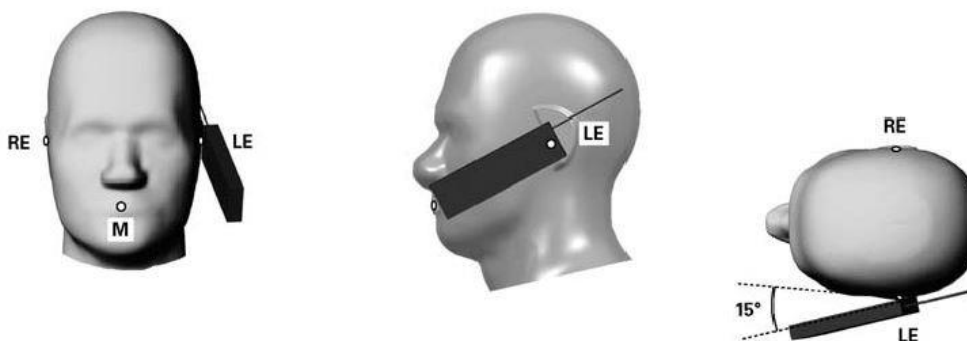


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

13.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

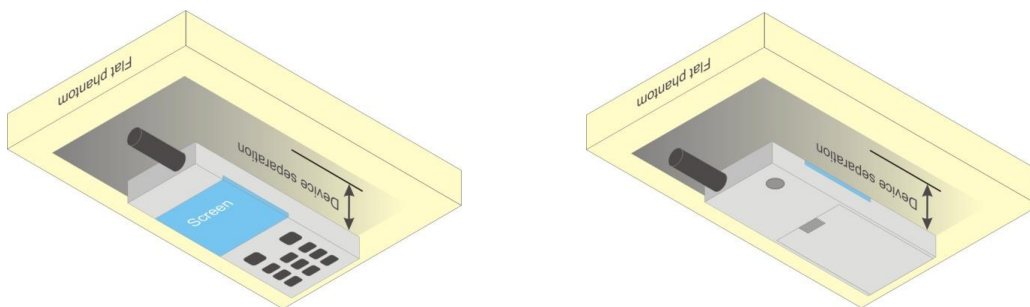


Fig 12.4 Body Worn Position

13.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

13.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

14. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - 1. Set RMC 12.2Kbps + HSDPA mode.
 - 2. Set Cell Power = -25 dBm
 - 3. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - 4. Select HSDPA Uplink Parameters
 - 5. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - 6. Set Delta ACK, Delta NACK and Delta CQI = 8
 - 7. Set Ack-Nack Repetition Factor to 3
 - 8. Set CQI Feedback Cycle (k) to 4 ms
 - 9. Set CQI Repetition Factor to 2
 - 10. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

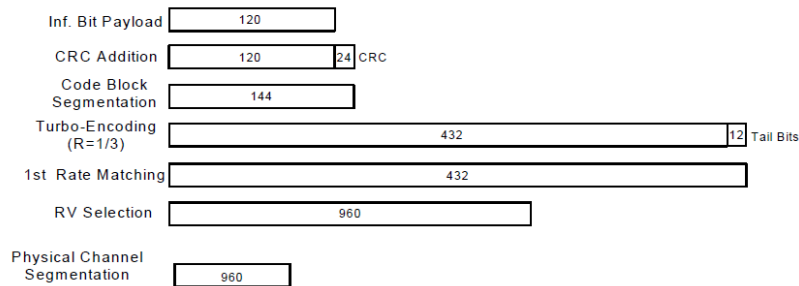


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK) Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

1. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Parms
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCl is equal to the target E-TFCl of 105 for sub-test 1, and other subtest's E-TFCl
4. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCl (Note 5)	E-TFCl (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration

<WCDMA Conducted Power>


General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B17 SAR test was covered by B12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.

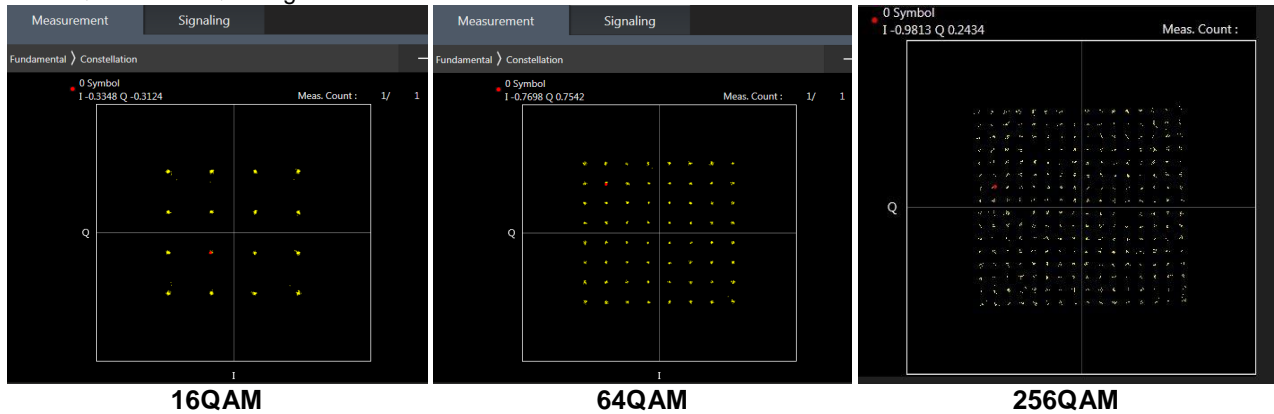

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

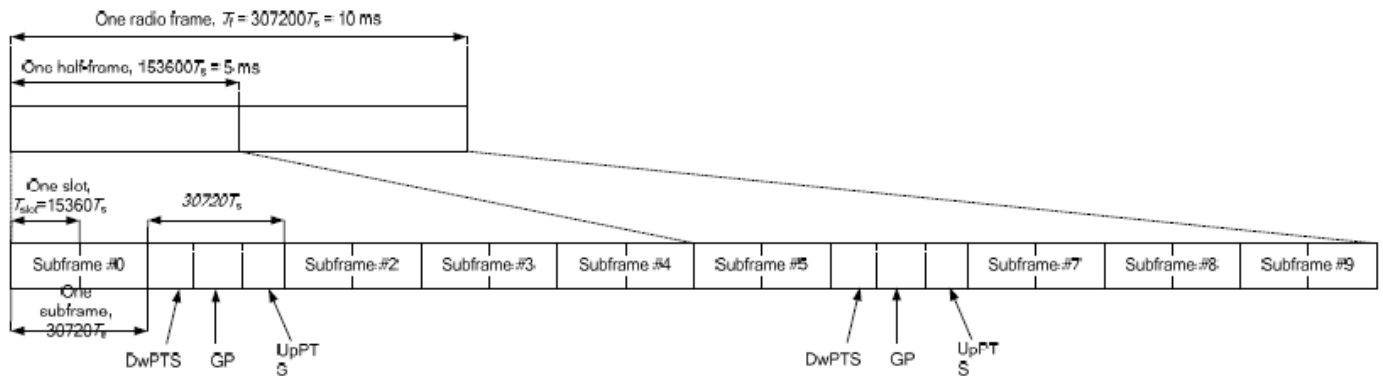


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	D	S	U	U	D	

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink			
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts	
1	19760 · Ts			20480 · Ts			
2	21952 · Ts			23040 · Ts			
3	24144 · Ts			25600 · Ts			
4	26336 · Ts			7680 · Ts			
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts	4384 · Ts	5120 · Ts	
6	19760 · Ts			23040 · Ts			
7	21952 · Ts			12800 · Ts			
8	24144 · Ts			-			-
9	13168 · Ts			-			-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Carrier Aggregation>

The detailed LTE Carrier Aggregation conducted power table can refer to Appendix F.

General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. All permutations exist. No restrictions on Pcell & Scell combinations.
4. The gray color table is covered by other combinations and no need to verify power

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation			
Number	Combination	4X4 MIMO	Covered by Measurement Superset	Number	Combination	4X4 MIMO	Covered by Measurement Superset
1	CA_26A-38A	38A		1	CA_2A-4A-5A	2A-4A	
2	CA_26A-41A	41A		2	CA_2A-4A-7A	2A-4A-7A	
3	CA_2A-26A	2A		3	CA_2A-5A-7A	2A-7A	
4	CA_2A-2A	2A-2A		4	CA_2A-7A-66A	2A,7A,66A	
5	CA_2A-4A	2A-4A	3CC-1	5	CA_2A-7A-7A	2A,7A,7A	
6	CA_2A-5A	2A	3CC-1	6	CA_2A-7C	2A,7C	
7	CA_2A-66A	2A-66A	3CC-4	7	CA_41A-41A-41A	41A-41A-41A	
8	CA_2A-7A	2A,7A	3CC-2	8	CA_41D	41D	
9	CA_2C	2C	3CC-6	9	CA_4A-4A-7A	4A-4A-7A	
10	CA_38C	38C		10	CA_4A-7C	4A-7C	
11	CA_41A-41A	41A-41A	3CC-7	11	CA_5A-7A-66A	7A-66A	
12	CA_41C	41C		12	CA_5A-7C	7C	
13	CA_4A-17A	4A		13	CA_7A-66A-66A	7A-66A-66A	
14	CA_4A-4A	4A-4A	3CC-9	14	CA_5A-7A-7A	7A-7A	
15	CA_4A-5A	4A		15	CA_2C-66A	2C-66A	
16	CA_4A-7A	4A-7A	3CC-9	16			
17	CA_5A-66A	66A	3CC-11	17			
18	CA_5A-7A	7A	3CC-11	18			
19	CA_66A-66A	66A-66A	3CC-13	19			
20	CA_66C	66C		20			
21	CA_7A-26A	7A		21			
22	CA_7A-66A	7A-66A	3CC-13	22			
23	CA_7A-7A	7A-7A	3CC-5	23			
24	CA_7C	7C	3CC-12	24			
25	CA_66B	66B		25			
26	CA_2A-38A	2A-38A		26			
27	CA_42C	42C		27			

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink three carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE 4x4 MIMO (Downlink)

This device supports downlink 4x4 MIMO operations for LTE Band LTE Band 2/4/7/25/38/41/42/48/66 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	Band
	LTE Band 2/4/7/25/38/41/42/48/66

LTE Carrier Aggregation Conducted Power (Uplink)

LTE Uplink CA	2CC Uplink Carrier Aggregation
Intra-band	Antenna Tx
CA_38C	B38:ANT4/5/3/6
CA_7C	B7:ANT4/5/3/6
CA_42C	B42:ANT4/5/9/8
CA_41C	B41:ANT4/5/3/6

<Intra-band>

General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B7/38/41/42 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

<Inter-band uplink carrier aggregation consideration>

LTE Uplink CA	2CC Uplink Carrier Aggregation	
Inter-band	Antenna Tx	Antenna Tx
CA_2A-4A	B2 Ant4/5	B4 Ant3/6
CA_4A-5A	B4 Ant3/6	B5 Ant0/1
CA_4A-7A	B4 Ant4/5	B7 Ant3/6

General Note:

1. The single carrier of inter band CA uplink power level is the same as Non-CA standalone LTE power level.
2. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window. To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.
3. For LTE inter-band CA mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure between two LTE bands. Smart Transmit algorithm controls the total RF exposure base on LTE inter band ULCA bands to not exceed FCC limit.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n2/n5/n7/n12/n25/n26/n66/n38/n41/n48/n77/n78 is SA mode.
2. 5G NR n5/n7/n66/n38/n41/n77/n78 is NSA mode.
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
4. For 5G NR n41/n77/n78 HPUE, 5G NR n41/n77/n78 PC2 Maximum Duty Cycle is 50%, using FTM (Factory Test Mode) with 50% duty cycle is considered during SAR testing. For 5G NR other bands, using FTM to perform SAR with default 100% transmission.
5. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
6. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
7. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
8. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
9. When channel bandwidth of SA and NSA is same, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time. When channel bandwidth of SA and NSA is different, chose the largest channel bandwidth mode among SA and NSA to perform power measurement.
10. For the NR bands, when channel bandwidth of SA and NSA is same, and the maximum power of NSA mode is same as SA total power level, SA SAR can represent NSA mode SAR. For the bands, when channel bandwidth of SA and NSA is different, choose the largest channel bandwidth with maximum power to perform SAR testing, so the largest channel bandwidth SAR can represent the smallest channel bandwidth SAR.
11. 5G NR n41/n77/n78 supports HPUE mode, HPUE power and SAR testing performed separately.
12. 5G NR n41/n77/n78 HPUE with higher power. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR.
13. 5G NR n7/n38/n41 supports UL MIMO. Based on Qualcomm Smart Transmit algorithm, the MIMO antennas located in same AGs and the MIMO Plimit is not populated in the EFS file, so additional verification tests need to be added, the more detail UL MIMO analysis results please referred to appendix H.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK		≤ 1	0
	16 QAM		≤ 2	≤ 1
	64 QAM		≤ 2.5	
CP-OFDM	256 QAM		≤ 4.5	
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5		≤ 2.5
	256 QAM		≤ 4.5	
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

<EN-DC combination>

ENDC	LTE TX	NR TX
DC_26A_n78A	ANT0/1	ANT4/5/9/8
DC_2A_n66A	ANT4/5	ANT3/6
DC_2A_n77A	ANT4/5	ANT4/5/9/8
DC_2A_n78A	ANT4/5	ANT4/5/9/8
DC_38A_n78A	ANT4/5	ANT4/5/9/8
DC_41A_n78A	ANT4/5	ANT4/5/9/8
DC_4A_n38A	ANT4/5/3/6	ANT3/6/4/5
DC_4A_n41A	ANT4/5/3/6	ANT3/6/4/5
DC_4A_n78A	ANT4/5	ANT4/5/9/8
DC_4A_n7A	ANT4/5/3/6	ANT3/6/4/5
DC_5A_n66A	ANT0/1	ANT3/6
DC_5A_n78A	ANT0/1	ANT4/5/9/8
DC_5A_n7A	ANT0/1	ANT3/6
DC_66A_n38A	ANT4/5/3/6	ANT3/6/4/5
DC_66A_n41A	ANT4/5/3/6	ANT3/6/4/5
DC_66A_n78A	ANT4/5	ANT4/5/9/8
DC_66A_n7A	ANT4/5	ANT3/6/4/5
DC_7A_n5A	ANT3/6	ANT0/1
DC_7A_n78A	ANT4/5	ANT4/5/9/8
DC_7A_n66A	ANT4/5	ANT3/6



Inter-Band CA Configuration:

FR1 Uplink CA	Antenna Tx	PA	Antenna Tx	PA
CA_n25A-n41A	n25 Ant4/5	Main PA	n41 Ant3/6	Other_PA
CA_n25A-n66A	n25 Ant4/5	Main PA	n66 Ant3/6	Other_PA
CA_n25A-n77A	n25 Ant4/5	Main PA	n77 Ant4/5/9/8	Main PA
CA_n41A-n66A	n41 Ant4/5/3/6	Ant4/5 Main PA Ant3/6 Other PA	n66 Ant3/6/4/5	Ant3/6 Other PA Ant4/5 Main PA
CA_n66A-n77A	n66 Ant4/5	Main PA	n77 Ant4/5/9/8	Main PA
CA_n5A-n78A	n5Ant0/1	Main PA	n78 Ant4/5/9/8	Main PA
CA_n7A-n78A	n7 Ant4/5	Main PA	n78 Ant4/5/9/8	Main PA

UL MIMO combination:

NR UL MIMO	Antenna Tx			
n7	Ant4+Ant3	Ant4+Ant6	Ant5+Ant3	Ant5+Ant6
n38	Ant4+Ant3	Ant4+Ant6	Ant5+Ant3	Ant5+Ant6
n41	Ant4+Ant3	Ant4+Ant6	Ant5+Ant3	Ant5+Ant6

<WLAN Conducted Power>



General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. 802.11ax/be supports both full tone size mode and partial tone size mode, after verification on partial tone size mode that partial size tone mode power will not be higher than full tone size mode, therefore, full tone mode power was chosen to be measured in this report.
7. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO mode to perform SAR testing.
8. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 77.45% for ant 8 and 76.97% for ant 15 as following figure, Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

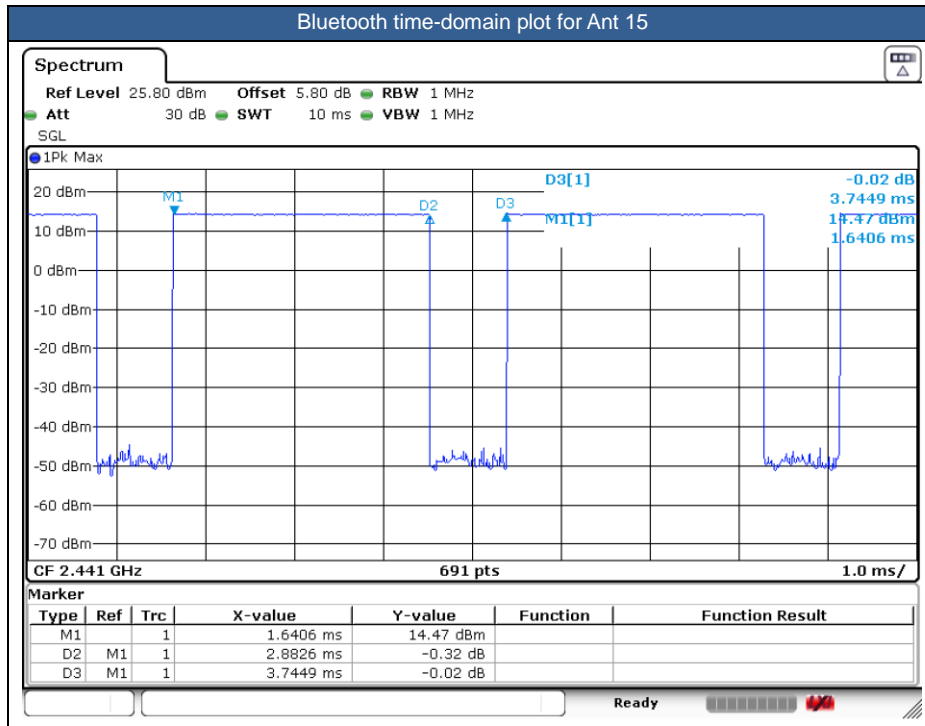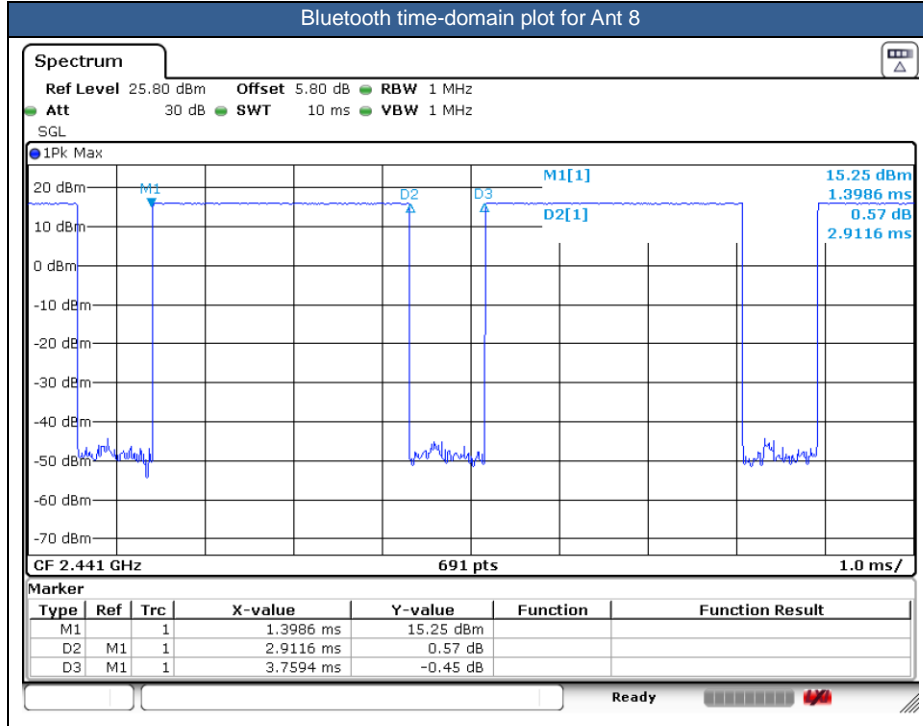



15. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity), and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
6. According to Nov. 2017 TCB workshop, when the reported 1gSAR for UL CA configuration is <1.2 W/kg, UL CA 1gSAR is not required for all required test channels (PCC based).
7. Based on Qualcomm Smart Transmit algorithm, the FR1/BT MIMO antennas located in same AGs and the MIMO Plimit is not populated in the EFS file, so additional verification tests need to be added, the more detail UL MIMO analysis results please referred to appendix H.
8. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot SAR.
9. For Phablet devices, when hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
10. The device for LTE Band 48/5G NR n48 SAR testing was configured by the 3GPP MPR implementations and in order to more conservative RF exposure assessment to determine SAR compliance, the actual maximum output power in production unit refer to Part 96 report and tune up document.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+ .

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 /B12 / B17 /B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B17 SAR test was covered by B12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. $\text{PI}/2$ BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, $\text{PI}/2$ BPSK

/16QAM/64QAM/256QAM SAR testing are not required.

- e. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
- f. For 5G FR1 n2/n5/n7/n12/n25/n26/n66/n38/n41/n77 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. Per KDB 248227 D01v02r02, when SAR measurement is required for at least one of the two U-NII bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is < 1.2 W/kg, SAR is not required for the 160 MHz channel.
4. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
5. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
7. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO mode to perform SAR testing.
8. For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. Further simplification chose the worse SAR value and the worst scaling factor from each transmit chain perform reported SAR calculation conservatively. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.

DSI status description:

The device has the following DSI state which used at different exposure condition.

This WWAN and WLAN/BT bands enabled with Qualcomm Smart Transmit feature which located at chapter 5. The default power is Pmax power, When Plimit power higher than Pmax power, the output power will be limited at Pmax, and so the SAR will use Pmax power to do the testing.

Exposure conditions	Trigger Conditions	DSI
Head	Receiver on	DSI1
Body Worn (15mm)	Sensor Off / Receiver off	DSI4
Hotspot (10mm)	Hotspot On	DSI5
Extremity (Handheld)	Sensor On	DSI3
	Sensor Off / Receiver off	DSI4



FCC SAR Test Report

Report No. : FA482619

Table with columns for test parameters (FR1 n5, FR1 n26, WCDMA IV, LTE Band 4) and SAR results. Includes rows for 08, 09, and 10, with highlighted values like 0.676 and 0.826.



Table with columns: Band, Modulation, Frequency, Power, etc. It lists various test configurations for LTE Band 4 and LTE Band 66, including antenna positions and measured SAR values. Some cells are highlighted in yellow, such as 0.745 and 0.970.



FCC SAR Test Report

Report No. : FA482619

Table with columns for Band, Power, Modulation, etc. Row 13 is highlighted in yellow.



FCC SAR Test Report

Report No. : FA482619

Table with columns for Test ID, Modulation, Power, Frequency, Bandwidth, Location, Distance, Antenna, DSI, Power Spectral Density, SAR, and Specific Absorption Rate. Includes sections for 1900MHz, GSM1900, WCDMA II, and LTE Band 2/25.



FCC SAR Test Report

Report No. : FA482619

Table with columns for LTE Band, Modulation, Power, and SAR values. Includes a highlighted cell with value 0.979.



Table with columns for Band, Modulation, Power, Frequency, Location, Antenna, and SAR values. Includes rows for LTE Band 41 and LTE Band 41C with various antenna configurations and SAR measurements.



FCC SAR Test Report

Report No. : FA482619

Table with columns: FR1 n38, 40M, QPSK, 1, 1, DFT-SCS-30KHz, Right Cheek, 0mm, Ant 5, DSI 1, 519000, 2595, 20.06, 21.00, 1.242, -, -, -0.1, 0.843, 1.047. Includes a highlighted cell with value 1.089.



FCC SAR Test Report

Report No. : FA482619

Table with columns: Other PA, FR1 n41 Other PA, Power (100M), Modulation (QPSK), Frequency (135, 69), Bandwidth (DFT-SCS-30KHz), Orientation (Right Tilted, Left Cheek, Left Tilted, Right Cheek), Distance (0mm), Antenna (Ant 3, Ant 6), DSI (DSI 1), EIRP (518598, 2592.99), SAR (24.32, 24.28, 14.86, 14.82, 14.81, 14.86), and other SAR values.

3500MHz

Table with columns: LTE Band (42, 42C), Power (20M), Modulation (QPSK), Frequency (1, 0, 50, 100), Bandwidth (-), Orientation (Right Cheek, Right Tilted, Left Cheek, Left Tilted), Distance (0mm), Antenna (Ant 4, Ant 5, Ant 9), DSI (DSI 1), EIRP (42590, 3500, 42590+, 3500+), SAR (18.34, 18.07, 18.14, 18.30, 18.15, 18.13, 18.23, 18.34, 18.07, 18.14, 17.03, 18.29, 18.45, 19.29, 20.00, 23.89, 23.41, 24.39, 25.50, 23.89, 23.41, 24.39, 25.50), and other SAR values.



FCC SAR Test Report

Report No. : FA482619

	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 9	DSI 1	650000	3750	24.51	25.40	1.227	-	-	-0.11	0.076	0.093
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 9	DSI 1	650000	3750	24.45	25.40	1.245	-	-	-0.01	0.060	0.075
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 9	DSI 1	650000	3750	24.51	25.40	1.227	-	-	0.14	0.110	0.135
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 9	DSI 1	650000	3750	24.45	25.40	1.245	-	-	0.12	0.085	0.106
	FR1 n78 PC2	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 9	DSI 1	650000	3750	27.41	28.90	1.409	50	1.000	-0.03	0.111	0.156
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 9	DSI 1	633332	3499.98	24.31	25.40	1.285	-	-	-0.01	0.435	0.559
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 9	DSI 1	633332	3499.98	24.21	25.40	1.315	-	-	-0.06	0.323	0.425
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 9	DSI 1	633332	3499.98	24.31	25.40	1.285	-	-	-0.1	0.142	0.183
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 9	DSI 1	633332	3499.98	24.21	25.40	1.315	-	-	0.12	0.109	0.143
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 9	DSI 1	633332	3499.98	24.31	25.40	1.285	-	-	0.02	0.225	0.289
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 9	DSI 1	633332	3499.98	24.21	25.40	1.315	-	-	0.01	0.153	0.201
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 9	DSI 1	633332	3499.98	24.31	25.40	1.285	-	-	0.05	0.072	0.093
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 9	DSI 1	633332	3499.98	24.21	25.40	1.315	-	-	-0.16	0.079	0.104
	FR1 n78 PC2	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 9	DSI 1	633332	3499.98	27.26	28.90	1.459	50	1.000	0.08	0.418	0.610
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 1	650000	3750	16.21	16.70	1.119	-	-	0.18	0.215	0.241
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 1	650000	3750	16.18	16.70	1.127	-	-	-0.1	0.149	0.168
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 1	650000	3750	16.21	16.70	1.119	-	-	0.01	0.169	0.189
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 1	650000	3750	16.18	16.70	1.127	-	-	-0.15	0.145	0.163
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	650000	3750	16.21	16.70	1.119	-	-	-0.04	0.744	0.833
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	650000	3750	16.18	16.70	1.127	-	-	0.19	0.614	0.692
	FR1 n78	100M	QPSK	270	0	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	650000	3750	16.12	16.70	1.143	-	-	0.07	0.612	0.699
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 1	650000	3750	16.21	16.70	1.119	-	-	-0.18	0.398	0.446
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 1	650000	3750	16.18	16.70	1.127	-	-	0.03	0.315	0.355
	FR1 n78 PC2	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	650000	3750	19.25	20.20	1.245	50	1.000	-0.15	0.716	0.891
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 1	633332	3499.98	15.59	16.70	1.291	-	-	-0.15	0.174	0.225
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 1	633332	3499.98	15.54	16.70	1.306	-	-	0.11	0.186	0.243
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 1	633332	3499.98	15.59	16.70	1.291	-	-	-0.08	0.135	0.174
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 1	633332	3499.98	15.54	16.70	1.306	-	-	-0.17	0.145	0.189
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	633332	3499.98	15.59	16.70	1.291	-	-	-0.08	0.713	0.921
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	633332	3499.98	15.54	16.70	1.306	-	-	0.01	0.761	0.994
	FR1 n78	100M	QPSK	270	0	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	633332	3499.98	15.52	16.70	1.312	-	-	-0.04	0.743	0.975
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 1	633332	3499.98	15.59	16.70	1.291	-	-	-0.08	0.341	0.440
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 1	633332	3499.98	15.54	16.70	1.306	-	-	0.17	0.370	0.483
30	FR1 n78 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 1	633332	3499.98	18.50	20.20	1.479	50	1.000	0.18	0.733	1.084



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 15+8(8)	Standalone	1	2412	12.17	13.00	1.211	97.05	1.030	0.04	0.223	0.278
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 15+8(8)	Standalone	1	2412	12.17	13.00	1.211	97.05	1.030	-0.01	0.241	0.301
31	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 15+8(8)	Standalone	1	2412	12.17	13.00	1.211	97.05	1.030	-0.01	0.725	0.904
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 15+8(8)	Standalone	6	2437	12.10	13.00	1.230	97.05	1.030	0.05	0.638	0.808
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 15+8(8)	Standalone	1	2412	12.17	13.00	1.211	97.05	1.030	-0.08	0.443	0.552
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 8	Standalone	78	2480	11.95	13.50	1.429	77.45	1.076	0.14	0.078	0.120
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 8	Standalone	78	2480	11.95	13.50	1.429	77.45	1.076	-0.17	0.056	0.086
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 8	Standalone	78	2480	11.95	13.50	1.429	77.45	1.076	-0.14	0.430	0.661
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 8	Standalone	78	2480	11.95	13.50	1.429	77.45	1.076	-0.05	0.181	0.278
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	0.01	0.210	0.337
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	0.1	0.300	0.481
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	-0.17	0.341	0.547
32	Bluetooth	1Mbps	Left Tilted	0mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	0.03	0.499	0.800
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 15	Full power	39	2441	15.28	17.00	1.486	76.97	1.082	0.09	0.481	0.773
5000MHz																
	WLAN5.3GHz	802.11ac-VHT160 MCS0	Right Cheek	0mm	Ant 16+12(16)	Standalone	50	5250	12.68	13.50	1.208	100	1.000	-0.09	0.292	0.353
	WLAN5.3GHz	802.11ac-VHT160 MCS0	Right Tilted	0mm	Ant 16+12(16)	Standalone	50	5250	12.68	13.50	1.208	100	1.000	-0.08	0.300	0.362
33	WLAN5.3GHz	802.11ac-VHT160 MCS0	Left Cheek	0mm	Ant 16+12(16)	Standalone	50	5250	12.68	13.50	1.208	100	1.000	-0.07	0.903	1.091
	WLAN5.3GHz	802.11ac-VHT160 MCS0	Left Tilted	0mm	Ant 16+12(16)	Standalone	50	5250	12.68	13.50	1.208	100	1.000	0.13	0.661	0.798
	WLAN5.5GHz	802.11ac-VHT160 MCS0	Right Cheek	0mm	Ant 16+12(16)	Standalone	114	5570	13.35	14.00	1.161	100	1.000	0.12	0.238	0.276
	WLAN5.5GHz	802.11ac-VHT160 MCS0	Right Tilted	0mm	Ant 16+12(16)	Standalone	114	5570	13.35	14.00	1.161	100	1.000	0.03	0.232	0.269
34	WLAN5.5GHz	802.11ac-VHT160 MCS0	Left Cheek	0mm	Ant 16+12(16)	Standalone	114	5570	13.35	14.00	1.161	100	1.000	-0.06	0.848	0.985
	WLAN5.5GHz	802.11ac-VHT160 MCS0	Left Tilted	0mm	Ant 16+12(16)	Standalone	114	5570	13.35	14.00	1.161	100	1.000	0.18	0.514	0.597
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 16+12(12)	Standalone	155	5775	14.19	15.00	1.205	100	1.000	0.01	0.242	0.292
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 16+12(12)	Standalone	155	5775	14.19	15.00	1.205	100	1.000	-0.15	0.232	0.280
35	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 16+12(12)	Standalone	155	5775	14.19	15.00	1.205	100	1.000	0.06	0.857	1.033
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 16+12(12)	Standalone	155	5775	14.19	15.00	1.205	100	1.000	0.19	0.643	0.775



16.2 Hotspot SAR

Table with columns: Plot No., Band, BW (MHz), Modulation, RB Size, RB offset, Mode, Test Position, Gap (mm), Antenna, Power State, Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Duty Cycle %, Duty Cycle Scaling Factor, Power Drift (dB), Measured 1g SAR (W/kg), Reported 1g SAR (W/kg). Rows include LTE Bands 12, 13, and FR1 n12, categorized under 750MHz and 850MHz.



FCC SAR Test Report

Report No. : FA482619

Table with columns for LTE Band, Modulation, Power, and SAR values. Row 47 is highlighted in yellow.



FCC SAR Test Report

Report No. : FA482619

Table with columns for test parameters (FR1 n66, 45M, QPSK, etc.) and SAR values. Includes sections for 1900MHz, GSM1900, WCDMA II, and LTE Band 2. Some cells are highlighted in yellow (e.g., 0.999, 0.656, 0.421).



2600MHz

Table with columns: LTE Band, Modulation, Power, etc. Row 55 is highlighted with a yellow background.



FCC SAR Test Report

Report No. : FA482619

Table with columns: LTE Band, Modulation, Power, etc. Includes a highlighted cell for 56 LTE Band 38C Other PA with a value of 0.894.



FCC SAR Test Report

Report No. : FA482619

Table with columns for test parameters (FR1 n7/n38, Modulation, Power, etc.) and SAR results. Includes rows 58 and 59 with highlighted values 0.874 and 0.683.



FCC SAR Test Report

Report No. : FA482619

Table with columns: FR1 n77, 100M, QPSK, 135, 69, DFT-SCS-30KHz, Right Side, 10mm, Ant 5, DSI 5, 656000, 3840, 16.09, 17.00, 1.233, -, -, -0.08, 0.167, 0.206. The table contains multiple rows of test data for various frequencies and antenna configurations.



FCC SAR Test Report

Report No. : FA482619

Table with columns for test parameters (FR1 n78, 100M, QPSK, 1, 1, DFT-SCS-30KHz, Front, 10mm, Ant 4, DSI 5, 633332, 3499.98, 14.98, 15.20, 1.052, -, -, -0.17, 0.120, 0.126) and a highlighted cell with value 0.562.



FCC SAR Test Report

Report No. : FA482619

FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	10mm	Ant 8	DSI 5	633332	3499.98	15.59	16.70	1.291	-	-	0.03	0.221	0.285
FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	10mm	Ant 8	DSI 5	633332	3499.98	15.54	16.70	1.306	-	-	0.05	0.262	0.342
FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	10mm	Ant 8	DSI 5	633332	3499.98	15.59	16.70	1.291	-	-	-0.15	0.064	0.083
FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	10mm	Ant 8	DSI 5	633332	3499.98	15.54	16.70	1.306	-	-	-0.15	0.067	0.088
FR1 n78 PC 2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	10mm	Ant 8	DSI 5	633332	3499.98	18.50	20.20	1.479	50	1.000	0.11	0.254	0.376

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	0.08	0.664	0.832
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 15+8(15)	Full power	11	2462	18.77	19.50	1.183	97.05	1.030	0.01	0.689	0.840
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	0.03	0.603	0.755
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	-0.08	0.050	0.063
66	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	-0.01	0.806	1.010
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 15+8(15)	Full power	11	2462	18.77	19.50	1.183	97.05	1.030	-0.03	0.776	0.946
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	0.1	0.704	0.882
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 15+8(15)	Full power	11	2462	18.77	19.50	1.183	97.05	1.030	0.02	0.668	0.814
5000MHz																
	Bluetooth	1Mbps	Front	10mm	Ant 8	Full power	78	2480	16.03	17.50	1.403	77.45	1.076	-0.09	0.145	0.219
	Bluetooth	1Mbps	Back	10mm	Ant 8	Full power	78	2480	16.03	17.50	1.403	77.45	1.076	0.11	0.136	0.205
	Bluetooth	1Mbps	Left Side	10mm	Ant 8	Full power	78	2480	16.03	17.50	1.403	77.45	1.076	-0.05	0.001	0.002
67	Bluetooth	1Mbps	Right Side	10mm	Ant 8	Full power	78	2480	16.03	17.50	1.403	77.45	1.076	0.17	0.239	0.361
	Bluetooth	1Mbps	Top Side	10mm	Ant 8	Full power	78	2480	16.03	17.50	1.403	77.45	1.076	-0.08	0.046	0.069
	Bluetooth	1Mbps	Front	10mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	-0.02	0.064	0.103
	Bluetooth	1Mbps	Back	10mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	0.07	0.076	0.122
	Bluetooth	1Mbps	Left Side	10mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	0.04	0.000	0.000
	Bluetooth	1Mbps	Right Side	10mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	-0.02	0.000	0.000
	Bluetooth	1Mbps	Top Side	10mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	0.07	0.168	0.269
5000MHz																
68	WLAN5.2GHz	802.11n-HT20 MCS0	Front	10mm	Ant 16+12(16)	Full power	36	5180	19.29	20.00	1.178	100	1.000	-0.05	0.469	0.552
	WLAN5.2GHz	802.11n-HT20 MCS0	Back	10mm	Ant 16+12(16)	Full power	36	5180	19.29	20.00	1.178	100	1.000	-0.18	0.159	0.187
	WLAN5.2GHz	802.11n-HT20 MCS0	Left Side	10mm	Ant 16+12(16)	Full power	36	5180	19.29	20.00	1.178	100	1.000	0.1	0.082	0.097
	WLAN5.2GHz	802.11n-HT20 MCS0	Right Side	10mm	Ant 16+12(16)	Full power	36	5180	19.29	20.00	1.178	100	1.000	0.12	0.340	0.400
	WLAN5.2GHz	802.11n-HT20 MCS0	Top Side	10mm	Ant 16+12(16)	Full power	36	5180	19.29	20.00	1.178	100	1.000	0.08	0.347	0.409
	WLAN5.8GHz	802.11a 6Mbps	Front	10mm	Ant 16+12(12)	Full power	165	5825	19.55	20.50	1.245	99.32	1.007	0.07	0.275	0.345
	WLAN5.8GHz	802.11a 6Mbps	Back	10mm	Ant 16+12(12)	Full power	165	5825	19.55	20.50	1.245	99.32	1.007	-0.18	0.251	0.315
	WLAN5.8GHz	802.11a 6Mbps	Left Side	10mm	Ant 16+12(12)	Full power	165	5825	19.55	20.50	1.245	99.32	1.007	0.03	0.084	0.105
69	WLAN5.8GHz	802.11a 6Mbps	Right Side	10mm	Ant 16+12(12)	Full power	165	5825	19.55	20.50	1.245	99.32	1.007	-0.02	0.290	0.363
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10mm	Ant 16+12(12)	Full power	165	5825	19.55	20.50	1.245	99.32	1.007	-0.15	0.248	0.311



16.3 Body Worn Accessory SAR

Table with columns: Plot No., Band, BW (MHz), Modulation, RB Size, RB offset, Mode, Test Position, Gap (mm), Antenna, Power State, Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Duty Cycle %, Duty Cycle Scaling Factor, Power Drift (dB), Measured 1g SAR (W/kg), Reported 1g SAR (W/kg). Rows include LTE Bands 12, 13, 5 and GSM/WCDMA bands.



FCC SAR Test Report

Report No. : FA482619

Table with columns for test parameters (FR1 n25, 40M, QPSK, 108, 54, DFT-SCS-15KHz, Front, 15mm, Ant 4, DSI 4, 376500, 1882.5, 24.42, 25.00, 1.143, -0.05, 0.404, 0.462) and rows for various LTE bands (7, 7C, 38, 38C) and antenna configurations. Includes a '2600MHz' section and highlighted values like 0.571, 0.908, and 0.546.



FCC SAR Test Report

Report No. : FA482619

Table with columns for Band, Modulation, Power, etc. Includes rows for LTE Bands 38C, 38, 41, 41C and FR1 n7, n38. Some cells are highlighted in yellow (0.470, 0.968, 0.839).



FCC SAR Test Report

Report No. : FA482619

Table with columns for device model, power, modulation, frequency, time, distance, antenna, and SAR values. Includes a 3500MHz section and a highlighted cell with value 0.993.



FCC SAR Test Report

Report No. : FA482619

Table with columns: Model, Power, Modulation, Channels, Frequency, Bandwidth, Distance, Antenna, Direction, SAR, etc. Row 98 is highlighted in yellow.



FCC SAR Test Report

Report No. : FA482619

	FR1 n78	100M	QPSK	270	0	DFT-SCS-30KHz	Back	15mm	Ant 9	DSI 4	633332	3499.98	23.32	24.40	1.282	-	-	0.17	0.735	0.943
99	FR1 n78 PC2	100M	QPSK	1	1	DFT-SCS-30KHz	Back	15mm	Ant 9	DSI 4	633332	3499.98	26.45	27.90	1.396	50	1.000	-0.01	0.745	1.040
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Front	15mm	Ant 8	DSI 4	650000	3750	18.74	19.20	1.112	-	-	0.11	0.162	0.180
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Front	15mm	Ant 8	DSI 4	650000	3750	18.67	19.20	1.130	-	-	-0.05	0.133	0.150
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Back	15mm	Ant 8	DSI 4	650000	3750	18.74	19.20	1.112	-	-	0.18	0.089	0.099
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Back	15mm	Ant 8	DSI 4	650000	3750	18.67	19.20	1.130	-	-	0.14	0.074	0.084
	FR1 n78 PC2	100M	QPSK	1	1	DFT-SCS-30KHz	Front	15mm	Ant 8	DSI 4	650000	3750	21.75	22.70	1.245	50	1.000	-0.17	0.154	0.192
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Front	15mm	Ant 8	DSI 4	633332	3499.98	18.13	19.20	1.279	-	-	0.17	0.135	0.173
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Front	15mm	Ant 8	DSI 4	633332	3499.98	18.08	19.20	1.294	-	-	-0.05	0.139	0.180
	FR1 n78	100M	QPSK	1	1	DFT-SCS-30KHz	Back	15mm	Ant 8	DSI 4	633332	3499.98	18.13	19.20	1.279	-	-	0.01	0.075	0.096
	FR1 n78	100M	QPSK	135	69	DFT-SCS-30KHz	Back	15mm	Ant 8	DSI 4	633332	3499.98	18.08	19.20	1.294	-	-	0.1	0.086	0.111
	FR1 n78 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	15mm	Ant 8	DSI 4	633332	3499.98	21.10	22.70	1.445	50	1.000	-0.17	0.134	0.194

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
100	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	-0.01	0.254	0.318
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	-0.16	0.212	0.266
101	Bluetooth	1Mbps	Front	15mm	Ant 8	Full power	78	2480	16.03	17.50	1.403	77.45	1.076	0.01	0.069	0.104
	Bluetooth	1Mbps	Back	15mm	Ant 8	Full power	78	2480	16.03	17.50	1.403	77.45	1.076	0.16	0.064	0.097
	Bluetooth	1Mbps	Front	15mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	-0.01	0.001	0.002
	Bluetooth	1Mbps	Back	15mm	Ant 15	Full power	0	2402	15.29	17.00	1.483	76.97	1.082	0	0.000	0.000
5000MHz																
102	WLAN5.3GHz	802.11a 6Mbps	Front	15mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	-0.08	0.271	0.331
	WLAN5.3GHz	802.11a 6Mbps	Back	15mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	-0.02	0.118	0.144
103	WLAN5.5GHz	802.11n-HT20 MCS0	Front	15mm	Ant 16+12(16)	Full power	100	5500	19.09	20.00	1.233	100	1.000	0.02	0.217	0.268
	WLAN5.5GHz	802.11n-HT20 MCS0	Back	15mm	Ant 16+12(16)	Full power	100	5500	19.09	20.00	1.233	100	1.000	0.15	0.201	0.248
104	WLAN5.8GHz	802.11a 6Mbps	Front	15mm	Ant 16+12(12)	Full power	165	5825	19.55	20.50	1.245	99.32	1.007	0.01	0.154	0.193
	WLAN5.8GHz	802.11a 6Mbps	Back	15mm	Ant 16+12(12)	Full power	165	5825	19.55	20.50	1.245	99.32	1.007	0.03	0.143	0.179



16.4 Product specific 10g SAR

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
5000MHz																
105	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	0.04	2.01	2.456
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 16+12(12)	Full power	52	5260	18.76	19.50	1.186	99.32	1.007	-0.17	1.92	2.293
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	-0.03	0.365	0.446
	WLAN5.3GHz	802.11a 6Mbps	Left Side	0mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	0.14	0.059	0.072
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	0.11	1.55	1.894
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	0.18	1.32	1.613
	WLAN5.5GHz	802.11n-HT20 MCS0	Front	0mm	Ant 16+12(16)	Full power	100	5500	19.09	20.00	1.233	100	1.000	0.16	1.69	2.084
106	WLAN5.5GHz	802.11n-HT20 MCS0	Front	0mm	Ant 16+12(12)	Full power	144	5720	19.74	20.50	1.191	100	1.000	-0.05	1.93	2.299
	WLAN5.5GHz	802.11n-HT20 MCS0	Back	0mm	Ant 16+12(16)	Full power	100	5500	19.09	20.00	1.233	100	1.000	-0.1	0.357	0.440
	WLAN5.5GHz	802.11n-HT20 MCS0	Left Side	0mm	Ant 16+12(16)	Full power	100	5500	19.09	20.00	1.233	100	1.000	0.07	0.036	0.044
	WLAN5.5GHz	802.11n-HT20 MCS0	Right Side	0mm	Ant 16+12(16)	Full power	100	5500	19.09	20.00	1.233	100	1.000	0.18	1.46	1.800
	WLAN5.5GHz	802.11n-HT20 MCS0	Top Side	0mm	Ant 16+12(16)	Full power	100	5500	19.09	20.00	1.233	100	1.000	-0.1	1.00	1.233



16.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 13	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 5	23230	782	25.14	25.70	1.138	-	-	0.03	0.961	1	1.093
2nd	LTE Band 13	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 5	23230	782	25.14	25.70	1.138	-	-	0.05	0.953	1.008	1.084
1st	LTE Band 4	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 3	DSI 5	20175	1732.5	22.00	22.70	1.175	-	-	0.01	0.864	1	1.015
2nd	LTE Band 4	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 3	DSI 5	20175	1732.5	22.00	22.70	1.175	-	-	0.06	0.858	1.007	1.008
1st	FR1 n25	40M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 5	DSI 1	376500	1882.5	16.41	16.80	1.094	-	-	0.03	0.807	1	0.883
2nd	FR1 n25	40M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 5	DSI 1	376500	1882.5	16.41	16.80	1.094	-	-	0.02	0.783	1.031	0.857
1st	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	40185	2549.5	19.53	20.20	1.167	62.9	1.006	-0.05	0.932	1	1.094
2nd	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI 1	40185	2549.5	19.53	20.20	1.167	62.9	1.006	0.02	0.905	1.030	1.062
1st	LTE Band 42	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	42990	3540	18.14	18.70	1.138	62.9	1.006	0.09	0.953	1	1.091
2nd	LTE Band 42	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI 1	42990	3540	18.14	18.70	1.138	62.9	1.006	0.02	0.912	1.045	1.044
1st	WLAN5.3GHz	-	-	-	-	802.11ac-VHT160 MCS0	Left Cheek	0mm	Ant 16+12(16)	Standalone	50	5250	12.68	13.50	1.208	100	1.000	-0.07	0.903	1	1.091
2nd	WLAN5.3GHz	-	-	-	-	802.11ac-VHT160 MCS0	Left Cheek	0mm	Ant 16+12(16)	Standalone	50	5250	12.68	13.50	1.208	100	1.000	0.02	0.856	1.055	1.034
1st	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Right Side	10mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	-0.01	0.806	1	1.010
2nd	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Right Side	10mm	Ant 15+8(8)	Full power	1	2412	19.65	20.50	1.216	97.05	1.030	0.06	0.798	1.010	1.000
1st	WLAN5.5GHz	-	-	-	-	802.11ac-VHT160 MCS0	Left Cheek	0mm	Ant 16+12(16)	Standalone	114	5570	13.35	14.00	1.161	100	1.000	-0.06	0.848	1	0.985
2nd	WLAN5.5GHz	-	-	-	-	802.11ac-VHT160 MCS0	Left Cheek	0mm	Ant 16+12(16)	Standalone	114	5570	13.35	14.00	1.161	100	1.000	0.03	0.811	1.046	0.942
1st	WLAN5.8GHz	-	-	-	-	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 16+12(12)	Standalone	155	5775	14.19	15.00	1.205	100	1.000	0.06	0.857	1	1.033
2nd	WLAN5.8GHz	-	-	-	-	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 16+12(12)	Standalone	155	5775	14.19	15.00	1.205	100	1.000	0.02	0.853	1.005	1.028
1st	LTE Band 5	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 5	20525	836.5	25.21	25.70	1.119	-	-	-0.01	0.879	1	0.984
2nd	LTE Band 5	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 5	20525	836.5	25.21	25.70	1.119	-	-	0.06	0.866	1.015	0.969

<10g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WLAN5.3GHz	-	-	-	-	802.11a 6Mbps	Front	0mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	0.04	2.01	1	2.456
2nd	WLAN5.3GHz	-	-	-	-	802.11a 6Mbps	Front	0mm	Ant 16+12(16)	Full power	64	5320	19.16	20.00	1.213	99.32	1.007	0.01	1.99	1.010	2.432

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16.6 TDD 5G NR Linearity Data Analysis

General Note:

This device support Power Class 2 and Power Class 3 operations for 5G NR n41/n77/n78. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each 5G NR configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg for 1g and < 3.5 W/kg for 10g, Separate SAR testing for Power Class 2 is not required.

FR1 n41 HPUE (HPUE)-Linearity Data for Head Ant4			FR1 n41 HPUE (HPUE)-Linearity Data for Head Ant5		
	NR n41 (Power Class 3)	NR n41 (Power Class 2)		NR n41 (Power Class 3)	NR n41 (Power Class 2)
Maximum Tune up Power (dBm)	16.70	20.00	Maximum Tune up Power (dBm)	20.70	23.70
Reported 1g SAR (W/kg)	0.931	1.009	Reported 1g SAR (W/kg)	1.037	1.020
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	46.77	50.00	Frame Averaged (mW)	117.49	117.21
Linearity SAR (W/kg)	0.995		Linearity SAR (W/kg)	1.035	
% deviation from expected linearity		1.38%	% deviation from expected linearity		-1.41%
FR1 n41 HPUE (HPUE)-Linearity Data for Body-worn Ant4			FR1 n41 HPUE (HPUE)-Linearity Data for Body-worn Ant5		
	NR n41 (Power Class 3)	NR n41 (Power Class 2)		NR n41 (Power Class 3)	NR n41 (Power Class 2)
Maximum Tune up Power (dBm)	25.70	27.00	Maximum Tune up Power (dBm)	19.20	22.20
Reported 1g SAR (W/kg)	0.993	0.731	Reported 1g SAR (W/kg)	0.192	0.173
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	371.54	250.59	Frame Averaged (mW)	83.18	82.98
Linearity SAR (W/kg)	0.670		Linearity SAR (W/kg)	0.192	
% deviation from expected linearity		9.14%	% deviation from expected linearity		-9.68%
FR1 n41 HPUE (HPUE)-Linearity Data for Hotspot Ant4			FR1 n41 HPUE (HPUE)-Linearity Data for Hotspot Ant5		
	NR n41 (Power Class 3)	NR n41 (Power Class 2)		NR n41 (Power Class 3)	NR n41 (Power Class 2)
Maximum Tune up Power (dBm)	16.70	20.00	Maximum Tune up Power (dBm)	19.20	22.20
Reported 1g SAR (W/kg)	0.242	0.233	Reported 1g SAR (W/kg)	0.584	0.562
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	46.77	50.00	Frame Averaged (mW)	83.18	82.98
Linearity SAR (W/kg)	0.259		Linearity SAR (W/kg)	0.583	
% deviation from expected linearity		-9.93%	% deviation from expected linearity		-3.54%



NR n77 Part27O (HPUE)-Linearity Data for Head Ant4			NR n77 Part27Q (HPUE)-Linearity Data for Head Ant4		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	15.20	18.50	Maximum Tune up Power (dBm)	15.20	18.50
Reported 1g SAR (W/kg)	0.475	0.552	Reported 1g SAR (W/kg)	0.795	0.829
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	33.11	35.40	Frame Averaged (mW)	33.11	35.40
Linearity SAR (W/kg)	0.508		Linearity SAR (W/kg)	0.850	
% deviation from expected linearity		8.71%	% deviation from expected linearity		-2.45%
NR n77 Part27O (HPUE)-Linearity Data for Body-worn Ant4			NR n77 Part27Q (HPUE)-Linearity Data for Body-worn Ant4		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	25.70	29.00	Maximum Tune up Power (dBm)	25.70	29.00
Reported 1g SAR (W/kg)	0.697	0.676	Reported 1g SAR (W/kg)	0.808	0.785
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	371.54	397.16	Frame Averaged (mW)	371.54	397.16
Linearity SAR (W/kg)	0.745		Linearity SAR (W/kg)	0.864	
% deviation from expected linearity		-9.27%	% deviation from expected linearity		-9.12%
NR n77 Part27O (HPUE)-Linearity Data for Hotspot Ant4			NR n77 Part27Q (HPUE)-Linearity Data for Hotspot Ant4		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	15.20	18.50	Maximum Tune up Power (dBm)	15.20	18.50
Reported 1g SAR (W/kg)	0.119	0.124	Reported 1g SAR (W/kg)	0.163	0.181
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	33.11	35.40	Frame Averaged (mW)	33.11	35.40
Linearity SAR (W/kg)	0.127		Linearity SAR (W/kg)	0.174	
% deviation from expected linearity		-2.52%	% deviation from expected linearity		3.88%

NR n77 Part27O (HPUE)-Linearity Data for Head Ant5			NR n77 Part27Q (HPUE)-Linearity Data for Head Ant5		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	17.00	20.50	Maximum Tune up Power (dBm)	17.00	20.50
Reported 1g SAR (W/kg)	0.574	0.654	Reported 1g SAR (W/kg)	0.544	0.586
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	50.12	56.10	Frame Averaged (mW)	50.12	56.10
Linearity SAR (W/kg)	0.643		Linearity SAR (W/kg)	0.609	
% deviation from expected linearity		1.79%	% deviation from expected linearity		-3.77%
NR n77 Part27O (HPUE)-Linearity Data for Body-worn Ant5			NR n77 Part27Q (HPUE)-Linearity Data for Body-worn Ant5		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	19.50	23.00	Maximum Tune up Power (dBm)	19.50	23.00
Reported 1g SAR (W/kg)	0.108	0.112	Reported 1g SAR (W/kg)	0.125	0.143
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	89.13	99.76	Frame Averaged (mW)	89.13	99.76
Linearity SAR (W/kg)	0.121		Linearity SAR (W/kg)	0.140	
% deviation from expected linearity		-7.35%	% deviation from expected linearity		2.20%
NR n77 Part27O (HPUE)-Linearity Data for Hotspot Ant5			NR n77 Part27Q (HPUE)-Linearity Data for Hotspot Ant5		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	17.00	20.50	Maximum Tune up Power (dBm)	17.00	20.50
Reported 1g SAR (W/kg)	0.227	0.258	Reported 1g SAR (W/kg)	0.280	0.320
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	50.12	56.10	Frame Averaged (mW)	50.12	56.10
Linearity SAR (W/kg)	0.254		Linearity SAR (W/kg)	0.313	
% deviation from expected linearity		1.54%	% deviation from expected linearity		2.10%



NR n77 Part27O (HPUE)-Linearity Data for Head Ant8			NR n77 Part27Q (HPUE)-Linearity Data for Head Ant8		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	16.80	20.30	Maximum Tune up Power (dBm)	16.80	20.30
Reported 1g SAR (W/kg)	0.677	0.744	Reported 1g SAR (W/kg)	0.955	1.082
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	47.86	53.58	Frame Averaged (mW)	47.86	53.58
Linearity SAR (W/kg)	0.758		Linearity SAR (W/kg)	1.069	
% deviation from expected linearity		-1.82%	% deviation from expected linearity		1.22%
NR n77 Part27O (HPUE)-Linearity Data for Body-worn Ant8			NR n77 Part27Q (HPUE)-Linearity Data for Body-worn Ant8		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	19.80	23.30	Maximum Tune up Power (dBm)	19.80	23.30
Reported 1g SAR (W/kg)	0.183	0.186	Reported 1g SAR (W/kg)	0.212	0.226
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	95.50	106.90	Frame Averaged (mW)	95.50	106.90
Linearity SAR (W/kg)	0.205		Linearity SAR (W/kg)	0.237	
% deviation from expected linearity		-9.20%	% deviation from expected linearity		-4.76%
NR n77 Part27O (HPUE)-Linearity Data for Hotspot Ant8			NR n77 Part27Q (HPUE)-Linearity Data for Hotspot Ant8		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	16.80	20.30	Maximum Tune up Power (dBm)	16.80	20.30
Reported 1g SAR (W/kg)	0.259	0.300	Reported 1g SAR (W/kg)	0.307	0.333
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	47.86	53.58	Frame Averaged (mW)	47.86	53.58
Linearity SAR (W/kg)	0.290		Linearity SAR (W/kg)	0.344	
% deviation from expected linearity		3.48%	% deviation from expected linearity		-3.10%

NR n77 Part27O (HPUE)-Linearity Data for Head Ant9			NR n77 Part27Q (HPUE)-Linearity Data for Head Ant9		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	25.40	28.90	Maximum Tune up Power (dBm)	25.40	28.90
Reported 1g SAR (W/kg)	0.143	0.145	Reported 1g SAR (W/kg)	0.550	0.562
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	346.74	388.12	Frame Averaged (mW)	346.74	388.12
Linearity SAR (W/kg)	0.160		Linearity SAR (W/kg)	0.616	
% deviation from expected linearity		-9.41%	% deviation from expected linearity		-8.71%
NR n77 Part27O (HPUE)-Linearity Data for Body-worn Ant9			NR n77 Part27Q (HPUE)-Linearity Data for Body-worn Ant9		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	24.40	27.90	Maximum Tune up Power (dBm)	24.40	27.90
Reported 1g SAR (W/kg)	0.810	0.825	Reported 1g SAR (W/kg)	1.028	1.064
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	275.42	308.30	Frame Averaged (mW)	275.42	308.30
Linearity SAR (W/kg)	0.907		Linearity SAR (W/kg)	1.151	
% deviation from expected linearity		-9.01%	% deviation from expected linearity		-7.53%
NR n77 Part27O (HPUE)-Linearity Data for Hotspot Ant9			NR n77 Part27Q (HPUE)-Linearity Data for Hotspot Ant9		
	NR n77 (Power Class 3)	NR n77 (Power Class 2)		NR n77 (Power Class 3)	NR n77 (Power Class 2)
Maximum Tune up Power (dBm)	17.40	20.90	Maximum Tune up Power (dBm)	17.40	20.90
Reported 1g SAR (W/kg)	0.409	0.434	Reported 1g SAR (W/kg)	0.604	0.615
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	54.95	61.51	Frame Averaged (mW)	54.95	61.51
Linearity SAR (W/kg)	0.458		Linearity SAR (W/kg)	0.676	
% deviation from expected linearity		-5.20%	% deviation from expected linearity		-9.04%



NR N78 Part270 (HPUE)-Linearity Data for Head Ant4			NR N78 Part27Q (HPUE)-Linearity Data for Head Ant4		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	15.20	18.50	Maximum Tune up Power (dBm)	15.20	18.50
Reported 1g SAR (W/kg)	0.633	0.731	Reported 1g SAR (W/kg)	0.803	0.840
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	33.11	35.40	Frame Averaged (mW)	33.11	35.40
Linearity SAR (W/kg)	0.677		Linearity SAR (W/kg)	0.858	
% deviation from expected linearity		8.03%	% deviation from expected linearity		-2.14%
NR N78 Part270 (HPUE)-Linearity Data for Body-worn Ant4			NR N78 Part27Q (HPUE)-Linearity Data for Body-worn Ant4		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	25.70	29.00	Maximum Tune up Power (dBm)	25.70	29.00
Reported 1g SAR (W/kg)	0.679	0.661	Reported 1g SAR (W/kg)	0.845	0.818
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	371.54	397.16	Frame Averaged (mW)	371.54	397.16
Linearity SAR (W/kg)	0.726		Linearity SAR (W/kg)	0.903	
% deviation from expected linearity		-8.93%	% deviation from expected linearity		-9.44%
NR N78 Part270 (HPUE)-Linearity Data for Hotspot Ant4			NR N78 Part27Q (HPUE)-Linearity Data for Hotspot Ant4		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	15.20	18.50	Maximum Tune up Power (dBm)	15.20	18.50
Reported 1g SAR (W/kg)	0.180	0.200	Reported 1g SAR (W/kg)	0.178	0.200
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	33.11	35.40	Frame Averaged (mW)	33.11	35.40
Linearity SAR (W/kg)	0.192		Linearity SAR (W/kg)	0.190	
% deviation from expected linearity		3.94%	% deviation from expected linearity		5.11%

NR N78 Part270 (HPUE)-Linearity Data for Head Ant5			NR N78 Part27Q (HPUE)-Linearity Data for Head Ant5		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	17.50	21.00	Maximum Tune up Power (dBm)	17.50	21.00
Reported 1g SAR (W/kg)	0.802	0.959	Reported 1g SAR (W/kg)	0.806	0.821
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	56.23	62.95	Frame Averaged (mW)	56.23	62.95
Linearity SAR (W/kg)	0.898		Linearity SAR (W/kg)	0.902	
% deviation from expected linearity		6.83%	% deviation from expected linearity		-9.00%
NR N78 Part270 (HPUE)-Linearity Data for Body-worn Ant5			NR N78 Part27Q (HPUE)-Linearity Data for Body-worn Ant5		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	20.00	23.50	Maximum Tune up Power (dBm)	20.00	23.50
Reported 1g SAR (W/kg)	0.245	0.282	Reported 1g SAR (W/kg)	0.154	0.171
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	100.00	111.94	Frame Averaged (mW)	100.00	111.94
Linearity SAR (W/kg)	0.274		Linearity SAR (W/kg)	0.172	
% deviation from expected linearity		2.83%	% deviation from expected linearity		-0.80%
NR N78 Part270 (HPUE)-Linearity Data for Hotspot Ant5			NR N78 Part27Q (HPUE)-Linearity Data for Hotspot Ant5		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	17.50	21.00	Maximum Tune up Power (dBm)	17.50	21.00
Reported 1g SAR (W/kg)	0.459	0.495	Reported 1g SAR (W/kg)	0.351	0.400
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	56.23	62.95	Frame Averaged (mW)	56.23	62.95
Linearity SAR (W/kg)	0.514		Linearity SAR (W/kg)	0.393	
% deviation from expected linearity		-3.66%	% deviation from expected linearity		1.81%



NR N78 Part270 (HPUE)-Linearity Data for Head Ant8			NR N78 Part27Q (HPUE)-Linearity Data for Head Ant8		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	16.70	20.20	Maximum Tune up Power (dBm)	16.70	20.20
Reported 1g SAR (W/kg)	0.833	0.891	Reported 1g SAR (W/kg)	0.994	1.084
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	46.77	52.36	Frame Averaged (mW)	46.77	52.36
Linearity SAR (W/kg)	0.932		Linearity SAR (W/kg)	1.113	
% deviation from expected linearity		-4.44%	% deviation from expected linearity		-2.57%
NR N78 Part270 (HPUE)-Linearity Data for Body-worn Ant8			NR N78 Part27Q (HPUE)-Linearity Data for Body-worn Ant8		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	19.20	22.70	Maximum Tune up Power (dBm)	19.20	22.70
Reported 1g SAR (W/kg)	0.180	0.192	Reported 1g SAR (W/kg)	0.180	0.194
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	83.18	93.10	Frame Averaged (mW)	83.18	93.10
Linearity SAR (W/kg)	0.201		Linearity SAR (W/kg)	0.201	
% deviation from expected linearity		-4.71%	% deviation from expected linearity		-3.71%
NR N78 Part270 (HPUE)-Linearity Data for Hotspot Ant8			NR N78 Part27Q (HPUE)-Linearity Data for Hotspot Ant8		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	16.70	20.20	Maximum Tune up Power (dBm)	16.70	20.20
Reported 1g SAR (W/kg)	0.318	0.343	Reported 1g SAR (W/kg)	0.342	0.376
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	46.77	52.36	Frame Averaged (mW)	46.77	52.36
Linearity SAR (W/kg)	0.356		Linearity SAR (W/kg)	0.383	
% deviation from expected linearity		-3.64%	% deviation from expected linearity		-1.78%

NR N78 Part270 (HPUE)-Linearity Data for Head Ant9			NR N78 Part27Q (HPUE)-Linearity Data for Head Ant9		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	25.40	28.90	Maximum Tune up Power (dBm)	25.40	28.90
Reported 1g SAR (W/kg)	0.144	0.156	Reported 1g SAR (W/kg)	0.559	0.610
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	346.74	388.12	Frame Averaged (mW)	346.74	388.12
Linearity SAR (W/kg)	0.161		Linearity SAR (W/kg)	0.626	
% deviation from expected linearity		-3.22%	% deviation from expected linearity		-2.51%
NR N78 Part270 (HPUE)-Linearity Data for Body-worn Ant9			NR N78 Part27Q (HPUE)-Linearity Data for Body-worn Ant9		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	24.40	27.90	Maximum Tune up Power (dBm)	24.40	27.90
Reported 1g SAR (W/kg)	0.907	0.921	Reported 1g SAR (W/kg)	0.992	1.040
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	275.42	308.30	Frame Averaged (mW)	275.42	308.30
Linearity SAR (W/kg)	1.015		Linearity SAR (W/kg)	1.110	
% deviation from expected linearity		-9.28%	% deviation from expected linearity		-6.34%
NR N78 Part270 (HPUE)-Linearity Data for Hotspot Ant9			NR N78 Part27Q (HPUE)-Linearity Data for Hotspot Ant9		
	NR N78 (Power Class 3)	NR N78 (Power Class 2)		NR N78 (Power Class 3)	NR N78 (Power Class 2)
Maximum Tune up Power (dBm)	17.40	20.90	Maximum Tune up Power (dBm)	17.40	20.90
Reported 1g SAR (W/kg)	0.402	0.439	Reported 1g SAR (W/kg)	0.489	0.562
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	54.95	61.51	Frame Averaged (mW)	54.95	61.51
Linearity SAR (W/kg)	0.450		Linearity SAR (W/kg)	0.547	
% deviation from expected linearity		-2.44%	% deviation from expected linearity		2.67%

17. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + 2.4GHz WLAN	Yes	Yes	Yes	Yes
2.	WWAN + 5GHz WLAN	Yes	Yes	Yes	Yes
3.	WWAN + 6GHz WLAN	Yes	Yes		Yes
4.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
5.	5GHz WLAN + Bluetooth	Yes	Yes	Yes	Yes
6.	6GHz WLAN + Bluetooth	Yes	Yes		Yes
7.	5GHz WLAN + 2.4GHz WLAN	Yes	Yes	Yes	Yes
8.	6GHz WLAN + 2.4GHz WLAN	Yes	Yes		Yes
9.	WWAN +5GHz WLAN + Bluetooth	Yes	Yes	Yes	Yes
10.	WWAN +6GHz WLAN + Bluetooth	Yes	Yes		Yes
11.	WWAN +5GHz WLAN + 2.4GHz WLAN	Yes	Yes	Yes	Yes
12.	WWAN +6GHz WLAN + 2.4GHz WLAN	Yes	Yes		Yes
13.	WWAN + 2.4GHz WLAN+ NFC				Yes
14.	WWAN + 5GHz/6GHz WLAN+ NFC				Yes
15.	WWAN + Bluetooth+ NFC				Yes
16.	5GHz/6GHz WLAN + Bluetooth+ NFC				Yes
17.	5GHz/6GHz WLAN + 2.4GHz WLAN+ NFC				Yes
18.	WWAN +5GHz/6GHz WLAN + Bluetooth+ NFC				Yes
19.	WWAN +5GHz/6GHz WLAN + 2.4GHz WLAN+ NFC				Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5GNR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- WWAN above includes 5G NR bands and EN-DC combination.
- WLAN2.4GHz/WLAN5GHz MIMO SAR can represent SISO SAR to do co-located SAR analysis.
- EUT will choose each GSM, WCDMA, LTE and 5GNR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). WLAN6GHz has no hotspot function.
- For EN-DC mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from 4G(LTE) and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR to not exceed SAR exposure limit. Therefore, simultaneous transmission compliance between 4G+5G (PCC+SCC) operations within an antenna group is demonstrated in the Part 2 Report during algorithm validation.
- The equipment under test (EUT) contains the Qualcomm modems supporting 2G/3G/4G/5G technologies and WLAN/BT technologies. these modems are always enabled with Qualcomm Smart Transmit feature to control and manage transmitting power in real time and to ensure the time-averaged RF exposure follows the FCC requirement. Smart Transmit algorithm controls the total RF exposure from all WWAN/WLAN/BT to not exceed FCC limit and each antenna group has controlled the total RF exposure from all transmitter to not exceed FCC limit. Therefore, in Part.1 report, it is evaluated whether the sum of the groups of each antenna does not exceed FCC limit or spatial separation is applied. In addition, each antenna needs to satisfy simultaneous transmission analysis with External radios (NFC) in this report at extremity exposure condition.
- According to the EUT characteristic, WLAN2.4GHz and Bluetooth cannot transmit simultaneously.
- According to the EUT characteristic, WLAN5GHz/6GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN5GHz/6GHz and WLAN 2.4GHz can transmit simultaneously.
- The worst case 5 GHz/6GHz WLAN SAR for each configuration was used for SAR summation.
- NFC can transmit simultaneously with other Radios in extremity exposure condition.
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- When stand-alone SAR is not required for a transmitter or antenna, its SAR is considered zero in the SAR summing process to assess Multi-band transmission SAR compliance.
- For standalone WWAN/BT/WLAN, always choose the highest SAR among all WWAN/BT/WLAN bands within all antennas for each exposure position to perform simultaneous transmission analysis. This is the worst co-located analysis and can represent each band.

17. The maximum SAR summation is calculated based on the same configuration and test position.
18. For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
19. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - v) The SPLSR calculated results please refer to section 17.7.
20. The WLAN6GHz Sim-Tx analysis guidance with other transmitters was based on SAR test results. The simultaneous transmission and test exemption analysis were compliant with KDB 447498 D01. For the device does not support FR2 or other MPE field measurement, therefore section 17 in the SAR report has no TER analysis according to KDB 987594 requirement.

17.1 MIMO SAR Test condition and verification

General Note:

1. Smart Transmit EFS v20 (or lower) uses SISO P_{limit} to calculate RF exposure from MIMO transmission scenario. Therefore, if MIMO is supported for WWAN technologies (including 5G sub6 NR), below procedure should be performed for validity of Smart Transmit operation:
 - 1) Below procedure should also be performed for Smart Transmit EFS v21 (or higher) if MIMO P_{limit} is not populated in the EFS but MIMO operation is supported for antennas belonging to the same antenna group (refer to Section 4.2.5 of Qualcomm's document 80-W2112-4).
2. Measure SAR for supported MIMO scenarios in FTM mode with each of the MIMO antennas set to transmit continuously at $P_{test} = \text{minimum} \{P_{limit}(i), P_{max}(i); i=1 \text{ to } n \text{ MIMO antennas}\}$, where $P_{limit}(i)$ is the power level entered in the Smart Transmit EFS for antenna i under the corresponding tech/band/DSI. For Smart Transmit to ensure the compliance in MIMO transmission scenario, the below criteria should be met for measured MIMO SAR (i.e., highest peak spatial-average SAR from the measurement):

$$\text{reported } SAR_{MIMO} = \text{Measured MIMO } SAR_{MIMO} \text{ at } (P_{test} + \text{device total uncertainty}) \leq \text{calc. SAR}$$

$$\text{Where } \text{calc. SAR} = \sum_{i=1}^n \left[SAR_{\text{design_target}} * 10^{\left(\frac{\text{total uncertainty} + P_{test} - P_{limit}(i) - \text{backoff}(i)}{10} \right)} \right]$$

Here,

- n is number of MIMO antennas (in case of 2x2MIMO, $n=2$).
 - $P_{limit}(i)$ is EFS P_{limit} for antenna $i \in$ MIMO for a given tech/band/DSI. P_{limit} corresponds to $SAR_{\text{design_target}}$.
 - $\text{backoff}(i)$ is backoff from $SAR_{\text{design_target}}$ used for the i th antenna's P_{limit} to meet TER with external radios (i.e., radios outside of Smart Transmit control). If EFS P_{limit} of antenna i corresponds to $SAR_{\text{design_target}}$, then $\text{backoff}(i) = 0$ in the above equation.
 - P_{test} (i.e., power level used for MIMO SAR measurement, $MIMO.SAR @ P_{test}$) = $\min \{P_{limit}(i), P_{max}(i), i = 1 \text{ to } n \text{ MIMO antenna}\}$. To further clarify, $P_{test} = \min \{P_{limit}(i), SISO.P_{max}(i), MIMO.P_{max}, i = 1 \text{ to } n \text{ antenna} \in MIMO\}$, where, P_{limit} corresponds to $SAR_{\text{design_target}}$, $SISO.P_{max}$ and $MIMO.P_{max}$ correspond to the maximum output power (nominal levels without device uncertainty) that device is capable; here, P_{test} is nominal power level, not measured level.
3. If the $\text{reported } SAR_{MIMO}$ does not meet the above condition, then $P_{limit}(i)$ for each of the MIMO antenna in the Smart Transmit EFS should be reduced by $10 * \log_{10}[\text{reported } SAR_{MIMO} / \text{calc. SAR}]$ dB.
 4. Per Qualcomm's document guideline, WLAN MIMO P_{limit} is configured in the EFS and WLAN MIMO antennas belong to the same antenna group, then SAR measurement results at MIMO P_{limit} for the corresponding WLAN MIMO transmission scenario can be referred to section 16 in this report.
 5. Per Qualcomm's document guideline, FR1/BT MIMO P_{limit} is not populated in the EFS file, but MIMO operation is supported for antennas belonging to the same antenna group, the detail FR1/BT MIMO analysis results please referred to appendix H.

17.2 Sub6 Antenna Groups

The Qualcomm® Smart Transmit™ 5.0 of Smart Transmit (GEN2) Feature operates based on pre-defined sub6 antenna groups (AG). Sub6 Tx antennas in the device are grouped based on spatial variation of RF exposure distributions, where the RF exposure of one AG is mutually exclusive from other AG. This is accomplished by demonstrating below conditions for all exposure positions under each DSI for a given exposure category.

- 1) Case 1: Demonstrate that Sum of maximum reported SAR from each of the sub6 AGs and the reported normalized SAR values from radios outside Smart Transmit should be less than regulatory limits for each supported DSI. This condition must be demonstrated for all antenna combinations of sub6 AGs.
 - i. For a given DSI, obtain the highest *reported* SAR for each antenna out of all supported technologies and frequency bands. Obtain the maximum *reported* SAR for each AG by taking the maximum out of *reported* SAR for all antennas belonging to each AG.
 - ii. Demonstrate that the sum of maximum reported SAR (normalized to regulatory limit) from each of the sub6 AGs and the sum of reported SAR (normalized to regulatory limit) from all supported radios outside of Smart Transmit should be less than 1.0
- 2) Case 2: If the Case 1 is NOT met, then for a given antenna grouping scheme plus external radios/antennas (ERs) (referred to as 'configuration'), demonstrate all AG pairs, all ER pairs and all (AG, ER) pairs in the configuration meet SPLSR criteria (Section 4.3.2 (c) in FCC KDB 447498 D01 v06) for each exposure position under each supported DSI. For a given exposure position under a given DSI, prove all AG pairs, all ER pairs and all (AG, ER) pairs (if there are external radios outside Smart Transmit) in the configuration meet SPLSR.

This device supports two sub6 AG: AG0 and AG1, the detailed please refer to the below table:

Antenna Group 0 (AG0)	ANT1 & ANT4 & ANT5 & ANT6 & ANT8 & ANT9 & ANT15 & ANT12 & ANT16
Antenna Group 1 (AG1)	ANT0 & ANT3

- 3) This model's multi_Tx_factor is 1.0.

The conditions are verified through the following criterias:

- i) (SAR1 + SAR2 criteria): If SPLSR criteria is not used, then the highest reported SAR at *Plimit* for each antenna should be obtained out of all supported technologies and frequency bands for each DSI. Demonstrate that the sum of reported SAR of one antenna from each of the sub6 AGs and the sum of RF exposure from all supported radios outside of Smart Transmit should be less than the regulatory limit as given below for each DSI.
 1. Obtain the worst-case reported SAR for each antenna group (i.e., maximum *reported* SAR at *Plimit* out of all supported technologies, frequency bands and antennas in AG0 and AG1), denoted as max.SAR.AG0 and max.SAR.AG1, and obtain the worst-case RF exposure for each external radio, and demonstrate that the sum of these RF exposures meets: { [max.SAR.AG0+ max.SAR.AG1] + each external radio worst-case reported SAR (ex: NFC)} ≤ 1.6 (for 1g, or 4.0 for 10g). (each external radio worst-case reported SAR is the worst SAR in all combinations of each external radio simultaneous transmission).
- ii) (SPLSR criteria): For each antenna, obtain the highest reported SAR value at *Plimit* out of all supported technologies for each frequency band. Using these values, demonstrate for a given DSI that every antenna from one sub6 AG meets SPLSR criteria with every antenna in another sub6 AG for all frequency bands. This criteria must be demonstrated for all antenna pair combinations irrespective of supported simultaneous transmission scenarios as given below for each DSI:
 - a. SPLSR criteria should be met for all antenna pair combinations of AG0 and AG1. As it can be seen, these include all combinations of antenna groups, antennas, and frequency bands.
 - b. Obtain combined SAR per AG: Obtain the worst-case conservative combined SAR and its peak location for each AG.
 - c. Use the 'closest' peak location out of all antennas of AGj to evaluate SPLSR with other AGs in the configuration. Note, by 'closest', select the peak location out of all antennas (ε AGj) that is closest to the peak location of other AG where SPLSR is evaluated.
- iii) (combination of SPLSR & SAR1+SAR2 criteria): If SPLSR criteria for all the combinations of sub6g antenna groups in (i) is demonstrated to show that each AG is mutually exclusive from other AGs, and if the WIFI/BT antennas supported outside of Smart Transmit do not meet SPLSR criteria, then the condition in (ii) reduces to: {max.SAR.AG0 + worst-case reported SAR} ≤ 1.6 and {max.SAR.AG1+ worst-case reported SAR } ≤ 1.6 for compliance demonstration (for 1g, or 4.0 for 10g).
- iv) Obtain the worst-case reported SAR for each antenna group, (i.e., maximum *reported* SAR at *Plimit* out of all supported technologies, frequency bands and antennas in AG0 and AG1), denoted as max.SAR.AG0 and max.SAR.AG1, and WIFI/BT antennas supported Smart Transmit technology and there is no other radios in this report, and demonstrate that the sum of these RF exposures meets: { [max.SAR.AG0+ max.SAR.AG1] } ≤ 1.6 (for 1g, or 4.0 for 10g).

For summed SAR results and SPLSR detailed analysis please refer to section 17.3 / 17.4 / 17.5 / 17.6 of this report. All of the combinations of sub6 antenna groups are sufficient to show that AG0 is mutually exclusive from AG1 and that



simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

17.3 Head Exposure Conditions

General Note: The unit of SAR evaluation is W/kg.

Simultaneous Transmission Evaluation of WWAN+WLAN+BT:

<AG0 maximum reported SAR>:

Test Position	Ant1	Ant4	Ant5	Ant6	Ant8	Ant9	WLAN2.4GHz Ant15+8	WLAN5GHz Ant16+12	WLAN6GHz Ant16+12	BT Ant8	BT Ant15	MAX
Right Cheek	0.889	1.094	1.047	1.086	0.243	0.610	0.278	0.353	0.221	0.120	0.337	1.094
Right Tilted	0.194	1.094	0.151	0.464	0.210	0.184	0.301	0.362	0.125	0.086	0.481	1.094
Left Cheek	0.968	0.550	1.089	0.322	1.084	0.289	0.904	1.091	1.092	0.661	0.547	1.092
Left Tilted	0.162	0.749	0.180	0.171	0.484	0.135	0.552	0.798	0.693	0.278	0.800	0.800

<AG1 maximum reported SAR>:

Test Position	Ant0	Ant3	MAX
Right Cheek	0.580	0.411	0.580
Right Tilted	0.214	0.170	0.214
Left Cheek	0.310	0.286	0.310
Left Tilted	0.176	0.127	0.176

<Simultaneous Transmission analysis of AG0 + AG1>:

Test Position	AG0	AG1	AG0+AG1
Right Cheek	1.094	0.580	1.67
Right Tilted	1.094	0.214	1.31
Left Cheek	1.092	0.310	1.40
Left Tilted	0.800	0.176	0.98

Note: The results marked yellow in above table refers to the detailed analysis corresponding to each position below tables.

Right Cheek				
Ant combination	AG1	AG0	AG0+AG1	SPLSR
	SAR	SAR		
Ant0-Ant1	0.580	0.889	1.47	-
Ant0-Ant4	0.580	1.094	1.67	Case 1
Ant0-Ant5	0.580	1.047	1.63	Case 2
Ant0-Ant6	0.580	1.086	1.67	Case 3
Ant0-Ant8	0.580	0.243	0.82	-
Ant0-Ant9	0.580	0.610	1.19	-
Ant0-WLAN2.4GHz Ant15+8	0.580	0.278	0.86	-
Ant0-WLAN5GHz Ant16+12	0.580	0.353	0.93	-
Ant0-WLAN6GHz Ant16+12	0.580	0.221	0.80	-
Ant0-BT Ant8	0.580	0.095	0.68	-
Ant0-BT Ant15	0.580	0.013	0.59	-
Ant3-Ant1	0.411	0.889	1.30	-
Ant3-Ant4	0.411	1.094	1.51	-
Ant3-Ant5	0.411	1.047	1.46	-
Ant3-Ant6	0.411	1.086	1.50	-
Ant3-Ant8	0.411	0.243	0.65	-
Ant3-Ant9	0.411	0.610	1.02	-
Ant3-WLAN2.4GHz Ant15+8	0.411	0.278	0.69	-
Ant3-WLAN5GHz Ant16+12	0.411	0.353	0.76	-
Ant3-WLAN6GHz Ant16+12	0.411	0.221	0.63	-
Ant3-BT Ant8	0.411	0.095	0.51	-
Ant3-BT Ant15	0.411	0.013	0.42	-



17.4 Hotspot Exposure Conditions

General Note: The unit of SAR evaluation is W/kg.

Simultaneous Transmission Evaluation of WWAN+WLAN+BT:

<AG0 maximum reported SAR>:

Test Position	Ant1	Ant4	Ant5	Ant6	Ant8	Ant9	WLAN2.4GHz Ant15+8	WLAN5GHz Ant16+12	BT Ant8	BT Ant15	MAX
Front	0.517	0.346	0.259	0.203	0.205	0.062	0.881	0.552	0.219	0.103	0.881
Back	0.622	0.437	0.344	0.316	0.148	0.615	0.755	0.315	0.205	0.122	0.755
Left Side	0.700	0.176		0.396		0.108	0.063	0.105	0.002	0.000	0.700
Right Side		0.139	0.584		0.376		1.010	0.400	0.361	0.000	1.010
Top Side		0.656		0.077	0.095	0.071	0.882	0.409	0.069	0.269	0.882

<AG1 maximum reported SAR>:

Test Position	Ant0	Ant3	MAX
Front	0.422	0.594	0.594
Back	0.588	0.744	0.744
Left Side		0.248	0.248
Right Side	1.094		1.094
Bottom Side	0.403	1.079	1.079

<Simultaneous Transmission SAR analysis of AG0 + AG1>:

Test Position	AG0	AG1	AG0+AG1
Front	0.881	0.594	1.48
Back	0.755	0.744	1.50
Left Side	0.700	0.248	0.95
Right Side	1.010	1.094	2.10
Top Side	0.882		0.88
Bottom Side		1.079	1.08

Note: The results marked yellow in above table refers to the detailed analysis corresponding to each position below tables.

Right Side				
Ant combination	AG1	AG0	AG0+AG1	SPLSR
	SAR	SAR		
Ant0-Ant1	1.094		1.09	-
Ant0-Ant4	1.094	0.139	1.23	-
Ant0-Ant5	1.094	0.584	1.68	Case 1
Ant0-Ant6	1.094		1.09	-
Ant0-Ant8	1.094	0.376	1.47	-
Ant0-Ant9	1.094		1.09	-
Ant0-WLAN2.4GHz Ant15+8	1.094	1.010	2.10	Case 2
Ant0-WLAN5GHz Ant16+12	1.094	0.400	1.49	-
Ant0-BT Ant8	1.094	0.361	1.46	-
Ant0-BT Ant15	1.094		1.09	-
Ant3-Ant1			0.00	-
Ant3-Ant4		0.139	0.14	-
Ant3-Ant5		0.584	0.58	-
Ant3-Ant6			0.00	-
Ant3-Ant8		0.376	0.38	-
Ant3-Ant9			0.00	-
Ant3-WLAN2.4GHz Ant15+8		1.010	1.01	-
Ant3-WLAN5GHz Ant16+12		0.400	0.40	-
Ant3-BT Ant8		0.361	0.36	-
Ant3-BT Ant15			0.00	-



17.5 Body-Worn Accessory Exposure Conditions

General Note: The unit of SAR evaluation is W/kg.
Simultaneous Transmission Evaluation of WWAN+WLAN+BT:
<AG0 maximum reported SAR>:

Test Position	Ant1	Ant4	Ant5	Ant6	Ant8	Ant9	WLAN2.4GHz Ant15+8	WLAN5GHz Ant16+12	WLAN6GHz Ant16+12	BT Ant8	BT Ant15	MAX
Front	0.491	0.813	0.308	0.457	0.226	0.054	0.318	0.331	0.063	0.104	0.002	0.813
Back	0.586	0.993	0.333	0.666	0.156	1.064	0.266	0.248	0.203	0.097	0.000	1.064

<AG1 maximum reported SAR>:

Test Position	Ant0	Ant3	MAX
Front	0.406	0.758	0.758
Back	0.450	0.819	0.819

<Simultaneous Transmission analysis of AG0 + AG1>:

Test Position	AG0	AG1	AG0+AG1
Front	0.813	0.758	1.57
Back	1.064	0.819	1.88

Note: The results marked yellow in above table refers to the detailed analysis corresponding to each position below tables.

Back				
Ant combination	AG1	AG0	AG0+AG1	SPLSR
	SAR	SAR		
Ant0-Ant1	0.450	0.586	1.04	-
Ant0-Ant4	0.450	0.993	1.44	-
Ant0-Ant5	0.450	0.333	0.78	-
Ant0-Ant6	0.450	0.666	1.12	-
Ant0-Ant8	0.450	0.156	0.61	-
Ant0-Ant9	0.450	1.064	1.51	-
Ant0-WLAN2.4GHz Ant15+8	0.450	0.266	0.72	-
Ant0-WLAN5GHz Ant16+12	0.450	0.254	0.70	-
Ant0-WLAN6GHz Ant16+12	0.450	0.203	0.65	-
Ant0-BT Ant8	0.450	0.097	0.55	-
Ant0-BT Ant15	0.450	0.000	0.45	-
Ant3-Ant1	0.819	0.586	1.41	-
Ant3-Ant4	0.819	0.993	1.81	Case 1
Ant3-Ant5	0.819	0.333	1.15	-
Ant3-Ant6	0.819	0.666	1.49	-
Ant3-Ant8	0.819	0.156	0.98	-
Ant3-Ant9	0.819	1.064	1.88	Case 2
Ant3-WLAN2.4GHz Ant15+8	0.819	0.266	1.09	-
Ant3-WLAN5GHz Ant16+12	0.819	0.254	1.07	-
Ant3-WLAN6GHz Ant16+12	0.819	0.203	1.02	-
Ant3-BT Ant8	0.819	0.097	0.92	-
Ant3-BT Ant15	0.819	0.000	0.82	-

17.6 Product specific 10g SAR Exposure Conditions

Remark:

1. For 2.4GHz/Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

General Note: The unit of SAR evaluation is W/kg.

Simultaneous Transmission Evaluation of WWAN+WLAN+BT+NFC:

<AG0 maximum reported SAR>:

Test Position	WLAN5GHz Ant16+12	WLAN6GHz Ant16+12	MAX
Front	2.456	0.592	2.456
Back	0.446	0.184	0.446
Left Side	0.072	0.001	0.072
Right Side	1.894	0.657	1.894
Top Side	1.613	0.242	1.613


<Simultaneous Transmission analysis of AG0 + NFC >:

Test Position	AG0	NFC	AG0+NFC
Front	2.456	0.001	2.46
Back	0.446	0.023	0.47
Left Side	0.072	0.001	0.07
Right Side	1.894	0.001	1.90
Top Side	1.613	0.001	1.61
Bottom Side		0.001	0.00


17.7 SPLSR Evaluation and Analysis

General Note:


1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR, simultaneously transmission SAR measurement is not necessary.
3. Per April 2022 TCB Workshop Notes, AG0 was summed algebraically with the BT/WIFI Antenna 8/15/16/12 for the purposes of hybrid SPLSR combination and they are located at the top of the device.
4. Per April 2022 TCB Workshop, instead of doing a small volume scan over a co-located antenna pair, used summing the SAR values of the co-located pair and using that value in SPLSR calculation. In the calculation used the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.
5. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.
6. The axis peak locations refer to Section 17.8.

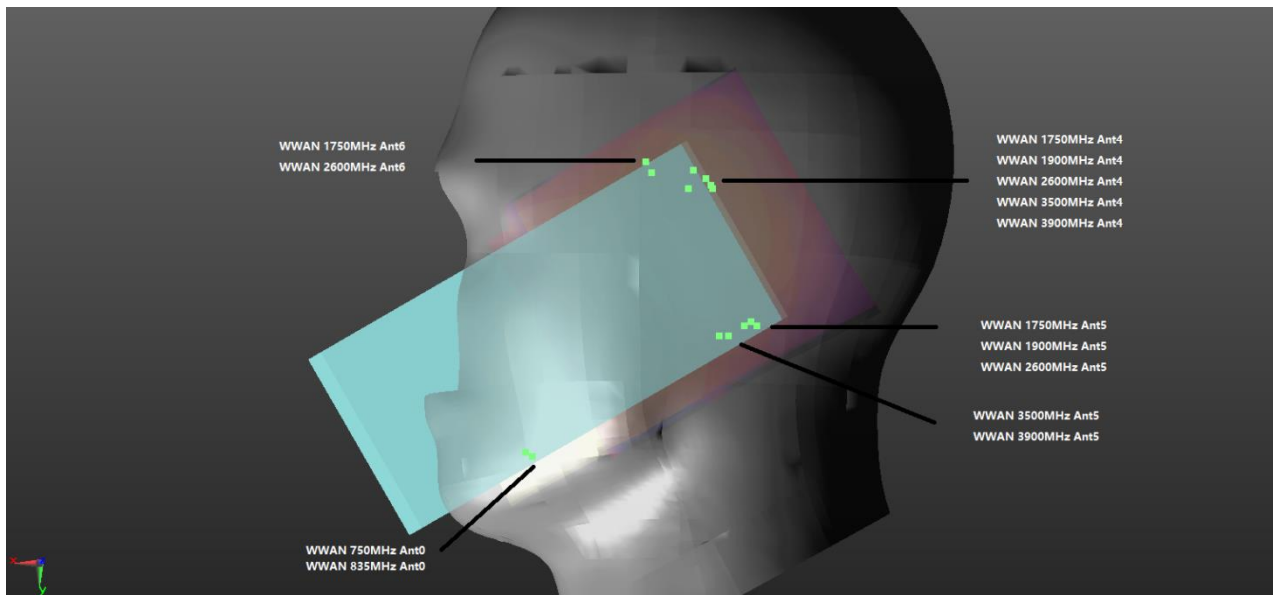

Head WWAN+WWAN Right Check 0mm

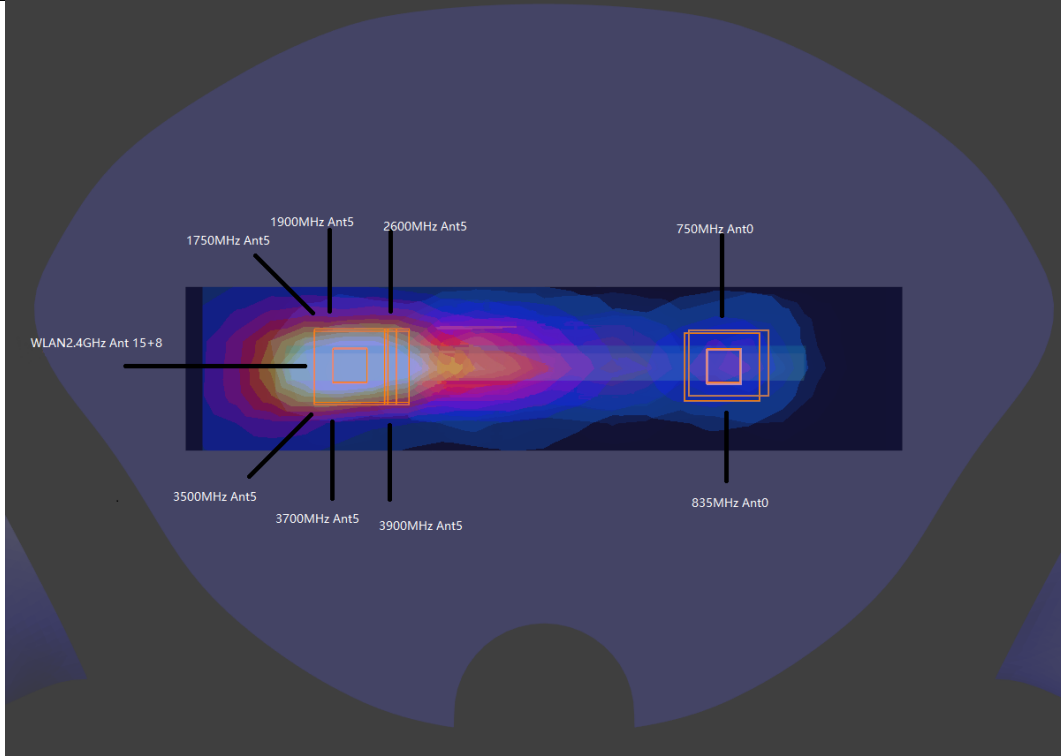

Hotspot WWAN+WLAN Right Side 10mm

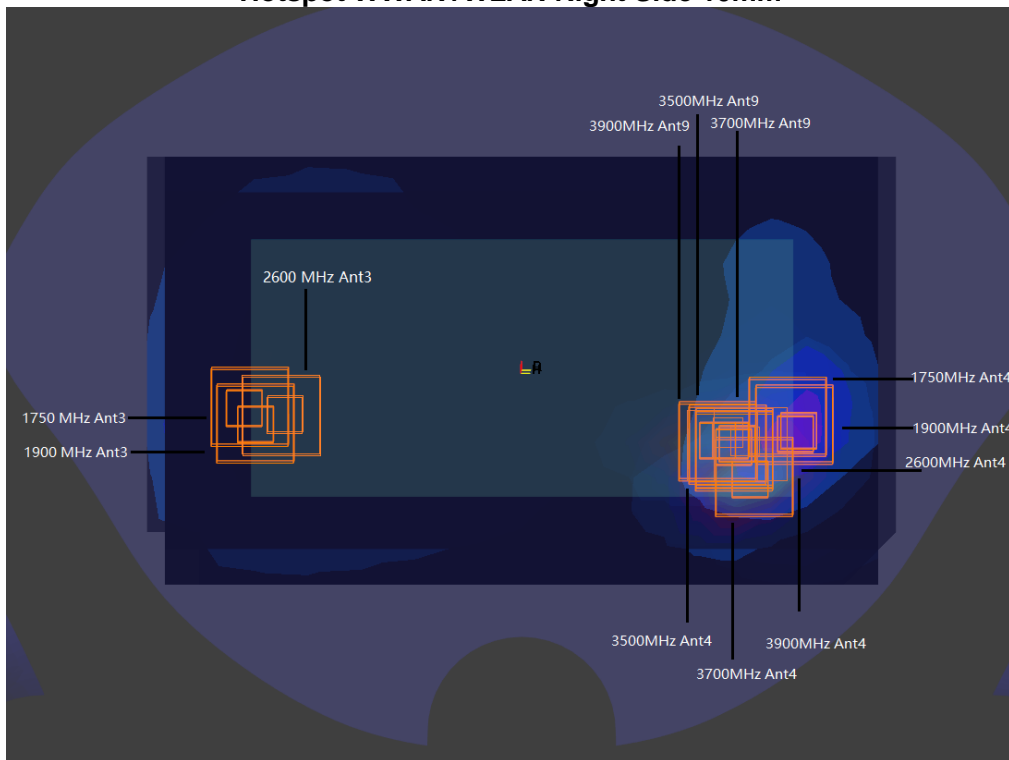

Body-worn WWAN+WWAN Back 15mm

<Head>

No.1 Band	Position	SAR 1g SAR (W/kg)	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Ant 0	Right Cheek	0.580	0.580	0mm	77.88	60.95	-1.12	100.1	1.67	0.02	Not required
Ant 4		1.094	1.094	0mm	12.72	-15.04	-2.03				
No.2 Band	Position	SAR 1g SAR (W/kg)	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Ant 0	Right Cheek	0.580	0.580	0mm	77.9	68.42	-1.62	65.8	1.63	0.03	Not required
Ant 5		1.047	1.047	0mm	20.17	36.94	-1.52				
No.3 Band	Position	SAR 1g SAR (W/kg)	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Ant 0	Right Cheek	0.580	0.580	0mm	77.73	71.91	-1.11	104.7	1.67	0.02	Not required
Ant 6		1.086	1.086	0mm	33.29	-22.91	-1.34				

<Hotspot>

No.1 Band	Position	SAR 1g SAR (W/kg)	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Ant 0	Right Side	1.094	1.094	10mm	-31.4	52.6	-207	111.0	1.68	0.02	Not required
Ant 5		0.584	0.584	10mm	-24.5	-58.2	-207				
No.2 Band	Position	SAR 1g SAR (W/kg)	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Ant 0	Right Side	1.094	1.094	10mm	-31.4	52.6	-207	110.8	2.10	0.03	Not required
WLAN2.4GHz 15+8		1.010	1.010	10mm	-24.8	-58	-207				

<Body-worn>

No.1 Band	Position	SAR 1g SAR (W/kg)	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Ant3	Back	0.819	1.812	15mm	-7.6	-74.7	-207	141.7	1.81	0.02	Not required
Ant4		0.993		15mm	-5	67	-207				
No.2 Band	Position	SAR 1g SAR (W/kg)	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Ant3	Back	0.819	1.883	15mm	-7.6	-74.7	-207	128.8	1.88	0.02	Not required
Ant9		1.064		15mm	-3	54	-207				



17.8 Maximum Reported SAR and SAR Peak Locations

General Note:

1. The maximum reported SAR and SAR Peak Locations corresponding to each position of each frequency band of each antenna in the below tables are as follows.
2. The unit of SAR evaluation is W/kg. The unit of x, y, z with Axis evaluation is mm.

<Head>

Right Cheek												
Band		Ant0			Ant4			Ant5			Ant6	
GSM850	SAR (W/kg)	0.329										
	Axis	78.02	62.05	-1.15								
GSM1900	SAR (W/kg)				0.873			0.439				
	Axis				5.25	-26.28	-1.06	-13.51	38.12	5.55		
WCDMA II	SAR (W/kg)				0.693			0.569				
	Axis				5.2	-26.2	-1.03	-13.45	38.05	5.67		
WCDMA IV	SAR (W/kg)				0.813			0.491				
	Axis				7.26	-26.75	-1.1	-15.51	32.89	6.35		
WCDMA V	SAR (W/kg)	0.538										
	Axis	78	62.06	-1.11								
LTE Band 2	SAR (W/kg)				0.74							
	Axis				5.25	-26.3	-1.11					
LTE Band 4	SAR (W/kg)				0.691			0.595			0.745	
	Axis				5.99	-28.15	-0.99	-15.65	35.15	6.29	28.61 -26.65 -1.17	
LTE Band 5	SAR (W/kg)	0.566										
	Axis	77.88	60.95	-1.12								
LTE Band 12	SAR (W/kg)	0.282										
	Axis	78.1	68.5	-1.77								
LTE Band 13	SAR (W/kg)	0.446										
	Axis	78.15	68.45	-1.66								
LTE Band 25	SAR (W/kg)				0.838							
	Axis				2.97	-25.73	-0.91					
LTE Band 26	SAR (W/kg)	0.517										
	Axis	77.99	71.89	-1.12								
LTE Band 66	SAR (W/kg)				0.97			0.353			0.949	
	Axis				5.95	-27.51	-0.97	-15.55	33.15	6.45	28.63 -27.06 -1.13	
LTE Band 7	SAR (W/kg)				0.938			0.737			0.979	
	Axis				3.59	-27.25	-0.92	7.55	43.29	2.11	30.08 -26.15 -1.12	
LTE Band 38	SAR (W/kg)				0.962			0.512			1.045	
	Axis				5.06	-27.8	-0.93	7.46	43.26	2.15	32.14 -26.13 -1.04	
LTE Band 41	SAR (W/kg)				1.094			0.587			1.01	
	Axis				3.59	-27.25	-0.92	7.39	45.02	2.26	30.24 -27.22 -0.98	
LTE Band 42	SAR (W/kg)				1.008			0.492				
	Axis				13	-19.06	-1.7	17.74	40.12	-0.66		
LTE Band 48	SAR (W/kg)				0.995			0.556				
	Axis				6.62	-20.87	-1.29	16.97	41.55	-0.89		
FR1 n2	SAR (W/kg)				0.678			0.595				
	Axis				2.48	-21.16	-1.11	-13.39	37.99	5.75		
FR1 n5	SAR (W/kg)	0.58										
	Axis	77.73	71.91	-1.11								
FR1 n12	SAR (W/kg)	0.313										
	Axis	77.9	68.42	-1.62								
FR1 n25	SAR (W/kg)				0.619			0.674				
	Axis				2.49	-21.16	-1.08	-13.44	38.11	5.66		
FR1 n26	SAR (W/kg)	0.499										
	Axis	77.73	71.91	-1.11								
FR1 n66	SAR (W/kg)				0.794			0.838			0.981	



	Axis				3.03	-18.88	-1.16	-15.41	33.42	6.48	31.38	-25.38	-1.08
FR1 n7	SAR (W/kg)				0.758			0.792			0.969		
	Axis				3.6	-23.3	-1.1	7.62	43.73	2.08	33.46	-25.59	-0.93
FR1 n38	SAR (W/kg)				1.002			1.047			1.086		
	Axis				8.43	-26.79	-1.12	7.71	44.15	2.12	33.29	-22.91	-1.34
FR1 n41	SAR (W/kg)				1.009			1.013			1.031		
	Axis				8.41	-25.75	-1.23	7.32	44.26	2.21	33.37	-25.85	-0.94
FR1 n48	SAR (W/kg)				0.683			0.605					
	Axis				12.72	-15.04	-2.03	17.9	38	-0.91			
FR1 n77	SAR (W/kg)				0.67			0.654					
	Axis				5.35	-22.3	-1.28	18.61	35.44	-1.64			
FR1 n78	SAR (W/kg)				0.657			0.972					
	Axis				6.33	-21.97	-1.35	20.17	36.94	-1.52			

<Hotspot>

		Right Side					
Band		Ant0			Ant5		
GSM850	SAR (W/kg)	0.466					
	Axis	-25.3	54.1	-207			
GSM1900	SAR (W/kg)				0.289		
	Axis				-20.8	-54.5	-207
WCDMA II	SAR (W/kg)				0.366		
	Axis				-27.7	-53.7	-207
WCDMA IV	SAR (W/kg)				0.24		
	Axis				-26.5	-56.6	-207
WCDMA V	SAR (W/kg)	0.828					
	Axis	-26.6	55.1	-207			
LTE Band 2	SAR (W/kg)				0.213		
	Axis				-26.1	-52.7	-207
LTE Band 4	SAR (W/kg)				0.295		
	Axis				-25.6	-56.9	-207
LTE Band 5	SAR (W/kg)	0.984					
	Axis	-26.3	54.6	-207			
LTE Band 12	SAR (W/kg)	0.719					
	Axis	-27.5	55.6	-207			
LTE Band 13	SAR (W/kg)	1.093					
	Axis	-26	56.3	-207			
LTE Band 25	SAR (W/kg)				0.237		
	Axis				-27.2	-52.4	-207
LTE Band 26	SAR (W/kg)	0.916					
	Axis	-26.5	56.8	-207			
LTE Band 66	SAR (W/kg)				0.152		
	Axis				-24.7	-58.8	-207
LTE Band 7	SAR (W/kg)				0.281		
	Axis				-25	-54.5	-207
LTE Band 38	SAR (W/kg)				0.438		
	Axis				-24.8	-53.6	-207
LTE Band 41	SAR (W/kg)				0.486		
	Axis				-25.3	-55.5	-207
LTE Band 42	SAR (W/kg)				0.315		
	Axis				-26.2	-55.3	-207
LTE Band 48	SAR (W/kg)				0.348		
	Axis				-25.4	-54.8	-207
FR1 n2	SAR (W/kg)				0.345		
	Axis				-30.4	-53.9	-207
FR1 n5	SAR (W/kg)	0.784					



	Axis	-22.9	58.5	-207			
FR1 n12	SAR (W/kg)	1.094					
	Axis	-31.4	52.6	-207			
FR1 n25	SAR (W/kg)	0.232					
	Axis				-27.2	-53.2	-207
FR1 n26	SAR (W/kg)	0.822					
	Axis	-26.9	56.2	-207			
FR1 n66	SAR (W/kg)	0.393					
	Axis				-25.1	-52.4	-207
FR1 n7	SAR (W/kg)	0.5					
	Axis				-28	-56.5	-207
FR1 n38	SAR (W/kg)	0.515					
	Axis				-28.8	-57.5	-207
FR1 n41	SAR (W/kg)	0.584					
	Axis				-24.5	-58.2	-207
FR1 n48	SAR (W/kg)	0.397					
	Axis				-27.5	-57.6	-207
FR1 n77	SAR (W/kg)	0.32					
	Axis				-28.8	-56.5	-207
FR1 n78	SAR (W/kg)	0.495					
	Axis				-26.4	-55.1	-207

WLAN2.4GHz 15+8	SAR (W/kg)	1.007		
	Axis	-24.8	-58	-207

<Body-worn>

		Back						
Band		Ant3			Ant4			Ant9
GSM1900	SAR	0.322						
	Axis				-33.1	76.1	-207	
WCDMA II	SAR	0.791						
	Axis				-28.8	74.8	-207	
WCDMA IV	SAR	0.712						
	Axis				-21.7	74.4	-207	
LTE Band 4	SAR	0.819			0.748			
	Axis	-7.6	-74.7	-207	-17.5	74.1	-207	
LTE Band 66	SAR	0.755			0.619			
	Axis	-6.1	-75.7	-207	-25.8	73.2	-207	
LTE Band 2	SAR	0.709						
	Axis				-36.4	69	-207	
LTE Band 25	SAR	0.388						
	Axis				-31.9	72.6	-207	
LTE Band 7	SAR	0.686			0.908			
	Axis	-13.7	-77.5	-207	-7.6	77	-207	
LTE Band 38	SAR	0.375			0.546			
	Axis	-13.9	-77	-207	4.2	77	-207	
LTE Band 41	SAR	0.366			0.470			
	Axis	-13.9	-77.5	-207	-37.6	71	-207	
LTE Band 42	SAR	0.455			0.707			
	Axis				3.1	77.6	-207	-1 59.5 -207
LTE Band 48	SAR	0.312			0.446			
	Axis				-7.5	78.5	-207	-1 58 -207
FR1 n66	SAR	0.692			0.658			
	Axis	-6.1	-75.7	-207	23.4	73	-207	
FR1 n2	SAR	0.789						
	Axis				-35	70.3	-207	



FR1 n25	SAR				0.571					
	Axis				-37.3	71.3	-207			
FR1 n7	SAR	0.570			0.968					
	Axis	-16.8	-76.5	-207	4	75.4	-207			
FR1 n38	SAR	0.550			0.839					
	Axis	-20.2	-76	-207	-41.2	71.5	-207			
FR1 n41	SAR	0.716			0.993					
	Axis	-18.5	-76	-207	4	74	-207			
FR1 n48	SAR				0.606			0.905		
	Axis				0.8	76.6	-207	1	58.3	-207
FR1 n77	SAR				0.808			1.064		
	Axis				-4.5	70.5	-207	-0.5	60.5	-207
FR1 n78	SAR				0.845			1.040		
	Axis				-5	67	-207	-3	54	-207

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu



18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, “SAR Measurement Requirements for 100 MHz to 6 GHz”, Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [7] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [8] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [9] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [10] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [11] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [12] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [13] FCC KDB 941225 D06 v02r01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, Oct 2015.
- [14] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015

-----THE END-----