



# FCC RF Test Report

**APPLICANT** : Xiaomi Communications Co., Ltd.  
**EQUIPMENT** : Mobile Phone  
**BRAND NAME** : Xiaomi  
**MODEL NAME** : 2407FPN8EG  
**FCC ID** : 2AFZZPN8EG  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : 15E 6 GHz Low Power Dual Client (6CD)  
(Standard Power UNII 5/7)  
**TEST DATE(S)** : Apr. 25, 2024 ~ Jul. 05, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# Table of Contents

- 1 General Description ..... 5**
  - 1.1 Applicant ..... 5
  - 1.2 Manufacturer ..... 5
  - 1.3 Product Feature of Equipment Under Test ..... 5
  - 1.4 Product Specification of Equipment Under Test ..... 6
  - 1.5 Modification of EUT ..... 9
  - 1.6 Testing Location ..... 9
  - 1.7 Test Software ..... 10
  - 1.8 Applicable Standards ..... 10
- 2 Test Configuration of Equipment Under Test ..... 11**
  - 2.1 Carrier Frequency and Channel ..... 11
  - 2.2 Test Mode ..... 13
  - 2.3 Connection Diagram of Test System ..... 14
  - 2.4 Support Unit used in test configuration and system ..... 14
  - 2.5 EUT Operation Test Setup ..... 15
  - 2.6 Measurement Results Explanation Example ..... 15
- 3 Test Result ..... 16**
  - 3.1 26dB & 99% Occupied Bandwidth Measurement ..... 16
  - 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement ..... 17
  - 3.3 Fundamental Power Spectral Density Measurement ..... 21
  - 3.4 In-Band Emissions (Channel Mask) ..... 23
  - 3.5 Unwanted Emissions Measurement ..... 25
  - 3.6 AC Conducted Emission Measurement ..... 29
  - 3.7 Antenna Requirements ..... 31
- 4 List of Measuring Equipment ..... 32**
- 5 Measurement Uncertainty ..... 33**
- Appendix A. Conducted Test Results**
- Appendix B. AC Conducted Emission Test Result**
- Appendix C. Radiated Spurious Emission**
- Appendix D. Duty Cycle Plots**
- Appendix E. Setup Photographs**





### Summary of Test Result

| Report Clause | Ref Std. Clause     | Test Items                         | Result (PASS/FAIL) | Remark                                   |
|---------------|---------------------|------------------------------------|--------------------|--|
| 3.1           | 15.407(a)(11)       | 26dB Emission Bandwidth            | Pass               | -  |
| 3.1           | 2.1049              | 99% Occupied Bandwidth             | Pass               | -  |
| 3.2           | 15.407(a)(7)        | Maximum Conducted Output Power     | Reporting only     | -  |
| 3.2           | 15.407(a)(7)        | Fundamental Maximum EIRP           | Pass               | -  |
| 3.3           | 15.407(a)(7)        | Fundamental Power Spectral Density | Pass               | -  |
| 3.4           | 15.407(b)(7)        | In-Band Emissions (Channel Mask)   | Pass               | -  |
| -             | 15.407(d)(6)        | Contention Based Protocol          | Not Applicable     | 1  |
| 3.5           | 15.407(b)           | Unwanted Emissions                 | Pass               | Under limit<br>8.14 dB at<br>7254.41 MHz |
| 3.6           | 15.207              | AC Conducted Emission              | Pass               | Under limit<br>14.08 dB at<br>0.600 MHz  |
| 3.7           | 15.203<br>15.407(a) | Antenna Requirement                | Pass               | -  |

Remark 1: The device is Dual Client, when it connected to standard AP, it is under control of standard power access which is under control of AFC, in accordance with KDB987594 D01 U-NII 6GHz General Requirements v02r02 section 8, thus the Contention Based Protocol is not applicable in this report.

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.3 Product Feature of Equipment Under Test

| Product Feature |   |
|-----------------|---|
| Equipment       | Mobile Phone  |
| Brand Name      | Xiaomi  |
| Model Name      | 2407FPN8EG  |
| FCC ID          | 2AFZZPN8EG  |
| IMEI Code       | Conducted: 869018070055084/869018070055092<br>Conduction: 869018070054764/869018070054772<br>Radiation: 869018070057585/869018070057593 |
| HW Version      | 13520N12  |
| SW Version      | Xiaomi HyperOS 1.0  |
| EUT Stage       | Identical Prototype   |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification |   |
|---|---|
| <b>Tx/Rx Frequency Range</b>            | U-NII-5: 5925 MHz ~ 6425 MHz<br>U-NII-7: 6525 MHz ~ 6875 MHz  |
| <b>Maximum EIRP</b>                     | <p><b>&lt;MIMO Ant.6+17&gt;</b></p> <p><b>&lt;U-NII-5&gt;</b></p> <p>802.11a : 17.38 dBm / 0.0547 W<br/> 802.11ax HE20 : 16.33 dBm / 0.0430 W<br/> 802.11ax HE40 : 15.63 dBm / 0.0366 W<br/> 802.11ax HE80 : 14.51 dBm / 0.0282 W<br/> 802.11ax HE160 : 13.27 dBm / 0.0212 W<br/> 802.11be EHT20 : 16.39 dBm / 0.0436 W<br/> 802.11be EHT40 : 15.69 dBm / 0.0371 W<br/> 802.11be EHT80 : 14.56 dBm / 0.0286 W<br/> 802.11be EHT160 : 13.29 dBm / 0.0213 W<br/> 802.11be EHT320 : 12.83 dBm / 0.0192 W</p> <p><b>&lt;U-NII-7&gt;</b></p> <p>802.11a : 17.98 dBm / 0.0628 W<br/> 802.11ax HE20 : 16.96 dBm / 0.0497 W<br/> 802.11ax HE40 : 16.24 dBm / 0.0421 W<br/> 802.11ax HE80 : 15.12 dBm / 0.0325 W<br/> 802.11ax HE160 : 13.86 dBm / 0.0243 W<br/> 802.11be EHT20 : 17.02 dBm / 0.0504 W<br/> 802.11be EHT40 : 16.31 dBm / 0.0428 W<br/> 802.11be EHT80 : 15.18 dBm / 0.0330 W<br/> 802.11be EHT160 : 13.88 dBm / 0.0244 W</p> |
| <b>99% Occupied Bandwidth</b>           | 802.11a : 16.663 MHz<br>802.11 be EHT20 : 18.821 MHz<br>802.11 be EHT40 : 37.722 MHz<br>802.11 be EHT80 : 77.203 MHz<br>802.11 be EHT160 : 156.963 MHz<br>802.11 be EHT320 : 313.287 MHz  |
| <b>Antenna Type / Gain</b>              | <p><b>&lt;5925 MHz ~ 6425 MHz &gt;</b></p> <p>&lt;Ant. 6&gt; : PIFA Antenna with gain -4.11 dBi<br/> &lt;Ant. 17&gt; : PIFA Antenna with gain -4.11 dBi</p> <p><b>&lt;6525 MHz ~ 6875 MHz &gt;</b></p> <p>&lt;Ant. 6&gt; : PIFA Antenna with gain -3.39 dBi<br/> &lt;Ant. 17&gt; : PIFA Antenna with gain -3.39 dBi</p>   |
| <b>Type of Modulation</b>               | 802.11a: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)<br>802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)   |

**Remark:**

1. WIFI MIMO support CDD by manufacturer declared.
2. For 802.11ax/be 20/40/80/160MHz mode, the whole testing has assessed only 802.11be EHT20/HET40/HET80/HET160MHz by referring to the higher output power.



- 3. 802.11ax/be support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix A, all the other test case were performed with full RU with its maximum power/PSD.
- 4. 802.11be support small size RU, Large size RU and Puncturing modes as below, which is less than full RU conducted power, therefore have assessed only Power Density/RSE.

<Small size RU >:

- a. For Low channel, 52Tone\_Index37 + 26Tone\_Index0 and 106Tone\_Index53 + 26Tone\_Index4
- b. For High channel, 52Tone\_Index40 + 26Tone\_Index8 and 106Tone\_Index54 + 26Tone\_Index4

<Large size RU 484+242 tone> & <80M BW Puncturing 20MHz>:

| Bandwidth | Tones |     | Index |    | For test modes configure |
|-----------|-------|-----|-------|----|--------------------------|
| 80MHz     | 242   | 484 | 62    | 66 | 1                        |
| 80MHz     | 242   | 484 | 61    | 66 | 2                        |
| 80MHz     | 484   | 242 | 65    | 64 | 3                        |
| 80MHz     | 484   | 242 | 65    | 63 | 4                        |

<Large size RU 996+484 tone> & <160M BW Puncturing 40MHz>:

| Bandwidth | Tones    |           | Index   |          | For test modes configure |
|-----------|----------|-----------|---------|----------|--------------------------|
| 160MHz    | 484-Left | 996-Right | 66-Left | 67-Right | 1                        |
| 160MHz    | 484-Left | 996-Right | 65-Left | 67-Right | 2                        |
| 160MHz    | 996-Left | 484-Right | 67-Left | 66-Right | 3                        |
| 160MHz    | 996-Left | 484-Right | 67-Left | 65-Right | 4                        |

<Large size RU 996+484+242 tone> & <160M BW Puncturing 20MHz>:

| Bandwidth | Tones    |           |           | Index   |          |          | For test modes configure |
|-----------|----------|-----------|-----------|---------|----------|----------|--------------------------|
| 160MHz    | 242-Left | 484-Left  | 996-Right | 62-Left | 66-Left  | 67-Right | 1                        |
| 160MHz    | 242-Left | 484-Left  | 996-Right | 61-Left | 66-Left  | 67-Right | 2                        |
| 160MHz    | 484-Left | 242-Left  | 996-Right | 65-Left | 64-Left  | 67-Right | 3                        |
| 160MHz    | 484-Left | 242-Left  | 996-Right | 65-Left | 63-Left  | 67-Right | 4                        |
| 160MHz    | 996-Left | 242-Right | 484-Right | 67-Left | 62-Right | 66-Right | 5                        |
| 160MHz    | 996-Left | 242-Right | 484-Right | 67-Left | 61-Right | 66-Right | 6                        |
| 160MHz    | 996-Left | 484-Right | 242-Right | 67-Left | 65-Right | 64-Right | 7                        |
| 160MHz    | 996-Left | 484-Right | 242-Right | 67-Left | 65-Right | 63-Right | 8                        |



<Large size RU 3\*996 tone> & <320M BW Puncturing 80MHz>:

| Bandwidth | Tones | Index | For test modes configure |
|-----------|-------|-------|--------------------------|
| 320MHz    |       |       | 1                        |
|           |       |       | 2                        |
|           |       |       | 3                        |
|           |       |       | 4                        |

<Large size RU 3\*996+484 tone> & <320M BW Puncturing 40MHz>:

| Bandwidth | Tones | Index | For test modes configure |
|-----------|-------|-------|--------------------------|
| 320MHz    |       |       | 1                        |
|           |       |       | 2                        |
|           |       |       | 3                        |
|           |       |       | 4                        |
|           |       |       | 5                        |
|           |       |       | 6                        |
|           |       |       | 7                        |
|           |       |       | 8                        |

<Large size RU 2\*996+484 tone> & <320M BW Puncturing 80+40MHz>:

| Bandwidth | Tones | Index | For test modes configure |
|-----------|-------|-------|--------------------------|
| 320MHz    |       |       | 1                        |
|           |       |       | 2                        |
|           |       |       | 3                        |
|           |       |       | 4                        |
|           |       |       | 5                        |
|           |       |       | 6                        |
|           |       |       | 7                        |
|           |       |       | 8                        |
|           |       |       | 9                        |
|           |       |       | 10                       |
|           |       |       | 11                       |
|           |       |       | 12                       |

Only the worse cases are shown in this report.

5. The worse cases of RSE for partial RU, Large size RU and small size RU are shown in this report.



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

|                           |  |                            |                                       |
|---------------------------|--|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (Kunshan)   |                            |                                       |
| <b>Test Site Location</b> | No. 1098, Pengxi North Road, Kunshan Economic Development Zone<br>Jiangsu Province 215300 People's Republic of China<br>TEL : +86-512-57900158 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>  | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | TH01-KS  | CN1257                     | 314309                                |

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

|                           |   |                            |                                       |
|---------------------------|---|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (ShenZhen)   |                            |                                       |
| <b>Test Site Location</b> | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China<br>TEL: +86-755-86379589<br>FAX: +86-755-86379595 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>   | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | CO01-SZ   | CN1256                     | 421272                                |

|                           |   |                            |                                       |
|---------------------------|---|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (ShenZhen)   |                            |                                       |
| <b>Test Site Location</b> | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China<br>TEL: +86-755-86066985 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>   | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | 03CH04-SZ   | CN1256                     | 421272                                |



### 1.7 Test Software

| Item | Site      | Manufacture | Name | Version     |
|------|-----------|-------------|------|-------------|
| 1.   | 03CH04-SZ | AUDIX       | E3   | 6.2009-8-24 |
| 2.   | CO01-SZ   | AUDIX       | E3   | 6.120613b   |

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

<U-NII-5>

|         |             |      |      |      |      |      |      |      |      |
|---------|-------------|------|------|------|------|------|------|------|------|
| BW 20M  | Channel     | 1    | 5    | 9    | 13   | 17   | 21   | 25   | 29   |
|         | Freq. (MHz) | 5955 | 5975 | 5995 | 6015 | 6035 | 6055 | 6075 | 6095 |
| BW 40M  | Channel     | 3    |      | 11   |      | 19   |      | 27   |      |
|         | Freq. (MHz) | 5965 |      | 6005 |      | 6045 |      | 6085 |      |
| BW 80M  | Channel     | 7    |      |      |      | 23   |      |      |      |
|         | Freq. (MHz) | 5985 |      |      |      | 6065 |      |      |      |
| BW 160M | Channel     | 15   |      |      |      |      |      |      |      |
|         | Freq. (MHz) | 6025 |      |      |      |      |      |      |      |
| BW 20M  | Channel     | 33   | 37   | 41   | 45   | 49   | 53   | 57   | 61   |
|         | Freq. (MHz) | 6115 | 6135 | 6155 | 6175 | 6195 | 6215 | 6235 | 6255 |
| BW 40M  | Channel     | 35   |      | 43   |      | 51   |      | 59   |      |
|         | Freq. (MHz) | 6125 |      | 6165 |      | 6205 |      | 6245 |      |
| BW 80M  | Channel     | 39   |      |      |      | 55   |      |      |      |
|         | Freq. (MHz) | 6145 |      |      |      | 6225 |      |      |      |
| BW 160M | Channel     | 47   |      |      |      |      |      |      |      |
|         | Freq. (MHz) | 6185 |      |      |      |      |      |      |      |
| BW 320M | Channel     | 31   |      |      |      | 63   |      |      |      |
|         | Freq. (MHz) | 6105 |      |      |      | 6265 |      |      |      |



|         |             |      |      |      |      |      |      |      |      |
|---------|-------------|------|------|------|------|------|------|------|------|
| BW 20M  | Channel     | 65   | 69   | 73   | 77   | 81   | 85   | 89   | 93   |
|         | Freq. (MHz) | 6275 | 6295 | 6315 | 6335 | 6355 | 6375 | 6395 | 6415 |
| BW 40M  | Channel     | 67   |      | 75   |      | 83   |      | 91   |      |
|         | Freq. (MHz) | 6285 |      | 6325 |      | 6365 |      | 6405 |      |
| BW 80M  | Channel     | 71   |      |      |      | 87   |      |      |      |
|         | Freq. (MHz) | 6305 |      |      |      | 6385 |      |      |      |
| BW 160M | Channel     | 79   |      |      |      |      |      |      |      |
|         | Freq. (MHz) | 6345 |      |      |      |      |      |      |      |

<U-NII- 7>

|        |             |   |   |   |   |   |      |      |      |
|--------|-------------|---|---|---|---|---|------|------|------|
| BW 20M | Channel     | - | - | - | - | - | 117  | 121  | 125  |
|        | Freq. (MHz) | - | - | - | - | - | 6535 | 6555 | 6575 |
| BW 40M | Channel     | - |   | - |   | - |      | 123  |      |
|        | Freq. (MHz) | - |   | - |   | - |      | 6565 |      |

|         |             |      |      |      |      |      |      |      |      |
|---------|-------------|------|------|------|------|------|------|------|------|
| BW 20M  | Channel     | 129  | 133  | 137  | 141  | 145  | 149  | 153  | 157  |
|         | Freq. (MHz) | 6595 | 6615 | 6635 | 6655 | 6675 | 6695 | 6715 | 6735 |
| BW 40M  | Channel     | 131  |      | 139  |      | 147  |      | 155  |      |
|         | Freq. (MHz) | 6605 |      | 6645 |      | 6685 |      | 6725 |      |
| BW 80M  | Channel     | 135  |      |      |      | 151  |      |      |      |
|         | Freq. (MHz) | 6625 |      |      |      | 6705 |      |      |      |
| BW 160M | Channel     | 143  |      |      |      |      |      |      |      |
|         | Freq. (MHz) | 6665 |      |      |      |      |      |      |      |

|        |             |      |      |      |      |      |      |   |   |
|--------|-------------|------|------|------|------|------|------|---|---|
| BW 20M | Channel     | 161  | 165  | 169  | 173  | 177  | 181  | - | - |
|        | Freq. (MHz) | 6755 | 6775 | 6795 | 6815 | 6835 | 6855 | - | - |
| BW 40M | Channel     | 163  |      | 171  |      | 179  |      | - |   |
|        | Freq. (MHz) | 6765 |      | 6805 |      | 6845 |      | - |   |
| BW 80M | Channel     | 167  |      |      |      | -    |      |   |   |
|        | Freq. (MHz) | 6785 |      |      |      | -    |      |   |   |



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

| Modulation      | Data Rate |
|-----------------|-----------|
| 802.11a         | 6 Mbps    |
| 802.11be EHT20  | MCS0      |
| 802.11be EHT40  | MCS0      |
| 802.11be EHT80  | MCS0      |
| 802.11be EHT160 | MCS0      |
| 802.11be EHT320 | MCS0      |

| Test Cases  |   |
|---|---|
| AC Conducted Emission   | Mode 1 : GSM 850 Idle+ BT Link+ WLAN Link(6G)+ USB Cable(Charging From Adapter) |
| Remark: For Radiated Test Cases, the tests were performed with Adapter, USB Cable |   |


| Ch. # |        | 5925-6425 MHz | 6525-6875 MHz | 5925-6425 MHz | 6525-6875 MHz |
|-------|--------|---------------|---------------|---------------|---------------|
|       |        | UNII-5        | UNII-7        | UNII-5        | UNII-7        |
|       |        | 20M BW        | 20M BW        | 40M BW        | 40M BW        |
| L     | Low    | 001           | 117           | 003           | 123           |
| M     | Middle | 049           | 149           | 051           | 147           |
| H     | High   | 093           | 181           | 091           | 179           |

| Ch. # |        | 5925-6425 MHz | 6525-6875 MHz | 5925-6425 MHz | 6525-6875 MHz |
|-------|--------|---------------|---------------|---------------|---------------|
|       |        | UNII-5        | UNII-7        | UNII-5        | UNII-7        |
|       |        | 80M BW        | 80M BW        | 160M BW       | 160M BW       |
| L     | Low    | 007           | 135           | 015           | 143           |
| M     | Middle | 055           | 151           | 047           | -             |
| H     | High   | 087           | 167           | 079           | -             |

| Ch. # |        | 5925-6425 MHz |
|-------|--------|---------------|
|       |        | UNII-5        |
|       |        | 320M BW       |
| L     | Low    | 031           |
| M     | Middle | -             |
| H     | High   | 063           |

**Remark:** For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

### 2.3 Connection Diagram of Test System

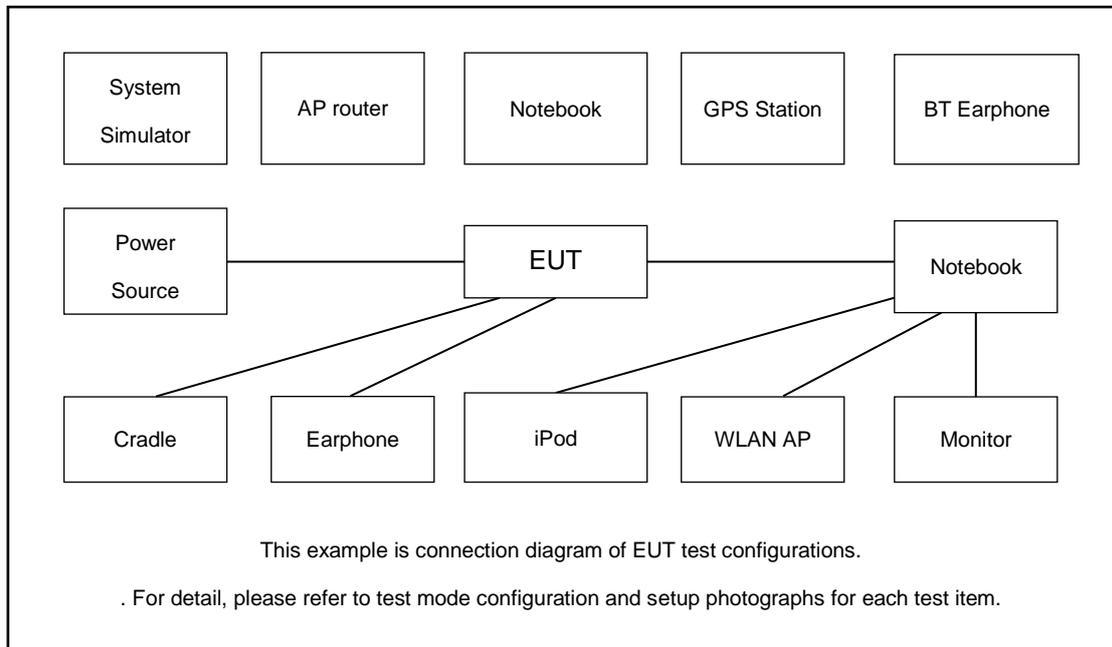

### 2.4 Support Unit used in test configuration and system

| Item | Equipment          | Brand Name | Model Name | FCC ID      | Data Cable | Power Cord        |
|------|--------------------|------------|------------|-------------|------------|-------------------|
| 1.   | Base Station(LTE)  | Anritsu    | MT8820C    | N/A         | N/A        | Unshielded, 1.8 m |
| 2.   | WLAN AP            | Dlink      | DIR-820L   | KA2IR820LA1 | N/A        | Unshielded, 1.8 m |
| 3.   | Bluetooth Earphone | Samsung    | EO-MG900   | PYAHS-107W  | N/A        | Unshielded, 1.8 m |



## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 5.87 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.87 + 10 = 15.87 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

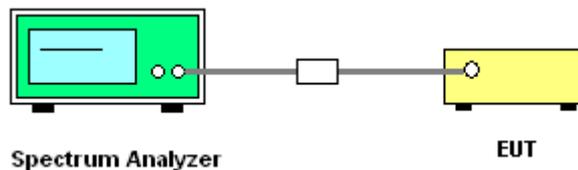

##### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

### 3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

### 3.2.4 Test Setup

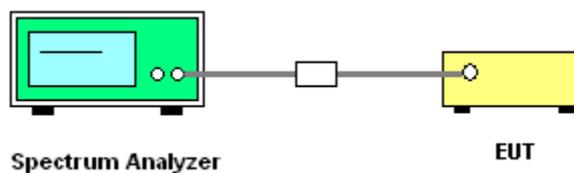



3.2.5 Test Result of Fundamental Maximum EIRP

| U-NII-5 |           |     |     |             |                  |        |  |        |       |          |        |                  |                        |            |               |       |
|---------|-----------|-----|-----|-------------|------------------|--------|--|--------|-------|----------|--------|------------------|------------------------|------------|---------------|-------|
| Mod.    | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) |        | Conducted Power with duty factor (dBm) |        |       | DG (dBi) |        | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail | Power Setting |       |
|         |           |     |     |             | Ant 6            | Ant 17 | Ant 6                                  | Ant 17 | SUM   | Ant 6    | Ant 17 |                  |                        |            | SUM           | Ant 6 |
| 11a     | 6Mbps     | 2   | 001 | 5955        | 0.16             | 0.16   | 18.38                                  | 18.57  | 21.49 | -4.11    | 17.38  | 30.00            | Pass                   | 18         |               |       |
| 11a     | 6Mbps     | 2   | 045 | 6175        | 0.16             | 0.16   | 18.12                                  | 18.34  | 21.25 | -4.11    | 17.14  | 30.00            | Pass                   | 18         |               |       |
| 11a     | 6Mbps     | 2   | 093 | 6415        | 0.16             | 0.16   | 17.80                                  | 18.20  | 21.02 | -4.11    | 16.91  | 30.00            | Pass                   | 18         |               |       |

| U-NII-7 |           |     |     |             |                  |        |  |        |       |          |        |                  |                        |            |               |       |
|---------|-----------|-----|-----|-------------|------------------|--------|--|--------|-------|----------|--------|------------------|------------------------|------------|---------------|-------|
| Mod.    | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) |        | Conducted Power with duty factor (dBm) |        |       | DG (dBi) |        | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail | Power Setting |       |
|         |           |     |     |             | Ant 6            | Ant 17 | Ant 6                                  | Ant 17 | SUM   | Ant 6    | Ant 17 |                  |                        |            | SUM           | Ant 6 |
| 11a     | 6Mbps     | 2   | 117 | 6535        | 0.16             | 0.16   | 17.88                                  | 18.60  | 21.27 | -3.39    | 17.88  | 30.00            | Pass                   | 18         |               |       |
| 11a     | 6Mbps     | 2   | 149 | 6695        | 0.16             | 0.16   | 18.13                                  | 18.57  | 21.37 | -3.39    | 17.98  | 30.00            | Pass                   | 18         |               |       |
| 11a     | 6Mbps     | 2   | 181 | 6855        | 0.16             | 0.16   | 17.78                                  | 17.51  | 20.66 | -3.39    | 17.27  | 30.00            | Pass                   | 18         |               |       |

| U-NII-5 |           |     |     |             |            |                  |        |  |        |       |          |        |                  |                        |            |               |       |
|---------|-----------|-----|-----|-------------|------------|------------------|--------|--|--------|-------|----------|--------|------------------|------------------------|------------|---------------|-------|
| Mod.    | Data Rate | NTX | CH. | Freq. (MHz) | RU Config. | Duty Factor (dB) |        | Conducted Power with duty factor (dBm) |        |       | DG (dBi) |        | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail | Power Setting |       |
|         |           |     |     |             |            | Ant 6            | Ant 17 | Ant 6                                  | Ant 17 | SUM   | Ant 6    | Ant 17 |                  |                        |            | SUM           | Ant 6 |
| HE20    | MCS0      | 2   | 001 | 5955        | Full       | 0.20             | 0.20   | 17.51                                  | 17.36  | 20.44 | -4.11    | 16.33  | 30.00            | Pass                   | 17         |               |       |
| HE20    | MCS0      | 2   | 001 | 5955        | 26/0       | 0.05             | 0.05   | 9.87                                   | 10.00  | 12.94 | -4.11    | 8.83   | 30.00            | Pass                   | 9          |               |       |
| HE20    | MCS0      | 2   | 001 | 5955        | 52/37      | 0.05             | 0.05   | 12.67                                  | 13.02  | 15.86 | -4.11    | 11.75  | 30.00            | Pass                   | 12         |               |       |
| HE20    | MCS0      | 2   | 001 | 5955        | 106/53     | 0.08             | 0.10   | 15.27                                  | 15.29  | 18.29 | -4.11    | 14.18  | 30.00            | Pass                   | 14.5       |               |       |
| HE20    | MCS0      | 2   | 045 | 6175        | Full       | 0.20             | 0.20   | 16.95                                  | 17.17  | 20.07 | -4.11    | 15.96  | 30.00            | Pass                   | 17         |               |       |
| HE20    | MCS0      | 2   | 093 | 6415        | Full       | 0.20             | 0.20   | 17.13                                  | 17.21  | 20.18 | -4.11    | 16.07  | 30.00            | Pass                   | 17         |               |       |
| HE40    | MCS0      | 2   | 003 | 5965        | Full       | 0.41             | 0.41   | 16.72                                  | 16.73  | 19.74 | -4.11    | 15.63  | 30.00            | Pass                   | 16         |               |       |
| HE40    | MCS0      | 2   | 043 | 6165        | Full       | 0.41             | 0.41   | 16.20                                  | 16.53  | 19.38 | -4.11    | 15.27  | 30.00            | Pass                   | 16         |               |       |
| HE40    | MCS0      | 2   | 091 | 6405        | Full       | 0.41             | 0.41   | 16.47                                  | 16.42  | 19.46 | -4.11    | 15.35  | 30.00            | Pass                   | 16         |               |       |
| HE80    | MCS0      | 2   | 007 | 5985        | Full       | 0.19             | 0.19   | 15.70                                  | 15.52  | 18.62 | -4.11    | 14.51  | 30.00            | Pass                   | 15         |               |       |
| HE80    | MCS0      | 2   | 039 | 6145        | Full       | 0.19             | 0.19   | 15.37                                  | 15.23  | 18.31 | -4.11    | 14.20  | 30.00            | Pass                   | 15         |               |       |
| HE80    | MCS0      | 2   | 087 | 6385        | Full       | 0.19             | 0.19   | 15.49                                  | 15.60  | 18.55 | -4.11    | 14.44  | 30.00            | Pass                   | 15         |               |       |
| HE160   | MCS0      | 2   | 015 | 6025        | Full       | 0.35             | 0.35   | 14.64                                  | 14.07  | 17.38 | -4.11    | 13.27  | 30.00            | Pass                   | 14         |               |       |
| HE160   | MCS0      | 2   | 047 | 6185        | Full       | 0.35             | 0.35   | 14.31                                  | 14.05  | 17.19 | -4.11    | 13.08  | 30.00            | Pass                   | 14         |               |       |



|       |      |   |     |      |      |      |      |       |       |       |       |       |       |      |    |
|-------|------|---|-----|------|------|------|------|-------|-------|-------|-------|-------|-------|------|----|
| HE160 | MCS0 | 2 | 079 | 6345 | Full | 0.35 | 0.35 | 14.11 | 14.39 | 17.26 | -4.11 | 13.15 | 30.00 | Pass | 14 |
|-------|------|---|-----|------|------|------|------|-------|-------|-------|-------|-------|-------|------|----|

| U-NII-7 |           |     |     |             |            |                  |        |  |        |       |          |        |                  |                        |            |               |       |
|---------|-----------|-----|-----|-------------|------------|------------------|--------|--|--------|-------|----------|--------|------------------|------------------------|------------|---------------|-------|
| Mod.    | Data Rate | NTX | CH. | Freq. (MHz) | RU Config. | Duty Factor (dB) |        | Conducted Power with duty factor (dBm) |        |       | DG (dBi) |        | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail | Power Setting |       |
|         |           |     |     |             |            | Ant 6            | Ant 17 | Ant 6                                  | Ant 17 | SUM   | Ant 6    | Ant 17 |                  |                        |            | SUM           | Ant 6 |
| HE20    | MCS0      | 2   | 117 | 6535        | Full       | 0.20             | 0.20   | 16.93                                  | 17.42  | 20.19 | -3.39    | 16.80  | 30.00            | Pass                   | 17         |               |       |
| HE20    | MCS0      | 2   | 117 | 6535        | 26/0       | 0.05             | 0.05   | 8.77                                   | 9.28   | 12.04 | -3.39    | 8.65   | 30.00            | Pass                   | 8.5        |               |       |
| HE20    | MCS0      | 2   | 117 | 6535        | 52/37      | 0.05             | 0.05   | 11.57                                  | 12.40  | 15.01 | -3.39    | 11.62  | 30.00            | Pass                   | 11.5       |               |       |
| HE20    | MCS0      | 2   | 117 | 6535        | 106/53     | 0.08             | 0.10   | 14.74                                  | 15.46  | 18.13 | -3.39    | 14.74  | 30.00            | Pass                   | 14.5       |               |       |
| HE20    | MCS0      | 2   | 149 | 6695        | Full       | 0.20             | 0.20   | 17.18                                  | 17.49  | 20.35 | -3.39    | 16.96  | 30.00            | Pass                   | 17         |               |       |
| HE20    | MCS0      | 2   | 181 | 6855        | Full       | 0.20             | 0.20   | 16.81                                  | 16.49  | 19.66 | -3.39    | 16.27  | 30.00            | Pass                   | 17         |               |       |
| HE40    | MCS0      | 2   | 123 | 6565        | Full       | 0.41             | 0.41   | 16.17                                  | 16.72  | 19.47 | -3.39    | 16.08  | 30.00            | Pass                   | 16         |               |       |
| HE40    | MCS0      | 2   | 147 | 6685        | Full       | 0.41             | 0.41   | 16.47                                  | 16.75  | 19.63 | -3.39    | 16.24  | 30.00            | Pass                   | 16         |               |       |
| HE40    | MCS0      | 2   | 179 | 6845        | Full       | 0.41             | 0.41   | 16.29                                  | 15.89  | 19.11 | -3.39    | 15.72  | 30.00            | Pass                   | 16         |               |       |
| HE80    | MCS0      | 2   | 135 | 6625        | Full       | 0.19             | 0.19   | 15.14                                  | 15.21  | 18.18 | -3.39    | 14.79  | 30.00            | Pass                   | 15         |               |       |
| HE80    | MCS0      | 2   | 151 | 6705        | Full       | 0.19             | 0.19   | 15.48                                  | 15.53  | 18.51 | -3.39    | 15.12  | 30.00            | Pass                   | 15         |               |       |
| HE80    | MCS0      | 2   | 167 | 6785        | Full       | 0.00             | 0.00   | 15.34                                  | 15.37  | 18.36 | -3.39    | 14.97  | 30.00            | Pass                   | 15         |               |       |
| HE160   | MCS0      | 2   | 143 | 6665        | Full       | 0.35             | 0.35   | 14.15                                  | 14.32  | 17.25 | -3.39    | 13.86  | 30.00            | Pass                   | 14         |               |       |

| U-NII-5 |           |     |     |             |                    |                  |        |  |        |       |          |        |                  |                        |            |               |       |
|---------|-----------|-----|-----|-------------|--------------------|------------------|--------|--|--------|-------|----------|--------|------------------|------------------------|------------|---------------|-------|
| Mod.    | Data Rate | NTX | CH. | Freq. (MHz) | RU Config.         | Duty Factor (dB) |        | Conducted Power with duty factor (dBm) |        |       | DG (dBi) |        | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail | Power Setting |       |
|         |           |     |     |             |                    | Ant 6            | Ant 17 | Ant 6                                  | Ant 17 | SUM   | Ant 6    | Ant 17 |                  |                        |            | SUM           | Ant 6 |
| EHT20   | MCS0      | 2   | 001 | 5955        | Full               | 0.21             | 0.21   | 17.55                                  | 17.43  | 20.50 | -4.11    | 16.39  | 30.00            | Pass                   | 17         |               |       |
| EHT20   | MCS0      | 2   | 001 | 5955        | 26/0               | 0.06             | 0.06   | 9.93                                   | 10.09  | 13.02 | -4.11    | 8.91   | 30.00            | Pass                   | 9          |               |       |
| EHT20   | MCS0      | 2   | 001 | 5955        | 52/37              | 0.06             | 0.06   | 12.73                                  | 13.08  | 15.92 | -4.11    | 11.81  | 30.00            | Pass                   | 12         |               |       |
| EHT20   | MCS0      | 2   | 001 | 5955        | 106/53             | 0.10             | 0.10   | 15.33                                  | 15.36  | 18.36 | -4.11    | 14.25  | 30.00            | Pass                   | 14.5       |               |       |
| EHT20   | MCS0      | 2   | 001 | 5955        | 52ru+26ru          | 0.05             | 0.05   | 13.72                                  | 13.88  | 16.81 | -4.11    | 12.70  | 30.00            | Pass                   | 13         |               |       |
| EHT20   | MCS0      | 2   | 001 | 5955        | 106ru+26ru         | 0.05             | 0.05   | 15.64                                  | 16.06  | 18.86 | -4.11    | 14.75  | 30.00            | Pass                   | 15         |               |       |
| EHT20   | MCS0      | 2   | 045 | 6175        | Full               | 0.21             | 0.21   | 16.98                                  | 17.22  | 20.11 | -4.11    | 16.00  | 30.00            | Pass                   | 17         |               |       |
| EHT20   | MCS0      | 2   | 093 | 6415        | Full               | 0.21             | 0.21   | 17.17                                  | 17.24  | 20.22 | -4.11    | 16.11  | 30.00            | Pass                   | 17         |               |       |
| EHT40   | MCS0      | 2   | 003 | 5965        | Full               | 0.42             | 0.42   | 16.81                                  | 16.77  | 19.80 | -4.11    | 15.69  | 30.00            | Pass                   | 16         |               |       |
| EHT40   | MCS0      | 2   | 043 | 6165        | Full               | 0.42             | 0.42   | 16.29                                  | 16.58  | 19.45 | -4.11    | 15.34  | 30.00            | Pass                   | 16         |               |       |
| EHT40   | MCS0      | 2   | 091 | 6405        | Full               | 0.42             | 0.42   | 16.55                                  | 16.51  | 19.54 | -4.11    | 15.43  | 30.00            | Pass                   | 16         |               |       |
| EHT80   | MCS0      | 2   | 007 | 5985        | Full               | 0.21             | 0.19   | 15.76                                  | 15.55  | 18.67 | -4.11    | 14.56  | 30.00            | Pass                   | 15         |               |       |
| EHT80   | MCS0      | 2   | 007 | 5985        | Puncturing 20M ②   | 0.11             | 0.11   | 13.79                                  | 13.84  | 16.82 | -4.11    | 12.71  | 30.00            | Pass                   | 13         |               |       |
| EHT80   | MCS0      | 2   | 007 | 5985        | Large RU 484+242 ④ | 0.14             | 0.14   | 15.56                                  | 15.49  | 18.54 | -4.11    | 14.43  | 30.00            | Pass                   | 14.5       |               |       |
| EHT80   | MCS0      | 2   | 039 | 6145        | Full               | 0.21             | 0.19   | 15.42                                  | 15.27  | 18.36 | -4.11    | 14.25  | 30.00            | Pass                   | 15         |               |       |
| EHT80   | MCS0      | 2   | 087 | 6385        | Full               | 0.21             | 0.19   | 15.53                                  | 15.66  | 18.61 | -4.11    | 14.50  | 30.00            | Pass                   | 15         |               |       |
| EHT160  | MCS0      | 2   | 015 | 6025        | Full               | 0.35             | 0.35   | 14.66                                  | 14.10  | 17.40 | -4.11    | 13.29  | 30.00            | Pass                   | 14         |               |       |
| EHT160  | MCS0      | 2   | 015 | 6025        | Puncturing 20M ③   | 0.28             | 0.28   | 13.50                                  | 13.10  | 16.31 | -4.11    | 12.20  | 30.00            | Pass                   | 13         |               |       |
| EHT160  | MCS0      | 2   | 015 | 6025        | Puncturing 40M ②   | 0.24             | 0.24   | 12.46                                  | 12.20  | 15.34 | -4.11    | 11.23  | 30.00            | Pass                   | 12         |               |       |
| EHT160  | MCS0      | 2   | 015 | 6025        | Large RU 996+484 ④ | 0.14             | 0.14   | 13.97                                  | 13.63  | 16.82 | -4.11    | 12.71  | 30.00            | Pass                   | 13.5       |               |       |
| EHT160  | MCS0      | 2   | 047 | 6185        | Full               | 0.35             | 0.35   | 14.34                                  | 14.09  | 17.23 | -4.11    | 13.12  | 30.00            | Pass                   | 14         |               |       |
| EHT160  | MCS0      | 2   | 079 | 6345        | Full               | 0.35             | 0.35   | 14.18                                  | 14.46  | 17.33 | -4.11    | 13.22  | 30.00            | Pass                   | 14         |               |       |



|        |      |   |    |      |                      |      |      |       |       |       |       |       |       |      |      |
|--------|------|---|----|------|----------------------|------|------|-------|-------|-------|-------|-------|-------|------|------|
| EHT320 | MCS0 | 2 | 31 | 6105 | Full                 | 0.61 | 0.61 | 14.13 | 13.72 | 16.94 | -4.11 | 12.83 | 30.00 | Pass | 14   |
| EHT320 | MCS0 | 2 | 31 | 6105 | Puncturing 40M ⑧     | 0.50 | 0.50 | 13.07 | 12.79 | 15.94 | -4.11 | 11.83 | 30.00 | Pass | 13   |
| EHT320 | MCS0 | 2 | 31 | 6105 | Puncturing 80M ②     | 0.47 | 0.44 | 12.08 | 11.78 | 14.94 | -4.11 | 10.83 | 30.00 | Pass | 12   |
| EHT320 | MCS0 | 2 | 31 | 6105 | Puncturing 80M+40M ③ | 0.38 | 0.38 | 12.19 | 12.10 | 15.15 | -4.11 | 11.04 | 30.00 | Pass | 12   |
| EHT320 | MCS0 | 2 | 31 | 6105 | Large RU 996*3+484 ⑧ | 0.51 | 0.51 | 13.99 | 13.59 | 16.81 | -4.11 | 12.70 | 30.00 | Pass | 13   |
| EHT320 | MCS0 | 2 | 31 | 6105 | Large RU 996*3 ④     | 0.46 | 0.46 | 13.95 | 13.52 | 16.75 | -4.11 | 12.64 | 30.00 | Pass | 13.5 |
| EHT320 | MCS0 | 2 | 63 | 6265 | Full                 | 0.61 | 0.61 | 14.06 | 13.73 | 16.91 | -4.11 | 12.80 | 30.00 | Pass | 14   |

| U-NII-7 |           |     |     |             |            |                  |        |  |        |       |          |        |                  |                        |            |               |       |
|---------|-----------|-----|-----|-------------|------------|------------------|--------|--|--------|-------|----------|--------|------------------|------------------------|------------|---------------|-------|
| Mod.    | Data Rate | NTX | CH. | Freq. (MHz) | RU Config. | Duty Factor (dB) |        | Conducted Power with duty factor (dBm) |        |       | DG (dBi) |        | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail | Power Setting |       |
|         |           |     |     |             |            | Ant 6            | Ant 17 | Ant 6                                  | Ant 17 | SUM   | Ant 6    | Ant 17 |                  |                        |            | SUM           | Ant 6 |
| EHT20   | MCS0      | 2   | 117 | 6535        | Full       | 0.21             | 0.21   | 16.97                                  | 17.48  | 20.24 | -3.39    | 16.85  | 30.00            | Pass                   | 17         |               |       |
| EHT20   | MCS0      | 2   | 117 | 6535        | 26/0       | 0.06             | 0.06   | 8.84                                   | 9.35   | 12.11 | -3.39    | 8.72   | 30.00            | Pass                   | 8.5        |               |       |
| EHT20   | MCS0      | 2   | 117 | 6535        | 52/37      | 0.06             | 0.06   | 11.64                                  | 12.51  | 15.11 | -3.39    | 11.72  | 30.00            | Pass                   | 11.5       |               |       |
| EHT20   | MCS0      | 2   | 117 | 6535        | 106/53     | 0.10             | 0.10   | 14.83                                  | 15.52  | 18.20 | -3.39    | 14.81  | 30.00            | Pass                   | 14.5       |               |       |
| EHT20   | MCS0      | 2   | 117 | 6535        | 52ru+26ru  | 0.05             | 0.05   | 12.61                                  | 13.33  | 15.99 | -3.39    | 12.60  | 30.00            | Pass                   | 12.5       |               |       |
| EHT20   | MCS0      | 2   | 117 | 6535        | 106ru+26ru | 0.05             | 0.05   | 15.36                                  | 15.97  | 18.68 | -3.39    | 15.29  | 30.00            | Pass                   | 15         |               |       |
| EHT20   | MCS0      | 2   | 149 | 6695        | Full       | 0.21             | 0.21   | 17.25                                  | 17.55  | 20.41 | -3.39    | 17.02  | 30.00            | Pass                   | 17         |               |       |
| EHT20   | MCS0      | 2   | 181 | 6855        | Full       | 0.21             | 0.21   | 16.88                                  | 16.55  | 19.73 | -3.39    | 16.34  | 30.00            | Pass                   | 17         |               |       |
| EHT20   | MCS0      | 2   | 185 | 6875        | Full       | 0.42             | 0.42   | 18.13                                  | 10.13  | 18.77 | -3.39    | 15.38  | 30.00            | Pass                   | 10.5       |               |       |
| EHT40   | MCS0      | 2   | 123 | 6565        | Full       | 0.42             | 0.42   | 16.26                                  | 16.77  | 19.53 | -3.39    | 16.14  | 30.00            | Pass                   | 16         |               |       |
| EHT40   | MCS0      | 2   | 147 | 6685        | Full       | 0.42             | 0.42   | 16.55                                  | 16.83  | 19.70 | -3.39    | 16.31  | 30.00            | Pass                   | 16         |               |       |
| EHT40   | MCS0      | 2   | 179 | 6845        | Full       | 0.42             | 0.42   | 16.34                                  | 15.95  | 19.16 | -3.39    | 15.77  | 30.00            | Pass                   | 16         |               |       |
| EHT80   | MCS0      | 2   | 135 | 6625        | Full       | 0.21             | 0.19   | 15.22                                  | 15.27  | 18.26 | -3.39    | 14.87  | 30.00            | Pass                   | 15         |               |       |
| EHT80   | MCS0      | 2   | 151 | 6705        | Full       | 0.21             | 0.19   | 15.55                                  | 15.57  | 18.57 | -3.39    | 15.18  | 30.00            | Pass                   | 15         |               |       |
| EHT80   | MCS0      | 2   | 167 | 6785        | Full       | 0.21             | 0.19   | 15.40                                  | 15.43  | 18.43 | -3.39    | 15.04  | 30.00            | Pass                   | 15         |               |       |
| EHT160  | MCS0      | 2   | 143 | 6665        | Full       | 0.35             | 0.35   | 14.17                                  | 14.34  | 17.27 | -3.39    | 13.88  | 30.00            | Pass                   | 14         |               |       |



### 3.3 Fundamental Power Spectral Density Measurement

#### 3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band.

#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

**# Method SA-2 #**


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW ≥ 3 MHz.
  - Number of points in sweep ≥ 2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
  3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

### 3.3.4 Test Setup

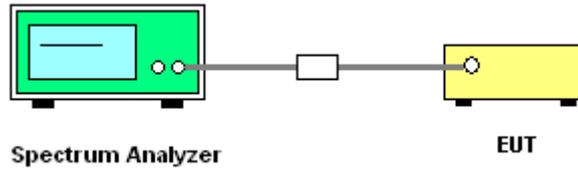

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



## 3.4 In-Band Emissions (Channel Mask)

### 3.4.1 Limit of Unwanted Emissions

#### <FCC 14-30 CFR 15.407>

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
  - a) Set the span to encompass the entire 26 dB EBW of the signal.
  - b) Set RBW = same RBW used for 26 dB EBW measurement.
  - c) Set VBW  $\geq 3 \times$  RBW
  - d) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
  - e) Sweep time = auto.
  - f) Detector = RMS (i.e., power averaging)
  - g) Trace average at least 100 traces in power averaging (rms) mode.
  - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
  - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
  - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

### 3.4.4 Test Setup

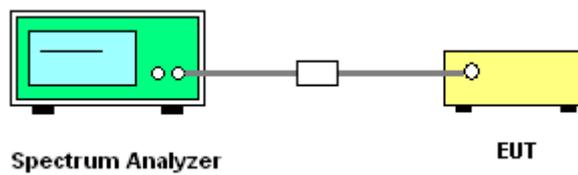

### 3.4.5 Test Result

Please refer to Appendix A.



### 3.5 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.5.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

| EIRP (dBm) | Field Strength at 3m (dBµV/m) |
|------------|-------------------------------|
| - 27 (RMS) | 68.3                          |
| - 7 (Peak) | 88.3                          |

Unwanted emissions outside of restricted bands are measured with a RMS detector.  
 In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490   | 2400/F(kHz)                       | 300                           |
| 0.490 – 1.705   | 24000/F(kHz)                      | 30                            |
| 1.705 – 30.0    | 30                                | 30                            |
| 30 – 88         | 100                               | 3                             |
| 88 – 216        | 150                               | 3                             |
| 216 - 960       | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

#### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.




### 3.5.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

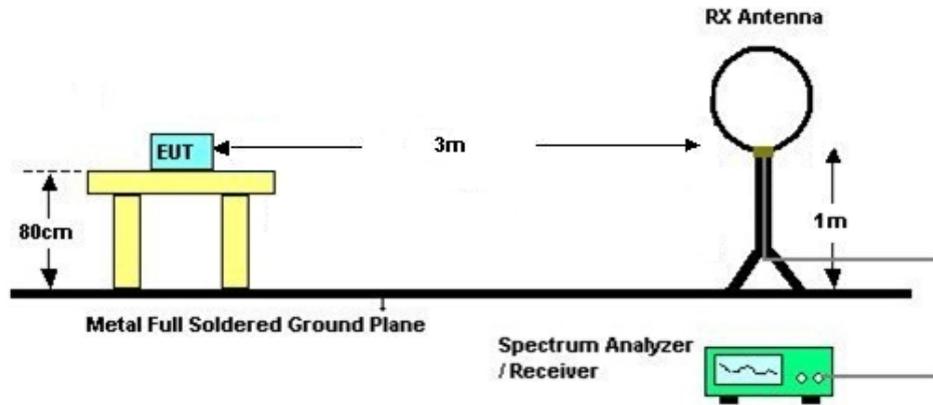

For radiated emissions from 30MHz to 1GHz

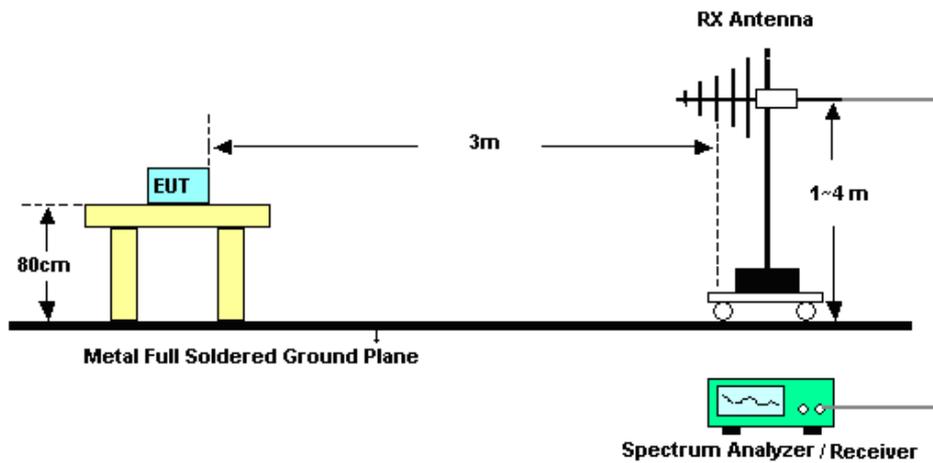

For radiated emissions above 1GHz

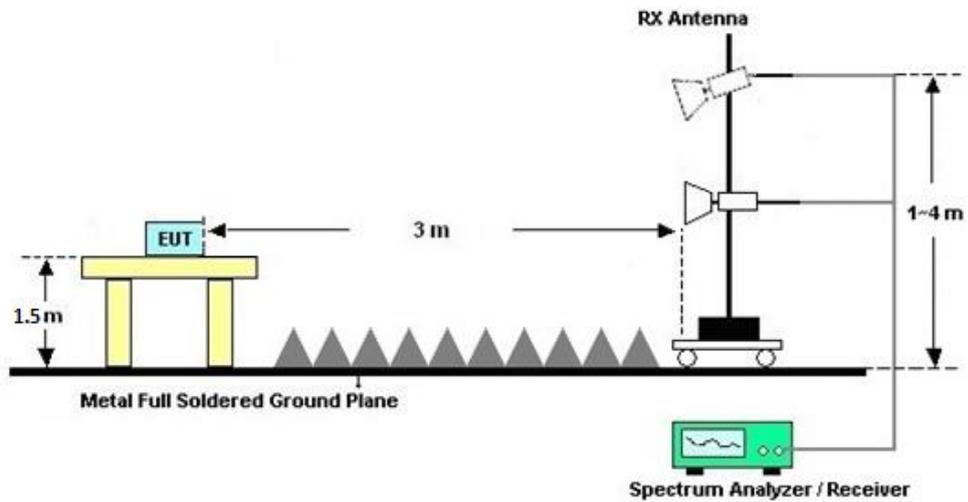



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBµV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

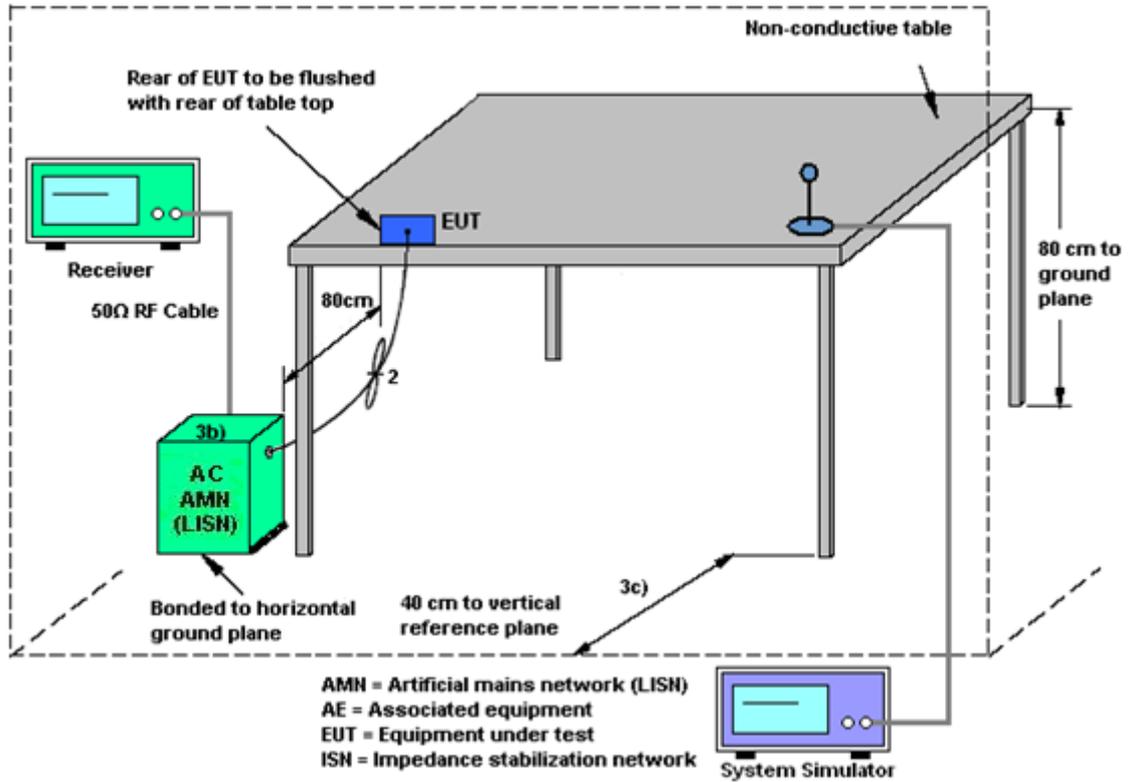

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

For power, the directional gain G<sub>ANT</sub> is set equal to the antenna having the highest gain, i.e.,

Directional gain = G<sub>ANT MAX</sub>(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N<sub>ANT</sub> ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10<sup>G<sup>1</sup>/20</sup> + 10<sup>G<sup>2</sup>/20</sup> + ... + 10<sup>G<sup>n</sup>/20</sup>)<sup>2</sup> / N<sub>ANT</sub>] dBi, as following table for PSD.

N<sub>ANT</sub> = number of transmit antennas

N<sub>SS</sub> = number of spatial streams. (The worst case directional gain will occur when N<sub>SS</sub> = 1)

| <b>&lt;CDD Modes&gt;</b> |               |                |              |              |
|--------------------------|---------------|----------------|--------------|--------------|
|                          |               |                | <b>DG</b>    | <b>DG</b>    |
|                          |               |                | <b>for</b>   | <b>for</b>   |
|                          | <b>Ant. 6</b> | <b>Ant. 17</b> | <b>Power</b> | <b>PSD</b>   |
|                          | <b>(dBi)</b>  | <b>(dBi)</b>   | <b>(dBi)</b> | <b>(dBi)</b> |
| <b>U-NII-5</b>           | -4.11         | -4.11          | -4.11        | -1.10        |
| <b>U-NII-7</b>           | -3.39         | -3.39          | -3.39        | -0.38        |



## 4 List of Measuring Equipment

| Instrument                        | Manufacturer         | Model No.                | Serial No.   | Characteristics | Calibration Date | Test Date                      | Due Date      | Remark                |
|-----------------------------------|----------------------|--------------------------|--------------|-----------------|------------------|--------------------------------|---------------|-----------------------|
| Spectrum Analyzer                 | R&S                  | FSV40                    | 101040       | 10Hz~40GHz      | Oct. 11, 2023    | May 02, 2024~<br>Jul. 05, 2024 | Oct. 10, 2024 | Conducted (TH01-KS)   |
| Pulse Power Sensor                | Anritsu              | MA2411B                  | 0917070      | 300MHz~40GHz    | Jan. 02, 2024    | May 02, 2024~<br>Jul. 05, 2024 | Jan. 01, 2025 | Conducted (TH01-KS)   |
| Power Meter                       | Anritsu              | ML2495A                  | 1005002      | 50MHz Bandwidth | Jan. 02, 2024    | May 02, 2024~<br>Jul. 05, 2024 | Jan. 01, 2025 | Conducted (TH01-KS)   |
| EMI Test Receiver                 | R&S                  | ESR7                     | 101404       | 9kHz~7GHz       | Oct. 18, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Oct. 17, 2024 | Radiation (03CH04-SZ) |
| EXA Spectrum Analyzer             | KEYSIGHT             | N9010A                   | MY55150213   | 10Hz~44GHz      | Jul. 07, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Jul. 06, 2024 | Radiation (03CH04-SZ) |
| Loop Antenna                      | R&S                  | HFH2-Z2                  | 100354       | 9kHz~30MHz      | Jun. 28, 2022    | Apr. 25, 2024~<br>May 24, 2024 | Jun. 27, 2024 | Radiation (03CH04-SZ) |
| Bilog Antenna                     | TeseQ                | CBL6111D                 | 41909        | 30MHz~1GHz      | May 14, 2023     | Apr. 25, 2024~<br>May 24, 2024 | May 13, 2024  | Radiation (03CH04-SZ) |
| Bilog Antenna                     | TeseQ                | CBL6111D                 | 41909        | 30MHz~1GHz      | May 09, 2024     |                                | May 08, 2025  | Radiation (03CH04-SZ) |
| Double Ridge Horn Antenna         | SCHWARZBECK          | BBHA9120D                | 9120D-1474   | 1GHz~18GHz      | Jul. 07, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Jul. 06, 2024 | Radiation (03CH04-SZ) |
| Horn Antenna                      | SCHWARZBECK          | BBHA9170                 | 9170#679     | 15GHz~40GHz     | Jul. 08, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Jul. 07, 2024 | Radiation (03CH04-SZ) |
| Amplifier                         | Burgeon              | BPA-530                  | 102211       | 0.01Hz~3000MHz  | Oct. 18, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Oct. 17, 2024 | Radiation (03CH04-SZ) |
| HF Amplifier                      | MITEQ                | AMF-7D-00101800-30-10P-R | 1943528      | 1GHz~18GHz      | Oct. 18, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Oct. 17, 2024 | Radiation (03CH04-SZ) |
| HF Amplifier                      | MITEQ                | TTA1840-35-HG            | 1871923      | 18GHz~40GHz     | Jul. 07, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Jul. 06, 2024 | Radiation (03CH04-SZ) |
| Amplifier                         | Agilent Technologies | 83017A                   | MY57280136   | 500MHz~26.5GHz  | Aug. 21, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Aug. 20, 2024 | Radiation (03CH04-SZ) |
| AC Power Source                   | APC                  | AFV-S-600B               | F119050019   | N/A             | Oct. 18, 2023    | Apr. 25, 2024~<br>May 24, 2024 | Oct. 17, 2024 | Radiation (03CH04-SZ) |
| Turn Table                        | EM                   | EM1000                   | N/A          | 0~360 degree    | NCR              | Apr. 25, 2024~<br>May 24, 2024 | NCR           | Radiation (03CH04-SZ) |
| Antenna Mast                      | EM                   | EM1000                   | N/A          | 1 m~4 m         | NCR              | Apr. 25, 2024~<br>May 24, 2024 | NCR           | Radiation (03CH04-SZ) |
| EMI Receiver                      | R&S                  | ESR7                     | 101630       | 9kHz~7GHz;      | Jul. 06, 2023    | May 15, 2024                   | Jul. 05, 2024 | Conduction (CO01-SZ)  |
| AC LISN                           | R&S                  | ENV216                   | 100063       | 9kHz~30MHz      | Aug. 21, 2023    | May 15, 2024                   | Aug. 20, 2024 | Conduction (CO01-SZ)  |
| AC LISN (for auxiliary equipment) | EMCO                 | 3816/2SH                 | 00103892     | 9kHz~30MHz      | Oct. 16, 2023    | May 15, 2024                   | Oct. 15, 2024 | Conduction (CO01-SZ)  |
| AC Power Source                   | Chroma               | 61602                    | 616020000891 | 100Vac~250Vac   | Jul. 07, 2023    | May 15, 2024                   | Jul. 06, 2024 | Conduction (CO01-SZ)  |

NCR: No Calibration Required



## 5 Measurement Uncertainty

### Uncertainty of Conducted Measurement

|  |          |
|--|----------|
| Conducted Spurious Emission & Bandedge | ±2.26 dB |
| Occupied Channel Bandwidth             | ±0.1%    |
| Conducted Power                        | ±0.46 dB |
| Conducted Power Spectral Density       | ±0.88 dB |
| Frequency                              | ±0.4 Hz  |
| Conducted Generated signal Levels      | ±0.56 dB |
| Conducted Time                         | 0.38%    |

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.5 dB |
|---|--------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.1 dB |
|---|--------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 4.8 dB |
|---|--------|

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.1 dB |
|---|--------|

----- THE END -----



## **Appendix A. Conducted Test Results**



Ambient Condition: 25 °C, 45 %RH

Test Date: 2024.5.2~2024.7.5

Test Engineer: Jiang Jun

### Emission Bandwidth

#### Test Result


| TestMode    | Antenna | Freq(MHz) | 26dB EBW [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-------------|---------|-----------|----------------|---------|---------|------------|---------|
| 11BE320MIMO | Ant6    | 6105      | 327.19         | 5941.59 | 6268.78 | ---        | ---     |
|             | Ant17   | 6105      | 327.27         | 5941.39 | 6268.67 | ---        | ---     |
|             | Ant6    | 6265      | 327.70         | 6101.07 | 6428.78 | ---        | ---     |
|             | Ant17   | 6265      | 327.64         | 6101.12 | 6428.75 | ---        | ---     |
| 11A-CDD     | Ant6    | 5955      | 19.35          | 5945.62 | 5964.97 | ≤320       | PASS    |
|             | Ant17   | 5955      | 18.46          | 5945.90 | 5964.36 | ≤320       | PASS    |
|             | Ant6    | 6175      | 18.39          | 6165.78 | 6184.17 | ≤320       | PASS    |
|             | Ant17   | 6175      | 18.24          | 6165.89 | 6184.13 | ≤320       | PASS    |
|             | Ant6    | 6415      | 18.59          | 6405.77 | 6424.36 | ≤320       | PASS    |
|             | Ant17   | 6415      | 18.21          | 6405.91 | 6424.12 | ≤320       | PASS    |
|             | Ant6    | 6535      | 18.38          | 6525.84 | 6544.22 | ≤320       | PASS    |
|             | Ant17   | 6535      | 18.14          | 6525.93 | 6544.07 | ≤320       | PASS    |
|             | Ant6    | 6695      | 18.68          | 6685.71 | 6704.39 | ≤320       | PASS    |
|             | Ant17   | 6695      | 18.27          | 6685.88 | 6704.15 | ≤320       | PASS    |
| 11BE20MIMO  | Ant6    | 6855      | 18.92          | 6845.43 | 6864.35 | ≤320       | PASS    |
|             | Ant17   | 6855      | 18.16          | 6845.87 | 6864.03 | ≤320       | PASS    |
|             | Ant6    | 5955      | 19.77          | 5945.07 | 5964.84 | ≤320       | PASS    |
|             | Ant17   | 5955      | 19.76          | 5945.13 | 5964.89 | ≤320       | PASS    |
|             | Ant6    | 6175      | 19.79          | 6165.13 | 6184.92 | ≤320       | PASS    |
|             | Ant17   | 6175      | 19.75          | 6165.14 | 6184.89 | ≤320       | PASS    |
|             | Ant6    | 6415      | 19.73          | 6405.12 | 6424.85 | ≤320       | PASS    |
|             | Ant17   | 6415      | 19.71          | 6405.15 | 6424.86 | ≤320       | PASS    |
|             | Ant6    | 6535      | 19.75          | 6525.10 | 6544.85 | ≤320       | PASS    |
|             | Ant17   | 6535      | 19.72          | 6525.12 | 6544.84 | ≤320       | PASS    |
| 11BE40MIMO  | Ant6    | 6695      | 19.69          | 6685.13 | 6704.82 | ≤320       | PASS    |
|             | Ant17   | 6695      | 19.76          | 6685.12 | 6704.88 | ≤320       | PASS    |
|             | Ant6    | 6855      | 19.74          | 6845.12 | 6864.86 | ≤320       | PASS    |
|             | Ant17   | 6855      | 19.76          | 6845.12 | 6864.87 | ≤320       | PASS    |
|             | Ant6    | 5965      | 39.57          | 5945.21 | 5984.78 | ≤320       | PASS    |
|             | Ant17   | 5965      | 39.48          | 5945.29 | 5984.77 | ≤320       | PASS    |
|             | Ant6    | 6165      | 39.47          | 6145.25 | 6184.71 | ≤320       | PASS    |
|             | Ant17   | 6165      | 39.55          | 6145.27 | 6184.81 | ≤320       | PASS    |
|             | Ant6    | 6405      | 39.41          | 6385.31 | 6424.72 | ≤320       | PASS    |
|             | Ant17   | 6405      | 39.41          | 6385.31 | 6424.72 | ≤320       | PASS    |
| 11BE80MIMO  | Ant6    | 6565      | 39.46          | 6545.27 | 6584.73 | ≤320       | PASS    |
|             | Ant17   | 6565      | 39.47          | 6545.25 | 6584.73 | ≤320       | PASS    |
|             | Ant6    | 6685      | 39.43          | 6665.28 | 6704.71 | ≤320       | PASS    |
|             | Ant17   | 6685      | 39.51          | 6665.25 | 6704.77 | ≤320       | PASS    |
|             | Ant6    | 6845      | 39.50          | 6825.24 | 6864.74 | ≤320       | PASS    |
|             | Ant17   | 6845      | 39.50          | 6825.25 | 6864.75 | ≤320       | PASS    |



|             |       |       |         |         |         |      |      |
|-------------|-------|-------|---------|---------|---------|------|------|
|             | Ant17 | 5985  | 79.97   | 5944.99 | 6024.96 | ≤320 | PASS |
|             | Ant6  | 6145  | 80.01   | 6105.00 | 6185.01 | ≤320 | PASS |
|             | Ant17 | 6145  | 80.08   | 6104.96 | 6185.04 | ≤320 | PASS |
|             | Ant6  | 6385  | 79.97   | 6344.96 | 6424.93 | ≤320 | PASS |
|             | Ant17 | 6385  | 80.08   | 6344.92 | 6425.00 | ≤320 | PASS |
|             | Ant6  | 6625  | 79.96   | 6585.00 | 6664.96 | ≤320 | PASS |
|             | Ant17 | 6625  | 79.91   | 6585.05 | 6664.96 | ≤320 | PASS |
|             | Ant6  | 6705  | 79.99   | 6664.96 | 6744.95 | ≤320 | PASS |
|             | Ant17 | 6705  | 79.95   | 6664.96 | 6744.91 | ≤320 | PASS |
|             | Ant6  | 6785  | 79.97   | 6744.99 | 6824.96 | ≤320 | PASS |
| Ant17       | 6785  | 79.92 | 6745.04 | 6824.96 | ≤320    | PASS |      |
| 11BE160MIMO | Ant6  | 6025  | 161.76  | 5944.07 | 6105.83 | ≤320 | PASS |
|             | Ant17 | 6025  | 161.97  | 5944.07 | 6106.04 | ≤320 | PASS |
|             | Ant6  | 6185  | 161.81  | 6104.07 | 6265.88 | ≤320 | PASS |
|             | Ant17 | 6185  | 161.95  | 6103.93 | 6265.88 | ≤320 | PASS |
|             | Ant6  | 6345  | 161.87  | 6263.99 | 6425.85 | ≤320 | PASS |
|             | Ant17 | 6345  | 161.87  | 6264.01 | 6425.88 | ≤320 | PASS |
|             | Ant6  | 6665  | 161.76  | 6584.04 | 6745.80 | ≤320 | PASS |
|             | Ant17 | 6665  | 161.60  | 6584.20 | 6745.80 | ≤320 | PASS |




Test Graphs

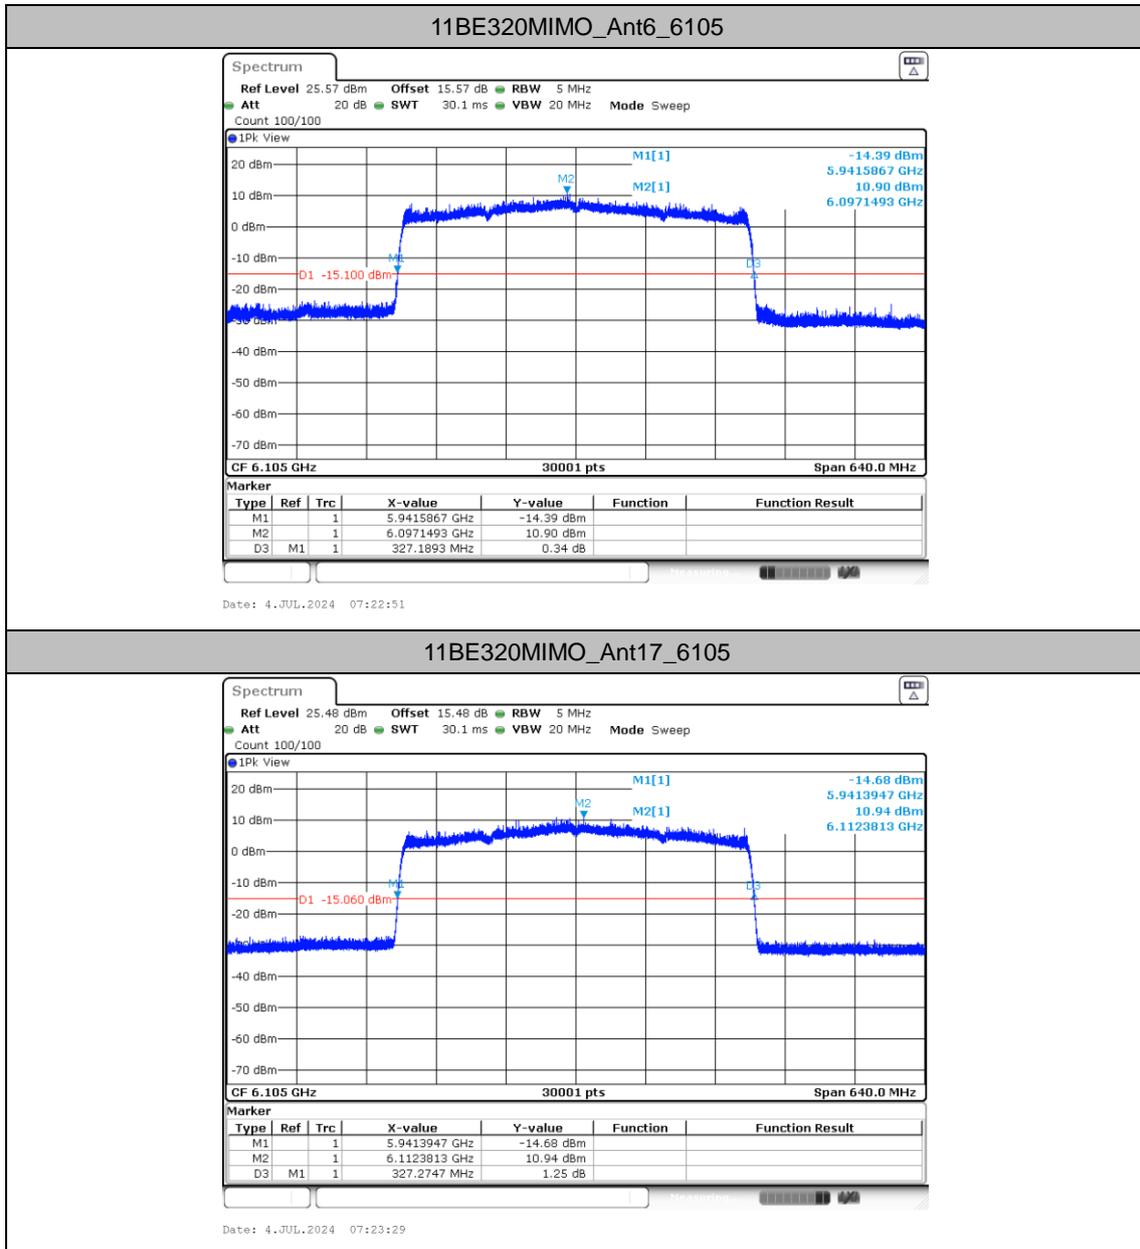




11BE320MIMO\_Ant6\_6265

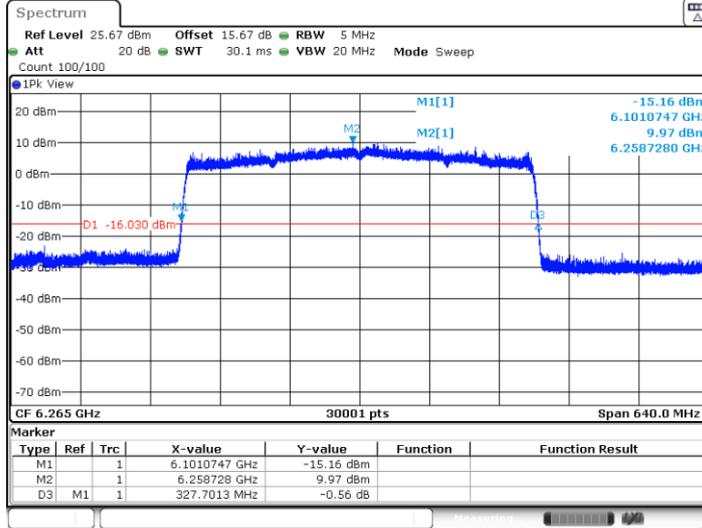


11BE320MIMO\_Ant17\_6265

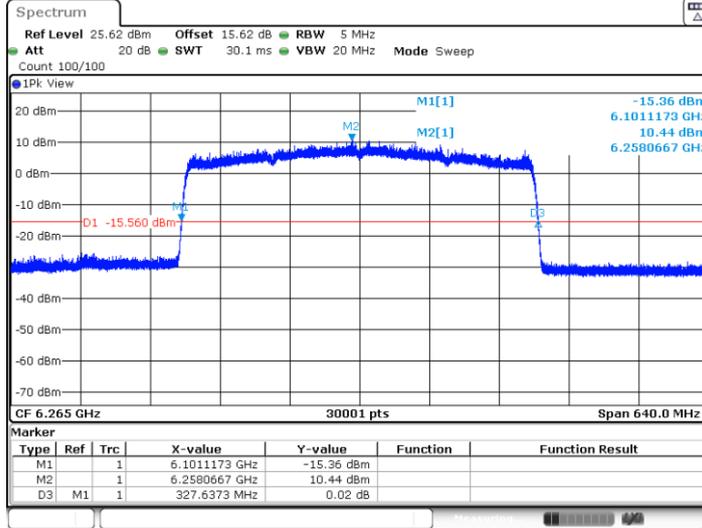




11A-CDD\_Ant6\_5955

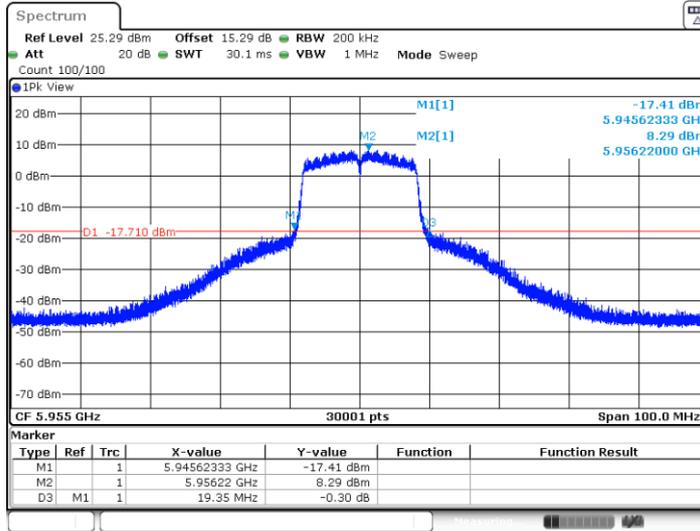

Date: 4.JUL.2024 09:22:12


11A-CDD\_Ant17\_5955

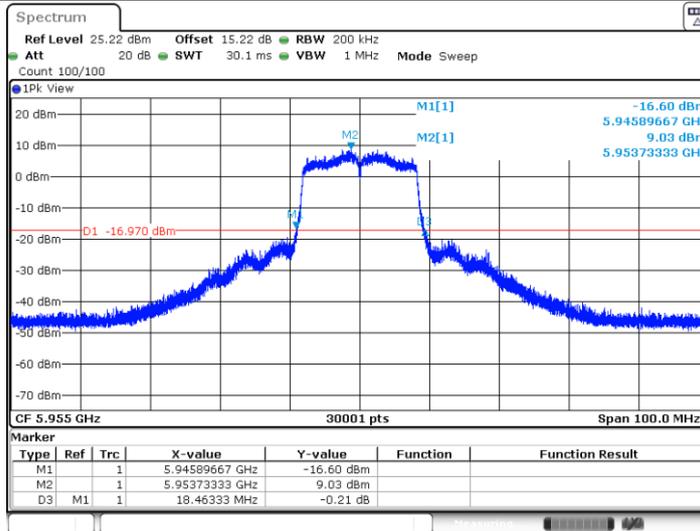

Date: 4.JUL.2024 05:17:28




11A-CDD\_Ant6\_6175

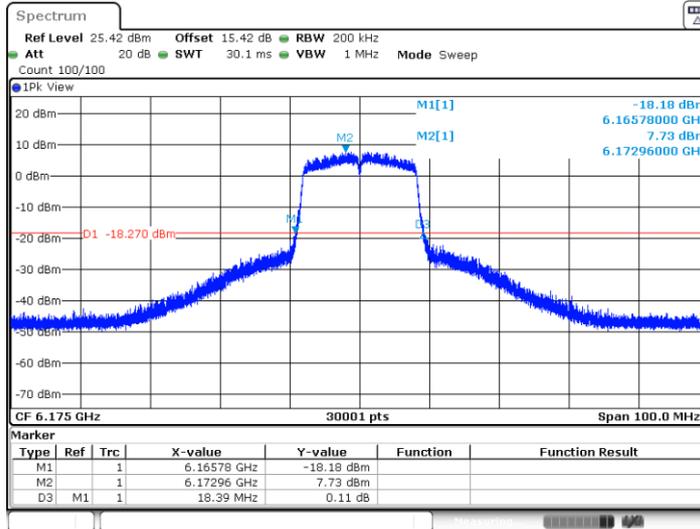

Date: 4.JUL.2024 05:35:12


11A-CDD\_Ant17\_6175

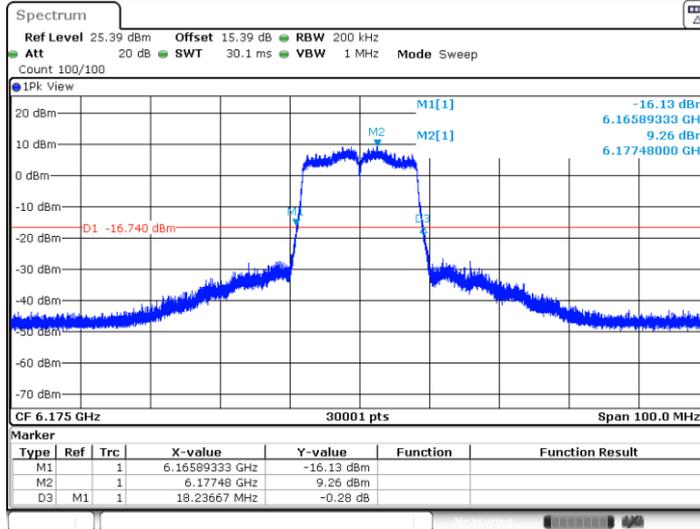

Date: 4.JUL.2024 05:35:54




11A-CDD\_Ant6\_6415

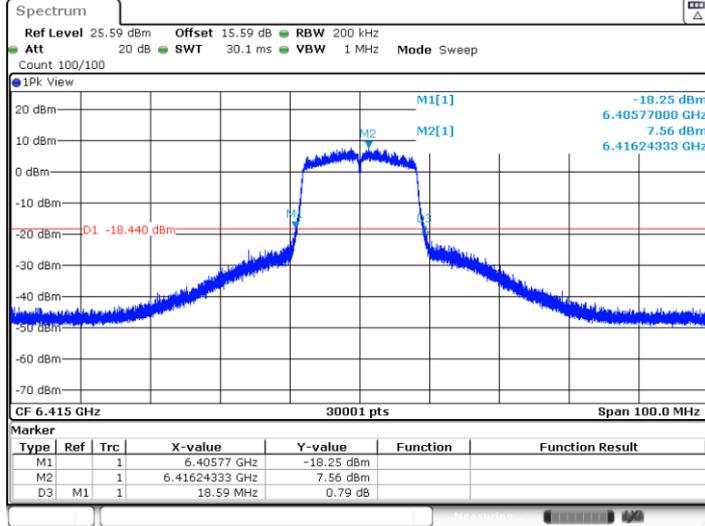

Date: 4.JUL.2024 05:37:57


11A-CDD\_Ant17\_6415

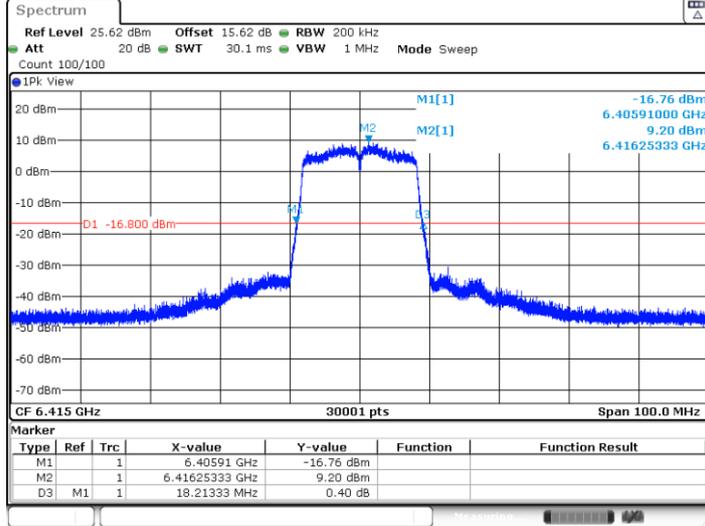


Date: 4.JUL.2024 05:38:39



11A-CDD\_Ant6\_6535

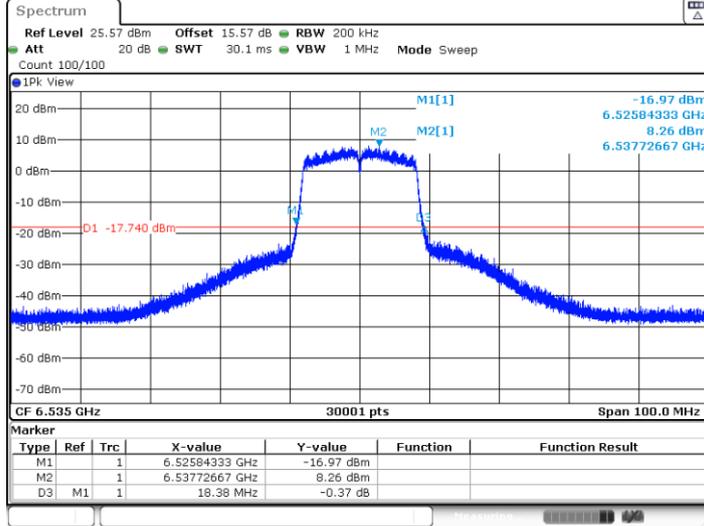


11A-CDD\_Ant17\_6535

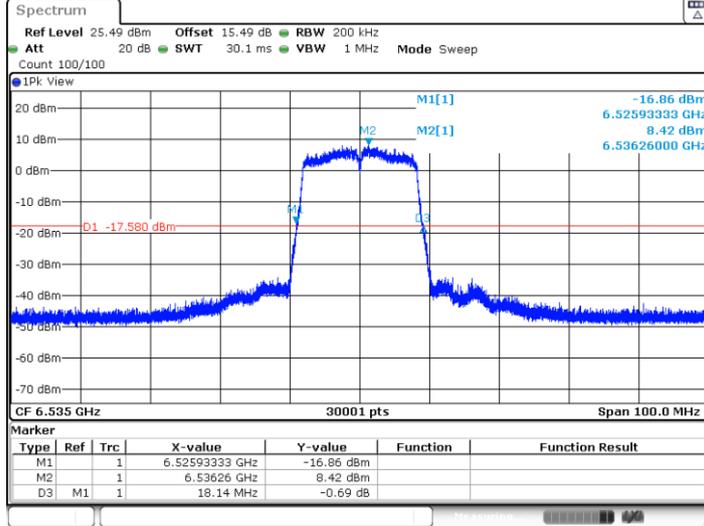




11A-CDD\_Ant6\_6695

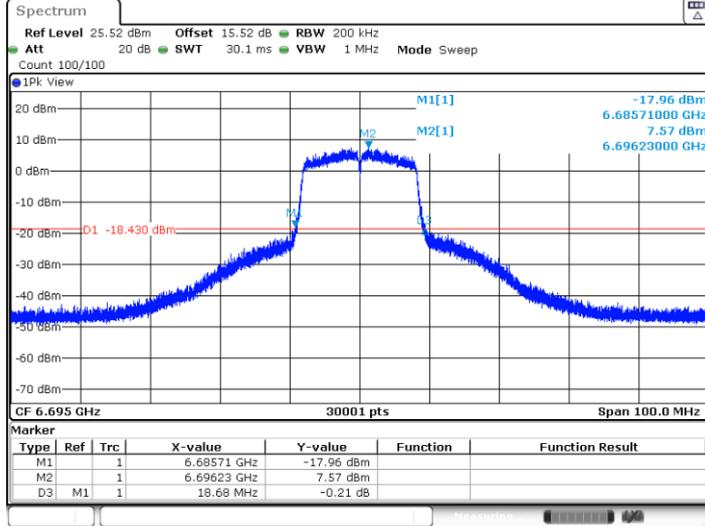

Date: 4.JUL.2024 05:41:08


11A-CDD\_Ant17\_6695

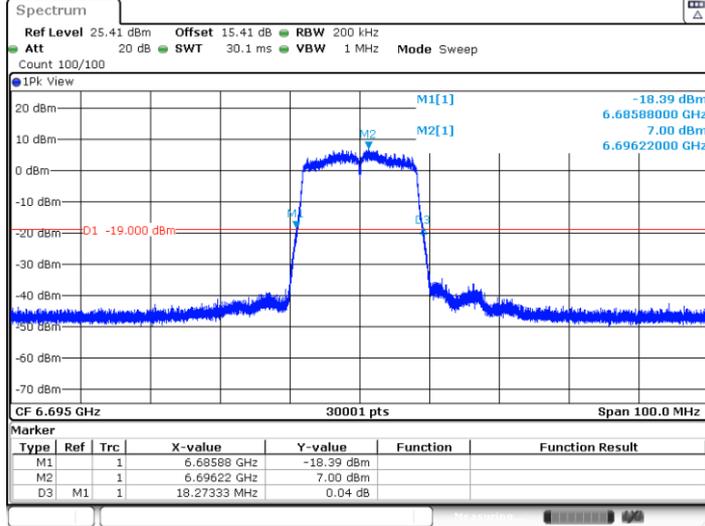

Date: 4.JUL.2024 05:41:50




11A-CDD\_Ant6\_6855

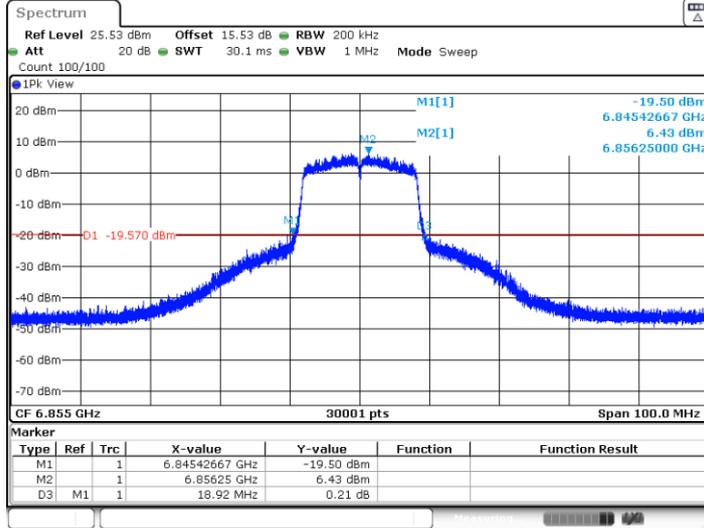

Date: 4.JUL.2024 09:25:06


11A-CDD\_Ant17\_6855

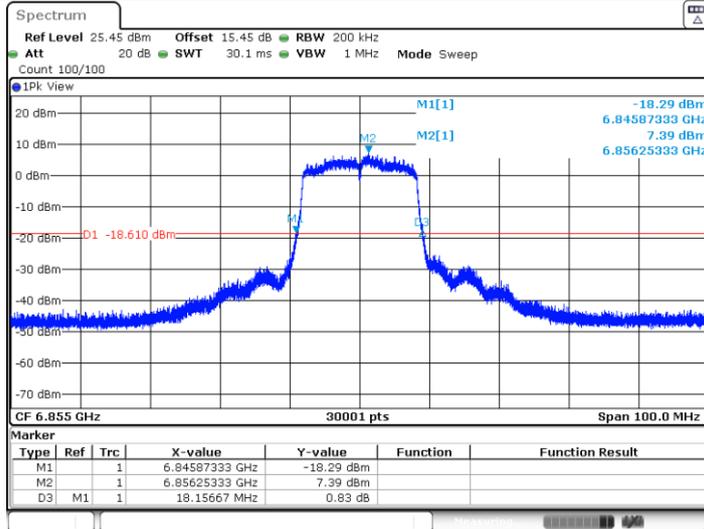


Date: 4.JUL.2024 05:43:30



11BE20MIMO\_Ant6\_5955

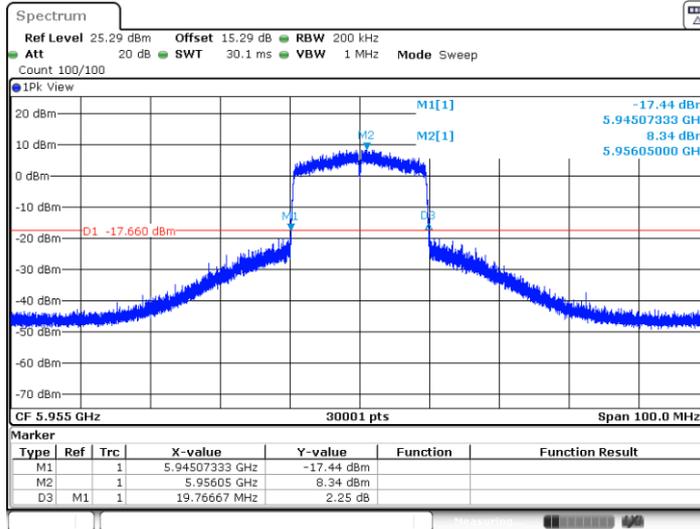


11BE20MIMO\_Ant17\_5955

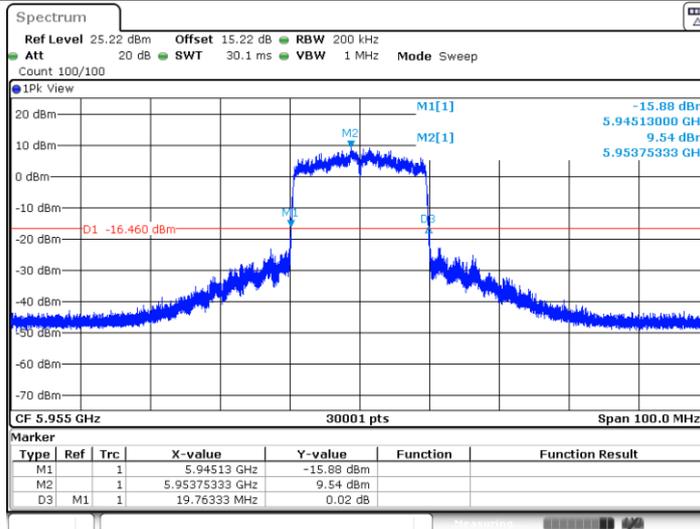




11BE20MIMO\_Ant6\_6175

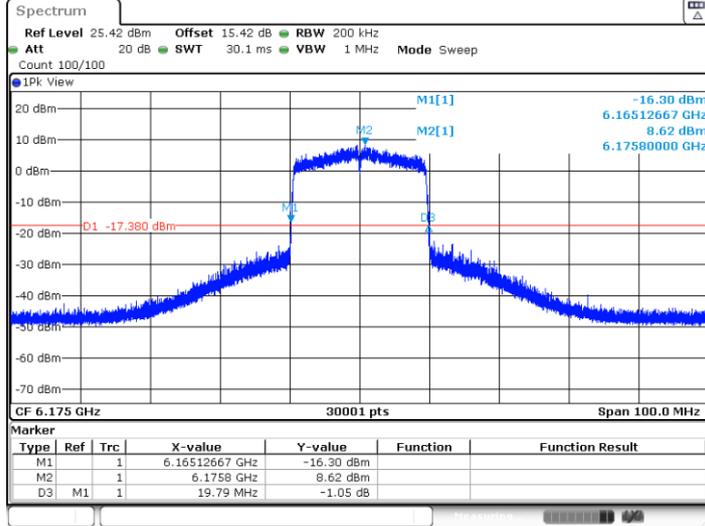

Date: 4.JUL.2024 05:48:36


11BE20MIMO\_Ant17\_6175

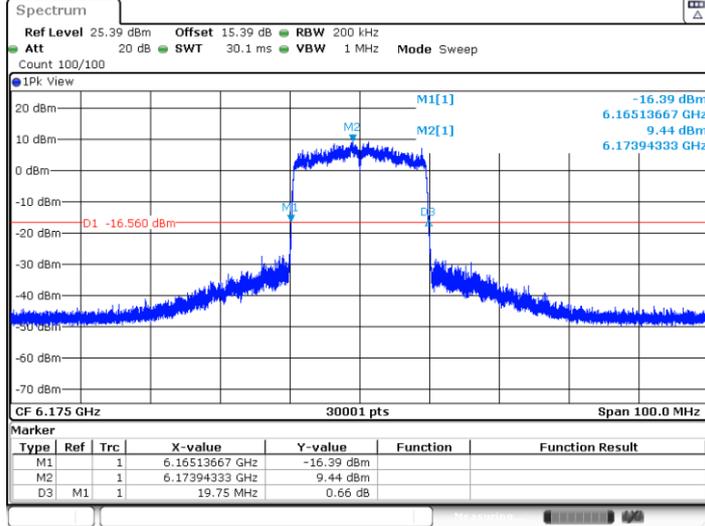


Date: 4.JUL.2024 05:49:17




11BE20MIMO\_Ant6\_6415

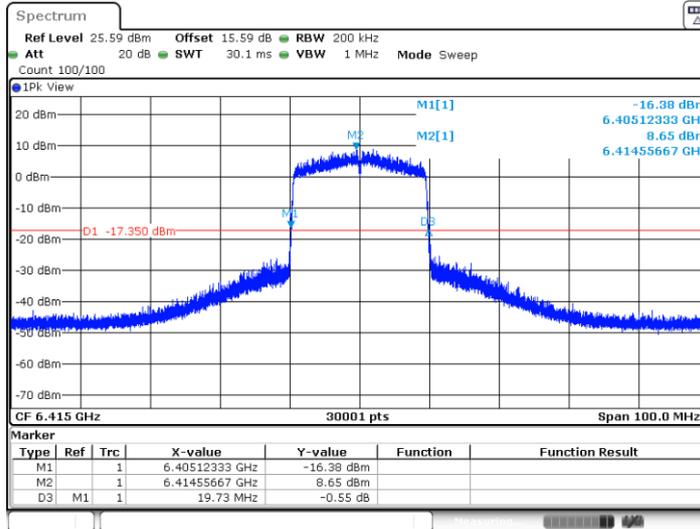


11BE20MIMO\_Ant17\_6415

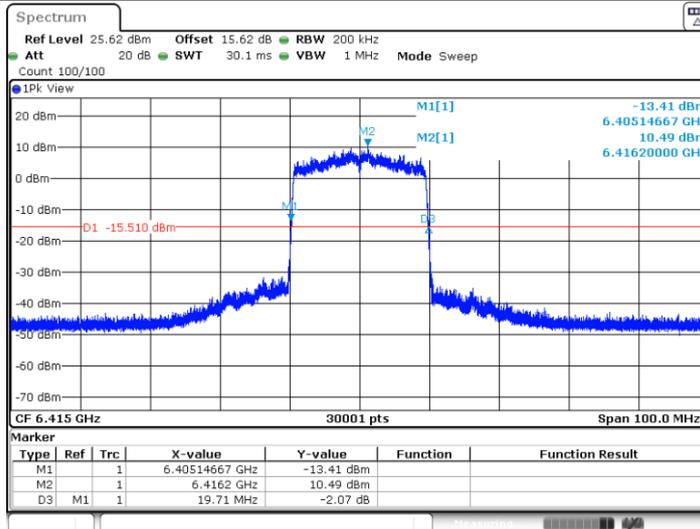

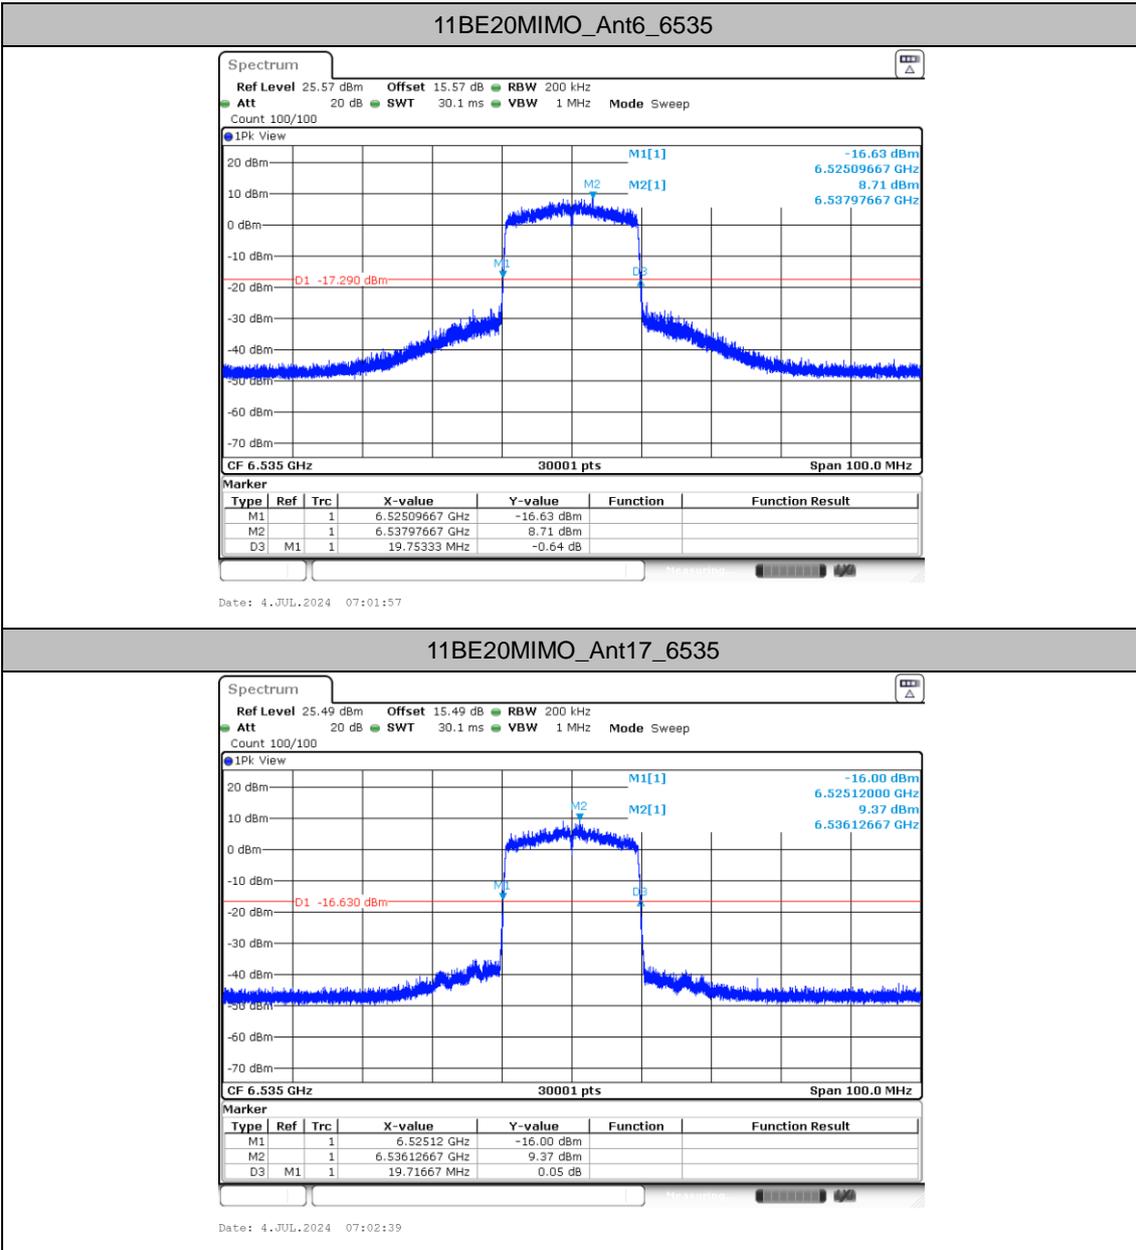




11BE20MIMO\_Ant6\_6695

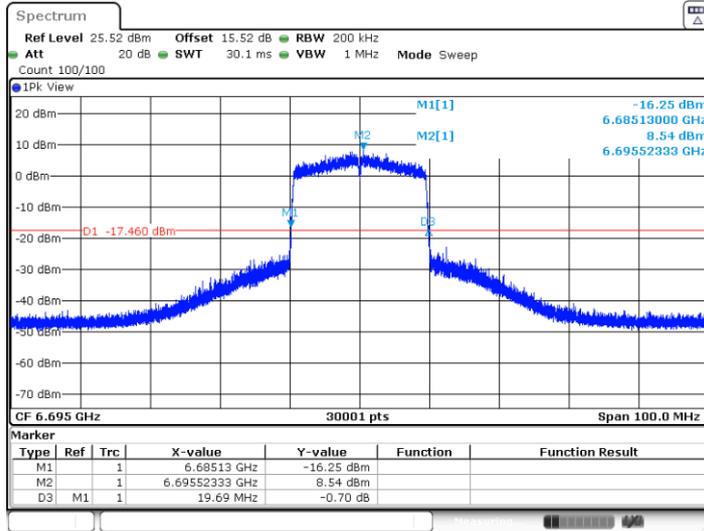

Date: 4.JUL.2024 07:03:35


11BE20MIMO\_Ant17\_6695

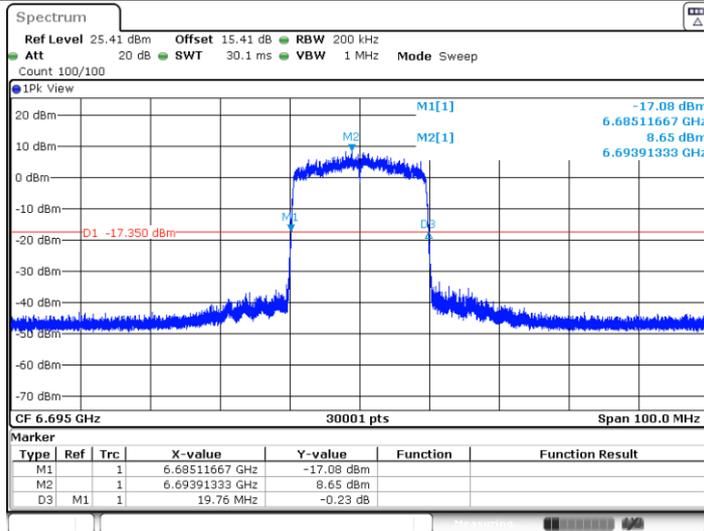

Date: 4.JUL.2024 07:04:17




11BE20MIMO\_Ant6\_6855

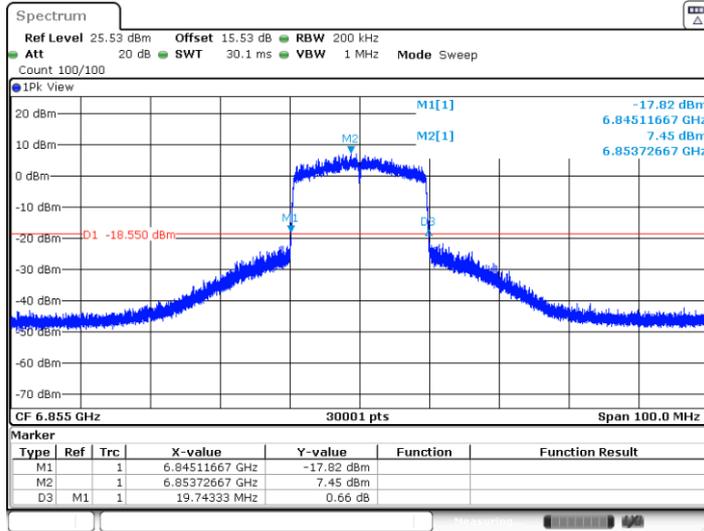

Date: 4.JUL.2024 07:05:10


11BE20MIMO\_Ant17\_6855

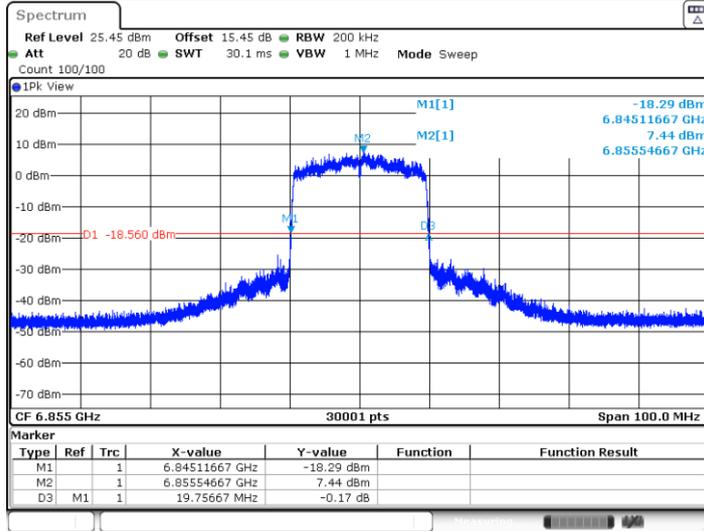

Date: 4.JUL.2024 07:05:52




11BE40MIMO\_Ant6\_5965

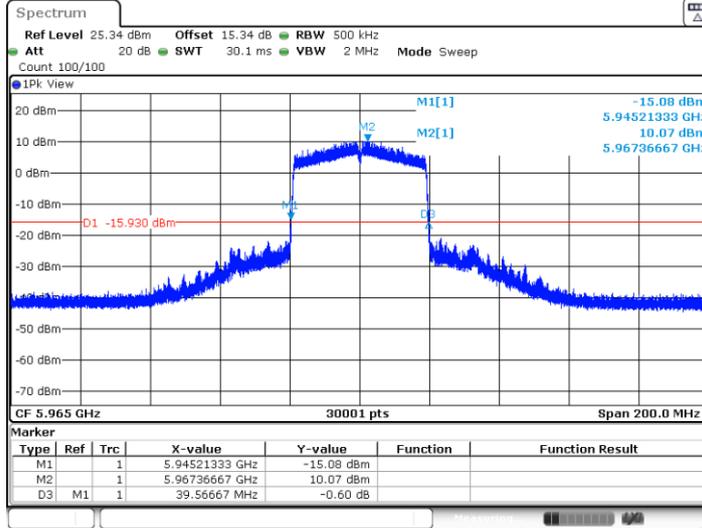

Date: 4.JUL.2024 07:07:27


11BE40MIMO\_Ant17\_5965

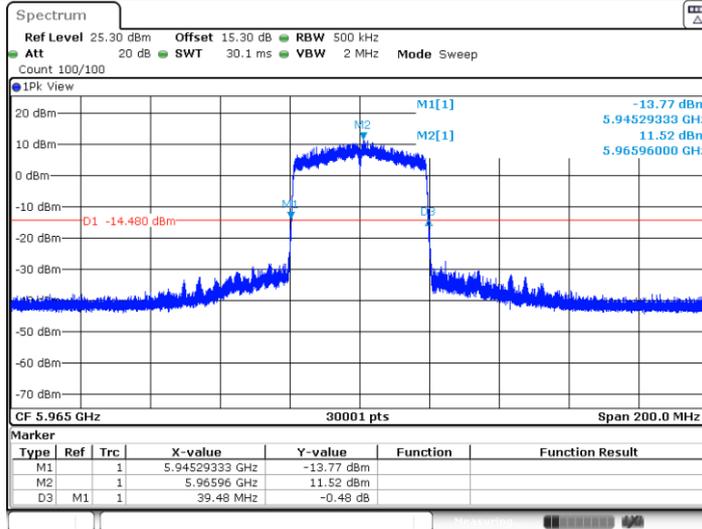

Date: 4.JUL.2024 07:08:09




11BE40MIMO\_Ant6\_6165

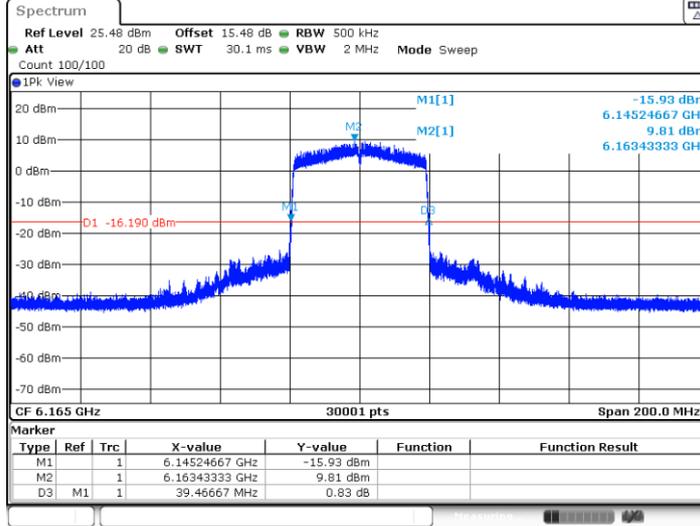

Date: 4.JUL.2024 07:09:25


11BE40MIMO\_Ant17\_6165

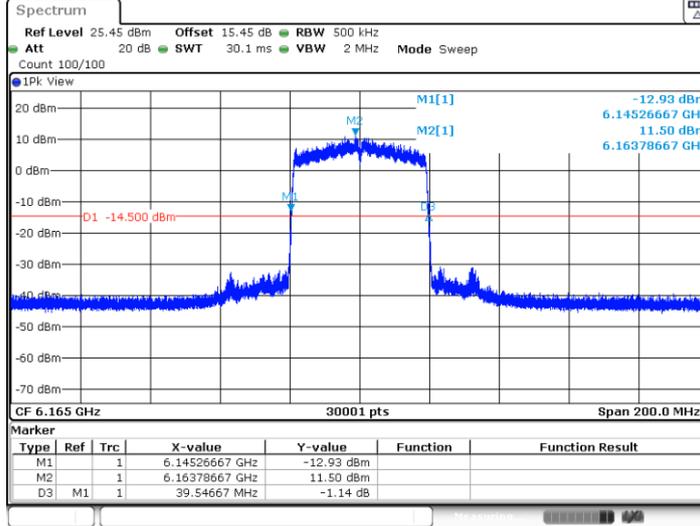

Date: 4.JUL.2024 07:10:07




11BE40MIMO\_Ant6\_6405

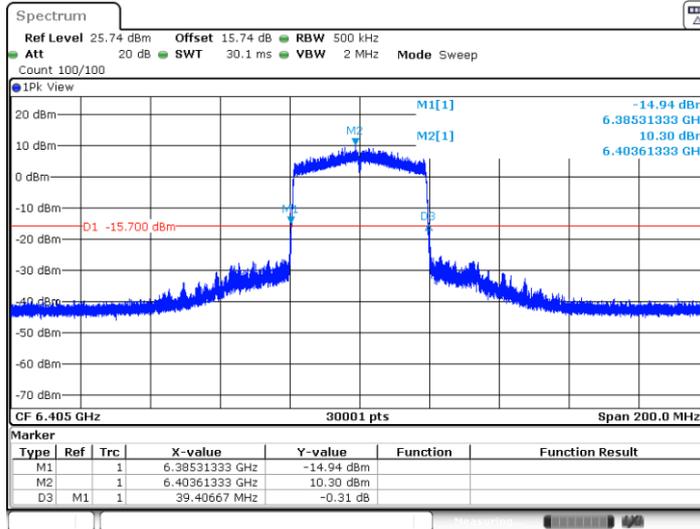

Date: 4.JUL.2024 07:11:03


11BE40MIMO\_Ant17\_6405

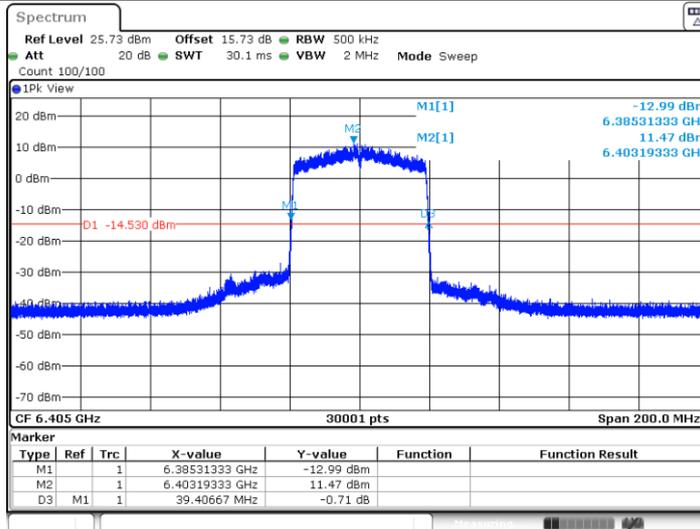

Date: 4.JUL.2024 07:11:45




11BE40MIMO\_Ant6\_6565

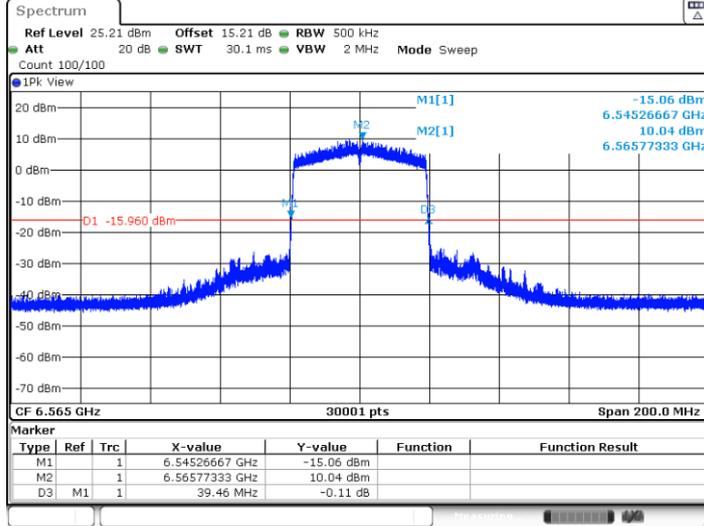

Date: 4.JUL.2024 07:15:57


11BE40MIMO\_Ant17\_6565

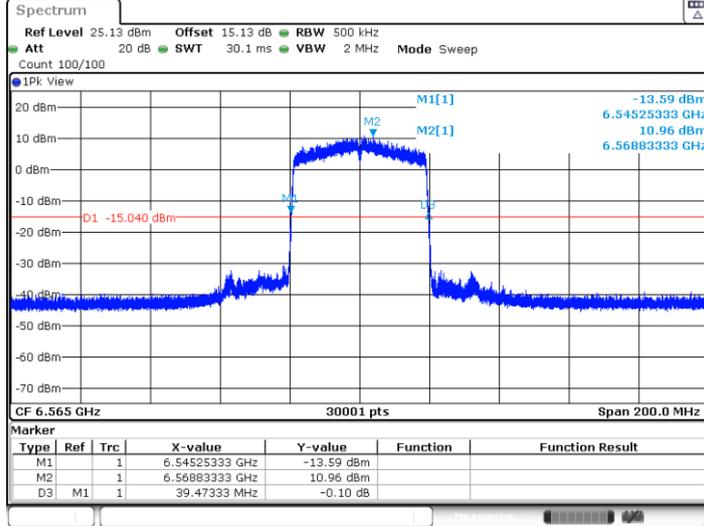

Date: 4.JUL.2024 07:16:39




11BE40MIMO\_Ant6\_6685

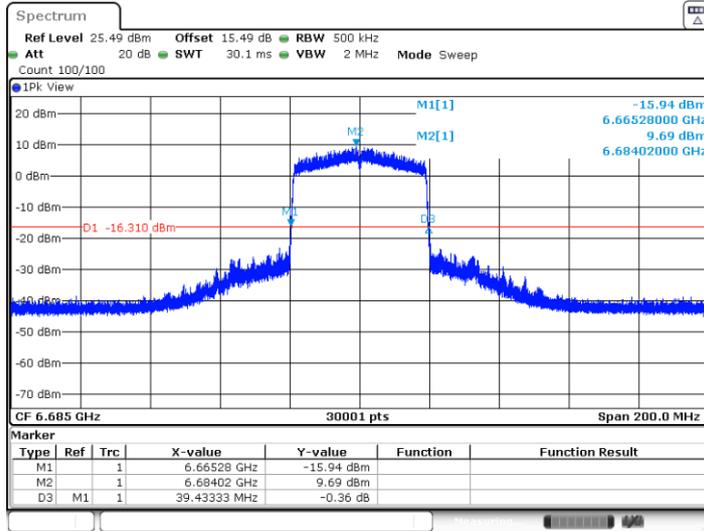


Date: 4.JUL.2024 07:17:31

11BE40MIMO\_Ant17\_6685

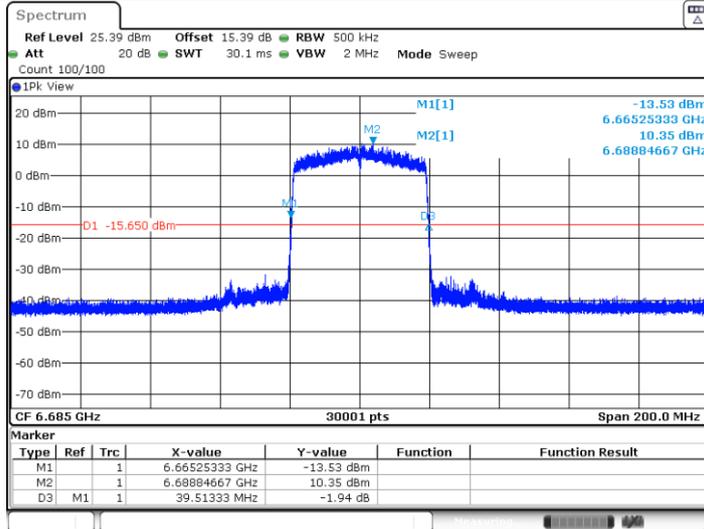


Date: 4.JUL.2024 07:18:13

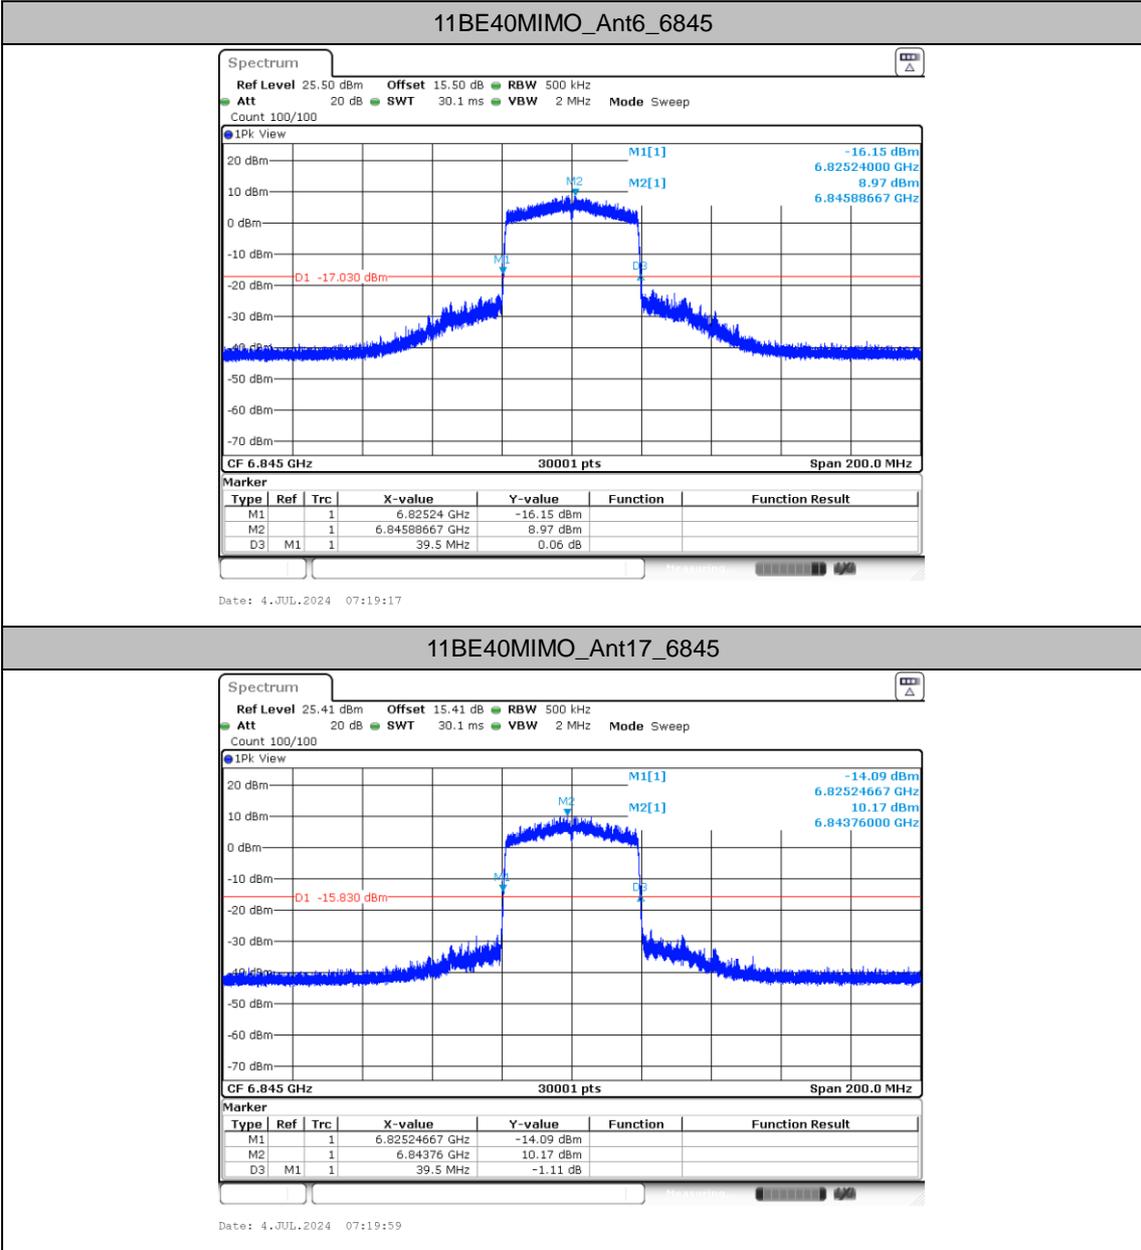




11BE80MIMO\_Ant6\_5985

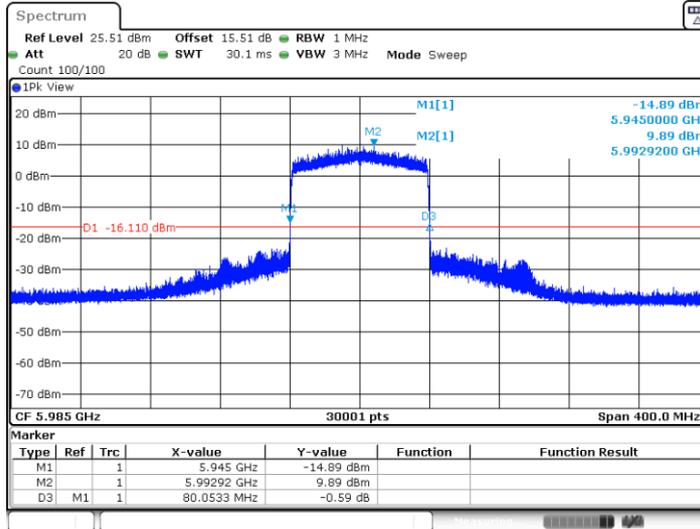

Date: 3.JUL.2024 15:08:21


11BE80MIMO\_Ant17\_5985

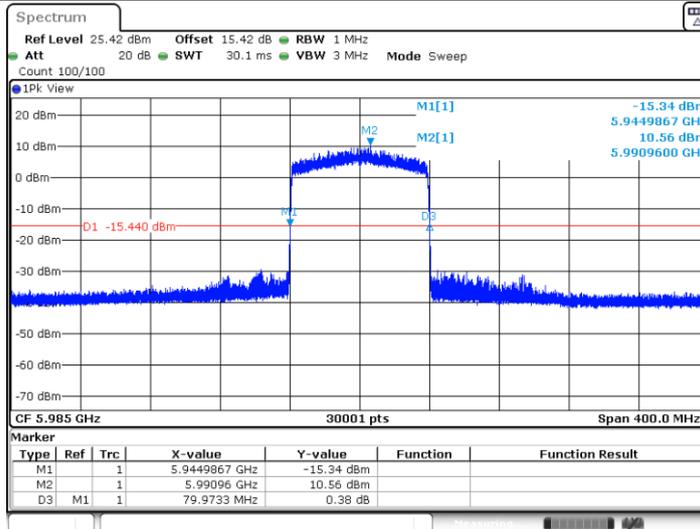


Date: 3.JUL.2024 15:08:59



11BE80MIMO\_Ant6\_6145

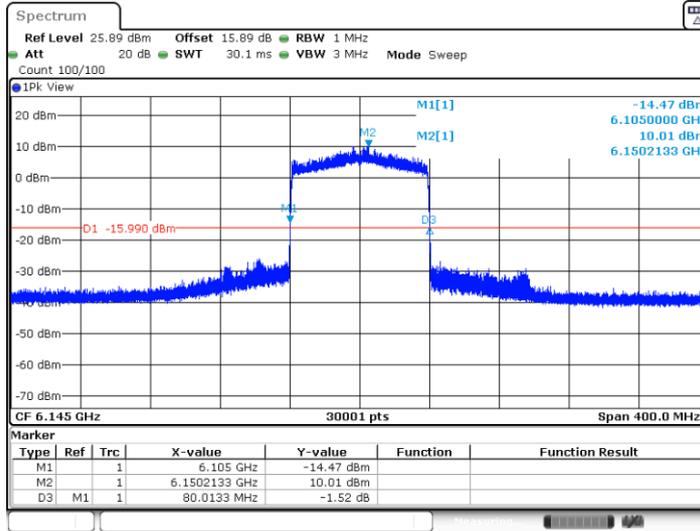


11BE80MIMO\_Ant17\_6145

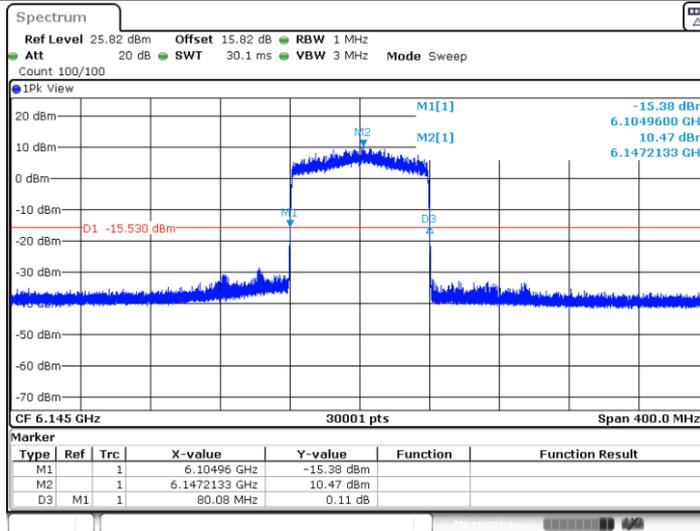




11BE80MIMO\_Ant6\_6385

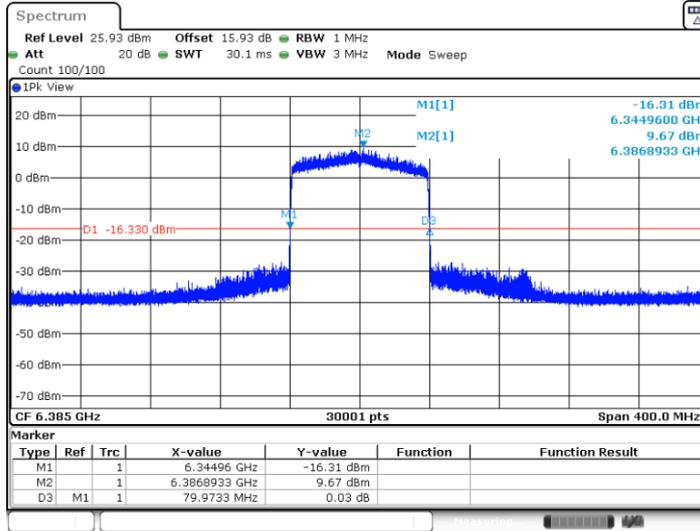


11BE80MIMO\_Ant17\_6385

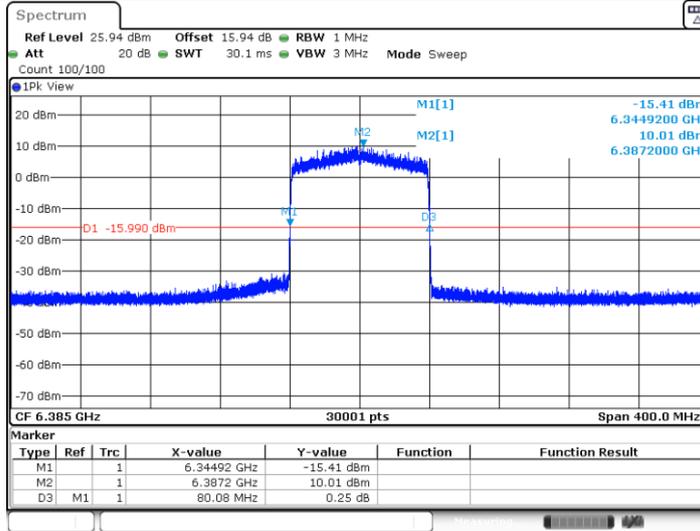




11BE80MIMO\_Ant6\_6625

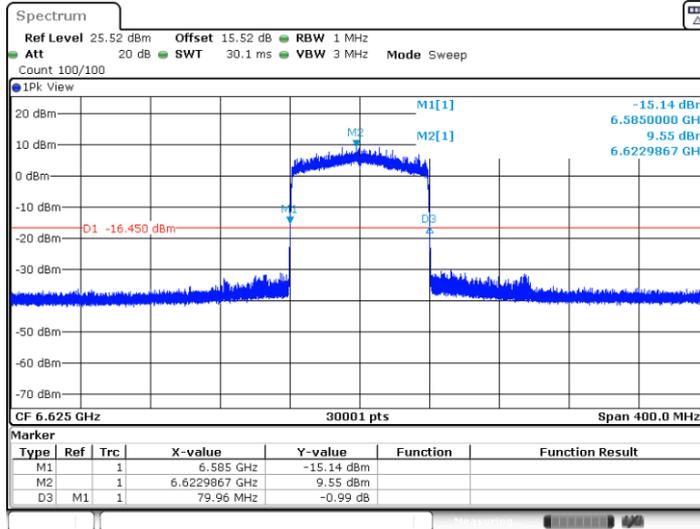

Date: 3.JUL.2024 16:55:26


11BE80MIMO\_Ant17\_6625

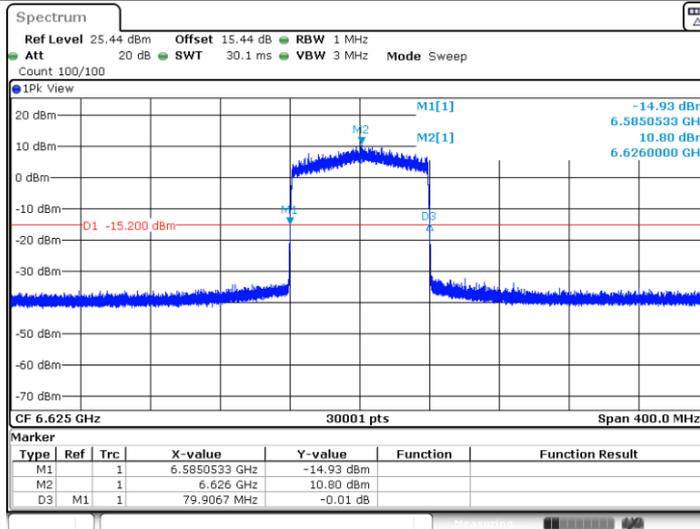

Date: 3.JUL.2024 16:56:04




11BE80MIMO\_Ant6\_6705

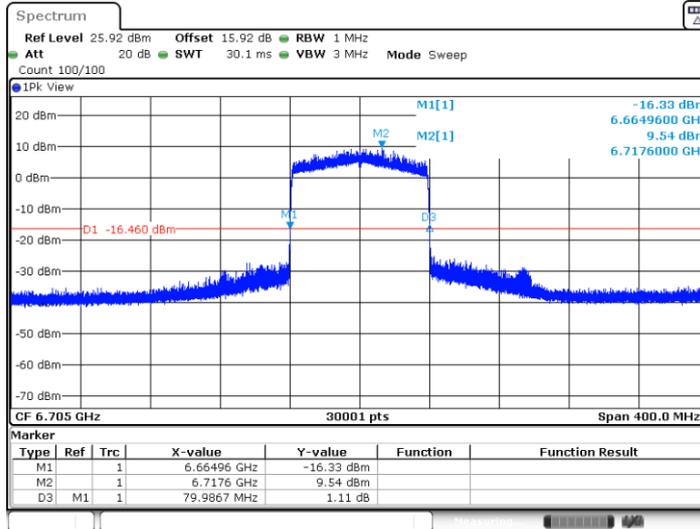


Date: 3.JUL.2024 16:56:56

11BE80MIMO\_Ant17\_6705

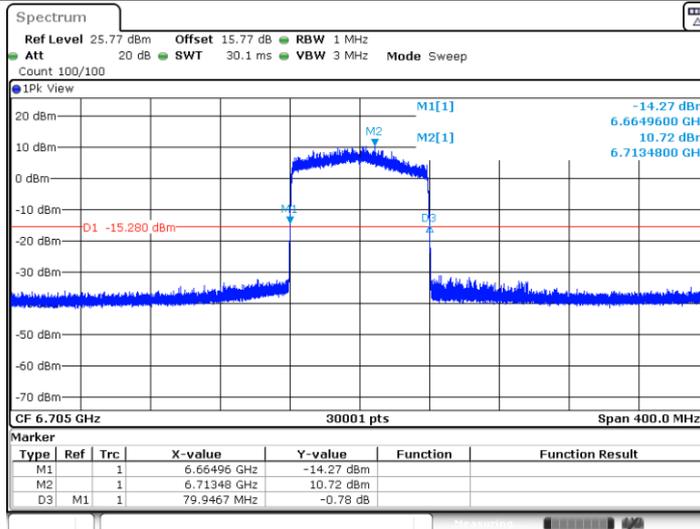


Date: 3.JUL.2024 16:57:38

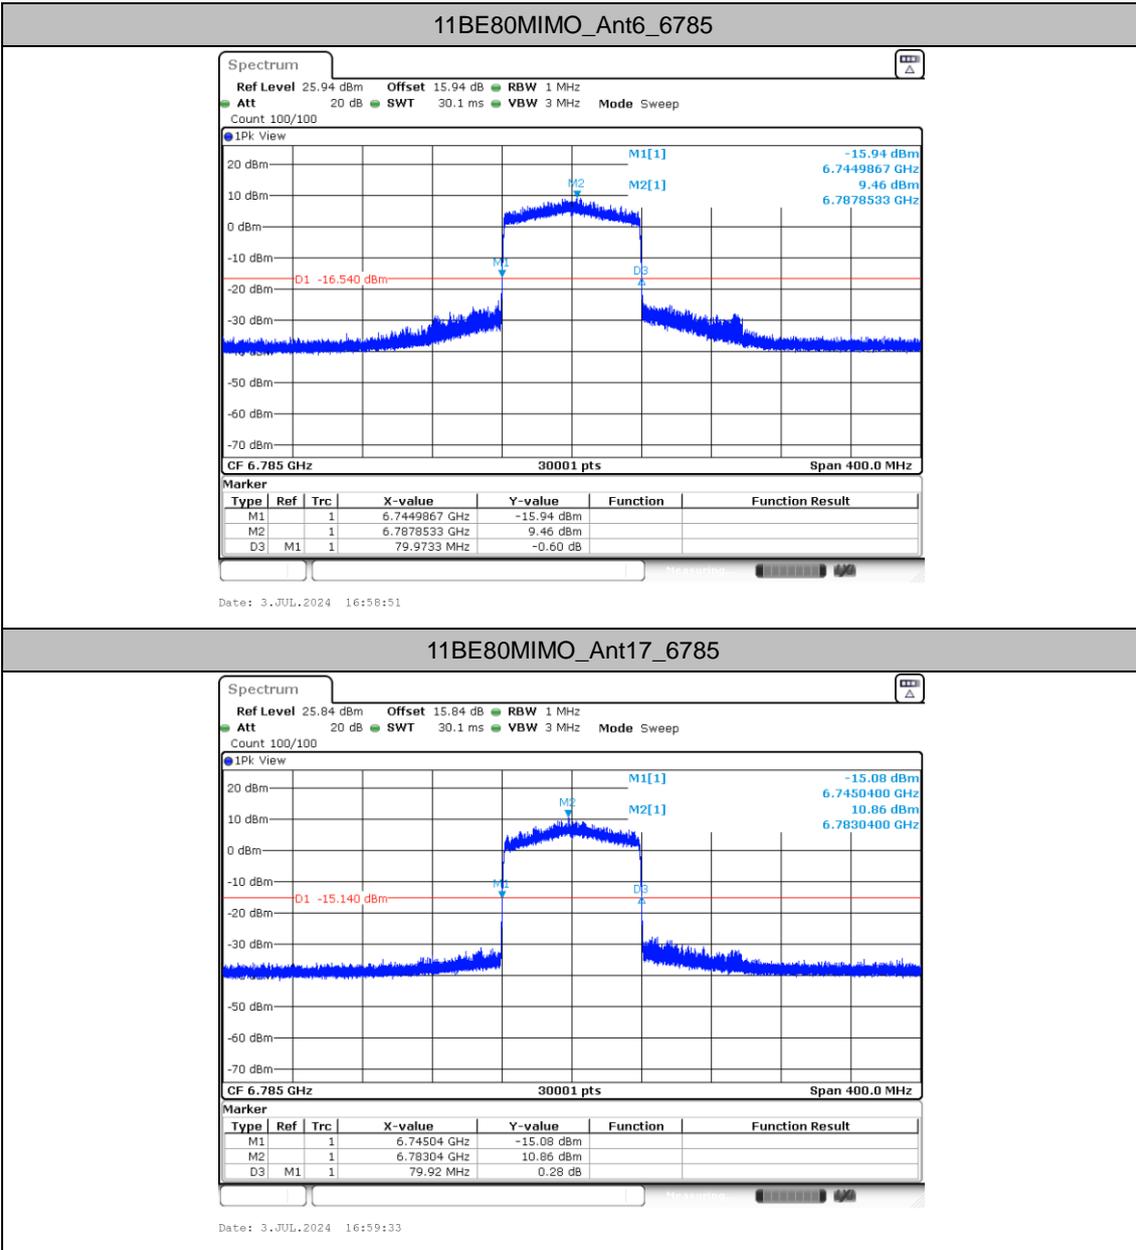

**11BE80MIMO\_Ant17\_6785**



11BE160MIMO\_Ant6\_6025

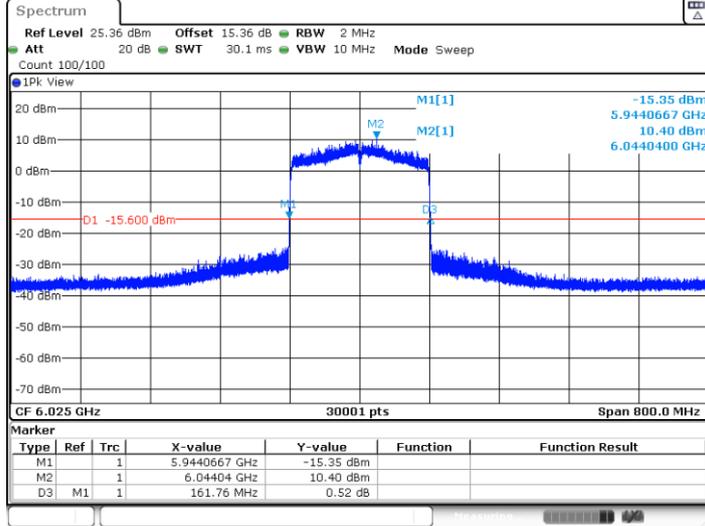


11BE160MIMO\_Ant17\_6025

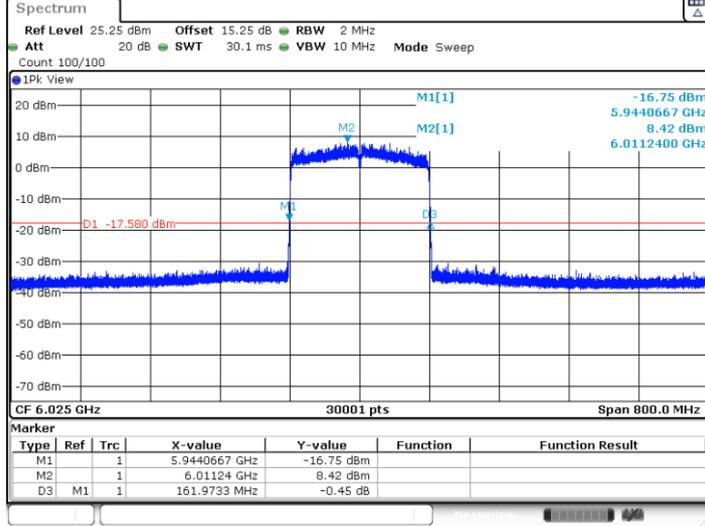




11BE160MIMO\_Ant6\_6185

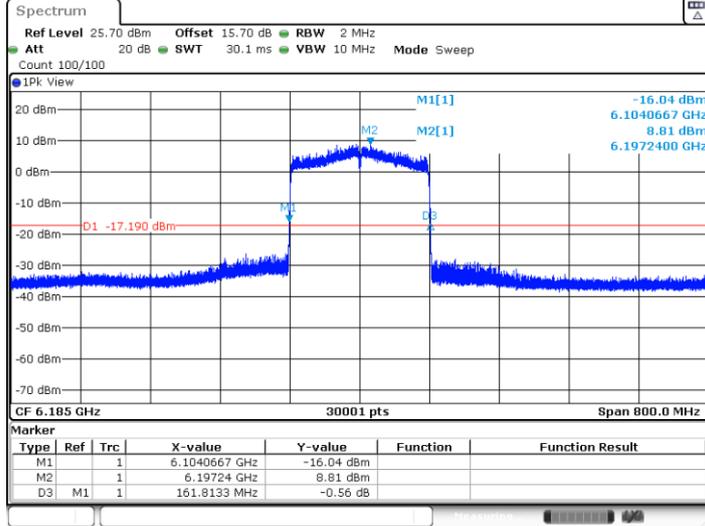

Date: 3.JUL.2024 17:02:23


11BE160MIMO\_Ant17\_6185

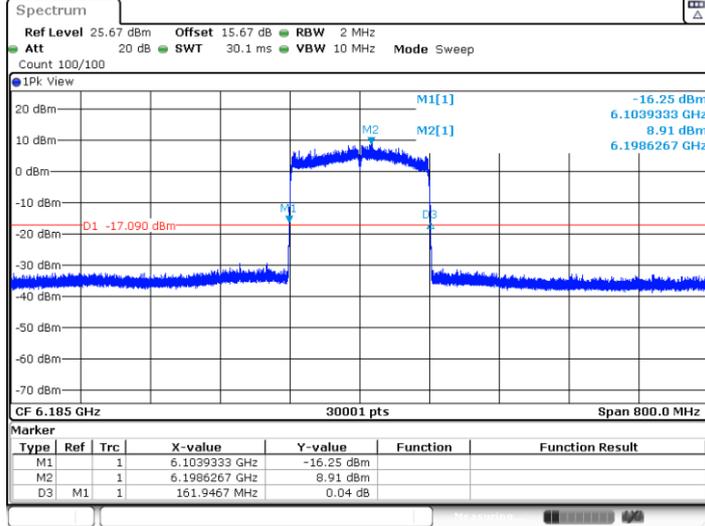

Date: 3.JUL.2024 17:03:05




11BE160MIMO\_Ant6\_6345

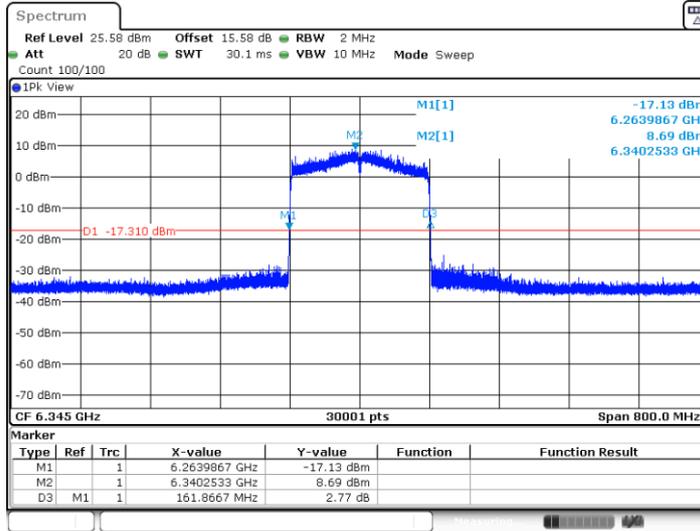

Date: 3.JUL.2024 17:06:53


11BE160MIMO\_Ant17\_6345

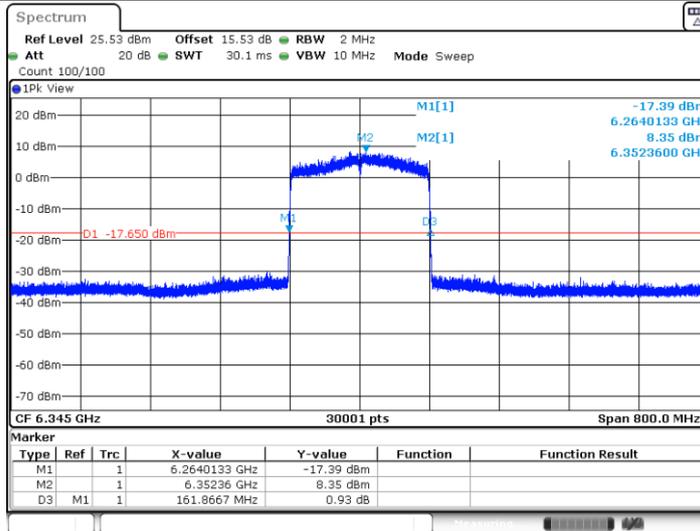

Date: 3.JUL.2024 17:07:34




11BE160MIMO\_Ant6\_6665

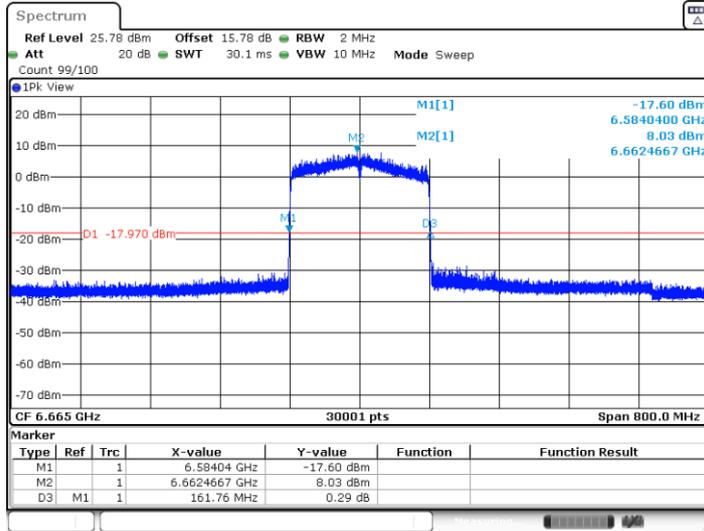

Date: 3.JUL.2024 17:08:25

11BE160MIMO\_Ant17\_6665

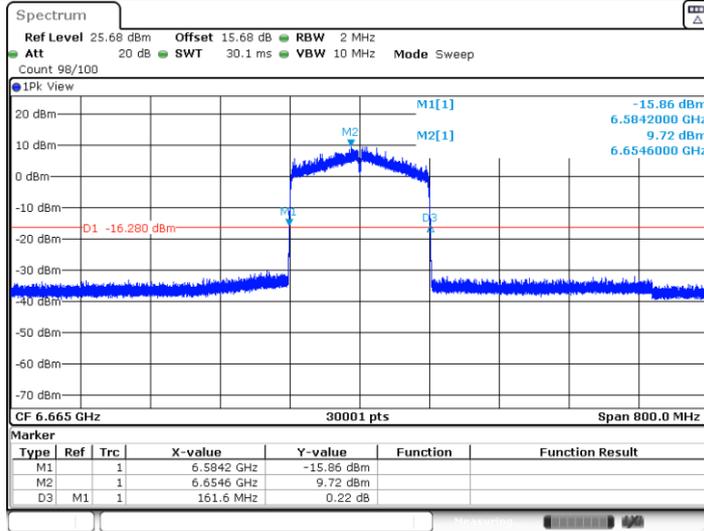

Date: 3.JUL.2024 17:09:07



## Occupied channel bandwidth

### Test Result



| TestMode    | Antenna | Freq(MHz) | OCB [MHz] | FL[MHz]   | FH[MHz]   | Limit[MHz] | Verdict |
|-------------|---------|-----------|-----------|-----------|-----------|------------|---------|
| 11BE320MIMO | Ant6    | 6105      | 313.287   | 5948.3566 | 6261.6434 | ≤320       | PASS    |
|             | Ant17   | 6105      | 312.647   | 5948.9960 | 6261.6434 | ≤320       | PASS    |
|             | Ant6    | 6265      | 313.287   | 6108.3566 | 6421.6434 | ≤320       | PASS    |
|             | Ant17   | 6265      | 312.008   | 6108.9960 | 6421.0040 | ≤320       | PASS    |
| 11A-CDD     | Ant6    | 5955      | 16.623    | 5946.6883 | 5963.3117 | ---        | ---     |
|             | Ant17   | 5955      | 16.424    | 5946.7682 | 5963.1918 | ---        | ---     |
|             | Ant6    | 6175      | 16.543    | 6166.7283 | 6183.2717 | ---        | ---     |
|             | Ant17   | 6175      | 16.464    | 6166.7682 | 6183.2318 | ---        | ---     |
|             | Ant6    | 6415      | 16.583    | 6406.6883 | 6423.2717 | ---        | ---     |
|             | Ant17   | 6415      | 16.464    | 6406.7682 | 6423.2318 | ---        | ---     |
|             | Ant6    | 6535      | 16.543    | 6526.6883 | 6543.2318 | ---        | ---     |
|             | Ant17   | 6535      | 16.424    | 6526.7682 | 6543.1918 | ---        | ---     |
|             | Ant6    | 6695      | 16.583    | 6686.6883 | 6703.2717 | ---        | ---     |
|             | Ant17   | 6695      | 16.424    | 6686.7682 | 6703.1918 | ---        | ---     |
|             | Ant6    | 6855      | 16.663    | 6846.6484 | 6863.3117 | ---        | ---     |
|             | Ant17   | 6855      | 16.424    | 6846.7682 | 6863.1918 | ---        | ---     |
| 11BE20MIMO  | Ant6    | 5955      | 18.781    | 5945.6094 | 5964.3906 | ---        | ---     |
|             | Ant17   | 5955      | 18.741    | 5945.6494 | 5964.3906 | ---        | ---     |
|             | Ant6    | 6175      | 18.781    | 6165.6094 | 6184.3906 | ---        | ---     |
|             | Ant17   | 6175      | 18.741    | 6165.6494 | 6184.3906 | ---        | ---     |
|             | Ant6    | 6415      | 18.741    | 6405.6094 | 6424.3506 | ---        | ---     |
|             | Ant17   | 6415      | 18.701    | 6405.6494 | 6424.3506 | ---        | ---     |
|             | Ant6    | 6535      | 18.741    | 6525.6094 | 6544.3506 | ---        | ---     |
|             | Ant17   | 6535      | 18.741    | 6525.6094 | 6544.3506 | ---        | ---     |
|             | Ant6    | 6695      | 18.741    | 6685.6094 | 6704.3506 | ---        | ---     |
|             | Ant17   | 6695      | 18.741    | 6685.6094 | 6704.3506 | ---        | ---     |
|             | Ant6    | 6855      | 18.821    | 6845.5694 | 6864.3906 | ---        | ---     |
|             | Ant17   | 6855      | 18.741    | 6845.6094 | 6864.3506 | ---        | ---     |
| 11BE40MIMO  | Ant6    | 5965      | 37.562    | 5946.2188 | 5983.7812 | ---        | ---     |
|             | Ant17   | 5965      | 37.642    | 5946.2188 | 5983.8611 | ---        | ---     |
|             | Ant6    | 6165      | 37.642    | 6146.1389 | 6183.7812 | ---        | ---     |
|             | Ant17   | 6165      | 37.642    | 6146.1389 | 6183.7812 | ---        | ---     |
|             | Ant6    | 6405      | 37.562    | 6386.2188 | 6423.7812 | ---        | ---     |
|             | Ant17   | 6405      | 37.642    | 6386.2188 | 6423.8611 | ---        | ---     |
|             | Ant6    | 6565      | 37.483    | 6546.2188 | 6583.7013 | ---        | ---     |
|             | Ant17   | 6565      | 37.562    | 6546.2188 | 6583.7812 | ---        | ---     |
|             | Ant6    | 6685      | 37.483    | 6666.2188 | 6703.7013 | ---        | ---     |
|             | Ant17   | 6685      | 37.642    | 6666.2188 | 6703.8611 | ---        | ---     |
|             | Ant6    | 6845      | 37.642    | 6826.1389 | 6863.7812 | ---        | ---     |
|             | Ant17   | 6845      | 37.722    | 6826.1389 | 6863.8611 | ---        | ---     |
| 11BE80MIMO  | Ant6    | 5985      | 77.043    | 5946.3187 | 6023.3616 | ---        | ---     |
|             | Ant17   | 5985      | 76.883    | 5946.6384 | 6023.5215 | ---        | ---     |
|             | Ant6    | 6145      | 77.043    | 6106.4785 | 6183.5215 | ---        | ---     |
|             | Ant17   | 6145      | 77.203    | 6106.4785 | 6183.6813 | ---        | ---     |



|             |       |      |         |           |           |     |     |
|-------------|-------|------|---------|-----------|-----------|-----|-----|
|             | Ant6  | 6385 | 77.203  | 6346.3187 | 6423.5215 | --- | --- |
|             | Ant17 | 6385 | 77.203  | 6346.3187 | 6423.5215 | --- | --- |
|             | Ant6  | 6625 | 77.043  | 6586.4785 | 6663.5215 | --- | --- |
|             | Ant17 | 6625 | 77.043  | 6586.3187 | 6663.3616 | --- | --- |
|             | Ant6  | 6705 | 77.043  | 6666.4785 | 6743.5215 | --- | --- |
|             | Ant17 | 6705 | 77.203  | 6666.4785 | 6743.6813 | --- | --- |
|             | Ant6  | 6785 | 77.043  | 6746.4785 | 6823.5215 | --- | --- |
|             | Ant17 | 6785 | 76.883  | 6746.3187 | 6823.2018 | --- | --- |
| 11BE160MIMO | Ant6  | 6025 | 156.643 | 5946.6783 | 6103.3217 | --- | --- |
|             | Ant17 | 6025 | 156.004 | 5946.3586 | 6102.3626 | --- | --- |
|             | Ant6  | 6185 | 156.324 | 6106.6783 | 6263.0020 | --- | --- |
|             | Ant17 | 6185 | 156.004 | 6106.9980 | 6263.0020 | --- | --- |
|             | Ant6  | 6345 | 156.324 | 6266.6783 | 6423.0020 | --- | --- |
|             | Ant17 | 6345 | 156.324 | 6266.6783 | 6423.0020 | --- | --- |
|             | Ant6  | 6665 | 156.643 | 6586.6783 | 6743.3217 | --- | --- |
|             | Ant17 | 6665 | 156.963 | 6586.6783 | 6743.6414 | --- | --- |




Test Graphs

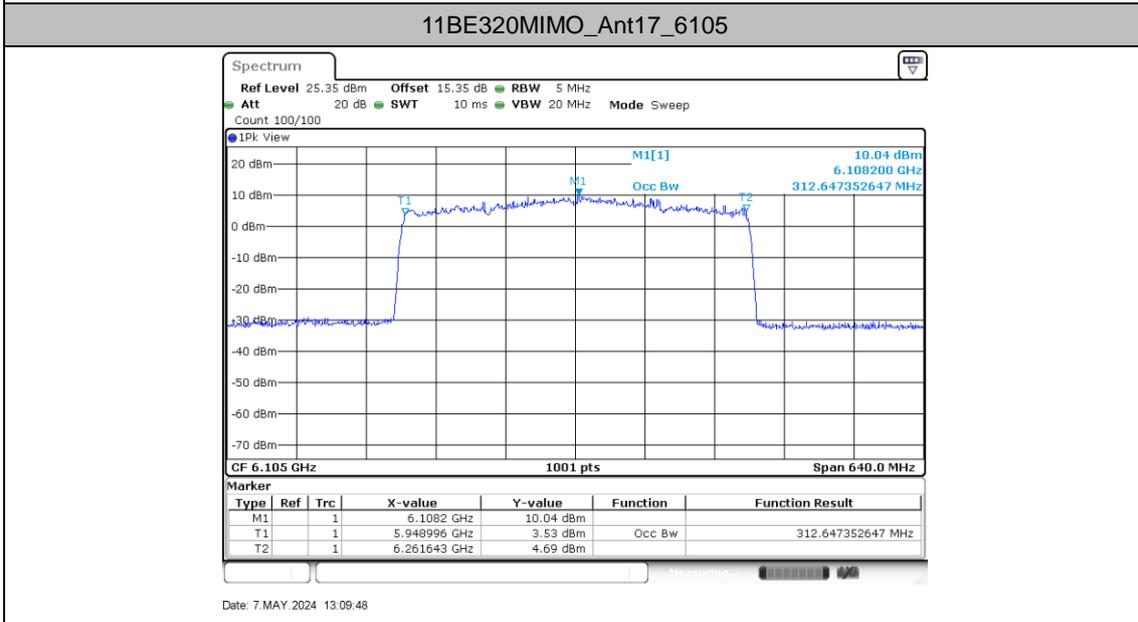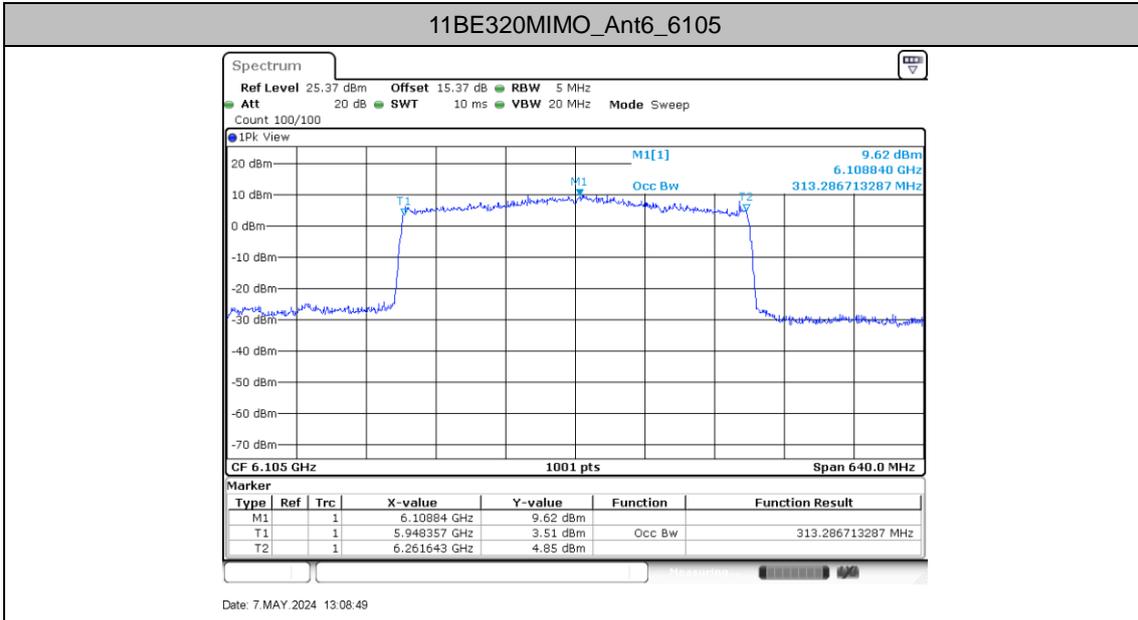




11BE320MIMO\_Ant6\_6265

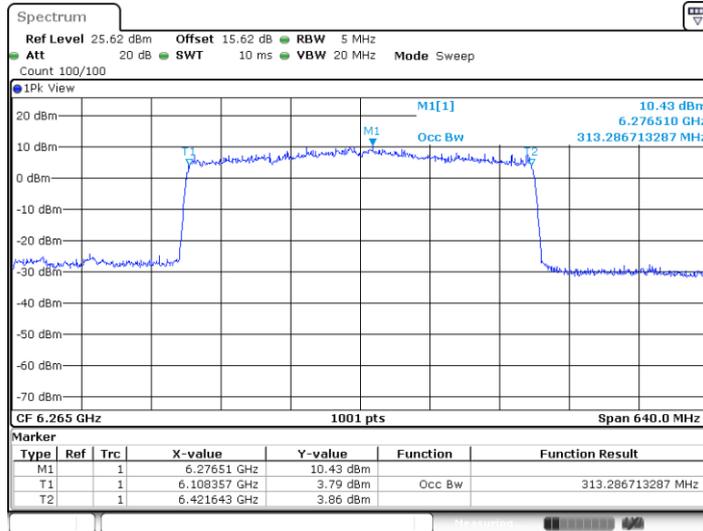

Date: 7.MAY.2024 13:11:00


11BE320MIMO\_Ant17\_6265

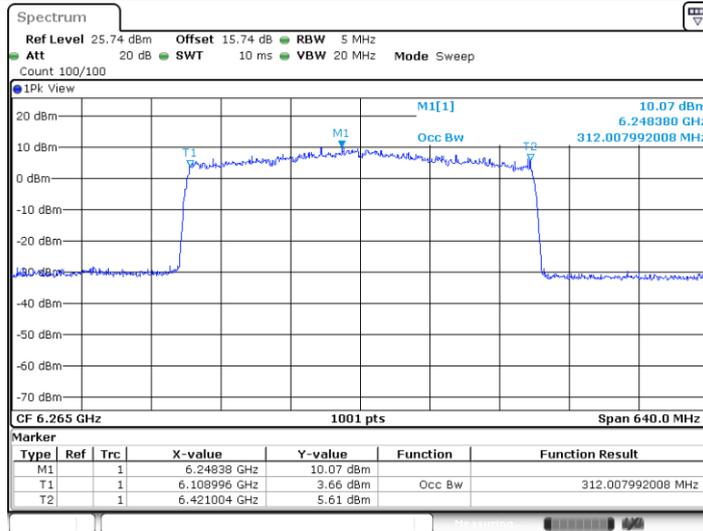

Date: 7.MAY.2024 13:11:46




11A-CDD\_Ant6\_5955

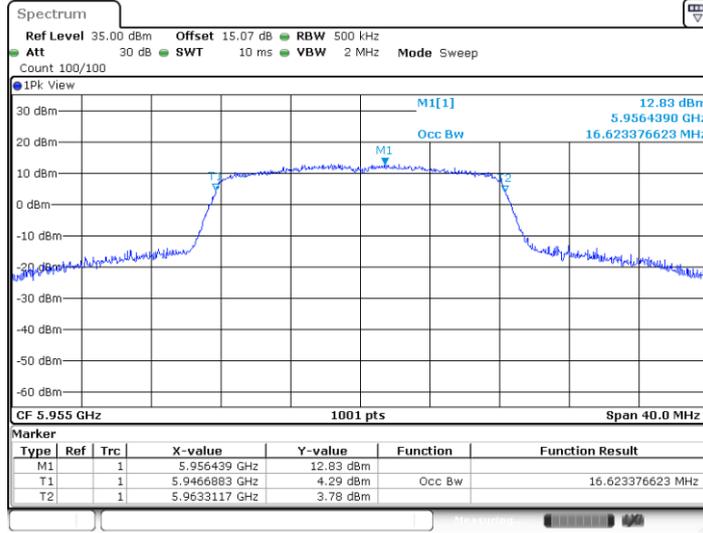

Date: 7.MAY.2024 10:43:51


11A-CDD\_Ant17\_5955

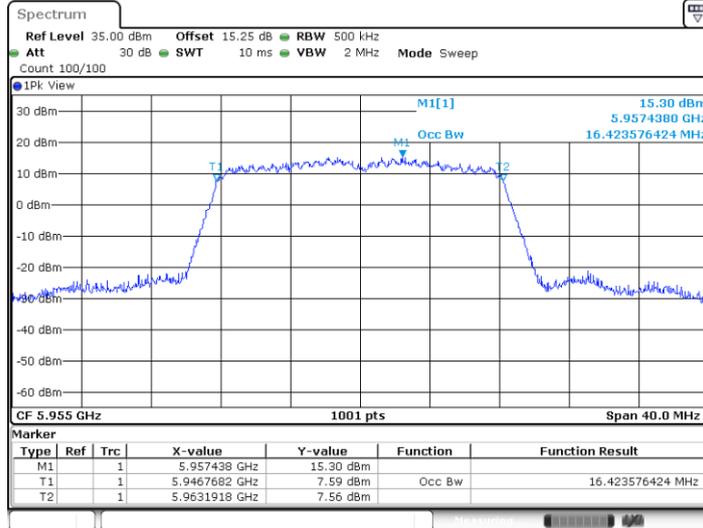

Date: 7.MAY.2024 10:44:50




11A-CDD\_Ant6\_6175

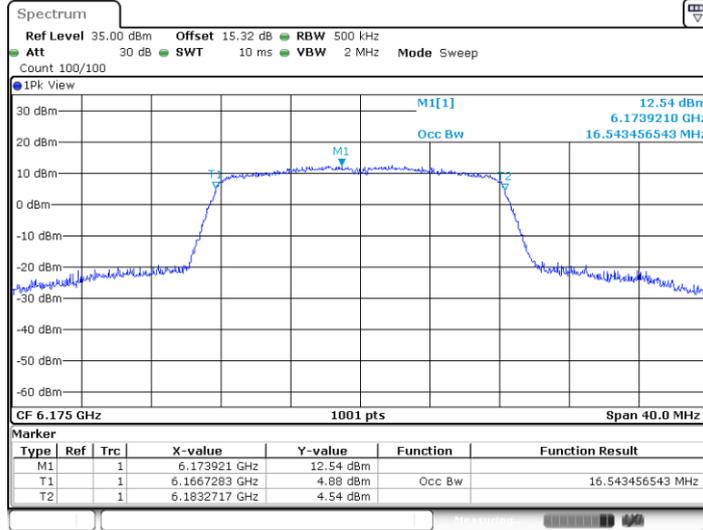

Date: 7.MAY.2024 10:47:58

11A-CDD\_Ant17\_6175

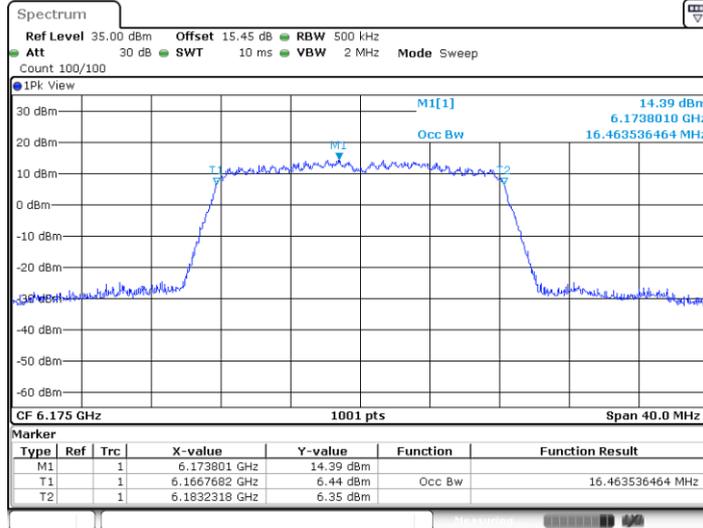

Date: 7.MAY.2024 10:48:45