

1. Effective (Isotropic) Radiated Power Output Data

1.1 Test Result

1.1.1 B26a_1.4MHz

Band: 26a / Bandwidth: 1.4MHz / NTN						
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)		Verdict
		Size	Offset	Result	Limit	
QPSK	814.7	1	0	24.18	<=50	Pass
			2	24.19	<=50	Pass
			5	24.16	<=50	Pass
		3	0	24.27	<=50	Pass
			2	24.27	<=50	Pass
			3	24.25	<=50	Pass
	6	0	23.31	<=50	Pass	
	819	1	0	24.18	<=50	Pass
			2	24.24	<=50	Pass
			5	24.19	<=50	Pass
		3	0	24.24	<=50	Pass
			2	24.26	<=50	Pass
			3	24.24	<=50	Pass
	6	0	23.32	<=50	Pass	
	823.3	1	0	24.24	<=50	Pass
			2	24.29	<=50	Pass
			5	24.23	<=50	Pass
		3	0	24.27	<=50	Pass
2			24.26	<=50	Pass	
3			24.26	<=50	Pass	
6	0	23.35	<=50	Pass		
16QAM	814.7	1	0	23.31	<=50	Pass
			2	23.34	<=50	Pass
			5	23.28	<=50	Pass
		3	0	23.17	<=50	Pass
			2	23.17	<=50	Pass
			3	23.18	<=50	Pass
	6	0	22.34	<=50	Pass	
	819	1	0	23.18	<=50	Pass
			2	23.21	<=50	Pass
			5	23.22	<=50	Pass
		3	0	23.29	<=50	Pass
			2	23.32	<=50	Pass
			3	23.29	<=50	Pass
	6	0	22.29	<=50	Pass	
	823.3	1	0	23.21	<=50	Pass
			2	23.23	<=50	Pass
			5	23.24	<=50	Pass
		3	0	23.32	<=50	Pass
2			23.33	<=50	Pass	
3			23.33	<=50	Pass	
6	0	22.34	<=50	Pass		
64QAM	814.7	1	0	22.43	<=50	Pass
			2	22.50	<=50	Pass
			5	22.40	<=50	Pass
		3	0	22.43	<=50	Pass
			2	22.47	<=50	Pass
			3	22.45	<=50	Pass
		6	0	21.69	<=50	Pass

	819	1	0	22.44	<=50	Pass
			2	22.47	<=50	Pass
			5	22.49	<=50	Pass
		3	0	22.30	<=50	Pass
			2	22.33	<=50	Pass
			3	22.32	<=50	Pass
	6	0	21.52	<=50	Pass	
	823.3	1	0	22.49	<=50	Pass
			2	22.50	<=50	Pass
			5	22.51	<=50	Pass
		3	0	22.31	<=50	Pass
			2	22.32	<=50	Pass
3			22.32	<=50	Pass	
6	0	21.52	<=50	Pass		

1.1.2 B26a_3MHz

Band: 26a / Bandwidth: 3MHz / NTN								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)		Verdict		
		Size	Offset	Result	Limit			
QPSK	815.5	1	0	24.05	<=50	Pass		
			7	24.17	<=50	Pass		
			14	24.04	<=50	Pass		
		8	0	23.20	<=50	Pass		
			4	23.28	<=50	Pass		
			7	23.24	<=50	Pass		
		15	0	23.24	<=50	Pass		
		819	1	0	24.05	<=50	Pass	
				7	24.14	<=50	Pass	
	14			24.07	<=50	Pass		
	8		0	23.28	<=50	Pass		
			4	23.34	<=50	Pass		
			7	23.29	<=50	Pass		
	15		0	23.27	<=50	Pass		
	822.5		1	0	24.09	<=50	Pass	
				7	24.17	<=50	Pass	
		14		24.09	<=50	Pass		
		8	0	23.26	<=50	Pass		
			4	23.33	<=50	Pass		
			7	23.28	<=50	Pass		
		15	0	23.25	<=50	Pass		
		16QAM	815.5	1	0	23.54	<=50	Pass
					7	23.63	<=50	Pass
	14				23.51	<=50	Pass	
8	0			22.41	<=50	Pass		
	4			22.46	<=50	Pass		
	7			22.43	<=50	Pass		
15	0			22.29	<=50	Pass		
819	1			0	23.22	<=50	Pass	
				7	23.36	<=50	Pass	
			14	23.26	<=50	Pass		
	8		0	22.25	<=50	Pass		
			4	22.30	<=50	Pass		
			7	22.25	<=50	Pass		
15	0		22.23	<=50	Pass			
822.5	1		0	23.07	<=50	Pass		
		7	23.20	<=50	Pass			

64QAM	815.5	8	14	23.12	<=50	Pass	
			0	22.31	<=50	Pass	
			4	22.38	<=50	Pass	
			7	22.32	<=50	Pass	
		15	0	22.30	<=50	Pass	
	819	1	0	22.44	<=50	Pass	
			7	22.55	<=50	Pass	
			14	22.48	<=50	Pass	
		8	0	21.38	<=50	Pass	
			4	21.41	<=50	Pass	
			7	21.36	<=50	Pass	
		15	0	21.26	<=50	Pass	
		822.5	1	0	22.35	<=50	Pass
				7	22.48	<=50	Pass
	14			22.40	<=50	Pass	
8	0		21.31	<=50	Pass		
	4		21.38	<=50	Pass		
	7		21.34	<=50	Pass		
15	0	21.30	<=50	Pass			
64QAM	815.5	8	0	22.42	<=50	Pass	
			7	22.49	<=50	Pass	
			14	22.36	<=50	Pass	
			0	21.24	<=50	Pass	
		8	4	21.24	<=50	Pass	
	7		21.21	<=50	Pass		
	15		0	21.33	<=50	Pass	

1.1.3 B26a_5MHz

Band: 26a / Bandwidth: 5MHz / NTNV								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)		Verdict		
		Size	Offset	Result	Limit			
QPSK	816.5	1	0	24.29	<=50	Pass		
			13	24.38	<=50	Pass		
			24	24.33	<=50	Pass		
		12	0	23.28	<=50	Pass		
			6	23.41	<=50	Pass		
			13	23.37	<=50	Pass		
		25	0	23.35	<=50	Pass		
		819	1	0	24.31	<=50	Pass	
				13	24.42	<=50	Pass	
	24			24.35	<=50	Pass		
	12		0	23.28	<=50	Pass		
			6	23.39	<=50	Pass		
			13	23.32	<=50	Pass		
	25	0	23.34	<=50	Pass			
	821.5	1	0	24.35	<=50	Pass		
			13	24.43	<=50	Pass		
			24	24.36	<=50	Pass		
		12	0	23.33	<=50	Pass		
			6	23.41	<=50	Pass		
			13	23.35	<=50	Pass		
		25	0	23.36	<=50	Pass		
		16QAM	816.5	1	0	23.13	<=50	Pass
					13	23.21	<=50	Pass
	24				23.22	<=50	Pass	
12	0			22.28	<=50	Pass		

		25	6	22.38	<=50	Pass	
			13	22.35	<=50	Pass	
			0	22.39	<=50	Pass	
	819	1		0	23.54	<=50	Pass
				13	23.68	<=50	Pass
				24	23.62	<=50	Pass
		12		0	22.32	<=50	Pass
				6	22.42	<=50	Pass
				13	22.37	<=50	Pass
	25		0	22.33	<=50	Pass	
	821.5	1		0	23.42	<=50	Pass
				13	23.48	<=50	Pass
				24	23.45	<=50	Pass
		12		0	22.29	<=50	Pass
				6	22.38	<=50	Pass
13				22.32	<=50	Pass	
25		0	22.41	<=50	Pass		
64QAM	816.5	1		0	22.27	<=50	Pass
				13	22.37	<=50	Pass
				24	22.34	<=50	Pass
		12		0	21.31	<=50	Pass
				6	21.43	<=50	Pass
				13	21.40	<=50	Pass
	25		0	21.36	<=50	Pass	
	819	1		0	22.71	<=50	Pass
				13	22.83	<=50	Pass
				24	22.75	<=50	Pass
		12		0	21.22	<=50	Pass
				6	21.34	<=50	Pass
				13	21.30	<=50	Pass
	25		0	21.34	<=50	Pass	
	821.5	1		0	22.58	<=50	Pass
				13	22.69	<=50	Pass
				24	22.63	<=50	Pass
		12		0	21.39	<=50	Pass
6				21.52	<=50	Pass	
13				21.44	<=50	Pass	
25		0	21.42	<=50	Pass		

1.1.4 B26a_10MHz

Band: 26a / Bandwidth: 10MHz / NTNV							
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)		Verdict	
		Size	Offset	Result	Limit		
QPSK	819	1		0	24.32	<=50	Pass
				25	24.38	<=50	Pass
				49	24.36	<=50	Pass
		25		0	23.25	<=50	Pass
				13	23.37	<=50	Pass
				25	23.34	<=50	Pass
50		0	23.35	<=50	Pass		
16QAM	819	1		0	23.77	<=50	Pass
				25	23.95	<=50	Pass
				49	23.89	<=50	Pass
		25		0	22.31	<=50	Pass
				13	22.48	<=50	Pass
				25	22.41	<=50	Pass

		50	0	22.33	<=50	Pass
64QAM	819	1	0	22.59	<=50	Pass
			25	22.72	<=50	Pass
			49	22.68	<=50	Pass
			0	21.31	<=50	Pass
		25	13	21.46	<=50	Pass
			25	21.41	<=50	Pass
			50	0	21.35	<=50

2. Frequency Stability

2.1 Test Result

2.1.1 B26a_10MHz

Band: 26a / Bandwidth: 10MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	819	50	0	20	LV	-3.362	-0.0041	-2.5 to 2.5	Pass
					NV	-1.373	-0.0017	-2.5 to 2.5	Pass
					HV	-3.805	-0.0046	-2.5 to 2.5	Pass
				-30	NV	-2.961	-0.0036	-2.5 to 2.5	Pass
				-20	NV	-3.033	-0.0037	-2.5 to 2.5	Pass
				-10	NV	-2.503	-0.0031	-2.5 to 2.5	Pass
				0	NV	-0.486	-0.0006	-2.5 to 2.5	Pass
				10	NV	-3.076	-0.0038	-2.5 to 2.5	Pass
				30	NV	-1.888	-0.0023	-2.5 to 2.5	Pass
				40	NV	-3.448	-0.0042	-2.5 to 2.5	Pass
				50	NV	-3.519	-0.0043	-2.5 to 2.5	Pass

3. 99% & 26dB Bandwidth

3.1 Test Result

3.1.1 Band26a_OBW


Band: 26a / NTNV							
Bandwidth (MHz)	Modulation	Frequency (MHz)	RB Allocation		99% Occupied Bandwidth (MHz)		Verdict
			Size	Offset	Result	Limit	
1.4	QPSK	819	6	0	1.114	/	Pass
	16QAM	819	6	0	1.117	/	Pass
	64QAM	819	6	0	1.115	/	Pass
3	QPSK	819	15	0	2.722	/	Pass
	16QAM	819	15	0	2.731	/	Pass
	64QAM	819	15	0	2.716	/	Pass
5	QPSK	819	25	0	4.553	/	Pass
	16QAM	819	25	0	4.536	/	Pass
	64QAM	819	25	0	4.518	/	Pass
10	QPSK	819	50	0	9.044	/	Pass
	16QAM	819	50	0	8.998	/	Pass
	64QAM	819	50	0	9.035	/	Pass

3.1.2 Band26a_XDB


Band: 26a / NTNV							
Bandwidth (MHz)	Modulation	Frequency (MHz)	RB Allocation		26dB Bandwidth (MHz)		Verdict
			Size	Offset	Result	Limit	
1.4	QPSK	819	6	0	1.311	/	Pass
	16QAM	819	6	0	1.312	/	Pass
	64QAM	819	6	0	1.312	/	Pass
3	QPSK	819	15	0	3.033	/	Pass
	16QAM	819	15	0	3.057	/	Pass
	64QAM	819	15	0	3.003	/	Pass
5	QPSK	819	25	0	4.995	/	Pass
	16QAM	819	25	0	4.976	/	Pass
	64QAM	819	25	0	4.999	/	Pass
10	QPSK	819	50	0	9.970	/	Pass
	16QAM	819	50	0	9.927	/	Pass
	64QAM	819	50	0	9.855	/	Pass

3.2 Test Graph


3.2.1 Band26a_OBW

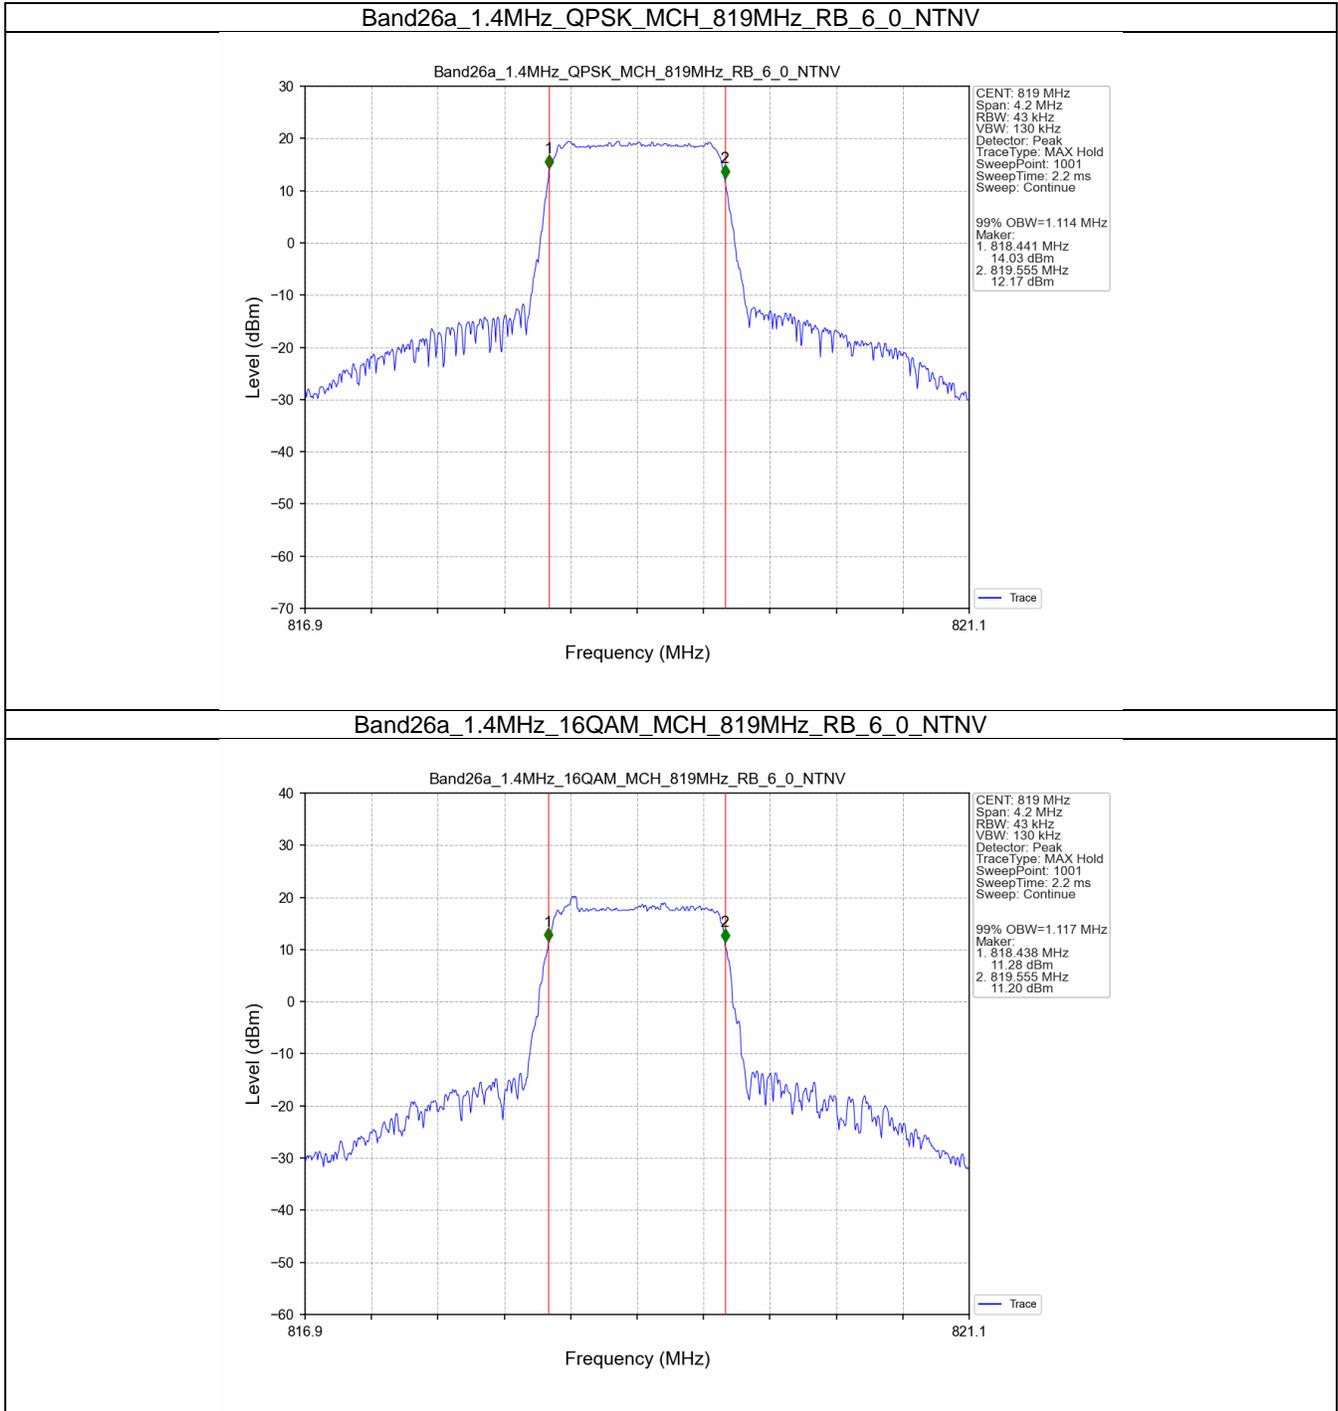


Band26a_1.4MHz_64QAM_MCH_819MHz_RB_6_0_NTNV

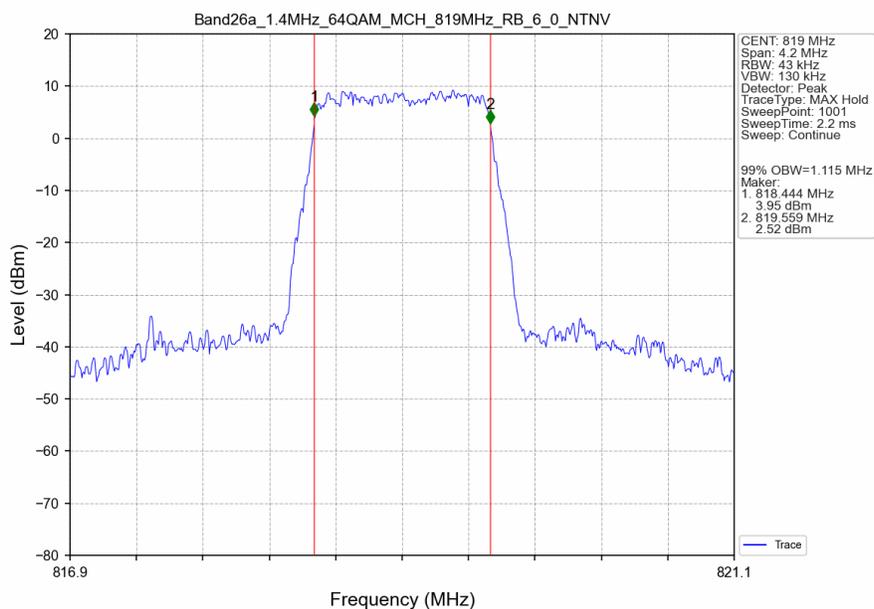


Band26a_3MHz_QPSK_MCH_819MHz_RB_15_0_NTNV

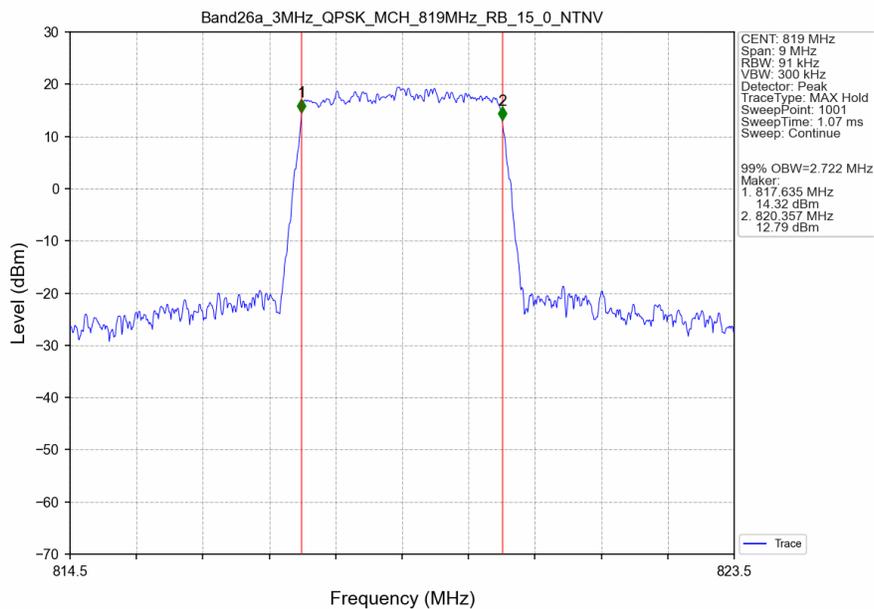


Band26a_3MHz_16QAM_MCH_819MHz_RB_15_0_NTNV

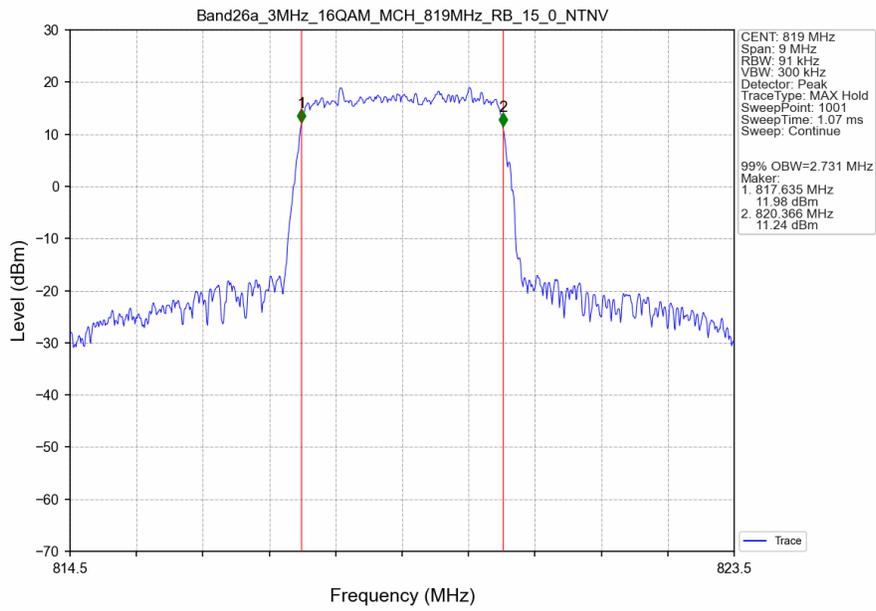


Band26a_3MHz_64QAM_MCH_819MHz_RB_15_0_NTNV

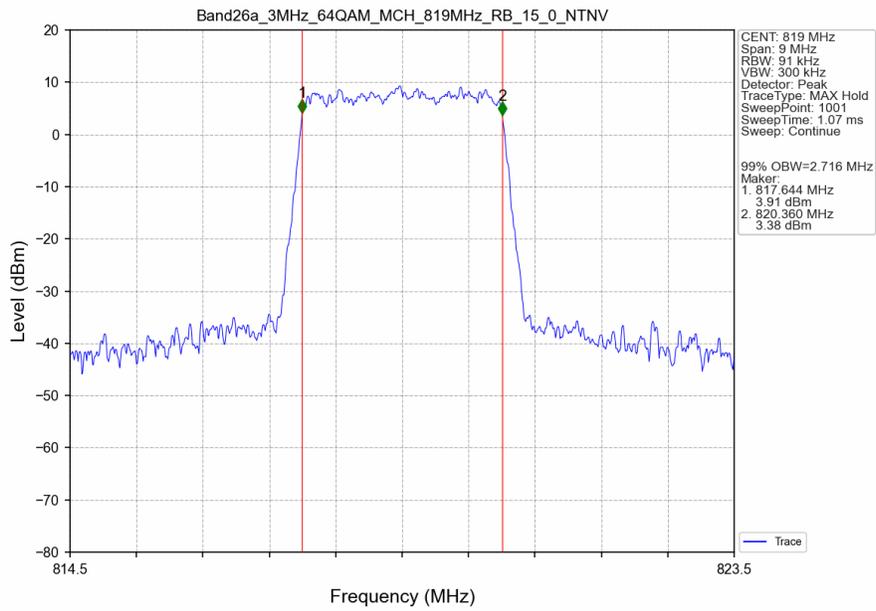


Band26a_5MHz_QPSK_MCH_819MHz_RB_25_0_NTNV

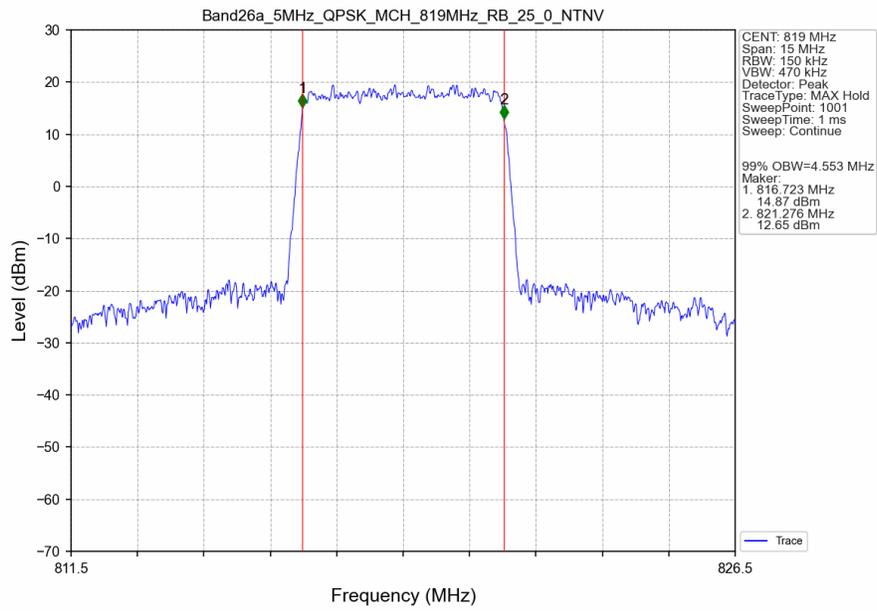


Band26a_5MHz_16QAM_MCH_819MHz_RB_25_0_NTNV

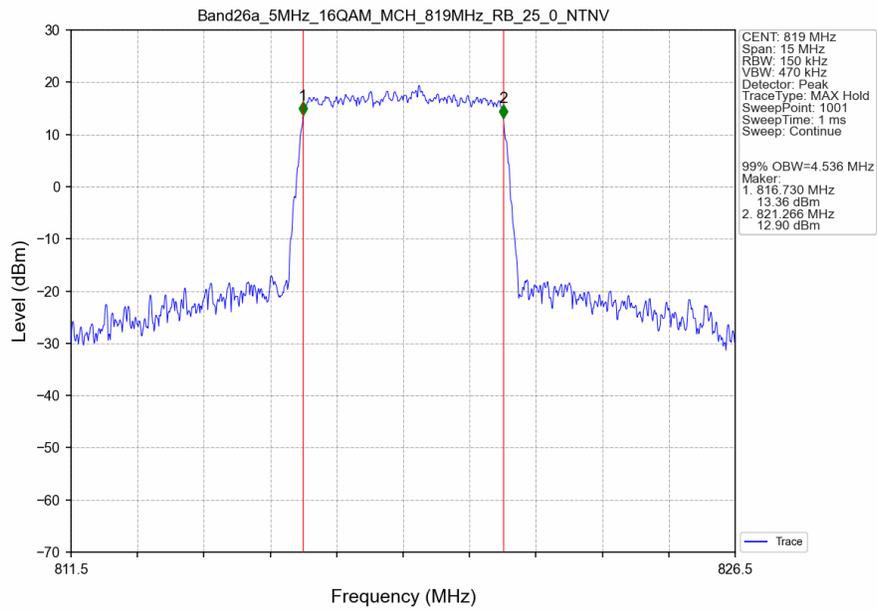


Band26a_5MHz_64QAM_MCH_819MHz_RB_25_0_NTNV

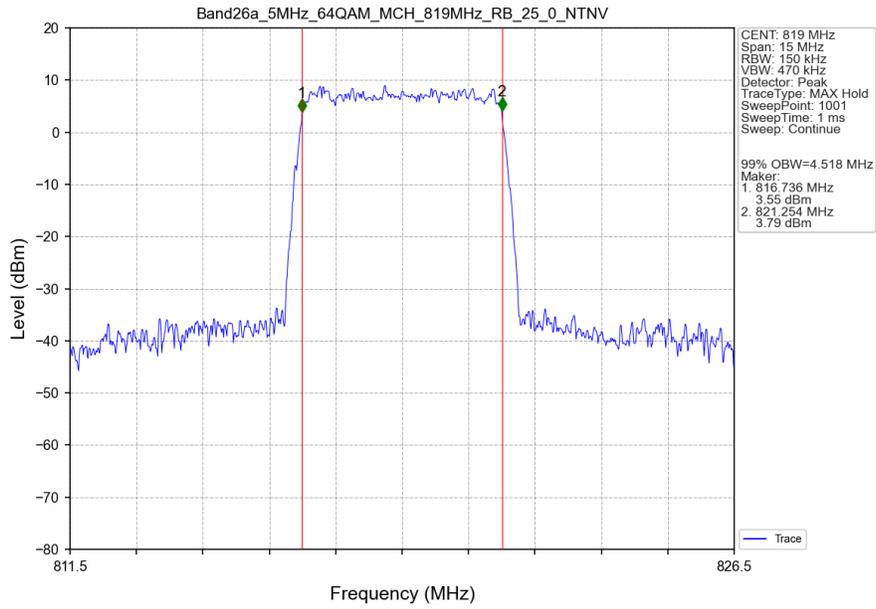


Band26a_10MHz_QPSK_MCH_819MHz_RB_50_0_NTNV

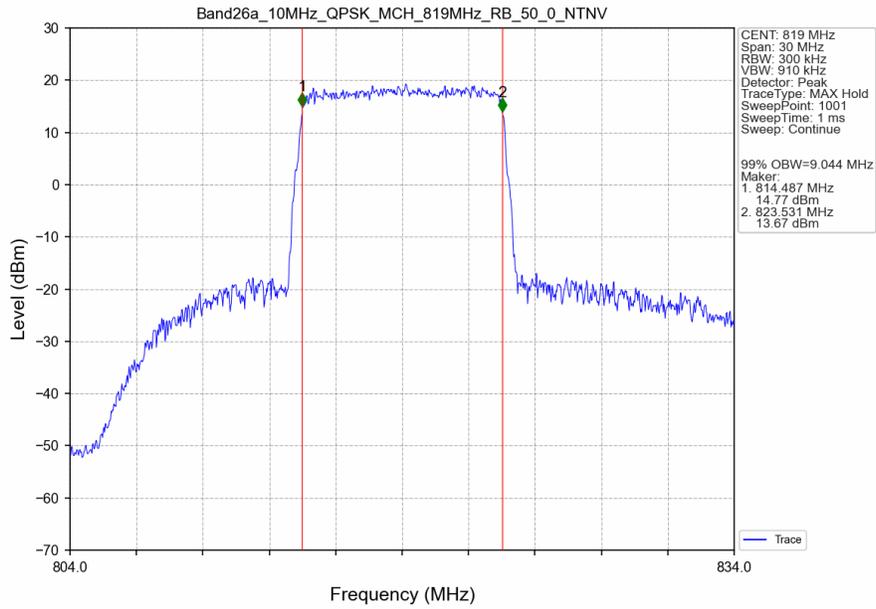


Band26a_10MHz_16QAM_MCH_819MHz_RB_50_0_NTNV

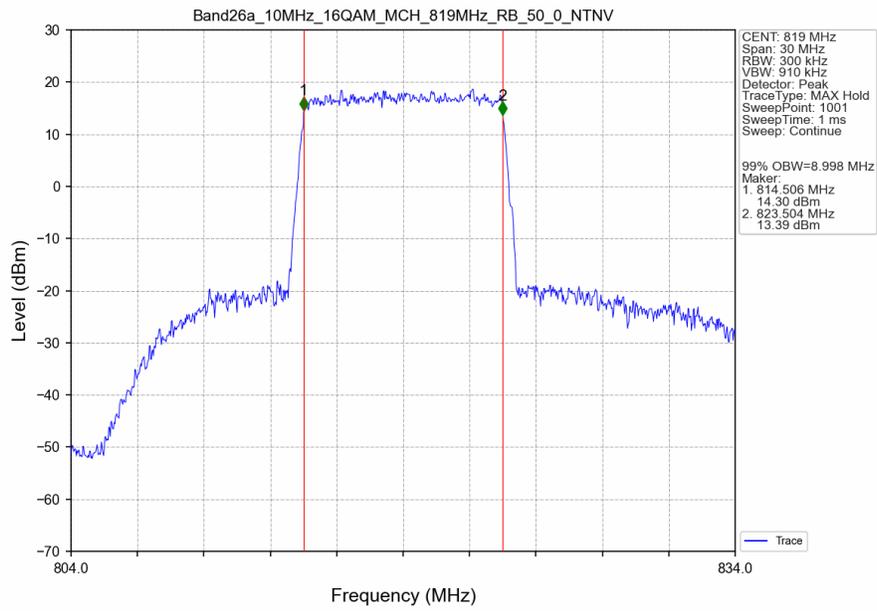


Band26a_10MHz_64QAM_MCH_819MHz_RB_50_0_NTNV

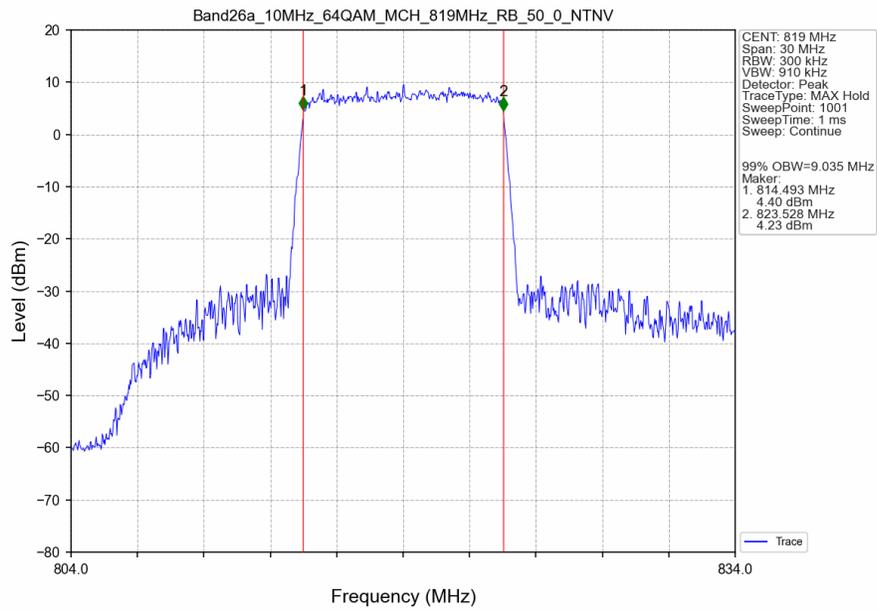


3.2.2 Band26a_XDB

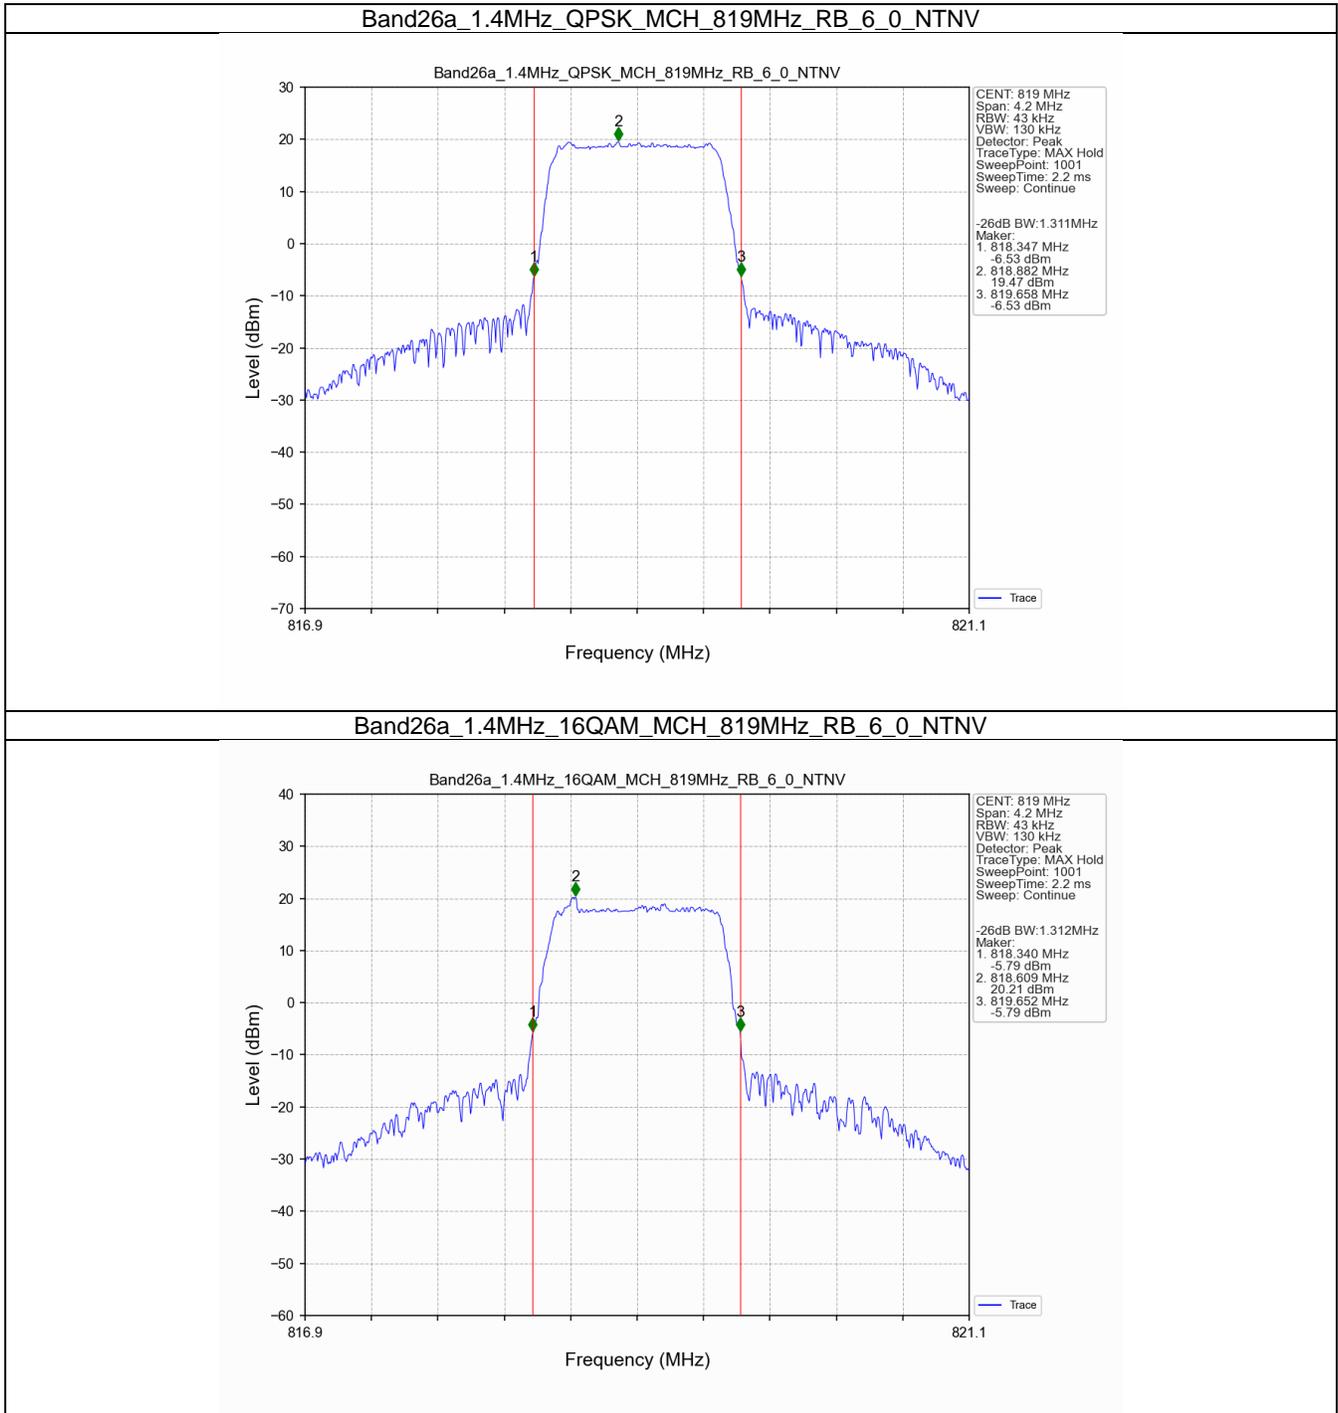


Band26a_1.4MHz_64QAM_MCH_819MHz_RB_6_0_NTNV

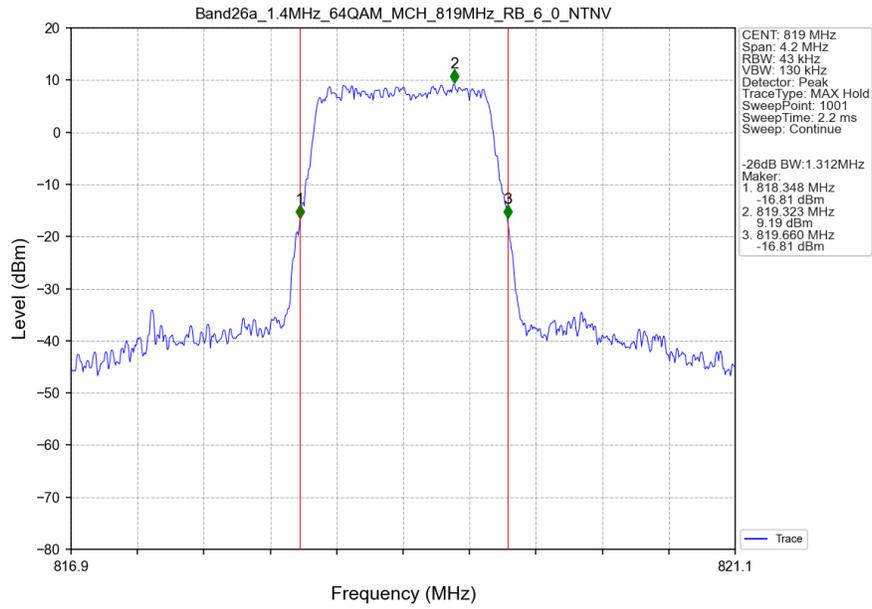


Band26a_3MHz_QPSK_MCH_819MHz_RB_15_0_NTNV

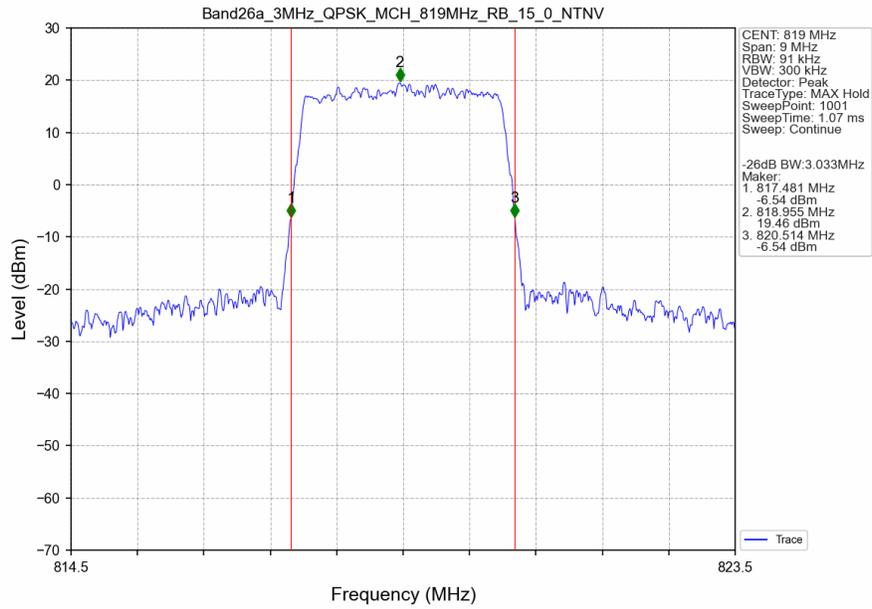


Band26a_3MHz_16QAM_MCH_819MHz_RB_15_0_NTNV

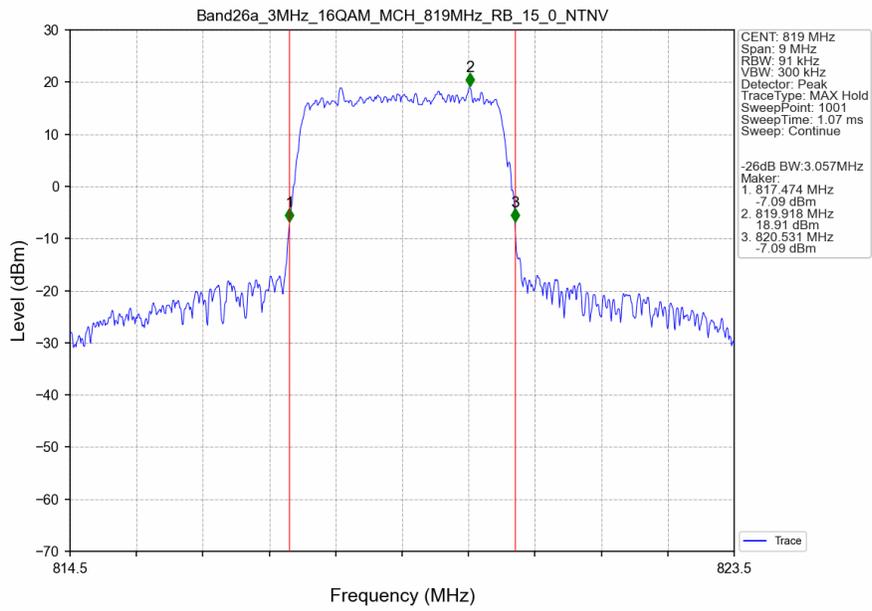


Band26a_3MHz_64QAM_MCH_819MHz_RB_15_0_NTNV

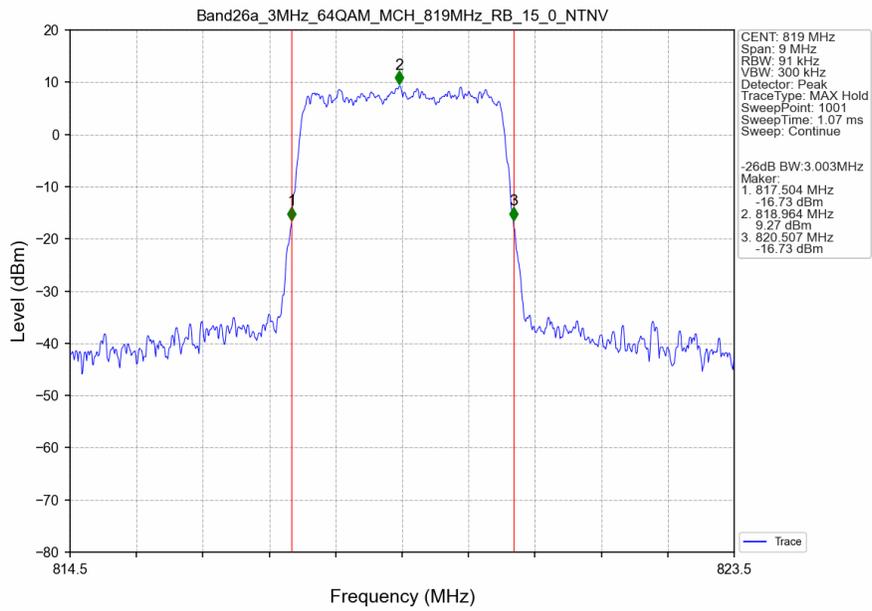


Band26a_5MHz_QPSK_MCH_819MHz_RB_25_0_NTNV

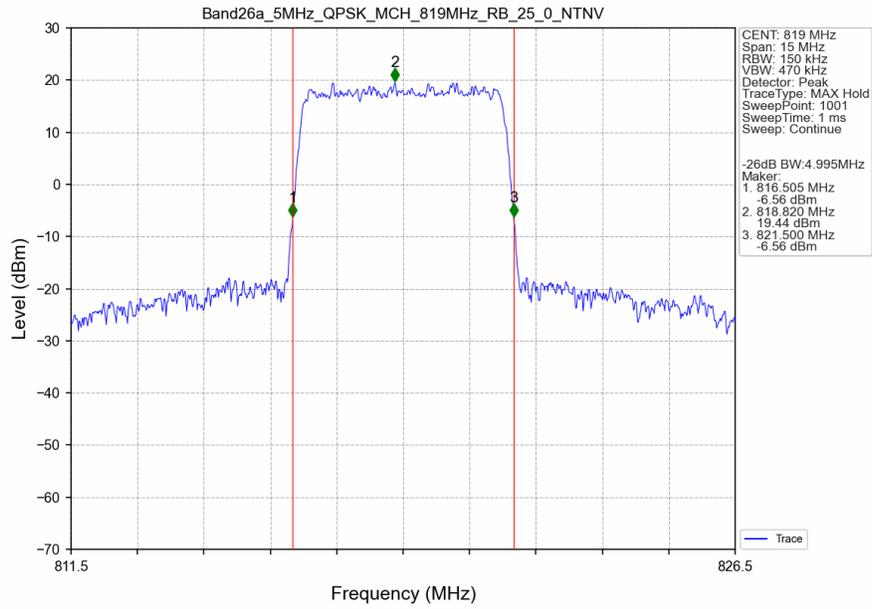


Band26a_5MHz_16QAM_MCH_819MHz_RB_25_0_NTNV

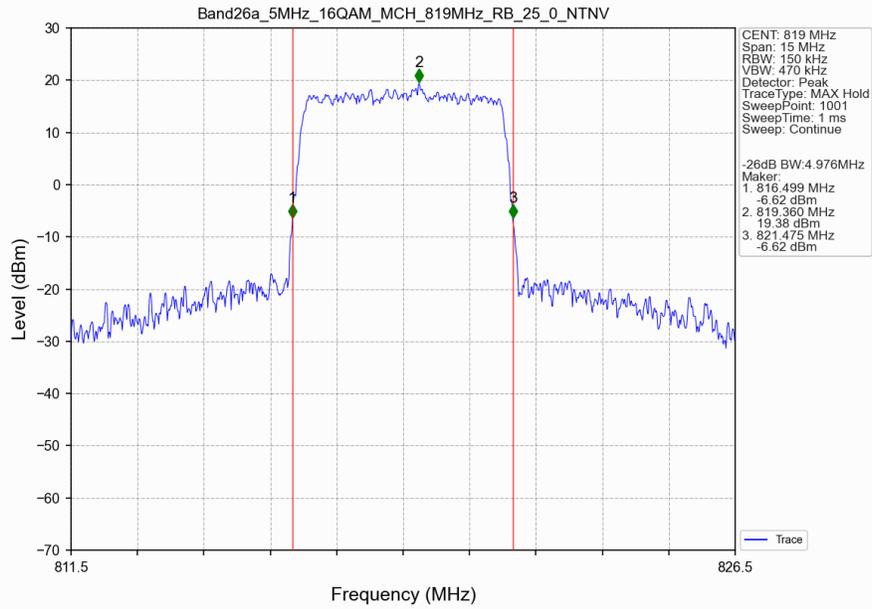


Band26a_5MHz_64QAM_MCH_819MHz_RB_25_0_NTNV

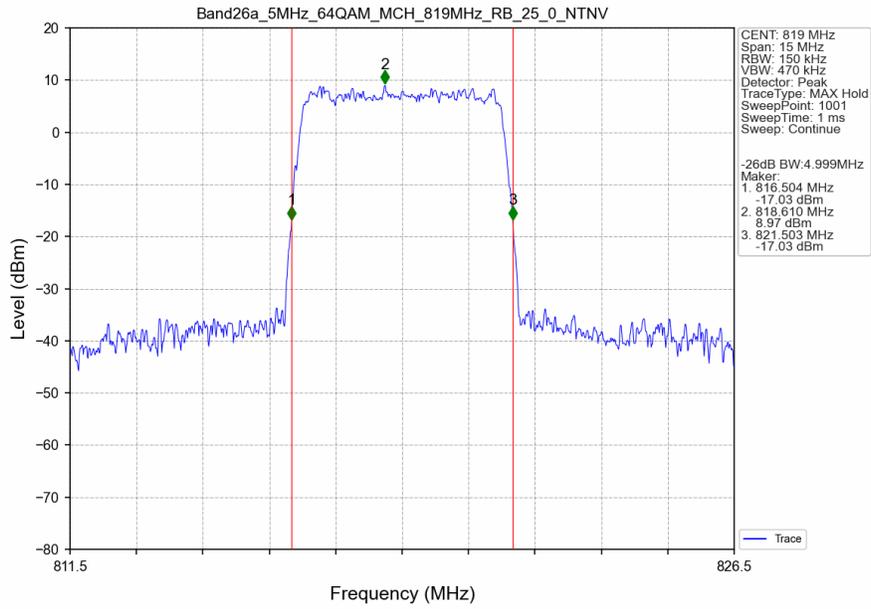


Band26a_10MHz_QPSK_MCH_819MHz_RB_50_0_NTNV

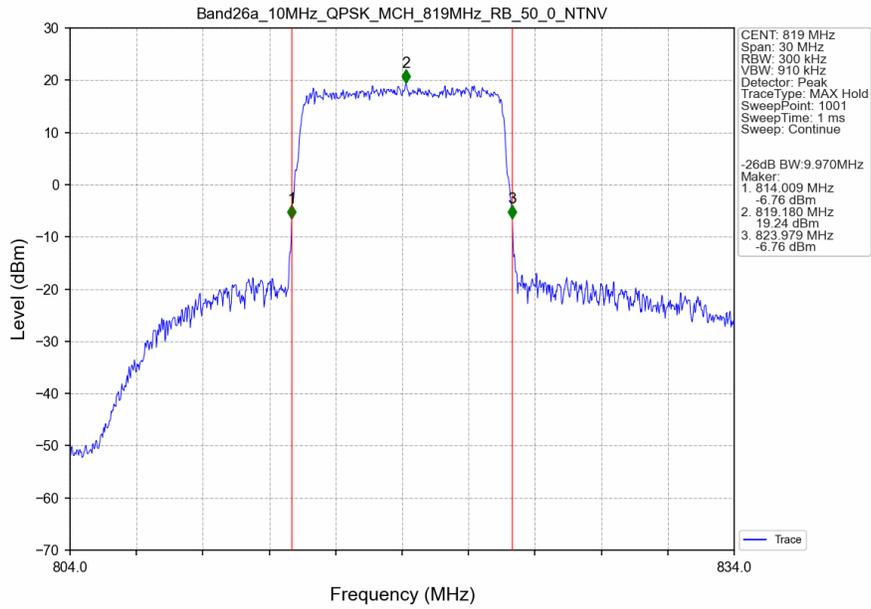

Band26a_10MHz_16QAM_MCH_819MHz_RB_50_0_NTNV

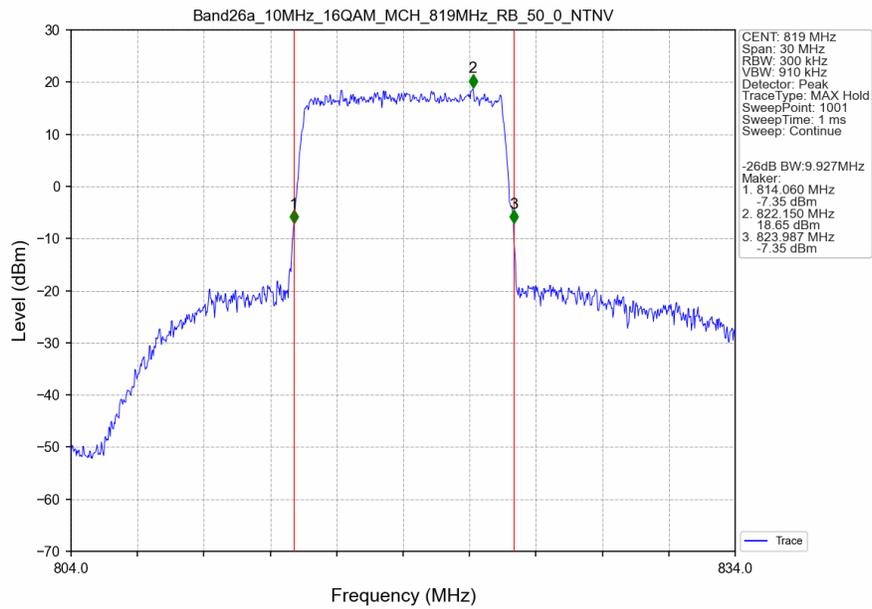

Band26a_10MHz_64QAM_MCH_819MHz_RB_50_0_NTNV

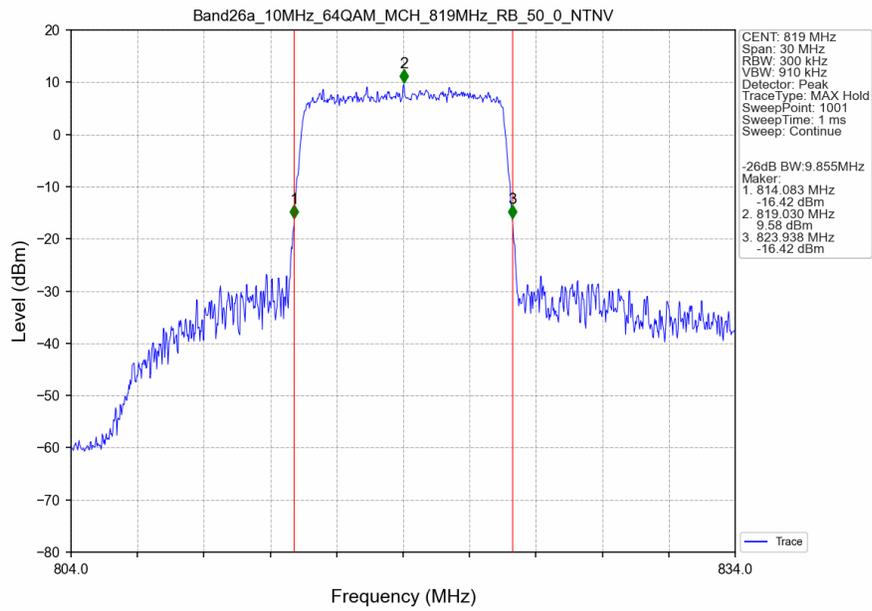

4. Peak-Average Ratio


4.1 Test Result

4.1.1 B26a_10MHz


Band: 26a / Bandwidth: 10MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Peak-Average Ratio (dB)		Verdict
		Size	Offset	Result	Limit	
QPSK	819	50	0	5.53	<=13	Pass
16QAM	819	50	0	6.33	<=13	Pass
64QAM	819	50	0	6.51	<=13	Pass

4.2 Test Graph

4.2.1 B26a_10MHz

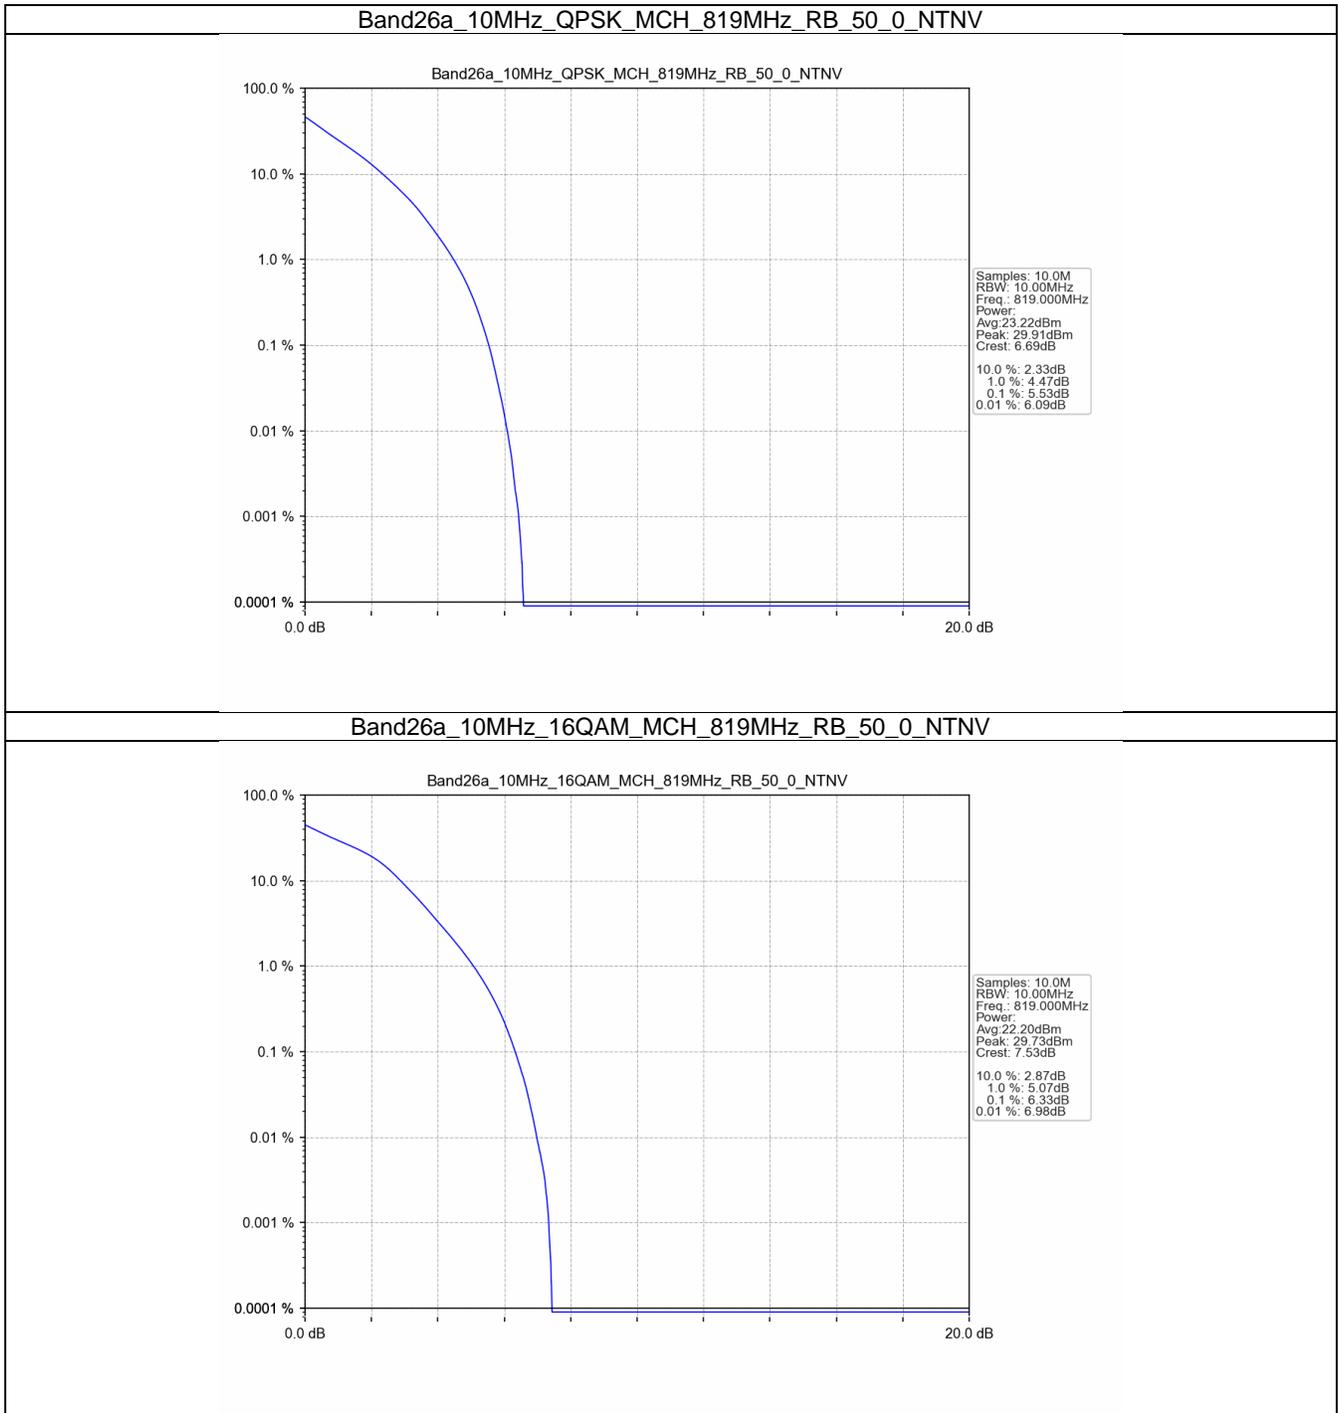

Band26a_10MHz_64QAM_MCH_819MHz_RB_50_0_NTNV

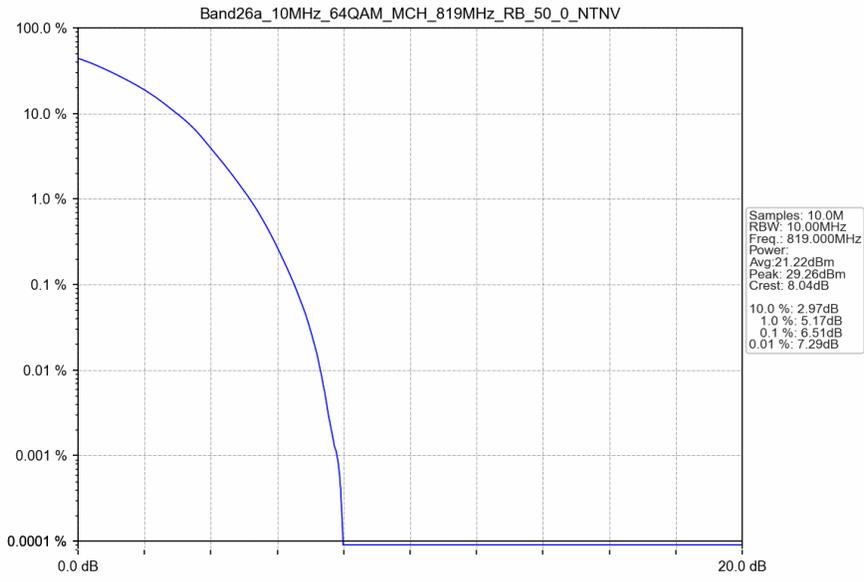

5. Spurious Emission

5.1 Test Result

5.1.1 B26a_1.4MHz

Band: 26a / Bandwidth: 1.4MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	814.7	1	0	Refer To Test Graph		Pass
		6	0	Refer To Test Graph		Pass
	819	1	0	Refer To Test Graph		Pass
	823.3	1	0	Refer To Test Graph		Pass
			5	Refer To Test Graph		Pass
		6	0	Refer To Test Graph		Pass

5.1.2 B26a_3MHz

Band: 26a / Bandwidth: 3MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	815.5	1	0	Refer To Test Graph		Pass
		15	0	Refer To Test Graph		Pass
	819	1	0	Refer To Test Graph		Pass
	822.5	1	0	Refer To Test Graph		Pass
			14	Refer To Test Graph		Pass
		15	0	Refer To Test Graph		Pass

5.1.3 B26a_5MHz


Band: 26a / Bandwidth: 5MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	816.5	1	0	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass
	819	1	0	Refer To Test Graph		Pass
	821.5	1	0	Refer To Test Graph		Pass
			24	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass

5.1.4 B26a_10MHz


Band: 26a / Bandwidth: 10MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	819	1	0	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass
	819	1	49	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass

5.2 Test Graph

5.2.1 B26a_1.4MHz

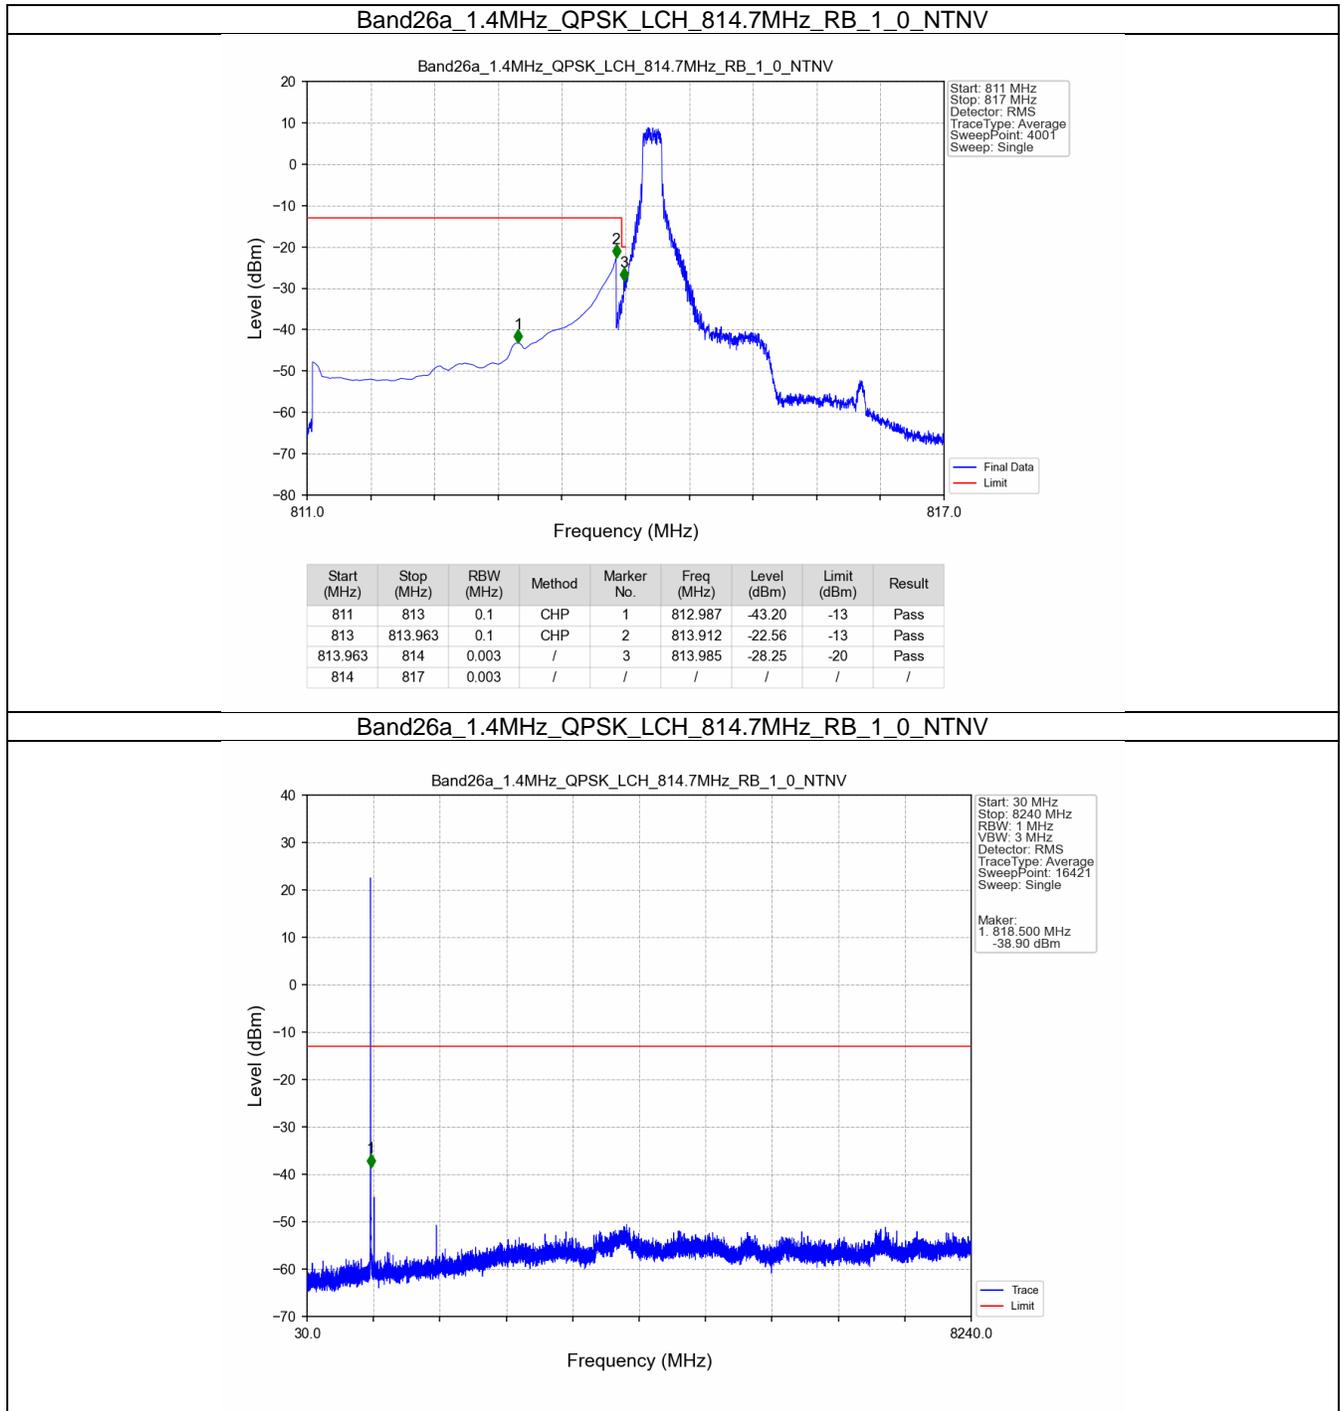


Band26a_1.4MHz_QPSK_LCH_814.7MHz_RB_6_0_NTNV

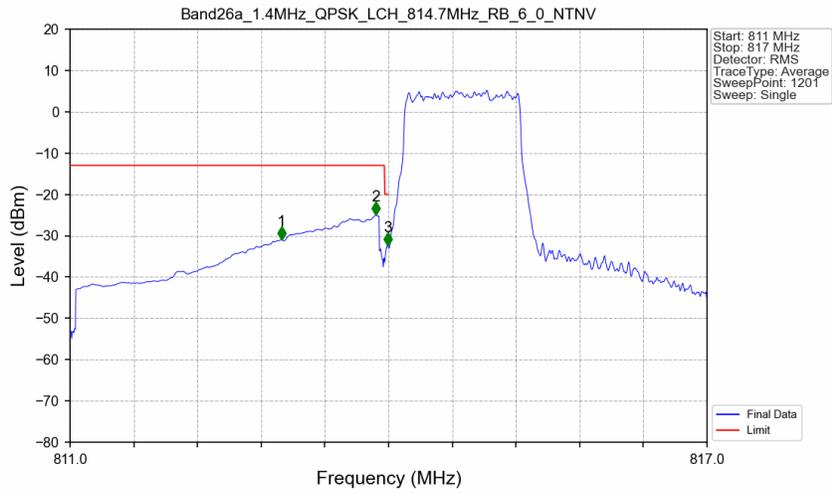


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
811	813	0.1	CHP	1	812.990	-30.91	-13	Pass
813	813.963	0.1	CHP	2	813.880	-24.97	-13	Pass
813.963	814	0.013	CHP	3	813.990	-32.38	-20	Pass
814	817	0.013	CHP	/	/	/	/	/


Band26a_1.4MHz_QPSK_MCH_819MHz_RB_1_0_NTNV

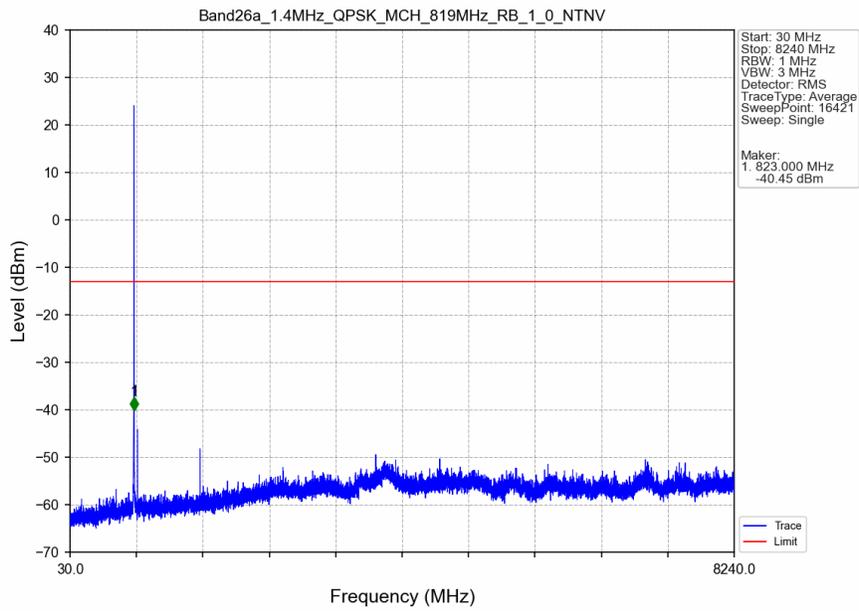

Band26a_1.4MHz_QPSK_HCH_823.3MHz_RB_1_0_NTNV

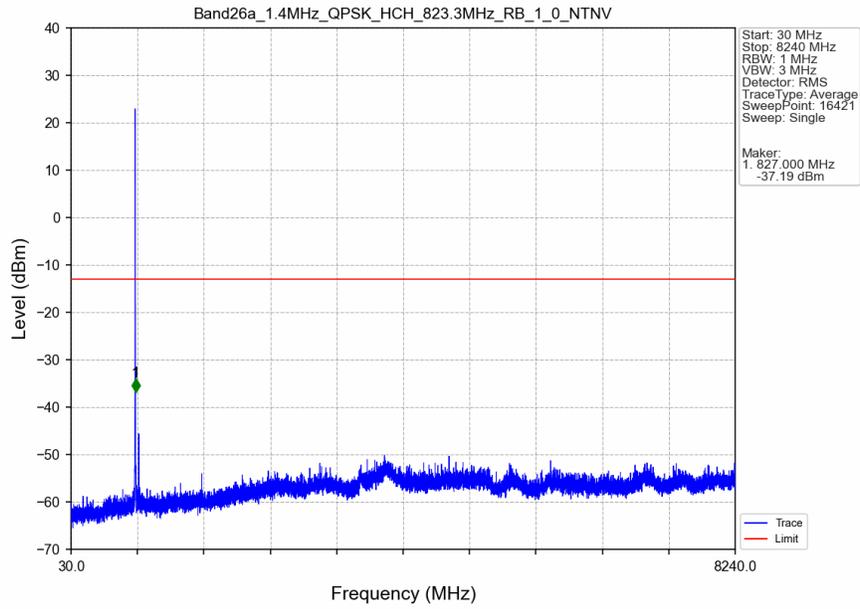


Band26a_1.4MHz_QPSK_HCH_823.3MHz_RB_1_5_NTNV

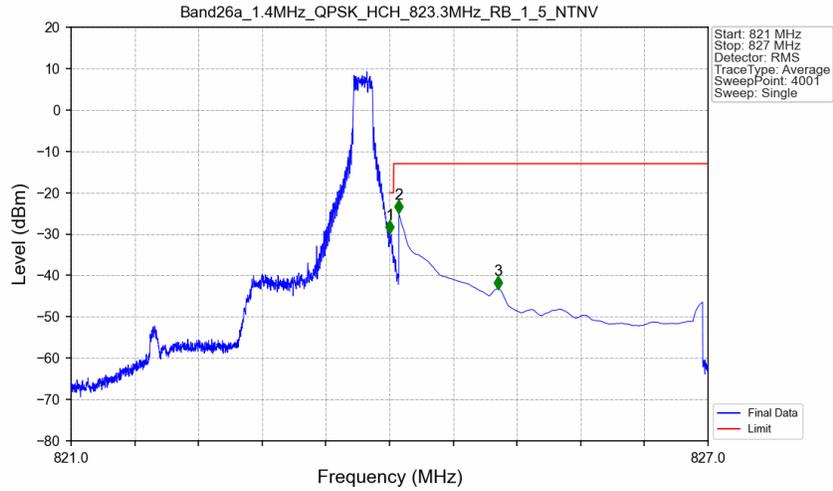


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
821	824	0.003	/	/	/	/	/	/
824	824.038	0.003	/	1	824.001	-29.84	-20	Pass
824.038	825	0.1	CHP	2	824.088	-25.02	-13	Pass
825	827	0.1	CHP	3	825.020	-43.26	-13	Pass

Band26a_1.4MHz_QPSK_HCH_823.3MHz_RB_6_0_NTNV

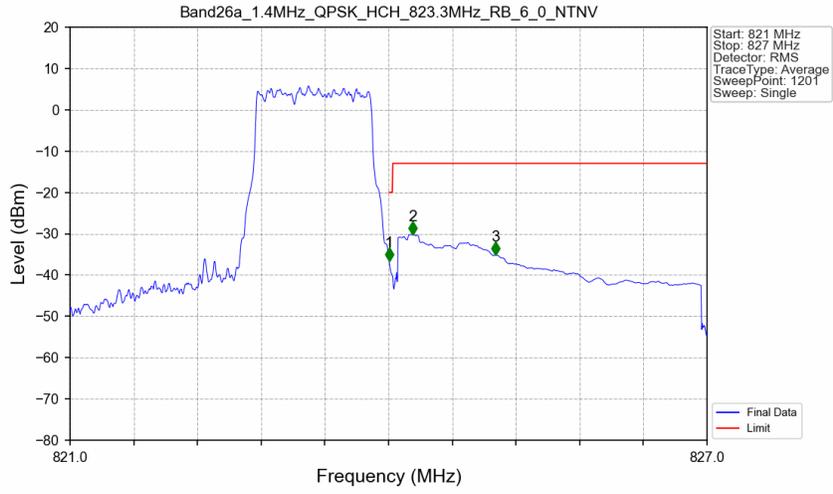


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
821	824	0.013	CHP	/	/	/	/	/
824	824.038	0.013	CHP	1	824.005	-36.61	-20	Pass
824.038	825	0.1	CHP	2	824.230	-30.17	-13	Pass
825	827	0.1	CHP	3	825.010	-35.15	-13	Pass

5.2.2 B26a_3MHz

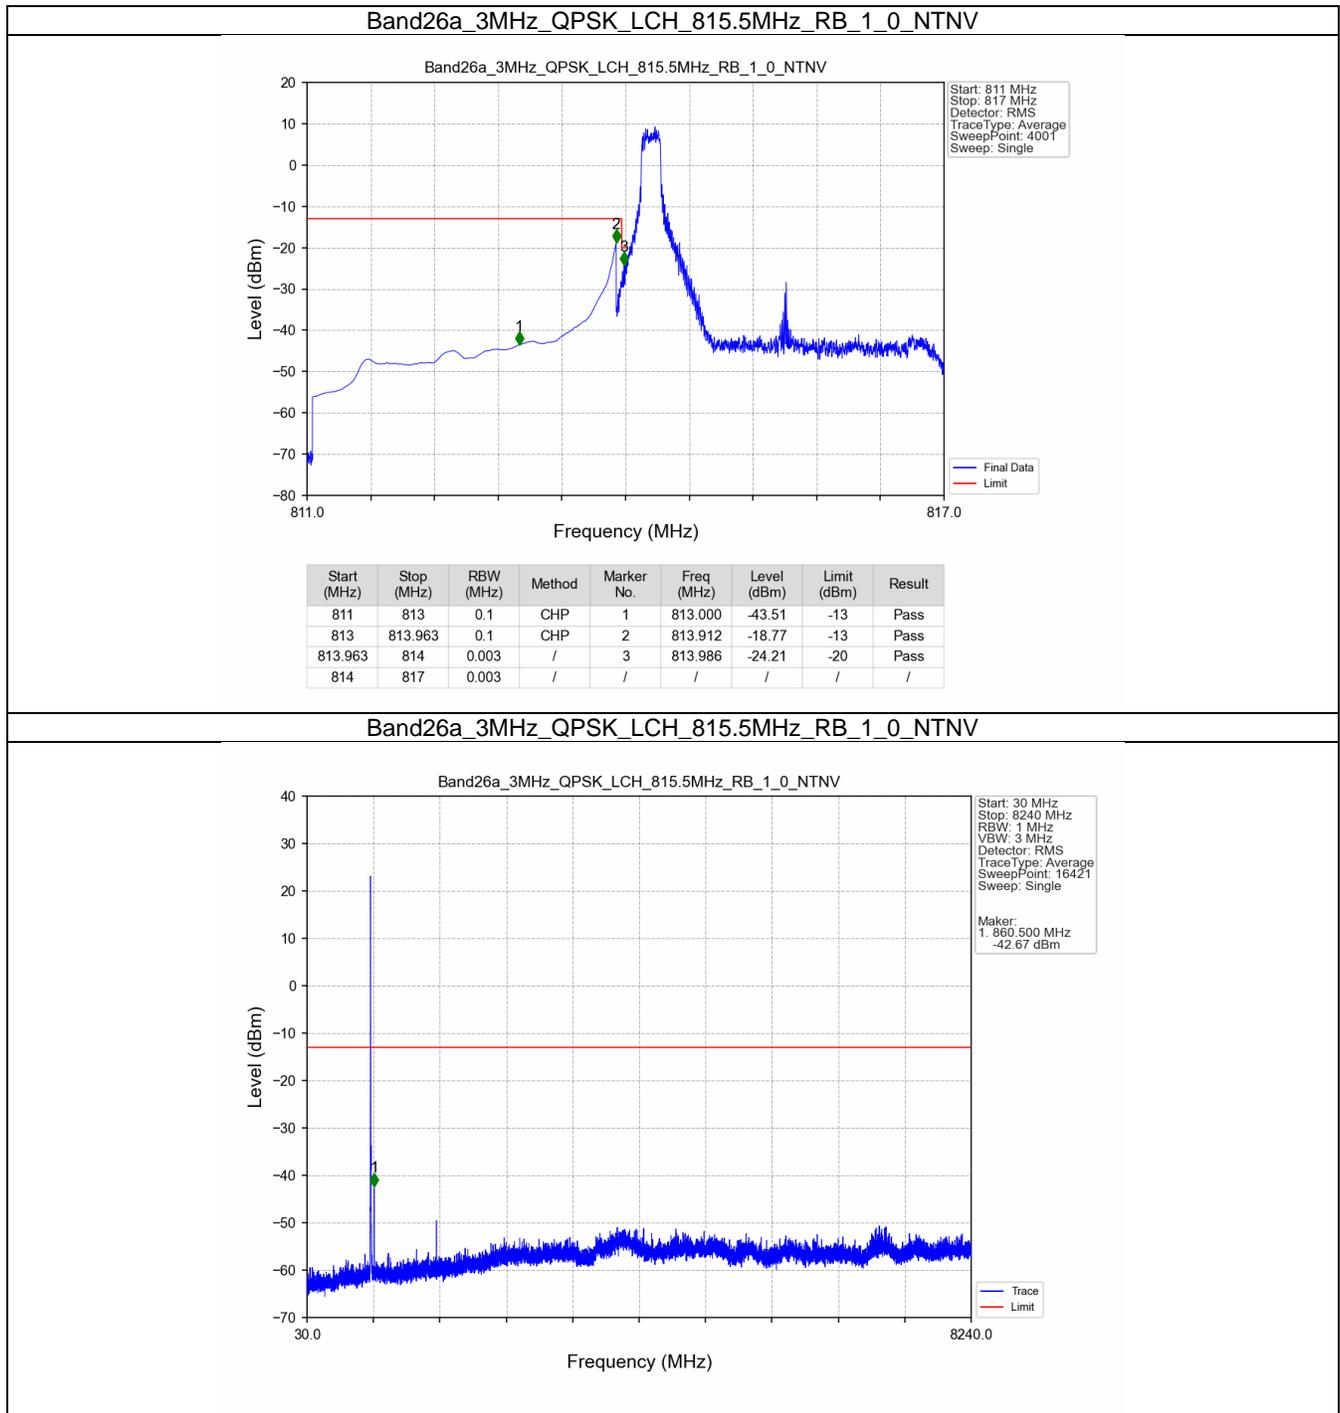


Band26a_3MHz_QPSK_LCH_815.5MHz_RB_15_0_NTNV

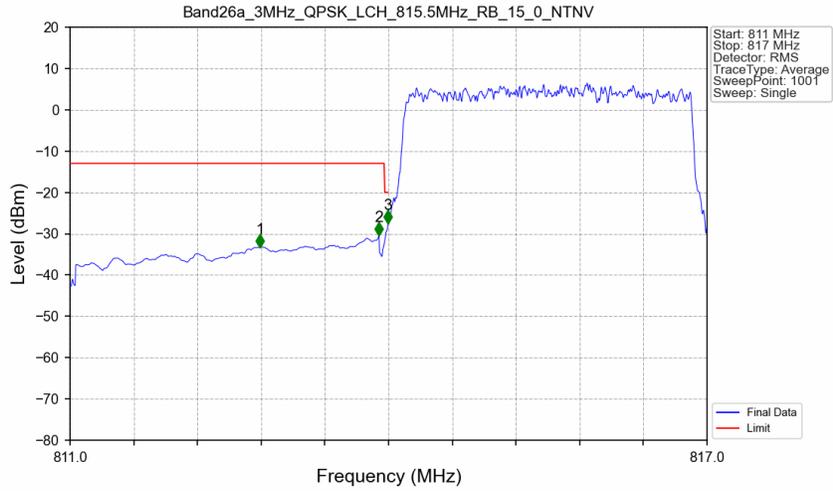


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
811	813	0.1	CHP	1	812.788	-33.23	-13	Pass
813	813.963	0.1	CHP	2	813.910	-30.44	-13	Pass
813.963	814	0.03	/	3	813.994	-27.53	-20	Pass
814	817	0.03	/	/	/	/	/	/


Band26a_3MHz_QPSK_MCH_819MHz_RB_1_0_NTNV

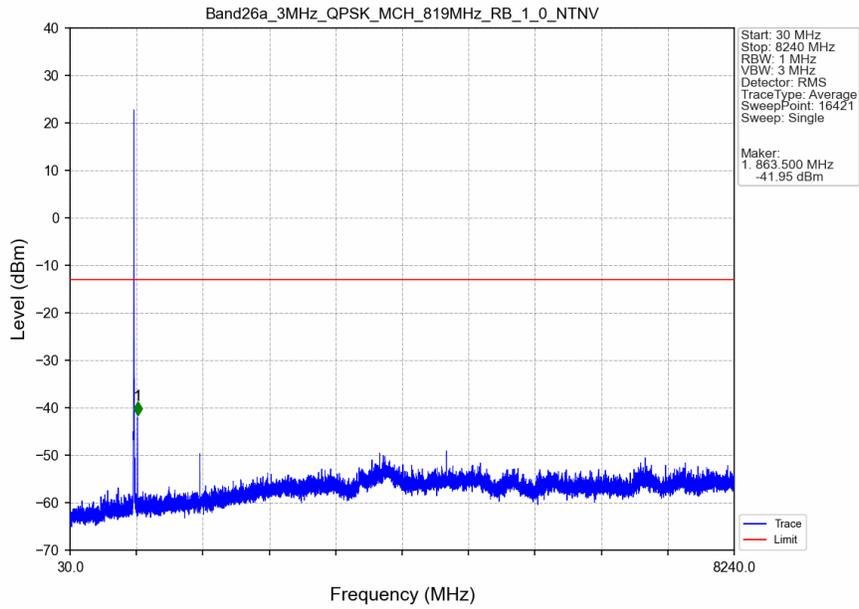

Band26a_3MHz_QPSK_HCH_822.5MHz_RB_1_0_NTNV

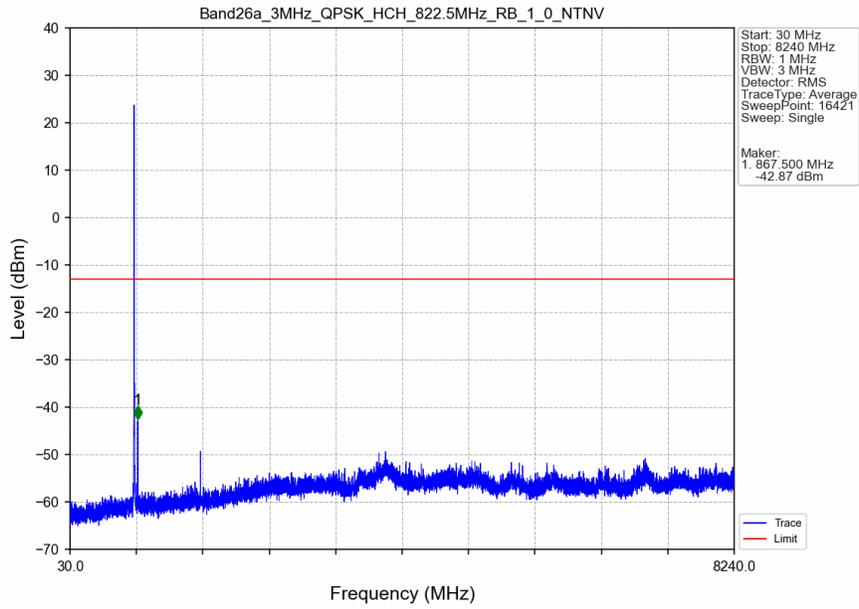


Band26a_3MHz_QPSK_HCH_822.5MHz_RB_1_14_NTNV

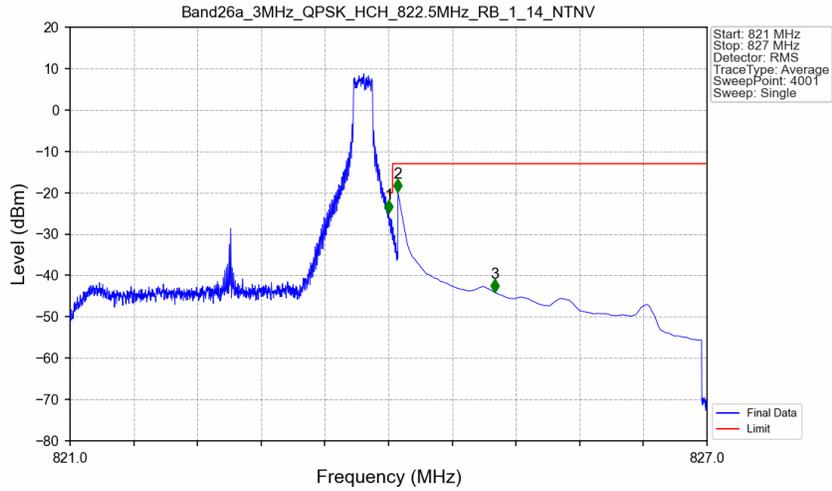


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
821	824	0.003	/	/	/	/	/	/
824	824.038	0.003	/	1	824.001	-24.97	-20	Pass
824.038	825	0.1	CHP	2	824.088	-19.81	-13	Pass
825	827	0.1	CHP	3	825.000	-44.12	-13	Pass

Band26a_3MHz_QPSK_HCH_822.5MHz_RB_15_0_NTNV

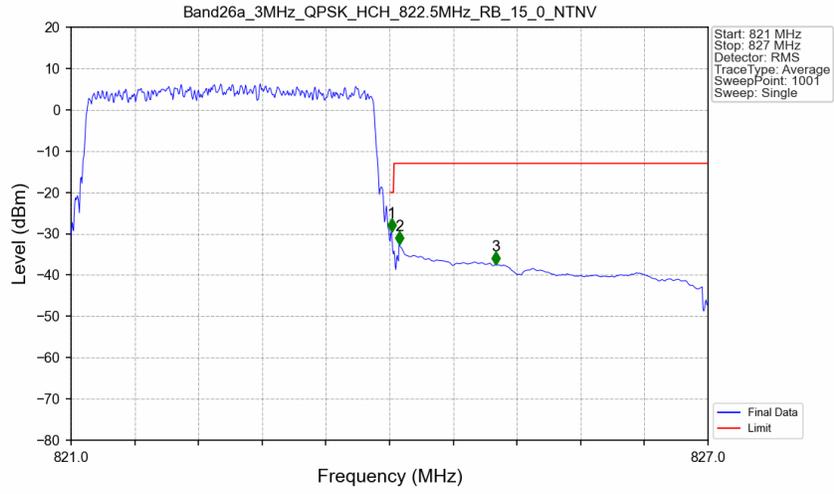


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
821	824	0.03	/	/	/	/	/	/
824	824.038	0.03	/	1	824.018	-29.57	-20	Pass
824.038	825	0.1	CHP	2	824.090	-32.65	-13	Pass
825	827	0.1	CHP	3	825.002	-37.46	-13	Pass

5.2.3 B26a_5MHz

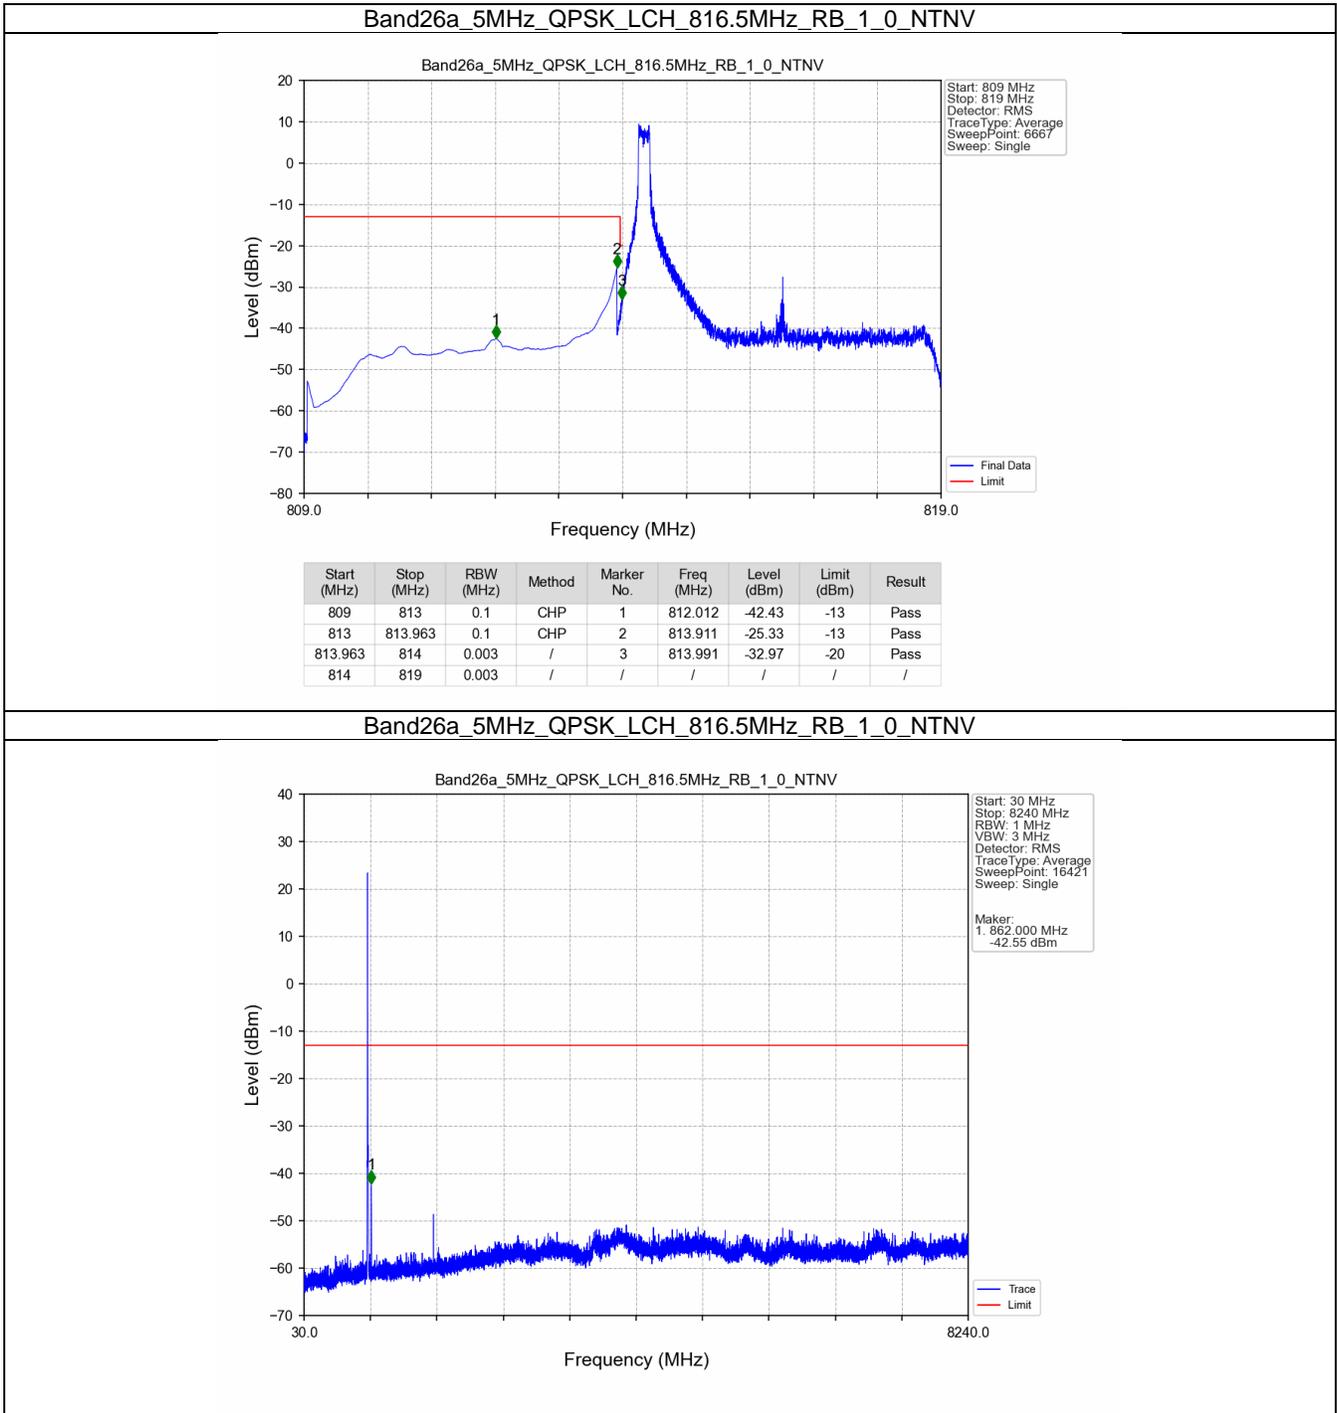


Band26a_5MHz_QPSK_LCH_816.5MHz_RB_25_0_NTNV

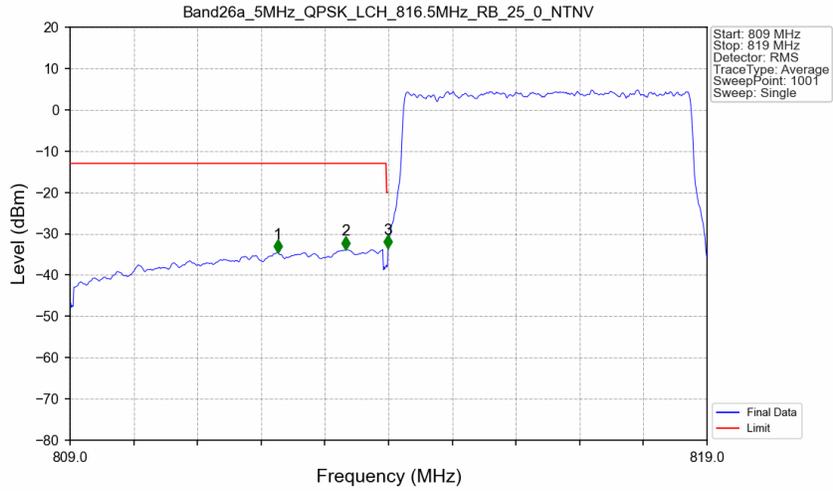


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
809	813	0.1	CHP	1	812.260	-34.57	-13	Pass
813	813.963	0.1	CHP	2	813.330	-33.77	-13	Pass
813.963	814	0.05	CHP	3	813.990	-33.56	-20	Pass
814	819	0.05	CHP	/	/	/	/	/


Band26a_5MHz_QPSK_MCH_819MHz_RB_1_0_NTNV

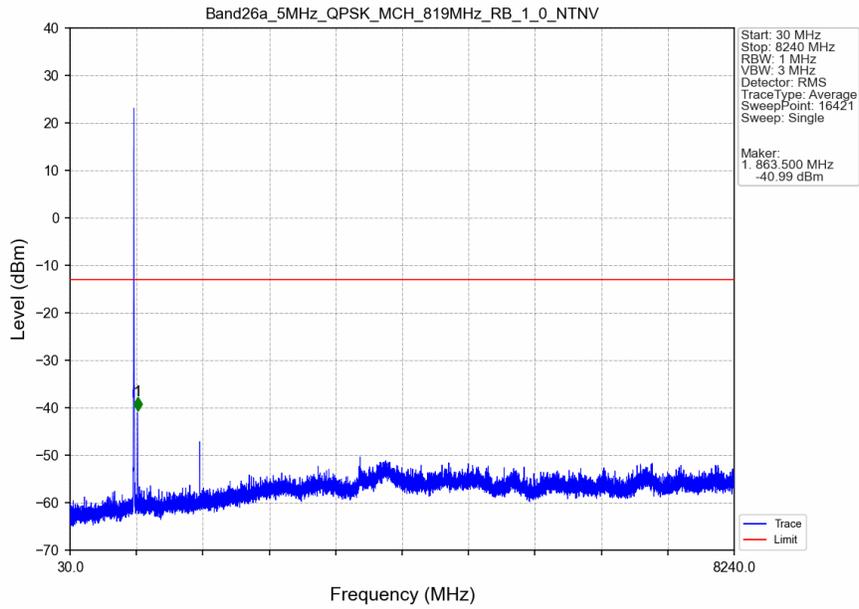

Band26a_5MHz_QPSK_HCH_821.5MHz_RB_1_0_NTNV

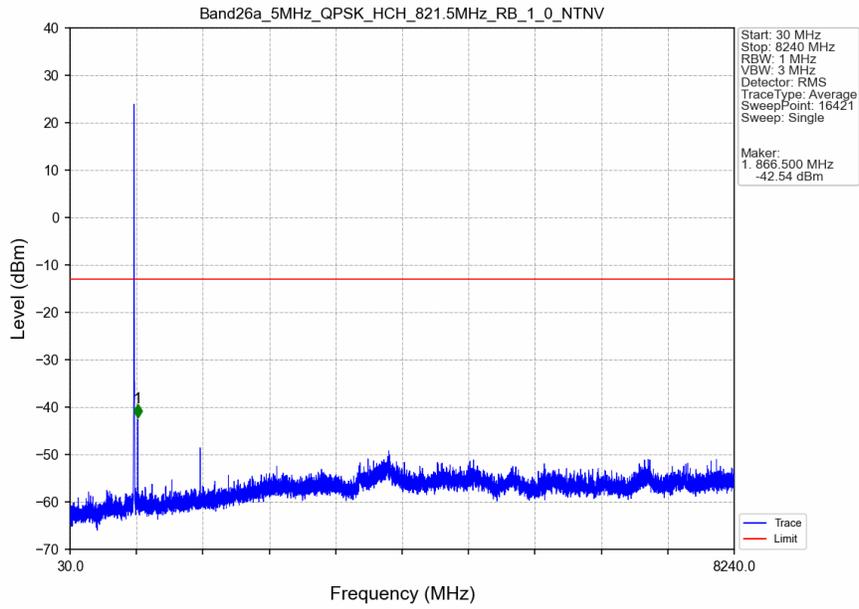


Band26a_5MHz_QPSK_HCH_821.5MHz_RB_1_24_NTNV

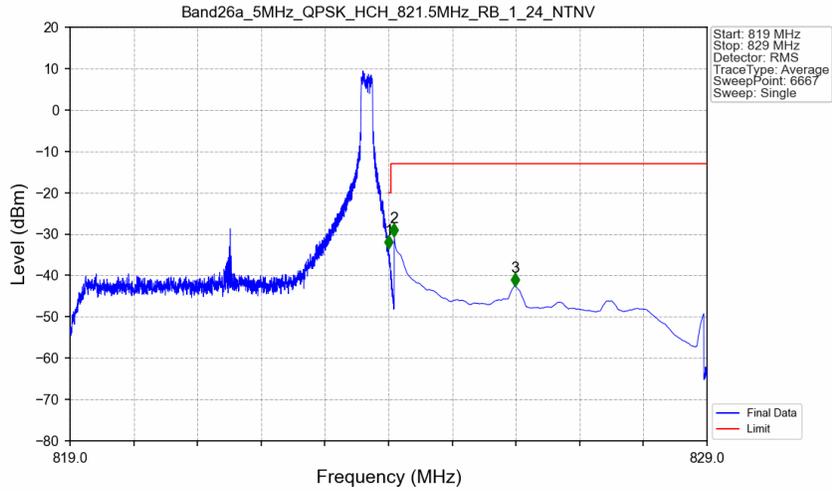

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
819	824	0.003	/	/	/	/	/	/
824	824.038	0.003	/	1	824.001	-33.43	-20	Pass
824.038	825	0.1	CHP	2	824.089	-30.64	-13	Pass
825	829	0.1	CHP	3	825.980	-42.52	-13	Pass


Band26a_5MHz_QPSK_HCH_821.5MHz_RB_25_0_NTNV

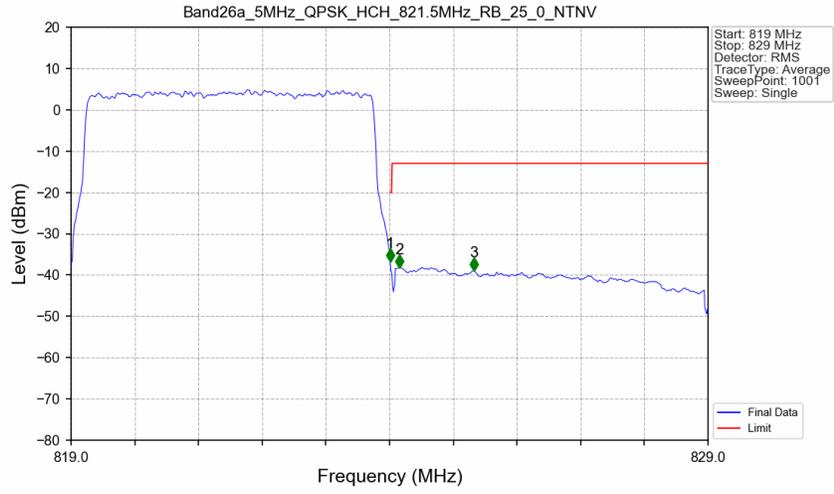

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
819	824	0.05	CHP	/	/	/	/	/
824	824.038	0.05	CHP	1	824.010	-36.82	-20	Pass
824.038	825	0.1	CHP	2	824.150	-38.18	-13	Pass
825	829	0.1	CHP	3	825.320	-38.97	-13	Pass


5.2.4 B26a_10MHz

Band26a_10MHz_QPSK_LCH_819MHz_RB_1_0_NTNV

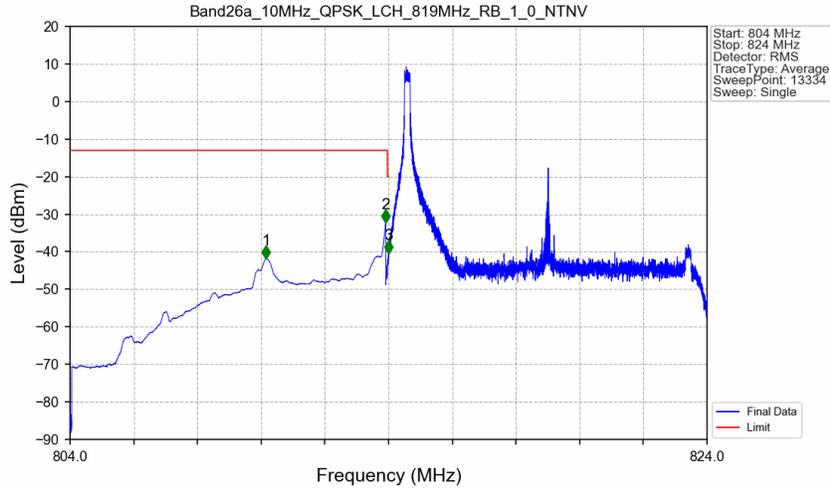


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
804	813	0.1	CHP	1	810.153	-41.77	-13	Pass
813	813.963	0.1	CHP	2	813.912	-32.14	-13	Pass
813.963	814	0.003	/	3	813.993	-40.38	-20	Pass
814	824	0.003	/	/	/	/	/	/

Band26a_10MHz_QPSK_LCH_819MHz_RB_1_0_NTNV

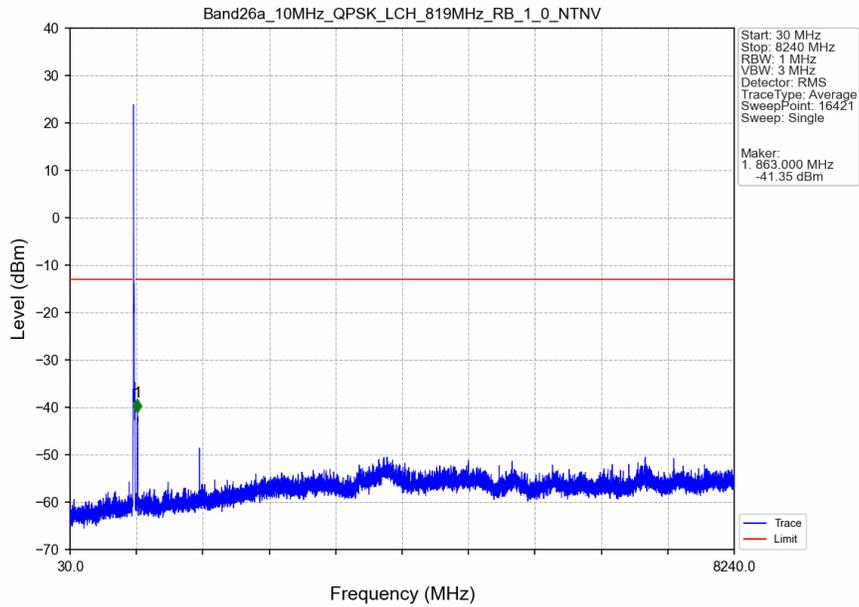


Band26a_10MHz_QPSK_LCH_819MHz_RB_50_0_NTNV

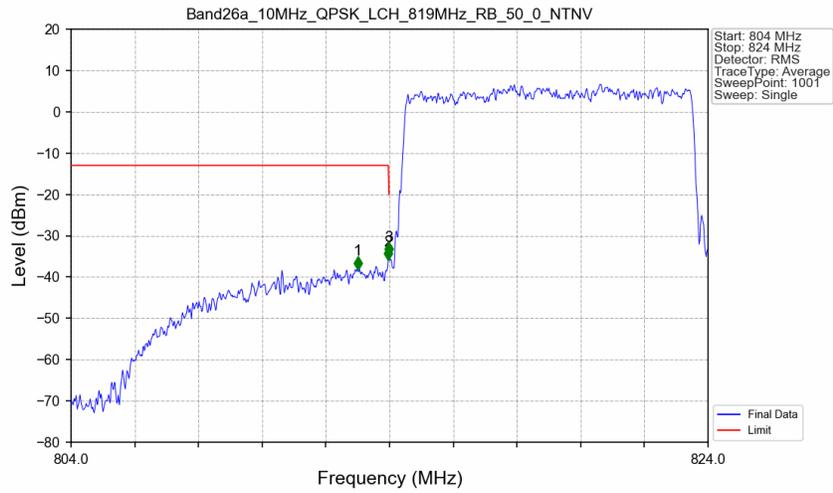


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
804	813	0.1	/	1	813.000	-38.14	-13	Pass
813	813.963	0.1	/	2	813.960	-35.79	-13	Pass
813.963	814	0.1	/	3	813.980	-34.75	-20	Pass
814	824	0.1	/	/	/	/	/	/

Band26a_10MHz_QPSK_HCH_819MHz_RB_1_49_NTNV

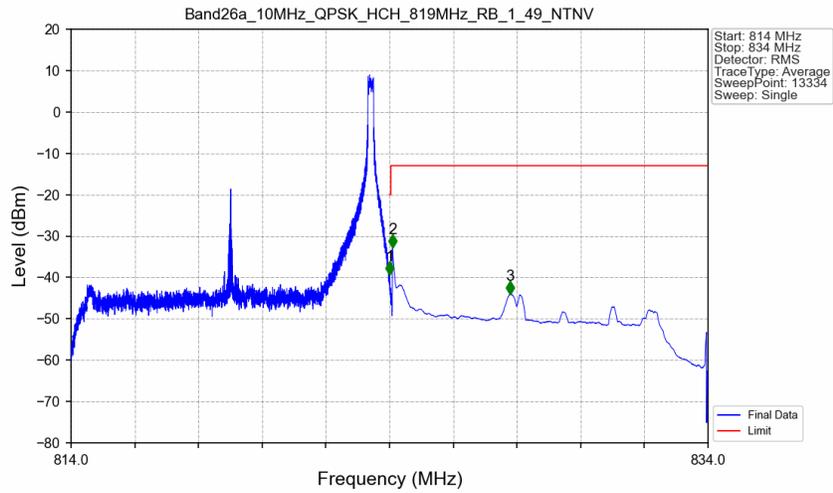

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
814	824	0.003	/	/	/	/	/	/
824	824.038	0.003	/	1	824.011	-39.30	-20	Pass
824.038	825	0.1	CHP	2	824.088	-32.81	-13	Pass
825	834	0.1	CHP	3	827.788	-44.06	-13	Pass

Band26a_10MHz_QPSK_HCH_819MHz_RB_50_0_NTV

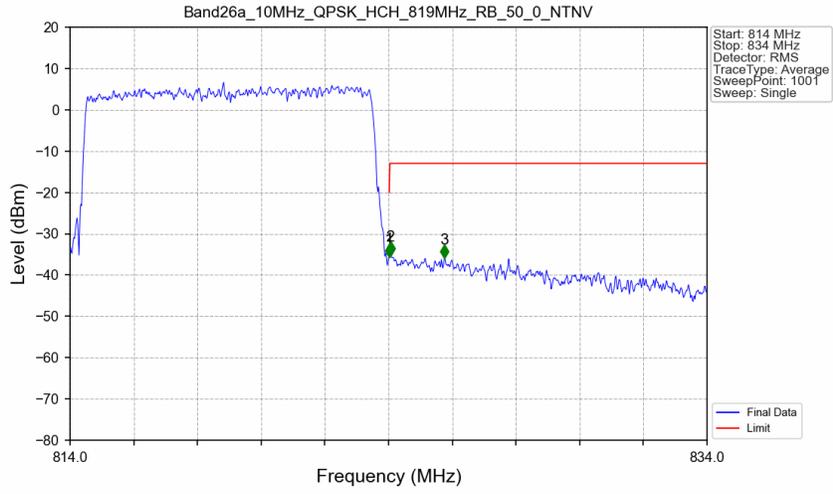

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
814	824	0.1	/	/	/	/	/	/
824	824.038	0.1	/	1	824.020	-35.71	-20	Pass
824.038	825	0.1	/	2	824.060	-35.13	-13	Pass
825	834	0.1	/	3	825.760	-35.90	-13	Pass