

Spot Check Evaluation

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 24095PCADG
FCC ID : 2AFZZRA8EG
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(O),
27(Q), Part96
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Aug. 15, 2024 ~ Oct. 16, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Testing Site.....	5
1.6 Test Software.....	5
1.7 Applicable Standards.....	5
2 RE-USE OF MEASURED DATA.....	6
2.1 Introduction Section.....	6
2.2 Model Difference Information	6
2.3 Reference detail Section:	7
2.4 Spot Check Verification Data Section.....	8
3 LIST OF MEASURING EQUIPMENT.....	16
4 MEASUREMENT UNCERTAINTY	18
APPENDIX A. RADIATED SPURIOUS EMISSION TEST DATA	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471506-01L	Rev. 01	Initial issue of report	Sep. 10, 2024
FG471506-01L	Rev. 02	1. Added Conducted power for L/M/H test channels across all frequency bands 2. Added Radiated spurious emissions test data for LTE Band 48 in Appendix A	Oct. 17, 2024

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCO
Model Name	24095PCADG
FCC ID	2AFZZRA8EG
IMEI Code	Conducted: 862769070026585/862769070026593 for BT/WLAN 862769070029589/862769070029597 for WWAN Radiation: 862769070028524 for BT/WLAN 862769070029282/862769070029290 for WWAN Conduction: 862669070025702/862769070025710 DFS: 862769070026585/862769070026593
HW Version	135300O16
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS TH01-KS DFS01-KS 03CH03-KS 03CH04-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	DFS01-KS	Sporton	Test Tools	1.0
3.	CO01-KS	AUDIX	E3	6.2009-8-24
4.	03CH03-KS	AUDIX	E3	210616
5.	03CH04-KS	AUDIX	E3	210616

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(O), 27(Q), Part96
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 24095PCADG, FCC ID: 2AFZZRA8EG) is electrically identical to the reference device (Model: 24090RA29G, FCC ID: 2AFZZRA29G) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA471506-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: 2AFZZRA8EG .

2.2 Model Difference Information

The **main** difference between FCC ID: 2AFZZRA29G and FCC ID: 2AFZZRA8EG is as below:

- Removed LTE Band 12/13/17/26/32
- Removed TX1 B20 alternative path of B20 which used for low band + low band CA and ENDC

Other differences and all the details of similarity and difference can be found in the confidential documents (2AFZZRA8EG Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	2AFZZRA29G	Full test	FR471506A	2AFZZRA8EG	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	2AFZZRA29G	Full test	FR471506B	2AFZZRA8EG	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	2AFZZRA29G	Full test	FR471506C	2AFZZRA8EG	Spot check	Y, All test items
15E	U-NII	5180~5240	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5260~5320	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5500~5720	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5745~5825	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5260~5320 5500~5720	2AFZZRA29G	Full test	FZ471506	2AFZZRA8EG	Spot check	Y, All test items
22, 24, 27, 96,	PCE (GSM)	GSM 850/1900	2AFZZRA29G	Full test	FG471506A	2AFZZRA8EG	Spot check	Y, All test items
	PCE (WCDMA)	Band II, IV, V	2AFZZRA29G	Full test	FG471506A	2AFZZRA8EG	Spot check	Y, All test items
	PCE/CBE (LTE)	B2/4/7/7C/38/38C/41/42/48/66	2AFZZRA29G	Full test	FG471506B FG471506C FG471506E FG471506F FG471506G	2AFZZRA8EG	Spot check	Y, All test items
	PCE/CBE (NR)	n2/n5/n7/n38/n41/n48/n66/n77/n78	2AFZZRA29G	Full test	FG471506I FG471506J FG471506K FG471506L FG471506M FG471506N	2AFZZRA8EG	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (DH5-CH00)	Number of Channels (N)	79	79	0	3
	Hopping Channel Separation (MHz)	1.004	1.002	0.002	3
	Dwell Time of Each Channel(s)	0.31	0.31	0	3
	20dB Bandwidth(MHz)	0.86	0.86	0	3
	99% Bandwidth(MHz)	0.76	0.76	0	3
	Conducted Band Edges(dBm)	-48.06	-49.2	1.14	3
	Conducted Spurious Emission(dBm)	-50.22	-50.55	0.33	3
BT (Ch78)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	51.51	51.02	0.49	3
BT	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
BLE 1Mbps (CH00)	6dB Bandwidth (MHz)	0.7	0.69	0.01	3
	99% Bandwidth (MHz)	1.04	1.04	0	3
	Power Spectral Density (dBm/3KHz)	-8.4	-8.6	0.2	3
	Conducted Band Edges and Spurious Emission (dBm)	-51.86	-52.32	0.46	3
	Conducted Spurious Emission (dBm)	-50.91	-51.88	0.97	3
BLE (CH38)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	40.2	40.22	0.02	3
BLE	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth (MHz)	8.04	8.02	0.02	3
	99% Bandwidth (MHz)	13.23	13.14	0.09	3
	Power Spectral Density (dBm/3KHz)	-7.64	-7.88	0.24	3
	Conducted Band Edges and Spurious Emission (dBm)	-34.74	-35.55	0.81	3
	Conducted Spurious Emission (dBm)	-41.41	-42.08	0.67	3
WIFI 2.4G (802.11ax HE20 CH01)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.96	50.50	0.46	3
WLAN 2.4G	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
WIFI 5G (802.11a CH116)	26dB Emission Bandwidth (MHz)	23.73	23.66	0.07	3
	99% Occupied Bandwidth (MHz)	17.41	17.38	0.03	3
	Power Spectral Density (dBm/MHz)	6.9	6.88	0.02	3
WIFI 5G (802.11ax HE80 CH42)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.86	50.89	0.03	3
WLAN 5G	AC Conducted Emission (dBuV)	38.5	40.8	2.3	3
WLAN 5G	DFS (S)	0.846028	0.848428	0.0024	3



Mode	Test Item	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 22/24/27 (LTE Band 48)	Peak-to-Average Ratio (dB)	5.42	5.16	0.26	3
	Occupied Bandwidth (MHz)	17.94	17.90	0.04	3
	Conducted Band Edge (dBm/MHz)	-14.08	-14.87	0.79	3
	Conducted Spurious Emission (dBm/MHz)	-42.80	-44.75	1.95	3
	Frequency Stability (ppm)	0.0016	0.0003	0.0013	3
Part 96 (LTE Band 48)	Radiated Spurious Emission (dBm)	-47.27	-49.88	2.61	3



Conducted power for Unlicensed bands

Test Item	Mode	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR -CH 00-DH5	10.09	8.65	1.44	3
	BT BR/EDR -CH 39-DH5	8.29	7.04	1.25	3
	BT BR/EDR -CH 78-DH5	11.29	9.64	1.65	3
	BT BR/EDR -CH 00-2DH1	9.09	7.72	1.37	3
	BT BR/EDR -CH 39-2DH1	7.19	6.20	0.99	3
	BT BR/EDR -CH 78-2DH1	10.36	8.96	1.40	3
	BT BR/EDR -CH 00-3DH1	8.89	7.56	1.33	3
	BT BR/EDR -CH 39-3DH1	6.95	6.04	0.91	3
	BT BR/EDR -CH 78-3DH1	10.19	8.80	1.39	3
	BLE 1Mbps -CH00	6.49	7.02	0.31	3
	BLE 1Mbps -CH19	7.33	5.88	0.43	3
	BLE 1Mbps -CH39	6.31	6.12	0.43	3
	BLE 2Mbps -CH00	6.55	6.12	0.43	3
	BLE 2Mbps -CH19	7.37	7.05	0.32	3
	BLE 2Mbps -CH39	6.49	6.08	0.41	3
	11b-CH 01	17.18	16.87	0.31	3
	11b-CH 06	20.52	20.28	0.24	3
	11b-CH 11	16.96	16.64	0.32	3
	11g-CH 01	24.5	24.46	0.04	3
	11g-CH 06	24.88	24.42	0.46	3
	11g-CH 11	24.4	23.98	0.42	3
	11n HT20-CH 01	25.15	24.86	0.29	3
	11n HT20-CH 06	25	24.65	0.35	3
	11n HT20-CH 11	24.88	24.53	0.35	3
	11ax HE20-CH 01	24.4	24.08	0.32	3
	11ax HE20-CH 06	24.66	24.35	0.31	3
	11ax HE20-CH 11	24.31	24.02	0.29	3
	11a-CH 36	16.98	16.51	0.47	3
	11a-CH 44	16.91	16.58	0.33	3
	11a-CH 48	16.89	16.49	0.40	3
	11a-CH 52	16.88	16.65	0.23	3
	11a-CH 60	16.96	16.54	0.42	3
	11a-CH 64	16.82	16.59	0.23	3
	11a-CH 100	16.85	16.45	0.40	3
	11a-CH 116	17.06	16.91	0.15	3
	11a-CH 140	12.49	12.45	0.04	3
	11a-CH 149	17.17	16.91	0.26	3
	11a-CH 157	17.29	16.97	0.32	3
	11a-CH 165	17.21	16.92	0.29	3
	11n HT20-CH 36	16.02	15.65	0.37	3
	11n HT20-CH 44	16.00	15.53	0.47	3
	11n HT20-CH 48	15.79	15.32	0.47	3
	11n HT20-CH 52	15.72	15.42	0.30	3
	11n HT20-CH 60	15.87	15.45	0.42	3
	11n HT20-CH 64	15.84	15.51	0.33	3
	11n HT20-CH 100	15.89	15.40	0.49	3
	11n HT20-CH 116	16.13	16.04	0.09	3
	11n HT20-CH 140	11.50	11.48	0.02	3
	11n HT20-CH 149	16.06	16.00	0.06	3
	11n HT20-CH 157	16.26	15.96	0.30	3



11n HT20-CH 165	16.20	16.02	0.18	3
11ac VHT20-CH 36	16.08	15.68	0.40	3
11ac VHT20-CH 44	16.06	15.58	0.48	3
11ac VHT20-CH 48	15.85	15.45	0.40	3
11ac VHT20-CH 52	15.79	15.45	0.34	3
11ac VHT20-CH 60	15.90	15.47	0.43	3
11ac VHT20-CH 64	15.87	15.54	0.33	3
11ac VHT20-CH 100	15.94	15.46	0.48	3
11ac VHT20-CH 116	16.17	16.06	0.11	3
11ac VHT20-CH 140	11.58	11.52	0.06	3
11ac VHT20-CH 149	16.12	16.01	0.11	3
11ac VHT20-CH 157	16.33	15.98	0.35	3
11ac VHT20-CH 165	16.24	16.04	0.20	3
11ax HE20-CH 36	16.18	15.76	0.42	3
11ax HE20-CH 44	16.14	15.67	0.47	3
11ax HE20-CH 48	15.94	15.53	0.41	3
11ax HE20-CH 52	15.86	15.53	0.33	3
11ax HE20-CH 60	16.00	15.57	0.43	3
11ax HE20-CH 64	15.97	15.62	0.35	3
11ax HE20-CH 100	16.06	15.59	0.47	3
11ax HE20-CH 116	16.24	16.13	0.11	3
11ax HE20-CH 140	11.64	11.60	0.04	3
11ax HE20-CH 149	16.24	16.10	0.14	3
11ax HE20-CH 157	16.41	16.06	0.35	3
11ax HE20-CH 165	16.35	16.13	0.22	3
11n HT40-CH 38	14.11	13.65	0.46	3
11n HT40-CH 46	15.06	14.57	0.49	3
11n HT40-CH 54	15.01	14.60	0.41	3
11n HT40-CH 62	14.52	14.20	0.32	3
11n HT40-CH 102	13.80	13.62	0.18	3
11n HT40-CH 110	14.77	14.62	0.15	3
11n HT40-CH 134	15.23	15.06	0.17	3
11n HT40-CH 151	15.32	15.13	0.19	3
11n HT40-CH 159	15.36	15.09	0.27	3
11ac VHT40-CH 38	14.34	14.16	0.18	3
11ac VHT40-CH 46	15.80	15.32	0.48	3
11ac VHT40-CH 54	15.88	15.40	0.48	3
11ac VHT40-CH 62	14.44	14.07	0.37	3
11ac VHT40-CH 102	13.72	13.44	0.28	3
11ac VHT40-CH 110	15.76	15.39	0.37	3
11ac VHT40-CH 134	15.51	15.40	0.11	3
11ac VHT40-CH 151	16.10	15.94	0.16	3
11ac VHT40-CH 159	16.24	15.86	0.38	3
11ax40-CH 38	14.24	13.76	0.48	3
11ax40-CH 46	15.17	14.69	0.48	3
11ax40-CH 54	15.12	14.70	0.42	3
11ax40-CH 62	14.65	14.29	0.36	3
11ax40-CH 102	13.94	13.70	0.24	3
11ax40-CH 110	14.88	14.73	0.15	3
11ax40-CH 134	15.35	15.16	0.19	3
11ax40-CH 151	15.41	15.21	0.20	3
11ax40-CH 159	15.47	15.19	0.28	3
11ac VHT80-CH 042	13.40	12.98	0.42	3
11ac VHT80-CH 058	12.70	12.53	0.17	3
11ac VHT80-CH 106	13.30	13.08	0.22	3



	11ac VHT80-CH 122	14.15	13.86	0.29	3
	11ac VHT80-CH 138	14.01	13.93	0.08	3
	11ac VHT80-CH 155	14.21	13.88	0.33	3
	11ax HE80-CH 042	13.57	13.09	0.48	3
	11ax HE80-CH 058	12.84	12.63	0.21	3
	11ax HE80-CH 106	13.43	13.16	0.27	3
	11ax HE80-CH 122	14.24	13.97	0.27	3
	11ax HE80-CH 138	14.13	14.02	0.11	3
	11ax HE80-CH 155	14.33	13.98	0.35	3

Conducted power/ERP/EIRP for Licensed bands

Test Item	Mode	Bandwidth	Channel	Frequency	Modulation	2AFZZRA29G Parent Worst mode Test Result		2AFZZRA8EG Variant Check Test Result		Deviation (dB)	Deviation Limit (dB)
						Coducted (dBm)	ERP/EIRP (W)	Coducted (dBm)	ERP/EIRP (W)		
Conducted Power /ERP/EIRP	GSM 850	/	128	824.2	GMSK	32.4	1.7378	32.15	1.6406	0.25	3
	GSM 850	/	189	836.4	GMSK	32.46	1.7620	32.26	1.6827	0.2	3
	GSM 850	/	251	848.8	GMSK	32.45	1.7579	32.28	1.6904	0.17	3
	GSM 1900	/	512	1850.2	GMSK	29.31	0.8531	29.12	0.8166	0.19	3
	GSM 1900	/	661	1880	GMSK	29.45	0.8810	29.22	0.8356	0.23	3
	GSM 1900	/	810	1909.8	GMSK	29.43	0.8770	29.18	0.8279	0.25	3
	WCDMA 850	/	4132	826.4	BPSK	24.48	0.2805	24.36	0.2729	0.12	3
	WCDMA 850	/	4182	836.4	BPSK	24.5	0.2818	24.38	0.2742	0.12	3
	WCDMA 850	/	4233	846.6	BPSK	24.44	0.2780	24.29	0.2685	0.15	3
	WCDMA1900	/	9262	1852.4	BPSK	22.91	0.1954	22.85	0.1928	0.06	3
	WCDMA1900	/	9400	1880	BPSK	22.98	0.1986	22.90	0.1950	0.08	3
	WCDMA1900	/	9538	1907.6	BPSK	22.93	0.1963	22.82	0.1914	0.11	3
	WCDMA1700	/	1312	1712.4	BPSK	23.91	0.2460	23.69	0.2339	0.22	3
	WCDMA1700	/	1413	1732.6	BPSK	23.96	0.2489	23.75	0.2371	0.21	3
	WCDMA1700	/	1513	1752.6	BPSK	23.92	0.2466	23.63	0.2307	0.29	3
	B2	20M	18700	1860	QPSK	23.01	0.2000	22.61	0.1824	0.4	3
	B2	20M	18900	1880	QPSK	23.05	0.2018	22.67	0.1849	0.38	3
	B2	20M	19100	1900	QPSK	22.98	0.1986	22.65	0.1841	0.33	3
	B4	20M	20050	1720	QPSK	23.81	0.2404	23.75	0.2371	0.06	3
	B4	20M	20175	1732.5	QPSK	23.86	0.2432	23.80	0.2399	0.06	3
	B4	20M	20300	1745	QPSK	23.83	0.2415	23.72	0.2355	0.11	3
	B66	20M	132072	1720	QPSK	23.83	0.2415	23.68	0.2333	0.15	3
	B66	20M	132322	1745	QPSK	23.94	0.2477	23.73	0.2360	0.21	3
	B66	20M	132572	1770	QPSK	23.93	0.2472	23.65	0.2317	0.28	3
	B7	20M	20850	2510	QPSK	23.68	0.2333	23.64	0.2312	0.04	3
	B7	20M	21100	2535	QPSK	23.75	0.2371	23.68	0.2333	0.07	3
	B7	20M	21350	2560	QPSK	23.66	0.2323	23.61	0.2296	0.05	3
	B7C	20M+20M	20850_21048	2510_2529.8	QPSK	23.24	0.2109	23.22	0.2099	0.02	3
	B7C	20M+20M	21001_21199	2525.1_2544.9	QPSK	23.29	0.2133	23.24	0.2109	0.05	3
	B7C	20M+20M	21152_21350	2540.2_2560	QPSK	23.28	0.2128	23.13	0.2056	0.15	3
	B38	20M	37850	2580	QPSK	23.43	0.2203	23.40	0.2188	0.03	3
	B38	20M	38000	2595	QPSK	23.52	0.2249	23.43	0.2203	0.09	3



	B38	20M	38150	2610	QPSK	23.48	0.2228	23.38	0.2178	0.1	3
	B41	20M	39750	2506	QPSK	23.44	0.2208	23.40	0.2188	0.04	3
	B41	20M	40620	2593	QPSK	23.6	0.2291	23.49	0.2234	0.11	3
	B41	20M	41490	2680	QPSK	23.54	0.2259	23.39	0.2183	0.15	3
	B38C-20M+20M	20M+20M	37850_38048	2580_2599.8	QPSK	23.38	0.2178	23.31	0.2143	0.07	3
	B38C-20M+20M	20M+20M	37901_38099	2585.1_2604.9	QPSK	23.39	0.2183	23.35	0.2163	0.04	3
	B38C-20M+20M	20M+20M	37952_38150	2590.2_2610	QPSK	23.36	0.2168	23.27	0.2123	0.09	3
	B42	20M	42190	3460	QPSK	24.56	0.2858	24.34	0.2716	0.22	3
	B42	20M	42590	3500	QPSK	24.59	0.2877	24.45	0.2786	0.14	3
	B42	20M	42990	3540	QPSK	24.54	0.2844	24.47	0.2799	0.07	3
	B48	20M	55340	3560	QPSK	24.41	0.2761	24.33	0.2710	0.08	3
	B48	20M	55830	3609	QPSK	24.48	0.2805	24.36	0.2729	0.12	3
	B48	20M	56640	3690	QPSK	24.38	0.2742	24.29	0.2685	0.09	3
	N2-L	20M	372000	1860	PI/2 BPSK	22.83	0.1919	22.78	0.1897	0.05	3
	N2-M	20M	376000	1880	PI/2 BPSK	22.78	0.1897	22.72	0.1871	0.06	3
	N2-H	20M	380000	1900	PI/2 BPSK	22.64	0.1837	22.61	0.1824	0.03	3
	N5-L	20M	166800	834	PI/2 BPSK	24.37	0.2735	24.33	0.2710	0.04	3
	N5-M	20M	167300	836.5	PI/2 BPSK	24.46	0.2793	24.41	0.2761	0.05	3
	N5-H	20M	167800	839	PI/2 BPSK	24.4	0.2754	24.28	0.2679	0.12	3
	N7-L	50M	505000	2525	PI/2 BPSK	22.85	0.1928	22.81	0.1910	0.04	3
	N7-M	50M	507000	2535	PI/2 BPSK	23.01	0.2000	22.98	0.1986	0.03	3
	N7-H	50M	509000	2545	PI/2 BPSK	23.3	0.2138	23.13	0.2056	0.17	3
	N38-L	40M	518000	2590	QPSK	23.16	0.2070	23.11	0.2046	0.05	3
	N38-M	40M	519000	2595	QPSK	23.16	0.2070	23.09	0.2037	0.07	3
	N38-H	40M	520000	2600	QPSK	23.18	0.2080	23.15	0.2065	0.03	3
	N41-L	100M	509202	2546.01	QPSK	23.16	0.2070	23.11	0.2046	0.05	3
	N41-M	100M	518598	2592.99	QPSK	23.23	0.2104	23.18	0.2080	0.05	3
	N41-H	100M	528000	2640	QPSK	23.03	0.2009	22.98	0.1986	0.05	3
	N66-L	40M	346000	1730	PI/2 BPSK	24.2	0.2630	24.16	0.2606	0.04	3
	N66-M	40M	349000	1745	PI/2 BPSK	24	0.2512	23.96	0.2489	0.04	3
	N66-H	40M	352000	1760	PI/2 BPSK	24.09	0.2564	24.03	0.2529	0.06	3
	N48-L	40M	638000	3570	PI/2 BPSK	24.23	0.2649	24.14	0.2594	0.09	3
	N48-M	40M	641666	3624.99	PI/2 BPSK	24.58	0.2871	24.48	0.2805	0.1	3
	N48-H	40M	645332	3679.98	PI/2 BPSK	24.15	0.2600	24.10	0.2570	0.05	3
	N77 27O-L	100M	650000	3750	PI/2 BPSK	26.17	0.4140	26.14	0.4111	0.03	3
	N77 27O-M	100M	656000	3840	PI/2 BPSK	26.19	0.4159	26.13	0.4102	0.06	3
	N77 27O-H	100M	662000	3930	PI/2 BPSK	26.4	0.4365	26.31	0.4276	0.09	3
	N78 27O	100M	650000	3750	QPSK	26.31	0.4276	26.27	0.4236	0.04	3
	N77 27Q	100M	633334	3500.01	PI/2 BPSK	26.3	0.4266	26.25	0.4217	0.05	3
	N78 27Q	100M	633334	3500.01	PI/2 BPSK	26.28	0.4246	26.11	0.4083	0.17	3

**Conclusion:**

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 28, 2024~ Oct. 16, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr 17, 2024	Aug. 30, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Aug. 30, 2024	NCR	Conducted (DFS01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;M ax 30dBm	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 15, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 15, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 15, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required.



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 28, 2024~ Oct. 16, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 28, 2024~ Oct. 16, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 18, 2024	Aug. 22, 2024~ Oct. 15, 2024	Aug. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz~18Ghz	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz~18Ghz	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

**03CH03-KS(BT/WIF):****Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.22dB
---	--------

03CH04-KS(WWAN):**Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Jake Zhou	Relative Humidity :	53-58%
		Temperature :	23-26℃





Radiated Spurious Emission Test Modes

Mode	Band	Band	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	Co-location	2.4G WIFI	6	802.11ax HE20	01	2412	MCS0	Full	-
		WWAN	3	Part 96 LTE Band 48 BW=20M					
Mode 2	Co-location	5G U-NII-1	6	802.11ax HE80	42	5210	MCS0	Full	-
		-	6	Bluetooth-LE	38	2478	2Mbps	Full	-
		WWAN	3	Part 96 LTE Band 48 BW=20M					





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE20	01	2389.95	50.83	54.00	-3.17	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	4824.00	44.42	74.00	-29.58	H	PEAK	Pass	Harmonic
2	802.11ax HE80	42	5149.76	50.67	54.00	-3.33	H	AVERAGE	Pass	Band Edge
	802.11ax HE80	42	10420.00	44.50	68.20	-23.70	V	PEAK	Pass	Harmonic
	Bluetooth-LE	38	2485.24	40.48	54.00	-13.52	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	4956.00	46.87	54.00	-7.13	H	AVERAGE	Pass	Harmonic

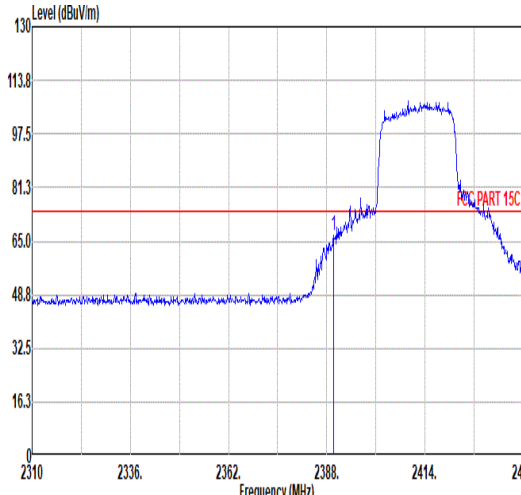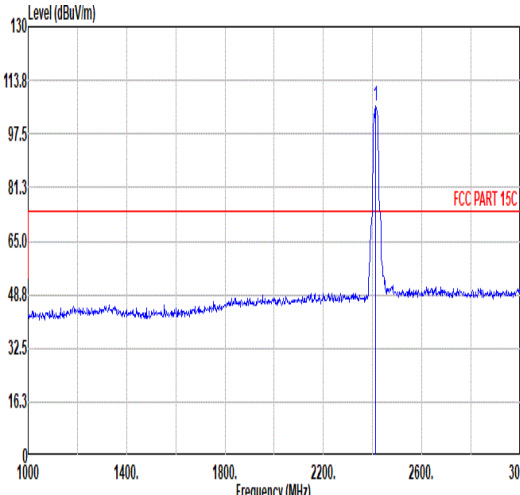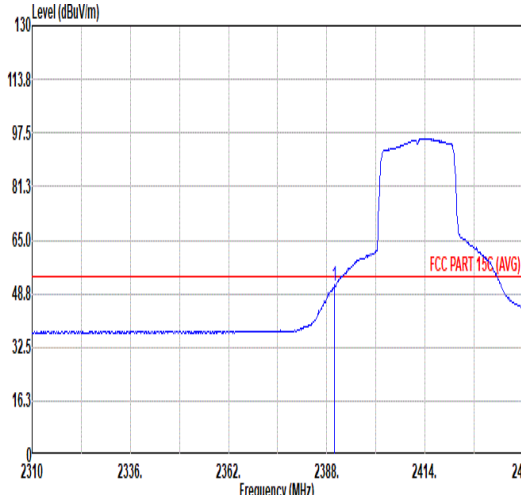
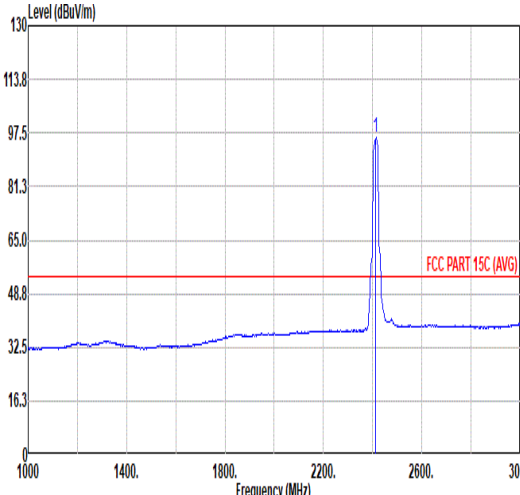


Mode	1																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																																														
ANT	6																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>66.56</td><td>74.00</td><td>-7.44</td><td>58.32</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	66.56	74.00	-7.44	58.32	31.94	7.16	36.86	6.00	206	311	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>105.97</td><td>-----</td><td>-----</td><td>97.49</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.97	-----	-----	97.49	32.14	7.20	36.86	6.00	206	311
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.82	66.56	74.00	-7.44	58.32	31.94	7.16	36.86	6.00	206	311	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	105.97	-----	-----	97.49	32.14	7.20	36.86	6.00	206	311	PEAK																																																																																																			
Avg																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>50.83</td><td>54.00</td><td>-3.17</td><td>42.59</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.83	54.00	-3.17	42.59	31.94	7.16	36.86	6.00	206	311	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.94</td><td>-----</td><td>-----</td><td>87.42</td><td>32.17</td><td>7.21</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.94	-----	-----	87.42	32.17	7.21	36.86	6.00	206	311
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.95	50.83	54.00	-3.17	42.59	31.94	7.16	36.86	6.00	206	311	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	95.94	-----	-----	87.42	32.17	7.21	36.86	6.00	206	311	AVERAGE																																																																																																			

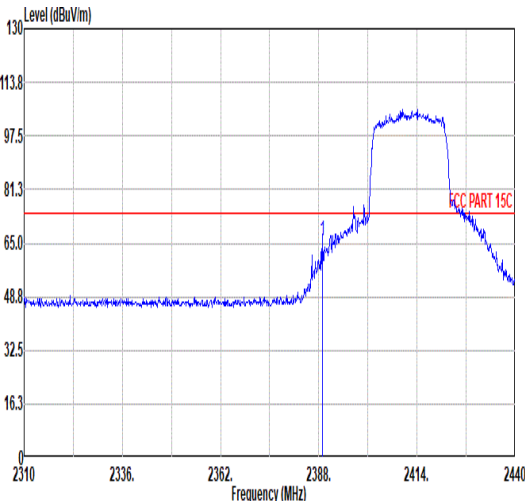
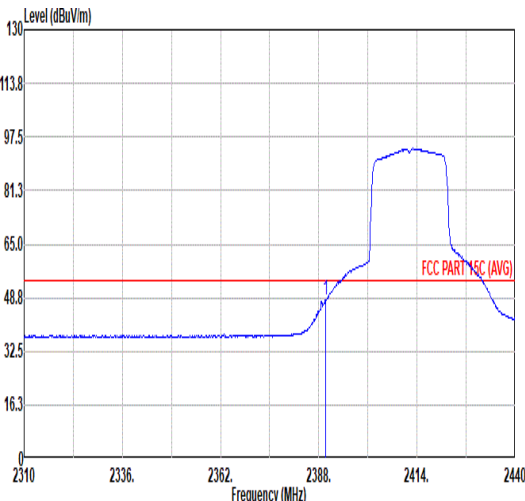
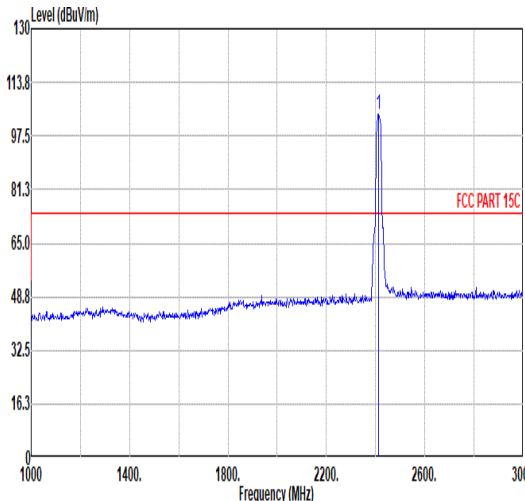
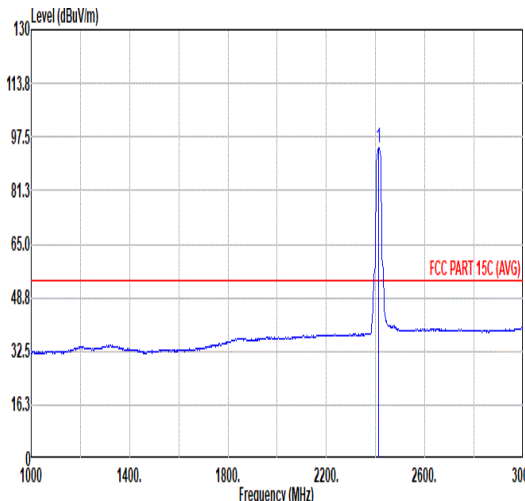


Mode	1																																																						
	Band Edge																																																						
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																						
ANT	6																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>65.71</td><td>74.00</td><td>-8.29</td><td>57.48</td><td>31.93</td><td>7.16</td><td>36.86</td><td>6.00</td><td>312</td><td>52</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	65.71	74.00	-8.29	57.48	31.93	7.16	36.86	6.00	312	52
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2388.91	65.71	74.00	-8.29	57.48	31.93	7.16	36.86	6.00	312	52	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>48.00</td><td>54.00</td><td>-6.00</td><td>39.76</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>312</td><td>52</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	48.00	54.00	-6.00	39.76	31.94	7.16	36.86	6.00	312	52
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.82	48.00	54.00	-6.00	39.76	31.94	7.16	36.86	6.00	312	52	AVERAGE																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.99</td><td>-----</td><td>-----</td><td>95.51</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>312</td><td>52</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.99	-----	-----	95.51	32.14	7.20	36.86	6.00	312	52
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	103.99	-----	-----	95.51	32.14	7.20	36.86	6.00	312	52	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.97</td><td>-----</td><td>-----</td><td>85.49</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>312</td><td>52</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.97	-----	-----	85.49	32.14	7.20	36.86	6.00	312	52
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	93.97	-----	-----	85.49	32.14	7.20	36.86	6.00	312	52	AVERAGE																																											

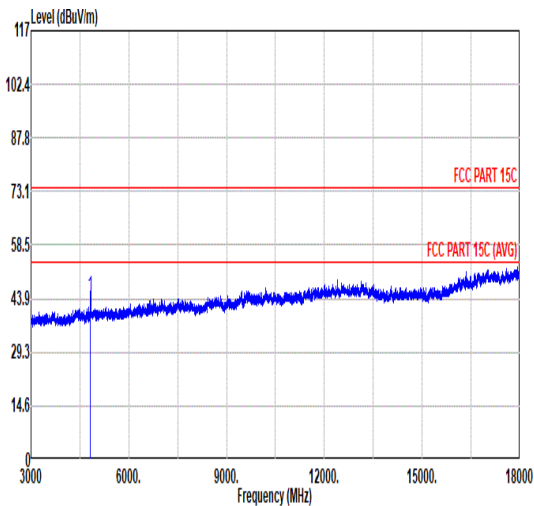
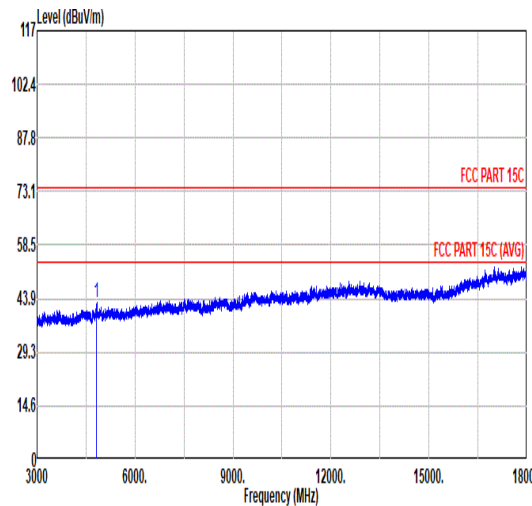


Mode	1																																																																																																							
	Harmonic																																																																																																							
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Horizontal						Vertical																																																																																																	
Peak Avg																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>64.97</td><td>34.40</td><td>10.29</td><td>65.24</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	44.42	74.00	-29.58	64.97	34.40	10.29	65.24	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>43.04</td><td>74.00</td><td>-30.96</td><td>63.59</td><td>34.40</td><td>10.29</td><td>65.24</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	43.04	74.00	-30.96	63.59	34.40	10.29	65.24	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	4824.00	44.42	74.00	-29.58	64.97	34.40	10.29	65.24	0.00	--	--	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	4824.00	43.04	74.00	-30.96	63.59	34.40	10.29	65.24	0.00	--	--	PEAK																																																																																												

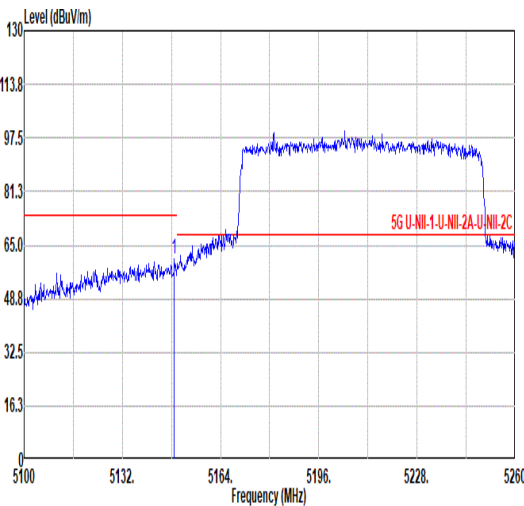
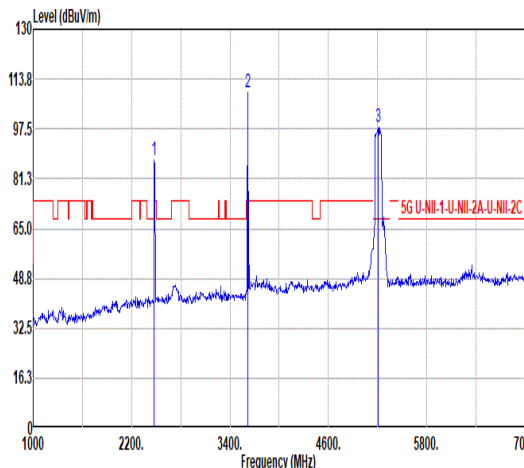
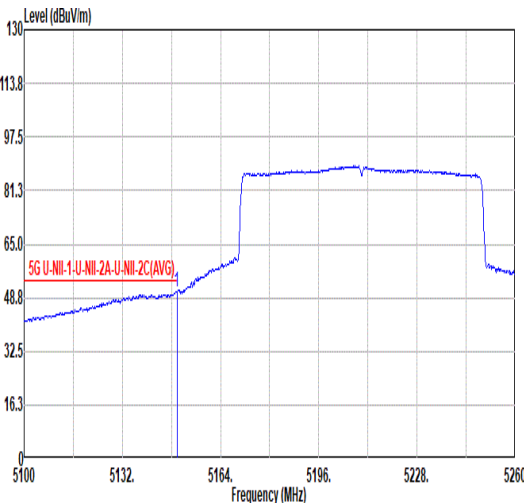
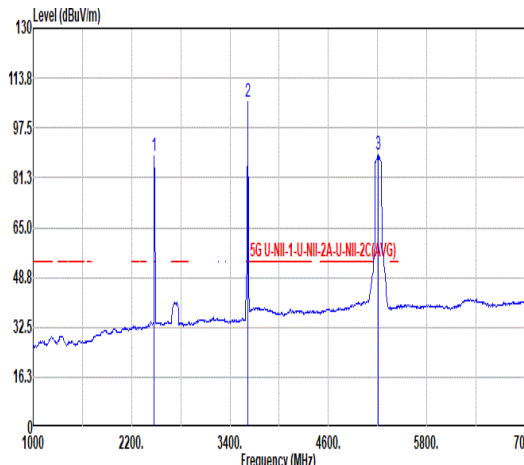


		2																																																																																																																						
Mode		Band Edge - L																																																																																																																						
		U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																																						
ANT		6																																																																																																																						
Pol.		Horizontal					Fundamental																																																																																																																	
Peak																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.96</td><td>60.84</td><td>74.00</td><td>-13.16</td><td>52.93</td><td>34.60</td><td>10.65</td><td>37.34</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.96	60.84	74.00	-13.16	52.93	34.60	10.65	37.34	0.00	101	236	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>87.52</td><td>-----</td><td>84.45</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>101</td><td>236</td><td>Peak</td></tr><tr><td>2</td><td>3616.00</td><td>109.54</td><td>-----</td><td>104.37</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>101</td><td>236</td><td>Peak</td></tr><tr><td>3</td><td>5210.00</td><td>98.23</td><td>-----</td><td>90.15</td><td>34.68</td><td>10.72</td><td>37.32</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	87.52	-----	84.45	32.60	7.32	36.85	0.00	101	236	Peak	2	3616.00	109.54	-----	104.37	32.86	8.89	36.58	0.00	101	236	Peak	3	5210.00	98.23	-----	90.15	34.68	10.72	37.32	0.00	101	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	5148.96	60.84	74.00	-13.16	52.93	34.60	10.65	37.34	0.00	101	236	PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	2476.00	87.52	-----	84.45	32.60	7.32	36.85	0.00	101	236	Peak																																																																																																													
2	3616.00	109.54	-----	104.37	32.86	8.89	36.58	0.00	101	236	Peak																																																																																																													
3	5210.00	98.23	-----	90.15	34.68	10.72	37.32	0.00	101	236	PEAK																																																																																																													
Avg																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>50.67</td><td>54.00</td><td>-3.33</td><td>42.76</td><td>34.60</td><td>10.65</td><td>37.34</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.76	50.67	54.00	-3.33	42.76	34.60	10.65	37.34	0.00	101	236	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>88.52</td><td>-----</td><td>85.45</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>101</td><td>236</td><td>Average</td></tr><tr><td>2</td><td>3616.00</td><td>106.02</td><td>-----</td><td>100.85</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>101</td><td>236</td><td>Average</td></tr><tr><td>3</td><td>5210.00</td><td>88.73</td><td>-----</td><td>80.65</td><td>34.69</td><td>10.71</td><td>37.32</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	88.52	-----	85.45	32.60	7.32	36.85	0.00	101	236	Average	2	3616.00	106.02	-----	100.85	32.86	8.89	36.58	0.00	101	236	Average	3	5210.00	88.73	-----	80.65	34.69	10.71	37.32	0.00	101	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	5149.76	50.67	54.00	-3.33	42.76	34.60	10.65	37.34	0.00	101	236	AVERAGE																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	2476.00	88.52	-----	85.45	32.60	7.32	36.85	0.00	101	236	Average																																																																																																													
2	3616.00	106.02	-----	100.85	32.86	8.89	36.58	0.00	101	236	Average																																																																																																													
3	5210.00	88.73	-----	80.65	34.69	10.71	37.32	0.00	101	236	AVERAGE																																																																																																													

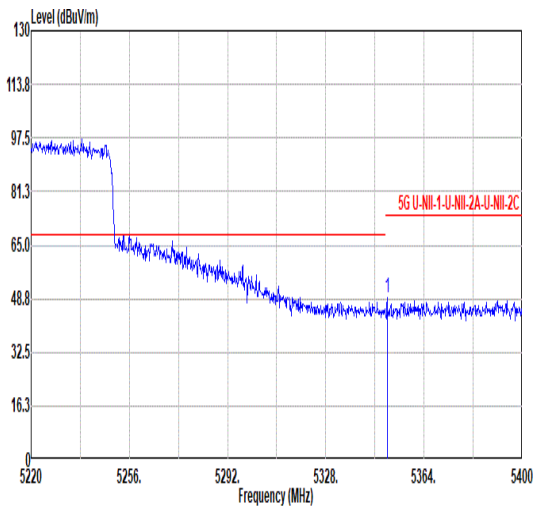
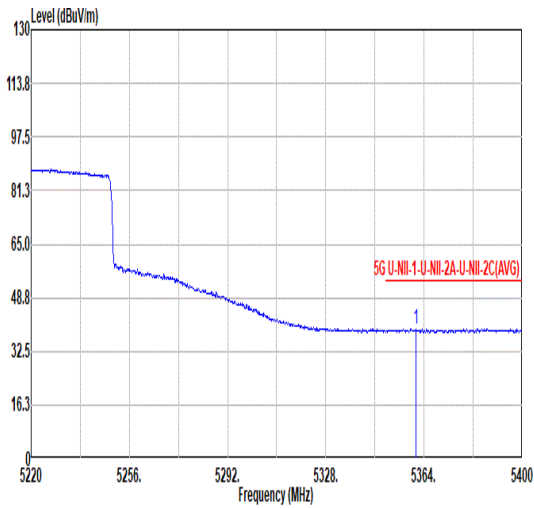


Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																							
ANT	6																																																							
Pol.	Horizontal											Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.50</td><td>49.25</td><td>74.00</td><td>-24.75</td><td>40.90</td><td>34.00</td><td>10.84</td><td>37.29</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.50	49.25	74.00	-24.75	40.90	34.00	10.84	37.29	0.00	101	236	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5350.50	49.25	74.00	-24.75	40.90	34.00	10.84	37.29	0.00	101	236	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5361.12</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>31.02</td><td>34.76</td><td>10.85</td><td>37.29</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5361.12	39.34	54.00	-14.66	31.02	34.76	10.85	37.29	0.00	101	236	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5361.12	39.34	54.00	-14.66	31.02	34.76	10.85	37.29	0.00	101	236	AVERAGE																																												

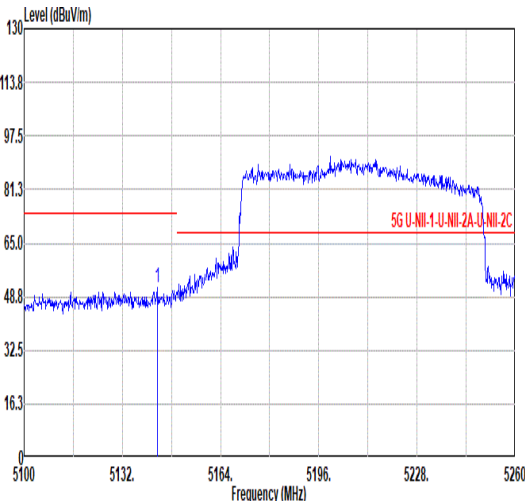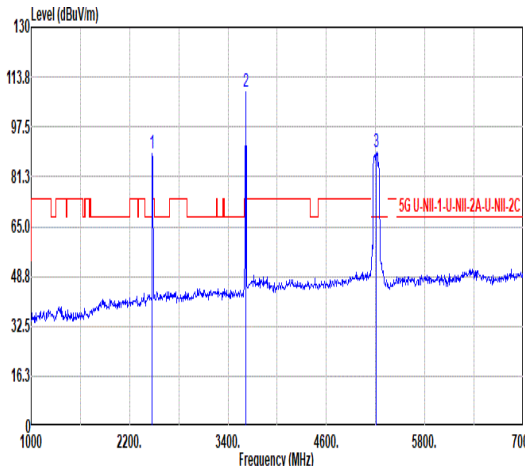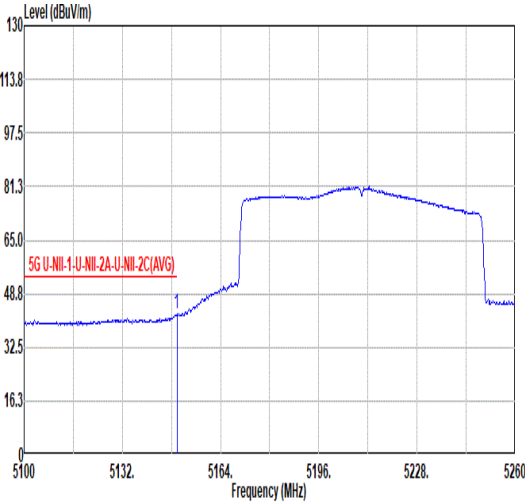
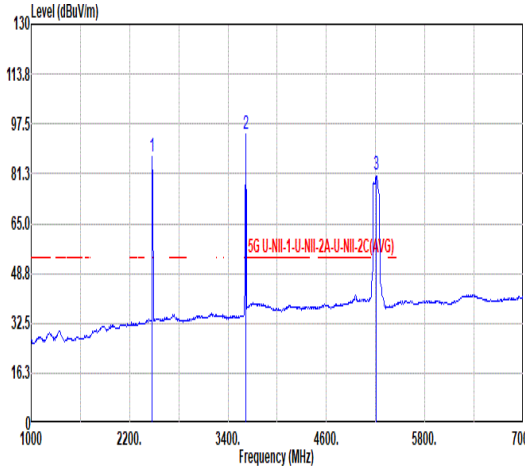


Mode	2																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																											
ANT	6																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>5143.36</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>43.40</td><td>34.63</td><td>10.65</td><td>376</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5143.36	51.34	74.00	-22.66	43.40	34.63	10.65	376	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>88.86</td><td>-----</td><td>85.79</td><td>32.60</td><td>7.32</td><td>36.85</td><td>376</td></tr><tr><td>2</td><td>3616.00</td><td>108.67</td><td>-----</td><td>103.50</td><td>32.86</td><td>8.89</td><td>36.58</td><td>376</td></tr><tr><td>3</td><td>5210.00</td><td>89.32</td><td>-----</td><td>81.24</td><td>34.68</td><td>10.72</td><td>37.32</td><td>376</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2476.00	88.86	-----	85.79	32.60	7.32	36.85	376	2	3616.00	108.67	-----	103.50	32.86	8.89	36.58	376	3	5210.00	89.32	-----	81.24	34.68	10.72	37.32	376
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1	5143.36	51.34	74.00	-22.66	43.40	34.63	10.65	376																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1	2476.00	88.86	-----	85.79	32.60	7.32	36.85	376																																																																																				
2	3616.00	108.67	-----	103.50	32.86	8.89	36.58	376																																																																																				
3	5210.00	89.32	-----	81.24	34.68	10.72	37.32	376																																																																																				
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>34.57</td><td>34.60</td><td>10.65</td><td>376</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5149.76	42.48	54.00	-11.52	34.57	34.60	10.65	376	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>86.75</td><td>-----</td><td>83.68</td><td>32.60</td><td>7.32</td><td>36.85</td><td>376</td></tr><tr><td>2</td><td>3616.00</td><td>94.11</td><td>-----</td><td>88.94</td><td>32.86</td><td>8.89</td><td>36.58</td><td>376</td></tr><tr><td>3</td><td>5210.00</td><td>80.75</td><td>-----</td><td>77.68</td><td>32.60</td><td>7.32</td><td>36.85</td><td>376</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2476.00	86.75	-----	83.68	32.60	7.32	36.85	376	2	3616.00	94.11	-----	88.94	32.86	8.89	36.58	376	3	5210.00	80.75	-----	77.68	32.60	7.32	36.85	376
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1	5149.76	42.48	54.00	-11.52	34.57	34.60	10.65	376																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1	2476.00	86.75	-----	83.68	32.60	7.32	36.85	376																																																																																				
2	3616.00	94.11	-----	88.94	32.86	8.89	36.58	376																																																																																				
3	5210.00	80.75	-----	77.68	32.60	7.32	36.85	376																																																																																				



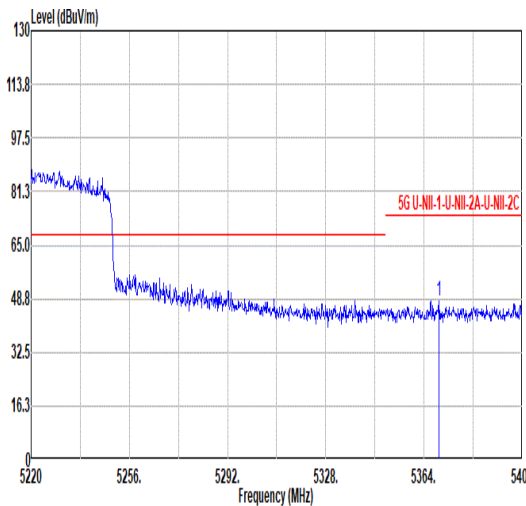
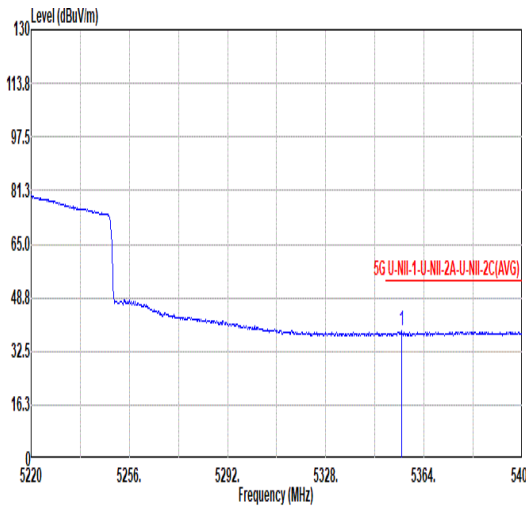


Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																							
ANT	6																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5369.40</td><td>48.08</td><td>74.00</td><td>-25.92</td><td>39.79</td><td>34.72</td><td>10.86</td><td>37.29</td><td>0.00</td><td>376</td><td>116</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5369.40	48.08	74.00	-25.92	39.79	34.72	10.86	37.29	0.00	376	116	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5369.40	48.08	74.00	-25.92	39.79	34.72	10.86	37.29	0.00	376	116	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5355.72</td><td>38.67</td><td>54.00</td><td>-15.33</td><td>30.33</td><td>34.78</td><td>10.85</td><td>37.29</td><td>0.00</td><td>376</td><td>116</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5355.72	38.67	54.00	-15.33	30.33	34.78	10.85	37.29	0.00	376	116	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5355.72	38.67	54.00	-15.33	30.33	34.78	10.85	37.29	0.00	376	116	AVERAGE																																												



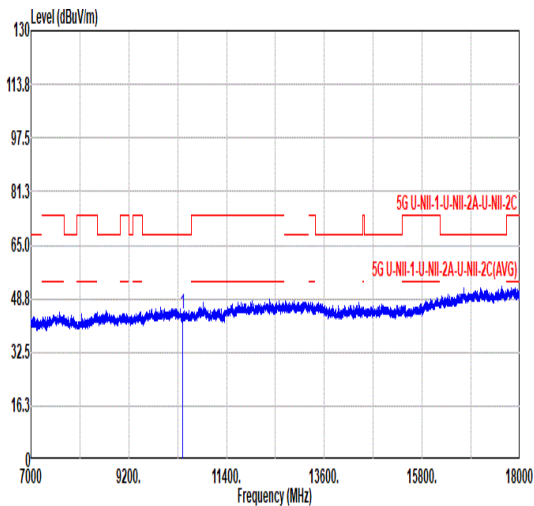
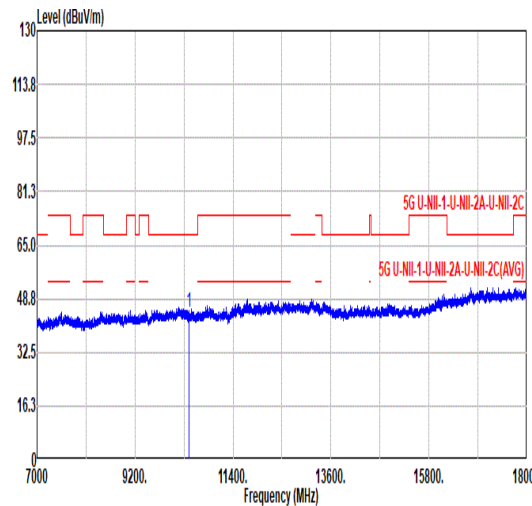


Mode	2																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																
ANT	6																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>44.20</td><td>68.20</td><td>-24.00</td><td>57.82</td><td>37.60</td><td>15.33</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	44.20	68.20	-24.00	57.82	37.60	15.33	66.55	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>44.50</td><td>68.20</td><td>-23.70</td><td>58.09</td><td>37.62</td><td>15.34</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	44.50	68.20	-23.70	58.09	37.62	15.34	66.55	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10420.00	44.20	68.20	-24.00	57.82	37.60	15.33	66.55	0.00	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10420.00	44.50	68.20	-23.70	58.09	37.62	15.34	66.55	0.00	--	PEAK																																																																																						

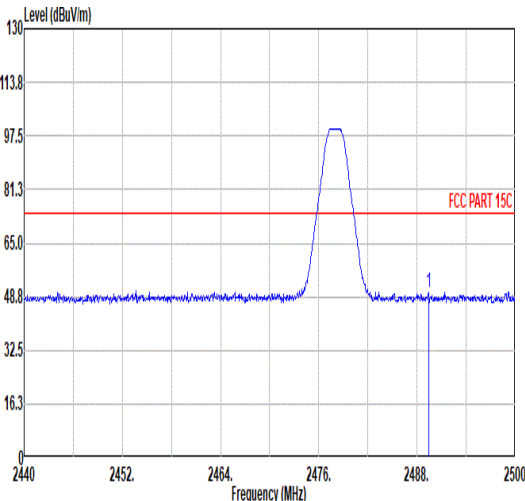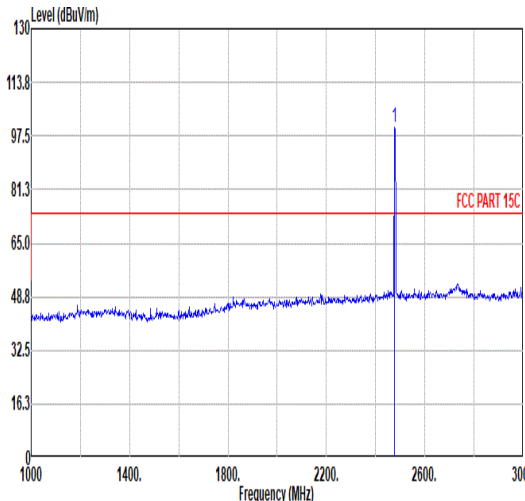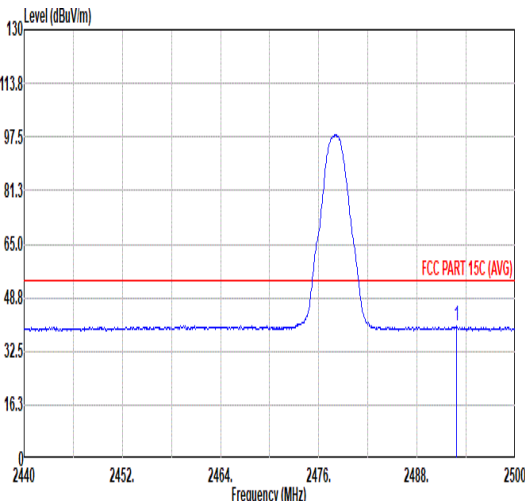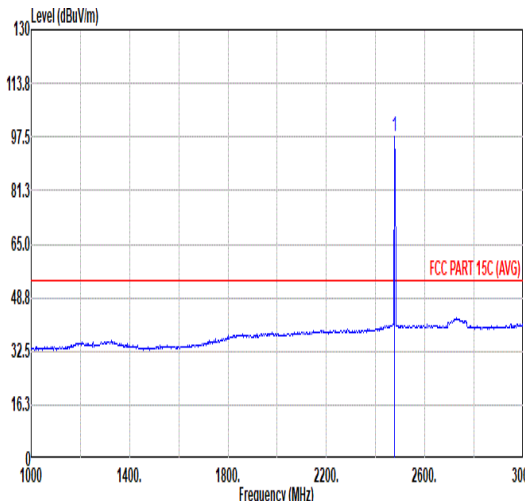

Mode	2																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																																				
ANT	6																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.44</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>41.18</td><td>32.60</td><td>7.34</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.44	50.27	74.00	-23.73	41.18	32.60	7.34	36.85	6.00	163	301	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>100.04</td><td>-----</td><td>-----</td><td>90.97</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2478.00	100.04	-----	-----	90.97	32.60	7.32	36.85	6.00	163	301	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2489.44	50.27	74.00	-23.73	41.18	32.60	7.34	36.85	6.00	163	301	PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2478.00	100.04	-----	-----	90.97	32.60	7.32	36.85	6.00	163	301	PEAK																																																																																									
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.00</td><td>40.02</td><td>54.00</td><td>-13.98</td><td>30.92</td><td>32.60</td><td>7.35</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.00	40.02	54.00	-13.98	30.92	32.60	7.35	36.85	6.00	163	301	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>97.84</td><td>-----</td><td>-----</td><td>88.77</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2478.00	97.84	-----	-----	88.77	32.60	7.32	36.85	6.00	163	301	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2492.00	40.02	54.00	-13.98	30.92	32.60	7.35	36.85	6.00	163	301	AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	2478.00	97.84	-----	-----	88.77	32.60	7.32	36.85	6.00	163	301	AVERAGE																																																																																									

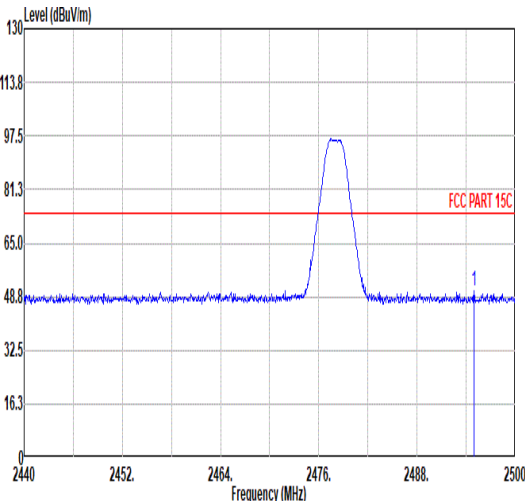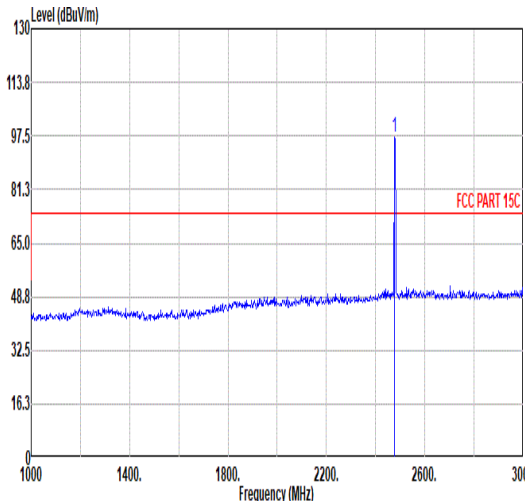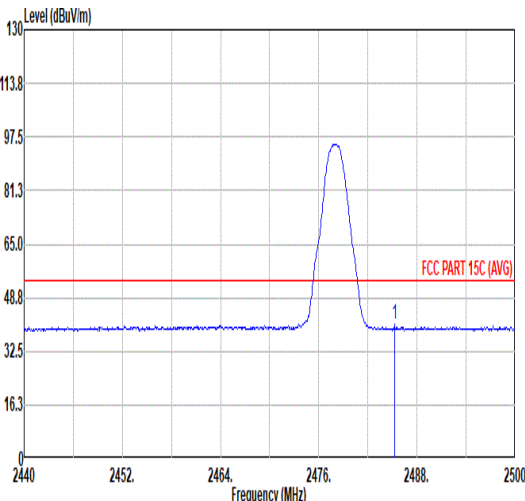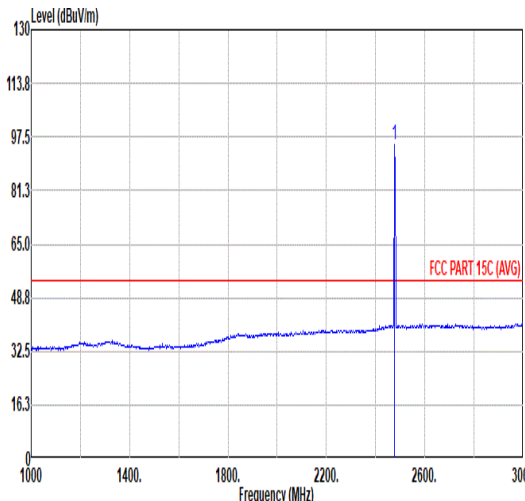

Mode	2																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																																		
ANT	6																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.96</td><td>50.36</td><td>74.00</td><td>-23.64</td><td>41.26</td><td>32.60</td><td>7.35</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.96	50.36	74.00	-23.64	41.26	32.60	7.35	36.85	6.00	303	56	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>97.33</td><td>-----</td><td>-----</td><td>88.26</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	97.33	-----	-----	88.26	32.60	7.32	36.85	6.00	303	56
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2494.96	50.36	74.00	-23.64	41.26	32.60	7.35	36.85	6.00	303	56	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	97.33	-----	-----	88.26	32.60	7.32	36.85	6.00	303	56	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.24</td><td>40.48</td><td>54.00</td><td>-13.52</td><td>31.40</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.24	40.48	54.00	-13.52	31.40	32.60	7.33	36.85	6.00	303	56	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>95.32</td><td>-----</td><td>-----</td><td>86.25</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	95.32	-----	-----	86.25	32.60	7.32	36.85	6.00	303	56
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2485.24	40.48	54.00	-13.52	31.40	32.60	7.33	36.85	6.00	303	56	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	95.32	-----	-----	86.25	32.60	7.32	36.85	6.00	303	56	AVERAGE																																																																																							



Mode	2																																																																																	
	Harmonic																																																																																	
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																	
ANT	6																																																																																	
Pol.	Horizontal						Vertical																																																																											
Peak Avg																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>51.92</td><td>74.00</td><td>-22.08</td><td>72.55</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr><tr><td>2</td><td>4956.00</td><td>46.87</td><td>54.00</td><td>-7.13</td><td>67.50</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>100</td><td>234</td><td>AVERAGE</td></tr><tr><td>3</td><td>5222.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>74.58</td><td>34.66</td><td>10.73</td><td>65.70</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	51.92	74.00	-22.08	72.55	34.56	10.44	65.63	0.00	100	234	PEAK	2	4956.00	46.87	54.00	-7.13	67.50	34.56	10.44	65.63	0.00	100	234	AVERAGE	3	5222.00	54.27	74.00	-19.73	74.58	34.66	10.73	65.70	0.00	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	4956.00	51.92	74.00	-22.08	72.55	34.56	10.44	65.63	0.00	100	234	PEAK																																																																						
2	4956.00	46.87	54.00	-7.13	67.50	34.56	10.44	65.63	0.00	100	234	AVERAGE																																																																						
3	5222.00	54.27	74.00	-19.73	74.58	34.66	10.73	65.70	0.00	--	--	Peak																																																																						
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>46.02</td><td>74.00</td><td>-27.98</td><td>66.65</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>5224.00</td><td>48.44</td><td>74.00</td><td>-25.56</td><td>68.76</td><td>34.65</td><td>10.73</td><td>65.70</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	46.02	74.00	-27.98	66.65	34.56	10.44	65.63	0.00	--	--	PEAK	2	5224.00	48.44	74.00	-25.56	68.76	34.65	10.73	65.70	0.00	--	--	Peak														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	4956.00	46.02	74.00	-27.98	66.65	34.56	10.44	65.63	0.00	--	--	PEAK																																																																						
2	5224.00	48.44	74.00	-25.56	68.76	34.65	10.73	65.70	0.00	--	--	Peak																																																																						

Note: For all plots above, the over limit line signals are Fundamental signal which can be ignored.




LTE Band 48 / 20MHz / QPSK / Ant.5								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7231	-58.82	-40	-18.82	-70.28	2.84	14.30	H
	10850	-56.40	-40	-16.40	-66.34	3.49	13.43	H
	14469	-61.02	-40	-21.02	-71.26	3.85	14.09	H
	7231	-60.93	-40	-20.93	-72.39	2.84	14.30	V
	10850	-49.88	-40	-9.88	-59.82	3.49	13.43	V
	14469	-57.38	-40	-17.38	-67.62	3.85	14.09	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Part 96_ LTE Band 48

ANT 5


Horizontal

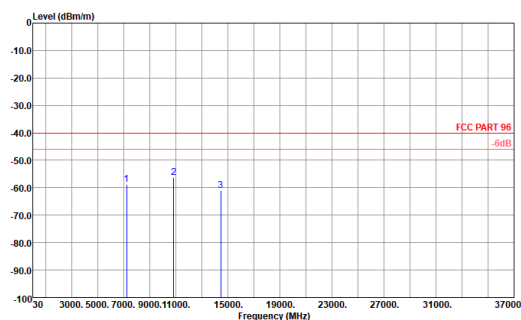

Site : 03CH04-KS
Condition : FCC PART 96 3m HF PART 22/24/27 HORIZONTAL

	Freq	Level	Over	Limit	Read	Pol/Phase
	MHz	dBm/m	Limit	Line	Level	
			dB	dBm/m	dBm	
1	7231.00	-58.82	-18.82	-40.00	-53.06	HORIZONTAL
2	10850.00	-56.40	-16.40	-40.00	-57.88	HORIZONTAL
3	14469.00	-61.02	-21.02	-40.00	-65.52	HORIZONTAL

Vertical

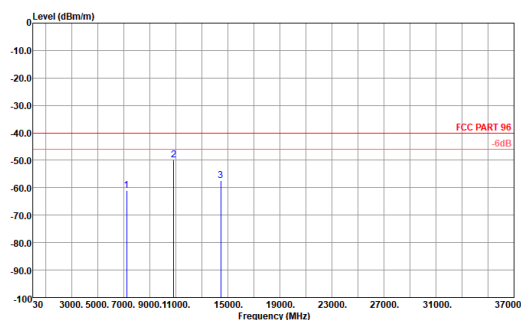

Site : 03CH04-KS
Condition : FCC PART 96 3m HF PART 22/24/27 VERTICAL

	Freq	Level	Over	Limit	Read	Pol/Phase
	MHz	dBm/m	Limit	Line	Level	
			dB	dBm/m	dBm	
1	7231.00	-60.93	-20.93	-40.00	-55.14	VERTICAL
2	10850.00	-49.88	-9.88	-40.00	-51.26	VERTICAL
3	14469.00	-57.38	-17.38	-40.00	-61.87	VERTICAL



Appendix C. Reference Report

FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 24090RA29G
FCC ID : 2AFZZRA29G
STANDARD : 47 CFR Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jul. 23, 2024 ~ Aug. 23, 2024

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT.....	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum EIRP Power and Emission Designator	6
1.7 Testing Site	7
1.8 Test Software	8
1.9 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels.....	11
3 CONDUCTED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup.....	13
3.3 Test Result of Conducted Test.....	13
3.4 Conducted Output Power Measurement	14
3.5 Peak-to-Average Ratio	15
3.6 EIRP	16
3.7 Occupied Bandwidth.....	17
3.8 Conducted Band Edge Measurement	18
3.9 Conducted Spurious Emission Measurement.....	19
3.10 Frequency Stability Measurement.....	20
4 RADIATED TEST ITEMS	21
4.1 Measuring Instruments	21
4.2 Test Setup.....	21
4.3 Test Result of Radiated Test.....	22
4.4 Radiated Spurious Emission Measurement.....	23
5 LIST OF MEASURING EQUIPMENT.....	24
6 MEASUREMENT UNCERTAINTY.....	25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471506N	Rev. 01	Initial issue of report	Aug. 23, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 37.89 dB at 10356.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	24090RA29G
FCC ID	2AFZZRA29G
IMEI Code	Conducted : 861793070041221/861793070041239 Radiation : 861793070039324/861793070039332
HW Version	135300O16
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz 5G NR n78: 3450 MHz ~ 3550 MHz
SCS	30kHz
Bandwidth	n77: 10 / 15 / 20 / 40 / 50 / 60 / 80 / 90 / 100MHz n78: 10 / 15 / 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 2> 5G NR n77: -1.81 dBi 5G NR n78: -1.81 dBi <Ant. 3> 5G NR n77: -0.81 dBi 5G NR n78: -4.71 dBi <Ant. 5> 5G NR n77: -0.6 dBi 5G NR n78: -0.6 dBi <Ant. 7> 5G NR n77: -2 dBi 5G NR n78: -2.94 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of ANT 5 for 5G NR n77/n78 is shown in the report.
2. The device supports n77(1T4R) SRS resources on Antenna 2/3/5/7, only the test data of worst Antenna 5 is showed in the report according to the maximum power.
3. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items.
4. The device supports HPUE mode for 5G NR n77/n78.
5. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n77 SA for SCS 30kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.3639	8M56G7D	0.2904	8M58W7D
15	3457.50 ~ 3542.49	0.3589	13M5G7D	0.2938	13M6W7D
20	3460.02 ~ 3540.00	0.3614	18M2G7D	0.2931	18M2W7D
40	3470.01 ~ 3529.98	0.3565	37M8G7D	0.2911	37M9W7D
50	3475.02 ~ 3525.00	0.3664	47M5G7D	0.3013	47M5W7D
60	3480.00 ~ 3519.99	0.3681	57M9G7D	0.3055	57M9W7D
80	3490.02 ~ 3510.00	0.3540	77M5G7D	0.2917	77M4W7D
90	3495.00 ~ 3504.99	0.3540	87M4G7D	0.2917	87M6W7D
100	3500.01	0.3715	97M6G7D	0.2831	97M4W7D

5G NR n78 SA for SCS 30kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.3648	8M56G7D	0.2979	8M58W7D
15	3457.50 ~ 3542.49	0.3673	13M5G7D	0.2985	13M6W7D
20	3460.02 ~ 3540.00	0.3648	18M2G7D	0.2965	18M2W7D
30	3465.00 ~ 3534.99	0.3656	27M8G7D	0.2979	27M9W7D
40	3470.01 ~ 3529.98	0.3622	37M8G7D	0.2938	37M9W7D
50	3475.02 ~ 3525.00	0.3648	47M5G7D	0.3069	47M5W7D
60	3480.00 ~ 3519.99	0.3597	57M9G7D	0.3048	57M9W7D
70	3485.01 ~ 3514.98	0.3606	67M5G7D	0.2917	67M5W7D
80	3490.02 ~ 3510.00	0.3581	77M5G7D	0.2944	77M4W7D
90	3495.00 ~ 3504.99	0.3524	87M4G7D	0.2864	87M6W7D
100	3500.01	0.3698	97M6G7D	0.2851	97M4W7D

Note:

- 5G NR n77 overlaps the entire frequency range of 5G NR n78, and n77 power > n78 power. Therefore, the conducted test results of n77 provided in this report cover n78, except the 30M and 70M BW of n78 are additional test.
- All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH04-KS	AUDIX	E3	210616

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	5G NR	Bandwidth (MHz)											Modulation					RB #			Test Channel			
		10	15	20	25	30	40	50	60	70	80~90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Partial	Full	L	M	H	
Max. Output Power	n77	v	v	v	-	-	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	
	n78	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Peak-to-Ave rage Ratio	n77			v	-	-				-			v	v				v		v		v		
	n78				-	v							v	v				v		v		v		
26dB and 99% Bandwidth	n77	v	v	v	-	-	v	v	v	-	v	v		v	v	v	v			v		v		
	n78				-	v				v				v	v	v	v			v		v		
Conducted Band Edge	n77	v			-	-		v		-		v	v	v				v		v	v		v	
	n78				-	v				v			v	v				v		v	v		v	
Conducted Spurious Emission	n77	v			-	-		v		-		v	v	v				v			v	v	v	
	n78				-	v				v			v	v				v			v	v	v	
Frequency Stability	n77			v	-	-				-				v						v		v		
	n78				-	v								v						v		v		
E.I.R.P	n77	v	v	v	-	-	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	
	n78	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n77	Worst Case																				v		
	n78	Worst Case																				v		
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.91V; Low Voltage =3.6V; High Voltage =4.3V.																							

2.2 Connection Diagram of Test System

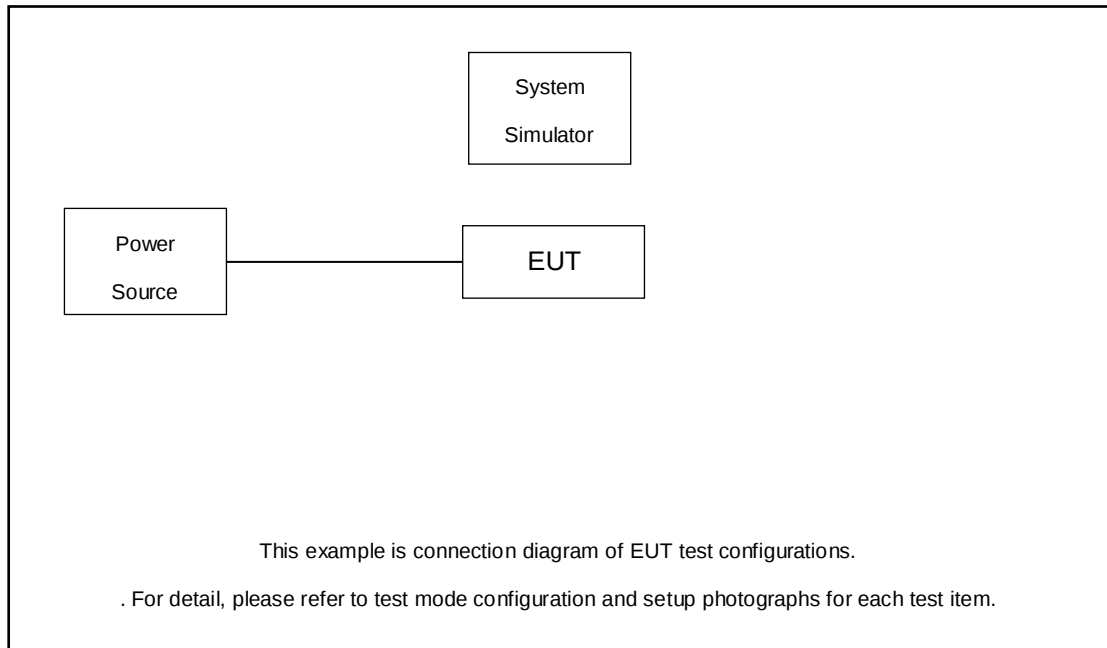

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.5 dB and 20dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 6.5 + 20 = 26.5 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98

5G n78 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

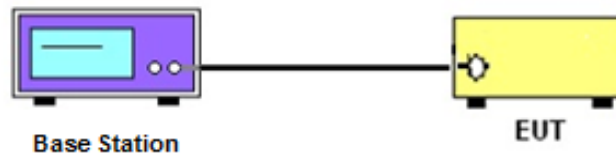

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

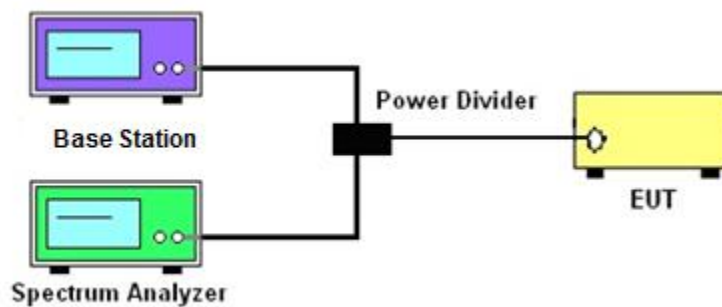

3.2.3 Frequency Stability

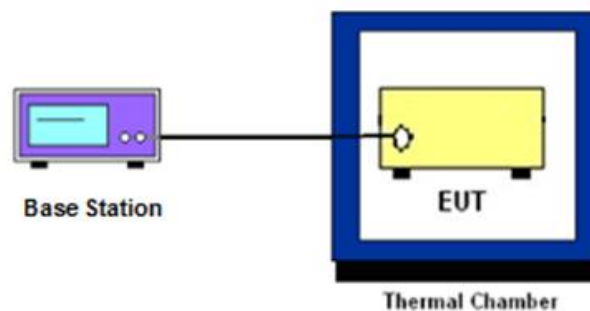

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10^{th} harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

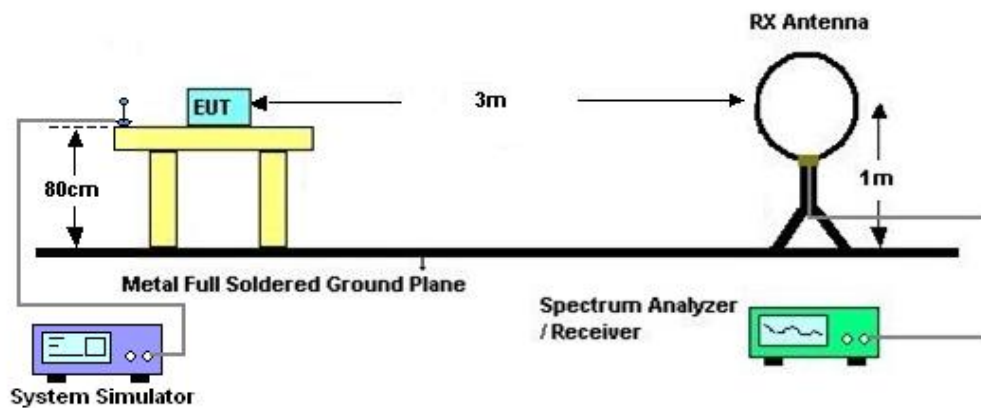

4.2.2 For radiated test from 30MHz to 1GHz

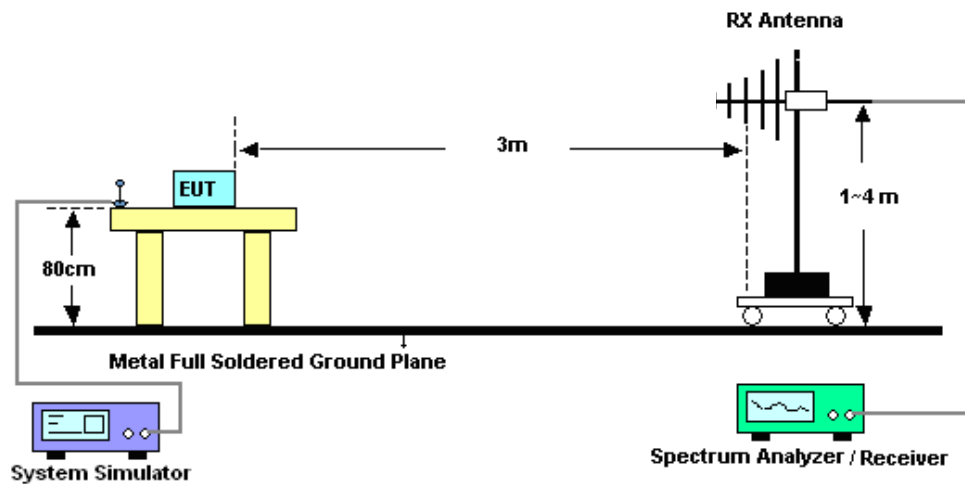

4.2.3 For radiated test above 1GHz

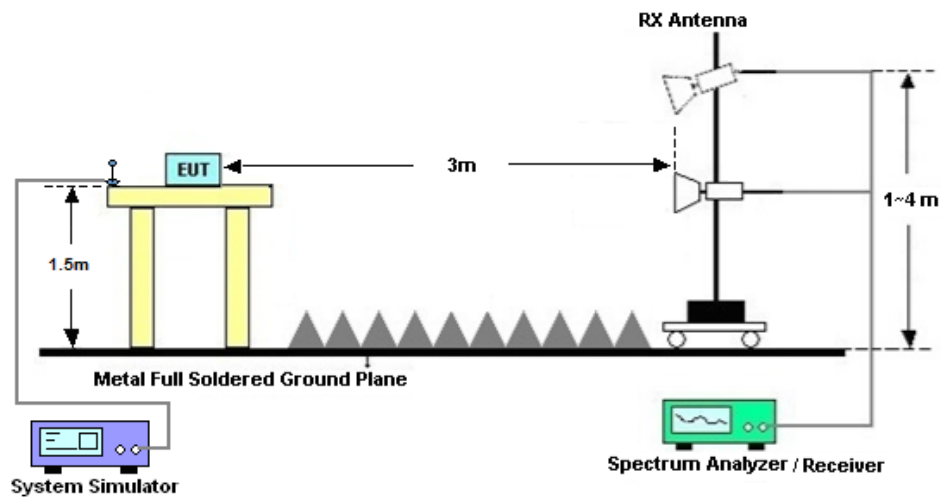

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 25, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jul. 25, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jul. 25, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 11, 2023	Jul. 23, 2024~ Aug. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11 2023	Jul. 23, 2024~ Aug. 23, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	Apr. 18, 2024	Jul. 23, 2024~ Aug. 23, 2024	Apr. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Jul. 23, 2024~ Aug. 23, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Jul. 23, 2024~ Aug. 23, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Jul. 23, 2024~ Aug. 23, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Jul. 23, 2024~ Aug. 23, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 11, 2023	Jul. 23, 2024~ Aug. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz-18Ghz	Oct. 11, 2023	Jul. 23, 2024~ Aug. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 23, 2024~ Aug. 23, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 23, 2024~ Aug. 23, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 23, 2024~ Aug. 23, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.46 dB
Frequency Stability	± 0.4 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.83dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.83dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.82dB
--	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N77_ANT5

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-0.6dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP(W)
77	30	10	630334	3455.01	DFT-s-OFDM PI/2 BPSK	1@1	25.79	25.19	0.3304
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	25.88	25.28	0.3373
77	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	24.9	24.3	0.2692
77	30	10	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.11	25.51	0.3556
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.21	25.61	0.3639
77	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.23	24.63	0.2904
77	30	10	636332	3544.98	DFT-s-OFDM PI/2 BPSK	1@1	26.11	25.51	0.3556
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	26.11	25.51	0.3556
77	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	25.21	24.61	0.2891
77	30	15	630500	3457.5	DFT-s-OFDM PI/2 BPSK	1@1	25.82	25.22	0.3327
77	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	25.86	25.26	0.3357
77	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	25	24.4	0.2754
77	30	15	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.13	25.53	0.3573
77	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.15	25.55	0.3589
77	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.28	24.68	0.2938
77	30	15	636166	3542.49	DFT-s-OFDM PI/2 BPSK	1@1	26.08	25.48	0.3532
77	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	26.12	25.52	0.3565
77	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	25.24	24.64	0.2911
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@1	25.84	25.24	0.3342
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	25.89	25.29	0.3381
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	24.93	24.33	0.2710
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.12	25.52	0.3565
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.18	25.58	0.3614
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.27	24.67	0.2931
77	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@1	26.07	25.47	0.3524
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	26.09	25.49	0.3540
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	25.25	24.65	0.2917
77	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@1	25.81	25.21	0.3319
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	25.86	25.26	0.3357
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	24.99	24.39	0.2748
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.92	25.32	0.3404
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	26	25.4	0.3467
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.15	24.55	0.2851
77	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@1	26.06	25.46	0.3516
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	26.12	25.52	0.3565
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	25.24	24.64	0.2911
77	30	50	631668	3475.02	DFT-s-OFDM PI/2 BPSK	1@1	25.81	25.21	0.3319



77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	25.82	25.22	0.3327
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	24.93	24.33	0.2710
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.94	25.34	0.3420
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.97	25.37	0.3443
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.09	24.49	0.2812
77	30	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@1	26.21	25.61	0.3639
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	26.24	25.64	0.3664
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	25.39	24.79	0.3013
77	30	60	632000	3480	DFT-s-OFDM PI/2 BPSK	1@1	25.84	25.24	0.3342
77	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	25.87	25.27	0.3365
77	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	25	24.4	0.2754
77	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.92	25.32	0.3404
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.02	25.42	0.3483
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.05	24.45	0.2786
77	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	1@1	26.2	25.6	0.3631
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	26.26	25.66	0.3681
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	25.45	24.85	0.3055
77	30	80	632668	3490.02	DFT-s-OFDM PI/2 BPSK	1@1	26.03	25.43	0.3491
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	26.07	25.47	0.3524
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	25.12	24.52	0.2831
77	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.06	25.46	0.3516
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.08	25.48	0.3532
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.25	24.65	0.2917
77	30	80	634000	3510	DFT-s-OFDM PI/2 BPSK	1@1	26.07	25.47	0.3524
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	26.09	25.49	0.3540
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	25.22	24.62	0.2897
77	30	90	633000	3495	DFT-s-OFDM PI/2 BPSK	1@1	25.98	25.38	0.3451
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	26.03	25.43	0.3491
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	25.16	24.56	0.2858
77	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26	25.4	0.3467
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.06	25.46	0.3516
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.2	24.6	0.2884
77	30	90	633666	3504.99	DFT-s-OFDM PI/2 BPSK	1@1	26.07	25.47	0.3524
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	26.09	25.49	0.3540
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	25.25	24.65	0.2917
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	26.3	25.7	0.3715
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.99	25.39	0.3459
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	25.9	25.3	0.3388
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	26.15	25.55	0.3589
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.06	25.46	0.3516
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	25.89	25.29	0.3381
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	25.12	24.52	0.2831
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.08	24.48	0.2805
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	25.02	24.42	0.2767
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	23.62	23.02	0.2004



77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	23.82	23.22	0.2099
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	23.66	23.06	0.2023
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	21.74	21.14	0.1300
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	21.54	20.94	0.1242
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	21.41	20.81	0.1205
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	24.55	23.95	0.2483
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	24.59	23.99	0.2506
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	24.52	23.92	0.2466



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0022	PASS	NV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0019	PASS	LV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0035	PASS	HV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0041	PASS	-30℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0057	PASS	-20℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0016	PASS	-10℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0024	PASS	0℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.034	PASS	10℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0052	PASS	20℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0055	PASS	30℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0091	PASS	40℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0057	PASS	50℃

**Peak to Average Ratio**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	4.4	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	4.18	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	5.57	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	5.78	13	PASS



N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH



N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH



N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH



**Occupied Bandwidth**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	633334	3500.01	CP-OFDM QPSK	24@0	8.5642	9.303
77	30	10	633334	3500.01	CP-OFDM 16 QAM	24@0	8.5776	9.005
77	30	10	633334	3500.01	CP-OFDM 64 QAM	24@0	8.5325	9.076
77	30	10	633334	3500.01	CP-OFDM 256 QAM	24@0	8.5846	9.108
77	30	15	633334	3500.01	CP-OFDM QPSK	38@0	13.516	14.26
77	30	15	633334	3500.01	CP-OFDM 16 QAM	38@0	13.594	14.21
77	30	15	633334	3500.01	CP-OFDM 64 QAM	38@0	13.609	14.3
77	30	15	633334	3500.01	CP-OFDM 256 QAM	38@0	13.57	14.26
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.214	19.08
77	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.191	18.98
77	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.178	18.97
77	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.136	18.82
77	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.845	39.19
77	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.886	39.31
77	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.799	39.4
77	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.858	39.27
77	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.454	49.11
77	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.548	48.99
77	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.487	48.97
77	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.426	49.02
77	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.862	59.65
77	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.835	59.69
77	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.864	59.69
77	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.822	59.74




77	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.517	79.93
77	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.216	79.85
77	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.196	79.93
77	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.422	80.0
77	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.36	90.16
77	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.542	90.27
77	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.587	90.13
77	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.406	90.22
77	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.573	100.5
77	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.324	100.4
77	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.26	100.5
77	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.408	100.5




N77(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

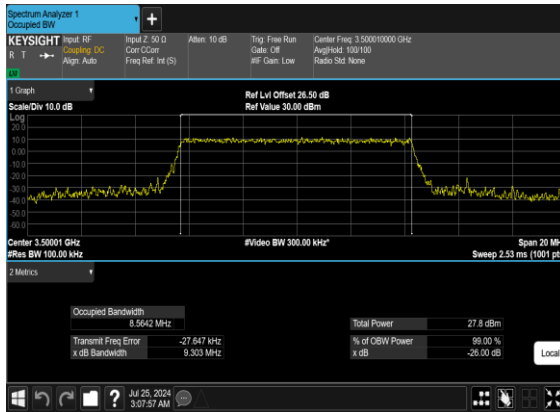


N77(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

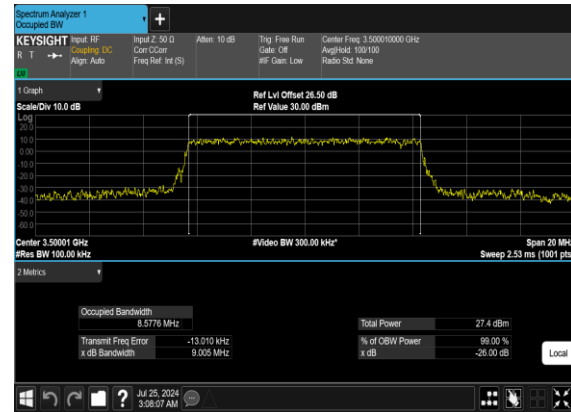

N77(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

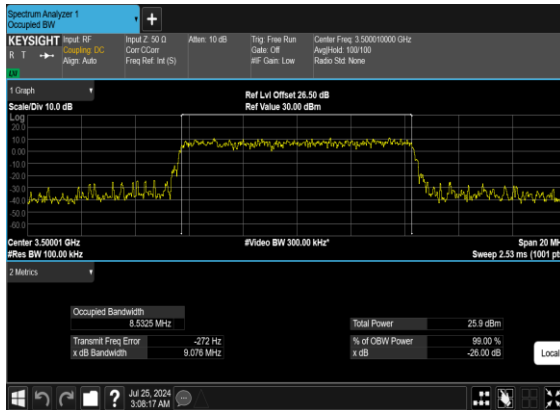


N77(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

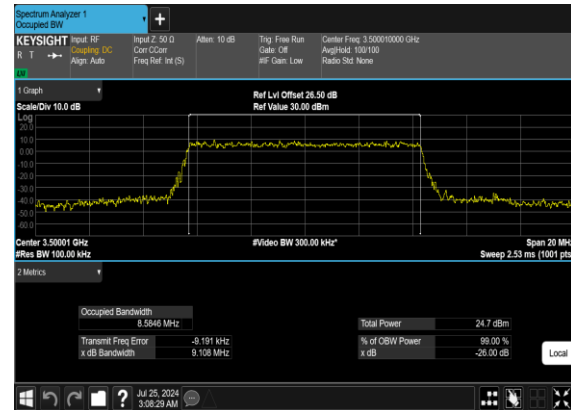





N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

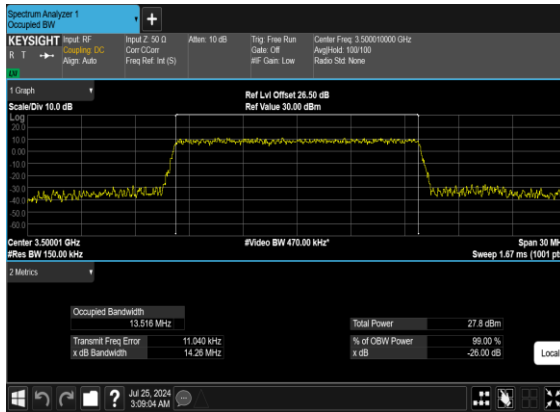


N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

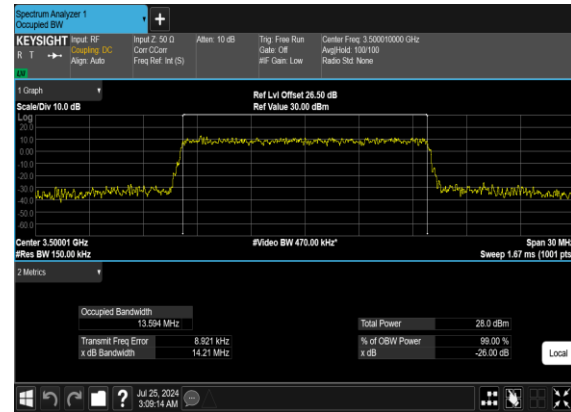

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

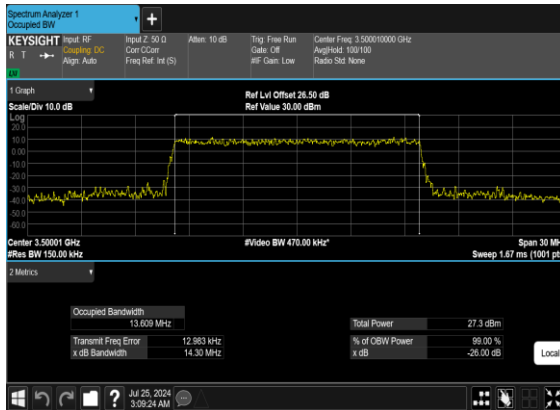


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

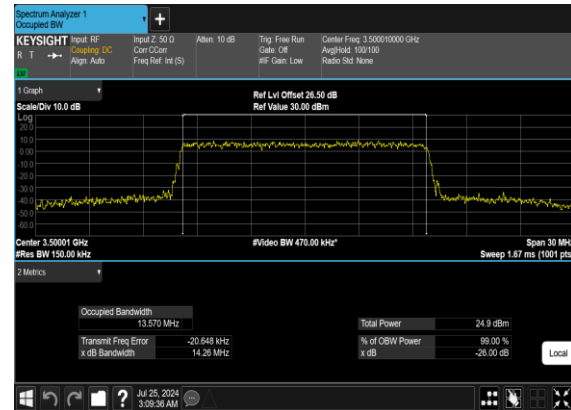





N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

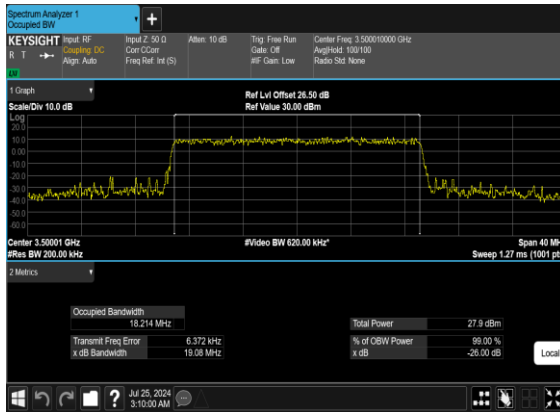


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

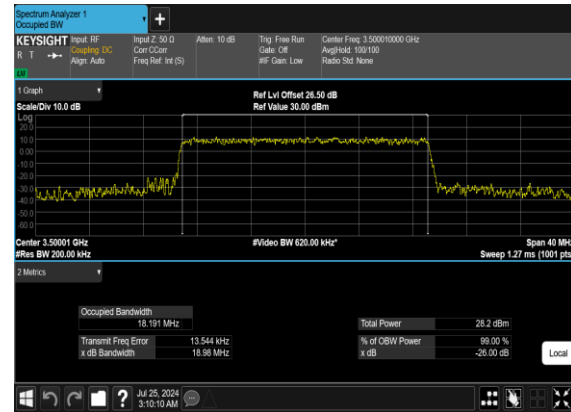

N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

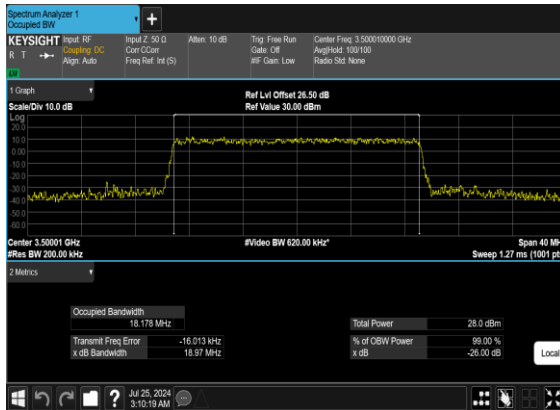


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

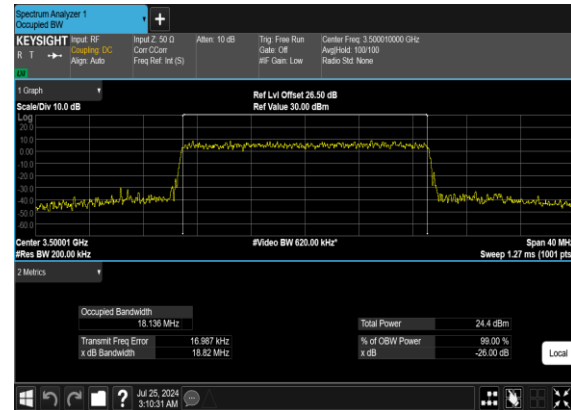





N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

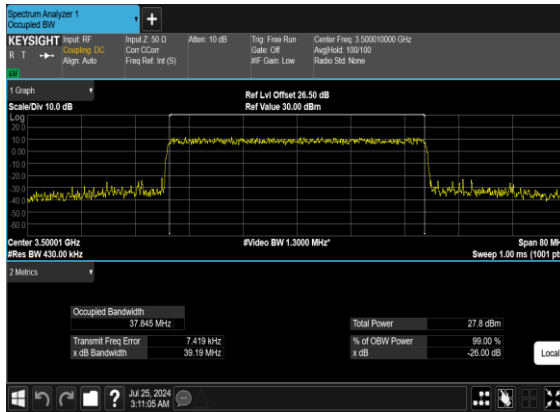


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

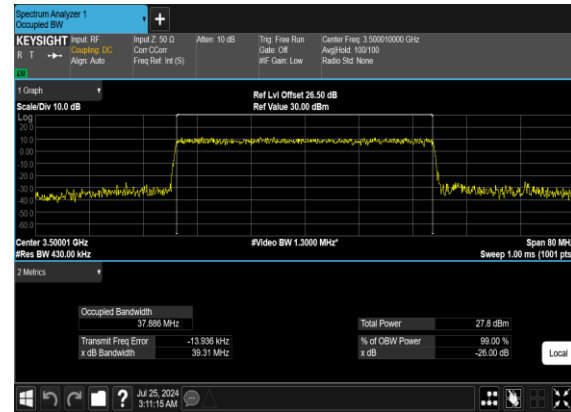

N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

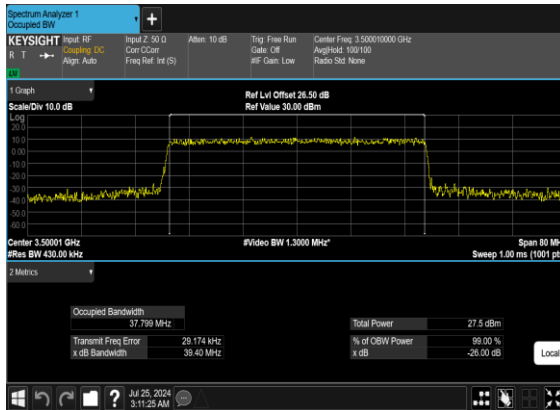


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

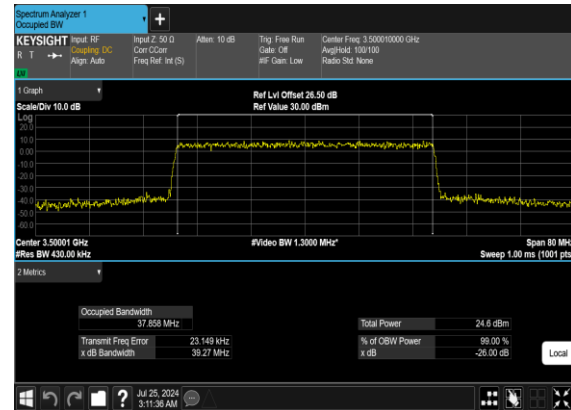





N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

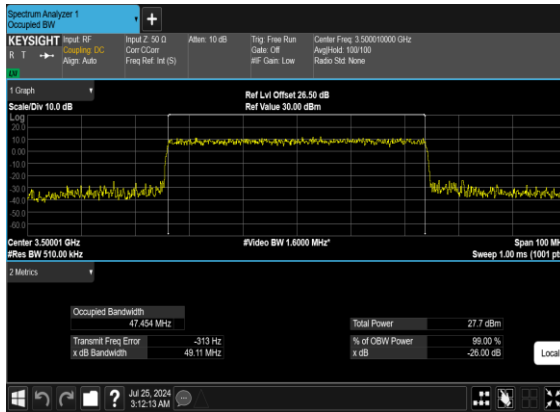


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

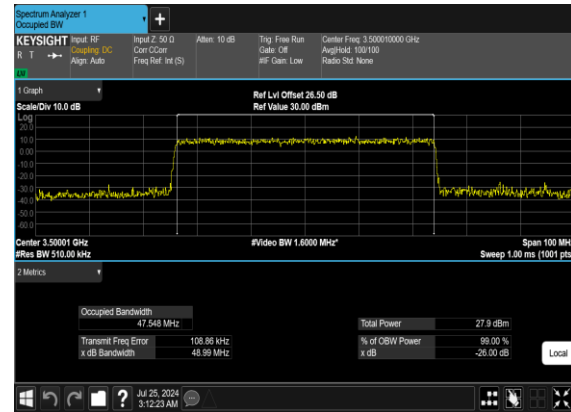

N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

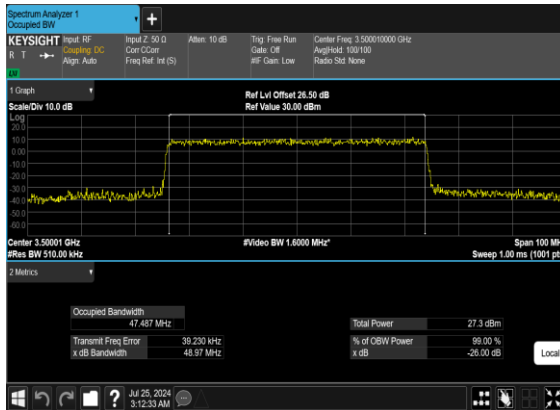


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

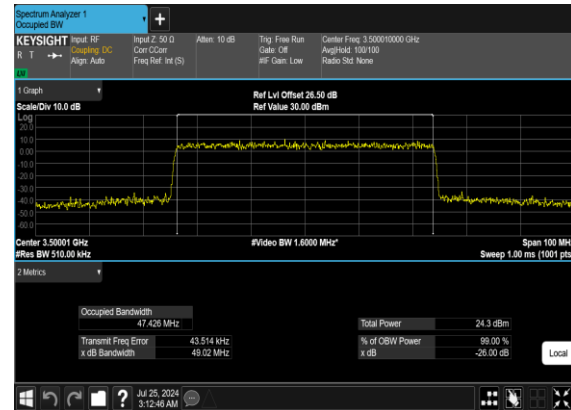





N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

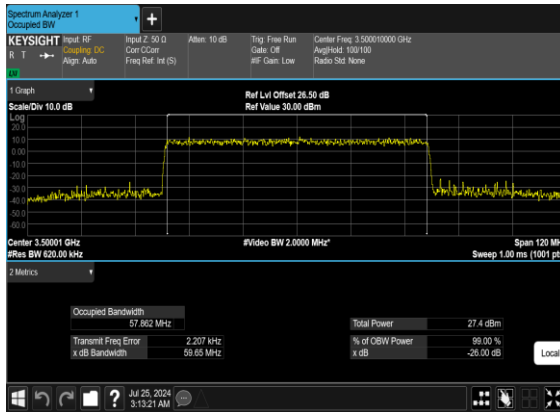


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

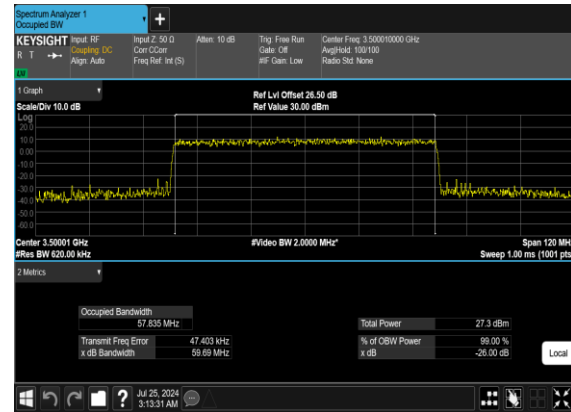

N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

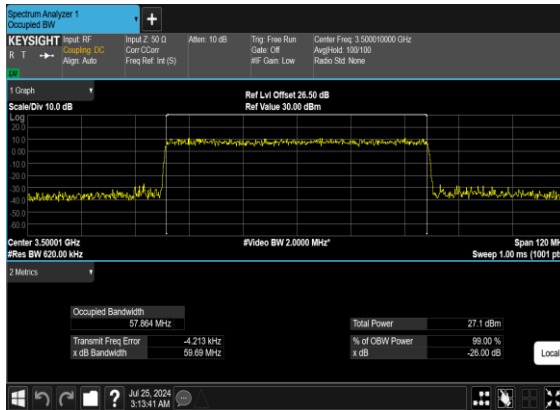


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

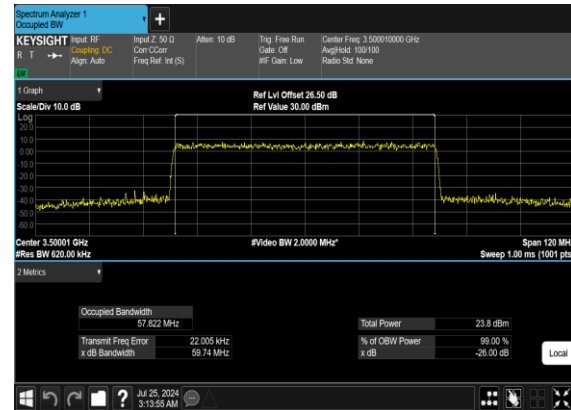





N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

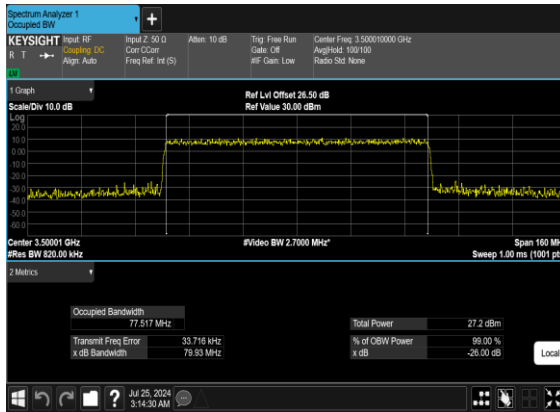


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

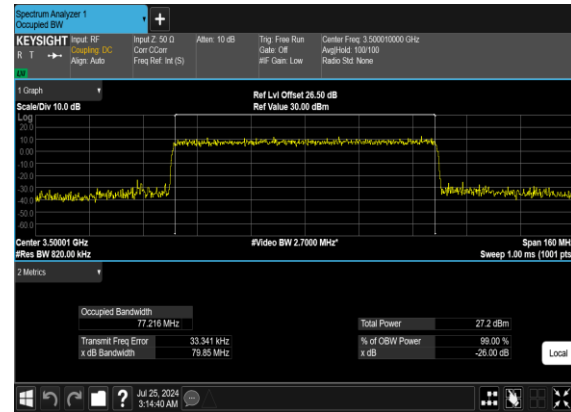

N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

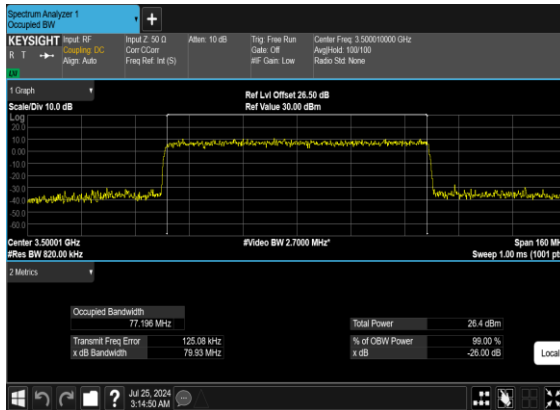


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

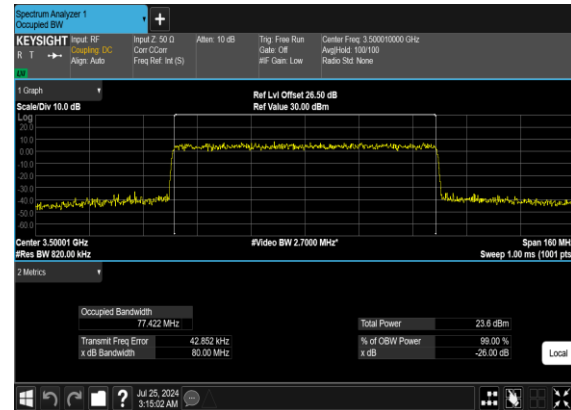





N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

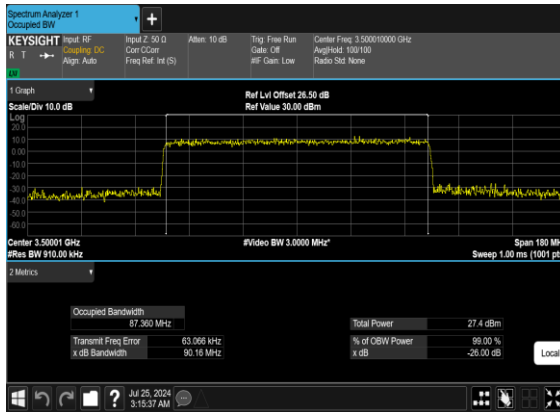


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

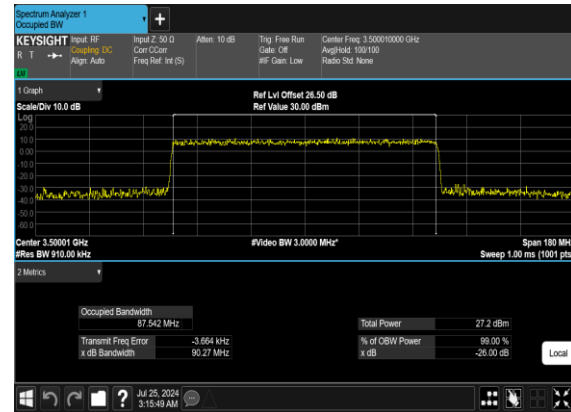

N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

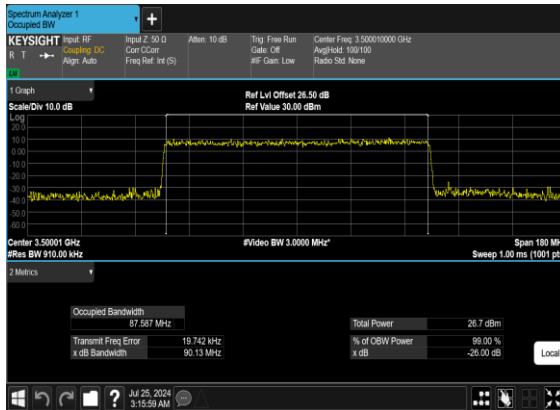


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

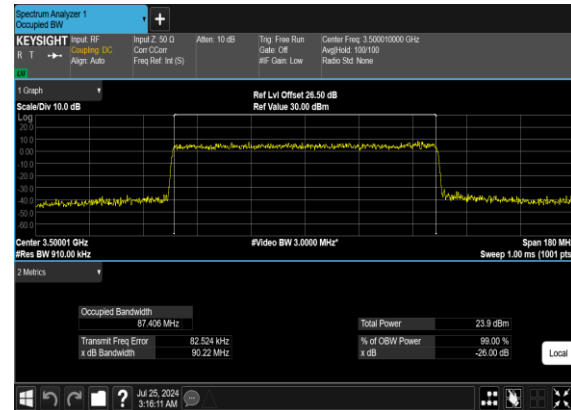





N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

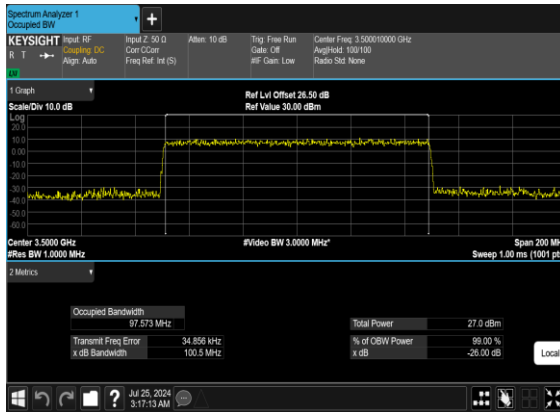


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

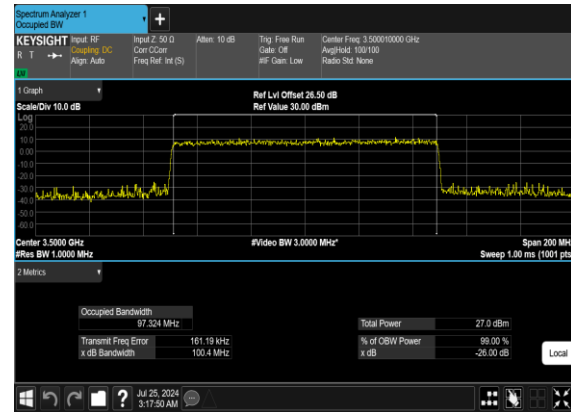

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

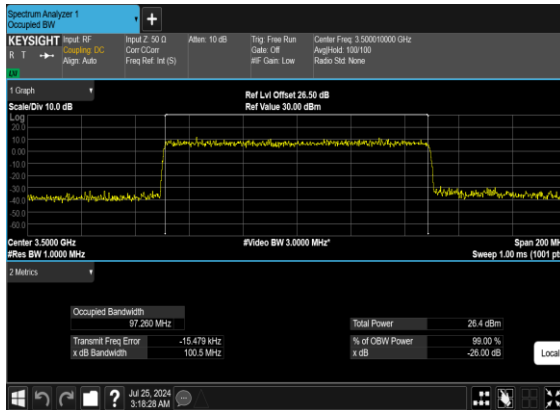

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

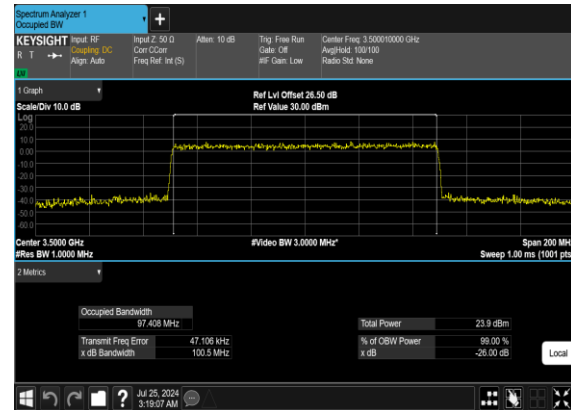

**Conducted Spurious Emissions**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	630334	3455.01	DFT-s-OFDM	1@0	see graph	---
77	30	10	630334	3455.01	BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM	1@0	see graph	PASS
77	30	10	630334	3455.01	BPSK	1@0	see graph	---
77	30	10	630334	3455.01	DFT-s-OFDM	1@0	see graph	PASS
77	30	10	630334	3455.01	QPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM	1@0	see graph	PASS
77	30	10	630334	3455.01	QPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM	1@0	see graph	---
77	30	10	633334	3500.01	BPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM	1@0	see graph	PASS
77	30	10	633334	3500.01	BPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM	1@0	see graph	---
77	30	10	633334	3500.01	QPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM	1@0	see graph	PASS
77	30	10	633334	3500.01	QPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM	1@0	see graph	---
77	30	10	636332	3544.98	BPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM	1@0	see graph	PASS
77	30	10	636332	3544.98	BPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM	1@0	see graph	---
77	30	10	636332	3544.98	QPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM	1@0	see graph	PASS
77	30	10	636332	3544.98	QPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM	1@0	see graph	---
77	30	50	631668	3475.02	BPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM	1@0	see graph	PASS
77	30	50	631668	3475.02	BPSK	1@0	see graph	PASS




77	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS




N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

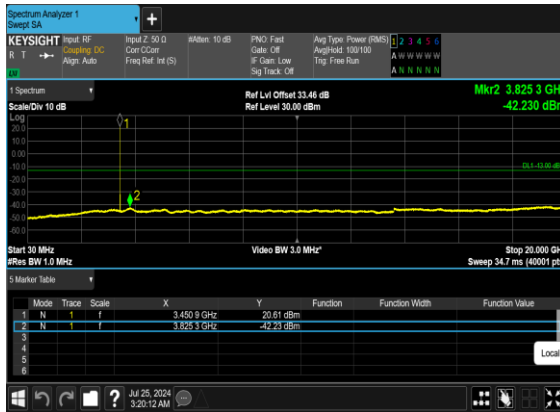


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

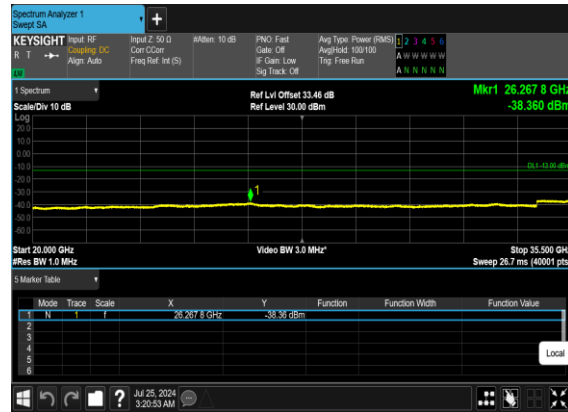

N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

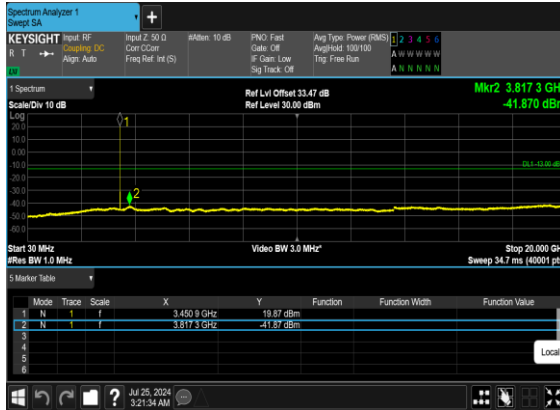


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

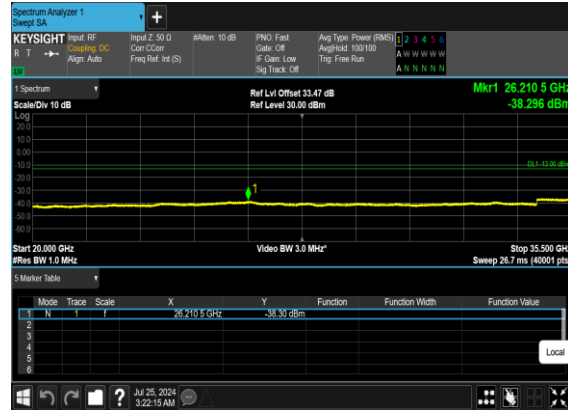





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

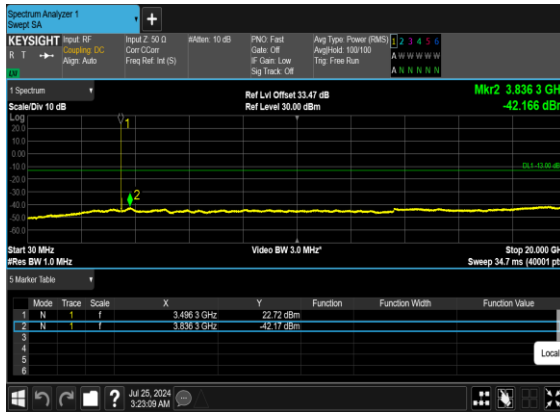


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

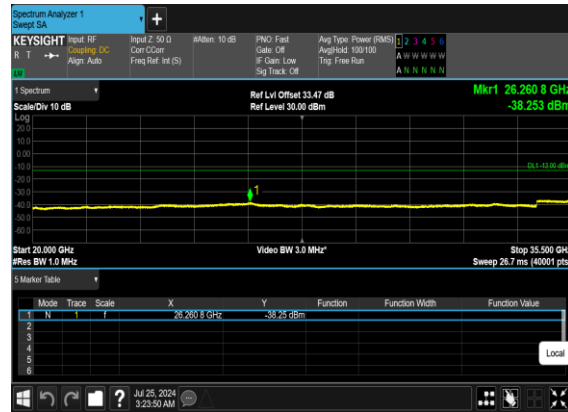

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

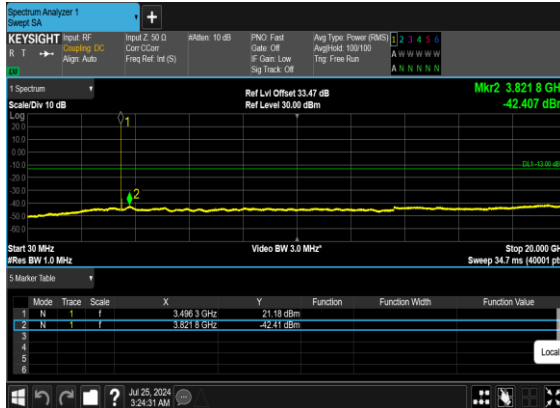


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

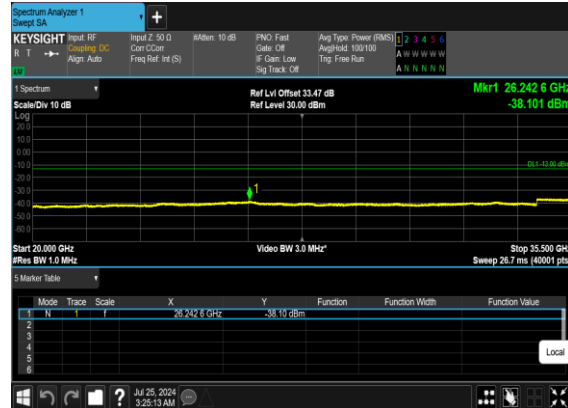





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

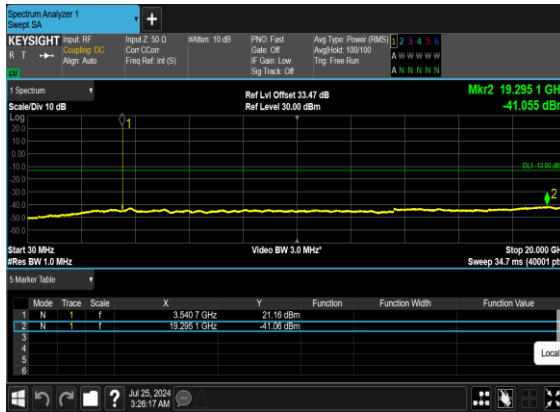


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

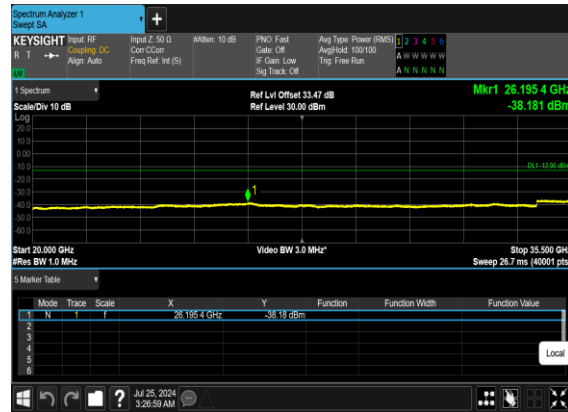

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

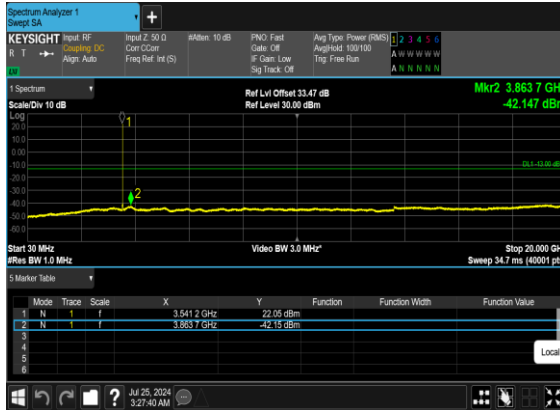


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

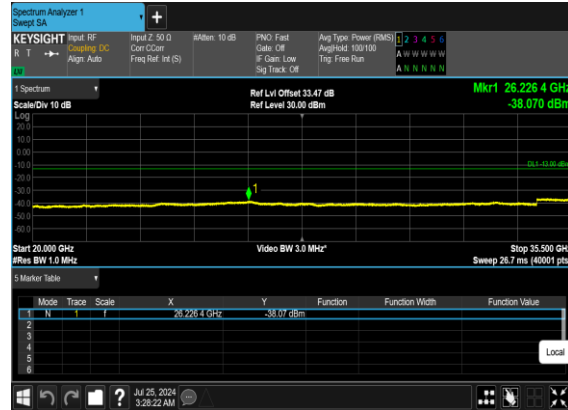





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

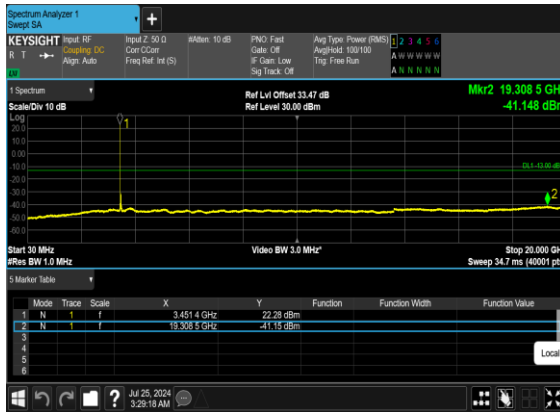


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

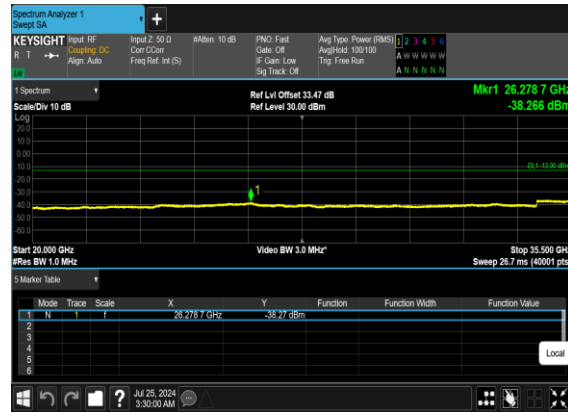

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

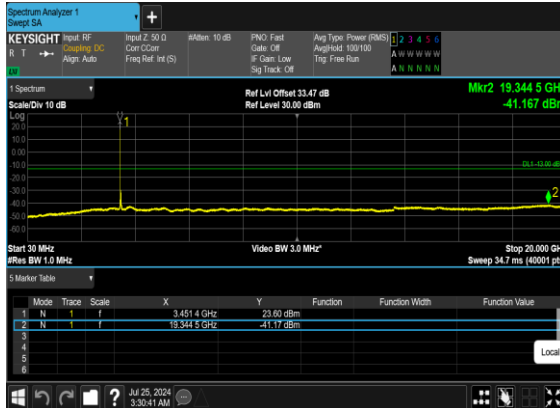


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

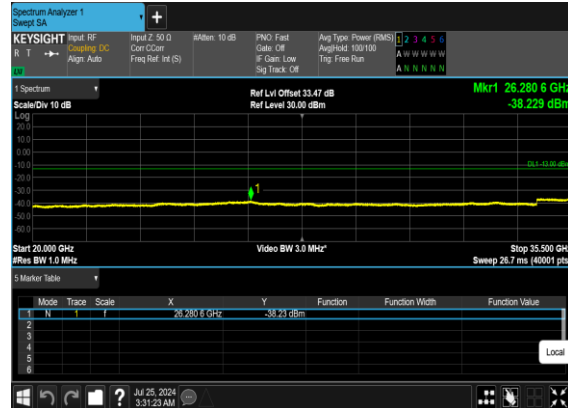





N77(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

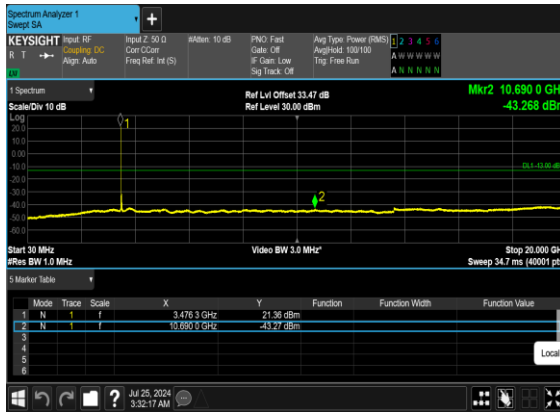


N77(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

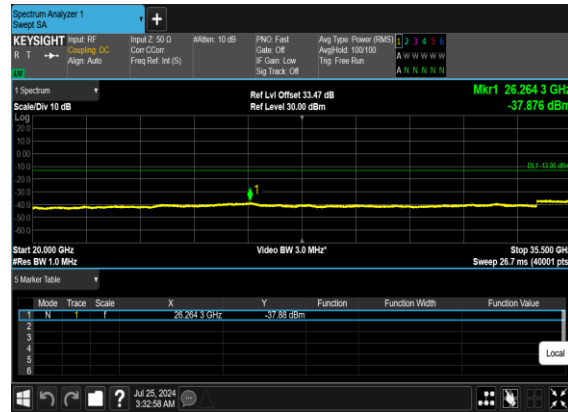

N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

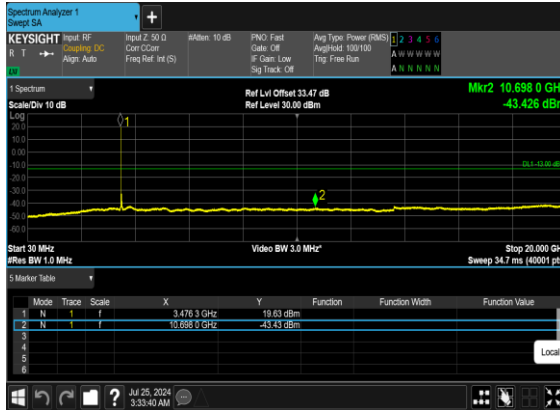


N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

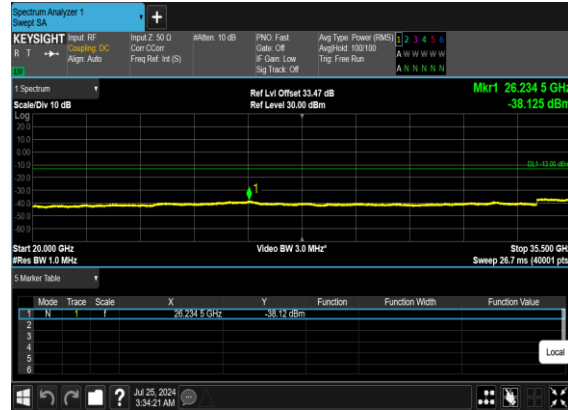





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

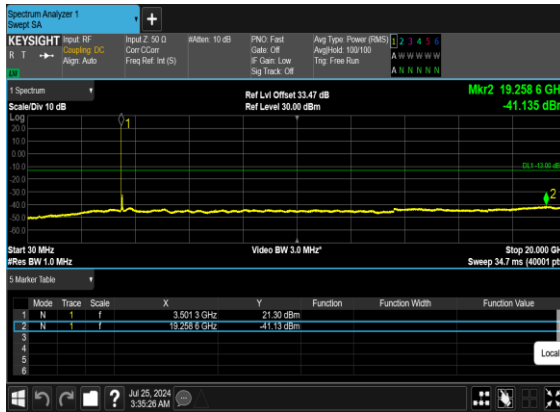

N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

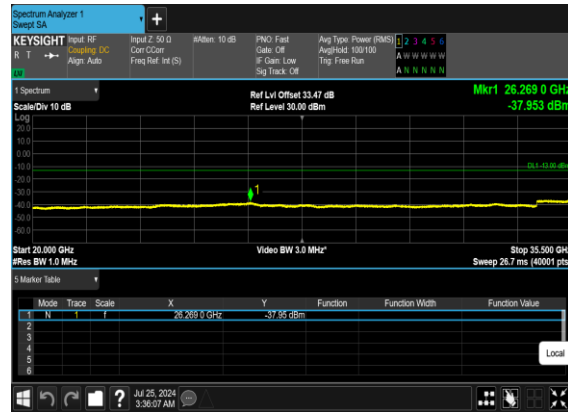

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

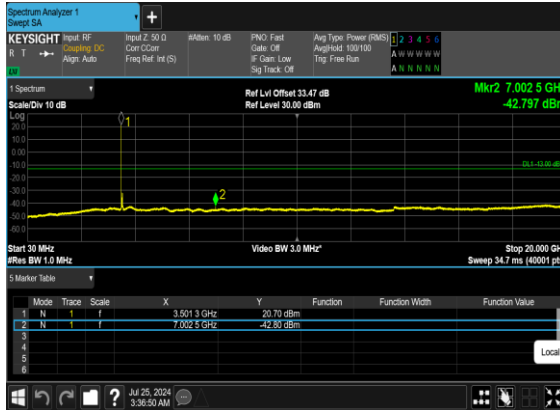

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

