


Power measurement connection diagram:

The power measurement for 2G/3G/LTE/5G FR1/UL and DL CA is to establish a connection between device and call box, and via call box to configure Bands, channel, BWs, RB size, carrier aggregation of CA, frequency channels, SCS and maximum output power. Hereunder is screenshot call box connection information for 2G/3G/LTE/5G FR1/UL and DL CA.


<GSM>

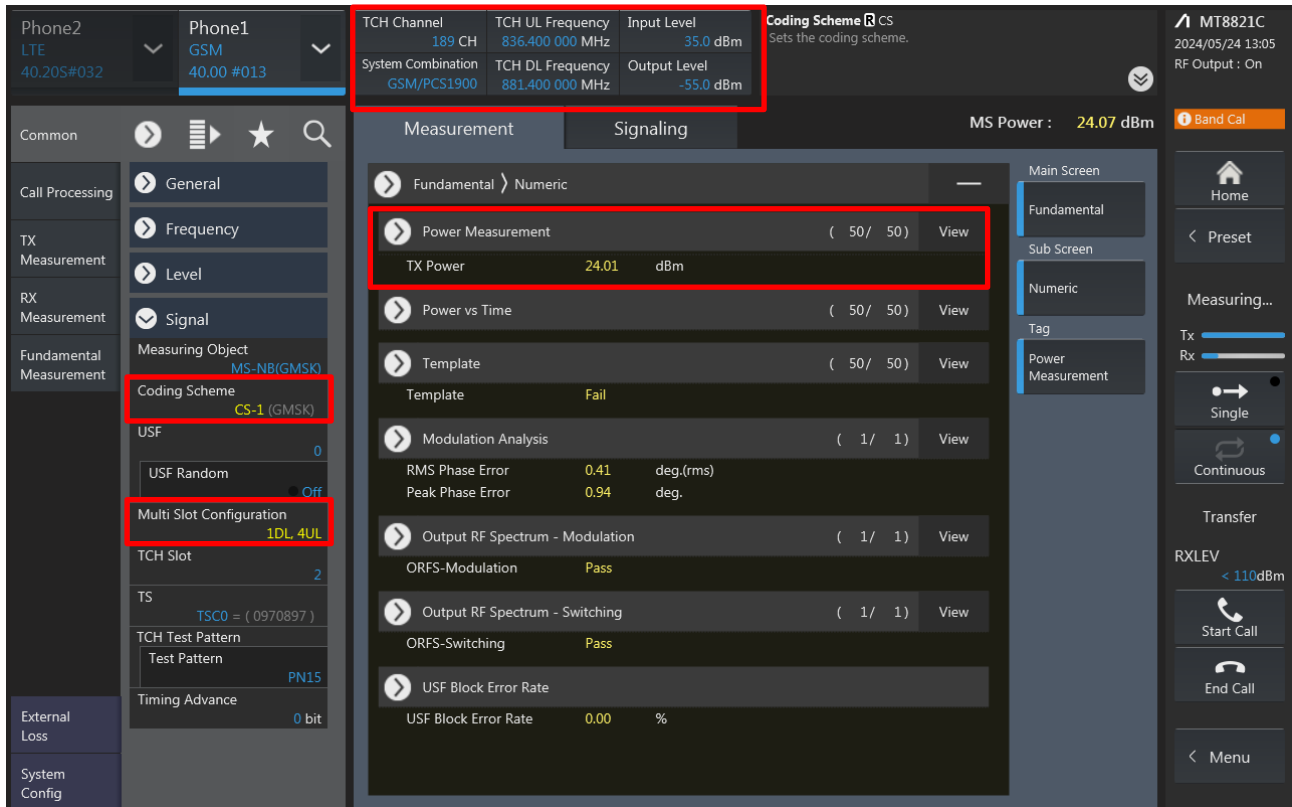

The screenshot displays the SPORTON LAB. software interface for GSM power measurement. The interface is divided into several sections:


- Top Bar:** Shows Phone2 (LTE, 40.205#032) and Phone1 (GSM, 40.00 #013). The TCH Channel is 189 CH, TCH UL Frequency is 836.400 000 MHz, Input Level is 35.0 dBm, TCH DL Frequency is 881.400 000 MHz, and Output Level is -55.0 dBm. The Coding Scheme is CS.
- Left Sidebar:** Contains navigation options: Common, Call Processing, TX Measurement, RX Measurement, Fundamental Measurement, and External Loss. The 'Fundamental Measurement' section is expanded, showing 'Coding Scheme' (CS-1 (GMSK)) and 'Multi Slot Configuration' (1DL, 4UL).
- Main Area:** Displays 'Measurement' and 'Signaling' tabs. The 'Measurement' tab is active, showing 'Fundamental' and 'Numeric' views. The 'Power Measurement' section is highlighted, showing 'TX Power' as 24.01 dBm. Other measurements include 'Power vs Time', 'Template', 'Modulation Analysis', 'Output RF Spectrum - Modulation', 'Output RF Spectrum - Switching', and 'USF Block Error Rate'.
- Right Sidebar:** Shows 'Main Screen' and 'Sub Screen' options. The 'Power Measurement' tag is selected. The 'MT8821C' device is connected, with a date/time of 2024/05/24 13:05 and RF Output: On. The 'Band Cal' button is visible.

<WCDMA>

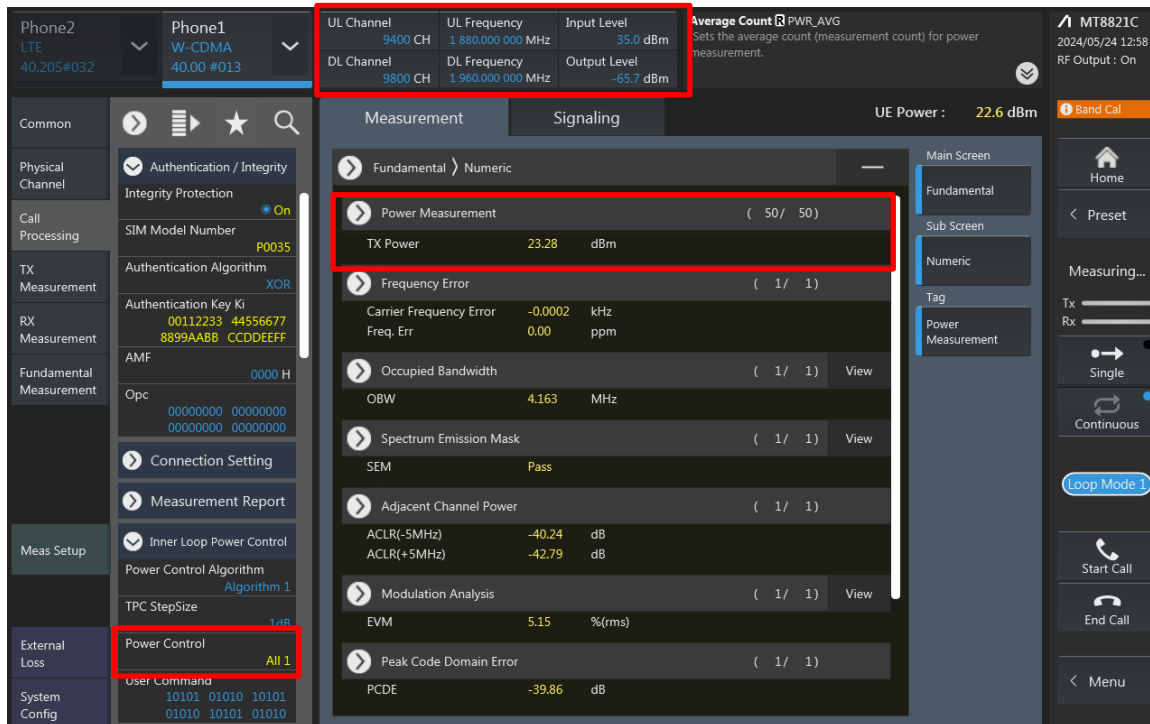

The screenshot displays the WCDMA measurement interface. The top bar shows 'Phone2 LTE 40.20S#032' and 'Phone1 W-CDMA 40.00 #013'. The 'Measurement' tab is active, showing 'Fundamental' and 'Numeric' views. The 'Power Measurement' section is highlighted with a red box, showing 'TX Power' at 23.28 dBm. The 'Occupied Bandwidth' section shows 'OBW' at 4.163 MHz. The 'Adjacent Channel Power' section shows 'ACLR(-5MHz)' at -40.24 dB and 'ACLR(+5MHz)' at -42.79 dB. The 'Modulation Analysis' section shows 'EVM' at 5.15 % (rms). The 'Peak Code Domain Error' section shows 'PCDE' at -39.86 dB. The 'UE Power' is 22.6 dBm. The 'Band Cal' button is visible on the right. The 'Meas Setup' section on the left includes 'Authentication / Integrity', 'SIM Model Number', 'Authentication Algorithm', 'Authentication Key Ki', 'AMF', 'Opc', 'Connection Setting', 'Measurement Report', 'Inner Loop Power Control', 'Power Control Algorithm', 'TPC StepSize', 'Power Control', and 'User Command'.

<LTE>

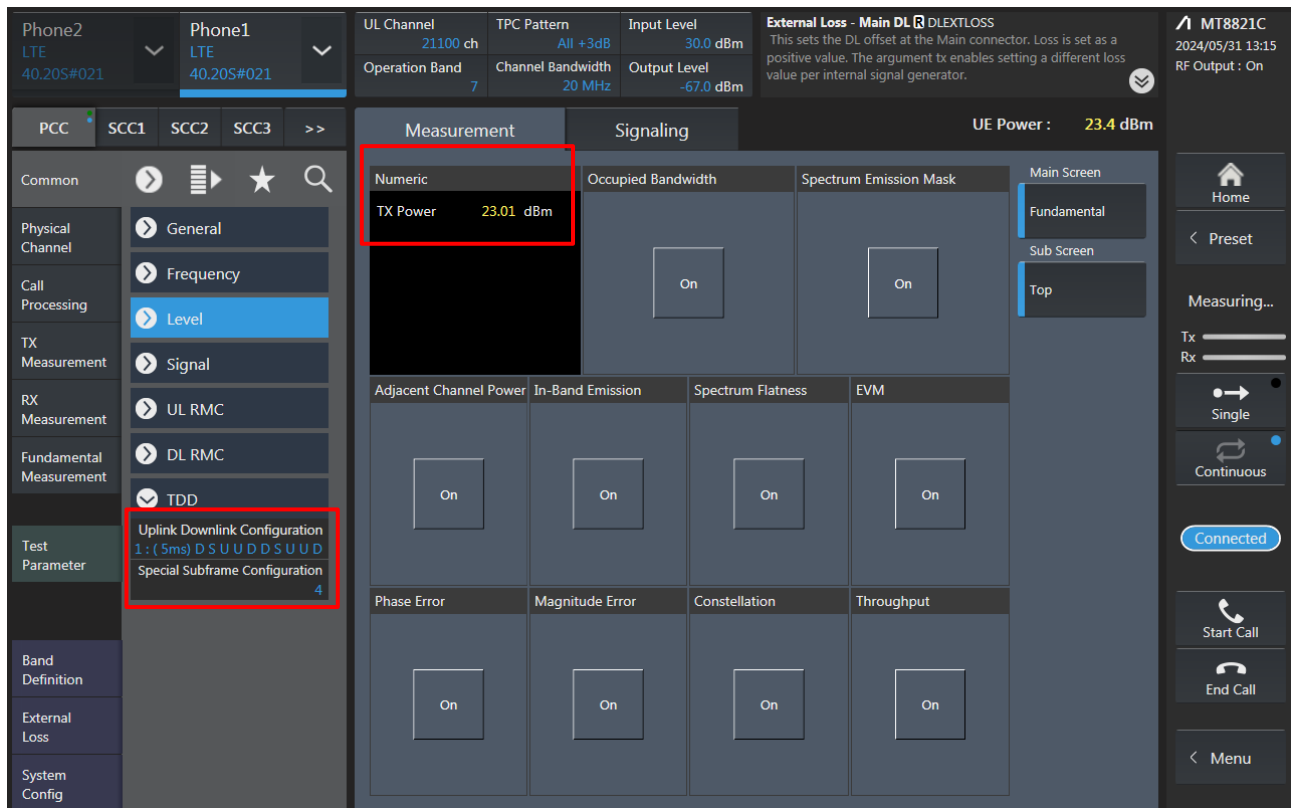

The screenshot displays the LTE measurement interface. The top bar shows 'Phone2 LTE 40.20S#021' and 'Phone1 LTE 40.20S#021'. The 'Measurement' tab is active, showing 'Numeric' and 'Occupied Bandwidth' views. The 'Power Measurement' section is highlighted with a red box, showing 'TX Power' at 23.01 dBm. The 'Occupied Bandwidth' section shows 'OBW' at 20 MHz. The 'Spectrum Emission Mask' section shows 'SEM' at Pass. The 'Adjacent Channel Power' section shows 'ACLR(-5MHz)' at -40.24 dB and 'ACLR(+5MHz)' at -42.79 dB. The 'Modulation Analysis' section shows 'EVM' at 5.15 % (rms). The 'Peak Code Domain Error' section shows 'PCDE' at -39.86 dB. The 'UE Power' is 23.4 dBm. The 'Band Cal' button is visible on the right. The 'Meas Setup' section on the left includes 'General', 'Frequency', 'Level', 'Signal', 'UL RMC', 'DL RMC', 'TDD', 'Uplink Downlink Configuration', 'Special Subframe Configuration', 'Band Definition', 'External Loss', and 'System Config'.

<LTE TDD Power class 3>

The screenshot displays the 5G NR Measurement and Signaling interface. The top bar shows the phone's status (Phone2, LTE, 40.20S#021) and the network's status (UL Channel 40620 ch, TPC Parameter All +3dB, Input Level 30.0 dBm). The 'TDD - Special Subframe Configuration' is set to 'TDDSSFCNF'. The 'UE Power' is 23.5 dBm.

The 'Measurement' section shows the following parameters:



- Numeric**: TX Power 23.19 dBm
- Occupied Bandwidth**: On
- Spectrum Emission Mask**: On
- Adjacent Channel Power**: On
- In-Band Emission**: On
- Spectrum Flatness**: On
- EVM**: On
- Phase Error**: On
- Magnitude Error**: On
- Constellation**: On
- Throughput**: On


The 'Signaling' section shows the following parameters:

- Uplink Downlink Configuration**: 0 : (5ms) D S U U U D S U U U
- Special Subframe Configuration**: 5


The 'Fundamental Measurement' section shows the 'TDD' option selected.

<5G NR FR1>

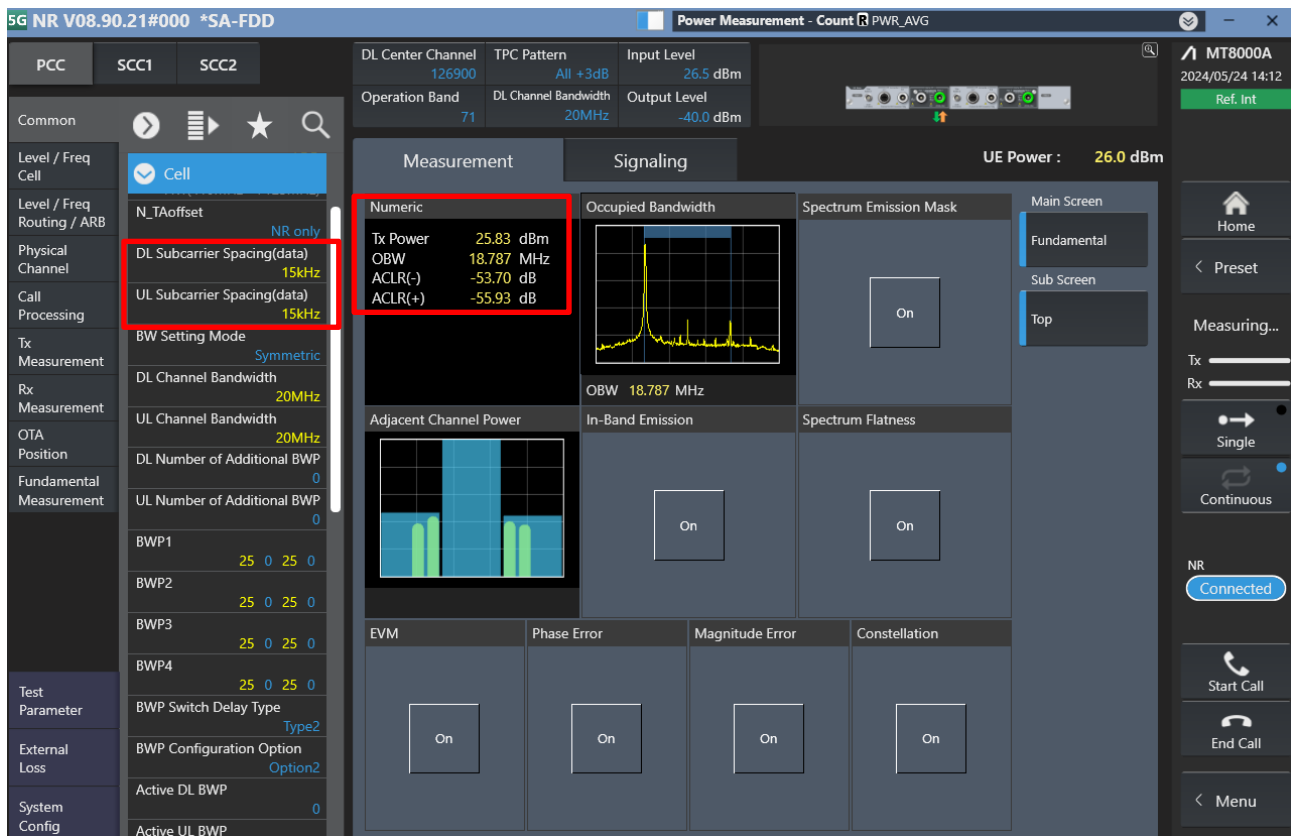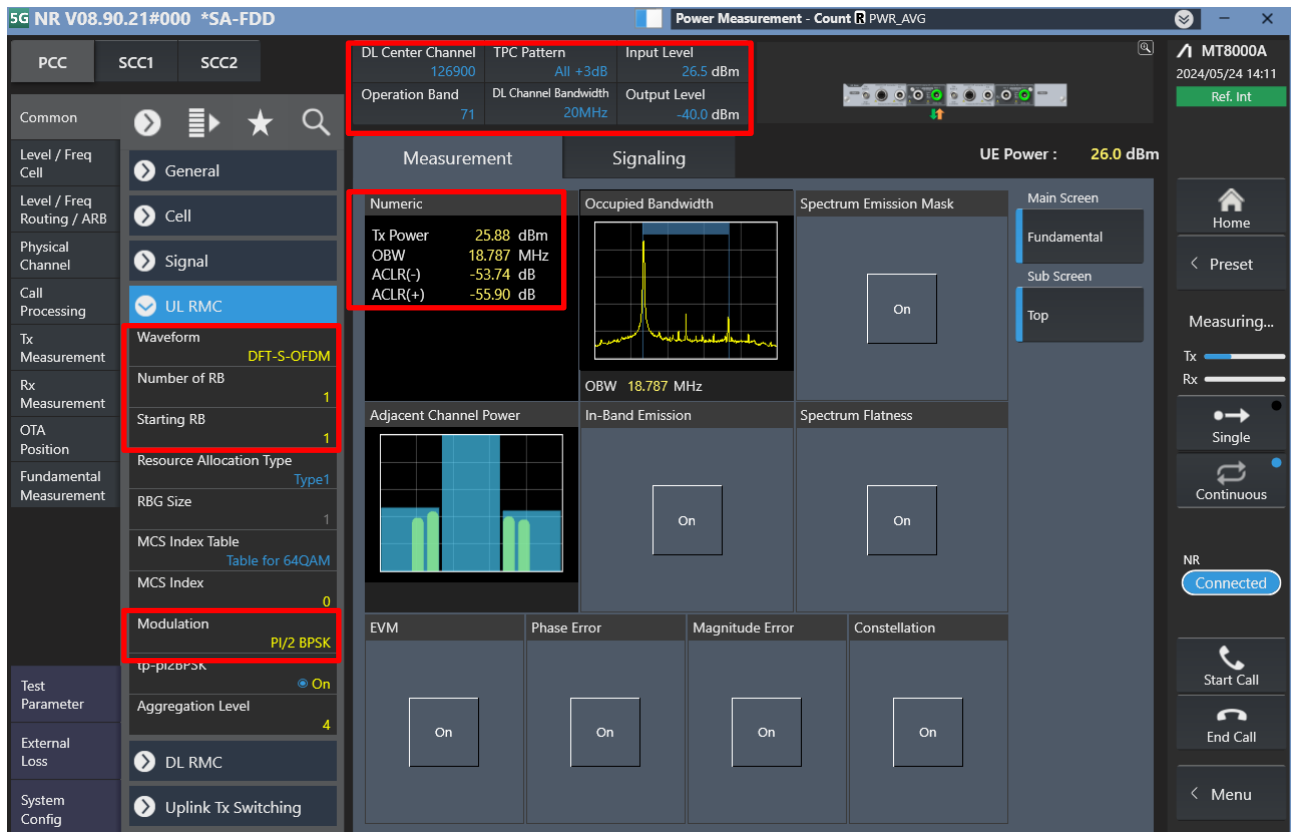


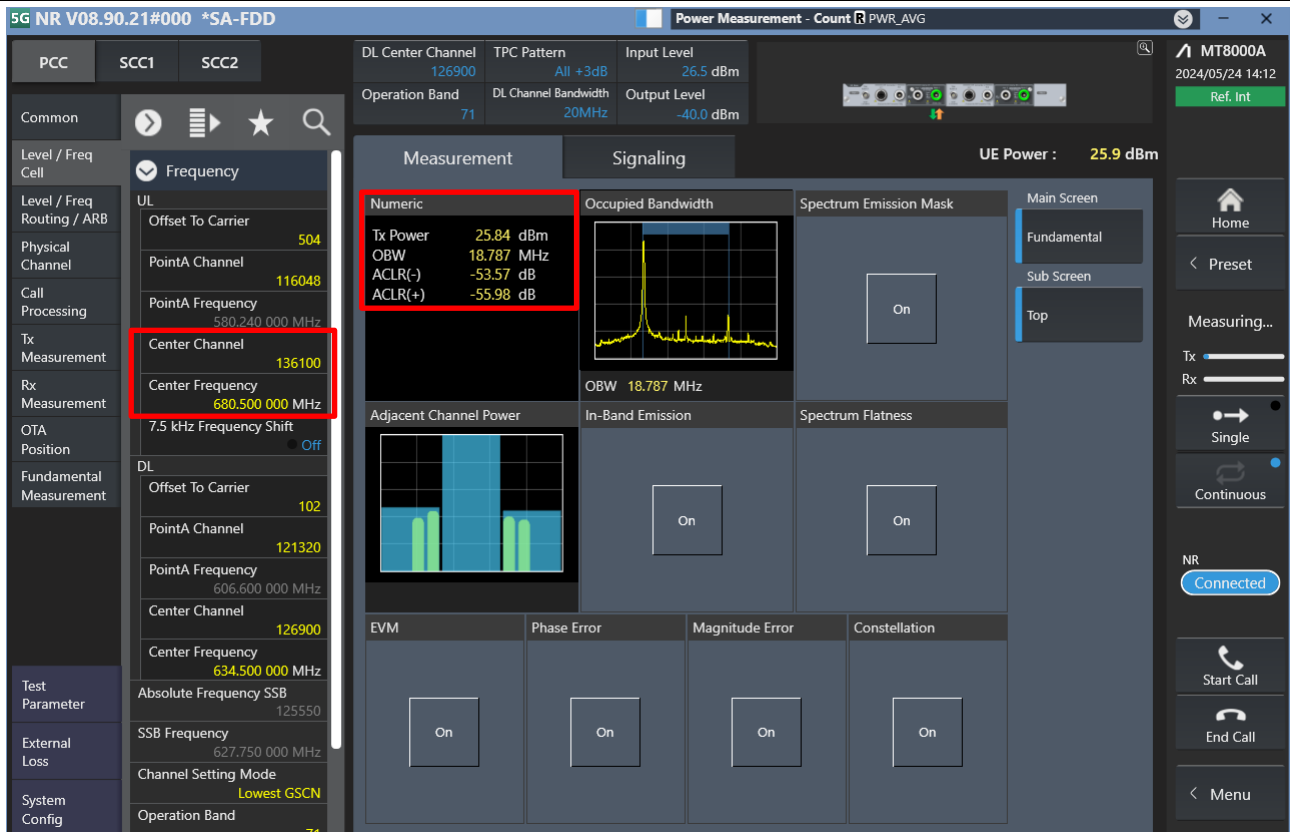


1. Change the Scenario in the Configuration of Phone1 LTE Signaling and Preset.




3. PCC parameter Settings: on the screen, and then select the PCC tab and Set operating band, BW, channel and RB configurations for PCC;

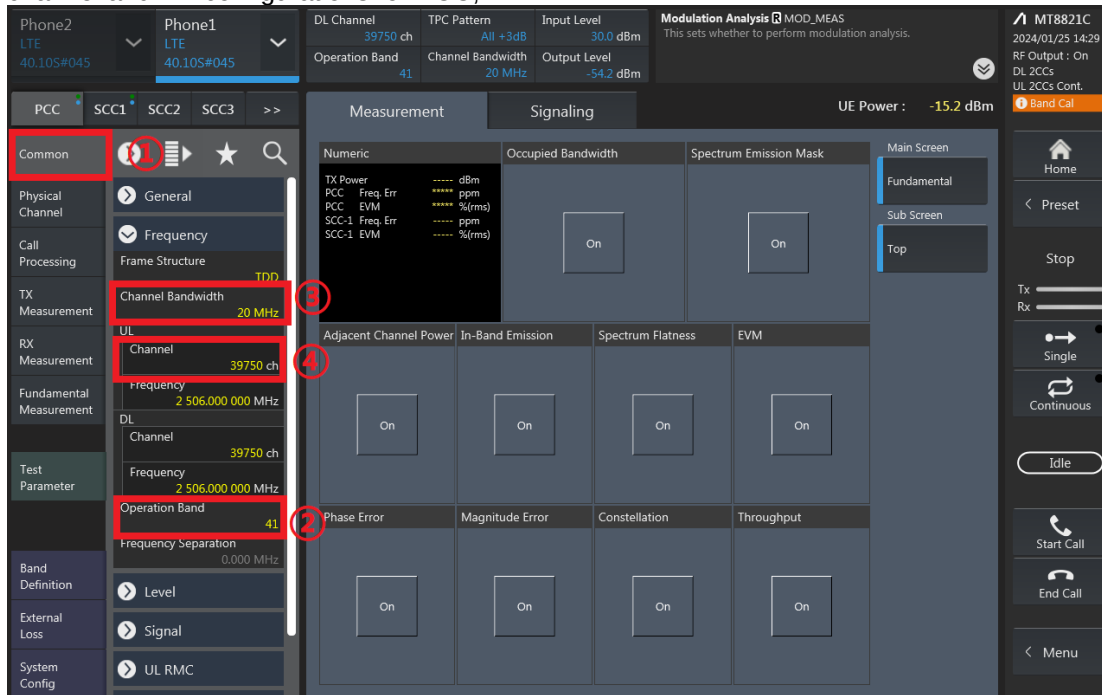


RB configurations (Number of RB / Starting RB) for PCC;

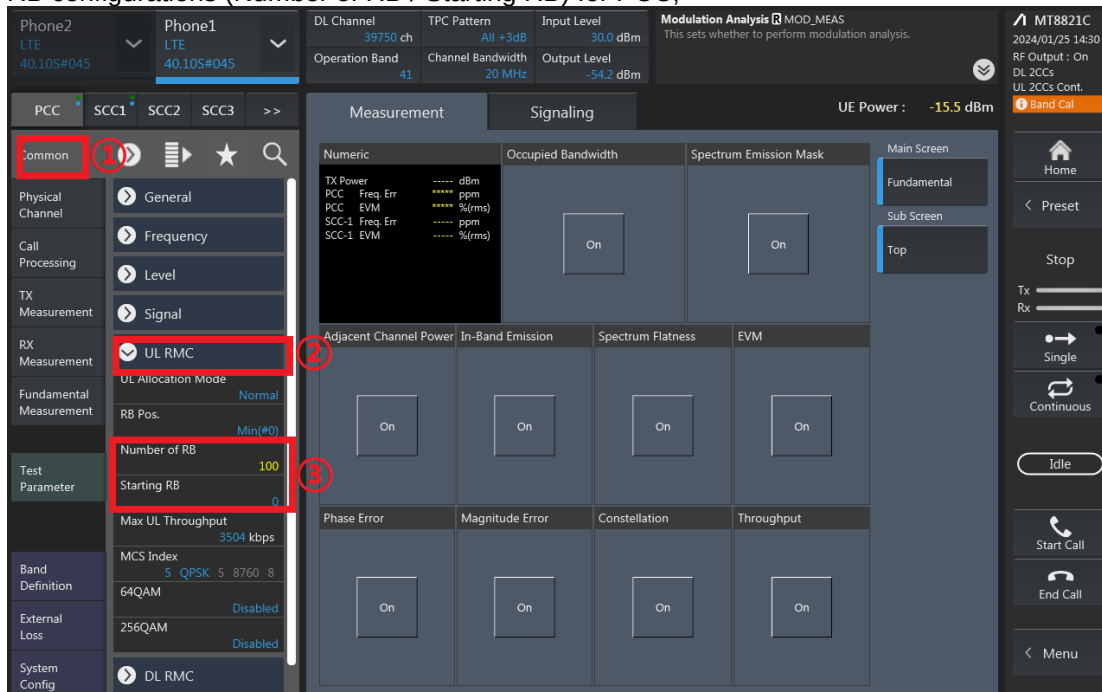


4. SCC parameter Settings: Select the SCC1 tab, Set operating band, BW, channel, and RB configurations for SCC1;

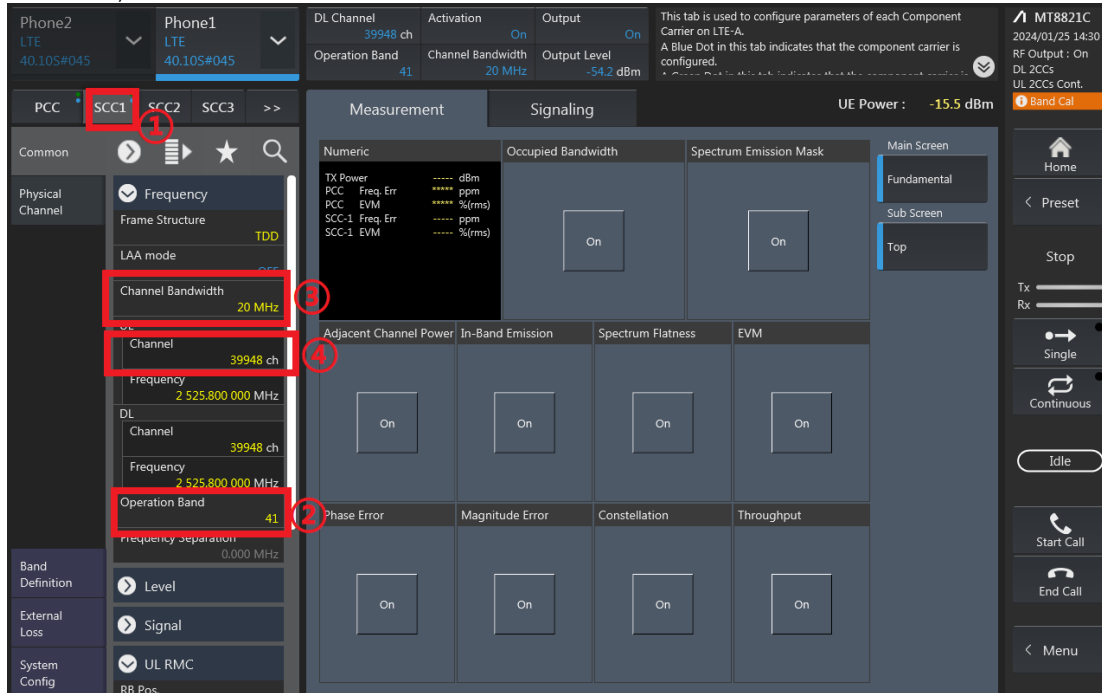


RB configurations (Number of RB / Starting RB) for SCC1;

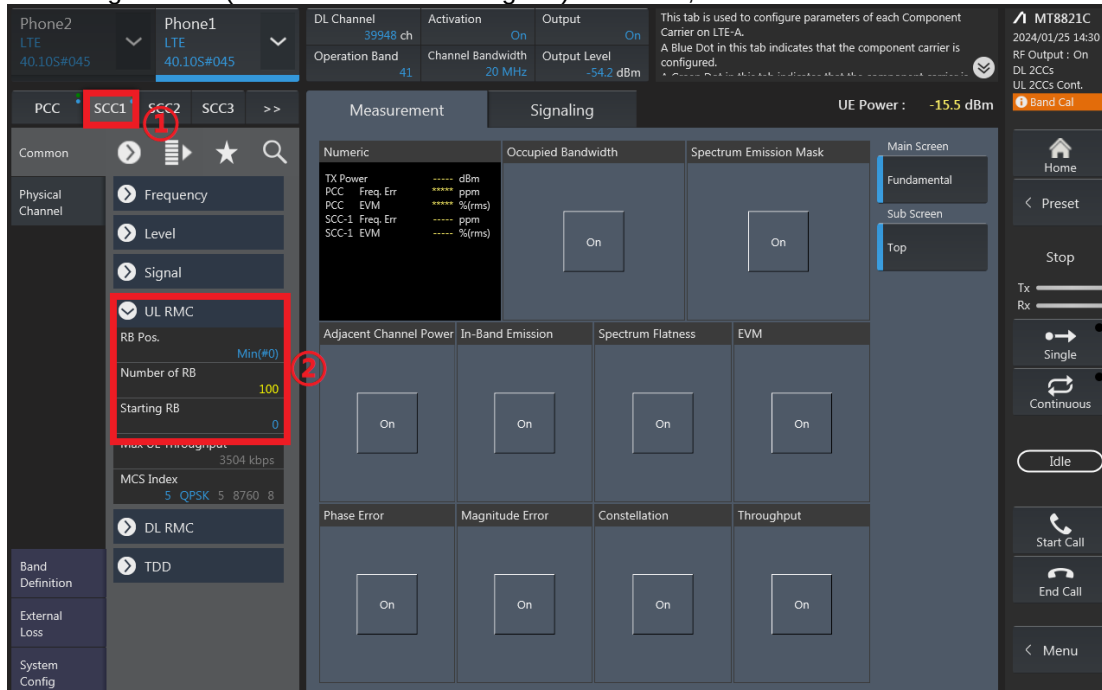

5. Select the PCC tab, then set “SIM Model Number” and select max power;

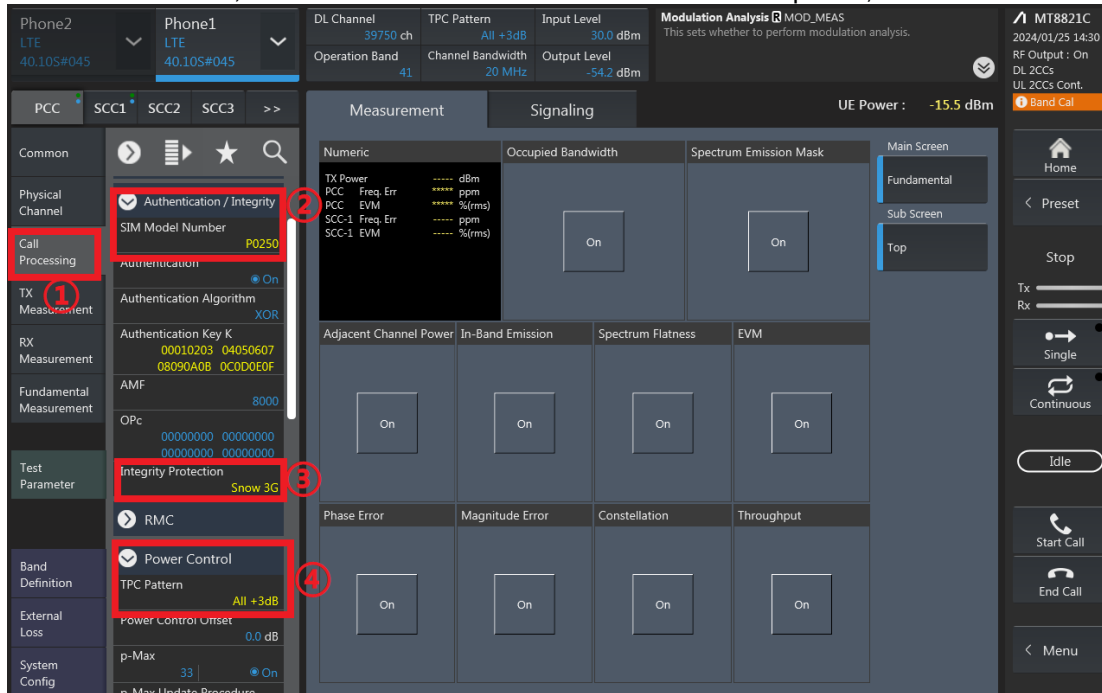

6. Click the “Connect” button at the Right of the screen, if necessary, turn the Airplane mode on/off in the DUT

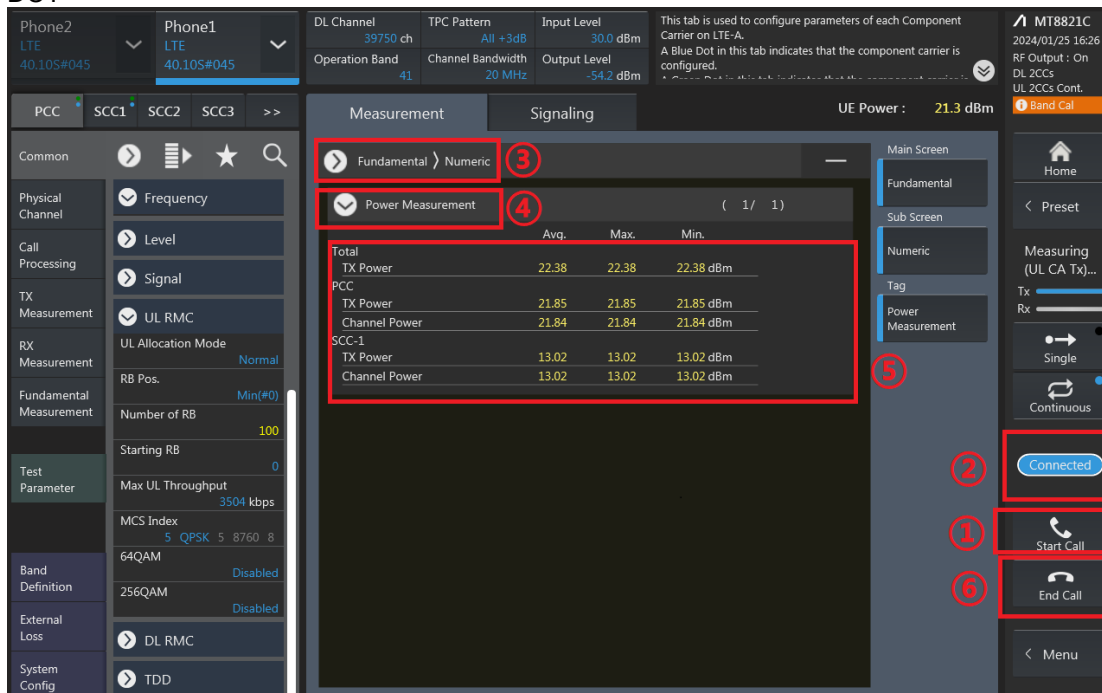

7. The inter-band ULCA test method is similar to intra-band ULCA, and DLCA test method is similar to intra-band ULCA too.

Full Power Mode

CA_7C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	24.79	25.70
21100	21298	QPSK	1	99	1	0	24.87	25.70
21350	21152	QPSK	1	0	1	99	24.76	25.70

CA_7C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	23.72	25.50
21100	21298	QPSK	1	99	1	0	23.88	25.50
21350	21152	QPSK	1	0	1	99	23.83	25.50

CA_7C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	23.89	25.50
21100	21298	QPSK	1	99	1	0	23.97	25.50
21350	21152	QPSK	1	0	1	99	23.82	25.50

CA_38C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	25.26	25.70
37901	38099	QPSK	1	99	1	0	25.31	25.70
38150	37952	QPSK	1	0	1	99	25.19	25.70

CA_38C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	23.93	25.50
37901	38099	QPSK	1	99	1	0	24.03	25.50
38150	37952	QPSK	1	0	1	99	23.98	25.50

CA_38C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	24.01	25.50
37901	38099	QPSK	1	99	1	0	24.07	25.50
38150	37952	QPSK	1	0	1	99	23.94	25.50

CA_38C Ant 4								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	22.87	24.50
37901	38099	QPSK	1	99	1	0	22.96	24.50
38150	37952	QPSK	1	0	1	99	22.94	24.50

Reduced Power Mode for DS11

CA_7C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	16.43	17.20
21100	21298	QPSK	1	99	1	0	16.47	17.20
21350	21152	QPSK	1	0	1	99	16.31	17.20

CA_38C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	18.27	18.70
37901	38099	QPSK	1	99	1	0	18.32	18.70
38150	37952	QPSK	1	0	1	99	18.19	18.70

CA_7C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	14.73	16.50
21100	21298	QPSK	1	99	1	0	14.89	16.50
21350	21152	QPSK	1	0	1	99	14.85	16.50

CA_38C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	16.02	17.50
37901	38099	QPSK	1	99	1	0	16.04	17.50
38150	37952	QPSK	1	0	1	99	15.98	17.50

CA_7C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	23.89	25.50
21100	21298	QPSK	1	99	1	0	23.97	25.50
21350	21152	QPSK	1	0	1	99	23.82	25.50

CA_38C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	24.01	25.50
37901	38099	QPSK	1	99	1	0	24.07	25.50
38150	37952	QPSK	1	0	1	99	23.94	25.50

CA_38C Ant 4								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	17.95	19.50
37901	38099	QPSK	1	99	1	0	17.99	19.50
38150	37952	QPSK	1	0	1	99	17.97	19.50

Reduced Power Mode for DSI3

CA_7C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	19.39	20.20
21100	21298	QPSK	1	99	1	0	19.41	20.20
21350	21152	QPSK	1	0	1	99	19.35	20.20

CA_38C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	21.74	22.20
37901	38099	QPSK	1	99	1	0	21.83	22.20
38150	37952	QPSK	1	0	1	99	21.75	22.20

CA_7C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	17.73	19.50
21100	21298	QPSK	1	99	1	0	17.88	19.50
21350	21152	QPSK	1	0	1	99	17.85	19.50

CA_38C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	19.43	21.00
37901	38099	QPSK	1	99	1	0	19.52	21.00
38150	37952	QPSK	1	0	1	99	19.46	21.00

CA_7C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	18.89	20.50
21100	21298	QPSK	1	99	1	0	18.97	20.50
21350	21152	QPSK	1	0	1	99	18.90	20.50

CA_38C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	22.06	23.50
37901	38099	QPSK	1	99	1	0	22.16	23.50
38150	37952	QPSK	1	0	1	99	22.08	23.50

CA_38C Ant 4								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	20.92	22.50
37901	38099	QPSK	1	99	1	0	21.05	22.50
38150	37952	QPSK	1	0	1	99	20.93	22.50

Reduced Power Mode for DSI4

CA_7C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	24.79	25.70
21100	21298	QPSK	1	99	1	0	24.87	25.70
21350	21152	QPSK	1	0	1	99	24.76	25.70

CA_38C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	25.26	25.70
37901	38099	QPSK	1	99	1	0	25.31	25.70
38150	37952	QPSK	1	0	1	99	25.19	25.70

CA_7C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	23.72	25.50
21100	21298	QPSK	1	99	1	0	23.88	25.50
21350	21152	QPSK	1	0	1	99	23.83	25.50

CA_38C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	23.93	25.50
37901	38099	QPSK	1	99	1	0	24.03	25.50
38150	37952	QPSK	1	0	1	99	23.98	25.50

CA_7C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	18.89	20.50
21100	21298	QPSK	1	99	1	0	18.97	20.50
21350	21152	QPSK	1	0	1	99	18.90	20.50

CA_38C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	22.06	23.50
37901	38099	QPSK	1	99	1	0	22.16	23.50
38150	37952	QPSK	1	0	1	99	22.08	23.50

CA_38C Ant 4								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	22.87	24.50
37901	38099	QPSK	1	99	1	0	22.96	24.50
38150	37952	QPSK	1	0	1	99	22.94	24.50

Reduced Power Mode for DSI6

CA_7C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	16.43	17.20
21100	21298	QPSK	1	99	1	0	16.47	17.20
21350	21152	QPSK	1	0	1	99	16.31	17.20

CA_7C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	14.73	16.50
21100	21298	QPSK	1	99	1	0	14.89	16.50
21350	21152	QPSK	1	0	1	99	14.85	16.50

CA_7C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	18.89	20.50
21100	21298	QPSK	1	99	1	0	18.97	20.50
21350	21152	QPSK	1	0	1	99	18.90	20.50

CA_38C Ant 3								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	18.27	18.70
37901	38099	QPSK	1	99	1	0	18.32	18.70
38150	37952	QPSK	1	0	1	99	18.19	18.70

CA_38C Ant 2								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	16.02	17.50
37901	38099	QPSK	1	99	1	0	16.04	17.50
38150	37952	QPSK	1	0	1	99	15.98	17.50

CA_38C Ant 5								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	22.06	23.50
37901	38099	QPSK	1	99	1	0	22.16	23.50
38150	37952	QPSK	1	0	1	99	22.08	23.50

CA_38C Ant 4								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	17.95	19.50
37901	38099	QPSK	1	99	1	0	17.99	19.50
38150	37952	QPSK	1	0	1	99	17.97	19.50

Downlink CA Power

2CA DL																
CA List	PCC								SCC				Power			
	LTE Band	BW Ant	BW (MHz)	UL Freq (MHz)	UL Channel	Mod.	UL RB	UL RB Offset	DL Antenna Configuration	LTE Band	BW Ant	DL Freq (MHz)	DL Channel	DL Antenna Configuration	With CA Tx Power (dBm)	Without CA Tx Power (dBm)
CA_2A-2A	Band 2	Ant 2	20M	1880	18800	QPSK	1	0		Band 2	5M	1987.5	1175		23.09	23.24
	Band 2	Ant 3	20M	1880	18800	QPSK	1	0		Band 2	5M	1987.5	1175		24.03	24.22
	Band 2	Ant 5	20M	1880	18800	QPSK	1	0		Band 2	5M	1987.5	1175		24.07	24.17
CA_2A-4A	Band 2	Ant 2	20M	1880	18800	QPSK	1	0		Band 4	20M	2132.5	2175	4x4MMIMO	23.13	23.24
	Band 2	Ant 3	20M	1880	18800	QPSK	1	0		Band 4	20M	2132.5	2175	4x4MMIMO	24.05	24.22
	Band 4	Ant 2	20M	1732.5	20175	QPSK	1	0	4x4MMIMO	Band 2	20M	1960	900		24.29	24.49
	Band 4	Ant 3	20M	1732.5	20175	QPSK	1	0	4x4MMIMO	Band 2	20M	1960	900		25.03	25.17
	Band 4	Ant 2	20M	1732.5	20175	QPSK	1	0	4x4MMIMO	Band 5	10M	881.5	2525		24.10	24.28
CA_4A-5A	Band 4	Ant 3	20M	1732.5	20175	QPSK	1	0	4x4MMIMO	Band 5	10M	881.5	2525		24.96	25.17
	Band 4	Ant 5	20M	1732.5	20175	QPSK	1	0	4x4MMIMO	Band 5	10M	881.5	2525		24.21	24.43
	Band 5	Ant 0	10M	836.5	20525	QPSK	1	0	4x4MMIMO	Band 4	20M	2132.5	2175	4x4MMIMO	25.19	25.38
	Band 5	Ant 1	10M	836.5	20525	QPSK	1	0	4x4MMIMO	Band 4	20M	2132.5	2175	4x4MMIMO	24.46	24.83
	Band 4	Ant 2	20M	1732.5	20175	QPSK	1	0	4x4MMIMO	Band 7	20M	2655	3100	4x4MMIMO	24.06	24.28
CA_4A-7A	Band 4	Ant 3	20M	1732.5	20175	QPSK	1	0	4x4MMIMO	Band 7	20M	2655	3100	4x4MMIMO	25.00	25.17
	Band 4	Ant 5	20M	1732.5	20175	QPSK	1	0	4x4MMIMO	Band 7	20M	2655	3100	4x4MMIMO	24.29	24.49
	Band 7	Ant 2	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 4	20M	2132.5	2175	4x4MMIMO	23.04	23.05
	Band 7	Ant 3	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 4	20M	2132.5	2175	4x4MMIMO	24.30	25.10
	Band 7	Ant 5	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 4	20M	2132.5	2175	4x4MMIMO	23.87	24.10
CA_7A-7A	Band 7	Ant 2	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 7	5M	2687.5	3425	4x4MMIMO	23.92	24.05
	Band 7	Ant 3	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 7	5M	2687.5	3425	4x4MMIMO	24.91	25.10
	Band 7	Ant 5	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 7	5M	2687.5	3425	4x4MMIMO	23.99	24.10
	Band 7	Ant 2	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 66	20M	2155	66880	4x4MMIMO	23.86	24.05
	Band 7	Ant 3	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 66	20M	2155	66880	4x4MMIMO	24.96	25.10
CA_7A-66A	Band 7	Ant 5	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 66	20M	2155	66880	4x4MMIMO	23.91	24.10
	Band 66	Ant 2	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 7	20M	2655	3100	4x4MMIMO	24.25	24.43
	Band 66	Ant 3	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 7	20M	2655	3100	4x4MMIMO	25.01	25.18
	Band 66	Ant 5	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 7	20M	2655	3100	4x4MMIMO	24.32	24.50
	Band 7	Ant 2	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 7	20M	2554.8	3298	4x4MMIMO	23.87	24.05
CA_7C	Band 7	Ant 3	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 7	20M	2554.8	3298	4x4MMIMO	24.89	25.10
	Band 7	Ant 5	20M	2535	21100	QPSK	1	0	4x4MMIMO	Band 7	20M	2554.8	3298	4x4MMIMO	23.97	24.10
	Band 38	Ant 2	20M	2580	37850	QPSK	1	0	4x4MMIMO	Band 38	20M	2599.8	38048	4x4MMIMO	23.99	24.20
CA_38C	Band 38	Ant 3	20M	2580	37850	QPSK	1	0	4x4MMIMO	Band 38	20M	2599.8	38048	4x4MMIMO	25.34	25.50
	Band 38	Ant 5	20M	2580	37850	QPSK	1	0	4x4MMIMO	Band 38	20M	2599.8	38048	4x4MMIMO	24.08	24.24
	Band 38	Ant 4	20M	2580	37850	QPSK	1	0	4x4MMIMO	Band 38	20M	2599.8	38048	4x4MMIMO	23.03	23.15
CA_41C	Band 41	Ant 2	20M	2593	40620	QPSK	1	0	4x4MMIMO	Band 41	20M	2612.8	40818	4x4MMIMO	24.04	24.15
	Band 41	Ant 3	20M	2593	40620	QPSK	1	0	4x4MMIMO	Band 41	20M	2612.8	40818	4x4MMIMO	25.34	25.48
	Band 41	Ant 5	20M	2593	40620	QPSK	1	0	4x4MMIMO	Band 41	20M	2612.8	40818	4x4MMIMO	23.98	24.15
	Band 41	Ant 4	20M	2593	40620	QPSK	1	0	4x4MMIMO	Band 41	20M	2612.8	40818	4x4MMIMO	22.95	23.11
	Band 41	Ant 2	20M	2593	40620	QPSK	1	0	4x4MMIMO	Band 41	5M	2687.5	41565	4x4MMIMO	23.96	24.16
CA_41A-41A	Band 41	Ant 3	20M	2593	40620	QPSK	1	0	4x4MMIMO	Band 41	5M	2687.5	41565	4x4MMIMO	25.36	25.48
	Band 41	Ant 5	20M	2593	40620	QPSK	1	0	4x4MMIMO	Band 41	5M	2687.5	41565	4x4MMIMO	24.04	24.18
	Band 41	Ant 4	20M	2593	40620	QPSK	1	0	4x4MMIMO	Band 41	5M	2687.5	41565	4x4MMIMO	22.97	23.11
	Band 66	Ant 2	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	5M	2145	66786	4x4MMIMO	24.35	24.43
	Band 66	Ant 3	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	5M	2145	66786	4x4MMIMO	24.06	25.18
CA_66A-66A	Band 66	Ant 5	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	5M	2145	66786	4x4MMIMO	24.35	24.50
	Band 66	Ant 2	15M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	5M	2164.3	66979	4x4MMIMO	24.29	24.43
	Band 66	Ant 3	15M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	5M	2164.3	66979	4x4MMIMO	25.03	25.18
CA_96B	Band 66	Ant 5	15M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	5M	2164.3	66979	4x4MMIMO	24.31	24.50
	Band 66	Ant 2	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	20M	2164.8	66984	4x4MMIMO	24.22	24.43
	Band 66	Ant 3	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	20M	2164.8	66984	4x4MMIMO	25.02	25.18
	Band 66	Ant 5	20M	1745	132322	QPSK	1	0	4x4MMIMO	Band 66	20M	2164.8	66984	4x4MMIMO	24.30	24.50

3CA DL																								
3CA List	POC									SOC1				SOC2				Power						
	LTE	BW	BW	UL	UL	Mod	UL#	UL	DL Antenna Configuration	LTE	BW	DL	DL	DL Antenna Configuration	LTE	BW	DL	DL	DL Antenna Configuration	With CA	Without CA			
	Band	Ant	(MHz)	Freq (MHz)	Channel		RB	RB Offset		Band	(MHz)	Freq (MHz)	Channel		Band	(MHz)	Freq (MHz)	Channel		Tx Power (dBm)	Tx Power (dBm)			
CA_2A-7A-7A	Band 2	Ant 2	20M	1880	18900	QPSK	1	0		Band 7	20M	2655	3100	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	23.04	23.24			
	Band 2	Ant 3	20M	1880	18900	QPSK	1	0		Band 7	20M	2655	3100	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	24.06	24.22			
	Band 2	Ant 3	20M	1880	18900	QPSK	1	0		Band 7	20M	2655	3100	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	24.01	24.17			
	Band 7	Ant 2	20M	2535	21100	QPSK	1	0	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	Band 2	20M	1960	900		23.84	24.06			
	Band 7	Ant 3	20M	2535	21100	QPSK	1	0	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	Band 2	20M	1960	900		24.92	25.10			
CA_5A-7A-7A	Band 7	Ant 5	20M	2535	21100	QPSK	1	0	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	Band 2	20M	1960	900		23.94	24.10			
	Band 5	Ant 0	10M	836.5	20525	QPSK	1	0		Band 7	20M	2655	3100	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	25.24	25.35			
	Band 5	Ant 1	10M	836.5	20525	QPSK	1	0		Band 7	20M	2655	3100	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	24.46	24.63			
	Band 7	Ant 2	20M	2535	21100	QPSK	1	0	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	Band 5	10M	881.5	2525		23.88	24.06			
	Band 7	Ant 3	20M	2535	21100	QPSK	1	0	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	Band 5	10M	881.5	2525		24.98	25.10			
CA_2A-7C	Band 7	Ant 5	20M	2535	21100	QPSK	1	0	4x4MIMO	Band 7	5M	2687.5	3425	4x4MIMO	Band 5	10M	881.5	2525		23.90	24.10			
	Band 2	Ant 2	20M	1880	18900	QPSK	1	0		Band 7	20M	2655	3100	4x4MIMO	Band 7	20M	2554.8	3298	4x4MIMO	23.07	23.24			
	Band 2	Ant 3	20M	1880	18900	QPSK	1	0		Band 7	20M	2655	3100	4x4MIMO	Band 7	20M	2554.8	3298	4x4MIMO	24.07	24.22			
CA_4TD	Band 2	Ant 5	20M	1880	18900	QPSK	1	0		Band 41	20M	2655	3100	4x4MIMO	Band 7	20M	2554.8	3298	4x4MIMO	24.02	24.17			
	Band 41	Ant 2	20M	2593	40620	QPSK	1	0	4x4MIMO	Band 41	20M	2612.8	40818	4x4MIMO	Band 41	20M	2632.6	41016	4x4MIMO	23.97	24.15			
	Band 41	Ant 3	20M	2593	40620	QPSK	1	0	4x4MIMO	Band 41	20M	2612.8	40818	4x4MIMO	Band 41	20M	2632.6	41016	4x4MIMO	25.26	25.48			
	Band 41	Ant 5	20M	2593	40620	QPSK	1	0	4x4MIMO	Band 41	20M	2612.8	40818	4x4MIMO	Band 41	20M	2632.6	41016	4x4MIMO	24.05	24.19			
	Band 41	Ant 4	20M	2593	40620	QPSK	1	0	4x4MIMO	Band 41	20M	2612.8	40818	4x4MIMO	Band 41	20M	2632.6	41016	4x4MIMO	22.86	23.11			
CA_4A-7C	Band 4	Ant 2	20M	1732.5	20175	QPSK	1	0	4x4 MIMO	Band 7	20M	2655	3100	4x4 MIMO	Band 7	20M	2554.8	3298	4x4 MIMO	24.06	24.28			
	Band 4	Ant 3	20M	1732.5	20175	QPSK	1	0	4x4 MIMO	Band 7	20M	2655	3100	4x4 MIMO	Band 7	20M	2554.8	3298	4x4 MIMO	25.00	25.17			
	Band 4	Ant 5	20M	1732.5	20175	QPSK	1	0	4x4 MIMO	Band 7	20M	2655	3100	4x4 MIMO	Band 7	20M	2554.8	3298	4x4 MIMO	24.29	24.43			
	Band 4	Ant 2	20M	2535	21100	QPSK	1	0	4x4 MIMO	Band 7	20M	2554.8	3298	4x4 MIMO	Band 4	20M	2132.5	2175	4x4 MIMO	23.94	24.06			
	Band 7	Ant 3	20M	2535	21100	QPSK	1	0	4x4 MIMO	Band 7	20M	2554.8	3298	4x4 MIMO	Band 4	20M	2132.5	2175	4x4 MIMO	24.10	25.10			
	Band 7	Ant 5	20M	2535	21100	QPSK	1	0	4x4 MIMO	Band 7	20M	2554.8	3298	4x4 MIMO	Band 4	20M	2132.5	2175	4x4 MIMO	23.97	24.10			
	Band 7	Ant 8	20M	2535	21100	QPSK	1	0	4x4 MIMO	Band 7	20M	2554.8	3298	4x4 MIMO	Band 4	20M	2132.5	2175	4x4 MIMO	23.97	24.10			