



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 25062RN2DL
FCC ID : 2AFZZRN2DL
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Apr. 23, 2025 ~ May 07, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.



Approved by: Fly Liang

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 8

 1.7 Test Software..... 8

 1.8 Applicable Standards..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode..... 10

 2.3 Connection Diagram of Test System..... 12

 2.4 Support Unit used in test configuration and system 13

 2.5 EUT Operation Test Setup 13

 2.6 Measurement Results Explanation Example..... 13

3 TEST RESULT 14

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 14

 3.2 Maximum Conducted Output Power Measurement 19

 3.3 Power Spectral Density Measurement 21

 3.4 Unwanted Emissions Measurement 25

 3.5 AC Conducted Emission Measurement..... 30

 3.6 Antenna Requirements 32

4 LIST OF MEASURING EQUIPMENT 33

5 MEASUREMENT UNCERTAINTY 34

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.29 dB at 5356.64 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 15.50 dB at 0.21 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	25062RN2DL
FCC ID	2AFZZRN2DL
IMEI Code	Conducted: 867451070065328/8674510700653336 Conduction: 867451070069023/867451070069031 Radiation: 869081070034574/869081070034566
HW Version	13510O19A
SW Version	Xiaomi HyperOS 2.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<p><5180 MHz ~ 5240 MHz> 802.11a : 13.59 dBm / 0.0229 W 802.11n HT20 : 13.63 dBm / 0.0231 W 802.11n HT40 : 12.61 dBm / 0.0182 W 802.11ac VHT20: 13.57 dBm / 0.0228 W 802.11ac VHT40: 12.58 dBm / 0.0181 W 802.11ac VHT80: 11.71 dBm / 0.0148 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 13.60 dBm / 0.0229 W 802.11n HT20 : 13.58 dBm / 0.0228 W 802.11n HT40 : 12.97 dBm / 0.0198 W 802.11ac VHT20: 13.55 dBm / 0.0226 W 802.11ac VHT40: 12.92 dBm / 0.0196 W 802.11ac VHT80: 11.80 dBm / 0.0151 W</p> <p><5500 MHz ~ 5700 MHz > 802.11a : 13.58 dBm / 0.0228 W 802.11n HT20 : 13.54 dBm / 0.0226 W 802.11n HT40 : 12.74 dBm / 0.0188 W 802.11ac VHT20: 13.52 dBm / 0.0225 W 802.11ac VHT40: 12.70 dBm / 0.0186 W 802.11ac VHT80: 11.61 dBm / 0.0145 W</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 13.59 dBm / 0.0229 W 802.11n HT20 : 13.62 dBm / 0.0230 W 802.11n HT40 : 12.73 dBm / 0.0187 W 802.11ac VHT20: 13.60 dBm / 0.0229 W 802.11ac VHT40: 12.69 dBm / 0.0186 W 802.11ac VHT80: 11.56 dBm / 0.0143 W</p>



<p>99% Occupied Bandwidth</p>	<p><5180 MHz ~ 5240 MHz> 802.11a : 16.74 MHz 802.11n HT20 : 17.87 MHz 802.11n HT40 : 36.30 MHz 802.11ac VHT80 : 75.58 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.74 MHz 802.11n HT20 : 17.87 MHz 802.11n HT40 : 36.29 MHz 802.11ac VHT80 : 75.52 MHz <5500 MHz ~ 5700 MHz> 802.11a : 16.73 MHz 802.11n HT20 : 17.88 MHz 802.11n HT40 : 36.28 MHz 802.11ac VHT80 : 75.54 MHz <5745 MHz ~ 5825 MHz> 802.11a : 16.74 MHz 802.11n HT20 : 17.90 MHz 802.11n HT40 : 36.28 MHz 802.11ac VHT80 : 75.56 MHz</p>
<p>Antenna Type / Gain</p>	<p><5180 MHz ~ 5240 MHz> PIFA Antenna with gain -1.4 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna with gain -1.6 dBi <5500 MHz ~ 5700 MHz> PIFA Antenna with gain -1.2 dBi <5745 MHz ~ 5825 MHz> PIFA Antenna with gain -1.1 dBi</p>
<p>Type of Modulation</p>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)</p>

Note: For 802.11n HT20/ ac VHT20 and 802.11n HT40/ ac VHT40 mode, the whole testing has assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ 03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5700MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "#" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + BT Link + WLAN Link(5G) + USB Cable1 (Charging From Adaptor) for sample 1
Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable.	

RSE Co-location
802.11ac VHT80 CH58 5290MHz Tx + LTE Band 13 Link




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

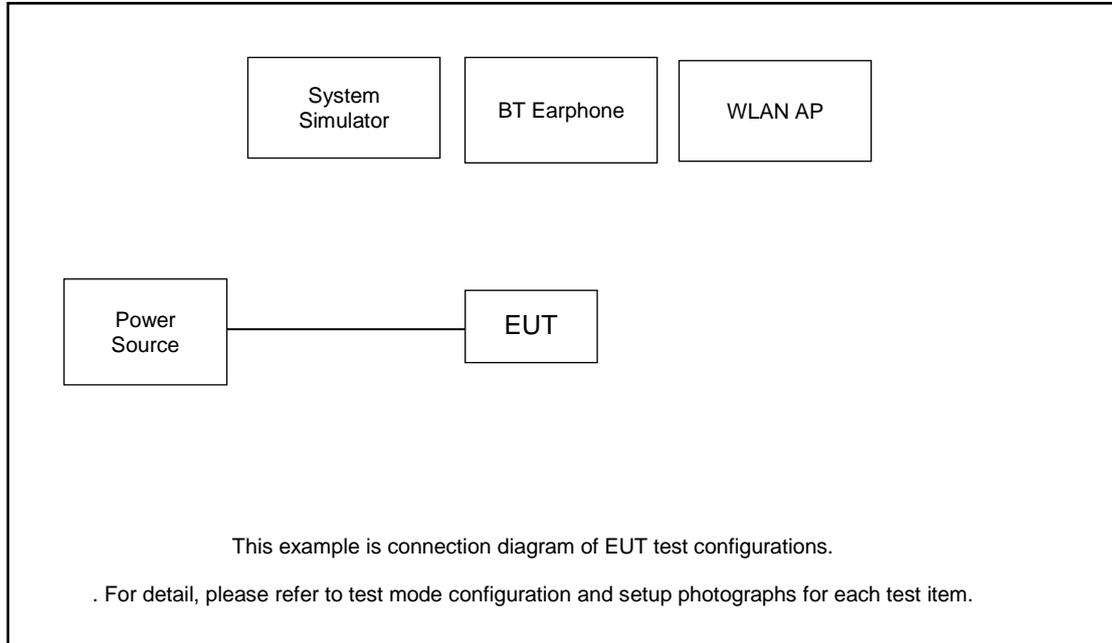

Radiated Emission:

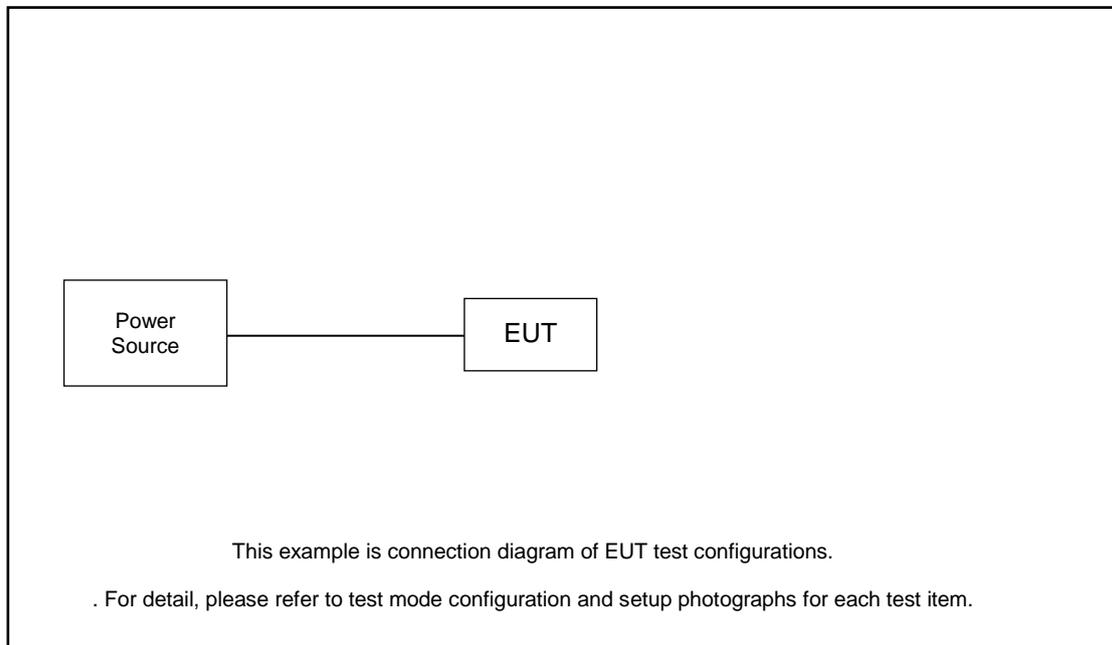



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Notebook	Latiude 3400	N/A	N/A	Unshielded,1.8m	Latiude 3400
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.8 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.8 + 10 = 12.8 \text{ (dB)}
 \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> Set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> Set RBW = 100kHz. Set the VBW ≥ 3 x RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 6 dB down from the peak of the emission. Measure and record the results in the test report.



3.1.4 Test Setup


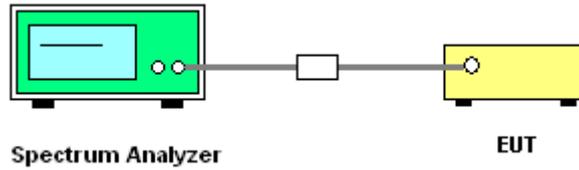




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

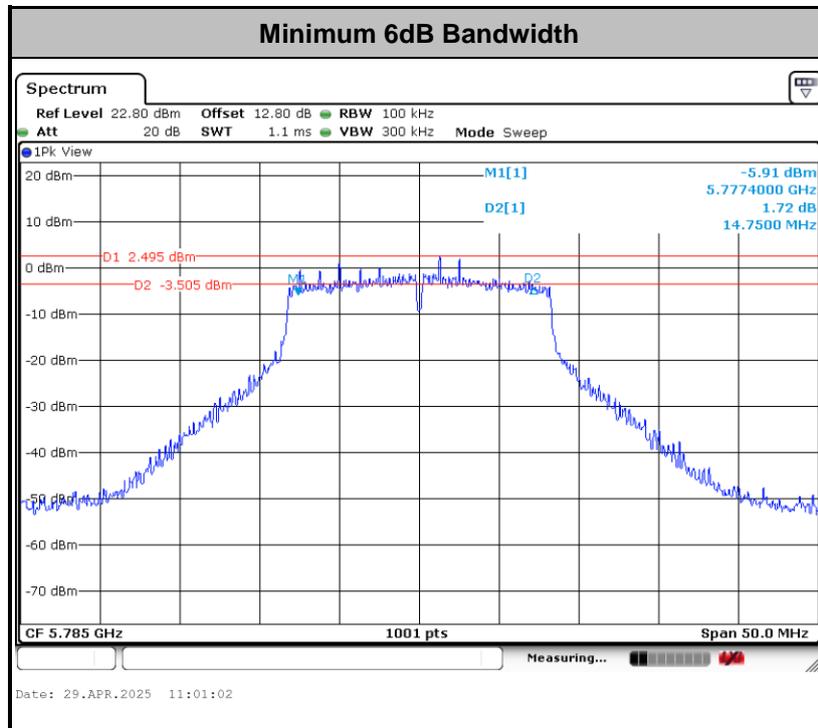

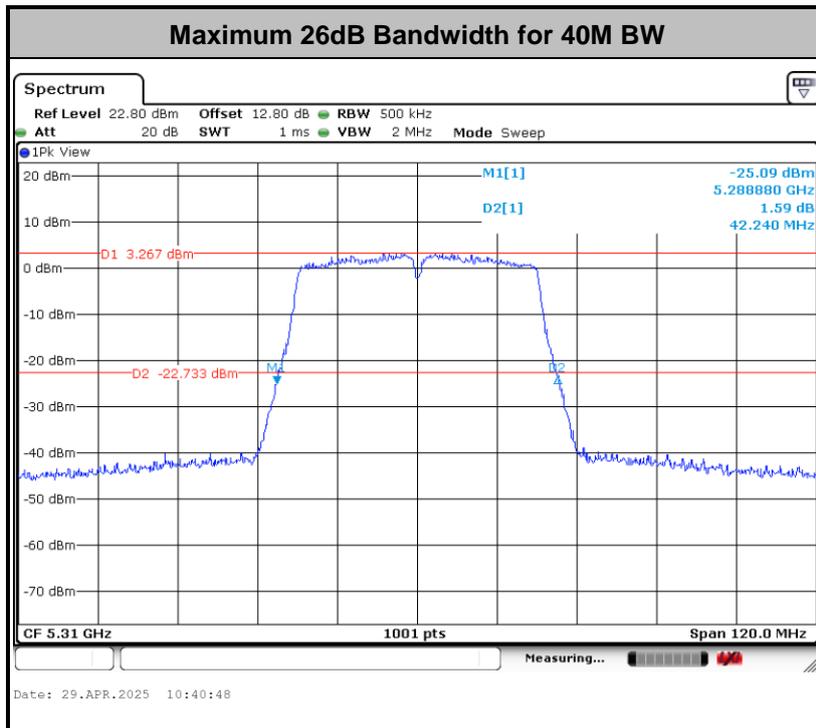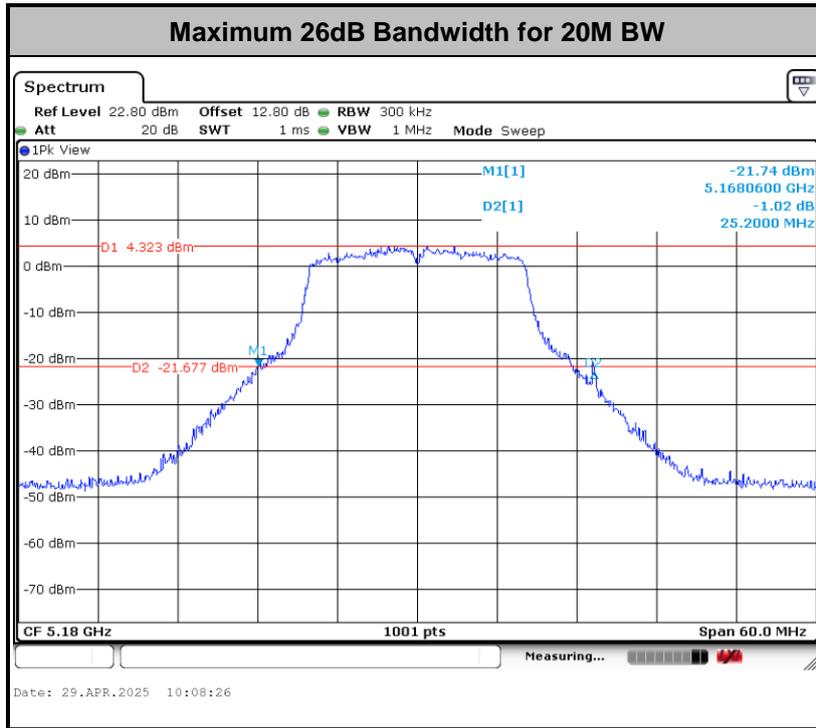

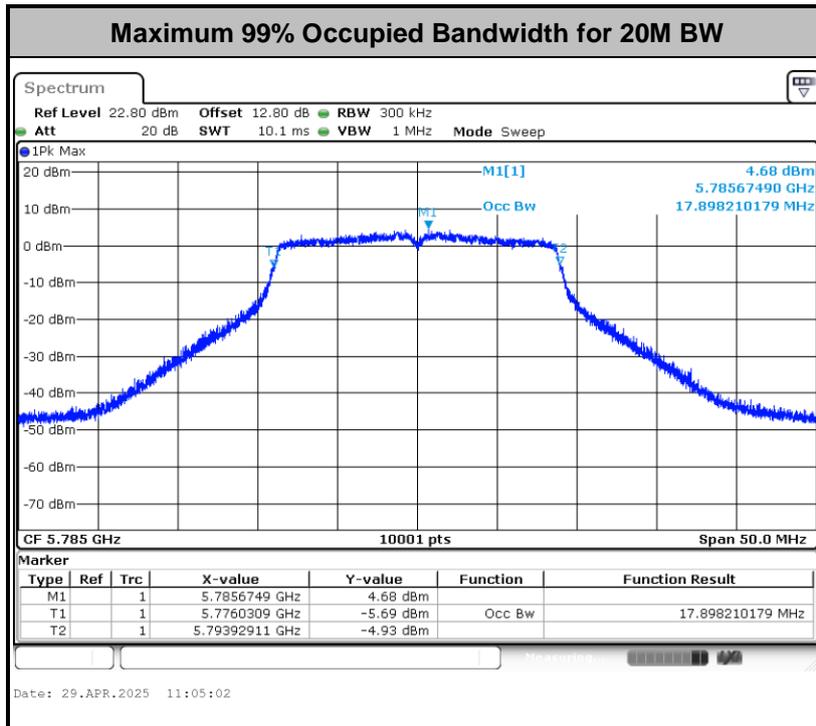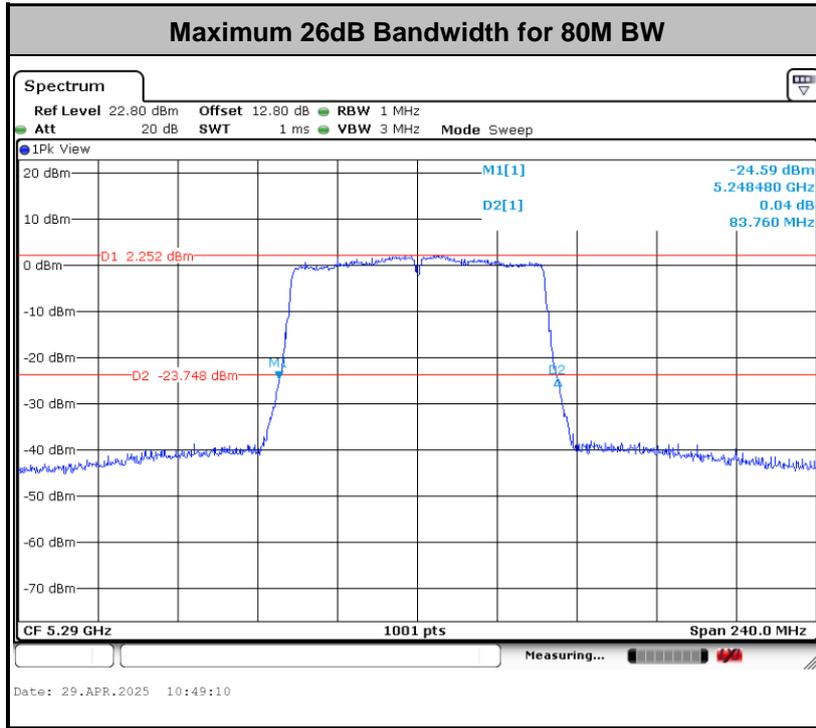

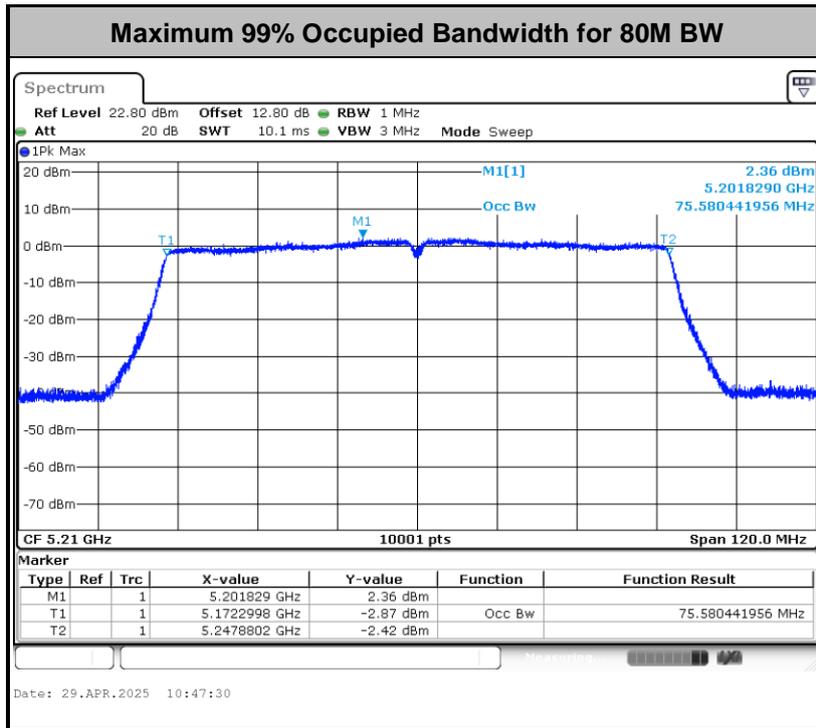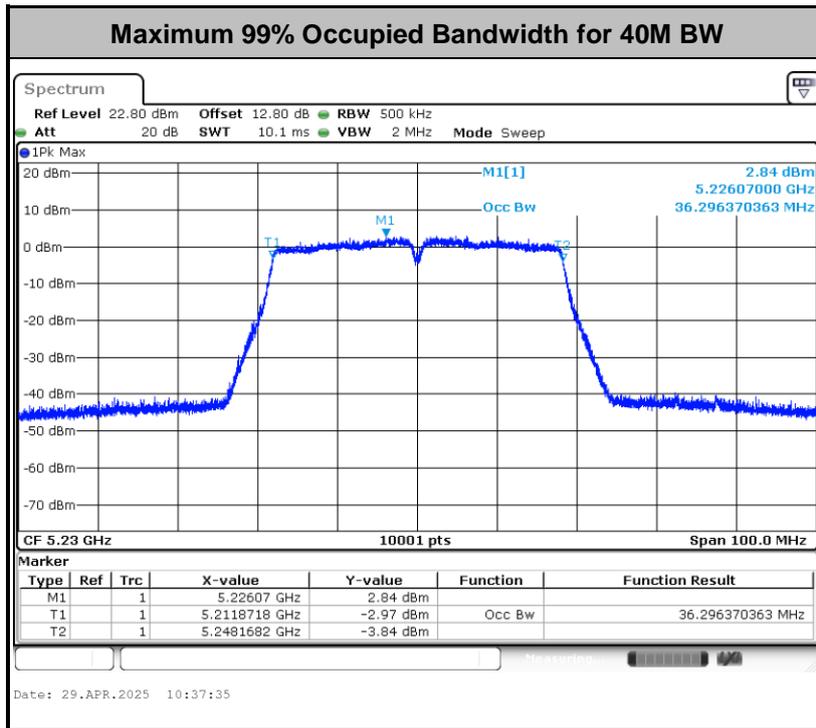

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

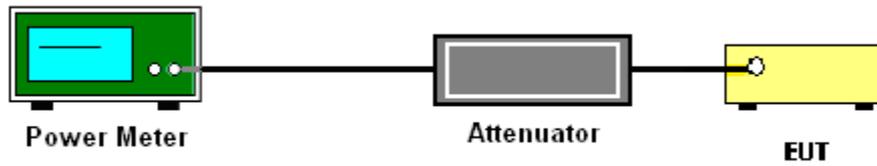

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PSD and record it.


3.3.4 Test Setup

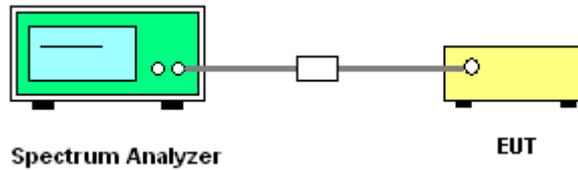

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


For devices operating in the bands UNII-1/2A/2C

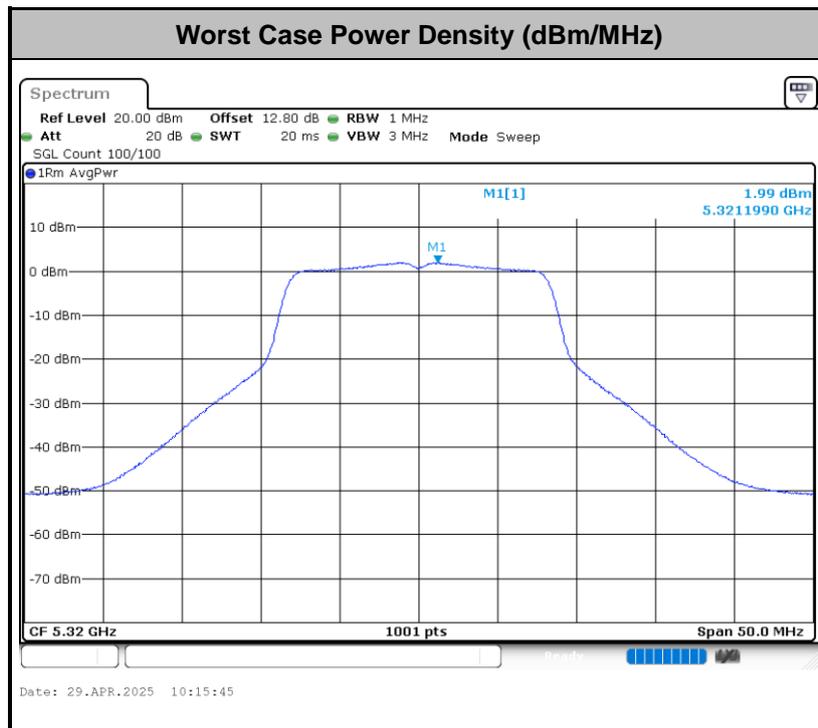

Note: Average Power Density (dB) = Measured value+ Duty Factor



For devices operating in the band UNII-3

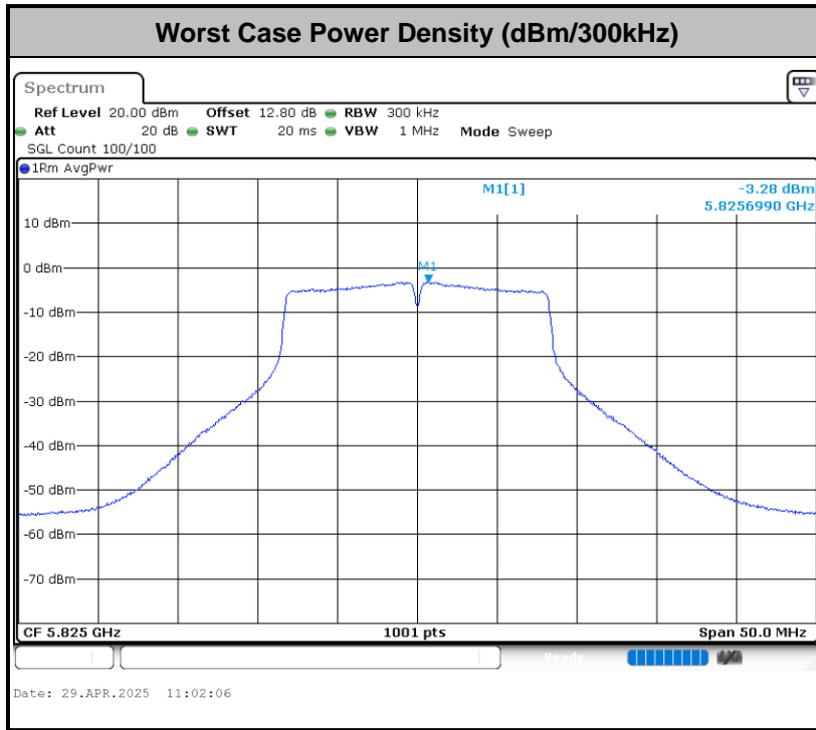



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

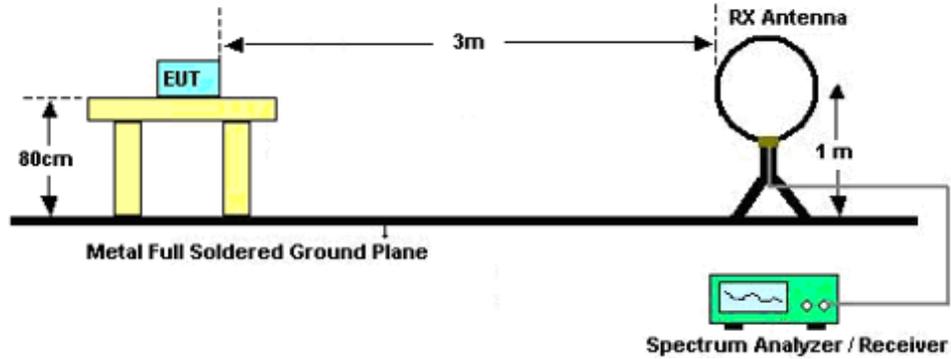

For radiated emissions from 30MHz to 1GHz

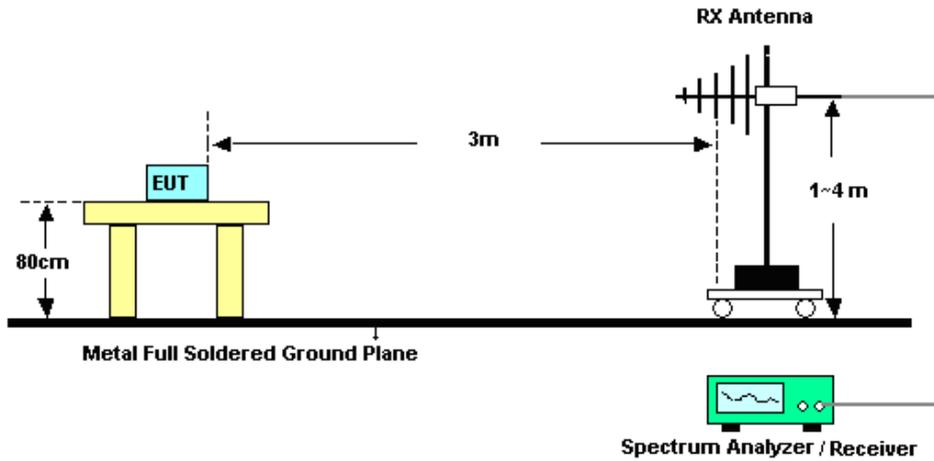

For radiated emissions above 1GHz

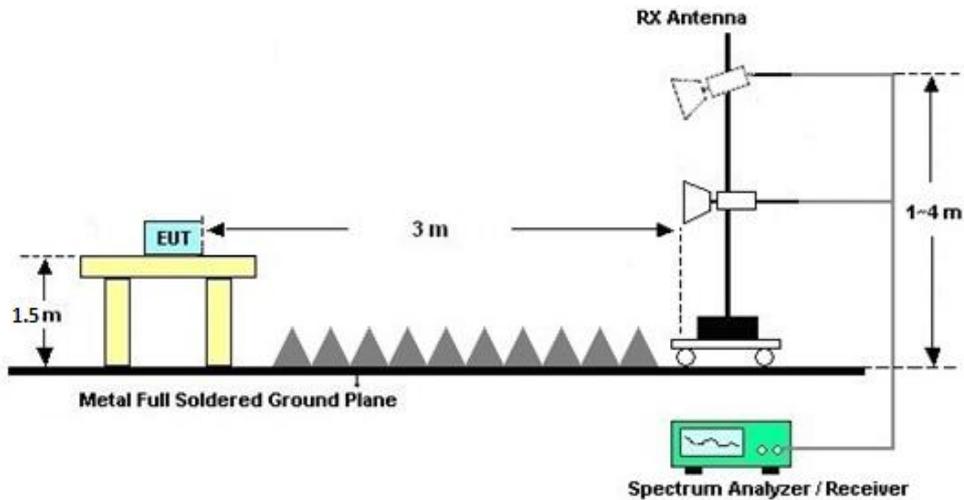



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

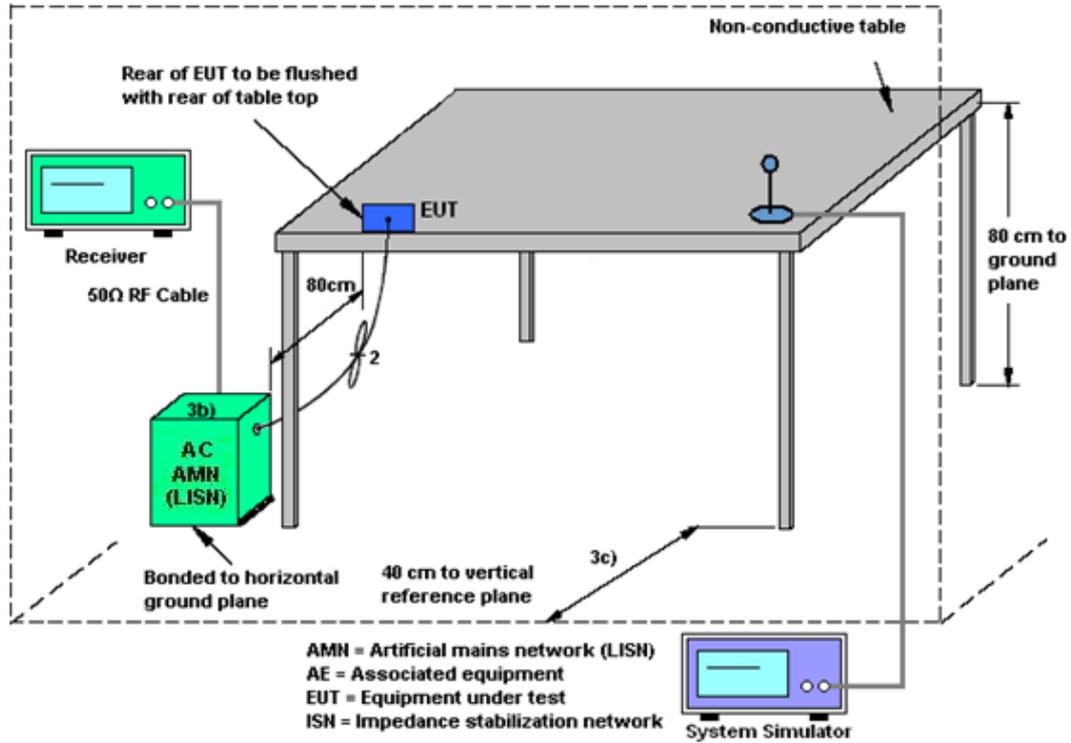

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024	Apr. 23, 2025~ May 07, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Apr. 23, 2025~ May 07, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 23, 2025~ May 07, 2025	Dec. 27, 2025	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 09, 2024	Apr. 23, 2025~ May 07, 2025	May 08, 2025	Radiation (03CH04-SZ)
Double Ridege Guide Antenna	ETS-Lindgren	Burgeon-3117	00240057	1GHz~18GHz	Jul. 13, 2024	Apr. 23, 2025~ May 07, 2025	Jul. 12, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	Apr. 23, 2025~ May 07, 2025	Jul. 03, 2025	Radiation (03CH04-SZ)
LF Amplifier	EM Electronics	EM330	060773	20MHz~3GHz	Apr. 02, 2025	Apr. 23, 2025~ May 07, 2025	Apr. 01, 2026	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Apr. 23, 2025~ May 07, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 23, 2025~ May 07, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5G Hz	Jul. 03, 2024	Apr. 23, 2025~ May 07, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 14, 2024	Apr. 23, 2025~ May 07, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 23, 2025~ May 07, 2025	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 23, 2025~ May 07, 2025	NCR	Radiation (03CH04-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Apr. 29, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 14, 2024	Apr. 29, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Apr. 29, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 27, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 27, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	6160100024 70	100Vac~250Vac	Dec.25, 2024	Apr. 27, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1
---	-----

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8
---	-----

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1
---	-----

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2025/4/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	16.74	25.20	-	22.24		
11a	6Mbps	1	44	5220	16.73	24.00	-	22.23		
11a	6Mbps	1	48	5240	16.72	23.28	-	22.23		
HT20	MCS0	1	36	5180	17.85	24.12	-	22.52		
HT20	MCS0	1	44	5220	17.87	24.84	-	22.52		
HT20	MCS0	1	48	5240	17.87	24.90	-	22.52		
HT40	MCS0	1	38	5190	36.26	41.64	-	23.01		
HT40	MCS0	1	46	5230	36.30	42.00	-	23.01		
VHT80	MCS0	1	42	5210	75.58	83.52	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
11a	6Mbps	1	36	5180	0.08	13.52	24.00	-1.40	Pass	14
11a	6Mbps	1	44	5220	0.08	13.59	24.00	-1.40	Pass	14
11a	6Mbps	1	48	5240	0.08	13.55	24.00	-1.40	Pass	14
HT20	MCS0	1	36	5180	0.09	13.52	24.00	-1.40	Pass	14
HT20	MCS0	1	44	5220	0.09	13.63	24.00	-1.40	Pass	14
HT20	MCS0	1	48	5240	0.09	13.57	24.00	-1.40	Pass	14
HT40	MCS0	1	38	5190	0.23	12.57	24.00	-1.40	Pass	14
HT40	MCS0	1	46	5230	0.23	12.61	24.00	-1.40	Pass	14
VHT20	MCS0	1	36	5180	0.07	13.51	24.00	-1.40	Pass	14
VHT20	MCS0	1	44	5220	0.07	13.57	24.00	-1.40	Pass	14
VHT20	MCS0	1	48	5240	0.07	13.53	24.00	-1.40	Pass	14
VHT40	MCS0	1	38	5190	0.27	12.55	24.00	-1.40	Pass	14
VHT40	MCS0	1	46	5230	0.27	12.58	24.00	-1.40	Pass	14
VHT80	MCS0	1	42	5210	0.35	11.71	24.00	-1.40	Pass	13

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.08	1.61	11.00	-1.40		Pass
11a	6Mbps	1	44	5220	0.08	1.68	11.00	-1.40		Pass
11a	6Mbps	1	48	5240	0.08	1.73	11.00	-1.40		Pass
HT20	MCS0	1	36	5180	0.09	1.11	11.00	-1.40		Pass
HT20	MCS0	1	44	5220	0.09	1.21	11.00	-1.40		Pass
HT20	MCS0	1	48	5240	0.09	1.37	11.00	-1.40		Pass
HT40	MCS0	1	38	5190	0.23	-2.49	11.00	-1.40		Pass
HT40	MCS0	1	46	5230	0.23	-2.25	11.00	-1.40		Pass
VHT80	MCS0	1	42	5210	0.35	-6.57	11.00	-1.40		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	16.72	25.38	23.23	29.23	23.98	
11a	6M bps	1	60	5300	16.74	23.94	23.24	29.24	23.98	
11a	6M bps	1	64	5320	16.74	25.14	23.24	29.24	23.98	
HT20	MCS 0	1	52	5260	17.87	24.60	23.52	29.52	23.98	
HT20	MCS 0	1	60	5300	17.86	24.48	23.52	29.52	23.98	
HT20	MCS 0	1	64	5320	17.87	23.88	23.52	29.52	23.98	
HT40	MCS 0	1	54	5270	36.29	42.12	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.28	42.24	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	75.52	83.76	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
11a	6M bps	1	52	5260	0.08	13.56	23.98	-1.60	26.99	Pass	14
11a	6M bps	1	60	5300	0.08	13.54	23.98	-1.60	26.99	Pass	14
11a	6M bps	1	64	5320	0.08	13.60	23.98	-1.60	26.99	Pass	14
HT20	MCS 0	1	52	5260	0.09	13.52	23.98	-1.60	26.99	Pass	14
HT20	MCS 0	1	60	5300	0.09	13.51	23.98	-1.60	26.99	Pass	14
HT20	MCS 0	1	64	5320	0.09	13.58	23.98	-1.60	26.99	Pass	14
HT40	MCS 0	1	54	5270	0.23	12.96	23.98	-1.60	26.99	Pass	14
HT40	MCS 0	1	62	5310	0.23	12.97	23.98	-1.60	26.99	Pass	14
VHT20	MCS 0	1	52	5260	0.07	13.51	23.98	-1.60	26.99	Pass	14
VHT20	MCS 0	1	60	5300	0.07	13.50	23.98	-1.60	26.99	Pass	14
VHT20	MCS 0	1	64	5320	0.07	13.55	23.98	-1.60	26.99	Pass	14
VHT40	MCS 0	1	54	5270	0.27	12.92	23.98	-1.60	26.99	Pass	14
VHT40	MCS 0	1	62	5310	0.27	12.92	23.98	-1.60	26.99	Pass	14
VHT80	MCS 0	1	58	5290	0.35	11.80	23.98	-1.60	26.99	Pass	13

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.08	1.84	11.00	-1.60		Pass
11a	6M bps	1	60	5300	0.08	2.05	11.00	-1.60		Pass
11a	6M bps	1	64	5320	0.08	2.07	11.00	-1.60		Pass
HT20	MCS 0	1	52	5260	0.09	1.52	11.00	-1.60		Pass
HT20	MCS 0	1	60	5300	0.09	1.66	11.00	-1.60		Pass
HT20	MCS 0	1	64	5320	0.09	1.71	11.00	-1.60		Pass
HT40	MCS 0	1	54	5270	0.23	-1.87	11.00	-1.60		Pass
HT40	MCS 0	1	62	5310	0.23	-1.70	11.00	-1.60		Pass
VHT80	MCS 0	1	58	5290	0.35	-6.16	11.00	-1.60		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)
11a	6M bps	1	100	5500	16.73	23.88	23.23	29.23	23.98
11a	6M bps	1	116	5580	16.71	23.82	23.23	29.23	23.98
11a	6M bps	1	140	5700	16.72	23.64	23.23	29.23	23.98
HT20	MCS 0	1	100	5500	17.88	25.02	23.52	29.52	23.98
HT20	MCS 0	1	116	5580	17.88	23.70	23.52	29.52	23.98
HT20	MCS 0	1	140	5700	17.86	25.26	23.52	29.52	23.98
HT40	MCS 0	1	102	5510	36.28	41.88	23.98	30.00	23.98
HT40	MCS 0	1	110	5550	36.27	41.64	23.98	30.00	23.98
HT40	MCS 0	1	134	5670	36.27	42.24	23.98	30.00	23.98
VHT80	MCS 0	1	106	5530	75.54	83.52	23.98	30.00	23.98
VHT80	MCS 0	1	122	5610	75.52	83.52	23.98	30.00	23.98

TEST RESULTS DATA
Average Power Table

FCC Band III											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
11a	6M bps	1	100	5500	0.08	13.58	23.98	-1.20	26.99	Pass	14
11a	6M bps	1	116	5580	0.08	13.51	23.98	-1.20	26.99	Pass	14
11a	6M bps	1	140	5700	0.08	12.67	23.98	-1.20	26.99	Pass	14
HT20	MCS 0	1	100	5500	0.09	13.52	23.98	-1.20	26.99	Pass	14
HT20	MCS 0	1	116	5580	0.09	13.54	23.98	-1.20	26.99	Pass	14
HT20	MCS 0	1	140	5700	0.09	12.42	23.98	-1.20	26.99	Pass	14
HT40	MCS 0	1	102	5510	0.23	12.59	23.98	-1.20	26.99	Pass	14
HT40	MCS 0	1	110	5550	0.23	12.62	23.98	-1.20	26.99	Pass	14
HT40	MCS 0	1	134	5670	0.23	12.74	23.98	-1.20	26.99	Pass	14
VHT20	MCS 0	1	100	5500	0.07	13.51	23.98	-1.20	26.99	Pass	14
VHT20	MCS 0	1	116	5580	0.07	13.52	23.98	-1.20	26.99	Pass	14
VHT20	MCS 0	1	140	5700	0.07	12.40	23.98	-1.20	26.99	Pass	14
VHT40	MCS 0	1	102	5510	0.27	12.56	23.98	-1.20	26.99	Pass	14
VHT40	MCS 0	1	110	5550	0.27	12.60	23.98	-1.20	26.99	Pass	14
VHT40	MCS 0	1	134	5670	0.27	12.70	23.98	-1.20	26.99	Pass	14
VHT80	MCS 0	1	106	5530	0.35	11.61	23.98	-1.20	26.99	Pass	13
VHT80	MCS 0	1	122	5610	0.35	11.59	23.98	-1.20	26.99	Pass	13

TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.08	1.52	11.00	-1.20		Pass
11a	6M bps	1	116	5580	0.08	1.80	11.00	-1.20		Pass
11a	6M bps	1	140	5700	0.08	1.14	11.00	-1.20		Pass
HT20	MCS 0	1	100	5500	0.09	1.16	11.00	-1.20		Pass
HT20	MCS 0	1	116	5580	0.09	1.56	11.00	-1.20		Pass
HT20	MCS 0	1	140	5700	0.09	0.86	11.00	-1.20		Pass
HT40	MCS 0	1	102	5510	0.23	-2.44	11.00	-1.20		Pass
HT40	MCS 0	1	110	5550	0.23	-2.31	11.00	-1.20		Pass
HT40	MCS 0	1	134	5670	0.23	-2.25	11.00	-1.20		Pass
VHT80	MCS 0	1	106	5530	0.35	-6.61	11.00	-1.20		Pass
VHT80	MCS 0	1	122	5610	0.35	-6.31	11.00	-1.20		Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	16.74	24.06	15.85	0.5	Pass
11a	6Mbps	1	157	5785	16.74	23.94	14.75	0.5	Pass
11a	6Mbps	1	165	5825	16.73	23.88	15.45	0.5	Pass
HT20	MCS 0	1	149	5745	17.88	24.24	15.10	0.5	Pass
HT20	MCS 0	1	157	5785	17.90	24.66	15.15	0.5	Pass
HT20	MCS 0	1	165	5825	17.86	24.36	15.20	0.5	Pass
HT40	MCS 0	1	151	5755	36.28	41.64	35.73	0.5	Pass
HT40	MCS 0	1	159	5795	36.28	41.64	35.82	0.5	Pass
VHT80	MCS 0	1	155	5775	75.56	83.76	75.52	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.08	13.52	30.00	-1.10	Pass
11a	6Mbps	1	157	5785	0.08	13.50	30.00	-1.10	Pass
11a	6Mbps	1	165	5825	0.08	13.59	30.00	-1.10	Pass
HT20	MCS 0	1	149	5745	0.09	13.52	30.00	-1.10	Pass
HT20	MCS 0	1	157	5785	0.09	13.55	30.00	-1.10	Pass
HT20	MCS 0	1	165	5825	0.09	13.62	30.00	-1.10	Pass
HT40	MCS 0	1	151	5755	0.23	12.56	30.00	-1.10	Pass
HT40	MCS 0	1	159	5795	0.23	12.73	30.00	-1.10	Pass
VHT20	MCS 0	1	149	5745	0.07	13.50	30.00	-1.10	Pass
VHT20	MCS 0	1	157	5785	0.07	13.54	30.00	-1.10	Pass
VHT20	MCS 0	1	165	5825	0.07	13.60	30.00	-1.10	Pass
VHT40	MCS 0	1	151	5755	0.27	12.53	30.00	-1.10	Pass
VHT40	MCS 0	1	159	5795	0.27	12.69	30.00	-1.10	Pass
VHT80	MCS 0	1	155	5775	0.35	11.56	30.00	-1.10	Pass

Setting
14
14
14
14
14
14
14
14
14
14
14
14
14
14
14
14
13


TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.08	2.22	-1.18	30.00	-1.10	Pass
11a	6Mbps	1	157	5785	0.08	2.22	-1.32	30.00	-1.10	Pass
11a	6Mbps	1	165	5825	0.08	2.22	-0.98	30.00	-1.10	Pass
HT20	MCS 0	1	149	5745	0.09	2.22	-1.55	30.00	-1.10	Pass
HT20	MCS 0	1	157	5785	0.09	2.22	-1.67	30.00	-1.10	Pass
HT20	MCS 0	1	165	5825	0.09	2.22	-1.30	30.00	-1.10	Pass
HT40	MCS 0	1	151	5755	0.23	2.22	-5.29	30.00	-1.10	Pass
HT40	MCS 0	1	159	5795	0.23	2.22	-5.11	30.00	-1.10	Pass
VHT80	MCS 0	1	155	5775	0.35	2.22	-9.48	30.00	-1.10	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

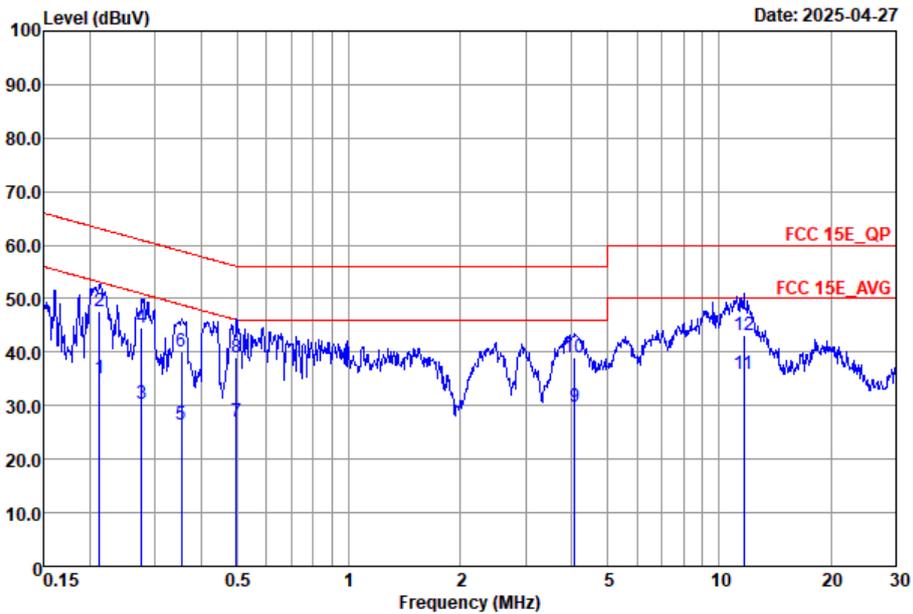


Site : CO02-SZ
 Condition : FCC 15E_QP LISN_2025-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.21	35.00	-18.10	53.10	15.11	9.71	10.18	Average
2 *	0.21	47.60	-15.50	63.10	27.71	9.71	10.18	QP
3	0.28	30.44	-20.50	50.94	10.50	9.74	10.20	Average
4	0.28	44.44	-16.50	60.94	24.50	9.74	10.20	QP
5	0.35	26.35	-22.52	48.87	6.40	9.73	10.22	Average
6	0.35	40.15	-18.72	58.87	20.20	9.73	10.22	QP
7	0.50	26.92	-19.13	46.05	7.00	9.68	10.24	Average
8	0.50	38.92	-17.13	56.05	19.00	9.68	10.24	QP
9	4.07	29.93	-16.07	46.00	10.00	9.66	10.27	Average
10	4.07	38.93	-17.07	56.00	19.00	9.66	10.27	QP
11	11.62	35.85	-14.15	50.00	16.01	9.63	10.21	Average
12	11.62	43.05	-16.95	60.00	23.21	9.63	10.21	QP



Test Engineer :	Nathon	Temperature :	22~24℃
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

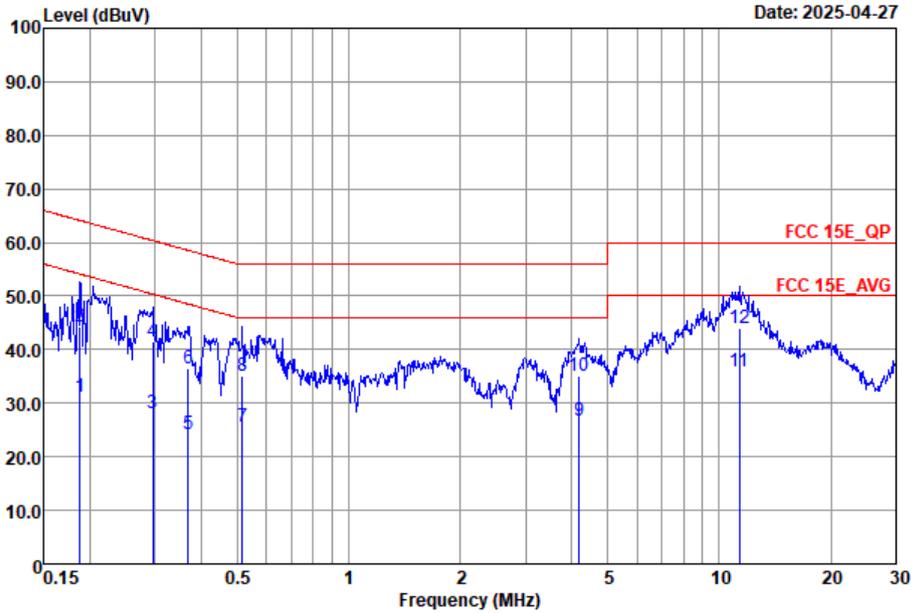

Site : CO02-SZ
 Condition : FCC 15E_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.19	31.10	-23.01	54.11	11.10	9.82	10.18	Average
2	0.19	44.30	-19.81	64.11	24.30	9.82	10.18	QP
3	0.30	28.27	-22.10	50.37	8.19	9.87	10.21	Average
4	0.30	41.37	-19.00	60.37	21.29	9.87	10.21	QP
5	0.37	24.30	-24.22	48.52	4.40	9.68	10.22	Average
6	0.37	36.40	-22.12	58.52	16.50	9.68	10.22	QP
7	0.52	25.65	-20.35	46.00	5.79	9.62	10.24	Average
8	0.52	35.05	-20.95	56.00	15.19	9.62	10.24	QP
9	4.18	26.74	-19.26	46.00	6.80	9.67	10.27	Average
10	4.18	35.24	-20.76	56.00	15.30	9.67	10.27	QP
11	11.32	35.96	-14.04	50.00	16.10	9.65	10.21	Average
12 *	11.32	43.96	-16.04	60.00	24.10	9.65	10.21	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Winter	Relative Humidity :	50%
		Temperature :	20°C-22°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	6	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	6	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	6	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	6	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	6	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	6	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	6	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	6	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	6	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	6	802.11n HT20	36	5180	MCS0	Full RU	-
Mode 11	U-NII-1	5.15-5.25	6	802.11n HT20	44	5220	MCS0	Full RU	-
Mode 12	U-NII-1	5.15-5.25	6	802.11n HT20	48	5240	MCS0	Full RU	-
Mode 13	U-NII-2A	5.25-5.35	6	802.11n HT20	52	5260	MCS0	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	6	802.11n HT20	60	5300	MCS0	Full RU	-
Mode 15	U-NII-2A	5.25-5.35	6	802.11n HT20	64	5320	MCS0	Full RU	-
Mode 16	U-NII-2C	5.47-5.725	6	802.11n HT20	100	5500	MCS0	Full RU	-
Mode 17	U-NII-2C	5.47-5.725	6	802.11n HT20	116	5580	MCS0	Full RU	-
Mode 18	U-NII-2C	5.47-5.725	6	802.11n HT20	140	5700	MCS0	Full RU	-
Mode 19	U-NII-1	5.15-5.25	6	802.11n HT40	38	5190	MCS0	Full RU	-
Mode 20	U-NII-1	5.15-5.25	6	802.11n HT40	46	5230	MCS0	Full RU	-
Mode 21	U-NII-2A	5.25-5.35	6	802.11n HT40	54	5270	MCS0	Full RU	-
Mode 22	U-NII-2A	5.25-5.35	6	802.11n HT40	62	5310	MCS0	Full RU	-
Mode 23	U-NII-2C	5.47-5.725	6	802.11n HT40	102	5510	MCS0	Full RU	-
Mode 24	U-NII-2C	5.47-5.725	6	802.11n HT40	110	5550	MCS0	Full RU	-
Mode 25	U-NII-2C	5.47-5.725	6	802.11n HT40	134	5670	MCS0	Full RU	-
Mode 26	U-NII-1	5.15-5.25	6	802.11ac VHT80	42	5210	MCS0	Full RU	-
Mode 27	U-NII-2A	5.25-5.35	6	802.11ac VHT80	58	5290	MCS0	Full RU	-
Mode 28	U-NII-2C	5.47-5.725	6	802.11ac VHT80	106	5530	MCS0	Full RU	-
Mode 29	U-NII-2C	5.47-5.725	6	802.11ac VHT80	122	5610	MCS0	Full RU	-
Mode 30	U-NII-3	5.725-5.85	6	802.11a	149	5745	6Mbps	-	-
Mode 31	U-NII-3	5.725-5.85	6	802.11a	157	5785	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	6	802.11a	165	5825	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	6	802.11n HT20	149	5745	MCS0	Full RU	-
Mode 34	U-NII-3	5.725-5.85	6	802.11n HT20	157	5785	MCS0	Full RU	-
Mode 35	U-NII-3	5.725-5.85	6	802.11n HT20	165	5825	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 36	U-NII-3	5.725-5.85	6	802.11n HT40	151	5755	MCS0	Full RU	-
Mode 37	U-NII-3	5.725-5.85	6	802.11n HT40	159	5795	MCS0	Full RU	-
Mode 38	U-NII-3	5.725-5.85	6	802.11ac VHT80	155	5775	MCS0	Full RU	-
Mode 43	U-NII-2A	5.25-5.35	6	802.11ac VHT80	58	5290-	MCS0	LF	-
Mode 44	U-NII-3	5.725-5.85	6	802.11n HT40	151	5755	MCS0	LF	-

For Co-location mode:

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 45 (CO-TX)	U-NII-2A	5.25-5.35	6	802.11ac VHT80	58	5290	MCS0	Full RU	-
LTE Band 13 Link									

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.76	43.18	54.00	-10.82	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	46.00	68.30	-22.30	V	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	47.01	68.30	-21.29	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	46.46	68.30	-21.84	H	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	43.53	68.30	-24.77	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	46.66	74.00	-27.34	V	Peak	Pass	Harmonic
6	802.11a	64	5352.62	44.86	54.00	-9.14	H	AVERAGE	Pass	Band Edge
6	802.11a	64	15960.00	46.55	74.00	-27.45	H	Peak	Pass	Harmonic
7	802.11a	100	5458.15	44.96	54.00	-9.04	H	AVERAGE	Pass	Band Edge
7	802.11a	100	16500.00	46.65	68.30	-21.65	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	48.12	68.30	-20.18	H	Peak	Pass	Harmonic
9	802.11a	140	5726.33	58.82	68.30	-9.48	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	47.90	68.30	-20.40	V	Peak	Pass	Harmonic
10	802.11n HT20	36	5149.22	44.49	54.00	-9.51	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	44.30	68.30	-24.00	V	Peak	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	44	10440.00	44.48	68.30	-23.82	V	Peak	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	48	10480.00	44.47	68.30	-23.83	V	Peak	Pass	Harmonic
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	52	10520.00	44.56	68.30	-23.74	V	Peak	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
14	802.11n HT20	60	15900.00	44.81	74.00	-29.19	V	Peak	Pass	Harmonic
15	802.11n HT20	64	5350.10	45.63	54.00	-8.37	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	15960.00	46.64	74.00	-27.36	V	Peak	Pass	Harmonic
16	802.11n HT20	100	5458.00	43.75	54.00	-10.25	H	AVERAGE	Pass	Band Edge
16	802.11n HT20	100	16500.00	43.27	68.30	-25.03	V	Peak	Pass	Harmonic
17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	116	16740.00	44.50	68.30	-23.80	V	Peak	Pass	Harmonic
18	802.11n HT20	140	5731.46	54.46	68.30	-13.84	H	PEAK	Pass	Band Edge
18	802.11n HT20	140	17100.00	44.87	68.30	-23.43	H	Peak	Pass	Harmonic
19	802.11n HT40	38	5148.96	45.64	54.00	-8.36	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	10380.00	45.92	68.30	-22.38	V	Peak	Pass	Harmonic
20	802.11n HT40	46	-	-	-	-	-	-	-	Band Edge
20	802.11n HT40	46	10460.00	44.08	68.30	-24.22	V	Peak	Pass	Harmonic
21	802.11n HT40	54	-	-	-	-	-	-	-	Band Edge
21	802.11n HT40	54	10540.00	45.05	68.30	-23.25	H	Peak	Pass	Harmonic
22	802.11n HT40	62	5350.65	47.36	54.00	-6.64	H	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	15930.00	46.57	74.00	-27.43	H	Peak	Pass	Harmonic
23	802.11n HT40	102	5459.76	44.51	54.00	-9.49	H	AVERAGE	Pass	Band Edge
23	802.11n HT40	102	16530.00	46.98	68.30	-21.32	H	Peak	Pass	Harmonic
24	802.11n HT40	110	-	-	-	-	-	-	-	Band Edge
24	802.11n HT40	110	16650.00	47.64	68.30	-20.66	H	Peak	Pass	Harmonic
25	802.11n HT40	134	5424.88	42.85	54.00	-11.15	H	AVERAGE	Pass	Band Edge
25	802.11n HT40	134	17010.00	47.49	68.30	-20.81	H	Peak	Pass	Harmonic
26	802.11ac VHT80	42	5137.97	47.86	54.00	-6.14	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	42	10420.00	45.24	68.30	-23.06	H	Peak	Pass	Harmonic
27	802.11ac VHT80	58	5356.64	50.71	54.00	-3.29	H	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	58	10580.00	45.95	68.30	-22.35	H	Peak	Pass	Harmonic
28	802.11ac VHT80	106	5458.72	49.62	54.00	-4.38	H	AVERAGE	Pass	Band Edge
28	802.11ac VHT80	106	16590.00	46.45	68.30	-21.85	H	Peak	Pass	Harmonic
29	802.11ac VHT80	122	5450.62	44.33	54.00	-9.67	V	AVERAGE	Pass	Band Edge
29	802.11ac VHT80	122	16830.00	46.92	68.30	-21.38	H	Peak	Pass	Harmonic
30	802.11a	149	5639.44	53.47	68.30	-14.83	H	PEAK	Pass	Band Edge
30	802.11a	149	17235.00	47.45	68.30	-20.85	V	Peak	Pass	Harmonic
31	802.11a	157	-	-	-	-	-	-	-	Band Edge
31	802.11a	157	17355.00	46.82	68.30	-21.48	H	Peak	Pass	Harmonic
32	802.11a	165	5945.88	53.68	68.30	-14.62	V	PEAK	Pass	Band Edge
32	802.11a	165	17475.00	48.25	68.30	-20.05	V	Peak	Pass	Harmonic
33	802.11n HT20	149	5627.84	53.31	68.30	-14.99	V	PEAK	Pass	Band Edge
33	802.11n HT20	149	17235.00	48.33	68.30	-19.97	H	Peak	Pass	Harmonic
34	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
34	802.11n HT20	157	17355.00	47.49	68.30	-20.81	H	Peak	Pass	Harmonic
35	802.11n HT20	165	5937.63	54.00	68.30	-14.30	V	PEAK	Pass	Band Edge
35	802.11n HT20	165	17475.00	50.12	68.30	-18.18	H	Peak	Pass	Harmonic
36	802.11n HT40	151	5633.95	53.32	68.30	-14.98	H	PEAK	Pass	Band Edge
36	802.11n HT40	151	17265.00	47.56	68.30	-20.74	H	Peak	Pass	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
37	802.11n HT40	159	5926.13	53.61	68.30	-14.69	V	PEAK	Pass	Band Edge
37	802.11n HT40	159	17385.00	47.63	68.30	-20.67	H	Peak	Pass	Harmonic
38	802.11ac VHT80	155	5946.15	54.19	68.30	-14.11	H	PEAK	Pass	Band Edge
38	802.11ac VHT80	155	17325.00	48.20	68.30	-20.10	H	Peak	Pass	Harmonic
43	802.11ac VHT80	58	40.67	32.29	40.00	-7.71	V	Peak	Pass	LF
44	802.11ac VHT40	151	41.64	31.63	40.00	-8.37	V	Peak	Pass	LF
45	802.11ac VHT80	58	5356.80	50.63	54.00	-3.37	H	Average	Pass	Band Edge
45	802.11ac VHT80	58	10580.00	48.13	68.30	-20.17	H	Peak	Pass	Harmonic



Mode	1																																																																											
	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																											
ANT	6																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.22</td> <td>52.43</td> <td>74.00</td> <td>-21.57</td> <td>42.08</td> <td>35.29</td> <td>8.53</td> <td>33.47</td> <td>100</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.22	52.43	74.00	-21.57	42.08	35.29	8.53	33.47	100	82	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.37</td> <td>-----</td> <td>-----</td> <td>94.93</td> <td>35.31</td> <td>8.59</td> <td>33.46</td> <td>100</td> <td>82</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	105.37	-----	-----	94.93	35.31	8.59	33.46	100	82	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5149.22	52.43	74.00	-21.57	42.08	35.29	8.53	33.47	100	82	PEAK																																																																	
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5180.00	105.37	-----	-----	94.93	35.31	8.59	33.46	100	82	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>43.18</td> <td>54.00</td> <td>-10.82</td> <td>32.82</td> <td>35.29</td> <td>8.54</td> <td>33.47</td> <td>100</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	43.18	54.00	-10.82	32.82	35.29	8.54	33.47	100	82	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>98.84</td> <td>-----</td> <td>-----</td> <td>88.40</td> <td>35.31</td> <td>8.59</td> <td>33.46</td> <td>100</td> <td>82</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	98.84	-----	-----	88.40	35.31	8.59	33.46	100	82	AVERAGE
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5149.76	43.18	54.00	-10.82	32.82	35.29	8.54	33.47	100	82	AVERAGE																																																																	
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5180.00	98.84	-----	-----	88.40	35.31	8.59	33.46	100	82	AVERAGE																																																																	



Mode	1																																																																															
	Band Edge																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																															
ANT	6																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-04-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5061.20</td> <td>51.43</td> <td>74.00</td> <td>-22.57</td> <td>41.31</td> <td>35.24</td> <td>8.37</td> <td>33.49</td> <td>400</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5061.20	51.43	74.00	-22.57	41.31	35.24	8.37	33.49	400	202	PEAK	<p style="text-align: right;">Date: 2025-04-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.08</td> <td>-----</td> <td>-----</td> <td>91.65</td> <td>35.31</td> <td>8.58</td> <td>33.46</td> <td>400</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.08	-----	-----	91.65	35.31	8.58	33.46	400	202	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5061.20	51.43	74.00	-22.57	41.31	35.24	8.37	33.49	400	202	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5180.00	102.08	-----	-----	91.65	35.31	8.58	33.46	400	202	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-04-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.58</td> <td>42.26</td> <td>54.00</td> <td>-11.74</td> <td>31.91</td> <td>35.29</td> <td>8.53</td> <td>33.47</td> <td>400</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.58	42.26	54.00	-11.74	31.91	35.29	8.53	33.47	400	202	AVERAGE	<p style="text-align: right;">Date: 2025-04-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>94.87</td> <td>-----</td> <td>-----</td> <td>84.43</td> <td>35.31</td> <td>8.59</td> <td>33.46</td> <td>400</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.87	-----	-----	84.43	35.31	8.59	33.46	400	202	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5149.58	42.26	54.00	-11.74	31.91	35.29	8.53	33.47	400	202	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5180.00	94.87	-----	-----	84.43	35.31	8.59	33.46	400	202	AVERAGE																																																																					



Mode	1																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>44.67</td> <td>68.30</td> <td>-23.63</td> <td>57.90</td> <td>38.47</td> <td>12.06</td> <td>63.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>45.58</td> <td>74.00</td> <td>-28.42</td> <td>54.06</td> <td>41.32</td> <td>14.58</td> <td>64.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	44.67	68.30	-23.63	57.90	38.47	12.06	63.76	---	---	Peak	2	15540.00	45.58	74.00	-28.42	54.06	41.32	14.58	64.38	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>46.00</td> <td>68.30</td> <td>-22.30</td> <td>59.23</td> <td>38.47</td> <td>12.06</td> <td>63.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>46.96</td> <td>74.00</td> <td>-27.04</td> <td>55.44</td> <td>41.32</td> <td>14.58</td> <td>64.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	46.00	68.30	-22.30	59.23	38.47	12.06	63.76	---	---	Peak	2	15540.00	46.96	74.00	-27.04	55.44	41.32	14.58	64.38	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	44.67	68.30	-23.63	57.90	38.47	12.06	63.76	---	---	Peak																																																																																							
2	15540.00	45.58	74.00	-28.42	54.06	41.32	14.58	64.38	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	46.00	68.30	-22.30	59.23	38.47	12.06	63.76	---	---	Peak																																																																																							
2	15540.00	46.96	74.00	-27.04	55.44	41.32	14.58	64.38	---	---	Peak																																																																																							



Mode	2																																																																																																										
	Harmonic																																																																																																										
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																										
ANT	6																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.03</td> <td>68.30</td> <td>-22.27</td> <td>59.14</td> <td>38.49</td> <td>12.12</td> <td>63.72</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>45.56</td> <td>74.00</td> <td>-28.44</td> <td>53.98</td> <td>41.40</td> <td>14.64</td> <td>64.46</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	46.03	68.30	-22.27	59.14	38.49	12.12	63.72	---	---	Peak	2	15660.00	45.56	74.00	-28.44	53.98	41.40	14.64	64.46	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.01</td> <td>68.30</td> <td>-21.29</td> <td>60.12</td> <td>38.49</td> <td>12.12</td> <td>63.72</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.95</td> <td>74.00</td> <td>-26.05</td> <td>56.37</td> <td>41.40</td> <td>14.64</td> <td>64.46</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.01	68.30	-21.29	60.12	38.49	12.12	63.72	---	---	Peak	2	15660.00	47.95	74.00	-26.05	56.37	41.40	14.64	64.46	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	10440.00	46.03	68.30	-22.27	59.14	38.49	12.12	63.72	---	---	Peak																																																																																																
2	15660.00	45.56	74.00	-28.44	53.98	41.40	14.64	64.46	---	---	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	10440.00	47.01	68.30	-21.29	60.12	38.49	12.12	63.72	---	---	Peak																																																																																																
2	15660.00	47.95	74.00	-26.05	56.37	41.40	14.64	64.46	---	---	Peak																																																																																																



Mode	3																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.46</td> <td>68.30</td> <td>-21.84</td> <td>59.52</td> <td>38.50</td> <td>12.15</td> <td>63.71</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.29</td> <td>74.00</td> <td>-27.71</td> <td>54.70</td> <td>41.43</td> <td>14.66</td> <td>64.50</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg	1	10480.00	46.46	68.30	-21.84	59.52	38.50	12.15	63.71	--- Peak	2	15720.00	46.29	74.00	-27.71	54.70	41.43	14.66	64.50	--- Peak	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.25</td> <td>68.30</td> <td>-22.05</td> <td>59.31</td> <td>38.50</td> <td>12.15</td> <td>63.71</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.96</td> <td>74.00</td> <td>-27.04</td> <td>55.37</td> <td>41.43</td> <td>14.66</td> <td>64.50</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg	1	10480.00	46.25	68.30	-22.05	59.31	38.50	12.15	63.71	--- Peak	2	15720.00	46.96	74.00	-27.04	55.37	41.43	14.66	64.50	--- Peak
	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg																																																																								
1	10480.00	46.46	68.30	-21.84	59.52	38.50	12.15	63.71	--- Peak																																																																							
2	15720.00	46.29	74.00	-27.71	54.70	41.43	14.66	64.50	--- Peak																																																																							
Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg																																																																								
1	10480.00	46.25	68.30	-22.05	59.31	38.50	12.15	63.71	--- Peak																																																																							
2	15720.00	46.96	74.00	-27.04	55.37	41.43	14.66	64.50	--- Peak																																																																							



Mode	4																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>43.44</td> <td>68.30</td> <td>-24.86</td> <td>56.45</td> <td>38.50</td> <td>12.18</td> <td>63.69</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.20</td> <td>74.00</td> <td>-27.80</td> <td>54.59</td> <td>41.47</td> <td>14.69</td> <td>64.55</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	43.44	68.30	-24.86	56.45	38.50	12.18	63.69	---	---	Peak	2	15780.00	46.20	74.00	-27.80	54.59	41.47	14.69	64.55	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>43.53</td> <td>68.30</td> <td>-24.77</td> <td>56.54</td> <td>38.50</td> <td>12.18</td> <td>63.69</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>45.90</td> <td>74.00</td> <td>-28.10</td> <td>54.29</td> <td>41.47</td> <td>14.69</td> <td>64.55</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	43.53	68.30	-24.77	56.54	38.50	12.18	63.69	---	---	Peak	2	15780.00	45.90	74.00	-28.10	54.29	41.47	14.69	64.55	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10520.00	43.44	68.30	-24.86	56.45	38.50	12.18	63.69	---	---	Peak																																																																																							
2	15780.00	46.20	74.00	-27.80	54.59	41.47	14.69	64.55	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10520.00	43.53	68.30	-24.77	56.54	38.50	12.18	63.69	---	---	Peak																																																																																							
2	15780.00	45.90	74.00	-28.10	54.29	41.47	14.69	64.55	---	---	Peak																																																																																							



Mode	5																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.32</td> <td>74.00</td> <td>-29.68</td> <td>57.23</td> <td>38.52</td> <td>12.23</td> <td>63.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>45.60</td> <td>74.00</td> <td>-28.40</td> <td>53.94</td> <td>41.54</td> <td>14.75</td> <td>64.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	44.32	74.00	-29.68	57.23	38.52	12.23	63.66	---	---	Peak	2	15900.00	45.60	74.00	-28.40	53.94	41.54	14.75	64.63	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.09</td> <td>74.00</td> <td>-29.91</td> <td>57.00</td> <td>38.52</td> <td>12.23</td> <td>63.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.66</td> <td>74.00</td> <td>-27.34</td> <td>55.00</td> <td>41.54</td> <td>14.75</td> <td>64.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	44.09	74.00	-29.91	57.00	38.52	12.23	63.66	---	---	Peak	2	15900.00	46.66	74.00	-27.34	55.00	41.54	14.75	64.63	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10600.00	44.32	74.00	-29.68	57.23	38.52	12.23	63.66	---	---	Peak																																																																																							
2	15900.00	45.60	74.00	-28.40	53.94	41.54	14.75	64.63	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10600.00	44.09	74.00	-29.91	57.00	38.52	12.23	63.66	---	---	Peak																																																																																							
2	15900.00	46.66	74.00	-27.34	55.00	41.54	14.75	64.63	---	---	Peak																																																																																							



	6																																																																															
Mode	Band Edge																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.68</td> <td>53.27</td> <td>74.00</td> <td>-20.73</td> <td>41.89</td> <td>35.41</td> <td>9.40</td> <td>33.43</td> <td>103</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5356.68	53.27	74.00	-20.73	41.89	35.41	9.40	33.43	103	84	PEAK	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.10</td> <td>74.00</td> <td>-----</td> <td>94.94</td> <td>35.39</td> <td>9.21</td> <td>33.44</td> <td>103</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	106.10	74.00	-----	94.94	35.39	9.21	33.44	103	84	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5356.68	53.27	74.00	-20.73	41.89	35.41	9.40	33.43	103	84	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	106.10	74.00	-----	94.94	35.39	9.21	33.44	103	84	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.62</td> <td>44.86</td> <td>54.00</td> <td>-9.14</td> <td>33.50</td> <td>35.41</td> <td>9.38</td> <td>33.43</td> <td>103</td> <td>84</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5352.62	44.86	54.00	-9.14	33.50	35.41	9.38	33.43	103	84	AVERAGE	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>99.17</td> <td>54.00</td> <td>-----</td> <td>88.01</td> <td>35.39</td> <td>9.21</td> <td>33.44</td> <td>103</td> <td>84</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	99.17	54.00	-----	88.01	35.39	9.21	33.44	103	84	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5352.62	44.86	54.00	-9.14	33.50	35.41	9.38	33.43	103	84	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	99.17	54.00	-----	88.01	35.39	9.21	33.44	103	84	AVERAGE																																																																					



	6																																																																															
Mode	Band Edge																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																															
ANT	6																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.30</td> <td>52.07</td> <td>74.00</td> <td>-21.93</td> <td>40.33</td> <td>35.47</td> <td>9.68</td> <td>33.41</td> <td>392</td> <td>198</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5445.30	52.07	74.00	-21.93	40.33	35.47	9.68	33.41	392	198	PEAK	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.75</td> <td>-----</td> <td>-----</td> <td>89.59</td> <td>35.39</td> <td>9.21</td> <td>33.44</td> <td>392</td> <td>198</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	100.75	-----	-----	89.59	35.39	9.21	33.44	392	198	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5445.30	52.07	74.00	-21.93	40.33	35.47	9.68	33.41	392	198	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	100.75	-----	-----	89.59	35.39	9.21	33.44	392	198	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.66</td> <td>42.44</td> <td>54.00</td> <td>-11.56</td> <td>31.09</td> <td>35.41</td> <td>9.37</td> <td>33.43</td> <td>392</td> <td>198</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.66	42.44	54.00	-11.56	31.09	35.41	9.37	33.43	392	198	AVERAGE	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>93.63</td> <td>-----</td> <td>-----</td> <td>82.47</td> <td>35.39</td> <td>9.21</td> <td>33.44</td> <td>392</td> <td>198</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	93.63	-----	-----	82.47	35.39	9.21	33.44	392	198	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5350.66	42.44	54.00	-11.56	31.09	35.41	9.37	33.43	392	198	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	93.63	-----	-----	82.47	35.39	9.21	33.44	392	198	AVERAGE																																																																					







Mode	6																																																																																																						
	Harmonic																																																																																																						
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																						
ANT	6																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg																																																																																																							
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>44.06</td> <td>74.00</td> <td>-29.94</td> <td>56.91</td> <td>38.53</td> <td>12.26</td> <td>63.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.55</td> <td>74.00</td> <td>-27.45</td> <td>54.87</td> <td>41.58</td> <td>14.77</td> <td>64.67</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	44.06	74.00	-29.94	56.91	38.53	12.26	63.64	---	---	Peak	2	15960.00	46.55	74.00	-27.45	54.87	41.58	14.77	64.67	---	---	Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>45.18</td> <td>74.00</td> <td>-28.82</td> <td>58.03</td> <td>38.53</td> <td>12.26</td> <td>63.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>45.77</td> <td>74.00</td> <td>-28.23</td> <td>54.09</td> <td>41.58</td> <td>14.77</td> <td>64.67</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	45.18	74.00	-28.82	58.03	38.53	12.26	63.64	---	---	Peak	2	15960.00	45.77	74.00	-28.23	54.09	41.58	14.77	64.67	---	---
Limit	Read		Ant	Cable							Preamp	APos	TPos	Remark																																																																																									
	Freq	Level			Line	Margin	Level	Factor	Loss Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10640.00	44.06	74.00	-29.94	56.91	38.53	12.26	63.64	---	---	Peak																																																																																												
2	15960.00	46.55	74.00	-27.45	54.87	41.58	14.77	64.67	---	---	Peak																																																																																												
Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
	Freq	Level							Line	Margin	Level	Factor	Loss Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10640.00	45.18	74.00	-28.82	58.03	38.53	12.26	63.64	---	---	Peak																																																																																												
2	15960.00	45.77	74.00	-28.23	54.09	41.58	14.77	64.67	---	---	Peak																																																																																												



	7																																																																																											
Mode	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																											
ANT	6																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.30</td> <td>53.69</td> <td>74.00</td> <td>-20.31</td> <td>41.95</td> <td>35.47</td> <td>9.68</td> <td>33.41</td> <td>103</td> <td>93</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.65</td> <td>54.89</td> <td>68.30</td> <td>-13.41</td> <td>43.13</td> <td>35.48</td> <td>9.69</td> <td>33.41</td> <td>103</td> <td>93</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5455.30	53.69	74.00	-20.31	41.95	35.47	9.68	33.41	103	93	PEAK	2	5462.65	54.89	68.30	-13.41	43.13	35.48	9.69	33.41	103	93	PEAK	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>105.28</td> <td>-----</td> <td>-----</td> <td>93.47</td> <td>35.50</td> <td>9.71</td> <td>33.40</td> <td>103</td> <td>93</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	105.28	-----	-----	93.47	35.50	9.71	33.40	103	93	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5455.30	53.69	74.00	-20.31	41.95	35.47	9.68	33.41	103	93	PEAK																																																																																	
2	5462.65	54.89	68.30	-13.41	43.13	35.48	9.69	33.41	103	93	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	105.28	-----	-----	93.47	35.50	9.71	33.40	103	93	PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.15</td> <td>44.96</td> <td>54.00</td> <td>-9.04</td> <td>33.21</td> <td>35.47</td> <td>9.69</td> <td>33.41</td> <td>103</td> <td>93</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.15	44.96	54.00	-9.04	33.21	35.47	9.69	33.41	103	93	AVERAGE	<p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.55</td> <td>-----</td> <td>-----</td> <td>86.74</td> <td>35.50</td> <td>9.71</td> <td>33.40</td> <td>103</td> <td>93</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	98.55	-----	-----	86.74	35.50	9.71	33.40	103	93	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5458.15	44.96	54.00	-9.04	33.21	35.47	9.69	33.41	103	93	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	98.55	-----	-----	86.74	35.50	9.71	33.40	103	93	AVERAGE																																																																																	

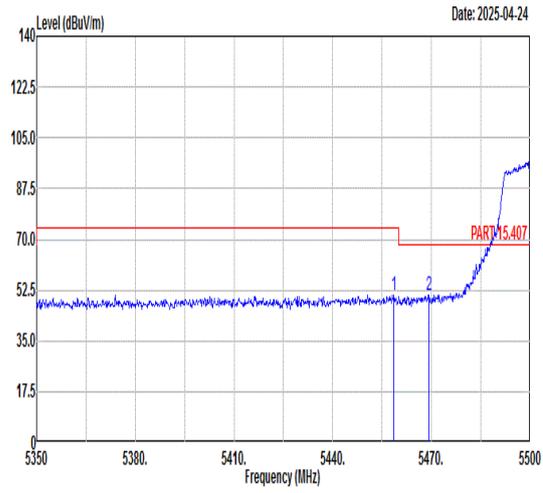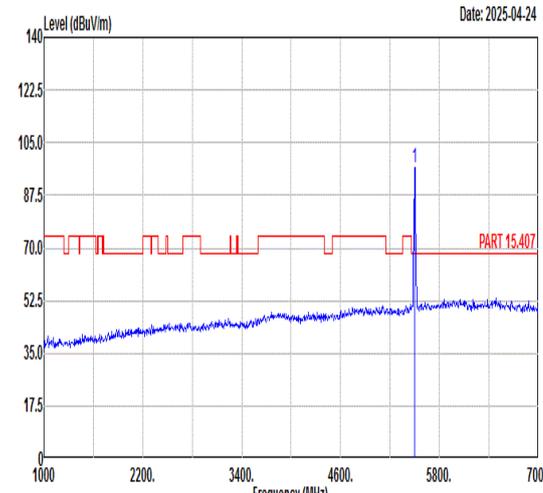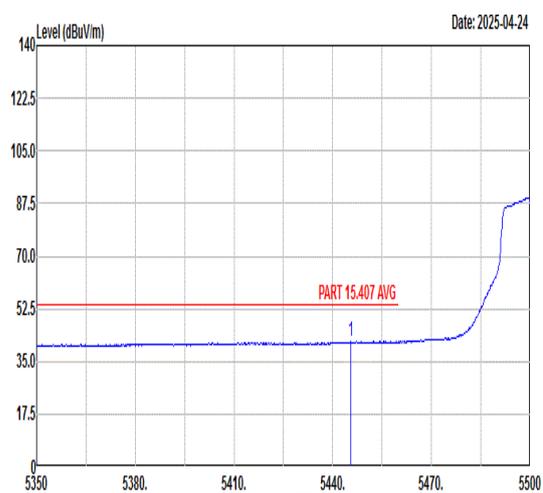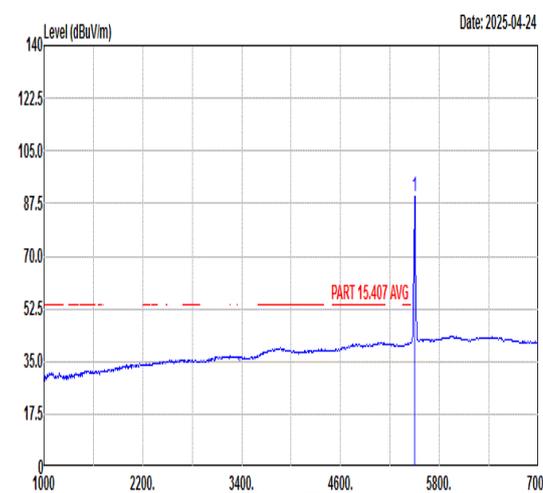

	7																																																																																											
Mode	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																											
ANT	6																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	 <p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.60</td> <td>50.86</td> <td>74.00</td> <td>-23.14</td> <td>39.10</td> <td>35.48</td> <td>9.69</td> <td>33.41</td> <td>107</td> <td>352</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.25</td> <td>50.88</td> <td>68.30</td> <td>-17.42</td> <td>39.12</td> <td>35.48</td> <td>9.69</td> <td>33.41</td> <td>107</td> <td>352</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.60	50.86	74.00	-23.14	39.10	35.48	9.69	33.41	107	352	PEAK	2	5469.25	50.88	68.30	-17.42	39.12	35.48	9.69	33.41	107	352	PEAK	 <p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.66</td> <td>-----</td> <td>-----</td> <td>84.85</td> <td>35.50</td> <td>9.71</td> <td>33.40</td> <td>107</td> <td>352</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	96.66	-----	-----	84.85	35.50	9.71	33.40	107	352	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5458.60	50.86	74.00	-23.14	39.10	35.48	9.69	33.41	107	352	PEAK																																																																																	
2	5469.25	50.88	68.30	-17.42	39.12	35.48	9.69	33.41	107	352	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	96.66	-----	-----	84.85	35.50	9.71	33.40	107	352	PEAK																																																																																	
Avg	 <p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.40</td> <td>41.74</td> <td>54.00</td> <td>-12.26</td> <td>30.00</td> <td>35.47</td> <td>9.68</td> <td>33.41</td> <td>107</td> <td>352</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5445.40	41.74	54.00	-12.26	30.00	35.47	9.68	33.41	107	352	AVERAGE	 <p style="text-align: right;">Date: 2025-04-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>90.01</td> <td>-----</td> <td>-----</td> <td>78.20</td> <td>35.50</td> <td>9.71</td> <td>33.40</td> <td>107</td> <td>352</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	90.01	-----	-----	78.20	35.50	9.71	33.40	107	352	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5445.40	41.74	54.00	-12.26	30.00	35.47	9.68	33.41	107	352	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	90.01	-----	-----	78.20	35.50	9.71	33.40	107	352	AVERAGE																																																																																	



Mode	7																																																																																																											
	Harmonic																																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.96</td> <td>74.00</td> <td>-27.04</td> <td>59.34</td> <td>38.60</td> <td>12.52</td> <td>63.50</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.65</td> <td>68.30</td> <td>-21.65</td> <td>54.28</td> <td>41.95</td> <td>15.17</td> <td>64.75</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	46.96	74.00	-27.04	59.34	38.60	12.52	63.50	---	---	Peak	2	16500.00	46.65	68.30	-21.65	54.28	41.95	15.17	64.75	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>44.15</td> <td>74.00</td> <td>-29.85</td> <td>56.53</td> <td>38.60</td> <td>12.52</td> <td>63.50</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.23</td> <td>68.30</td> <td>-22.07</td> <td>53.86</td> <td>41.95</td> <td>15.17</td> <td>64.75</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	44.15	74.00	-29.85	56.53	38.60	12.52	63.50	---	---	Peak	2	16500.00	46.23	68.30	-22.07	53.86	41.95	15.17	64.75	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11000.00	46.96	74.00	-27.04	59.34	38.60	12.52	63.50	---	---	Peak																																																																																																	
2	16500.00	46.65	68.30	-21.65	54.28	41.95	15.17	64.75	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11000.00	44.15	74.00	-29.85	56.53	38.60	12.52	63.50	---	---	Peak																																																																																																	
2	16500.00	46.23	68.30	-22.07	53.86	41.95	15.17	64.75	---	---	Peak																																																																																																	



Mode	8																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.12</td> <td>74.00</td> <td>-26.88</td> <td>59.30</td> <td>38.79</td> <td>12.64</td> <td>63.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>48.12</td> <td>68.30</td> <td>-20.18</td> <td>55.42</td> <td>42.12</td> <td>15.35</td> <td>64.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	47.12	74.00	-26.88	59.30	38.79	12.64	63.61	---	---	Peak	2	16740.00	48.12	68.30	-20.18	55.42	42.12	15.35	64.77	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>44.56</td> <td>74.00</td> <td>-29.44</td> <td>56.74</td> <td>38.79</td> <td>12.64</td> <td>63.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>47.54</td> <td>68.30</td> <td>-20.76</td> <td>54.84</td> <td>42.12</td> <td>15.35</td> <td>64.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	44.56	74.00	-29.44	56.74	38.79	12.64	63.61	---	---	Peak	2	16740.00	47.54	68.30	-20.76	54.84	42.12	15.35	64.77	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11160.00	47.12	74.00	-26.88	59.30	38.79	12.64	63.61	---	---	Peak																																																																																							
2	16740.00	48.12	68.30	-20.18	55.42	42.12	15.35	64.77	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11160.00	44.56	74.00	-29.44	56.74	38.79	12.64	63.61	---	---	Peak																																																																																							
2	16740.00	47.54	68.30	-20.76	54.84	42.12	15.35	64.77	---	---	Peak																																																																																							



	9																																																																									
Mode	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5726.33</td> <td>58.82</td> <td>68.30</td> <td>-9.48</td> <td>45.72</td> <td>36.53</td> <td>10.02</td> <td>33.45</td> <td>107 68 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5726.33	58.82	68.30	-9.48	45.72	36.53	10.02	33.45	107 68 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>106.96</td> <td>-----</td> <td>-----</td> <td>93.94</td> <td>36.50</td> <td>9.96</td> <td>33.44</td> <td>107 68 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	106.96	-----	-----	93.94	36.50	9.96	33.44	107 68 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5726.33	58.82	68.30	-9.48	45.72	36.53	10.02	33.45	107 68 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5700.00	106.96	-----	-----	93.94	36.50	9.96	33.44	107 68 PEAK																																																																		
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>100.45</td> <td>-----</td> <td>-----</td> <td>87.43</td> <td>36.50</td> <td>9.96</td> <td>33.44</td> <td>107 68 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	100.45	-----	-----	87.43	36.50	9.96	33.44	107 68 AVERAGE																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5700.00	100.45	-----	-----	87.43	36.50	9.96	33.44	107 68 AVERAGE																																																																		



Mode	9																																																																	
	Band Edge																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																	
ANT	6																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5728.54 56.88 68.30 -11.42</td> <td>43.77</td> <td>36.53</td> <td>10.03</td> <td>33.45</td> <td>355</td> <td>214</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5728.54 56.88 68.30 -11.42	43.77	36.53	10.03	33.45	355	214	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00 97.68</td> <td>84.65</td> <td>36.50</td> <td>9.97</td> <td>33.44</td> <td>355</td> <td>214</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5700.00 97.68	84.65	36.50	9.97	33.44	355	214	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5728.54 56.88 68.30 -11.42	43.77	36.53	10.03	33.45	355	214	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5700.00 97.68	84.65	36.50	9.97	33.44	355	214	PEAK																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00 91.14</td> <td>78.12</td> <td>36.50</td> <td>9.96</td> <td>33.44</td> <td>355</td> <td>214</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5700.00 91.14	78.12	36.50	9.96	33.44	355	214	AVERAGE																																
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5700.00 91.14	78.12	36.50	9.96	33.44	355	214	AVERAGE																																																											



Mode	9																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																															
ANT	6																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.16</td> <td>74.00</td> <td>-26.84</td> <td>59.05</td> <td>39.08</td> <td>12.81</td> <td>63.78</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.04</td> <td>68.30</td> <td>-21.26</td> <td>53.92</td> <td>42.41</td> <td>15.62</td> <td>64.91</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	47.16	74.00	-26.84	59.05	39.08	12.81	63.78	--- Peak	2	17100.00	47.04	68.30	-21.26	53.92	42.41	15.62	64.91	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.03</td> <td>74.00</td> <td>-28.97</td> <td>56.92</td> <td>39.08</td> <td>12.81</td> <td>63.78</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.90</td> <td>68.30</td> <td>-20.40</td> <td>54.78</td> <td>42.41</td> <td>15.62</td> <td>64.91</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	45.03	74.00	-28.97	56.92	39.08	12.81	63.78	--- Peak	2	17100.00	47.90	68.30	-20.40	54.78	42.41	15.62	64.91	--- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	11400.00	47.16	74.00	-26.84	59.05	39.08	12.81	63.78	--- Peak																																																																																							
2	17100.00	47.04	68.30	-21.26	53.92	42.41	15.62	64.91	--- Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	11400.00	45.03	74.00	-28.97	56.92	39.08	12.81	63.78	--- Peak																																																																																							
2	17100.00	47.90	68.30	-20.40	54.78	42.41	15.62	64.91	--- Peak																																																																																							



Mode	10																																																																	
	Band Edge																																																																	
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_Full RU_5180MHz																																																																	
ANT	6																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5148.68 53.94 74.00 -20.06</td> <td>42.30</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5148.68 53.94 74.00 -20.06	42.30	36.58	8.53	33.47	100	75	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5180.00 104.35</td> <td>92.67</td> <td>36.55</td> <td>8.59</td> <td>33.46</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5180.00 104.35	92.67	36.55	8.59	33.46	100	75	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5148.68 53.94 74.00 -20.06	42.30	36.58	8.53	33.47	100	75	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5180.00 104.35	92.67	36.55	8.59	33.46	100	75	PEAK																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5149.22 44.49 54.00 -9.51</td> <td>32.85</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>100</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5149.22 44.49 54.00 -9.51	32.85	36.58	8.53	33.47	100	75	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5180.00 97.50</td> <td>85.82</td> <td>36.55</td> <td>8.59</td> <td>33.46</td> <td>100</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5180.00 97.50	85.82	36.55	8.59	33.46	100	75	AVERAGE
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5149.22 44.49 54.00 -9.51	32.85	36.58	8.53	33.47	100	75	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5180.00 97.50	85.82	36.55	8.59	33.46	100	75	AVERAGE																																																											



Mode	10																																																																															
	Band Edge																																																																															
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_Full RU_5180MHz																																																																															
ANT	6																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.16</td> <td>54.28</td> <td>74.00</td> <td>-19.72</td> <td>42.64</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>394</td> <td>206</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5146.16	54.28	74.00	-19.72	42.64	36.58	8.53	33.47	394	206	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.48</td> <td>-----</td> <td>-----</td> <td>89.80</td> <td>36.55</td> <td>8.59</td> <td>33.46</td> <td>394</td> <td>206</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.48	-----	-----	89.80	36.55	8.59	33.46	394	206	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5146.16	54.28	74.00	-19.72	42.64	36.58	8.53	33.47	394	206	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5180.00	101.48	-----	-----	89.80	36.55	8.59	33.46	394	206	PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.22</td> <td>43.19</td> <td>54.00</td> <td>-10.81</td> <td>31.55</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>394</td> <td>206</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.22	43.19	54.00	-10.81	31.55	36.58	8.53	33.47	394	206	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>94.52</td> <td>-----</td> <td>-----</td> <td>82.84</td> <td>36.55</td> <td>8.59</td> <td>33.46</td> <td>394</td> <td>206</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.52	-----	-----	82.84	36.55	8.59	33.46	394	206	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5149.22	43.19	54.00	-10.81	31.55	36.58	8.53	33.47	394	206	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5180.00	94.52	-----	-----	82.84	36.55	8.59	33.46	394	206	AVERAGE																																																																					



Mode	10																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_Full RU_5180MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>40.97</td> <td>68.30</td> <td>-27.33</td> <td>54.20</td> <td>38.47</td> <td>12.06</td> <td>63.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>44.04</td> <td>74.00</td> <td>-29.96</td> <td>52.52</td> <td>41.32</td> <td>14.58</td> <td>64.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	40.97	68.30	-27.33	54.20	38.47	12.06	63.76	---	---	Peak	2	15540.00	44.04	74.00	-29.96	52.52	41.32	14.58	64.38	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>44.30</td> <td>68.30</td> <td>-24.00</td> <td>57.53</td> <td>38.47</td> <td>12.06</td> <td>63.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>45.69</td> <td>74.00</td> <td>-28.31</td> <td>54.17</td> <td>41.32</td> <td>14.58</td> <td>64.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	44.30	68.30	-24.00	57.53	38.47	12.06	63.76	---	---	Peak	2	15540.00	45.69	74.00	-28.31	54.17	41.32	14.58	64.38	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	40.97	68.30	-27.33	54.20	38.47	12.06	63.76	---	---	Peak																																																																																							
2	15540.00	44.04	74.00	-29.96	52.52	41.32	14.58	64.38	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	44.30	68.30	-24.00	57.53	38.47	12.06	63.76	---	---	Peak																																																																																							
2	15540.00	45.69	74.00	-28.31	54.17	41.32	14.58	64.38	---	---	Peak																																																																																							



Mode	11																																																																																					
	Harmonic																																																																																					
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full RU_5220MHz																																																																																					
ANT	6																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>41.77</td> <td>68.30</td> <td>-26.53</td> <td>54.88</td> <td>38.49</td> <td>12.12</td> <td>63.72</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>44.29</td> <td>74.00</td> <td>-29.71</td> <td>52.71</td> <td>41.40</td> <td>14.64</td> <td>64.46</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	10440.00	41.77	68.30	-26.53	54.88	38.49	12.12	63.72	---	---	Peak	2	15660.00	44.29	74.00	-29.71	52.71	41.40	14.64	64.46	---	---	Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>44.48</td> <td>68.30</td> <td>-23.82</td> <td>57.59</td> <td>38.49</td> <td>12.12</td> <td>63.72</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>46.45</td> <td>74.00</td> <td>-27.55</td> <td>54.87</td> <td>41.40</td> <td>14.64</td> <td>64.46</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	10440.00	44.48	68.30	-23.82	57.59	38.49	12.12	63.72	---	---	Peak	2	15660.00	46.45	74.00	-27.55	54.87	41.40	14.64	64.46	---	---	Peak
	Limit									Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq		Level	Line	Margin	Level	Factor	Loss	Factor	cm								deg																																																																					
1	10440.00	41.77	68.30	-26.53	54.88	38.49	12.12	63.72	---	---	Peak																																																																											
2	15660.00	44.29	74.00	-29.71	52.71	41.40	14.64	64.46	---	---	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
								Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																					
1	10440.00	44.48	68.30	-23.82	57.59	38.49	12.12	63.72	---	---	Peak																																																																											
2	15660.00	46.45	74.00	-27.55	54.87	41.40	14.64	64.46	---	---	Peak																																																																											



Mode	12																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full RU_5240MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>41.74</td> <td>68.30</td> <td>-26.56</td> <td>54.80</td> <td>38.50</td> <td>12.15</td> <td>63.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>44.01</td> <td>74.00</td> <td>-29.99</td> <td>52.42</td> <td>41.43</td> <td>14.66</td> <td>64.50</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	41.74	68.30	-26.56	54.80	38.50	12.15	63.71	---	---	Peak	2	15720.00	44.01	74.00	-29.99	52.42	41.43	14.66	64.50	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>44.47</td> <td>68.30</td> <td>-23.83</td> <td>57.53</td> <td>38.50</td> <td>12.15</td> <td>63.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.08</td> <td>74.00</td> <td>-27.92</td> <td>54.49</td> <td>41.43</td> <td>14.66</td> <td>64.50</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	44.47	68.30	-23.83	57.53	38.50	12.15	63.71	---	---	Peak	2	15720.00	46.08	74.00	-27.92	54.49	41.43	14.66	64.50	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10480.00	41.74	68.30	-26.56	54.80	38.50	12.15	63.71	---	---	Peak																																																																																							
2	15720.00	44.01	74.00	-29.99	52.42	41.43	14.66	64.50	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10480.00	44.47	68.30	-23.83	57.53	38.50	12.15	63.71	---	---	Peak																																																																																							
2	15720.00	46.08	74.00	-27.92	54.49	41.43	14.66	64.50	---	---	Peak																																																																																							



Mode	13																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_Full RU_5260MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>41.53</td> <td>68.30</td> <td>-26.77</td> <td>54.54</td> <td>38.50</td> <td>12.18</td> <td>63.69</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>44.70</td> <td>74.00</td> <td>-29.30</td> <td>53.09</td> <td>41.47</td> <td>14.69</td> <td>64.55</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10520.00	41.53	68.30	-26.77	54.54	38.50	12.18	63.69	---	---	Peak	2	15780.00	44.70	74.00	-29.30	53.09	41.47	14.69	64.55	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>44.56</td> <td>68.30</td> <td>-23.74</td> <td>57.57</td> <td>38.50</td> <td>12.18</td> <td>63.69</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.93</td> <td>74.00</td> <td>-27.07</td> <td>55.32</td> <td>41.47</td> <td>14.69</td> <td>64.55</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10520.00	44.56	68.30	-23.74	57.57	38.50	12.18	63.69	---	---	Peak	2	15780.00	46.93	74.00	-27.07	55.32	41.47	14.69	64.55	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	10520.00	41.53	68.30	-26.77	54.54	38.50	12.18	63.69	---	---	Peak																																																																																							
2	15780.00	44.70	74.00	-29.30	53.09	41.47	14.69	64.55	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	10520.00	44.56	68.30	-23.74	57.57	38.50	12.18	63.69	---	---	Peak																																																																																							
2	15780.00	46.93	74.00	-27.07	55.32	41.47	14.69	64.55	---	---	Peak																																																																																							



Mode	14																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_Full RU_5300MHz																																																																																																
ANT	6																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>42.73</td> <td>74.00</td> <td>-31.27</td> <td>55.64</td> <td>38.52</td> <td>12.23</td> <td>63.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>42.75</td> <td>74.00</td> <td>-31.25</td> <td>51.09</td> <td>41.54</td> <td>14.75</td> <td>64.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	42.73	74.00	-31.27	55.64	38.52	12.23	63.66	---	---	Peak	2	15900.00	42.75	74.00	-31.25	51.09	41.54	14.75	64.63	---	---	Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.27</td> <td>74.00</td> <td>-29.73</td> <td>57.18</td> <td>38.52</td> <td>12.23</td> <td>63.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>44.81</td> <td>74.00</td> <td>-29.19</td> <td>53.15</td> <td>41.54</td> <td>14.75</td> <td>64.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	44.27	74.00	-29.73	57.18	38.52	12.23	63.66	---	---	Peak	2	15900.00	44.81	74.00	-29.19	53.15	41.54	14.75	64.63	---	---
Limit	Read		Ant	Cable							Preamp	APos	TPos	Remark																																																																																			
	Freq	Level			Line	Margin																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10600.00	42.73	74.00	-31.27	55.64	38.52	12.23	63.66	---	---	Peak																																																																																						
2	15900.00	42.75	74.00	-31.25	51.09	41.54	14.75	64.63	---	---	Peak																																																																																						
Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
	Freq	Level							Line	Margin																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10600.00	44.27	74.00	-29.73	57.18	38.52	12.23	63.66	---	---	Peak																																																																																						
2	15900.00	44.81	74.00	-29.19	53.15	41.54	14.75	64.63	---	---	Peak																																																																																						



	15																																																																									
Mode	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_Full RU_5320MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5372.22</td> <td>54.41</td> <td>74.00</td> <td>-19.59</td> <td>41.96</td> <td>36.40</td> <td>9.48</td> <td>33.43</td> <td>100 68 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5372.22	54.41	74.00	-19.59	41.96	36.40	9.48	33.43	100 68 PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>104.93</td> <td>-----</td> <td>-----</td> <td>92.74</td> <td>36.45</td> <td>9.18</td> <td>33.44</td> <td>100 68 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	104.93	-----	-----	92.74	36.45	9.18	33.44	100 68 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5372.22	54.41	74.00	-19.59	41.96	36.40	9.48	33.43	100 68 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5320.00	104.93	-----	-----	92.74	36.45	9.18	33.44	100 68 PEAK																																																																		
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>45.63</td> <td>54.00</td> <td>-8.37</td> <td>33.27</td> <td>36.42</td> <td>9.37</td> <td>33.43</td> <td>100 68 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5350.10	45.63	54.00	-8.37	33.27	36.42	9.37	33.43	100 68 AVERAGE	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>98.29</td> <td>-----</td> <td>-----</td> <td>86.08</td> <td>36.44</td> <td>9.21</td> <td>33.44</td> <td>100 68 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	98.29	-----	-----	86.08	36.44	9.21	33.44	100 68 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5350.10	45.63	54.00	-8.37	33.27	36.42	9.37	33.43	100 68 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5320.00	98.29	-----	-----	86.08	36.44	9.21	33.44	100 68 AVERAGE																																																																		



	15																																																																															
Mode	Band Edge																																																																															
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_Full RU_5320MHz																																																																															
ANT	6																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5416.74</td> <td>51.37</td> <td>74.00</td> <td>-22.63</td> <td>38.76</td> <td>36.37</td> <td>9.66</td> <td>33.42</td> <td>371</td> <td>209</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	cm	deg		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5416.74	51.37	74.00	-22.63	38.76	36.37	9.66	33.42	371	209	PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>99.85</td> <td>-----</td> <td>-----</td> <td>87.64</td> <td>36.44</td> <td>9.21</td> <td>33.44</td> <td>371</td> <td>209</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	cm	deg		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	99.85	-----	-----	87.64	36.44	9.21	33.44	371	209	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5416.74	51.37	74.00	-22.63	38.76	36.37	9.66	33.42	371	209	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	99.85	-----	-----	87.64	36.44	9.21	33.44	371	209	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.74</td> <td>42.53</td> <td>54.00</td> <td>-11.47</td> <td>30.16</td> <td>36.42</td> <td>9.38</td> <td>33.43</td> <td>371</td> <td>209</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	cm	deg		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5353.74	42.53	54.00	-11.47	30.16	36.42	9.38	33.43	371	209	AVERAGE	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>92.94</td> <td>-----</td> <td>-----</td> <td>80.73</td> <td>36.44</td> <td>9.21</td> <td>33.44</td> <td>371</td> <td>209</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	cm	deg		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	92.94	-----	-----	80.73	36.44	9.21	33.44	371	209	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5353.74	42.53	54.00	-11.47	30.16	36.42	9.38	33.43	371	209	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5320.00	92.94	-----	-----	80.73	36.44	9.21	33.44	371	209	AVERAGE																																																																					



Mode	15																																																																																					
	Harmonic																																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_Full RU_5320MHz																																																																																					
ANT	6																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>42.89</td> <td>74.00</td> <td>-31.11</td> <td>55.74</td> <td>38.53</td> <td>12.26</td> <td>63.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>44.03</td> <td>74.00</td> <td>-29.97</td> <td>52.35</td> <td>41.58</td> <td>14.77</td> <td>64.67</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	10640.00	42.89	74.00	-31.11	55.74	38.53	12.26	63.64	---	---	Peak	2	15960.00	44.03	74.00	-29.97	52.35	41.58	14.77	64.67	---	---	Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>44.96</td> <td>74.00</td> <td>-29.04</td> <td>57.81</td> <td>38.53</td> <td>12.26</td> <td>63.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.64</td> <td>74.00</td> <td>-27.36</td> <td>54.96</td> <td>41.58</td> <td>14.77</td> <td>64.67</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	10640.00	44.96	74.00	-29.04	57.81	38.53	12.26	63.64	---	---	Peak	2	15960.00	46.64	74.00	-27.36	54.96	41.58	14.77	64.67	---	---	Peak
	Limit									Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq		Level	Line	Margin	Level	Factor	Loss	Factor	cm								deg																																																																					
1	10640.00	42.89	74.00	-31.11	55.74	38.53	12.26	63.64	---	---	Peak																																																																											
2	15960.00	44.03	74.00	-29.97	52.35	41.58	14.77	64.67	---	---	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
								Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																					
1	10640.00	44.96	74.00	-29.04	57.81	38.53	12.26	63.64	---	---	Peak																																																																											
2	15960.00	46.64	74.00	-27.36	54.96	41.58	14.77	64.67	---	---	Peak																																																																											



	16																																																																																											
Mode	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full RU_5500MHz																																																																																											
ANT	6																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.50</td> <td>52.34</td> <td>74.00</td> <td>-21.66</td> <td>39.73</td> <td>36.36</td> <td>9.67</td> <td>33.42</td> <td>100</td> <td>81</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.25</td> <td>52.87</td> <td>68.30</td> <td>-15.43</td> <td>40.26</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>100</td> <td>81</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5420.50	52.34	74.00	-21.66	39.73	36.36	9.67	33.42	100	81	PEAK	2	5466.25	52.87	68.30	-15.43	40.26	36.33	9.69	33.41	100	81	PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.64</td> <td>-----</td> <td>-----</td> <td>91.03</td> <td>36.30</td> <td>9.71</td> <td>33.40</td> <td>100</td> <td>81</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.64	-----	-----	91.03	36.30	9.71	33.40	100	81	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5420.50	52.34	74.00	-21.66	39.73	36.36	9.67	33.42	100	81	PEAK																																																																																	
2	5466.25	52.87	68.30	-15.43	40.26	36.33	9.69	33.41	100	81	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	103.64	-----	-----	91.03	36.30	9.71	33.40	100	81	PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>43.75</td> <td>54.00</td> <td>-10.25</td> <td>31.14</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>100</td> <td>81</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.00	43.75	54.00	-10.25	31.14	36.33	9.69	33.41	100	81	AVERAGE	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.49</td> <td>-----</td> <td>-----</td> <td>83.88</td> <td>36.30</td> <td>9.71</td> <td>33.40</td> <td>100</td> <td>81</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	96.49	-----	-----	83.88	36.30	9.71	33.40	100	81	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5458.00	43.75	54.00	-10.25	31.14	36.33	9.69	33.41	100	81	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	96.49	-----	-----	83.88	36.30	9.71	33.40	100	81	AVERAGE																																																																																	



	16																																																																																											
Mode	Band Edge																																																																																											
	U-NII-2C 5.47-5.725 802.11n HT20_CH100_Full RU_5500MHz																																																																																											
ANT	6																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5401.75</td> <td>50.99</td> <td>74.00</td> <td>-23.01</td> <td>38.40</td> <td>36.38</td> <td>9.63</td> <td>33.42</td> <td>343</td> <td>204</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.70</td> <td>51.90</td> <td>68.30</td> <td>-16.40</td> <td>39.30</td> <td>36.32</td> <td>9.69</td> <td>33.41</td> <td>343</td> <td>204</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5401.75	50.99	74.00	-23.01	38.40	36.38	9.63	33.42	343	204	PEAK	2	5469.70	51.90	68.30	-16.40	39.30	36.32	9.69	33.41	343	204	PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.62</td> <td>-----</td> <td>-----</td> <td>86.01</td> <td>36.30</td> <td>9.71</td> <td>33.40</td> <td>343</td> <td>204</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	98.62	-----	-----	86.01	36.30	9.71	33.40	343	204	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5401.75	50.99	74.00	-23.01	38.40	36.38	9.63	33.42	343	204	PEAK																																																																																	
2	5469.70	51.90	68.30	-16.40	39.30	36.32	9.69	33.41	343	204	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	98.62	-----	-----	86.01	36.30	9.71	33.40	343	204	PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.85</td> <td>42.17</td> <td>54.00</td> <td>-11.83</td> <td>29.56</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>343</td> <td>204</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.85	42.17	54.00	-11.83	29.56	36.33	9.69	33.41	343	204	AVERAGE	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>91.48</td> <td>-----</td> <td>-----</td> <td>78.87</td> <td>36.30</td> <td>9.71</td> <td>33.40</td> <td>343</td> <td>204</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	91.48	-----	-----	78.87	36.30	9.71	33.40	343	204	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5457.85	42.17	54.00	-11.83	29.56	36.33	9.69	33.41	343	204	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5500.00	91.48	-----	-----	78.87	36.30	9.71	33.40	343	204	AVERAGE																																																																																	



Mode	16																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full RU_5500MHz																																																																																															
ANT	6																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>44.10</td> <td>74.00</td> <td>-29.90</td> <td>56.48</td> <td>38.60</td> <td>12.52</td> <td>63.50</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>43.27</td> <td>68.30</td> <td>-25.03</td> <td>50.90</td> <td>41.95</td> <td>15.17</td> <td>64.75</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	44.10	74.00	-29.90	56.48	38.60	12.52	63.50	--- Peak	2	16500.00	43.27	68.30	-25.03	50.90	41.95	15.17	64.75	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>45.42</td> <td>74.00</td> <td>-28.58</td> <td>57.80</td> <td>38.60</td> <td>12.52</td> <td>63.50</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>43.27</td> <td>68.30</td> <td>-25.03</td> <td>50.90</td> <td>41.95</td> <td>15.17</td> <td>64.75</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	45.42	74.00	-28.58	57.80	38.60	12.52	63.50	--- Peak	2	16500.00	43.27	68.30	-25.03	50.90	41.95	15.17	64.75	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	11000.00	44.10	74.00	-29.90	56.48	38.60	12.52	63.50	--- Peak																																																																																							
2	16500.00	43.27	68.30	-25.03	50.90	41.95	15.17	64.75	--- Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	11000.00	45.42	74.00	-28.58	57.80	38.60	12.52	63.50	--- Peak																																																																																							
2	16500.00	43.27	68.30	-25.03	50.90	41.95	15.17	64.75	--- Peak																																																																																							



Mode	17																																																																																																											
	Harmonic																																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_Full RU_5580MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>44.75</td> <td>74.00</td> <td>-29.25</td> <td>56.93</td> <td>38.79</td> <td>12.64</td> <td>63.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>42.90</td> <td>68.30</td> <td>-25.40</td> <td>50.20</td> <td>42.12</td> <td>15.35</td> <td>64.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	44.75	74.00	-29.25	56.93	38.79	12.64	63.61	---	---	Peak	2	16740.00	42.90	68.30	-25.40	50.20	42.12	15.35	64.77	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>45.64</td> <td>74.00</td> <td>-28.36</td> <td>57.82</td> <td>38.79</td> <td>12.64</td> <td>63.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>44.50</td> <td>68.30</td> <td>-23.80</td> <td>51.80</td> <td>42.12</td> <td>15.35</td> <td>64.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	45.64	74.00	-28.36	57.82	38.79	12.64	63.61	---	---	Peak	2	16740.00	44.50	68.30	-23.80	51.80	42.12	15.35	64.77	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11160.00	44.75	74.00	-29.25	56.93	38.79	12.64	63.61	---	---	Peak																																																																																																	
2	16740.00	42.90	68.30	-25.40	50.20	42.12	15.35	64.77	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11160.00	45.64	74.00	-28.36	57.82	38.79	12.64	63.61	---	---	Peak																																																																																																	
2	16740.00	44.50	68.30	-23.80	51.80	42.12	15.35	64.77	---	---	Peak																																																																																																	



	18																																																																									
Mode	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_Full RU_5700MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.46</td> <td>54.46</td> <td>68.30</td> <td>-13.84</td> <td>41.35</td> <td>36.53</td> <td>10.03</td> <td>33.45</td> <td>104 65 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5731.46	54.46	68.30	-13.84	41.35	36.53	10.03	33.45	104 65 PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>104.07</td> <td>-----</td> <td>-----</td> <td>91.05</td> <td>36.50</td> <td>9.96</td> <td>33.44</td> <td>104 65 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5700.00	104.07	-----	-----	91.05	36.50	9.96	33.44	104 65 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5731.46	54.46	68.30	-13.84	41.35	36.53	10.03	33.45	104 65 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5700.00	104.07	-----	-----	91.05	36.50	9.96	33.44	104 65 PEAK																																																																		
Avg	Blank	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.78</td> <td>-----</td> <td>-----</td> <td>83.76</td> <td>36.50</td> <td>9.96</td> <td>33.44</td> <td>104 65 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5700.00	96.78	-----	-----	83.76	36.50	9.96	33.44	104 65 AVERAGE																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5700.00	96.78	-----	-----	83.76	36.50	9.96	33.44	104 65 AVERAGE																																																																		



Mode	18																																																																	
	Band Edge																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_Full RU_5700MHz																																																																	
ANT	6																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5752.78 53.03 68.30 -15.27</td> <td>39.85</td> <td>36.55</td> <td>10.08</td> <td>33.45</td> <td>385</td> <td>310</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5752.78 53.03 68.30 -15.27	39.85	36.55	10.08	33.45	385	310	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00 97.73</td> <td>84.71</td> <td>36.50</td> <td>9.96</td> <td>33.44</td> <td>385</td> <td>310</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5700.00 97.73	84.71	36.50	9.96	33.44	385	310	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5752.78 53.03 68.30 -15.27	39.85	36.55	10.08	33.45	385	310	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5700.00 97.73	84.71	36.50	9.96	33.44	385	310	PEAK																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00 89.97</td> <td>76.95</td> <td>36.50</td> <td>9.96</td> <td>33.44</td> <td>385</td> <td>310</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5700.00 89.97	76.95	36.50	9.96	33.44	385	310	AVERAGE																																
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5700.00 89.97	76.95	36.50	9.96	33.44	385	310	AVERAGE																																																											



Mode	18																																																																																				
	Harmonic																																																																																				
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_Full RU_5700MHz																																																																																				
ANT	6																																																																																				
Pol.	Horizontal	Vertical																																																																																			
Peak Avg																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>43.93</td> <td>74.00</td> <td>-30.07</td> <td>55.82</td> <td>39.08</td> <td>12.81</td> <td>63.78</td> <td>--- --- Peak</td> </tr> <tr> <td>2 17100.00</td> <td>44.87</td> <td>68.30</td> <td>-23.43</td> <td>51.75</td> <td>42.41</td> <td>15.62</td> <td>64.91</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11400.00	43.93	74.00	-30.07	55.82	39.08	12.81	63.78	--- --- Peak	2 17100.00	44.87	68.30	-23.43	51.75	42.41	15.62	64.91	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>45.76</td> <td>74.00</td> <td>-28.24</td> <td>57.65</td> <td>39.08</td> <td>12.81</td> <td>63.78</td> <td>--- --- Peak</td> </tr> <tr> <td>2 17100.00</td> <td>44.72</td> <td>68.30</td> <td>-23.58</td> <td>51.60</td> <td>42.41</td> <td>15.62</td> <td>64.91</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11400.00	45.76	74.00	-28.24	57.65	39.08	12.81	63.78	--- --- Peak	2 17100.00	44.72	68.30	-23.58	51.60	42.41	15.62	64.91
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1 11400.00	43.93	74.00	-30.07	55.82	39.08	12.81	63.78	--- --- Peak																																																																													
2 17100.00	44.87	68.30	-23.43	51.75	42.41	15.62	64.91	--- --- Peak																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1 11400.00	45.76	74.00	-28.24	57.65	39.08	12.81	63.78	--- --- Peak																																																																													
2 17100.00	44.72	68.30	-23.58	51.60	42.41	15.62	64.91	--- --- Peak																																																																													



	19																																																																															
Mode	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11n_HT40_CH38_Full_RU_5190MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.30</td> <td>54.88</td> <td>74.00</td> <td>-19.12</td> <td>43.24</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5146.30	54.88	74.00	-19.12	43.24	36.58	8.53	33.47	100	76	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>101.14</td> <td>-----</td> <td>-----</td> <td>89.44</td> <td>36.55</td> <td>8.61</td> <td>33.46</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	101.14	-----	-----	89.44	36.55	8.61	33.46	100	76	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5146.30	54.88	74.00	-19.12	43.24	36.58	8.53	33.47	100	76	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5190.00	101.14	-----	-----	89.44	36.55	8.61	33.46	100	76	PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.96</td> <td>45.64</td> <td>54.00</td> <td>-8.36</td> <td>34.00</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5148.96	45.64	54.00	-8.36	34.00	36.58	8.53	33.47	100	76	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>94.67</td> <td>-----</td> <td>-----</td> <td>82.97</td> <td>36.55</td> <td>8.61</td> <td>33.46</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	94.67	-----	-----	82.97	36.55	8.61	33.46	100	76	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5148.96	45.64	54.00	-8.36	34.00	36.58	8.53	33.47	100	76	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5190.00	94.67	-----	-----	82.97	36.55	8.61	33.46	100	76	AVERAGE																																																																					



	19																																	
Mode	Band Edge - R																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz																																	
ANT	6																																	
Pol.	Horizontal	Fundamental																																
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5410.32 51.91 74.00 -22.09</td> <td>39.30</td> <td>36.37</td> <td>9.66</td> <td>33.42</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5410.32 51.91 74.00 -22.09	39.30	36.37	9.66	33.42	100	76	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																												
1 5410.32 51.91 74.00 -22.09	39.30	36.37	9.66	33.42	100	76	PEAK																											
Blank																																		
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5418.69 42.75 54.00 -11.25</td> <td>30.13</td> <td>36.37</td> <td>9.67</td> <td>33.42</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5418.69 42.75 54.00 -11.25	30.13	36.37	9.67	33.42	100	76	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																												
1 5418.69 42.75 54.00 -11.25	30.13	36.37	9.67	33.42	100	76	AVERAGE																											
Blank																																		



Mode	19																																																																	
	Band Edge - L																																																																	
	U-NII-1_5.15-5.25_802.11n_HT40_CH38_Full_RU_5190MHz																																																																	
ANT	6																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5034.20 53.19 74.00 -20.81</td> <td>41.69</td> <td>36.67</td> <td>8.32</td> <td>33.49</td> <td>100</td> <td>9</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5034.20 53.19 74.00 -20.81	41.69	36.67	8.32	33.49	100	9	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5190.00 93.26 -</td> <td>81.56</td> <td>36.54</td> <td>8.62</td> <td>33.46</td> <td>100</td> <td>9</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5190.00 93.26 -	81.56	36.54	8.62	33.46	100	9	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5034.20 53.19 74.00 -20.81	41.69	36.67	8.32	33.49	100	9	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5190.00 93.26 -	81.56	36.54	8.62	33.46	100	9	PEAK																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5148.20 43.73 54.00 -10.27</td> <td>32.09</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>100</td> <td>9</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5148.20 43.73 54.00 -10.27	32.09	36.58	8.53	33.47	100	9	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5190.00 86.60 -</td> <td>74.90</td> <td>36.54</td> <td>8.62</td> <td>33.46</td> <td>100</td> <td>9</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5190.00 86.60 -	74.90	36.54	8.62	33.46	100	9	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5148.20 43.73 54.00 -10.27	32.09	36.58	8.53	33.47	100	9	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 5190.00 86.60 -	74.90	36.54	8.62	33.46	100	9	AVERAGE																																																											



	19																																
Mode	Band Edge - R																																
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz																																
ANT	6																																
Pol.	Vertical	Fundamental																															
Peak																																	
	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5432.19 51.50 74.00 -22.50</td> <td>38.89</td> <td>36.35</td> <td>9.67</td> <td>33.41</td> <td>100</td> <td>9</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB				1 5432.19 51.50 74.00 -22.50	38.89	36.35	9.67	33.41	100	9
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB																													
1 5432.19 51.50 74.00 -22.50	38.89	36.35	9.67	33.41	100	9	PEAK																										
Avg																																	
	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5447.58 42.68 54.00 -11.32</td> <td>30.07</td> <td>36.34</td> <td>9.68</td> <td>33.41</td> <td>100</td> <td>9</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB				1 5447.58 42.68 54.00 -11.32	30.07	36.34	9.68	33.41	100	9
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB																													
1 5447.58 42.68 54.00 -11.32	30.07	36.34	9.68	33.41	100	9	AVERAGE																										



Mode	19																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz																																																																																																
ANT	6																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>44.32</td> <td>68.30</td> <td>-23.98</td> <td>57.51</td> <td>38.48</td> <td>12.08</td> <td>63.75</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>45.99</td> <td>74.00</td> <td>-28.01</td> <td>54.45</td> <td>41.34</td> <td>14.60</td> <td>64.40</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	44.32	68.30	-23.98	57.51	38.48	12.08	63.75	---	---	Peak	2	15570.00	45.99	74.00	-28.01	54.45	41.34	14.60	64.40	---	---	Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>45.92</td> <td>68.30</td> <td>-22.38</td> <td>59.11</td> <td>38.48</td> <td>12.08</td> <td>63.75</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>46.98</td> <td>74.00</td> <td>-27.02</td> <td>55.44</td> <td>41.34</td> <td>14.60</td> <td>64.40</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	45.92	68.30	-22.38	59.11	38.48	12.08	63.75	---	---	Peak	2	15570.00	46.98	74.00	-27.02	55.44	41.34	14.60	64.40	---	---
Limit	Read		Ant	Cable							Preamp	APos	TPos	Remark																																																																																			
	Freq	Level			Line	Margin																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10380.00	44.32	68.30	-23.98	57.51	38.48	12.08	63.75	---	---	Peak																																																																																						
2	15570.00	45.99	74.00	-28.01	54.45	41.34	14.60	64.40	---	---	Peak																																																																																						
Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
	Freq	Level							Line	Margin																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10380.00	45.92	68.30	-22.38	59.11	38.48	12.08	63.75	---	---	Peak																																																																																						
2	15570.00	46.98	74.00	-27.02	55.44	41.34	14.60	64.40	---	---	Peak																																																																																						



Mode	20																																																																																																							
	Harmonic																																																																																																							
	U-NII-1_5.15-5.25_802.11n HT40_CH46_Full RU_5230MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>42.30</td> <td>68.30</td> <td>-26.00</td> <td>55.40</td> <td>38.49</td> <td>12.13</td> <td>63.72</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>45.26</td> <td>74.00</td> <td>-28.74</td> <td>53.68</td> <td>41.41</td> <td>14.65</td> <td>64.48</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10460.00	42.30	68.30	-26.00	55.40	38.49	12.13	63.72	---	---	Peak	2	15690.00	45.26	74.00	-28.74	53.68	41.41	14.65	64.48	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>44.08</td> <td>68.30</td> <td>-24.22</td> <td>57.18</td> <td>38.49</td> <td>12.13</td> <td>63.72</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>46.11</td> <td>74.00</td> <td>-27.89</td> <td>54.53</td> <td>41.41</td> <td>14.65</td> <td>64.48</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10460.00	44.08	68.30	-24.22	57.18	38.49	12.13	63.72	---	---	Peak	2	15690.00	46.11	74.00	-27.89	54.53	41.41	14.65	64.48	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
1	10460.00	42.30	68.30	-26.00	55.40	38.49	12.13	63.72	---	---	Peak																																																																																													
2	15690.00	45.26	74.00	-28.74	53.68	41.41	14.65	64.48	---	---	Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
1	10460.00	44.08	68.30	-24.22	57.18	38.49	12.13	63.72	---	---	Peak																																																																																													
2	15690.00	46.11	74.00	-27.89	54.53	41.41	14.65	64.48	---	---	Peak																																																																																													



Mode	21																																																																															
	Harmonic																																																																															
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_Full RU_5270MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>45.05</td> <td>68.30</td> <td>-23.25</td> <td>58.03</td> <td>38.51</td> <td>12.19</td> <td>63.68</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>45.63</td> <td>74.00</td> <td>-28.37</td> <td>54.00</td> <td>41.49</td> <td>14.71</td> <td>64.57</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg	1	10540.00	45.05	68.30	-23.25	58.03	38.51	12.19	63.68	--- Peak	2	15810.00	45.63	74.00	-28.37	54.00	41.49	14.71	64.57	--- Peak	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>45.03</td> <td>68.30</td> <td>-23.27</td> <td>58.01</td> <td>38.51</td> <td>12.19</td> <td>63.68</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>46.97</td> <td>74.00</td> <td>-27.03</td> <td>55.34</td> <td>41.49</td> <td>14.71</td> <td>64.57</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg	1	10540.00	45.03	68.30	-23.27	58.01	38.51	12.19	63.68	--- Peak	2	15810.00	46.97	74.00	-27.03	55.34	41.49	14.71	64.57	--- Peak
Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg																																																																								
1	10540.00	45.05	68.30	-23.25	58.03	38.51	12.19	63.68	--- Peak																																																																							
2	15810.00	45.63	74.00	-28.37	54.00	41.49	14.71	64.57	--- Peak																																																																							
Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg																																																																								
1	10540.00	45.03	68.30	-23.27	58.01	38.51	12.19	63.68	--- Peak																																																																							
2	15810.00	46.97	74.00	-27.03	55.34	41.49	14.71	64.57	--- Peak																																																																							



	22																																																																									
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full RU_5310MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5059.21</td> <td>52.35</td> <td>74.00</td> <td>-21.65</td> <td>40.82</td> <td>36.65</td> <td>8.37</td> <td>33.49</td> <td>100 78 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5059.21	52.35	74.00	-21.65	40.82	36.65	8.37	33.49	100 78 PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>101.90</td> <td>-----</td> <td>-----</td> <td>89.71</td> <td>36.45</td> <td>9.18</td> <td>33.44</td> <td>100 78 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	101.90	-----	-----	89.71	36.45	9.18	33.44	100 78 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5059.21	52.35	74.00	-21.65	40.82	36.65	8.37	33.49	100 78 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5310.00	101.90	-----	-----	89.71	36.45	9.18	33.44	100 78 PEAK																																																																		
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5107.57</td> <td>43.52</td> <td>54.00</td> <td>-10.48</td> <td>31.93</td> <td>36.61</td> <td>8.46</td> <td>33.48</td> <td>100 78 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5107.57	43.52	54.00	-10.48	31.93	36.61	8.46	33.48	100 78 AVERAGE	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>95.39</td> <td>-----</td> <td>-----</td> <td>83.20</td> <td>36.45</td> <td>9.18</td> <td>33.44</td> <td>100 78 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	95.39	-----	-----	83.20	36.45	9.18	33.44	100 78 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5107.57	43.52	54.00	-10.48	31.93	36.61	8.46	33.48	100 78 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5310.00	95.39	-----	-----	83.20	36.45	9.18	33.44	100 78 AVERAGE																																																																		



	22																																	
Mode	Band Edge - R																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full RU_5310MHz																																	
ANT	6																																	
Pol.	Horizontal	Fundamental																																
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <p style="text-align: right;">PART 15.407</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5351.25 54.07 74.00 -19.93</td> <td>41.71</td> <td>36.42</td> <td>9.37</td> <td>33.43</td> <td>100</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5351.25 54.07 74.00 -19.93	41.71	36.42	9.37	33.43	100	78	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	Loss Factor	cm	deg																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																												
1 5351.25 54.07 74.00 -19.93	41.71	36.42	9.37	33.43	100	78	PEAK																											
Blank																																		
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <p style="text-align: right;">PART 15.407 AVG</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.65 47.36 54.00 -6.64</td> <td>35.00</td> <td>36.42</td> <td>9.37</td> <td>33.43</td> <td>100</td> <td>78</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5350.65 47.36 54.00 -6.64	35.00	36.42	9.37	33.43	100	78	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	Loss Factor	cm	deg																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																												
1 5350.65 47.36 54.00 -6.64	35.00	36.42	9.37	33.43	100	78	AVERAGE																											
Blank																																		



	22																																																																									
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full RU_5310MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5067.27</td> <td>52.31</td> <td>74.00</td> <td>-21.69</td> <td>40.77</td> <td>36.65</td> <td>8.38</td> <td>33.49</td> <td>100 12 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5067.27	52.31	74.00	-21.69	40.77	36.65	8.38	33.49	100 12 PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>92.53</td> <td>-----</td> <td>-----</td> <td>80.32</td> <td>36.44</td> <td>9.21</td> <td>33.44</td> <td>100 12 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	92.53	-----	-----	80.32	36.44	9.21	33.44	100 12 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5067.27	52.31	74.00	-21.69	40.77	36.65	8.38	33.49	100 12 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5310.00	92.53	-----	-----	80.32	36.44	9.21	33.44	100 12 PEAK																																																																		
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5013.64</td> <td>43.66</td> <td>54.00</td> <td>-10.34</td> <td>32.17</td> <td>36.69</td> <td>8.30</td> <td>33.50</td> <td>100 12 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5013.64	43.66	54.00	-10.34	32.17	36.69	8.30	33.50	100 12 AVERAGE	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5310.00</td> <td>86.09</td> <td>-----</td> <td>-----</td> <td>73.88</td> <td>36.44</td> <td>9.21</td> <td>33.44</td> <td>100 12 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	86.09	-----	-----	73.88	36.44	9.21	33.44	100 12 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5013.64	43.66	54.00	-10.34	32.17	36.69	8.30	33.50	100 12 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5310.00	86.09	-----	-----	73.88	36.44	9.21	33.44	100 12 AVERAGE																																																																		



	22																																								
Mode	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full RU_5310MHz																																								
ANT	6																																								
Pol.	Vertical	Fundamental																																							
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5363.25</td> <td>51.47</td> <td>74.00</td> <td>-22.53</td> <td>39.06</td> <td>36.41</td> <td>9.43</td> <td>33.43</td> <td>100</td> <td>12</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5363.25	51.47	74.00	-22.53	39.06	36.41	9.43	33.43	100	12	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5363.25	51.47	74.00	-22.53	39.06	36.41	9.43	33.43	100	12	PEAK																														
Blank																																									
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.05</td> <td>43.12</td> <td>54.00</td> <td>-10.88</td> <td>30.76</td> <td>36.42</td> <td>9.37</td> <td>33.43</td> <td>100</td> <td>12</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.05	43.12	54.00	-10.88	30.76	36.42	9.37	33.43	100	12	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.05	43.12	54.00	-10.88	30.76	36.42	9.37	33.43	100	12	AVERAGE																														
Blank																																									



Mode	22																																																																																																							
	Harmonic																																																																																																							
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full RU_5310MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>44.43</td> <td>74.00</td> <td>-29.57</td> <td>57.31</td> <td>38.52</td> <td>12.25</td> <td>63.65</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>46.57</td> <td>74.00</td> <td>-27.43</td> <td>54.90</td> <td>41.56</td> <td>14.76</td> <td>64.65</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10620.00	44.43	74.00	-29.57	57.31	38.52	12.25	63.65	---	Peak	2	15930.00	46.57	74.00	-27.43	54.90	41.56	14.76	64.65	---	Peak	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>44.61</td> <td>74.00</td> <td>-29.39</td> <td>57.49</td> <td>38.52</td> <td>12.25</td> <td>63.65</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>46.09</td> <td>74.00</td> <td>-27.91</td> <td>54.42</td> <td>41.56</td> <td>14.76</td> <td>64.65</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10620.00	44.61	74.00	-29.39	57.49	38.52	12.25	63.65	---	Peak	2	15930.00	46.09	74.00	-27.91	54.42	41.56	14.76	64.65	---	Peak
	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	10620.00	44.43	74.00	-29.57	57.31	38.52	12.25	63.65	---	Peak																																																																																														
2	15930.00	46.57	74.00	-27.43	54.90	41.56	14.76	64.65	---	Peak																																																																																														
Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	10620.00	44.61	74.00	-29.39	57.49	38.52	12.25	63.65	---	Peak																																																																																														
2	15930.00	46.09	74.00	-27.91	54.42	41.56	14.76	64.65	---	Peak																																																																																														







	23																																																																																											
Mode	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz																																																																																											
ANT	6																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.96</td> <td>52.58</td> <td>74.00</td> <td>-21.42</td> <td>39.97</td> <td>36.34</td> <td>9.68</td> <td>33.41</td> <td>100</td> <td>89</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.68</td> <td>54.65</td> <td>68.30</td> <td>-13.65</td> <td>42.05</td> <td>36.32</td> <td>9.69</td> <td>33.41</td> <td>100</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5454.96	52.58	74.00	-21.42	39.97	36.34	9.68	33.41	100	89	PEAK	2	5469.68	54.65	68.30	-13.65	42.05	36.32	9.69	33.41	100	89	PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>100.75</td> <td>-----</td> <td>-----</td> <td>88.11</td> <td>36.32</td> <td>9.72</td> <td>33.40</td> <td>100</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	100.75	-----	-----	88.11	36.32	9.72	33.40	100	89	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5454.96	52.58	74.00	-21.42	39.97	36.34	9.68	33.41	100	89	PEAK																																																																																	
2	5469.68	54.65	68.30	-13.65	42.05	36.32	9.69	33.41	100	89	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5510.00	100.75	-----	-----	88.11	36.32	9.72	33.40	100	89	PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>44.51</td> <td>54.00</td> <td>-9.49</td> <td>31.90</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>100</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	44.51	54.00	-9.49	31.90	36.33	9.69	33.41	100	89	AVERAGE	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>94.20</td> <td>-----</td> <td>-----</td> <td>81.58</td> <td>36.31</td> <td>9.71</td> <td>33.40</td> <td>100</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	94.20	-----	-----	81.58	36.31	9.71	33.40	100	89	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5459.76	44.51	54.00	-9.49	31.90	36.33	9.69	33.41	100	89	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5510.00	94.20	-----	-----	81.58	36.31	9.71	33.40	100	89	AVERAGE																																																																																	



	23																																				
Mode	Band Edge - R																																				
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz																																				
ANT	6																																				
Pol.	Horizontal	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5751.49</td> <td>52.63</td> <td>68.30</td> <td>-15.67</td> <td>39.46</td> <td>36.55</td> <td>10.07</td> <td>33.45</td> <td>100</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5751.49	52.63	68.30	-15.67	39.46	36.55	10.07	33.45	100	89
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																														
1	5751.49	52.63	68.30	-15.67	39.46	36.55	10.07	33.45	100	89	PEAK																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>44.51</td> <td>54.00</td> <td>-9.49</td> <td>31.90</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>100</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5459.76	44.51	54.00	-9.49	31.90	36.33	9.69	33.41	100	89
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																														
1	5459.76	44.51	54.00	-9.49	31.90	36.33	9.69	33.41	100	89	AVERAGE																										

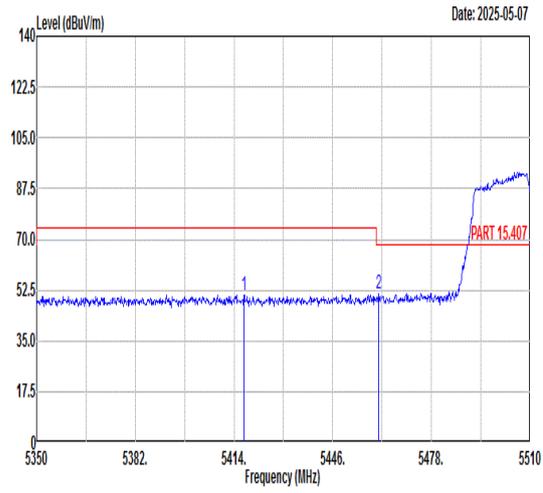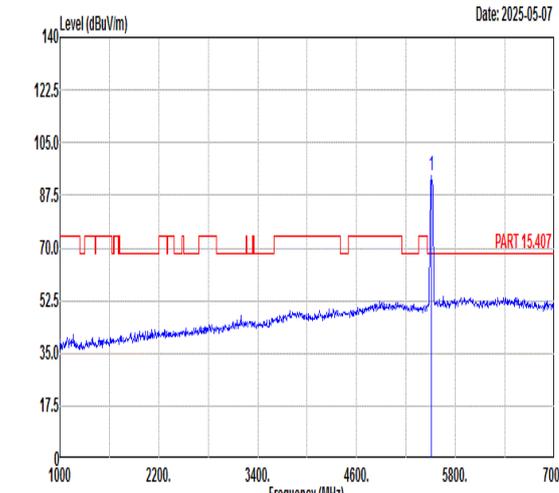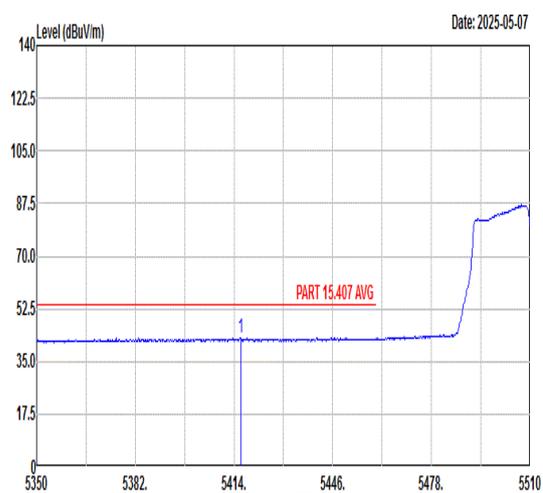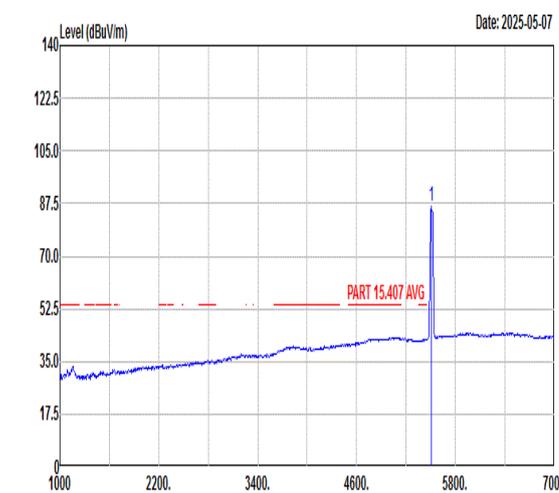

		23																																																																																										
Mode		Band Edge - L																																																																																										
		U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz																																																																																										
ANT		6																																																																																										
Pol.		Vertical	Fundamental																																																																																									
Peak	 <p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5417.20</td> <td>50.80</td> <td>74.00</td> <td>-23.20</td> <td>38.18</td> <td>36.37</td> <td>9.67</td> <td>33.42</td> <td>397</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5460.88</td> <td>51.35</td> <td>68.30</td> <td>-16.95</td> <td>38.74</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>397</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5417.20	50.80	74.00	-23.20	38.18	36.37	9.67	33.42	397	116	PEAK	2	5460.88	51.35	68.30	-16.95	38.74	36.33	9.69	33.41	397	116	PEAK	 <p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>93.93</td> <td>-----</td> <td>-----</td> <td>81.31</td> <td>36.31</td> <td>9.71</td> <td>33.40</td> <td>397</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	93.93	-----	-----	81.31	36.31	9.71	33.40	397	116	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5417.20	50.80	74.00	-23.20	38.18	36.37	9.67	33.42	397	116	PEAK																																																																																	
2	5460.88	51.35	68.30	-16.95	38.74	36.33	9.69	33.41	397	116	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5510.00	93.93	-----	-----	81.31	36.31	9.71	33.40	397	116	PEAK																																																																																	
Avg	 <p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5416.08</td> <td>42.99</td> <td>54.00</td> <td>-11.01</td> <td>30.38</td> <td>36.37</td> <td>9.66</td> <td>33.42</td> <td>397</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5416.08	42.99	54.00	-11.01	30.38	36.37	9.66	33.42	397	116	AVERAGE	 <p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>86.39</td> <td>-----</td> <td>-----</td> <td>73.77</td> <td>36.31</td> <td>9.71</td> <td>33.40</td> <td>397</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	86.39	-----	-----	73.77	36.31	9.71	33.40	397	116	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5416.08	42.99	54.00	-11.01	30.38	36.37	9.66	33.42	397	116	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5510.00	86.39	-----	-----	73.77	36.31	9.71	33.40	397	116	AVERAGE																																																																																	



	23																																	
Mode	Band Edge - R																																	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz																																	
ANT	6																																	
Pol.	Vertical	Fundamental																																
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5733.38 52.37 68.30 -15.93</td> <td>39.25</td> <td>36.53</td> <td>10.04</td> <td>33.45</td> <td>397</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB				1 5733.38 52.37 68.30 -15.93	39.25	36.53	10.04	33.45	397	116	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB																														
1 5733.38 52.37 68.30 -15.93	39.25	36.53	10.04	33.45	397	116	PEAK																											
Blank																																		
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5416.08 42.99 54.00 -11.01</td> <td>30.38</td> <td>36.37</td> <td>9.66</td> <td>33.42</td> <td>397</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB				1 5416.08 42.99 54.00 -11.01	30.38	36.37	9.66	33.42	397	116	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB																														
1 5416.08 42.99 54.00 -11.01	30.38	36.37	9.66	33.42	397	116	AVERAGE																											
Blank																																		



Mode	23																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz																																																																																	
ANT	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>44.26</td> <td>74.00</td> <td>-29.74</td> <td>56.61</td> <td>38.62</td> <td>12.54</td> <td>63.51 --- --- Peak</td> </tr> <tr> <td>2 16530.00</td> <td>46.98</td> <td>68.30</td> <td>-21.32</td> <td>54.57</td> <td>41.97</td> <td>15.19</td> <td>64.75 --- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11020.00	44.26	74.00	-29.74	56.61	38.62	12.54	63.51 --- --- Peak	2 16530.00	46.98	68.30	-21.32	54.57	41.97	15.19	64.75 --- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>44.72</td> <td>74.00</td> <td>-29.28</td> <td>57.07</td> <td>38.62</td> <td>12.54</td> <td>63.51 --- --- Peak</td> </tr> <tr> <td>2 16530.00</td> <td>45.23</td> <td>68.30</td> <td>-23.07</td> <td>52.82</td> <td>41.97</td> <td>15.19</td> <td>64.75 --- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11020.00	44.72	74.00	-29.28	57.07	38.62	12.54	63.51 --- --- Peak	2 16530.00	45.23	68.30	-23.07	52.82	41.97	15.19	64.75 --- --- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 11020.00	44.26	74.00	-29.74	56.61	38.62	12.54	63.51 --- --- Peak																																																																											
2 16530.00	46.98	68.30	-21.32	54.57	41.97	15.19	64.75 --- --- Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 11020.00	44.72	74.00	-29.28	57.07	38.62	12.54	63.51 --- --- Peak																																																																											
2 16530.00	45.23	68.30	-23.07	52.82	41.97	15.19	64.75 --- --- Peak																																																																											



Mode	24																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_Full RU_5550MHz																																																																																														
ANT	6																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>43.48</td> <td>74.00</td> <td>-30.52</td> <td>55.74</td> <td>38.72</td> <td>12.59</td> <td>63.57</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16650.00</td> <td>47.64</td> <td>68.30</td> <td>-20.66</td> <td>55.06</td> <td>42.06</td> <td>15.28</td> <td>64.76</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11100.00	43.48	74.00	-30.52	55.74	38.72	12.59	63.57	--- Peak	2	16650.00	47.64	68.30	-20.66	55.06	42.06	15.28	64.76	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>45.62</td> <td>74.00</td> <td>-28.38</td> <td>57.88</td> <td>38.72</td> <td>12.59</td> <td>63.57</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16650.00</td> <td>46.93</td> <td>68.30</td> <td>-21.37</td> <td>54.35</td> <td>42.06</td> <td>15.28</td> <td>64.76</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11100.00	45.62	74.00	-28.38	57.88	38.72	12.59	63.57	--- Peak	2	16650.00	46.93	68.30	-21.37	54.35	42.06	15.28	64.76
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11100.00	43.48	74.00	-30.52	55.74	38.72	12.59	63.57	--- Peak																																																																																						
2	16650.00	47.64	68.30	-20.66	55.06	42.06	15.28	64.76	--- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11100.00	45.62	74.00	-28.38	57.88	38.72	12.59	63.57	--- Peak																																																																																						
2	16650.00	46.93	68.30	-21.37	54.35	42.06	15.28	64.76	--- Peak																																																																																						



	25																																																									
Mode	Band Edge - L																																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full RU_5670MHz																																																									
ANT	6																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5427.12 50.94 74.00 -23.06</td> <td>38.32</td> <td>36.36</td> <td>9.67</td> <td>33.41</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>2 5463.92 50.52 68.30 -17.78</td> <td>37.91</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5427.12 50.94 74.00 -23.06	38.32	36.36	9.67	33.41	100	63	PEAK	2 5463.92 50.52 68.30 -17.78	37.91	36.33	9.69	33.41	100	63	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5670.00 101.82 -----</td> <td>88.87</td> <td>36.47</td> <td>9.91</td> <td>33.43</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5670.00 101.82 -----	88.87	36.47	9.91	33.43	100	63	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																				
1 5427.12 50.94 74.00 -23.06	38.32	36.36	9.67	33.41	100	63	PEAK																																																			
2 5463.92 50.52 68.30 -17.78	37.91	36.33	9.69	33.41	100	63	PEAK																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																				
1 5670.00 101.82 -----	88.87	36.47	9.91	33.43	100	63	PEAK																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5424.88 42.85 54.00 -11.15</td> <td>30.24</td> <td>36.36</td> <td>9.67</td> <td>33.42</td> <td>100</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5424.88 42.85 54.00 -11.15	30.24	36.36	9.67	33.42	100	63	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5670.00 94.94 -----</td> <td>81.99</td> <td>36.47</td> <td>9.91</td> <td>33.43</td> <td>100</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1 5670.00 94.94 -----	81.99	36.47	9.91	33.43	100	63	AVERAGE								
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																				
1 5424.88 42.85 54.00 -11.15	30.24	36.36	9.67	33.42	100	63	AVERAGE																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																				
1 5670.00 94.94 -----	81.99	36.47	9.91	33.43	100	63	AVERAGE																																																			



	25																																			
Mode	Band Edge - R																																			
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full RU_5670MHz																																			
ANT	6																																			
Pol.	Horizontal	Fundamental																																		
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5725.01</td> <td>52.80</td> <td>68.30</td> <td>-15.50</td> <td>39.69</td> <td>36.53</td> <td>10.02</td> <td>33.44</td> <td>100</td> <td>63 PEAK</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dB	cm	deg		1 5725.01	52.80	68.30	-15.50	39.69	36.53	10.02	33.44	100	63 PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq Level Line (dB)	Level	Factor	Loss	Factor	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dB	cm	deg																														
1 5725.01	52.80	68.30	-15.50	39.69	36.53	10.02	33.44	100	63 PEAK																											
Blank																																				
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5424.88</td> <td>42.85</td> <td>54.00</td> <td>-11.15</td> <td>30.24</td> <td>36.36</td> <td>9.67</td> <td>33.42</td> <td>100</td> <td>63 AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dB	cm	deg		1 5424.88	42.85	54.00	-11.15	30.24	36.36	9.67	33.42	100	63 AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq Level Line (dB)	Level	Factor	Loss	Factor	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dB	cm	deg																														
1 5424.88	42.85	54.00	-11.15	30.24	36.36	9.67	33.42	100	63 AVERAGE																											
Blank																																				



	25																																																																																											
Mode	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full RU_5670MHz																																																																																											
ANT	6																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5386.16</td> <td>51.30</td> <td>74.00</td> <td>-22.70</td> <td>38.78</td> <td>36.39</td> <td>9.55</td> <td>33.42</td> <td>345</td> <td>202</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5478.00</td> <td>51.32</td> <td>68.30</td> <td>-16.98</td> <td>38.72</td> <td>36.32</td> <td>9.69</td> <td>33.41</td> <td>345</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5386.16	51.30	74.00	-22.70	38.78	36.39	9.55	33.42	345	202	PEAK	2	5478.00	51.32	68.30	-16.98	38.72	36.32	9.69	33.41	345	202	PEAK	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>96.12</td> <td>-----</td> <td>-----</td> <td>83.18</td> <td>36.47</td> <td>9.90</td> <td>33.43</td> <td>345</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	96.12	-----	-----	83.18	36.47	9.90	33.43	345	202	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5386.16	51.30	74.00	-22.70	38.78	36.39	9.55	33.42	345	202	PEAK																																																																																	
2	5478.00	51.32	68.30	-16.98	38.72	36.32	9.69	33.41	345	202	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5670.00	96.12	-----	-----	83.18	36.47	9.90	33.43	345	202	PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5389.36</td> <td>42.69</td> <td>54.00</td> <td>-11.31</td> <td>30.15</td> <td>36.39</td> <td>9.57</td> <td>33.42</td> <td>345</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5389.36	42.69	54.00	-11.31	30.15	36.39	9.57	33.42	345	202	AVERAGE	<p style="text-align: right;">Date: 2025-05-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>89.40</td> <td>-----</td> <td>-----</td> <td>76.46</td> <td>36.47</td> <td>9.90</td> <td>33.43</td> <td>345</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	89.40	-----	-----	76.46	36.47	9.90	33.43	345	202	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5389.36	42.69	54.00	-11.31	30.15	36.39	9.57	33.42	345	202	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5670.00	89.40	-----	-----	76.46	36.47	9.90	33.43	345	202	AVERAGE																																																																																	



	25	
Mode	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full RU_5670MHz	
ANT	6	
Pol.	Vertical	Fundamental
Peak	<p style="text-align: right;">Date: 2025-05-07</p>	
	Blank	
Avg	<p style="text-align: right;">Date: 2025-05-07</p>	
	Blank	



Mode	25																																																																																																										
	Harmonic																																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full RU_5670MHz																																																																																																										
ANT	6																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>44.37</td> <td>74.00</td> <td>-29.63</td> <td>56.33</td> <td>39.01</td> <td>12.77</td> <td>63.74</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>47.49</td> <td>68.30</td> <td>-20.81</td> <td>54.44</td> <td>42.31</td> <td>15.55</td> <td>64.81</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11340.00	44.37	74.00	-29.63	56.33	39.01	12.77	63.74	---	---	Peak	2	17010.00	47.49	68.30	-20.81	54.44	42.31	15.55	64.81	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>45.10</td> <td>74.00</td> <td>-28.90</td> <td>57.06</td> <td>39.01</td> <td>12.77</td> <td>63.74</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>46.66</td> <td>68.30</td> <td>-21.64</td> <td>53.61</td> <td>42.31</td> <td>15.55</td> <td>64.81</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11340.00	45.10	74.00	-28.90	57.06	39.01	12.77	63.74	---	---	Peak	2	17010.00	46.66	68.30	-21.64	53.61	42.31	15.55	64.81	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11340.00	44.37	74.00	-29.63	56.33	39.01	12.77	63.74	---	---	Peak																																																																																																
2	17010.00	47.49	68.30	-20.81	54.44	42.31	15.55	64.81	---	---	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11340.00	45.10	74.00	-28.90	57.06	39.01	12.77	63.74	---	---	Peak																																																																																																
2	17010.00	46.66	68.30	-21.64	53.61	42.31	15.55	64.81	---	---	Peak																																																																																																



	26																																																																															
Mode	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-04-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.52</td> <td>55.76</td> <td>74.00</td> <td>-18.24</td> <td>44.12</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.52	55.76	74.00	-18.24	44.12	36.58	8.53	33.47	100	68	PEAK	<p style="text-align: right;">Date: 2025-04-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>97.94</td> <td>-----</td> <td>-----</td> <td>86.22</td> <td>36.54</td> <td>8.64</td> <td>33.46</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	97.94	-----	-----	86.22	36.54	8.64	33.46	100	68	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5149.52	55.76	74.00	-18.24	44.12	36.58	8.53	33.47	100	68	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5210.00	97.94	-----	-----	86.22	36.54	8.64	33.46	100	68	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-04-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.97</td> <td>47.86</td> <td>54.00</td> <td>-6.14</td> <td>36.23</td> <td>36.59</td> <td>8.51</td> <td>33.47</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5137.97	47.86	54.00	-6.14	36.23	36.59	8.51	33.47	100	68	AVERAGE	<p style="text-align: right;">Date: 2025-04-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>91.78</td> <td>-----</td> <td>-----</td> <td>80.07</td> <td>36.54</td> <td>8.63</td> <td>33.46</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	91.78	-----	-----	80.07	36.54	8.63	33.46	100	68	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5137.97	47.86	54.00	-6.14	36.23	36.59	8.51	33.47	100	68	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5210.00	91.78	-----	-----	80.07	36.54	8.63	33.46	100	68	AVERAGE																																																																					



Mode	26																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																								
ANT	6																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Date: 2025-04-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5408.75</td> <td>51.92</td> <td>74.00</td> <td>-22.08</td> <td>39.31</td> <td>36.37</td> <td>9.66</td> <td>33.42</td> <td>100</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5408.75	51.92	74.00	-22.08	39.31	36.37	9.66	33.42	100	68	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5408.75	51.92	74.00	-22.08	39.31	36.37	9.66	33.42	100	68	PEAK																														
Avg	<p>Date: 2025-04-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.00</td> <td>44.54</td> <td>54.00</td> <td>-9.46</td> <td>31.92</td> <td>36.36</td> <td>9.67</td> <td>33.41</td> <td>100</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5431.00	44.54	54.00	-9.46	31.92	36.36	9.67	33.41	100	68	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5431.00	44.54	54.00	-9.46	31.92	36.36	9.67	33.41	100	68	AVERAGE																														



	26																																																																															
Mode	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																																																															
ANT	6																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.52</td> <td>52.96</td> <td>74.00</td> <td>-21.04</td> <td>41.32</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>400</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.52	52.96	74.00	-21.04	41.32	36.58	8.53	33.47	400	183	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>88.38</td> <td>-----</td> <td>-----</td> <td>76.70</td> <td>36.55</td> <td>8.59</td> <td>33.46</td> <td>400</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	88.38	-----	-----	76.70	36.55	8.59	33.46	400	183	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5149.52	52.96	74.00	-21.04	41.32	36.58	8.53	33.47	400	183	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5210.00	88.38	-----	-----	76.70	36.55	8.59	33.46	400	183	PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.74</td> <td>45.99</td> <td>54.00</td> <td>-8.01</td> <td>34.35</td> <td>36.58</td> <td>8.53</td> <td>33.47</td> <td>400</td> <td>183</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5145.74	45.99	54.00	-8.01	34.35	36.58	8.53	33.47	400	183	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>82.65</td> <td>-----</td> <td>-----</td> <td>70.97</td> <td>36.55</td> <td>8.59</td> <td>33.46</td> <td>400</td> <td>183</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	82.65	-----	-----	70.97	36.55	8.59	33.46	400	183	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5145.74	45.99	54.00	-8.01	34.35	36.58	8.53	33.47	400	183	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5210.00	82.65	-----	-----	70.97	36.55	8.59	33.46	400	183	AVERAGE																																																																					



	26																																								
Mode	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																								
ANT	6																																								
Pol.	Vertical	Fundamental																																							
Peak	<p style="text-align: right;">Date: 2025-04-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.00</td> <td>51.33</td> <td>74.00</td> <td>-22.67</td> <td>38.72</td> <td>36.36</td> <td>9.67</td> <td>33.42</td> <td>400</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5420.00	51.33	74.00	-22.67	38.72	36.36	9.67	33.42	400	183	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5420.00	51.33	74.00	-22.67	38.72	36.36	9.67	33.42	400	183	PEAK																														
Avg	<p style="text-align: right;">Date: 2025-04-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.50</td> <td>44.36</td> <td>54.00</td> <td>-9.64</td> <td>31.75</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>400</td> <td>183</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.50	44.36	54.00	-9.64	31.75	36.33	9.69	33.41	400	183	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5458.50	44.36	54.00	-9.64	31.75	36.33	9.69	33.41	400	183	AVERAGE																														



Mode	26																																																																																																							
	Harmonic																																																																																																							
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>45.24</td> <td>68.30</td> <td>-23.06</td> <td>58.38</td> <td>38.48</td> <td>12.11</td> <td>63.73</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>46.42</td> <td>74.00</td> <td>-27.58</td> <td>54.86</td> <td>41.38</td> <td>14.62</td> <td>64.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	45.24	68.30	-23.06	58.38	38.48	12.11	63.73	---	---	Peak	2	15630.00	46.42	74.00	-27.58	54.86	41.38	14.62	64.44	---	---	Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>44.56</td> <td>68.30</td> <td>-23.74</td> <td>57.70</td> <td>38.48</td> <td>12.11</td> <td>63.73</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>45.53</td> <td>74.00</td> <td>-28.47</td> <td>53.97</td> <td>41.38</td> <td>14.62</td> <td>64.44</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	44.56	68.30	-23.74	57.70	38.48	12.11	63.73	---	---	Peak	2	15630.00	45.53	74.00	-28.47	53.97	41.38	14.62	64.44	---	---	Peak
	Limit		Read								Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq		Level	Line	Margin	Level	Factor	Loss Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	10420.00	45.24	68.30	-23.06	58.38	38.48	12.11	63.73	---	---	Peak																																																																																													
2	15630.00	46.42	74.00	-27.58	54.86	41.38	14.62	64.44	---	---	Peak																																																																																													
Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
	Freq	Level							Line	Margin	Level	Factor	Loss Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	10420.00	44.56	68.30	-23.74	57.70	38.48	12.11	63.73	---	---	Peak																																																																																													
2	15630.00	45.53	74.00	-28.47	53.97	41.38	14.62	64.44	---	---	Peak																																																																																													



	27																																																																															
Mode	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_Full RU_5290MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5128.76</td> <td>52.89</td> <td>74.00</td> <td>-21.11</td> <td>41.26</td> <td>36.60</td> <td>8.50</td> <td>33.47</td> <td>105</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5128.76	52.89	74.00	-21.11	41.26	36.60	8.50	33.47	105	65	PEAK	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>98.38</td> <td>-----</td> <td>-----</td> <td>86.27</td> <td>36.46</td> <td>9.09</td> <td>33.44</td> <td>105</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	98.38	-----	-----	86.27	36.46	9.09	33.44	105	65	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5128.76	52.89	74.00	-21.11	41.26	36.60	8.50	33.47	105	65	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5290.00	98.38	-----	-----	86.27	36.46	9.09	33.44	105	65	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5011.60</td> <td>44.98</td> <td>54.00</td> <td>-9.02</td> <td>33.48</td> <td>36.69</td> <td>8.31</td> <td>33.50</td> <td>105</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5011.60	44.98	54.00	-9.02	33.48	36.69	8.31	33.50	105	65	AVERAGE	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>92.25</td> <td>-----</td> <td>-----</td> <td>80.20</td> <td>36.47</td> <td>9.02</td> <td>33.44</td> <td>105</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	92.25	-----	-----	80.20	36.47	9.02	33.44	105	65	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5011.60	44.98	54.00	-9.02	33.48	36.69	8.31	33.50	105	65	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5290.00	92.25	-----	-----	80.20	36.47	9.02	33.44	105	65	AVERAGE																																																																					



	27																																								
Mode	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_Full RU_5290MHz																																								
ANT	6																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.28</td> <td>56.60</td> <td>74.00</td> <td>-17.40</td> <td>44.22</td> <td>36.42</td> <td>9.39</td> <td>33.43</td> <td>105</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5355.28	56.60	74.00	-17.40	44.22	36.42	9.39	33.43	105	65	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5355.28	56.60	74.00	-17.40	44.22	36.42	9.39	33.43	105	65	PEAK																														
Blank																																									
Avg	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.64</td> <td>50.71</td> <td>54.00</td> <td>-3.29</td> <td>38.33</td> <td>36.41</td> <td>9.40</td> <td>33.43</td> <td>105</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5356.64	50.71	54.00	-3.29	38.33	36.41	9.40	33.43	105	65	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5356.64	50.71	54.00	-3.29	38.33	36.41	9.40	33.43	105	65	AVERAGE																														
Blank																																									



		27																																																																									
Mode		Band Edge - L																																																																									
		U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_Full RU_5290MHz																																																																									
ANT		6																																																																									
Pol.		Vertical	Fundamental																																																																								
Peak		<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5049.59</td> <td>52.91</td> <td>74.00</td> <td>-21.09</td> <td>41.39</td> <td>36.66</td> <td>8.35</td> <td>33.49</td> <td>400 121 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5049.59	52.91	74.00	-21.09	41.39	36.66	8.35	33.49	400 121 PEAK	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>86.91</td> <td>-----</td> <td>-----</td> <td>74.70</td> <td>36.44</td> <td>9.21</td> <td>33.44</td> <td>400 121 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5290.00	86.91	-----	-----	74.70	36.44	9.21	33.44	400 121 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5049.59	52.91	74.00	-21.09	41.39	36.66	8.35	33.49	400 121 PEAK																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5290.00	86.91	-----	-----	74.70	36.44	9.21	33.44	400 121 PEAK																																																																			
Avg		<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5101.21</td> <td>44.86</td> <td>54.00</td> <td>-9.14</td> <td>33.27</td> <td>36.62</td> <td>8.45</td> <td>33.48</td> <td>400 121 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5101.21	44.86	54.00	-9.14	33.27	36.62	8.45	33.48	400 121 AVERAGE	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>80.66</td> <td>-----</td> <td>-----</td> <td>68.74</td> <td>36.50</td> <td>8.87</td> <td>33.45</td> <td>400 121 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5290.00	80.66	-----	-----	68.74	36.50	8.87	33.45	400 121 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5101.21	44.86	54.00	-9.14	33.27	36.62	8.45	33.48	400 121 AVERAGE																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5290.00	80.66	-----	-----	68.74	36.50	8.87	33.45	400 121 AVERAGE																																																																			



	27																																	
Mode	Band Edge - R																																	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_Full RU_5290MHz																																	
ANT	6																																	
Pol.	Vertical	Fundamental																																
Peak	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5362.42 51.91 74.00</td> <td>-22.09</td> <td>39.50</td> <td>36.41</td> <td>9.43</td> <td>33.43</td> <td>400</td> <td>121 PEAK</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5362.42 51.91 74.00	-22.09	39.50	36.41	9.43	33.43	400	121 PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level	Factor	Loss Factor																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																												
1 5362.42 51.91 74.00	-22.09	39.50	36.41	9.43	33.43	400	121 PEAK																											
Blank																																		
Avg	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5353.75 46.63 54.00</td> <td>-7.37</td> <td>34.26</td> <td>36.42</td> <td>9.38</td> <td>33.43</td> <td>400</td> <td>121 AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5353.75 46.63 54.00	-7.37	34.26	36.42	9.38	33.43	400	121 AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level	Factor	Loss Factor																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																												
1 5353.75 46.63 54.00	-7.37	34.26	36.42	9.38	33.43	400	121 AVERAGE																											
Blank																																		



Mode	27																																																																																															
	Harmonic																																																																																															
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_Full RU_5290MHz																																																																																															
ANT	6																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>45.95</td> <td>68.30</td> <td>-22.35</td> <td>58.88</td> <td>38.52</td> <td>12.22</td> <td>63.67</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>44.61</td> <td>74.00</td> <td>-29.39</td> <td>52.97</td> <td>41.52</td> <td>14.73</td> <td>64.61</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10580.00	45.95	68.30	-22.35	58.88	38.52	12.22	63.67	--- Peak	2	15870.00	44.61	74.00	-29.39	52.97	41.52	14.73	64.61	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>43.85</td> <td>68.30</td> <td>-24.45</td> <td>56.78</td> <td>38.52</td> <td>12.22</td> <td>63.67</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>45.71</td> <td>74.00</td> <td>-28.29</td> <td>54.07</td> <td>41.52</td> <td>14.73</td> <td>64.61</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10580.00	43.85	68.30	-24.45	56.78	38.52	12.22	63.67	--- Peak	2	15870.00	45.71	74.00	-28.29	54.07	41.52	14.73	64.61	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	10580.00	45.95	68.30	-22.35	58.88	38.52	12.22	63.67	--- Peak																																																																																							
2	15870.00	44.61	74.00	-29.39	52.97	41.52	14.73	64.61	--- Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																								
1	10580.00	43.85	68.30	-24.45	56.78	38.52	12.22	63.67	--- Peak																																																																																							
2	15870.00	45.71	74.00	-28.29	54.07	41.52	14.73	64.61	--- Peak																																																																																							



		28																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																																																																																												
ANT	6																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.92</td> <td>56.07</td> <td>74.00</td> <td>-17.93</td> <td>43.46</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>105</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.34</td> <td>56.11</td> <td>68.30</td> <td>-12.19</td> <td>43.51</td> <td>36.32</td> <td>9.69</td> <td>33.41</td> <td>105</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5456.92	56.07	74.00	-17.93	43.46	36.33	9.69	33.41	105	78	PEAK	2	5469.34	56.11	68.30	-12.19	43.51	36.32	9.69	33.41	105	78	PEAK	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>97.27</td> <td>-----</td> <td>-----</td> <td>84.65</td> <td>36.31</td> <td>9.71</td> <td>33.40</td> <td>105</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5530.00	97.27	-----	-----	84.65	36.31	9.71	33.40	105	78	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																					
1	5456.92	56.07	74.00	-17.93	43.46	36.33	9.69	33.41	105	78	PEAK																																																																																		
2	5469.34	56.11	68.30	-12.19	43.51	36.32	9.69	33.41	105	78	PEAK																																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																					
1	5530.00	97.27	-----	-----	84.65	36.31	9.71	33.40	105	78	PEAK																																																																																		
Avg	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.72</td> <td>49.62</td> <td>54.00</td> <td>-4.38</td> <td>37.01</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>105</td> <td>78</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5458.72	49.62	54.00	-4.38	37.01	36.33	9.69	33.41	105	78	AVERAGE	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>90.35</td> <td>-----</td> <td>-----</td> <td>77.71</td> <td>36.32</td> <td>9.72</td> <td>33.40</td> <td>105</td> <td>78</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5530.00	90.35	-----	-----	77.71	36.32	9.72	33.40	105	78	AVERAGE												
	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																					
1	5458.72	49.62	54.00	-4.38	37.01	36.33	9.69	33.41	105	78	AVERAGE																																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																					
1	5530.00	90.35	-----	-----	77.71	36.32	9.72	33.40	105	78	AVERAGE																																																																																		



Mode	28																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																																					
ANT	6																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5730.69</td> <td>52.20</td> <td>68.30</td> <td>-16.10</td> <td>39.09</td> <td>36.53</td> <td>10.03</td> <td>33.45</td> <td>105 78 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5730.69	52.20	68.30	-16.10	39.09	36.53	10.03	33.45	105 78 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Level	Factor	Loss Factor			Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5730.69	52.20	68.30	-16.10	39.09	36.53	10.03	33.45	105 78 PEAK																														



		28																																																																																									
Mode		Band Edge - L																																																																																									
		U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																																																																																									
ANT		6																																																																																									
Pol.		Vertical	Fundamental																																																																																								
Peak		<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.38</td> <td>53.14</td> <td>74.00</td> <td>-20.86</td> <td>40.53</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>353</td> <td>201</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.88</td> <td>52.55</td> <td>68.30</td> <td>-15.75</td> <td>39.95</td> <td>36.32</td> <td>9.69</td> <td>33.41</td> <td>353</td> <td>201</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5456.38	53.14	74.00	-20.86	40.53	36.33	9.69	33.41	353	201	PEAK	2	5469.88	52.55	68.30	-15.75	39.95	36.32	9.69	33.41	353	201	PEAK	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>87.86</td> <td>75.25</td> <td>36.30</td> <td>9.71</td> <td>33.40</td> <td>353</td> <td>201</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	87.86	75.25	36.30	9.71	33.40	353	201	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5456.38	53.14	74.00	-20.86	40.53	36.33	9.69	33.41	353	201	PEAK																																																																																
2	5469.88	52.55	68.30	-15.75	39.95	36.32	9.69	33.41	353	201	PEAK																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5530.00	87.86	75.25	36.30	9.71	33.40	353	201	PEAK																																																																																		
Avg		<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.40</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>33.97</td> <td>36.34</td> <td>9.68</td> <td>33.41</td> <td>353</td> <td>201</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5454.40	46.58	54.00	-7.42	33.97	36.34	9.68	33.41	353	201	AVERAGE	<p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>81.96</td> <td>69.36</td> <td>36.30</td> <td>9.70</td> <td>33.40</td> <td>353</td> <td>201</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	81.96	69.36	36.30	9.70	33.40	353	201	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5454.40	46.58	54.00	-7.42	33.97	36.34	9.68	33.41	353	201	AVERAGE																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5530.00	81.96	69.36	36.30	9.70	33.40	353	201	AVERAGE																																																																																		







Mode	28																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																																								
ANT	6																																								
Pol.	Vertical	Fundamental																																							
Peak	<p>Date: 2025-04-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5749.73</td> <td>52.78</td> <td>68.30</td> <td>-15.52</td> <td>39.61</td> <td>36.55</td> <td>10.07</td> <td>33.45</td> <td>353</td> <td>201</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5749.73	52.78	68.30	-15.52	39.61	36.55	10.07	33.45	353	201	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5749.73	52.78	68.30	-15.52	39.61	36.55	10.07	33.45	353	201	PEAK																														



Mode	28																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>43.73</td> <td>74.00</td> <td>-30.27</td> <td>56.03</td> <td>38.67</td> <td>12.57</td> <td>63.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>46.45</td> <td>68.30</td> <td>-21.85</td> <td>53.97</td> <td>42.01</td> <td>15.23</td> <td>64.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11060.00	43.73	74.00	-30.27	56.03	38.67	12.57	63.54	---	---	Peak	2	16590.00	46.45	68.30	-21.85	53.97	42.01	15.23	64.76	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>44.18</td> <td>74.00</td> <td>-29.82</td> <td>56.48</td> <td>38.67</td> <td>12.57</td> <td>63.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>46.11</td> <td>68.30</td> <td>-22.19</td> <td>53.63</td> <td>42.01</td> <td>15.23</td> <td>64.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11060.00	44.18	74.00	-29.82	56.48	38.67	12.57	63.54	---	---	Peak	2	16590.00	46.11	68.30	-22.19	53.63	42.01	15.23	64.76	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11060.00	43.73	74.00	-30.27	56.03	38.67	12.57	63.54	---	---	Peak																																																																																							
2	16590.00	46.45	68.30	-21.85	53.97	42.01	15.23	64.76	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11060.00	44.18	74.00	-29.82	56.48	38.67	12.57	63.54	---	---	Peak																																																																																							
2	16590.00	46.11	68.30	-22.19	53.63	42.01	15.23	64.76	---	---	Peak																																																																																							

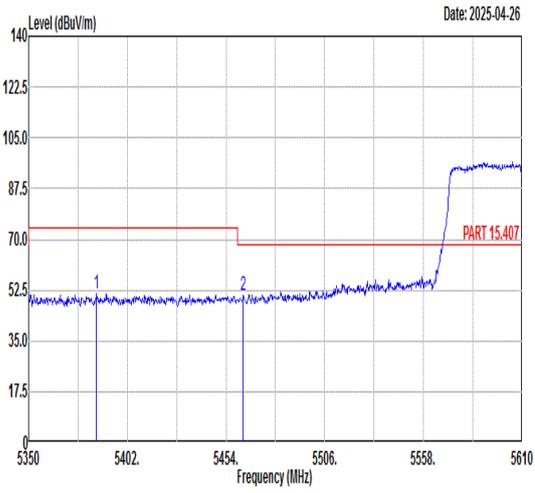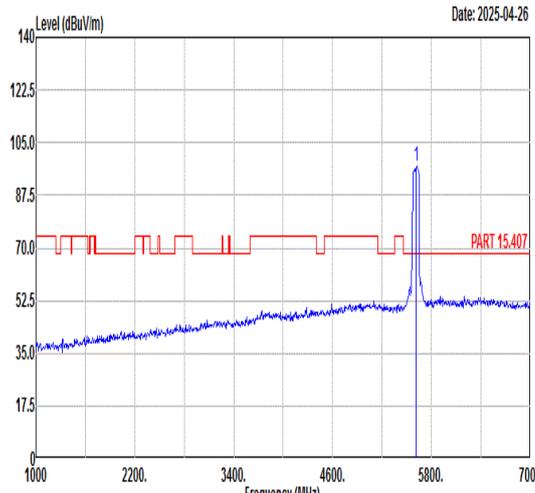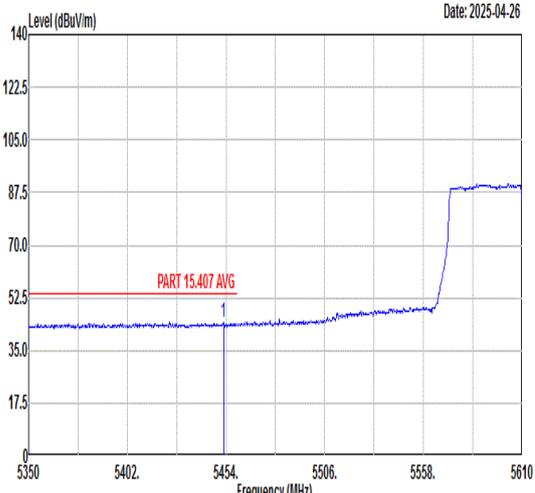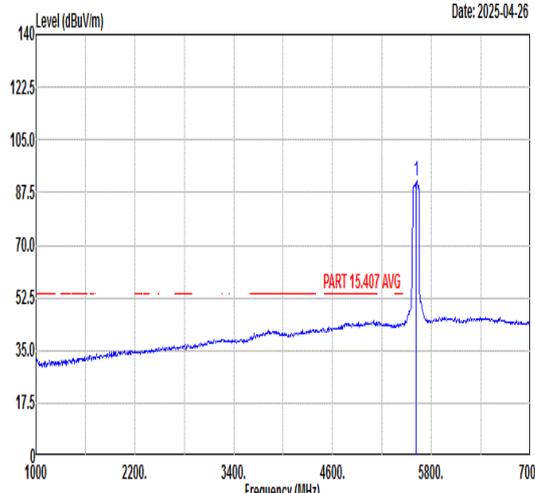

		29																																																																																										
Mode	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_Full RU_5610MHz																																																																																											
ANT	6																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	 <p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5385.88</td> <td>51.34</td> <td>74.00</td> <td>-22.66</td> <td>38.82</td> <td>36.39</td> <td>9.55</td> <td>33.42</td> <td>100</td> <td>83</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.10</td> <td>50.97</td> <td>68.30</td> <td>-17.33</td> <td>38.36</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>100</td> <td>83</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5385.88	51.34	74.00	-22.66	38.82	36.39	9.55	33.42	100	83	PEAK	2	5463.10	50.97	68.30	-17.33	38.36	36.33	9.69	33.41	100	83	PEAK	 <p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>97.15</td> <td>-----</td> <td>-----</td> <td>84.35</td> <td>36.42</td> <td>9.80</td> <td>33.42</td> <td>100</td> <td>83</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	97.15	-----	-----	84.35	36.42	9.80	33.42	100	83	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5385.88	51.34	74.00	-22.66	38.82	36.39	9.55	33.42	100	83	PEAK																																																																																	
2	5463.10	50.97	68.30	-17.33	38.36	36.33	9.69	33.41	100	83	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5610.00	97.15	-----	-----	84.35	36.42	9.80	33.42	100	83	PEAK																																																																																	
Avg	 <p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.70</td> <td>44.30</td> <td>54.00</td> <td>-9.70</td> <td>31.69</td> <td>36.34</td> <td>9.68</td> <td>33.41</td> <td>100</td> <td>83</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5452.70	44.30	54.00	-9.70	31.69	36.34	9.68	33.41	100	83	AVERAGE	 <p style="text-align: right;">Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>91.20</td> <td>-----</td> <td>-----</td> <td>78.40</td> <td>36.42</td> <td>9.80</td> <td>33.42</td> <td>100</td> <td>83</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	91.20	-----	-----	78.40	36.42	9.80	33.42	100	83	AVERAGE												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5452.70	44.30	54.00	-9.70	31.69	36.34	9.68	33.41	100	83	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5610.00	91.20	-----	-----	78.40	36.42	9.80	33.42	100	83	AVERAGE																																																																																	



Mode	29																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_Full RU_5610MHz																																					
ANT	6																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.83</td> <td>53.73</td> <td>68.30</td> <td>-14.57</td> <td>40.62</td> <td>36.53</td> <td>10.03</td> <td>33.45</td> <td>100 83 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5731.83	53.73	68.30	-14.57	40.62	36.53	10.03	33.45	100 83 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5731.83	53.73	68.30	-14.57	40.62	36.53	10.03	33.45	100 83 PEAK																														



	29																																																																																													
Mode	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_Full RU_5610MHz																																																																																													
ANT	6																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.14</td> <td>51.65</td> <td>74.00</td> <td>-22.35</td> <td>39.04</td> <td>36.34</td> <td>9.68</td> <td>33.41</td> <td>370</td> <td>207</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5460.24</td> <td>51.70</td> <td>68.30</td> <td>-16.60</td> <td>39.09</td> <td>36.33</td> <td>9.69</td> <td>33.41</td> <td>370</td> <td>207</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5451.14	51.65	74.00	-22.35	39.04	36.34	9.68	33.41	370	207	PEAK	2	5460.24	51.70	68.30	-16.60	39.09	36.33	9.69	33.41	370	207	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>92.18</td> <td>-----</td> <td>-----</td> <td>79.38</td> <td>36.42</td> <td>9.80</td> <td>33.42</td> <td>370</td> <td>207</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	92.18	-----	-----	79.38	36.42	9.80	33.42	370	207	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5451.14	51.65	74.00	-22.35	39.04	36.34	9.68	33.41	370	207	PEAK																																																																																			
2	5460.24	51.70	68.30	-16.60	39.09	36.33	9.69	33.41	370	207	PEAK																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5610.00	92.18	-----	-----	79.38	36.42	9.80	33.42	370	207	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.62</td> <td>44.33</td> <td>54.00</td> <td>-9.67</td> <td>31.72</td> <td>36.34</td> <td>9.68</td> <td>33.41</td> <td>370</td> <td>207</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5450.62	44.33	54.00	-9.67	31.72	36.34	9.68	33.41	370	207	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>85.85</td> <td>-----</td> <td>-----</td> <td>73.05</td> <td>36.42</td> <td>9.80</td> <td>33.42</td> <td>370</td> <td>207</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	85.85	-----	-----	73.05	36.42	9.80	33.42	370	207	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5450.62	44.33	54.00	-9.67	31.72	36.34	9.68	33.41	370	207	AVERAGE																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5610.00	85.85	-----	-----	73.05	36.42	9.80	33.42	370	207	AVERAGE																																																																																			



Mode	29																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_Full RU_5610MHz																																					
ANT	6																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2025-04-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5759.42</td> <td>53.09</td> <td>68.30</td> <td>-15.21</td> <td>39.89</td> <td>36.56</td> <td>10.09</td> <td>33.45</td> <td>370 207 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5759.42	53.09	68.30	-15.21	39.89	36.56	10.09	33.45	370 207 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Level	Factor	Loss Factor			Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5759.42	53.09	68.30	-15.21	39.89	36.56	10.09	33.45	370 207 PEAK																														



Mode	29																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_Full RU_5610MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.00</td> <td>44.89</td> <td>74.00</td> <td>-29.11</td> <td>57.00</td> <td>38.86</td> <td>12.68</td> <td>63.65</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16830.00</td> <td>46.92</td> <td>68.30</td> <td>-21.38</td> <td>54.11</td> <td>42.18</td> <td>15.41</td> <td>64.78</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11220.00	44.89	74.00	-29.11	57.00	38.86	12.68	63.65	---	---	Peak	2	16830.00	46.92	68.30	-21.38	54.11	42.18	15.41	64.78	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.00</td> <td>44.76</td> <td>74.00</td> <td>-29.24</td> <td>56.87</td> <td>38.86</td> <td>12.68</td> <td>63.65</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16830.00</td> <td>46.66</td> <td>68.30</td> <td>-21.64</td> <td>53.85</td> <td>42.18</td> <td>15.41</td> <td>64.78</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11220.00	44.76	74.00	-29.24	56.87	38.86	12.68	63.65	---	---	Peak	2	16830.00	46.66	68.30	-21.64	53.85	42.18	15.41	64.78	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11220.00	44.89	74.00	-29.11	57.00	38.86	12.68	63.65	---	---	Peak																																																																																							
2	16830.00	46.92	68.30	-21.38	54.11	42.18	15.41	64.78	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11220.00	44.76	74.00	-29.24	56.87	38.86	12.68	63.65	---	---	Peak																																																																																							
2	16830.00	46.66	68.30	-21.64	53.85	42.18	15.41	64.78	---	---	Peak																																																																																							