




Test report No:  
NIE: 2515bRCB.001A1

## Test report

### Citizen Broadband Radio Service Test report

Identification of item tested	Citizens Based Category A and B Devices
Trademark	Baicells
Model and /or type reference	EG7010A-M11
Other identification of the product	FCC ID: 2AG32EG7010AM11N
Features	----
Manufacturer	Baicells Technologies Co., Ltd. 3F, Hui Yuan Development Building, No.1 Shangdi Information Industry Base, Haidian Dist., Beijing, PR China, 100085.
Final HW version	A
Final SW version	CPE: BaiCE_BG_1.2.1 Domain Proxy: BaiOMC Rev-18822
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Gonzalo Casado (Lab Manager) 
Date of issue	06-19-2020
Report template No	FDT08_22

## Index

Competences and guarantees .....	3
General conditions .....	3
Uncertainty .....	4
Data provided by the client .....	4
Usage of samples .....	4
Identification of the client .....	4
Testing period and place .....	4
Document history .....	4
Remarks and comments .....	5
Testing verdicts .....	5
Summary .....	5
Appendix A: Test Results .....	6
Appendix B: Test Systems .....	9
Appendix C: DUT Photographs .....	10
Appendix D: CBSD/ DP Supported Features .....	11
Appendix E: Reference Standards and Procedures .....	12
Appendix F: Test case descriptions, parameters and test steps .....	14

## Competences and guarantees

---

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01.

DEKRA Certification, Inc. is a CBRS Alliance authorized test laboratory.

DEKRA Certification, Inc. is a WIInnForum Approved CBSD test laboratory.

In order to assure the traceability to other national and international laboratories, DEKRA Certification, Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification, Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification, Inc. at the time of performance of the test.

DEKRA Certification, Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification, Inc.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification, Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification, Inc and the Accreditation Bodies.

## Uncertainty

Uncertainty (factor k=2) was calculated according to the DEKRA Certification, Inc internal document PODT000.

## Data provided by the client

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: Baicells Technologies, Inc.

Sample M/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Hardware Version	Software Version	Date of reception
2515b.01	CPE	EG7010A-M11	1203000039 192TP0950	A	BaiCE_BG_1.2.1	4/9/2019
NA	Domain Proxy Software	BaiOMC	Not Applicable	BaiOMC	BaiOMC Rev-18822	Not Applicable

1. Sample M/01 has undergone the test(s) specified in subclause "Test method requested".

## Identification of the client

Baicells Technologies

3F, Hui Yuan Development Building, No.1 Shangdi Information Industry Base, Haidian Dist., Beijing

China

+86-010-62607100

## Testing period and place

Test Location	DEKRA Certification, Inc.
Test Location Address	405 Glenn Dr #12, Sterling, VA 20164
Date (start)	2019-Apr-11
Date (finish)	2019-May-22

## Document history

Report number	Date	Description
2515bRCB.001	09-12-2019	First release
2515bRCB.001A1	06-19-2020	Second release

## Modifications to the reference test report

It was introduced the following modifications in respect to the test report number 2515bRCB.001 related with the same samples, in the next clauses and sub-clauses:

Clauses/ Sub-Clauses	Modification	Justification
Page 1/Other identification of the product	FCC ID updated	Requested by customer
Page 1	Lab Manager Name updated	

## Remarks and comments

1: The tests have been performed by the technical personnel: Indusha Chitepu

## Testing verdicts

Not applicable :	N/A
Pass :	PASS
Fail :	FAIL
Not measured :	N/M

## Summary

Standard :	WINNF-TS-0122
Band :	TDD 48
<b>Total</b>	<b>PASS VERDICT</b>
34	34

## Appendix A: Test Results

Test Case ID	Test Case Name	Verdict	Date	Sample
WINNF.FT.D.REG.2	Domain Proxy Multi-Step registration	PASS	18-Apr-19	M/01
WINNF.FT.D.REG.6	Domain Proxy Single-Step registration for CBSD with CPI signed data	PASS	18-Apr-19	M/01
WINNF.FT.D.REG.9	Domain Proxy Missing Required parameters (responseCode 102)	PASS	18-Apr-19	M/01
WINNF.FT.D.REG.11	Domain Proxy Pending registration (responseCode 200)	PASS	18-Apr-19	M/01
WINNF.FT.D.REG.13	Domain Proxy Invalid parameters (responseCode 103)	PASS	18-Apr-19	M/01
WINNF.FT.D.REG.15	Domain Proxy Blacklisted CBSD (responseCode 101)	PASS	18-Apr-19	M/01
WINNF.FT.D.REG.17	Domain Proxy Unsupported SAS protocol version responseCode 100)	PASS	18-Apr-19	M/01
WINNF.FT.D.REG.19	Domain Proxy Group Error (responseCode 201)	PASS	18-Apr-19	M/01
WINNF.FT.C.GRA.1	Unsuccessful Grant responseCode=400 (INTERFERENCE)	PASS	18-Apr-19	M/01
WINNF.FT.C.GRA.2	Unsuccessful Grant responseCode=401 (GRANT CONFLICT)	PASS	18-Apr-19	M/01
WINNF.FT.D.HBT.2	Domain Proxy Heartbeat Success Case (first Heartbeat Response)	PASS	18-Apr-19	M/01
WINNF.FT.C.HBT.3	Heartbeat responseCode=105 (DREGISTER)	PASS	18-Apr-19	M/01
WINNF.FT.C.HBT.5	Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	PASS	18-Apr-19	M/01
WINNF.FT.C.HBT.6	Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	PASS	18-Apr-19	M/01
WINNF.FT.C.HBT.7	Heartbeat responseCode=502 (UNSYNC OP PARAM)	PASS	18-Apr-19	M/01
WINNF.FT.D.HBT.8	Domain Proxy Heartbeat responseCode=500 (TERMINATED_GRANT)	PASS	18-Apr-19	M/01
WINNF.FT.C.HBT.9	Heartbeat Response Absent (First Heartbeat)	PASS	18-Apr-19	M/01
WINNF.FT.C.HBT.10	Heartbeat Response Absent (Subsequent Heartbeat)	PASS	18-Apr-19	M/01
WINNF.FT.C.HBT.11	Successful Grant Renewal in Heartbeat Test Case	PASS	18-Apr-19	M/01

Test Case ID	Test Case Name	Verdict	Date	Sample
WINNF.FT.D.MES.2	Domain Proxy Registration Response contains measReportConfig	PASS	18-Apr-19	M/01
WINNF.FT.C.MES.3	Grant Response contains measReportConfig	PASS	18-Apr-19	M/01
WINNF.FT.C.MES.5	Domain Proxy Heartbeat Response contains measReportConfig	PASS	18-Apr-19	M/01
WINNF.FT.D.RLQ.2	Domain Proxy Successful Relinquishment	PASS	18-Apr-19	M/01
WINNF.FT.D.RLQ.4	Domain Proxy Unsuccessful Relinquishment, responseCode=102	PASS	18-Apr-19	M/01
WINNF.FT.D.RLQ.6	Domain Proxy Unsuccessful Relinquishment, responseCode=103	PASS	18-Apr-19	M/01
WINNF.FT.D.DRG.2	Domain Proxy Successful Deregistration	PASS	18-Apr-19	M/01
WINNF.FT.D.DRG.4	Domain Proxy Deregistration responseCode=102	PASS	18-Apr-19	M/01
WINNF.FT.C.DRG.5	Deregistration responseCode=103	PASS	18-Apr-19	M/01
WINNF.FT.C.SCS.1	Successful TLS connection between UUT and SAS Test Harness	PASS	18-Apr-19	M/01
WINNF.FT.C.SCS.2	TLS failure due to revoked certificate	PASS	18-Apr-19	M/01
WINNF.FT.C.SCS.3	TLS failure due to expired server certificate	PASS	18-Apr-19	M/01
WINNF.FT.C.SCS.4	TLS failure when SAS Test Harness certificate is issued by unknown CA	PASS	18-Apr-19	M/01
WINNF.FT.C.SCS.5	TLS failure when certificate at the SAS Test Harness is corrupted	PASS	18-Apr-19	M/01
WINNF.PT.C.HBT	UUT RF Transmit Power Measurement	PASS	19-Apr-19	M/01

## Additional CPE test requirements

1. Connect a laptop via LAN connection to check whether the CPE provides internet connection before it is Registered to the SAS. According to the customer it should provide internet connection only after it is registered with the SAS.
2. With the help spectrum analyzer verify the power level is at the minimum ( as specified by the customer) before the CPE is authorized.
3. The frequency of the CPE before and after the registration should remain the same. It can be checked on domain proxy of the customer.
4. The duty cycle is <1 in 10s before the authorization. Once the CBSD starts heart beating the duty cycle returns to normal.

Requirement	Verified in TC
CPE used transmission only for communicating to the SAS for registration and authorization of the device	WINNF.FT.D.HBT.2 CPE-CBSD UUT did not transmit user traffic until authorized by SAS.
The device registration and authorization with the SAS – determine if the device behaves appropriately for successful and unsuccessful registrations. The device should not be transmitting without authorization from the SAS	WINNF.FT.D.REG.2 WINNF.FT.D.REG.9 WINNF.FT.D.REG.11 WINNF.FT.D.REG.13 WINNF.FT.D.REG.15 WINNF.FT.D.REG.17 WINNF.FT.D.REG.19
CPE used transmission on a channel used by or indicated by the BTS-CBSD after receiving an authorization signal from the BTS-CBSD	WINNF.PT.C.HBT
CPE transmission is limited in duration and duty cycle to the minimum time necessary to get a grant from the SAS; this time should not exceed 1 second within any 10-second period, 10seconds within any 300-second period, or 20 seconds within any 3600-second period.	Transmitted for 10s in a period of 774.75s


	Before Authorization	After Authorization
Case 1	No Internet connection available. Only can connect to DP	Can access internet
Case 2	Power is -21dbm before authorization	Changes accordingly to the requested power level
Case 3	The frequency before and after Authorization is same	The frequency before and after Authorization is same
Case 4	Duty cycle <1 in 10s	Duty Cycle normal

## Appendix B: Test Systems

Description	Model	Control Number	SW Version
Test SAS harness	N/A	Laptop: CTC-5233-K	Test Harness:1.0.0.3 Laptop OS: Windows7
Signal Analyzer	MXA N9020A	2510.57	A.04.26

### Test Setup

#### Domain Proxy Configuration

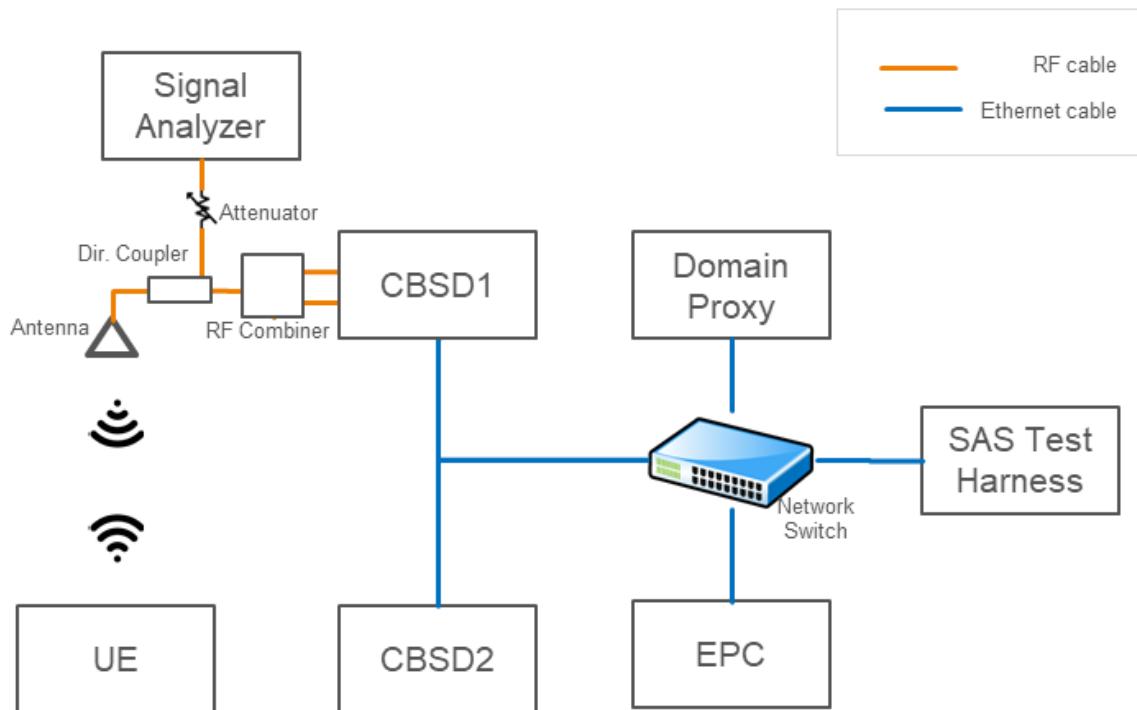

## Appendix C: DUT Photographs



## Appendix D: CBSD/ DP Supported Features

Condition	Feature Description	Supported
C1	Mandatory for UUT which supports multi-step registration message.	Y
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	N
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	Y
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	Y
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	Y
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.	N

## Appendix E: Reference Standards and Procedures

### Reference Standards

Test and Certification for Citizens Broadband Radio Service (CBRS); Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT) Working Document WINNF-TS-0122	V1.0.0
---	--------

### Test Procedures

PECB001_00: CBRS Alliance Certification Testing Based On WINN Forum CBRS CBSD Test Specification "WINNF-TS-0122"
---

### Test Requirements and Test Case Mapping

Requirement	Verified in TC
The device will only transmit after it receives authorization from a SAS	WINNF.FT.D.HBT.2
The device registration and authorization with the SAS – determine if the device behaves appropriately for successful and unsuccessful registrations. The device should not be transmitting without authorization from the SAS	WINNF.FT.D.REG.2 WINNF.FT.D.REG.9 WINNF.FT.D.REG.11 WINNF.FT.D.REG.13 WINNF.FT.D.REG.15 WINNF.FT.D.REG.17 WINNF.FT.D.REG.19
The device changes its operating power and/or channel in response to a command from the SAS	WINNF.PT.C.HBT
The device correctly configures based on the different license classes	WINNF.FT.C.SCS.1, WINNF.FT.C.SCS.2, WINNF.FT.C.SCS.3, WINNF.FT.C.SCS.4, WINNF.FT.C.SCS.5
The device transmits at a power level less than or equal to the maximum power level approved by the SAS	WINNF.PT.C.HBT
The device transmits with a bandwidth less than or equal to the SAS specified bandwidth.	WINNF.PT.C.HBT
The device transmits on the SAS specified frequency	WINNF.FT.D.HBT.2, WINNF.FT.C.HBT.3, WINNF.FT.C.HBT.4, WINNF.FT.C.HBT.5, WINNF.FT.C.HBT.6, WINNF.FT.C.HBT.7, WINNF.FT.D.HBT.8, WINNF.FT.C.HBT.9, WINNF.FT.C.HBT.10, WINNF.FT.C.HBT.11, WINNF.PT.C.HBT
The device stops transmission in response to a command from the SAS, within a period as required by Part 96	WINNF.FT.D.RLQ.2, WINNF.FT.D.RLQ.4, WINNF.FT.D.RLQ.6, WINNF.FT.D.DRG.2, WINNF.FT.D.DRG.4, WINNF.FT.C.DRG.5
the device sends measurements data in response to the command from the SAS.	WINNF.FT.C.MES.3, WINNF.FT.D.MES.5

Requirement	Verified in TC
For devices with geo-location, confirm that it notifies the SAS of a new location when it is beyond the required distance parameter ( $\pm 50$ m) within the required time frame	N/A as Condition C2 is not supported by device
the device is capable of reporting the signal level (measurement data) and frequency to SAS	WINNF.FT.C.MES.3, WINNF.FT.D.MES.5
For a device that operates as a Category A CBSD and then desires to operate as a Category B CBSD (or vice versa), confirm that it re-registers with the SAS for the updated authorization status	N/A as DUT is not category A
Loss of communication with SAS behavior	WINNF.FT.C.HBT.9, WINNF.FT.C.HBT.10, WINNF.FT.D.RLQ.4, WINNF.FT.D.RLQ.6, WINNF.FT.D.DRG.4, WINNF.FT.C.DRG.5
Heartbeat loss behavior	WINNF.FT.C.HBT.10
When CBSDs communicate through a management system, confirm compliance with all requirements	The tested product has a Domain Proxy implementation; hence all relevant test cases mentioned in the above bullets are selected as such

## Appendix F: Test case descriptions, parameters and test steps

### WINNF.FT.D.REG.2

This test is mandatory for the Domain proxy that is controlling CBSDs which support multistep registration. This test validates that each of the required parameters appear within the registration request message. This test case applies to Domain Proxy supervising two

Test Execution Steps	Results	
Ensure the following conditions are met for test entry: •UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness •UUT is in the Unregistered state	-	-
DP with two CBSD sends correct Registration request information, as specified in [n.5], in the form of one 2-element Array or as individual messages to the SAS Test Harness: •The required userId, fccId and cbidSerialNumber registration parameters shall be sent for each CBSD and conform to proper format and acceptable ranges. •Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. Note: It is outside the scope of this document to test the Registration information that is supplied via another means.	PASS	FAIL
•SAS Test Harness sends a CBSD Registration Response in the form of one 2-element Array or individual messages as follows: -cbsdId = Ci -measReportConfig shall not be included -responseCode = 0 for each CBSD	-	-
After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	-	-
Monitor the RF output of each UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: •UUT shall not transmit RF	PASS	FAIL