# **HAC RF EMISSION TEST REPORT**



Report No.: 18070083-HAC-RF Supersede Report No.: NONE

Applicant	Plus One Marketing Ltd.				
Product Name	Mobile Phone				
Model No.	FTU18A00				
Standards	FCC 47 CFR	20.19, ANSI C63.1	9:2011		
Test Date	Nov 22, 2017				
Issue Date	Jan 29, 2018				
HAC RF Emission	E-Field(dBv/n	n)	M Rating		
Test Result	31.62dBv/m		M3		
Test Result	PASS				
Equipment complied with the specification					
Equipment did not comply with the specification					
York Liu Wiby Zhang					
York Lit Test Engir	•	Zhang ked By			
This test report may be reproduced in full only  Test result presented in this test report is applicable to the tested sample only					

Issued by:

### SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	18070083-HAC-RF
Page	2 of 49

## **Laboratory Introduction**

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to <u>testing</u> and <u>certification</u>, SIEMIC provides initial design reviews and <u>compliance</u> <u>management</u> through out a project. Our extensive experience with <u>China</u>, <u>Asia Pacific</u>, <u>North America</u>, <u>European</u>, <u>and international</u> compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the <u>global markets</u>.

#### **Accreditations for Conformity Assessment**

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	18070083-HAC-RF
Page	3 of 49

This page has been left blank intentionally.



Test Report	18070083-HAC-RF
Page	4 of 49

#### CONTENTS

1	TECHNICAL DETAILS	5
2	TEST CONDITION	6
3	HAC RF EMISSIONS TEST SYSTEM	7
4	MODULATION INTERFERENCE FACTOR (MIF)	9
5	HAC RF EMISSION TEST PROCEDURE	11
6	SYSTEM VALIDATION	13
7	LIST OF EQUIPMENTS	14
8	HAC RF EMISSIONS MEASUREMENT UNCERTAINTY	15
9	RF CONDUCTED POWER & TESTED MODE JUSTIFICATION	16
10	HAC RF EMISSIONS TEST RESULTS	17
ANN	EX A SYSTEM CHECK	18
ANN	EX B TEST PLOTS	20
ANN	EX C TEST SETUP PHOTO	25
ANN	EX D CALIBRATION REPORT	26



Test Report	18070083-HAC-RF
Page	5 of 49

## 1 TECHNICAL DETAILS

	TECHNICAL DETAILS
Purpose	Compliance testing of Mobile Phone model FTU18A00
	with stipulated standard Plus One Marketing Ltd.
Applicant / Client	2-8-6 Nishi-Shimbashi, Minatoku, Tokyo, JAPAN
Manufacturer	Plus One Marketing Ltd.
manadatarer	2-8-6 Nishi-Shimbashi,Minatoku,Tokyo,JAPAN
Laboratory performing the tests	SIEMIC(Shenzhen-China) Laboratories Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen 518108, Guangdong, P.R.C. Tel: +(86) 0755-26014629 VIP Line: 950-4038-0435
Test report reference number	18070083-HAC-RF
Date EUT received	Nov 15,2017
Standard applied	CFR 20.19 , ANSI C63.19:2011
Dates of test (from – to)	Nov 22,2017
No of Units:	1
Equipment Category:	PCE
Trade Name:	N/A
Model Name:	FTU18A00
RF Operating Frequency (ies)	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz UMTS-FDD Band IV TX: 1712.4 ~ 1752.6 MHz; RX: 2112.4 ~ 2152.6 MHz LTE Band 2 TX: 1850~ 1910MHz; RX: 1930 ~ 1990 MHz LTE Band 4/66 TX: 1710 ~ 1755 MHz; RX: 2110~ 2155 MHz (Remark: LTE Band 66 at EUT not configured the CC; TX:1755-1780, RX:2155-2200 Not applicable) LTE Band 5 TX: 824 ~ 849MHz; RX: 869 ~ 894 MHz LTE Band 12 TX: 699~716MHz; RX: 729~746 MHz LTE Band 30 TX: 2305~2315MHz; RX: 2350~2360 MHz WIFI:2412MHz~2462MHz(802.11b/802.11g/802.11n(H20)) WIFI:2422MHz~2452MHz(802.11n(H40)) BT:2402~ 2480MHz(TX/RX)
Antenna Type:	Internal Antenna
Modulation:	LTE Band: QPSK, 16QAM GSM / GPRS : GMSK EGPRS: GMSK,8PSK WCDMA:QPSK WIFI: DSSS, OFDM Bluetooth: GFSK, π /4-DQPSK, 8DPSK
FCC ID:	2AG5L-FTU18A00



Test Report	18070083-HAC-RF
Page	6 of 49

## 2 Test Condition

#### **Ambient Condition**

Temperature: 20 °C~ 24 °C

Humidity : < 60 %

#### **Testing Configuration**

The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by air link. The power control bits was set to "Always Up" from the emulator to radiate maximum output power during all testing

Measurements were performed on the low, middle and high channels of all bands

#### List of Air Interfaces/Bands & Operating Modes

Air- Interface	Band (MHz)	Туре	C63.19/ Tested	Simultaneous Transmissions Note: Not to be test	Concurred single transmission	Reduced power 20.19(c)(1)	Voice Over Digital Transport (Data)
	Band 2						
	Band 4/66						
LTE	Band 5	DT	NO	Yes, with WIFI or Bluetooth	NA	NA	NA
	Band 12			2.40.00			
	Band 30	•					
	850	V0	VEC	Yes, with WIFI or	NA	NA	NA
GSM	1900	VO	YES	Bluetooth	NA	NA	NA
	GPRS/EDGE	DT	NO	NA	NA	NA	NA
WCDMA	Band II ,Band IV, Band V R99	VO	Yes	Yes, with WIFI or Bluetooth	NA	NA	NA
	HSDPA	DT	NO	NA	NA	NA	NA
WIFI	2.4G	DT	NO	Yes, with WIFI or Bluetooth	NA	NA	NA
BT	2.4G	DT	NO	Yes, with WIFI or Bluetooth	NA	NA	NA

VO Voice CMRS/PTSN Service Only

V/D Voice CMRS/PSTN and Data Service

**DT Digital Transport** 


Note: \* HAC Rating was not base on concurrent voice and data modes, Noncurrent mode was found to represent worst

Case rating.



Test Report	18070083-HAC-RF
Page	7 of 49

## 3 HAC RF Emissions Test System

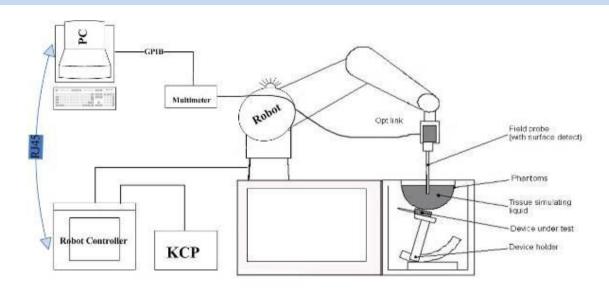

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than  $\pm$  0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

## The OPENSAR system for performing compliance tests consist of the following items:

- 1. A standard high precision 6-axis robot (KUKA) with controller and software.
- 2. KUKA Control Panel (KCP).
- 3. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 4. The functions of the PC plug-in card are to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.
- 5. A computer operating Windows XP.
- OPENSAR software.
- 7. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- 8. The SAM phantom enabling testing left-hand right-hand and body usage.
- 9. The Position device for handheld EUT.
- 10. Tissue simulating liquid mixed according to the given recipes (see Application Note).
- 11. System validation dipoles to validate the proper functioning of the system.




Test Report	18070083-HAC-RF
Page	8 of 49

#### **COMOHAC E-Field Probe**

The probe could be checked by measuring the resistance of the three dipoles

Probe calibration is realized by using the waveguide method as described in the IEEE 1309-2005 standard.




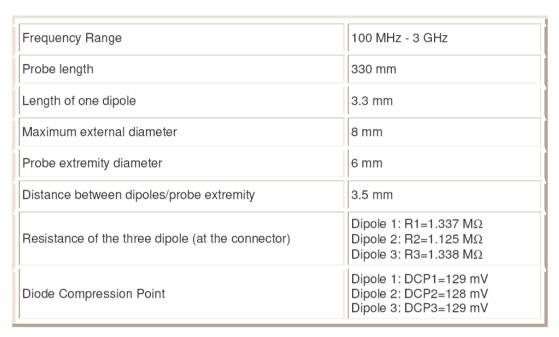

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

Magnetic field sensors are measuring the integral of the H-field across their sensor area surrounded by the loop. They are calibrated in a precise, homogeneous field. When measuring a gradient field, the result will be very close to the field in the center of the loop which is equivalent to the value of a homogeneous field equivalent to the center value. But it will be different from the field at the field at the border of the loop.

Consequently, two sensors with different loop diameters – both calibrated ideally – would give different results when measuring from the edge of the probe sensor elements. The behavior for electrically small E-field sensors is equivalent. See below for distance plots from a WD which show the conservative nature of field readings at the probe element center vs. measurements at the sensor end:



Z-Axis Scan at maximum point above a typical wireless device for E-field



Test Report	18070083-HAC-RF
Page	9 of 49

## 4 Modulation Interference Factor (MIF)

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF) which replaces the need for the Articulation Weighting Factor (AWF) during the evaluation and is applicable to any modulation scheme.

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics. Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63-2007.

#### **Definitions**

COMHAC E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. OPENHAC is therefore using the "indirect" measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by probe modulation response (PMR) calibration in order to not overestimate the field reading. The evaluation method or the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is called to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty

It may alternatively be determined through analysis and simulation, because it is constraint and characteristic for a communication signal. OPENHAC uses well defined signals for PMR calibration. The MIF of these signals has been determined by simulation and is automatically applied.

MIF values were not tested by a probe or as specified in the standards but are based on analysis provided by SATIMO for all the air interfaces (GSM, WCDMA, CDMA). For GSM, CDMA2000, WCDMA, the data included in this report are for the worst case operating modes.

Communication System Name	
UMTS-FDD(WCDMA)	-20.00
GSM-FDD(TDMA,GMSK)	+3.50
CDMA2000(1XRTT, RC3)	-19.00
CDMA2000(RC1;1/8th frame rate);	+3.3

A PMR calibrated probe is linearized for the selected waveform over the full dynamic range within the uncertainty specified in its calibration certificate. COMHAC E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. OPENHAC is therefore using the \indirect" measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading.

The evaluation method for the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF



Test Report	18070083-HAC-RF
Page	10 of 49

signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty. It may alternatively be determined through analysis and simulation, because it is constant and characteristic for a communication signal. OPENHAC uses well-defined signals for PMR calibration. The MIF of these signals has been determined by simulation and is automatically applied. The MIF measurement uncertainty is estimated as follows, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:

0.2 dB for MIF -7 to +5 dB, 0.5 dB for MIF -13 to +11 dB 1 dB for MIF > -20 dB

The modulation interference factors obtained were applied to readings taken of the actual wireless device in order to obtain an accurate audio interference level reading using the formula:

Audio Interference Level [dB(V/m)] = 20 \* log[Raw Field Value (V/m)] + MIF (dB)



Test Report	18070083-HAC-RF
Page	11 of 49

## 5 HAC RF Emission Test Procedure

The following are step-by-step test procedures.

- a) Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
- b) Position the WD in its intended test position.
- c) Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use.

  Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.
- d) The center sub-grid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, refer to illustrated in Figure 1. If the field alignment method is used, align the probe for maximum field reception.
- e) Record the reading at the output of the measurement system
- f) Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- g) Identify the five contiguous sub-grids around the center sub-grid whose maximum reading is the lowest of all available choices. This eliminates the three sub-grids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
- h) Identify the maximum reading within the non-excluded sub-grids identified in step g).
- i) Convert the highest field reading within identified in step h) to RF audio interference level, in V/m, by taking the square root of the reading and then dividing it by the measurement system transfer function, established in 5.5.1.1 Convert this result to dB(V/m) by taking the base-10 logarithm and multiplying by 20. Indirect measurement method Replacing step i), the RF audio interference level in dB (V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB(V/m), from step h). Use this result to determine the category rating
- j) Compare this RF audio interference level with the categories in Clause 8 (ANSI C63.19-2011) and record the resulting WD category rating
- k) For the T-Coil mode M-rating assessment, determine whether the chosen perpendicular measurement point is contained in an included sub-grid of the first scan. If so, then a second scan is not necessary. The first scan and resultant category rating may be used for the T-Coil mode M rating. Otherwise, repeat step a) through step i), with the grid shifted so that it is centered on the perpendicular measurement point. Record the WD category rating.



Test Report	18070083-HAC-RF
Page	12 of 49



#### Test flowchart Per ANSI-PC63.19 2011

#### Test Instructions

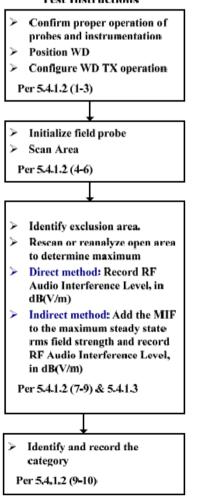


Figure 5.3—WD near-field emission scan flowchart



Test Report	18070083-HAC-RF
Page	13 of 49

## 6 System Validation

The test setup was validated when first configured and verified periodically thereafter to ensure proper function. The procedure provided in this section is a validation procedure using dipole antennas for which the field levels were computed by numeric modeling.

#### Procedure

Place a dipole antenna meeting the requirements given in ANSI C63.19-2011 in the normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field probe so that the following occurs:

- The probes and their cables are parallel to the coaxial feed of the dipole antenna
- The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions
- The center point of the probe element(s) is 15 mm from the closest surface of the dipole elements.

Scan the length of the dipole with the E-field probe and record the two maximum values found near the dipole ends. Average the two readings and compare the reading to the expected value in the calibration certificate or the expected value in this standard.

## Electric Field 15 mm to top edge Probe of dipole element Dipole RF Signal Generator **Dual Directional Coupler** Amplifier RF Power Meter

Setup diagram

#### 5. 1 System Validation Results

Calibration	F(MHz)	Input Power	Measured	E-field Target	Deviation
Dipole		(mW)	Results Values (V/m)		(%)
				(From MVG)	
DHA31	835	100	226.18	220.4	2.62
DHA32	1880	100	158.26	153.4	3.17

Note: performed at 11/22/2017



Test Report	18070083-HAC-RF	
Page	14 of 49	

## 7 List of Equipments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Due
PC	Compaq	PV 3.06GHz	375052-AA1	N/A
Signal Generator	Agilent	8665B-008	3744A01304	05/17/2018
MultiMeter	Keithley	MiltiMeter 2000	1259033	08/13/2017
S-Parameter Network Analyzer	Agilent	8753ES	US38161019	08/04/2018
Wireless Communication Test Set	R&S	CMU200	111078	07/22/2018
Power Meter	HP	437B	3038A03648	05/17/2018
COMOHAC E-Field Probe	MVG	SCE	SN 31/10 EPH46	09/19/2018
Communication Antenna	SATIMO	ANTA30	SN 31/10 ANTA30	N/A
Mobile Phone POSITIONING DEVICE	SATIMO	MSH63	SN 31/10 MSH63	N/A
COMOHAC Broadband Dipole 800-950	SATIMO	COMOHAC Broadband Dipole 800-950MHz	SN 24/11 DHA31	06/08/2018
COMOHAC Broadband Dipole 1700- 2000	SATIMO	COMOHAC Broadband Dipole 1700-2000MHz	SN 24/11 DHB32	06/08/2018
PHANTOM TABLE	SATIMO	N/A	N/A	N/A
6 AXIS ROBOT	KUKA	KR5	949319	N/A
High Power Solid State Amplifier (80MHz~1000MHz)	Instruments for Industry	CMC150	M631-0408	N/A
Medium Power Solid State Amplifier (0.8~4.2GHz)	Instruments for Industry	S41-25	M629-0408	N/A
Wave Tube Amplifier 4-8 GHz at 20Watt	Hughes Aircraft Company	1277H02F000	81	N/A



Test Report	18070083-HAC-RF
Page	15 of 49

## 8 HAC RF Emissions Measurement Uncertainty

Uncertainty Component	Tolerances (dB) / %	Probability Distribution	Divisor	Ci	Uncertainty (dB)	Uncertainty (%)
Measurement System Related						
RF Reflections	0.1 dB	R	$\sqrt{3}$	1	0.06	N/A
Field Probe Conv. Factor	0.2 dB	R	$\sqrt{3}$	1	0.12	N/A
Field Probe Anisotropy	0.25 dB	R	$\sqrt{3}$	1	0.14	N/A
Positioning Accuracy	0.1 dB	R	$\sqrt{3}$	1	0.06	N/A
Probe Cable Placement	0.1 dB	R	$\sqrt{3}$	1	0.06	N/A
System Repeatability	0.2 dB	R	$\sqrt{3}$	1	0.12	N/A
EUT Repeatability	0.1 dB	N	1	1	0.10	N/A
	Comb	ined Standard Ur	ncertainty :		0.26	6.36 %
Test Sample Related						
Device Positioning Vertical	4.7 %	R	$\sqrt{3}$	0.67	N/A	1.8 %
Device Positioning Lateral	1.0 %	R	$\sqrt{3}$	1	N/A	0.6 %
Device Holder	2.4 %	R	$\sqrt{3}$	1	N/A	1.4 %
Test Sample	0.3 %	N	1	1	N/A	0.3 %
Power drift	5 %	R	$\sqrt{3}$	1	N/A	1.7 %
PMF Calculation						
Power Sensor	1.0 %	R	$\sqrt{3}$	1	N/A	0.6 %
Dual Directional Coupler	1.0 %	R	$\sqrt{3}$	1	N/A	0.6 %
Phantom and setup Related						
Phantom Thickness	2.4 %	R	$\sqrt{3}$	0.67	N/A	0.9 %
			(	L Combined Sta	andard Uncertainty	7.1 %
		Expanded S			confidence 95%)	14.2 %



Test Report	18070083-HAC-RF
Page	16 of 49

## 9 RF Conducted Power & Tested Mode Justification

#### RF Conducted power

Mobile phone radio output power measurement

- 1. The transmitter output port was connected to base station emulator.
- 2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
- 3. Select lowest, middle, and highest channels for each band and different possible test mode.
- 4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

Burst Average Power (dBm);						
Band		GSM850			GSM1900	
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GSM Voice (1 uplink),GMSK	32.90	33.07	32.74	29.77	29.85	29.83

#### WCDMA BAND V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)
ADNANCCIE	4132	826.4	24.36
ARM VOCIE (R99)	4175	835	24.65
	4232	846.4	24.55

#### WCDMA Band $\, { m II} :$

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)
ADMANGGE	9262	1852.4	24.84
ARM VOCIE (R99)	9400	1880.0	24.86
	9538	1907.6	24.60

#### WCDMA Band IV:

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)
ADNANOCIE	1312	1712.4	22.46
ARM VOCIE	1413	1732.6	22.69
(R99)	1513	1752.6	22.62



Test Report	18070083-HAC-RF
Page	17 of 49

#### 8.1 RF Emissions Measurement Criteria

WD RF audio interference level caterories in logarithmic units

Emission Catagorias	E-field emissions		
Emission Categories	< 960 MHz	> 960 MHz	
Category M1	50 to 55 dB (V/m)	40 to 45 dB (V/m)	
Category M2	45 to 50 dB (V/m)	35 to 40 dB (V/m)	
Category M3	40 to 45 dB (V/m)	30 to 35 dB (V/m)	
Category M4	<40 dB (V/m)	<30 dB (V/m)	

8.2 HAC (RF Emissions) Test Results

Operating Mode	Channel No.	Frequency(MHz)	Peak E Field (dBv/m)	M rating	Plots
	128	824.2	23.87	M4	-
GSM850	192	836.6	23.90	M4	1#
	251	848.8	23.89	M4	-
	512	1850.2	22.66	M4	-
GSM1900	661	1880.0	22.70	M4	2#
	810	1909.8	22.67	M4	-
	4132	826.4	33.52	M4	-
WCDMA Band V	4175	835	33.57	M4	3#
	4232	846.4	33.55	M4	-
	9262	1852.4	25.33	M4	-
WCDMA Band II	9400	1880.0	25.40	M4	4#
	9538	1907.6	25.36	M4	-
WCDMA Band IV	1313	1712.4	31.27	M3	-
	1413	1732	31.62	M3	5#
	1512	1752.6	31.44	M3	-



Test Report	18070083-HAC-RF
Page	18 of 49

## **Annex A System Check**




Band

Frequency (MHz): 835.000000

Input power: 20dBm

#### Surface HAC

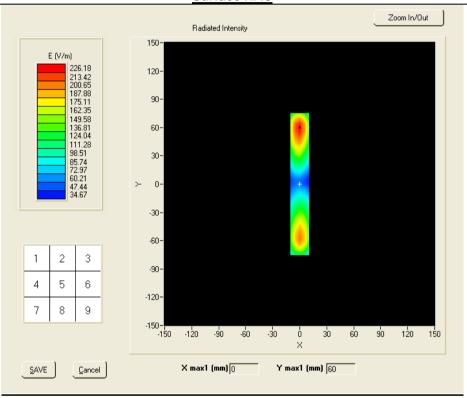

Probe Modulation Factor = 1.000000 Maximum value of total field = 226.18 V/m



Test Report	18070083-HAC-RF
Page	19 of 49


#### CW1900

Band

Frequency (MHz): 1880.00000

Input power: 20dBm

#### Surface HAC

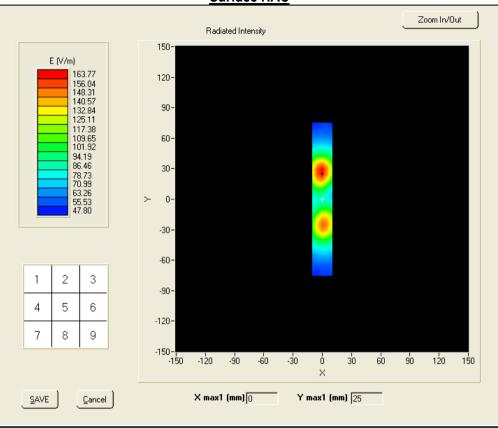

Probe Modulation Factor = 1.000000 Maximum value of total field = 158.26V/m



Test Report	18070083-HAC-RF
Page	20 of 49

## **Annex B** Test plots

Test Item 1

GSM850

Middle Band


Frequency (MHz): 836.600000

E-Field

Grid size (mm x mm): 50.0, 50.0

Step (mm): 5

#### Surface HAC



Maximum value of total field = 23.90 dB (V/m)

**Hearing Aid Near-Field Category: M4** 

Grid 1: 21.83	Grid 2: 23.83	Grid 3: 23.82
Grid 4: 22.49	Grid 5: 23.90	Grid 6: 23.80
Grid 7: 22.98	Grid 8: 23.94	Grid 9: 23.72



Test Report	18070083-HAC-RF
Page	21 of 49

PCS1900

Middle Band


Frequency (MHz): 1880.0000

E-Field

Grid size (mm x mm): 50.0, 50.0

Step (mm): 5

#### Surface HAC



Maximum value of total field = 22.70dB (V/m)

**Hearing Aid Near-Field Category: M4** 

Grid 1: 22.65	Grid 2: 22.70	Grid 3: 20.82
Grid 4: 20.52	Grid 5: 20.39	Grid 6: 18.27
Grid 7: 25.27	Grid 8: 25.32	Grid 9: 23.60



Test Report	18070083-HAC-RF	
Page	22 of 49	

WCDMA Band V

Middle Band


Frequency (MHz): 835.00000

E-Field

Grid size (mm x mm): 50.0, 50.0

Step (mm): 5

#### Surface HAC



Maximum value of total field = 33.57 dB (V/m)

**Hearing Aid Near-Field Category: M4** 

Grid 1: 33.36	Grid 2: 33.49	Grid 3: 33.22
Grid 4: 33.36	Grid 5: 33.57	Grid 6: 33.33
Grid 7: 33.12	Grid 8: 33.64	Grid 9: 33.35



Test Report	18070083-HAC-RF	
Page	23 of 49	

WCDMA Band II

Middle Band


Frequency (MHz): 1880.0000

E-Field

Grid size (mm x mm): 50.0, 50.0

Step (mm): 5

#### Surface HAC



Maximum value of total field = 25.40 dB (V/m)

**Hearing Aid Near-Field Category: M4** 

Grid 1: 25.38	Grid 2: 25.40	Grid 3: 23.61
Grid 4: 23.24	Grid 5: 23.14	Grid 6: 20.94
Grid 7: 27.99	Grid 8: 28.09	Grid 9: 26.40



Test Report	18070083-HAC-RF	
Page	24 of 49	

 $\overline{\text{WCDMA Band}\, \text{IV}}$ 

Middle Band


Frequency (MHz): 1732.00000

E-Field

Grid size (mm x mm): 50.0, 50.0

Step (mm): 5

#### **Surface HAC**



Maximum value of total field = 31.62 dB (V/m)

**Hearing Aid Near-Field Category: M3** 

Grid 1: 31.64	Grid 2: 32.10	Grid 3: 30.75
Grid 4: 30.29	Grid 5: 30.43	Grid 6: 28.38
Grid 7: 30.34	Grid 8: 31.62	Grid 9: 31.55



Test Report	18070083-HAC-RF	
Page	25 of 49	

## **Annex C Test Setup Photo**





Test Report	18070083-HAC-RF	
Page	26 of 49	

## **Annex D Calibration Report**



#### COMOHAC E-Field Probe Calibration Report

Ref: ACR.264.4.16.SATU.A

#### SIEMIC TESTING AND CERTIFICATION SERVICES

ZONE A,FLOOR 1,BUILDING 2,WAN YE LONG TECHNOLOGY PARK,SOUTH SIDE OF ZHOUSHI ROAD, SHIYAN STREET,BAO'AN DISTRICT, SHENZHEN 518108, GUANGDONG, P.R.C.

#### MVG COMOHAC E-FIELD PROBE

SERIAL NO.: SN 03/16 EPH46

Calibrated at MVG US 2105 Barrett Park Dr. - Kennesaw, GA 30144





Calibration Date: 09/20/2016

#### Summary:

This document presents the method and results from an accredited COMOHAC E-Field Probe calibration performed in MVG USA using the CALIBAIR test bench, for use with a MVG COMOHAC system only. All calibration results are traceable to national metrology institutions.



Test Report	18070083-HAC-RF
Page	27 of 49



Ref: ACR.264,4,16,SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	9/20/2016	JS
Checked by:	Jérôme LUC	Product Manager	9/20/2016	JS
Approved by:	Kim RUTKOWSKI	Quality Manager	9/20/2016	Aim Puthoushi

	Customer Name	
Distribution :	SIEMIC Testing and Certification Services	

Issue	Date	Modifications
A	9/20/2016	Initial release
-		8
-		5 S



Test Report	18070083-HAC-RF
Page	28 of 49



Ref: ACR.264.4.16.SATU.A

#### TABLE OF CONTENTS

1	De	vice Under Test4	
2	Pro	duct Description4	
	2.1	General Information	4
3	Me	asurement Method4	
	3.1	Linearity	4
	3.2	Sensitivity	5
	3.3	Isotropy	5
	3.4	Probe Modulation Response	5
4	Me	asurement Uncertainty5	
5	Cal	ibration Measurement Results	
	5.1	Sensitivity in air	6
	5.2	Linearity	7
	5.3	Isotropy	7
6	Lis	t of Equipment8	



Test Report	18070083-HAC-RF
Page	29 of 49



Ref: ACR.264,4.16.SATU.A

#### 1 DEVICE UNDER TEST

Device Under Test		
Device Type	COMOHAC E FIELD PROBE	
Manufacturer	MVG	
Model	SCE	
Serial Number	SN 03/16 EPH46	
Product Condition (new / used)	New	
Frequency Range of Probe	0.7GHz-2.5GHz	
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.172 MΩ	
	Dipole 2: R2=0.178 MΩ	
	Dipole 3: R3=0.182 MΩ	

A yearly calibration interval is recommended.

#### 2 PRODUCT DESCRIPTION

#### 2.1 GENERAL INFORMATION

MVG's COMOHAC E field Probes are built in accordance to the ANSI C63.19 and IEEE 1309 standards.



Figure 1 - MVG COMOHAC E field Probe

Probe Length	330 mm
Length of Individual Dipoles	3.3 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	3 mm

#### 3 MEASUREMENT METHOD

All methods used to perform the measurements and calibrations comply with the ANSI C63.19 and IEEE 1309 standards.

#### 3.1 LINEARITY

The linearity was determined using a standard dipole with the probe positioned 10 mm above the dipole. The input power of the dipole was adjusted from -15 to 36 dBm using a 1dB step (to cover the range 2V/m to 1000A/m).

Page: 4/8

This document shall not be reproduced, except in full or in part, without the written approval of MVG.

The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of MVG.



Test Report	18070083-HAC-RF
Page	30 of 49



Ref: ACR 264.4.16.SATU.A.

#### 3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using the waveguide method outlined in the fore mentioned standards.

#### 3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps.

#### 3.4 PROBE MODULATION RESPONSE

The modulation factor was determined by illuminating the probe with a reference wave from a standard dipole 10 mm away, applying first a CW signal and then a modulated signal (both at same power level). The modulation factor is the ratio, in linear units, of the CW to modulated signal reading.

#### 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528 and IEC/CEI 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	√3	1	1.732%
Reflected power	3.00%	Rectangular	<b>—√3</b> —	Ĭ.	1.732%
Field homogeneity	3.00%	Rectangular	<b>—√3</b> —	1	1.732%
Field probe positioning	5.00%	Rectangular	<b>—√3</b> —	10	2.887%
Field probe linearity	3.00%	Rectangular	<b></b> √3-	T.	1.732%
Combined standard uncertainty					4.509%
Expanded uncertainty 95 % confidence level k = 2					9.0%

#### 5 CALIBRATION MEASUREMENT RESULTS

	Calibration Parameters	
Lab Temperature 21 °C		

Page: 5/8

This document shall not be reproduced, except in full or in part, without the written approval of MFG.

The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of MFG.



Test Report	18070083-HAC-RF
Page	31 of 49



Ref: ACR.264.4.16.SATU.A

Character Annual Control of Contr	Common National Common
Lab Humidity	45 %

#### 5.1 SENSITIVITY IN AIR

Normx dipole 1	Normy dipole 2	Normz dipole 3
(μV/(V/m) <sup>2</sup> )	$(\mu V/(V/m)^2)$	(μV/(V/m) <sup>2</sup> )
3.65	3.78	3.35

DCP dipole 1	DCP dipole 2	DCP dipole 3
(mV)	(mV)	(mV)
116	117	110

# Calibration curves 765700600254001001000.00 0.05 0.10 0.15 0.20 0.25 0.30 0.35 0.38

Voltage [V]

Dipole 1 Dipole 2 Dipole 3

Page: 6/8

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of MVG.




Test Report	18070083-HAC-RF
Page	32 of 49




Ref: ACR.264,4.16,SATU.A

#### 5.2 LINEARITY



Linearity: 1+/-1.82% (+/-0.08dB)

#### 5.3 ISOTROPY



Page: 7/8

This document shall not be reproduced, except in full or in part, without the written approval of MFG.

The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of MFG.



Test Report	18070083-HAC-RF
Page	33 of 49



Ref: ACR.264,4.16,SATU.A

#### 6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
HAC positioning ruler	MVG	TABH12 SN 42/09	Validated. No cal required.	Validated. No ca required.
COMOHAC Test Bench	Version 2	NA	Validated. No cal required.	Validated. No ca required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2016	02/2019
Reference Probe	MVG	EPH28 SN 08/11	10/2015	10/2016
Reference Probe	MVG	HPH38 SN31/10	10/2015	10/2016
Multimeter	Keithley 2000	1188656	12/2013	12/2016
Signal Generator	Agilent E4438C	MY49070581	12/2013	12/2016
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	12/2013	12/2016
Power Sensor	HP ECP-E26A	US37181460	12/2013	12/2016
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Control Company	150798832	10/2015	10/2017



Test Report	18070083-HAC-RF
Page	34 of 49



#### **HAC Reference Dipole Calibration Report**

Ref: ACR.165.12.17.SATU.A

## SIEMIC TESTING AND CERTIFICATION SERVICES

ZONE A,FLOOR 1,BUILDING 2,WAN YE LONG TECHNOLOGY PARK,SOUTH SIDE OF ZHOUSHI ROAD, SHIYAN STREET,BAO'AN DISTRICT, SHENZHEN 518108, GUANGDONG, P.R.C.

#### MVG COMOHAC REFERENCE DIPOLE

FREQUENCY: 800-950MHZ SERIAL NO.: SN 24/11 DHA31

Calibrated at MVG US 2105 Barrett Park Dr. - Kennesaw, GA 30144





Calibration Date: 06/8/2017

#### Summary:

This document presents the method and results from an accredited HAC reference dipole calibration performed in MVG USA using the COMOHAC test bench. All calibration results are traceable to national metrology institutions.



Test Report	18070083-HAC-RF
Page	35 of 49



#### HAC REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.165.12.17.SATU.A

	Name	Function	Date	Signature
Prepared by:	Jérôme LUC	Product Manager	6/14/2017	JES
Checked by:	Jérôme LUC	Product Manager	6/14/2017	JS
Approved by:	Kim RUTKOWSKI	Quality Manager	6/14/2017	him Puthowski

	Customer Name
Distribution:	SIEMIC Testing and Certification Services

Issue	Date	Modifications
A	6/14/2017	Initial release



Test Report	18070083-HAC-RF
Page	36 of 49



#### HAC REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.165.12.17.SATU.A

#### TABLE OF CONTENTS

1	Intro	oduction4	
2	Dev	ice Under TEst4	
3	Prod	luct Description4	
	3.1	General Information	4
		surement Method4	
	4.1	Return Loss Requirements	5
	4.2	Reference Dipole Calibration	5
5	Mea	surement Uncertainty5	
	5.1	Return Loss	5
	5.2	Validation Measurement	5
6	Cali	bration Measurement Results6	
	6.1	Return Loss	6
	6.2	Validation measurement	6
7	List	of Equipment8	



Test Report	18070083-HAC-RF		
Page	37 of 49		



Ref: ACR.165.12.17.SATU.A

#### 1 INTRODUCTION

This document contains a summary of the requirements set forth by the ANSI C63.19 standard for reference dipoles used for HAC measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

# 2 DEVICE UNDER TEST

Device Under Test				
Device Type	COMOHAC 800-950 MHz REFERENCE DIPOLE			
Manufacturer	MVG			
Model	SIDB835			
Serial Number	SN 24/11 DHA31			
Product Condition (new / used)	Used			

A yearly calibration interval is recommended.

# 3 PRODUCT DESCRIPTION

# 3.1 GENERAL INFORMATION

MVG's COMOHAC Validation Dipoles are built in accordance to the ANSI C63.19 standard. The product is designed for use with the COMOHAC system only.



**Figure 1** – MVG COMOHAC Validation Dipole

# 4 MEASUREMENT METHOD

The ANSI C63.19 standard outlines the requirements for reference dipoles to be used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standard.



Test Report	18070083-HAC-RF		
Page	38 of 49		



Ref: ACR.165.12.17.SATU.A

#### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for HAC system validation measurements and checks must have a return loss of -10 dB or better. The return loss measurement shall be performed in free space.

# 4.2 REFERENCE DIPOLE CALIBRATION

The IEEE ANSI C63-19 standard states that the dipole used for validation measurements and checks must be scanned with the E and H field probe, with the dipole 10 mm below the probe. The E and H field strength plots are compared to the simulation results obtained by MVG.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

# 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Gain	
400-6000MHz	0.1 dB	

#### 5.2 VALIDATION MEASUREMENT

The guideline outlined in the IEEE ANSI C63.19 standard was followed to generate the measurement uncertainty for validation measurements.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	Uncertainty (dB)	Standard Uncertainty (%)
RF reflections	0.1	R	$\sqrt{3}$	0.06	
Field probe conv. Factor	0.4	R	$\sqrt{3}$	0.23	
Field probe anisotropy	0.25	R	$\sqrt{3}$	0.14	
Positioning accuracy	0.2	R	$\sqrt{3}$	0.12	
Probe cable placement	0.1	R	$\sqrt{3}$	0.06	
System repeatability	0.2	R	$\sqrt{3}$	0.12	
EUT repeatability	0.4	N	1	0.40	
Combined standard uncertainty				0.52	
Expanded uncertainty 95 % confidence level k = 2				1.00	13.0




Test Report	18070083-HAC-RF	
Page	39 of 49	



Ref: ACR.165.12.17.SATU.A

# 6 CALIBRATION MEASUREMENT RESULTS

# 6.1 RETURN LOSS

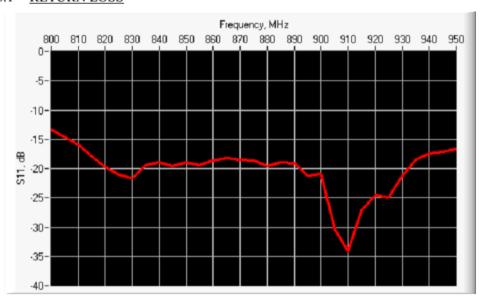

Frequency (MHz)	Worst Case Return Loss (dB)	Requirement (dB)
800-950 MHz	-13.35	-10

# 6.2 VALIDATION MEASUREMENT

The IEEE ANSI C63.19 standard states that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss requirements. The system validations measurement results are then compared to MVG's simulated results.

# **Measurement Condition**

Software Version	OpenHAC V2
HAC positioning ruler	SN 42/09 TABH12
E-Field probe	SN 08/11 EPH28
H-Field probe	SN 31/10 HPH38
Distance between dipole and sensor center	10 mm
E-field scan size	X=150mm/Y=20mm
H-field scan size	X=40mm/Y=20mm
Scan resolution	dx=5mm/dy=5mm
Frequency	835 MHz
Input power	20 dBm
Lab Temperature	21°C
Lab Humidity	45%




Test Report	18070083-HAC-RF	
Page	40 of 49	




Ref: ACR.165.12.17.SATU.A

#### Measurement Result

	Measured	Internal Requirement
E field (V/m)	218.44	220.4
H field (A/m)	0.46	0.445

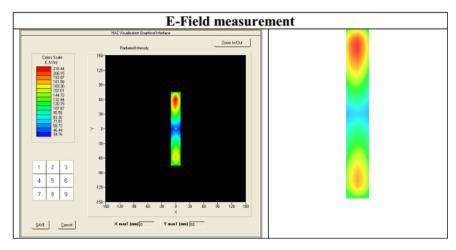

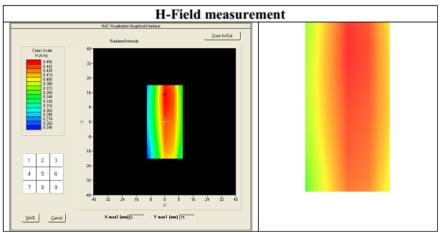



Test Report	18070083-HAC-RF	
Page	41 of 49	



Ref: ACR.165.12.17.SATU.A

# 7 LIST OF EQUIPMENT

Equipment Summary Sheet						
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date		
HAC positioning ruler	MVG	TABH12 SN 42/09	Validated. No cal required.	Validated. No cal required.		
COMOHAC Test Bench	Version 2	NA	Validated. No cal required.	Validated. No cal required.		
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2016	02/2019		
Reference Probe	MVG	EPH28 SN 08/11	10/2016	10/2017		
Reference Probe	MVG	HPH38 SN31/10	10/2016	10/2017		
Multimeter	Keithley 2000	1188656	01/2017	01/2020		
Signal Generator	Agilent E4438C	MY49070581	01/2017	01/2020		
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Power Meter	HP E4418A	US38261498	01/2017	01/2020		
Power Sensor	HP ECP-E26A	US37181460	01/2017	01/2020		
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Temperature and Humidity Sensor	Control Company	150798832	10/2015	10/2017		



Test Report	18070083-HAC-RF
Page	42 of 49



# **HAC Reference Dipole Calibration Report**

Ref: ACR.165.13.17.SATU.A

# SIEMIC TESTING AND CERTIFICATION SERVICES

ZONE A,FLOOR 1,BUILDING 2,WAN YE LONG TECHNOLOGY PARK,SOUTH SIDE OF ZHOUSHI ROAD, SHIYAN STREET,BAO'AN DISTRICT, SHENZHEN 518108, GUANGDONG, P.R.C.

# MVG COMOHAC REFERENCE DIPOLE

FREQUENCY: 1700-2000MHZ SERIAL NO.: SN 24/11 DHB32

Calibrated at MVG US 2105 Barrett Park Dr. - Kennesaw, GA 30144





Calibration Date: 06/8/2017

# Summary:

This document presents the method and results from an accredited HAC reference dipole calibration performed in MVG USA using the COMOHAC test bench. All calibration results are traceable to national metrology institutions.



Test Report	18070083-HAC-RF
Page	43 of 49



Ref: ACR.165.13.17.SATU.A

	Name	Function	Date	Signature
Prepared by:	Jérôme LUC	Product Manager	6/14/2017	JES
Checked by:	Jérôme LUC	Product Manager	6/14/2017	JS
Approved by:	Kim RUTKOWSKI	Quality Manager	6/14/2017	him Puthowski

	Customer Name
Distribution:	SIEMIC Testing and Certification Services

Issue	Date	Modifications
A	6/14/2017	Initial release



Test Report	18070083-HAC-RF
Page	44 of 49



Ref: ACR.165.13.17.SATU.A

# TABLE OF CONTENTS

1	Intro	oduction4	
2	Devi	ice Under TEst4	
3	Prod	luct Description4	
	3.1	General Information	
		surement Method	
	4.1	Return Loss Requirements	5
	4.2	Reference Dipole Calibration	5
5	Mea	surement Uncertainty5	
	5.1	Return Loss	5
	5.2	Validation Measurement	5
6	Cali	bration Measurement Results6	
	6.1	Return Loss	6
	6.2	Validation measurement	6
7	List	of Equipment8	



Test Report	18070083-HAC-RF
Page	45 of 49



Ref: ACR.165.13.17.SATU.A

#### 1 INTRODUCTION

This document contains a summary of the requirements set forth by the ANSI C63.19 standard for reference dipoles used for HAC measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

#### 2 DEVICE UNDER TEST

Device Under Test			
Device Type	COMOHAC 1700-2000 MHz REFERENCE DIPOLE		
Manufacturer	MVG		
Model	SIDB1900		
Serial Number	SN 24/11 DHB32		
Product Condition (new / used)	Used		

A yearly calibration interval is recommended.

# 3 PRODUCT DESCRIPTION

# 3.1 GENERAL INFORMATION

MVG's COMOHAC Validation Dipoles are built in accordance to the ANSI C63.19 standard. The product is designed for use with the COMOHAC system only.



Figure 1 - MVG COMOHAC Validation Dipole

# 4 MEASUREMENT METHOD

The ANSI C63.19 standard outlines the requirements for reference dipoles to be used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standard.

Page: 4/8



Test Report	18070083-HAC-RF
Page	46 of 49



Ref: ACR.165.13.17.SATU.A

#### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for HAC system validation measurements and checks must have a return loss of -10 dB or better. The return loss measurement shall be performed in free space.

#### 4.2 REFERENCE DIPOLE CALIBRATION

The IEEE ANSI C63-19 standard states that the dipole used for validation measurements and checks must be scanned with the E and H field probe, with the dipole 10 mm below the probe. The E and H field strength plots are compared to the simulation results obtained by MVG.

# 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

# 5.1 <u>RETURN LOSS</u>

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Gain		
400-6000MHz	0.1 dB		

# 5.2 VALIDATION MEASUREMENT

The guideline outlined in the IEEE ANSI C63.19 standard was followed to generate the measurement uncertainty for validation measurements.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	Uncertainty (dB)	Standard Uncertainty (%)
RF reflections	0.1	R	$\sqrt{3}$	0.06	
Field probe conv. Factor	0.4	R	$\sqrt{3}$	0.23	
Field probe anisotropy	0.25	R	$\sqrt{3}$	0.14	
Positioning accuracy	0.2	R	$\sqrt{3}$	0.12	
Probe cable placement	0.1	R	$\sqrt{3}$	0.06	
System repeatability	0.2	R	$\sqrt{3}$	0.12	
EUT repeatability	0.4	N	1	0.40	
Combined standard uncertainty				0.52	
Expanded uncertainty 95 % confidence level k = 2				1.00	13.0




Test Report	18070083-HAC-RF	
Page	47 of 49	



Ref: ACR.165.13.17.SATU.A

# 6 CALIBRATION MEASUREMENT RESULTS

# 6.1 RETURN LOSS

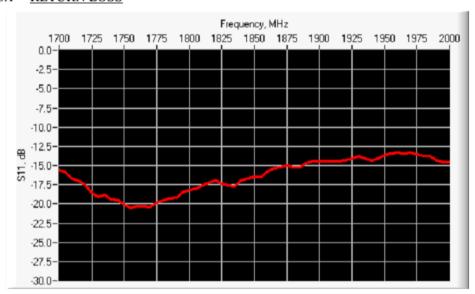

Frequency (MHz)	Worst Case Return Loss (dB)	Requirement (dB)
1700-2000 MHz	-13.25	-10

# 6.2 VALIDATION MEASUREMENT

The IEEE ANSI C63.19 standard states that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss requirements. The system validations measurement results are then compared to MVG's simulated results.

#### **Measurement Condition**

OpenHAC V2
SN 42/09 TABH12
SN 08/11 EPH28
SN 31/10 HPH38
10 mm
X=150mm/Y=20mm
X=40mm/Y=20mm
dx=5mm/dy=5mm
1900 MHz
20 dBm
21°C
45%




Test Report	18070083-HAC-RF	
Page	48 of 49	




Ref: ACR.165.13.17.SATU.A

# Measurement Result

	Measured	Internal Requirement	
E field (V/m)	152.33	153.4	
H field (A/m)	0.45	0.445	

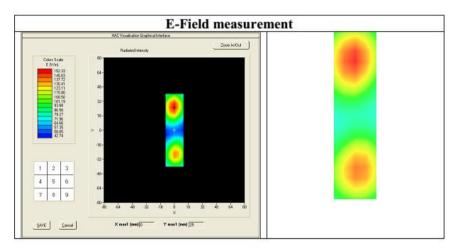

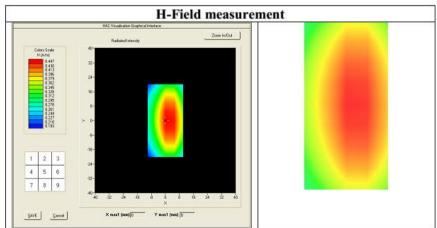



Test Report	18070083-HAC-RF	
Page	49 of 49	



Ref: ACR.165.13.17.SATU.A

# 7 LIST OF EQUIPMENT

Equipment Summary Sheet						
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date		
HAC positioning ruler	MVG	TARH12 SN 42/09	Validated. No cal required.	Validated. No cal required.		
COMOHAC Test Bench	Version 2	NA	Validated. No cal required.	Validated. No cal required.		
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2016	02/2019		
Reference Probe	MVG	EPH28 SN 08/11	10/2016	10/2017		
Reference Probe	MVG	HPH38 SN31/10	10/2016	10/2017		
Multimeter	Keithley 2000	1188656	01/2017	01/2020		
Signal Generator	Agilent E4438C	MY49070581	01/2017	01/2020		
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Power Meter	HP E4418A	US38261498	01/2017	01/2020		
Power Sensor	HP ECP-E26A	US37181460	01/2017	01/2020		
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.		
Temperature and Humidity Sensor	Control Company	150798832	10/2015	10/2017		