


TRANSMITTER

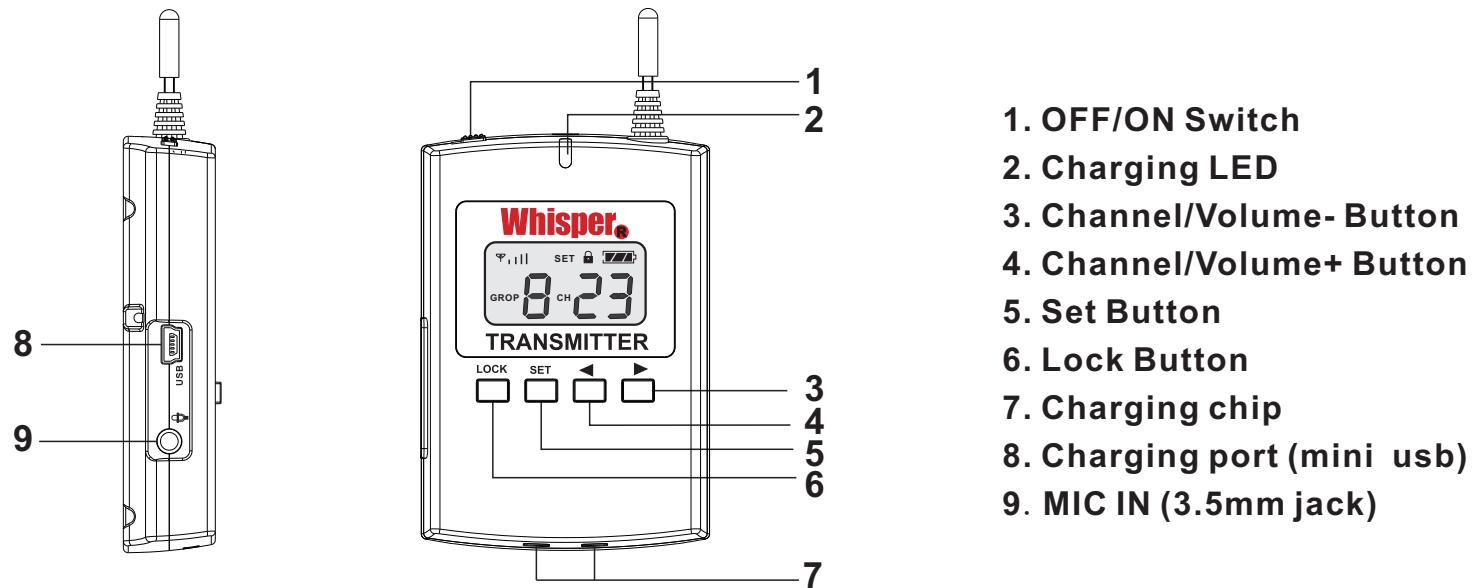

Operations :

1. Unlock: Press and hold the button 6 till the lock icon disappears.
2. Channel setup: Turn on the transmitter do unlock, then press button 3or4 to scroll through the channel numbers form 1to 83.
3. Mic input setup: In unlock status, press button 5 to adjust the microphone input.
4. Charging: Users can charge the transmitter the USB port or using our charging luggage to charge mulit-units together.

Transmitter Specifications

Frequency Range 2.401Ghz-2.483Ghz

Channel Space 1Mhz

Mic input Voltage 20mV

Current Consumption 180mA

Frequency Range 100Hz-7.5KHz

Signal to Noise Ratio 80dB

Mic & line Connecto 3.5mm

Battery 2500mAH

Size 85*59*19 (mm)

Weight 105g

Led Display Charge

Lcd Display ALL

Antenna outside

Furthest Distance >100m

Separation 80dB(Typical)

Distortion <0.1%

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.