


RFID 4dBi Four wall spiral

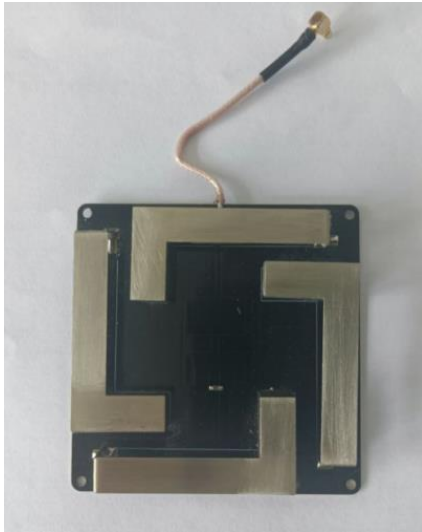


- Voltage standing wave ratio VSWR change curve with frequency

产品性能指标


Antenna size	70*70*10mm
Read distance	10-15m
Operating frequency	902-928MHz
gain	4dBi
Polarization mode	circularly polarized
Axial ratio	< 2
Wave width	E face : 120° H face : 125°
Standing wave ratio	< 1.5
Input impedance	50Ω
joint	MMCX1.13 wire
Operating temperature	-20℃—+80℃

- Voltage standing wave ratio VSWR change curve with frequency



Voltage standing wave ratio VSWR change curve with frequency:

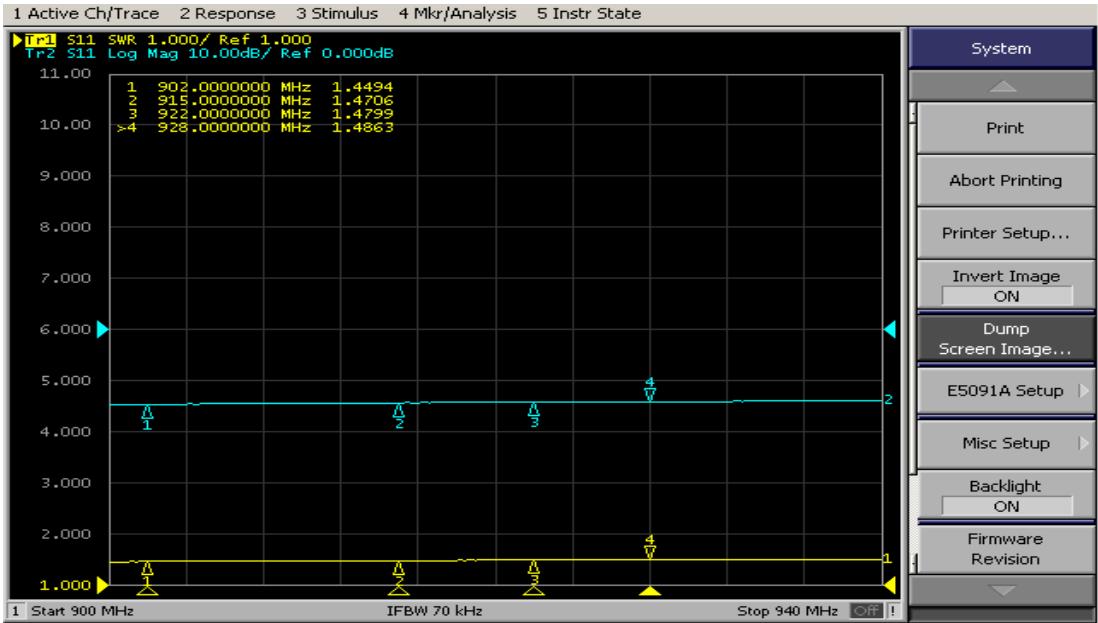


回波损耗 S11 随频率变化曲线


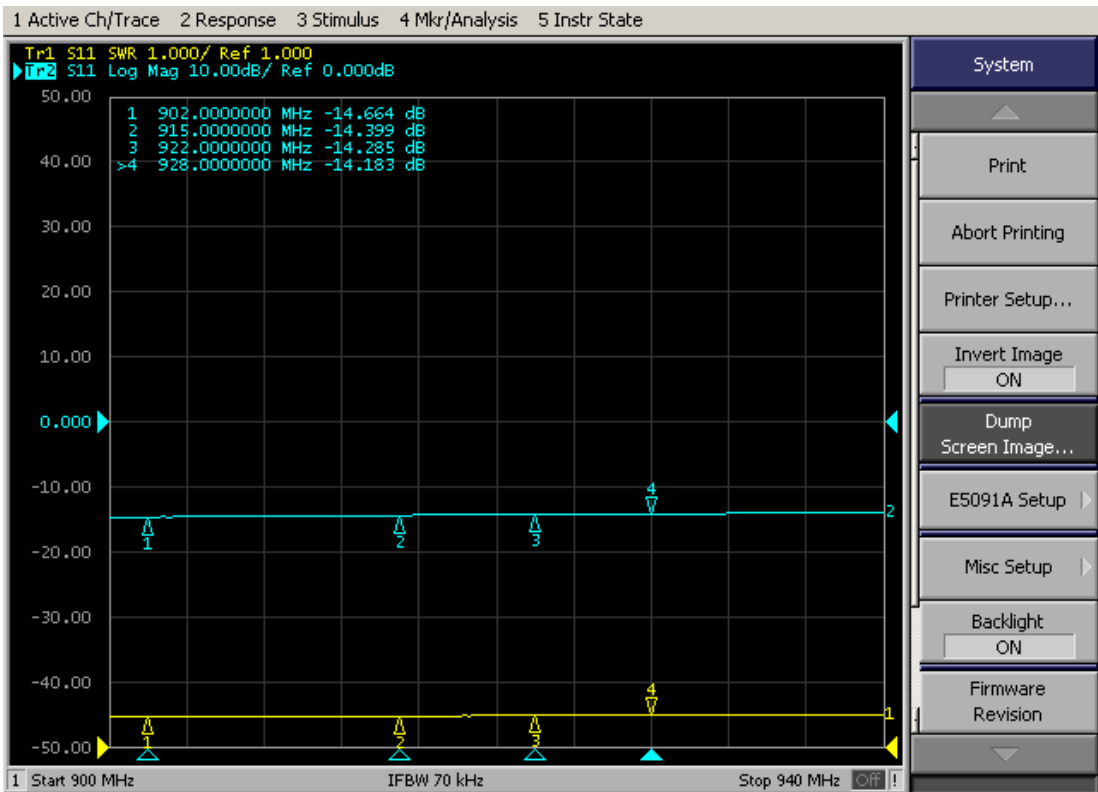


Characteristic curve of antenna measured in darkroom:

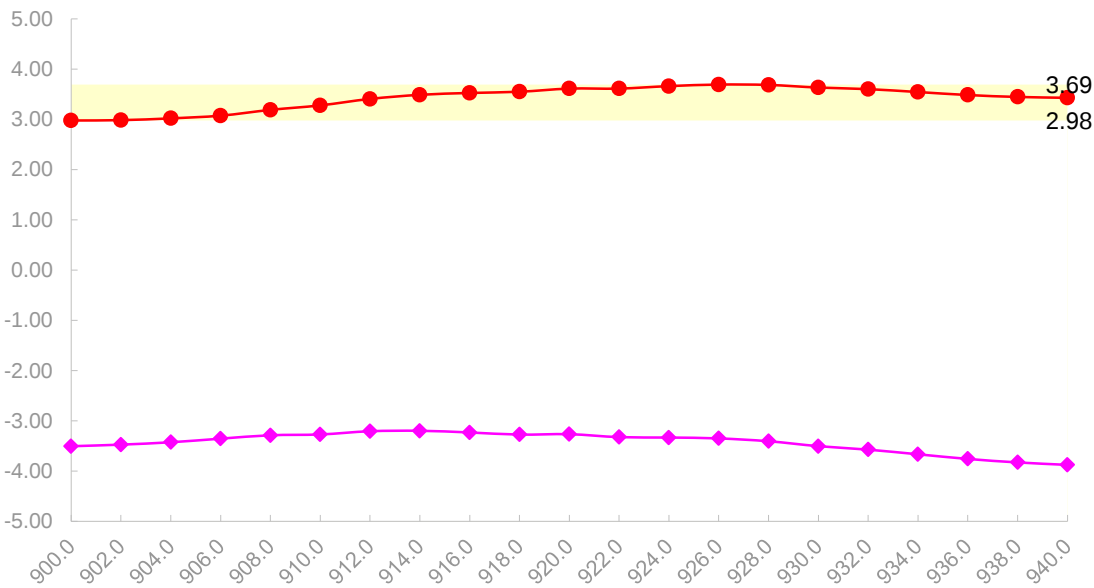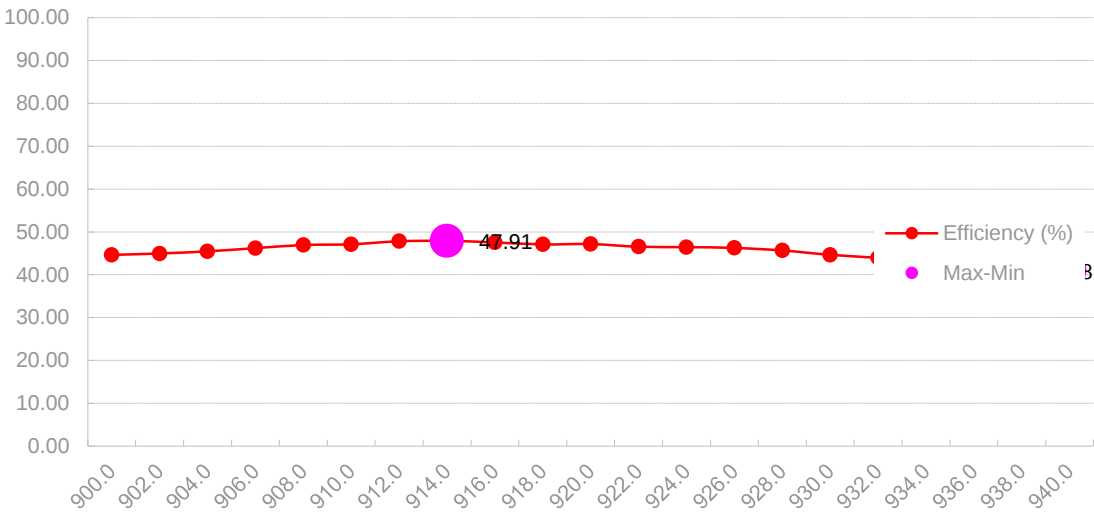




902

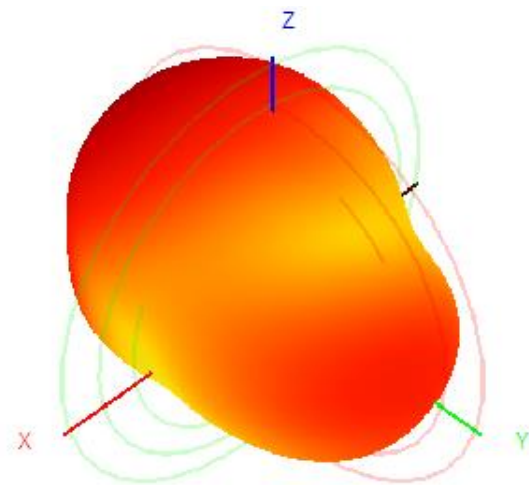

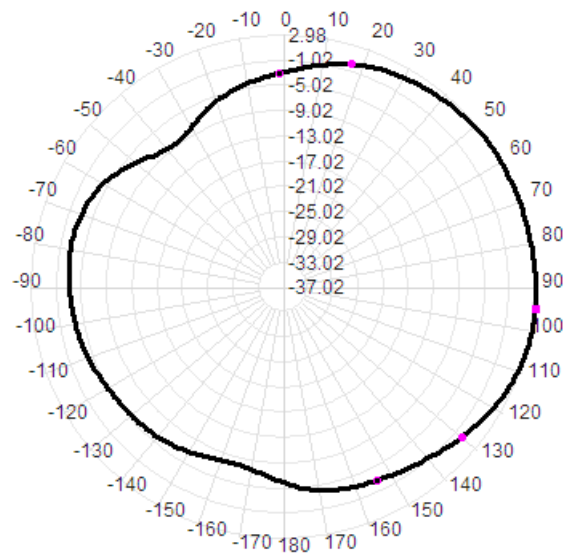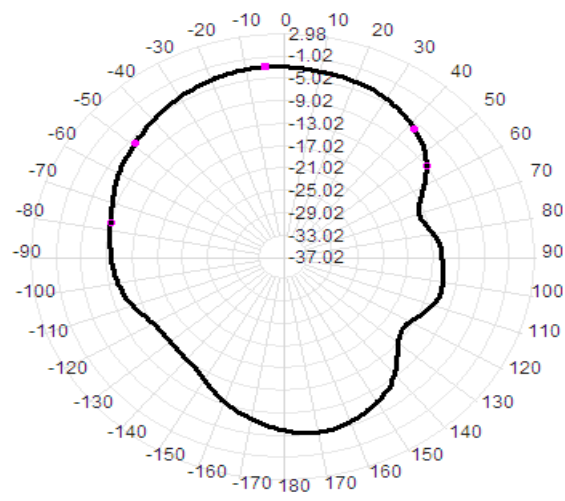

915

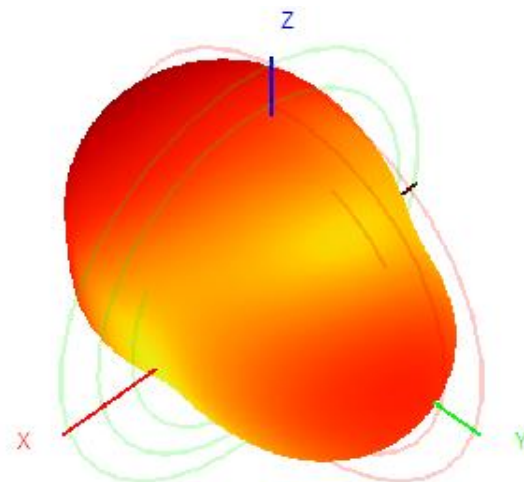

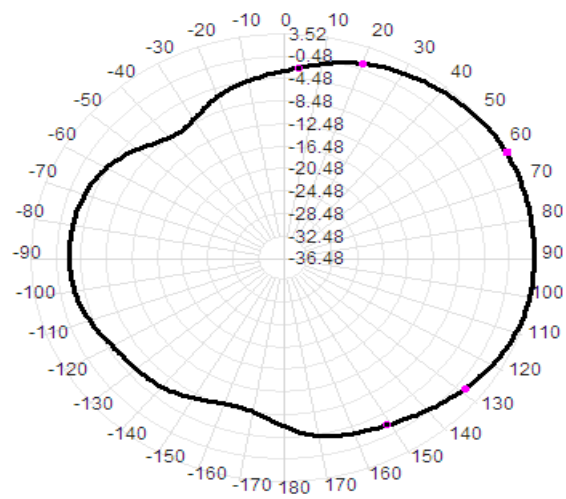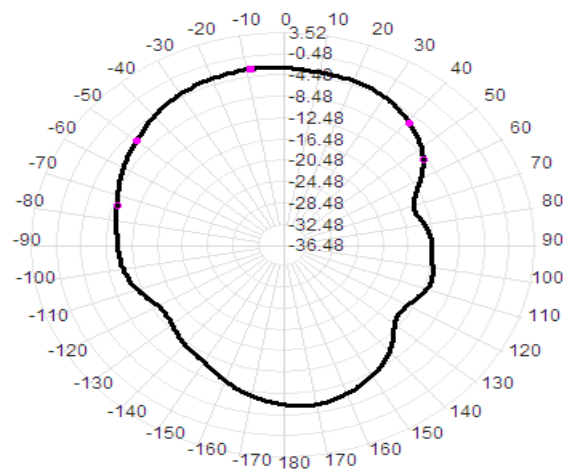

928

