



FCC TEST REPORT FCC ID: 2A3HP-M41	
Report Number.....: ZKT-211116L6124E	
Date of Test..... Nov. 09, 2021 to Nov. 16, 2021	
Date of issue.....: Nov. 17, 2021	
Total number of pages..... 123	
Test Result: PASS	
Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.	
Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China	
Applicant's name: Kwai Chung Trading DBA Elgin USA	
Address: 1975 Ballpark Way 200757, Arlington, Texas 76006, United States	
Manufacturer's name: Kwai Chung Trading DBA Elgin USA	
Address: 1975 Ballpark Way 200757, Arlington, Texas 76006, United States	
Test specification:	
Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10:2013	
Test procedure.....: /	
Non-standard test method: N/A	
Test Report Form No.....: TRF-EL-112_V0	
Test Report Form(s) Originator.....: ZKT Testing	
Master TRF: Dated: 2021-04-22	
This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.	
Product name.....: Rebel	
Trademark: ELGIN	
Model/Type reference.....: M4.1 M4.2, M4.3, M4.4, M4.5, M4.6, M4.7, M4.8, M4.9	
Ratings.....: Input : 5V==1A Battery: DC 3.7V 900mAh for charge box DC 3.7V 65mAh for earbuds	



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Alen He

Reviewer (name + signature).....: Joe Liu

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION.....	5
2. TEST SUMMARY.....	6
2.1 TEST FACILITY.....	7
2.2 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 Test Setup Configuration.....	9
3.3 Support Equipment.....	9
3.4 Test Mode.....	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
4. EMC EMISSION TEST.....	12
4.1 Conducted emissions.....	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits.....	12
4.1.2 TEST PROCEDURE.....	12
4.1.3 DEVIATION FROM TEST STANDARD.....	12
4.1.4 TEST SETUP.....	13
4.1.5 EUT OPERATING CONDITIONS.....	13
4.1.6 Test Result.....	14
4.2 Radiated emissions.....	16
4.2.1 Radiated Emission Limits.....	16
4.2.2 TEST PROCEDURE.....	16
4.2.3 DEVIATION FROM TEST STANDARD.....	17
4.2.4 TEST SETUP.....	17
4.2.5 EUT OPERATING CONDITIONS.....	18
4.2.6 TEST RESULTS.....	19
5. RADIATED BAND EMISSION MEASUREMENT.....	35
5.1 Test Requirement.....	35
5.2 TEST PROCEDURE.....	35
5.3 DEVIATION FROM TEST STANDARD.....	36
5.4 TEST SETUP.....	36
5.5 EUT OPERATING CONDITIONS.....	36
5.6 TEST RESULT.....	37
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....	41
6.1 Limit.....	41
6.2 Test Setup.....	41
6.3 Test procedure.....	41
6.4 DEVIATION FROM STANDARD.....	41
6.5 Test Result.....	42
7. 20DB&99% BANDWIDTH.....	72
7.1 Test Setup.....	72
7.2 Limit.....	72
7.3 Test procedure.....	72
7.4 DEVIATION FROM STANDARD.....	72
7.5 Test Result.....	72
8. MAXIMUM PEAK OUTPUT POWER.....	83
8.1 Block Diagram Of Test Setup.....	83
8.2 Limit.....	83
8.3 Test procedure.....	83
8.4 DEVIATION FROM STANDARD.....	83
8.5 Test Result.....	83
9. HOPPING CHANNEL SEPARATION.....	94
9.1 Test Setup.....	94
9.2 Test procedure.....	94
9.3 DEVIATION FROM STANDARD.....	94
9.4 Test Result.....	95



10.NUMBER OF HOPPING FREQUENCY.....	105
10.1 Test Setup.....	105
10.2 Test procedure.....	105
10.3 DEVIATION FROM STANDARD.....	105
10.4 Test Result.....	106
11. DWELL TIME.....	109
11.1 Test Setup.....	109
11.2 Test procedure.....	109
11.3 DEVIATION FROM STANDARD.....	109
11.4 Test Result.....	110
12. ANTENNA REQUIREMENT.....	122
13. TEST SETUP PHOTO.....	123
14. EUT CONSTRUCTIONAL DETAILS.....	123



1. VERSION

Report No.	Version	Description	Approved
ZKT-211116L6124E	Rev.01	Initial issue of report	Nov. 17, 2021



2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033
Designation Number: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Rebel
Model No.:	M4.1 M4.2, M4.3, M4.4, M4.5, M4.6, M4.7, M4.8, M4.9
Model Difference:	All the model are the same circuit and RF module. Only the model names and appearance colors are different. The model M4.1 is the tested sample.
Sample(s) Status:	Engineer sample
Channel numbers:	79
Channel separation:	2402MHz-2480MHz
Modulation technology:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	Internal Antenna
Antenna gain:	0 dBi
Power supply:	Input : 5V $\overline{=}$ 1A Battery: DC 3.7V 900mAh for charge box DC 3.7V 65mAh for earbuds

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		



Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.2 Test Setup Configuration

Conducted Emission

AC Line

Radiated Emission

Conducted Spurious

3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Rebel	ELGIN	M4.1	M4.2, M4.3, M4.4, M4.5, M4.6, M4.7, M4.8, M4.9	EUT
E-2	C-type USB Cable	N/A	C-type USB Cable	N/A	AE
E-3	Adapter	N/A	HW-059200CHQ	N/A	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: The EUT use new battery during the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	AB1562 Lab Test Tool-1.5.11.1
Power level setup	<7dBm



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 21, 2021	Sep. 20, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 21, 2021	Sep. 20, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Sep. 21, 2021	Sep. 20, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 21, 2021	Sep. 20, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 21, 2021	Sep. 20, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 21, 2021	Sep. 20, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 21, 2021	Sep. 20, 2022
8	Amplifier (1GHz-40GHz)	QuanJuDa	DLE-161	097	Sep. 21, 2021	Sep. 20, 2022
9	Loop Antenna (9kHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 21, 2021	Sep. 20, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 21, 2021	Sep. 20, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 21, 2021	Sep. 20, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 21, 2021	Sep. 20, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 21, 2021	Sep. 20, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 21, 2021	Sep. 20, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 21, 2021	Sep. 20, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\
18	Power Meter	MWRFTest	MW100-RFCB	\	Sep. 21, 2021	Sep. 20, 2022

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 21, 2021	Sep. 20, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 21, 2021	Sep. 20, 2022
3	Test Cable	N/A	C01	N/A	Sep. 21, 2021	Sep. 20, 2022
4	Test Cable	N/A	C02	N/A	Sep. 21, 2021	Sep. 20, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 21, 2021	Sep. 20, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 21, 2021	Sep. 20, 2022



4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

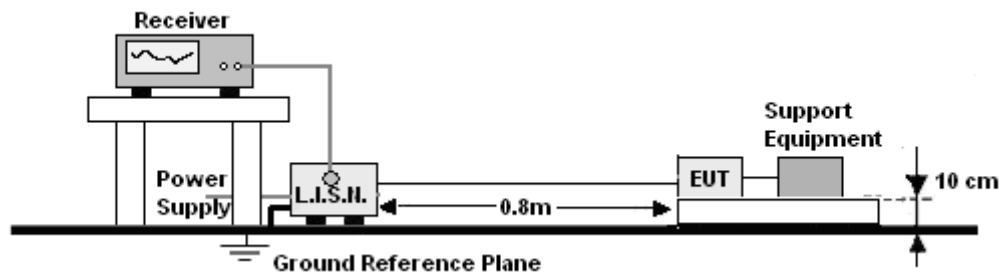


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature :	25.8℃	Relative Humidity :	49%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

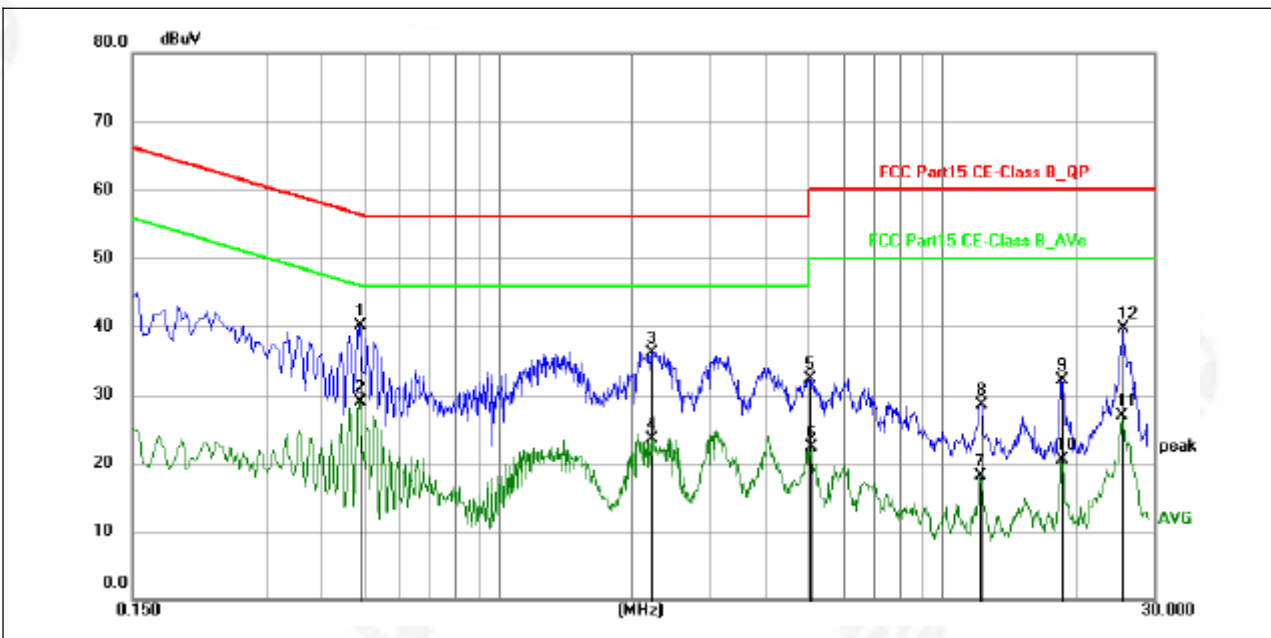


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4874	29.57	10.60	40.17	56.21	-16.04	peak	P	
2	0.4874	18.31	10.60	28.91	46.21	-17.30	AVG	P	
3	2.2153	26.03	10.14	36.17	56.00	-19.83	peak	P	
4	2.2153	13.41	10.14	23.55	46.00	-22.45	AVG	P	
5	5.0144	23.73	8.65	32.38	60.00	-27.62	peak	P	
6	5.0594	13.66	8.65	22.31	50.00	-27.69	AVG	P	
7	12.1515	9.26	8.76	18.02	50.00	-31.98	AVG	P	
8	12.2189	19.76	8.77	28.53	60.00	-31.47	peak	P	
9	18.6090	22.53	9.66	32.19	60.00	-27.81	peak	P	
10	18.6090	10.89	9.66	20.55	50.00	-29.45	AVG	P	
11	25.4039	16.90	9.91	26.81	50.00	-23.19	AVG	P	
12	25.4804	29.74	9.91	39.65	60.00	-20.35	peak	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



Temperature :	25.8℃	Relative Humidity :	49%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

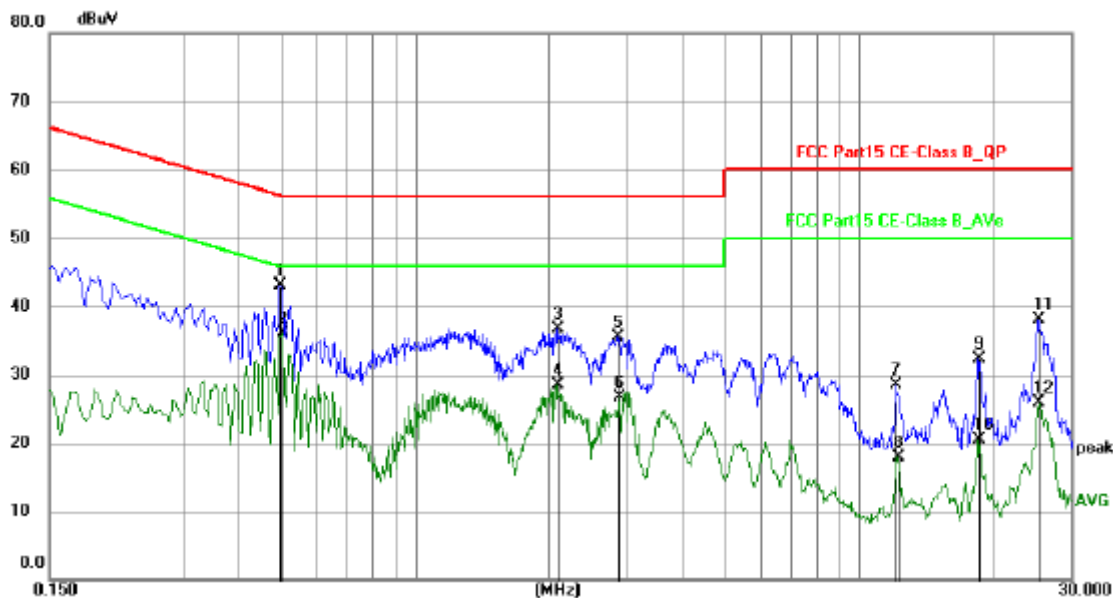

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4964	32.45	10.56	43.01	56.06	-13.05	peak	P	
2	0.5010	25.59	10.54	36.13	46.00	-9.87	AVG	P	
3	2.0893	26.51	10.17	36.68	56.00	-19.32	peak	P	
4	2.0893	18.28	10.17	28.45	46.00	-17.55	AVG	P	
5	2.8410	25.53	9.98	35.51	56.00	-20.49	peak	P	
6	2.8769	16.65	9.97	26.62	46.00	-19.38	AVG	P	
7	12.1200	19.66	8.76	28.42	60.00	-31.58	peak	P	
8	12.2415	9.20	8.77	17.97	50.00	-32.03	AVG	P	
9	18.5594	22.74	9.66	32.40	60.00	-27.60	peak	P	
10	18.5594	10.79	9.66	20.45	50.00	-29.55	AVG	P	
11	25.2824	28.29	9.91	38.20	60.00	-21.80	peak	P	
12	25.3500	15.99	9.91	25.90	50.00	-24.10	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

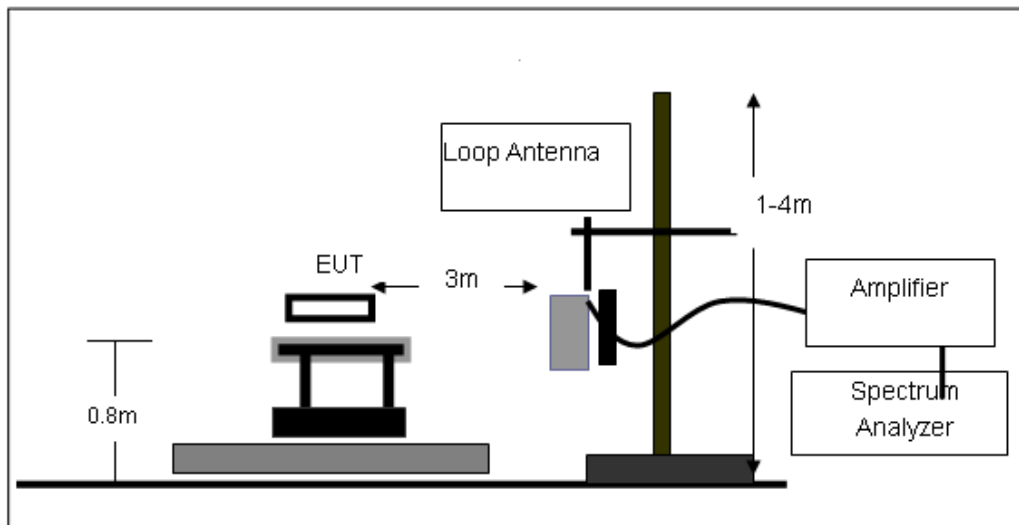




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

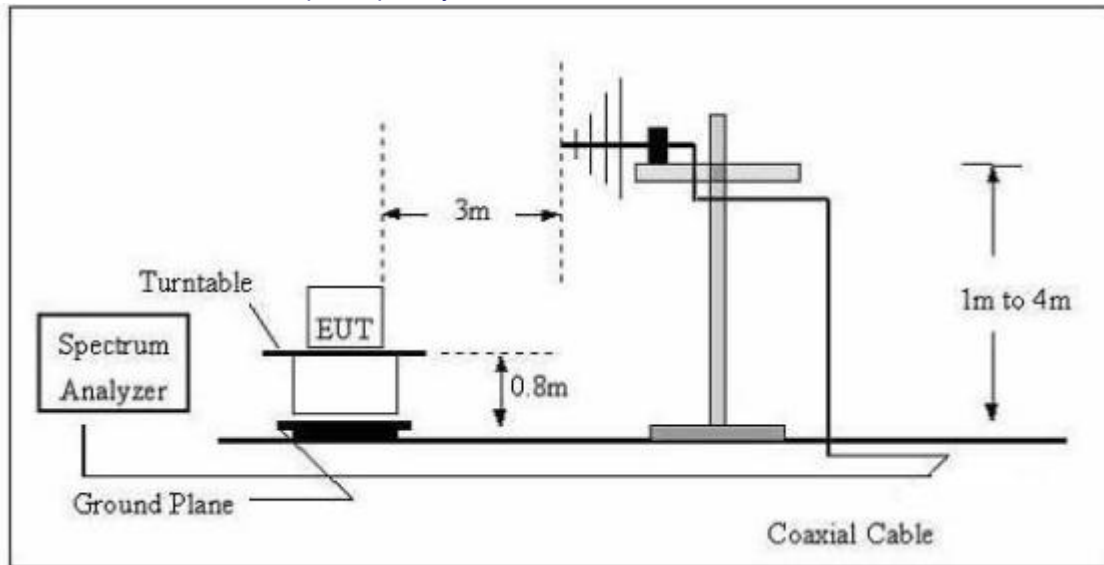

(C) Radiated Emission Test-Up Frequency Above 1GHz

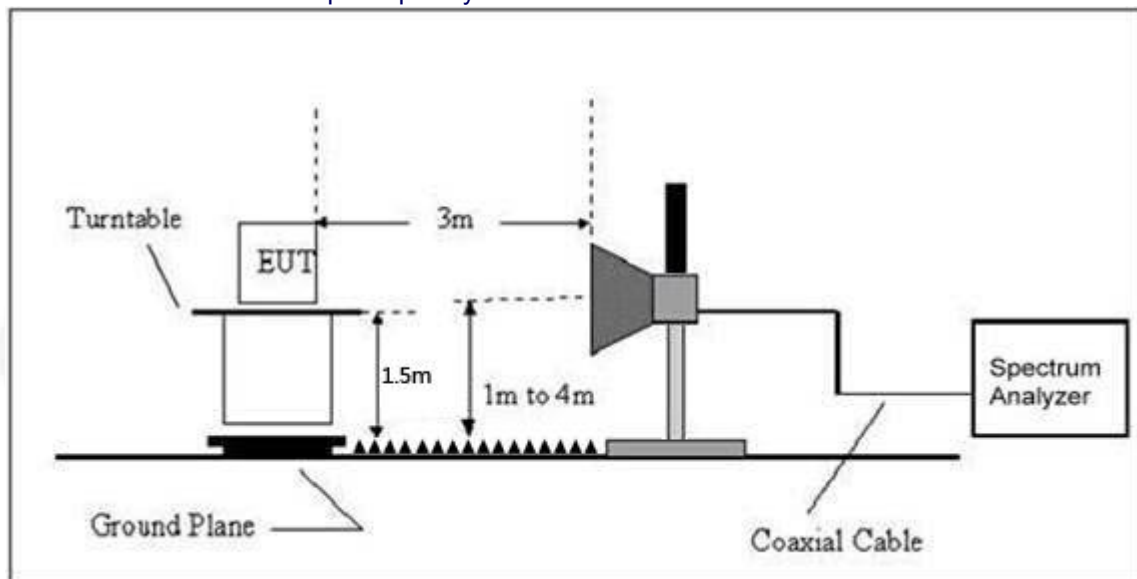

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

Between 30MHz – 1GHz


left earbud:

Temperature:	26.1℃	Relative Humidity:	47%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V		

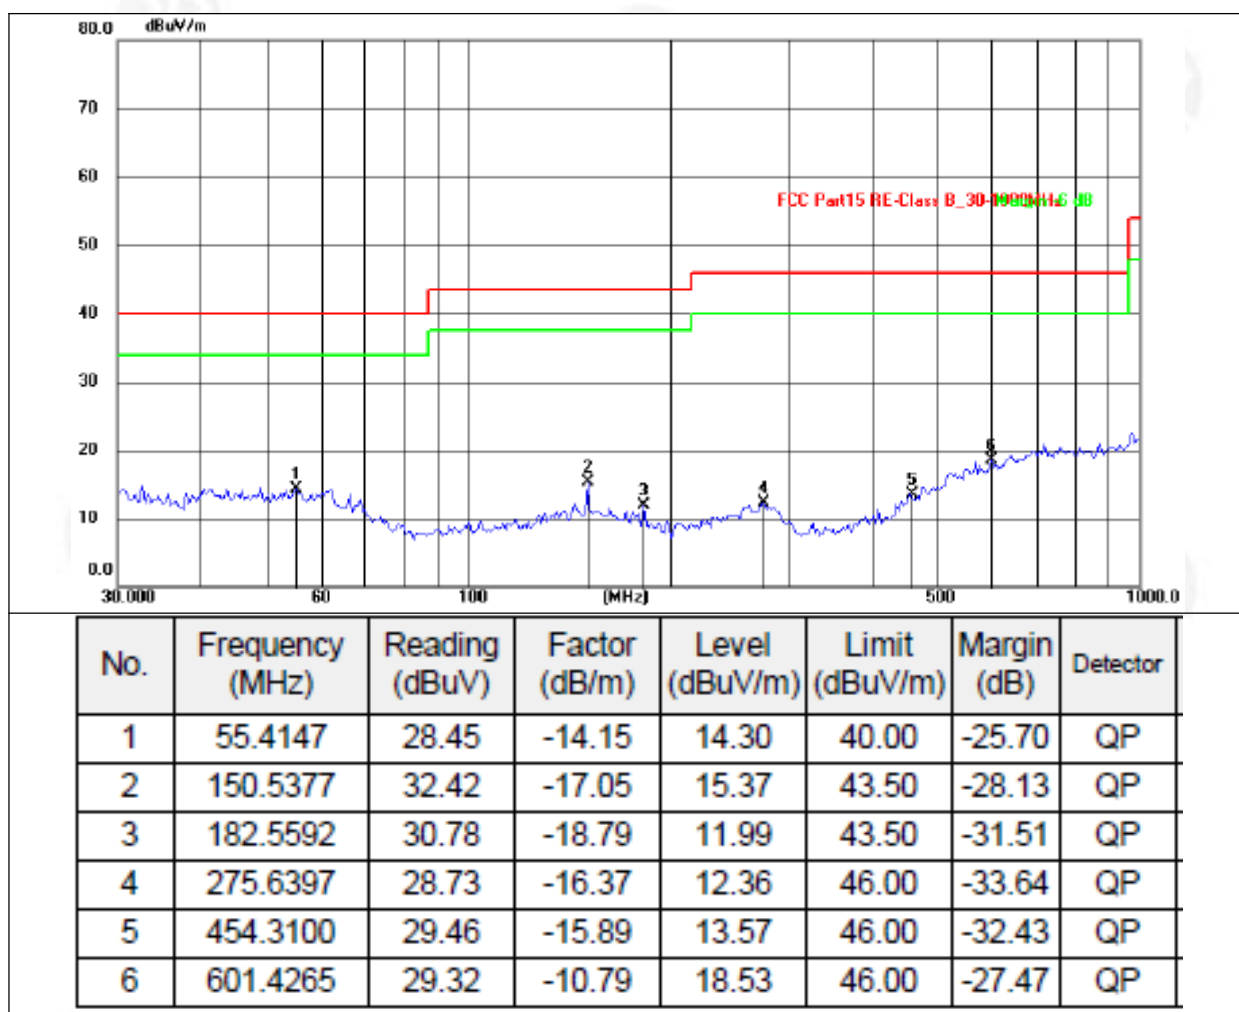




Temperature:	26.1℃	Relative Humidity:	47%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V		

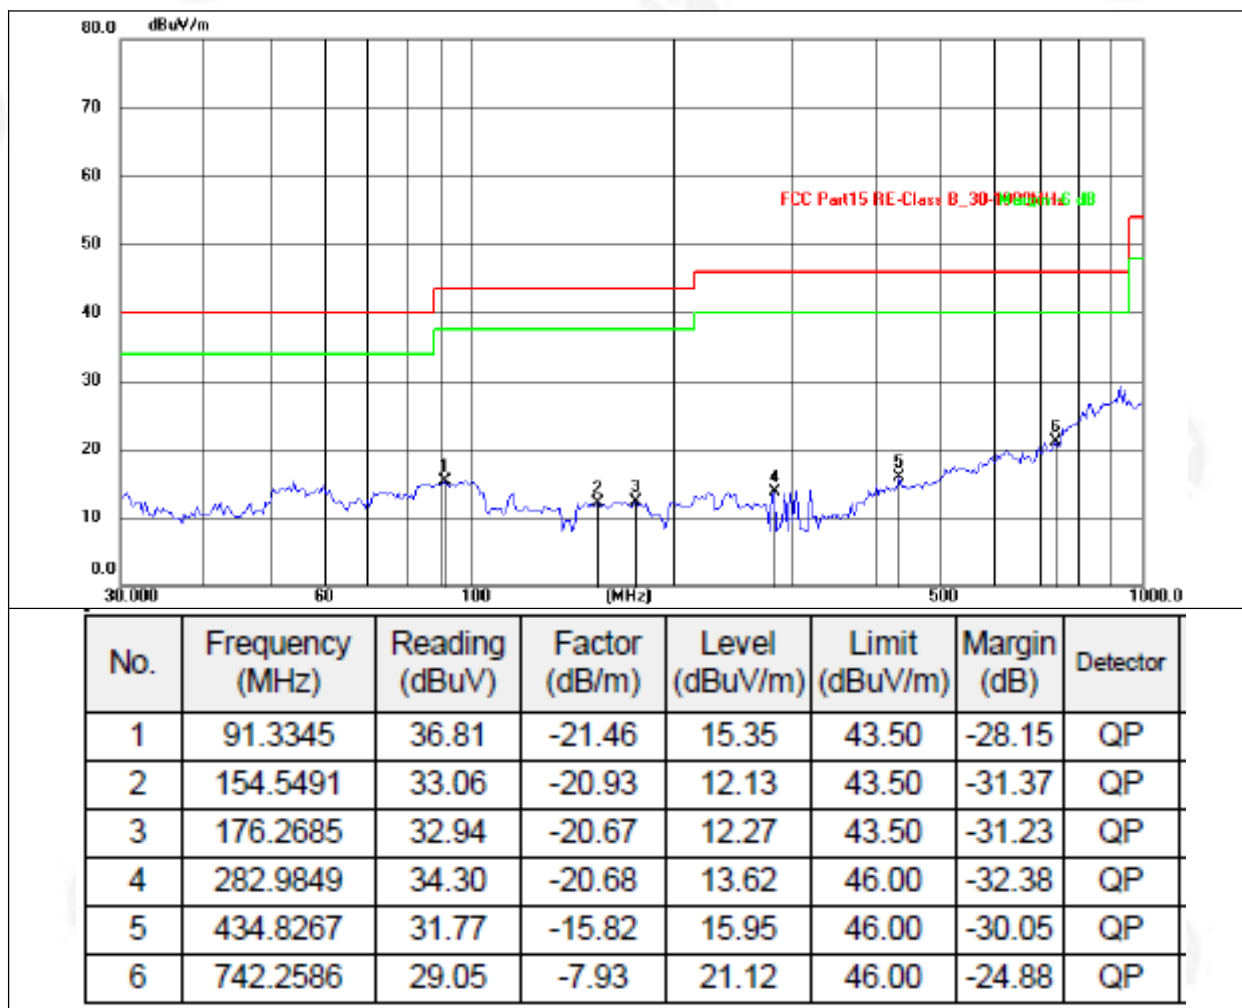




right earbud:

Temperature:	26.1℃	Relative Humidity:	47%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V		

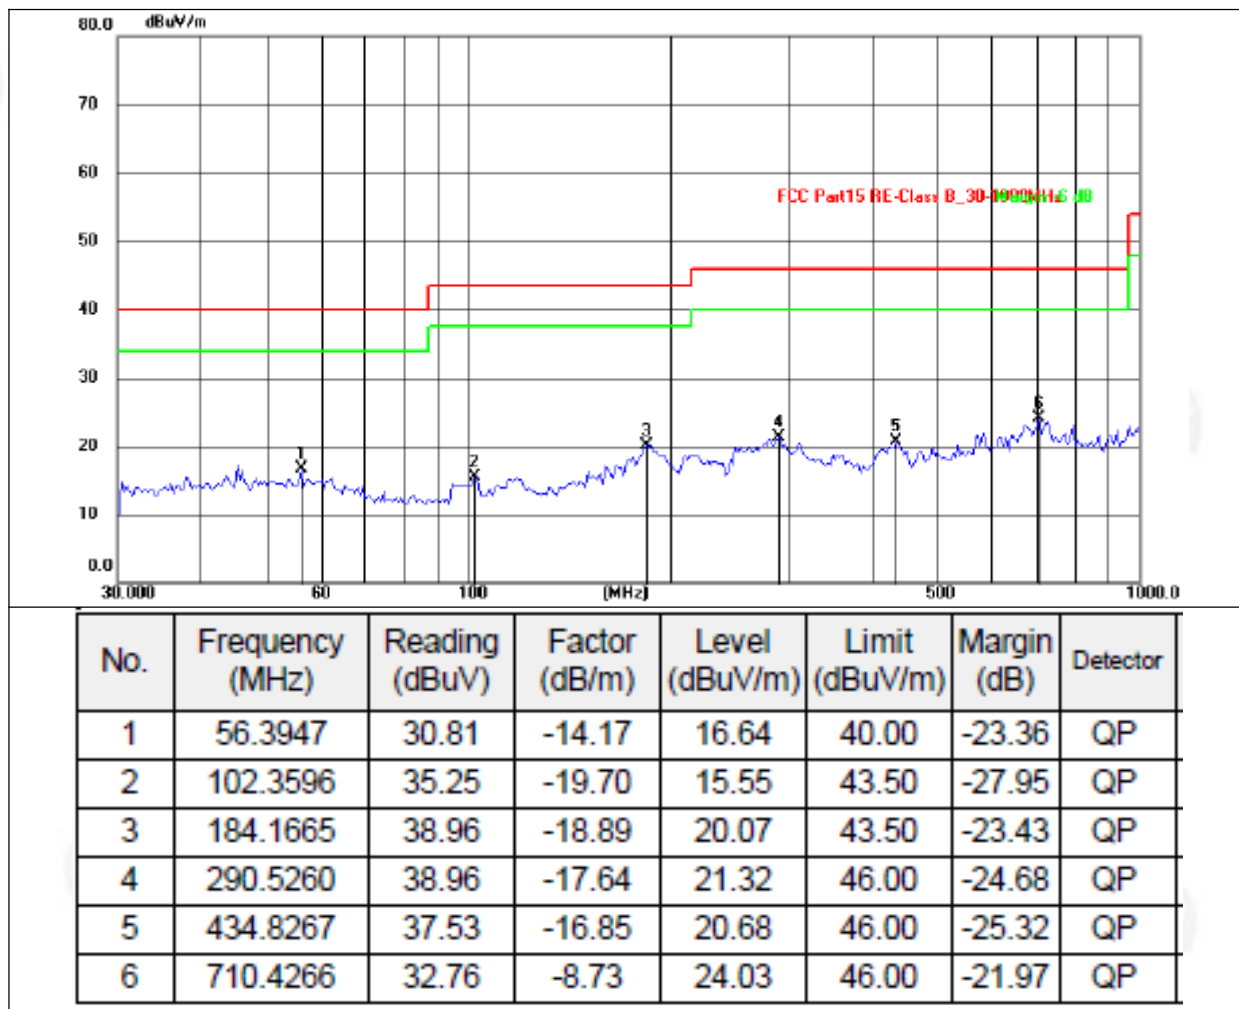



Temperature:	26.1℃	Relative Humidity:	47%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V		

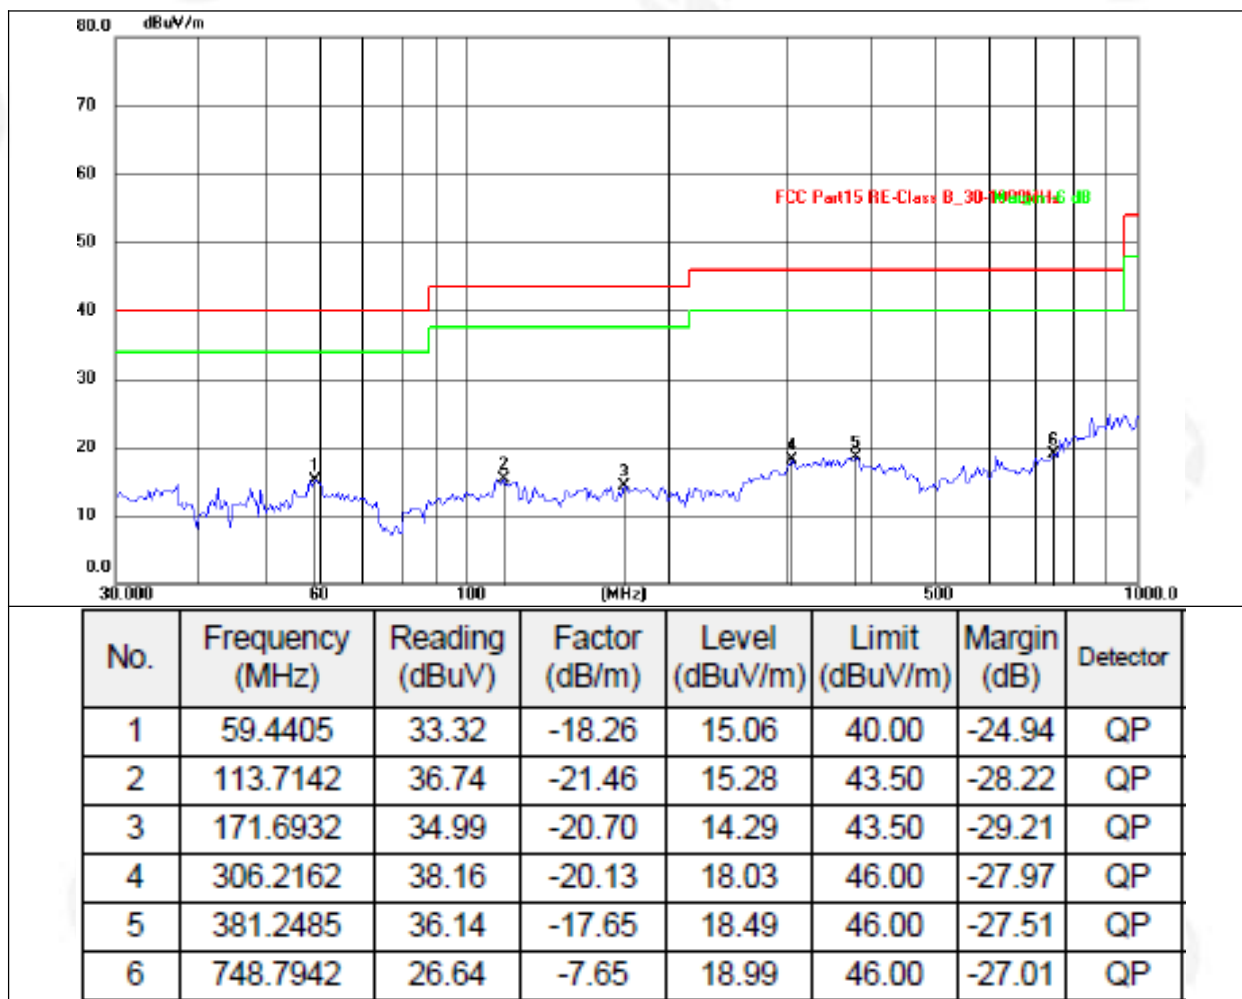

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case GFSK mode



1GHz~25GHz

left earbud:

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	57.06	30.55	5.77	24.66	56.94	74.00	-17.06	Pk
V	4804.00	42.76	30.55	5.77	24.66	42.64	54.00	-11.36	AV
V	7206.00	52.67	30.33	6.32	24.55	53.21	74.00	-20.79	Pk
V	7206.00	37.37	30.33	6.32	24.55	37.91	54.00	-16.09	AV
V	9608.00	51.22	30.85	7.45	24.69	52.51	74.00	-21.49	Pk
V	9608.00	34.98	30.85	7.45	24.69	36.27	54.00	-17.73	AV
V	12010.00	55.82	31.02	8.99	25.57	59.36	74.00	-14.64	Pk
V	12010.00	37.97	31.02	8.99	25.57	41.51	54.00	-12.49	AV
H	4804.00	53.59	30.55	5.77	24.66	53.47	74.00	-20.53	Pk
H	4804.00	37.39	30.55	5.77	24.66	37.27	54.00	-16.73	AV
H	7206.00	50.53	30.33	6.32	24.55	51.07	74.00	-22.93	Pk
H	7206.00	35.52	30.33	6.32	24.55	36.06	54.00	-17.94	AV
H	9608.00	49.07	30.85	7.45	24.69	50.36	74.00	-23.64	Pk
H	9608.00	34.24	30.85	7.45	24.69	35.53	54.00	-18.47	AV
H	12010.00	46.25	31.02	8.99	25.57	49.79	74.00	-24.21	Pk
H	12010.00	32.50	31.02	8.99	25.57	36.04	54.00	-17.96	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	57.39	30.55	5.77	24.66	57.27	74.00	-16.73	Pk
V	4882.00	42.80	30.55	5.77	24.66	42.68	54.00	-11.32	AV
V	7323.00	53.48	30.33	6.32	24.55	54.02	74.00	-19.98	Pk
V	7323.00	37.44	30.33	6.32	24.55	37.98	54.00	-16.02	AV
V	9764.00	51.23	30.85	7.45	24.69	52.52	74.00	-21.48	Pk
V	9764.00	34.20	30.85	7.45	24.69	35.49	54.00	-18.51	AV
V	12205.00	56.13	31.02	8.99	25.57	59.67	74.00	-14.33	Pk
V	12205.00	37.79	31.02	8.99	25.57	41.33	54.00	-12.67	AV
H	4882.00	54.16	30.55	5.77	24.66	54.04	74.00	-19.96	Pk
H	4882.00	36.78	30.55	5.77	24.66	36.66	54.00	-17.34	AV
H	7323.00	50.60	30.33	6.32	24.55	51.14	74.00	-22.86	Pk
H	7323.00	36.14	30.33	6.32	24.55	36.68	54.00	-17.32	AV
H	9764.00	49.08	30.85	7.45	24.69	50.37	74.00	-23.63	Pk
H	9764.00	34.64	30.85	7.45	24.69	35.93	54.00	-18.07	AV
H	12205.00	46.37	31.02	8.99	25.57	49.91	74.00	-24.09	Pk
H	12205.00	32.51	31.02	8.99	25.57	36.05	54.00	-17.95	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	56.61	30.55	5.77	24.66	56.49	74.00	-17.51	Pk
V	4960.00	42.53	30.55	5.77	24.66	42.41	54.00	-11.59	AV
V	7440.00	53.29	30.33	6.32	24.55	53.83	74.00	-20.17	Pk
V	7440.00	37.48	30.33	6.32	24.55	38.02	54.00	-15.98	AV
V	9920.00	50.59	30.85	7.45	24.69	51.88	74.00	-22.12	Pk
V	9920.00	34.42	30.85	7.45	24.69	35.71	54.00	-18.29	AV
V	12400.00	55.78	31.02	8.99	25.57	59.32	74.00	-14.68	Pk
V	12400.00	38.17	31.02	8.99	25.57	41.71	54.00	-12.29	AV
H	4960.00	53.54	30.55	5.77	24.66	53.42	74.00	-20.58	Pk
H	4960.00	37.34	30.55	5.77	24.66	37.22	54.00	-16.78	AV
H	7440.00	50.42	30.33	6.32	24.55	50.96	74.00	-23.04	Pk
H	7440.00	35.50	30.33	6.32	24.55	36.04	54.00	-17.96	AV
H	9920.00	48.97	30.85	7.45	24.69	50.26	74.00	-23.74	Pk
H	9920.00	34.95	30.85	7.45	24.69	36.24	54.00	-17.76	AV
H	12400.00	46.40	31.02	8.99	25.57	49.94	74.00	-24.06	Pk
H	12400.00	32.20	31.02	8.99	25.57	35.74	54.00	-18.26	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



$\pi/4$ DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	57.43	30.55	5.77	24.66	57.31	74.00	-16.69	Pk
V	4804.00	42.67	30.55	5.77	24.66	42.55	54.00	-11.45	AV
V	7206.00	53.04	30.33	6.32	24.55	53.58	74.00	-20.42	Pk
V	7206.00	37.27	30.33	6.32	24.55	37.81	54.00	-16.19	AV
V	9608.00	50.98	30.85	7.45	24.69	52.27	74.00	-21.73	Pk
V	9608.00	34.35	30.85	7.45	24.69	35.64	54.00	-18.36	AV
V	12010.00	55.44	31.02	8.99	25.57	58.98	74.00	-15.02	Pk
V	12010.00	37.66	31.02	8.99	25.57	41.20	54.00	-12.80	AV
H	4804.00	53.28	30.55	5.77	24.66	53.16	74.00	-20.84	Pk
H	4804.00	37.09	30.55	5.77	24.66	36.97	54.00	-17.03	AV
H	7206.00	50.51	30.33	6.32	24.55	51.05	74.00	-22.95	Pk
H	7206.00	35.43	30.33	6.32	24.55	35.97	54.00	-18.03	AV
H	9608.00	48.28	30.85	7.45	24.69	49.57	74.00	-24.43	Pk
H	9608.00	34.84	30.85	7.45	24.69	36.13	54.00	-17.87	AV
H	12010.00	46.25	31.02	8.99	25.57	49.79	74.00	-24.21	Pk
H	12010.00	32.97	31.02	8.99	25.57	36.51	54.00	-17.49	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	57.09	30.55	5.77	24.66	56.97	74.00	-17.03	Pk
V	4882.00	43.04	30.55	5.77	24.66	42.92	54.00	-11.08	AV
V	7323.00	52.74	30.33	6.32	24.55	53.28	74.00	-20.72	Pk
V	7323.00	37.28	30.33	6.32	24.55	37.82	54.00	-16.18	AV
V	9764.00	51.46	30.85	7.45	24.69	52.75	74.00	-21.25	Pk
V	9764.00	34.88	30.85	7.45	24.69	36.17	54.00	-17.83	AV
V	12205.00	55.41	31.02	8.99	25.57	58.95	74.00	-15.05	Pk
V	12205.00	37.99	31.02	8.99	25.57	41.53	54.00	-12.47	AV
H	4882.00	53.80	30.55	5.77	24.66	53.68	74.00	-20.32	Pk
H	4882.00	36.93	30.55	5.77	24.66	36.81	54.00	-17.19	AV
H	7323.00	50.58	30.33	6.32	24.55	51.12	74.00	-22.88	Pk
H	7323.00	35.50	30.33	6.32	24.55	36.04	54.00	-17.96	AV
H	9764.00	48.44	30.85	7.45	24.69	49.73	74.00	-24.27	Pk
H	9764.00	34.98	30.85	7.45	24.69	36.27	54.00	-17.73	AV
H	12205.00	47.11	31.02	8.99	25.57	50.65	74.00	-23.35	Pk
H	12205.00	33.09	31.02	8.99	25.57	36.63	54.00	-17.37	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	56.84	30.55	5.77	24.66	56.72	74.00	-17.28	Pk
V	4960.00	42.32	30.55	5.77	24.66	42.20	54.00	-11.80	AV
V	7440.00	52.70	30.33	6.32	24.55	53.24	74.00	-20.76	Pk
V	7440.00	37.33	30.33	6.32	24.55	37.87	54.00	-16.13	AV
V	9920.00	51.26	30.85	7.45	24.69	52.55	74.00	-21.45	Pk
V	9920.00	34.51	30.85	7.45	24.69	35.80	54.00	-18.20	AV
V	12400.00	56.12	31.02	8.99	25.57	59.66	74.00	-14.34	Pk
V	12400.00	37.72	31.02	8.99	25.57	41.26	54.00	-12.74	AV
H	4960.00	53.48	30.55	5.77	24.66	53.36	74.00	-20.64	Pk
H	4960.00	37.40	30.55	5.77	24.66	37.28	54.00	-16.72	AV
H	7440.00	50.25	30.33	6.32	24.55	50.79	74.00	-23.21	Pk
H	7440.00	35.56	30.33	6.32	24.55	36.10	54.00	-17.90	AV
H	9920.00	48.25	30.85	7.45	24.69	49.54	74.00	-24.46	Pk
H	9920.00	34.38	30.85	7.45	24.69	35.67	54.00	-18.33	AV
H	12400.00	47.14	31.02	8.99	25.57	50.68	74.00	-23.32	Pk
H	12400.00	32.76	31.02	8.99	25.57	36.30	54.00	-17.70	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	56.54	30.55	5.77	24.66	56.42	74.00	-17.58	Pk
V	4804.00	42.32	30.55	5.77	24.66	42.20	54.00	-11.80	AV
V	7206.00	53.50	30.33	6.32	24.55	54.04	74.00	-19.96	Pk
V	7206.00	37.46	30.33	6.32	24.55	38.00	54.00	-16.00	AV
V	9608.00	51.39	30.85	7.45	24.69	52.68	74.00	-21.32	Pk
V	9608.00	35.10	30.85	7.45	24.69	36.39	54.00	-17.61	AV
V	12010.00	55.82	31.02	8.99	25.57	59.36	74.00	-14.64	Pk
V	12010.00	37.66	31.02	8.99	25.57	41.20	54.00	-12.80	AV
H	4804.00	54.06	30.55	5.77	24.66	53.94	74.00	-20.06	Pk
H	4804.00	36.93	30.55	5.77	24.66	36.81	54.00	-17.19	AV
H	7206.00	50.20	30.33	6.32	24.55	50.74	74.00	-23.26	Pk
H	7206.00	35.59	30.33	6.32	24.55	36.13	54.00	-17.87	AV
H	9608.00	48.23	30.85	7.45	24.69	49.52	74.00	-24.48	Pk
H	9608.00	34.81	30.85	7.45	24.69	36.10	54.00	-17.90	AV
H	12010.00	46.49	31.02	8.99	25.57	50.03	74.00	-23.97	Pk
H	12010.00	32.76	31.02	8.99	25.57	36.30	54.00	-17.70	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	56.80	30.55	5.77	24.66	56.68	74.00	-17.32	Pk
V	4882.00	42.40	30.55	5.77	24.66	42.28	54.00	-11.72	AV
V	7323.00	52.76	30.33	6.32	24.55	53.30	74.00	-20.70	Pk
V	7323.00	36.71	30.33	6.32	24.55	37.25	54.00	-16.75	AV
V	9764.00	51.33	30.85	7.45	24.69	52.62	74.00	-21.38	Pk
V	9764.00	34.92	30.85	7.45	24.69	36.21	54.00	-17.79	AV
V	12205.00	55.91	31.02	8.99	25.57	59.45	74.00	-14.55	Pk
V	12205.00	37.63	31.02	8.99	25.57	41.17	54.00	-12.83	AV
H	4882.00	53.73	30.55	5.77	24.66	53.61	74.00	-20.39	Pk
H	4882.00	37.48	30.55	5.77	24.66	37.36	54.00	-16.64	AV
H	7323.00	51.05	30.33	6.32	24.55	51.59	74.00	-22.41	Pk
H	7323.00	35.95	30.33	6.32	24.55	36.49	54.00	-17.51	AV
H	9764.00	48.79	30.85	7.45	24.69	50.08	74.00	-23.92	Pk
H	9764.00	34.35	30.85	7.45	24.69	35.64	54.00	-18.36	AV
H	12205.00	46.89	31.02	8.99	25.57	50.43	74.00	-23.57	Pk
H	12205.00	32.26	31.02	8.99	25.57	35.80	54.00	-18.20	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	56.82	30.55	5.77	24.66	56.70	74.00	-17.30	Pk
V	4960.00	42.87	30.55	5.77	24.66	42.75	54.00	-11.25	AV
V	7440.00	53.19	30.33	6.32	24.55	53.73	74.00	-20.27	Pk
V	7440.00	36.97	30.33	6.32	24.55	37.51	54.00	-16.49	AV
V	9920.00	51.06	30.85	7.45	24.69	52.35	74.00	-21.65	Pk
V	9920.00	34.93	30.85	7.45	24.69	36.22	54.00	-17.78	AV
V	12400.00	55.30	31.02	8.99	25.57	58.84	74.00	-15.16	Pk
V	12400.00	38.32	31.02	8.99	25.57	41.86	54.00	-12.14	AV
H	4960.00	54.09	30.55	5.77	24.66	53.97	74.00	-20.03	Pk
H	4960.00	37.24	30.55	5.77	24.66	37.12	54.00	-16.88	AV
H	7440.00	50.29	30.33	6.32	24.55	50.83	74.00	-23.17	Pk
H	7440.00	35.58	30.33	6.32	24.55	36.12	54.00	-17.88	AV
H	9920.00	48.66	30.85	7.45	24.69	49.95	74.00	-24.05	Pk
H	9920.00	34.31	30.85	7.45	24.69	35.60	54.00	-18.40	AV
H	12400.00	46.78	31.02	8.99	25.57	50.32	74.00	-23.68	Pk
H	12400.00	32.60	31.02	8.99	25.57	36.14	54.00	-17.86	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



right earbud:

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	57.16	30.55	5.77	24.66	57.04	74.00	-16.96	Pk
V	4804.00	42.34	30.55	5.77	24.66	42.22	54.00	-11.78	AV
V	7206.00	52.68	30.33	6.32	24.55	53.22	74.00	-20.78	Pk
V	7206.00	36.59	30.33	6.32	24.55	37.13	54.00	-16.87	AV
V	9608.00	51.35	30.85	7.45	24.69	52.64	74.00	-21.36	Pk
V	9608.00	35.14	30.85	7.45	24.69	36.43	54.00	-17.57	AV
V	12010.00	55.61	31.02	8.99	25.57	59.15	74.00	-14.85	Pk
V	12010.00	38.36	31.02	8.99	25.57	41.90	54.00	-12.10	AV
H	4804.00	54.01	30.55	5.77	24.66	53.89	74.00	-20.11	Pk
H	4804.00	36.60	30.55	5.77	24.66	36.48	54.00	-17.52	AV
H	7206.00	50.28	30.33	6.32	24.55	50.82	74.00	-23.18	Pk
H	7206.00	35.99	30.33	6.32	24.55	36.53	54.00	-17.47	AV
H	9608.00	48.44	30.85	7.45	24.69	49.73	74.00	-24.27	Pk
H	9608.00	34.75	30.85	7.45	24.69	36.04	54.00	-17.96	AV
H	12010.00	46.72	31.02	8.99	25.57	50.26	74.00	-23.74	Pk
H	12010.00	33.10	31.02	8.99	25.57	36.64	54.00	-17.36	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	56.55	30.55	5.77	24.66	56.43	74.00	-17.57	Pk
V	4882.00	42.50	30.55	5.77	24.66	42.38	54.00	-11.62	AV
V	7323.00	52.99	30.33	6.32	24.55	53.53	74.00	-20.47	Pk
V	7323.00	37.50	30.33	6.32	24.55	38.04	54.00	-15.96	AV
V	9764.00	50.67	30.85	7.45	24.69	51.96	74.00	-22.04	Pk
V	9764.00	34.54	30.85	7.45	24.69	35.83	54.00	-18.17	AV
V	12205.00	55.92	31.02	8.99	25.57	59.46	74.00	-14.54	Pk
V	12205.00	38.29	31.02	8.99	25.57	41.83	54.00	-12.17	AV
H	4882.00	53.38	30.55	5.77	24.66	53.26	74.00	-20.74	Pk
H	4882.00	36.96	30.55	5.77	24.66	36.84	54.00	-17.16	AV
H	7323.00	50.80	30.33	6.32	24.55	51.34	74.00	-22.66	Pk
H	7323.00	35.99	30.33	6.32	24.55	36.53	54.00	-17.47	AV
H	9764.00	49.00	30.85	7.45	24.69	50.29	74.00	-23.71	Pk
H	9764.00	34.22	30.85	7.45	24.69	35.51	54.00	-18.49	AV
H	12205.00	46.77	31.02	8.99	25.57	50.31	74.00	-23.69	Pk
H	12205.00	32.51	31.02	8.99	25.57	36.05	54.00	-17.95	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	56.92	30.55	5.77	24.66	56.80	74.00	-17.20	Pk
V	4960.00	42.59	30.55	5.77	24.66	42.47	54.00	-11.53	AV
V	7440.00	53.14	30.33	6.32	24.55	53.68	74.00	-20.32	Pk
V	7440.00	36.54	30.33	6.32	24.55	37.08	54.00	-16.92	AV
V	9920.00	51.37	30.85	7.45	24.69	52.66	74.00	-21.34	Pk
V	9920.00	34.22	30.85	7.45	24.69	35.51	54.00	-18.49	AV
V	12400.00	56.17	31.02	8.99	25.57	59.71	74.00	-14.29	Pk
V	12400.00	37.58	31.02	8.99	25.57	41.12	54.00	-12.88	AV
H	4960.00	53.64	30.55	5.77	24.66	53.52	74.00	-20.48	Pk
H	4960.00	37.24	30.55	5.77	24.66	37.12	54.00	-16.88	AV
H	7440.00	50.39	30.33	6.32	24.55	50.93	74.00	-23.07	Pk
H	7440.00	36.13	30.33	6.32	24.55	36.67	54.00	-17.33	AV
H	9920.00	48.98	30.85	7.45	24.69	50.27	74.00	-23.73	Pk
H	9920.00	35.09	30.85	7.45	24.69	36.38	54.00	-17.62	AV
H	12400.00	46.64	31.02	8.99	25.57	50.18	74.00	-23.82	Pk
H	12400.00	32.76	31.02	8.99	25.57	36.30	54.00	-17.70	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



$\pi/4$ DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	56.86	30.55	5.77	24.66	56.74	74.00	-17.26	Pk
V	4804.00	42.76	30.55	5.77	24.66	42.64	54.00	-11.36	AV
V	7206.00	53.32	30.33	6.32	24.55	53.86	74.00	-20.14	Pk
V	7206.00	36.91	30.33	6.32	24.55	37.45	54.00	-16.55	AV
V	9608.00	50.75	30.85	7.45	24.69	52.04	74.00	-21.96	Pk
V	9608.00	34.32	30.85	7.45	24.69	35.61	54.00	-18.39	AV
V	12010.00	55.25	31.02	8.99	25.57	58.79	74.00	-15.21	Pk
V	12010.00	38.40	31.02	8.99	25.57	41.94	54.00	-12.06	AV
H	4804.00	53.43	30.55	5.77	24.66	53.31	74.00	-20.69	Pk
H	4804.00	37.24	30.55	5.77	24.66	37.12	54.00	-16.88	AV
H	7206.00	50.41	30.33	6.32	24.55	50.95	74.00	-23.05	Pk
H	7206.00	36.12	30.33	6.32	24.55	36.66	54.00	-17.34	AV
H	9608.00	49.10	30.85	7.45	24.69	50.39	74.00	-23.61	Pk
H	9608.00	35.10	30.85	7.45	24.69	36.39	54.00	-17.61	AV
H	12010.00	47.04	31.02	8.99	25.57	50.58	74.00	-23.42	Pk
H	12010.00	33.04	31.02	8.99	25.57	36.58	54.00	-17.42	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	57.24	30.55	5.77	24.66	57.12	74.00	-16.88	Pk
V	4882.00	42.82	30.55	5.77	24.66	42.70	54.00	-11.30	AV
V	7323.00	53.07	30.33	6.32	24.55	53.61	74.00	-20.39	Pk
V	7323.00	36.66	30.33	6.32	24.55	37.20	54.00	-16.80	AV
V	9764.00	50.71	30.85	7.45	24.69	52.00	74.00	-22.00	Pk
V	9764.00	34.95	30.85	7.45	24.69	36.24	54.00	-17.76	AV
V	12205.00	55.18	31.02	8.99	25.57	58.72	74.00	-15.28	Pk
V	12205.00	38.48	31.02	8.99	25.57	42.02	54.00	-11.98	AV
H	4882.00	53.89	30.55	5.77	24.66	53.77	74.00	-20.23	Pk
H	4882.00	36.69	30.55	5.77	24.66	36.57	54.00	-17.43	AV
H	7323.00	51.17	30.33	6.32	24.55	51.71	74.00	-22.29	Pk
H	7323.00	35.88	30.33	6.32	24.55	36.42	54.00	-17.58	AV
H	9764.00	48.91	30.85	7.45	24.69	50.20	74.00	-23.80	Pk
H	9764.00	34.57	30.85	7.45	24.69	35.86	54.00	-18.14	AV
H	12205.00	46.93	31.02	8.99	25.57	50.47	74.00	-23.53	Pk
H	12205.00	32.18	31.02	8.99	25.57	35.72	54.00	-18.28	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	57.00	30.55	5.77	24.66	56.88	74.00	-17.12	Pk
V	4960.00	42.54	30.55	5.77	24.66	42.42	54.00	-11.58	AV
V	7440.00	53.23	30.33	6.32	24.55	53.77	74.00	-20.23	Pk
V	7440.00	37.22	30.33	6.32	24.55	37.76	54.00	-16.24	AV
V	9920.00	50.84	30.85	7.45	24.69	52.13	74.00	-21.87	Pk
V	9920.00	35.05	30.85	7.45	24.69	36.34	54.00	-17.66	AV
V	12400.00	55.64	31.02	8.99	25.57	59.18	74.00	-14.82	Pk
V	12400.00	37.54	31.02	8.99	25.57	41.08	54.00	-12.92	AV
H	4960.00	53.64	30.55	5.77	24.66	53.52	74.00	-20.48	Pk
H	4960.00	37.09	30.55	5.77	24.66	36.97	54.00	-17.03	AV
H	7440.00	50.91	30.33	6.32	24.55	51.45	74.00	-22.55	Pk
H	7440.00	36.12	30.33	6.32	24.55	36.66	54.00	-17.34	AV
H	9920.00	49.07	30.85	7.45	24.69	50.36	74.00	-23.64	Pk
H	9920.00	34.92	30.85	7.45	24.69	36.21	54.00	-17.79	AV
H	12400.00	46.29	31.02	8.99	25.57	49.83	74.00	-24.17	Pk
H	12400.00	33.18	31.02	8.99	25.57	36.72	54.00	-17.28	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	56.97	30.55	5.77	24.66	56.85	74.00	-17.15	Pk
V	4804.00	42.32	30.55	5.77	24.66	42.20	54.00	-11.80	AV
V	7206.00	52.70	30.33	6.32	24.55	53.24	74.00	-20.76	Pk
V	7206.00	37.49	30.33	6.32	24.55	38.03	54.00	-15.97	AV
V	9608.00	50.95	30.85	7.45	24.69	52.24	74.00	-21.76	Pk
V	9608.00	34.56	30.85	7.45	24.69	35.85	54.00	-18.15	AV
V	12010.00	55.97	31.02	8.99	25.57	59.51	74.00	-14.49	Pk
V	12010.00	37.95	31.02	8.99	25.57	41.49	54.00	-12.51	AV
H	4804.00	53.96	30.55	5.77	24.66	53.84	74.00	-20.16	Pk
H	4804.00	36.89	30.55	5.77	24.66	36.77	54.00	-17.23	AV
H	7206.00	50.82	30.33	6.32	24.55	51.36	74.00	-22.64	Pk
H	7206.00	35.50	30.33	6.32	24.55	36.04	54.00	-17.96	AV
H	9608.00	48.55	30.85	7.45	24.69	49.84	74.00	-24.16	Pk
H	9608.00	34.83	30.85	7.45	24.69	36.12	54.00	-17.88	AV
H	12010.00	46.89	31.02	8.99	25.57	50.43	74.00	-23.57	Pk
H	12010.00	33.07	31.02	8.99	25.57	36.61	54.00	-17.39	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	56.90	30.55	5.77	24.66	56.78	74.00	-17.22	Pk
V	4882.00	43.12	30.55	5.77	24.66	43.00	54.00	-11.00	AV
V	7323.00	52.92	30.33	6.32	24.55	53.46	74.00	-20.54	Pk
V	7323.00	37.11	30.33	6.32	24.55	37.65	54.00	-16.35	AV
V	9764.00	51.21	30.85	7.45	24.69	52.50	74.00	-21.50	Pk
V	9764.00	34.58	30.85	7.45	24.69	35.87	54.00	-18.13	AV
V	12205.00	55.53	31.02	8.99	25.57	59.07	74.00	-14.93	Pk
V	12205.00	37.57	31.02	8.99	25.57	41.11	54.00	-12.89	AV
H	4882.00	53.48	30.55	5.77	24.66	53.36	74.00	-20.64	Pk
H	4882.00	36.84	30.55	5.77	24.66	36.72	54.00	-17.28	AV
H	7323.00	50.86	30.33	6.32	24.55	51.40	74.00	-22.60	Pk
H	7323.00	35.50	30.33	6.32	24.55	36.04	54.00	-17.96	AV
H	9764.00	48.68	30.85	7.45	24.69	49.97	74.00	-24.03	Pk
H	9764.00	35.16	30.85	7.45	24.69	36.45	54.00	-17.55	AV
H	12205.00	46.70	31.02	8.99	25.57	50.24	74.00	-23.76	Pk
H	12205.00	32.73	31.02	8.99	25.57	36.27	54.00	-17.73	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	57.50	30.55	5.77	24.66	57.38	74.00	-16.62	Pk
V	4960.00	42.46	30.55	5.77	24.66	42.34	54.00	-11.66	AV
V	7440.00	53.01	30.33	6.32	24.55	53.55	74.00	-20.45	Pk
V	7440.00	36.52	30.33	6.32	24.55	37.06	54.00	-16.94	AV
V	9920.00	50.55	30.85	7.45	24.69	51.84	74.00	-22.16	Pk
V	9920.00	34.20	30.85	7.45	24.69	35.49	54.00	-18.51	AV
V	12400.00	55.25	31.02	8.99	25.57	58.79	74.00	-15.21	Pk
V	12400.00	37.66	31.02	8.99	25.57	41.20	54.00	-12.80	AV
H	4960.00	53.52	30.55	5.77	24.66	53.40	74.00	-20.60	Pk
H	4960.00	36.94	30.55	5.77	24.66	36.82	54.00	-17.18	AV
H	7440.00	50.22	30.33	6.32	24.55	50.76	74.00	-23.24	Pk
H	7440.00	35.73	30.33	6.32	24.55	36.27	54.00	-17.73	AV
H	9920.00	48.23	30.85	7.45	24.69	49.52	74.00	-24.48	Pk
H	9920.00	34.91	30.85	7.45	24.69	36.20	54.00	-17.80	AV
H	12400.00	46.44	31.02	8.99	25.57	49.98	74.00	-24.02	Pk
H	12400.00	32.33	31.02	8.99	25.57	35.87	54.00	-18.13	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

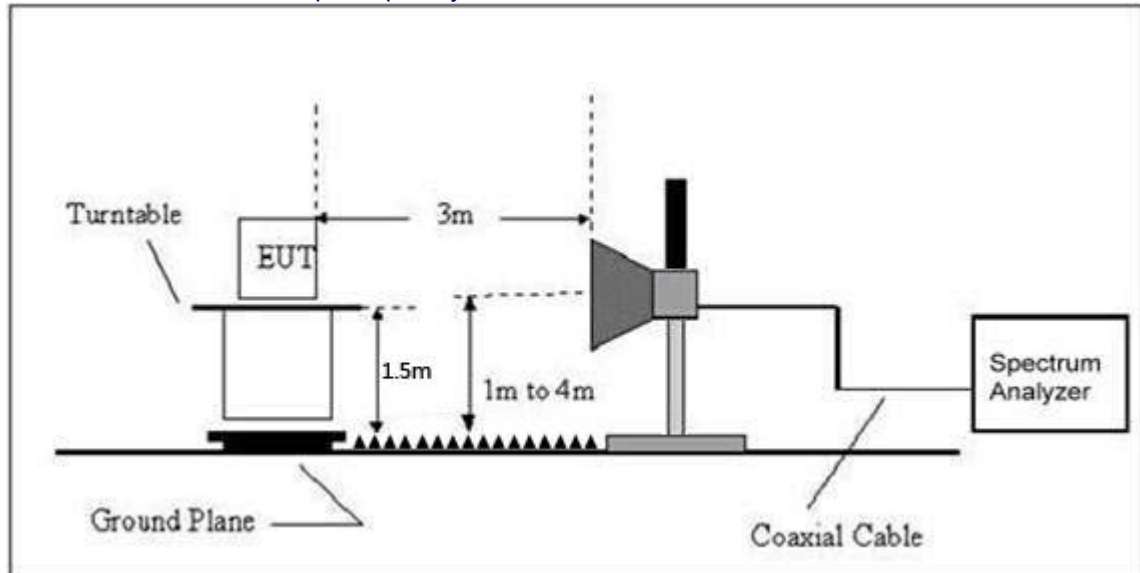

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

left earbud:

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	59.89	30.22	4.85	23.98	58.50	74.00	PK	PASS
	H	2390.00	47.33	30.22	4.85	23.98	45.94	54.00	AV	PASS
	H	2400.00	60.64	30.22	4.85	23.98	59.25	74.00	PK	PASS
	H	2400.00	47.71	30.22	4.85	23.98	46.32	54.00	AV	PASS
	V	2390.00	59.04	30.22	4.85	23.98	57.65	74.00	PK	PASS
	V	2390.00	47.26	30.22	4.85	23.98	45.87	54.00	AV	PASS
	V	2400.00	60.13	30.22	4.85	23.98	58.74	74.00	PK	PASS
	V	2400.00	48.53	30.22	4.85	23.98	47.14	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	59.88	30.22	4.85	23.98	58.49	74.00	PK	PASS
	H	2485.50	48.29	30.22	4.85	23.98	46.90	54.00	AV	PASS
	H	2483.50	59.34	30.22	4.85	23.98	57.95	74.00	PK	PASS
	H	2485.50	47.52	30.22	4.85	23.98	46.13	54.00	AV	PASS
	V	2483.50	59.71	30.22	4.85	23.98	58.32	74.00	PK	PASS
	V	2485.50	48.95	30.22	4.85	23.98	47.56	54.00	AV	PASS
$\pi/4$ DQPS K	Low Channel: 2402MHz									
	H	2390.00	59.35	30.22	4.85	23.98	57.96	74.00	PK	PASS
	H	2390.00	47.71	30.22	4.85	23.98	46.32	54.00	AV	PASS
	H	2400.00	59.93	30.22	4.85	23.98	58.54	74.00	PK	PASS
	H	2400.00	47.74	30.22	4.85	23.98	46.35	54.00	AV	PASS
	V	2390.00	58.33	30.22	4.85	23.98	56.94	74.00	PK	PASS
	V	2390.00	47.84	30.22	4.85	23.98	46.45	54.00	AV	PASS
	V	2400.00	59.45	30.22	4.85	23.98	58.06	74.00	PK	PASS
	V	2400.00	49.04	30.22	4.85	23.98	47.65	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	60.21	30.22	4.85	23.98	58.82	74.00	PK	PASS
	H	2485.50	48.49	30.22	4.85	23.98	47.10	54.00	AV	PASS
	H	2483.50	59.18	30.22	4.85	23.98	57.79	74.00	PK	PASS
	H	2485.50	47.74	30.22	4.85	23.98	46.35	54.00	AV	PASS
	V	2483.50	59.45	30.22	4.85	23.98	58.06	74.00	PK	PASS
	V	2485.50	48.42	30.22	4.85	23.98	47.03	54.00	AV	PASS
	V	2483.50	58.35	30.22	4.85	23.98	56.96	74.00	PK	PASS
	V	2485.50	47.13	30.22	4.85	23.98	45.74	54.00	AV	PASS



8DPSK	Low Channel: 2402MHz									
	H	2390.00	59.48	30.22	4.85	23.98	58.09	74.00	PK	PASS
	H	2390.00	46.92	30.22	4.85	23.98	45.53	54.00	AV	PASS
	H	2400.00	60.11	30.22	4.85	23.98	58.72	74.00	PK	PASS
	H	2400.00	47.75	30.22	4.85	23.98	46.36	54.00	AV	PASS
	V	2390.00	58.83	30.22	4.85	23.98	57.44	74.00	PK	PASS
	V	2390.00	47.86	30.22	4.85	23.98	46.47	54.00	AV	PASS
	V	2400.00	59.79	30.22	4.85	23.98	58.40	74.00	PK	PASS
	V	2400.00	49.21	30.22	4.85	23.98	47.82	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	59.94	30.22	4.85	23.98	58.55	74.00	PK	PASS
	H	2485.50	48.69	30.22	4.85	23.98	47.30	54.00	AV	PASS
	H	2483.50	59.31	30.22	4.85	23.98	57.92	74.00	PK	PASS
	H	2485.50	47.30	30.22	4.85	23.98	45.91	54.00	AV	PASS
	V	2483.50	59.81	30.22	4.85	23.98	58.42	74.00	PK	PASS
	V	2485.50	49.05	30.22	4.85	23.98	47.66	54.00	AV	PASS
	V	2483.50	58.39	30.22	4.85	23.98	57.00	74.00	PK	PASS
	V	2485.50	47.63	30.22	4.85	23.98	46.24	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										



right earbud:

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	58.93	30.22	4.85	23.98	57.54	74.00	PK	PASS
	H	2390.00	47.68	30.22	4.85	23.98	46.29	54.00	AV	PASS
	H	2400.00	59.86	30.22	4.85	23.98	58.47	74.00	PK	PASS
	H	2400.00	47.89	30.22	4.85	23.98	46.50	54.00	AV	PASS
	V	2390.00	58.48	30.22	4.85	23.98	57.09	74.00	PK	PASS
	V	2390.00	47.79	30.22	4.85	23.98	46.40	54.00	AV	PASS
	V	2400.00	59.47	30.22	4.85	23.98	58.08	74.00	PK	PASS
	V	2400.00	48.54	30.22	4.85	23.98	47.15	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	60.38	30.22	4.85	23.98	58.99	74.00	PK	PASS
	H	2485.50	48.16	30.22	4.85	23.98	46.77	54.00	AV	PASS
	H	2483.50	59.73	30.22	4.85	23.98	58.34	74.00	PK	PASS
	H	2485.50	48.04	30.22	4.85	23.98	46.65	54.00	AV	PASS
	V	2483.50	59.26	30.22	4.85	23.98	57.87	74.00	PK	PASS
	V	2485.50	49.36	30.22	4.85	23.98	47.97	54.00	AV	PASS
	V	2483.50	58.19	30.22	4.85	23.98	56.80	74.00	PK	PASS
	V	2485.50	47.93	30.22	4.85	23.98	46.54	54.00	AV	PASS
$\pi/4$ DQPS K	Low Channel: 2402MHz									
	H	2390.00	59.42	30.22	4.85	23.98	58.03	74.00	PK	PASS
	H	2390.00	46.89	30.22	4.85	23.98	45.50	54.00	AV	PASS
	H	2400.00	60.35	30.22	4.85	23.98	58.96	74.00	PK	PASS
	H	2400.00	47.61	30.22	4.85	23.98	46.22	54.00	AV	PASS
	V	2390.00	58.62	30.22	4.85	23.98	57.23	74.00	PK	PASS
	V	2390.00	47.59	30.22	4.85	23.98	46.20	54.00	AV	PASS
	V	2400.00	60.01	30.22	4.85	23.98	58.62	74.00	PK	PASS
	V	2400.00	49.21	30.22	4.85	23.98	47.82	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	60.24	30.22	4.85	23.98	58.85	74.00	PK	PASS
	H	2485.50	48.75	30.22	4.85	23.98	47.36	54.00	AV	PASS
	H	2483.50	59.83	30.22	4.85	23.98	58.44	74.00	PK	PASS
	H	2485.50	47.85	30.22	4.85	23.98	46.46	54.00	AV	PASS
	V	2483.50	59.47	30.22	4.85	23.98	58.08	74.00	PK	PASS
	V	2485.50	49.33	30.22	4.85	23.98	47.94	54.00	AV	PASS
	V	2483.50	58.16	30.22	4.85	23.98	56.77	74.00	PK	PASS
	V	2485.50	47.86	30.22	4.85	23.98	46.47	54.00	AV	PASS



8DPSK	Low Channel: 2402MHz									
	H	2390.00	59.31	30.22	4.85	23.98	57.92	74.00	PK	PASS
	H	2390.00	46.84	30.22	4.85	23.98	45.45	54.00	AV	PASS
	H	2400.00	60.67	30.22	4.85	23.98	59.28	74.00	PK	PASS
	H	2400.00	47.64	30.22	4.85	23.98	46.25	54.00	AV	PASS
	V	2390.00	58.92	30.22	4.85	23.98	57.53	74.00	PK	PASS
	V	2390.00	47.97	30.22	4.85	23.98	46.58	54.00	AV	PASS
	V	2400.00	59.35	30.22	4.85	23.98	57.96	74.00	PK	PASS
	V	2400.00	48.65	30.22	4.85	23.98	47.26	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	60.00	30.22	4.85	23.98	58.61	74.00	PK	PASS
	H	2485.50	48.73	30.22	4.85	23.98	47.34	54.00	AV	PASS
	H	2483.50	59.84	30.22	4.85	23.98	58.45	74.00	PK	PASS
	H	2485.50	47.37	30.22	4.85	23.98	45.98	54.00	AV	PASS
	V	2483.50	60.08	30.22	4.85	23.98	58.69	74.00	PK	PASS
	V	2485.50	48.47	30.22	4.85	23.98	47.08	54.00	AV	PASS
	V	2483.50	57.67	30.22	4.85	23.98	56.28	74.00	PK	PASS
	V	2485.50	47.86	30.22	4.85	23.98	46.47	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										



6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup



6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD


No deviation.



6.5 Test Result

left earbud:
GFSK mode:


Test channel:	Lowest channel
---------------	----------------

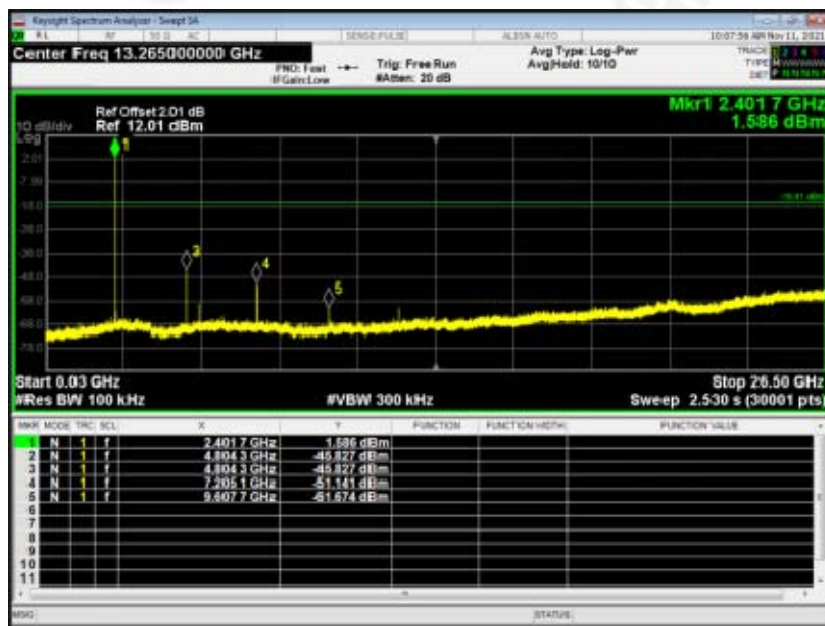

30MHz~26.5GHz




Test channel:	Middle channel
---------------	----------------

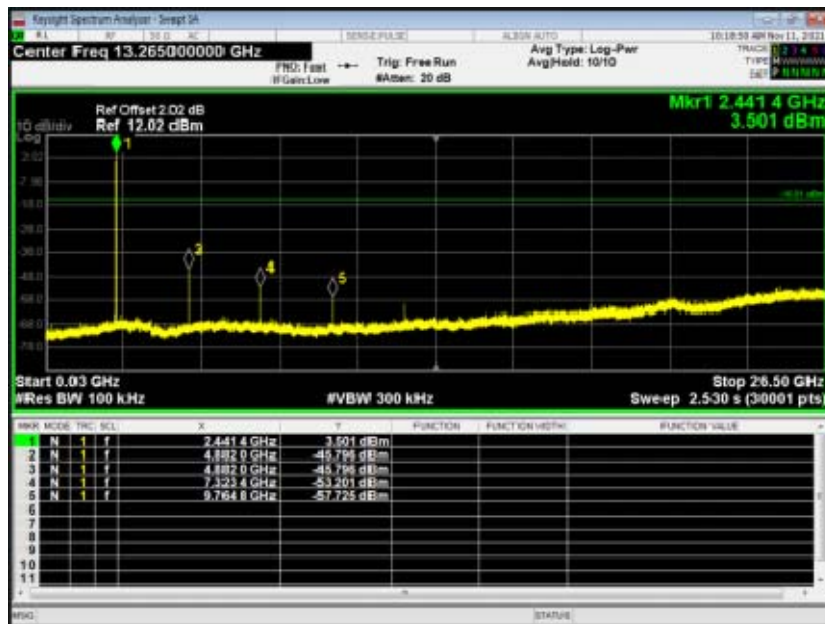

30MHz~26.5GHz



Test channel:	Highest channel
---------------	-----------------

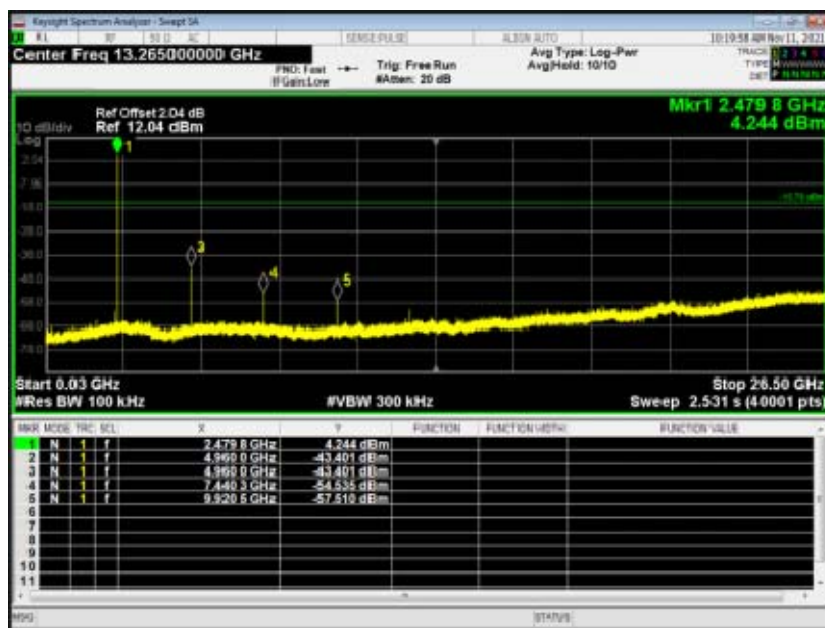


30MHz~26.5GHz



$\pi/4$ DQPSK mode:


Test channel:	Lowest channel
---------------	----------------

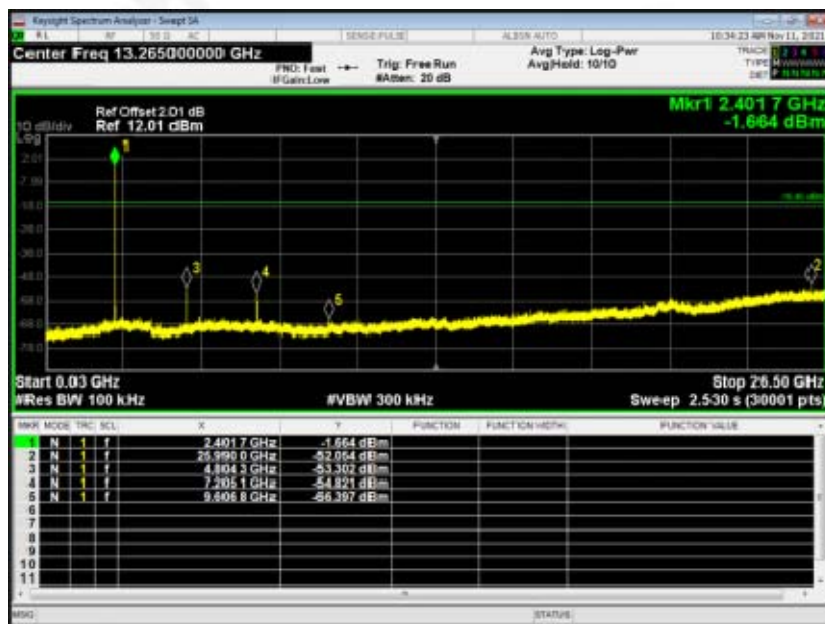

30MHz~26.5GHz




Test channel:	Middle channel
---------------	----------------

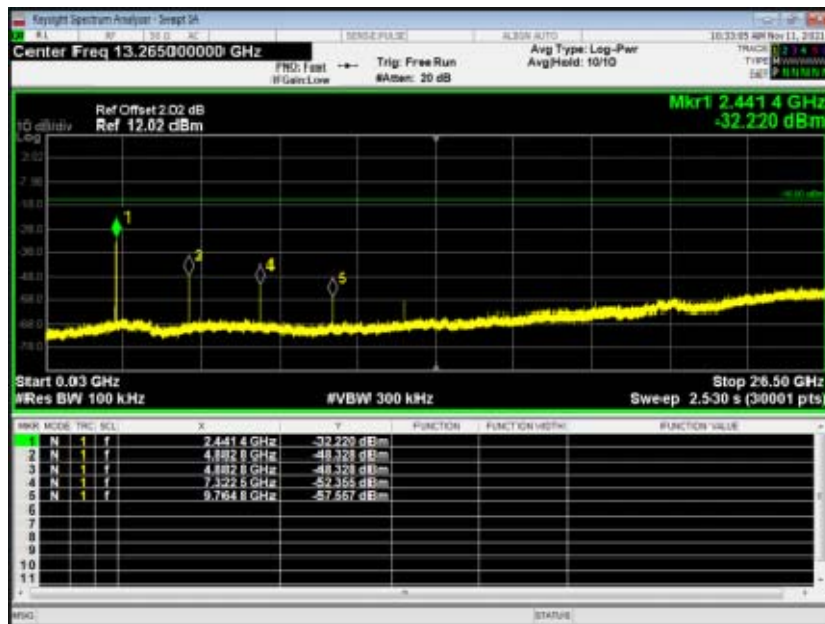

30MHz~26.5GHz



Test channel:	Highest channel
---------------	-----------------

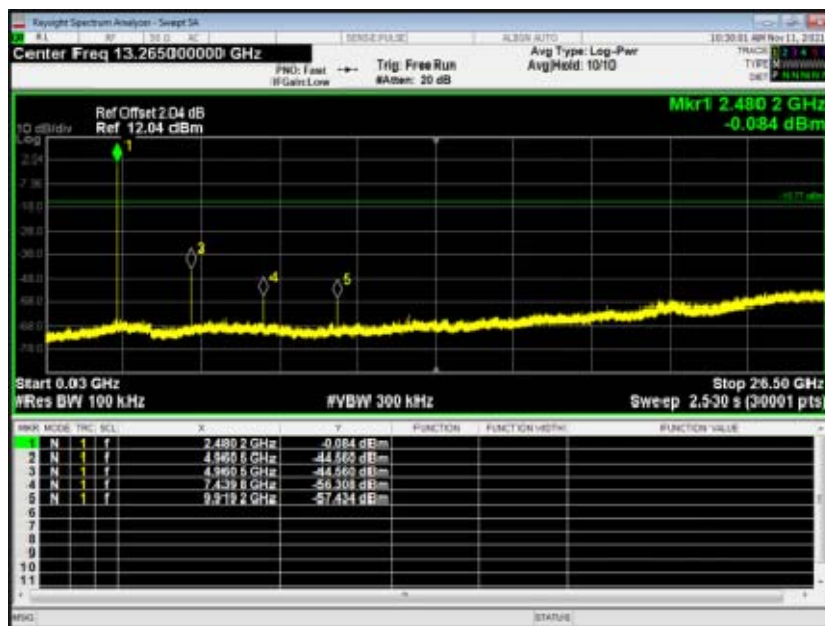


30MHz~26.5GHz



8DPSK mode:


Test channel:	Lowest channel
---------------	----------------

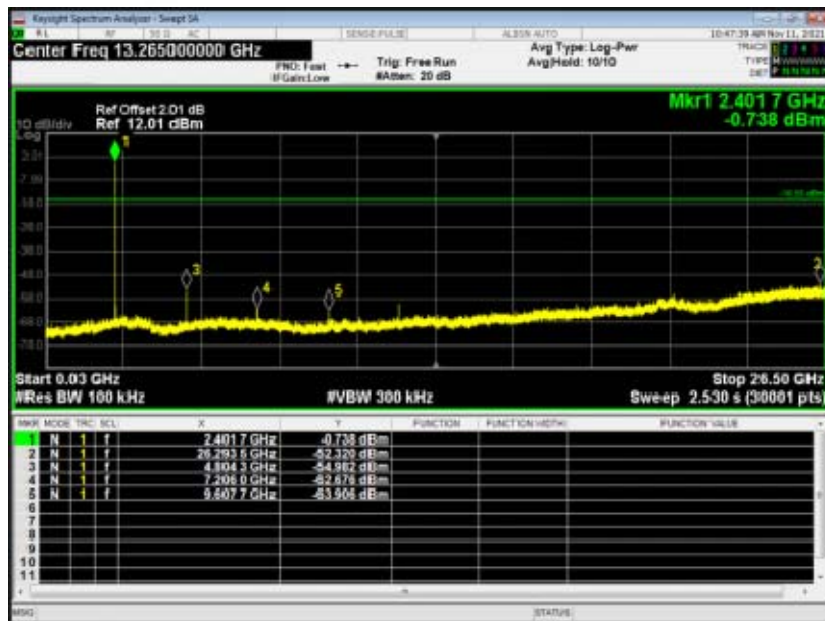

30MHz~26.5GHz




Test channel:	Middle channel
---------------	----------------

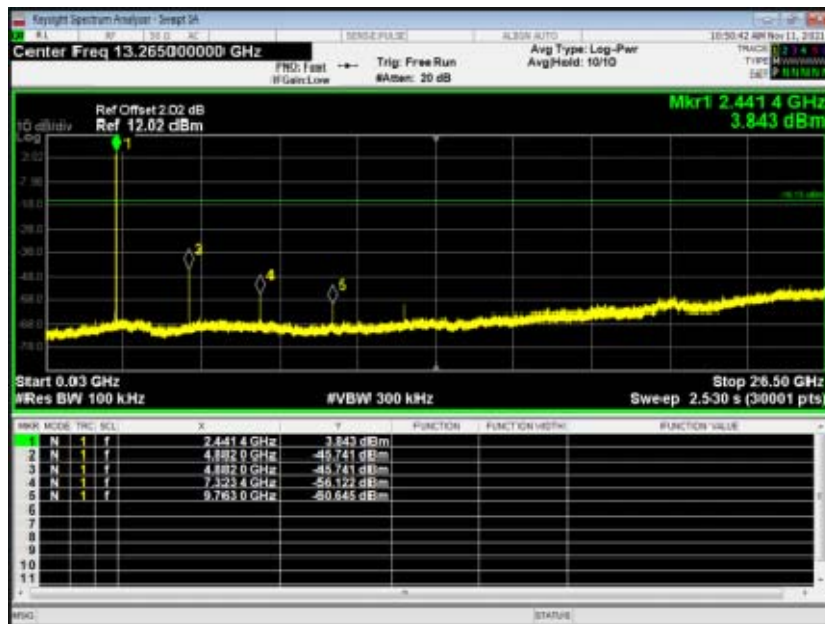

30MHz~26.5GHz




Test channel:	Highest channel
---------------	-----------------

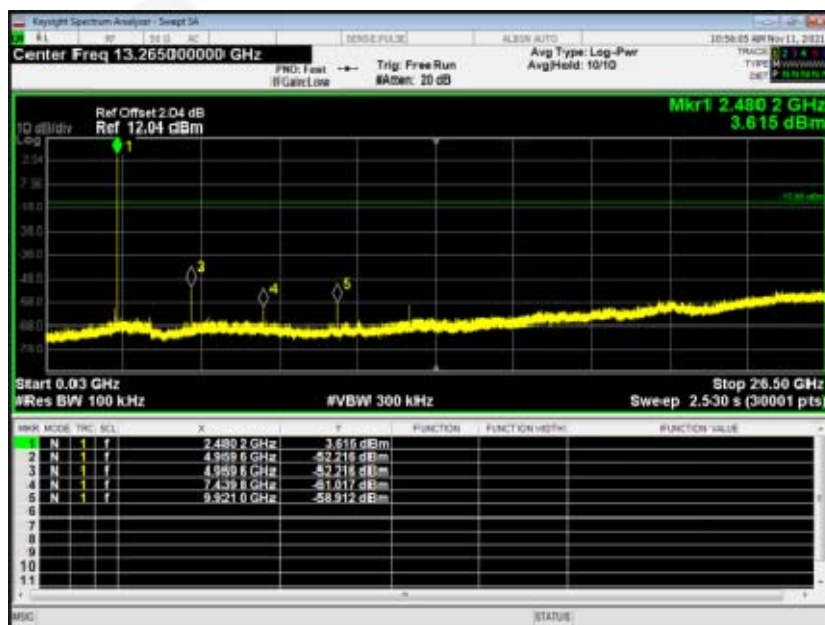


30MHz~26.5GHz



GFSK No-hopping Band edge-left side

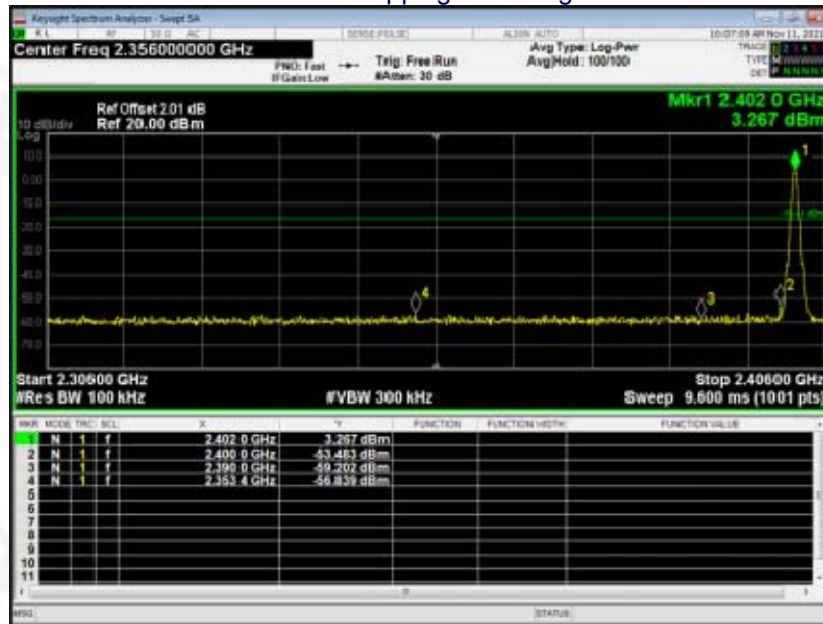


GFSK Hopping Band edge-left side

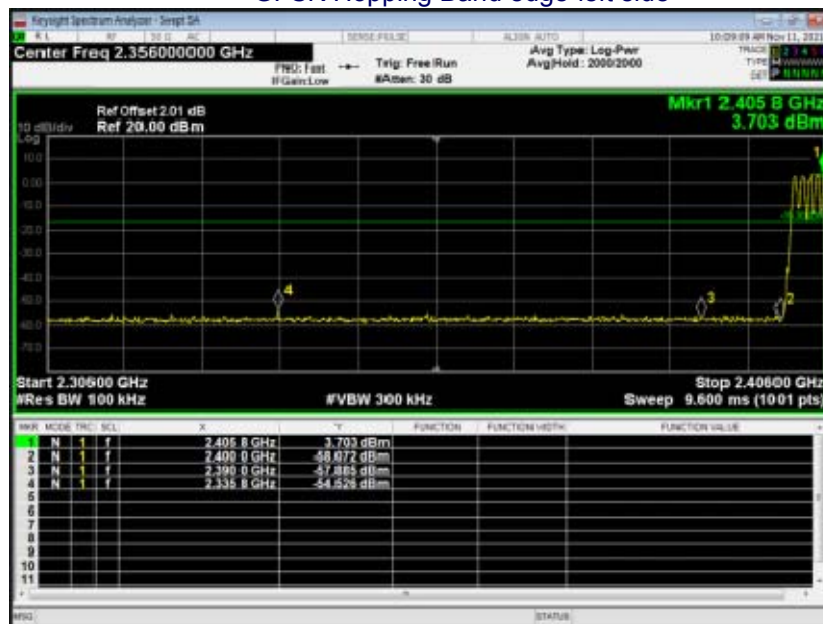




GFSK No-hopping Band edge-right side

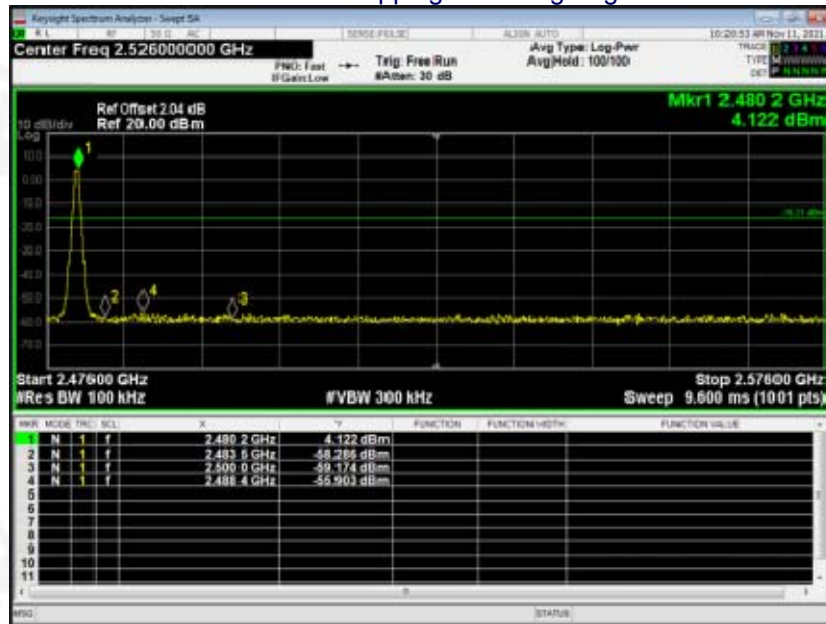


GFSK Hopping Band edge-right side

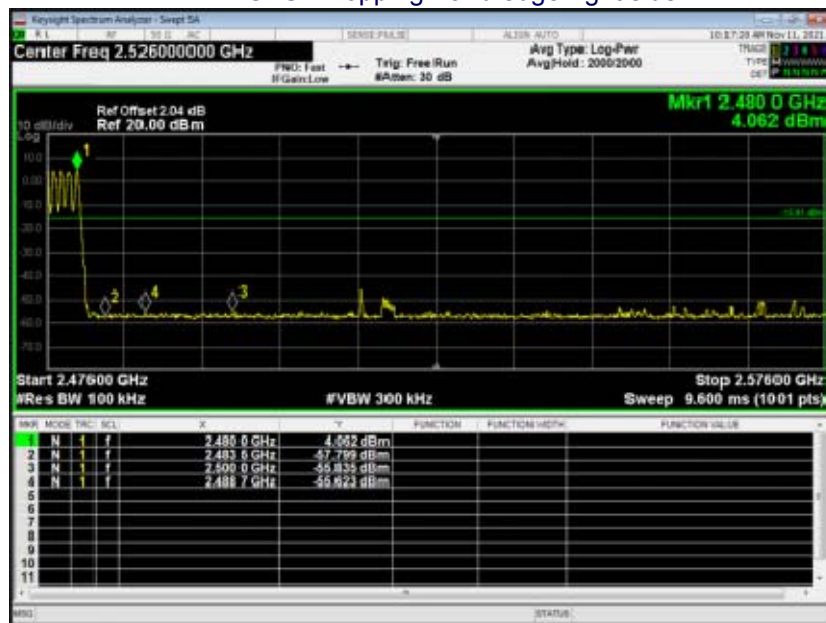




$\pi/4$ DQPSK No-hopping Band edge-left side

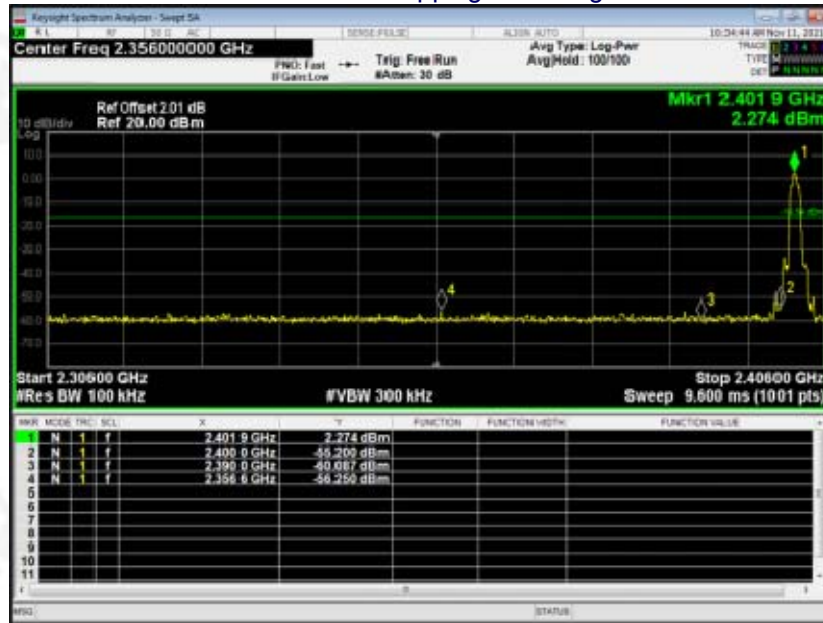


$\pi/4$ DQPSK Hopping Band edge-left side

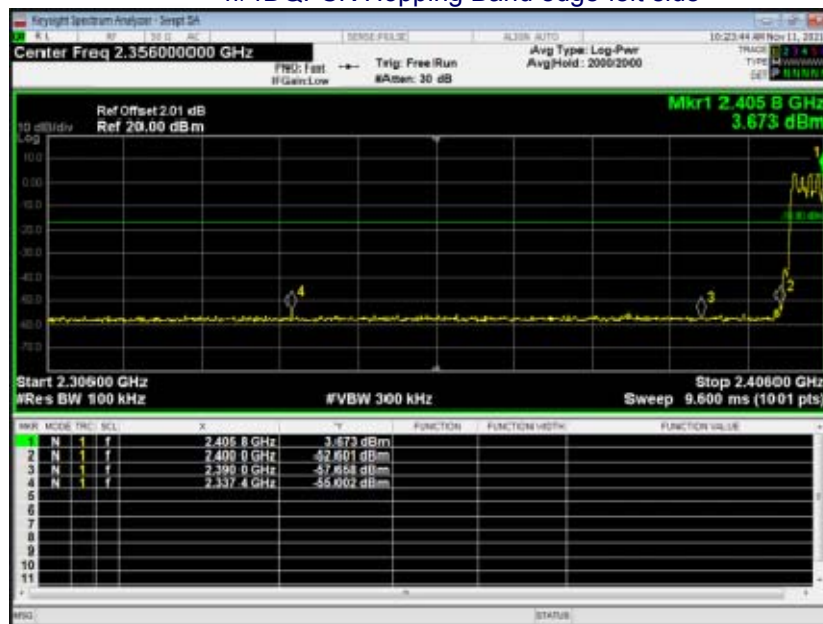




$\pi/4$ DQPSK No-hopping Band edge-right side

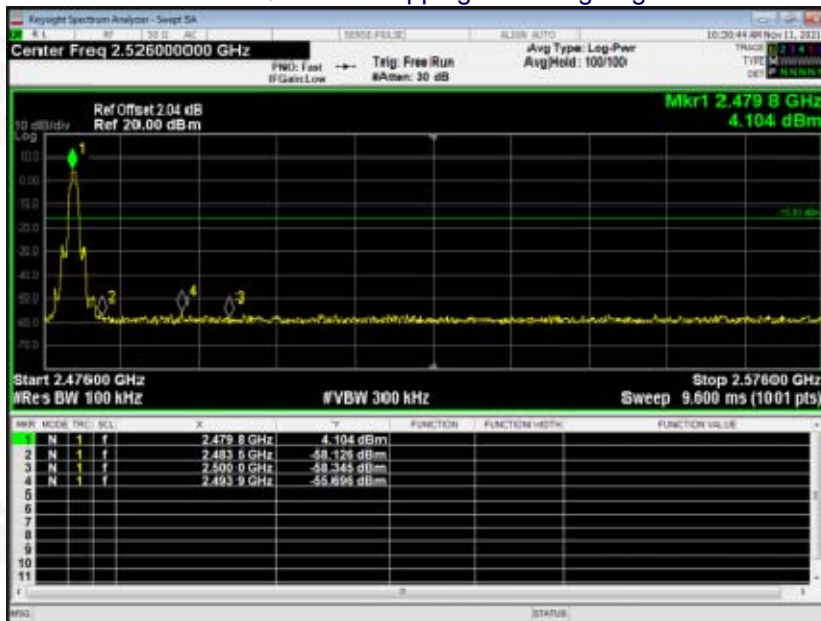


$\pi/4$ DQPSK Hopping Band edge-right side

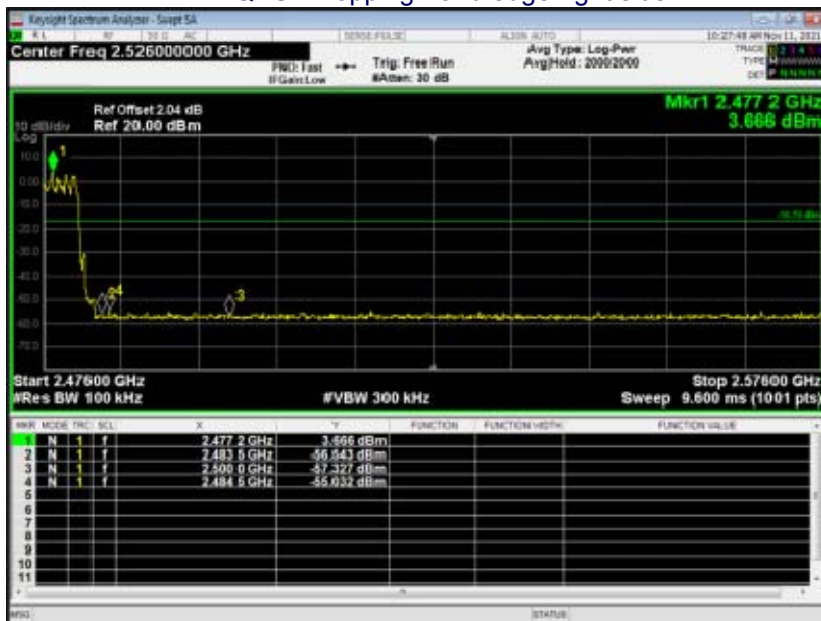




8DPSK No-hopping Band edge-left side

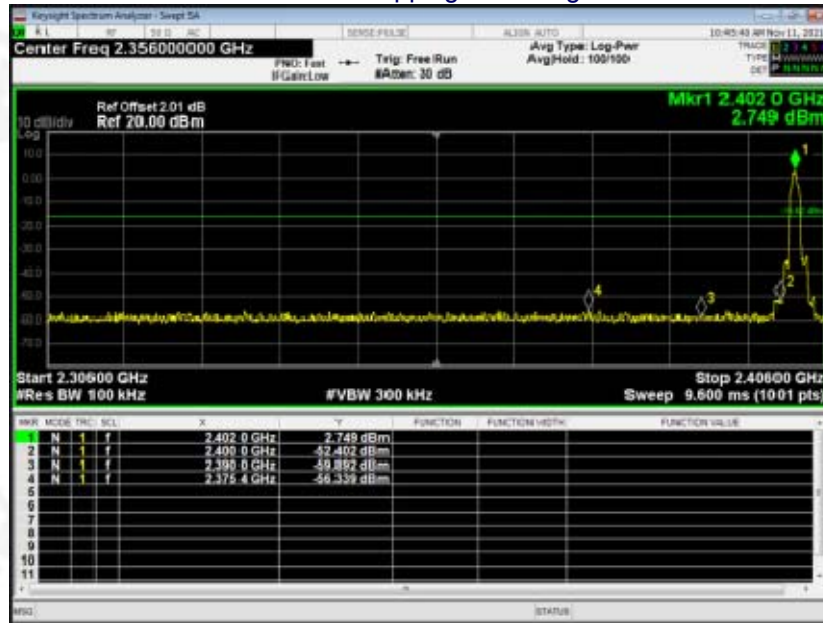


8DPSK Hopping Band edge-left side

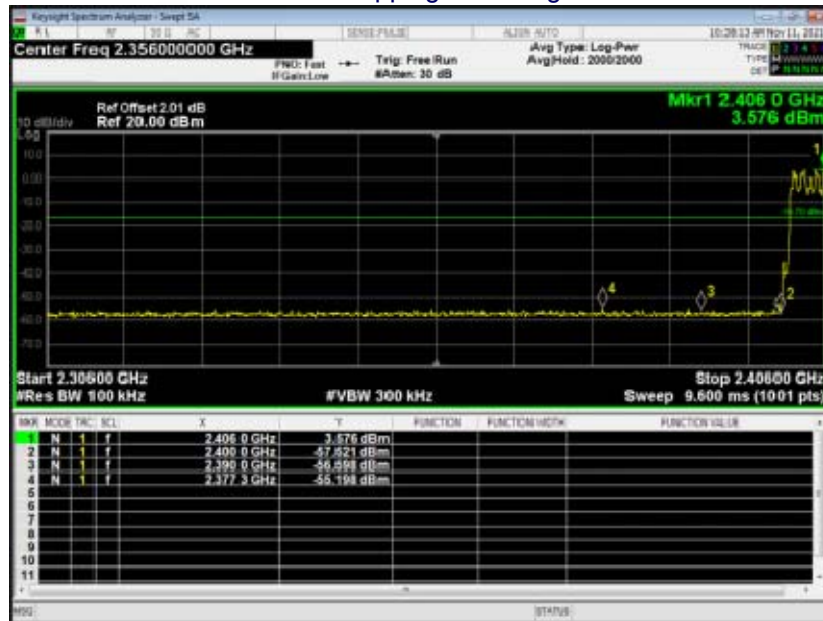




8DPSK No-hopping Band edge-right side

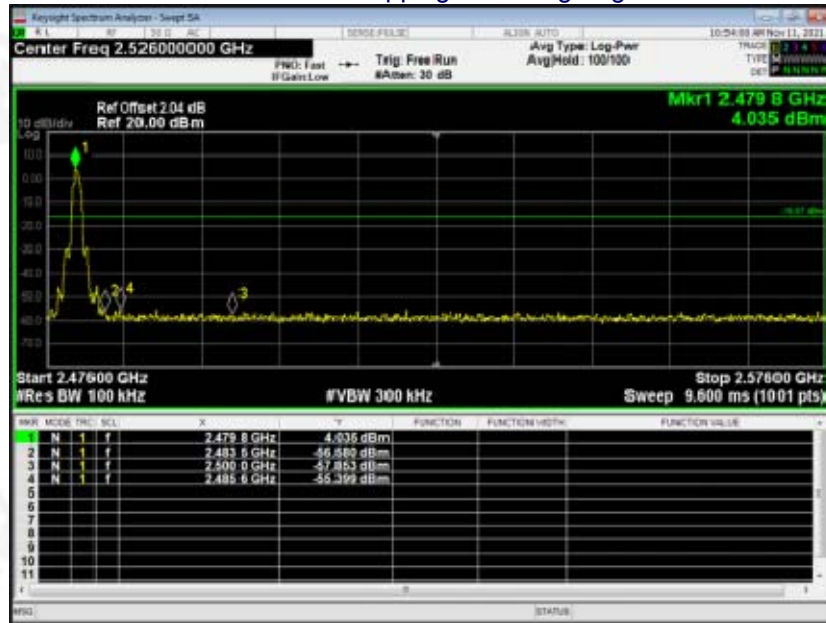


8DPSK Hopping Band edge-right side

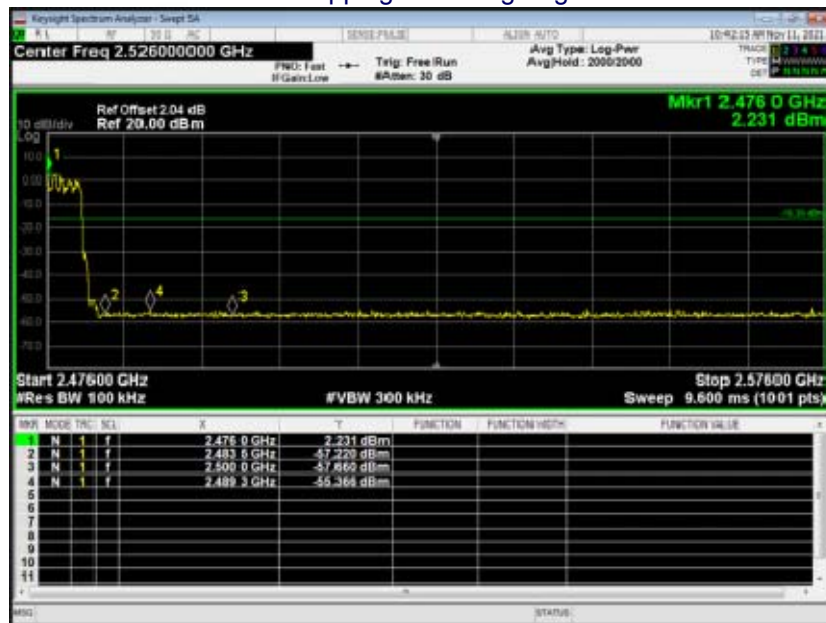



right earbud:
GFSK mode:


Test channel:	Lowest channel
---------------	----------------

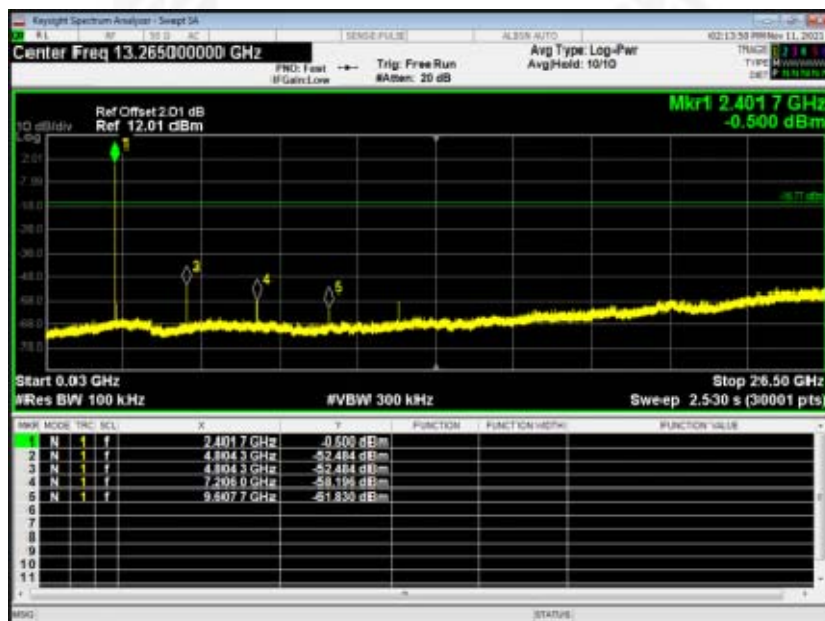

30MHz~26.5GHz




Test channel:	Middle channel
---------------	----------------

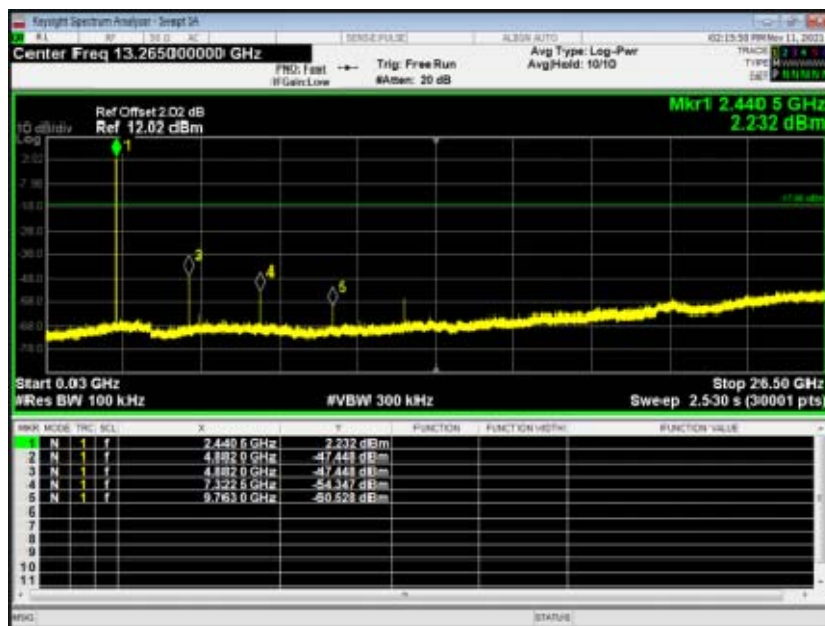

30MHz~26.5GHz



Test channel:	Highest channel
---------------	-----------------

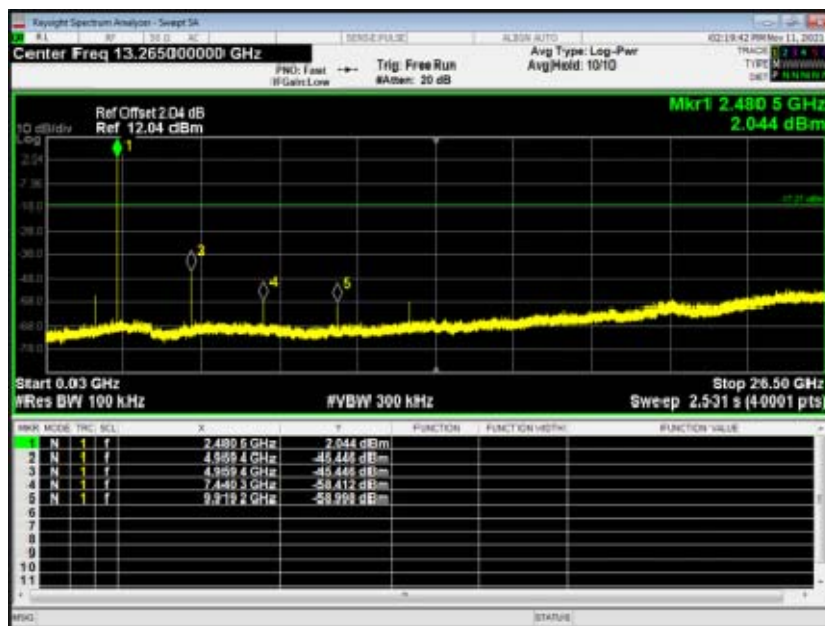


30MHz~26.5GHz



$\pi/4$ DQPSK mode:


Test channel:	Lowest channel
---------------	----------------

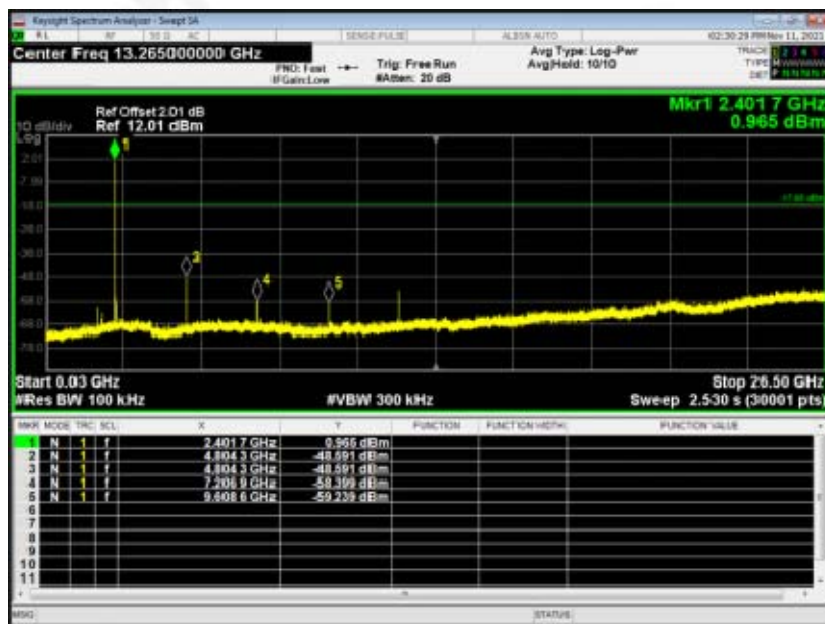

30MHz~26.5GHz




Test channel:	Middle channel
---------------	----------------

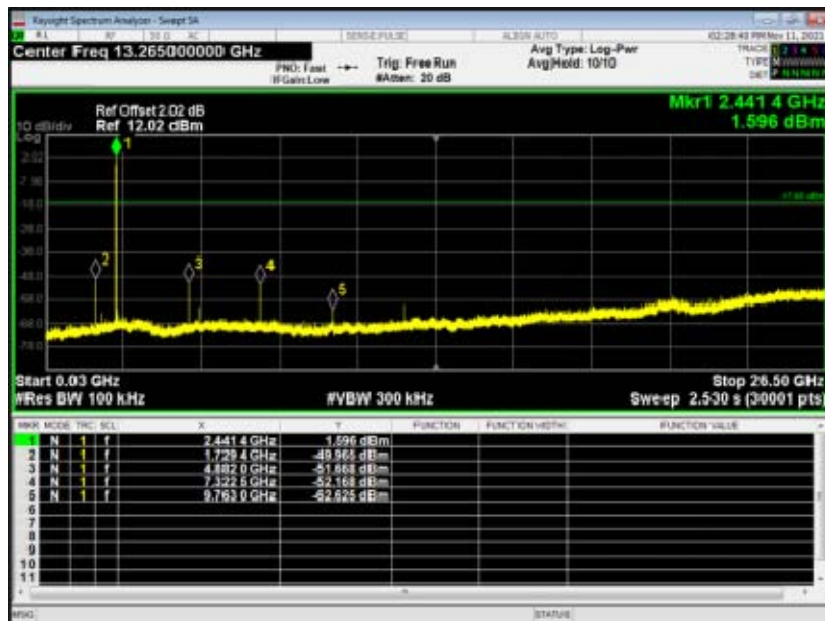

30MHz~26.5GHz



Test channel:	Highest channel
---------------	-----------------


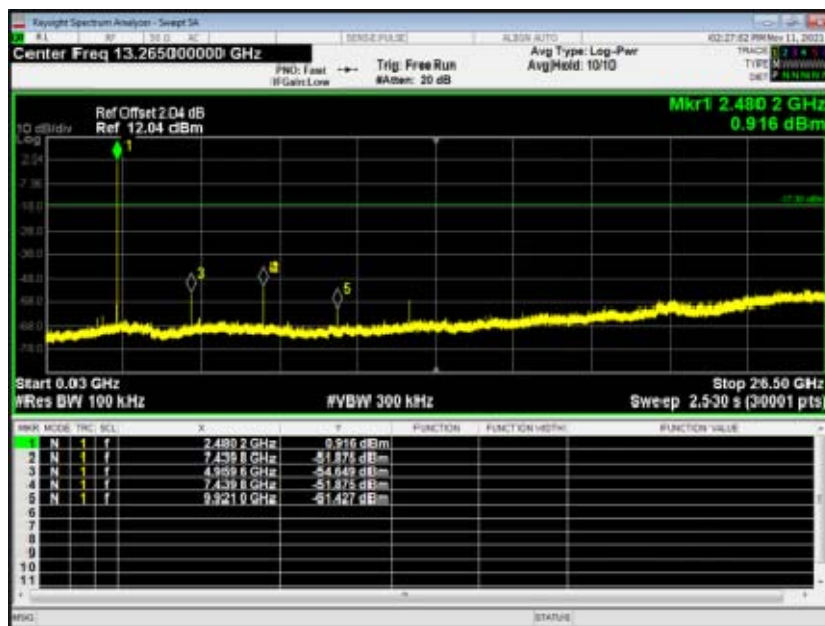


30MHz~26.5GHz



8DPSK mode:


Test channel:	Lowest channel
---------------	----------------

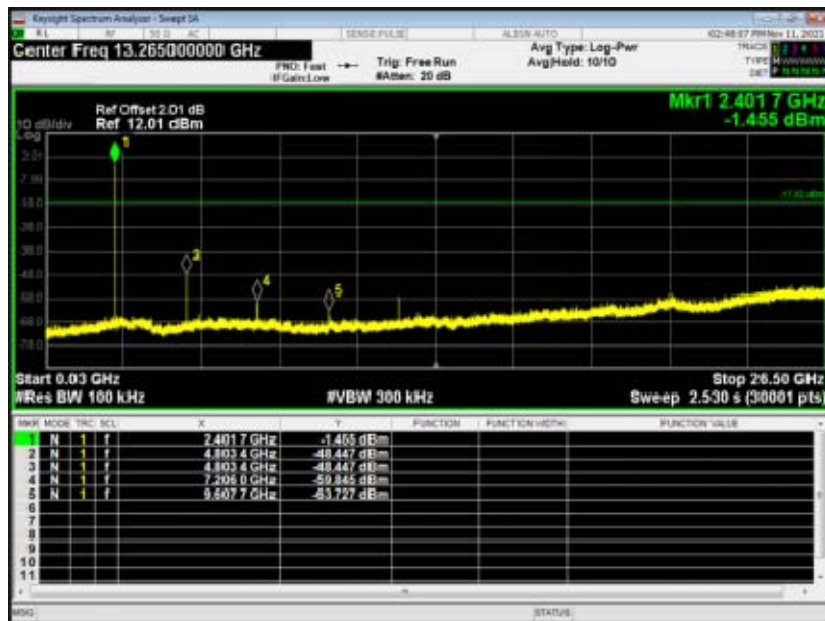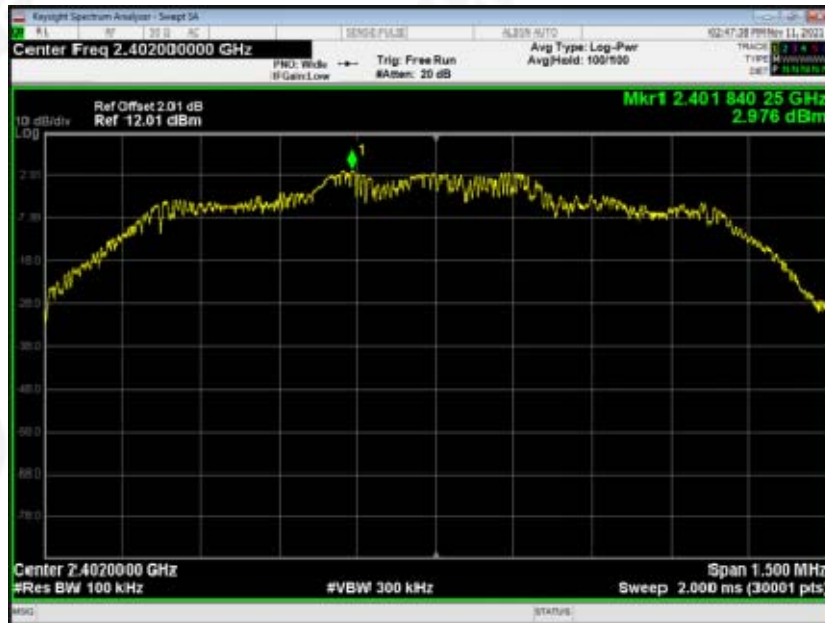

30MHz~26.5GHz




Test channel:	Middle channel
---------------	----------------

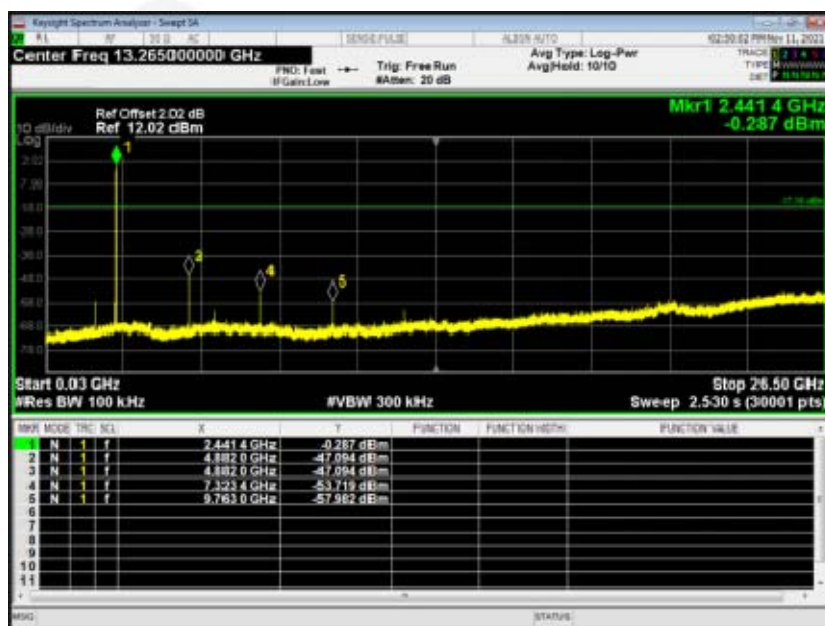

30MHz~26.5GHz




Test channel:	Highest channel
---------------	-----------------

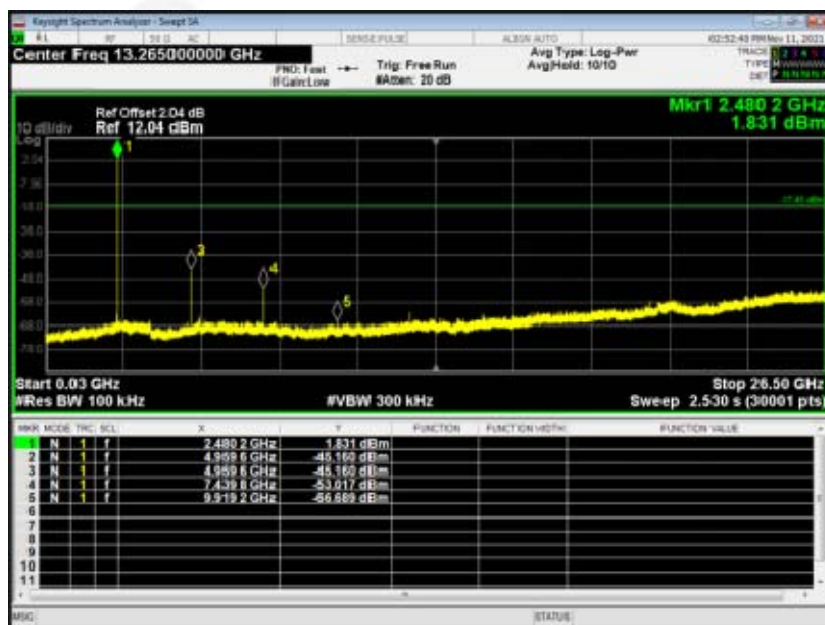


30MHz~26.5GHz



GFSK No-hopping Band edge-left side

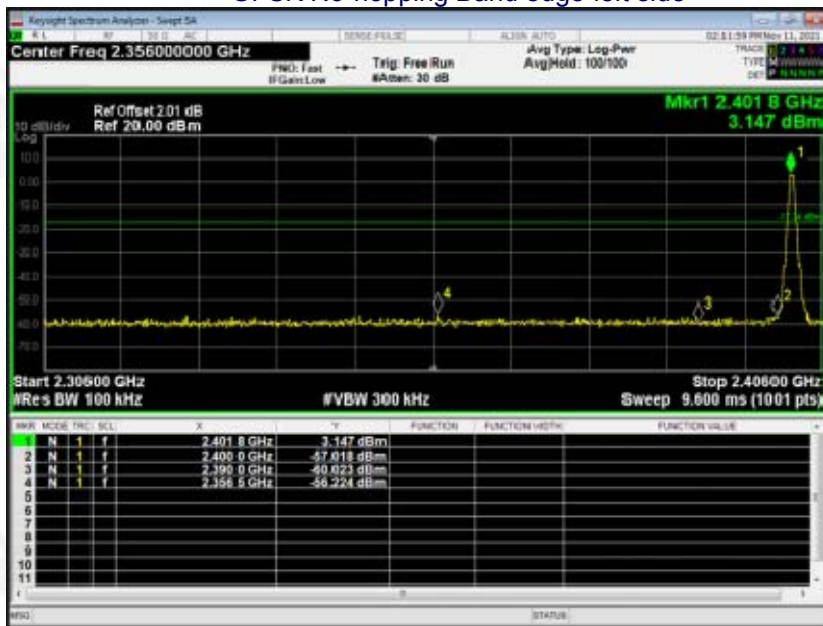


GFSK Hopping Band edge-left side

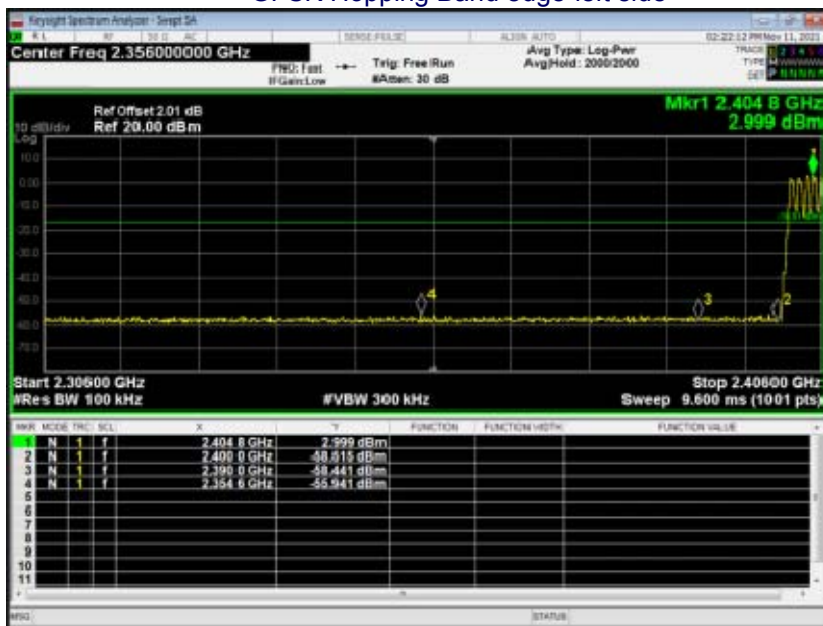




GFSK No-hopping Band edge-right side

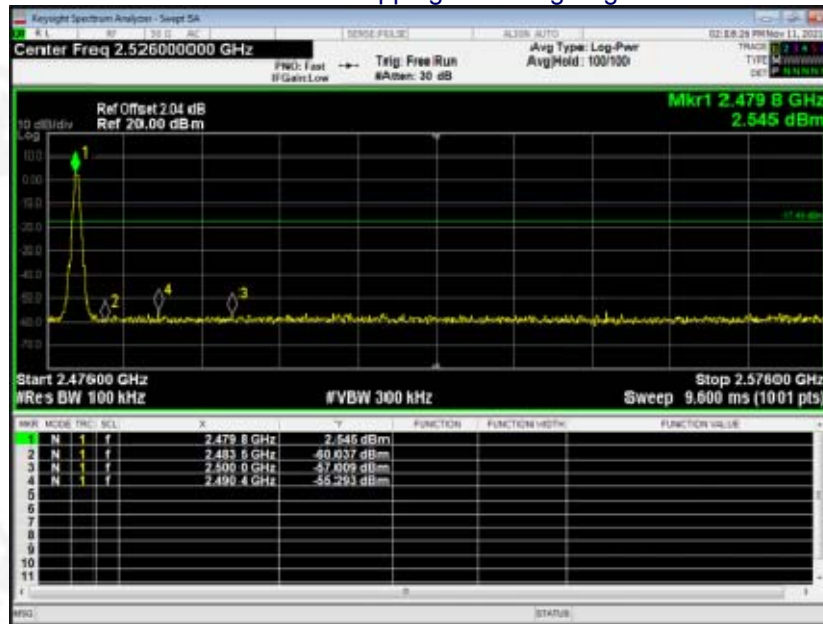


GFSK Hopping Band edge-right side

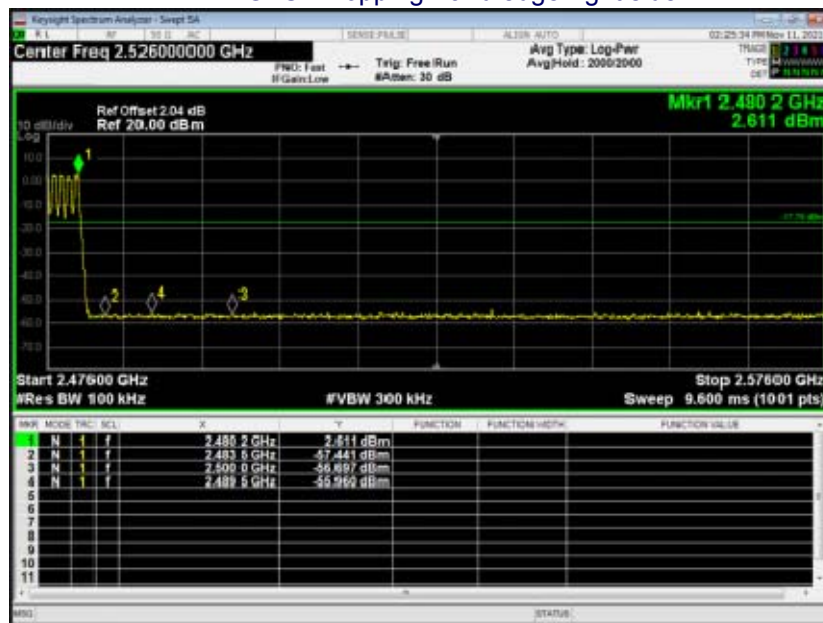




$\pi/4$ DQPSK No-hopping Band edge-left side

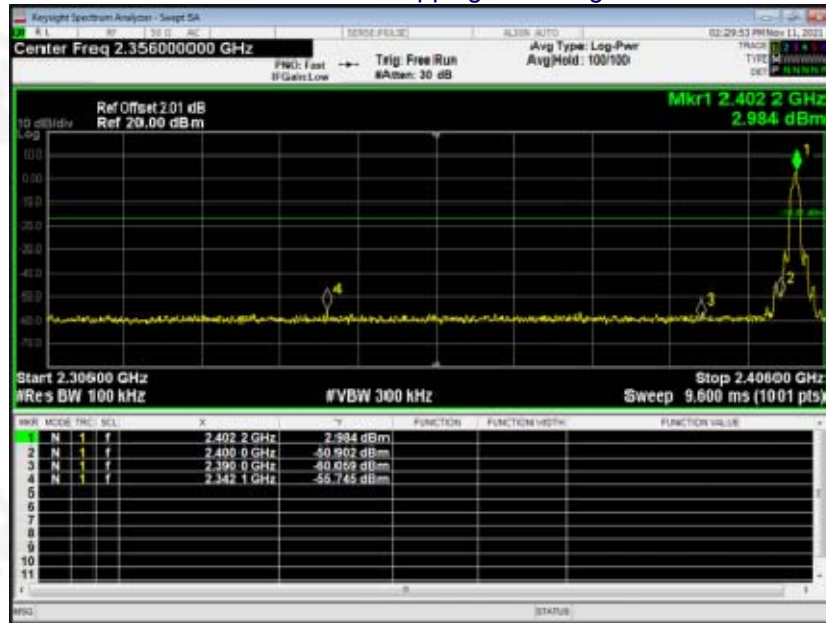


$\pi/4$ DQPSK Hopping Band edge-left side

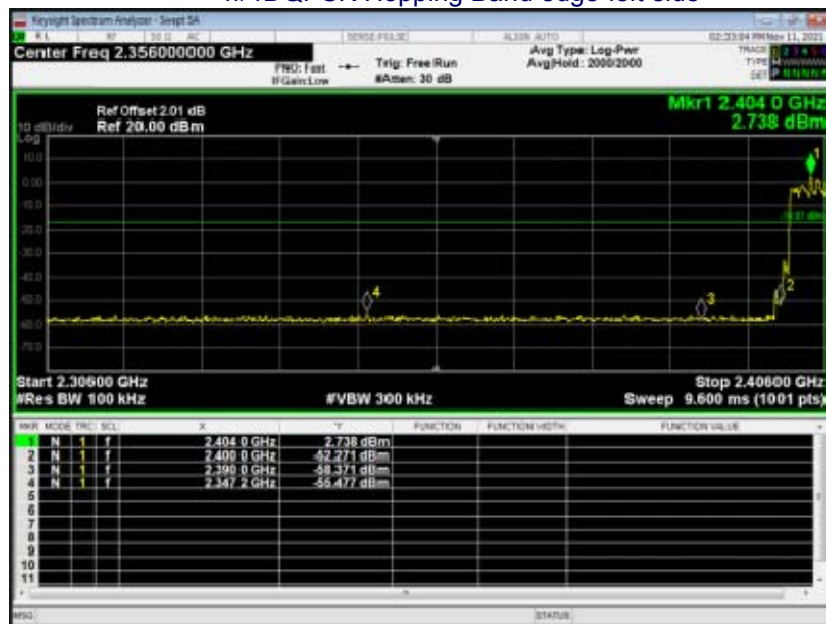




$\pi/4$ DQPSK No-hopping Band edge-right side

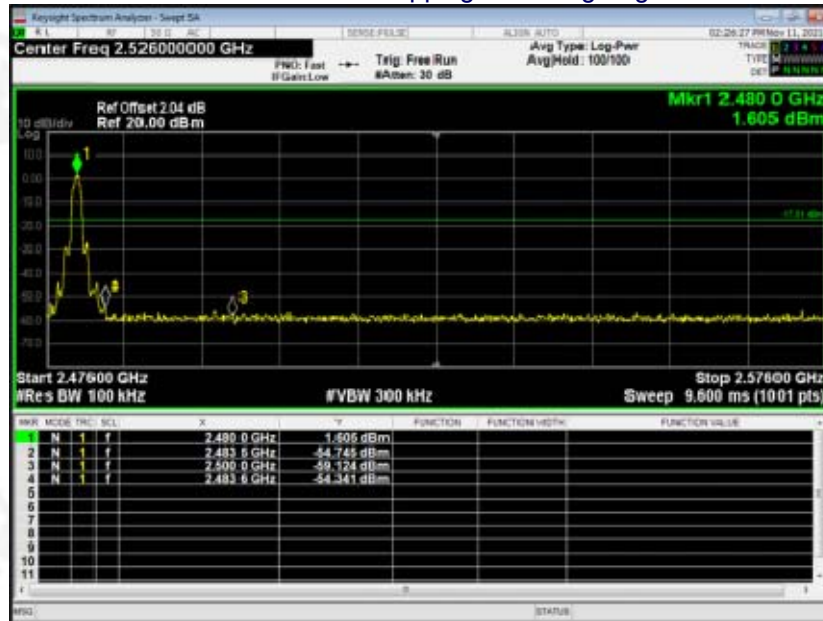


$\pi/4$ DQPSK Hopping Band edge-right side

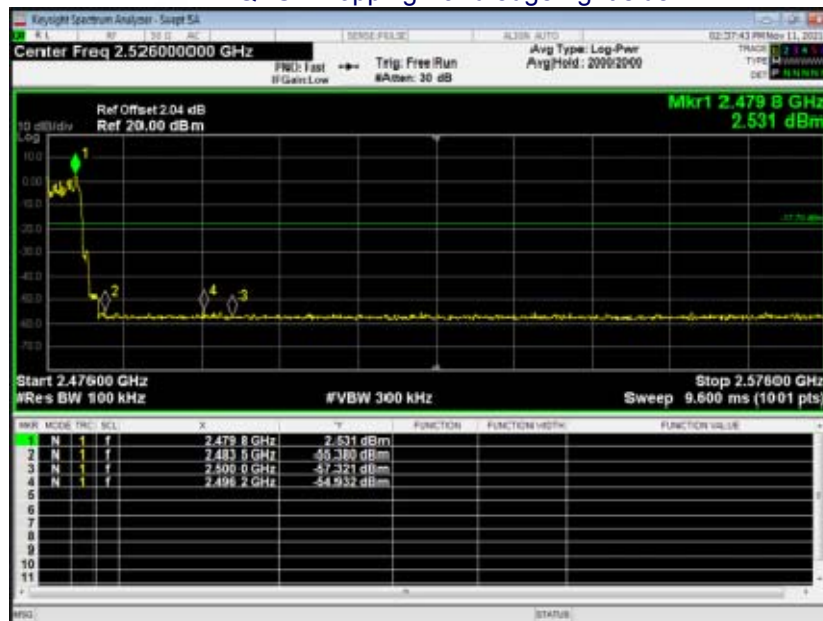




8DPSK No-hopping Band edge-left side

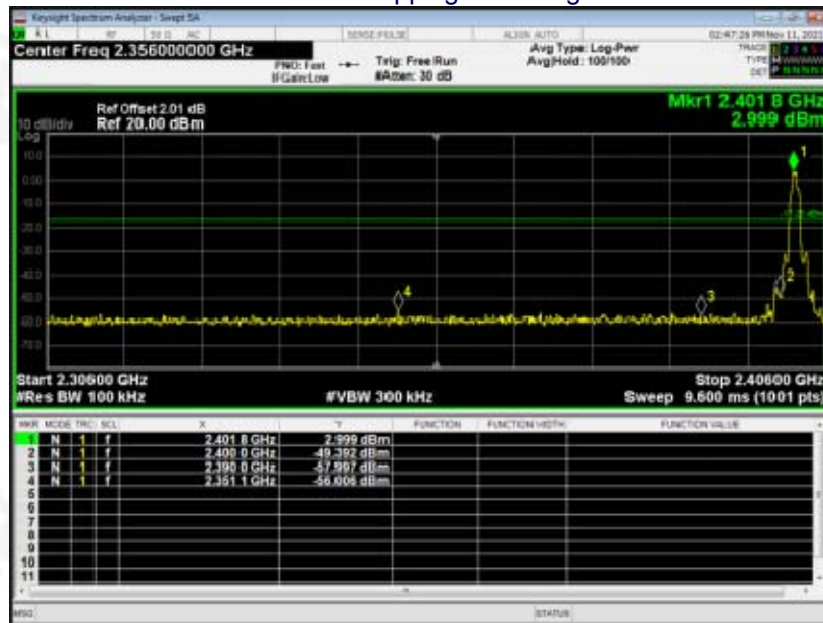


8DPSK Hopping Band edge-left side

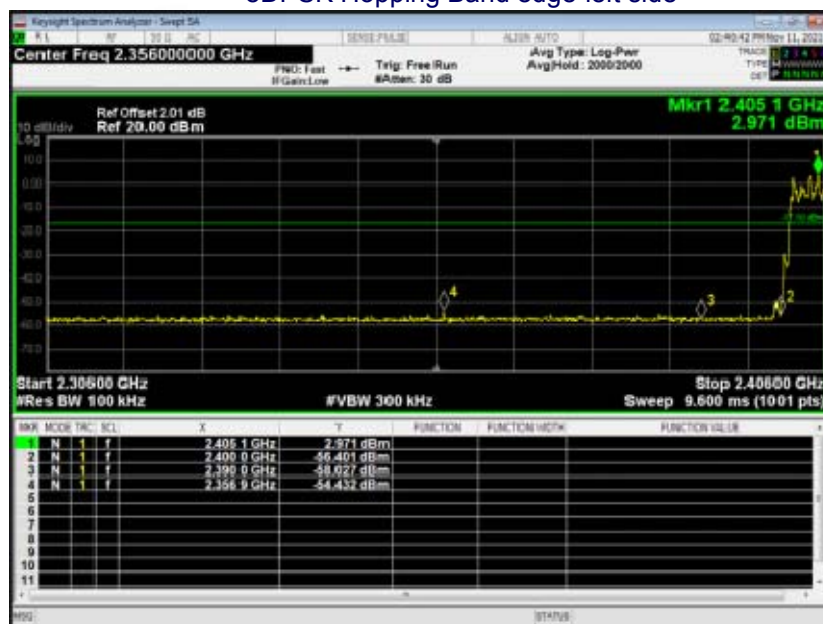




8DPSK No-hopping Band edge-right side

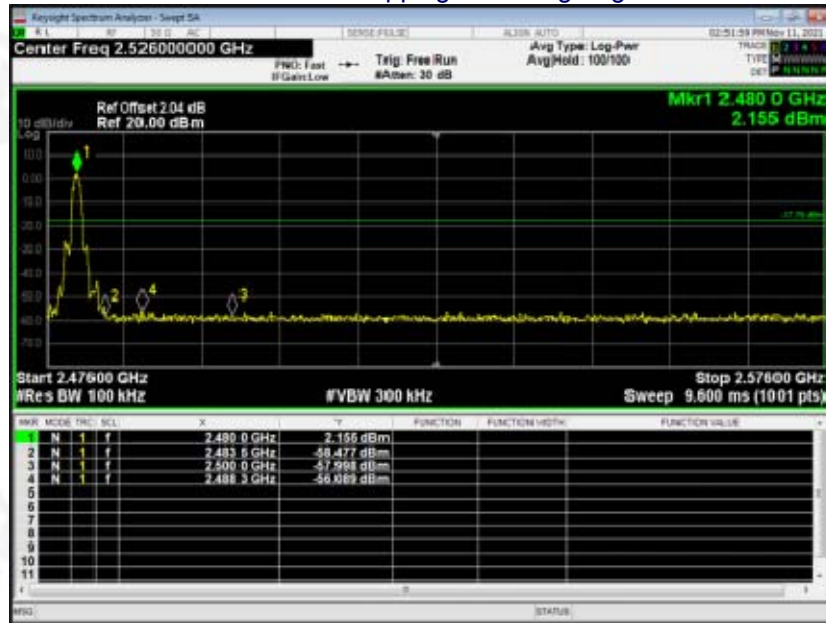

8DPSK Hopping Band edge-right side

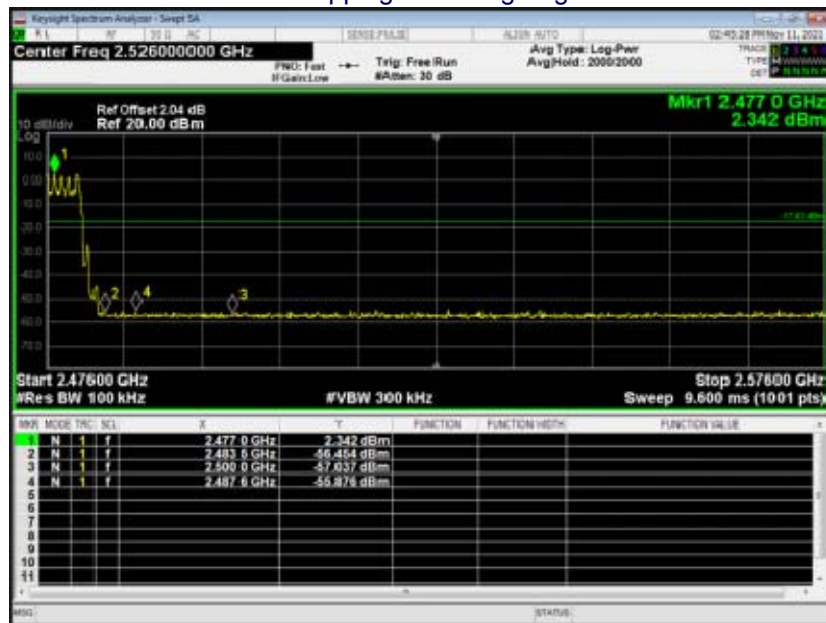



7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup



7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result

left earbud:

Mode	Test channel	20dB Emission Bandwidth (MHz)	99%Bandwidth (MHz)	Result
GFSK	Lowest	0.929	0.861	Pass
	Middle	0.926	0.858	
	Highest	0.924	0.857	
$\pi/4$ DQPSK	Lowest	1.220	1.157	Pass
	Middle	1.225	1.158	
	Highest	1.215	1.162	
8DPSK	Lowest	1.223	1.134	Pass
	Middle	1.229	1.146	
	Highest	1.218	1.149	



right earbud:

Mode	Test channel	20dB Emission Bandwidth (MHz)	99%Bandwidth (MHz)	Result
GFSK	Lowest	0.916	0.860	Pass
	Middle	0.922	0.860	
	Highest	0.918	0.873	
$\pi/4$ DQPSK	Lowest	1.218	1.147	Pass
	Middle	1.226	1.160	
	Highest	1.228	1.164	
8DPSK	Lowest	1.219	1.137	Pass
	Middle	1.218	1.142	
	Highest	1.219	1.155	



Test plots

left earbud: GFSK Low Channel



GFSK Middle Channel





GFSK High Channel



π /4DQPSK Low Channel





$\pi/4$ DQPSK Middle Channel



$\pi/4$ DQPSK High Channel





8DPSK Low Channel



8-DPSK Middle Channel





8DPSK High Channel




right earbud: GFSK Low Channel





GFSK Middle Channel

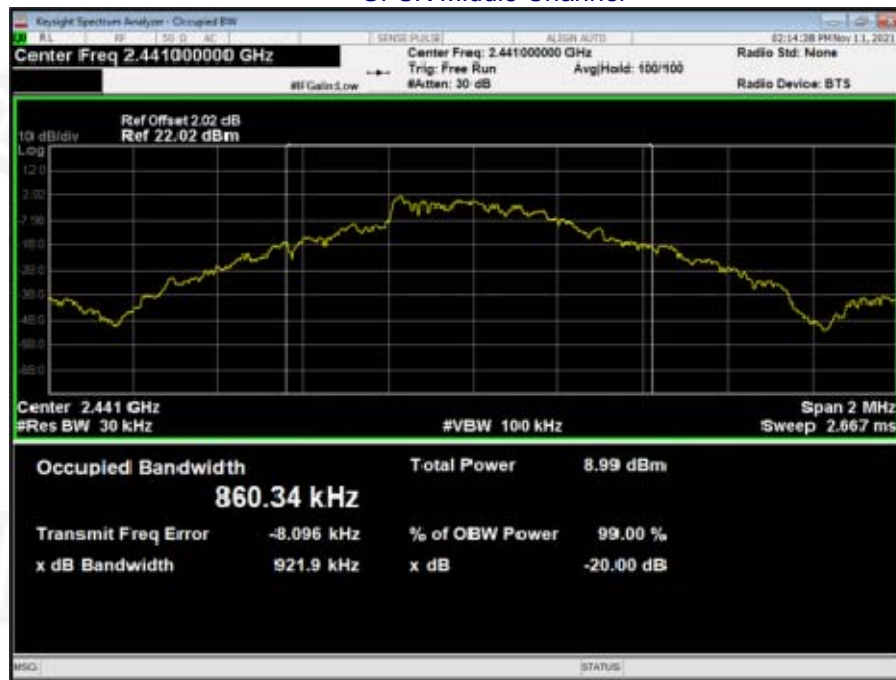


GFSK High Channel





$\pi/4$ DQPSK Low Channel

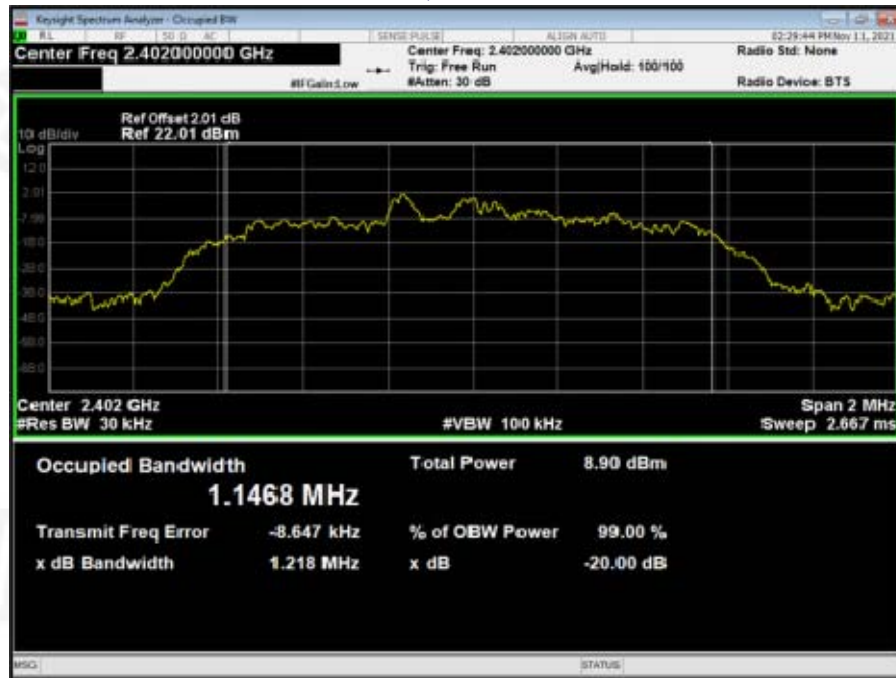


$\pi/4$ DQPSK Middle Channel





$\pi/4$ DQPSK High Channel

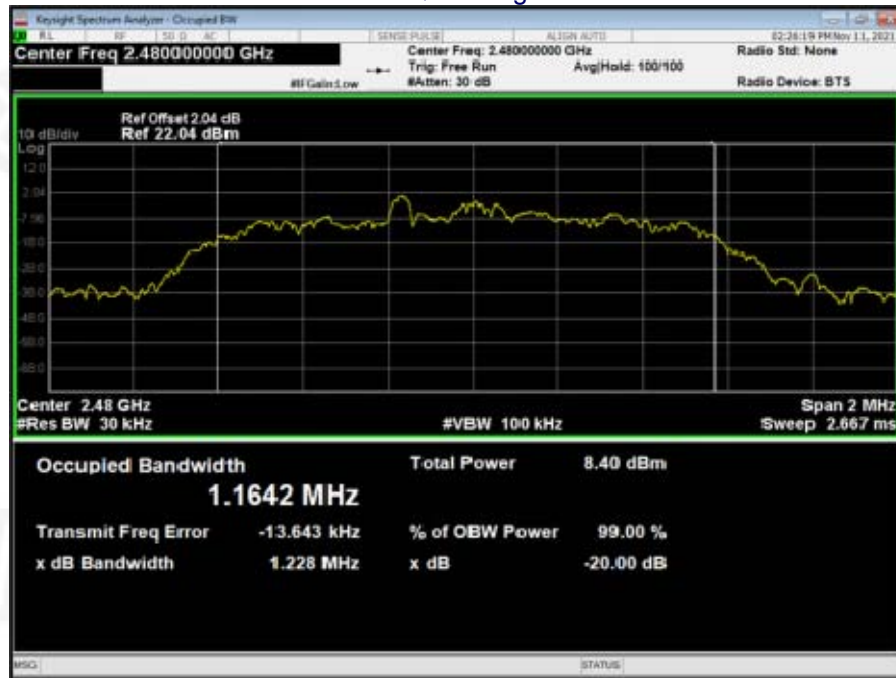

8DPSK Low Channel





8-DPSK Middle Channel



8-DPSK High Channel





8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	FCC:20.97 dBm IC:30dBm

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.

8.5 Test Result

left earbud:

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	3.678	30.00	Pass
	Middle	4.093		
	Highest	4.149		
$\pi/4$ DQPSK	Lowest	3.695	30.00	Pass
	Middle	4.092		
	Highest	4.173		
8DPSK	Lowest	3.768	30.00	Pass
	Middle	4.109		
	Highest	4.186		




right earbud:

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	3.27	30.00	Pass
	Middle	2.942		
	Highest	2.59		
$\pi/4$ DQPSK	Lowest	3.247	30.00	Pass
	Middle	2.921		
	Highest	2.566		
8DPSK	Lowest	3.274	30.00	Pass
	Middle	3.006		
	Highest	2.636		


Test plots

left earbud:
GFSK Low Channel

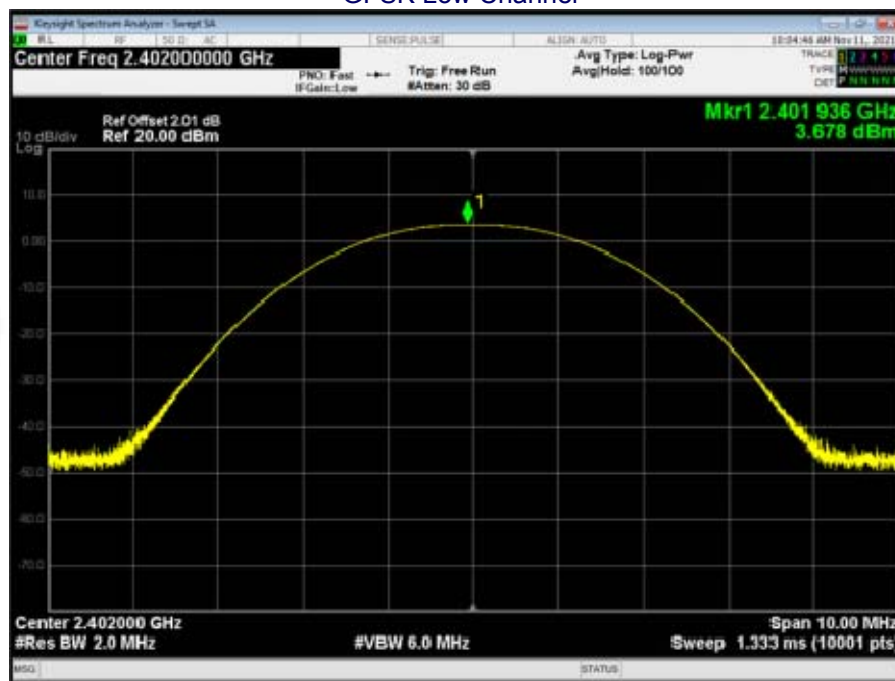




GFSK Middle Channel

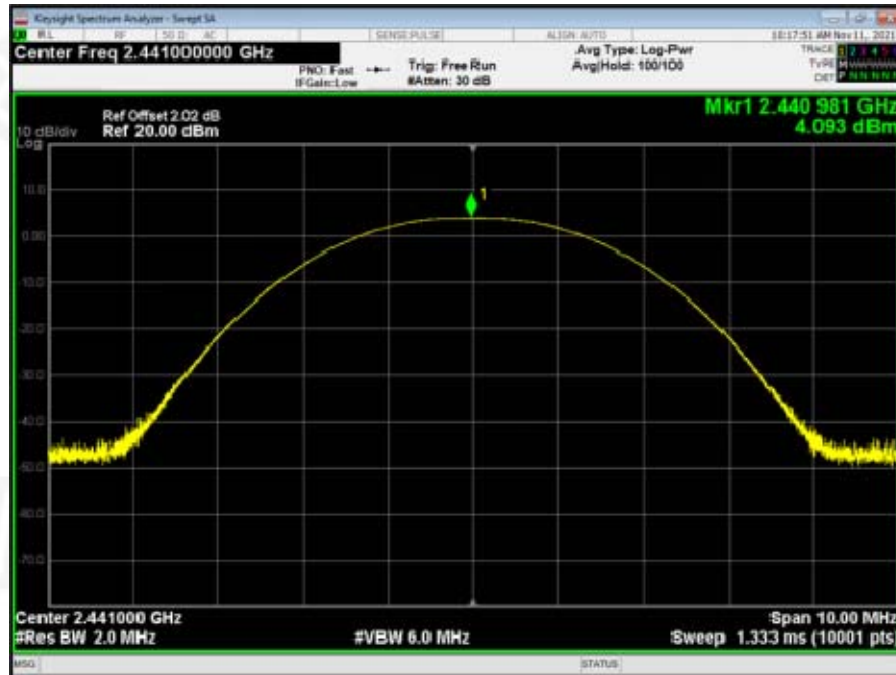


GFSK High Channel

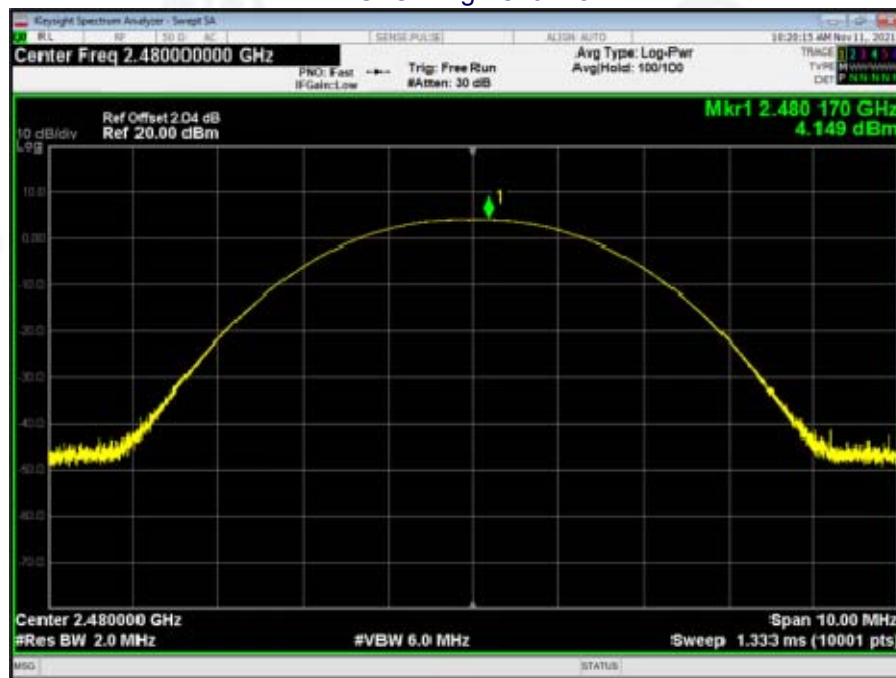




$\pi/4$ DQPSK Low Channel

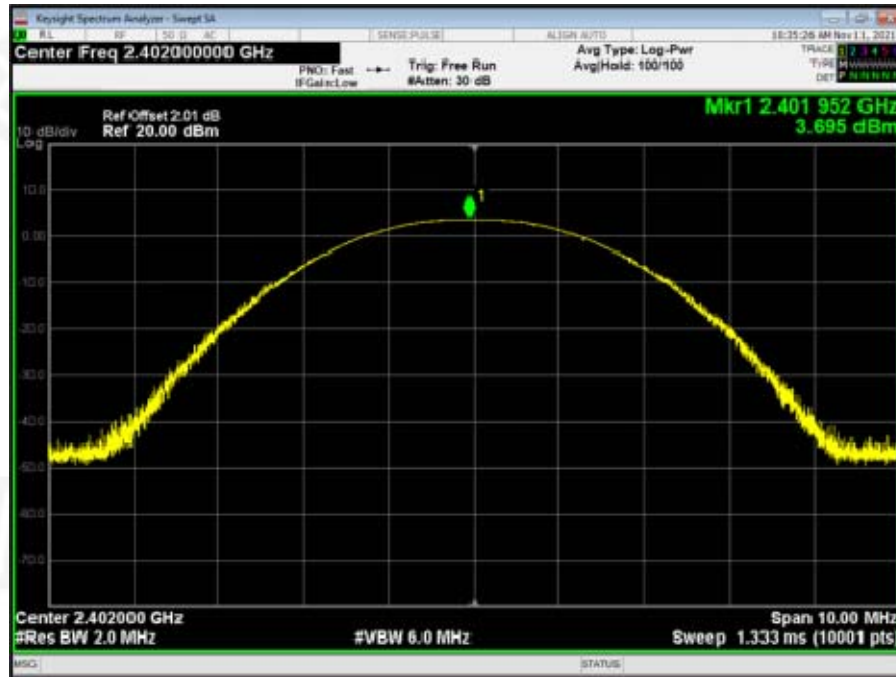


$\pi/4$ DQPSK Middle Channel

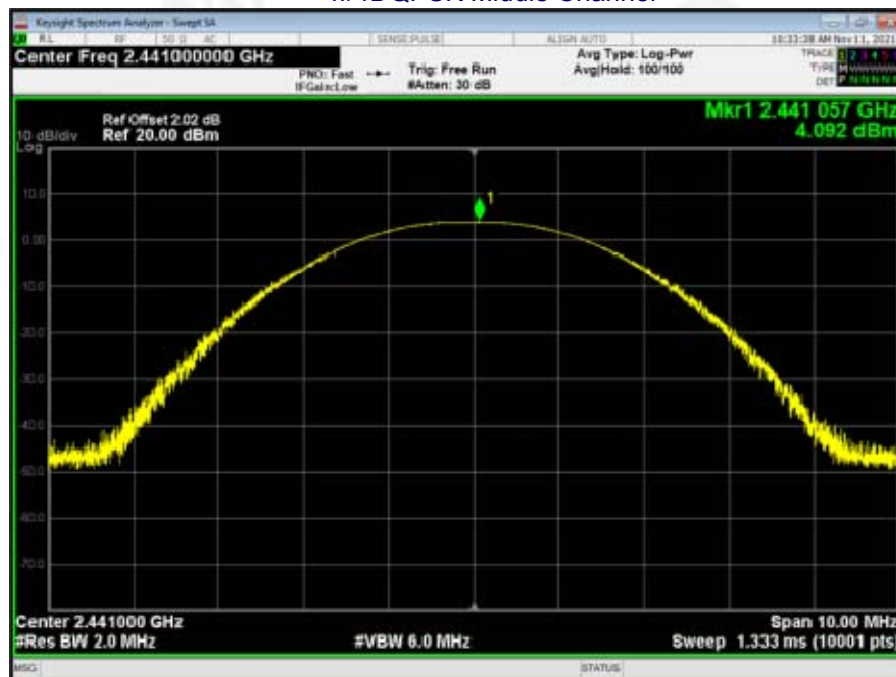




$\pi/4$ DQPSK High Channel

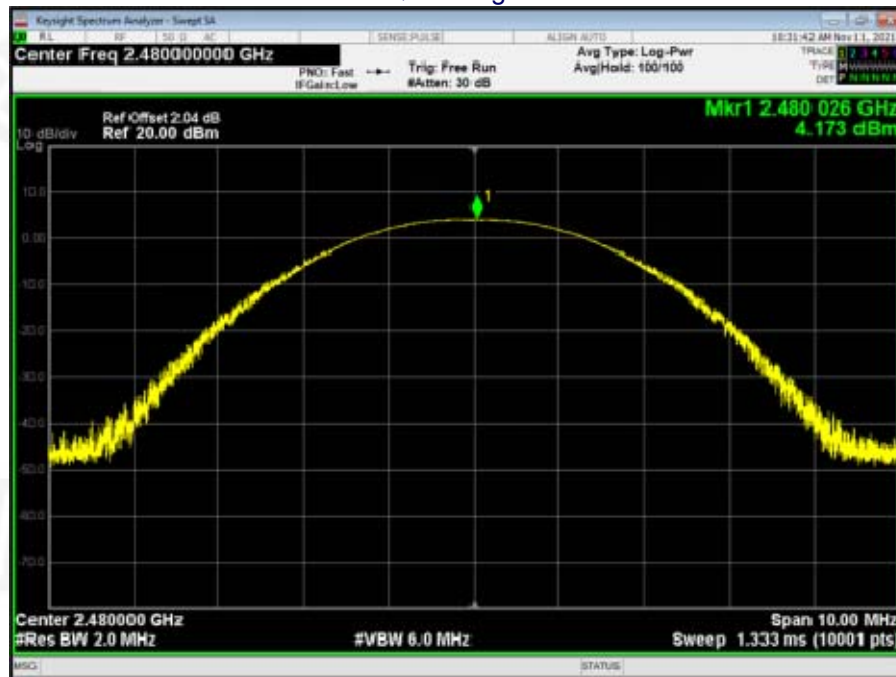


8DPSK Low Channel

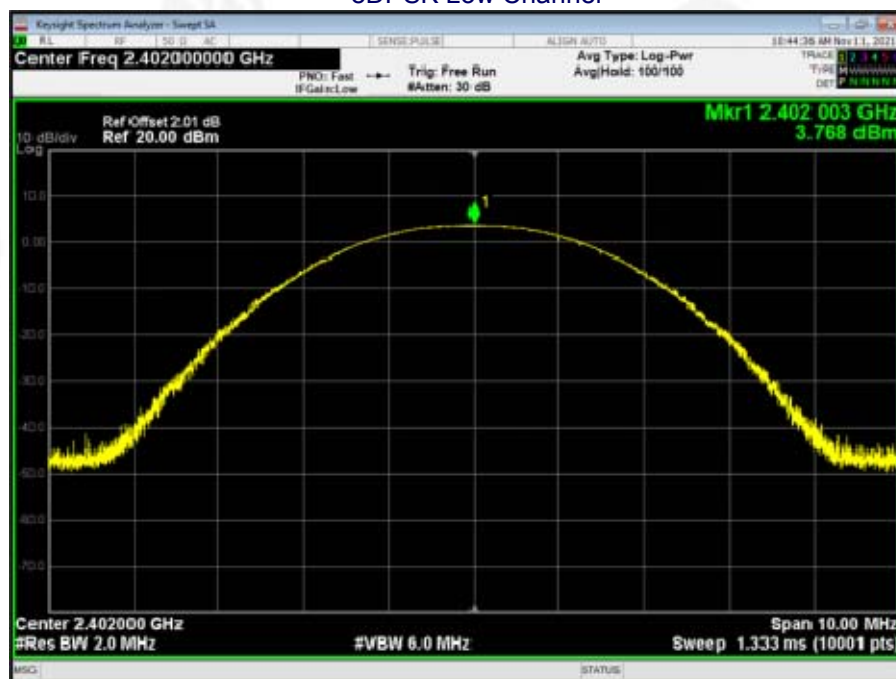




8DPSK Middle Channel

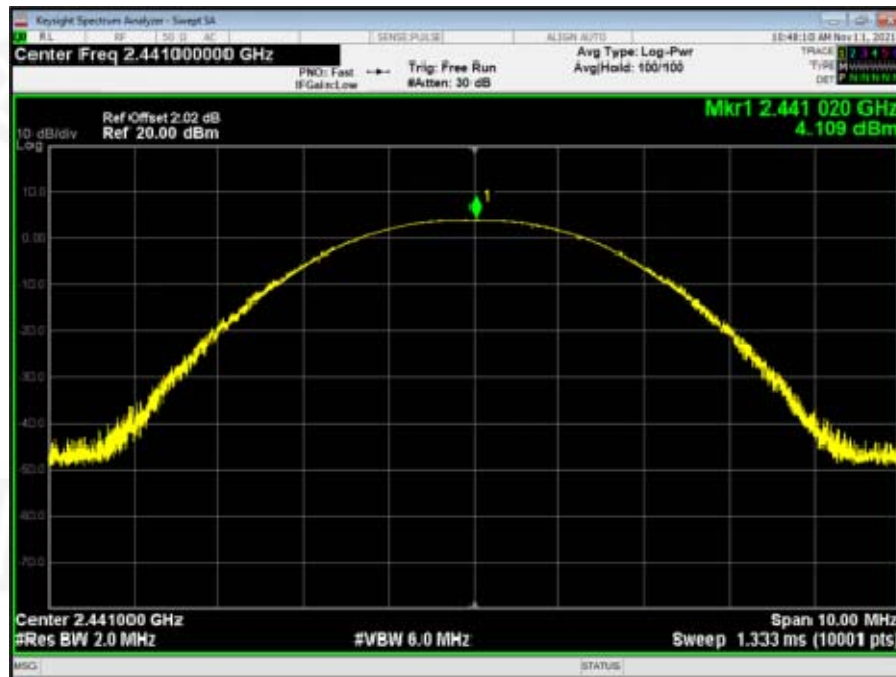


8DPSK High Channel

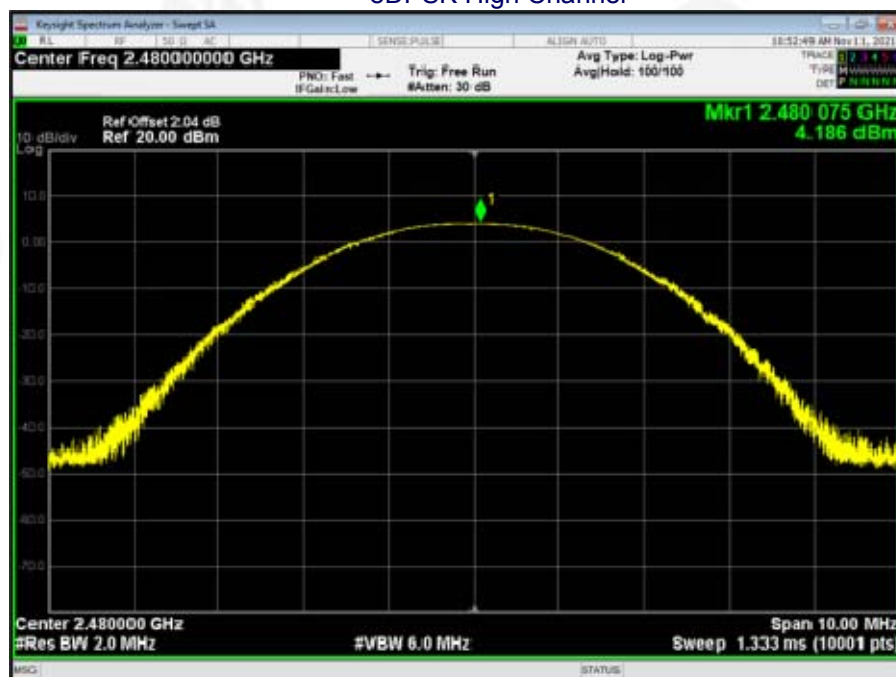




right earbud:
GFSK Low Channel

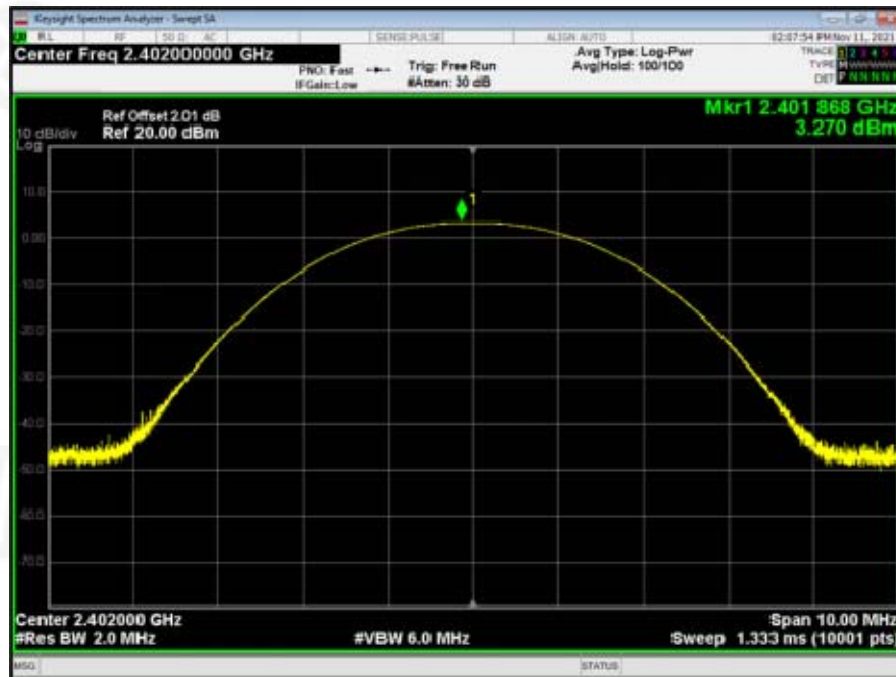


GFSK Middle Channel

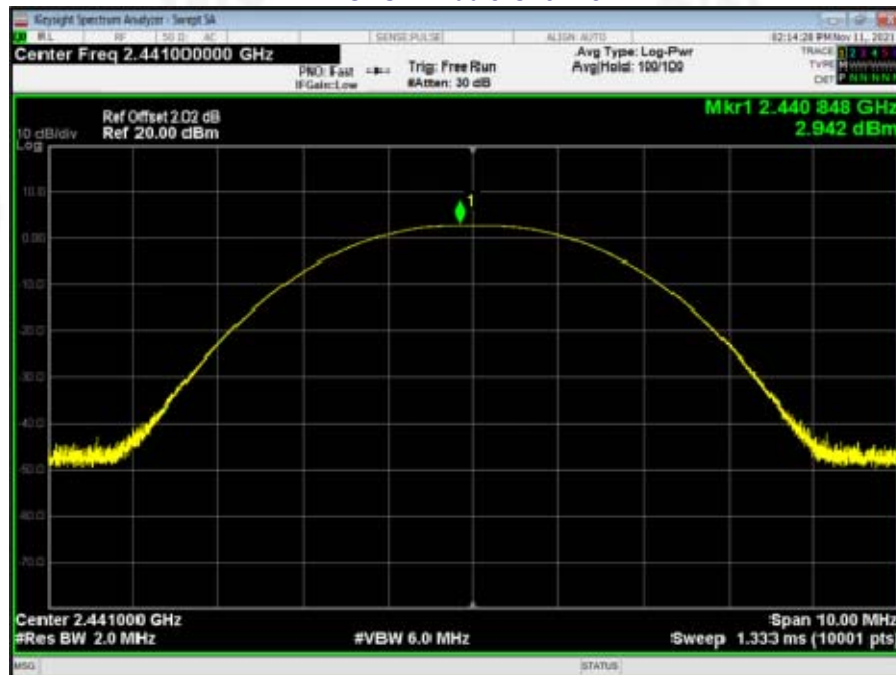




GFSK High Channel

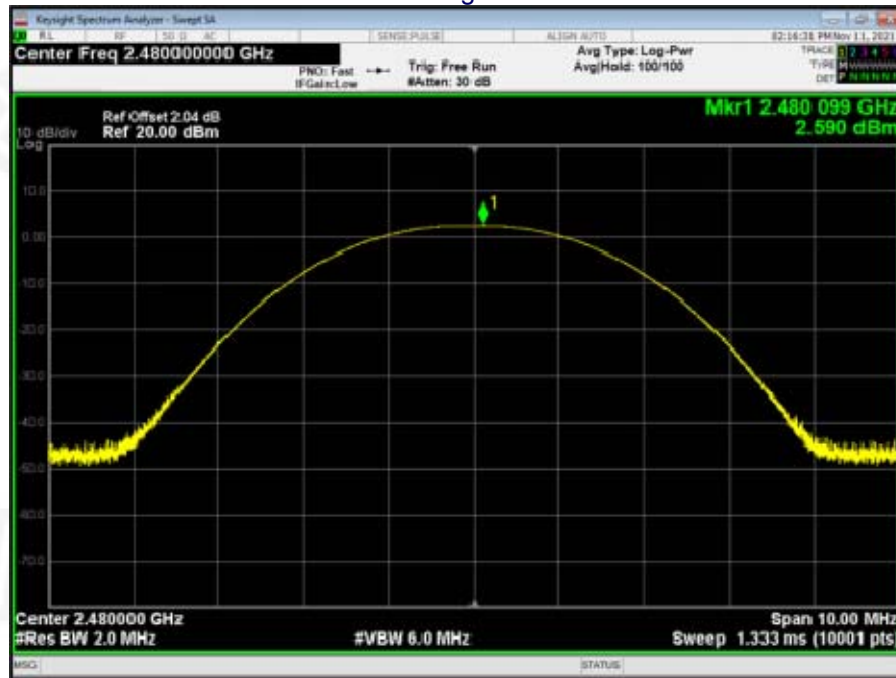


$\pi/4$ DQPSK Low Channel

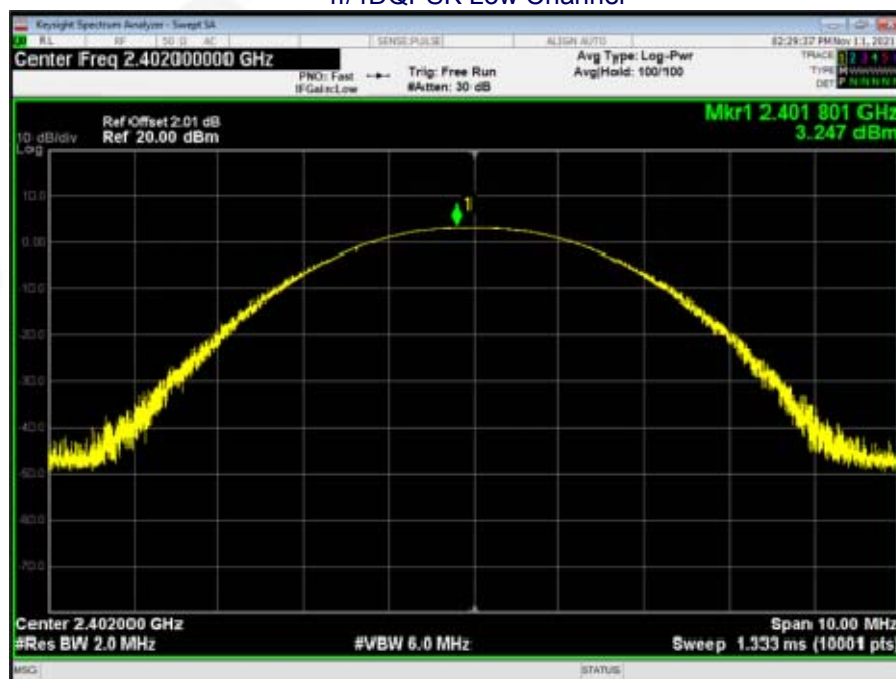




$\pi/4$ DQPSK Middle Channel

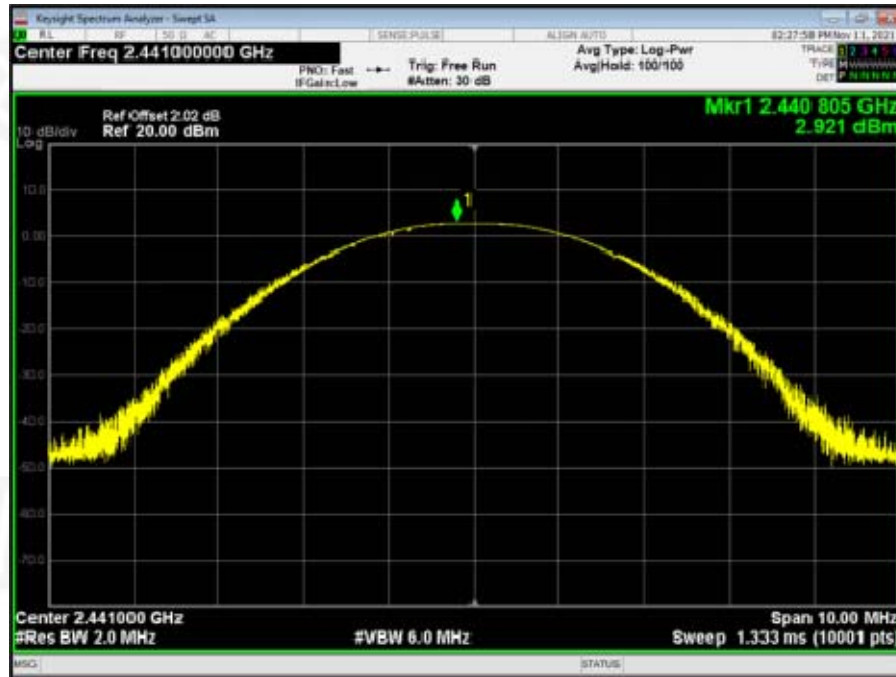


$\pi/4$ DQPSK High Channel

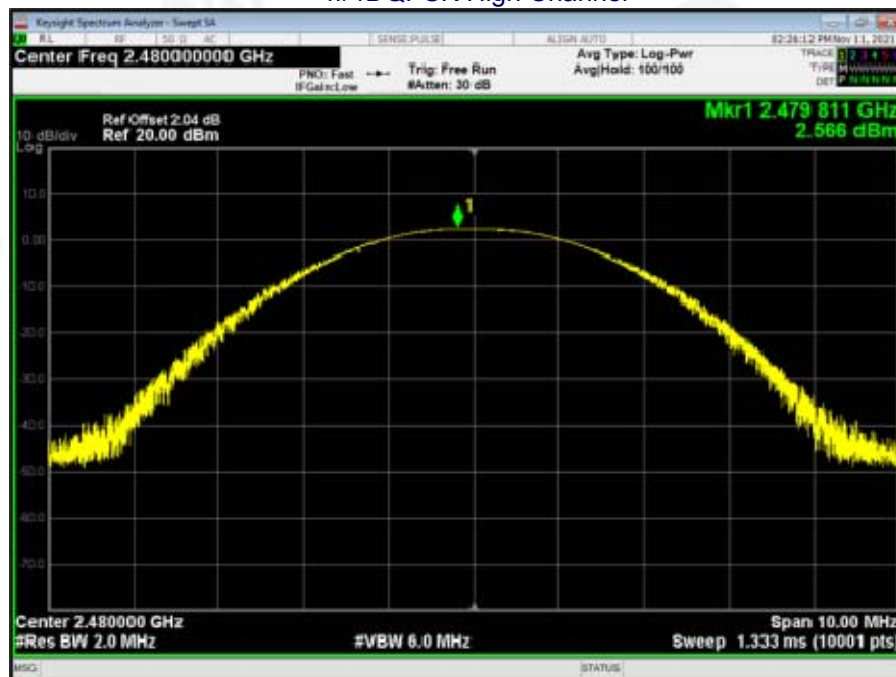




8DPSK Low Channel

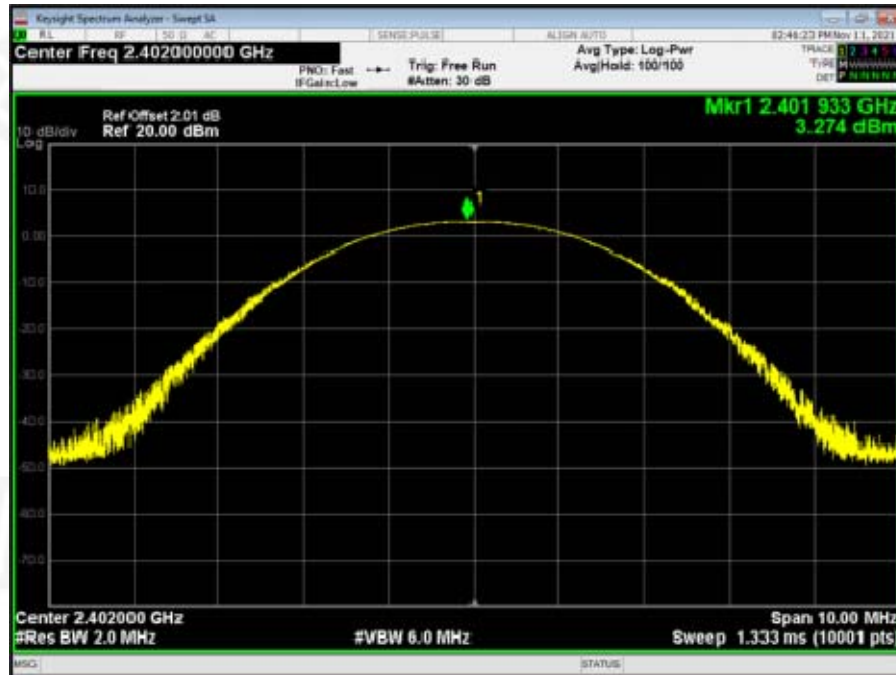


8DPSK Middle Channel

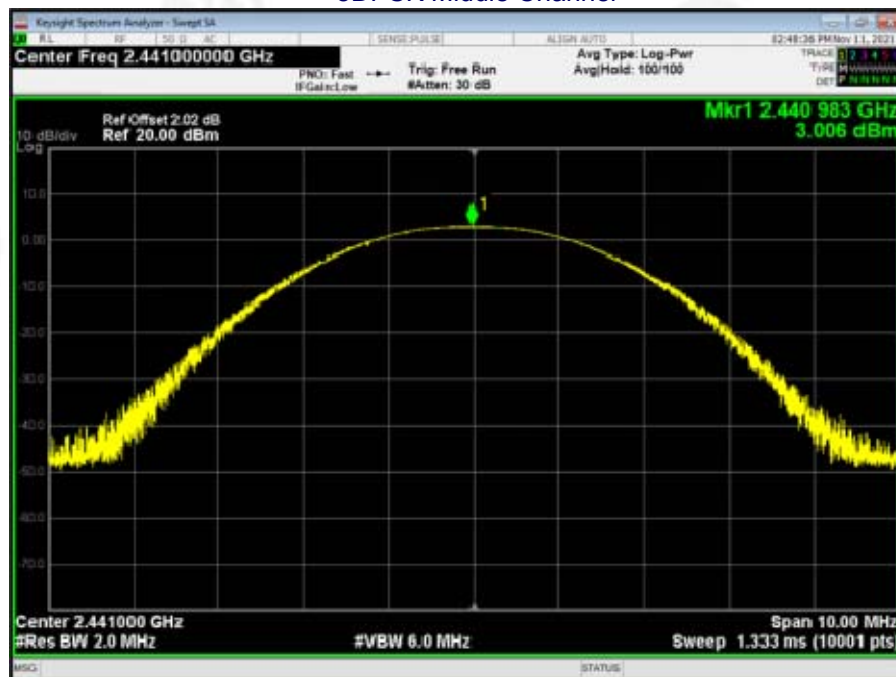



8DPSK High Channel

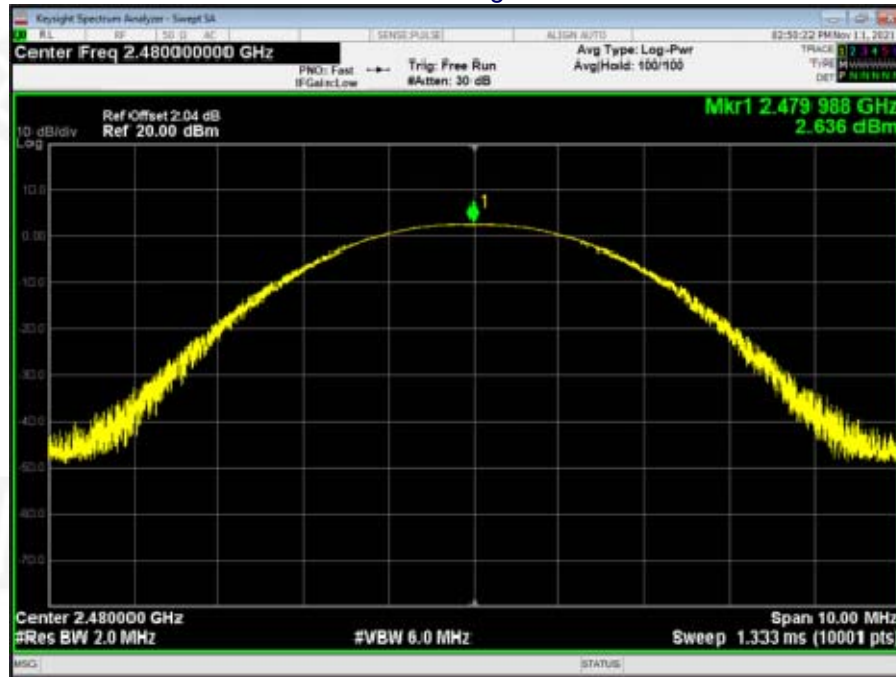




9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup

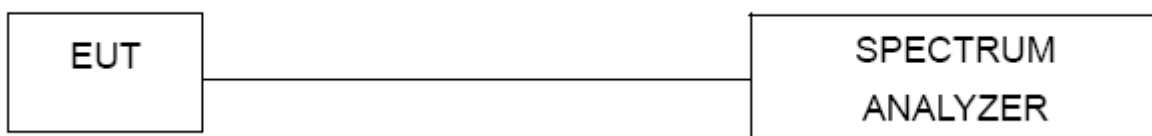

9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.



9.4 Test Result

left earbud:

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	0.934	0.929	PASS
GFSK	Middle	1.155	0.926	PASS
GFSK	High	0.996	0.924	PASS
$\pi/4$ -DQPSK	Low	0.822	0.813	PASS
$\pi/4$ -DQPSK	Middle	0.942	0.817	PASS
$\pi/4$ -DQPSK	High	0.975	0.810	PASS
8-DPSK	Low	0.999	0.815	PASS
8-DPSK	Middle	1.182	0.819	PASS
8-DPSK	High	0.849	0.812	PASS

right earbud:

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.050	0.916	PASS
GFSK	Middle	1.002	0.922	PASS
GFSK	High	1.017	0.918	PASS
$\pi/4$ -DQPSK	Low	0.978	0.812	PASS
$\pi/4$ -DQPSK	Middle	1.143	0.817	PASS
$\pi/4$ -DQPSK	High	1.014	0.819	PASS
8-DPSK	Low	1.002	0.813	PASS
8-DPSK	Middle	0.996	0.812	PASS
8-DPSK	High	1.173	0.813	PASS



Test plots

left earbud: GFSK Low Channel



GFSK Middle Channel






GFSK High Channel




$\pi/4$ DQPSK Low Channel

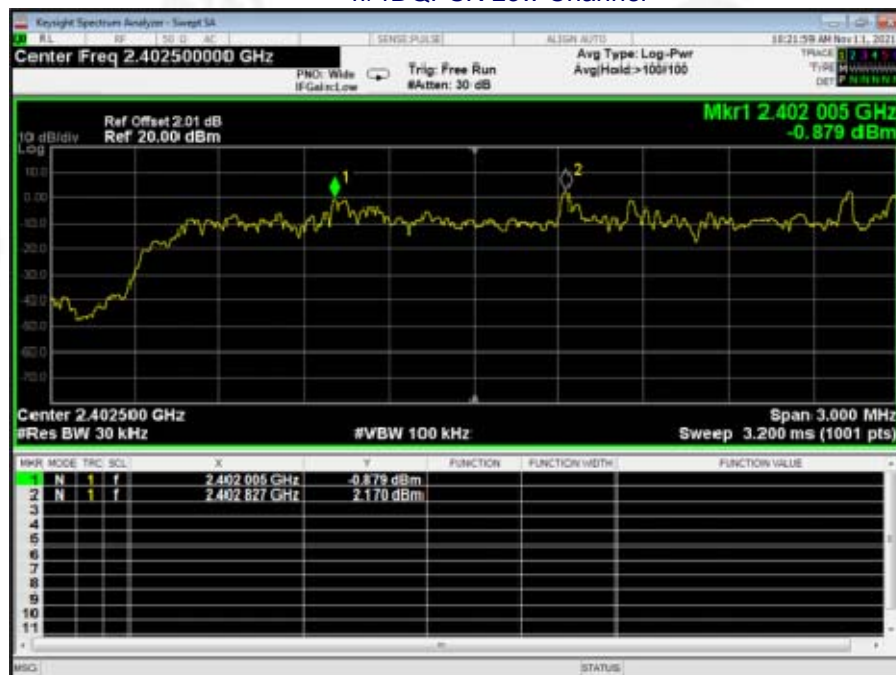




$\pi/4$ DQPSK Middle Channel

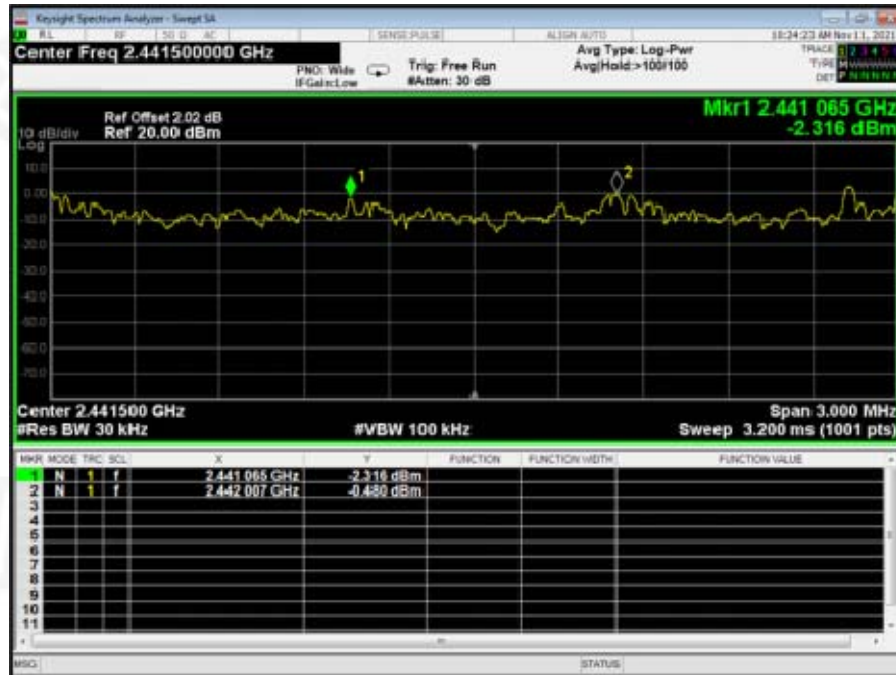


$\pi/4$ DQPSK High Channel

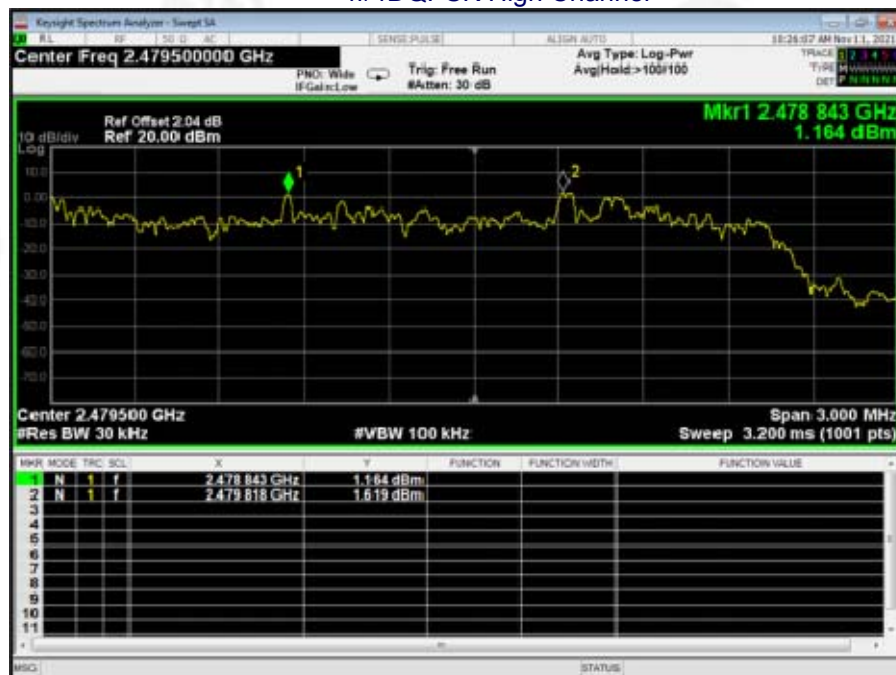




8DPSK Low Channel

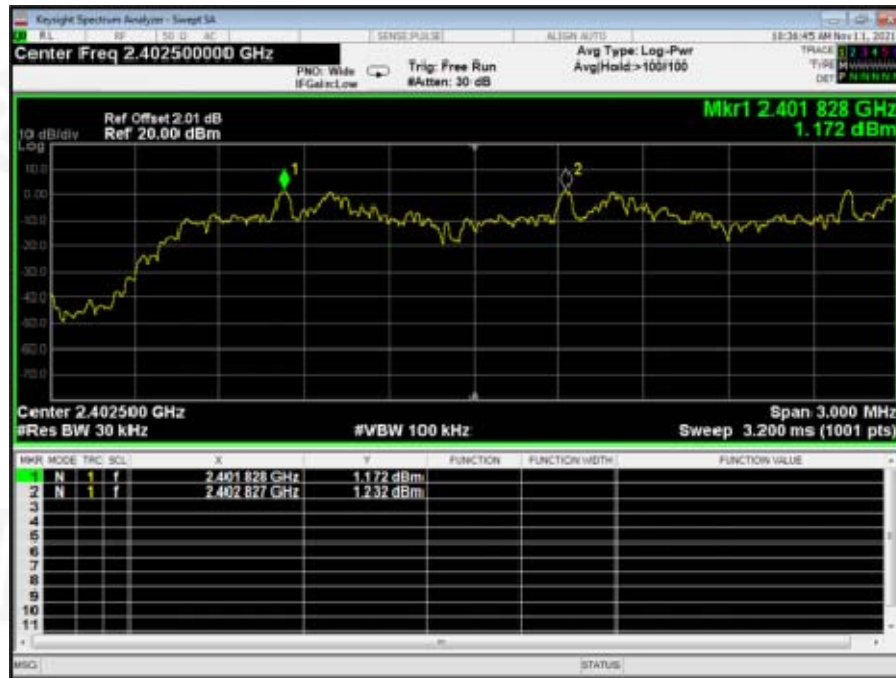


8DPSK Middle Channel

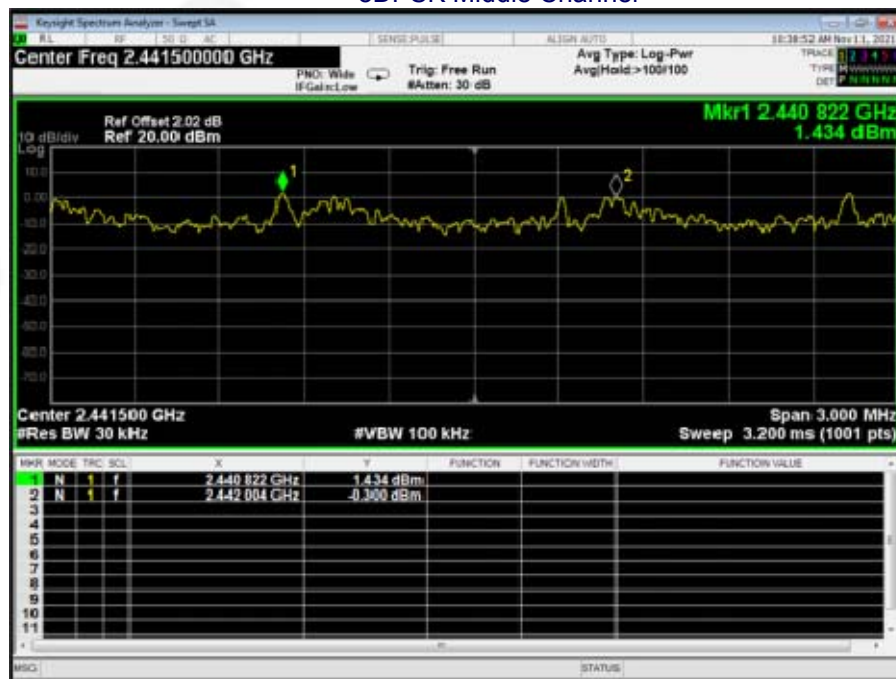



8DPSK High Channel

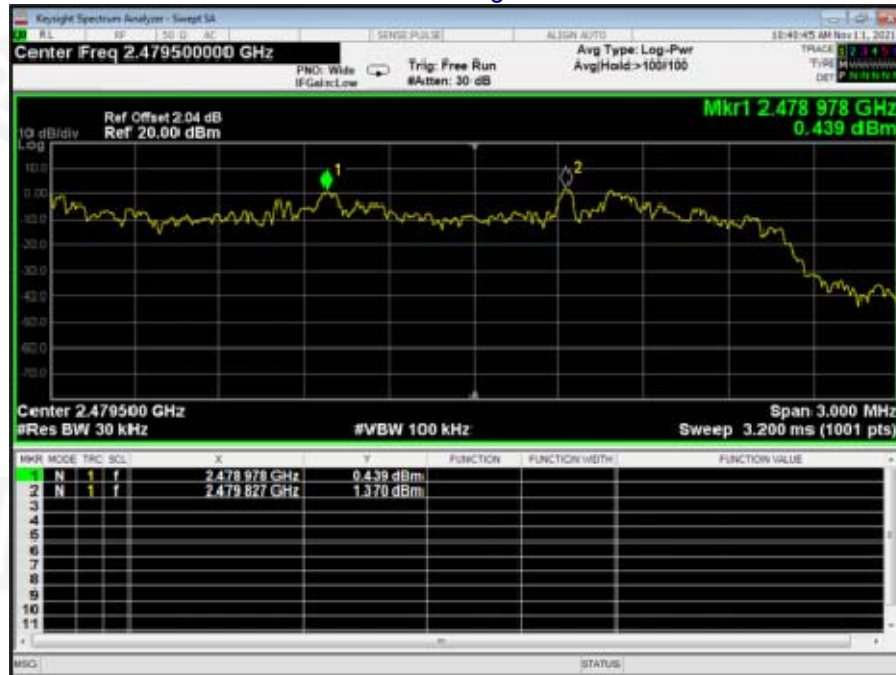


right earbud: GFSK Low Channel





GFSK Middle Channel

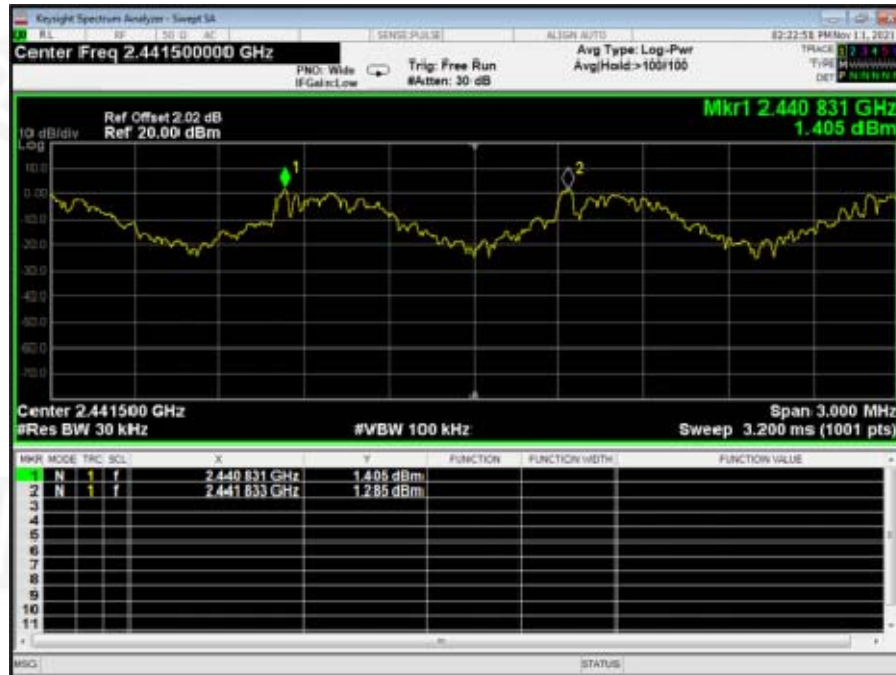


GFSK High Channel






$\pi/4$ DQPSK Low Channel

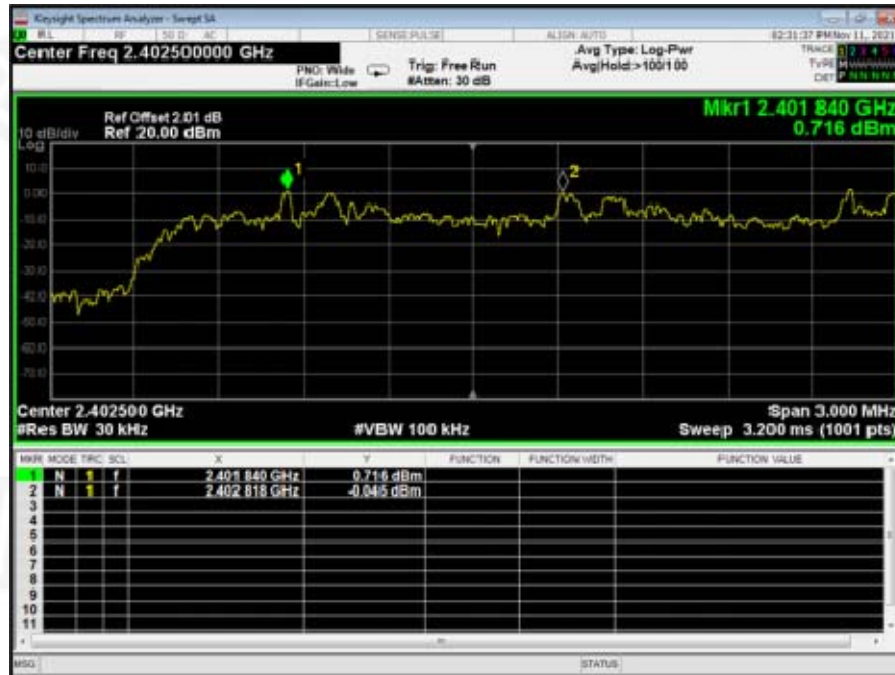


$\pi/4$ DQPSK Middle Channel

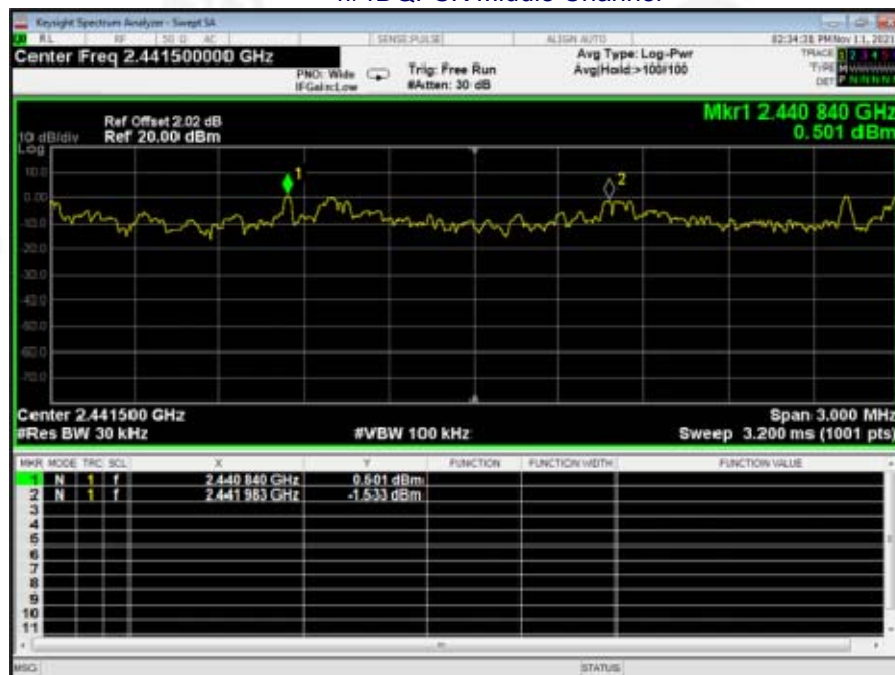




$\pi/4$ DQPSK High Channel

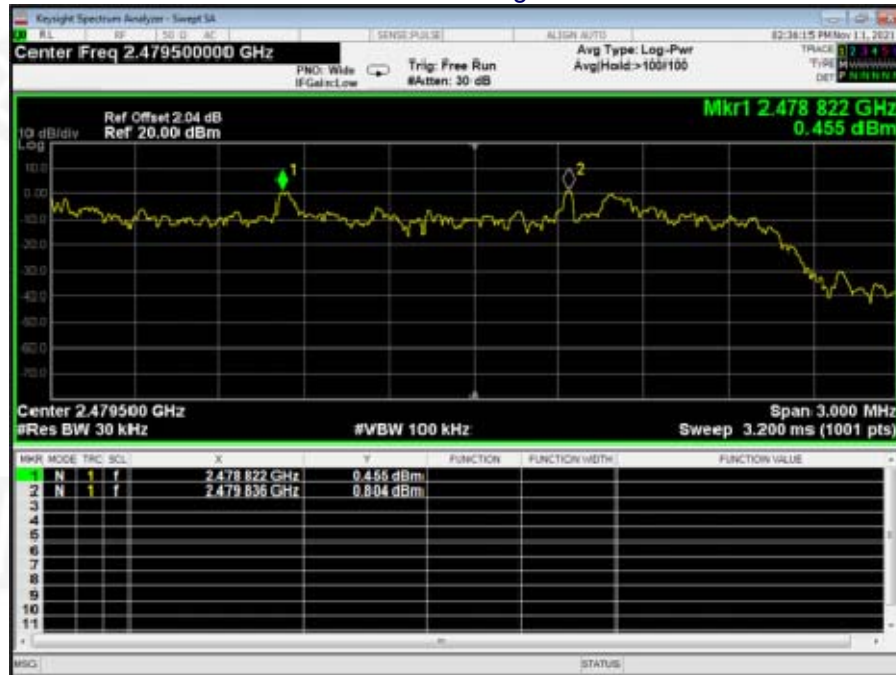


8DPSK Low Channel

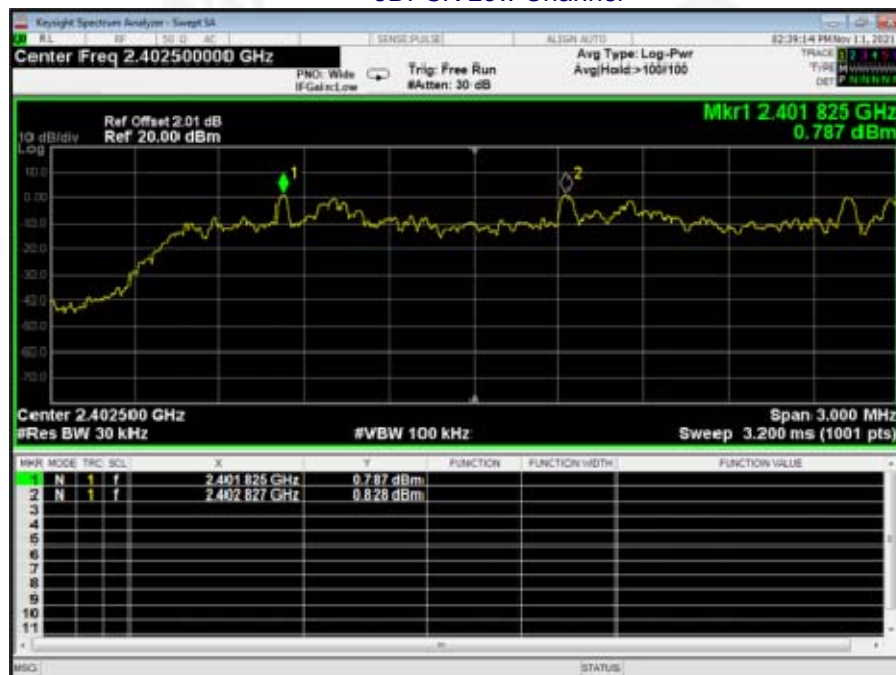




8DPSK Middle Channel

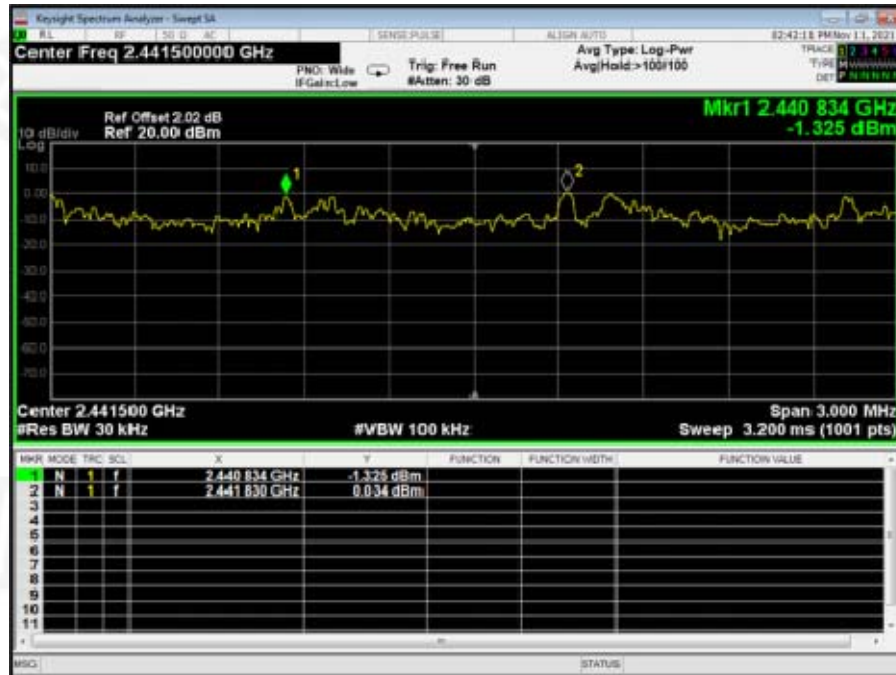

8DPSK High Channel

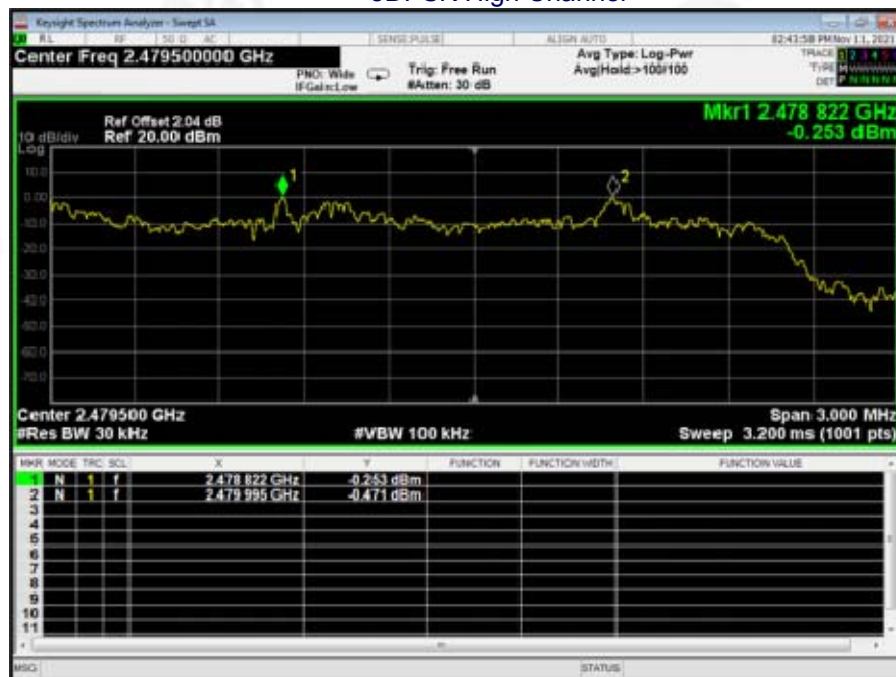




10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup

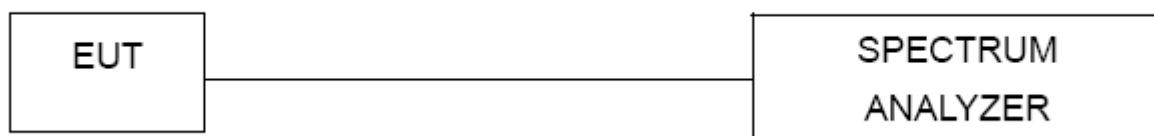

10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD


No deviation.




10.4 Test Result

Test Plots:

left earbud:
79 Channels in total
GFSK

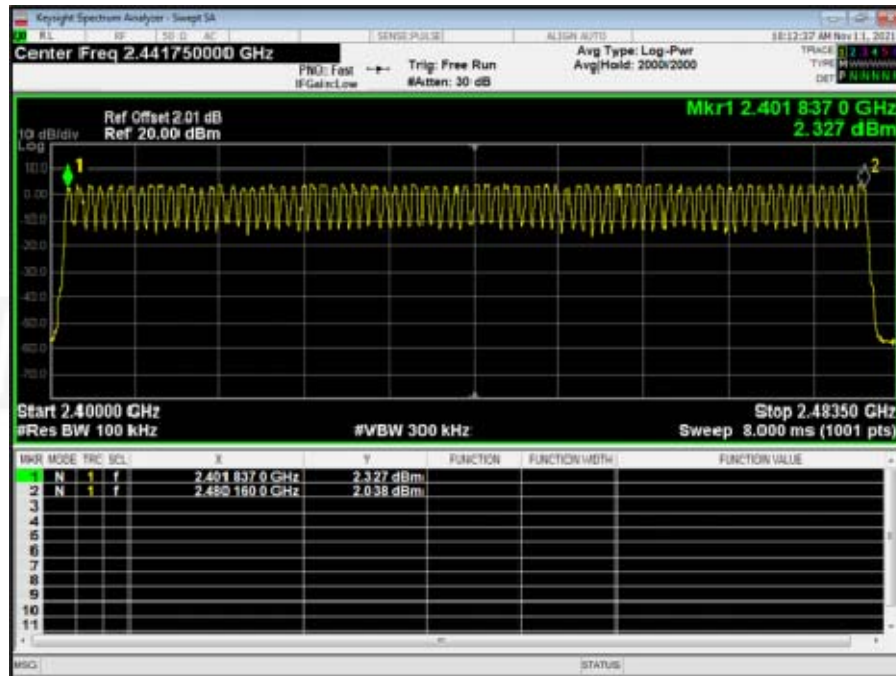


$\pi/4$ DQPSK

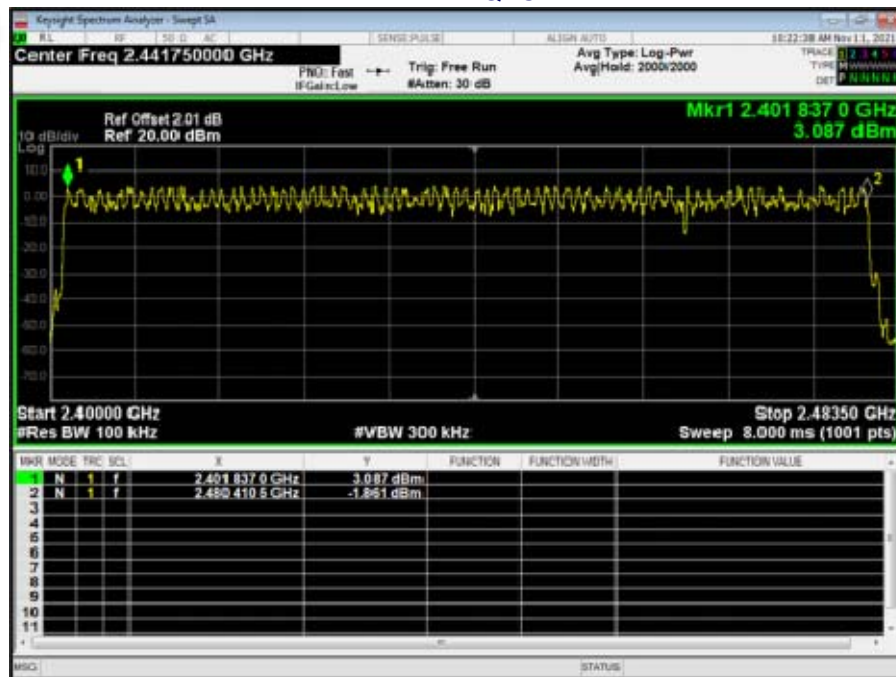




8DPSK

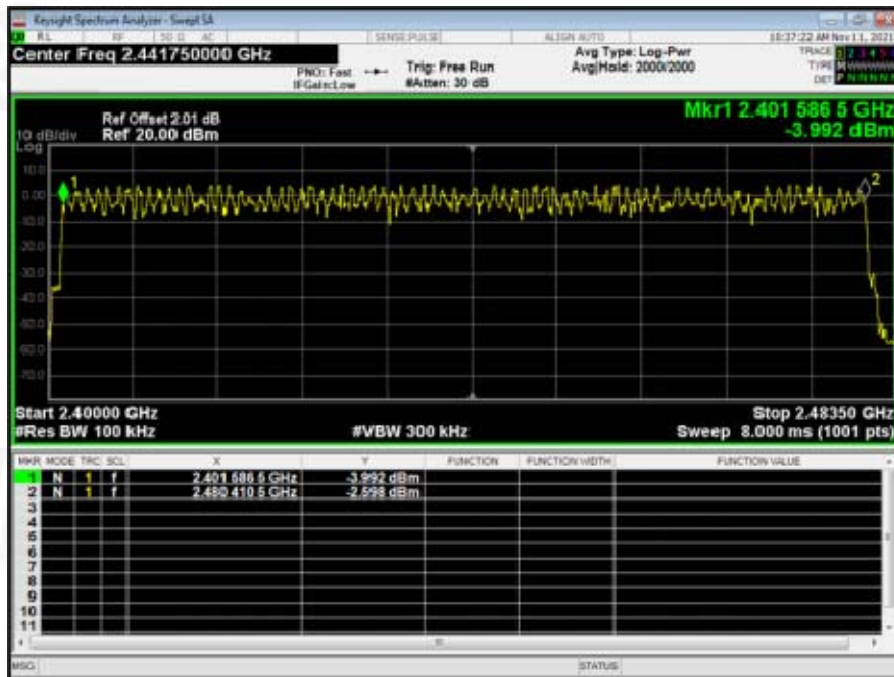


right earbud:
79 Channels in total
GFSK

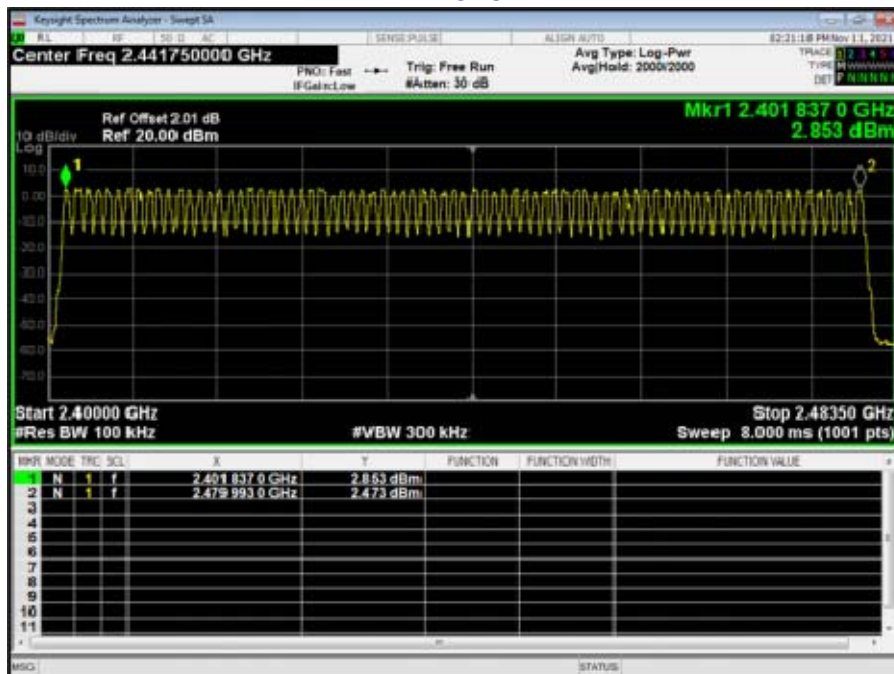




$\pi/4$ DQPSK

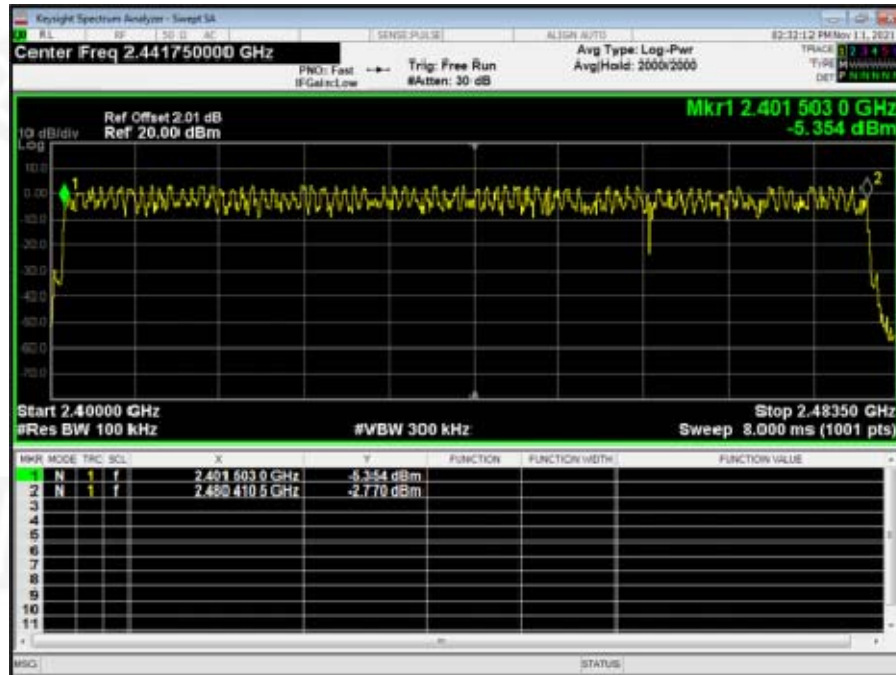

8DPSK

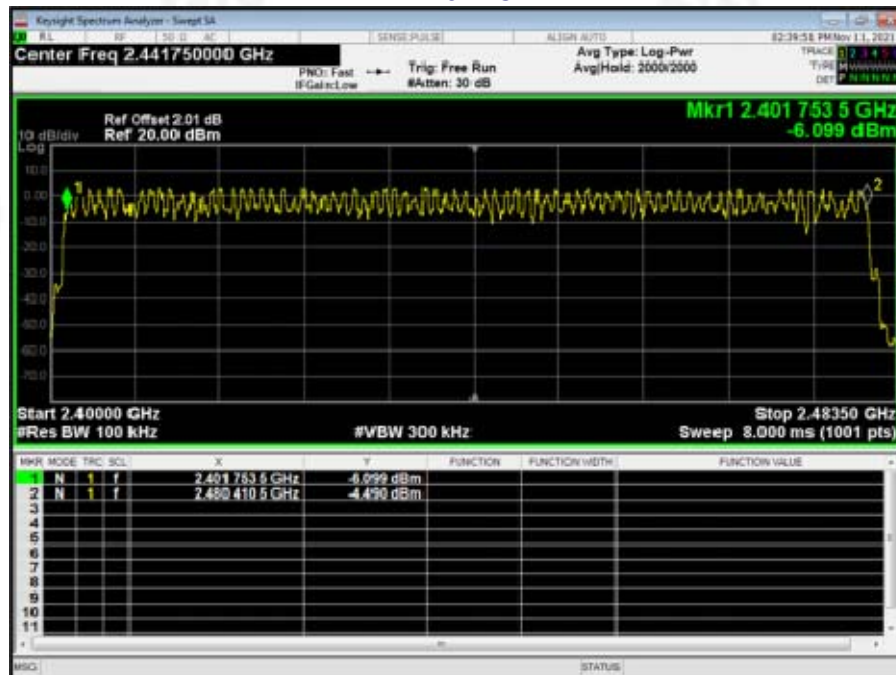



11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result

left earbud:

GFSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	120.32	400	Pass
2441MHz	DH3	260.96	400	Pass
2441MHz	DH5	307.20	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.376(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 120.32\text{ms}$

CH:2441MHz time slot= $1.631(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 260.96\text{ms}$

CH:2441MHz time slot= $2.880(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 307.20\text{ms}$

$\pi/4$ -DQPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	2DH1	120.00	400	Pass
2441MHz	2DH3	259.20	400	Pass
2441MHz	2DH5	306.67	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.375(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 120.00\text{ms}$

CH:2441MHz time slot= $1.620(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 259.20\text{ms}$

CH:2441MHz time slot= $2.875(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 306.67\text{ms}$

8-DPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	3DH1	118.72	400	Pass
2441MHz	3DH3	258.88	400	Pass
2441MHz	3DH5	306.56	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.371(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 118.72\text{ms}$

CH:2441MHz time slot= $1.618(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 258.88\text{ms}$

CH:2441MHz time slot= $2.874(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 306.56\text{ms}$



right earbud:

GFSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	120.32	400	Pass
2441MHz	DH3	261.12	400	Pass
2441MHz	DH5	307.20	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
Test channel: as blow
CH:2441MHz time slot= $0.376(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 120.32\text{ms}$
CH:2441MHz time slot= $1.632(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 261.12\text{ms}$
CH:2441MHz time slot= $2.880(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 307.20\text{ms}$

$\pi/4$ -DQPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	2DH1	120.00	400	Pass
2441MHz	2DH3	259.20	400	Pass
2441MHz	2DH5	306.67	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
Test channel: as blow
CH:2441MHz time slot= $0.375(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 120.00\text{ms}$
CH:2441MHz time slot= $1.620(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 259.20\text{ms}$
CH:2441MHz time slot= $2.875(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 306.67\text{ms}$

8-DPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	3DH1	119.04	400	Pass
2441MHz	3DH3	258.88	400	Pass
2441MHz	3DH5	306.56	400	Pass


Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
Test channel: as blow
CH:2441MHz time slot= $0.372(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 119.04\text{ms}$
CH:2441MHz time slot= $1.618(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 258.88\text{ms}$
CH:2441MHz time slot= $2.874(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 306.56\text{ms}$




Test Plots

left earbud:
GFSK DH1 2441MHz

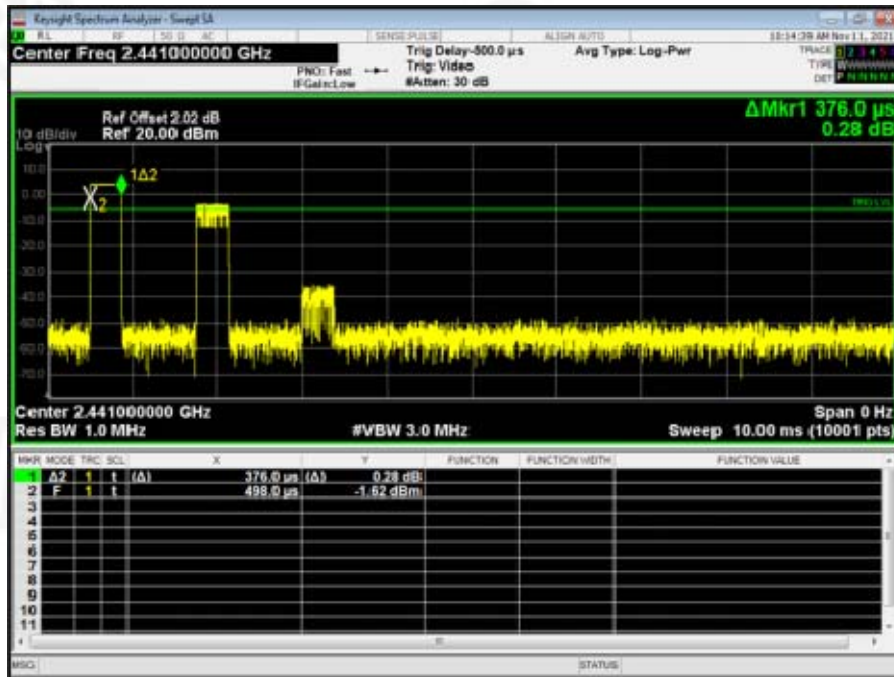


GFSK DH3 2441MHz

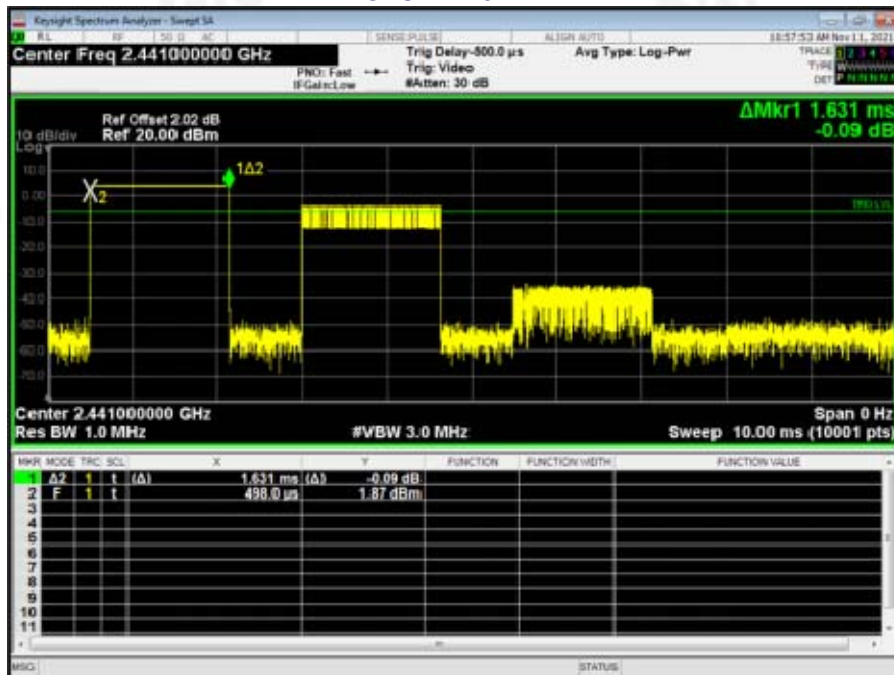




GFSK DH5 2441MHz

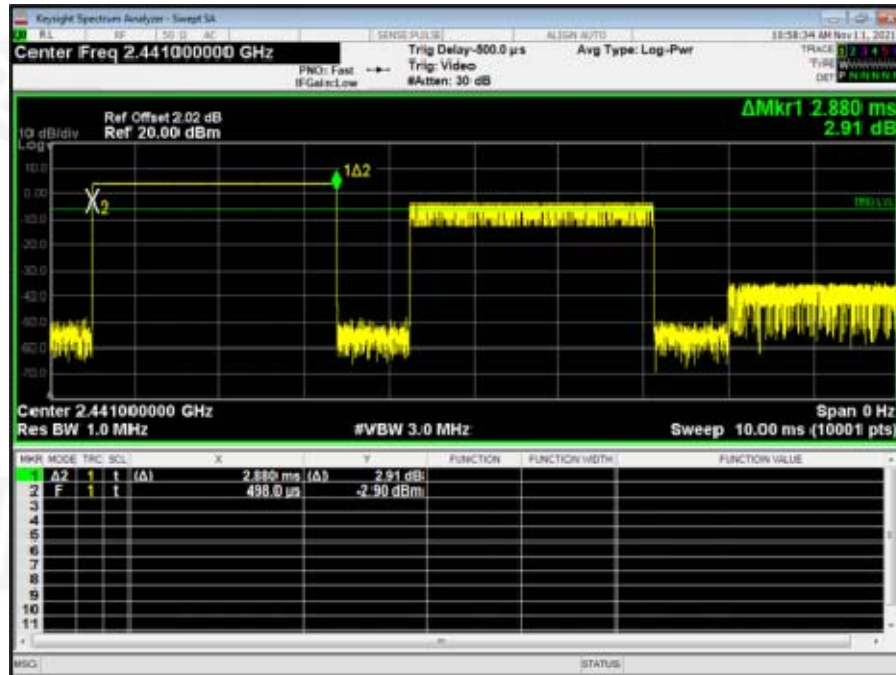


$\pi/4$ DQPSK 2DH1 2441MHz

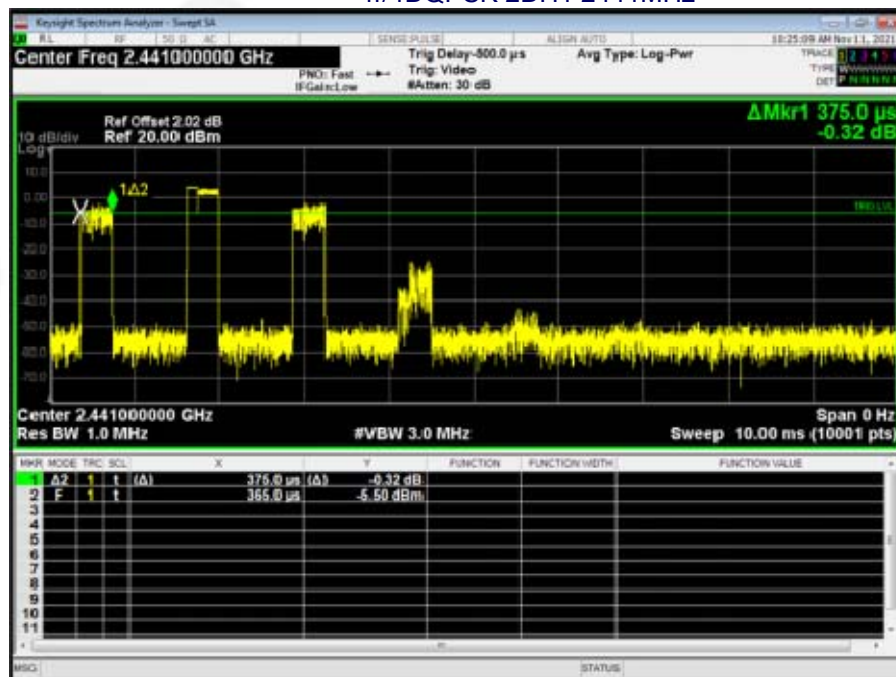




$\pi/4$ DQPSK 2DH3 2441MHz

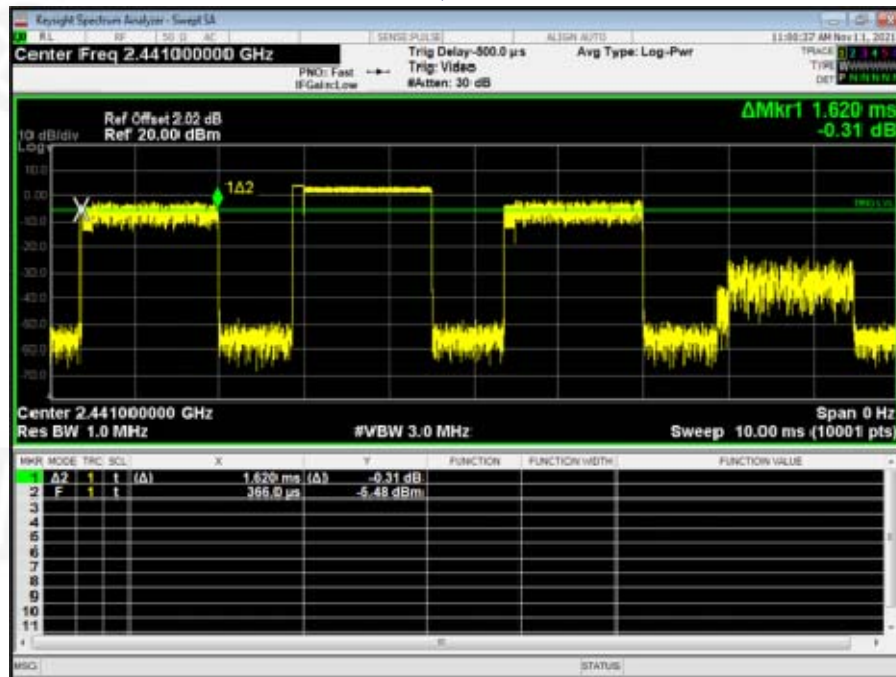


$\pi/4$ DQPSK 2DH5 2441MHz

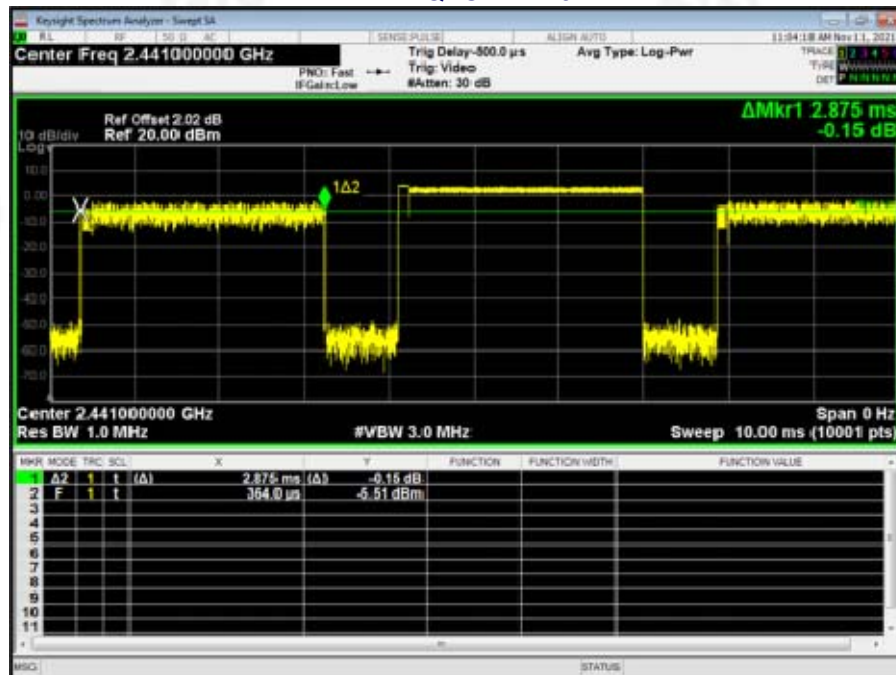




8DPSK 3DH1 2441MHz

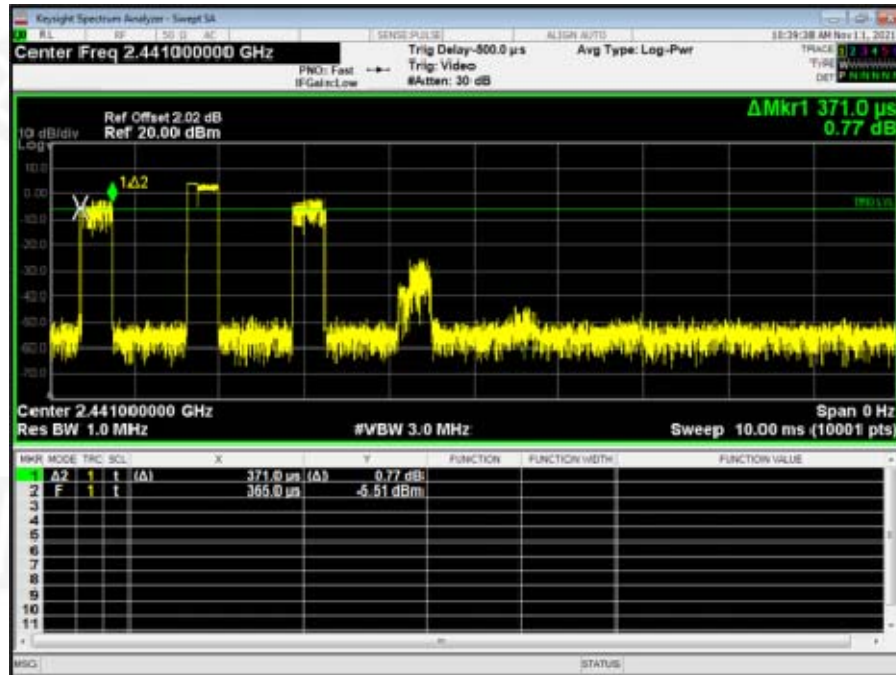


8DPSK 3DH3 2441MHz

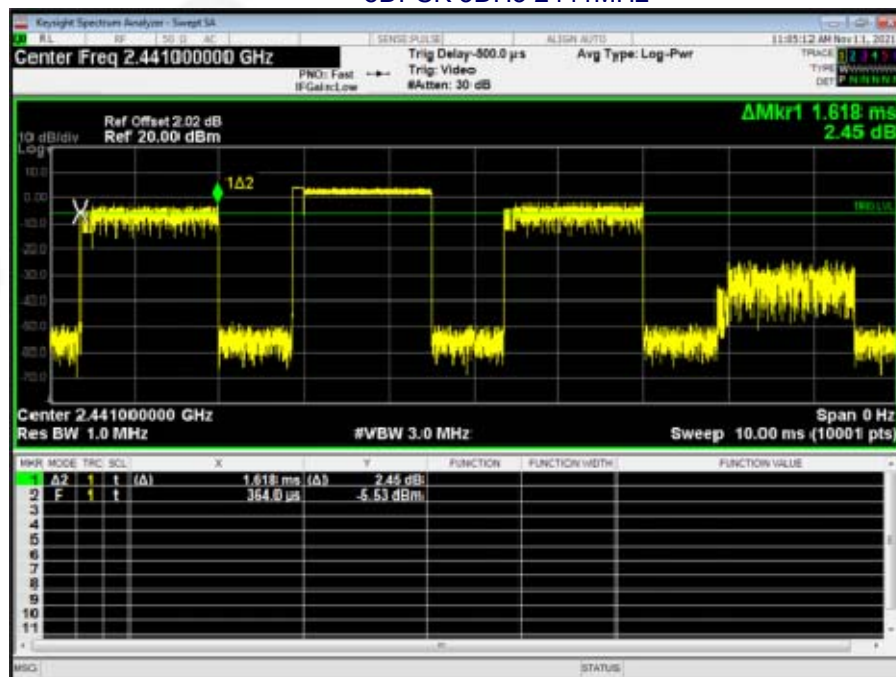




8DPSK 3DH5 2441MHz

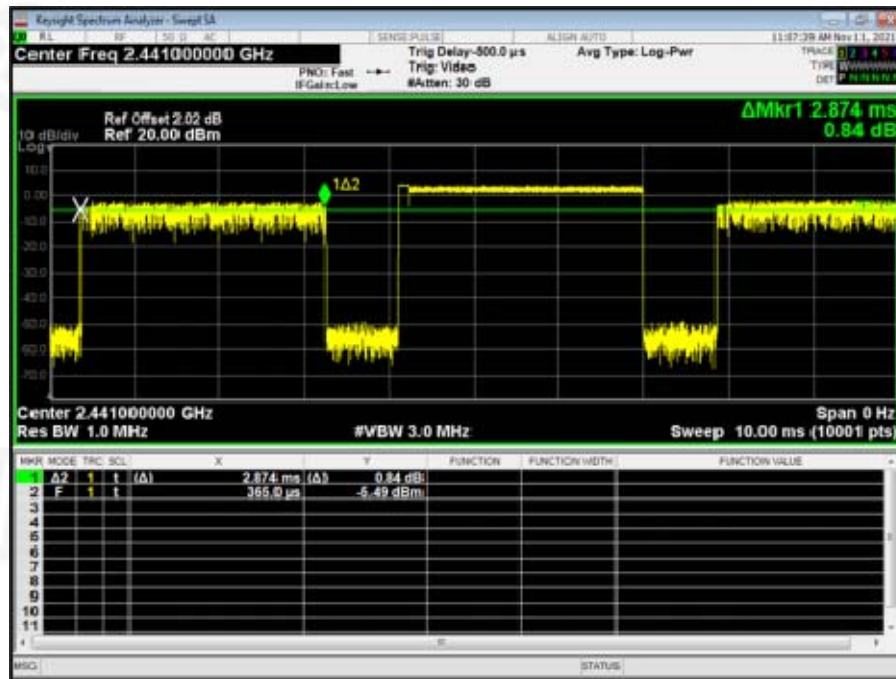




right earbud:
GFSK DH1 2441MHz

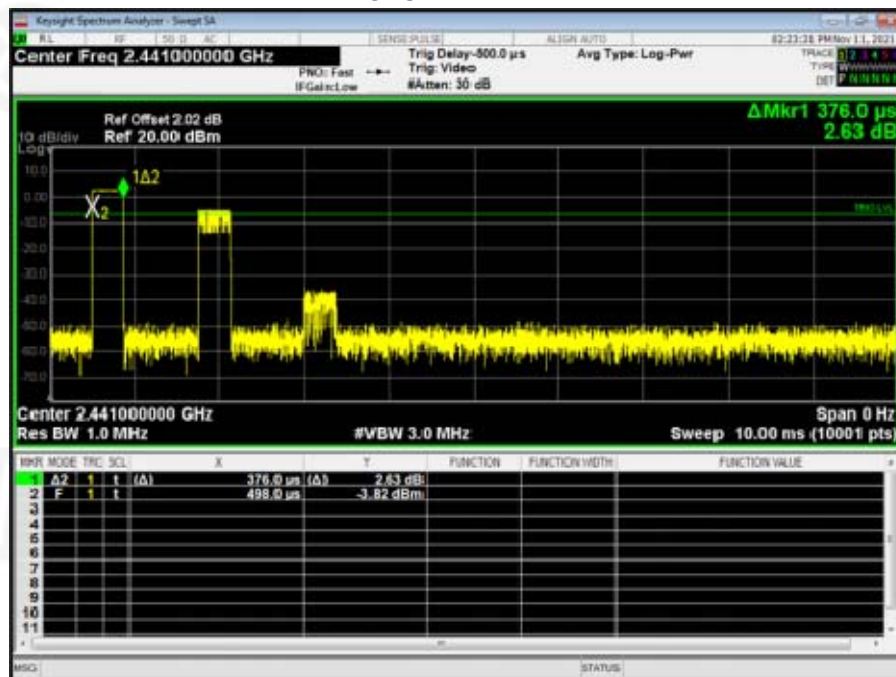


GFSK DH3 2441MHz

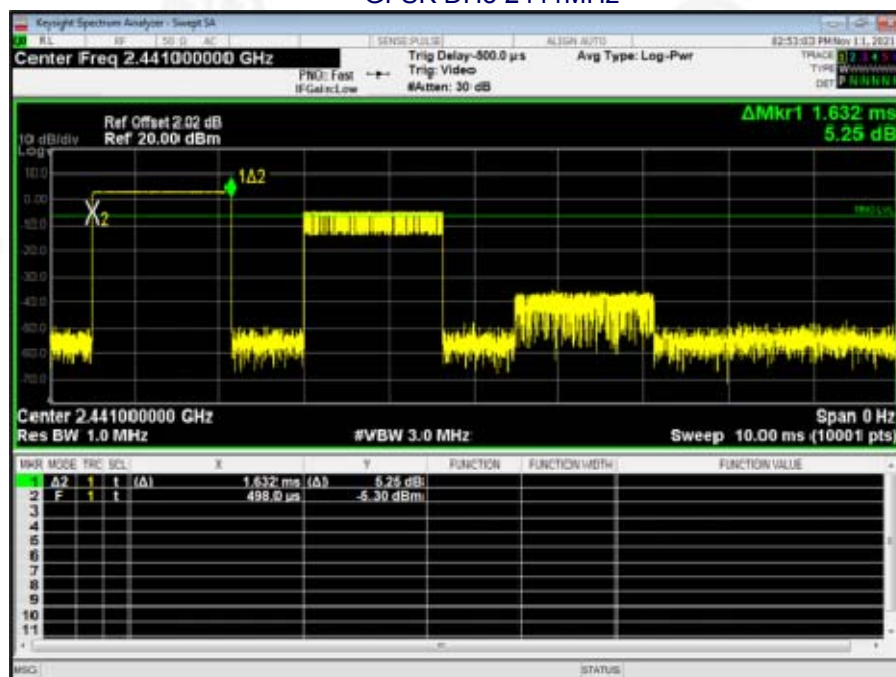




GFSK DH5 2441MHz

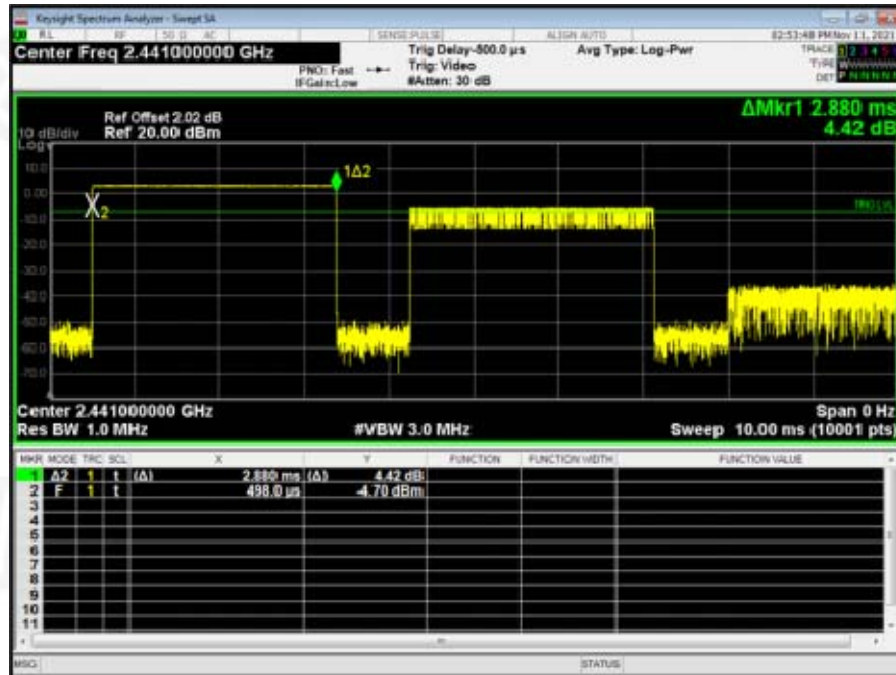


$\pi/4$ DQPSK 2DH1 2441MHz

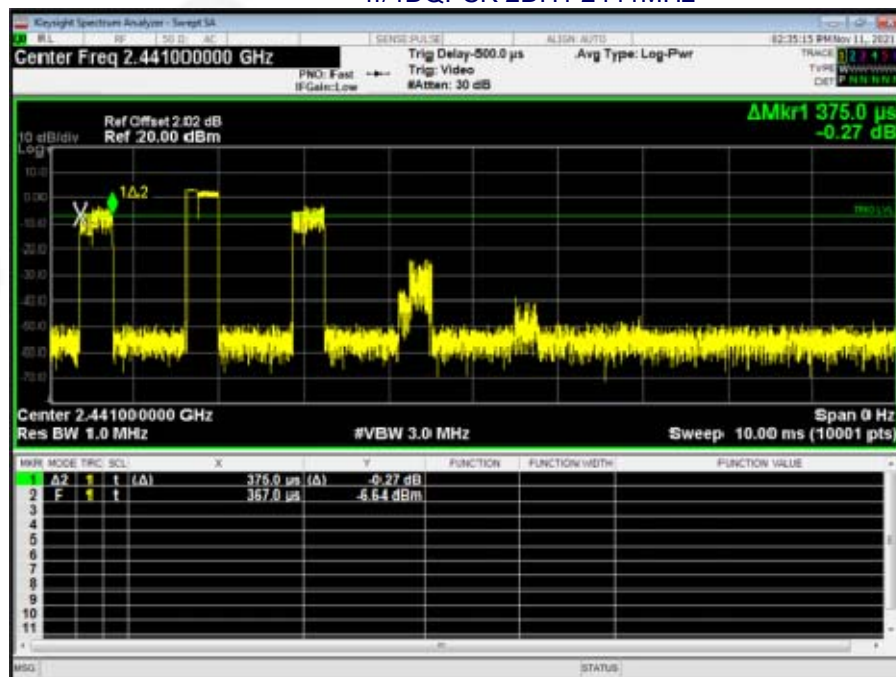




$\pi/4$ DQPSK 2DH3 2441MHz

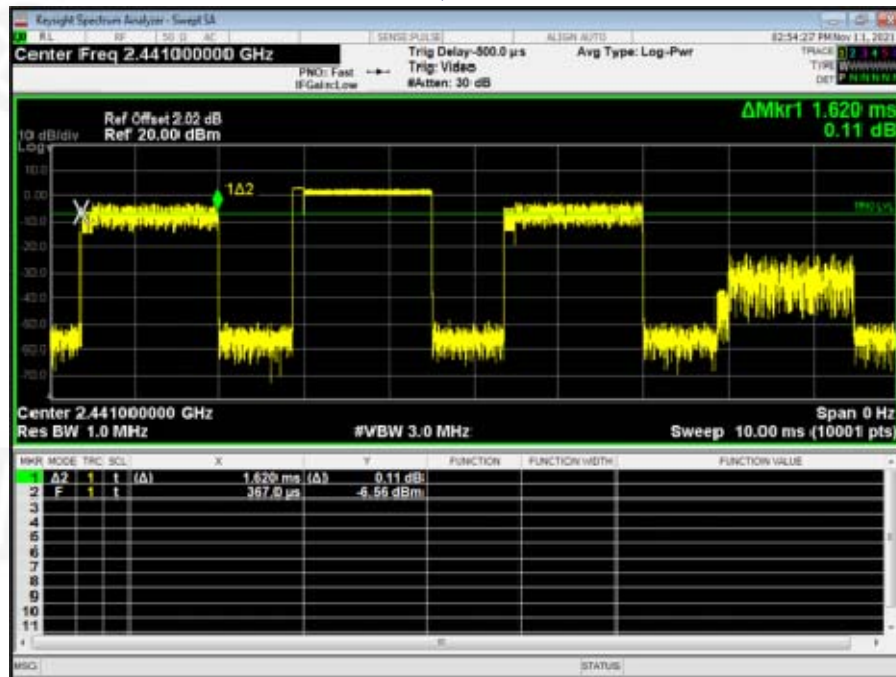


$\pi/4$ DQPSK 2DH5 2441MHz

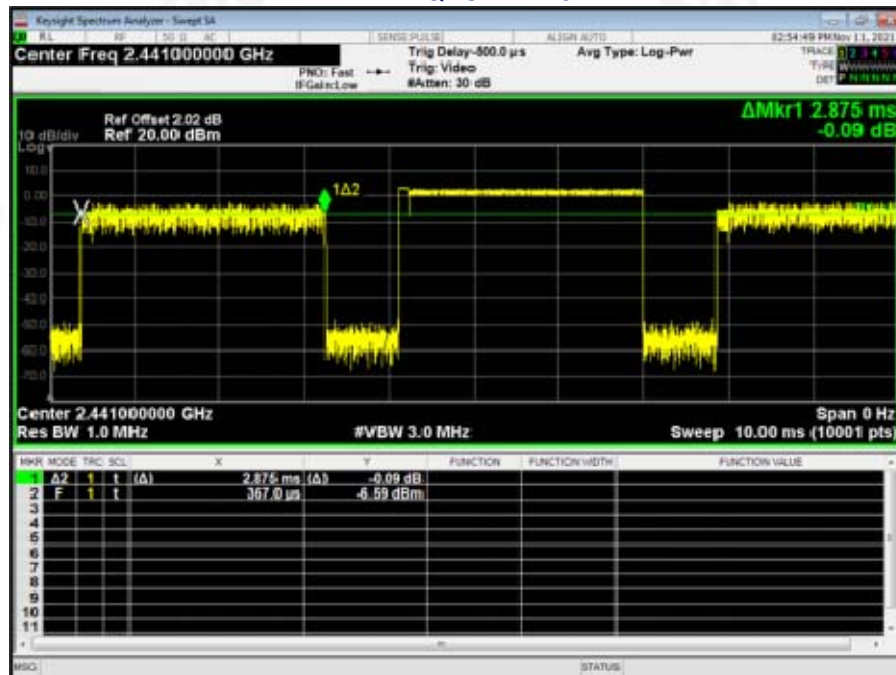




8DPSK 3DH1 2441MHz

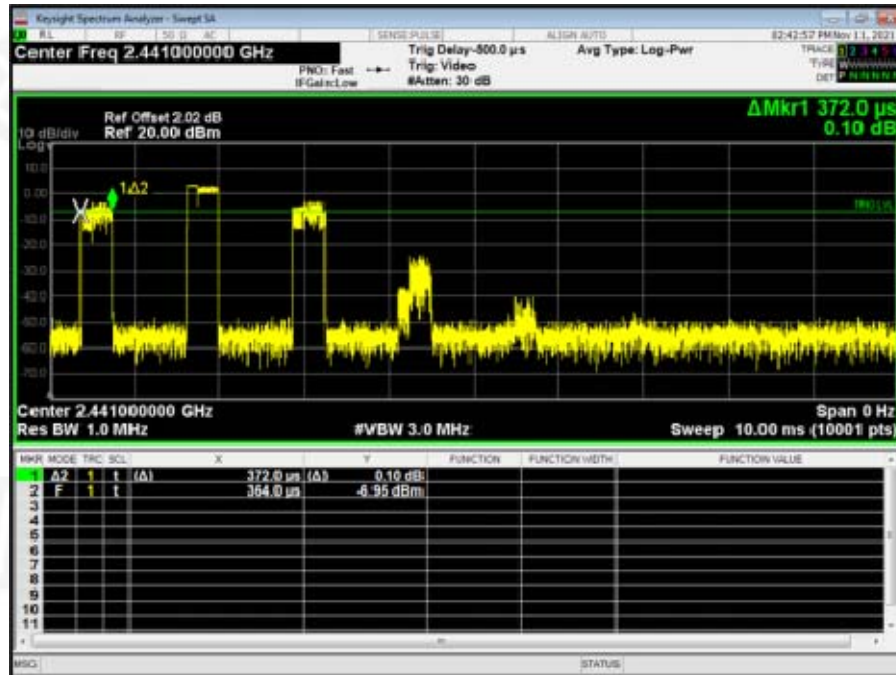


8DPSK 3DH3 2441MHz

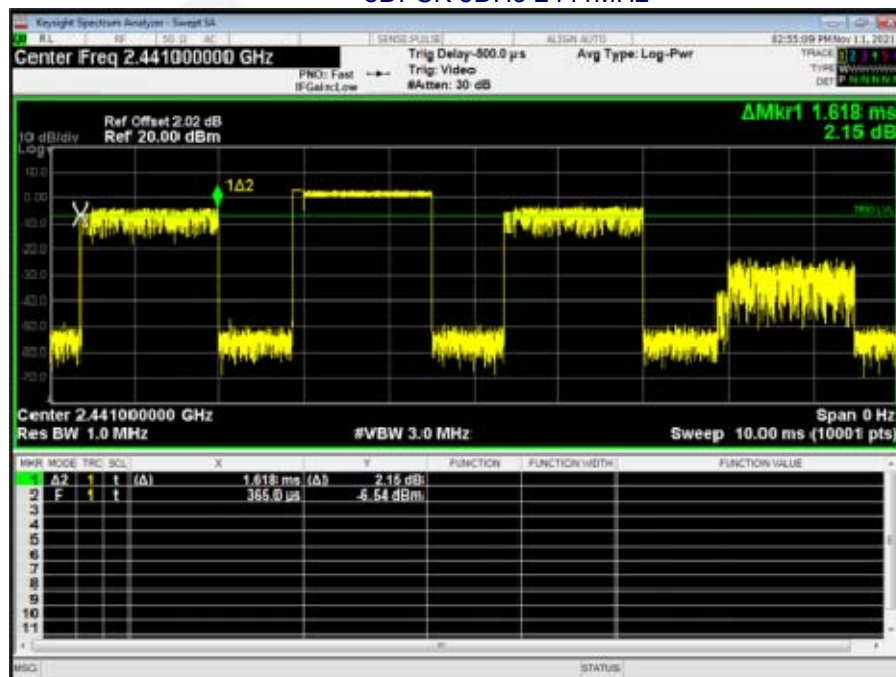



8DPSK 3DH5 2441MHz

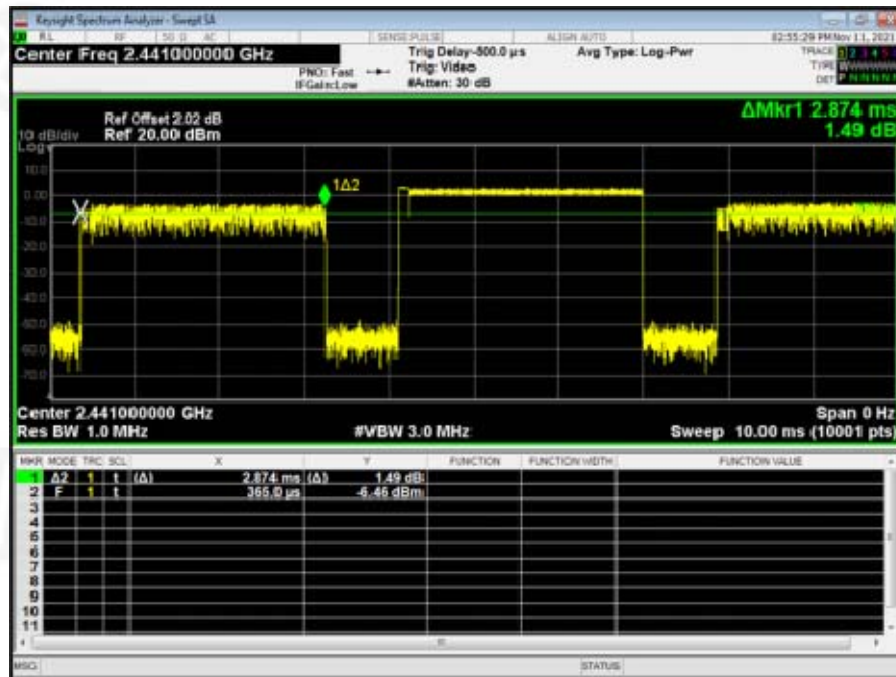



12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is Internal Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****