



Test Graphs

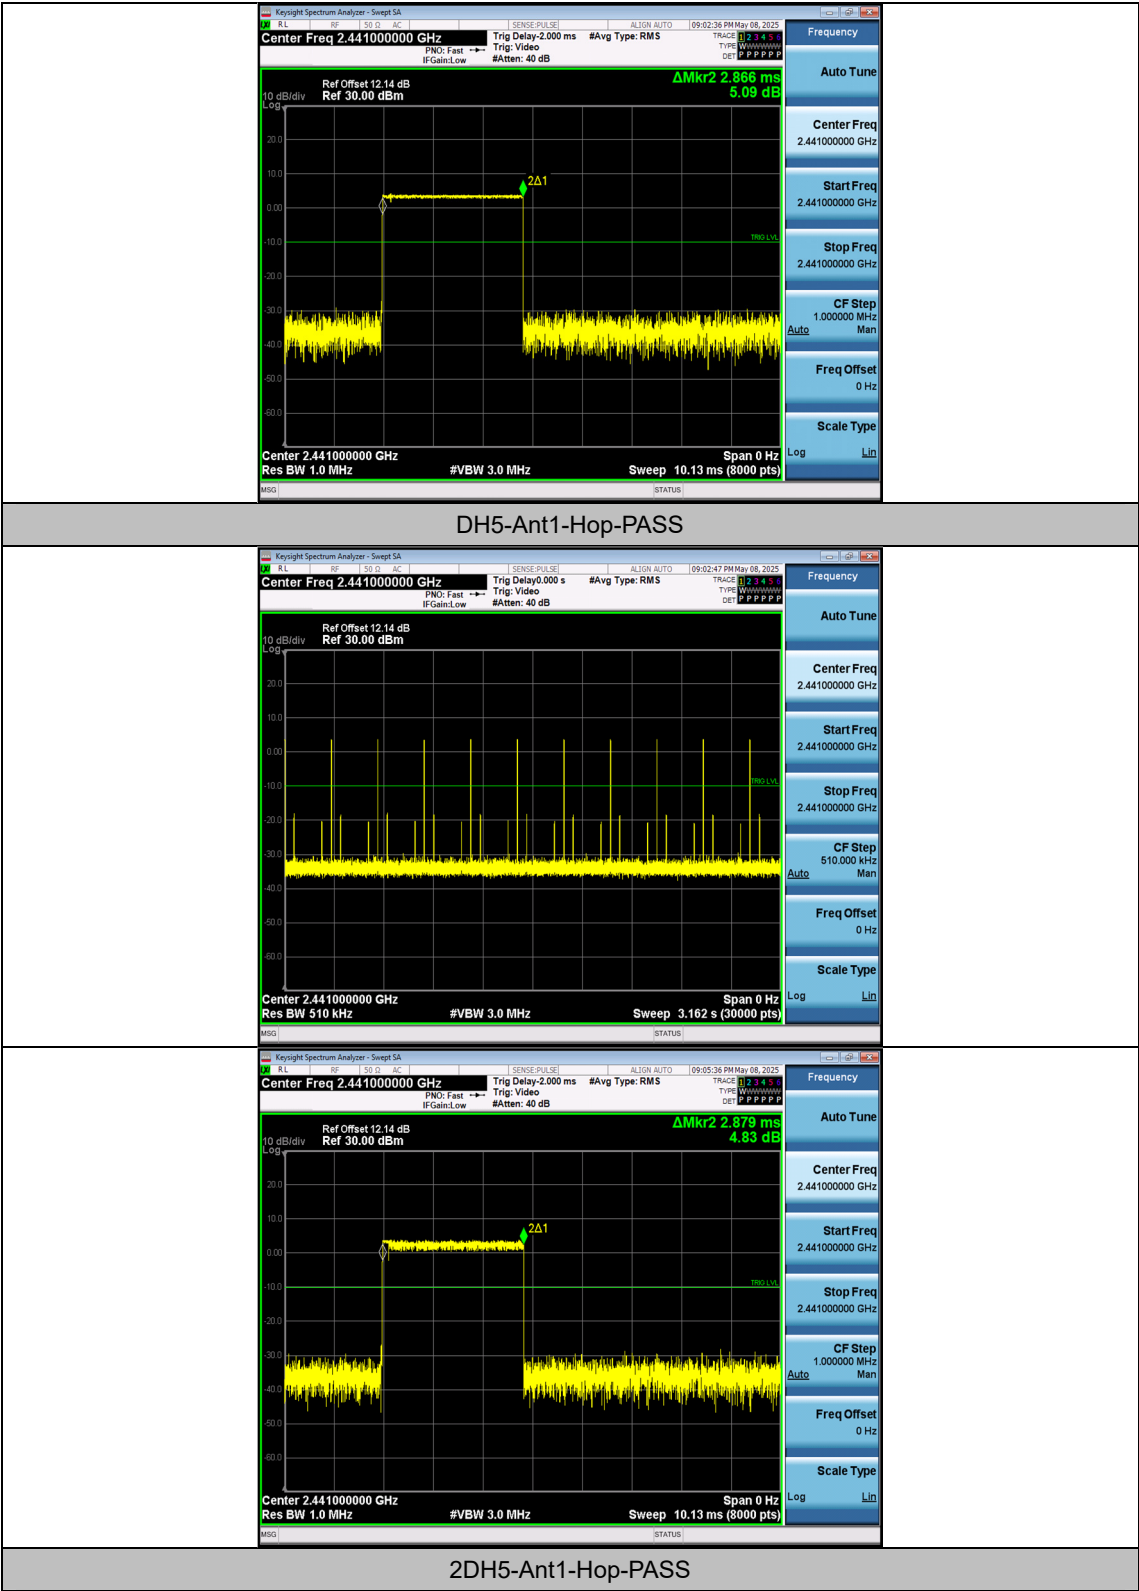

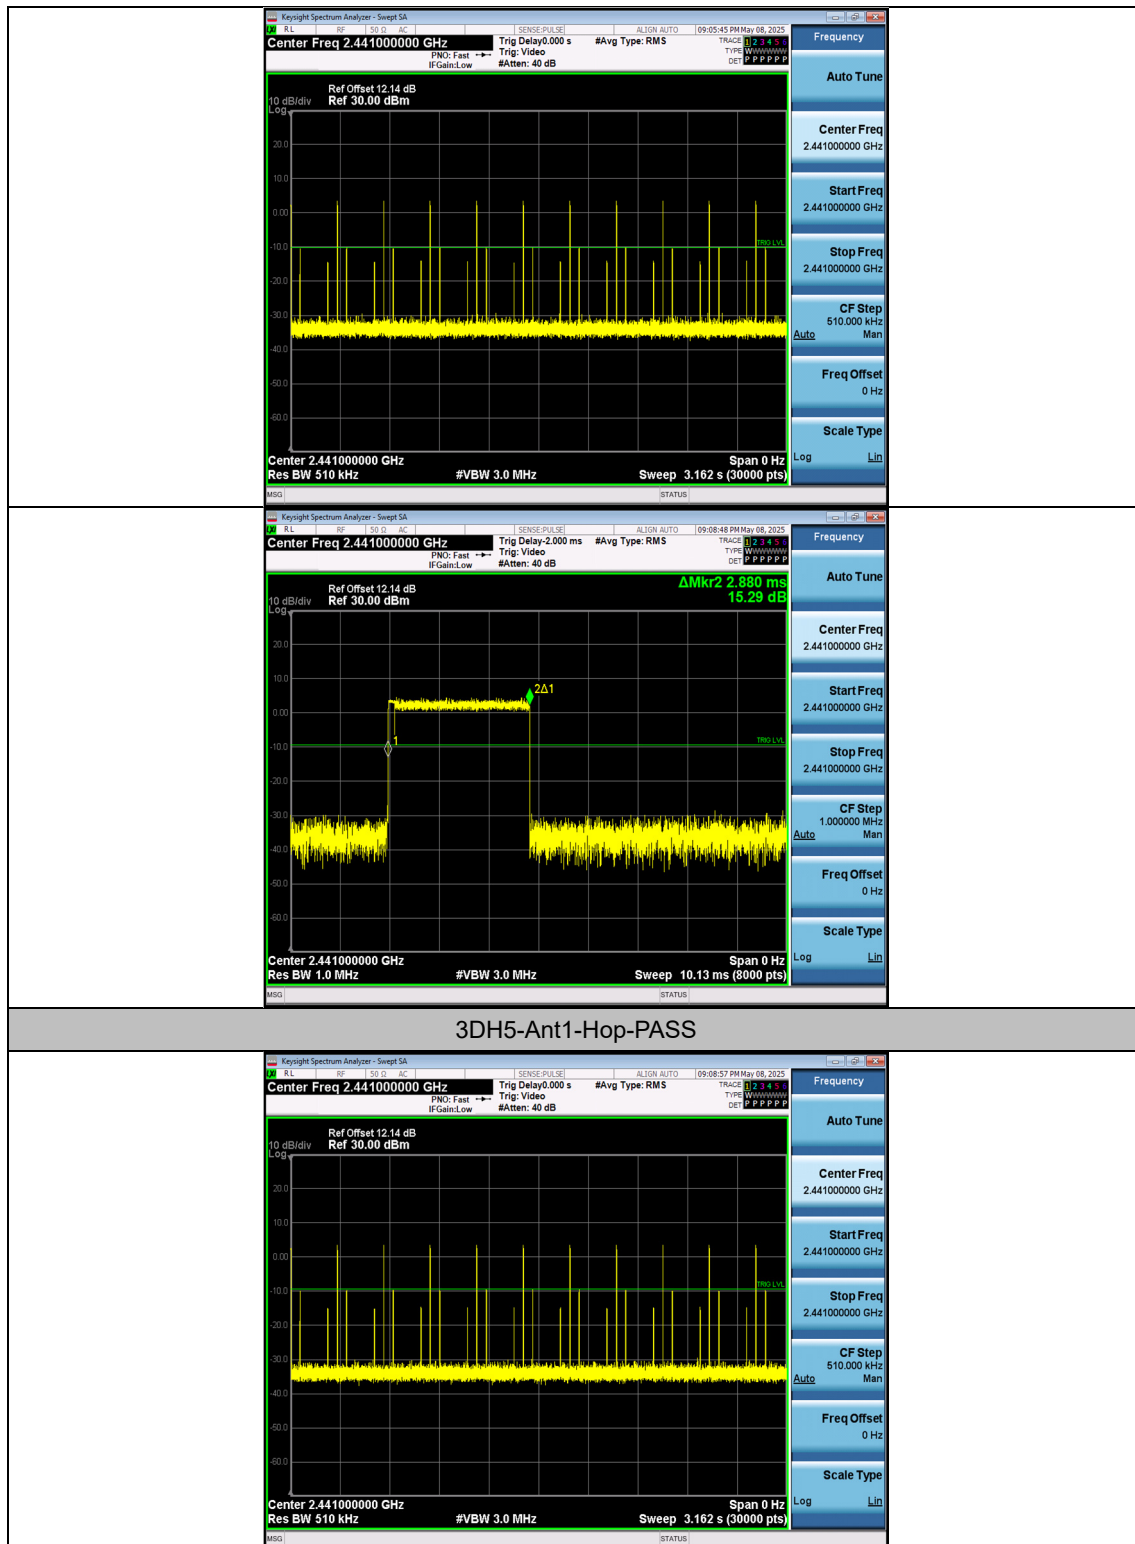


3DH5-Ant1-Hop-PASS

Appendix E: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

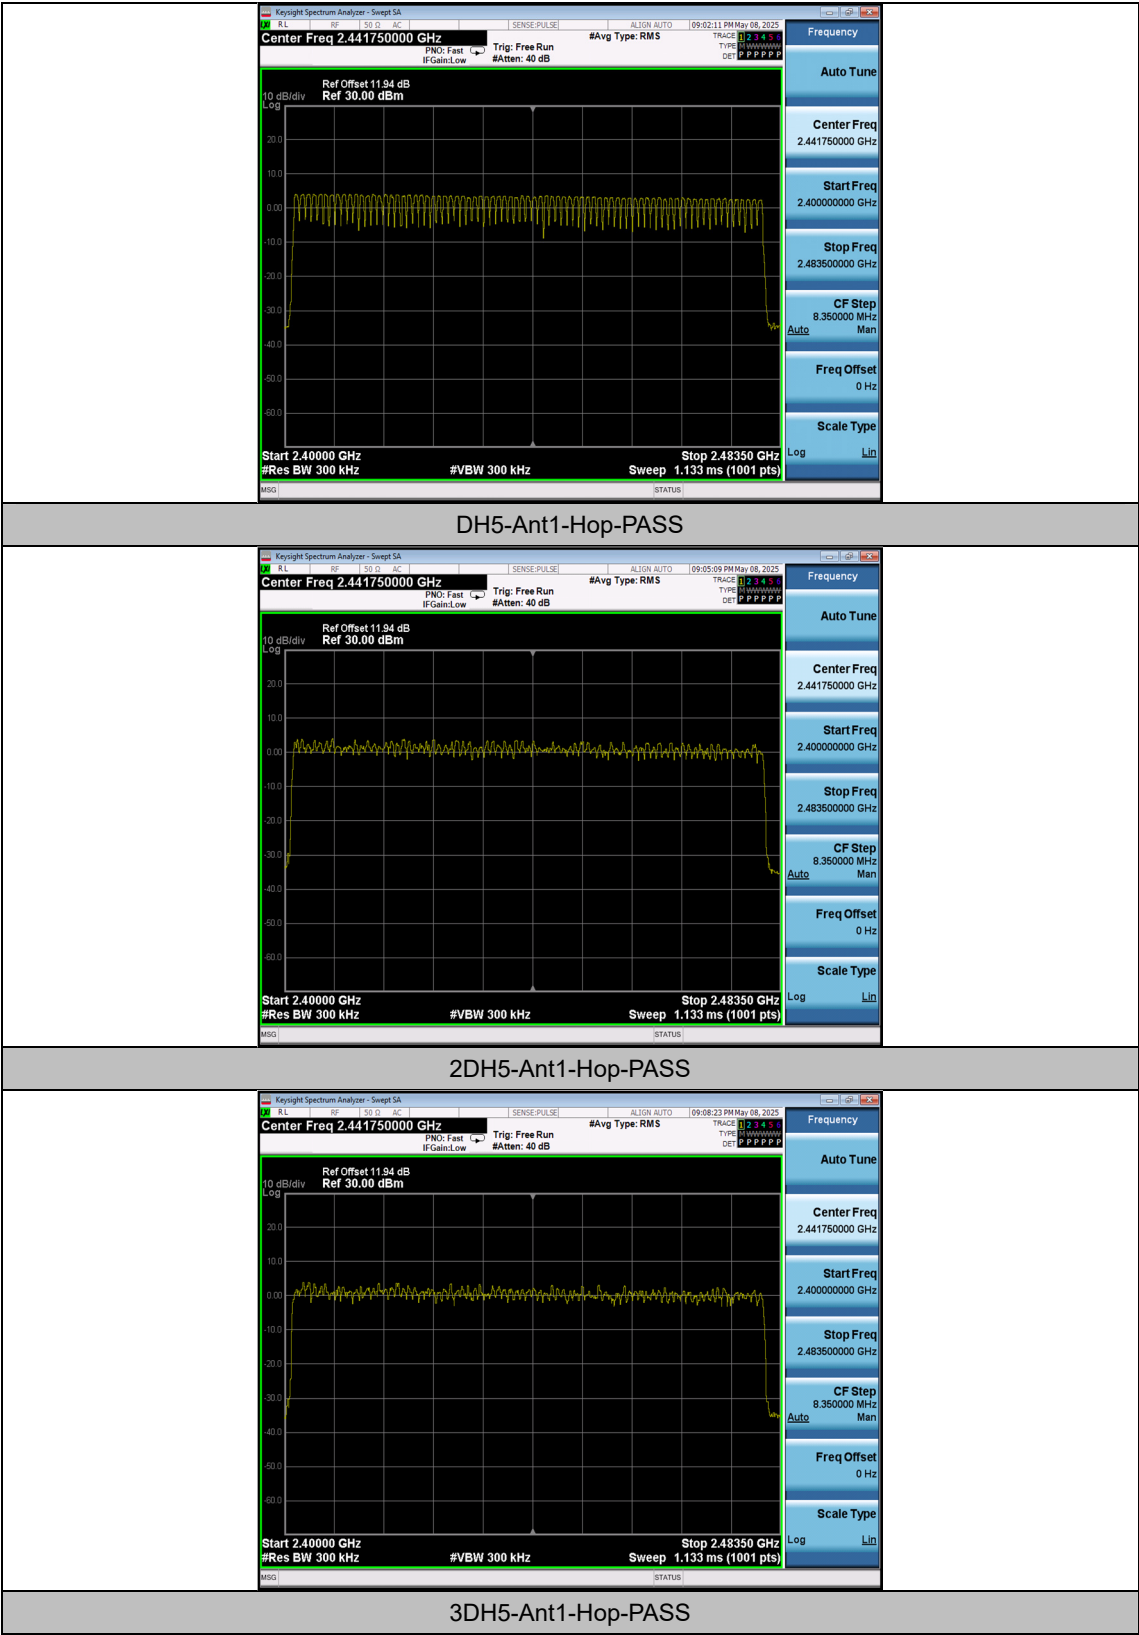


Appendix F: Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
DH5	Ant1	2402	2401.79	3.85
DH5	Ant1	2441	2440.78	3.43
DH5	Ant1	2480	2479.78	2.18
2DH5	Ant1	2402	2402.12	3.08
2DH5	Ant1	2441	2440.79	3.28
2DH5	Ant1	2480	2479.79	2.14
3DH5	Ant1	2402	2401.78	3.72
3DH5	Ant1	2441	2440.79	3.38
3DH5	Ant1	2480	2480.11	2.10

Test Graphs



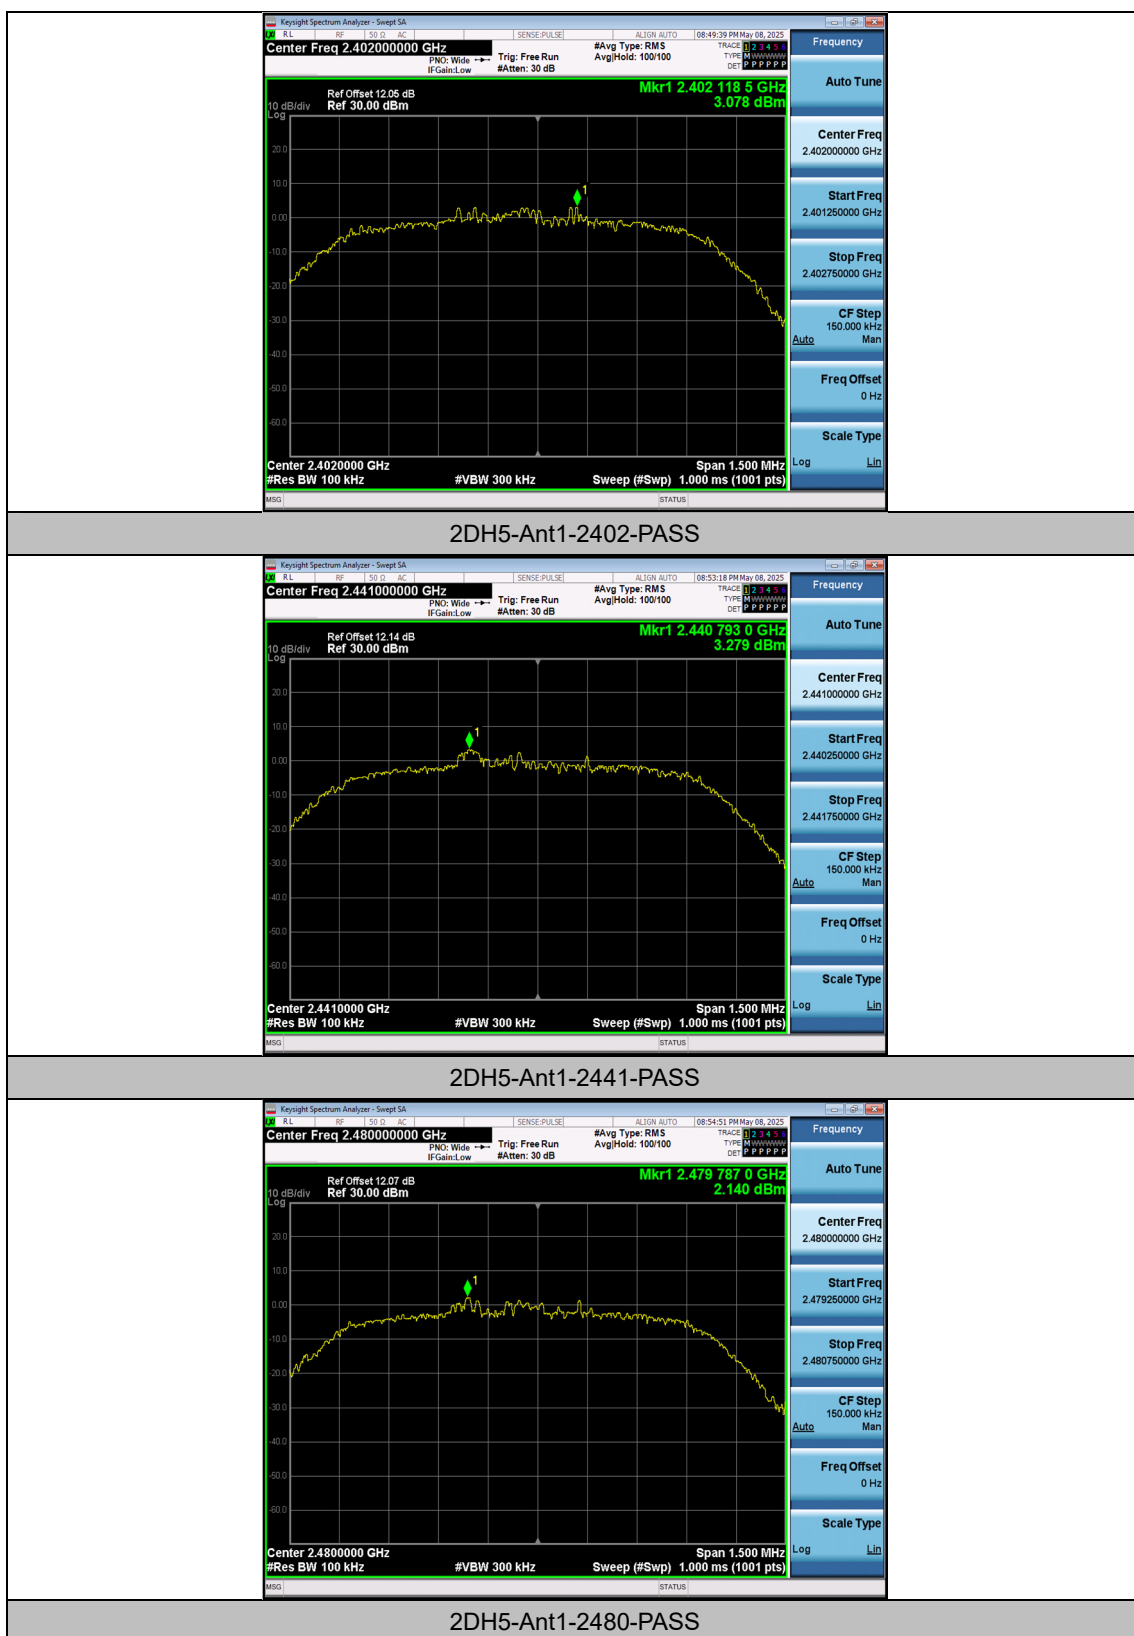

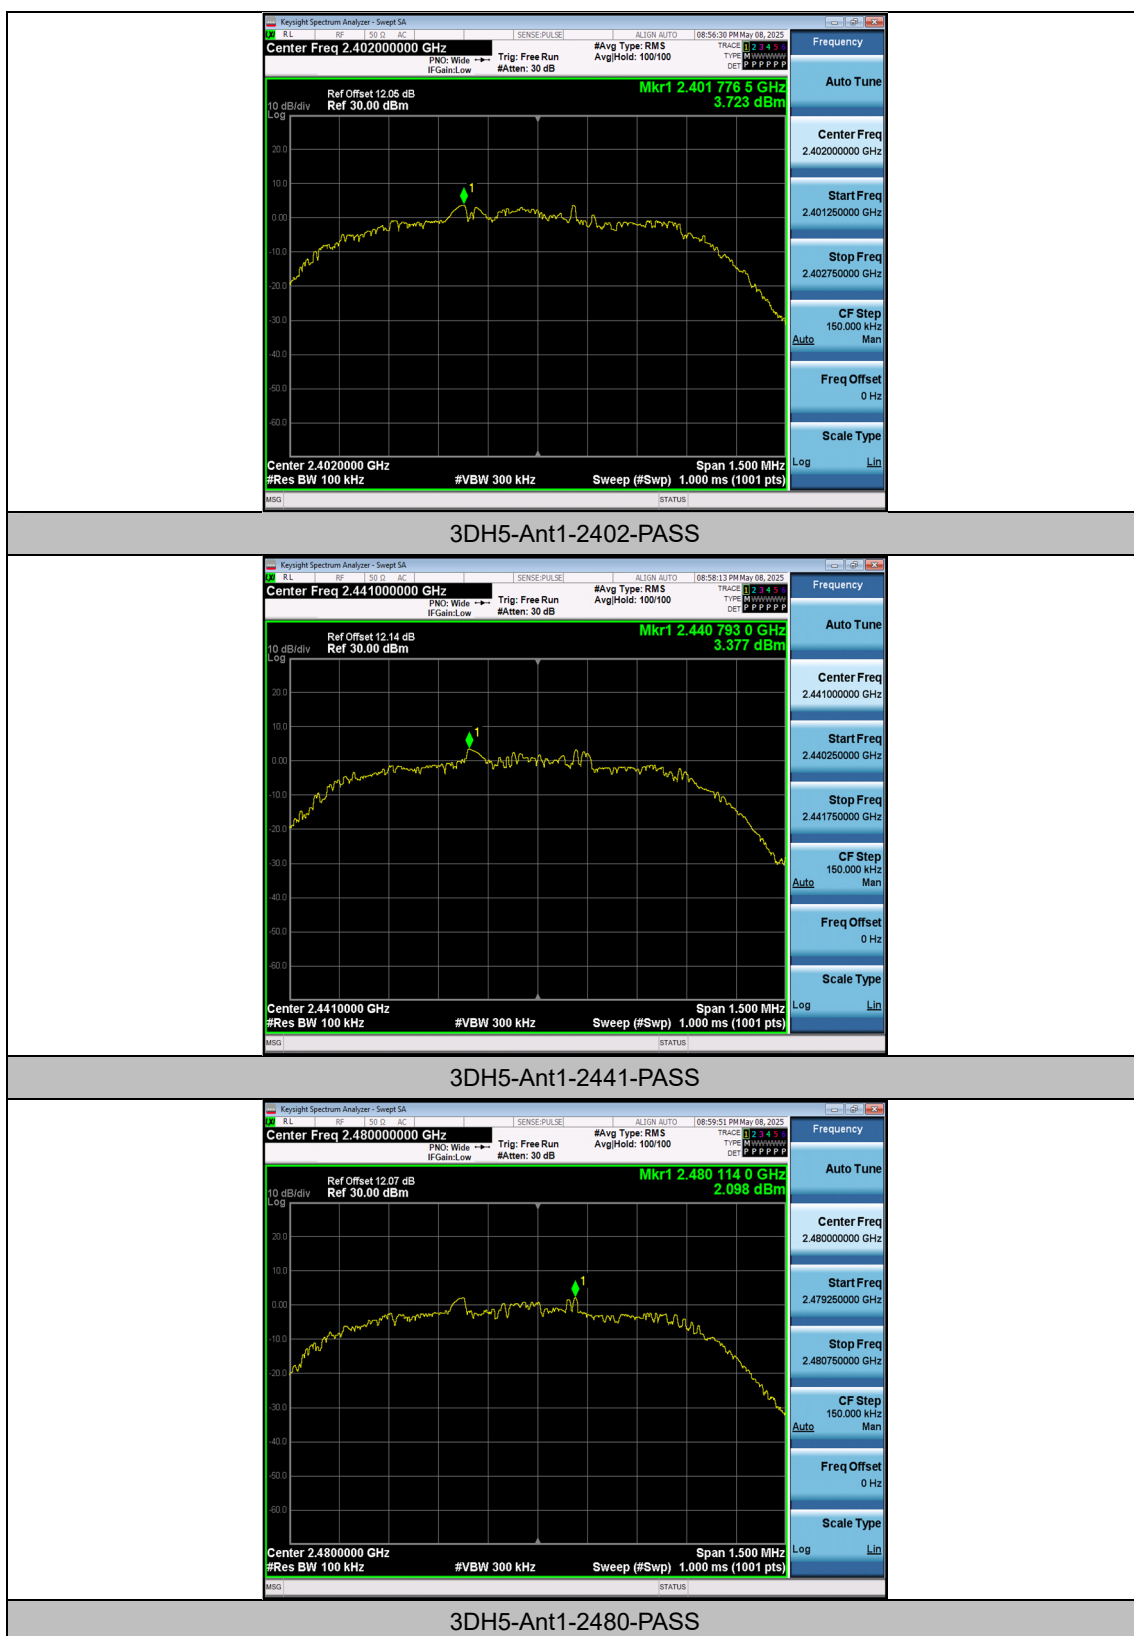

Appendix G: Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	3.85	-46.64	≤-16.15	PASS
DH5	Ant1	High	2480	2.18	-47.14	≤-17.82	PASS
DH5	Ant1	Low	Hop_2402	3.20	-46.67	≤-16.8	PASS
DH5	Ant1	High	Hop_2480	2.00	-46.54	≤-18	PASS
2DH5	Ant1	Low	2402	3.08	-46.49	≤-16.92	PASS
2DH5	Ant1	High	2480	2.14	-46.24	≤-17.86	PASS
2DH5	Ant1	Low	Hop_2402	0.02	-46.42	≤-19.98	PASS
2DH5	Ant1	High	Hop_2480	2.18	-46.78	≤-17.82	PASS
3DH5	Ant1	Low	2402	3.72	-46.52	≤-16.28	PASS
3DH5	Ant1	High	2480	2.10	-47.01	≤-17.9	PASS
3DH5	Ant1	Low	Hop_2402	-0.61	-46.42	≤-20.61	PASS
3DH5	Ant1	High	Hop_2480	2.35	-46.07	≤-17.65	PASS

Test Graphs

