



EMC TEST REPORT

Applicant UAB TELTONIKA TELEMATICS

FCC ID 2A3HUFMM230

Product Fleet Management System

Brand TELTONIKA TELEMATICS

Model FMM230-Q3IB0

Report No. R2407A0915-E1

Issue Date September 5, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2023)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Liu Wei

Approved by: Fan Guangchang

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility.....	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test	5
2.1	Applicant and Manufacturer Information	5
2.2	General Information	5
2.3	Applied Standards	7
2.4	Test Mode	8
3	Test Case Results	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	14
4	Uncertainty Measurement.....	19
5	Main Test Instruments	20
	ANNEX A: The EUT Appearance	21
	ANNEX B: Test Setup Photos	22

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS

Date of Testing: July 20, 2024 ~ August 9, 2024

Date of Sample Received: July 17, 2024

Note:

1. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Fan Guangchang
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Jack.Fan@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	UAB TELTONIKA TELEMATICS
Applicant address	Saltoniskiu st. 9B-1, LT-08105, Vilnius, Lithuania
Manufacturer	UAB TELTONIKA TELEMATICS
Manufacturer address	Saltoniskiu st. 9B-1, LT-08105, Vilnius, Lithuania

2.2 General Information

EUT Description			
Device Type	Fixed Device		
Model	FMM230-Q3IB0		
SN	MPH23JB01005556		
HW Version	FMM130-4-1		
SW Version	FMB.Ver.03.27.07		
Power Rating	DC12V; DC24V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Internal Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 ~ 849	869 ~ 894
	GSM 1900	1850 ~ 1910	1930 ~ 1990
	LTE-M Band 2	1850 ~ 1910	1930 ~ 1990
	LTE-M Band 4	1710 ~ 1755	2110 ~ 2155
	LTE-M Band 5	824 ~ 849	869 ~ 894
	LTE-M Band 12	699 ~ 716	729 ~ 746
	LTE-M Band 13	777 ~ 787	746 ~ 756
	LTE-M Band 25	1850 ~ 1915	1930 ~ 1995
	LTE-M Band 66	1710 ~ 1780	2110 ~ 2180
	LTE-M Band 85	698~716	728~746
	NB-IoT Band 2	1850 ~ 1910	1930 ~ 1990
	NB-IoT Band 4	1710 ~ 1755	2110 ~ 2155
	NB-IoT Band 5	824 ~ 849	869 ~ 894
	NB-IoT Band 12	699 ~ 716	729 ~ 746
	NB-IoT Band 13	777 ~ 787	746 ~ 756
	NB-IoT Band 25	1850 ~ 1915	1930 ~ 1995
	NB-IoT Band 66	1710 ~ 1780	2110 ~ 2180

	NB-IoT Band 71	663 ~ 698	617 ~ 652
	NB-IoT Band 85	698 ~ 716	728 ~ 746
	Bluetooth	2400 ~ 2483.5	2400 ~ 2483.5
	Bluetooth LE	2400 ~ 2483.5	2400 ~ 2483.5

Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2023)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	DC Power Supply + EUT Working

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1	Mode 1
Conducted Emission	Mode 1	Mode 1
After technical evaluation or/and preliminary test, the test data of the worst-case condition was recorded in this report.		

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

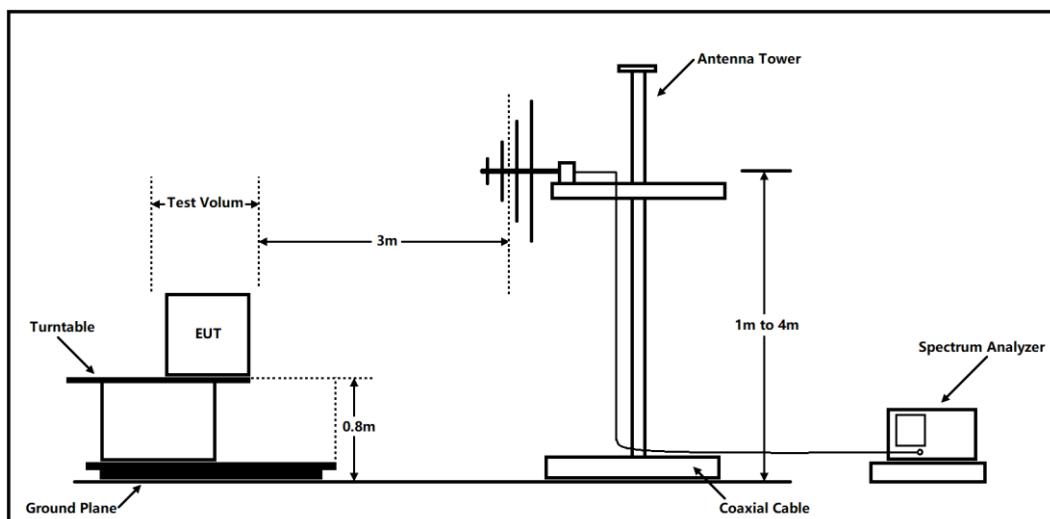

Above 1GHz

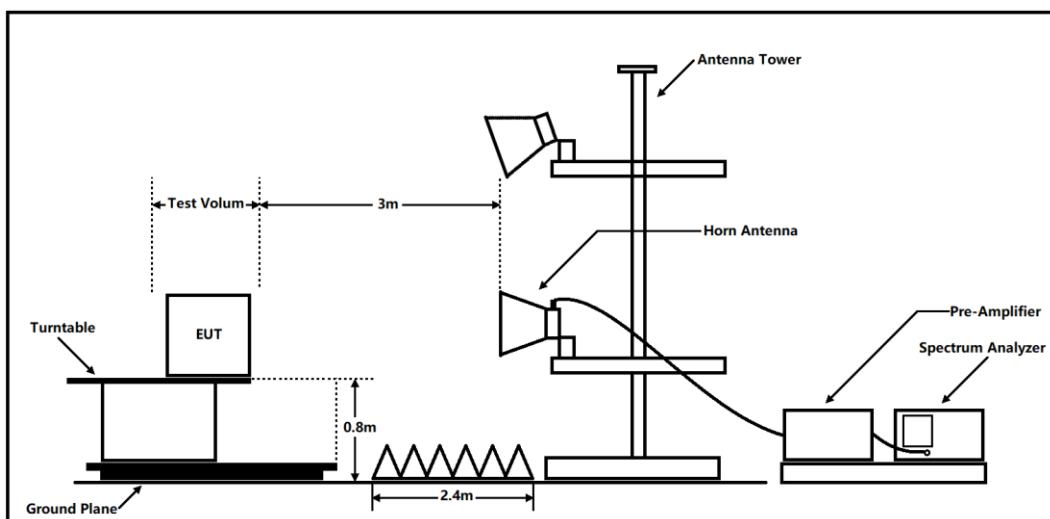

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits**Class B**

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Frequency range of radiated measurements

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Test Results


Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, pre-tests were performed in the EUT's voltage (DC12V and DC24V), and DC12V mode is selected as the worst condition. The test data of the worst-case condition was recorded in this report.

DC12V

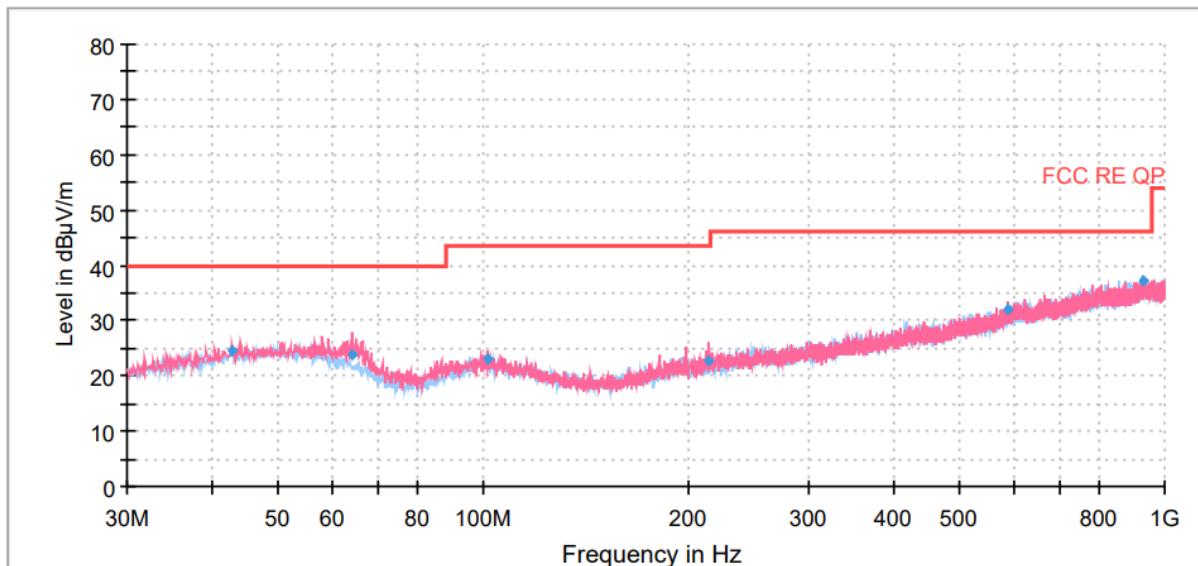


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
42.85	24.54	40.00	15.46	106.0	V	49.00	20
64.19	23.86	40.00	16.14	113.0	V	28.00	18
101.05	23.02	43.50	20.48	116.0	V	0.00	19
214.42	22.82	43.50	20.68	218.0	V	17.00	18
587.63	32.15	46.00	13.85	197.0	V	194.00	27
931.01	37.18	46.00	8.82	189.0	H	190.00	31

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss)

2. Margin = Limit – Quasi-Peak

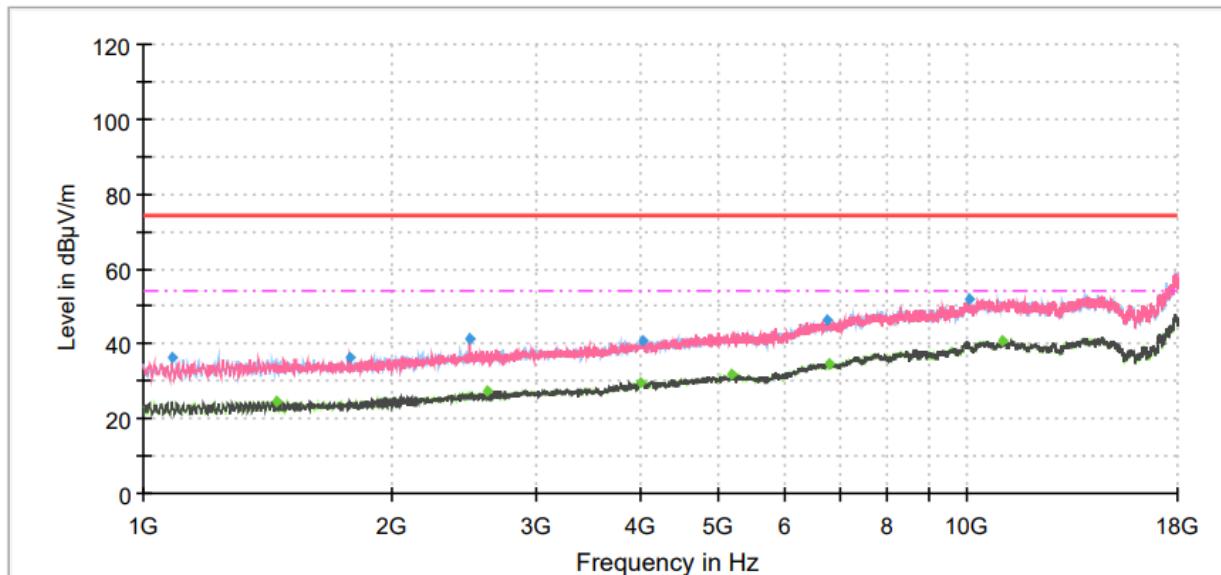
Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1085.00	36.42	---	74.00	37.58	500.00	181.0	H	324.00	-22
1448.38	---	24.75	54.00	29.25	500.00	170.0	V	10.00	-20
1784.13	36.04	---	74.00	37.96	500.00	115.0	V	304.00	-20
2487.50	41.19	---	74.00	32.81	500.00	135.0	V	7.00	-17
2612.88	---	27.27	54.00	26.73	500.00	110.0	V	70.00	-17
4015.38	---	29.86	54.00	24.14	500.00	210.0	H	123.00	-13
4045.13	40.94	---	74.00	33.06	500.00	103.0	V	219.00	-13
5175.63	---	31.56	54.00	22.44	500.00	100.0	H	54.00	-10
6769.38	46.11	---	74.00	27.89	500.00	174.0	H	56.00	-5
6809.75	---	34.85	54.00	19.15	500.00	106.0	H	1.00	-5
10020.63	52.14	---	74.00	21.86	500.00	117.0	V	312.00	-1
11034.25	---	40.64	54.00	13.36	500.00	163.0	H	344.00	1

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
2. Margin = Limit – MaxPeak / Average

3.2 Conducted Emission


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

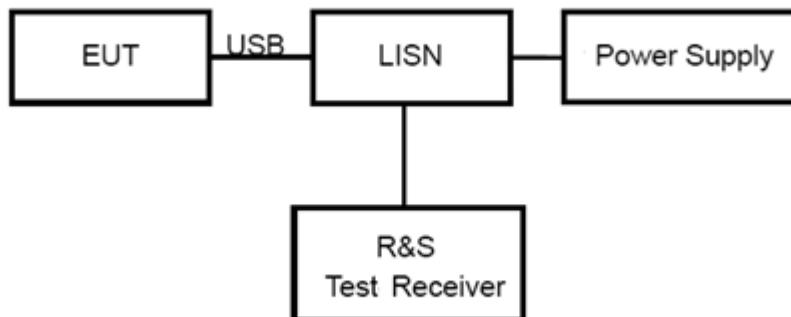

Limits

Frequency (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50


*: Decreases with the logarithm of the frequency.

Note: The EUT should meet CLASS B limit.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

DC12V

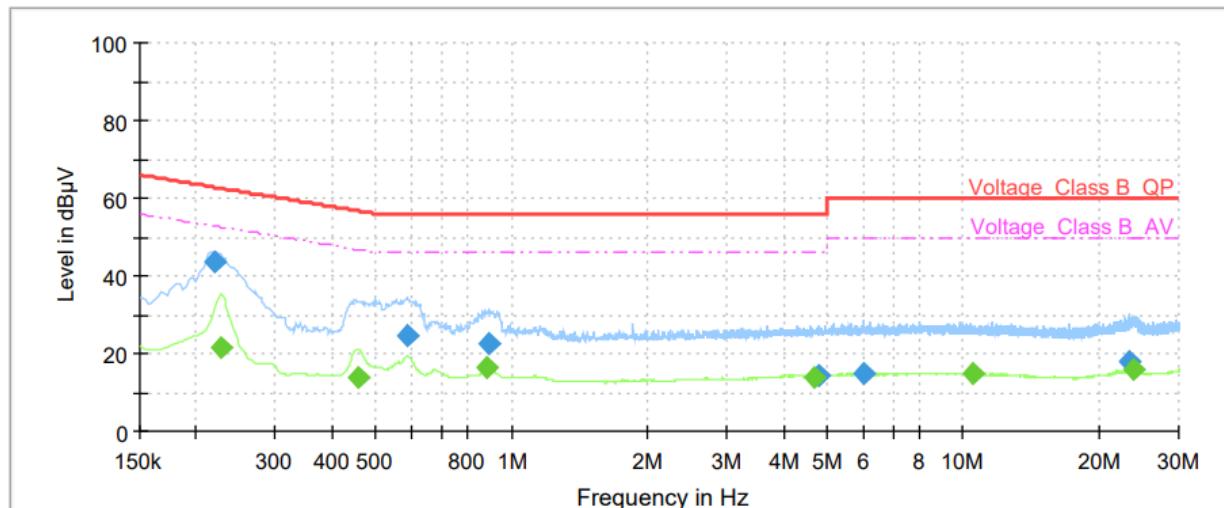


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.22	43.35	---	62.83	19.48	1000.0	9.000	L1	ON	21.1
0.23	---	21.57	52.58	31.01	1000.0	9.000	L1	ON	21.1
0.46	---	13.73	46.72	32.99	1000.0	9.000	L1	ON	20.9
0.59	24.82	---	56.00	31.18	1000.0	9.000	L1	ON	20.8
0.88	---	16.17	46.00	29.83	1000.0	9.000	L1	ON	20.3
0.89	22.80	---	56.00	33.20	1000.0	9.000	L1	ON	20.3
4.69	---	14.06	46.00	31.94	1000.0	9.000	L1	ON	19.5
4.79	14.56	---	56.00	41.44	1000.0	9.000	L1	ON	19.5
6.04	14.99	---	60.00	45.01	1000.0	9.000	L1	ON	19.5
10.48	---	14.67	50.00	35.33	1000.0	9.000	L1	ON	19.6
23.36	17.72	---	60.00	42.28	1000.0	9.000	L1	ON	19.7
23.93	---	16.09	50.00	33.91	1000.0	9.000	L1	ON	19.7

Remark: Correct factor=cable loss + LISN factor

L line


Conducted Emission from 150 kHz to 30 MHz

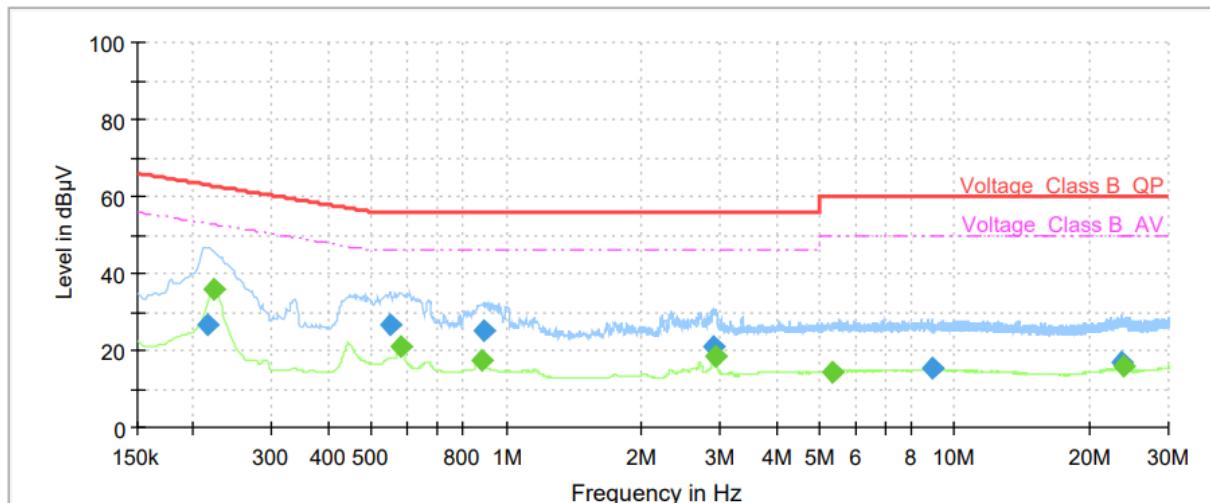

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.22	26.89	---	63.00	36.11	1000.0	9.000	N	ON	21.1
0.22	---	36.02	52.74	16.72	1000.0	9.000	N	ON	21.1
0.55	26.80	---	56.00	29.20	1000.0	9.000	N	ON	20.8
0.58	---	20.89	46.00	25.11	1000.0	9.000	N	ON	20.8
0.88	---	17.39	46.00	28.61	1000.0	9.000	N	ON	20.3
0.89	25.08	---	56.00	30.92	1000.0	9.000	N	ON	20.3
2.88	20.94	---	56.00	35.06	1000.0	9.000	N	ON	19.6
2.93	---	18.32	46.00	27.68	1000.0	9.000	N	ON	19.6
5.35	---	14.38	50.00	35.62	1000.0	9.000	N	ON	19.5
8.91	15.18	---	60.00	44.82	1000.0	9.000	N	ON	19.5
23.52	17.09	---	60.00	42.91	1000.0	9.000	N	ON	19.8
23.73	---	15.74	50.00	34.26	1000.0	9.000	N	ON	19.8

Remark: Correct factor=cable loss + LISN factor
N line
Conducted Emission from 150 kHz to 30 MHz

DC24V

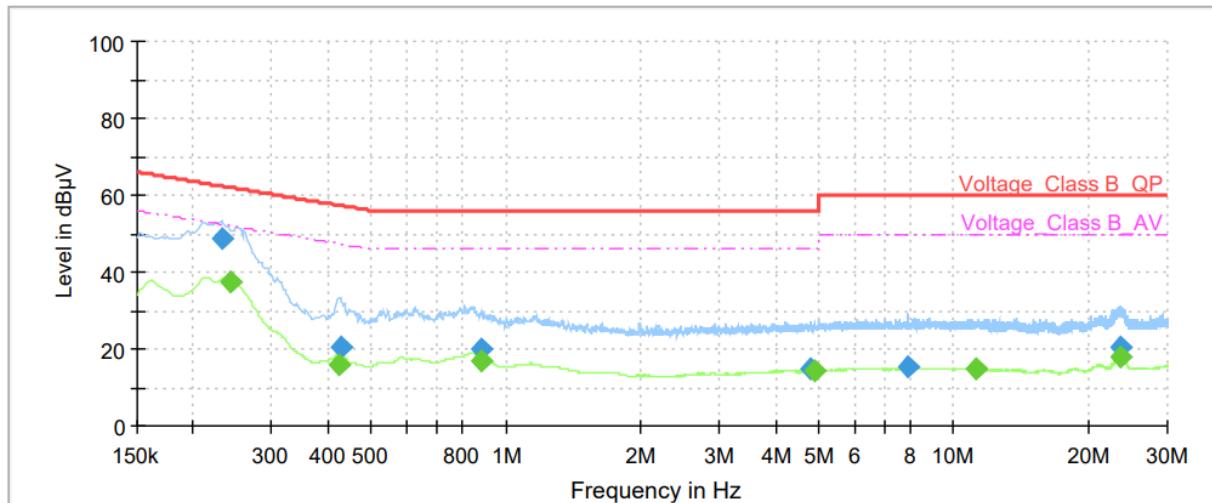


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.23	48.57	---	62.41	13.84	1000.0	9.000	L1	ON	21.1
0.24	---	37.39	52.02	14.63	1000.0	9.000	L1	ON	21.1
0.42	---	16.00	47.36	31.36	1000.0	9.000	L1	ON	20.9
0.43	20.37	---	57.32	36.95	1000.0	9.000	L1	ON	20.9
0.88	---	16.96	46.00	29.04	1000.0	9.000	L1	ON	20.3
0.88	19.76	---	56.00	36.24	1000.0	9.000	L1	ON	20.3
4.80	14.79	---	56.00	41.21	1000.0	9.000	L1	ON	19.5
4.90	---	14.21	46.00	31.79	1000.0	9.000	L1	ON	19.5
7.93	15.22	---	60.00	44.78	1000.0	9.000	L1	ON	19.5
11.28	---	14.69	50.00	35.31	1000.0	9.000	L1	ON	19.5
23.52	20.75	---	60.00	39.25	1000.0	9.000	L1	ON	19.7
23.63	---	17.91	50.00	32.09	1000.0	9.000	L1	ON	19.7

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 kHz to 30 MHz

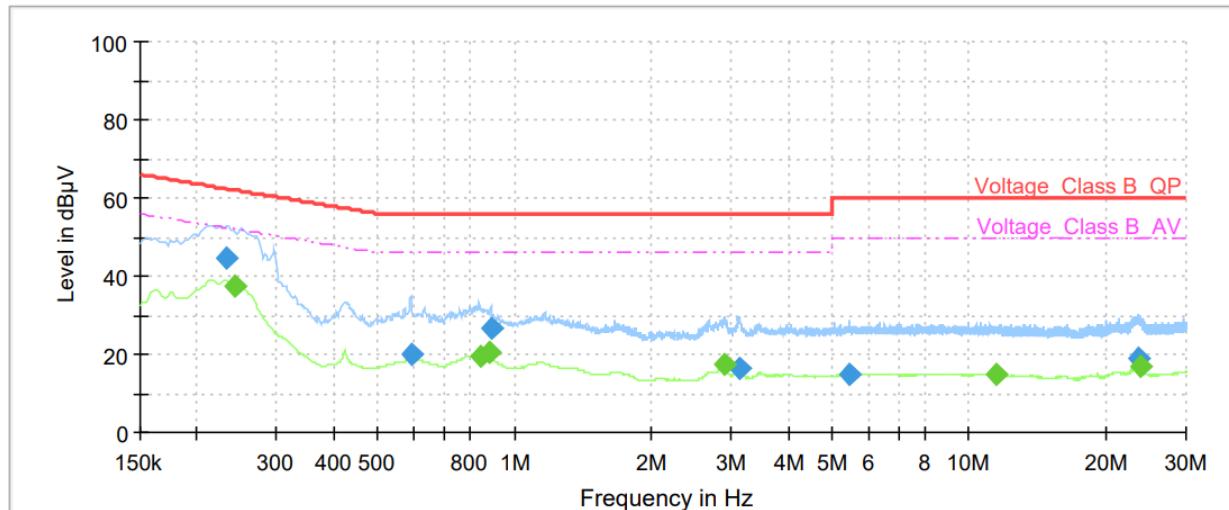

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.23	44.40	---	62.33	17.93	1000.0	9.000	N	ON	21.1
0.24	---	37.36	52.02	14.66	1000.0	9.000	N	ON	21.1
0.59	19.93	---	56.00	36.07	1000.0	9.000	N	ON	20.8
0.84	---	19.73	46.00	26.27	1000.0	9.000	N	ON	20.4
0.88	---	20.39	46.00	25.61	1000.0	9.000	N	ON	20.3
0.89	26.70	---	56.00	29.30	1000.0	9.000	N	ON	20.3
2.90	---	17.39	46.00	28.61	1000.0	9.000	N	ON	19.6
3.13	16.29	---	56.00	39.71	1000.0	9.000	N	ON	19.5
5.48	14.90	---	60.00	45.10	1000.0	9.000	N	ON	19.5
11.52	---	14.62	50.00	35.38	1000.0	9.000	N	ON	19.6
23.51	18.97	---	60.00	41.03	1000.0	9.000	N	ON	19.8
23.72	---	17.02	50.00	32.98	1000.0	9.000	N	ON	19.8

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 kHz to 30 MHz

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Conducted Emission	2.57 dB	2

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV40	101298	2024-05-07	2025-05-06
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Amplifier	MWPA.CN	MWLA-010200G 40	YQ2103039B0 1	2024-05-07	2025-05-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	101171	2023-12-05	2025-12-04
EMI Test Receiver	R&S	ESR	101667	2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****