

**FCC PART 22 TEST REPORT**  
**Part 22H Subpart E****Report Reference No.** ..... : HK2207012848-5E**FCC ID.** ..... : 2AGBD-HERO-ME40-02

Compiled by

( position+printedname+signature) .. : File administrators Gary Qian

Supervised by

(position+printedname+signature) ... : Technique principal Eden Hu

Approved by

(position+printedname+signature) ... : Manager Jason Zhou

Date of issue ..... : Jul. 19, 2022

**Testing Laboratory Name** ..... : **Shenzhen HUAK Testing Technology Co., Ltd.**

Address ..... : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Applicant's name** ..... : **Howen Technologies Co., Ltd.**

Address ..... : 6th Floor, Zone B, Jiada Research &amp; Development Building, Songpingshan Rd, Hi-tech Park North, Nanshan, Shenzhen, Guangdong Province, China

**Test specification** ..... :Standard ..... : **FCC CFR Title 47 Part 2, Part 22H**

TRF Originator ..... : Shenzhen HUAK Testing Technology Co., Ltd.

**Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** ..... : Dash Camera

Trade Mark ..... : N/A

**Manufacturer** ..... : **Howen Technologies Co., Ltd.**

Model/Type reference ..... : Hero-ME40-02

Series Models ..... : Please refer to page 6 for Serial models

Modulation Type ..... : QPSK,16QAM

Rating ..... : DC 12V From Power Box

Hardware version ..... : V2.0

Software version ..... : V2.0

Result ..... : **PASS**

**TEST REPORT**

|                          |                        |               |
|--------------------------|------------------------|---------------|
| <b>Test Report No. :</b> | <b>HK2207012848-5E</b> | Jul. 19, 2022 |
| <b>Date of issue</b>     |                        |               |

Equipment under Test : Dash Camera

Model /Type : Hero-ME40-02

Series Models : Please refer to page 6 for Serial models

**Applicant** : **Howen Technologies Co., Ltd.**

Address : 6th Floor, Zone B, Jiada Research & Development Building, Songpingshan Rd, Hi-tech Park North, Nanshan, Shenzhen, Guangdong Province, China

**Manufacturer** : **Howen Technologies Co., Ltd.**

Address : 6th Floor, Zone B, Jiada Research & Development Building, Songpingshan Rd, Hi-tech Park North, Nanshan, Shenzhen, Guangdong Province, China

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**\*\* Modified History \*\***

| Revision     | Description                 | Issued Data   | Remark     |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Jul. 19, 2022 | Jason Zhou |
|              |                             |               |            |
|              |                             |               |            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b><u>TEST STANDARDS</u></b>                          | <b>5</b>  |
| <b>2</b> | <b><u>SUMMARY</u></b>                                 | <b>6</b>  |
| 2.1      | General Remarks                                       | 6         |
| 2.2      | Product Description                                   | 6         |
| 2.3      | Equipment under Test                                  | 6         |
| 2.4      | Normal Accessory Setting                              | 7         |
| 2.5      | EUT Configuration                                     | 7         |
| 2.6      | Related Submittal(s) / Grant (s)                      | 7         |
| 2.7      | Modifications   | 7         |
| 2.8      | General Test Conditions/Configurations                | 7         |
| <b>3</b> | <b><u>TEST ENVIRONMENT</u></b>                        | <b>8</b>  |
| 3.1      | Information of the Test Laboratory                    | 8         |
| 3.2      | Environmental Conditions                              | 8         |
| 3.3      | Test Description                                      | 8         |
| 3.4      | Equipments Used During The Test                       | 9         |
| <b>4</b> | <b><u>TEST CONDITIONS AND RESULTS</u></b>             | <b>10</b> |
| 4.1      | Output Power  | 10        |
| 4.2      | Peak-to-Average Ratio (PAR)                           | 15        |
| 4.3      | Occupied Bandwidth and Emission Bandwidth             | 20        |
| 4.4      | Band Edge Compliance                                  | 25        |
| 4.5      | Spurious Emission on Antenna Port                     | 30        |
| 4.6      | Radiated Spurious Emission                            | 53        |
| 4.7      | Frequency Stability                                   | 59        |
| <b>5</b> | <b><u>TEST SETUP PHOTOS OF THE EUT</u></b>            | <b>61</b> |
| <b>6</b> | <b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u></b> | <b>62</b> |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



## 1 TEST STANDARDS

The tests were performed according to following standards:

FCC Part 2:FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

FCC Part 22Subpart H:PRIVATE LAND MOBILE RADIO SERVICES.

ANSI/TIA-603-E-2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

FCC KDB 971168D01 v03r01 Power Meas License Digital Systems.



## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Jul. 01, 2022 |
|                                |   |               |
| Testing commenced on           | : | Jul. 01, 2022 |
|                                |   |               |
| Testing concluded on           | : | Jul. 19, 2022 |

### 2.2 Product Description

|                           |  |
|---------------------------|--|
| Name of EUT:              | Dash Camera  |
| Model/Type reference:     | Hero-ME40-02   |
| Series Models:            | Hero-MA90-01, Hero-MA90-02, Hero-MA90-03, Hero-MA90-04, Hero-ME40-01, Hero-ME40-02, Hero-ME40-03, Hero-ME40-04, Hero-MC30-01, Hero-MC30-02, Hero-MC30-03, Hero-MC30-04 |
| Model Difference:         | All model's the function, software and electric circuit are the same, only with a product model named different. Test sample model: Hero-ME40-02.                      |
| Power supply:             | DC 12V From Power Box  |
| Modulation Type:          | QPSK,16QAM   |
| Antenna Type:             | Internal Antenna   |
| Operation Frequency Band: | LTE BAND 5   |
| Operation frequency:      | LTE BAND 5.824~849 MHz   |
| LTE Release:              | R8   |
| Extreme temp. Tolerance:  | -30°C to +50°C   |
| Extreme vol. Limits:      | 10.2VDC to 13.8VDC (nominal: 12.0VDC)  |

### 2.3 Equipment under Test

#### Power supply system utilised

|                      |   |   |                                 |
|----------------------|---|---|---------------------------------|
| Power supply voltage | : | <input type="radio"/> 120V/ 60 Hz                                 | <input type="radio"/> 115V/60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC   |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                 |

DC 12V From Power Box



## 2.4 Normal Accessory Setting

Fully charged battery was used during the test.

## 2.5 EUT Configuration

**The following peripheral devices and interface cables were connected during the measurement:**

- - supplied by the manufacturer
- - supplied by the lab

|                       |             |                |   |
|-----------------------|-------------|----------------|---|
| <input type="radio"/> | Power Cable | Length (m) :   | / |
|                       |             | Shield :       | / |
|                       |             | Detachable :   | / |
| <input type="radio"/> | Multimeter  | Manufacturer : | / |
|                       |             | Model No. :    | / |

## 2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended filing to comply with FCC Part 22H, Rules.

## 2.7 Modifications

No modifications were implemented to meet testing criteria.

## 2.8 General Test Conditions/Configurations

### 2.10.1 Test Environment

| Environment Parameter | Selected Values During Tests |         |
|-----------------------|------------------------------|---------|
| Relative Humidity     | Ambient                      |         |
| Temperature           | TN                           | Ambient |
| Voltage               | VL                           | 10.2V   |
|                       | VN                           | 12.0V   |
|                       | VH                           | 13.8V   |

NOTE: VL=lower extreme test voltage VN=nominal voltage

VH=upper extreme test voltage TN=normal temperature



### 3 TEST ENVIRONMENT

#### 3.1 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.  
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.  
FCC Designation Number is CN1229.  
Canada IC CAB identifier is CN0045.  
CNAS Registration Number is L9589.

#### 3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 °C     |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

#### 3.3 Test Description

##### Band 5 (824~849 MHz)

| Test Item                                  | FCCRuleNo.                      | Requirements  | Verdict |
|--|---------------------------------|---|---------|
| Effective(Isotropic) Radiated Output Power | §2.1046, §22.913(a)(2)          | EIRP ≤ 2W   | Pass    |
| Peak-Average Ratio                         | §24.232(d)                      | FCC:Limit≤13dB  | Pass    |
| Modulation Characteristics                 | §2.1047                         | Digital modulation  | Pass    |
| Bandwidth                                  | §2.1049                         | OBW: Nolimit. EBW: Nolimit.   | Pass    |
| Band Edges Compliance                      | §2.1051, §24.238                | ≤ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to Thefrequency block.       | Pass    |
| Spurious Emission at AntennaTerminals      | §2.1051, §24.238                | ≤-13dBm/1MHz, from9kHz to 10th harmonics but outside authorized Operating frequency ranges. | Pass    |
| Field Strength of Spurious Radiation       | Clause 7of KDB971168 D01 v02r02 | ≤ -13dBm/1MHz.  | Pass    |
| Frequency Stability                        | §2.1055, §22.355, §24.235       | FCC:within authorized frequency block.  | Pass    |

NOTE 1:For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

Remark:

1. The measurement uncertainty is not included in the test result.



### 3.4 Equipments Used During The Test

| Test Equipment                  | Manufacturer | Model No.            | Serial No. | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|----------------------|------------|------------------|----------------------|
| LISN                            | R&S          | ENV216               | HKE-059    | 2022/02/18       | 2023/02/17           |
| LISN                            | R&S          | ENV216               | HKE-002    | 2022/02/18       | 2023/02/17           |
| Receiver                        | R&S          | ESCI 7               | HKE-010    | 2022/02/18       | 2023/02/17           |
| Spectrum analyzer               | R&S          | FSP40                | HKE-025    | 2022/02/18       | 2023/02/17           |
| Spectrum analyzer               | Agilent      | N9020A               | HKE-048    | 2022/02/18       | 2023/02/17           |
| RF automatic control unit       | Tonscend     | JS0806-1             | HKE-060    | 2022/02/18       | 2023/02/17           |
| Loop antenna                    | Schwarzbeck  | FMZB 1519 B          | HKE-014    | 2022/02/18       | 2023/02/17           |
| Bilog Broadband Antenna         | Schwarzbeck  | VULB9163             | HKE-012    | 2022/02/18       | 2023/02/17           |
| Horn antenna                    | Schwarzbeck  | 9120D                | HKE-013    | 2022/02/18       | 2023/02/17           |
| High gain antenna               | Schwarzbeck  | LB-180400KF          | HKE-054    | 2022/02/18       | 2023/02/17           |
| Preamplifier                    | EMCI         | EMC051845SE          | HKE-015    | 2022/02/18       | 2023/02/17           |
| Preamplifier                    | Agilent      | 83051A               | HKE-016    | 2022/02/18       | 2023/02/17           |
| Preamplifier                    | Schwarzbeck  | BBV 9743             | HKE-006    | 2022/02/18       | 2023/02/17           |
| Temperature and humidity meter  | Boyang       | HTC-1                | HKE-075    | 2022/02/18       | 2023/02/17           |
| High-low temperature chamber    | Guangke      | HT-80L               | HKE-118    | 2022/02/18       | 2023/02/17           |
| High pass filter unit           | Tonscend     | JS0806-F             | HKE-055    | 2022/02/18       | 2023/02/17           |
| RF Cable(below1GHz)             | Times        | 9kHz-1GHz            | HKE-117    | 2022/02/18       | 2023/02/17           |
| RF Cable(above 1GHz)            | Times        | 1-40G                | HKE-034    | 2022/02/18       | 2023/02/17           |
| Power meter                     | Agilent      | E4419B               | HKE-085    | 2022/02/18       | 2023/02/17           |
| Power Sensor                    | Agilent      | E9300A               | HKE-086    | 2022/02/18       | 2023/02/17           |
| Conducted test software         | Tonscend     | TS+ Rev 2.5.0.0      | HKE-081    | N/A              | N/A                  |
| Radiated test software          | Tonscend     | TS+ Rev 2.5.0.0      | HKE-082    | N/A              | N/A                  |
| RF test software                | Tonscend     | JS1120-B Version 2.6 | HKE-083    | N/A              | N/A                  |
| RF test software                | Tonscend     | JS1120-4             | HKE-113    | N/A              | N/A                  |
| RF test software                | Tonscend     | JS1120-3             | HKE-114    | N/A              | N/A                  |
| RF test software                | Tonscend     | JS1120-1             | HKE-115    | N/A              | N/A                  |
| Wireless Communication Test Set | R&S          | CMW500               | HKE-026    | 2022/02/18       | 2023/02/17           |
| Wireless Communication Test Set | R&S          | CMU200               | HKE-029    | 2022/02/18       | 2023/02/17           |
| High gain antenna               | Schwarzbeck  | LB-180400KF          | HKE-054    | 2022/02/18       | 2023/02/17           |
| Horn antenna                    | Schwarzbeck  | 9120D                | HKE-135    | 2022/02/18       | 2023/02/17           |
| High gain antenna               | Schwarzbeck  | LB-180400KF          | HKE-128    | 2022/02/18       | 2023/02/17           |
| Broadband antenna               | Schwarzbeck  | VULB 9163            | HKE-087    | 2022/02/18       | 2023/02/17           |
| Signal generator                | Agilent      | E4433B               | HKE-120    | 2022/02/18       | 2023/02/17           |
| Signal generator                | Agilent      | E4421B               | HKE-121    | 2022/02/18       | 2023/02/17           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



## 4 TEST CONDITIONS AND RESULTS


### 4.1 Output Power

#### 4.1.1 Conducted Output Power

##### TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

##### TEST CONFIGURATION

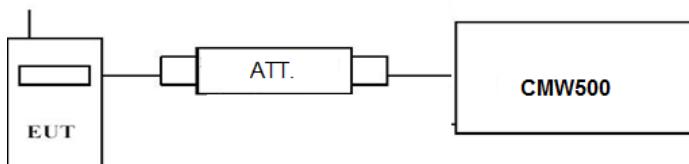

##### TEST PROCEDURE

###### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

##### TEST RESULTS

###### compliance \*

###### *Remark:*

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5;

| LTE FDD Band 5       |                 |                |                           |       |
|----------------------|-----------------|----------------|---------------------------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | Burst Average Power [dBm] |       |
|                      |                 |                | QPSK                      | 16QAM |
| 1.4 MHz              | 824.7           | 1 RB low       | 22.90                     | 21.65 |
|                      |                 | 1 RB high      | 23.01                     | 21.74 |
|                      |                 | 50% RB mid     | 22.86                     | 21.78 |
|                      |                 | 100% RB        | 22.90                     | 21.73 |
|                      | 836.5           | 1 RB low       | 22.00                     | 21.71 |
|                      |                 | 1 RB high      | 23.08                     | 21.89 |
|                      |                 | 50% RB mid     | 23.24                     | 20.74 |
|                      |                 | 100% RB        | 23.15                     | 22.11 |
| 3 MHz                | 848.3           | 1 RB low       | 23.43                     | 22.52 |
|                      |                 | 1 RB high      | 23.33                     | 22.18 |
|                      |                 | 50% RB mid     | 23.41                     | 21.75 |
|                      |                 | 100% RB        | 22.31                     | 21.57 |
|                      | 825.5           | 1 RB low       | 22.07                     | 22.08 |
|                      |                 | 1 RB high      | 22.04                     | 21.69 |
|                      |                 | 50% RB mid     | 22.06                     | 21.76 |
|                      |                 | 100% RB        | 22.85                     | 21.19 |
|                      | 836.5           | 1 RB low       | 23.01                     | 21.18 |
|                      |                 | 1 RB high      | 22.87                     | 21.09 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



|        |       |            |       |       |
|--------|-------|------------|-------|-------|
| 5 MHz  | 847.5 | 50% RB mid | 22.04 | 21.97 |
|        |       | 100% RB    | 22.14 | 21.98 |
|        |       | 1 RB low   | 21.98 | 21.99 |
|        |       | 1 RB high  | 22.07 | 21.08 |
|        |       | 50% RB mid | 23.13 | 21.14 |
|        | 826.5 | 100% RB    | 23.44 | 21.05 |
|        |       | 1 RB low   | 23.53 | 21.13 |
|        |       | 1 RB high  | 22.25 | 22.19 |
|        |       | 50% RB mid | 22.27 | 22.41 |
|        |       | 100% RB    | 22.31 | 22.37 |
| 10 MHz | 836.5 | 1 RB low   | 22.84 | 21.80 |
|        |       | 1 RB high  | 22.89 | 21.51 |
|        |       | 50% RB mid | 22.77 | 21.84 |
|        |       | 100% RB    | 22.02 | 21.04 |
|        | 846.5 | 1 RB low   | 22.00 | 21.02 |
|        |       | 1 RB high  | 21.96 | 20.83 |
|        |       | 50% RB mid | 22.00 | 20.96 |
|        |       | 100% RB    | 22.93 | 21.64 |
|        | 829.0 | 1 RB low   | 23.25 | 21.65 |
|        |       | 1 RB high  | 23.18 | 21.97 |
|        |       | 50% RB mid | 22.00 | 21.03 |
|        |       | 100% RB    | 21.99 | 20.92 |
|        | 836.5 | 1 RB low   | 22.00 | 20.93 |
|        |       | 1 RB high  | 22.01 | 20.85 |
|        |       | 50% RB mid | 23.21 | 22.23 |
|        |       | 100% RB    | 23.29 | 22.20 |
|        | 844.0 | 1 RB low   | 23.45 | 22.16 |
|        |       | 1 RB high  | 22.13 | 21.18 |
|        |       | 50% RB mid | 22.21 | 21.05 |
|        |       | 100% RB    | 22.28 | 21.31 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




#### 4.1.2. Radiated Output Power

##### LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 22H.232(b) specifies, "Mobile/portable stations are limited to 7 watts e.i.r.p.

##### TEST CONFIGURATION

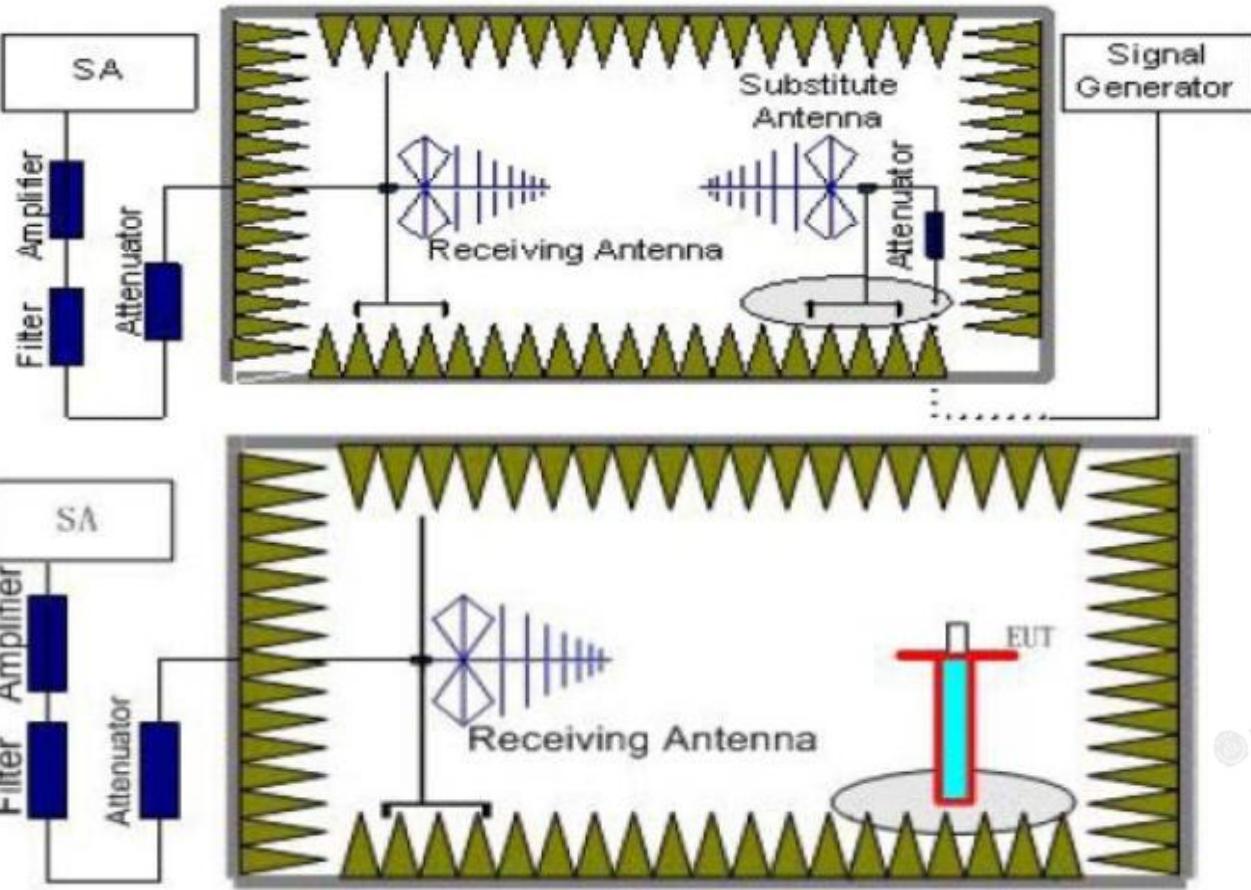

##### TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>



5. reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:  $Power(EIRP) = P_{Mea} - P_{Ag} - P_{cl} + G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$Power(EIRP) = P_{Mea} - P_{cl} + G_a$

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

## TEST RESULTS

### Radiated Measurement:

#### Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.
2.  $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. We measured both Horizontal and Vertical direction, recorded worst case direction.

#### LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-----------|-------------|-------------|--------------|
| 824.7           | -17.21          | 2.42          | 8.45                   | 36.82         | 25.64      | 23.49     | 38.45       | 12.81       | V            |
| 836.5           | -15.74          | 3.46          | 8.45                   | 36.82         | 26.07      | 23.92     | 38.45       | 12.38       | V            |
| 848.3           | -18.53          | 2.53          | 8.36                   | 36.82         | 24.12      | 21.97     | 38.45       | 14.33       | V            |

#### LTE FDD Band 5\_Channel Bandwidth 3MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-----------|-------------|-------------|--------------|
| 825.5           | -17.99          | 2.42          | 8.45                   | 36.82         | 24.86      | 22.71     | 38.45       | 13.59       | V            |
| 836.5           | -16.26          | 3.46          | 8.45                   | 36.82         | 25.55      | 23.4      | 38.45       | 12.9        | V            |
| 847.5           | -18.74          | 2.53          | 8.36                   | 36.82         | 23.91      | 21.76     | 38.45       | 14.54       | V            |

#### LTE FDD Band 5\_Channel Bandwidth 5MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-----------|-------------|-------------|--------------|
| 826.5           | -16.5           | 2.42          | 8.45                   | 36.82         | 26.35      | 24.2      | 38.45       | 12.1        | V            |
| 836.5           | -16.38          | 3.46          | 8.45                   | 36.82         | 25.43      | 23.28     | 38.45       | 13.02       | V            |
| 846.5           | -19.28          | 2.53          | 8.36                   | 36.82         | 23.37      | 21.22     | 38.45       | 15.08       | V            |

#### LTE FDD Band 5\_Channel Bandwidth 10MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-----------|-------------|-------------|--------------|
| 829.0           | -17.15          | 2.42          | 8.45                   | 36.82         | 25.7       | 23.55     | 38.45       | 12.75       | V            |
| 836.5           | -16.09          | 3.46          | 8.45                   | 36.82         | 25.72      | 23.57     | 38.45       | 12.73       | V            |
| 844.0           | -18.3           | 2.53          | 8.36                   | 36.82         | 24.35      | 22.2      | 38.45       | 14.1        | V            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_16QAM

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-----------|-------------|-------------|--------------|
| 824.7           | -16.78                 | 2.42                 | 8.45                            | 36.82                | 26.07      | 23.92     | 38.45       | 12.38       | V            |
| 836.5           | -16.78                 | 3.46                 | 8.45                            | 36.82                | 25.03      | 22.88     | 38.45       | 13.42       | V            |
| 848.3           | -19.78                 | 2.53                 | 8.36                            | 36.82                | 22.87      | 20.72     | 38.45       | 15.58       | V            |

## LTE FDD Band 5\_Channel Bandwidth 3MHz\_16QAM

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-----------|-------------|-------------|--------------|
| 825.5           | -17.62                 | 2.42                 | 8.45                            | 36.82                | 25.23      | 23.08     | 38.45       | 13.22       | V            |
| 836.5           | -17.17                 | 3.46                 | 8.45                            | 36.82                | 24.64      | 22.49     | 38.45       | 13.81       | V            |
| 847.5           | -17.87                 | 2.53                 | 8.36                            | 36.82                | 24.78      | 22.63     | 38.45       | 13.67       | V            |

## LTE FDD Band 5\_Channel Bandwidth 5MHz\_16QAM

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-----------|-------------|-------------|--------------|
| 826.5           | -16.9                  | 2.42                 | 8.45                            | 36.82                | 25.95      | 23.8      | 38.45       | 12.5        | V            |
| 836.5           | -16.87                 | 3.46                 | 8.45                            | 36.82                | 24.94      | 22.79     | 38.45       | 13.51       | V            |
| 846.5           | -17.41                 | 2.53                 | 8.36                            | 36.82                | 25.24      | 23.09     | 38.45       | 13.21       | V            |

## LTE FDD Band 5\_Channel Bandwidth 10MHz\_16QAM

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-----------|-------------|-------------|--------------|
| 829.0           | -17.32                 | 2.42                 | 8.45                            | 36.82                | 25.53      | 23.38     | 38.45       | 12.92       | V            |
| 836.5           | -16.7                  | 3.46                 | 8.45                            | 36.82                | 25.11      | 22.96     | 38.45       | 13.34       | V            |
| 844.0           | -17.57                 | 2.53                 | 8.36                            | 36.82                | 25.08      | 22.93     | 38.45       | 13.37       | V            |




## 4.2 Peak-to-Average Ratio (PAR)

### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

### TEST CONFIGURATION

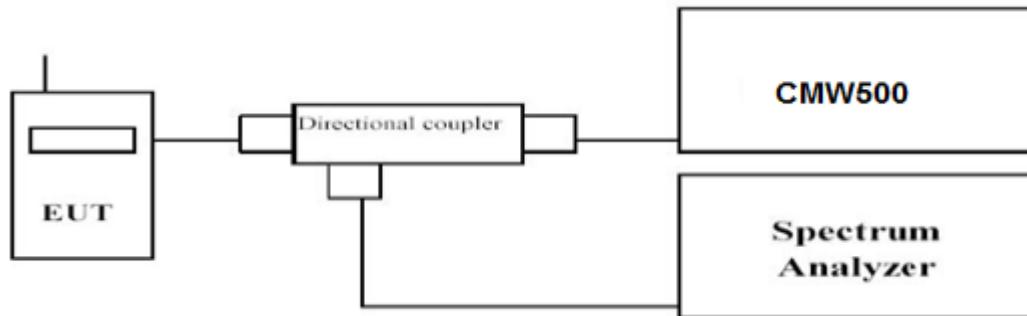

### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms;
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.


### TEST RESULTS

Remark:


1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

| LTE FDD Band 5       |                 |                |          |       |
|----------------------|-----------------|----------------|----------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | PAPR(dB) |       |
|                      |                 |                | QPSK     | 16QAM |
| 1.4 MHz              | 824.7           | 1RB#0          | 8.46     | 8.48  |
|                      | 836.5           |                | 4.75     | 5.80  |
|                      | 848.3           |                | 4.58     | 5.57  |
| 3 MHz                | 825.5           | 1RB#0          | 4.19     | 5.26  |
|                      | 836.5           |                | 4.75     | 8.47  |
|                      | 847.5           |                | 4.30     | 5.13  |
| 5 MHz                | 826.5           | 1RB#0          | 4.17     | 4.96  |
|                      | 836.5           |                | 4.69     | 5.63  |
|                      | 846.5           |                | 3.84     | 4.67  |
| 10 MHz               | 829.0           | 1RB#0          | 3.91     | 4.72  |
|                      | 836.5           |                | 4.56     | 5.41  |
|                      | 844.0           |                | 3.79     | 4.79  |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

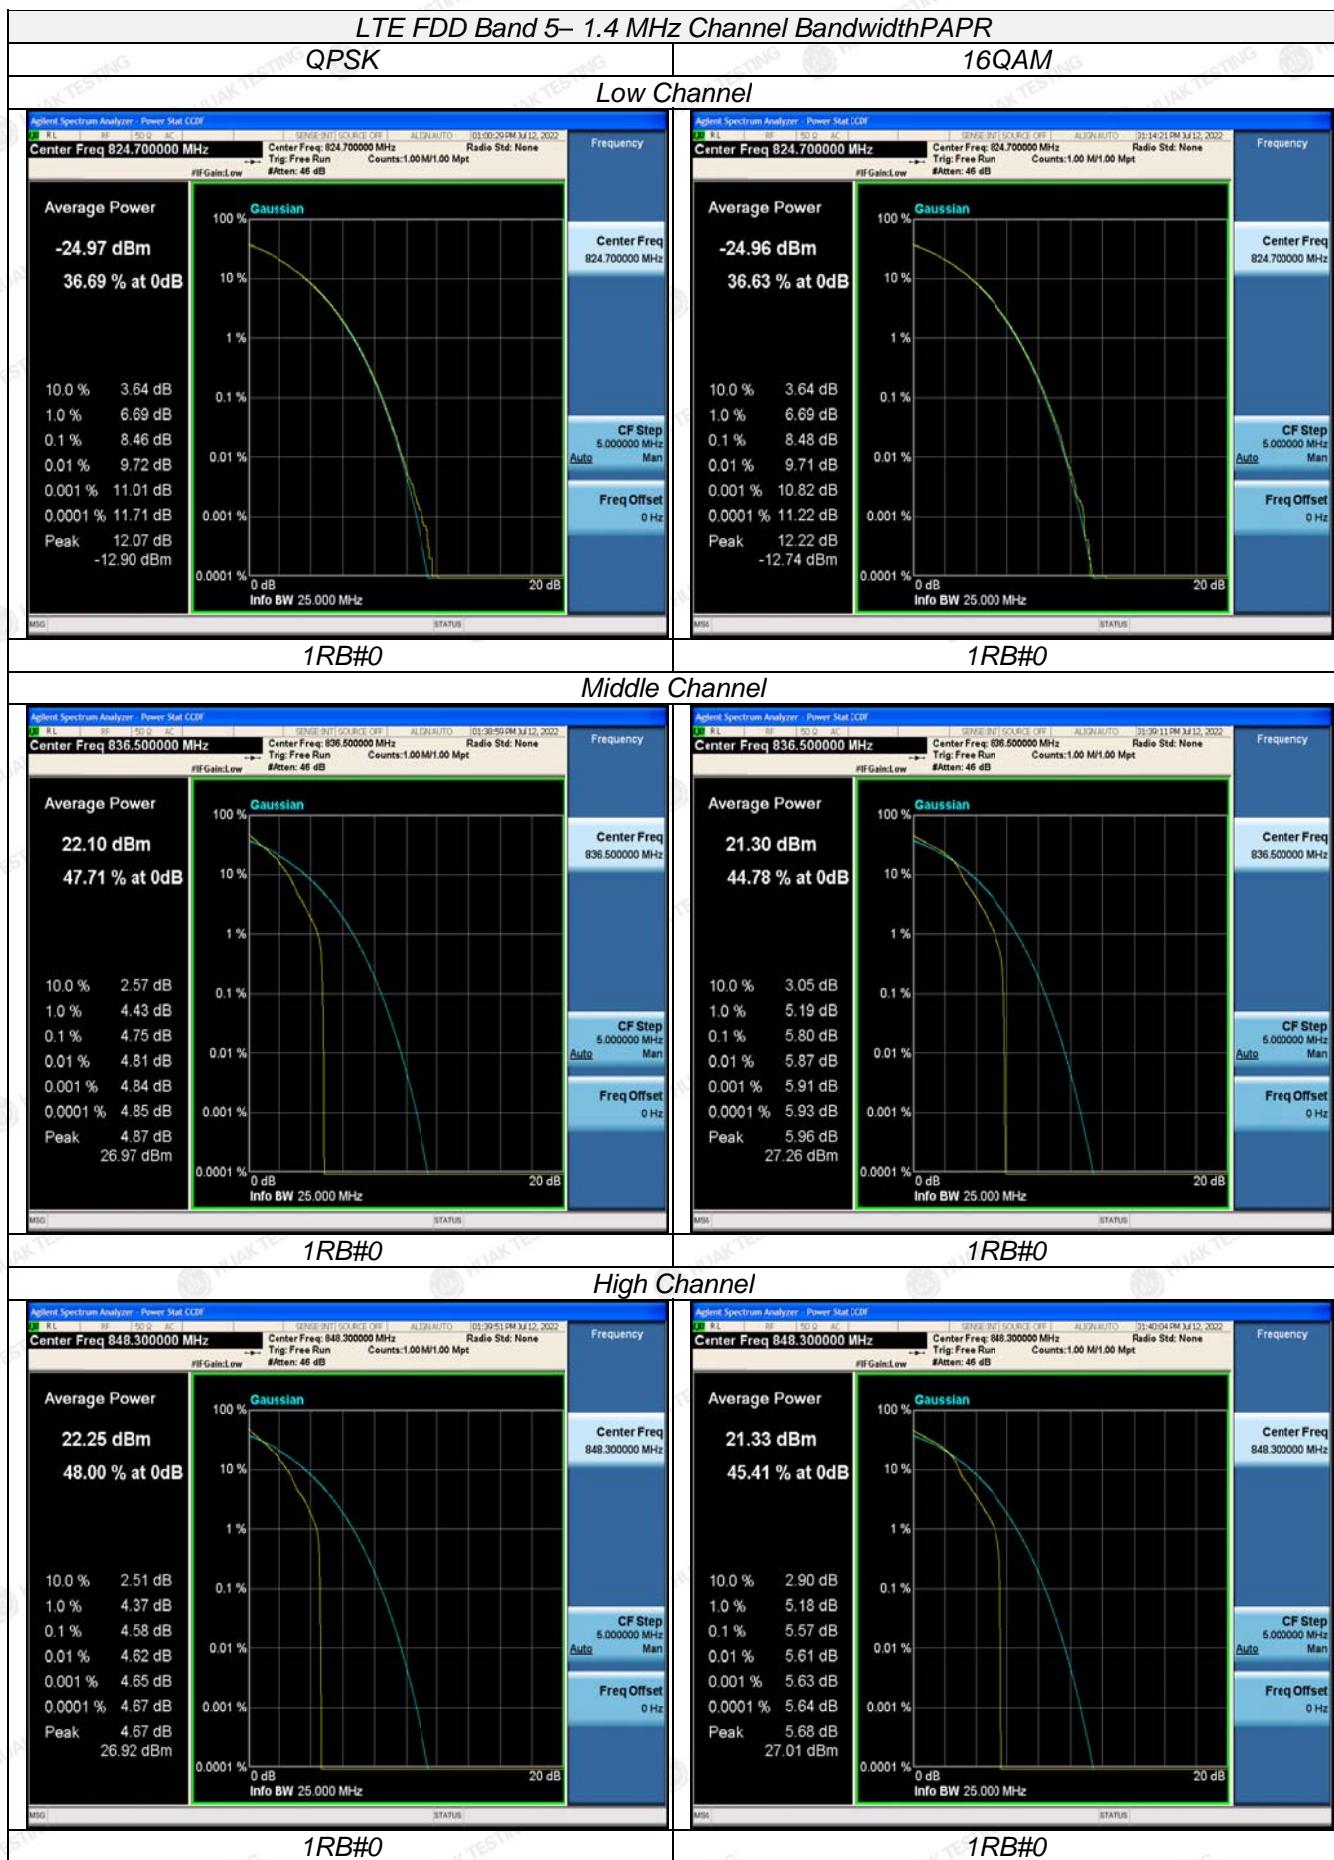

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

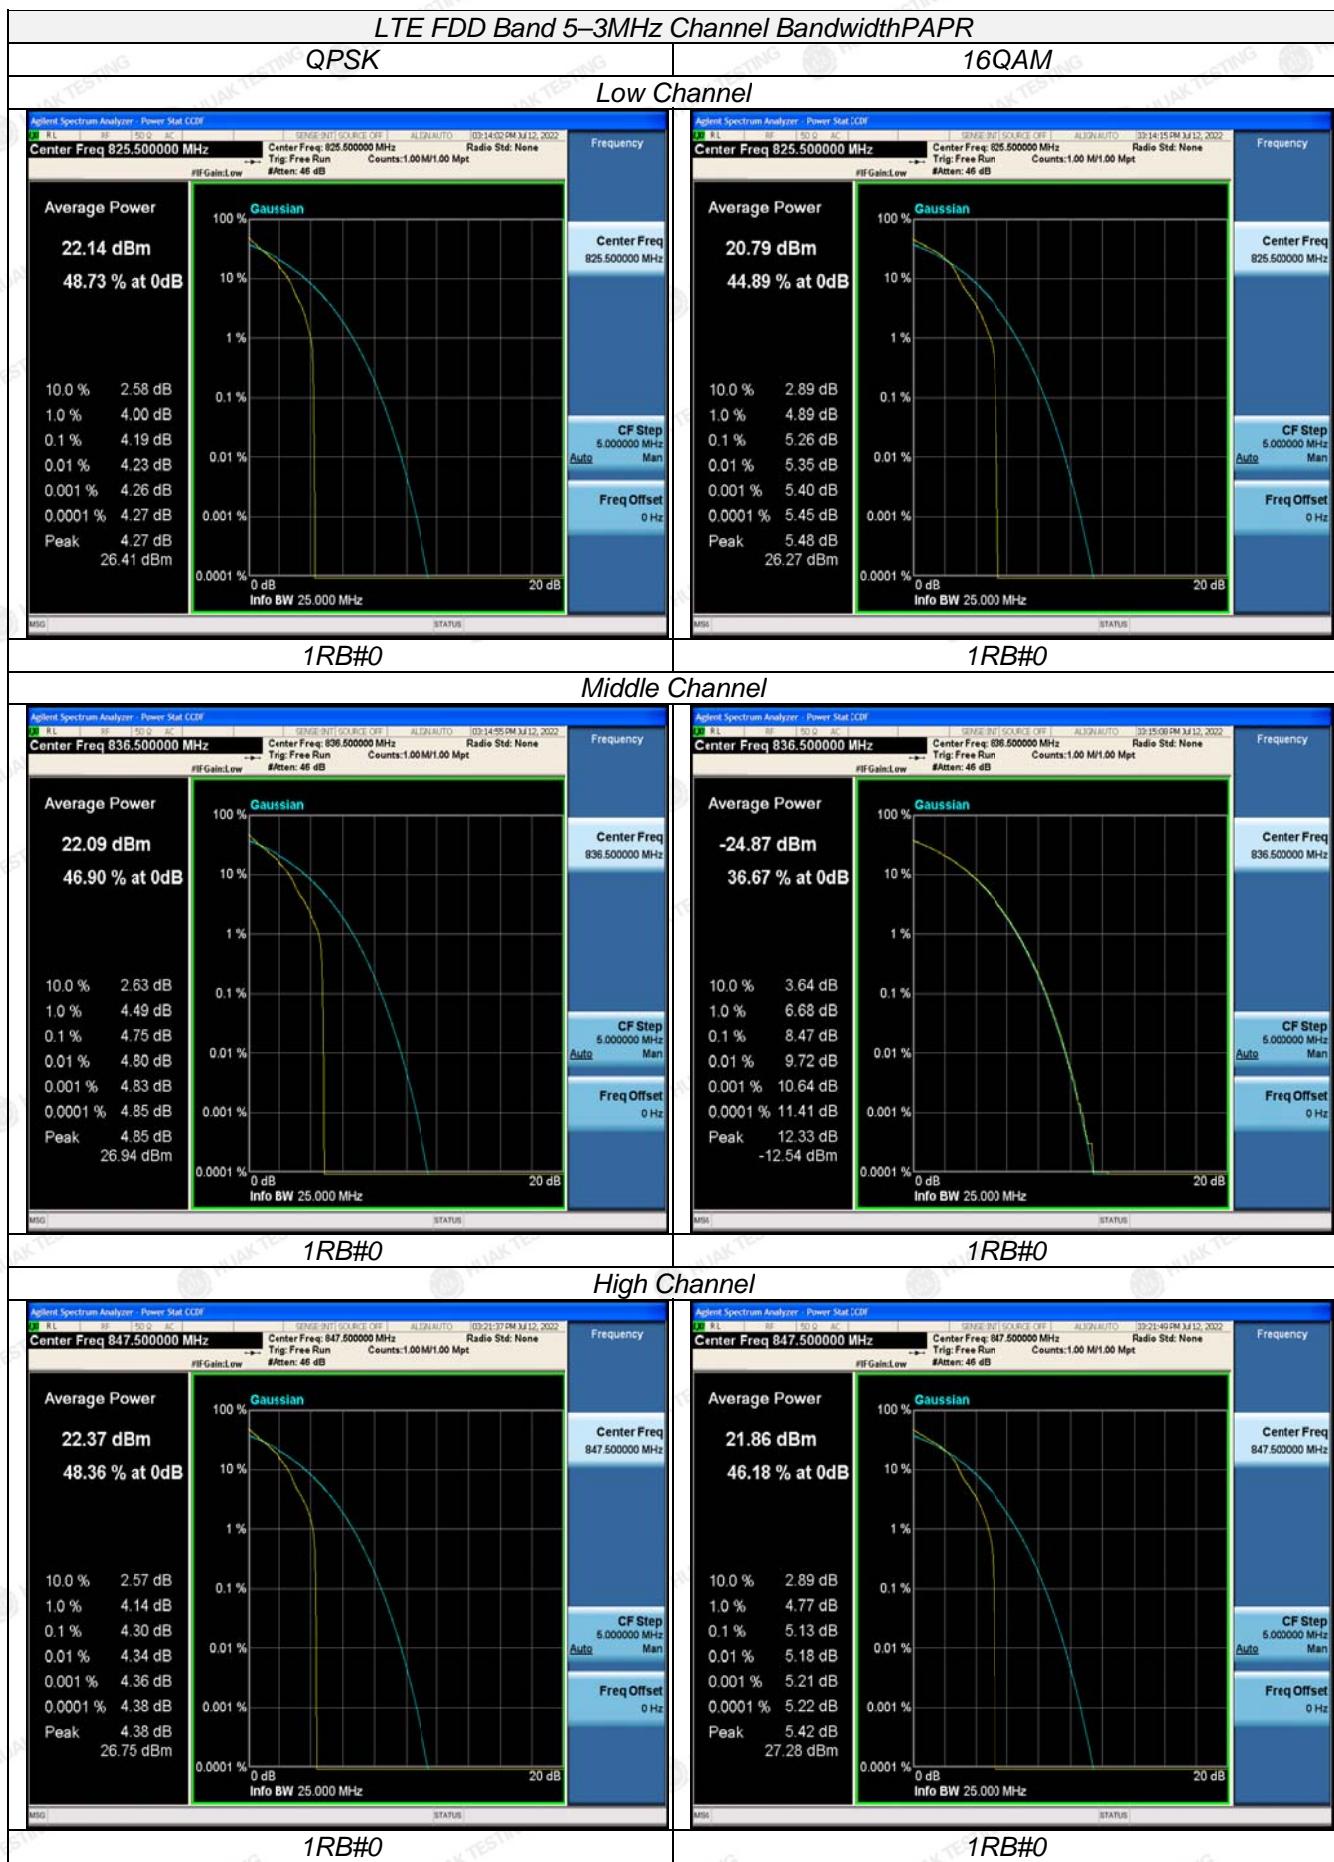

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




### 4.3 Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

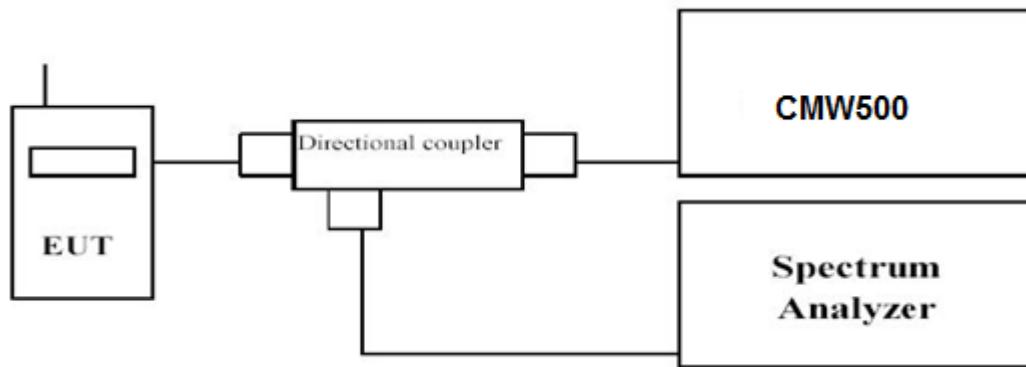

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW,  $VBW \geq 3$  times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.


#### TEST RESULTS

##### *Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

| LTE FDD Band 5       |                |                 |                                 |       |                              |        |
|----------------------|----------------|-----------------|---------------------------------|-------|------------------------------|--------|
| TX Channel Bandwidth | RB Size/Offset | Frequency (MHz) | -26dBc Emission bandwidth (MHz) |       | 99% Occupied bandwidth (MHz) |        |
|                      |                |                 | QPSK                            | 16QAM | QPSK                         | 16QAM  |
| 1.4 MHz              | 6RB#0          | 824.7           | 1.304                           | 1.286 | 1.0908                       | 1.0986 |
|                      |                | 836.5           | 1.298                           | 1.303 | 1.0932                       | 1.0992 |
|                      |                | 848.3           | 1.265                           | 1.271 | 1.0850                       | 1.0897 |
| 3 MHz                | 15RB#0         | 825.5           | 2.964                           | 2.966 | 2.7020                       | 2.6861 |
|                      |                | 836.5           | 2.967                           | 2.974 | 2.7025                       | 2.6946 |
|                      |                | 847.5           | 2.972                           | 2.972 | 2.7002                       | 2.6919 |
| 5 MHz                | 25RB#0         | 826.5           | 5.035                           | 4.986 | 4.5074                       | 4.5016 |
|                      |                | 836.5           | 5.022                           | 4.983 | 4.5126                       | 4.5052 |
|                      |                | 846.5           | 5.011                           | 5.036 | 4.5005                       | 4.5098 |
| 10 MHz               | 50RB#0         | 829.0           | 9.962                           | 9.889 | 9.0004                       | 8.9880 |
|                      |                | 836.5           | 9.845                           | 9.869 | 8.9479                       | 8.9498 |
|                      |                | 844.0           | 20.00                           | 20.00 | 19.841                       | 19.851 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

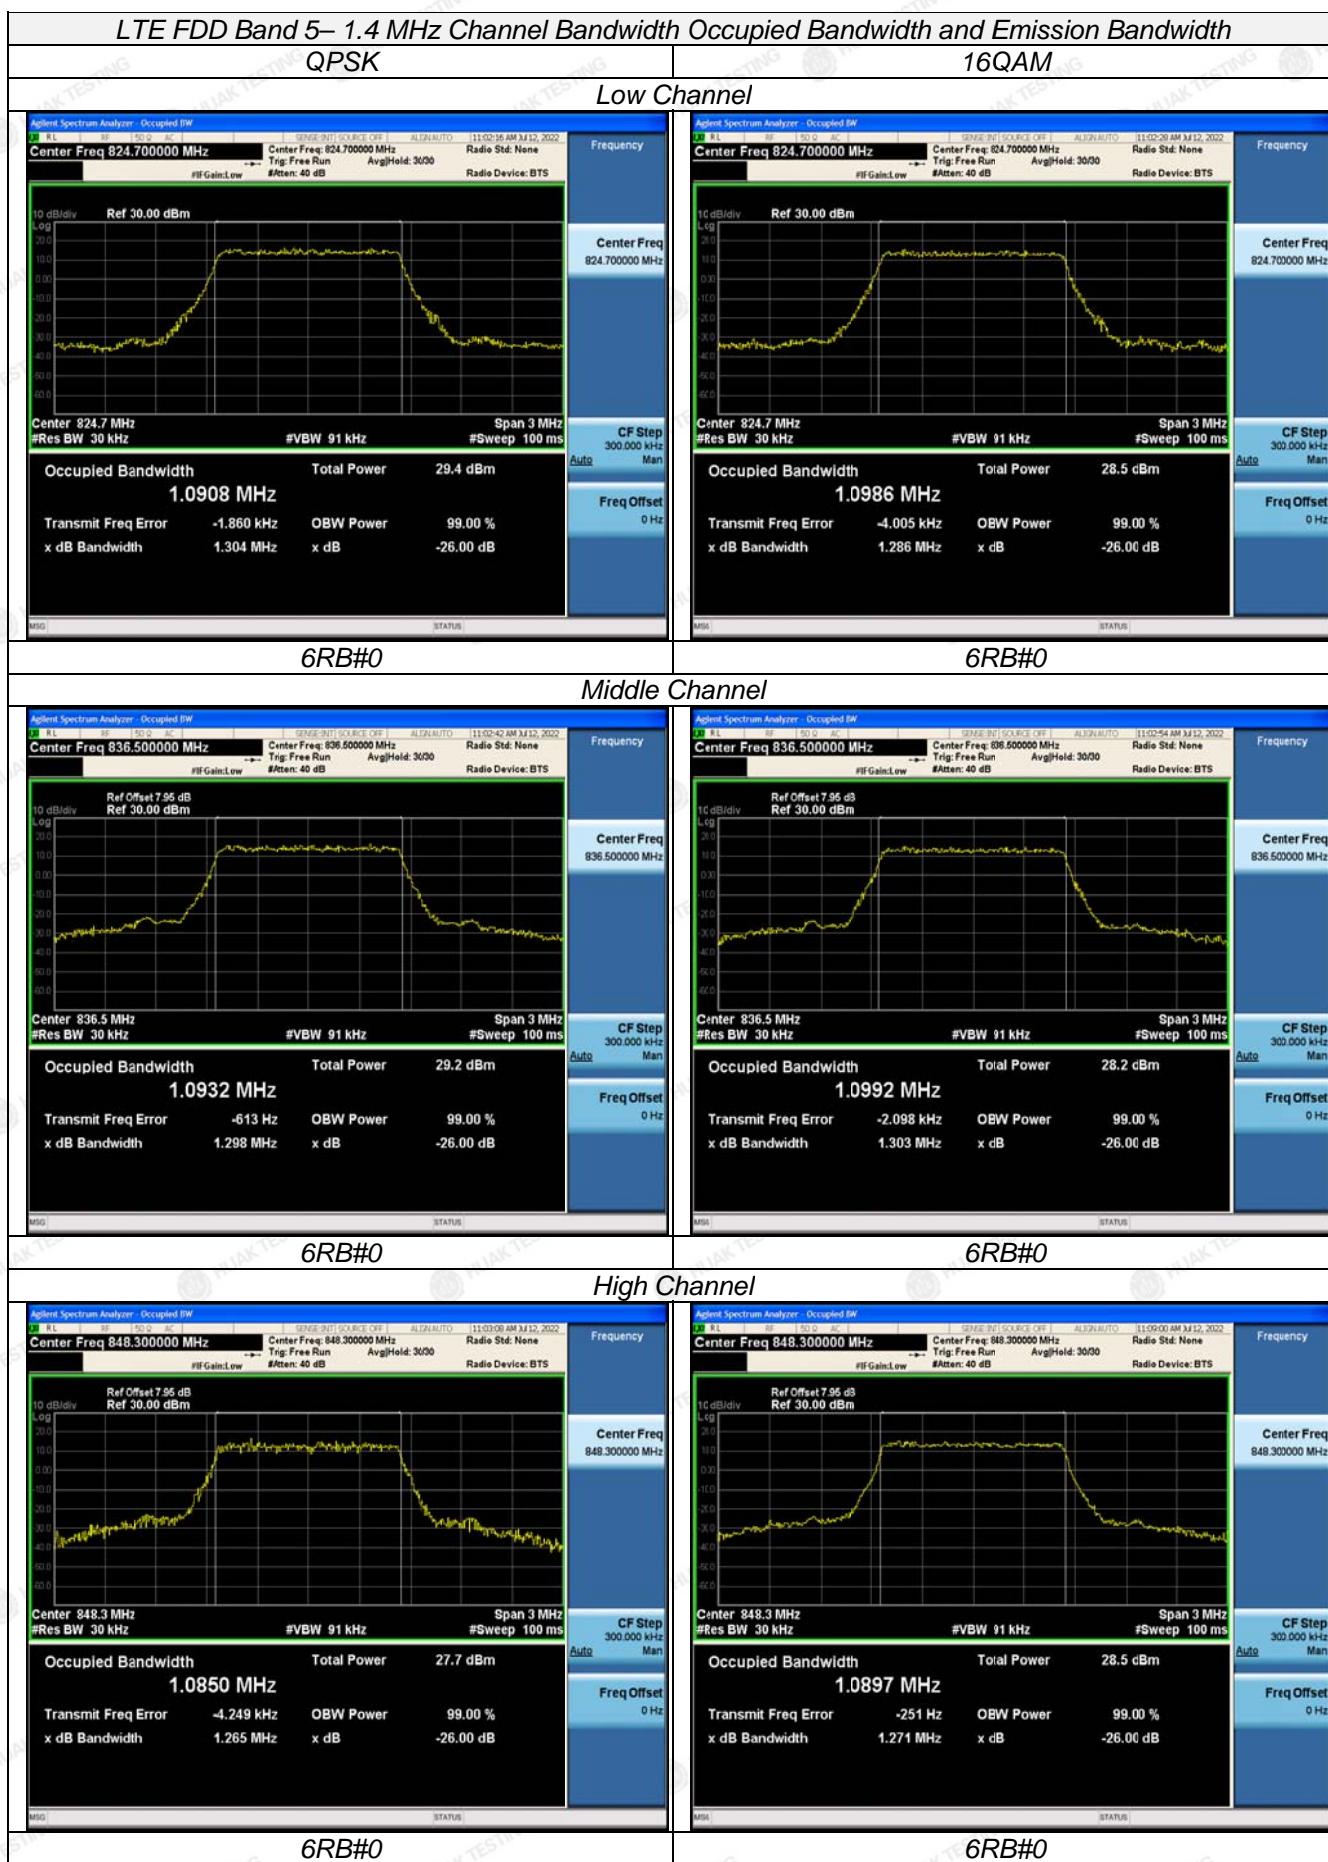


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

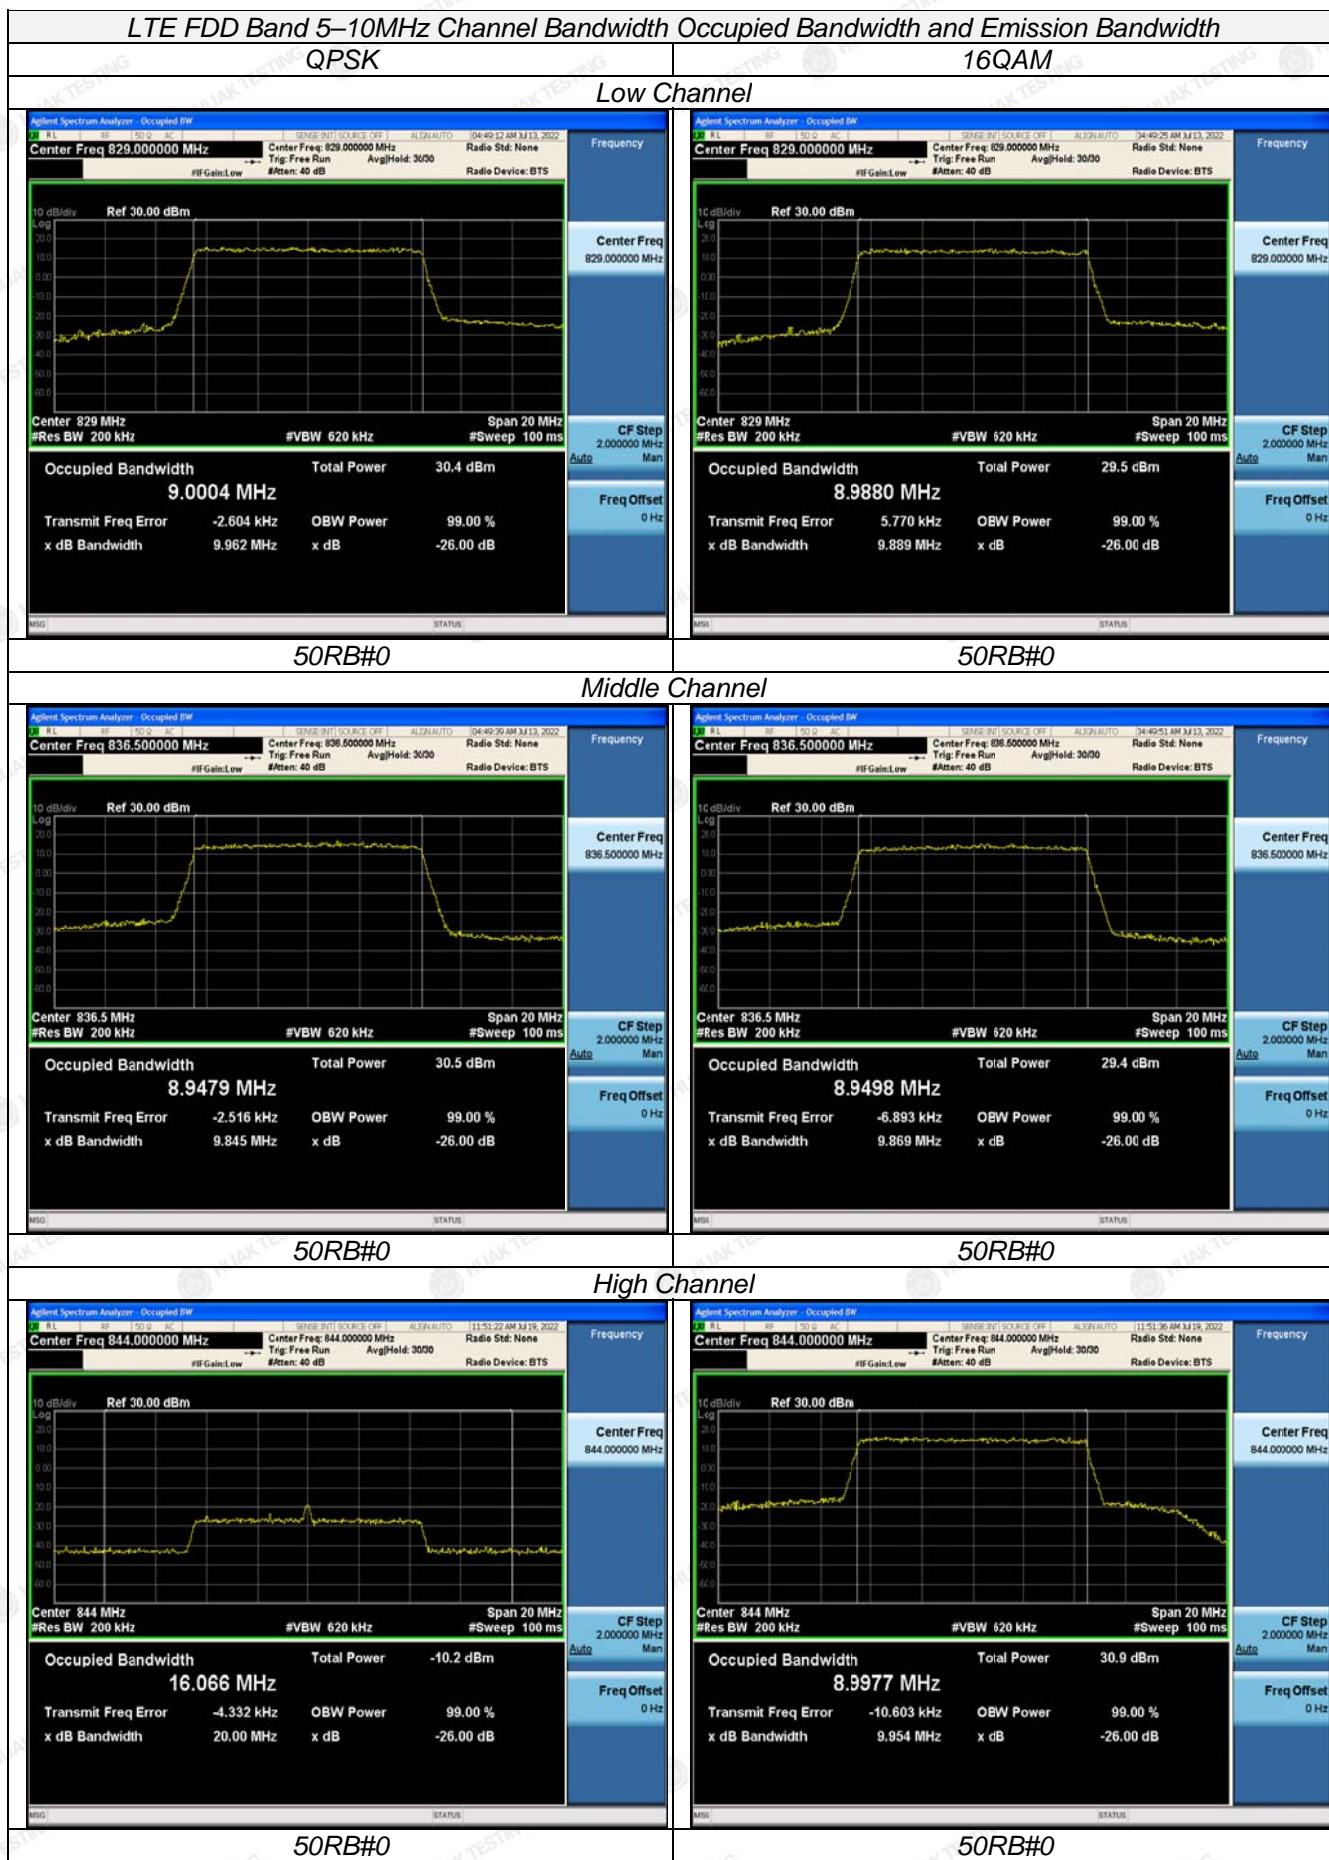

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




## 4.4 Band Edge Compliance

### LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### TEST CONFIGURATION

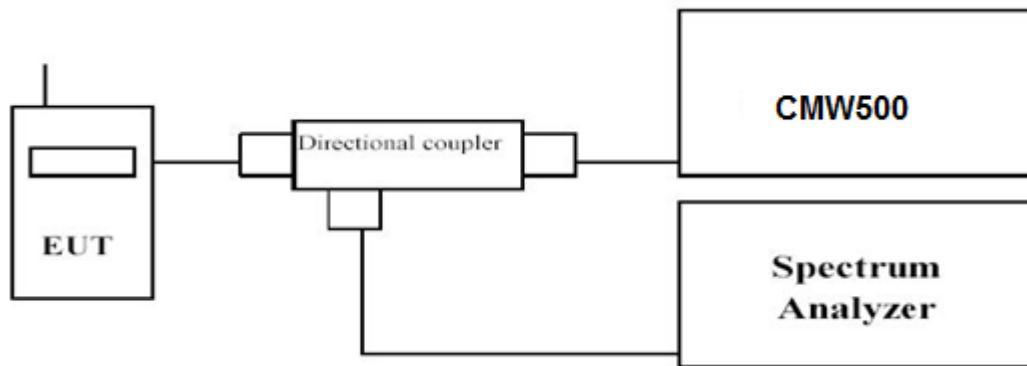


### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.


### TEST RESULTS

#### *Remark:*


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

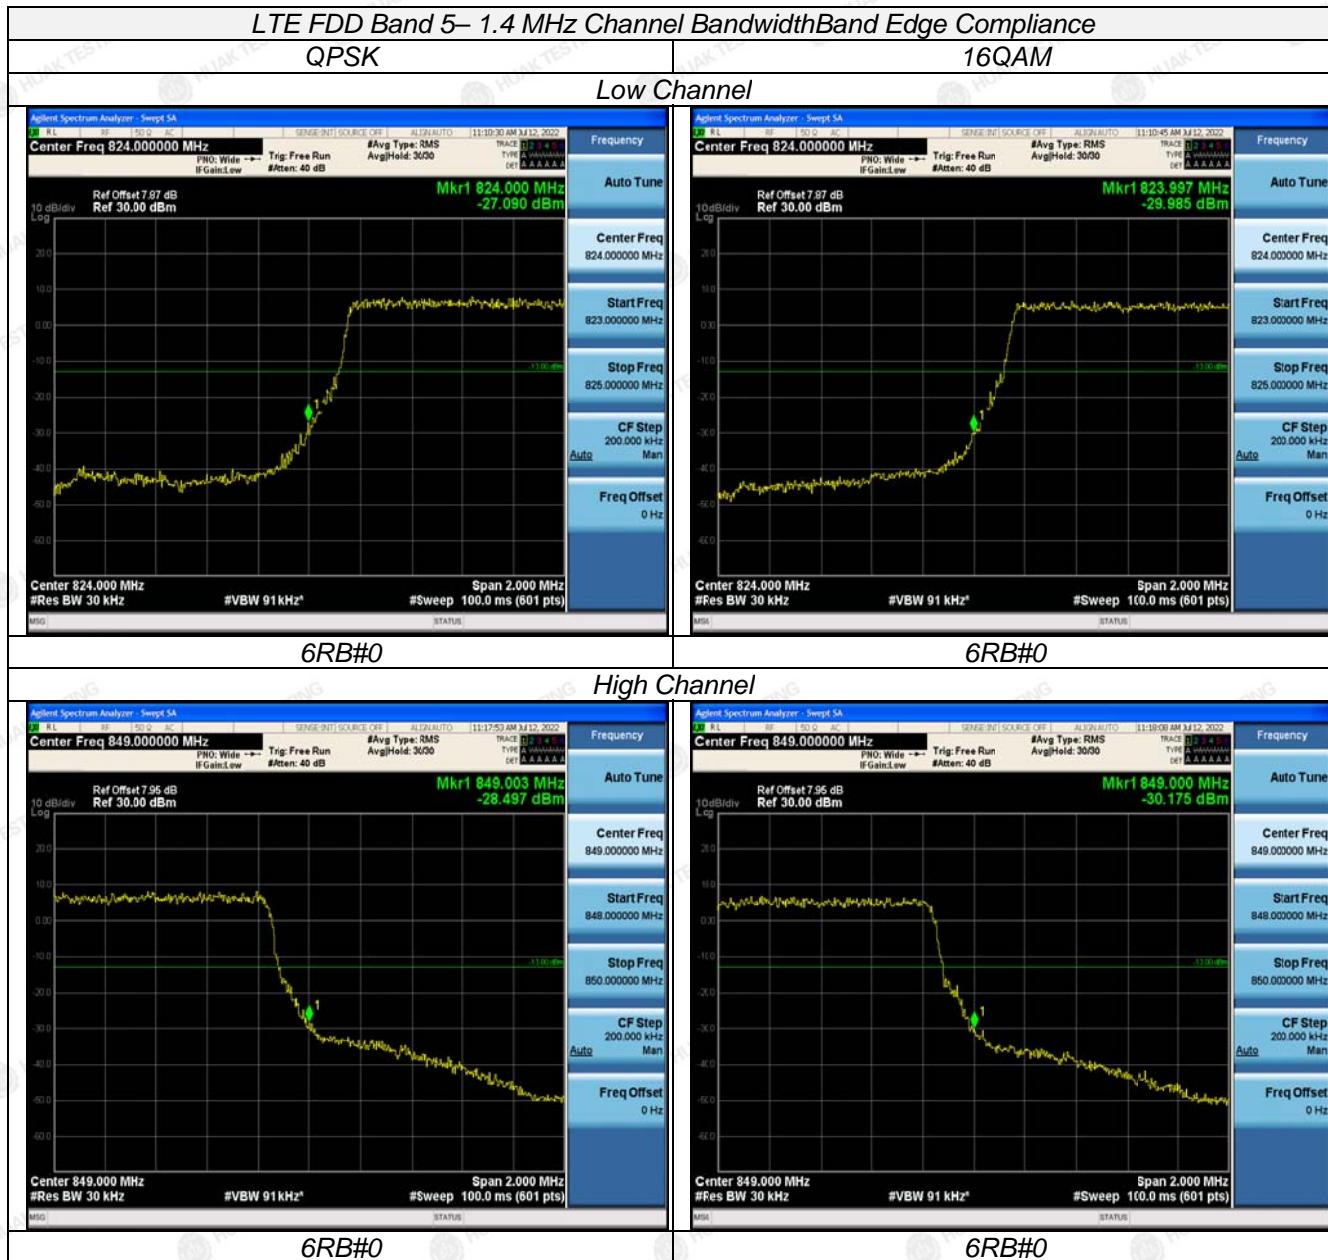


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

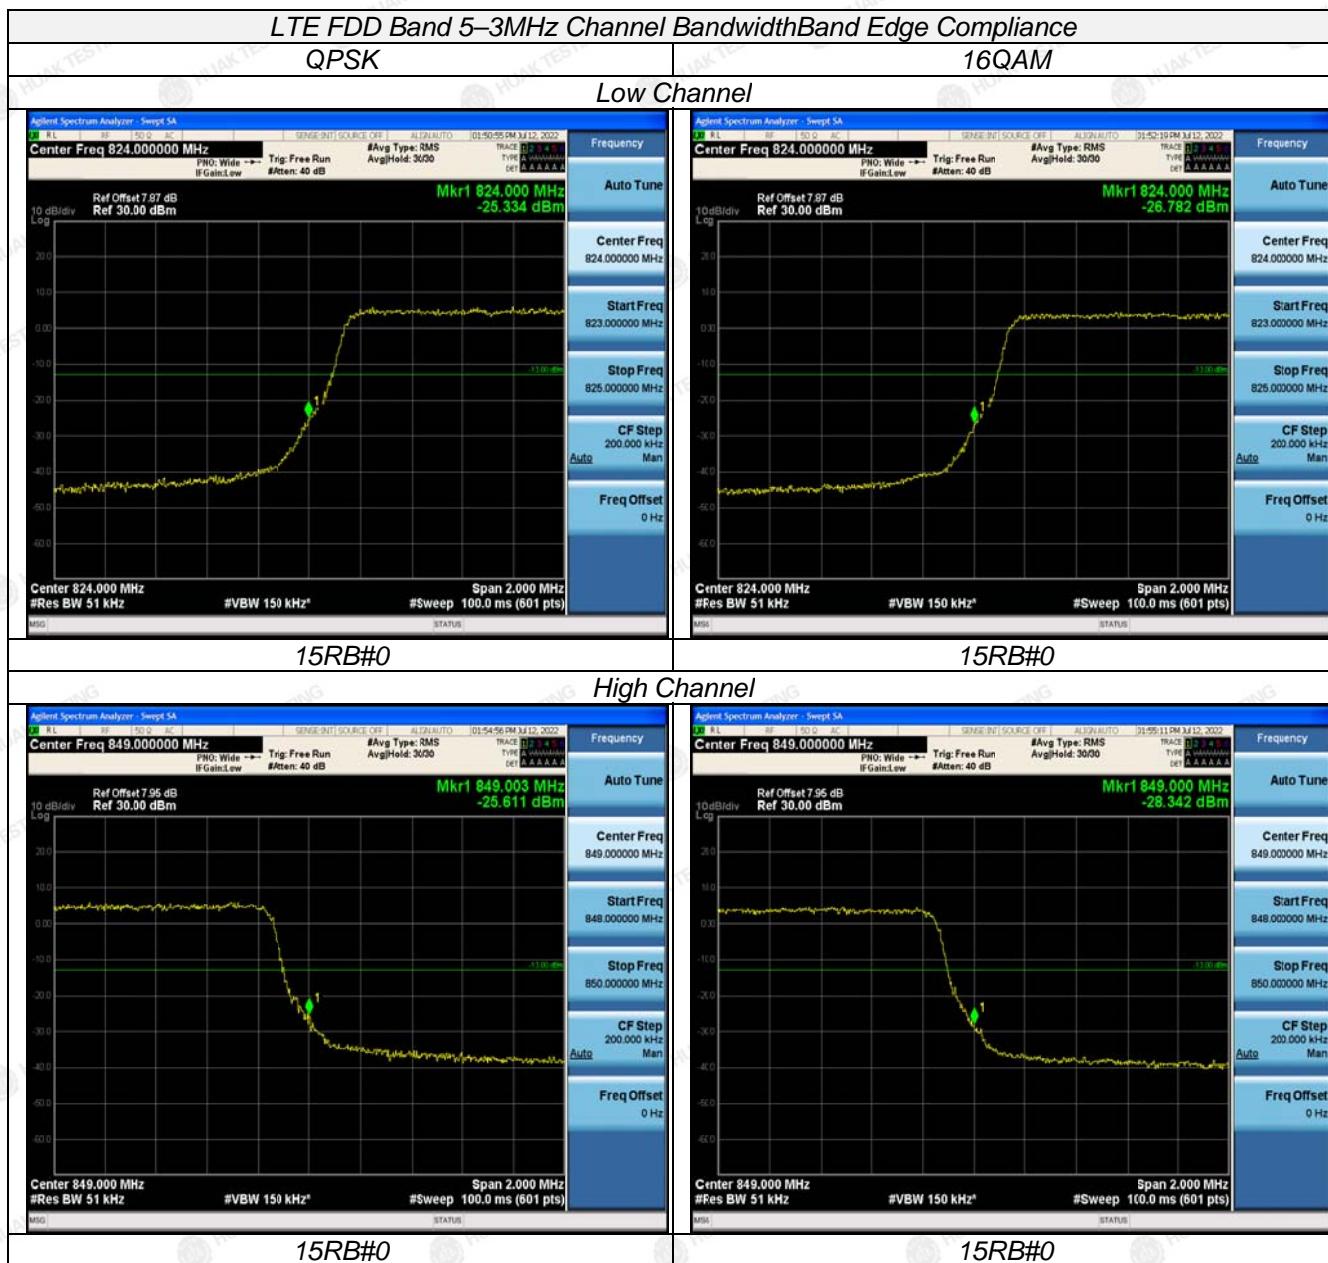

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

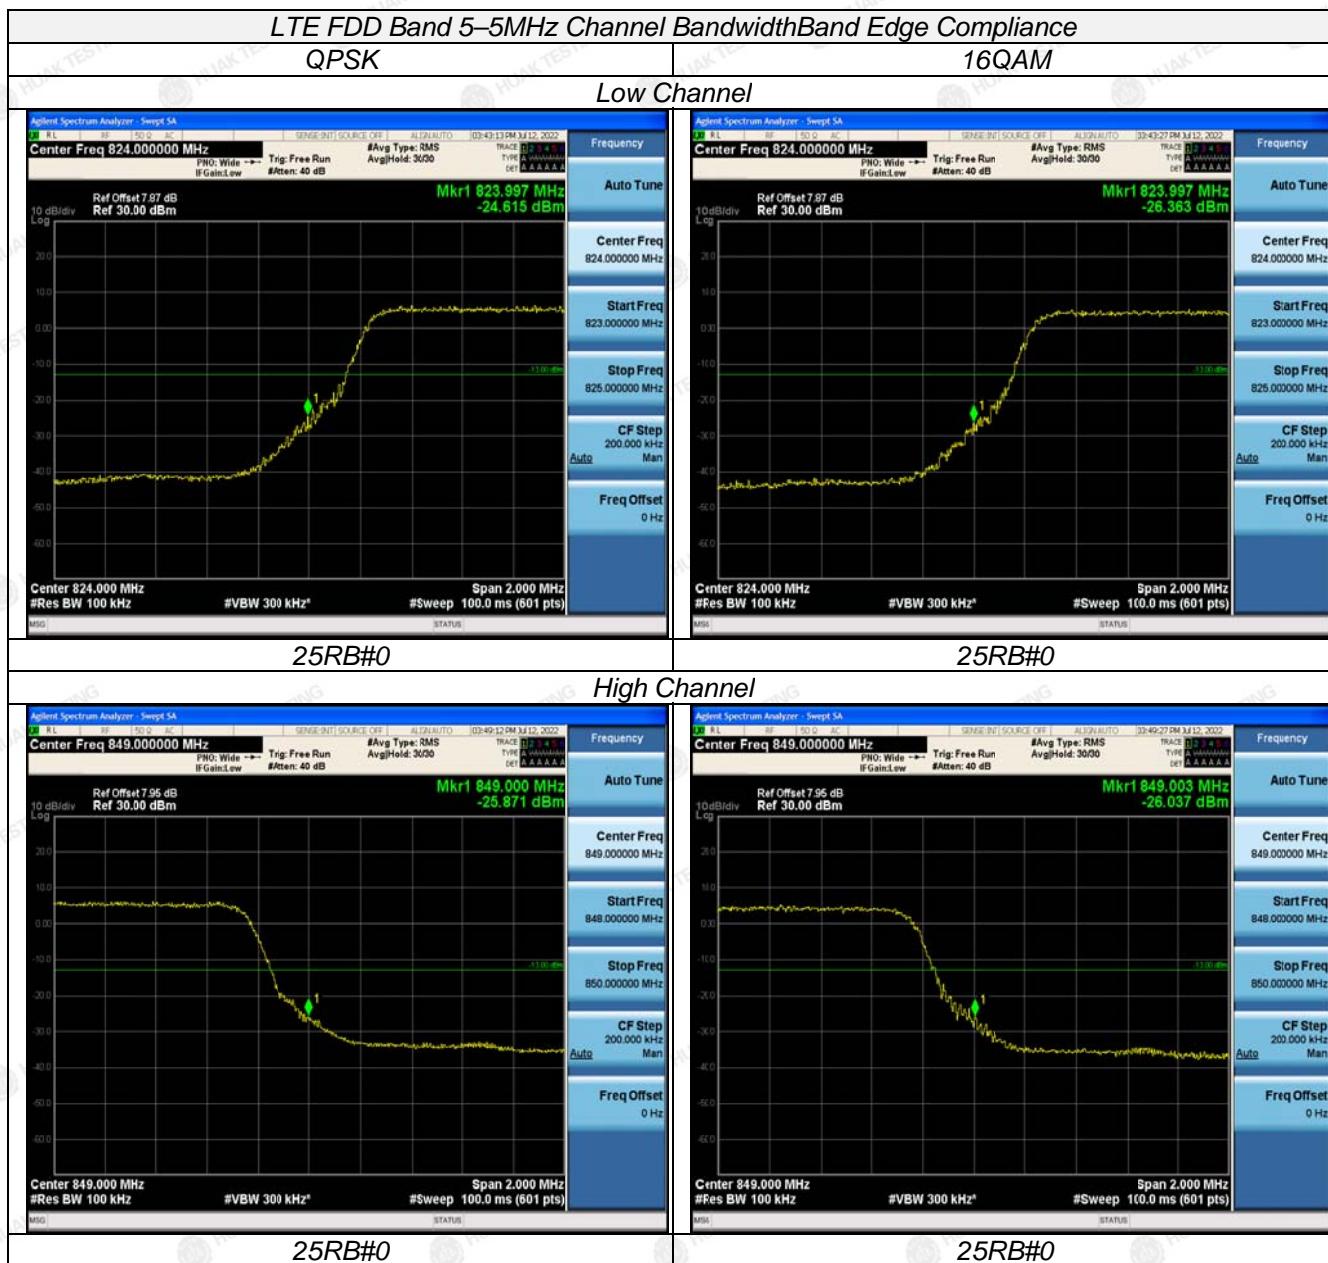

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

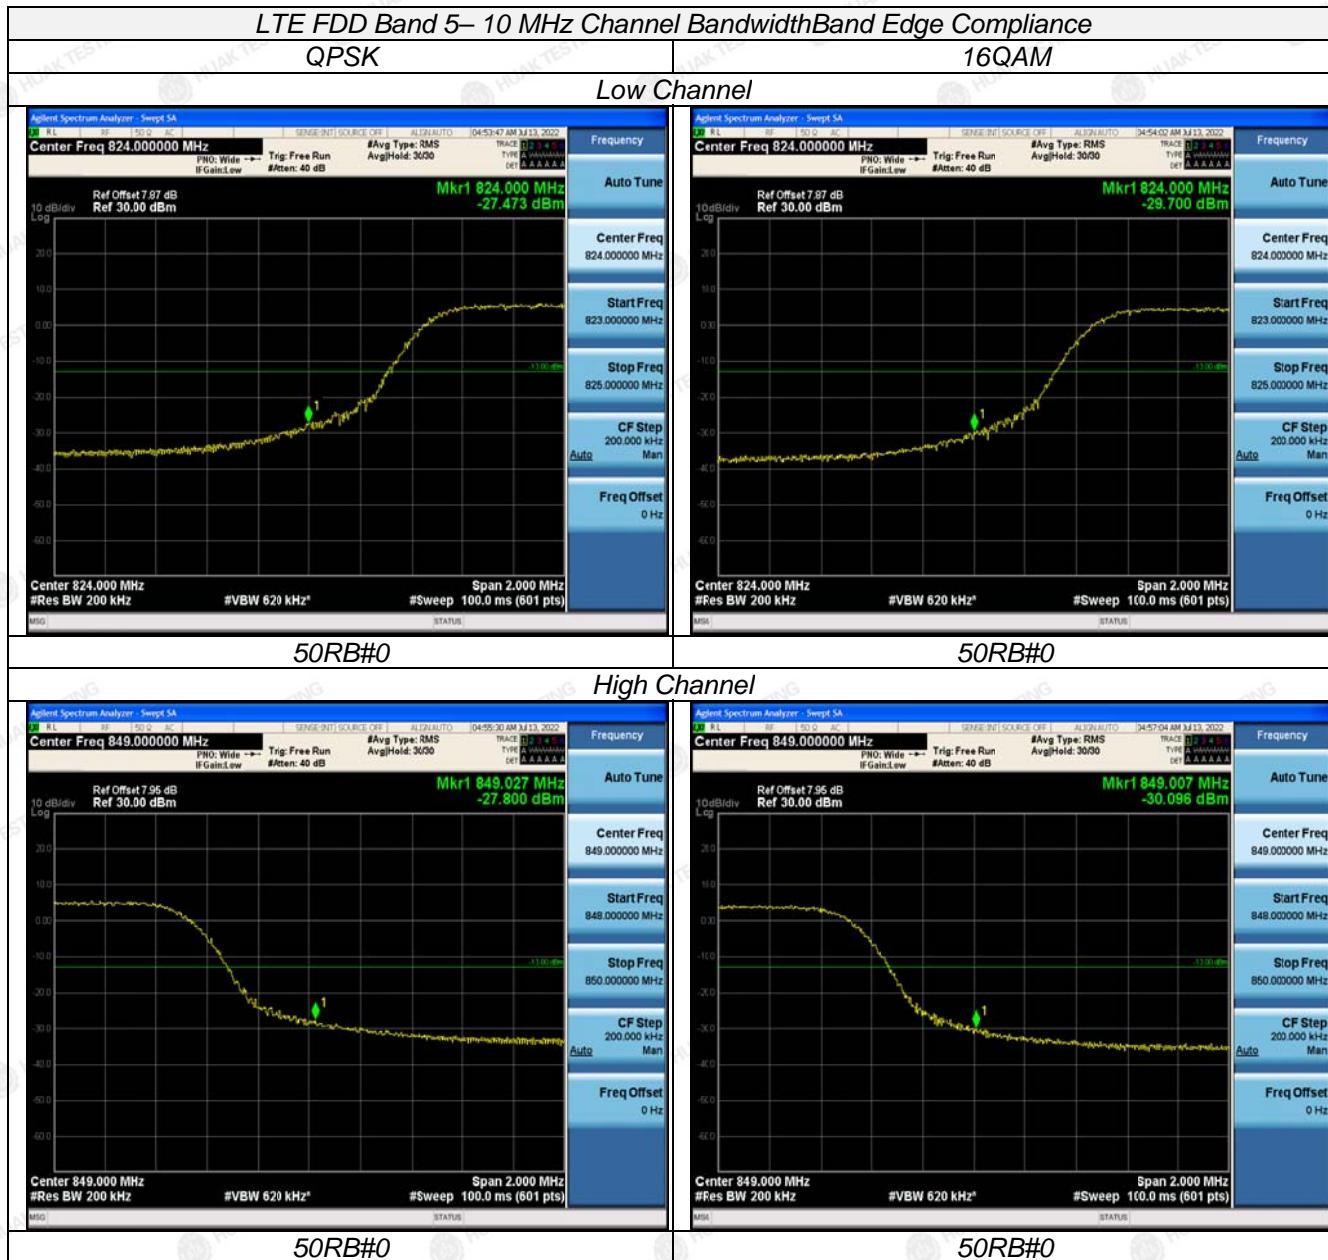

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




## 4.5 Spurious Emission on Antenna Port

### LIMIT

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### TEST CONFIGURATION

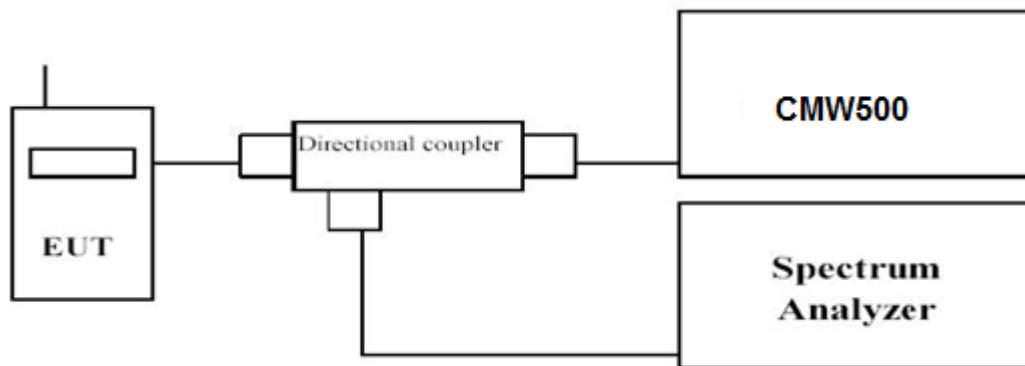

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c. EUT Communicate with CMW500, then select a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.
- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10<sup>th</sup> harmonic.
- f. Please refer to following tables for test antenna conducted emissions.

| Working Frequency | Sub range (GHz) | RBW   | VBW   | Sweep time (s) |
|-------------------|-----------------|-------|-------|----------------|
| LTE FDD Band 5    | 0.01~20         | 1 MHz | 3 MHz | Auto           |

### TEST RESULTS

#### *Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case at the QPSK Mode for each Channel Bandwidth of LTE FDD Band 5.