



TEST REPORT

Report No.: CTC2025323603
FCC ID.....: 2AGKB-VT9201
Applicant: **Videostrong Technology Co.,Ltd**
Address.....: 604, Lushi industrial Building, 28 District, Bao'an District, Shenzhen, China
Manufacturer.....: Videostrong Technology Co.,Ltd
Address.....: 604, Lushi industrial Building, 28 District, Bao'an District, Shenzhen, China
Product Name: **Android TV Box**
Trade Mark: /
Model/Type reference.....: IPx3
Listed Model(s): Refer to page seven of the report.
Standard: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Test Report Form No: CTC-TR-057_A2
Master TRF: Dated 2025-05-12
Date of receipt of test sample.....: May 16, 2025
Date of testing.....: May 16, 2025 ~ Jun. 25, 2025
Date of issue.....: Jun. 26, 2025
Result.....: **PASS**

Compiled by:
(Printed name+signature) Jim Jiang

Supervised by:
(Printed name+signature) Eric Zhang

Approved by:
(Printed name+signature) Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents**

	Page
1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY.....	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT.....	7
2.3. ACCESSORY EQUIPMENT INFORMATION	8
2.4. OPERATION STATE	8
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS	12
3.1. CONDUCTED EMISSION.....	12
3.2. RADIATED EMISSION.....	15
3.3. BAND EDGE EMISSIONS (RADIATED)	38
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED).....	63
3.5. DTS BANDWIDTH.....	111
3.6. OUTPUT POWER	137
3.7. POWER SPECTRAL DENSITY	139
3.8. DUTY CYCLE	153
3.9. ANTENNA REQUIREMENT.....	167



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[RSS-247 Issue 3](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2025323603	Jun. 26, 2025	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	ISED		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 5.5	Pass	Jim Jiang
6dB Bandwidth	15.247(a)(2)	RSS-247 5.2 (a)	Pass	Jim Jiang
Occupied Bandwidth	/	RSS-Gen 6.7	Pass	Jim Jiang
Conducted Max Output Power	15.247(b)(3)	RSS-247 5.4 (d)	Pass	Jim Jiang
Power Spectral Density	15.247(e)	RSS-247 5.2 (b)	Pass	Jim Jiang
Transmitter Radiated Spurious	15.209&15.247(d)	RSS-247 5.5&RSS-Gen 8.9	Pass	Jim Jiang

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	±0.0196%	(1)
Maximum Conducted Output Power	±0.686 dB	(1)
Maximum Power Spectral Density Level	±0.743 dB	(1)
Band-edge Compliance	±1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Videostrong Technology Co.,Ltd
Address:	604, Lushi industrial Building, 28 District, Bao'an District, Shenzhen, China
Manufacturer:	Videostrong Technology Co.,Ltd
Address:	604, Lushi industrial Building, 28 District, Bao'an District, Shenzhen, China

2.2. General Description of EUT

Product Name:	Android TV Box
Trade Mark:	/
Model/Type reference:	IPx3
Listed Model(s):	VT9201, VT9202, VT9203, VT9204, VT9205, VD9201, VD9202, VD9203, VD9204, VD9205, MEon1, MEon2, MEon3, MEon1 PRO, MEon2 PRO, MEon3 PRO, MEvo1, MEvo2, MEvo3, MEvo1 PRO, MEvo2 PRO, MEvo3 PRO, KM10, IPx4, IPx5, IPx6, IPx1 PRO, IPx2 PRO, IPx3 Lite, M3, M5, M6, M7, M2 PRO, M3 PRO, M5 PRO, V13, V14, N1, N2
Model Difference:	All these models are identical in the same PCB, layout, electrical circuit and enclosure. The difference is the model name.
Sample ID:	CTC250513-004-S001, CTC250513-004-S002
Power Supply:	Input: 5.0V--- 2.0A
Hardware Version:	/
Software Version:	/

2.4G Wi-Fi

Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/ n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Operation Frequency:	802.11b/ g/ n(HT20)/ ax(HE20): 2412MHz~2462MHz 802.11n(HT40)/ ax(HE40): 2422MHz~2452MHz
Channel Number:	802.11b/ g/ n(HT20)/ ax(HE20): 11 channels 802.11n(HT40)/ ax(HE40): 7 channels
Channel Separation:	5MHz
Antenna 1&2 Type:	Chip Antenna
Antenna 1&2 Gain:	4.49dBi
Directional Gain:	7.50dBi



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	MP246QDR	Lenovo
AC Adapter	TEKA-TB050200US	/	TEKA
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	100cm
Test Software Information			
Name	Version	/	/
SecureCRTPortable	7.1.1	/	/

2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20)/ax(HE20), CH 03~CH 09 for 802.11n(HT40)/ax(HE40).



Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is the worst case mode.

Test Mode	Data Rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/ (HT40)	HT-MCS0
802.11ax(HE20)/ (HE40)	HE-MCS0

Test Mode:

For RF test items:
1. The engineering test program was provided and enabled to make EUT continuous transmit. 2. IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.5. Measurement Instruments List

RF Test System – SRD						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Calibrated Until
1	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Dec. 13, 2024	Dec. 12, 2025
2	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 13, 2024	Dec. 12, 2025
3	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 13, 2024	Dec. 12, 2025
4	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 25, 2025	Mar. 24, 2026
5	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 25, 2025	Mar. 24, 2026
6	RF Control Unit	Tonscend	JS0806-2	/	Aug. 22, 2024	Aug. 21, 2025
7	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 25, 2025	Mar. 24, 2026
8	RF Cable	HUBER+SUHNER	SUCOFLEX101PE	RF-08	Apr. 15, 2025	Apr. 16, 2026

Test Software

Name	Manufacturer	Software Version
JS1120-3	Tonscend	V2.6.88.0346

Radiated emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Dec. 18, 2024	Dec. 17, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-648	Dec. 12, 2024	Dec. 11, 2025
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 13, 2024	Dec. 12, 2025
4	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 22, 2025	Mar. 21, 2026
5	Pre-Amplifier	SONOMA	310	186194	Dec. 13, 2024	Dec. 12, 2025
6	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 13, 2024	Dec. 12, 2025
7	Test Receiver	R&S	ESCI7	100967	Dec. 13, 2024	Dec. 12, 2025
8	RE32L-001	HUBENR	/	009 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
9	RE32L-002	HUBENR	/	010 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
10	RE32L-003	HUBENR	/	011 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
11	RE32H-001	HUBENR	/	012 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
12	RE32H-002	HUBENR	/	013 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
13	RE33H-003	HUBENR	/	019 (18GHz-40GHz)	Feb. 09, 2025	Feb. 08, 2026
14	3m chamber 2	Frankonia	EE025	/	Oct. 19, 2024	Oct. 18, 2027

Test Software

Name	Manufacturer	Software Version
EZ-EMC	FARA	FA-03A2

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-057_A2



Conducted emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 13, 2024	Dec. 12, 2025
2	LISN	R&S	ENV216	101113	Dec. 13, 2024	Dec. 12, 2025
3	EMI Test Receiver	R&S	ESCI	100524	Dec. 13, 2024	Dec. 12, 2025
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 13, 2024	Dec. 12, 2025
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 13, 2024	Dec. 12, 2025
6	CE-001	COMM	/	001	Feb. 09, 2025	Feb. 08, 2026

Test Software		
Name	Manufacturer	Software Version
EMC32	R&S	6.10.10

Note: 1. The Cal. Interval was one year.
2. The Cal. Interval was three years of the antenna.
3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

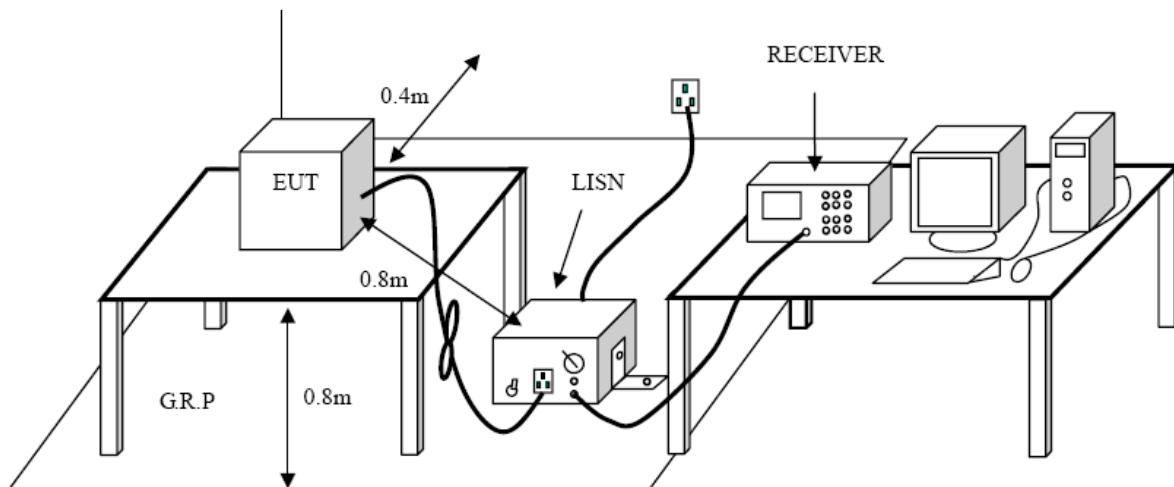


Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

Test Result

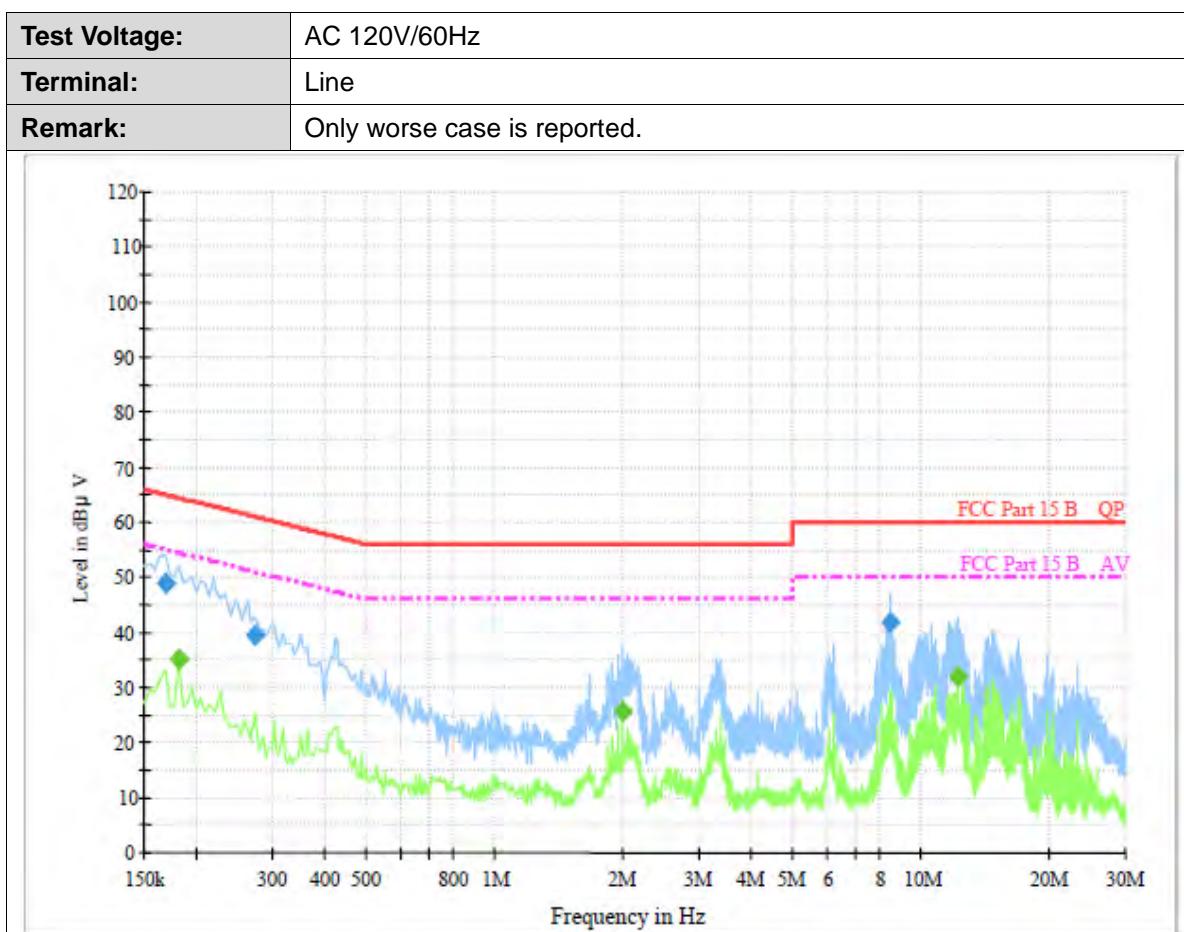

Final Measurement Detector 1


Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.168000	49.0	1000.00	9.000	On	L1	9.5	16.1	65.1	
0.271500	39.3	1000.00	9.000	On	L1	9.5	21.8	61.1	
8.434500	41.9	1000.00	9.000	On	L1	9.6	18.1	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.181500	35.1	1000.00	9.000	On	L1	9.5	19.3	54.4	
1.990500	25.5	1000.00	9.000	On	L1	9.7	20.5	46.0	
12.196500	32.0	1000.00	9.000	On	L1	9.6	18.0	50.0	

Emission Level = Read Level + Correct Factor

Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported.

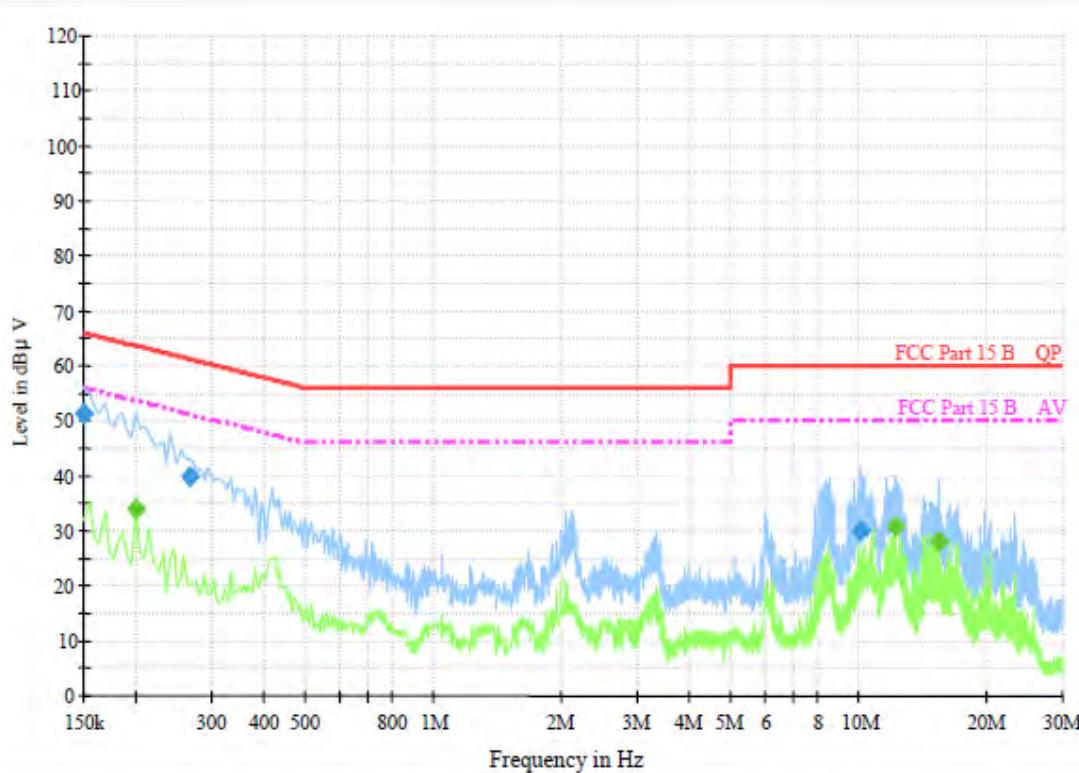

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	51.5	1000.00	9.000	On	N	9.4	14.5	66.0	
0.267000	39.8	1000.00	9.000	On	N	9.4	21.4	61.2	
10.041000	30.2	1000.00	9.000	On	N	9.6	29.8	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.199500	33.8	1000.00	9.000	On	N	9.3	19.8	53.6	
12.196500	30.7	1000.00	9.000	On	N	9.7	19.3	50.0	
15.373500	27.9	1000.00	9.000	On	N	9.6	22.1	50.0	

Emission Level = Read Level + Correct Factor

3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3


Frequency Range (MHz)	dB μ V/m (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:


- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB μ V/m)=20log Emission Level (μ V/m).

Test Configuration

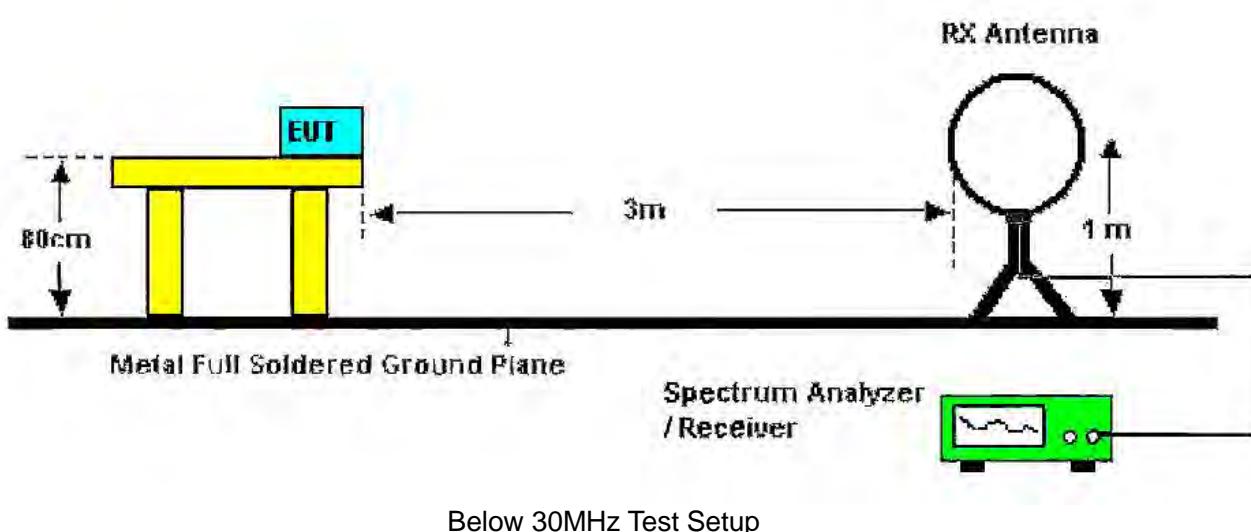

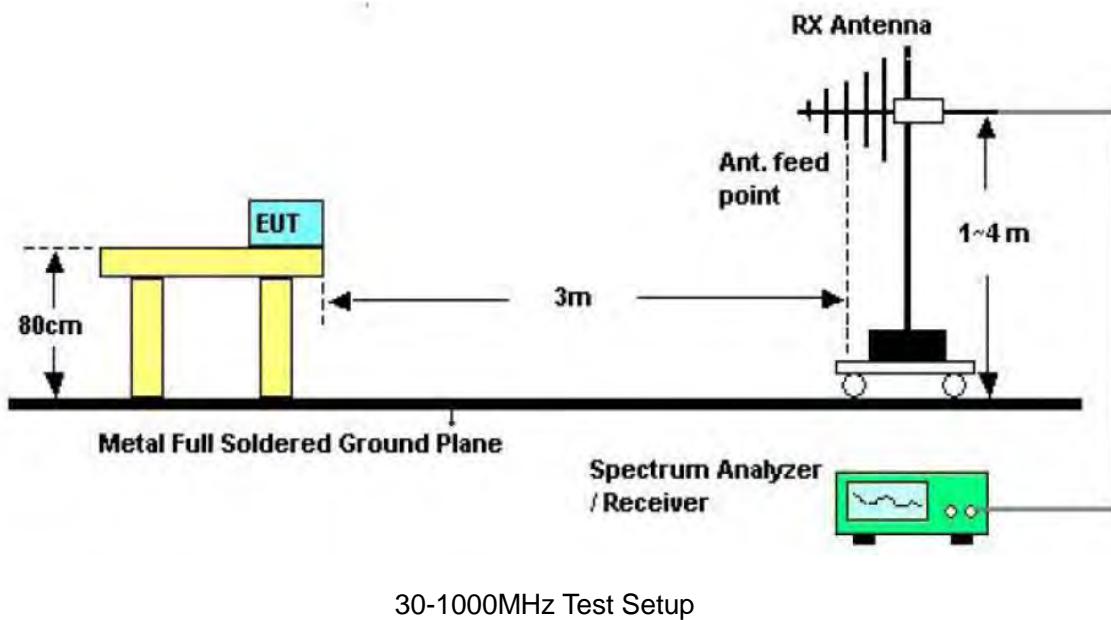

30-1000MHz Test Setup

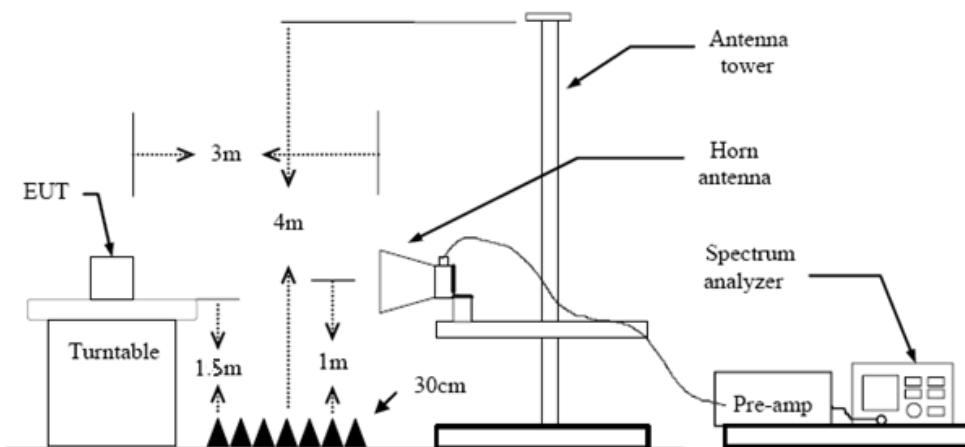

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz: RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz: RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz: RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 kHz~30 MHz

From 9 kHz to 30 MHz: The conclusion is PASS.

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Pre-scan all antenna, only show the test data for worse case antenna on the test report.



30MHz-1GHz



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	133.4315	41.92	-19.06	22.86	43.50	-20.64	QP
2 *	224.2045	54.78	-20.15	34.63	46.00	-11.37	QP
3	309.5632	45.75	-16.80	28.95	46.00	-17.05	QP
4	399.5902	42.31	-14.70	27.61	46.00	-18.39	QP
5	600.1624	36.96	-9.00	27.96	46.00	-18.04	QP
6	801.2242	37.50	-5.51	31.99	46.00	-14.01	QP


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

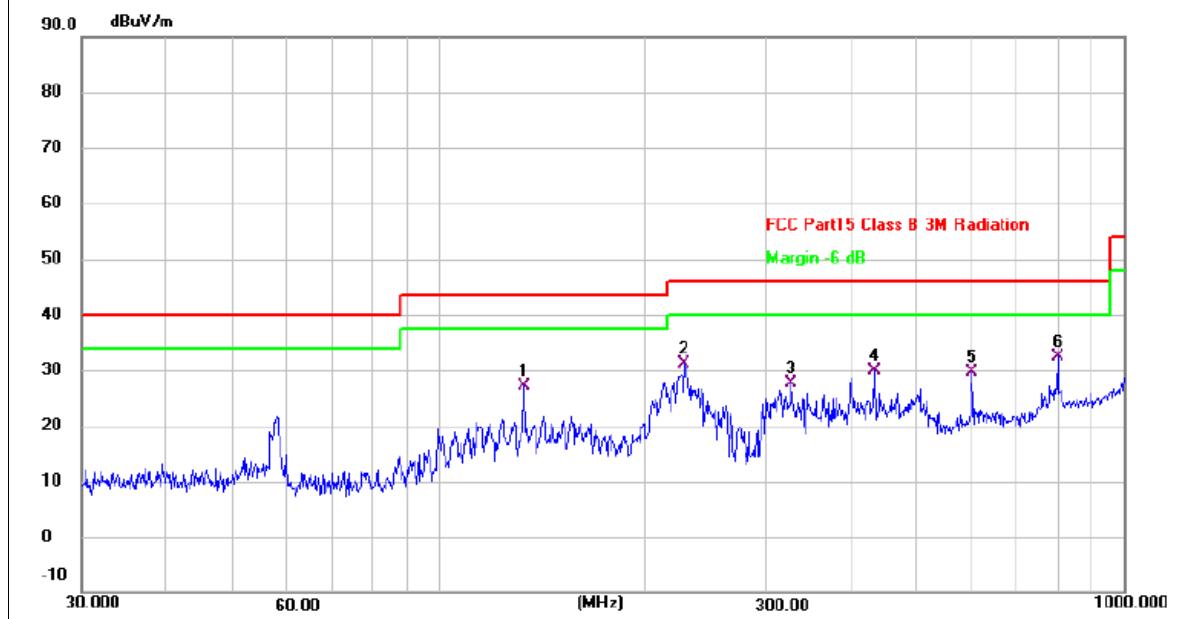

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	133.0577	46.28	-19.06	27.22	43.50	-16.28	QP
2	228.0102	51.14	-19.96	31.18	46.00	-14.82	QP
3	327.4277	44.15	-16.45	27.70	46.00	-18.30	QP
4	432.2424	43.34	-13.52	29.82	46.00	-16.18	QP
5	600.1625	38.68	-9.00	29.68	46.00	-16.32	QP
6 *	798.9797	37.91	-5.54	32.37	46.00	-13.63	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Above 1GHz

Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.097	44.62	1.87	46.49	74.00	-27.51	peak
2 *	4824.106	37.80	1.87	39.67	54.00	-14.33	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4823.883	35.49	1.87	37.36	54.00	-16.64	AVG
2	4824.103	43.11	1.87	44.98	74.00	-29.02	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4874.033	37.80	1.95	39.75	54.00	-14.25	AVG
2	4874.085	45.06	1.95	47.01	74.00	-26.99	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.959	34.59	1.95	36.54	54.00	-17.46	AVG
2	4874.194	42.35	1.95	44.30	74.00	-29.70	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4924.021	37.24	2.04	39.28	54.00	-14.72	AVG
2	4924.051	44.55	2.04	46.59	74.00	-27.41	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.103	42.30	2.04	44.34	74.00	-29.66	peak
2 *	4924.112	34.97	2.04	37.01	54.00	-16.99	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.212	42.58	1.87	44.45	74.00	-29.55	peak
2 *	4824.337	29.56	1.87	31.43	54.00	-22.57	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4823.728	27.82	1.87	29.69	54.00	-24.31	AVG
2	4824.310	41.66	1.87	43.53	74.00	-30.47	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11g Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.877	42.01	1.95	43.96	74.00	-30.04	peak
2 *	4874.105	29.19	1.95	31.14	54.00	-22.86	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11g Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.989	41.63	1.95	43.58	74.00	-30.42	peak
2 *	4874.221	27.26	1.95	29.21	54.00	-24.79	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11g Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4924.012	28.88	2.04	30.92	54.00	-23.08	AVG
2	4924.111	40.85	2.04	42.89	74.00	-31.11	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11g Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.830	41.48	2.04	43.52	74.00	-30.48	peak
2 *	4923.878	27.11	2.04	29.15	54.00	-24.85	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.888	41.43	1.87	43.30	74.00	-30.70	peak
2 *	4824.101	27.33	1.87	29.20	54.00	-24.80	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4823.853	26.36	1.87	28.23	54.00	-25.77	AVG
2	4823.910	41.08	1.87	42.95	74.00	-31.05	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.679	27.15	1.95	29.10	54.00	-24.90	AVG
2	4874.174	41.87	1.95	43.82	74.00	-30.18	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.030	40.50	1.95	42.45	74.00	-31.55	peak
2 *	4874.100	26.50	1.95	28.45	54.00	-25.55	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.861	40.96	2.04	43.00	74.00	-31.00	peak
2 *	4924.112	26.90	2.04	28.94	54.00	-25.06	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.983	41.65	2.04	43.69	74.00	-30.31	peak
2 *	4924.816	26.06	2.04	28.10	54.00	-25.90	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4844.057	41.40	1.90	43.30	74.00	-30.70	peak
2 *	4844.140	27.21	1.90	29.11	54.00	-24.89	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4843.725	26.31	1.90	28.21	54.00	-25.79	AVG
2	4843.975	40.74	1.90	42.64	74.00	-31.36	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.874	41.67	1.95	43.62	74.00	-30.38	peak
2 *	4874.011	27.26	1.95	29.21	54.00	-24.79	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.120	41.39	1.95	43.34	74.00	-30.66	peak
2 *	4874.188	26.45	1.95	28.40	54.00	-25.60	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4903.793	27.31	2.00	29.31	54.00	-24.69	AVG
2	4904.044	41.72	2.00	43.72	74.00	-30.28	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4903.796	26.43	2.00	28.43	54.00	-25.57	AVG
2	4904.201	41.17	2.00	43.17	74.00	-30.83	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4824.210	27.45	1.87	29.32	54.00	-24.68	AVG
2	4824.230	41.56	1.87	43.43	74.00	-30.57	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.791	41.13	1.87	43.00	74.00	-31.00	peak
2 *	4824.130	26.55	1.87	28.42	54.00	-25.58	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value							

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value							



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value							

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value							



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4843.794	41.83	1.90	43.73	74.00	-30.27	peak
2 *	4844.114	27.32	1.90	29.22	54.00	-24.78	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4843.797	40.96	1.90	42.86	74.00	-31.14	peak
2 *	4844.000	26.62	1.90	28.52	54.00	-25.48	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.874	42.03	1.95	43.98	74.00	-30.02	peak
2 *	4873.900	27.38	1.95	29.33	54.00	-24.67	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 2437MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.860	41.69	1.95	43.64	74.00	-30.36	peak
2 *	4873.900	26.49	1.95	28.44	54.00	-25.56	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4903.719	27.13	2.00	29.13	54.00	-24.87	AVG
2	4904.104	41.70	2.00	43.70	74.00	-30.30	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4904.152	41.32	2.00	43.32	74.00	-30.68	peak
2 *	4904.210	26.44	2.00	28.44	54.00	-25.56	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

Restricted Frequency Band (MHz)	(dB μ V/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

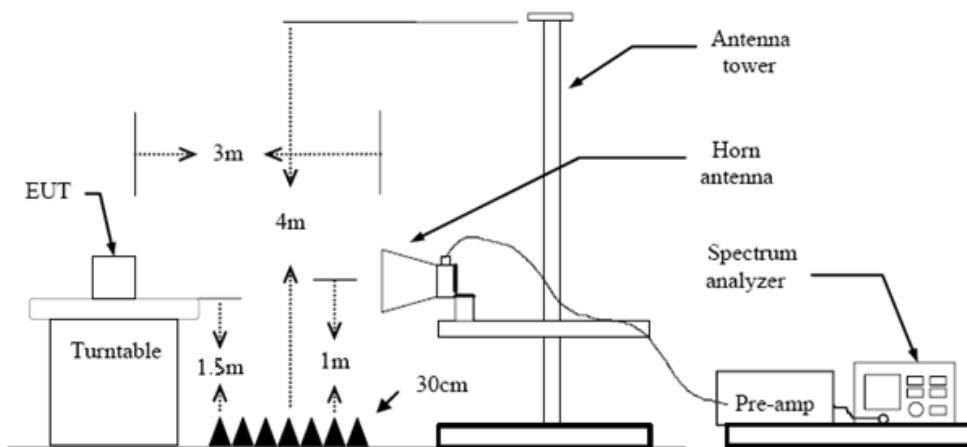

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


Test Mode


Please refer to the clause 2.4.

Note: Pre-scan all antenna, only show the test data for worse case antenna on the test report.

**Test Result**

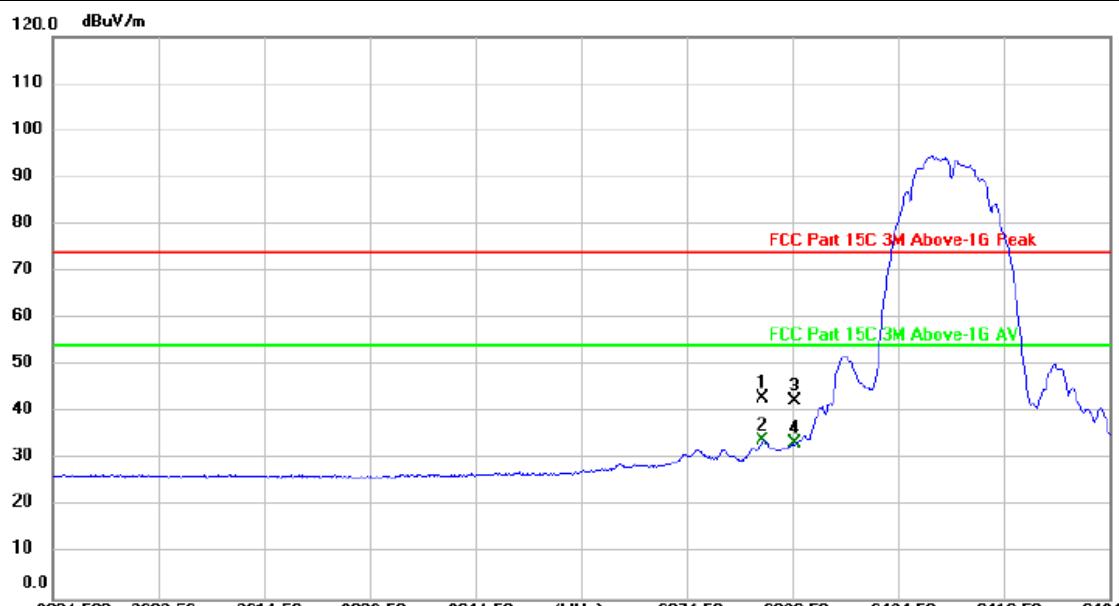Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2412MHz						
							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2385.390	51.63	-8.46	43.17	74.00	-30.83	peak
2 *	2385.390	42.42	-8.46	33.96	54.00	-20.04	AVG
3	2390.000	51.02	-8.46	42.56	74.00	-31.44	peak
4	2390.000	41.84	-8.46	33.38	54.00	-20.62	AVG
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value							

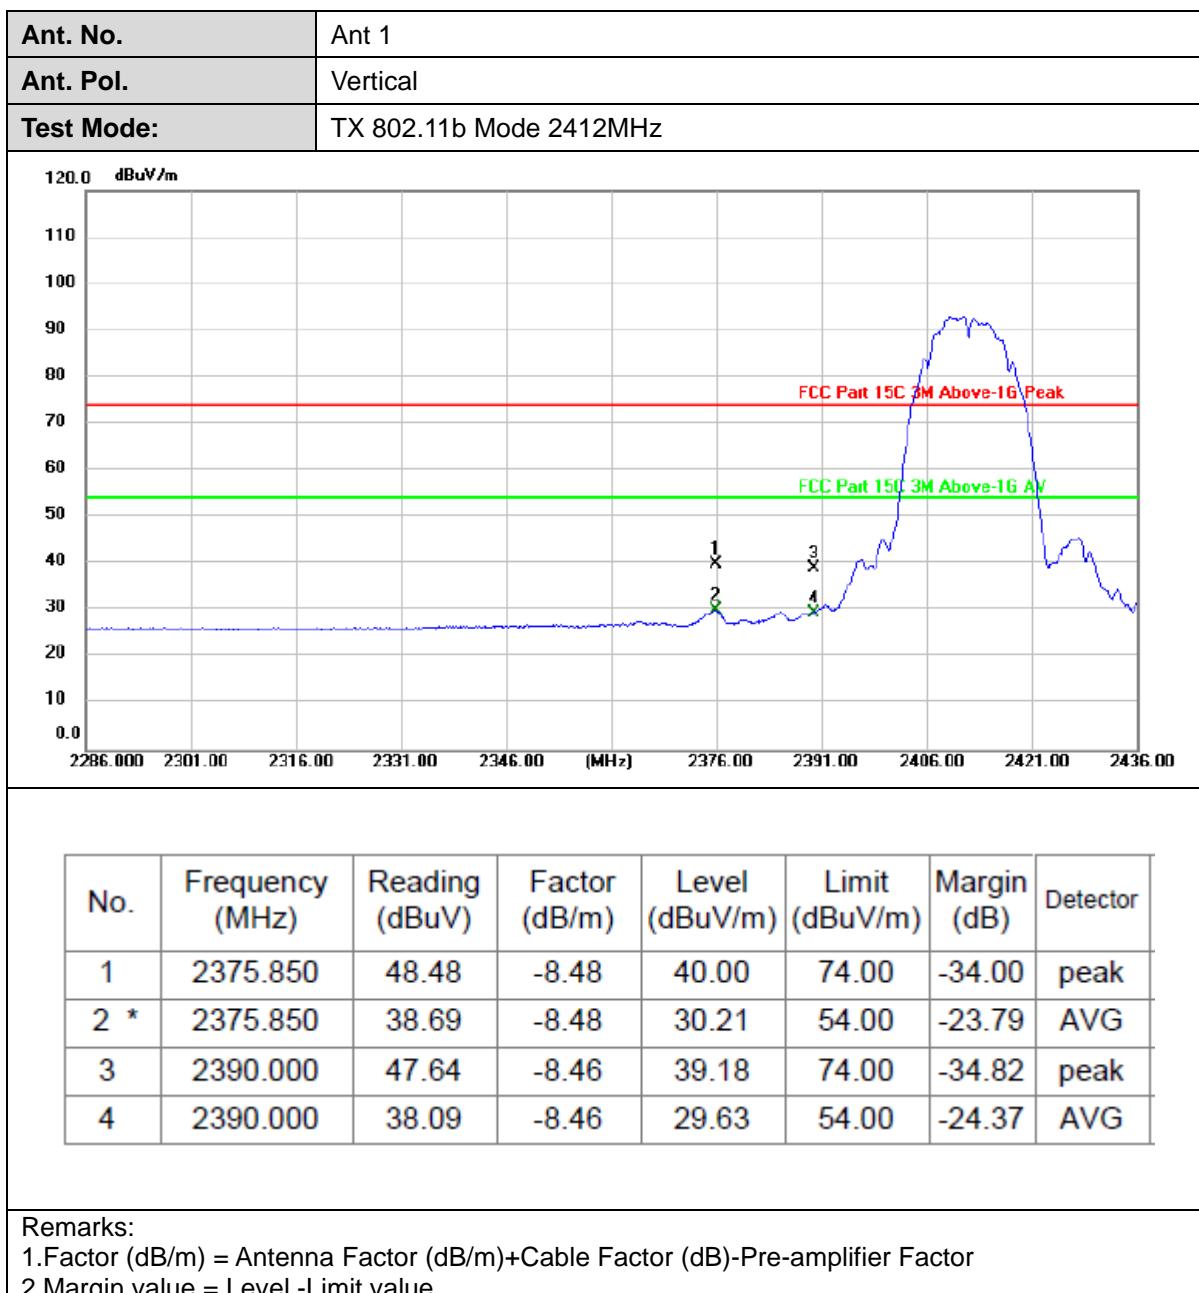

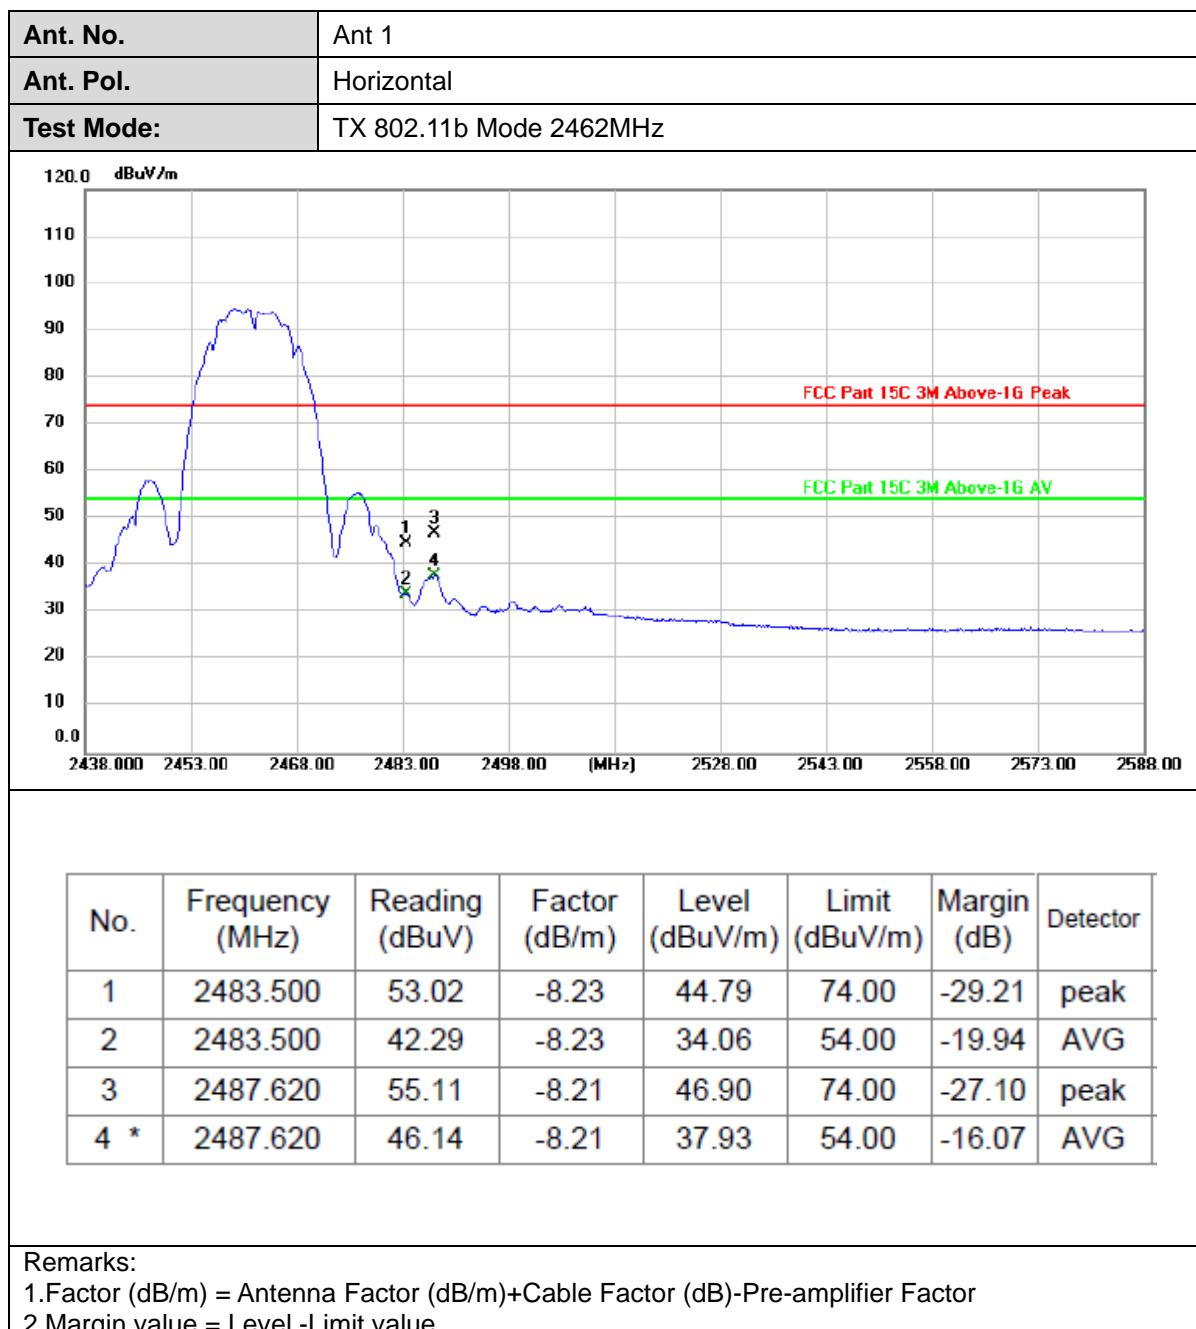




Ant. No.	Ant 1																																															
Ant. Pol.	Vertical																																															
Test Mode:	TX 802.11b Mode 2462MHz																																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2483.500</td><td>52.41</td><td>-8.23</td><td>44.18</td><td>74.00</td><td>-29.82</td><td>peak</td></tr><tr><td>2</td><td>2483.500</td><td>42.37</td><td>-8.23</td><td>34.14</td><td>54.00</td><td>-19.86</td><td>AVG</td></tr><tr><td>3</td><td>2487.110</td><td>54.22</td><td>-8.22</td><td>46.00</td><td>74.00</td><td>-28.00</td><td>peak</td></tr><tr><td>4 *</td><td>2487.110</td><td>45.56</td><td>-8.22</td><td>37.34</td><td>54.00</td><td>-16.66</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2483.500	52.41	-8.23	44.18	74.00	-29.82	peak	2	2483.500	42.37	-8.23	34.14	54.00	-19.86	AVG	3	2487.110	54.22	-8.22	46.00	74.00	-28.00	peak	4 *	2487.110	45.56	-8.22	37.34	54.00	-16.66	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																									
1	2483.500	52.41	-8.23	44.18	74.00	-29.82	peak																																									
2	2483.500	42.37	-8.23	34.14	54.00	-19.86	AVG																																									
3	2487.110	54.22	-8.22	46.00	74.00	-28.00	peak																																									
4 *	2487.110	45.56	-8.22	37.34	54.00	-16.66	AVG																																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																																





Ant. No.	Ant 1																															
Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11g Mode 2412MHz																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>54.54</td><td>-8.46</td><td>46.08</td><td>74.00</td><td>-27.92</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>42.24</td><td>-8.46</td><td>33.78</td><td>54.00</td><td>-20.22</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	54.54	-8.46	46.08	74.00	-27.92	peak	2 *	2390.000	42.24	-8.46	33.78	54.00	-20.22	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2390.000	54.54	-8.46	46.08	74.00	-27.92	peak																									
2 *	2390.000	42.24	-8.46	33.78	54.00	-20.22	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																																





Ant. No.	Ant 1							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11g Mode 2412MHz							
120.0								
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
1	2390.000	48.81	-8.46	40.35	74.00	-33.65	peak	
2 *	2390.000	38.35	-8.46	29.89	54.00	-24.11	AVG	
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value								

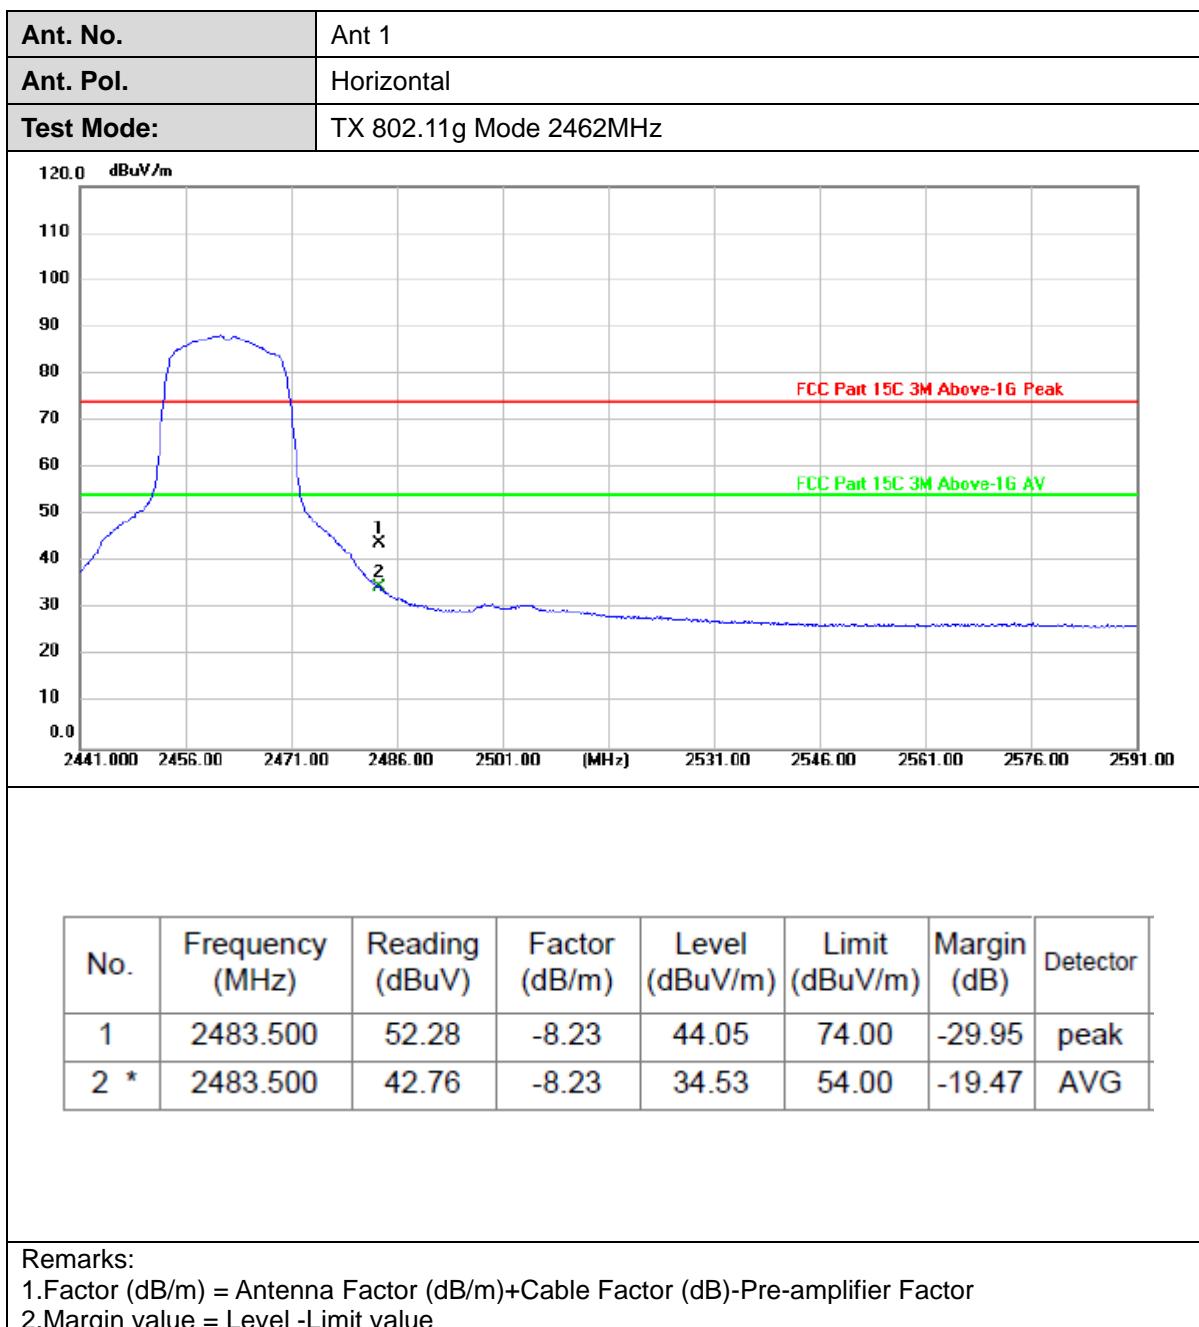

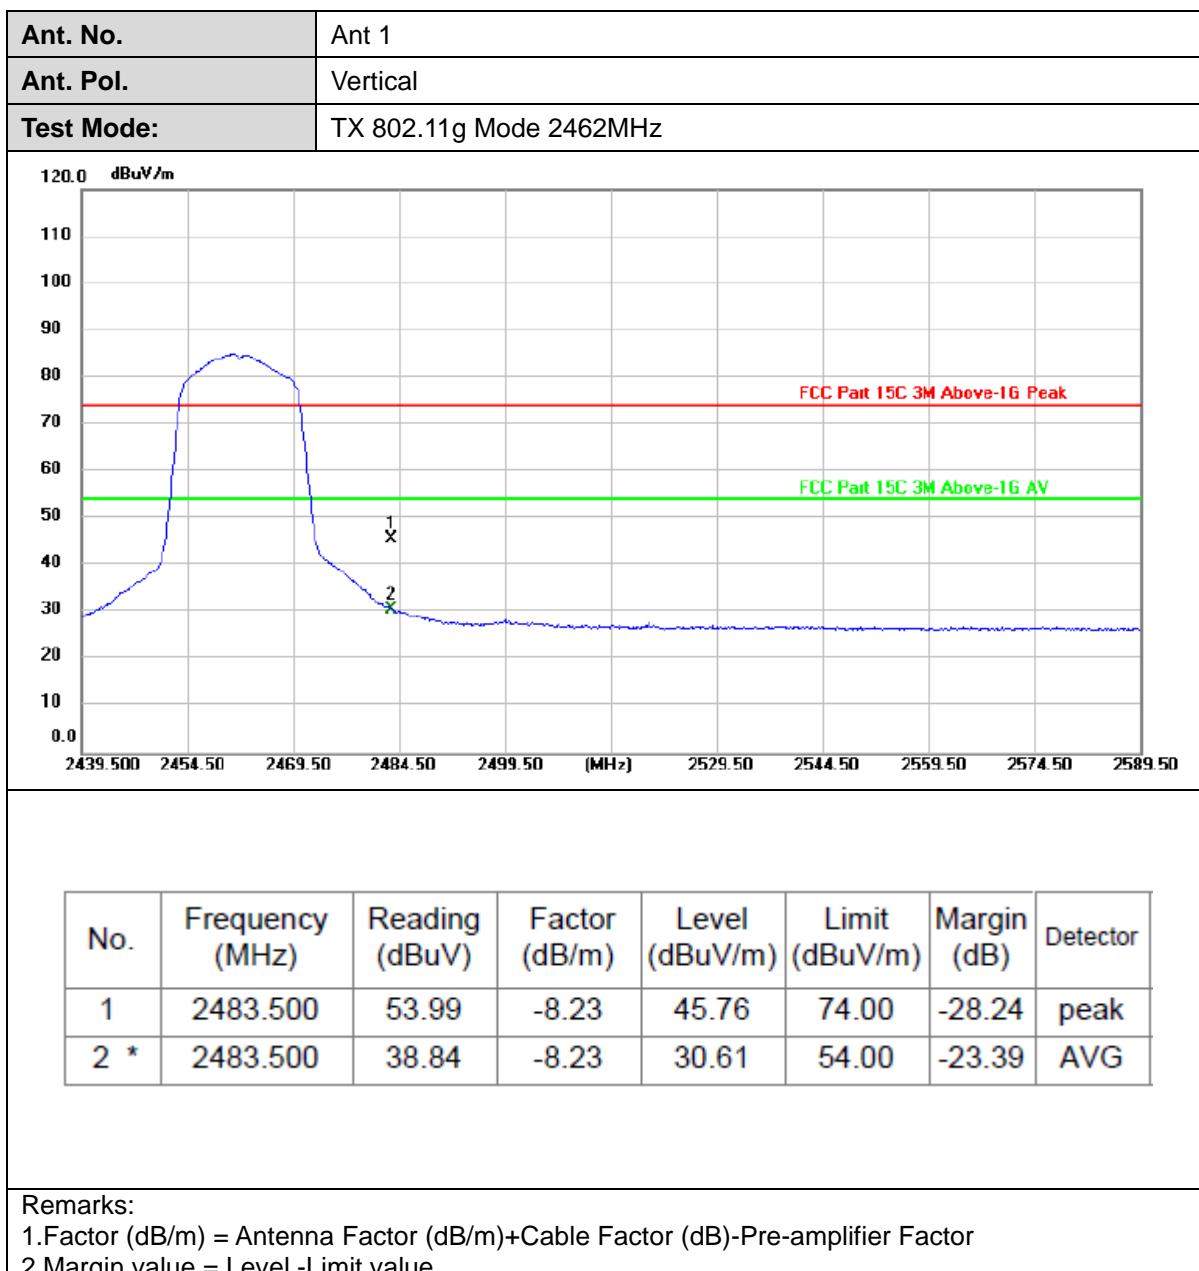


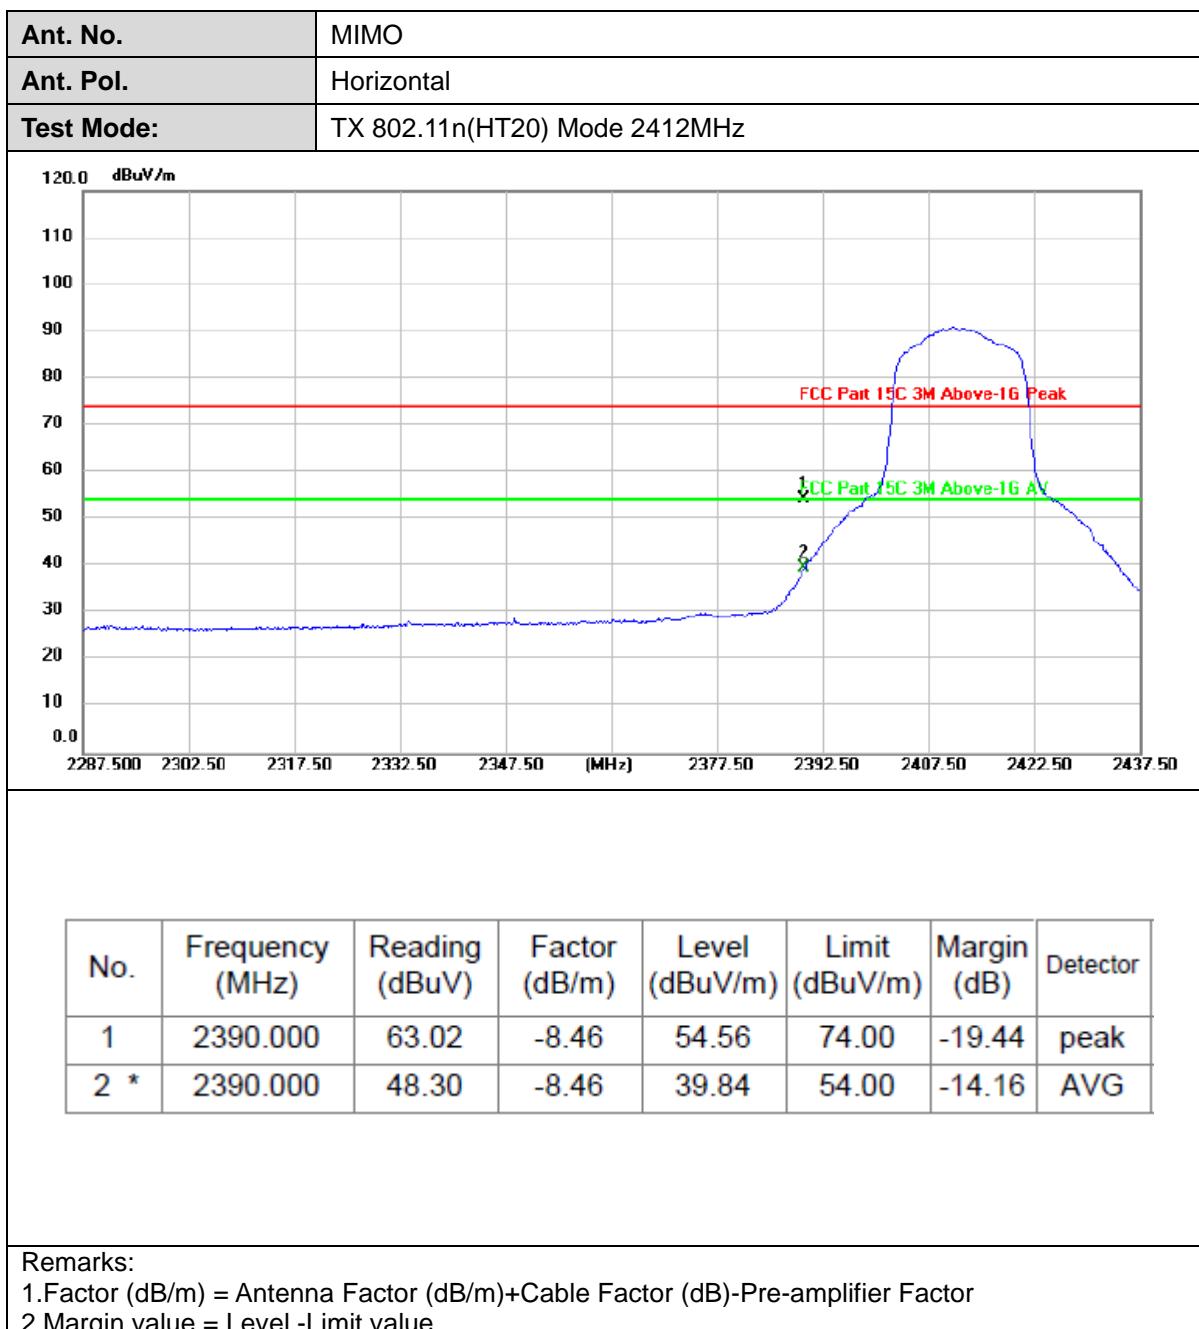


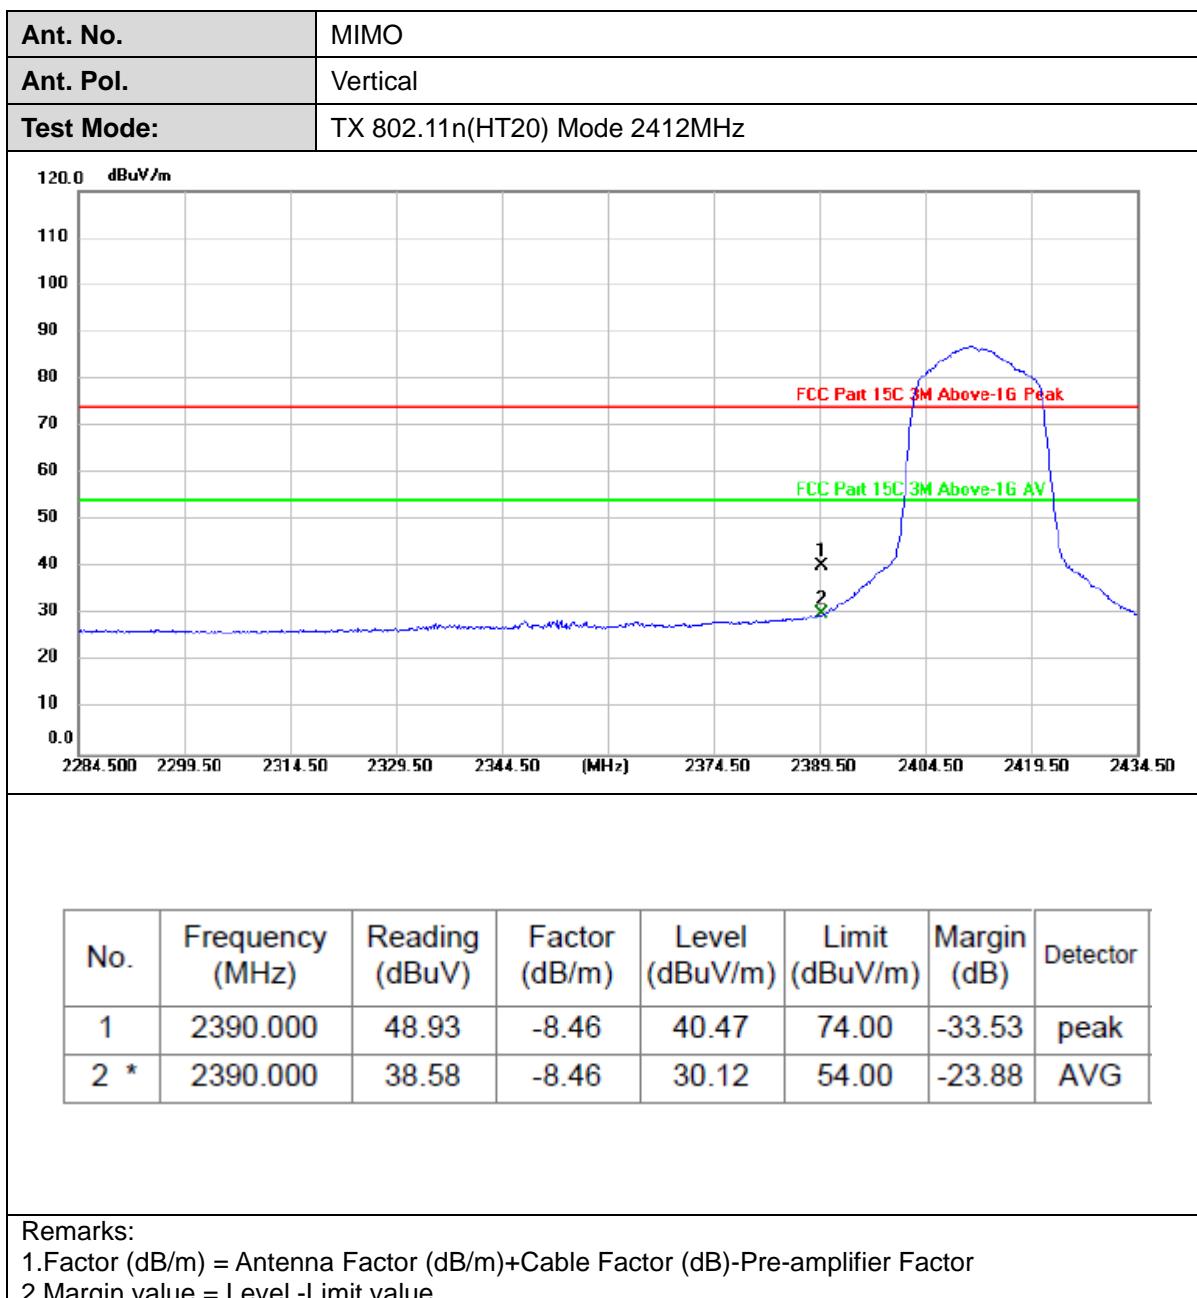

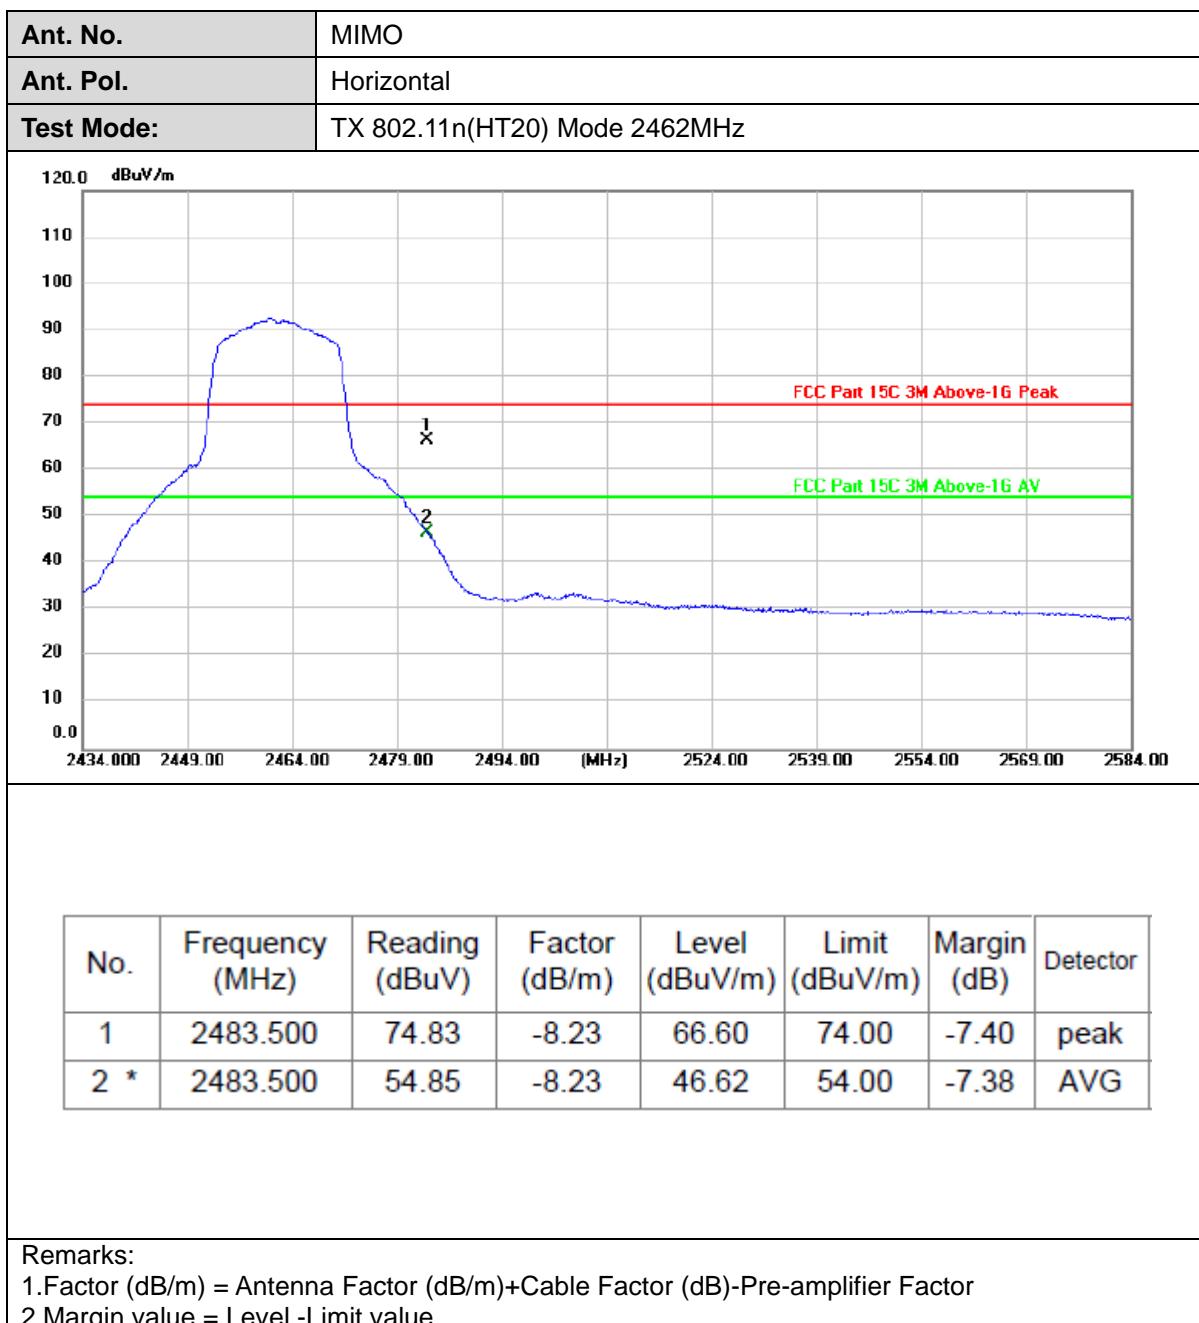


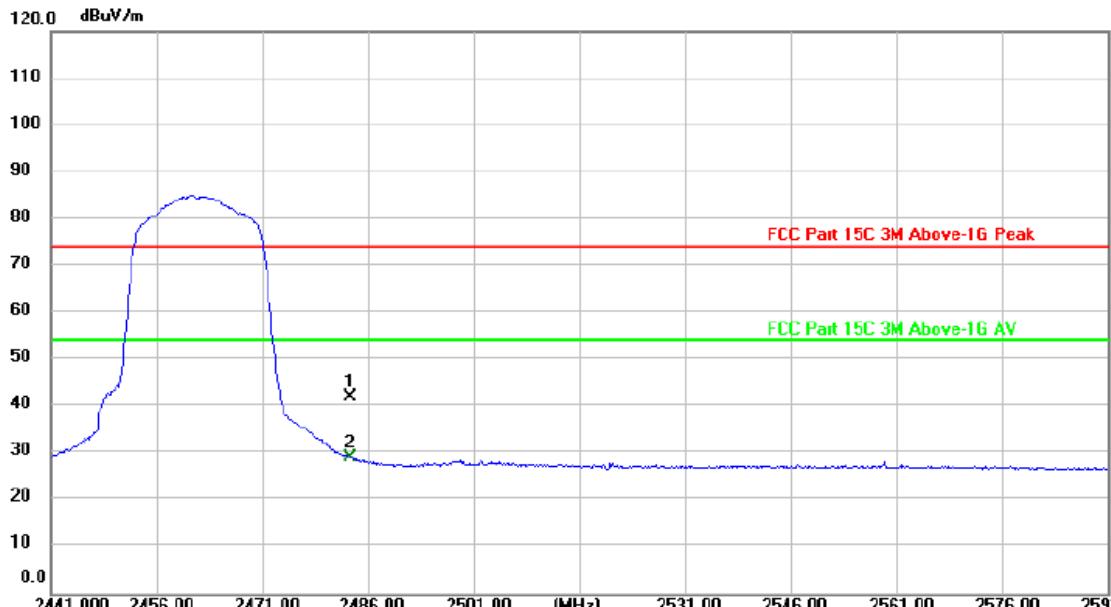



Ant. No.	MIMO																															
Ant. Pol.	Vertical																															
Test Mode:	TX 802.11n(HT20) Mode 2462MHz																															
																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2483.500</td><td>50.37</td><td>-8.23</td><td>42.14</td><td>74.00</td><td>-31.86</td><td>peak</td></tr><tr><td>2 *</td><td>2483.500</td><td>37.48</td><td>-8.23</td><td>29.25</td><td>54.00</td><td>-24.75</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2483.500	50.37	-8.23	42.14	74.00	-31.86	peak	2 *	2483.500	37.48	-8.23	29.25	54.00	-24.75	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2483.500	50.37	-8.23	42.14	74.00	-31.86	peak																									
2 *	2483.500	37.48	-8.23	29.25	54.00	-24.75	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

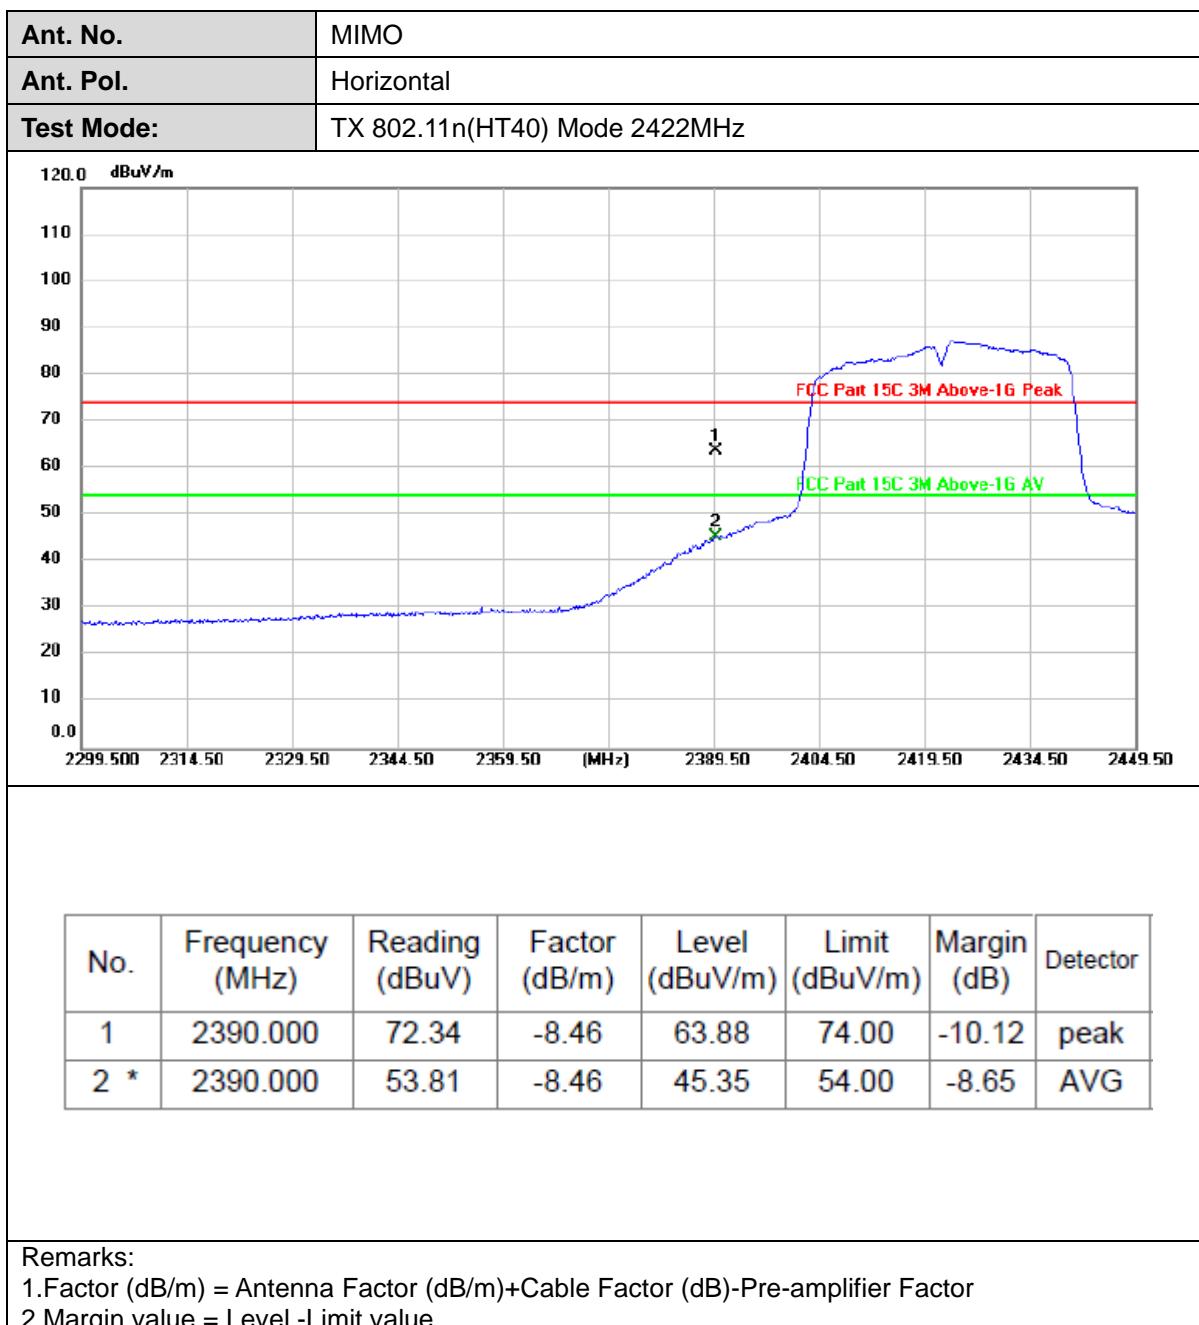

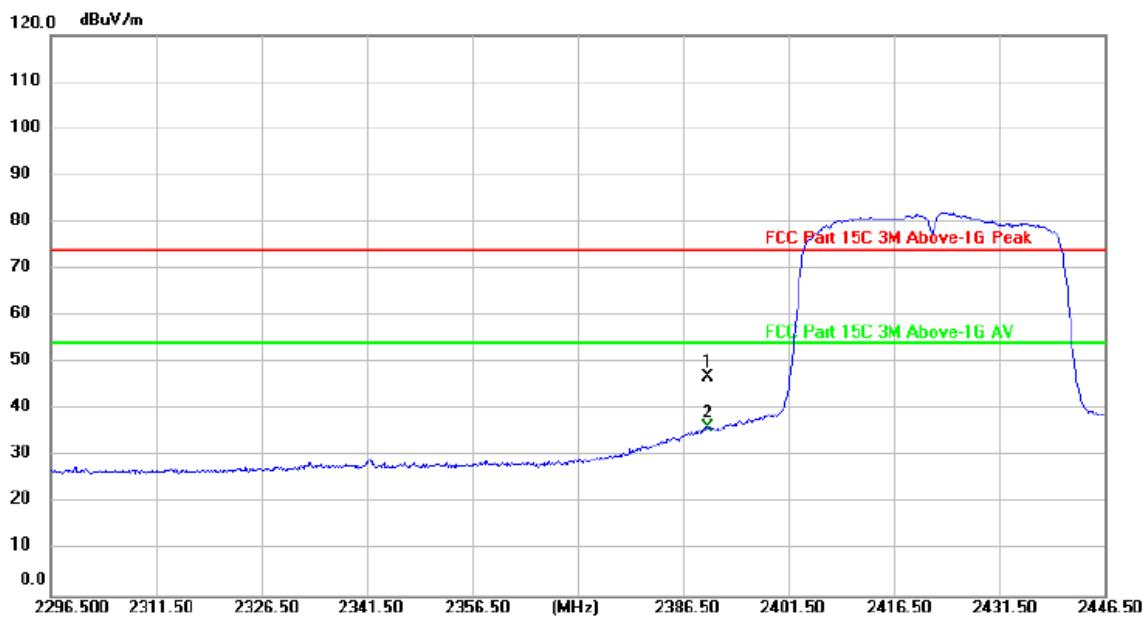

Ant. No.	MIMO																															
Ant. Pol.	Vertical																															
Test Mode:	TX 802.11n(HT40) Mode 2422MHz																															
																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>55.56</td><td>-8.46</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>44.65</td><td>-8.46</td><td>36.19</td><td>54.00</td><td>-17.81</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	55.56	-8.46	47.10	74.00	-26.90	peak	2 *	2390.000	44.65	-8.46	36.19	54.00	-17.81	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2390.000	55.56	-8.46	47.10	74.00	-26.90	peak																									
2 *	2390.000	44.65	-8.46	36.19	54.00	-17.81	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

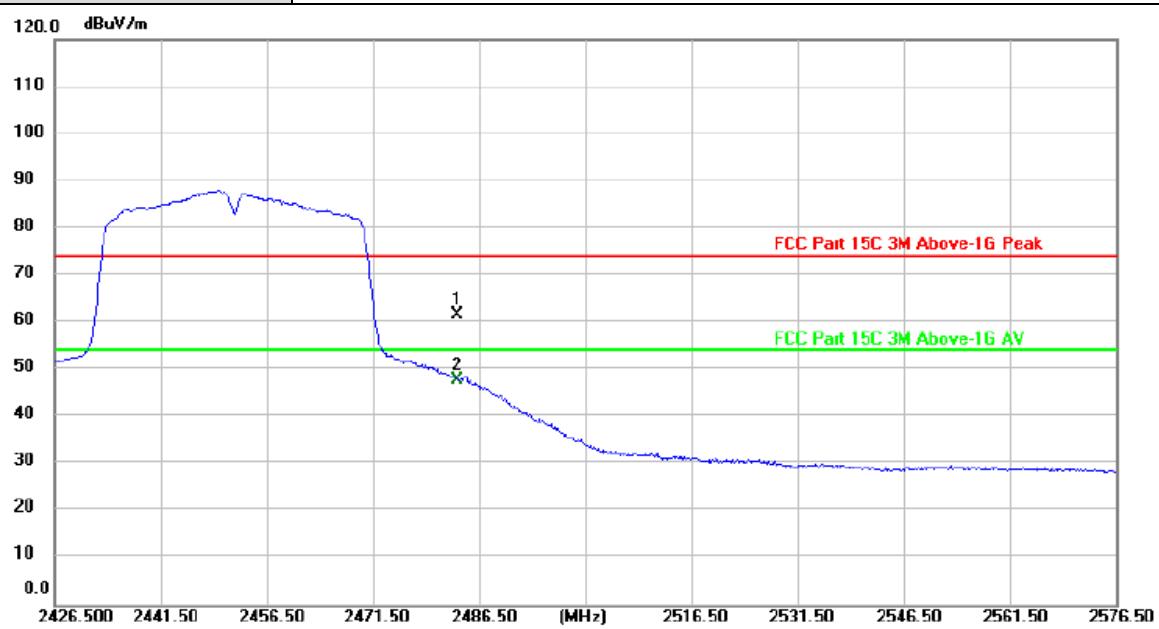Ant. No.	MIMO																															
Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11n(HT40) Mode 2452MHz																															
																																
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.500</td><td>69.94</td><td>-8.23</td><td>61.71</td><td>74.00</td><td>-12.29</td><td>peak</td></tr> <tr> <td>2 *</td><td>2483.500</td><td>56.16</td><td>-8.23</td><td>47.93</td><td>54.00</td><td>-6.07</td><td>AVG</td></tr> </tbody> </table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2483.500	69.94	-8.23	61.71	74.00	-12.29	peak	2 *	2483.500	56.16	-8.23	47.93	54.00	-6.07	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2483.500	69.94	-8.23	61.71	74.00	-12.29	peak																									
2 *	2483.500	56.16	-8.23	47.93	54.00	-6.07	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

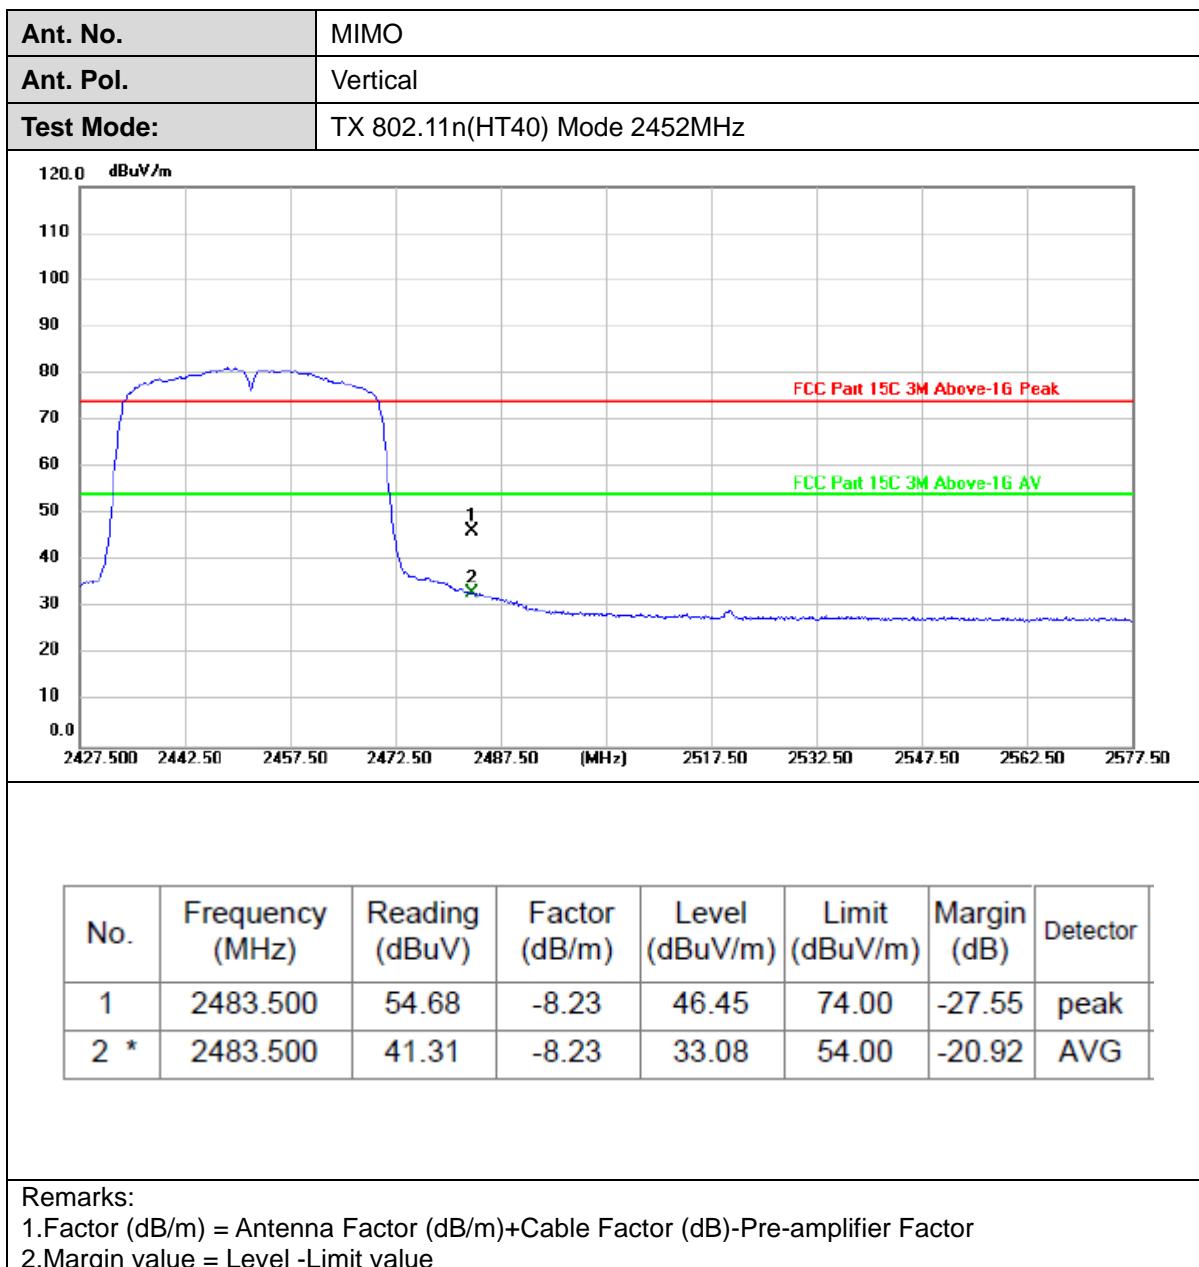





Ant. No.	MIMO																															
Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>60.25</td><td>-8.46</td><td>51.79</td><td>74.00</td><td>-22.21</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>45.93</td><td>-8.46</td><td>37.47</td><td>54.00</td><td>-16.53</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	60.25	-8.46	51.79	74.00	-22.21	peak	2 *	2390.000	45.93	-8.46	37.47	54.00	-16.53	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2390.000	60.25	-8.46	51.79	74.00	-22.21	peak																									
2 *	2390.000	45.93	-8.46	37.47	54.00	-16.53	AVG																									
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor 2. Margin value = Level - Limit value																																



Ant. No.	MIMO																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>52.29</td><td>-8.46</td><td>43.83</td><td>74.00</td><td>-30.17</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>37.90</td><td>-8.46</td><td>29.44</td><td>54.00</td><td>-24.56</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	52.29	-8.46	43.83	74.00	-30.17	peak	2 *	2390.000	37.90	-8.46	29.44	54.00	-24.56	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	2390.000	52.29	-8.46	43.83	74.00	-30.17	peak																								
2 *	2390.000	37.90	-8.46	29.44	54.00	-24.56	AVG																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															

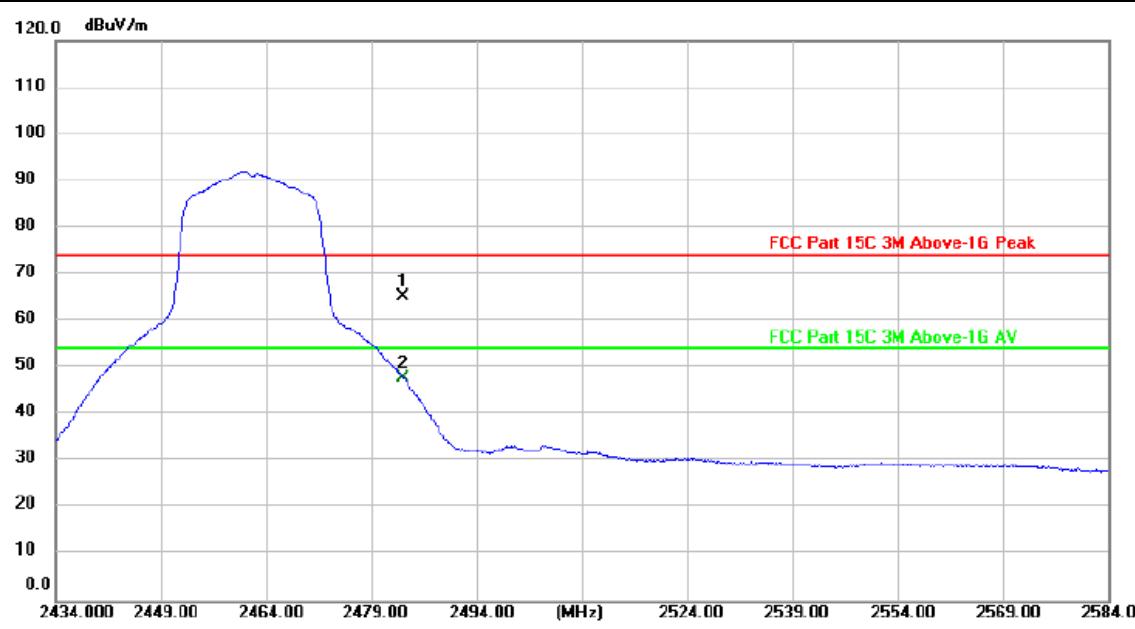

Ant. No.	MIMO																															
Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz																															
																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2483.500</td><td>73.48</td><td>-8.23</td><td>65.25</td><td>74.00</td><td>-8.75</td><td>peak</td></tr><tr><td>2 *</td><td>2483.500</td><td>56.22</td><td>-8.23</td><td>47.99</td><td>54.00</td><td>-6.01</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2483.500	73.48	-8.23	65.25	74.00	-8.75	peak	2 *	2483.500	56.22	-8.23	47.99	54.00	-6.01	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2483.500	73.48	-8.23	65.25	74.00	-8.75	peak																									
2 *	2483.500	56.22	-8.23	47.99	54.00	-6.01	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																																

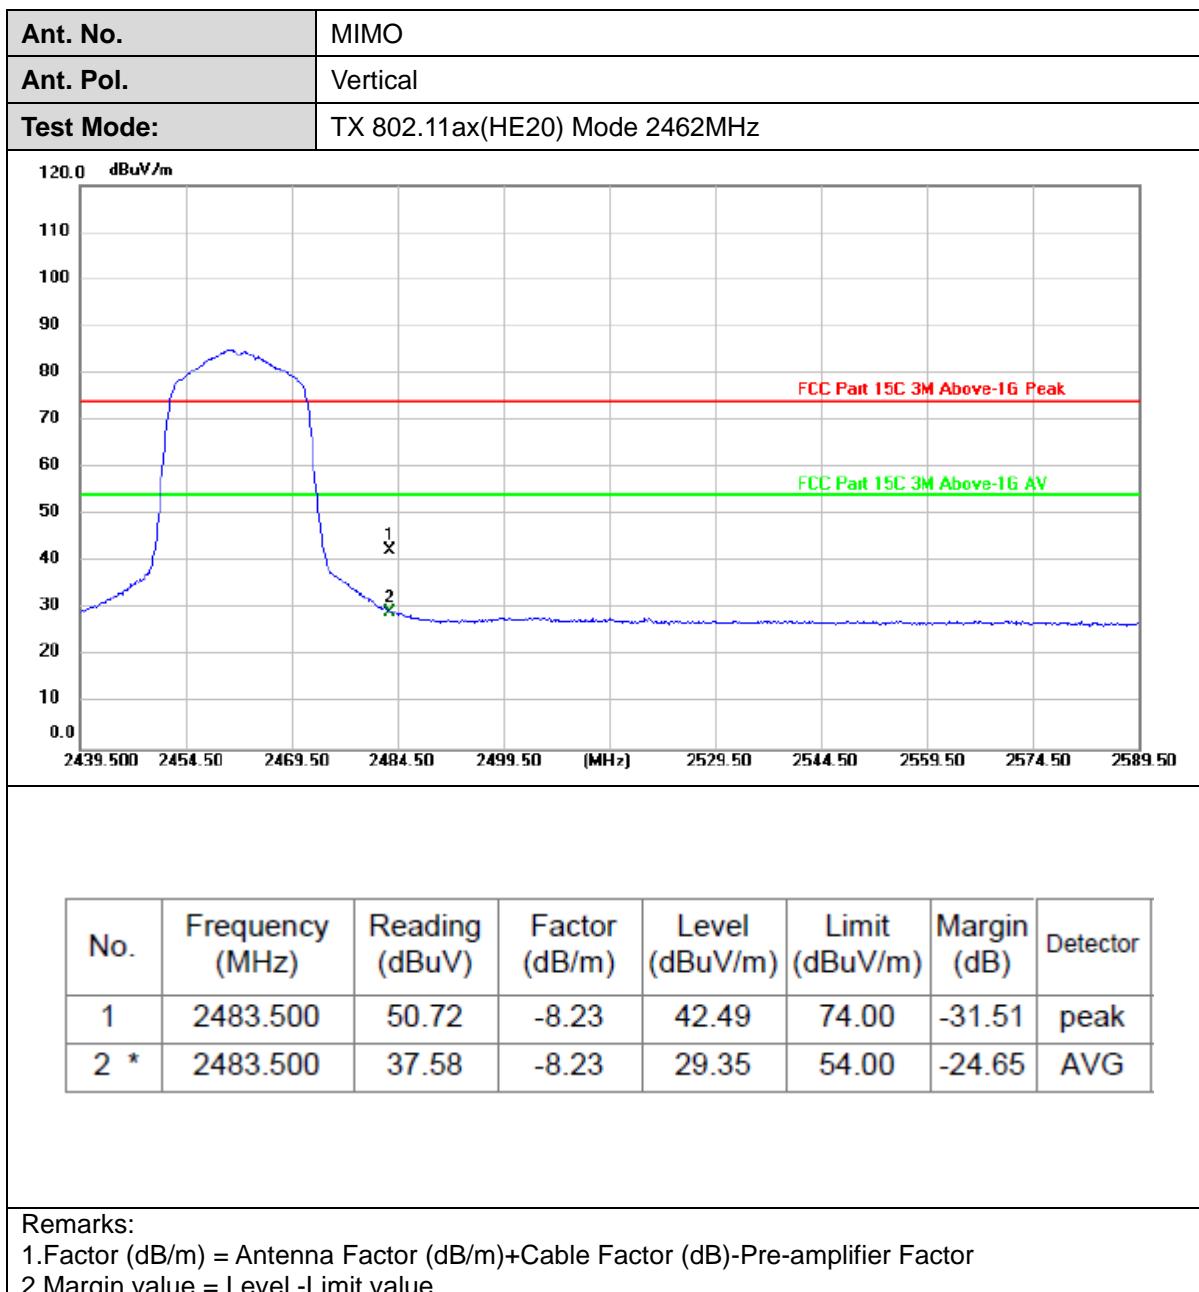





Ant. No.	MIMO																															
Ant. Pol.	Horizontal																															
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>72.11</td><td>-8.46</td><td>63.65</td><td>74.00</td><td>-10.35</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>58.44</td><td>-8.46</td><td>49.98</td><td>54.00</td><td>-4.02</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	72.11	-8.46	63.65	74.00	-10.35	peak	2 *	2390.000	58.44	-8.46	49.98	54.00	-4.02	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	2390.000	72.11	-8.46	63.65	74.00	-10.35	peak																									
2 *	2390.000	58.44	-8.46	49.98	54.00	-4.02	AVG																									
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor 2. Margin value = Level - Limit value																																



Ant. No.	MIMO																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>2390.000</td><td>53.89</td><td>-8.46</td><td>45.43</td><td>74.00</td><td>-28.57</td><td>peak</td></tr><tr><td>2 *</td><td>2390.000</td><td>41.67</td><td>-8.46</td><td>33.21</td><td>54.00</td><td>-20.79</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2390.000	53.89	-8.46	45.43	74.00	-28.57	peak	2 *	2390.000	41.67	-8.46	33.21	54.00	-20.79	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	2390.000	53.89	-8.46	45.43	74.00	-28.57	peak																								
2 *	2390.000	41.67	-8.46	33.21	54.00	-20.79	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

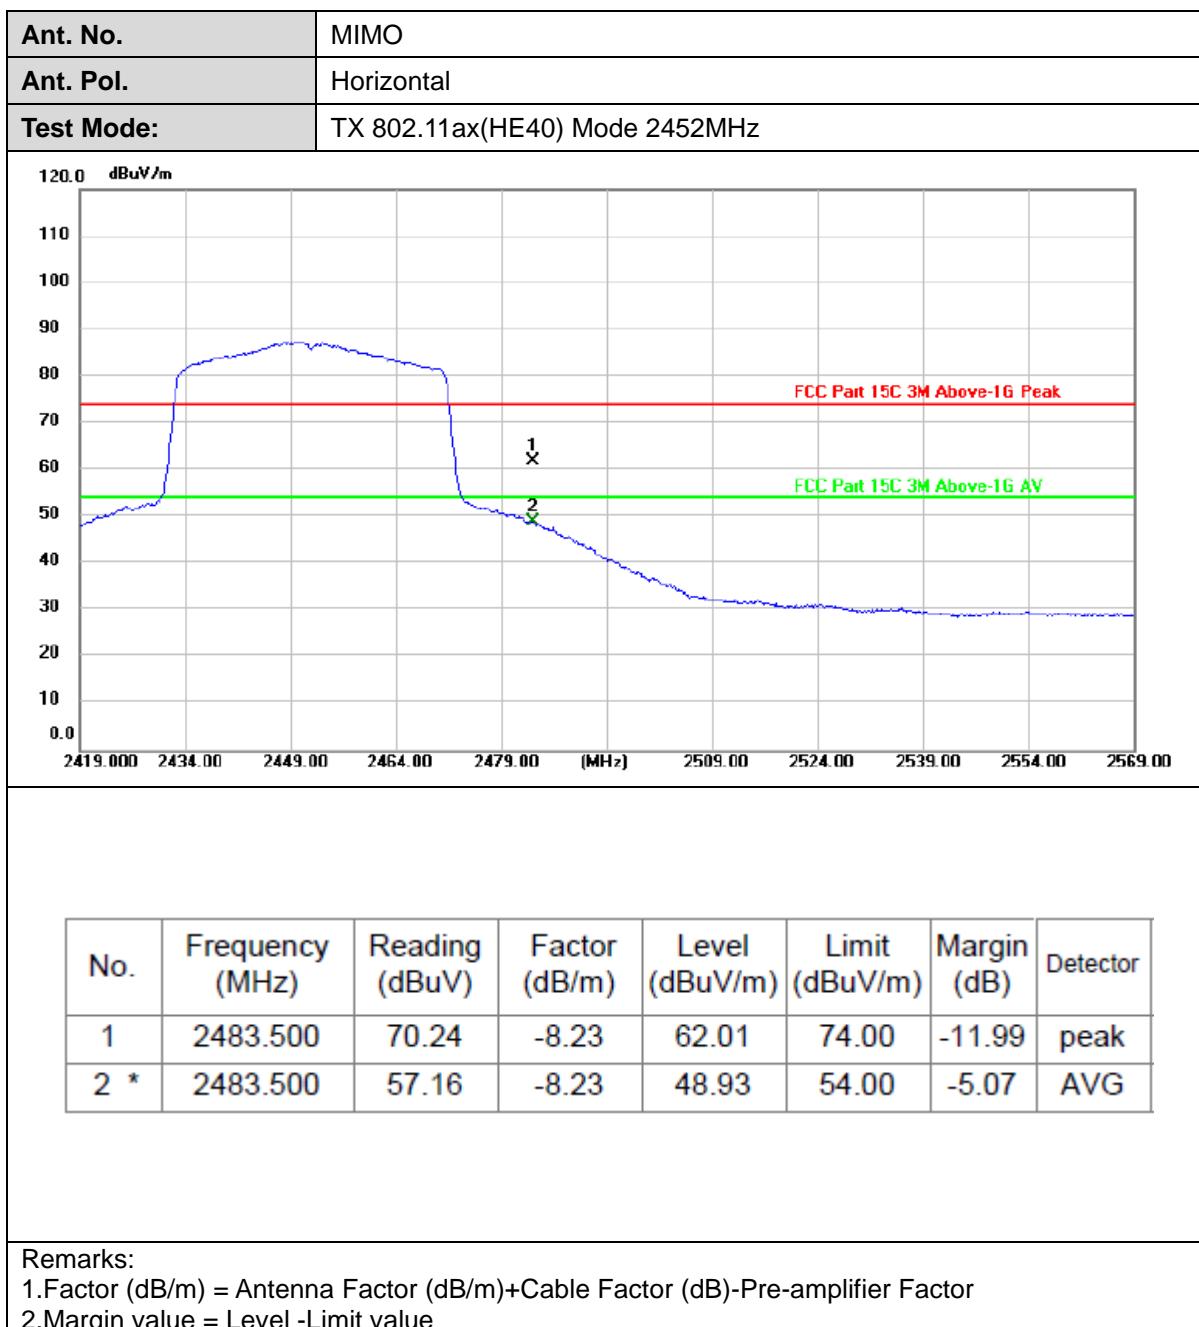

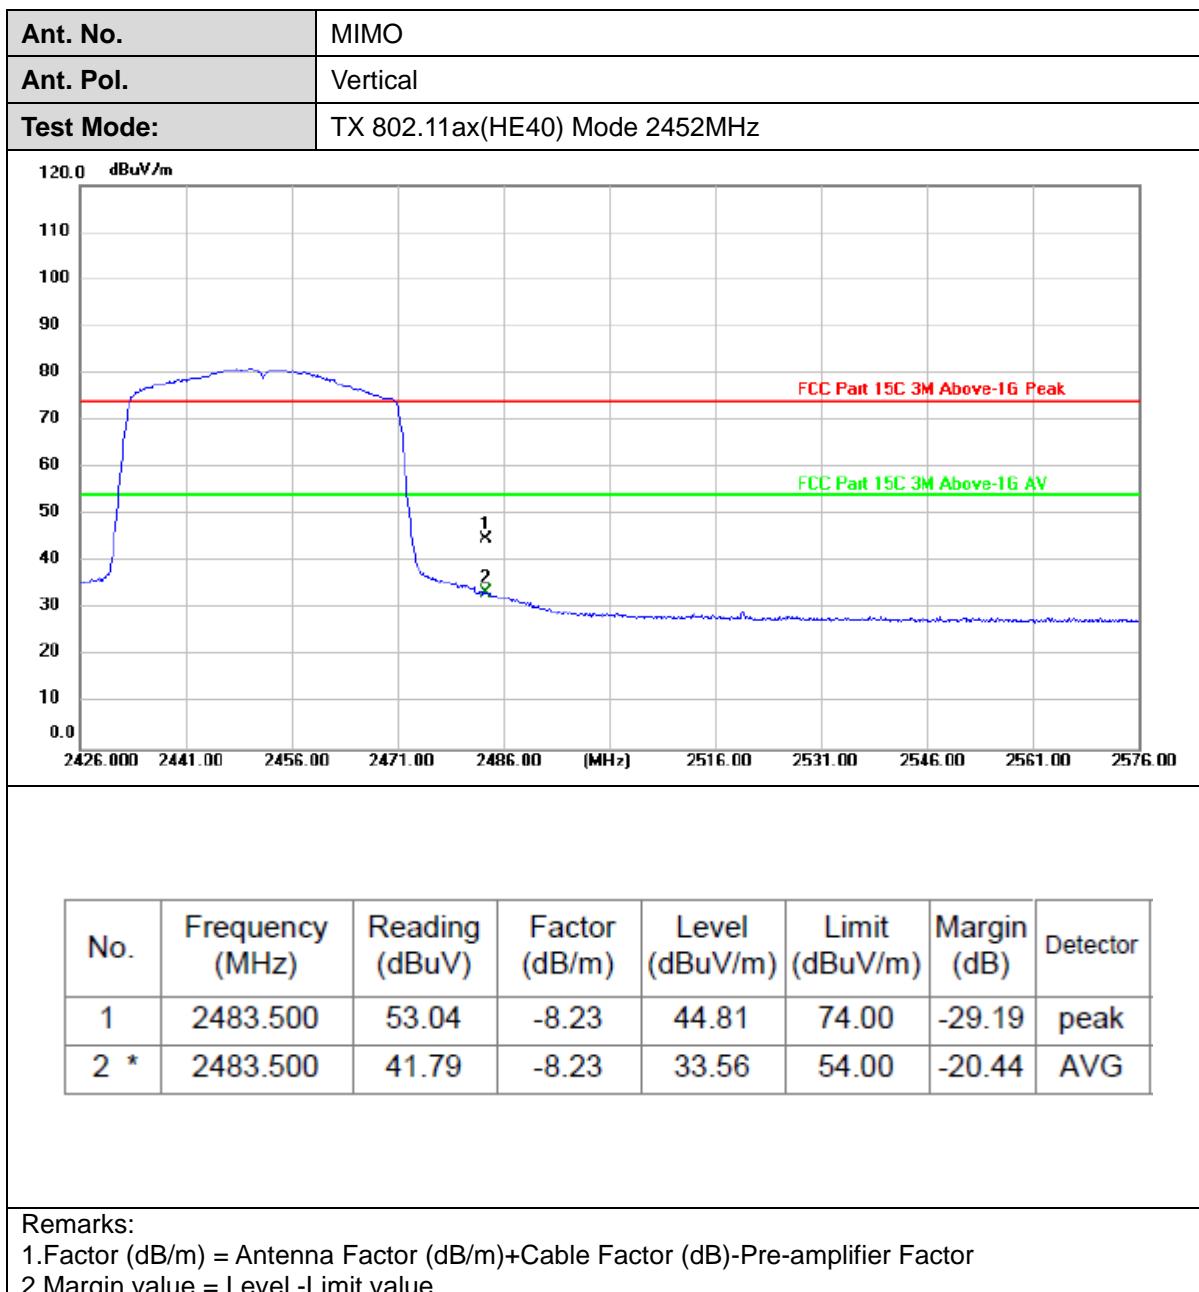




3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration

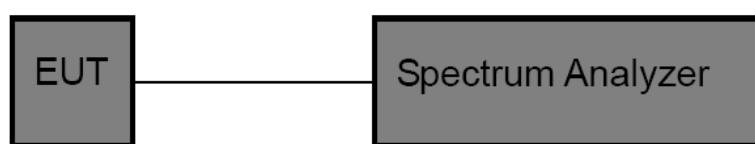

Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.

**Test Result****(1) Band Edge Conducted Test**

Test Mode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	5.50	-35.68	≤-14.50	PASS
	Ant2	Low	2412	6.03	-37.25	≤-13.97	PASS
	Ant1	High	2462	6.28	-46.62	≤-13.72	PASS
	Ant2	High	2462	5.40	-46.72	≤-14.61	PASS
11G	Ant1	Low	2412	0.97	-44.48	≤-19.04	PASS
	Ant2	Low	2412	1.32	-45.69	≤-18.68	PASS
	Ant1	High	2462	1.07	-46.50	≤-18.93	PASS
	Ant2	High	2462	1.32	-47.70	≤-18.68	PASS
11N20MIMO	Ant1	Low	2412	-5.29	-47.34	≤-25.29	PASS
	Ant2	Low	2412	-1.44	-47.14	≤-21.44	PASS
	Ant1	High	2462	-3.56	-47.16	≤-23.56	PASS
	Ant2	High	2462	-1.78	-47.16	≤-21.78	PASS
11N40MIMO	Ant1	Low	2422	-8.17	-48.03	≤-28.17	PASS
	Ant2	Low	2422	-5.23	-47.72	≤-25.23	PASS
	Ant1	High	2452	-7.24	-46.95	≤-27.24	PASS
	Ant2	High	2452	-4.88	-46.05	≤-24.88	PASS
11AX20MIMO	Ant1	Low	2412	-4.16	-48.15	≤-24.16	PASS
	Ant2	Low	2412	-1.27	-46.66	≤-21.27	PASS
	Ant1	High	2462	-4.91	-47.44	≤-24.91	PASS
	Ant2	High	2462	-1.61	-47.06	≤-21.61	PASS
11AX40MIMO	Ant1	Low	2422	-8.52	-47.99	≤-28.52	PASS
	Ant2	Low	2422	-5.19	-47.23	≤-25.19	PASS
	Ant1	High	2452	-7.45	-47.38	≤-27.45	PASS
	Ant2	High	2452	-5.43	-46.67	≤-25.43	PASS



Test plot as follows:




CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



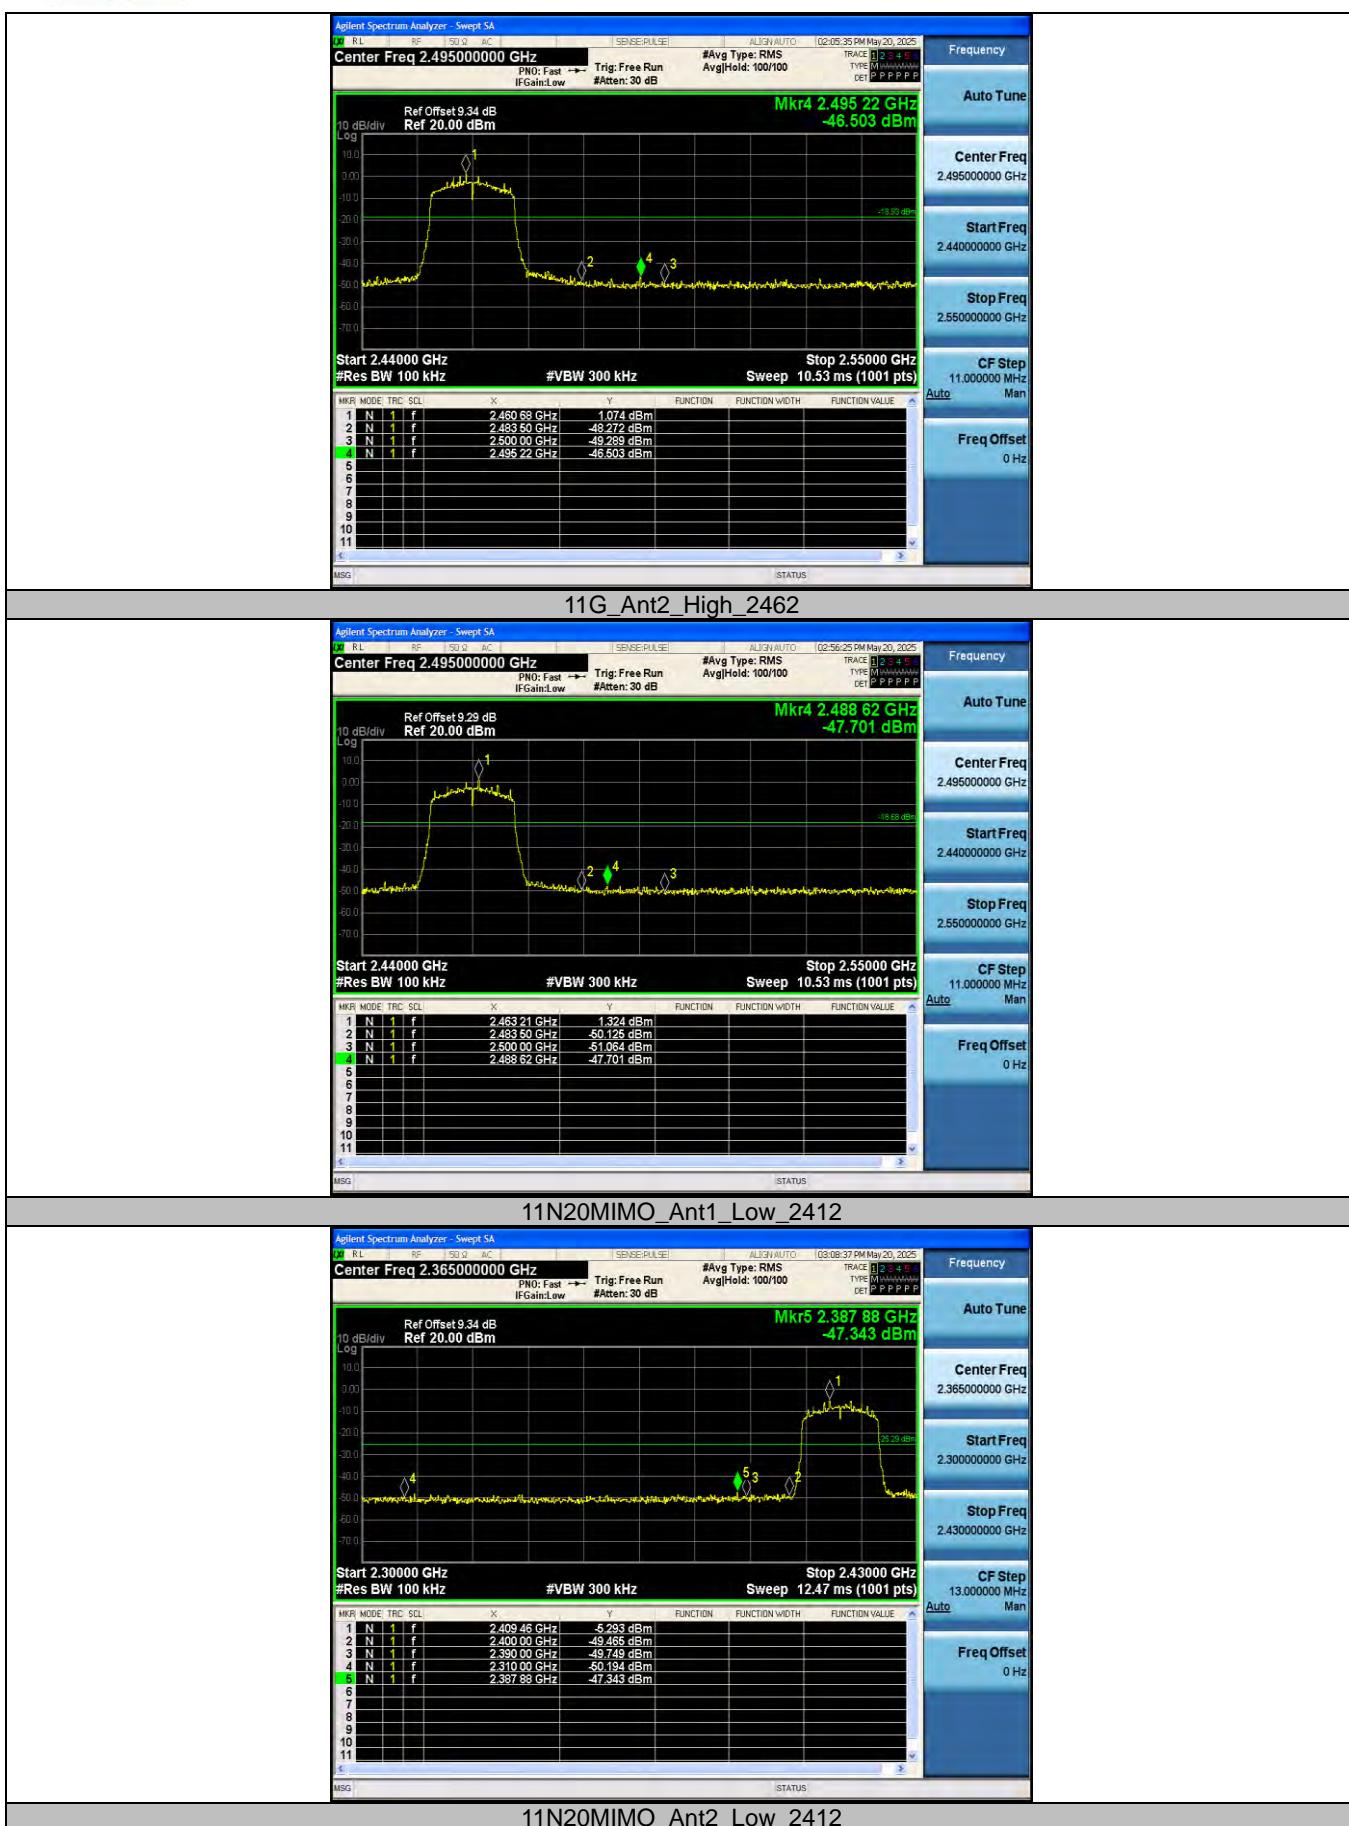


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

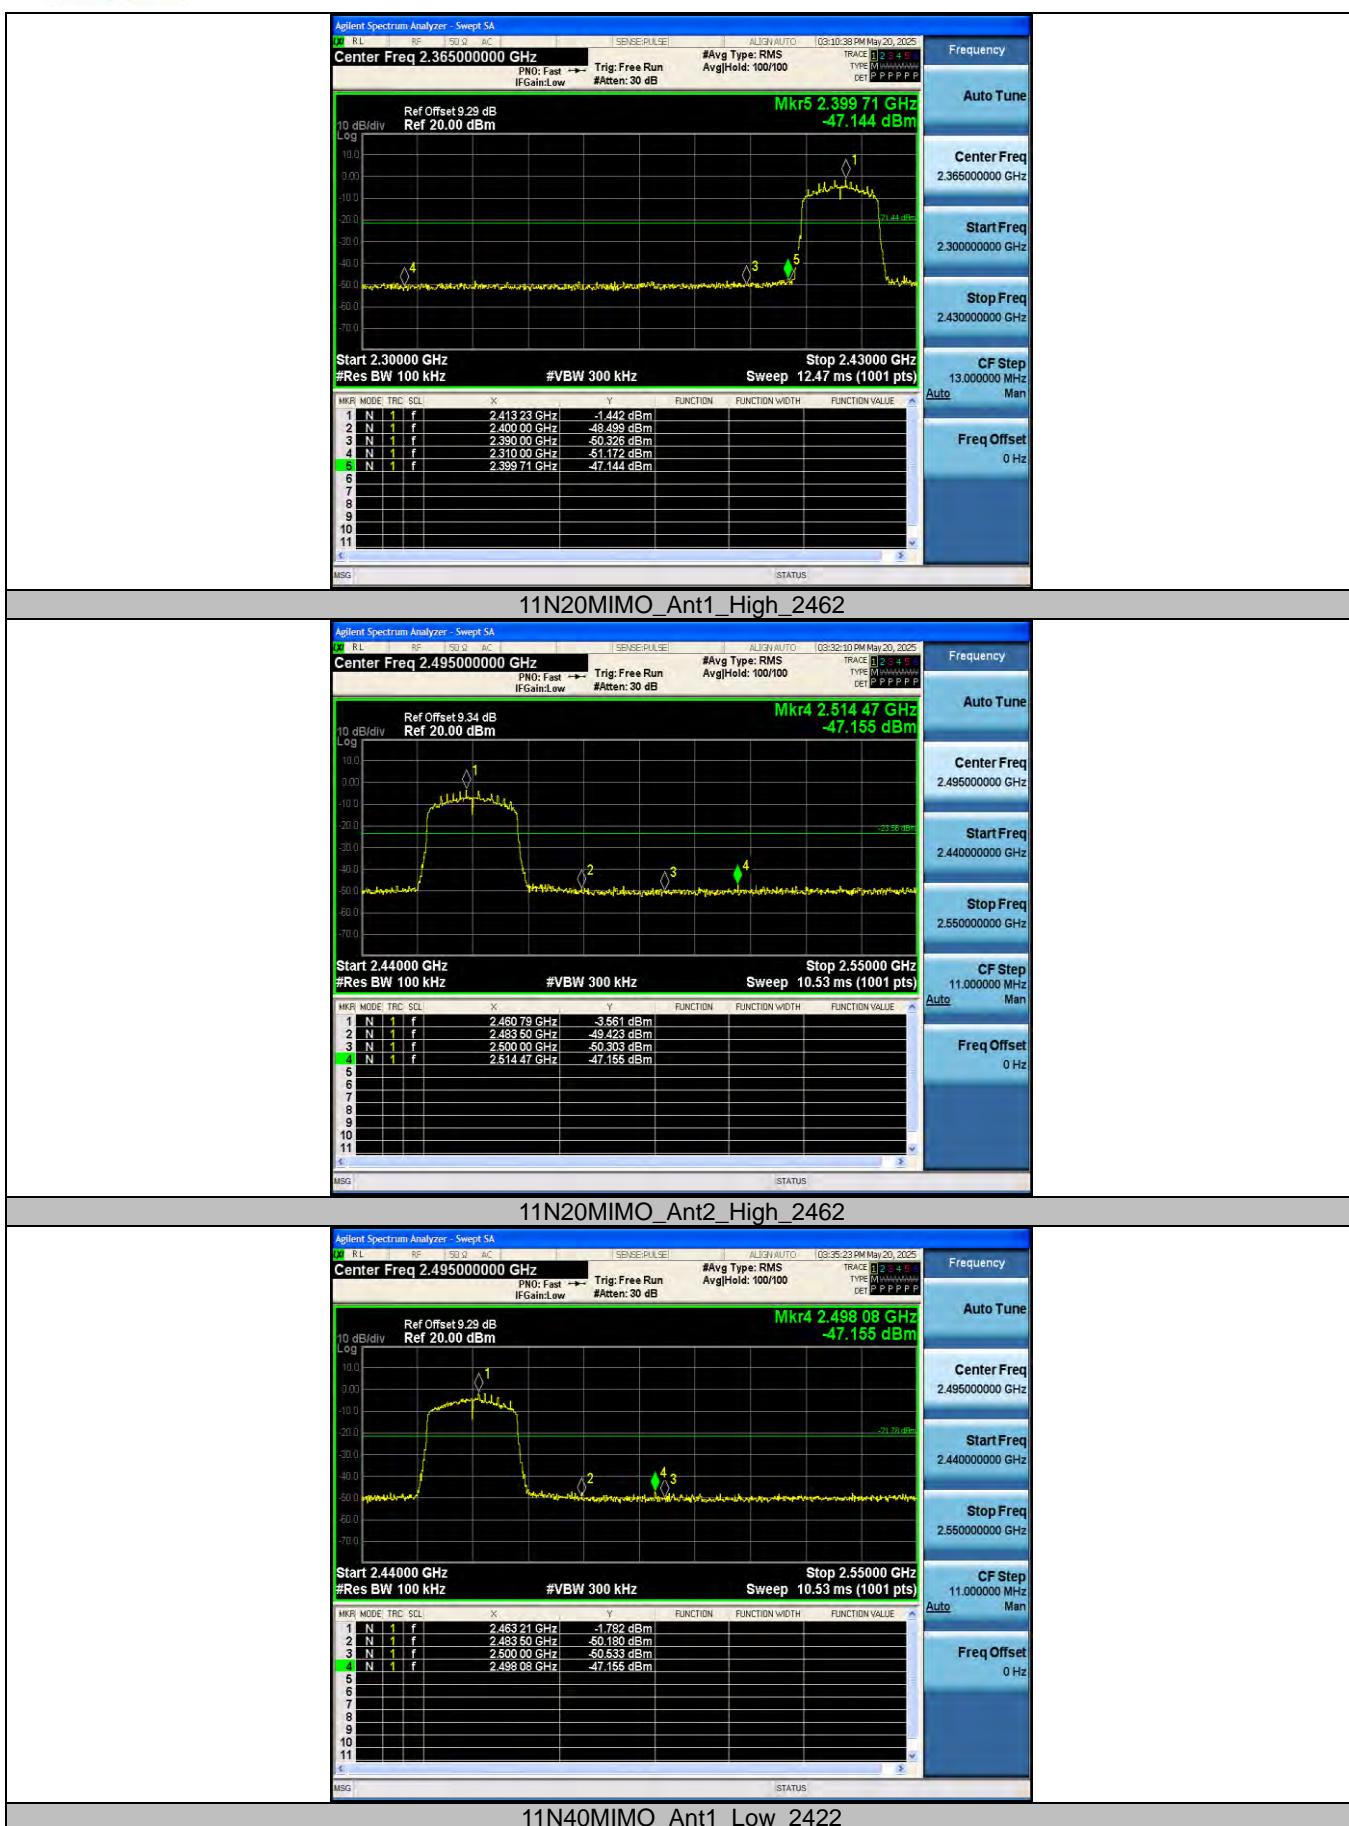


CTC Laboratories, Inc.


Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

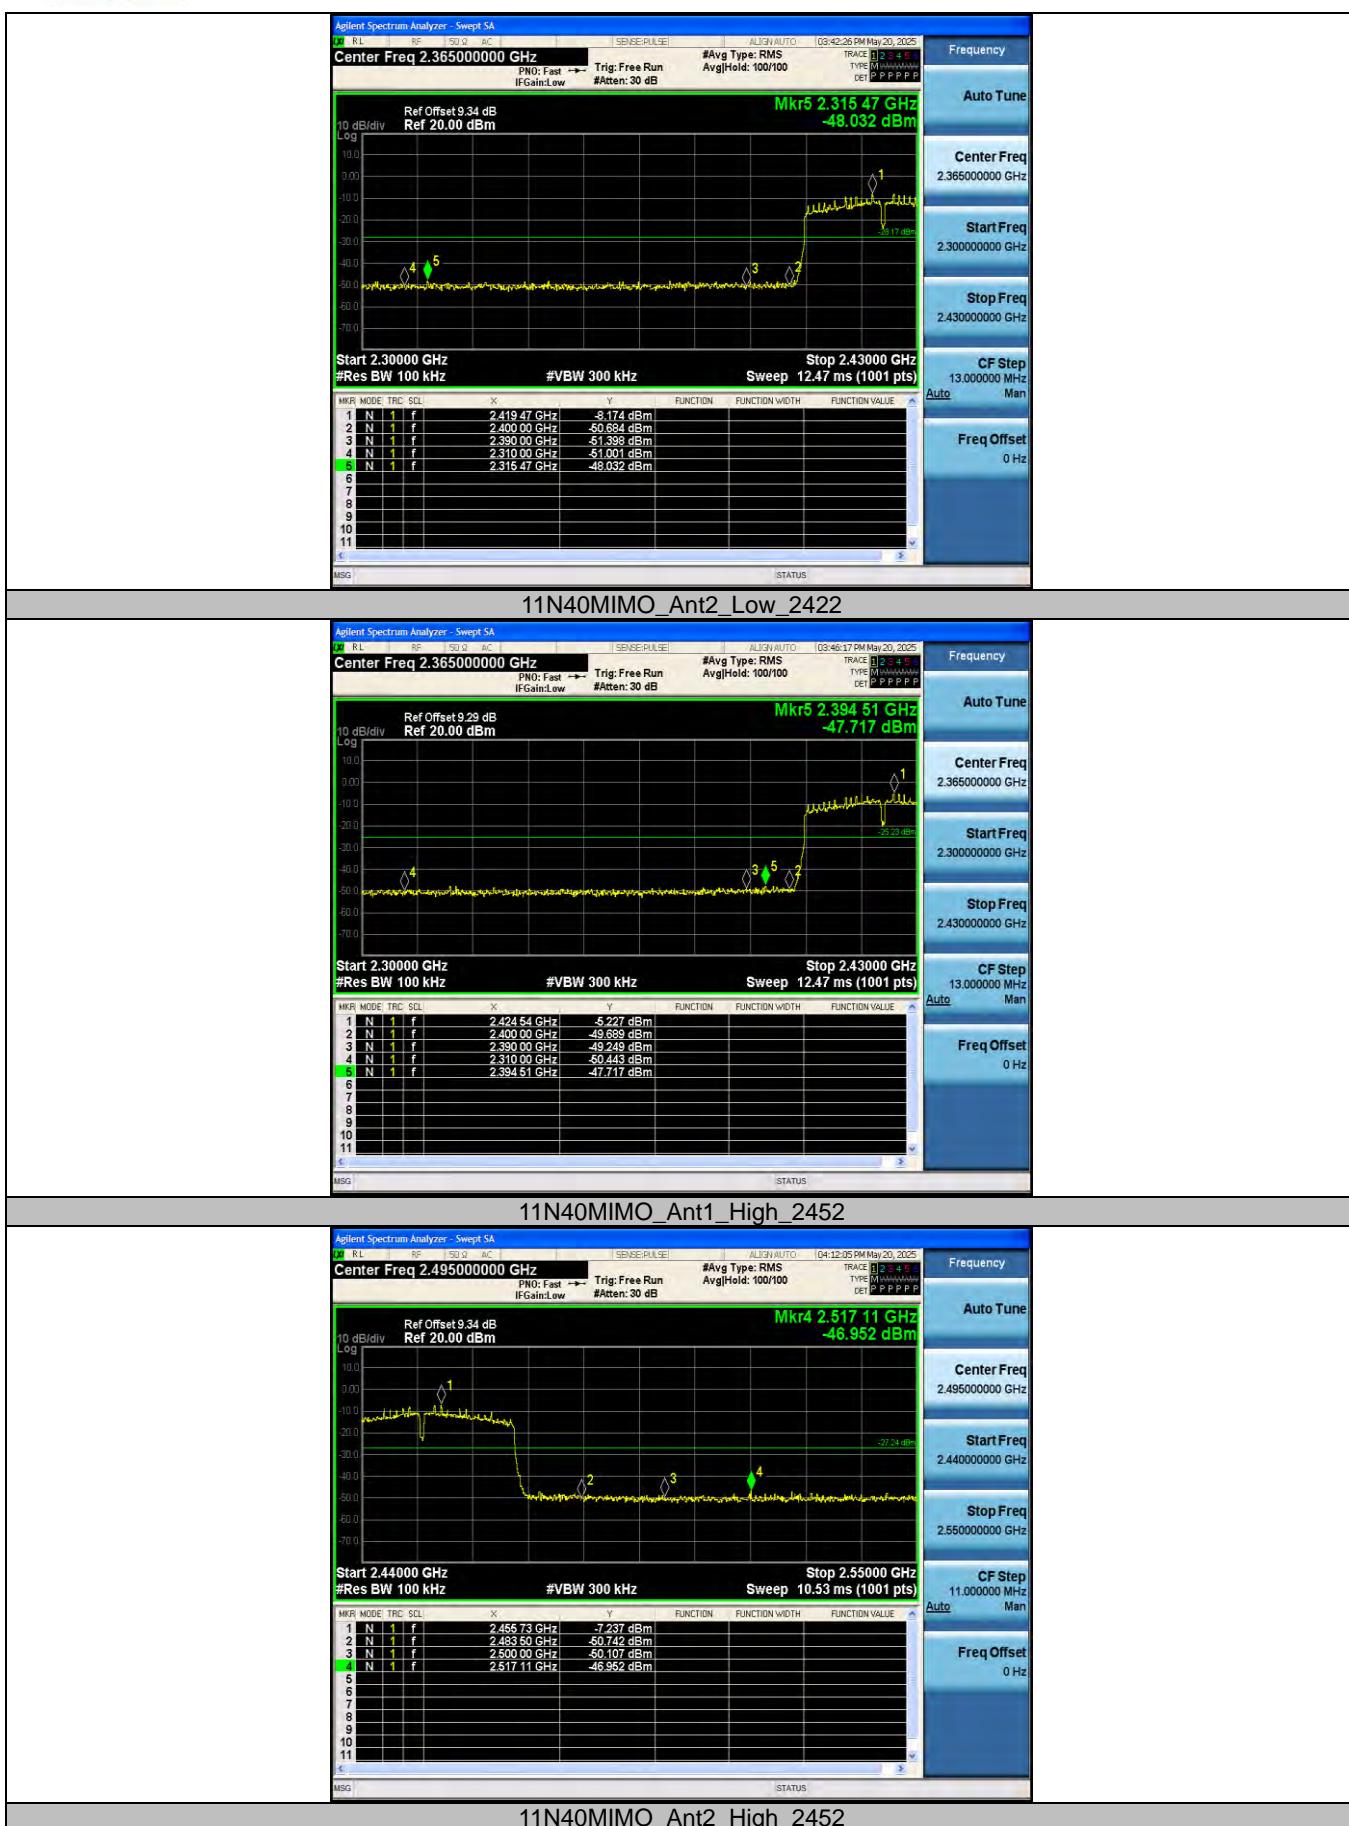



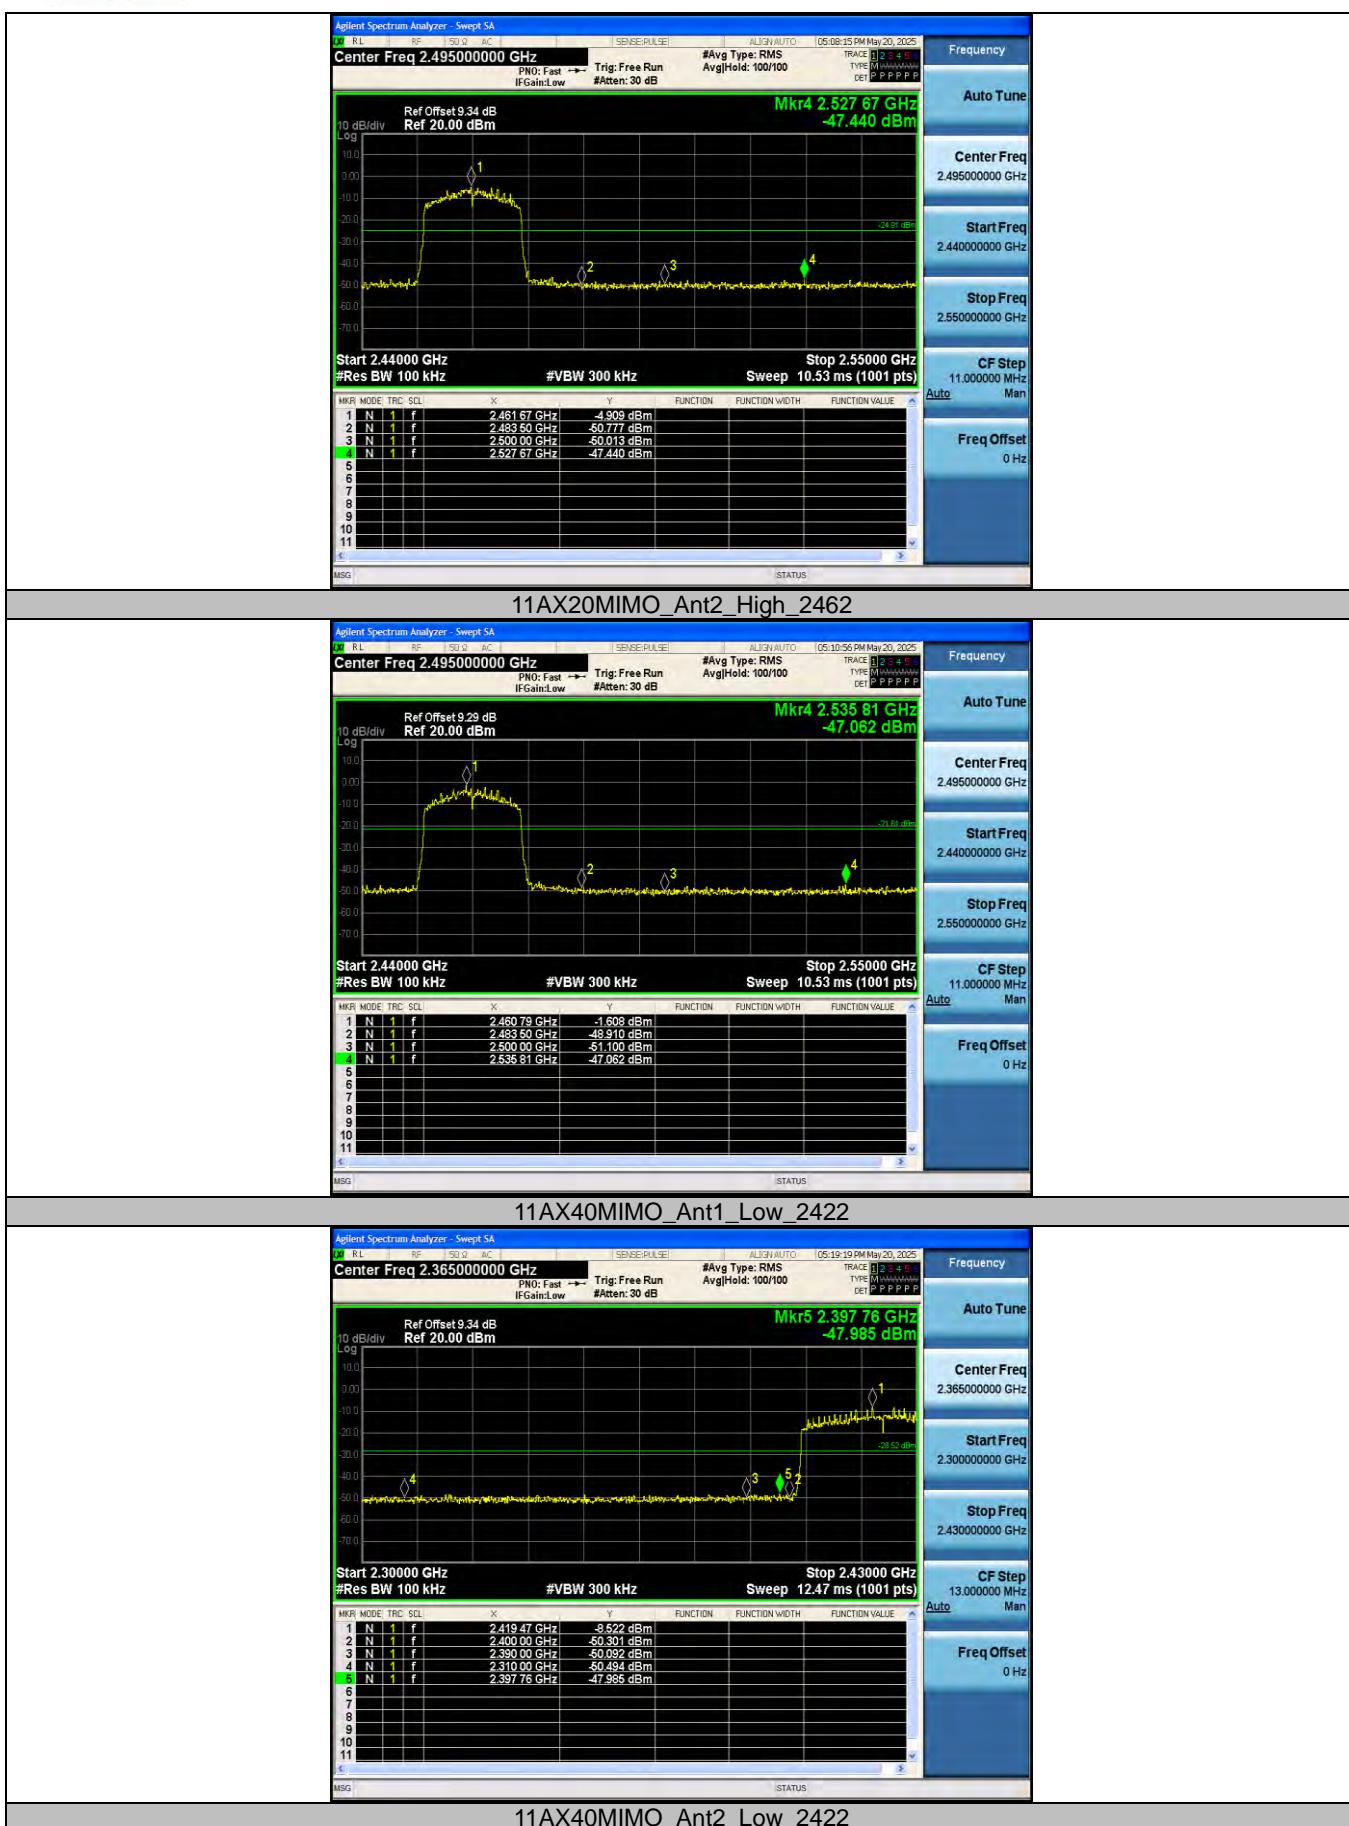


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

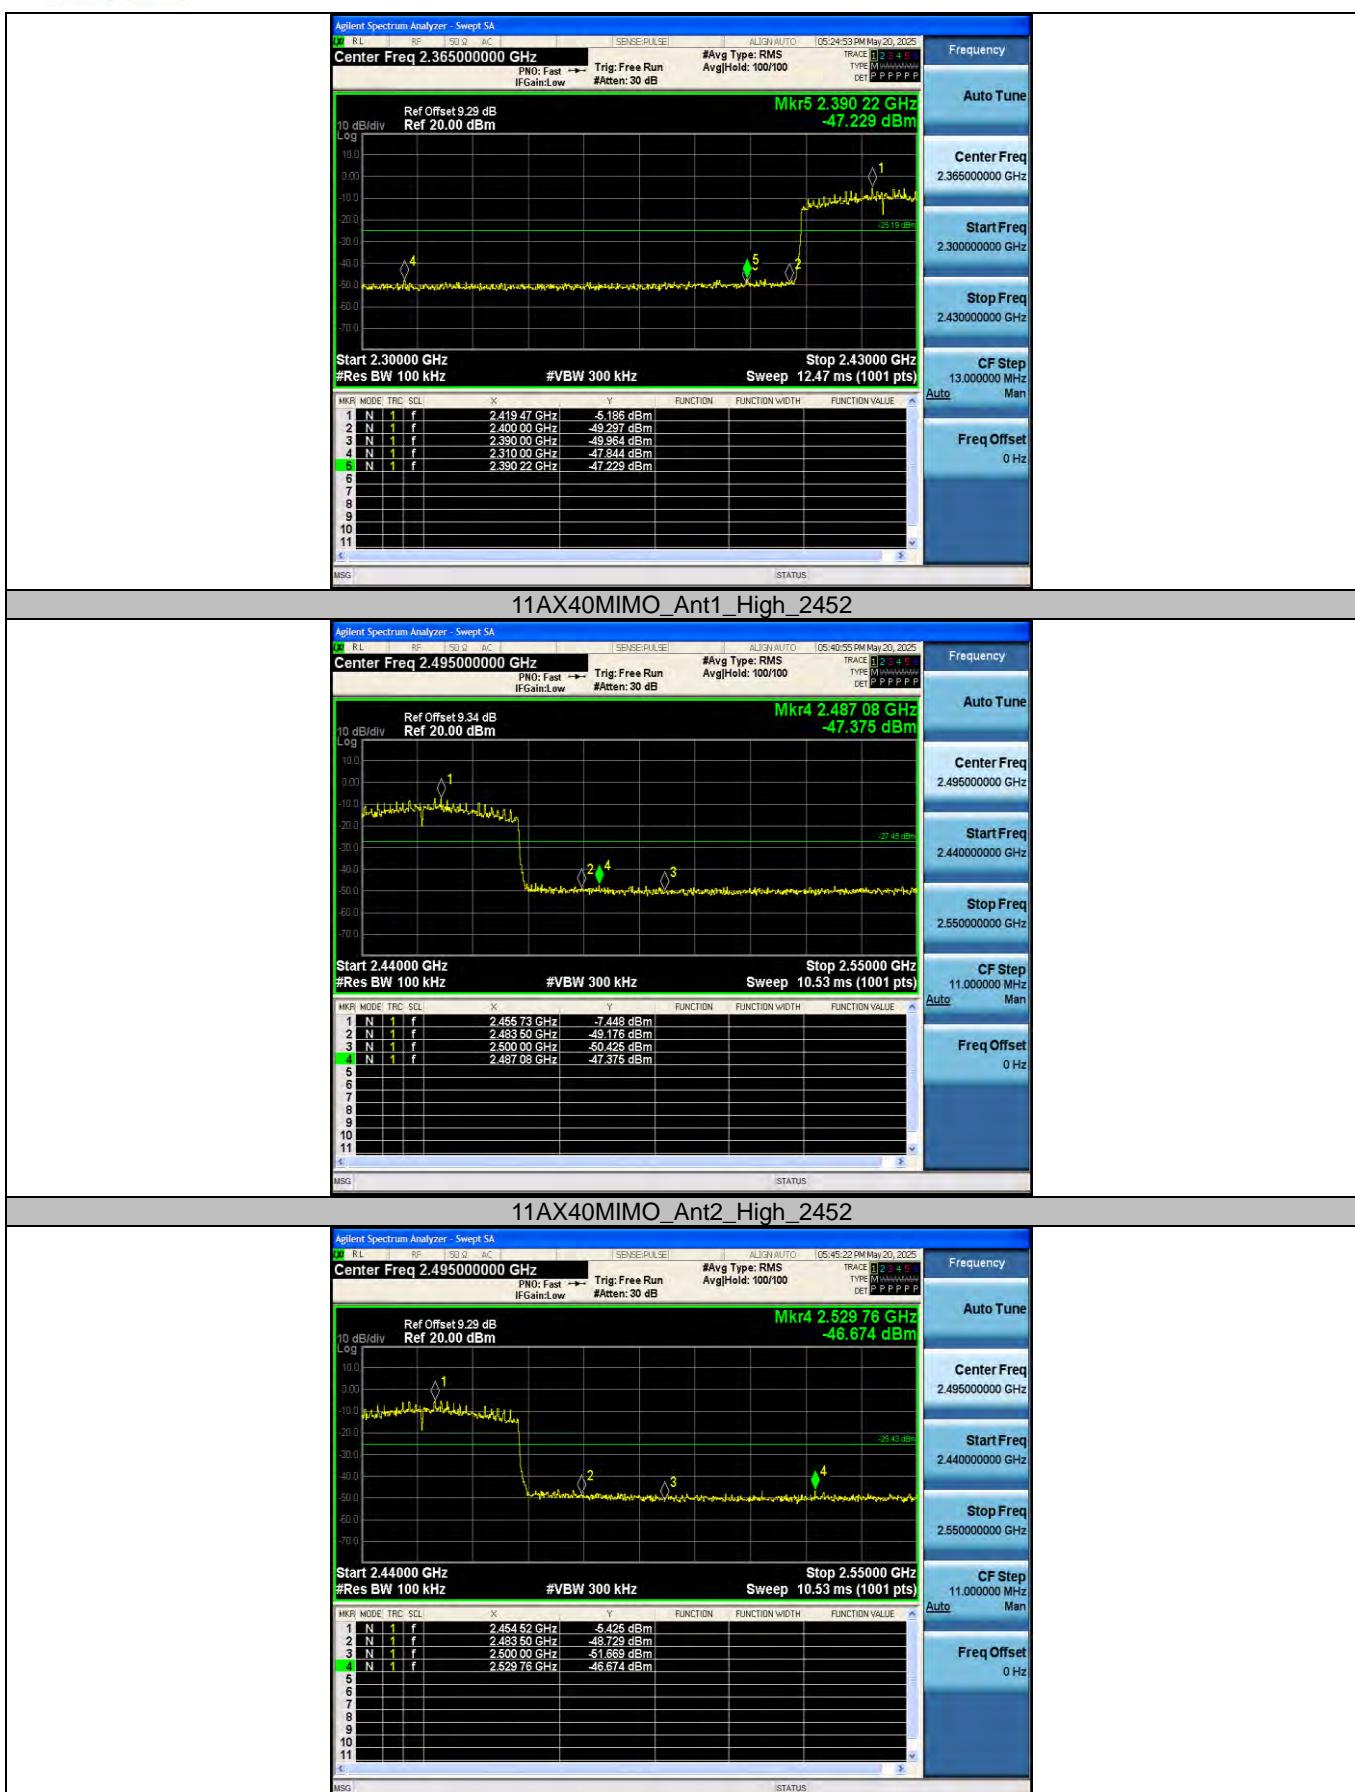



(2) Conducted Spurious Emissions Test

Test Mode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	5.53	5.53	---	PASS
			30~1000	5.53	-53.10	\leq -14.47	PASS
			1000~26500	5.53	-44.24	\leq -14.47	PASS
	Ant2	2412	Reference	5.53	5.53	---	PASS
			30~1000	5.53	-53.55	\leq -14.47	PASS
			1000~26500	5.53	-44.53	\leq -14.47	PASS
	Ant1	2437	Reference	5.39	5.39	---	PASS
			30~1000	5.39	-52.80	\leq -14.61	PASS
			1000~26500	5.39	-44.83	\leq -14.61	PASS
	Ant2	2437	Reference	5.93	5.93	---	PASS
			30~1000	5.93	-53.47	\leq -14.07	PASS
			1000~26500	5.93	-44.74	\leq -14.07	PASS
11G	Ant1	2462	Reference	5.09	5.09	---	PASS
			30~1000	5.09	-53.16	\leq -14.91	PASS
			1000~26500	5.09	-44.56	\leq -14.91	PASS
	Ant2	2462	Reference	4.32	4.32	---	PASS
			30~1000	4.32	-53.67	\leq -15.68	PASS
			1000~26500	4.32	-44.29	\leq -15.68	PASS
	Ant1	2412	Reference	-1.68	-1.68	---	PASS
			30~1000	-1.68	-53.06	\leq -21.68	PASS
			1000~26500	-1.68	-43.34	\leq -21.68	PASS
	Ant2	2412	Reference	-1.40	-1.40	---	PASS
			30~1000	-1.40	-54.23	\leq -21.40	PASS
			1000~26500	-1.40	-44.85	\leq -21.40	PASS
11N20MIMO	Ant1	2437	Reference	-2.42	-2.42	---	PASS
			30~1000	-2.42	-53.66	\leq -22.42	PASS
			1000~26500	-2.42	-44.73	\leq -22.42	PASS
	Ant2	2437	Reference	-2.30	-2.30	---	PASS
			30~1000	-2.30	-53.22	\leq -22.30	PASS
			1000~26500	-2.30	-44.34	\leq -22.30	PASS
	Ant1	2462	Reference	-1.13	-1.13	---	PASS
			30~1000	-1.13	-53.52	\leq -21.13	PASS
			1000~26500	-1.13	-45.21	\leq -21.13	PASS
	Ant2	2462	Reference	-2.51	-2.51	---	PASS
			30~1000	-2.51	-53.54	\leq -22.51	PASS
			1000~26500	-2.51	-44.84	\leq -22.51	PASS
11N40MIMO	Ant1	2412	Reference	-7.70	-7.70	---	PASS
			30~1000	-7.70	-54.08	\leq -27.70	PASS
			1000~26500	-7.70	-44.18	\leq -27.70	PASS
	Ant2	2412	Reference	-2.96	-2.96	---	PASS
			30~1000	-2.96	-53.82	\leq -22.96	PASS
			1000~26500	-2.96	-44.41	\leq -22.96	PASS
	Ant1	2437	Reference	-6.75	-6.75	---	PASS
			30~1000	-6.75	-54.22	\leq -26.75	PASS
			1000~26500	-6.75	-44.78	\leq -26.75	PASS
	Ant2	2437	Reference	-4.09	-4.09	---	PASS
			30~1000	-4.09	-53.63	\leq -24.09	PASS
			1000~26500	-4.09	-45.07	\leq -24.09	PASS
	Ant1	2462	Reference	-6.77	-6.77	---	PASS
			30~1000	-6.77	-53.99	\leq -26.77	PASS
			1000~26500	-6.77	-44.77	\leq -26.77	PASS
	Ant2	2462	Reference	-3.87	-3.87	---	PASS
			30~1000	-3.87	-54.04	\leq -23.87	PASS
			1000~26500	-3.87	-44.43	\leq -23.87	PASS
11N40MIMO	Ant1	2422	Reference	-8.96	-8.96	---	PASS
			30~1000	-8.96	-53.45	\leq -28.96	PASS

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing


Society : yz.cncaq.com



11AX20MIMO	Ant2	2422	1000~26500	-8.96	-44.26	≤-28.96	PASS
			Reference	-7.76	-7.76	---	PASS
			30~1000	-7.76	-54.07	≤-27.76	PASS
			1000~26500	-7.76	-43.96	≤-27.76	PASS
	Ant1	2437	Reference	-8.23	-8.23	---	PASS
			30~1000	-8.23	-53.78	≤-28.23	PASS
			1000~26500	-8.23	-44.25	≤-28.23	PASS
	Ant2	2437	Reference	-7.57	-7.57	---	PASS
			30~1000	-7.57	-54.04	≤-27.57	PASS
			1000~26500	-7.57	-43.15	≤-27.57	PASS
	Ant1	2452	Reference	-9.53	-9.53	---	PASS
			30~1000	-9.53	-53.42	≤-29.53	PASS
			1000~26500	-9.53	-44.70	≤-29.53	PASS
	Ant2	2452	Reference	-5.28	-5.28	---	PASS
			30~1000	-5.28	-53.69	≤-25.28	PASS
			1000~26500	-5.28	-44.25	≤-25.28	PASS
11AX40MIMO	Ant1	2412	Reference	-7.41	-7.41	---	PASS
			30~1000	-7.41	-53.88	≤-27.41	PASS
			1000~26500	-7.41	-44.89	≤-27.41	PASS
	Ant2	2412	Reference	-4.02	-4.02	---	PASS
			30~1000	-4.02	-53.66	≤-24.02	PASS
			1000~26500	-4.02	-44.26	≤-24.02	PASS
	Ant1	2437	Reference	-6.05	-6.05	---	PASS
			30~1000	-6.05	-53.45	≤-26.05	PASS
			1000~26500	-6.05	-44.74	≤-26.05	PASS
	Ant2	2437	Reference	-3.43	-3.43	---	PASS
			30~1000	-3.43	-53.06	≤-23.43	PASS
			1000~26500	-3.43	-43.90	≤-23.43	PASS
	Ant1	2462	Reference	-4.88	-4.88	---	PASS
			30~1000	-4.88	-54.02	≤-24.88	PASS
			1000~26500	-4.88	-44.69	≤-24.88	PASS
	Ant2	2462	Reference	-4.04	-4.04	---	PASS
			30~1000	-4.04	-53.56	≤-24.04	PASS
			1000~26500	-4.04	-44.69	≤-24.04	PASS
11AX40MIMO	Ant1	2422	Reference	-10.75	-10.75	---	PASS
			30~1000	-10.75	-53.06	≤-30.75	PASS
			1000~26500	-10.75	-43.32	≤-30.75	PASS
	Ant2	2422	Reference	-7.11	-7.11	---	PASS
			30~1000	-7.11	-54.25	≤-27.11	PASS
			1000~26500	-7.11	-44.11	≤-27.11	PASS
	Ant1	2437	Reference	-9.54	-9.54	---	PASS
			30~1000	-9.54	-53.90	≤-29.54	PASS
			1000~26500	-9.54	-45.04	≤-29.54	PASS
	Ant2	2437	Reference	-7.66	-7.66	---	PASS
			30~1000	-7.66	-53.57	≤-27.66	PASS
			1000~26500	-7.66	-44.80	≤-27.66	PASS
	Ant1	2452	Reference	-7.85	-7.85	---	PASS
			30~1000	-7.85	-53.44	≤-27.85	PASS
			1000~26500	-7.85	-44.60	≤-27.85	PASS
	Ant2	2452	Reference	-6.85	-6.85	---	PASS
			30~1000	-6.85	-53.62	≤-26.85	PASS
			1000~26500	-6.85	-44.71	≤-26.85	PASS



Test plot as follows:

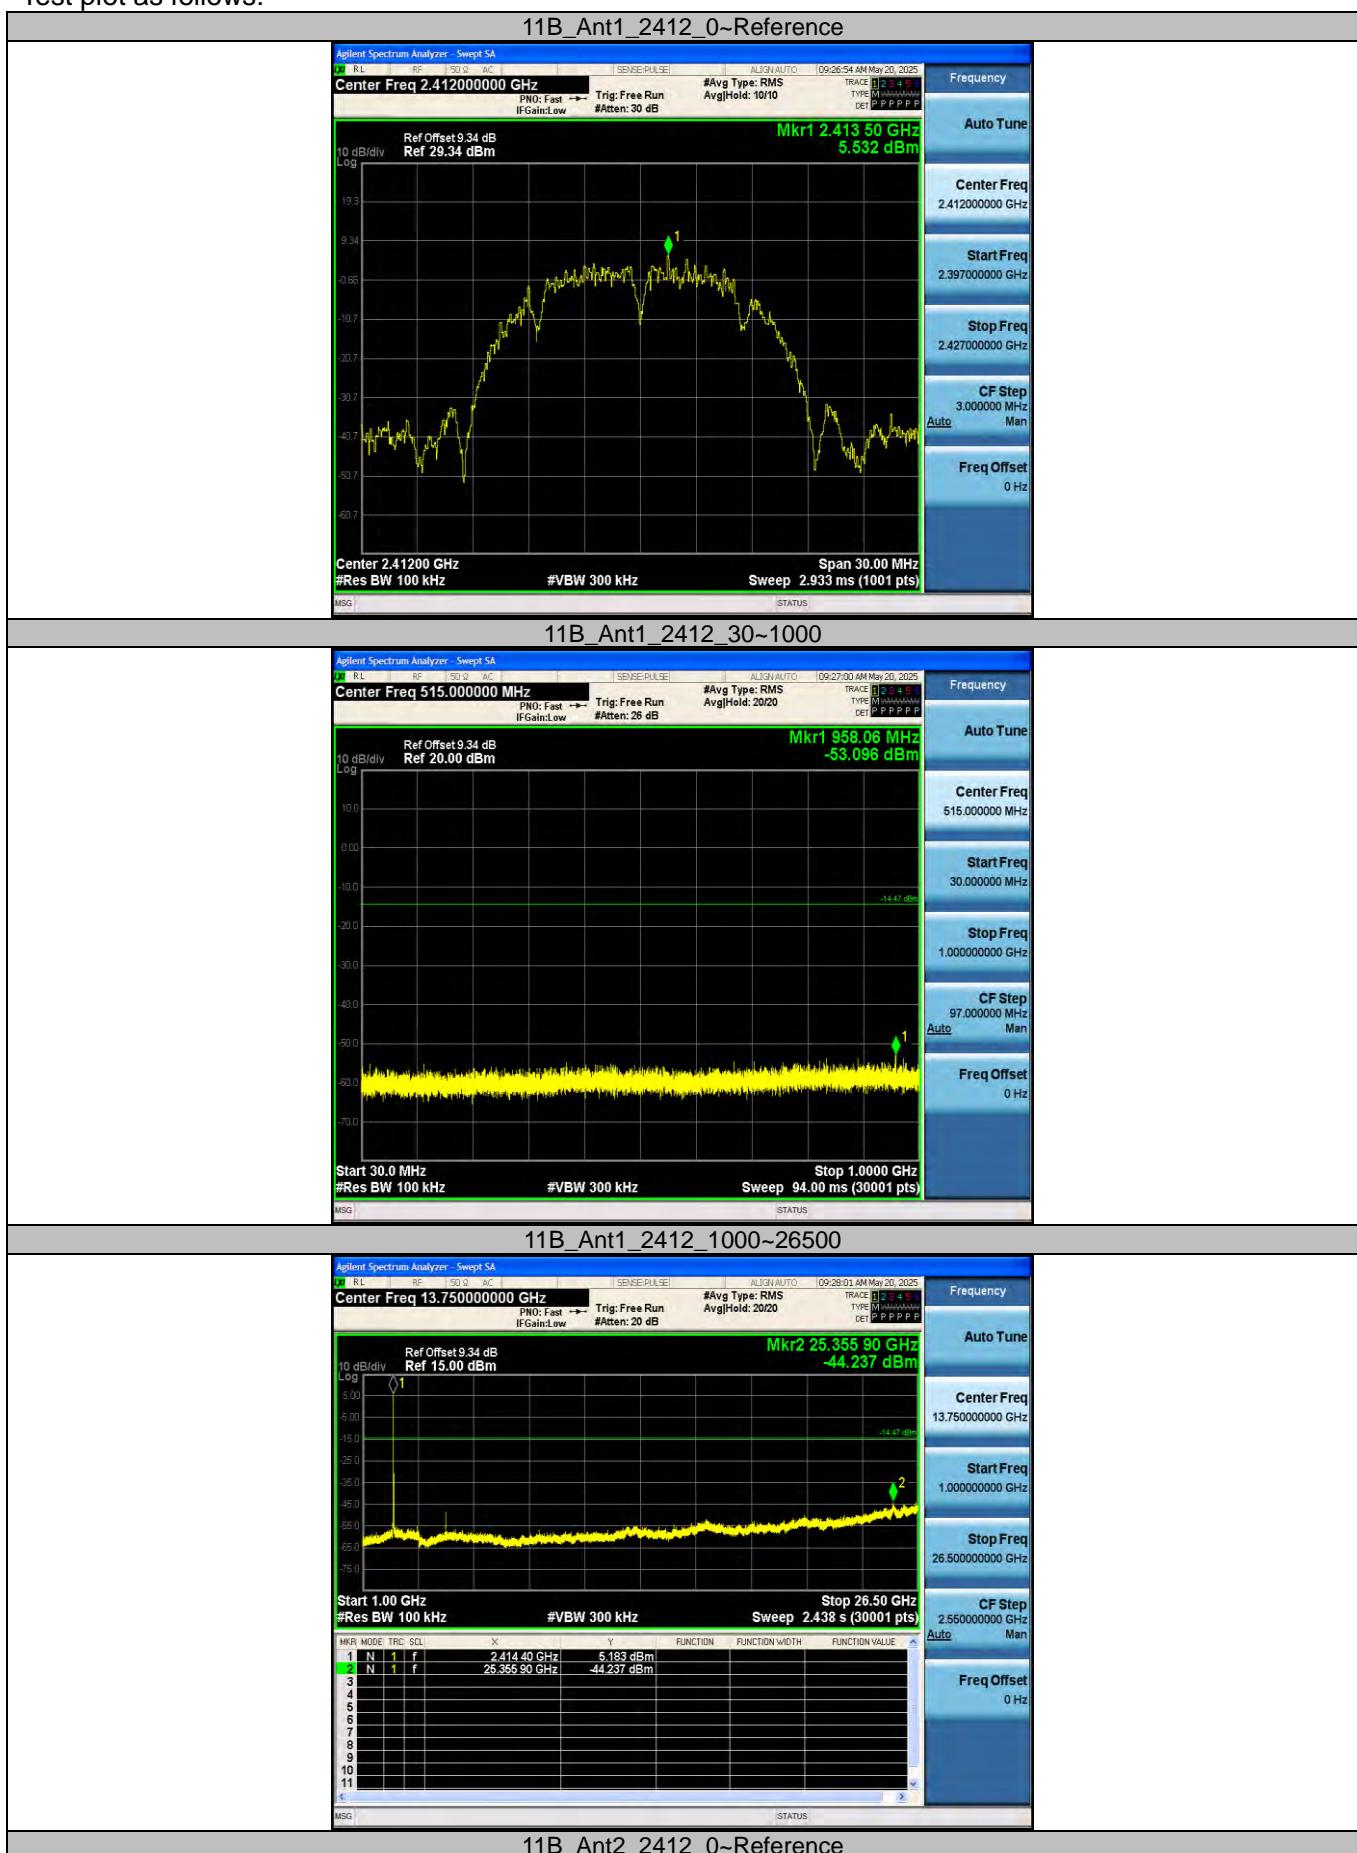


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

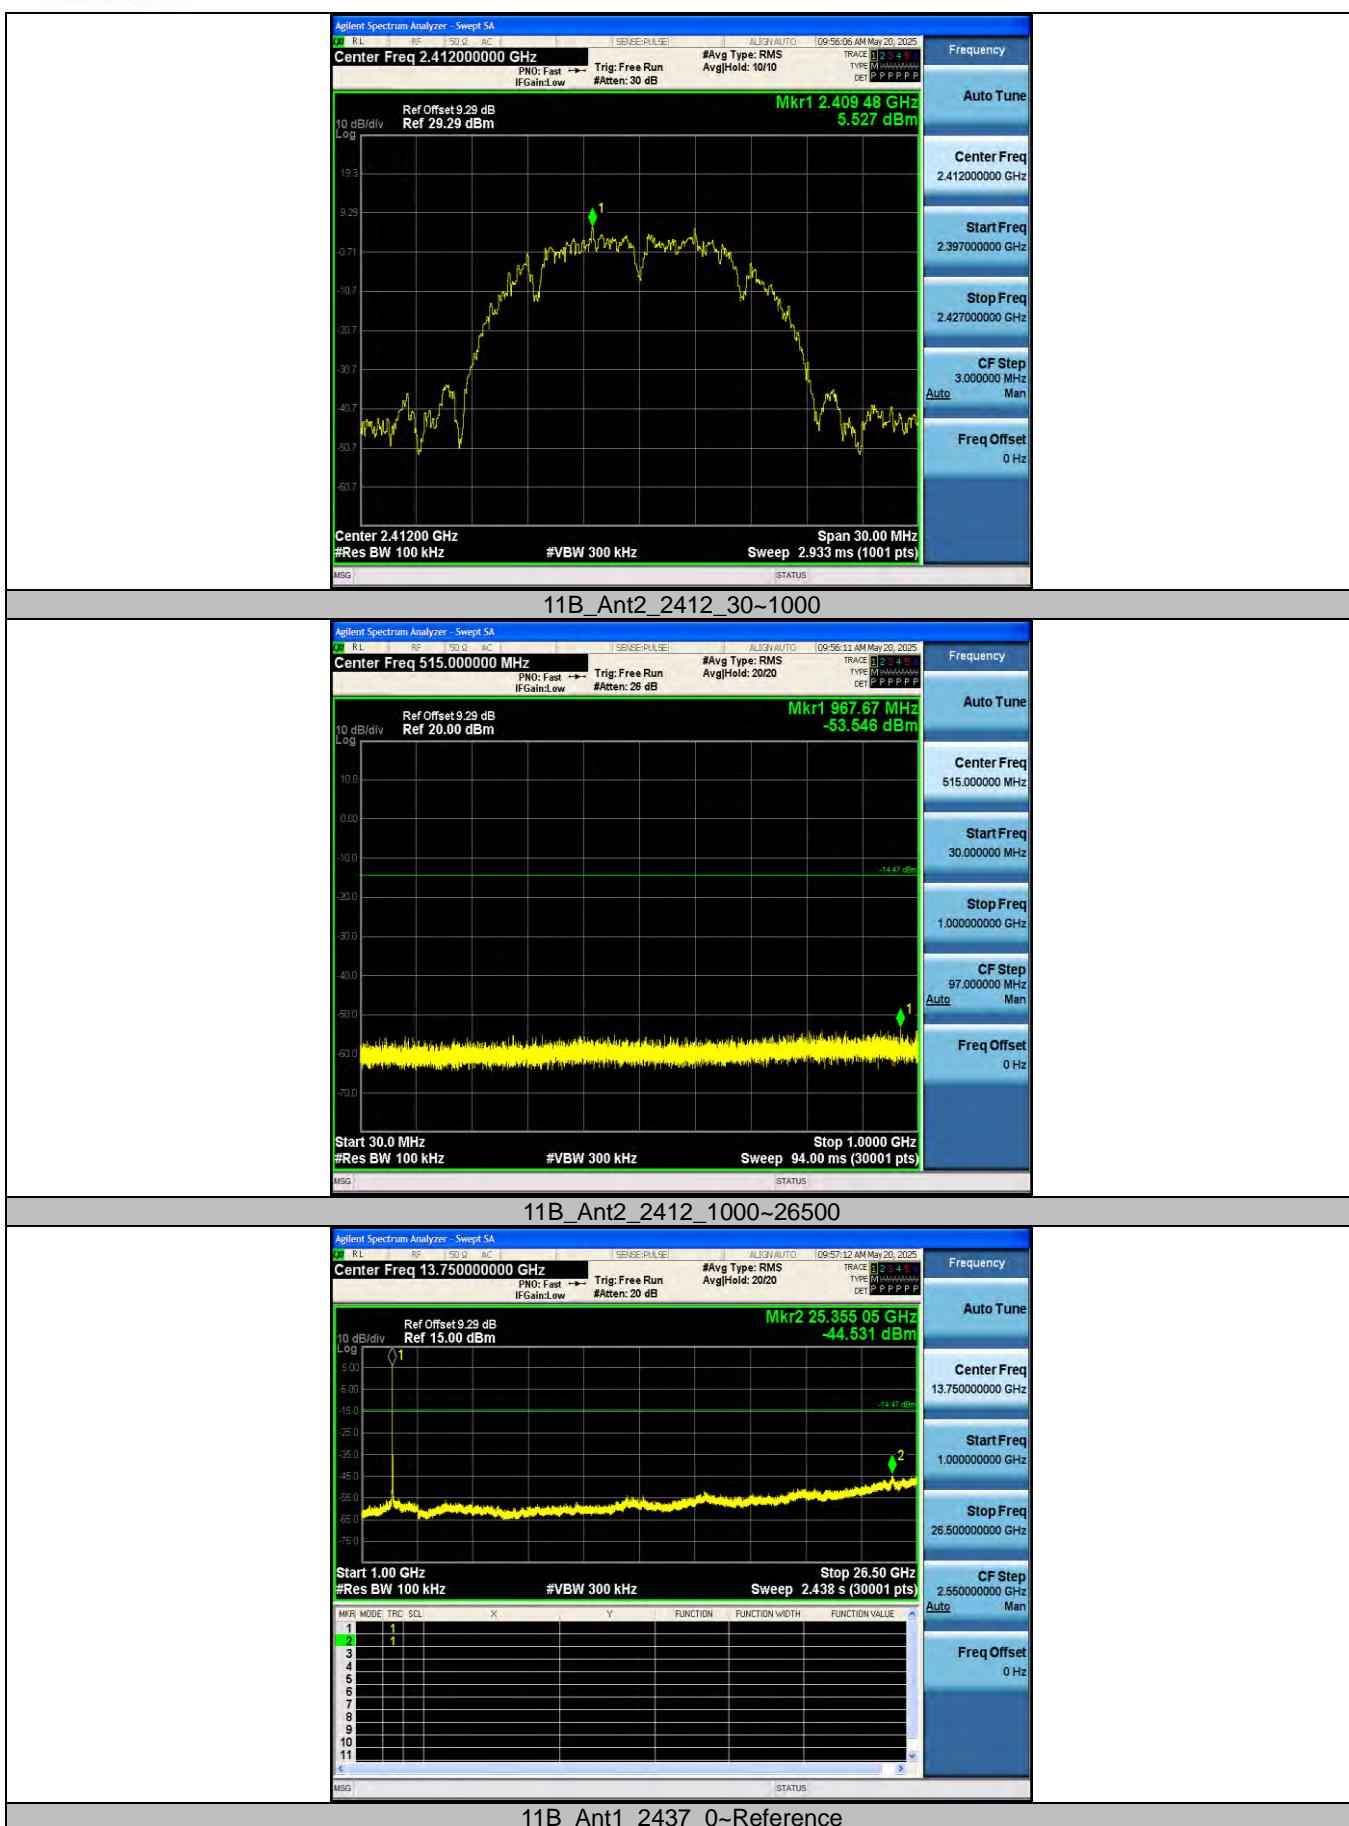


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-057_A2

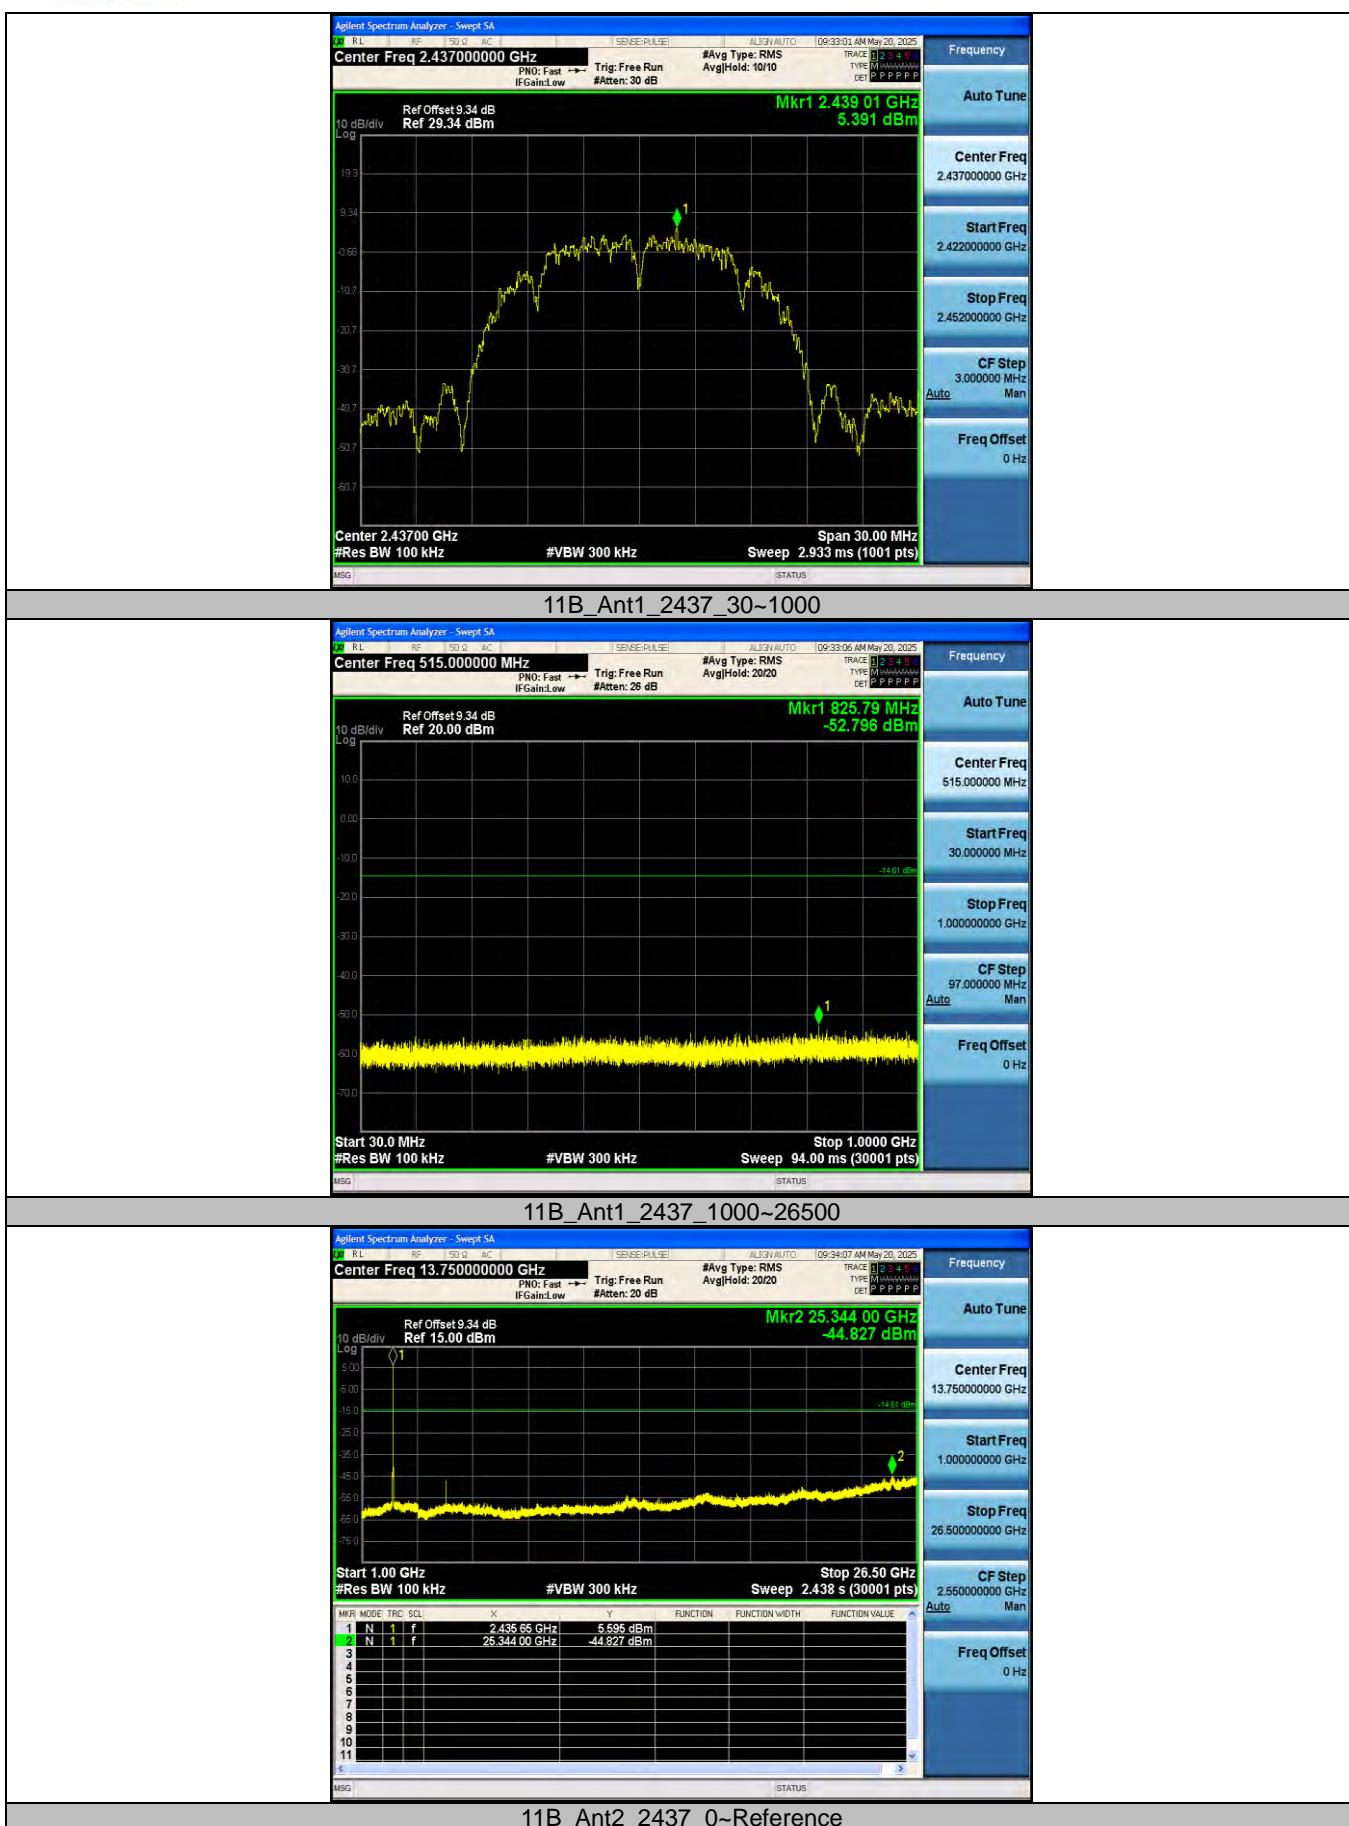


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-057_A2

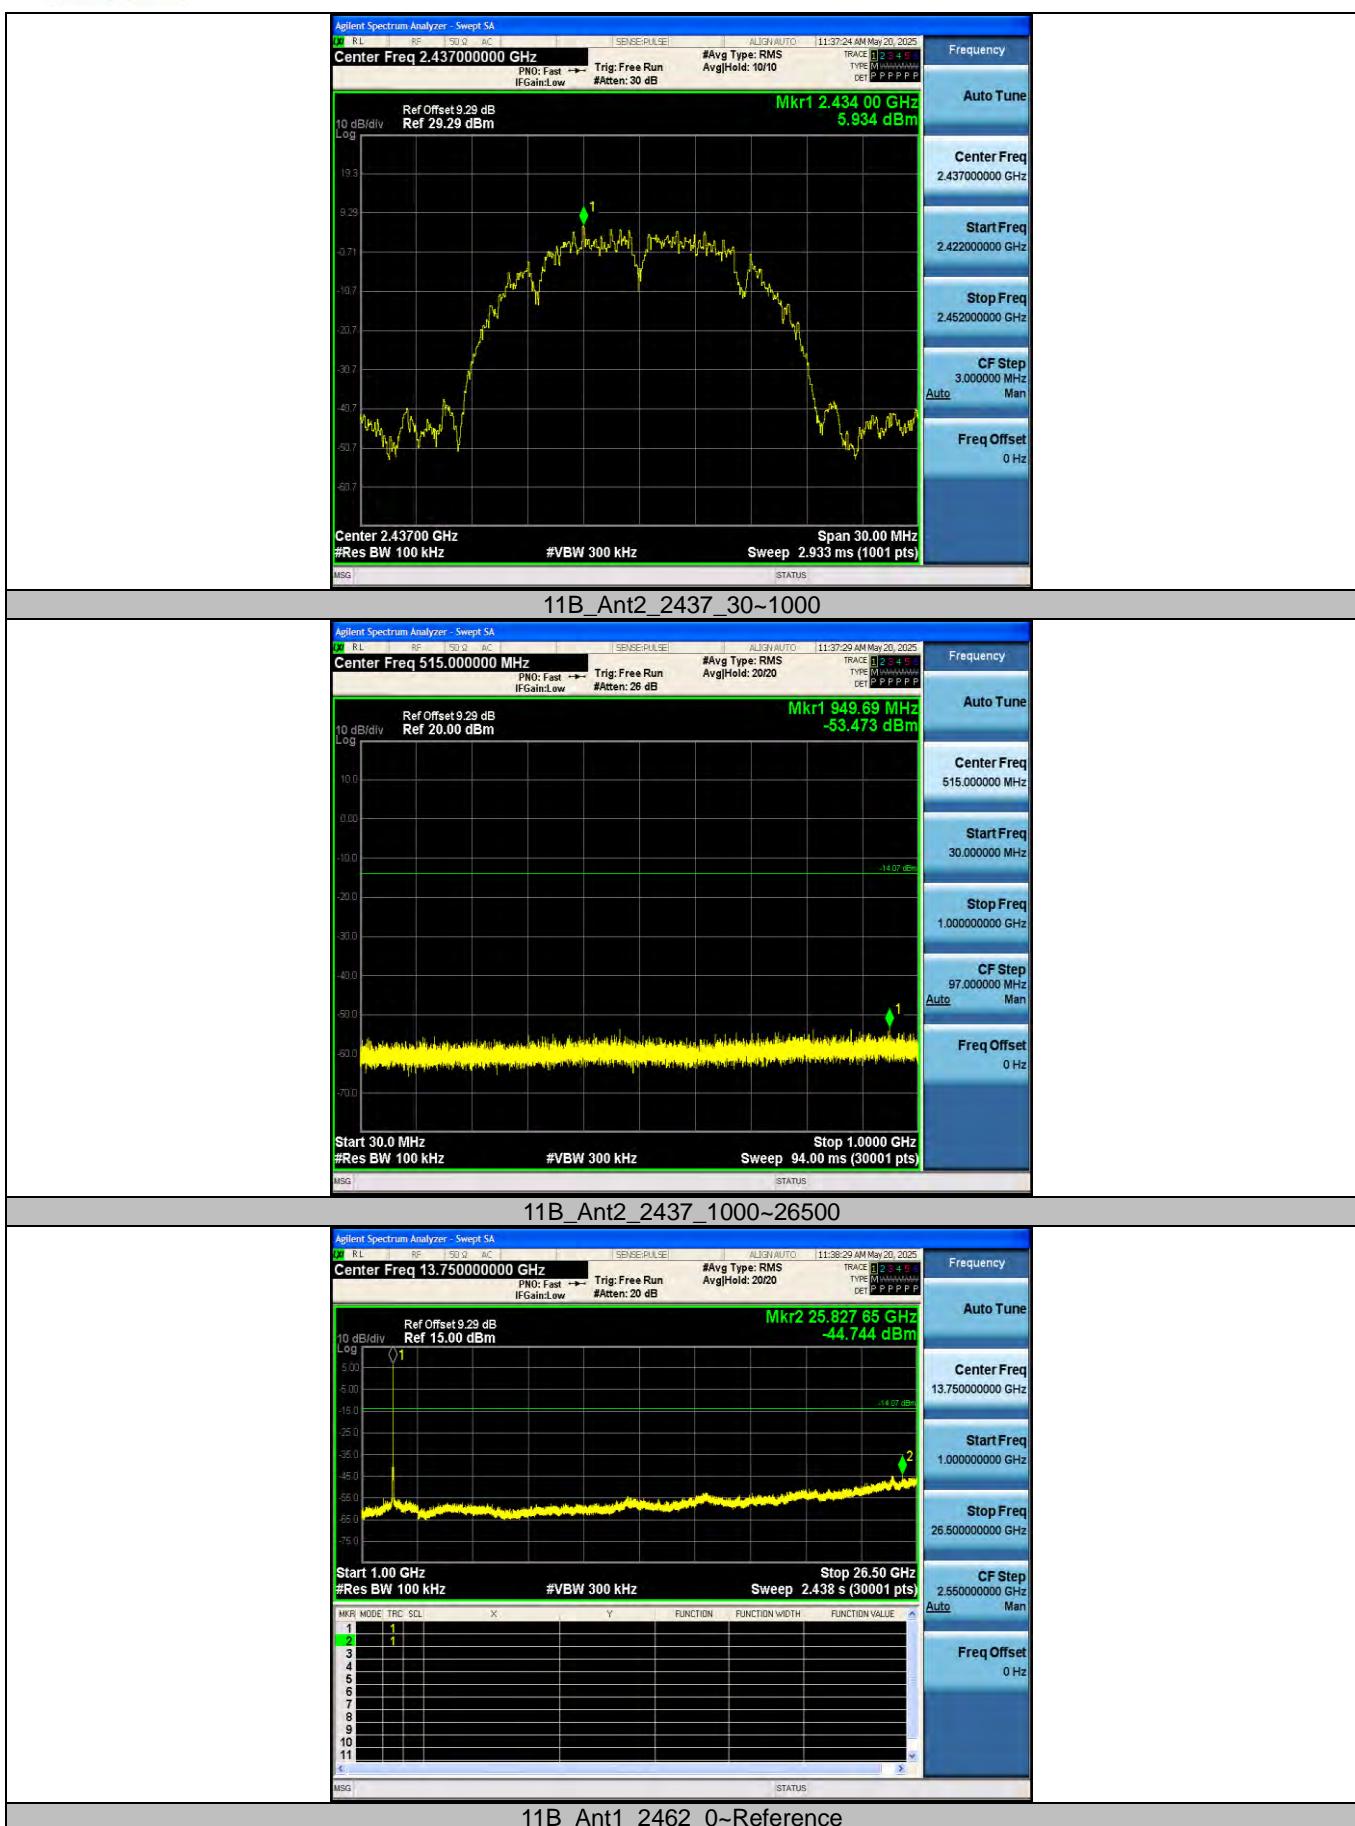


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

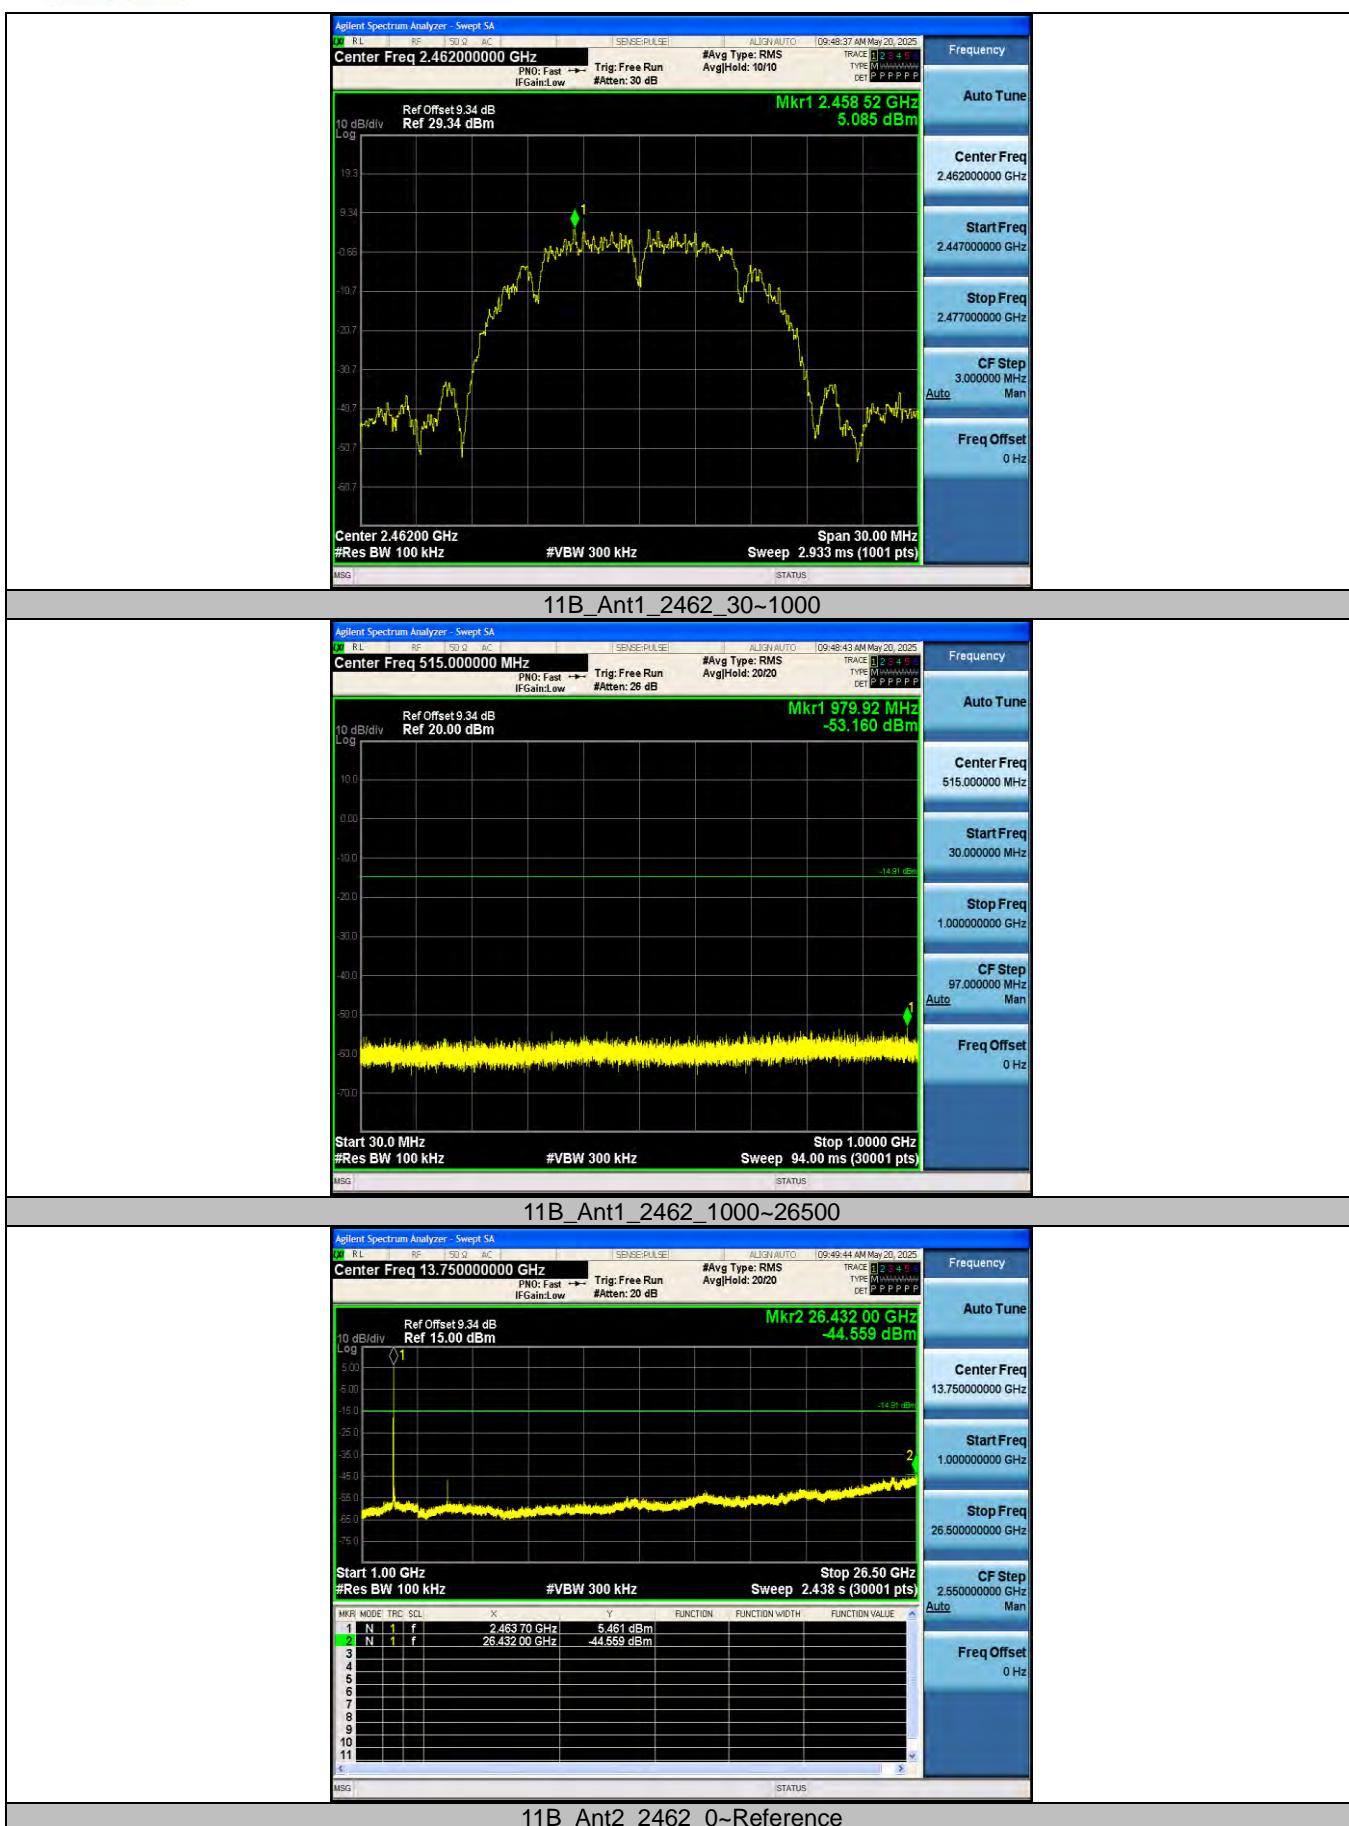



CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

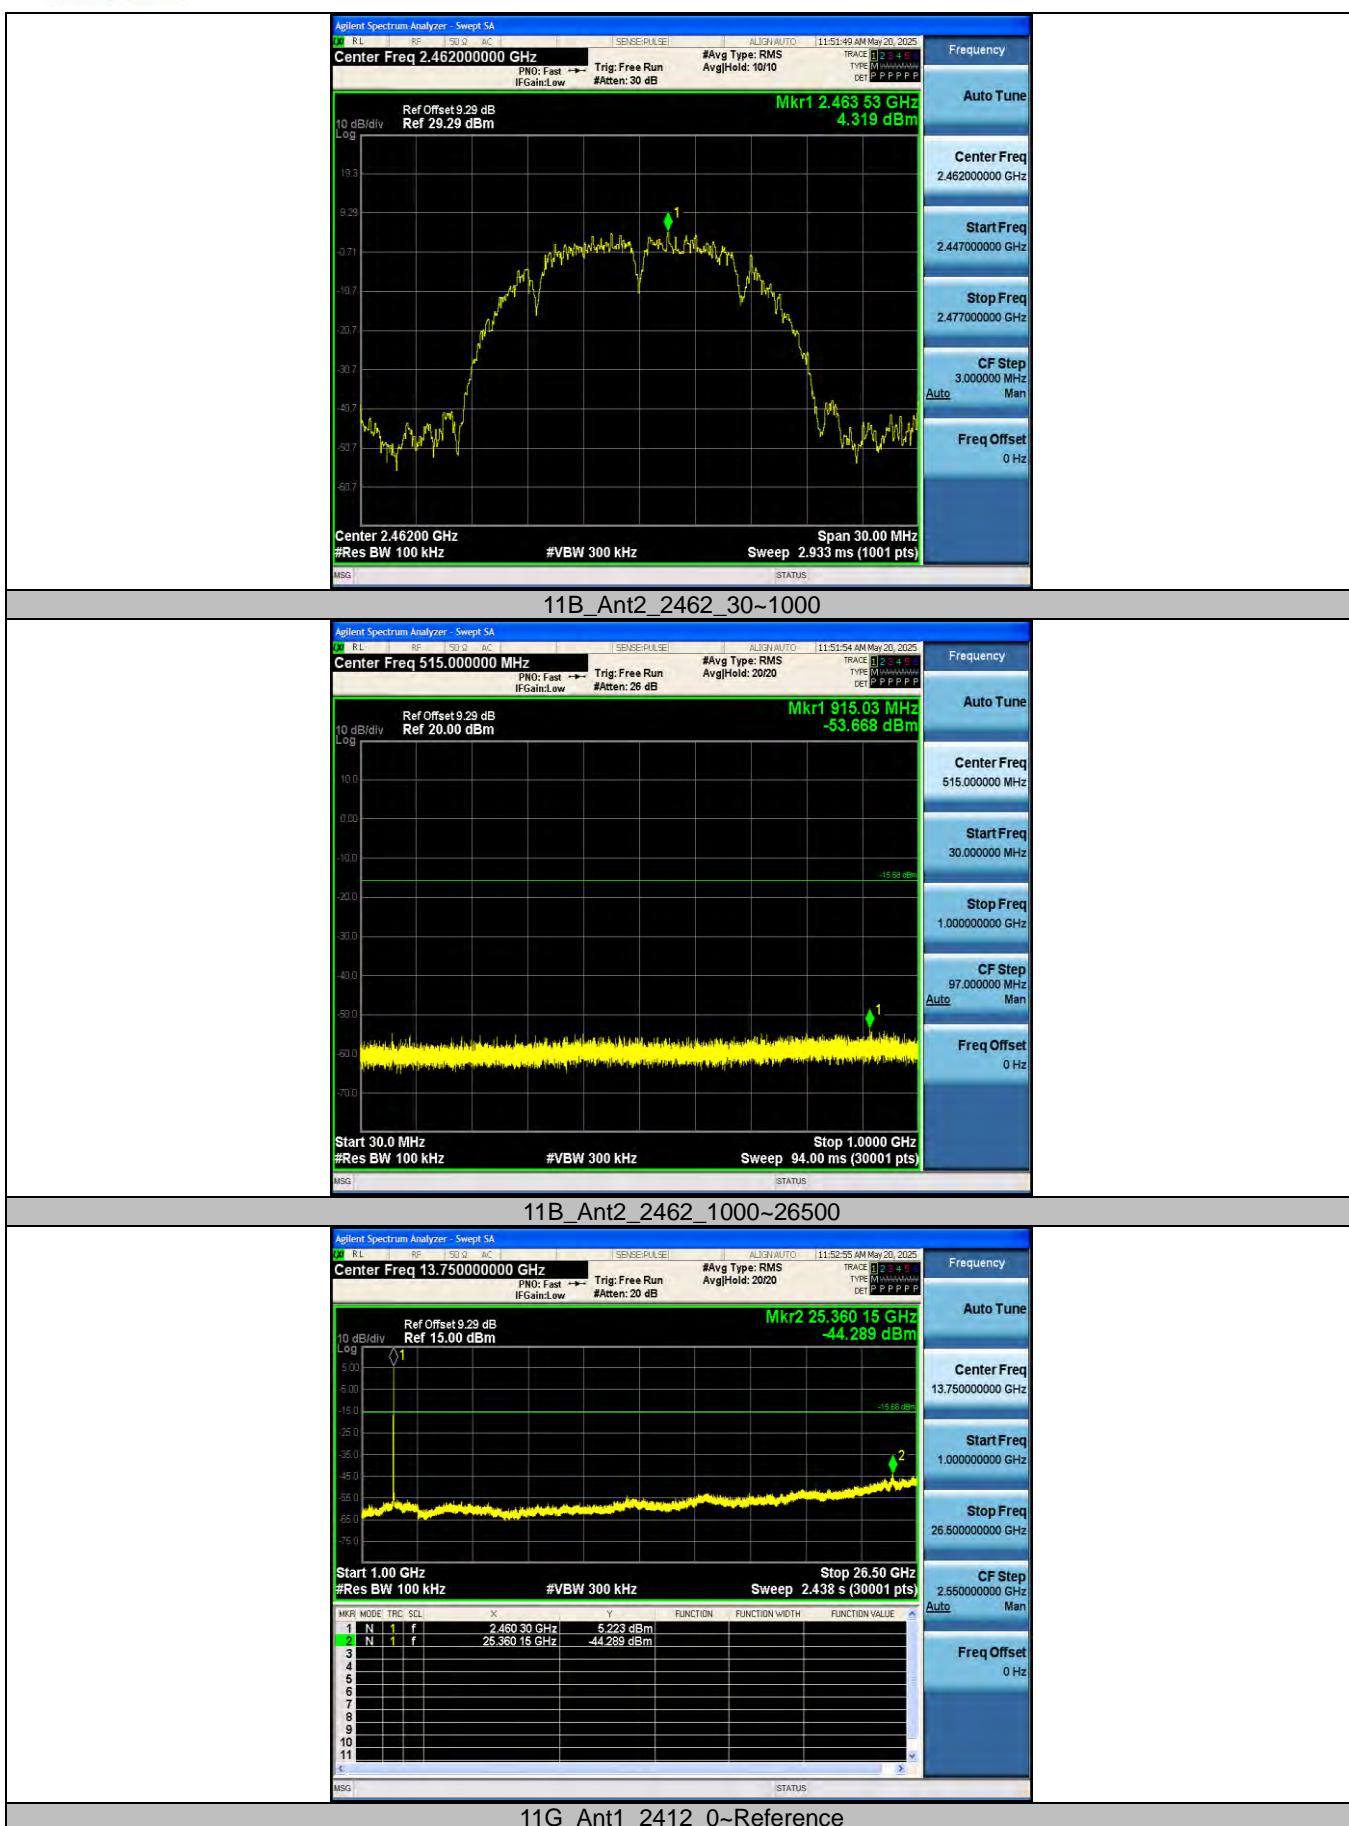

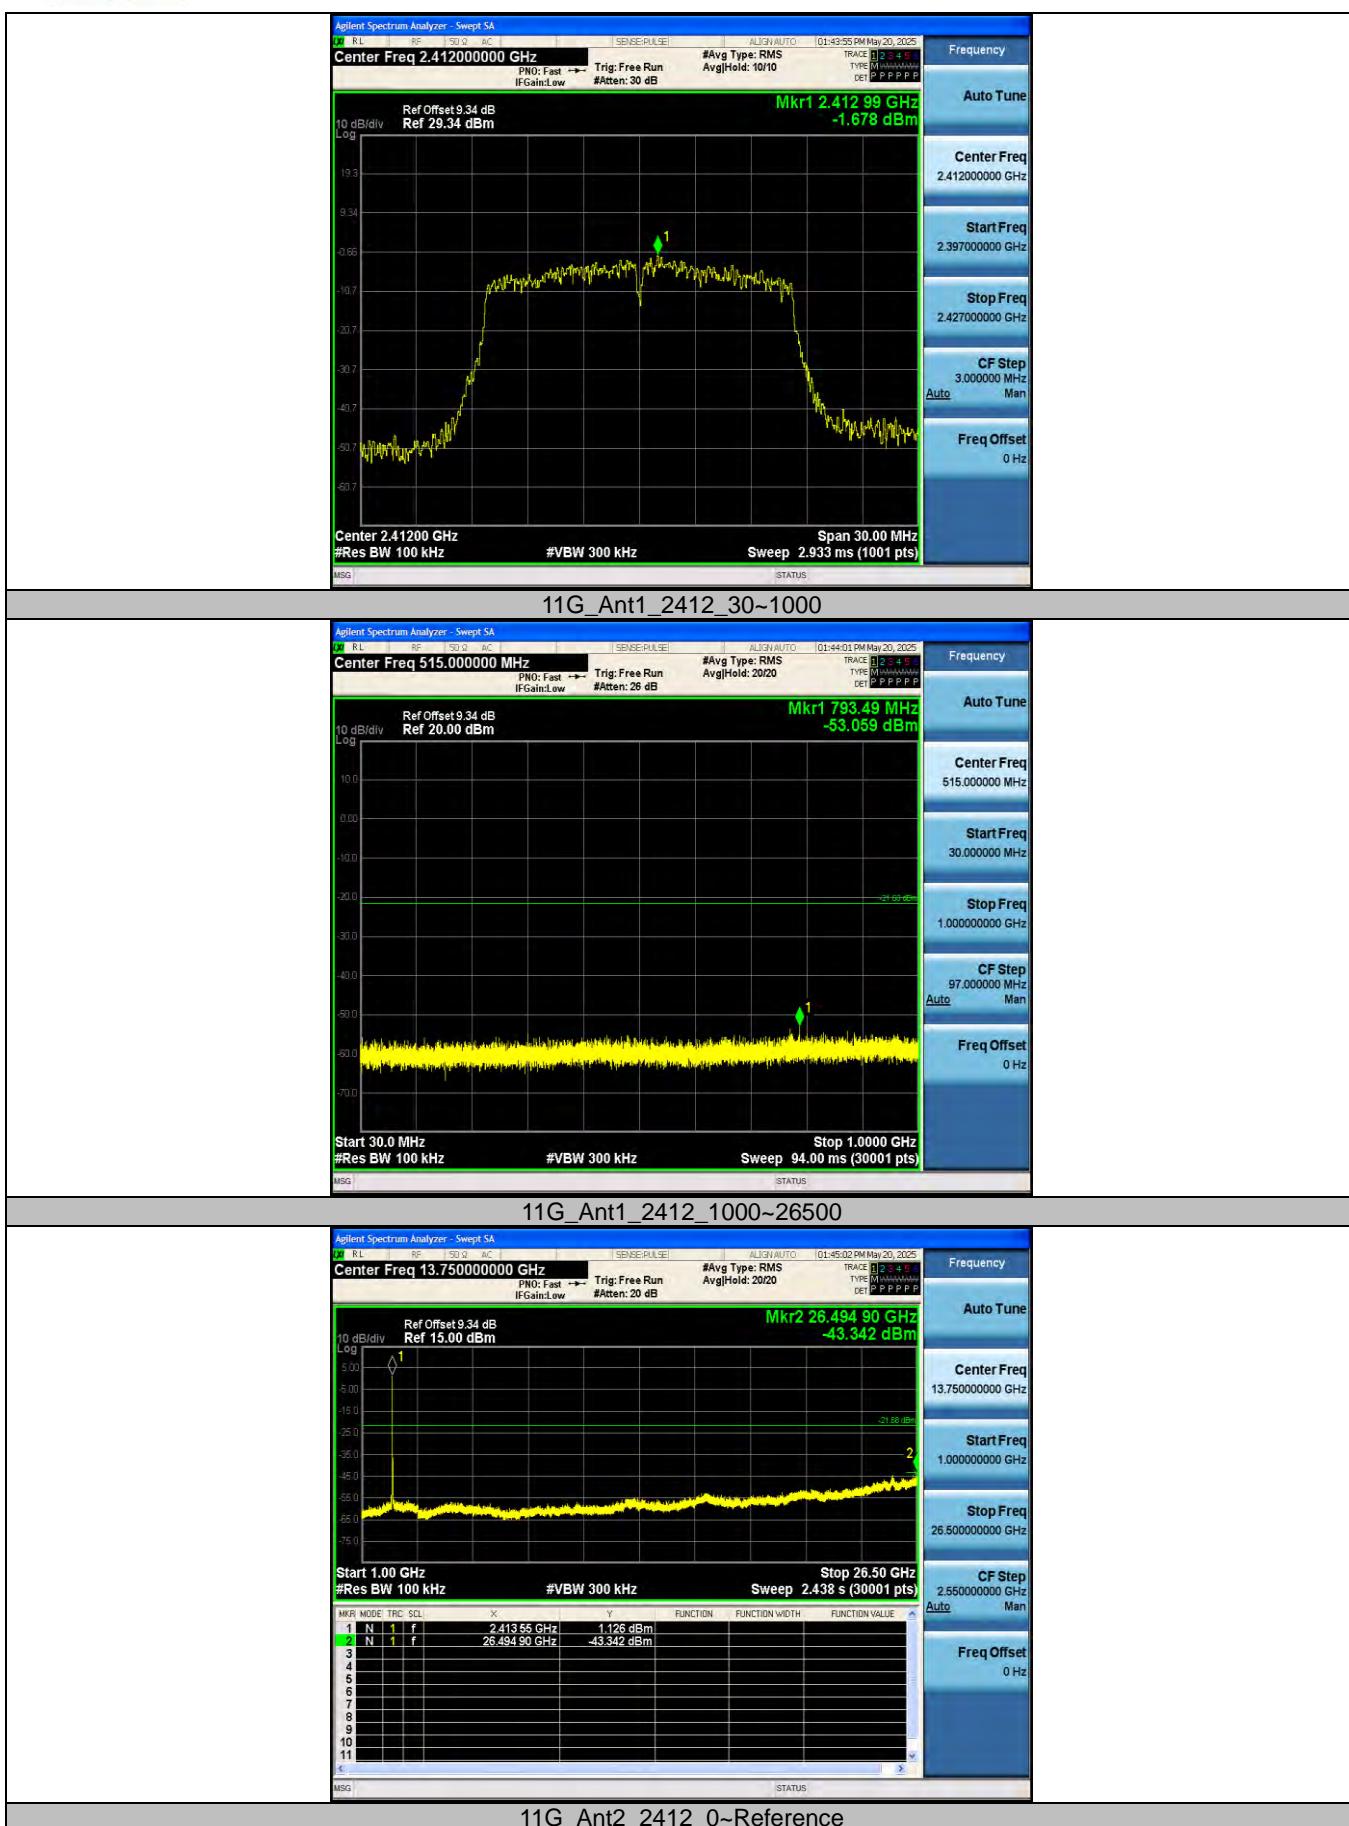


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-057_A2

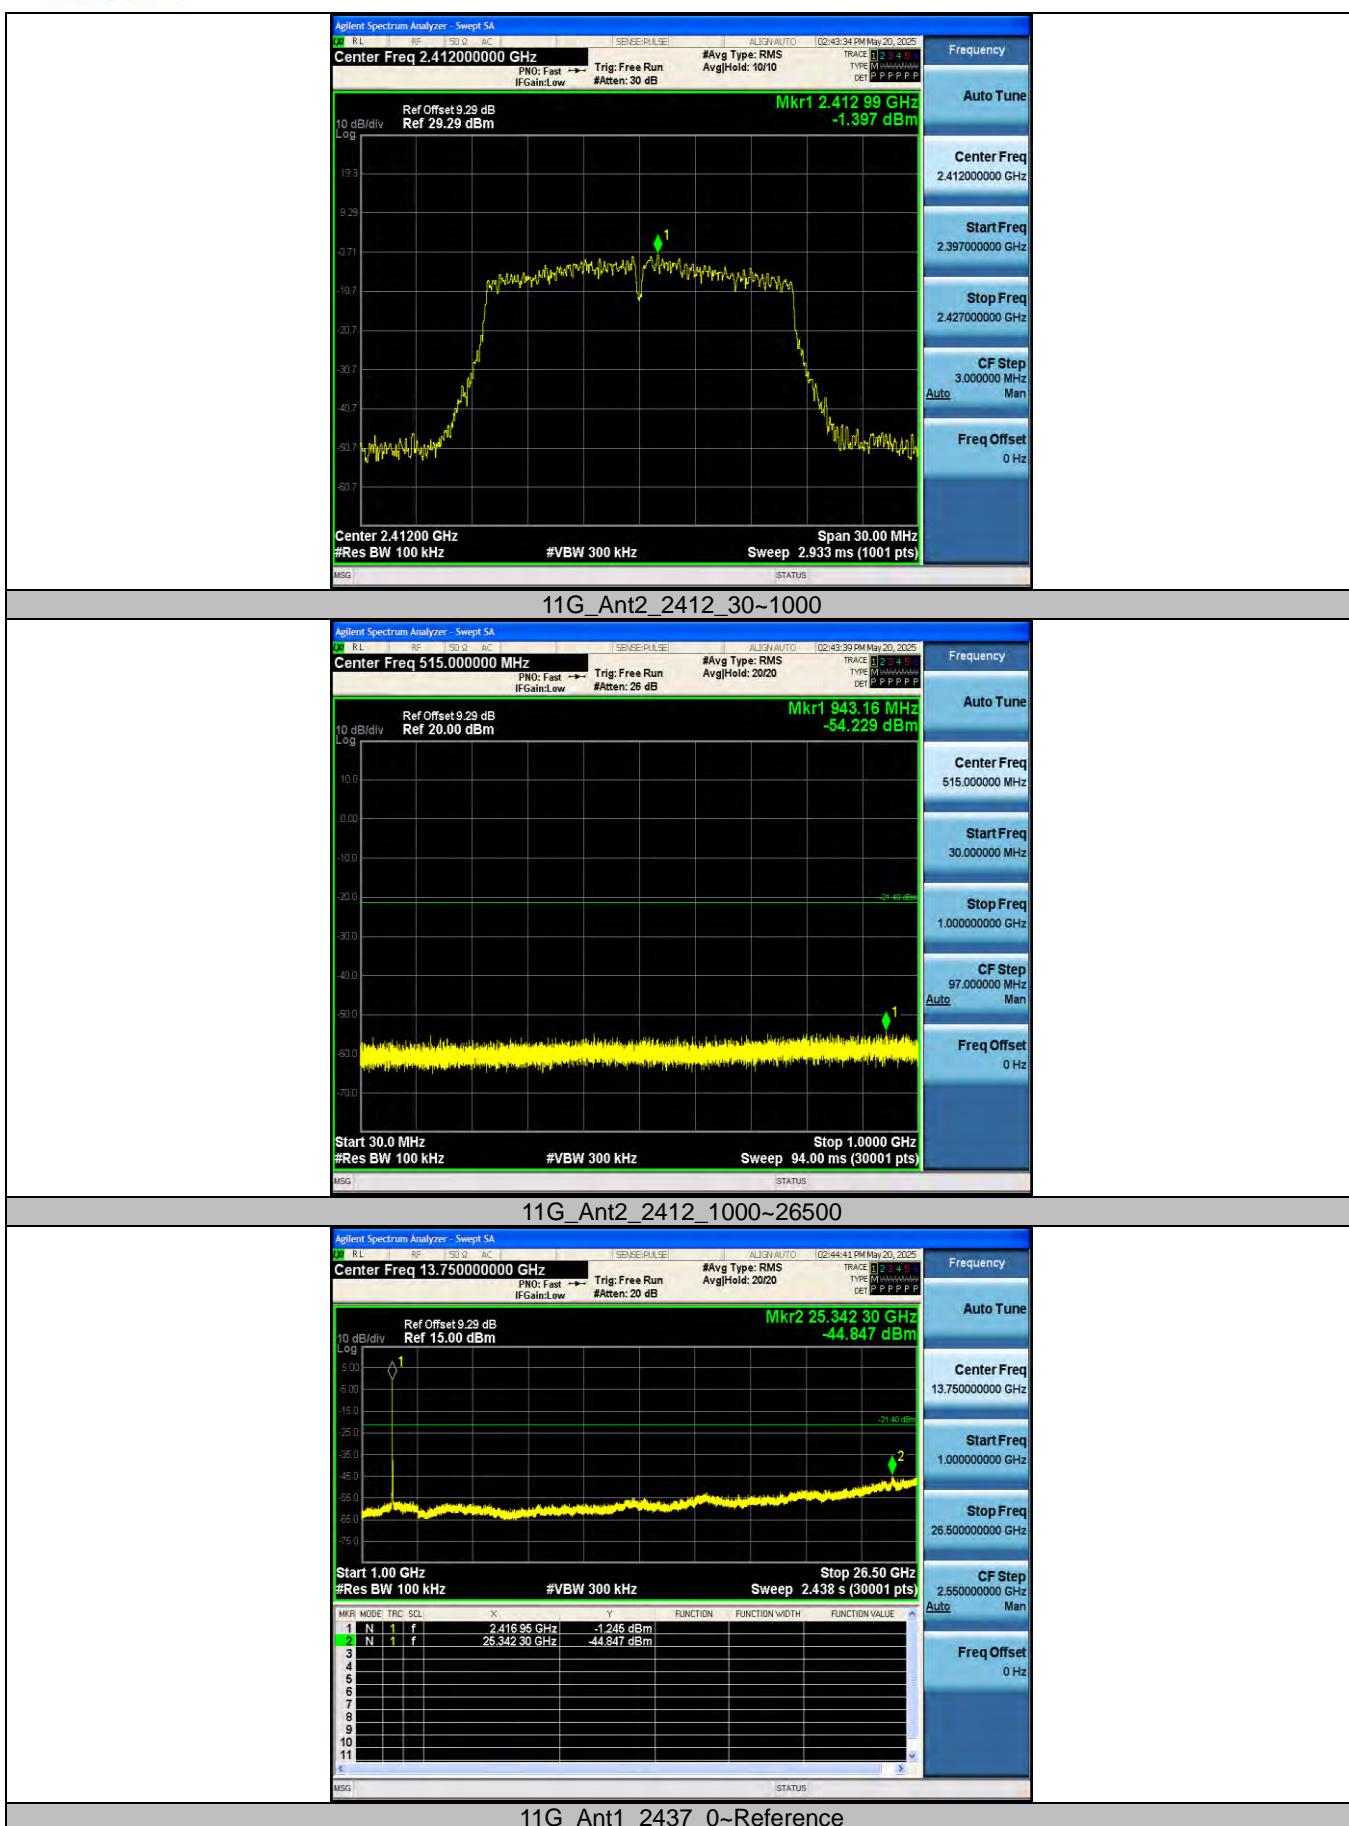

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-057_A2