

CO-LOCATION RADIO TEST REPORT

Product : Hydrow Touchscreen Monitor

Model Name : D24

FCC ID : 2A3HV-D24

Test Regulation : FCC 47 CFR PART 15 Subpart C (Section 15.247)
FCC 47 CFR PART 15 Subpart E (Section 15.407)

Received Date : 2025/4/22

Test Date : 2025/05/06 ~ 2025/05/20

Issued Date : 2025/7/11

Applicant : Hydrow, Inc.
10 Summer St, 5th Floor Boston MA 02110

Issued By : Underwriters Laboratories Taiwan Co., Ltd.
Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd.,
Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

REVISION HISTORY

Original Test Report No.: 4791664087-US-R7-V0

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Building A, B and E, No. 372-7, Sec. 4
Telephone :+886-2-7737-3000

Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948

Table of Contents

1. Attestation of Test Results	4
2. Summary of Test Results	5
3. Test Methodology and Reference Procedures.....	6
4. Facilities and Accreditation	6
5. Measurement Uncertainty	7
6. Equipment under Test.....	8
6.1. Description of EUT	8
6.2. Test Condition.....	9
6.3. Description of Available Antennas	10
6.4. Test Mode Applicability and Tested Channel Detail.....	11
7. Test Equipment	12
8. Description of Test Setup	14
9. Test Results	16
9.1. Conducted Out of Band Emission.....	16
9.2. Radiated Spurious Emission	18
9.3. AC Power Line Conducted Emission	26

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

1. Attestation of Test Results

APPLICANT: Hydrow, Inc.
 10 Summer St, 5th Floor Boston MA 02110

MANUFACTURER: InnoComm Mobile Technology Corp.
 3F, No. 6, Hsin Ann Rd., Hsinchu Science Park, Hsinchu 30078,
 Taiwan

EUT DESCRIPTION: Hydrow Touchscreen Monitor

BRAND: Hydrow, Inc.

MODEL: D24

SAMPLE STAGE: Design Verification Test Sample

DATE of TESTED: 2025/05/06 ~ 2025/05/20

APPLICABLE STANDARDS	
STANDARD	Test Results
FCC 47 CFR PART 15 Subpart C (Section 15.247)	PASS
FCC 47 CFR PART 15 Subpart E (Section 15.407)	PASS

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:


Cindy Hsin
 Cindy Hsin
 Project Handler

Date : 2025/7/11

Approved and Authorized By:


Eric Lee
 Eric Lee
 Senior Laboratory Engineer

Date : 2025/7/11

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

2. Summary of Test Results

Summary of Test Results		
FCC Clause	Test Items	Result
15.205 / 15.209 / 15.247(d) / 15.407(b) (1/2/3/4(i/ii)/9) /15.407(b)(5)(8)	Radiated Spurious Emission	PASS
15.247(d)	Antenna Port Emission	PASS
15.207 15.407(b)(9)	AC Power Conducted Emission	PASS

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB558074 D01 Meas Guidance v05r02, KDB 789033 D02 General UNII Test Procedure New Rules v02r01, KDB 987594 D02 U-NII 6 GHz EMC Measurement v01r01, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013.

4. Facilities and Accreditation

Test Location	Underwriters Laboratories Taiwan Co., Ltd.
Address	Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Accreditation Certificate	Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

5. Measurement Uncertainty

For statement of conformity, Simple acceptance (Section 3.1.4 of IEC Guide 115) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor k=2.

Determining compliance based on the results of the compliance measurement, not considering measurement instrumentation uncertainty.

Measurement	Frequency	Uncertainty
Conducted disturbance at mains terminals ports	150kHz ~ 30MHz	3.1 dB
RF Conducted	9 kHz - 40GHz	2.4 dB
Radiated disturbance below 30MHz	9 kHz - 30 MHz	3.2 dB
Radiated disturbance below 1 GHz	30MHz ~ 1GHz	6.1 dB
Radiated disturbance above 1 GHz	1GHz ~ 40GHz	5.1 dB

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6. Equipment under Test

6.1. Description of EUT

Product	Hydrow Touchscreen Monitor
Brand Name	Hydrow, Inc.
Model Name	D24
Normal Voltage	120Vac from adapter

Operating Frequency	BT EDR: 2402MHz ~ 2480MHz BT LE: 2402MHz ~ 2480MHz 2.4G WiFi: 2412MHz ~ 2462MHz 5G WiFi: 5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5700MHz, 5745 ~ 5825MHz Ant Plus: 2402MHz ~ 2480MHz
Sample ID	Conducted Test:8379125 Radiated Test:8379125

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx,Rx Function
802.11a	2TX,2RX
802.11b	2TX,2RX
802.11g	2TX,2RX
802.11n (HT20)	2TX,2RX
802.11n (HT40)	2TX,2RX
802.11ac (VHT20)	2TX,2RX
802.11ac (VHT40)	2TX,2RX
802.11ac (VHT80)	2TX,2RX
802.11ax (HE20)	2TX,2RX
802.11ax (HE40)	2TX,2RX
802.11ax (HE80)	2TX,2RX

* The modulation and bandwidth are similar for 802.11n mode for HT20 / HT40 and 802.11ac mode for VHT20 / VHT40 / VHT80 and 802.11ax mode for HE20 / HE40 / HE80, therefore investigated worst case to representative mode in test report.

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual, the laboratory shall not be held responsible.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.2. Test Condition

Test Item	Test Site No.	Environmental Condition	Input Power	Test Date	Tested by
Antenna Port Conducted Measurement	SR4	22~26°C/ 62~68%RH	120Vac/ 60Hz	2025/05/06~ 2025/05/20	Rex Chen
Radiated Spurious Emission	966-2	22~26°C/ 62~68%RH	120Vac/ 60Hz	2025/05/06~ 2025/05/20	Rex Chen
AC power Line Conducted Emission	SR1	24°C/ 62%RH	120Vac/ 60Hz	2025/05/10	Rex Chen

FCC Test Firm Registration Number: 498077

Sample Calculation:

Antenna Port Conducted Measurement:

- Where relevant, the follow sample calculation is provided:

$$\text{Result Value (dBm)} = \text{Reading Value (dBm)} + \text{Attenuator Factor (dB)} + \text{Cable Loss (dB)}.$$

Example: Result Value (10dBm) = Reading Value (-2dBm) + Attenuator Factor (10dB) + Cable Loss(2dB).

*Test plot only shown the “Result Value”.

Radiated Spurious Emission:

- Where relevant, the follow sample calculation is provided:

$$\text{Result Value (dBuV/m)} = \text{Reading Value (dBuV)} + \text{Correction Factor (dB/m)}.$$

$$\text{Correction Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Factor (dB)}.$$

Example: Result Value (34.5dBuV/m) = Reading Value (40.1dBuV) + Antenna Factor (18.7dB/m) + Cable Loss (4.2dB) - Preamp Factor (28.5dB).

AC power Line Conducted Emission:

- Where relevant, the follow sample calculation is provided:

$$\text{Result Value (dBuV)} = \text{Reading Value (dBuV)} + \text{Correction Factor (dB)}.$$

$$\text{Correction Factor (dB)} = \text{Insertion loss(dB)} + \text{Cable loss(dB)}.$$

Example: Result Value (53.7dBuV) = Reading Value (35.1dBuV) + Insertion loss(18.1dB) + Cable loss(0.5dB).

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.3. Description of Available Antennas

Ant. No.	Transmitter Circuit	Frequency Range	Brand Name	Model Name	Maximum Gain (dBi)	Ant. Type	Connector Type
Ant+ 1	Chain0	2402~2480 MHz	INPAQ	Huginn_ANT	3.55	PIFA	None
BT 1	Chain0	2402~2480 MHz	INPAQ	Huginn_BT	4.39	PIFA	None
WiFi 1	Chain0	2402~2480 MHz	INPAQ	Huginn_WIFI1	4.39	PIFA	None
		5.15~5.25GHz			6.48		
		5.25~5.35GHz			7.13		
		5.47~5.725GHz			6.98		
		5.725~5.85GHz			6.03		
		2402~2480 MHz			3.82		
WiFi 2	Chain1	5.15~5.25GHz	INPAQ	Huginn_WIFI2	6.51	PIFA	None
		5.25~5.35GHz			6.9		
		5.47~5.725GHz			7.27		
		5.725~5.85GHz			6.07		

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual, the laboratory shall not be held responsible.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.4. Test Mode Applicability and Tested Channel Detail

Simultaneously transmission condition:

Condition	Technology			
Radiated Emission	WLAN (2.4GHz)	WLAN (5GHz)	BTLE	Ant Plus
Conducted Emission	WLAN (2.4GHz)	WLAN (5GHz)	-	-

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

7. Test Equipment

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
Radiated Spurious Emission					
Spectrum Analyzer	Keysight	N9010A	MY56070818	2025/3/12	2026/3/11
EMI Test Reciever	Rohde & Schwarz	ESR7	101754	2024/12/24	2025/12/23
Loop Antenna	ETS lindgren	6502	00213440	2024/12/11	2025/12/10
Trilog-Broadband Antenna with 5dB Attenuator	Schwarzbeck & EMCI	VULB 9168 & N-6-05	774 & AT-N0538	2024/12/30	2025/12/29
Horn Antenna (1-18 GHz)	Schwarzbeck	BBHA 9120 D	01690	2024/11/27	2025/11/26
Horn Antenna (18-40 GHz)	Schwarzbeck	BBHA 9170	781	2024/12/18	2025/12/17
Preamplifier (30-1000 MHz)	EMCI	EMC330E	980405	2024/5/28	2025/5/27
Preamplifier (1-18 GHz)	EMCI	EMC051835BE	980406	2025/1/13	2026/1/12
Preamplifier (18-40GHz)	EMCI	EMC184040SEE	980426	2025/4/7	2026/4/6
Cables (9k-18 GHz)	Hanyitek	K1K50-UP0264-K1K50-2500	170214-4 & 170425-2	2024/11/22	2025/11/21
Cables (18-40GHz)	Hanyitek	K1K50-UP0264-K1K50-2500	170214-1 & 170214-2	2024/11/22	2025/11/21

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
Antenna Port Conducted Measurement					
Signal Analyzer	Rohde & Schwarz	FSVA3044	101281	2025/3/5	2026/3/4
Signal Analyzer	Rohde & Schwarz	FSV40	101490	2024/7/1	2025/6/30
Attenuator	EMCI	EMC-40ATK2W10	17002	2024/11/13	2025/11/12
USB Power Sensor	Anritsu	MA24408A	12031	2024/7/13	2025/7/12
Temperature &Humidity Test Chamber	GIANT FORCE	GTH-150- 40-CP-AR	MAA1701-010	2025/2/25	2026/2/24
AC power Line Conducted Emission					
EMI Test Receiver	Rohde & Schwarz	ESR7	101753	2024/10/1	2025/9/30
Two-Line V-Network	Rohde & Schwarz	ENV216	102136	2024/5/14	2025/5/13
Impuls-Begrenzer Pulse Limiter	Rohde & Schwarz	ESH3-Z2	102219-Qt	2024/8/29	2025/8/28
Cables	TITAN	CFD200	T0732ACFD 20020A300-2	2025/4/21	2026/4/20

UL Software		
Description	Name	Version
Radiated measurement	e3	6.191211 (V6)
AC power Line Conducted Emission	EZ_EMC	UL-3A1.2

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

8. Description of Test Setup

Support Equipment

ID	Equipment	Brand Name	Model Name	S/N	Remark
A	AC Adapter	NEUMULLER	ATS050T-P121	N/A	Supplied by Client

I/O Cables

ID	Equipment	Brand Name	Model Name	Length (m)	Remark
1	AC Cable	HOU TA	AL-501	1.83	Supplied by Client

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Setup

The EUT was worked in engineering mode to transmit signal.

Controlled using a bespoke application (Entering RF commands by ADB interface) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

Setup Diagram for Test

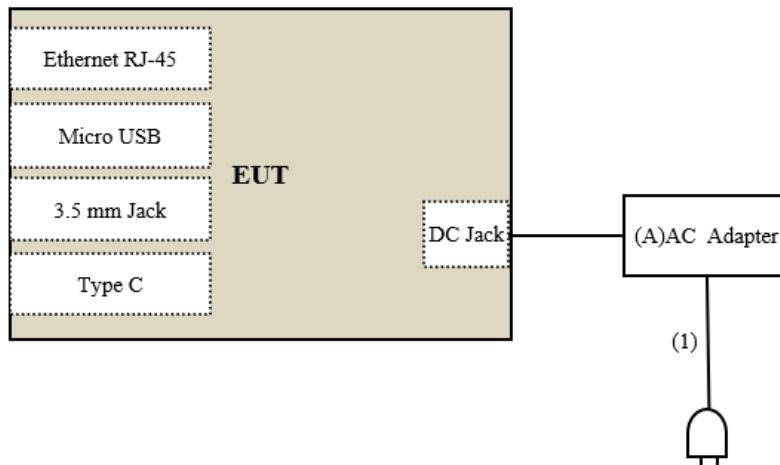

Under Table

Remote Site

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

9. Test Results

9.1. Conducted Out of Band Emission

Requirements

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b) (3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209 (a) is not required.

Test procedure


Measurement Procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1


Test Data

802.11b + 802.11a

Chain 0

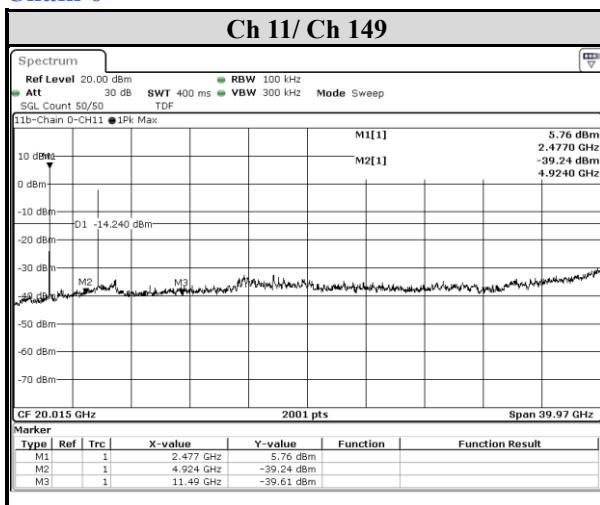

Chain 1

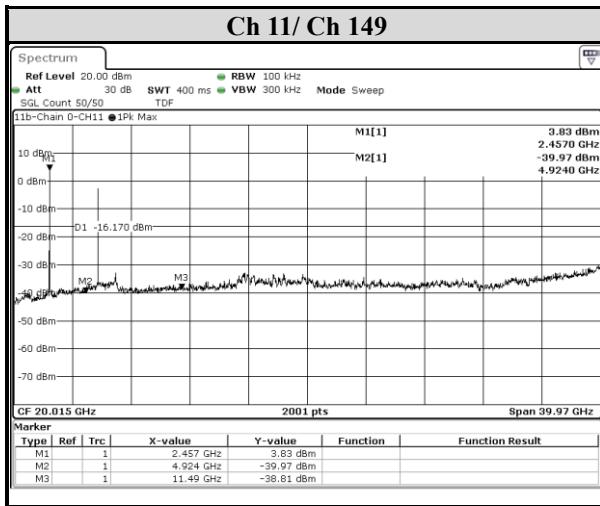

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

9.2. Radiated Spurious Emission

Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dB μ V/m)	AV:54 (dB μ V/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dB μ V/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dB μ V/m) ^{*1} PK:105.2 (dB μ V/m) ^{*2} PK: 110.8(dB μ V/m) ^{*3} PK:122.2 (dB μ V/m) ^{*4}

*1 beyond 75 MHz or more above of the band edge.

*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Procedures

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz, for 1/T (Duty cycle < 98%) video bandwidth detail information refer to main report duty cycle test result.
- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
- e. Test data of Result value (dB_{UV}/m) = Reading value (dB_{UV}/m) + Correction Factor (dB/m).
- f. Test data of Margin(dB) = Result value (dB_{UV}/m) - Limit value (dB_{UV}/m).
- g. Test data of Correction Factor (dB/m) = Antenna Factor (dB_{UV}/m) + Cable Loss (dB) - Preamp Factor (dB).
- h. Test data of Notation "@" = Fundamental Frequency
- i. Test data of Notation " * " = The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.

Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

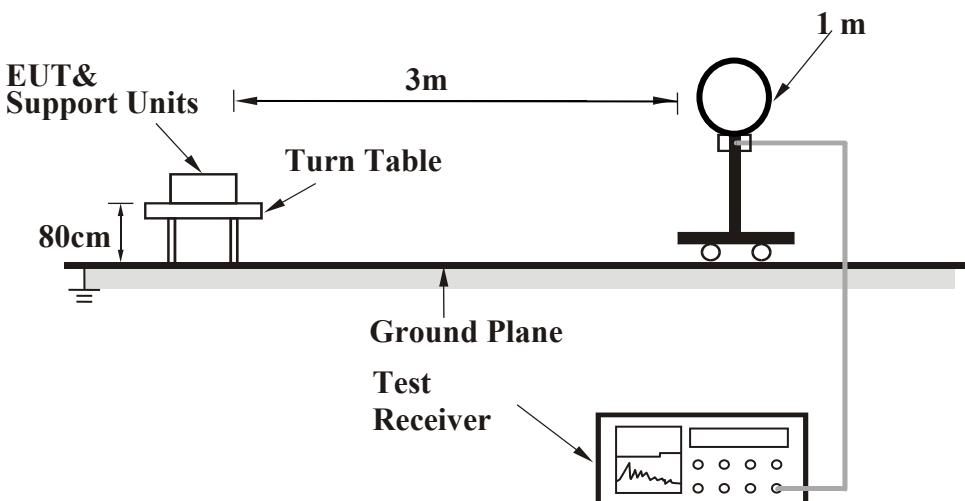

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

<Frequency Range 30 MHz ~ 1 GHz>

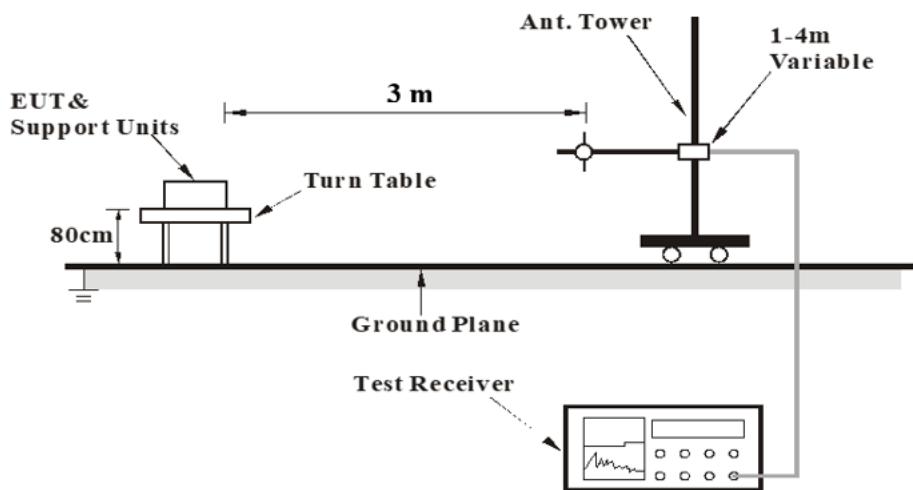

<Frequency Range above 1 GHz>

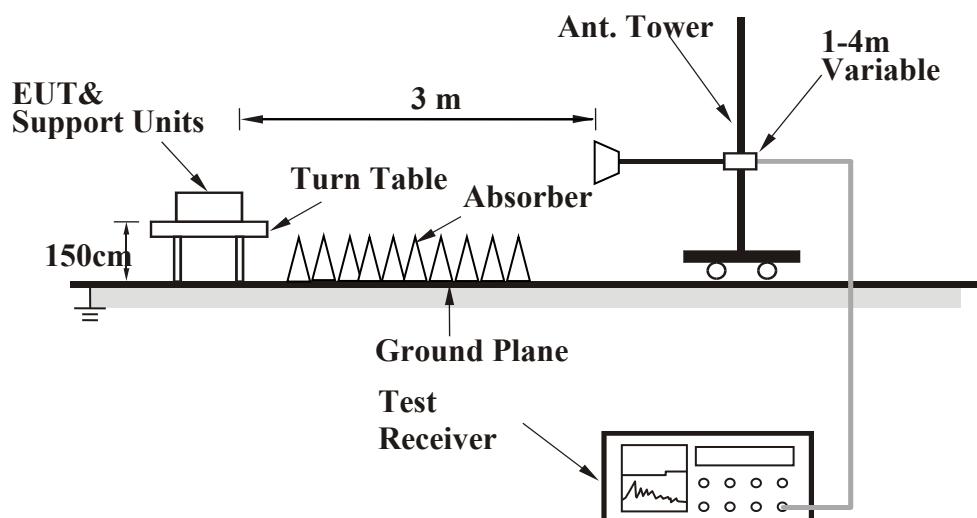

For the actual test configuration, please refer to the Setup Configurations.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Data

Above 1 GHz

Mode	WLAN 2.4GHz 802.11b & WLAN 5GHz 802.11a & BLE(1M) & Ant Plus	Channel	WLAN 2.4GHz 802.11b Ch11 & WLAN 5GHz 802.11a Ch149 & BLE(1M) CH39 + Ant Plus CH39
------	--	---------	---

Polarization	Notation @	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	4924	49.14	2.72	51.86	74	-22.14	PK	
	4960	40.41	2.81	43.22	74	-30.78	PK	
	11490	37.12	19.52	56.64	74	-17.36	PK	
	11490	27.21	19.52	46.73	54	-7.27	AVG	
Vertical	4924	51.11	2.72	53.83	74	-20.17	PK	
	4960	51.12	2.81	53.93	74	-20.07	PK	
	11490	40.84	19.52	60.36	74	-13.64	PK	
	11490	31.14	19.52	50.66	54	-3.34	AVG	

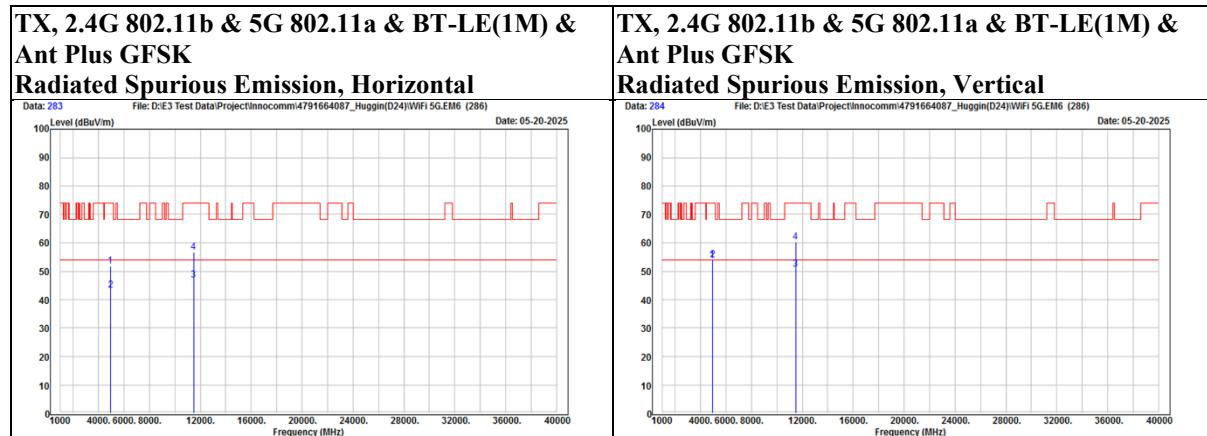

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Below 1 GHz

Mode	WLAN 2.4GHz 802.11b & WLAN 5GHz 802.11a & BLE(1M) & Ant Plus	Channel	WLAN 2.4GHz 802.11b Ch11 & WLAN 5GHz 802.11a Ch149 & BLE(1M) CH39 + Ant Plus CH39
------	--	---------	---

Polarization	Notation @	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		43.58	37.69	-21.05	16.64	40	-23.36	PK
		130.88	41.09	-21.72	19.37	43.5	-24.13	PK
		170.65	46.9	-20.48	26.42	43.5	-17.08	PK
		246.31	41.15	-20.89	20.26	46	-25.74	PK
		428.67	37.38	-15.21	22.17	46	-23.83	PK
		644.98	38.08	-9.94	28.14	46	-17.86	PK
Vertical		46.49	40.63	-20.75	19.88	40	-20.12	PK
		77.53	45.38	-24.51	20.87	40	-19.13	PK
		144.46	39.98	-20.29	19.69	43.5	-23.81	PK
		164.83	41.4	-20.19	21.21	43.5	-22.29	PK
		418	37.91	-15.59	22.32	46	-23.68	PK
		579.02	37.7	-11.65	26.05	46	-19.95	PK

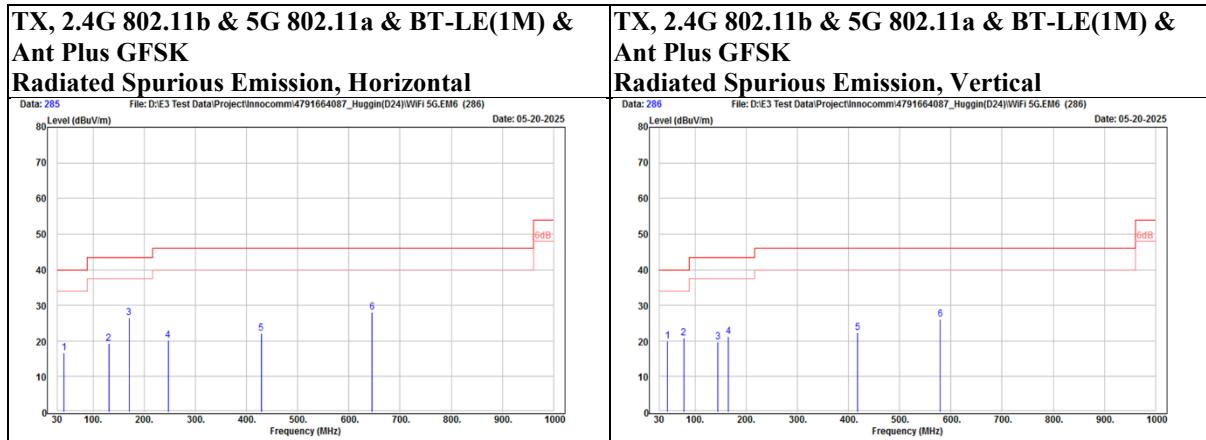
Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

9 kHz ~ 30 MHz Data:

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

KDB 414788 D01 OATS and Chamber Correlation Justification

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

9.3. AC Power Line Conducted Emission

Requirements

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
2. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
3. Test data of Result value (dB μ V) = Reading value (dB μ V) + Correction Factor (dB).
4. Test data of Margin(dB) = Result value (dB μ V) - Limit value (dB μ V).
5. Test data of Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Setup

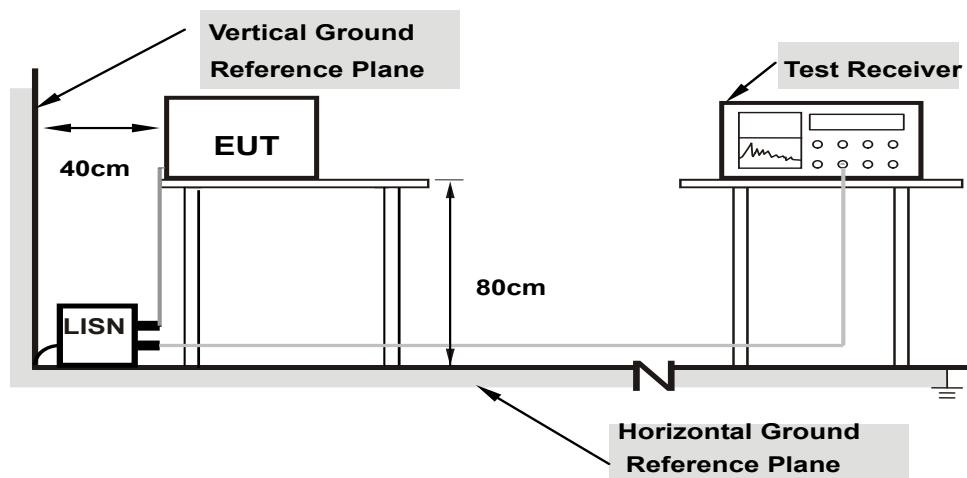

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the Setup Configurations.

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Data

Mode	WLAN 2.4GHz 802.11n40 & WLAN 5GHz 802.11a & BLE(1M) & Ant Plus	Channel	WLAN 2.4GHz 802.11n40 Ch09 & WLAN 5GHz 801.11a Ch149 & BLE(1M) CH39 + Ant Plus CH39
------	--	---------	---

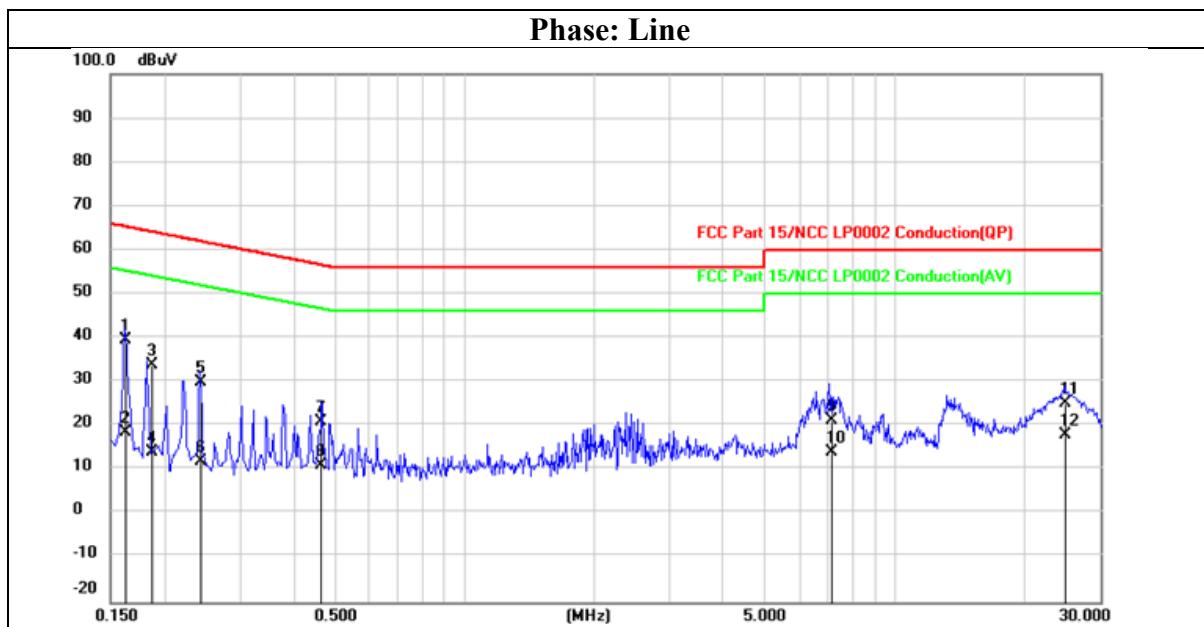

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1627	29.69	9.96	39.65	65.32	-25.67	QP
2	0.1627	8.54	9.96	18.50	55.32	-36.82	AVG
3	0.1866	23.85	9.96	33.81	64.19	-30.38	QP
4	0.1866	4.24	9.96	14.20	54.19	-39.99	AVG
5	0.2437	20.11	9.96	30.07	61.97	-31.90	QP
6	0.2437	1.89	9.96	11.85	51.97	-40.12	AVG
7	0.4648	10.96	9.97	20.93	56.61	-35.68	QP
8	0.4648	1.12	9.97	11.09	46.61	-35.52	AVG
9	7.1344	10.97	10.18	21.15	60.00	-38.85	QP
10	7.1344	3.75	10.18	13.93	50.00	-36.07	AVG
11	24.8635	14.54	10.68	25.22	60.00	-34.78	QP
12	24.8635	7.21	10.68	17.89	50.00	-32.11	AVG

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Mode	WLAN 2.4GHz 802.11n40 & WLAN 5GHz 802.11a & BLE(1M) & Ant Plus	Channel	WLAN 2.4GHz 802.11n40 Ch09 & WLAN 5GHz 801.11a Ch149 & BLE(1M) CH39 + Ant Plus CH39
------	--	---------	---

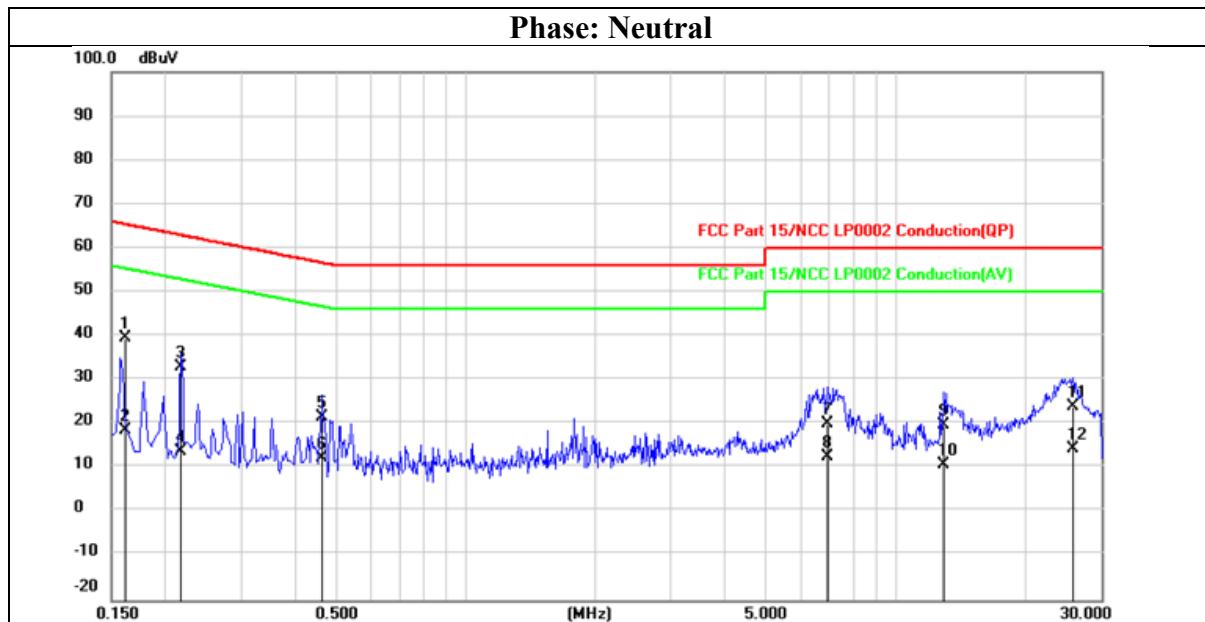

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1621	29.56	9.94	39.50	65.36	-25.86	QP
2	0.1621	8.76	9.94	18.70	55.36	-36.66	AVG
3	0.2166	23.15	9.94	33.09	62.95	-29.86	QP
4	0.2166	3.88	9.94	13.82	52.95	-39.13	AVG
5	0.4615	11.65	9.95	21.60	56.67	-35.07	QP
6	0.4615	2.27	9.95	12.22	46.67	-34.45	AVG
7	6.9558	9.97	10.15	20.12	60.00	-39.88	QP
8	6.9558	2.46	10.15	12.61	50.00	-37.39	AVG
9	13.0047	9.56	10.33	19.89	60.00	-40.11	QP
10	13.0047	0.29	10.33	10.62	50.00	-39.38	AVG
11	25.7993	13.24	10.69	23.93	60.00	-36.07	QP
12	25.7993	3.58	10.69	14.27	50.00	-35.73	AVG

END OF REPORT

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1