

# **Dongguan Togran Electronics Technology Co.,LTD**

File Name: Scissor Keyboard

Department: R&D Edit:

haolan bai/yuhui liu

Check: ZhongMin Wang

Approval: Zhengliang You

Edit Date	2024-11-05	Version	A0	Issued	2024-11-06
-----------	------------	---------	----	--------	------------

Dongguan Togran Electronics Technology CO.,Ltd	DN: QW172	Version: A0
File Name: Scissor Keyboard	Page	<b>1 / 8</b>


Origial	DCC					
Edit by	Date	Edit	Check	Approval	Issued by	Reveipt by
R&D	2024-11-05	Haolan bai/yuhui liu	ZhongMin Wang	Zhengliang. You	DCC	Sales/PE

Dongguan Togran Electronics Technology CO.,Ltd	DN: QW172	Version: A0
File Name: Scissor Keyboard	Page	2 / 8

## 1 Introduction

This document contains a functional and performance specification of the Wireless slim Keyboard. BT5.0 compatible with Win XP, Win Vista, Win7, Win8, Win8.1, Win10, Win11 and other operating systems.

Transmitter:

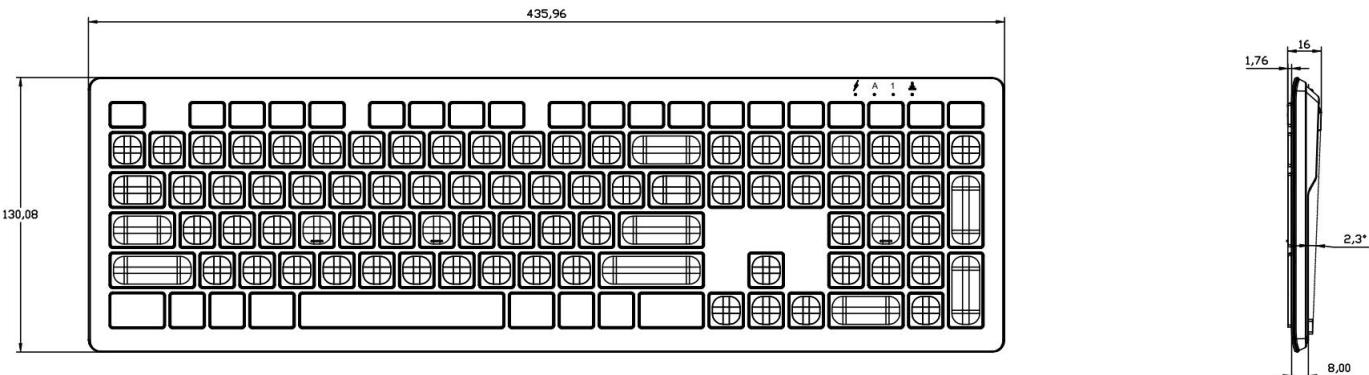

## 2 Physical Specification

- Dimension

Transmitter:

Height:	$16.0 \pm 0.5$ mm
Length:	$436.0 \pm 0.5$ mm
Width:	$130.0 \pm 0.5$ mm

- Weight: approx.  $540 \pm 50$ g.

## 3 Mechanical Characteristics

### 3.1 Keyboard color

- Top case togran black (According to customer requirements)
- Bottom case togran black (According to customer requirements)
- Kepcap1# togran black(According to customer requirements)
- Kepcap2# togran gray (According to customer requirements)
- LED lens transparency clear
- Legend printing Pantone white/305C for Fn+ key
- LED indicator icon Pantone 403C

### 3.2 Key switch

- Operating force of Keys:  $65 \pm 15$  gf
- Total travel  $1.5 \pm 0.3$  mm
- Click ratio  $>40\%$
- Bounce 5ms

### 3.3 Keyboard material

Dongguan Togran Electronics Technology CO.,Ltd	DN: QW172	Version: A0
File Name: Scissor Keyboard	Page	3 / 8

- Top case ABS or HIPS
- Bottom case ABS or HIPS
- Kepcap1# ABS
- Kepcap2# ABS
- LED lens transparency PC
- Mid-board transparency PC
- Scissors POM
- Rubber dome Silicone
- Foot (turn) ABS+TPE
- Foot Silicone

## 4 Radio Characteristics:

### 4.1 Transmitter

- Rating: 5V=500mA (with DC 3.7V, 500mAh battery inside)
- Frequency: 2.402~2.48 GHz.
- Working channel:40channel
- Power consume: Key working <10mA ; (Suspend I) <0.1mA ; (Suspend II) <0.02mA
- Working distance: >10Metre

## 5 Important Components

- Transmitter : IC: EP2T42F40E (TLSR8373C)

## 6 Environment

### 6.1 Operating Temperature and Humidity

Temperature: -5° C to 45° C

Humidity: 85% RH or less

### 6.2 Storage Temperature and Humidity

Temperature: -15 ° C to 65° C

Humidity: 85% RH or less

## 7 Reliability Specifications

### 7.1 Key Life Test

Switching speed: 30 cycles/min.

Operating force of Key: 65gf

Operating cycles: 5,000,000 cycles

Judging Criteria : No functional defect should be found for the switch actuation.

### 7.2 High Temperature Test

Temperature: 60±2°C

Storage time: 96 hours.

After this test the mouse shall be left in room temperature for 1 hour.

Dongguan Togran Electronics Technology CO.,Ltd	DN: QW172	Version: A0
File Name: Scissor Keyboard	Page	4 / 8

Judging Criteria : No functional defect should be found.

### 7.3 Low Temperature Test

Temperature:  $-15\pm2^{\circ}\text{C}$

Storage time: 96 hours

After this test the mouse shall be left in room temperature for 1 hour.

Judging Criteria : No functional defect should be found.

### 7.4 Moisture Test

Temperature:  $40\pm2^{\circ}\text{C}$

Humidity: 90~95% R.H.

Storage time: 96 hours.

After this test the mouse shall be left in room temperature for 1 hour.

Judging Criteria : No functional defect should be found.

### 7.5 Heat Cycle Test

Temperature:  $-15\pm2^{\circ}\text{C}$  for 1 hour and then  $60\pm2^{\circ}\text{C}$  for 1 hour

Storage time: 5 cycles.

After this test the mouse shall be left in room temperature for 1 hour.

Judging Criteria : No functional defect should be found.


## 8 Agency Certifications

FCC CLASS B PART15

CE

## 9 Schematic

Transmitter:

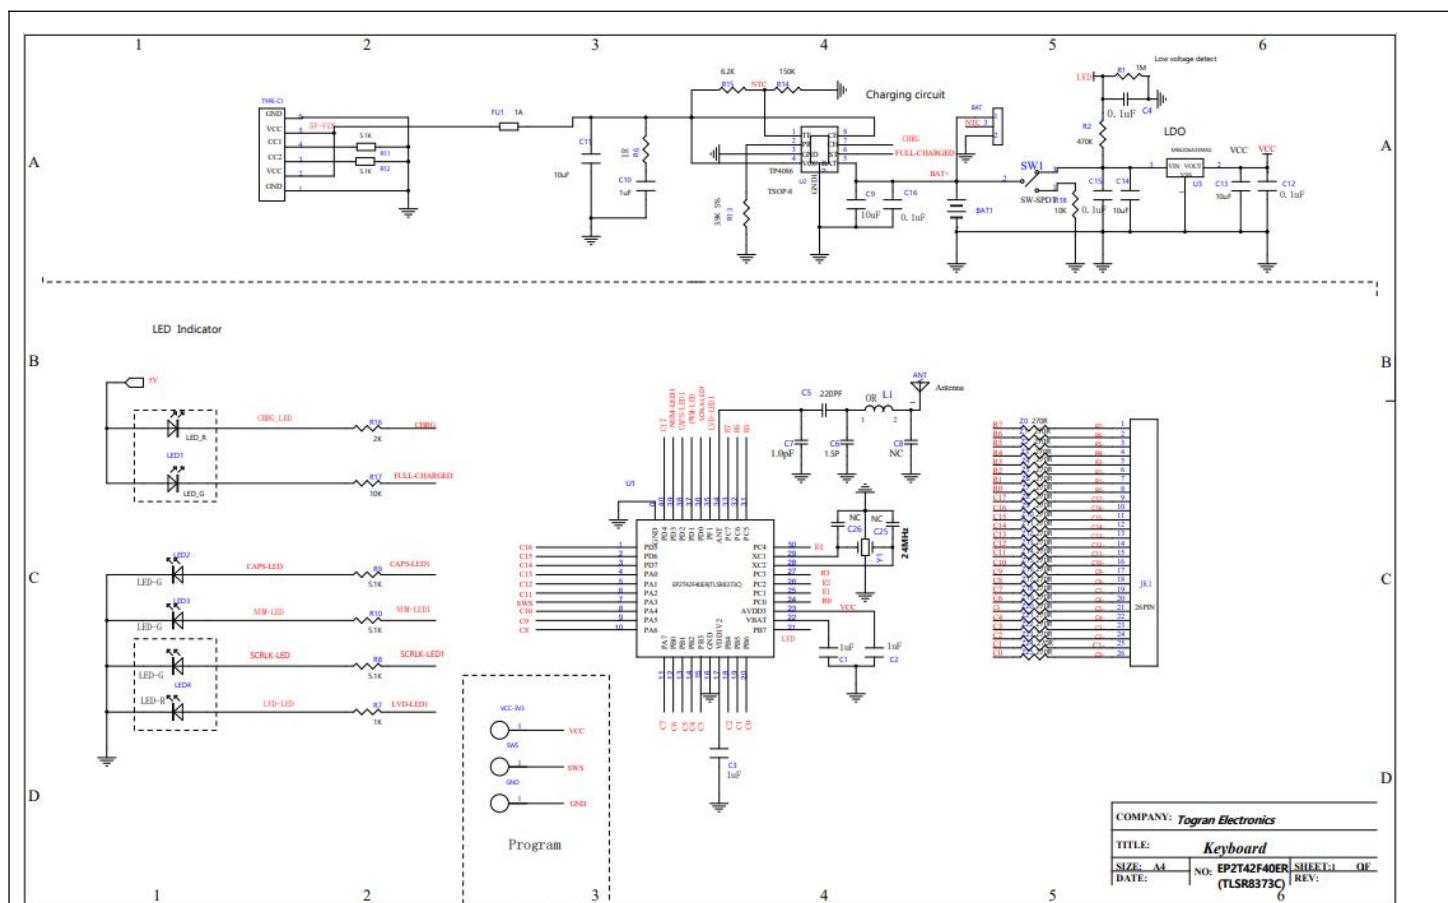

## 10 Application Matrix.

	R0 P20	R1 P21	R2 P22	R3 P23	R4 P24	R5 P25	R6 P26	R7 P27
C0 P15	Z	1(!)	POWER	Prev Track	Alt-R <del>WIN-R</del>	Next Track	Sleep	WAKE UP
C1 P35	C	3(#)	€	Volume+	Volume-	WWW refresh	Ctrl-R	WWW favorite
C2 P36	V	5%	F5 (PreTrack)	WWW back	Alt-L	WWW Forward	WWW STOP	WWW search
C3 P37	ENTER	6^	F6 (NextTrack)			Shift-L	¥	G
C4 P00	F	F3 (VOL+)	PAUSE	M			Ctrl-L	MAIL
C5 P01	K56	4(\$)	SPACE	Win-L	WWW Home	131	132	133 ALT_R
C6	K14	F4	A	Calculator		K150	K151	WIN_R

P02		(MUTE)						
C7 P03	F7 (Play/Pause)	~ (^)	S	Y	P	7 (&)	B	
C8 P11	F8 (Stop)	—	Tab	U	[ {	8*	H	N
C9 P14	F9 (www Web)	= +	D	I	] }	9 (	“ ”	FN
C10 P12	F11 (My Computer)	F1 ( Media )	W	PRINT	HOME	DEL	Insert	. (>)
C11 P10	F12 (Favorite)	L	E	SCROLL LOCK	END	Page Up	Page Down	/ ?
C12 P13	F10 (Mail)	F2 (VOL-)	Q	0	\	0 ()	K42	, (<)
C13 P07	APP	; :	↑	NUM LOCK	7 (K)	4 (K)	1 (K)	K45
C14 P06	ESC	K	←	/ (K)	8 (K)	5 (K)	2 (K)	0 (K)
C15 P05	R	J	↓	* (K)	9 (K)	6 (K)	3 (K)	. (K)
C16 P04	T	Back Spack	→	_ (K)	+ (K)	K107	Enter (K)	CAPS LOCK
C17 P16	X	2 (@)	MyPC	Play/ Pause	Media	Shift-R	Media Mute	Media Stop

充电

BT1

CapsLOCK/B

T2 /BT3

FN LOCK/ 低电提醒

## 11 Functional Specification.




### 1. LED Indicator:

Item	Indicator	Icon	Color	Definition
1	Charging		Red	Red always on when charging.
			Green	Green always on when fully charged.
2	BT1		Green	Green indicator is on.
3	Caps lock/BT2		Green	Green indicator is on.
4	FN lock/BT3		Green	Green indicator is on.
	LVD		Flash red	The indicator flashes red slowly when the battery is low.

## 2. Multimedia function

FN+ESC:FN Lock, FN+F1: Screen brightness decrease, FN+F2: Screen brightness increase, FN+F3: display all active windows, FN+F4:copy, FN+F5:paste, FN+F6: Pre track, FN+F7: Play/Pause, FN+F8: Next track, FN+F9: mute, FN+F10: volume-, FN+F11: volume+, FN+F12: Pop-up Keyboard, F13:Force out, F14: Print, F15: save

## 3. Hotkey

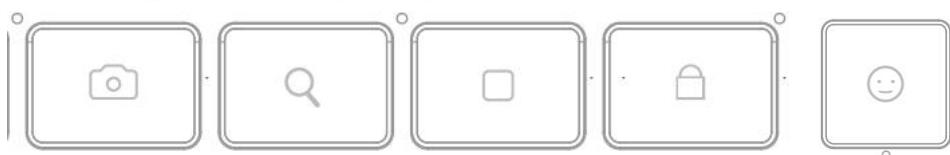

lock screen

Search

Windows home

FN lock

Emote

## 4. Bluetooth forced pairing instructions

Press and hold FN+BT1/ BT2/ BT3 for more than 3 seconds to enter the pairing state,, and the green LED flashes quickly (the pairing time is 2minutes) ,Search BTSLKEYCB, click to enter the pairing , LED will be on for 2 seconds and then turn off , means that BLE pairing is successful.

Dongguan Togran Electronics Technology CO.,Ltd	DN: QW172	Version: A0
File Name: Scissor Keyboard	Page	8 / 8

#### FCC STATEMENT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: This device may not cause harmful interference, and This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

#### RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.