


219mm

印刷颜色
Color Printing:

IQTM DIGITAL LOCK BOX

USER SET UP GUIDE

robern.

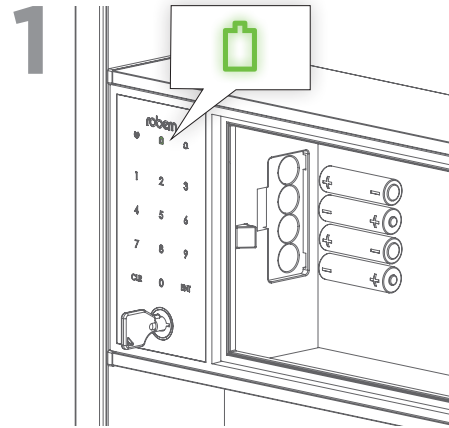

1 Locate the key, unlock the digital lock box and install the AA batteries (NOT INCLUDED). Check that the battery status LED is **green** and steady before proceeding.



2 Download the Robern IQ mobile app from robern.com/IQ by clicking on App Store or Google Play and following the step-by-step instructions in the app.



Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App store is a service mark of Apple Inc., registered in the U.S. and other countries. Google Play and the Google Play logo are trademarks of Google Inc.

If you have any questions, please visit robern.com/IQ or call Customer Service at +1 (800) 877-2376

FRONT

3

Change the default access code of the digital lock box. To set your secure access code, follow these steps:

- 1 With the digital lock box door open, press and hold the ENT button until the digital lock box beeps. 
- 2 Enter any 4 to 8 digit access code, then press ENT. The digital lock box will beep, and the status LED will flash **yellow 3 times** and then stay lit.



- 3 Re-enter the same combination and then press ENT to confirm the new access code. If the combination is accepted, the digital lock box will beep and the status LED will flash **green 3 times**, otherwise, the LED will flash **red 3 times**, and you must close the digital lock box door and repeat the process.



robern.

If you have any questions, please visit robern.com/IQ or call Customer Service at +1 (800) 877-2376

4

In tamper detection mode, the digital lock box will alarm when it has been jostled or shook. If connected to Wi-Fi, an alert will be received via the smartphone app. Follow these instructions to enable tamper detection.

With the digital lock box door open, press the "0" key for 5 seconds until the digital lock box beeps. Tamper detection mode can be turned on or off by pressing and holding the "0" key for 5 seconds. 

DEFAULT ACCESS CODE



TWO WAYS TO USE YOUR LOCK BOX:

CONNECTED MODE

Use your smartphone app to receive alerts, reminders, reports, and to unlock your digital lock box remotely. If Wi-Fi signal is lost or out of range, the digital lock box will securely default to offline mode.

OFFLINE MODE

Offline mode means that you are not Wi-Fi connected. In this mode, the app will not connect to the digital lock box and no data from the usage of the digital lock box will be recorded in the app. The digital lock box can still be opened via secure access code or physical lock and key when in offline mode. If tampered with, the digital lock box light and alarm will still operate.

BATTERIES REQUIRED

Four (4) AA Alkaline batteries are required to operate the digital lock box.

- DO NOT use rechargeable batteries
- DO NOT mix old and new batteries
- DO NOT mix alkaline and standard carbon-zinc batteries

FCC STATEMENT

RF Exposure Statement

This equipment complies with the FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body. This equipment meets the exemption from the routine evaluation limits in section 2.5 of RSS-102. It should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.

FCC Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Industry Canada Statement

This device contains licence-exempt transmitter(s) that comply with Innovation, Science and Economic Development Canada's licence exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

DÉCLARATION FCC

Déclaration d'exposition aux RF

Cet équipement est conforme à l'exemption des limites d'évaluation habituelle de la section 2.5 de la norme RSS-102. Il doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et toute partie de votre corps.

Avertissement FCC

Cet appareil est conforme à la partie 15 des règles de la FCC. Son fonctionnement est soumis aux deux conditions suivantes:

(1) Cet appareil ne doit pas provoquer d'interférences nuisibles, et (2) Cet appareil doit accepter toute interférence reçue, y compris les interférences susceptibles de provoquer un fonctionnement indésirable.

REMARQUE 1: Cet équipement a été testé et déclaré conforme aux limites d'un appareil numérique de classe B, conformément à la partie 15 des règles de la FCC. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans une installation résidentielle. Cet équipement génère des utilisations et peut émettre de l'énergie de radiofréquence et, s'il n'est pas installé et utilisé conformément aux instructions, peut provoquer des interférences nuisibles aux communications radio. Cependant, il n'y a aucune garantie qu'aucune interférence ne se produira dans une installation particulière. (continuer)

DECLARACIÓN FCC (A CONTINUÉ)

REMARQUE 1: (A continué) Si cet équipement provoque des interférences nuisibles à la réception radio ou télévision, ce qui peut être déterminé en éteignant puis en rallumant l'équipement, l'utilisateur est encouragé à essayer de corriger les interférences par une ou plusieurs des mesures suivantes:

- Réorientez ou déplacez l'antenne de réception.
- Augmentez la distance entre l'équipement et le récepteur.
- Connectez l'équipement à une prise sur un circuit différent de celui auquel le récepteur est connecté.
- Consulter le revendeur ou un technicien radio / TV expérimenté pour obtenir de l'aide.

REMARQUE 2: Tout changement ou modification de cet appareil non expressément approuvé par la partie responsable de la conformité peut annuler le droit de l'utilisateur à utiliser l'équipement.

Avertissement IC

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

DECLARACIÓN DE LA FCC

Declaración de exposición a RF

Este equipo cumple con la exención de los límites de evaluación habituales en la sección 2.5 del estándar RSS-102. Debe instalarse y usarse a una distancia mínima de 20 cm entre el radiador y cualquier parte de su cuerpo.

Advertencia de la FCC

Este dispositivo cumple con la parte 15 de las Reglas de la FCC. Su funcionamiento está sujeto a las siguientes dos condiciones:

- (1) Este dispositivo no puede causar interferencia dañina, y
- (2) Este dispositivo debe aceptar cualquier interferencia recibida, incluida la interferencia que pueda causar un funcionamiento no deseado.

NOTA 1: Este equipo ha sido probado y cumple con los límites para un dispositivo digital de Clase B, de conformidad con la Parte 15 de las Reglas de la FCC. Estos límites están diseñados para proporcionar una protección razonable contra interferencias perjudiciales en una instalación residencial. Este equipo genera usos y puede emitir energía de radiofrecuencia y, si no se instala y utiliza de acuerdo con las instrucciones, puede causar interferencias perjudiciales en las comunicaciones de radio. Sin embargo, no hay garantía de que no se produzcan interferencias en una instalación en particular. Si este equipo causa interferencias perjudiciales en la recepción de radio o televisión, lo que puede determinarse apagando el equipo y volviéndolo a encender, se recomienda al usuario que intente corregir la interferencia mediante una o más de las siguientes medidas:

- Reorientar o reubicar la antena receptora.
- Aumente la distancia entre el equipo y el receptor.
- Conecte el equipo a una toma de corriente en un circuito diferente al que está conectado el receptor.
- Consulte al distribuidor o a un técnico experimentado de radio / TV para obtener ayuda.

NOTA 2: Cualquier cambio o modificación a este dispositivo que no esté expresamente aprobado por la parte responsable del cumplimiento puede anular el derecho del usuario a usar el equipo.

Advertencia IC

El transceptor exento de licencia contenido en este dispositivo cumple con las NRC de Innovación, Ciencia y Desarrollo Económico de Canadá aplicables a los dispositivos de radio exentos de licencia. La operación está autorizada bajo las siguientes dos condiciones:

1. El dispositivo no puede causar interferencia
2. El dispositivo debe aceptar cualquier interferencia de radio recibida, incluso si la interferencia puede poner en peligro su funcionamiento.