



FCC RF Test Report

APPLICANT : Meta Platforms Technologies, LLC
EQUIPMENT : SMART GLASSES
MODEL NAME : JN3
FCC ID : 2AG0Z-JN3
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Mar. 09, 2025 ~ Mar. 26, 2025

We, Sporton International Inc.(ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	8
1.6 Testing Location	8
1.7 Test Software.....	8
1.8 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	12
2.3 Connection Diagram of Test System.....	14
2.4 Support Unit used in test configuration and system	15
2.5 EUT Operation Test Setup	15
2.6 Measurement Results Explanation Example.....	15
3 TEST RESULT	16
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	16
3.2 Maximum Conducted Output Power Measurement	22
3.3 Power Spectral Density Measurement	24
3.4 Unwanted Emissions Measurement	28
3.5 AC Conducted Emission Measurement.....	33
3.6 Antenna Requirements	35
4 LIST OF MEASURING EQUIPMENT	36
5 MEASUREMENT UNCERTAINTY	37
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR522809D	Rev. 01	Initial issue of report	May 26, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.66 dB at 5126.00 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 18.50 dB at 0.62 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Meta Platforms Technologies, LLC
1 Hacker Way, Menlo Park, CA 94025, USA

1.2 Manufacturer

Meta Platforms Technologies, LLC
1 Hacker Way, Menlo Park, CA 94025, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	SMART GLASSES
Model Name	JN3
FCC ID	2AGOZ-JN3
SN Code	Conducted: 2Y0YG04H220004 Conduction: 2Y0YB6GH1F000P Radiation: 2Y0YB6GH1F0009
HW Version	EVT2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 15.72 dBm / 0.0373 W 802.11n HT20 : 16.22 dBm / 0.0419 W 802.11n HT40 : 15.36 dBm / 0.0344 W 802.11ac VHT20: 16.19 dBm / 0.0416 W 802.11ac VHT40: 15.35 dBm / 0.0343 W 802.11ac VHT80: 15.90 dBm / 0.0389 W 802.11ac VHT160: 16.35 dBm / 0.0432 W 802.11ax HE20: 16.28 dBm / 0.0425 W 802.11ax HE40: 15.39 dBm / 0.0346 W 802.11ax HE80: 15.95 dBm / 0.0394 W 802.11ax HE160: 16.40 dBm / 0.0437 W <5260 MHz ~ 5320 MHz> 802.11a : 16.62 dBm / 0.0459 W 802.11n HT20 : 17.06 dBm / 0.0508 W 802.11n HT40 : 16.72 dBm / 0.0470 W 802.11ac VHT20: 17.01 dBm / 0.0502 W 802.11ac VHT40: 16.68 dBm / 0.0466 W 802.11ac VHT80: 16.15 dBm / 0.0412 W 802.11ax HE20: 17.10 dBm / 0.0513 W 802.11ax HE40: 16.90 dBm / 0.0490 W 802.11ax HE80: 16.23 dBm / 0.0420 W <5500 MHz ~ 5720 MHz > 802.11a : 16.54 dBm / 0.0451 W 802.11n HT20 : 16.24 dBm / 0.0421 W 802.11n HT40 : 16.29 dBm / 0.0426 W 802.11ac VHT20: 16.20 dBm / 0.0417 W 802.11ac VHT40: 16.26 dBm / 0.0423 W 802.11ac VHT80: 16.07 dBm / 0.0405 W 802.11ac VHT160: 14.70 dBm / 0.0295 W 802.11ax HE20: 16.27 dBm / 0.0424 W 802.11ax HE40: 16.72 dBm / 0.0470 W 802.11ax HE80: 16.09 dBm / 0.0406 W 802.11ax HE160: 14.72 dBm / 0.0296 W <5745 MHz ~ 5825 MHz> 802.11a : 16.35 dBm / 0.0432 W 802.11n HT20 : 16.30 dBm / 0.0427 W 802.11n HT40 : 16.28 dBm / 0.0425 W 802.11ac VHT20: 16.31 dBm / 0.0428 W 802.11ac VHT40: 16.26 dBm / 0.0423 W 802.11ac VHT80: 16.06 dBm / 0.0404 W 802.11ax HE20: 16.33 dBm / 0.0430 W 802.11ax HE40: 16.31 dBm / 0.0428 W 802.11ax HE80: 16.13 dBm / 0.0410 W

99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 16.93 MHz 802.11n HT20 : 18.05 MHz 802.11n HT40 : 36.75 MHz 802.11ac VHT80 : 76.62 MHz 802.11ac VHT160 : 156.46 MHz 802.11ax HE20: 19.15 MHz 802.11ax HE40: 38.10 MHz 802.11ax HE80: 77.91 MHz 802.11ax HE160: 158.02 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.94 MHz 802.11n HT20 : 18.05 MHz 802.11n HT40 : 36.80 MHz 802.11ac VHT80 : 76.58 MHz 802.11ax HE20: 19.16 MHz 802.11ax HE40: 38.07 MHz 802.11ax HE80: 77.92 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.03 MHz 802.11n HT20 : 18.06 MHz 802.11n HT40 : 36.80 MHz 802.11ac VHT80 : 76.62 MHz 802.11ac VHT160 : 156.63 MHz 802.11ax HE20: 19.15 MHz 802.11ax HE40: 38.07 MHz 802.11ax HE80: 77.94 MHz 802.11ax HE160: 157.78 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.20 MHz 802.11n HT40 : 36.78 MHz 802.11ac VHT20 : 18.07 MHz 802.11ac VHT80 : 76.68 MHz 802.11ax HE20: 19.13 MHz 802.11ax HE40: 38.07 MHz 802.11ax HE80: 77.85 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> Monopole PCB Antenna type with gain 3.52 dBi <5260 MHz ~ 5320 MHz> Monopole PCB Antenna type with gain 3.55 dBi <5500 MHz ~ 5720 MHz> Monopole PCB Antenna type with gain 4.11 dBi <5745 MHz ~ 5825 MHz> Monopole PCB Antenna type with gain 3.60 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For 802.11n HT20 /ac VHT20 and 802.11n HT40 /ac VHT40 mode, the whole testing have assessed only 802.11n HT20/HT40 by referring to the higher output power.



2. 802.11ax support OFDMA full RU tone and partial RU tone.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ 03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210	50##	5250
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640
	-	-	114 ^{##}	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.
3. The above Frequency and Channel in "^{##}" are 160MHz bandwidth.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link (5G) + USB Cable ((Type C) + Adapter
Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable.	

RSE Co-location
Bluetooth LE(2 Mbps) CH39_TX + 802.11ax HE80 CH42



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-
Straddle		-	-	138	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		160M BW		160M BW	160M BW
M	Middle	50		114	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

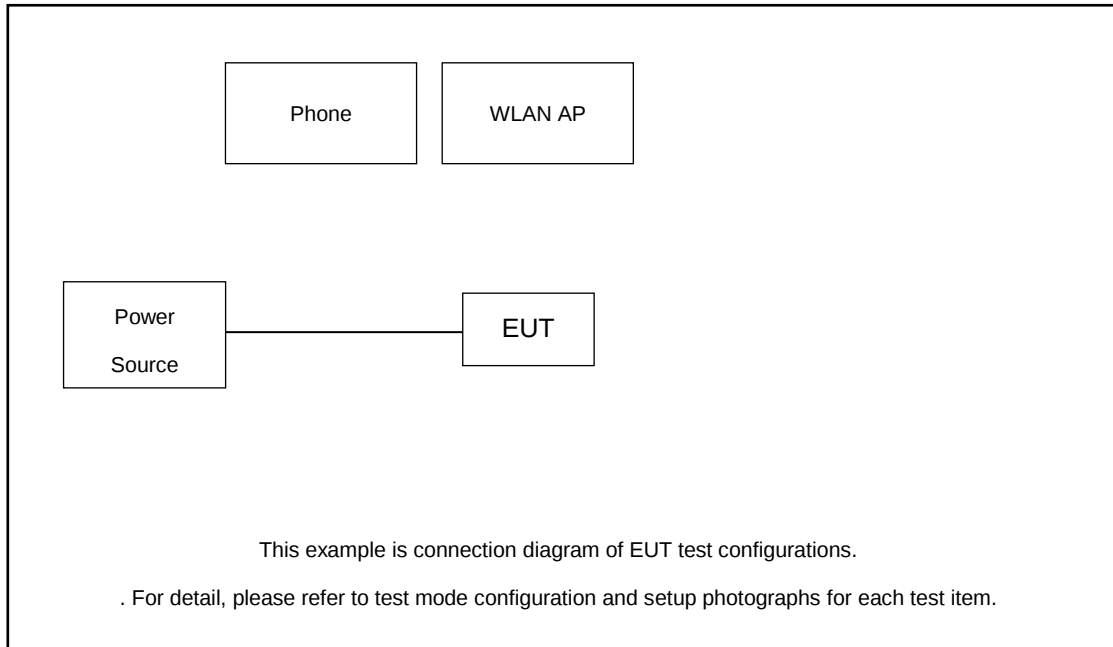

Radiated Emission:

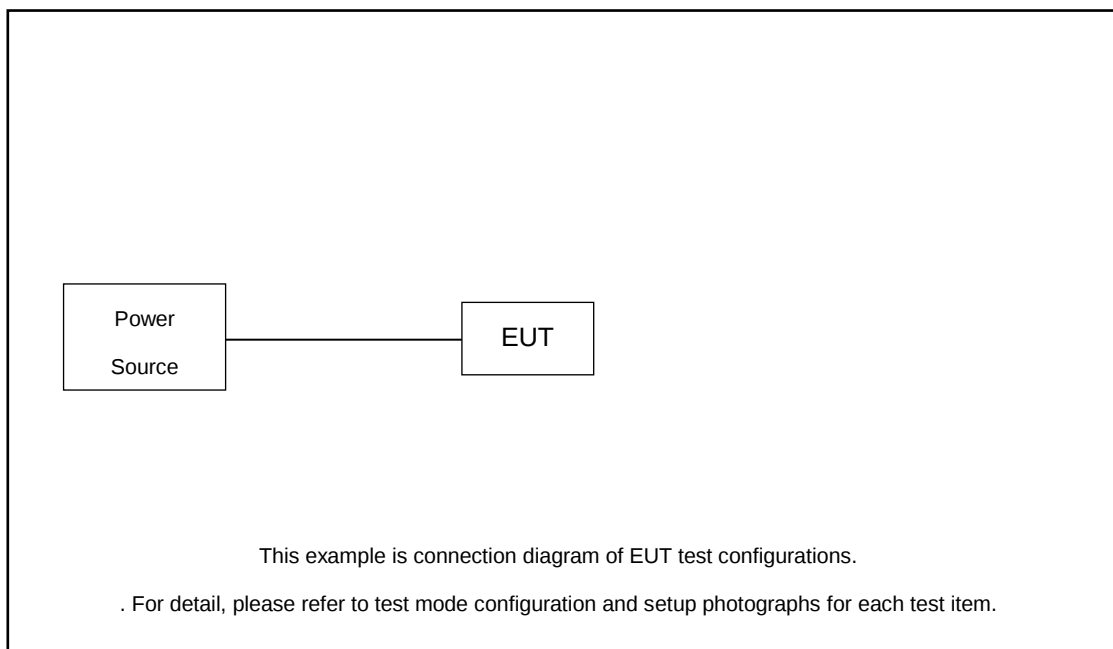

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
2.	Phone	Google	N/A	N/A	N/A	N/A
3.	USB Cable	NA	NA	NA	NA	NA
4.	Adapter	NA	NA	NA	NA	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.80 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.80 + 10 = 12.80 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 \times$ RBW. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100kHz. 2. Set the VBW $\geq 3 \times$ RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.



3.1.4 Test Setup


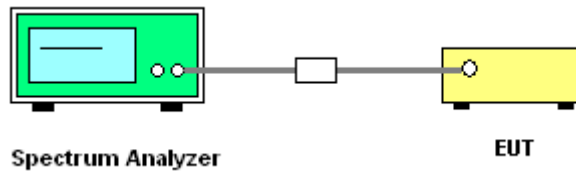




3.1.5 Test Result of 6dB Bandwidth



Please refer to Appendix A.

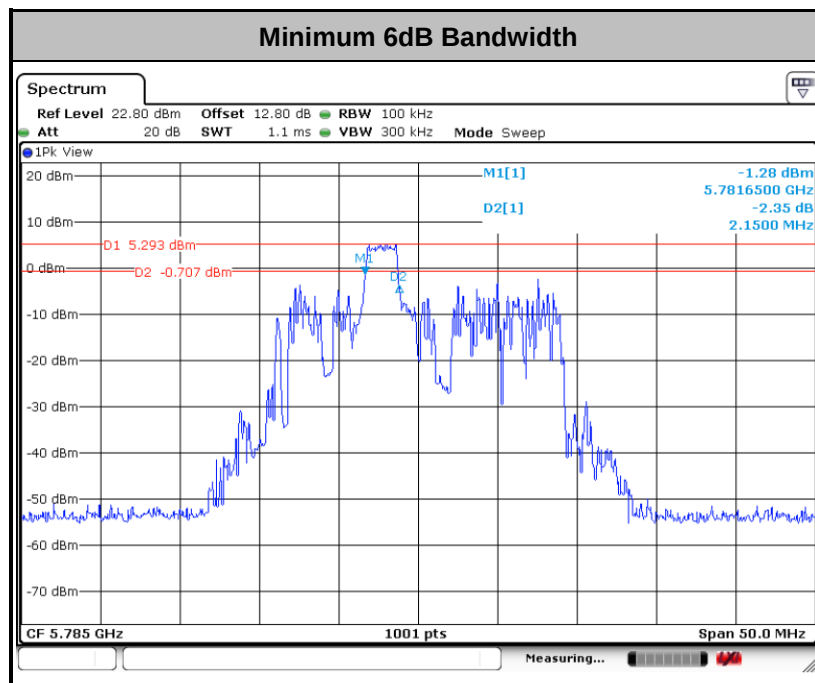

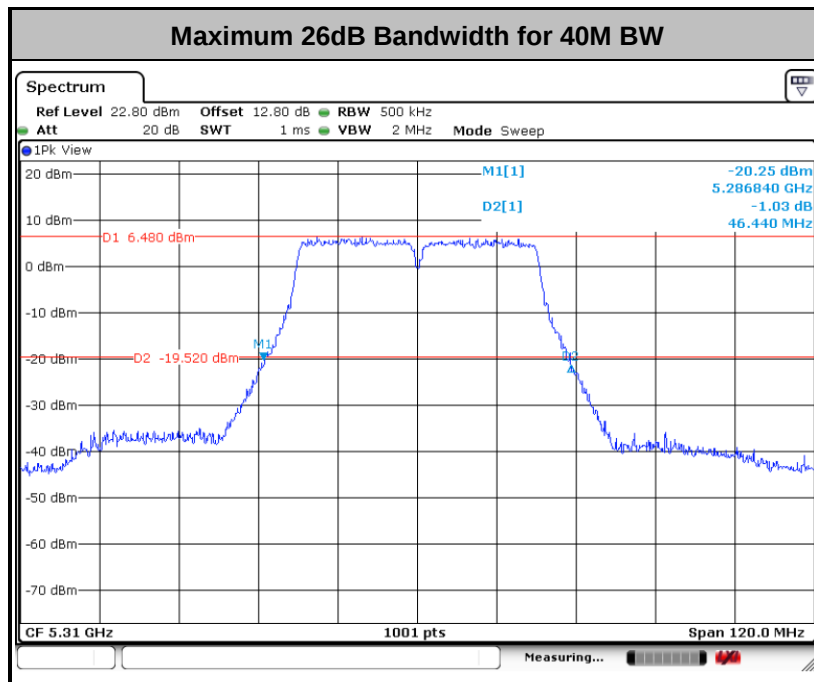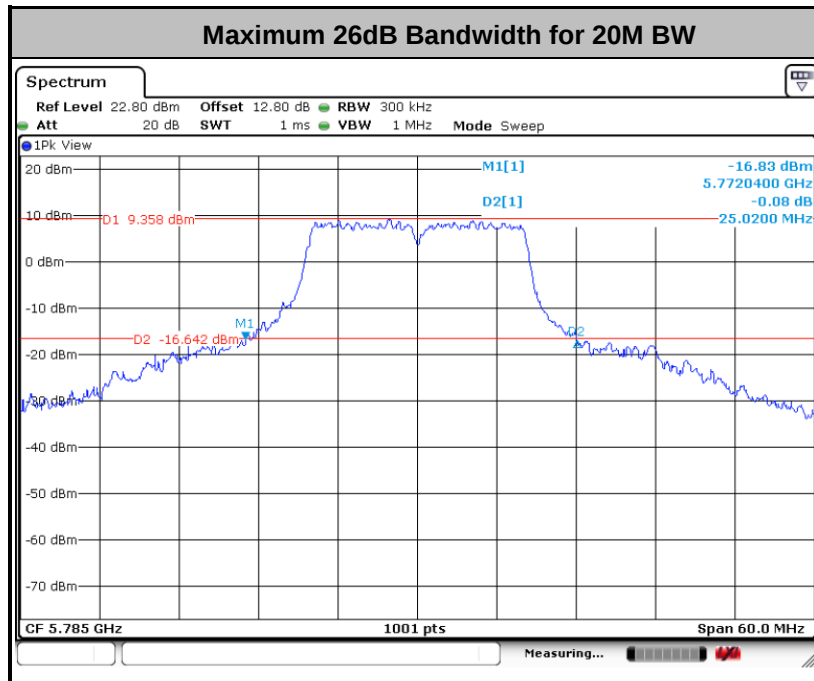

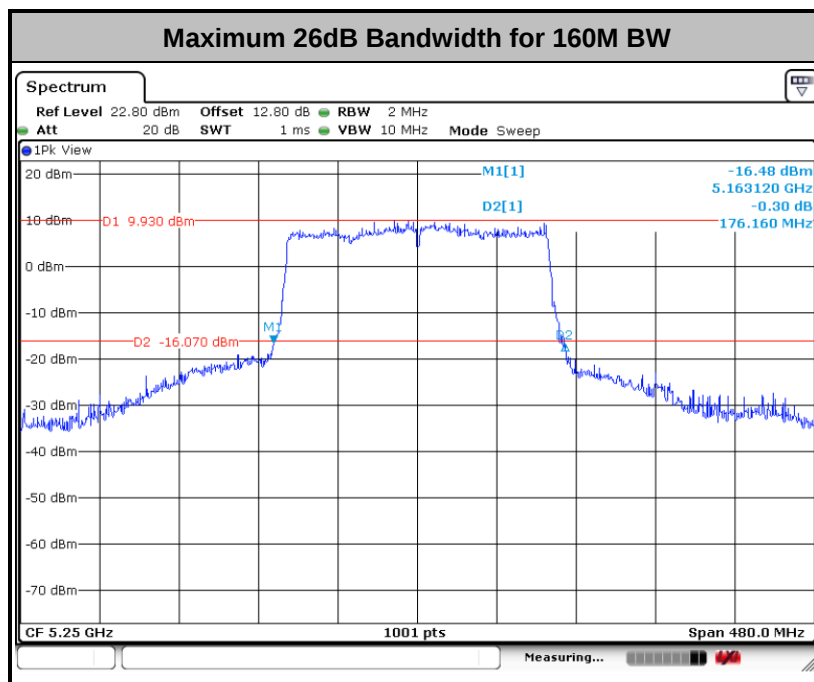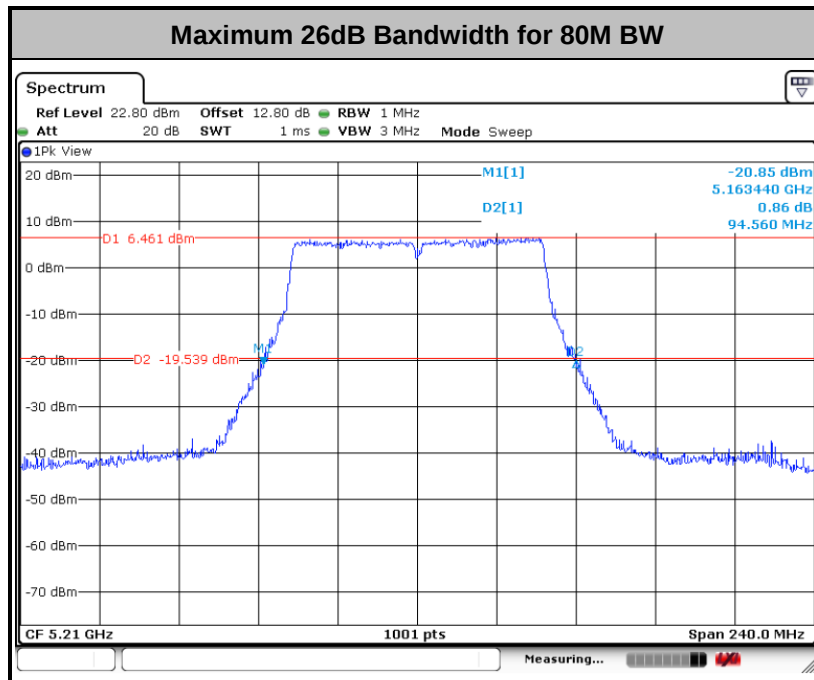

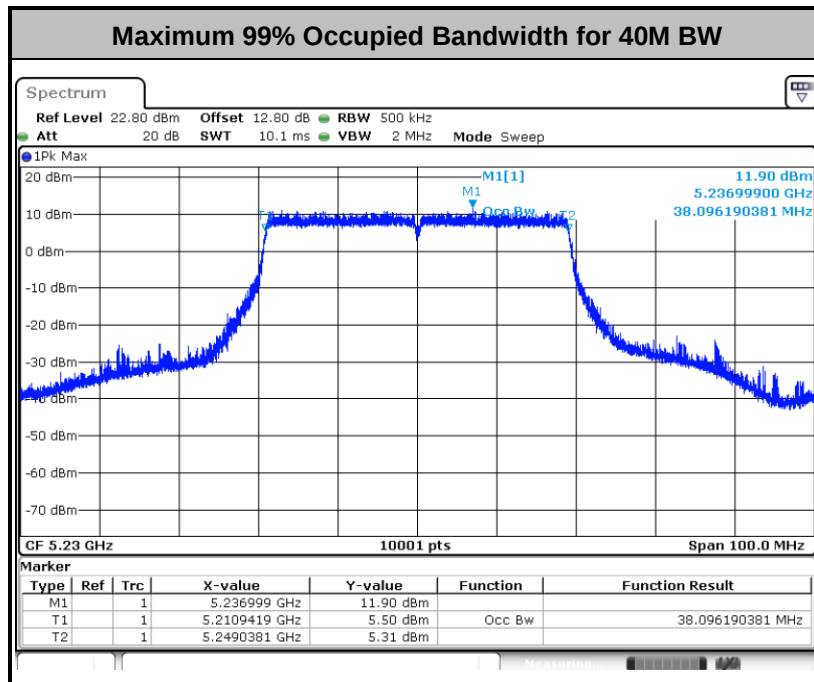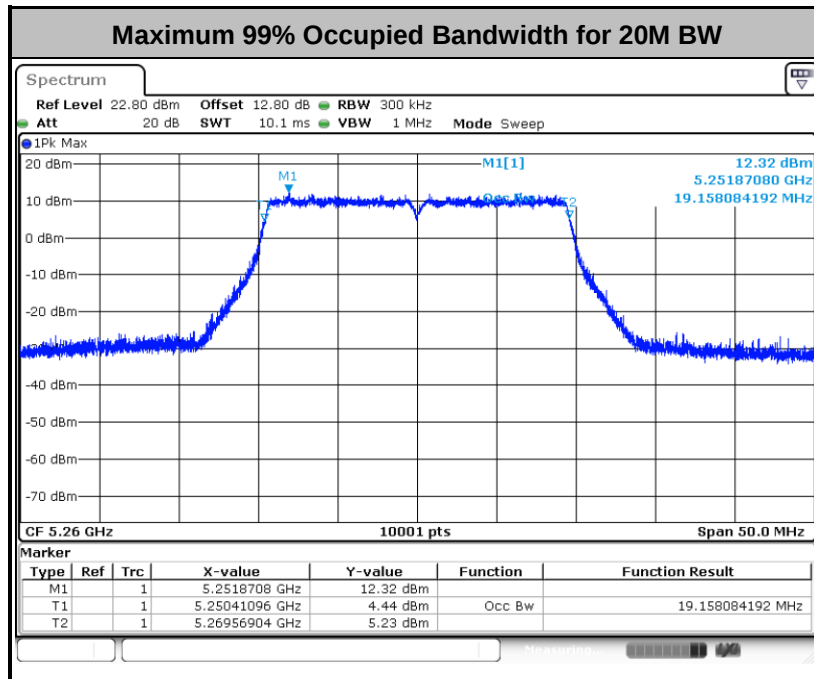

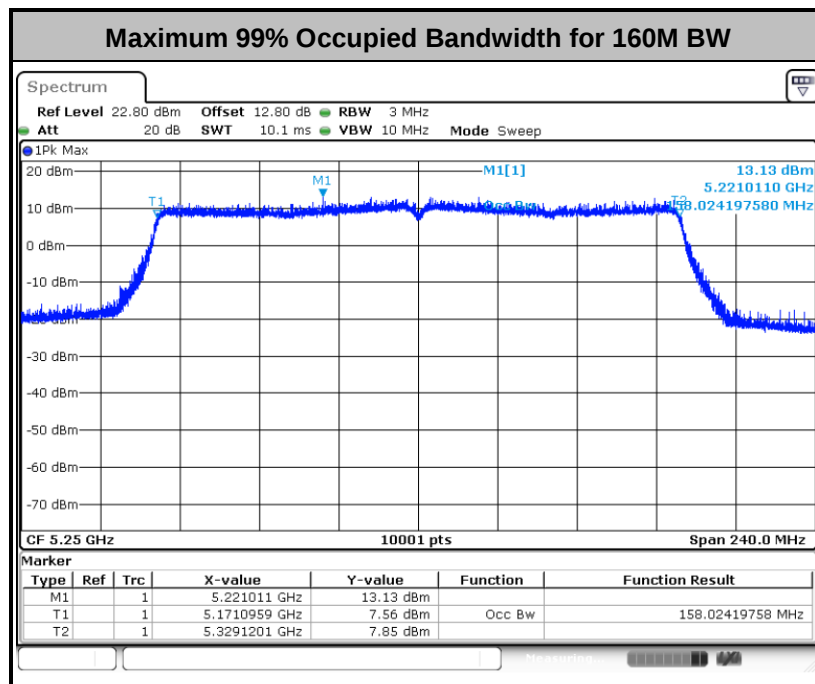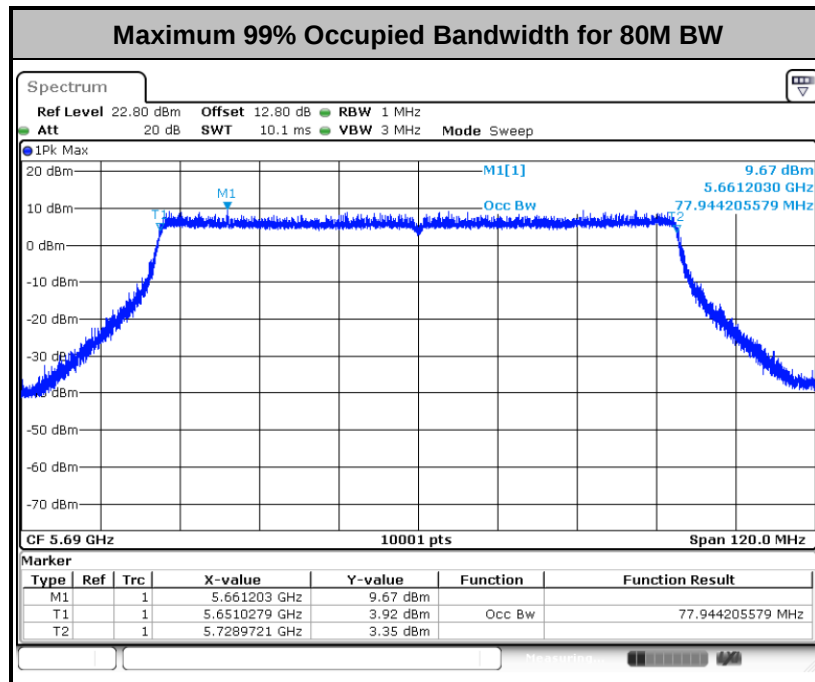

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

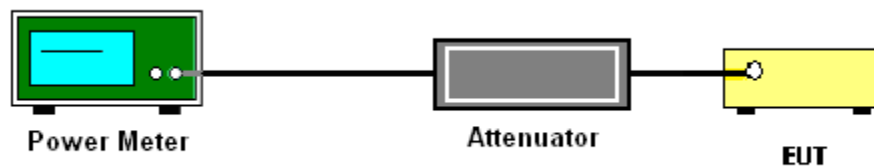

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

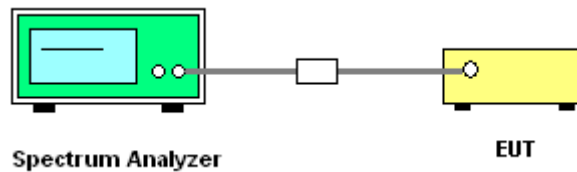

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.

For devices operating in the bands UNII-1/2A/2C

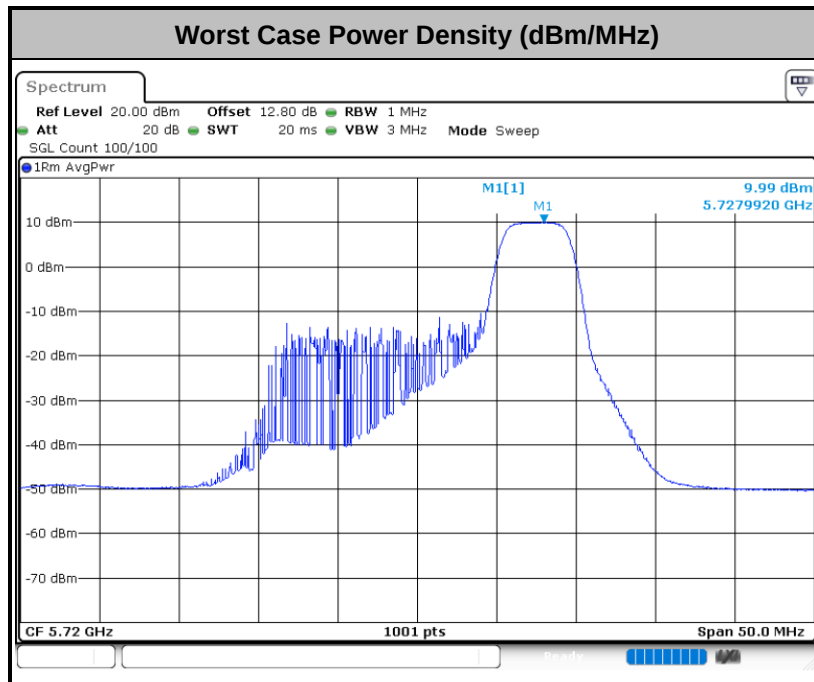

Note: Average Power Density (dB) = Measured value+ Duty Factor

For devices operating in the band UNII-3

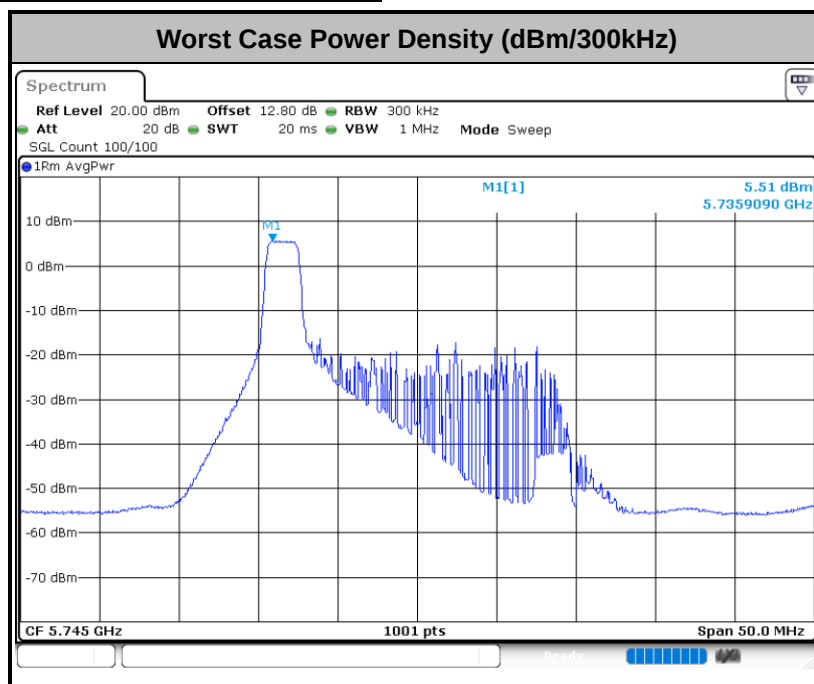

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

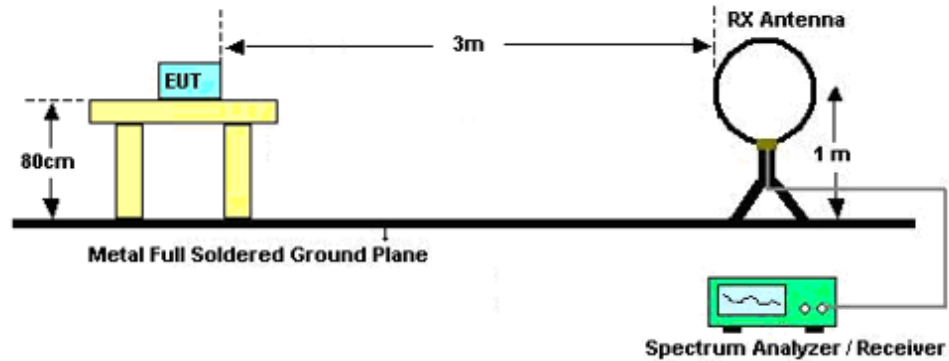

For radiated emissions from 30MHz to 1GHz

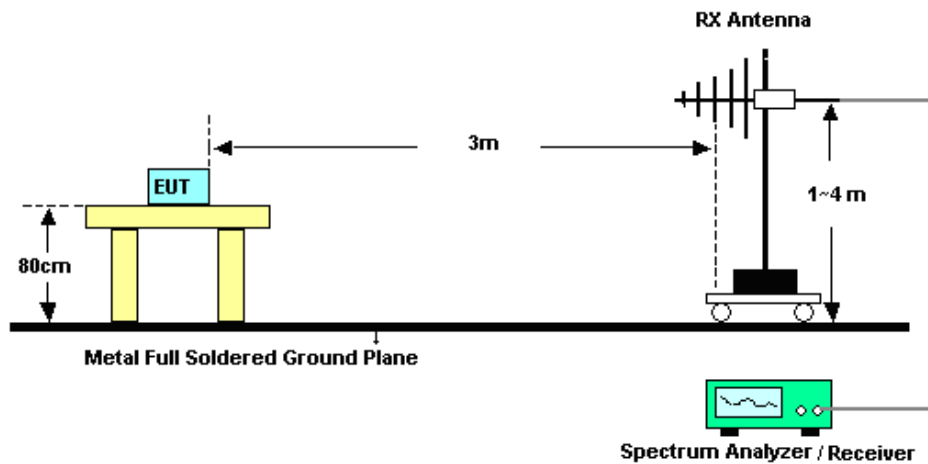

For radiated emissions above 1GHz

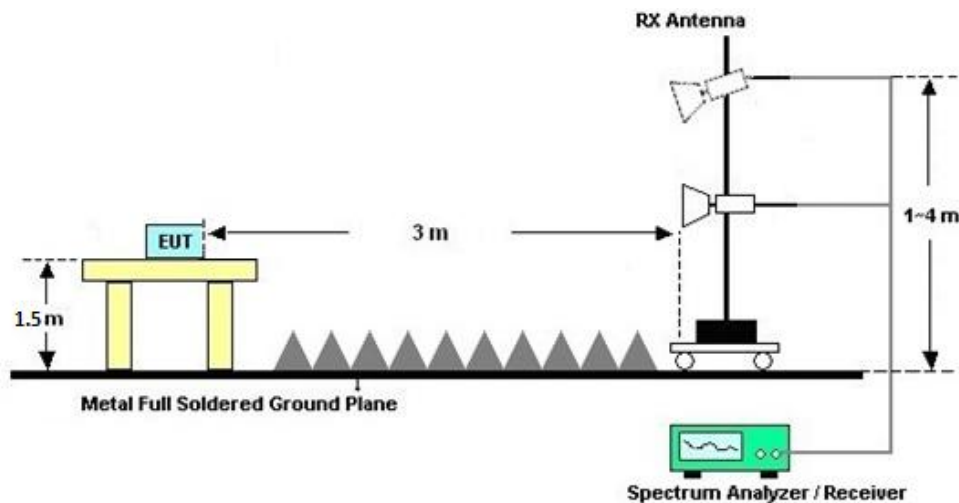



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

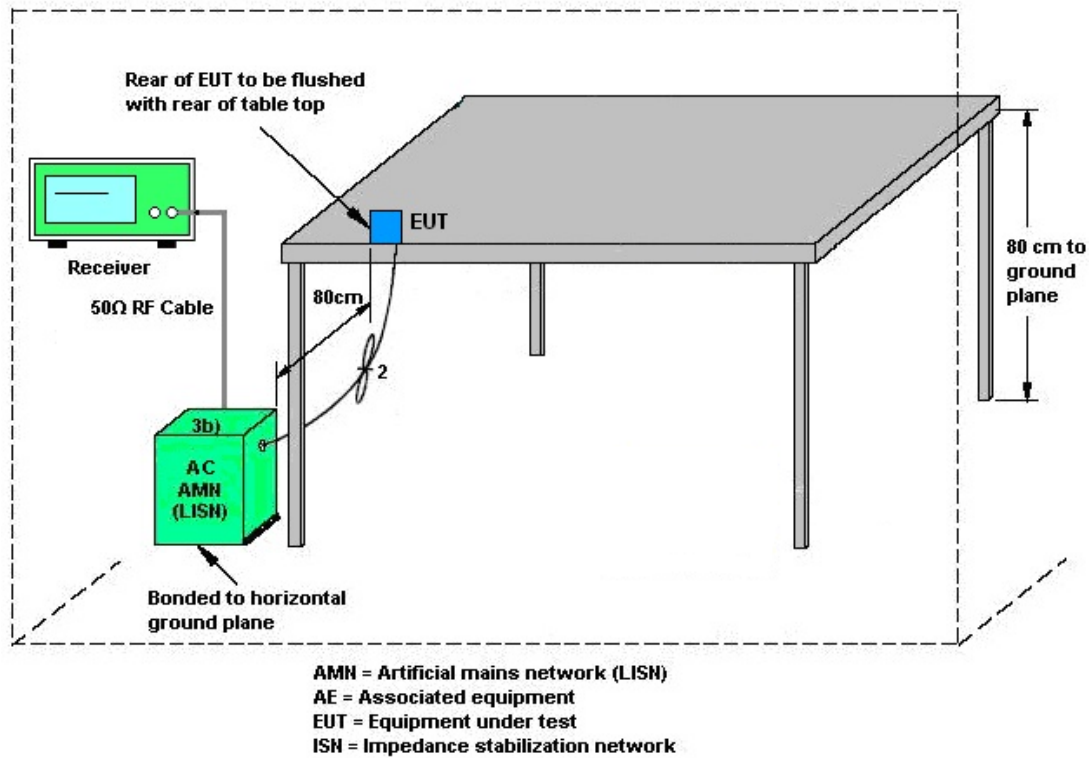

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2024	Mar. 12, 2026	Apr. 01, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Mar. 12, 2026	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.14,2024	Mar. 12, 2026	Oct. 13, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct.14,2024	Mar. 12, 2026	Oct. 13, 2025	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Mar. 26, 2026	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Mar. 26, 2026	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Mar. 26, 2026	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 02, 2024	Mar. 09, 2026~ Mar. 11, 2026	Apr. 01, 2025	Radiation (03CH03-SZ)
EXA Signal Analyzer	KEYSIGHT	N9010B	MY59071191	10KHz~44GHz	Apr. 02, 2024	Mar. 09, 2026~ Mar. 11, 2026	Apr. 01, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Mar. 09, 2026~ Mar. 11, 2026	Dec. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Mar. 09, 2026~ Mar. 11, 2026	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240107	1GHz~18GHz	Jul. 13, 2024	Mar. 09, 2026~ Mar. 11, 2026	Jul.12, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Mar. 09, 2026~ Mar. 11, 2026	Jul.02, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2024	Mar. 09, 2026~ Mar. 11, 2026	Apr. 02, 2025	Radiation (03CH03-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 02, 2024	Mar. 09, 2026~ Mar. 11, 2026	Apr. 01, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Mar. 09, 2026~ Mar. 11, 2026	Oct. 13, 2025	Radiation (03CH03-SZ)
HF Amplifier	Keysight	83017A	MY53270357	500MHz~26.5GHz	Apr. 02, 2024	Mar. 09, 2026~ Mar. 11, 2026	Apr. 01, 2025	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2024	Mar. 09, 2026~ Mar. 11, 2026	Oct. 17, 2025	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 09, 2026~ Mar. 11, 2026	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 09, 2026~ Mar. 11, 2026	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2025/3/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

<5180 MHz ~ 5240 MHz>													
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP	EIRP Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	36	Full	5180	0.00	15.36	23.98	3.52	18.88	21.00	Pass	15.25
11a	6Mbps	1	44	Full	5220	0.00	15.68	23.98	3.52	19.20	21.00	Pass	15.25
11a	6Mbps	1	48	Full	5240	0.00	15.72	23.98	3.52	19.24	21.00	Pass	15.25
HT20	MCS0	1	36	Full	5180	0.00	15.40	23.98	3.52	18.92	21.00	Pass	15.25
HT20	MCS0	1	44	Full	5220	0.00	16.22	23.98	3.52	19.74	21.00	Pass	15.25
HT20	MCS0	1	48	Full	5240	0.00	16.03	23.98	3.52	19.55	21.00	Pass	15.25
HT40	MCS0	1	38	Full	5190	0.00	15.36	23.98	3.52	18.88	21.00	Pass	15.25
HT40	MCS0	1	46	Full	5230	0.00	15.29	23.98	3.52	18.81	21.00	Pass	15.25
VHT20	MCS0	1	36	Full	5180	0.00	15.38	23.98	3.52	18.90	21.00	Pass	15.25
VHT20	MCS0	1	44	Full	5220	0.00	16.19	23.98	3.52	19.71	21.00	Pass	15.25
VHT20	MCS0	1	48	Full	5240	0.00	15.97	23.98	3.52	19.49	21.00	Pass	15.25
VHT40	MCS0	1	38	Full	5190	0.00	15.35	23.98	3.52	18.87	21.00	Pass	15.25
VHT40	MCS0	1	46	Full	5230	0.00	15.27	23.98	3.52	18.79	21.00	Pass	15.25
VHT80	MCS0	1	42	Full	5210	0.00	15.90	23.98	3.52	19.42	21.00	Pass	15.25
VHT160	MCS0	1	50	Full	5250	0.00	16.35	23.98	3.52	19.87	21.00	Pass	16
HE20	MCS0	1	36	Full	5180	0.00	15.42	23.98	3.52	18.94	21.00	Pass	15.25
				26/0		0.00	6.53	23.98	3.52	10.05	21.00	Pass	6.5
				52/37		0.00	10.15	23.98	3.52	13.67	21.00	Pass	9.5
				106/53		0.00	13.33	23.98	3.52	16.85	21.00	Pass	12.5
			44	Full	5220	0.00	16.28	23.98	3.52	19.80	21.00	Pass	15.25
				26/4		0.00	6.69	23.98	3.52	10.21	21.00	Pass	6.5
				52/37		0.00	10.21	23.98	3.52	13.73	21.00	Pass	9.5
				106/53		0.00	13.36	23.98	3.52	16.88	21.00	Pass	12.5
			48	Full	5240	0.00	16.10	23.98	3.52	19.62	21.00	Pass	15.25
				26/8		0.00	6.99	23.98	3.52	10.51	21.00	Pass	6.5
				52/40		0.00	10.46	23.98	3.52	13.98	21.00	Pass	9.5
				106/54		0.00	13.52	23.98	3.52	17.04	21.00	Pass	12.5
HE40	MCS0	1	38	Full	5190	0.00	15.39	23.98	3.52	18.91	21.00	Pass	15.25
				242/61		0.00	15.20	23.98	3.52	18.72	21.00	Pass	15
			46	Full	5230	0.00	15.37	23.98	3.52	18.89	21.00	Pass	15.25
				242/62		0.00	15.24	23.98	3.52	18.76	21.00	Pass	15
HE80	MCS0	1	42	Full	5210	0.00	15.95	23.98	3.52	19.47	21.00	Pass	15.25
				484/65		0.00	15.30	23.98	3.52	18.82	21.00	Pass	15
HE160	MCS0	1	50	Full	5250	0.00	16.40	23.98	3.52	19.92	21.00	Pass	16
				996/67		0.00	14.56	23.98	3.52	18.08	21.00	Pass	14.5

TEST RESULTS DATA
Average Power Table

<5260 MHz ~ 5320 MHz>												
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	52	Full	5260	0.00	16.62	23.98	3.55	26.99	Pass	16
11a	6Mbps	1	60	Full	5300	0.00	16.43	23.98	3.55	26.99	Pass	16
11a	6Mbps	1	64	Full	5320	0.00	16.46	23.98	3.55	26.99	Pass	16
HT20	MCS0	1	52	Full	5260	0.00	17.06	23.98	3.55	26.99	Pass	16
HT20	MCS0	1	60	Full	5300	0.00	16.69	23.98	3.55	26.99	Pass	16
HT20	MCS0	1	64	Full	5320	0.00	16.79	23.98	3.55	26.99	Pass	16
HT40	MCS0	1	54	Full	5270	0.00	16.72	23.98	3.55	26.99	Pass	16
HT40	MCS0	1	62	Full	5310	0.00	16.62	23.98	3.55	26.99	Pass	16
VHT20	MCS0	1	52	Full	5260	0.00	17.01	23.98	3.55	26.99	Pass	16
VHT20	MCS0	1	60	Full	5300	0.00	16.64	23.98	3.55	26.99	Pass	16
VHT20	MCS0	1	64	Full	5320	0.00	16.76	23.98	3.55	26.99	Pass	16
VHT40	MCS0	1	54	Full	5270	0.00	16.68	23.98	3.55	26.99	Pass	16
VHT40	MCS0	1	62	Full	5310	0.00	16.57	23.98	3.55	26.99	Pass	16
VHT80	MCS0	1	58	Full	5290	0.00	16.15	23.98	3.55	26.99	Pass	16
HE20	MCS0	1	52	Full	5260	0.00	17.10	23.98	3.55	26.99	Pass	16
				26/0		0.00	12.02	23.98	3.55	26.99	Pass	11
				52/37		0.00	15.06	23.98	3.55	26.99	Pass	14
				106/53		0.00	16.12	23.98	3.55	26.99	Pass	15
HE20	MCS0	1	60	Full	5300	0.00	16.75	23.98	3.55	26.99	Pass	16
				26/4		0.00	12.01	23.98	3.55	26.99	Pass	11
				52/37		0.00	15.13	23.98	3.55	26.99	Pass	14
				106/53		0.00	16.17	23.98	3.55	26.99	Pass	15
HE20	MCS0	1	64	Full	5320	0.00	16.86	23.98	3.55	26.99	Pass	16
				26/8		0.00	11.12	23.98	3.55	26.99	Pass	11
				52/40		0.00	15.10	23.98	3.55	26.99	Pass	14
				106/54		0.00	16.08	23.98	3.55	26.99	Pass	15
HE40	MCS0	1	54	Full	5270	0.00	16.80	23.98	3.55	26.99	Pass	16
				242/61		0.00	15.71	23.98	3.55	26.99	Pass	15
HE40	MCS0	1	62	Full	5310	0.00	16.90	23.98	3.55	26.99	Pass	16
				242/62		0.00	15.78	23.98	3.55	26.99	Pass	15
HE80	MCS0	1	58	Full	5290	0.00	16.23	23.98	3.55	26.99	Pass	16
				484/66		0.00	15.36	23.98	3.55	26.99	Pass	15
HE80	MCS0	1	58	484/66	5290	0.00	15.36	23.44	3.55	26.99	Pass	15

TEST RESULTS DATA
Average Power Table

<5500 MHz ~ 5720 MHz >												
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	100	Full	5500	0.00	16.10	23.98	4.11	26.99	Pass	16
11a	6Mbps	1	116	Full	5580	0.00	16.54	23.98	4.11	26.99	Pass	16
11a	6Mbps	1	140	Full	5700	0.00	16.26	23.98	4.11	26.99	Pass	16
11a	6Mbps	1	144	Full	5720	0.00	16.37	23.98	4.11	26.99	Pass	16
HT20	MCS0	1	100	Full	5500	0.00	16.18	23.98	4.11	26.99	Pass	16
HT20	MCS0	1	116	Full	5580	0.00	16.24	23.98	4.11	26.99	Pass	16
HT20	MCS0	1	140	Full	5700	0.00	16.05	23.98	4.11	26.99	Pass	16
HT20	MCS0	1	144	Full	5720	0.00	16.20	23.98	4.11	26.99	Pass	16
HT40	MCS0	1	102	Full	5510	0.00	16.17	23.98	4.11	26.99	Pass	16
HT40	MCS0	1	110	Full	5550	0.00	16.29	23.98	4.11	26.99	Pass	16
HT40	MCS0	1	134	Full	5670	0.00	16.09	23.98	4.11	26.99	Pass	16
HT40	MCS0	1	142	Full	5710	0.00	16.18	23.98	4.11	26.99	Pass	16
VHT20	MCS0	1	100	Full	5500	0.00	16.16	23.98	4.11	26.99	Pass	16
VHT20	MCS0	1	116	Full	5580	0.00	16.20	23.98	4.11	26.99	Pass	16
VHT20	MCS0	1	140	Full	5700	0.00	16.04	23.98	4.11	26.99	Pass	16
VHT20	MCS0	1	144	Full	5720	0.00	16.18	23.98	4.11	26.99	Pass	16
VHT40	MCS0	1	102	Full	5510	0.00	16.11	23.98	4.11	26.99	Pass	16
VHT40	MCS0	1	110	Full	5550	0.00	16.26	23.98	4.11	26.99	Pass	16
VHT40	MCS0	1	134	Full	5670	0.00	16.07	23.98	4.11	26.99	Pass	16
VHT40	MCS0	1	142	Full	5710	0.00	16.15	23.98	4.11	26.99	Pass	16
VHT80	MCS0	1	106	Full	5530	0.00	15.58	23.98	4.11	26.99	Pass	15.5
VHT80	MCS0	1	122	Full	5610	0.00	16.07	23.98	4.11	26.99	Pass	16
VHT80	MCS0	1	138	Full	5690	0.00	16.05	23.98	4.11	26.99	Pass	16
VHT160	MCS0	1	114	Full	5570	0.00	14.70	23.98	4.11	26.99	Pass	14
HE20	MCS0	1	100	Full	5500	0.00	16.20	23.98	4.11	26.99	Pass	16
				26/0		0.00	11.97	23.98	4.11	26.99	Pass	11
				52/37		0.00	14.90	23.98	4.11	26.99	Pass	14
				106/53		0.00	16.01	23.98	4.11	26.99	Pass	15
			116	Full	5580	0.00	16.27	23.98	4.11	26.99	Pass	16
				26/4		0.00	11.70	23.98	4.11	26.99	Pass	11
				52/37		0.00	14.52	23.98	4.11	26.99	Pass	14
				106/53		0.00	16.06	23.98	4.11	26.99	Pass	15
			140	Full	5700	0.00	16.12	23.98	4.11	26.99	Pass	16
				26/8		0.00	12.05	23.98	4.11	26.99	Pass	11
				52/40		0.00	14.36	23.98	4.11	26.99	Pass	14
				106/54		0.00	15.99	23.98	4.11	26.99	Pass	15
			144	Full	5720	0.00	16.23	23.98	4.11	26.99	Pass	16
				26/8		0.00	12.02	23.98	4.11	26.99	Pass	11
				52/40		0.00	14.49	23.98	4.11	26.99	Pass	14
				106/54		0.00	15.93	23.98	4.11	26.99	Pass	15
HE40	MCS0	1	102	Full	5510	0.00	16.62	23.98	4.11	26.99	Pass	16
				242/61		0.00	15.80	23.98	4.11	26.99	Pass	15
			110	Full	5550	0.00	16.72	23.98	4.11	26.99	Pass	16
				242/61		0.00	15.73	23.98	4.11	26.99	Pass	15
			134	Full	5670	0.00	16.22	23.98	4.11	26.99	Pass	16
				242/62		0.00	15.85	23.98	4.11	26.99	Pass	15
			142	Full	5710	0.00	16.23	23.98	4.11	26.99	Pass	16
				242/62		0.00	15.83	23.98	4.11	26.99	Pass	15
HE80	MCS0	1	106	Full	5530	0.00	15.79	23.98	4.11	26.99	Pass	15.5
				484/65		0.00	15.78	23.98	4.11	26.99	Pass	15
			122	Full	5610	0.00	16.09	23.98	4.11	26.99	Pass	16
				484/66		0.00	15.82	23.98	4.11	26.99	Pass	15
			138	Full	5690	0.00	16.07	23.98	4.11	26.99	Pass	16
				484/66		0.00	15.79	23.98	4.11	26.99	Pass	15
HE160	MCS0	1	114	Full	5570	0.00	14.72	23.98	4.11	26.99	Pass	14
				996/S67		0.00	14.70	23.98	4.11	26.99	Pass	14

TEST RESULTS DATA
Average Power Table

<5745 MHz ~ 5825 MHz>											
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Setting
11a	6M bps	1	149	Full	5745	0.00	16.35	30.00	3.60	Pass	16
11a	6Mbps	1	157	Full	5785	0.00	16.26	30.00	3.60	Pass	16
11a	6Mbps	1	165	Full	5825	0.00	16.17	30.00	3.60	Pass	16
HT20	MCS 0	1	149	Full	5745	0.00	16.30	30.00	3.60	Pass	16
HT20	MCS 0	1	157	Full	5785	0.00	16.23	30.00	3.60	Pass	16
HT20	MCS 0	1	165	Full	5825	0.00	16.18	30.00	3.60	Pass	16
HT40	MCS 0	1	151	Full	5755	0.00	16.28	30.00	3.60	Pass	16
HT40	MCS 0	1	159	Full	5795	0.00	16.09	30.00	3.60	Pass	16
VHT20	MCS 0	1	149	Full	5745	0.00	16.31	30.00	3.60	Pass	16
VHT20	MCS 0	1	157	Full	5785	0.00	16.25	30.00	3.60	Pass	16
VHT20	MCS 0	1	165	Full	5825	0.00	16.19	30.00	3.60	Pass	16
VHT40	MCS 0	1	151	Full	5755	0.00	16.26	30.00	3.60	Pass	16
VHT40	MCS 0	1	159	Full	5795	0.00	16.07	30.00	3.60	Pass	16
VHT80	MCS 0	1	155	Full	5775	0.00	16.06	30.00	3.60	Pass	16
HE20	MCS0	1	149	Full	5745	0.00	16.33	30.00	3.60	Pass	16
				26/0		0.00	11.94	30.00	3.60	Pass	11
				52/37		0.00	14.32	30.00	3.60	Pass	14
				106/53		0.00	15.90	30.00	3.60	Pass	15
HE20	MCS0	1	157	Full	5785	0.00	16.29	30.00	3.60	Pass	16
				26/4		0.00	11.83	30.00	3.60	Pass	11
				52/37		0.00	14.52	30.00	3.60	Pass	14
				106/53		0.00	15.91	30.00	3.60	Pass	15
HE20	MCS0	1	165	Full	5825	0.00	16.22	30.00	3.60	Pass	16
				26/8		0.00	11.93	30.00	3.60	Pass	11
				52/40		0.00	14.46	30.00	3.60	Pass	14
				106/54		0.00	15.87	30.00	3.60	Pass	15
HE40	MCS0	1	151	Full	5755	0.00	16.31	30.00	3.60	Pass	16
				242/61		0.00	15.90	30.00	3.60	Pass	15
HE40	MCS0	1	159	Full	5795	0.00	16.11	30.00	3.60	Pass	16
				242/62		0.00	15.84	30.00	3.60	Pass	15
HE80	MCS0	1	155	Full	5775	0.00	16.13	30.00	3.60	Pass	16
				484/65		0.00	15.88	30.00	3.60	Pass	15

TEST RESULTS DATA
26dB and 99% OBW

<5180 MHz ~ 5240 MHz>							
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Note
					Ant 1	Ant 1	
11a	6Mbps	1	36	5180	16.89	22.08	
11a	6Mbps	1	44	5220	16.92	22.02	
11a	6Mbps	1	48	5240	16.93	22.44	
HT20	MCS0	1	36	5180	18.05	22.56	
HT20	MCS0	1	44	5220	18.04	22.98	
HT20	MCS0	1	48	5240	18.04	23.40	
HT40	MCS0	1	38	5190	36.75	45.24	
HT40	MCS0	1	46	5230	36.75	45.12	
VHT80	MCS0	1	42	5210	76.62	94.56	
VHT160	MCS0	1	50	5250	156.46	176.16	
HE20	MCS0	1	36	5180	19.11	22.80	
HE20	MCS0	1	44	5220	19.15	23.28	
HE20	MCS0	1	48	5240	19.13	23.04	
HE40	MCS0	1	38	5190	38.04	45.00	
HE40	MCS0	1	46	5230	38.10	44.88	
HE80	MCS0	1	42	5210	77.91	89.04	
HE160	MCS0	1	50	5250	158.02	176.16	

TEST RESULTS DATA
26dB and 99% OBW

<5260 MHz ~ 5320 MHz>								
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	FCC 26dB Bandwidth Power Limit (dBm)	Note
					Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	52	5260	16.94	22.02	23.98	
11a	6Mbps	1	60	5300	16.88	22.02	23.98	
11a	6Mbps	1	64	5320	16.92	22.26	23.98	
HT20	MCS0	1	52	5260	18.05	23.28	23.98	
HT20	MCS0	1	60	5300	18.02	23.10	23.98	
HT20	MCS0	1	64	5320	18.03	23.16	23.98	
HT40	MCS0	1	54	5270	36.71	45.84	23.98	
HT40	MCS0	1	62	5310	36.80	46.44	23.98	
VHT80	MCS0	1	58	5290	76.58	93.84	23.98	
HE20	MCS0	1	52	5260	19.16	22.68	23.98	
HE20	MCS0	1	60	5300	19.12	22.68	23.98	
HE20	MCS0	1	64	5320	19.13	22.74	23.98	
HE40	MCS0	1	54	5270	38.06	45.48	23.98	
HE40	MCS0	1	62	5310	38.07	44.76	23.98	
HE80	MCS0	1	58	5290	77.92	89.52	23.98	

TEST RESULTS DATA
26dB and 99% OBW

<5500 MHz ~ 5720 MHz >								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	FCC 26dB Bandwidth Power Limit (dBm)	Note
					Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	100	5500	16.91	22.08	23.98	
11a	6Mbps	1	116	5580	16.98	22.08	23.98	
11a	6Mbps	1	140	5700	17.00	22.26	23.98	
11a	6Mbps	1	144	5720	17.03	23.16	23.98	
HT20	MCS0	1	100	5500	18.05	23.16	23.98	
HT20	MCS0	1	116	5580	18.04	23.28	23.98	
HT20	MCS0	1	140	5700	18.04	22.98	23.98	
HT20	MCS0	1	144	5720	18.06	23.22	23.98	
HT40	MCS0	1	102	5510	36.75	45.48	23.98	
HT40	MCS0	1	110	5550	36.78	45.84	23.98	
HT40	MCS0	1	134	5670	36.80	46.44	23.98	
HT40	MCS0	1	142	5710	36.79	45.96	23.98	
VHT80	MCS0	1	106	5530	76.60	93.36	23.98	
VHT80	MCS0	1	122	5610	76.56	93.36	23.98	
VHT80	MCS0	1	138	5690	76.62	94.80	23.98	
VHT160	MCS0	1	114	5570	156.63	174.72	23.98	
HE20	MCS0	1	100	5500	19.13	22.92	23.98	
HE20	MCS0	1	116	5580	19.13	22.62	23.98	
HE20	MCS0	1	140	5700	19.13	23.16	23.98	
HE20	MCS0	1	144	5720	19.15	23.34	23.98	
HE40	MCS0	1	102	5510	38.05	43.56	23.98	
HE40	MCS0	1	110	5550	38.05	44.04	23.98	
HE40	MCS0	1	134	5670	38.07	44.40	23.98	
HE40	MCS0	1	142	5710	38.06	45.00	23.98	
HE80	MCS0	1	106	5530	77.94	88.56	23.98	
HE80	MCS0	1	122	5610	77.88	90.24	23.98	
HE80	MCS0	1	138	5690	77.94	91.20	23.98	
HE160	MCS0	1	114	5570	157.78	172.80	23.98	

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Config	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	Full	16.93	22.02	16.45	0.5	Pass
11a	6Mbps	1	157	5785	Full	17.20	25.02	16.45	0.5	Pass
11a	6Mbps	1	165	5825	Full	16.99	22.56	16.45	0.5	Pass
HT40	MCS 0	1	151	5755	Full	36.78	46.08	36.45	0.5	Pass
HT40	MCS 0	1	159	5795	Full	36.78	45.36	36.45	0.5	Pass
VHT20	MCS 0	1	149	5745	Full	18.06	23.28	17.70	0.5	Pass
VHT20	MCS 0	1	157	5785	Full	18.07	23.22	17.70	0.5	Pass
VHT20	MCS 0	1	165	5825	Full	18.04	23.16	17.65	0.5	Pass
VHT80	MCS 0	1	155	5775	Full	76.68	94.32	76.64	0.5	Pass
HE20	MCS0	1	149	5745	Full	19.12	22.74	19.10	0.5	Pass
HE20	MCS0	1	149	5745	26/0	-	-	2.15	0.5	Pass
HE20	MCS0	1	157	5785	Full	19.13	22.74	19.15	0.5	Pass
HE20	MCS0	1	157	5785	26/4	-	-	2.15	0.5	Pass
HE20	MCS0	1	165	5825	Full	19.11	22.68	19.10	0.5	Pass
HE20	MCS0	1	165	5825	26/8	-	-	2.15	0.5	Pass
HE40	MCS0	1	151	5755	Full	38.07	44.28	38.34	0.5	Pass
HE40	MCS0	1	159	5795	Full	38.06	44.40	38.34	0.5	Pass
HE80	MCS0	1	155	5775	Full	77.85	88.80	78.40	0.5	Pass

TEST RESULTS DATA
Power Spectral Density

<5180 MHz ~ 5240 MHz>											
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	36	Full	5180	0.00	3.42	11.00	3.52		Pass
11a	6Mbps	1	44	Full	5220	0.00	3.52	11.00	3.52		Pass
11a	6Mbps	1	48	Full	5240	0.00	3.66	11.00	3.52		Pass
HT20	MCS0	1	36	Full	5180	0.00	4.28	11.00	3.52		Pass
HT20	MCS0	1	44	Full	5220	0.00	4.52	11.00	3.52		Pass
HT20	MCS0	1	48	Full	5240	0.00	4.57	11.00	3.52		Pass
HT40	MCS0	1	38	Full	5190	0.00	0.96	11.00	3.52		Pass
HT40	MCS0	1	46	Full	5230	0.00	1.38	11.00	3.52		Pass
VHT80	MCS0	1	42	Full	5210	0.00	-2.13	11.00	3.52		Pass
VHT160	MCS0	1	50	Full	5250	0.00	-3.92	11.00	3.52		Pass
HE20	MCS0	1	36	Full	5180	0.00	2.74	11.00	3.52		Pass
				26/0		0.00	5.03	11.00	3.52		Pass
				52/37		0.00	5.19	11.00	3.52		Pass
				106/53		0.00	5.65	11.00	3.52		Pass
HE20	MCS0	1	44	Full	5220	0.00	2.98	11.00	3.52		Pass
				26/4		0.00	4.39	11.00	3.52		Pass
				52/37		0.00	5.75	11.00	3.52		Pass
				106/53		0.00	5.65	11.00	3.52		Pass
HE20	MCS0	1	48	Full	5240	0.00	3.08	11.00	3.52		Pass
				26/8		0.00	5.20	11.00	3.52		Pass
				52/40		0.00	5.77	11.00	3.52		Pass
				106/54		0.00	5.70	11.00	3.52		Pass
HE40	MCS0	1	38	Full	5190	0.00	1.63	11.00	3.52		Pass
				242/61		0.00	3.86	11.00	3.52		Pass
HE40	MCS0	1	46	Full	5230	0.00	2.42	11.00	3.52		Pass
				242/62		0.00	3.92	11.00	3.52		Pass
HE80	MCS0	1	42	Full	5210	0.00	-1.66	11.00	3.52		Pass
				484/65		0.00	1.52	11.00	3.52		Pass
HE160	MCS0	1	50	Full	5250	0.00	-4.54	11.00	3.52		Pass
				996/67		0.00	-2.18	11.00	3.52		Pass

TEST RESULTS DATA
Power Spectral Density

<5260 MHz ~ 5320 MHz>											
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	52	Full	5260	0.00	6.88	11.00	3.55		Pass
11a	6Mbps	1	60	Full	5300	0.00	6.77	11.00	3.55		Pass
11a	6Mbps	1	64	Full	5320	0.00	6.90	11.00	3.55		Pass
HT20	MCS0	1	52	Full	5260	0.00	4.56	11.00	3.55		Pass
HT20	MCS0	1	60	Full	5300	0.00	4.25	11.00	3.55		Pass
HT20	MCS0	1	64	Full	5320	0.00	4.41	11.00	3.55		Pass
HT40	MCS0	1	54	Full	5270	0.00	1.30	11.00	3.55		Pass
HT40	MCS0	1	62	Full	5310	0.00	1.05	11.00	3.55		Pass
VHT80	MCS0	1	58	Full	5290	0.00	-2.63	11.00	3.55		Pass
HE20	MCS0	1	52	Full	5260	0.00	6.30	11.00	3.55		Pass
				26/0		0.00	9.77	11.00	3.55		Pass
				52/37		0.00	9.74	11.00	3.55		Pass
				106/53		0.00	8.28	11.00	3.55		Pass
HE20	MCS0	1	60	Full	5300	0.00	6.31	11.00	3.55		Pass
				26/4		0.00	8.80	11.00	3.55		Pass
				52/37		0.00	9.65	11.00	3.55		Pass
				106/53		0.00	8.21	11.00	3.55		Pass
HE20	MCS0	1	64	Full	5320	0.00	6.20	11.00	3.55		Pass
				26/8		0.00	9.87	11.00	3.55		Pass
				52/40		0.00	9.79	11.00	3.55		Pass
				106/54		0.00	8.44	11.00	3.55		Pass
HE40	MCS0	1	54	Full	5270	0.00	3.25	11.00	3.55		Pass
				242/61		0.00	4.61	11.00	3.55		Pass
HE40	MCS0	1	62	Full	5310	0.00	3.18	11.00	3.55		Pass
				242/62		0.00	4.54	11.00	3.55		Pass
HE80	MCS0	1	58	Full	5290	0.00	-0.71	11.00	3.55		Pass
				484/66		0.00	1.84	11.00	3.55		Pass

TEST RESULTS DATA
Power Spectral Density


<5500 MHz ~ 5720 MHz >											
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	100	Full	5500	0.00	6.63	11.00	4.11		Pass
11a	6Mbps	1	116	Full	5580	0.00	6.39	11.00	4.11		Pass
11a	6Mbps	1	140	Full	5700	0.00	6.26	11.00	4.11		Pass
11a	6Mbps	1	144	Full	5720	0.00	6.25	11.00	4.11		Pass
HT20	MCS0	1	100	Full	5500	0.00	3.97	11.00	4.11		Pass
HT20	MCS0	1	116	Full	5580	0.00	4.02	11.00	4.11		Pass
HT20	MCS0	1	140	Full	5700	0.00	4.08	11.00	4.11		Pass
HT20	MCS0	1	144	Full	5720	0.00	3.99	11.00	4.11		Pass
HT40	MCS0	1	102	Full	5510	0.00	0.74	11.00	4.11		Pass
HT40	MCS0	1	110	Full	5550	0.00	0.76	11.00	4.11		Pass
HT40	MCS0	1	134	Full	5670	0.00	0.82	11.00	4.11		Pass
HT40	MCS0	1	142	Full	5710	0.00	0.94	11.00	4.11		Pass
VHT80	MCS0	1	106	Full	5530	0.00	-2.75	11.00	4.11		Pass
VHT80	MCS0	1	122	Full	5610	0.00	-2.85	11.00	4.11		Pass
VHT80	MCS0	1	138	Full	5690	0.00	-3.36	11.00	4.11		Pass
VHT160	MCS0	2	114	Full	5570	0.00	-6.58	11.00	4.11		Pass
HE20	MCS0	1	100	Full	5500	0.00	5.83	11.00	4.11		Pass
				26/0		0.00	9.87	11.00	4.11		Pass
				52/37		0.00	8.27	11.00	4.11		Pass
				106/53		0.00	8.44	11.00	4.11		Pass
HE20	MCS0	1	116	Full	5580	0.00	5.44	11.00	4.11		Pass
				26/0		0.00	8.95	11.00	4.11		Pass
				52/37		0.00	9.80	11.00	4.11		Pass
				106/53		0.00	8.46	11.00	4.11		Pass
HE20	MCS0	1	140	Full	5700	0.00	5.34	11.00	4.11		Pass
				26/8		0.00	9.95	11.00	4.11		Pass
				52/40		0.00	9.78	11.00	4.11		Pass
				106/54		0.00	8.40	11.00	4.11		Pass
HE20	MCS0	1	144	Full	5720	0.00	5.33	11.00	4.11		Pass
				26/8		0.00	9.83	11.00	4.11		Pass
				52/40		0.00	9.99	11.00	4.11		Pass
				106/54		0.00	8.32	11.00	4.11		Pass
HE40	MCS0	1	102	Full	5510	0.00	2.85	11.00	4.11		Pass
				242/61		0.00	4.58	11.00	4.11		Pass
HE40	MCS0	1	110	Full	5550	0.00	2.71	11.00	4.11		Pass
				242/61		0.00	4.49	11.00	4.11		Pass
HE40	MCS0	1	134	Full	5670	0.00	2.45	11.00	4.11		Pass
				242/62		0.00	4.74	11.00	4.11		Pass
HE40	MCS0	1	142	Full	5710	0.00	2.40	11.00	4.11		Pass
				242/62		0.00	4.71	11.00	4.11		Pass
HE80	MCS0	1	106	Full	5530	0.00	-1.79	11.00	4.11		Pass
				484/65		0.00	1.72	11.00	4.11		Pass
HE80	MCS0	1	122	Full	5610	0.00	-1.72	11.00	4.11		Pass
				484/66		0.00	1.94	11.00	4.11		Pass
HE80	MCS0	1	138	Full	5690	0.00	-1.89	11.00	4.11		Pass
				484/66		0.00	2.05	11.00	4.11		Pass
HE160	MCS0	1	114	Full	5570	0.00	-4.97	11.00	4.11		Pass
				996/67		0.00	-3.51	11.00	4.11		Pass

TEST RESULTS DATA
Power Spectral Density

<5745 MHz ~ 5825 MHz>											
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	Full	5745	0.00	2.22	3.51	30.00	3.60	Pass
11a	6Mbps	1	157	Full	5785	0.00	2.22	3.45	30.00	3.60	Pass
11a	6Mbps	1	165	Full	5825	0.00	2.22	3.29	30.00	3.60	Pass
HT40	MCS 0	1	151	Full	5755	0.00	2.22	-2.03	30.00	3.60	Pass
HT40	MCS 0	1	159	Full	5795	0.00	2.22	-2.29	30.00	3.60	Pass
VHT20	MCS 0	1	149	Full	5745	0.00	2.22	1.10	30.00	3.60	Pass
VHT20	MCS 0	1	157	Full	5785	0.00	2.22	0.98	30.00	3.60	Pass
VHT20	MCS 0	1	165	Full	5825	0.00	2.22	0.76	30.00	3.60	Pass
VHT80	MCS 0	1	155	Full	5775	0.00	2.22	-5.51	30.00	3.60	Pass
HE20	MCS0	1	149	Full	5745	0.00	2.22	2.46	30.00	3.60	Pass
				26/0		0.00	2.22	7.73	30.00	3.60	Pass
				52/37		0.00	2.22	6.85	30.00	3.60	Pass
				106/53		0.00	2.22	5.69	30.00	3.60	Pass
HE20	MCS0	1	157	Full	5785	0.00	2.22	2.39	30.00	3.60	Pass
				26/4		0.00	2.22	7.23	30.00	3.60	Pass
				52/37		0.00	2.22	7.10	30.00	3.60	Pass
				106/53		0.00	2.22	5.66	30.00	3.60	Pass
HE20	MCS0	1	165	Full	5825	0.00	2.22	2.30	30.00	3.60	Pass
				26/8		0.00	2.22	7.53	30.00	3.60	Pass
				52/40		0.00	2.22	6.86	30.00	3.60	Pass
				106/54		0.00	2.22	5.49	30.00	3.60	Pass
HE40	MCS0	1	151	Full	5755	0.00	2.22	-0.38	30.00	3.60	Pass
				242/61	5755	0.00	2.22	1.91	30.00	3.60	Pass
HE40	MCS0	1	159	Full	5795	0.00	2.22	-0.27	30.00	3.60	Pass
				242/62	5795	0.00	2.22	1.74	30.00	3.60	Pass
HE80	MCS0	1	155	Full	5775	0.00	2.22	-5.10	30.00	3.60	Pass
				484/65	5775	0.00	2.22	-0.89	30.00	3.60	Pass




Appendix B. AC Conducted Emission Test Results

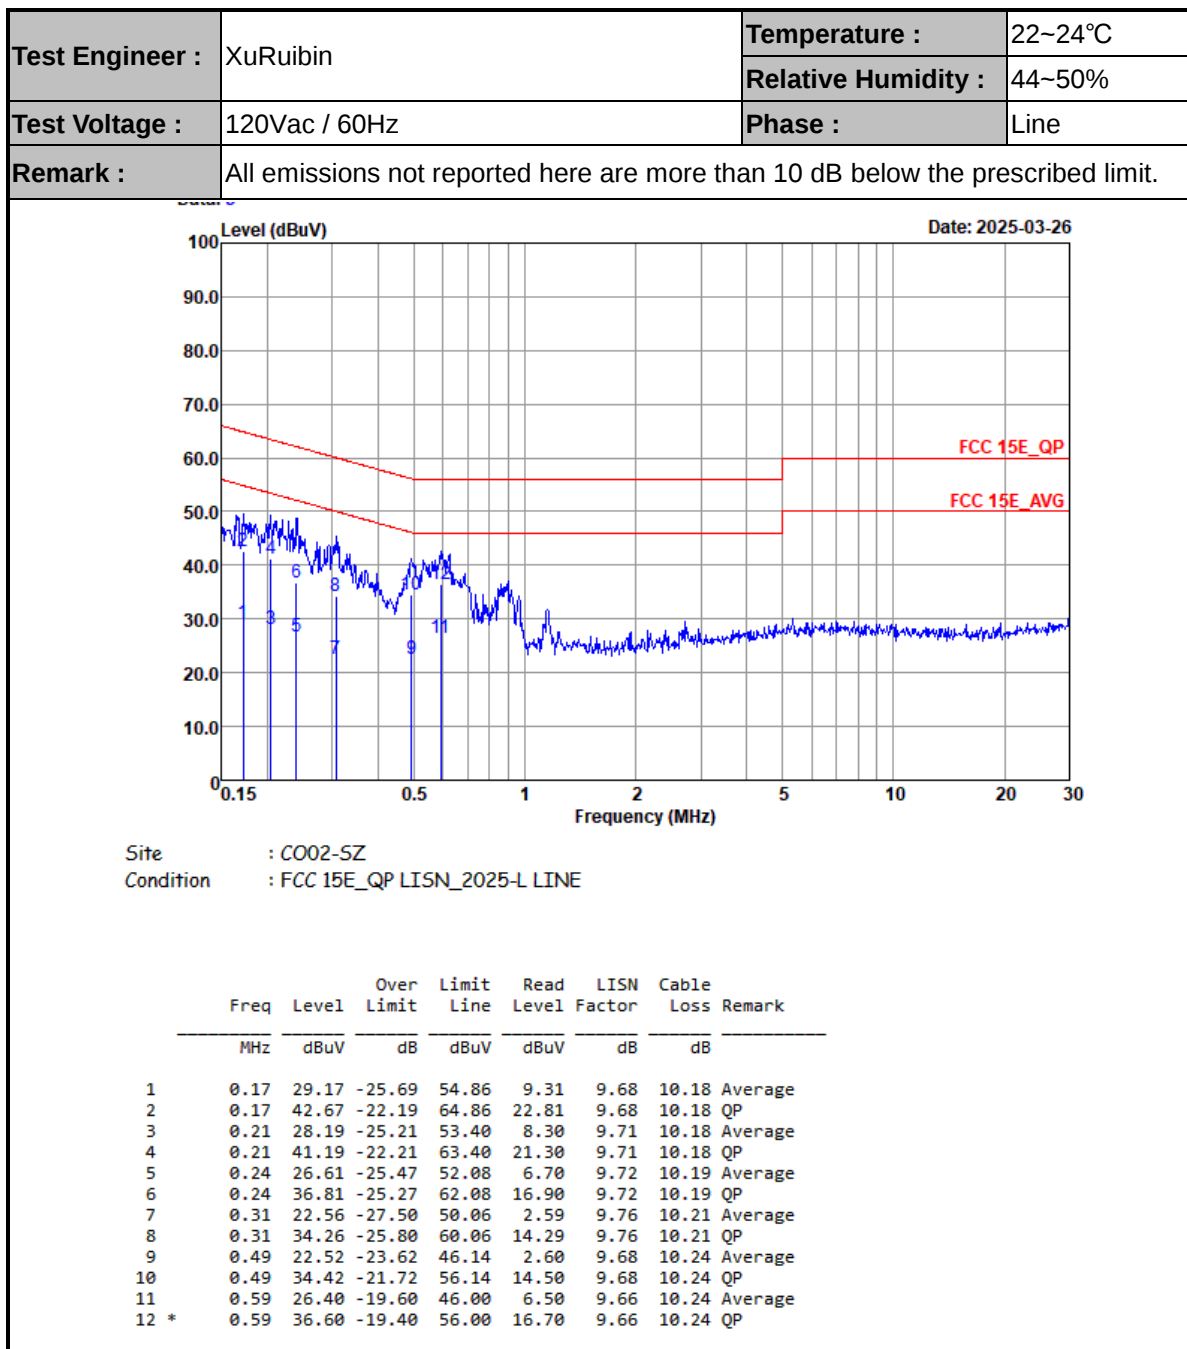



Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

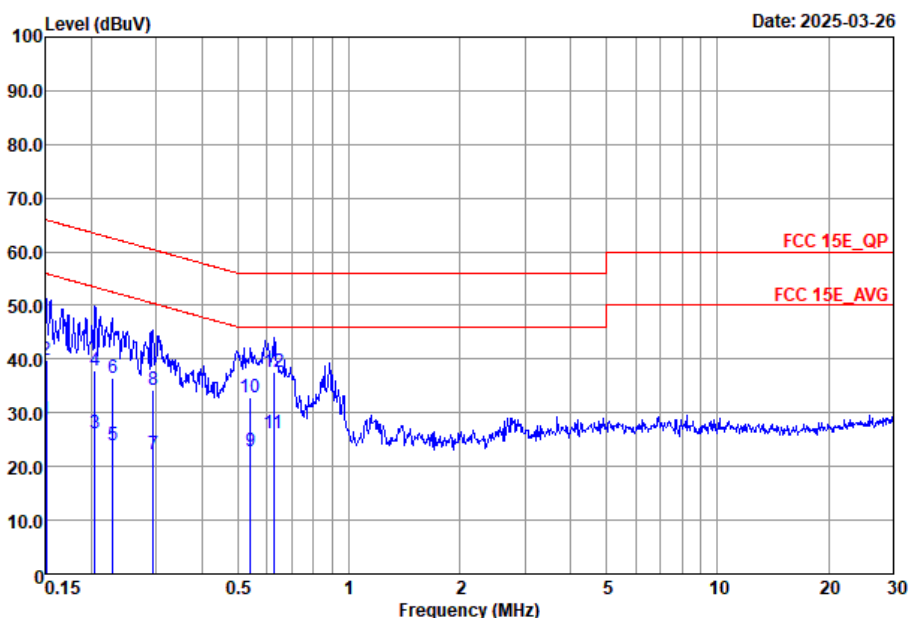

Site : C002-SZ
Condition : FCC 15E_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	28.64	-27.32	55.96	8.90	9.55	10.19	Average
2	0.15	39.84	-26.12	65.96	20.10	9.55	10.19	QP
3	0.21	26.11	-27.29	53.40	6.11	9.82	10.18	Average
4	0.21	38.01	-25.39	63.40	18.01	9.82	10.18	QP
5	0.23	23.84	-28.64	52.48	4.00	9.65	10.19	Average
6	0.23	36.44	-26.04	62.48	16.60	9.65	10.19	QP
7	0.29	22.37	-28.04	50.41	2.29	9.87	10.21	Average
8	0.29	34.37	-26.04	60.41	14.29	9.87	10.21	QP
9	0.54	22.86	-23.14	46.00	3.00	9.62	10.24	Average
10	0.54	32.86	-23.14	56.00	13.00	9.62	10.24	QP
11	0.62	26.30	-19.70	46.00	6.40	9.66	10.24	Average
12 *	0.62	37.50	-18.50	56.00	17.60	9.66	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24-25°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	RU26/0	-
Mode 6	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	RU52/37	-
Mode 7	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	RU106/53	-
Mode 8	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	RU26/4	-
Mode 10	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	RU52/37	-
Mode 11	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	RU106/53	-
Mode 12	U-NII-1	5.25-5.35	1	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 13	U-NII-1	5.25-5.35	1	802.11ax HE20	48	5240	MCS0	RU26/8	-
Mode 14	U-NII-1	5.25-5.35	1	802.11ax HE20	48	5240	MCS0	RU52/40	-
Mode 15	U-NII-1	5.25-5.35	1	802.11ax HE20	48	5240	MCS0	RU106/54	-
Mode 16	U-NII-1	5.15-5.25	1	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 17	U-NII-1	5.15-5.25	1	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 18	U-NII-1	5.15-5.25	1	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 19	U-NII-1	5.15-5.25	1	802.11ax HE160	50	5250	MCS0	Full RU	-
Mode 20	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-	-
Mode 21	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 22	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 23	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 24	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	RU26/0	-
Mode 25	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	RU52/37	-
Mode 26	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	RU106/53	-
Mode 27	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 28	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	RU26/4	-
Mode 29	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	RU52/37	-
Mode 30	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	RU106/53	-
Mode 31	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 32	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	RU26/8	-
Mode 33	U-NII-2A	5.47-5.725	1	802.11ax HE20	64	5320	6Mbps	RU52/40	-
Mode 34	U-NII-2A	5.47-5.725	1	802.11ax HE20	64	5320	6Mbps	RU106/54	-
Mode 35	U-NII-2A	5.25-5.35	1	802.11ax HE40	54	5270	MCS0	-	-
Mode 36	U-NII-2A	5.25-5.35	1	802.11ax HE40	62	5310	MCS0	-	-
Mode 37	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	-	-
Mode 38	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 39	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-



Mode 40	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 41	U-NII-2C	5.47-5.725	1	802.11a	144	5720	6Mbps	-	-
Mode 42	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 43	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	RU26/0	-
Mode 44	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	RU52/37	-
Mode 45	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	RU106/53	-
Mode 46	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 47	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	RU26/4	-
Mode 48	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	RU52/37	-
Mode 49	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	RU106/53	-
Mode 50	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 51	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	RU26/8	-
Mode 52	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	RU52/40	-
Mode 53	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	RU106/54	-
Mode 54	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	Full RU	-
Mode 55	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	RU26/8	-
Mode 56	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	RU52/40	-
Mode 57	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	RU106/54	-
Mode 58	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 59	U-NII-2C	5.47-5.725	1	802.11ax HE40	110	5550	MCS0	Full RU	-
Mode 60	U-NII-2C	5.47-5.725	1	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 61	U-NII-2C	5.47-5.725	1	802.11ax HE40	142	5710	MCS0	Full RU	-
Mode 62	U-NII-2C	5.47-5.725	1	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 63	U-NII-2C	5.47-5.725	1	802.11ax HE80	122	5610	MCS0	Full RU	-
Mode 64	U-NII-2C	5.47-5.725	1	802.11ax HE80	138	5690	MCS0	Full RU	-
Mode 65	U-NII-2C	5.47-5.725	1	802.11ax HE160	114	5570	MCS0	Full RU	-
Mode 66	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-	-
Mode 67	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-	-
Mode 68	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-	-
Mode 69	U-NII-3	5.47-5.725	1	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 70	U-NII-3	5.47-5.725	1	802.11ax HE20	149	5745	MCS0	RU26/0	-
Mode 71	U-NII-3	5.47-5.725	1	802.11ax HE20	149	5745	MCS0	RU52/37	-
Mode 72	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	RU106/53	-
Mode 73	U-NII-3	5.725-5.85	1	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 74	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 75	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	RU26/8	-
Mode 76	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	RU52/40	-
Mode 77	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	RU106/54	-
Mode 78	U-NII-3	5.725-5.85	1	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 79	U-NII-3	5.725-5.85	1	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 80	U-NII-3	5.725-5.85	1	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 81	U-NII-1	5.15-5.25	1	802.11ax HE80_LF	42	5210	MCS0	Full RU	-
Mode 82	U-NII-3	5.725-5.85	1	802.11ax HE80_LF	155	5775	MCS0	Full RU	-
Mode 83	-	2400-2483.5	1	Bluetooth-LE_GSFK	39	-	-	-	-
Mode 83	U-NII-1	5.15-5.25	1	11ax80_TX_CH42	42	5210	-	-	-
Mode 84	U-NII-1	5.15-5.25	1	802.11ac VHT80_	42	5210	MCS0	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.94	47.30	54.00	-6.70	V	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	42.26	68.30	-26.04	H	Peak	Pass	Harmonic
2	802.11a	44	5133.10	39.54	54.00	-14.46	V	AVERAGE	Pass	Band Edge
2	802.11a	44	10440.00	40.83	68.30	-27.47	V	Peak	Pass	Harmonic
3	802.11a	48	5021.60	39.78	54.00	-14.22	V	AVERAGE	Pass	Band Edge
3	802.11a	48	10480.00	41.61	68.30	-26.69	H	Peak	Pass	Harmonic
4	802.11ax HE20	36	5148.68	41.01	54.00	-12.99	V	AVERAGE	Pass	Band Edge
4	802.11ax HE20	36	10360.00	41.60	68.30	-26.70	H	Peak	Pass	Harmonic
5	802.11ax HE20	36	5019.98	40.15	54.00	-13.85	V	AVERAGE	Pass	Band Edge
5	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
6	802.11ax HE20	36	5122.40	40.27	54.00	-13.73	V	AVERAGE	Pass	Band Edge
6	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
7	802.11ax HE20	36	5149.40	41.39	54.00	-12.61	V	AVERAGE	Pass	Band Edge
7	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
8	802.11ax HE20	44	5148.50	45.43	54.00	-8.57	V	AVERAGE	Pass	Band Edge
8	802.11ax HE20	44	10440.00	41.21	68.30	-27.09	V	Peak	Pass	Harmonic
9	802.11ax HE20	44	5019.14	40.08	54.00	-13.92	V	AVERAGE	Pass	Band Edge
9	802.11ax HE20	44	-	-	-	-	-	-	-	Harmonic
10	802.11ax HE20	44	5025.96	39.63	54.00	-14.37	H	AVERAGE	Pass	Band Edge
10	802.11ax HE20	44	-	-	-	-	-	-	-	Harmonic
11	802.11ax HE20	44	5047.96	39.96	54.00	-14.04	V	AVERAGE	Pass	Band Edge
11	802.11ax HE20	44	-	-	-	-	-	-	-	Harmonic
12	802.11ax HE20	48	5047.28	39.70	54.00	-14.30	H	AVERAGE	Pass	Band Edge
12	802.11ax HE20	48	10480.00	42.44	68.30	-25.86	V	Peak	Pass	Harmonic
13	802.11ax HE20	48	5025.92	39.83	54.00	-14.17	V	AVERAGE	Pass	Band Edge
13	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
14	802.11ax HE20	48	5044.16	39.88	54.00	-14.12	V	AVERAGE	Pass	Band Edge
14	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
15	802.11ax HE20	48	5048.96	39.75	54.00	-14.25	V	AVERAGE	Pass	Band Edge
15	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
16	802.11ax HE40	38	5149.91	43.65	54.00	-10.35	V	AVERAGE	Pass	Band Edge
16	802.11ax HE40	38	10380.00	46.97	68.30	-21.33	V	Peak	Pass	Harmonic
17	802.11ax HE40	46	5149.27	41.36	54.00	-12.64	V	AVERAGE	Pass	Band Edge
17	802.11ax HE40	46	10460.00	46.63	68.30	-21.67	H	Peak	Pass	Harmonic
18	802.11ax HE80	42	5126.00	50.34	54.00	-3.66	V	AVERAGE	Pass	Band Edge
18	802.11ax HE80	42	10420.00	46.13	68.30	-22.17	H	Peak	Pass	Harmonic
19	802.11ax HE160	50	5427.66	43.32	54.00	-10.68	V	AVERAGE	Pass	Band Edge
19	802.11ax HE160	50	10500.00	46.38	68.30	-21.92	V	Peak	Pass	Harmonic
20	802.11a	52	5350.00	39.86	54.00	-14.14	V	AVERAGE	Pass	Band Edge
20	802.11a	52	10520.00	48.12	68.30	-20.18	V	Peak	Pass	Harmonic
21	802.11a	60	5350.56	40.09	54.00	-13.91	V	AVERAGE	Pass	Band Edge
21	802.11a	60	15900.00	48.26	74.00	-25.74	V	Peak	Pass	Harmonic







22	802.11a	64	5350.24	46.91	54.00	-7.09	V	AVERAGE	Pass	Band Edge
22	802.11a	64	15960.00	50.28	74.00	-23.72	H	Peak	Pass	Harmonic
23	802.11ax HE20	52	5351.40	39.66	54.00	-14.34	V	AVERAGE	Pass	Band Edge
23	802.11ax HE20	52	10520.00	45.59	68.30	-22.71	V	Peak	Pass	Harmonic
24	802.11ax HE20	52	5350.40	40.17	54.00	-13.83	V	AVERAGE	Pass	Band Edge
24	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE20	52	5050.18	39.87	54.00	-14.13	V	AVERAGE	Pass	Band Edge
25	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE20	52	5027.04	40.13	54.00	-13.87	V	AVERAGE	Pass	Band Edge
26	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE20	60	5001.50	39.90	54.00	-14.10	V	AVERAGE	Pass	Band Edge
27	802.11ax HE20	60	10600.00	45.25	74.00	-28.75	V	Peak	Pass	Harmonic
28	802.11ax HE20	60	5048.60	39.58	54.00	-14.42	H	AVERAGE	Pass	Band Edge
28	802.11ax HE20	60	-	-	-	-	-	-	-	Harmonic
29	802.11ax HE20	60	5057.30	39.35	54.00	-14.65	V	AVERAGE	Pass	Band Edge
29	802.11ax HE20	60	-	-	-	-	-	-	-	Harmonic
30	802.11ax HE20	60	5098.40	39.68	54.00	-14.32	V	AVERAGE	Pass	Band Edge
30	802.11ax HE20	60	-	-	-	-	-	-	-	Harmonic
31	802.11ax HE20	64	5350.38	41.32	54.00	-12.68	V	AVERAGE	Pass	Band Edge
31	802.11ax HE20	64	15960.00	47.51	74.00	-26.49	H	Peak	Pass	Harmonic
32	802.11ax HE20	64	5350.66	39.97	54.00	-14.03	V	AVERAGE	Pass	Band Edge
32	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
33	802.11ax HE20	64	5356.54	39.12	54.00	-14.88	V	AVERAGE	Pass	Band Edge
33	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
34	802.11ax HE20	64	5350.10	40.72	54.00	-13.28	V	AVERAGE	Pass	Band Edge
34	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
35	802.11ax HE40	54	5350.75	40.55	54.00	-13.45	V	AVERAGE	Pass	Band Edge
35	802.11ax HE40	54	10540.00	46.60	68.30	-21.70	H	Peak	Pass	Harmonic
36	802.11ax HE40	62	5358.90	41.29	54.00	-12.71	V	AVERAGE	Pass	Band Edge
36	802.11ax HE40	62	10620.00	46.85	74.00	-27.15	V	Peak	Pass	Harmonic
37	802.11ax HE80	58	5379.25	45.65	54.00	-8.32	V	AVERAGE	Pass	Band Edge
37	802.11ax HE80	58	10580.00	45.80	68.30	-22.50	H	Peak	Pass	Harmonic
38	802.11a	100	5470.00	56.24	68.30	-12.06	V	PEAK	Pass	Band Edge
38	802.11a	100	16500.00	47.01	68.30	-21.29	V	Peak	Pass	Harmonic
39	802.11a	116	5350.00	39.05	54.00	-14.95	V	AVERAGE	Pass	Band Edge
39	802.11a	116	16740.00	49.01	68.30	-19.29	V	Peak	Pass	Harmonic
40	802.11a	140	5725.03	62.69	68.30	-5.61	V	PEAK	Pass	Band Edge
40	802.11a	140	17100.00	47.35	68.30	-20.95	V	Peak	Pass	Harmonic
41	802.11a	144	5431.95	37.59	54.00	-16.41	H	Peak	Pass	Band Edge
41	802.11a	144	17160.00	48.03	68.30	-20.27	H	Peak	Pass	Harmonic
42	802.11ax HE20	100	5441.35	39.54	54.00	-14.46	H	AVERAGE	Pass	Band Edge
42	802.11ax HE20	100	16500.00	49.33	68.30	-18.97	V	Peak	Pass	Harmonic
43	802.11ax HE20	100	5444.50	39.50	54.00	-14.50	V	AVERAGE	Pass	Band Edge
43	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
44	802.11ax HE20	100	5458.75	39.38	54.00	-14.62	V	AVERAGE	Pass	Band Edge
44	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic







45	802.11ax HE20	100	5459.80	39.59	54.00	-14.41	V	AVERAGE	Pass	Band Edge
45	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
46	802.11ax HE20	116	5432.80	38.75	54.00	-15.25	V	AVERAGE	Pass	Band Edge
46	802.11ax HE20	116	16740.00	47.32	68.30	-20.98	H	Peak	Pass	Harmonic
47	802.11ax HE20	116	5437.86	38.65	54.00	-15.35	V	AVERAGE	Pass	Band Edge
47	802.11ax HE20	116	-	-	-	-	-	-	-	Harmonic
48	802.11ax HE20	116	5428.66	38.68	54.00	-15.32	V	AVERAGE	Pass	Band Edge
48	802.11ax HE20	116	-	-	-	-	-	-	-	Harmonic
49	802.11ax HE20	116	5457.87	38.61	54.00	-15.39	V	AVERAGE	Pass	Band Edge
49	802.11ax HE20	116	-	-	-	-	-	-	-	Harmonic
50	802.11ax HE20	140	5725.55	57.60	68.30	-10.70	V	PEAK	Pass	Band Edge
50	802.11ax HE20	140	17100.00	47.20	68.30	-21.10	V	Peak	Pass	Harmonic
51	802.11ax HE20	140	5729.97	49.27	68.30	-19.03	H	PEAK	Pass	Band Edge
51	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
52	802.11ax HE20	140	5735.69	50.00	68.30	-18.30	V	PEAK	Pass	Band Edge
52	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
53	802.11ax HE20	140	5726.52	54.39	68.30	-13.91	V	PEAK	Pass	Band Edge
53	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
54	802.11ax HE20	144	5435.80	34.79	54.00	-16.21	V	Average	Pass	Band Edge
54	802.11ax HE20	144	17160.00	49.78	68.30	-18.52	H	Peak	Pass	Harmonic
55	802.11ax HE20	144	5430.30	37.78	54.00	-16.22	V	Average	Pass	Band Edge
55	802.11ax HE20	144	-	-	-	-	-	-	-	Harmonic
56	802.11ax HE20	144	5459.45	37.76	54.00	-16.24	V	Average	Pass	Band Edge
56	802.11ax HE20	144	-	-	-	-	-	-	-	Harmonic
57	802.11ax HE20	144	5460.00	37.78	54.00	-16.22	V	Average	Pass	Band Edge
57	802.11ax HE20	144	-	-	-	-	-	-	-	Harmonic
58	802.11ax HE40	102	5459.92	43.82	54.00	-10.18	V	AVERAGE	Pass	Band Edge
58	802.11ax HE40	102	16530.00	48.13	68.30	-20.17	H	Peak	Pass	Harmonic
59	802.11ax HE40	110	5441.60	39.39	54.00	-14.61	V	AVERAGE	Pass	Band Edge
59	802.11ax HE40	110	16650.00	47.63	68.30	-20.67	H	Peak	Pass	Harmonic
60	802.11ax HE40	134	5457.20	38.76	54.00	-15.24	V	AVERAGE	Pass	Band Edge
60	802.11ax HE40	134	17010.00	46.23	68.30	-22.07	H	Peak	Pass	Harmonic
61	802.11ax HE40	142	5460.00	37.84	54.00	-16.16	V	Average	Pass	Band Edge
61	802.11ax HE40	142	17130.00	46.86	68.30	-21.44	H	Peak	Pass	Harmonic
62	802.11ax HE80	106	5459.62	44.46	54.00	-9.54	V	AVERAGE	Pass	Band Edge
62	802.11ax HE80	106	16590.00	46.06	68.30	-22.24	H	Peak	Pass	Harmonic
63	802.11ax HE80	122	5458.68	39.59	54.00	-14.41	V	AVERAGE	Pass	Band Edge
63	802.11ax HE80	122	16830.00	46.53	68.30	-21.77	H	Peak	Pass	Harmonic
64	802.11ax HE80	138	5430.85	38.07	54.00	-15.93	H	Average	Pass	Band Edge
64	802.11ax HE80	138	17070.00	47.18	68.30	-21.12	H	Peak	Pass	Harmonic
65	802.11ax HE160	114	5434.04	46.81	54.00	-7.19	V	AVERAGE	Pass	Band Edge
65	802.11ax HE160	114	16710.00	46.27	68.30	-22.03	H	Peak	Pass	Harmonic
66	802.11a	149	5645.39	49.22	68.30	-19.08	V	PEAK	Pass	Band Edge
66	802.11a	149	17235.00	50.05	68.30	-18.25	H	Peak	Pass	Harmonic
67	802.11a	157	5606.29	48.89	68.30	-19.41	V	PEAK	Pass	Band Edge
67	802.11a	157	17355.00	49.61	68.30	-18.69	H	Peak	Pass	Harmonic

68	802.11a	165	5932.00	49.63	68.30	-18.67	H	PEAK	Pass	Band Edge
68	802.11a	165	17475.00	50.26	68.30	-18.04	V	Peak	Pass	Harmonic
69	802.11ax HE20	149	5637.85	49.00	68.30	-19.30	H	PEAK	Pass	Band Edge
69	802.11ax HE20	149	17235.00	47.90	68.30	-20.40	V	Peak	Pass	Harmonic
70	802.11ax HE20	149	5642.49	49.60	68.30	-18.70	H	PEAK	Pass	Band Edge
70	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
71	802.11ax HE20	149	5624.22	49.35	68.30	-18.95	H	PEAK	Pass	Band Edge
71	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
72	802.11ax HE20	149	5623.20	49.22	68.30	-19.08	H	PEAK	Pass	Band Edge
72	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
73	802.11ax HE20	157	5604.63	49.72	68.30	-18.58	V	PEAK	Pass	Band Edge
73	802.11ax HE20	157	17355.00	48.16	68.30	-20.14	V	Peak	Pass	Harmonic
74	802.11ax HE20	165	5931.75	50.05	68.30	-18.25	V	PEAK	Pass	Band Edge
74	802.11ax HE20	165	17475.00	49.74	68.30	-18.56	H	Peak	Pass	Harmonic
75	802.11ax HE20	165	5934.75	49.60	68.30	-18.70	V	PEAK	Pass	Band Edge
75	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
76	802.11ax HE20	165	5926.75	49.60	68.30	-18.70	V	PEAK	Pass	Band Edge
76	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
77	802.11ax HE20	165	5946.13	49.02	68.30	-19.28	H	PEAK	Pass	Band Edge
77	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
78	802.11ax HE40	151	5947.66	49.50	68.30	-18.80	V	PEAK	Pass	Band Edge
78	802.11ax HE40	151	17265.00	48.11	68.30	-20.19	H	Peak	Pass	Harmonic
79	802.11ax HE40	159	5614.04	50.36	68.30	-17.94	H	PEAK	Pass	Band Edge
79	802.11ax HE40	159	17385.00	48.99	68.30	-19.31	H	Peak	Pass	Harmonic
80	802.11ax HE80	155	5650.93	53.13	68.99	-15.86	V	PEAK	Pass	Band Edge
80	802.11ax HE80	155	17325.00	48.43	68.30	-19.87	H	Peak	Pass	Harmonic
81	802.11ax HE80_LF	42	49.40	26.18	40.00	-13.82	V	Peak	Pass	LF
82	802.11ax HE80_LF	155	84.32	26.12	40.00	-13.88	V	Peak	Pass	LF
83	CO-TX	-	5132.60	49.09	54.00	-4.91	V	Average	Pass	Band Edge
83		-	10420.00	46.31	68.30	-21.99	V	Peak	Pass	Harmonic
84	802.11ac VHT80	42	5136.29	47.98	54.00	-6.02	V	Average	Pass	Band Edge
84	802.11ac VHT80	42	10420.00	42.19	68.30	-26.11	V	Peak	Pass	Harmonic

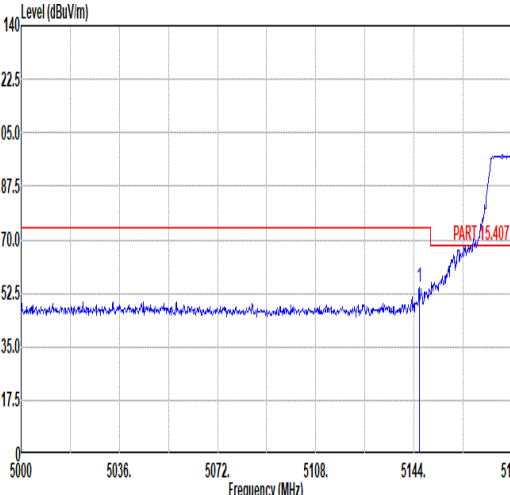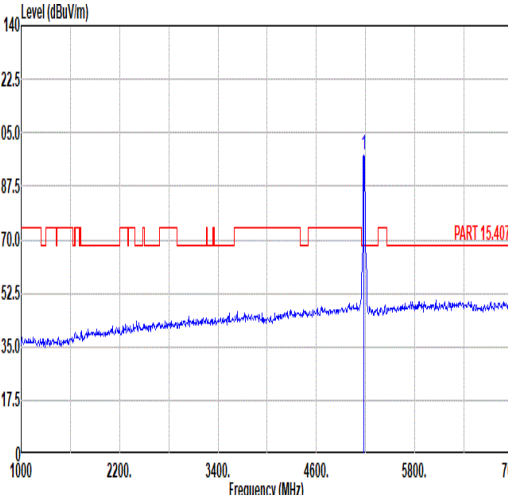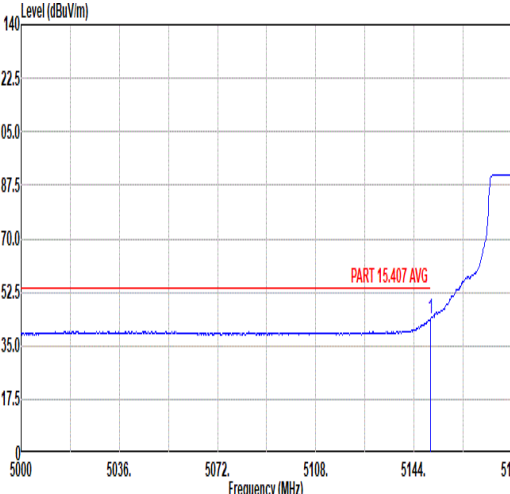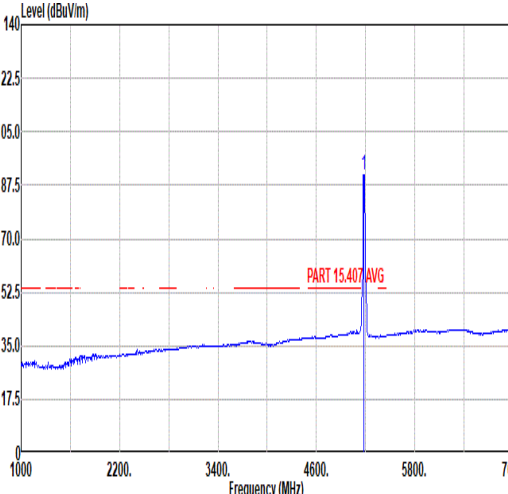


Mode	1																																																																																			
	Band Edge																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak																																																																																				
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.98	54.48	74.00	-19.52	45.31	33.99	7.92	32.74	316	219	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>97.71</td><td>-----</td><td>-----</td><td>88.49</td><td>34.01</td><td>7.94</td><td>32.73</td><td>316</td><td>219</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	97.71	-----	-----	88.49	34.01	7.94	32.73	316	219
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5145.98	54.48	74.00	-19.52	45.31	33.99	7.92	32.74	316	219	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5180.00	97.71	-----	-----	88.49	34.01	7.94	32.73	316	219	PEAK																																																																									
Avg																																																																																				
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	43.64	54.00	-10.36	34.47	33.99	7.92	32.74	316	219	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>91.06</td><td>-----</td><td>-----</td><td>81.84</td><td>34.01</td><td>7.94</td><td>32.73</td><td>316</td><td>219</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	91.06	-----	-----	81.84	34.01	7.94	32.73	316	219
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5149.94	43.64	54.00	-10.36	34.47	33.99	7.92	32.74	316	219	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5180.00	91.06	-----	-----	81.84	34.01	7.94	32.73	316	219	AVERAGE																																																																									

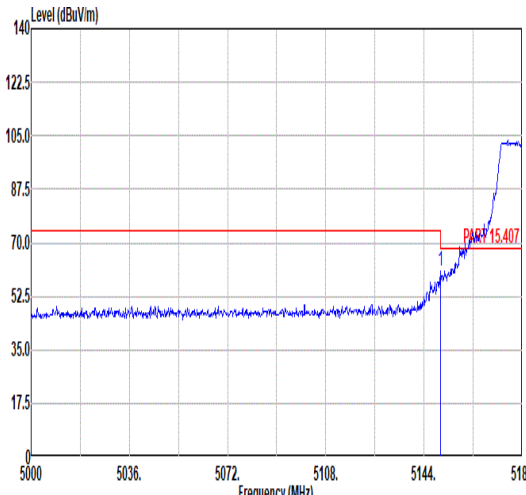
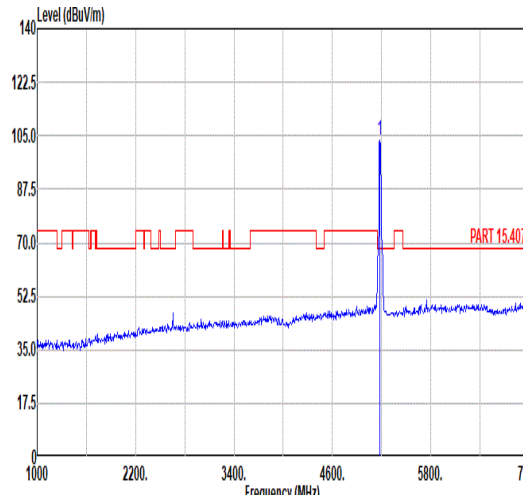
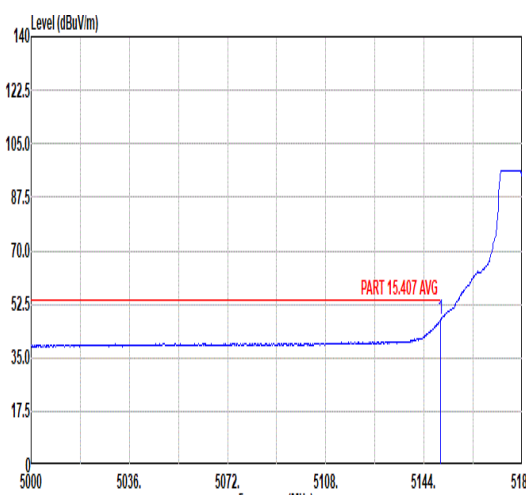
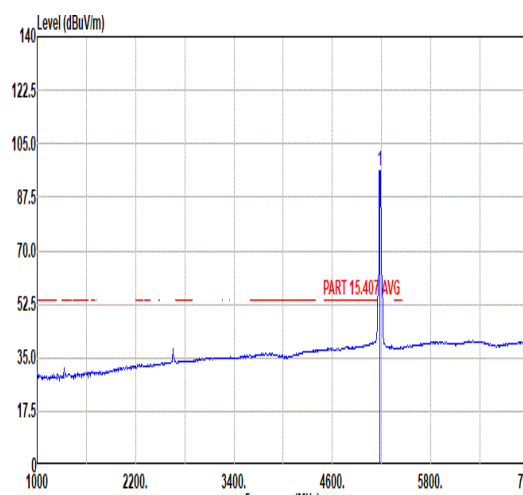


Mode	1																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>60.80</td><td>74.00</td><td>-13.20</td><td>51.63</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>170</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	60.80	74.00	-13.20	51.63	33.99	7.92	32.74	100	170	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>103.37</td><td>-----</td><td>-----</td><td>94.15</td><td>34.01</td><td>7.94</td><td>32.73</td><td>100</td><td>170</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	103.37	-----	-----	94.15	34.01	7.94	32.73	100	170
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.94	60.80	74.00	-13.20	51.63	33.99	7.92	32.74	100	170	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	103.37	-----	-----	94.15	34.01	7.94	32.73	100	170	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>47.30</td><td>54.00</td><td>-6.70</td><td>38.13</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>170</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	47.30	54.00	-6.70	38.13	33.99	7.92	32.74	100	170	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>96.40</td><td>-----</td><td>-----</td><td>87.17</td><td>34.01</td><td>7.94</td><td>32.72</td><td>100</td><td>170</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	96.40	-----	-----	87.17	34.01	7.94	32.72	100	170
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.94	47.30	54.00	-6.70	38.13	33.99	7.92	32.74	100	170	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	96.40	-----	-----	87.17	34.01	7.94	32.72	100	170	AVERAGE																																																																															


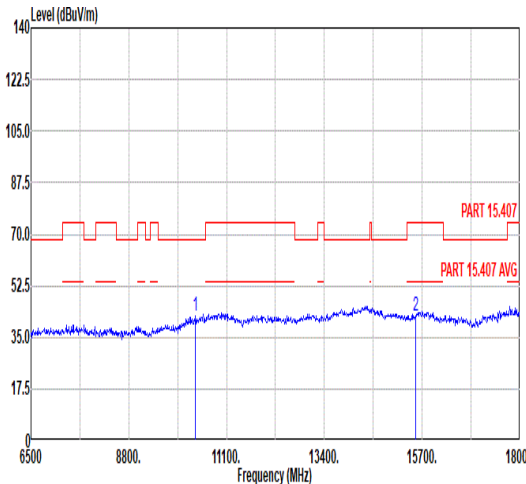


Mode	1																																																																
	Harmonic																																																																
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																
ANT	1																																																																
Pol.	Horizontal						Vertical																																																										
Peak Avg																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10360.00</td><td>42.26</td><td>68.30</td><td>-26.04</td><td>58.96</td><td>37.16</td><td>10.73</td><td>64.59</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>42.01</td><td>74.00</td><td>-31.99</td><td>53.25</td><td>39.42</td><td>12.72</td><td>63.38</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10360.00	42.26	68.30	-26.04	58.96	37.16	10.73	64.59	--	--	Peak	2	15540.00	42.01	74.00	-31.99	53.25	39.42	12.72	63.38	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	10360.00	42.26	68.30	-26.04	58.96	37.16	10.73	64.59	--	--	Peak																																																						
2	15540.00	42.01	74.00	-31.99	53.25	39.42	12.72	63.38	--	--	Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10360.00</td><td>40.70</td><td>68.30</td><td>-27.60</td><td>57.40</td><td>37.16</td><td>10.73</td><td>64.59</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>42.80</td><td>74.00</td><td>-31.20</td><td>54.04</td><td>39.42</td><td>12.72</td><td>63.38</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10360.00	40.70	68.30	-27.60	57.40	37.16	10.73	64.59	--	--	Peak	2	15540.00	42.80	74.00	-31.20	54.04	39.42	12.72	63.38	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	10360.00	40.70	68.30	-27.60	57.40	37.16	10.73	64.59	--	--	Peak																																																						
2	15540.00	42.80	74.00	-31.20	54.04	39.42	12.72	63.38	--	--	Peak																																																						

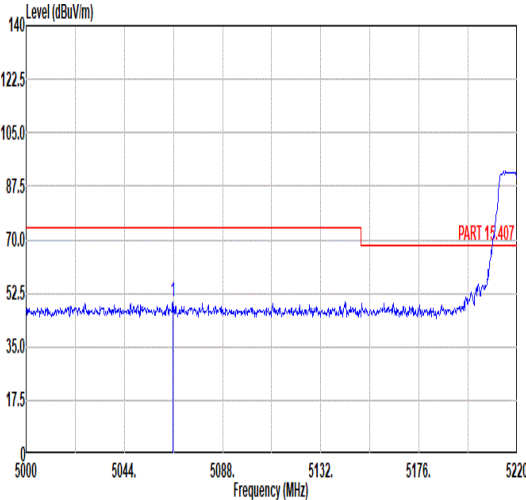
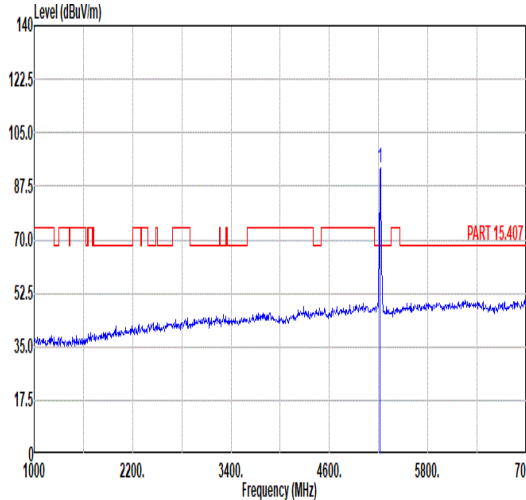
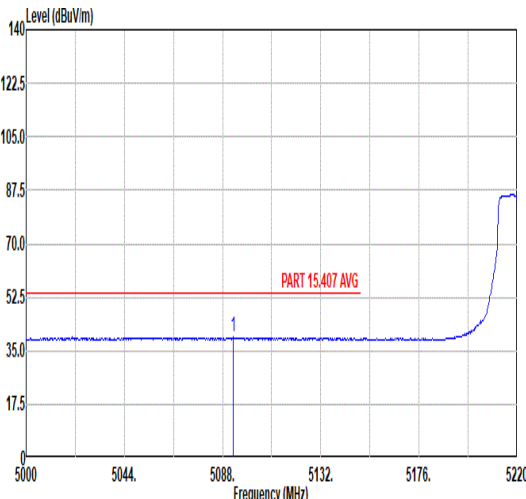
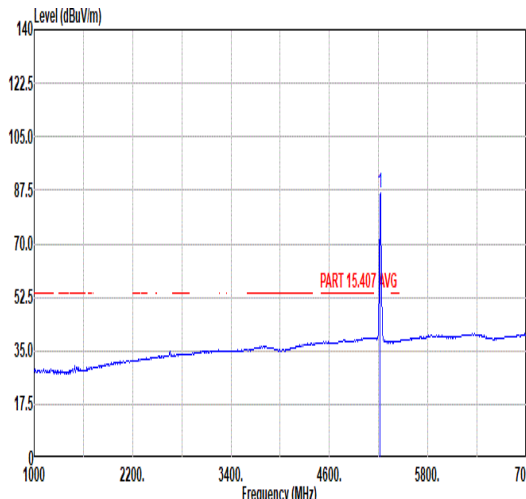


Mode	2																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5065.78</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>40.60</td><td>33.94</td><td>7.86</td><td>32.77</td><td>400</td><td>137</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5065.78	49.63	74.00	-24.37	40.60	33.94	7.86	32.77	400	137	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>93.29</td><td>-----</td><td>-----</td><td>83.98</td><td>34.03</td><td>7.99</td><td>32.71</td><td>400</td><td>137</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	93.29	-----	-----	83.98	34.03	7.99	32.71	400	137
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5065.78	49.63	74.00	-24.37	40.60	33.94	7.86	32.77	400	137	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5220.00	93.29	-----	-----	83.98	34.03	7.99	32.71	400	137	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5092.62</td><td>39.54</td><td>54.00</td><td>-14.46</td><td>30.46</td><td>33.96</td><td>7.88</td><td>32.76</td><td>400</td><td>137</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5092.62	39.54	54.00	-14.46	30.46	33.96	7.88	32.76	400	137	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>86.59</td><td>-----</td><td>-----</td><td>77.28</td><td>34.03</td><td>7.99</td><td>32.71</td><td>400</td><td>137</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	86.59	-----	-----	77.28	34.03	7.99	32.71	400	137
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5092.62	39.54	54.00	-14.46	30.46	33.96	7.88	32.76	400	137	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5220.00	86.59	-----	-----	77.28	34.03	7.99	32.71	400	137	AVERAGE																																																																															

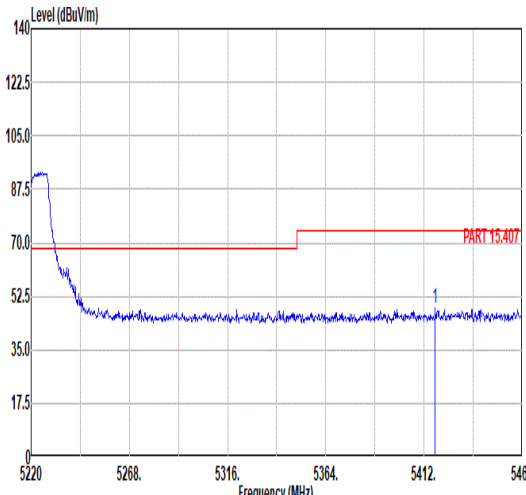
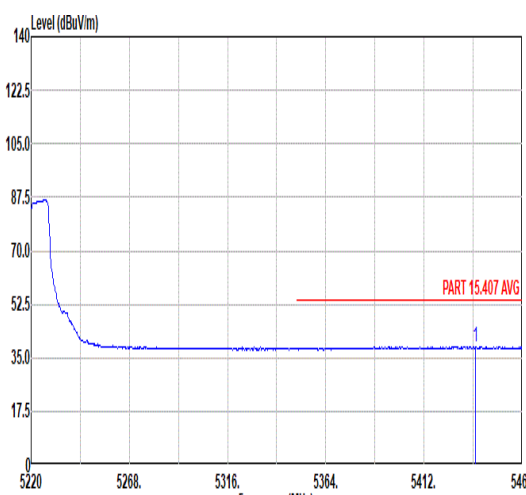


Mode	2																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5417.52</td><td>48.36</td><td>74.00</td><td>-25.64</td><td>38.37</td><td>34.15</td><td>8.47</td><td>32.63</td><td>400</td><td>137</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5417.52	48.36	74.00	-25.64	38.37	34.15	8.47	32.63	400	137	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5417.52	48.36	74.00	-25.64	38.37	34.15	8.47	32.63	400	137	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5436.96</td><td>38.59</td><td>54.00</td><td>-15.41</td><td>28.61</td><td>34.16</td><td>8.44</td><td>32.62</td><td>400</td><td>137</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5436.96	38.59	54.00	-15.41	28.61	34.16	8.44	32.62	400	137	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5436.96	38.59	54.00	-15.41	28.61	34.16	8.44	32.62	400	137	AVERAGE																																								

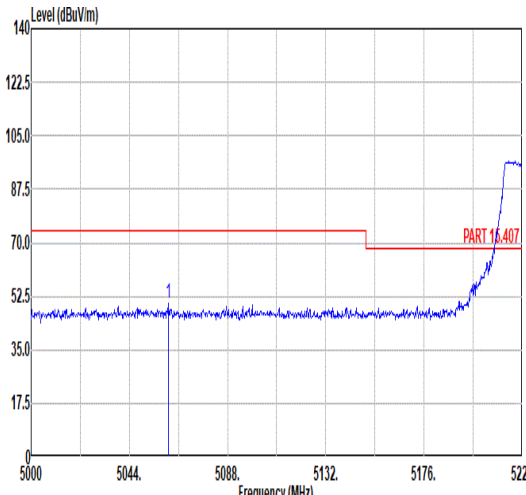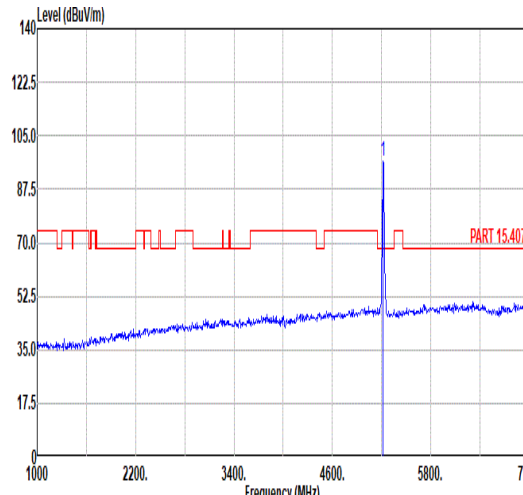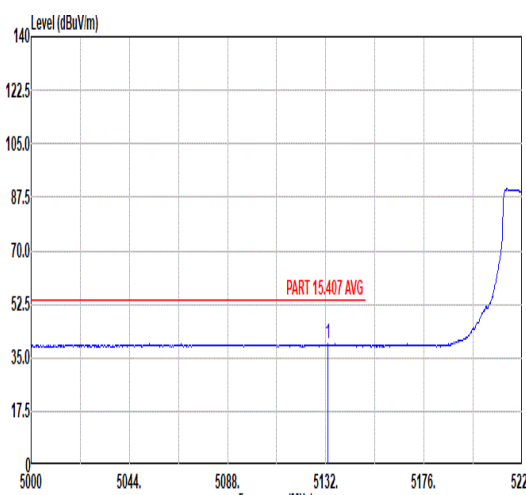
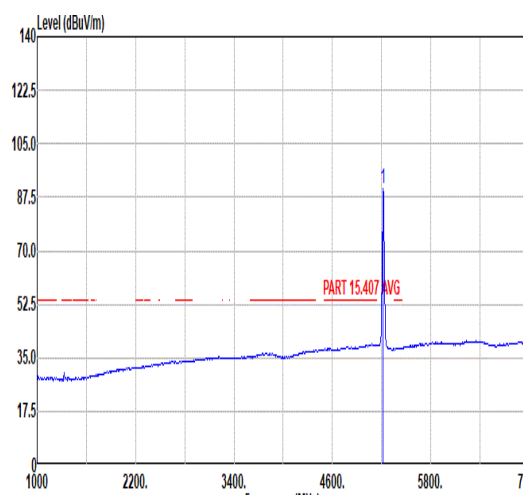


Mode	2																																																		
	Band Edge - L																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																		
ANT	1																																																		
Pol.	Vertical																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5061.38</td><td>50.05</td><td>74.00</td><td>-23.95</td><td>41.02</td><td>33.94</td><td>7.86</td><td>32.77</td><td>200</td><td>62</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5061.38	50.05	74.00	-23.95	41.02	33.94	7.86	32.77	200	62
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5061.38	50.05	74.00	-23.95	41.02	33.94	7.86	32.77	200	62	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>96.84</td><td>-----</td><td>-----</td><td>87.56</td><td>34.03</td><td>7.96</td><td>32.71</td><td>200</td><td>62</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	96.84	-----	-----	87.56	34.03	7.96	32.71	200	62
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5220.00	96.84	-----	-----	87.56	34.03	7.96	32.71	200	62	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5133.10</td><td>39.54</td><td>54.00</td><td>-14.46</td><td>30.40</td><td>33.98</td><td>7.91</td><td>32.75</td><td>200</td><td>62</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5133.10	39.54	54.00	-14.46	30.40	33.98	7.91	32.75	200	62
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5133.10	39.54	54.00	-14.46	30.40	33.98	7.91	32.75	200	62	AVERAGE																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>90.28</td><td>-----</td><td>-----</td><td>81.00</td><td>34.03</td><td>7.96</td><td>32.71</td><td>200</td><td>62</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	90.28	-----	-----	81.00	34.03	7.96	32.71	200	62
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5220.00	90.28	-----	-----	81.00	34.03	7.96	32.71	200	62	AVERAGE																																								



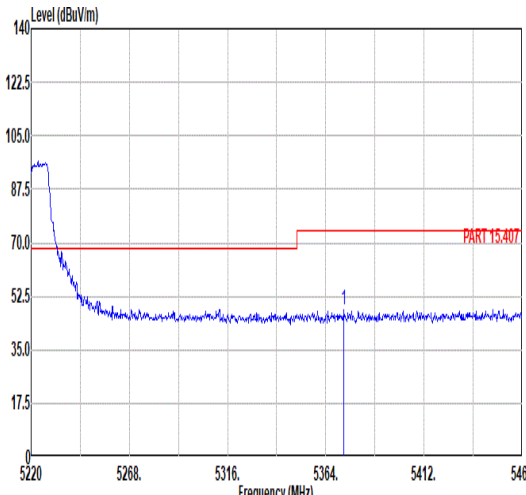
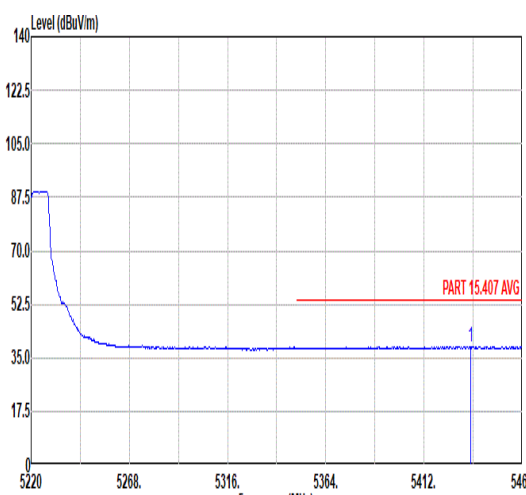


Mode	2																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5372.88</td><td>48.17</td><td>74.00</td><td>-25.83</td><td>38.31</td><td>34.12</td><td>8.39</td><td>32.65</td><td>200</td><td>62</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5372.88	48.17	74.00	-25.83	38.31	34.12	8.39	32.65	200	62	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5372.88	48.17	74.00	-25.83	38.31	34.12	8.39	32.65	200	62	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5434.80</td><td>38.67</td><td>54.00</td><td>-15.33</td><td>28.69</td><td>34.16</td><td>8.44</td><td>32.62</td><td>200</td><td>62</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5434.80	38.67	54.00	-15.33	28.69	34.16	8.44	32.62	200	62	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5434.80	38.67	54.00	-15.33	28.69	34.16	8.44	32.62	200	62	AVERAGE																																								

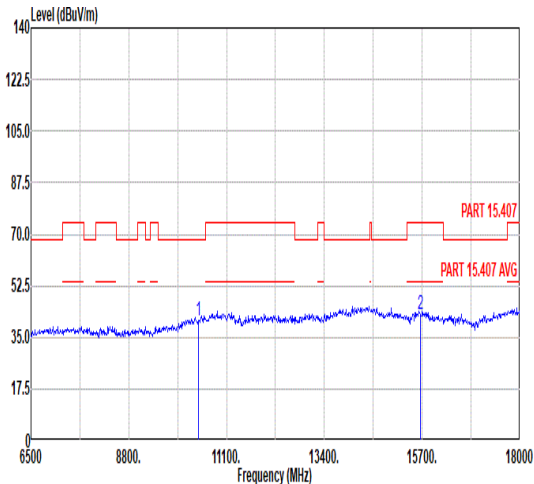
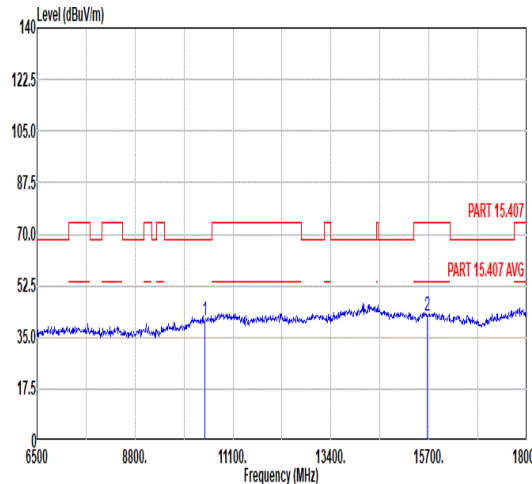


Mode	2																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal						Vertical																																																																																																									
Peak Avg																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>40.79</td><td>68.30</td><td>-27.51</td><td>57.41</td><td>37.35</td><td>10.79</td><td>64.76</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>42.60</td><td>74.00</td><td>-31.40</td><td>54.04</td><td>39.46</td><td>12.72</td><td>63.62</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	40.79	68.30	-27.51	57.41	37.35	10.79	64.76	--	--	Peak	2	15660.00	42.60	74.00	-31.40	54.04	39.46	12.72	63.62	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>40.83</td><td>68.30</td><td>-27.47</td><td>57.45</td><td>37.35</td><td>10.79</td><td>64.76</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>42.37</td><td>74.00</td><td>-31.63</td><td>53.81</td><td>39.46</td><td>12.72</td><td>63.62</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	40.83	68.30	-27.47	57.45	37.35	10.79	64.76	--	--	Peak	2	15660.00	42.37	74.00	-31.63	53.81	39.46	12.72	63.62	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	10440.00	40.79	68.30	-27.51	57.41	37.35	10.79	64.76	--	--	Peak																																																																																																					
2	15660.00	42.60	74.00	-31.40	54.04	39.46	12.72	63.62	--	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	10440.00	40.83	68.30	-27.47	57.45	37.35	10.79	64.76	--	--	Peak																																																																																																					
2	15660.00	42.37	74.00	-31.63	53.81	39.46	12.72	63.62	--	--	Peak																																																																																																					

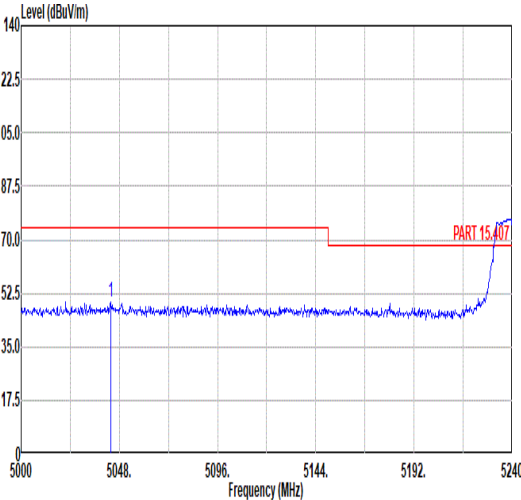
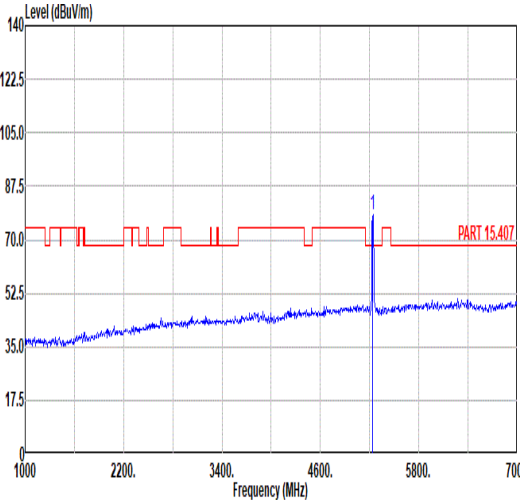
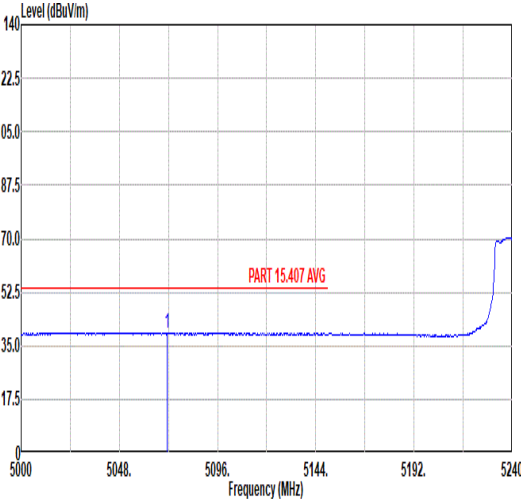
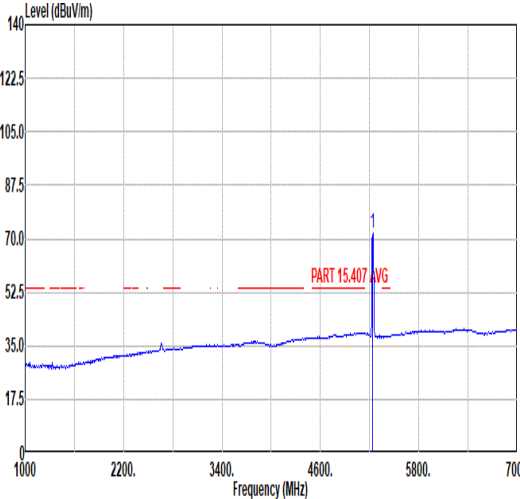


Mode	3																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5043.68</td><td>49.79</td><td>74.00</td><td>-24.21</td><td>40.79</td><td>33.93</td><td>7.85</td><td>32.78</td><td>200</td><td>250</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5043.68	49.79	74.00	-24.21	40.79	33.93	7.85	32.78	200	250	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>78.05</td><td>68.30</td><td>9.75</td><td>68.66</td><td>34.05</td><td>8.04</td><td>32.70</td><td>200</td><td>250</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	78.05	68.30	9.75	68.66	34.05	8.04	32.70	200	250
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5043.68	49.79	74.00	-24.21	40.79	33.93	7.85	32.78	200	250	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5240.00	78.05	68.30	9.75	68.66	34.05	8.04	32.70	200	250	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5071.28</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>30.30</td><td>33.94</td><td>7.87</td><td>32.77</td><td>200</td><td>250</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5071.28	39.34	54.00	-14.66	30.30	33.94	7.87	32.77	200	250	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>71.85</td><td>-----</td><td>-----</td><td>62.44</td><td>34.05</td><td>8.06</td><td>32.70</td><td>200</td><td>250</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	71.85	-----	-----	62.44	34.05	8.06	32.70	200	250
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5071.28	39.34	54.00	-14.66	30.30	33.94	7.87	32.77	200	250	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5240.00	71.85	-----	-----	62.44	34.05	8.06	32.70	200	250	AVERAGE																																																																															

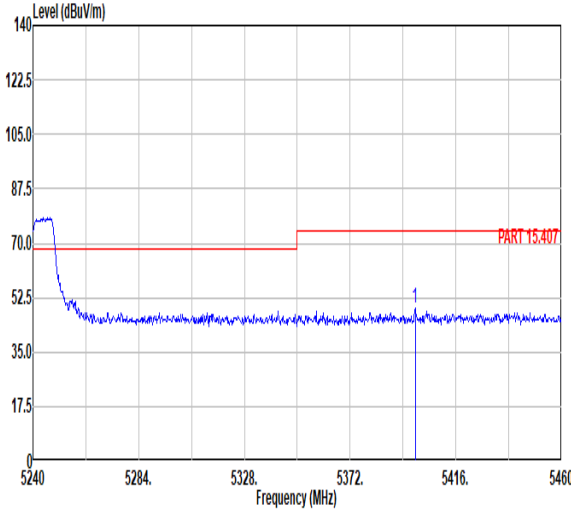
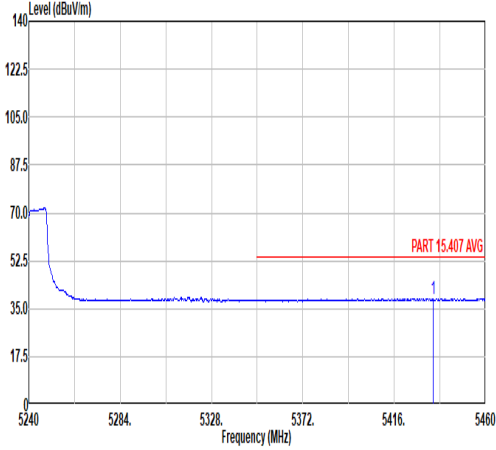


Mode	3																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																									
ANT	1																																									
Pol.	Horizontal					Fundamental																																				
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5399.06</td><td>49.28</td><td>74.00</td><td>-24.72</td><td>39.32</td><td>34.14</td><td>8.46</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5399.06	49.28	74.00	-24.72	39.32	34.14	8.46	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1	5399.06	49.28	74.00	-24.72	39.32	34.14	8.46																																			
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5434.70</td><td>38.66</td><td>54.00</td><td>-15.34</td><td>28.68</td><td>34.16</td><td>8.44</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5434.70	38.66	54.00	-15.34	28.68	34.16	8.44	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1	5434.70	38.66	54.00	-15.34	28.68	34.16	8.44																																			

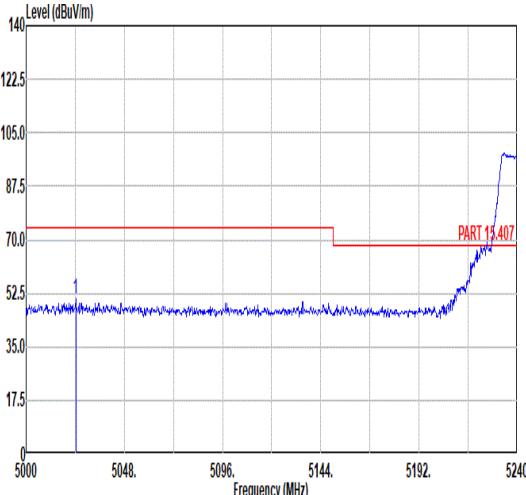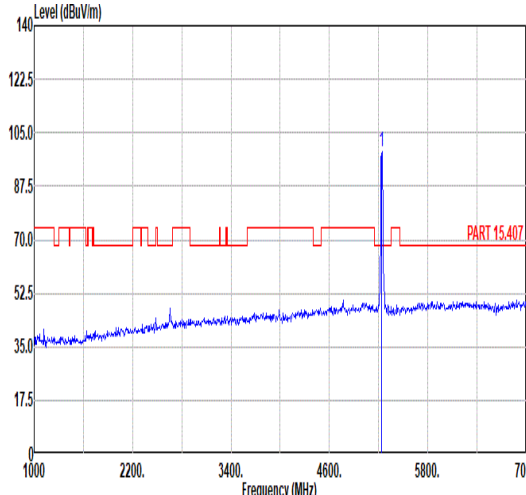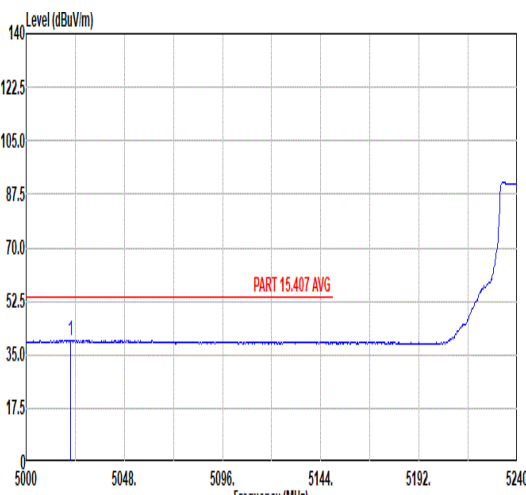
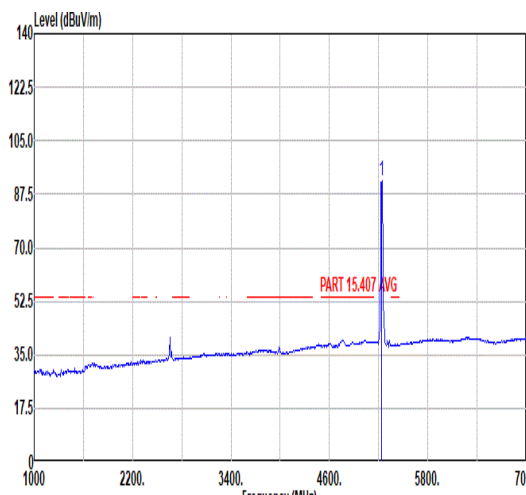


Mode	3																																																																																
	Band Edge - L																																																																																
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																
ANT	1																																																																																
Pol.	Vertical						Fundamental																																																																										
Peak																																																																																	
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5024.24	50.76	74.00	-23.24	41.80	33.92	7.83	32.79	300	187	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>98.71</td><td>-----</td><td>-----</td><td>89.30</td><td>34.05</td><td>8.06</td><td>32.70</td><td>300</td><td>187</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	98.71	-----	-----	89.30	34.05	8.06	32.70	300	187	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5024.24	50.76	74.00	-23.24	41.80	33.92	7.83	32.79	300	187	PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5240.00	98.71	-----	-----	89.30	34.05	8.06	32.70	300	187	PEAK																																																																						
Avg																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5021.60</td><td>39.78</td><td>54.00</td><td>-14.22</td><td>30.82</td><td>33.92</td><td>7.83</td><td>32.79</td><td>300</td><td>187</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5021.60	39.78	54.00	-14.22	30.82	33.92	7.83	32.79	300	187	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>92.15</td><td>-----</td><td>-----</td><td>82.74</td><td>34.05</td><td>8.06</td><td>32.70</td><td>300</td><td>187</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	92.15	-----	-----	82.74	34.05	8.06	32.70	300	187
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5021.60	39.78	54.00	-14.22	30.82	33.92	7.83	32.79	300	187	AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5240.00	92.15	-----	-----	82.74	34.05	8.06	32.70	300	187	AVERAGE																																																																						



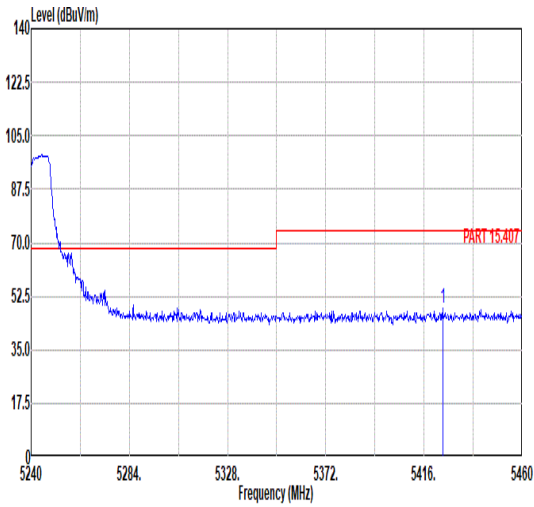
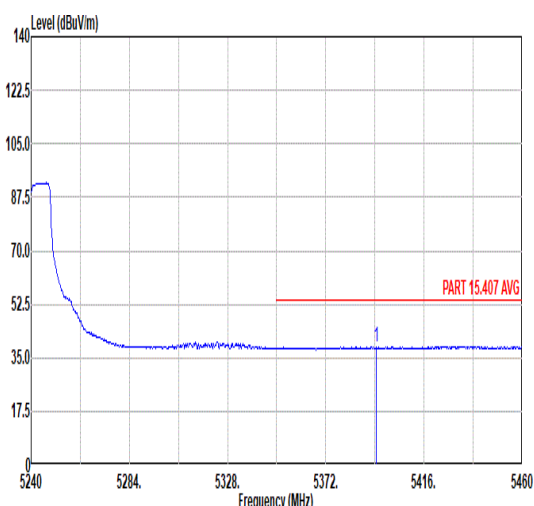


Mode	3																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5424.36</td><td>48.34</td><td>74.00</td><td>-25.66</td><td>38.36</td><td>34.15</td><td>8.46</td><td>32.63</td><td>300</td><td>187</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5424.36	48.34	74.00	-25.66	38.36	34.15	8.46	32.63	300	187	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5424.36	48.34	74.00	-25.66	38.36	34.15	8.46	32.63	300	187	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5394.66</td><td>38.64</td><td>54.00</td><td>-15.36</td><td>28.69</td><td>34.14</td><td>8.45</td><td>32.64</td><td>300</td><td>187</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5394.66	38.64	54.00	-15.36	28.69	34.14	8.45	32.64	300	187	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5394.66	38.64	54.00	-15.36	28.69	34.14	8.45	32.64	300	187	AVERAGE																																								



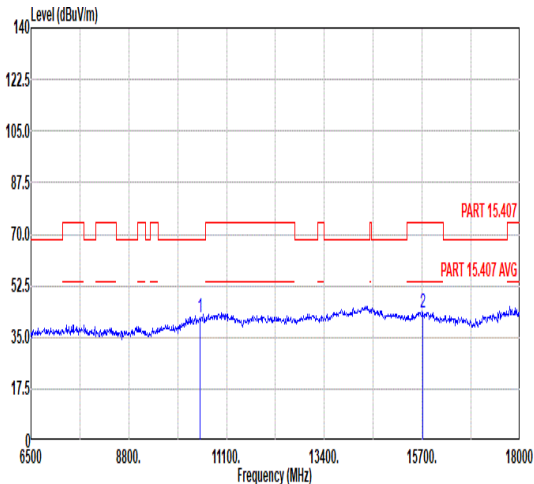
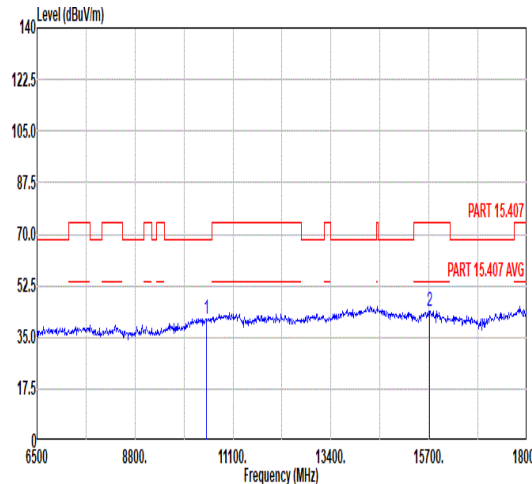


Mode	3																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal						Vertical																																																																																																									
Peak Avg																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>41.61</td><td>68.30</td><td>-26.69</td><td>58.19</td><td>37.45</td><td>10.82</td><td>64.85</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>43.10</td><td>74.00</td><td>-30.90</td><td>54.64</td><td>39.49</td><td>12.71</td><td>63.74</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	41.61	68.30	-26.69	58.19	37.45	10.82	64.85	--	--	Peak	2	15720.00	43.10	74.00	-30.90	54.64	39.49	12.71	63.74	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>41.05</td><td>68.30</td><td>-27.25</td><td>57.63</td><td>37.45</td><td>10.82</td><td>64.85</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>43.75</td><td>74.00</td><td>-30.25</td><td>55.29</td><td>39.49</td><td>12.71</td><td>63.74</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	41.05	68.30	-27.25	57.63	37.45	10.82	64.85	--	--	Peak	2	15720.00	43.75	74.00	-30.25	55.29	39.49	12.71	63.74	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	10480.00	41.61	68.30	-26.69	58.19	37.45	10.82	64.85	--	--	Peak																																																																																																					
2	15720.00	43.10	74.00	-30.90	54.64	39.49	12.71	63.74	--	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	10480.00	41.05	68.30	-27.25	57.63	37.45	10.82	64.85	--	--	Peak																																																																																																					
2	15720.00	43.75	74.00	-30.25	55.29	39.49	12.71	63.74	--	--	Peak																																																																																																					

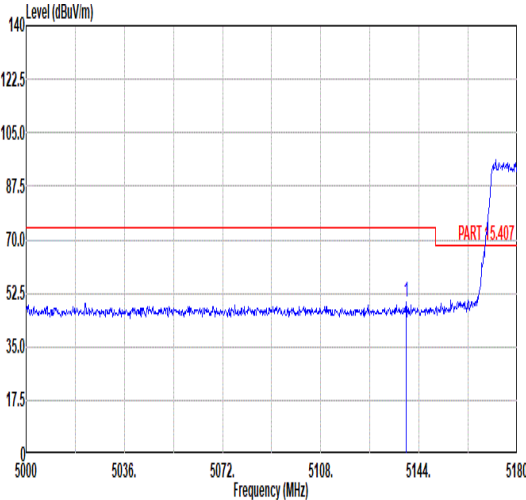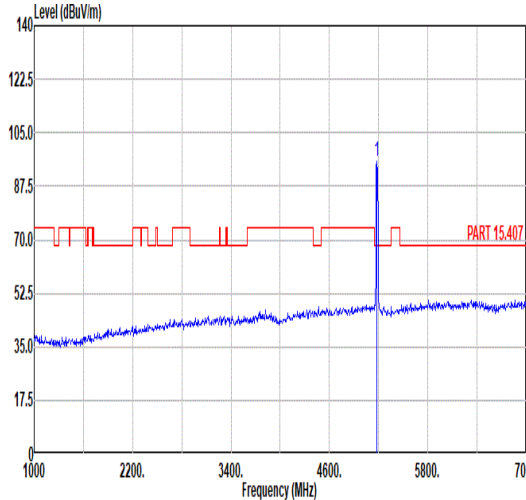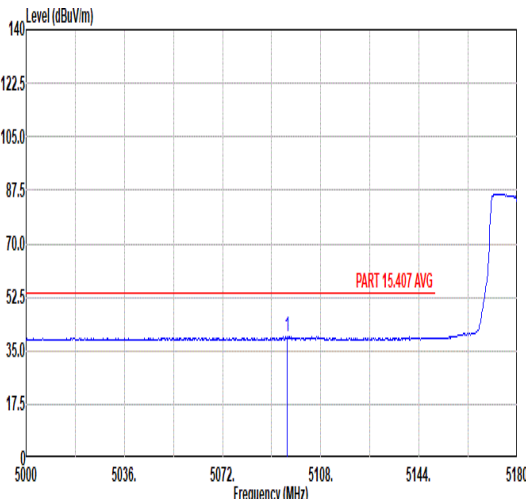
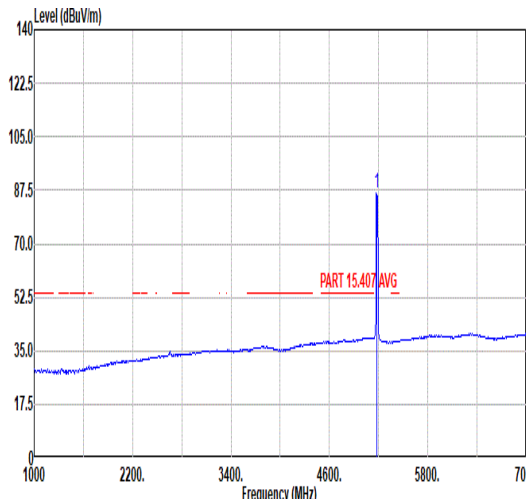


Mode	4																																																	
	Band Edge																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																	
ANT	1																																																	
Pol.	Horizontal																																																	
Peak																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5139.32</td><td>49.60</td><td>74.00</td><td>-24.40</td><td>40.45</td><td>33.98</td><td>7.91</td><td>32.74</td><td>300</td><td>158</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5139.32	49.60	74.00	-24.40	40.45	33.98	7.91	32.74	300	158
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5139.32	49.60	74.00	-24.40	40.45	33.98	7.91	32.74	300	158	PEAK																																							
Fundamental																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.55</td><td>-----</td><td>-----</td><td>86.33</td><td>34.01</td><td>7.94</td><td>32.73</td><td>300</td><td>158</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.55	-----	-----	86.33	34.01	7.94	32.73	300	158
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5180.00	95.55	-----	-----	86.33	34.01	7.94	32.73	300	158	PEAK																																							
Avg																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5095.58</td><td>39.86</td><td>54.00</td><td>-14.14</td><td>30.78</td><td>33.96</td><td>7.88</td><td>32.76</td><td>300</td><td>158</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5095.58	39.86	54.00	-14.14	30.78	33.96	7.88	32.76	300	158
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5095.58	39.86	54.00	-14.14	30.78	33.96	7.88	32.76	300	158	AVERAGE																																							
AVERAGE																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>86.40</td><td>-----</td><td>-----</td><td>77.20</td><td>34.00</td><td>7.93</td><td>32.73</td><td>300</td><td>158</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	86.40	-----	-----	77.20	34.00	7.93	32.73	300	158
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5180.00	86.40	-----	-----	77.20	34.00	7.93	32.73	300	158	AVERAGE																																							

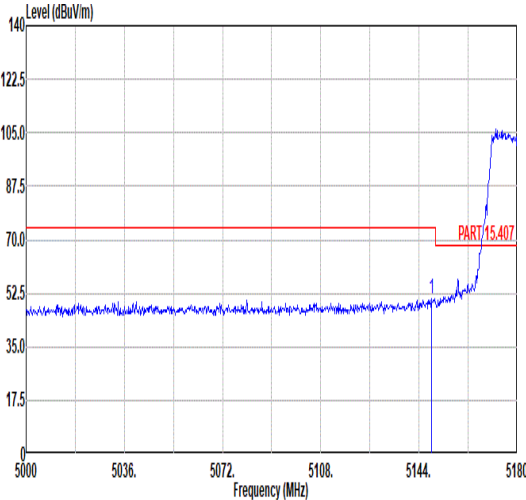
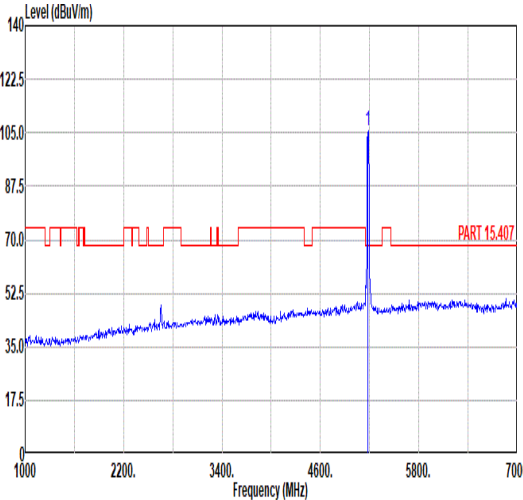
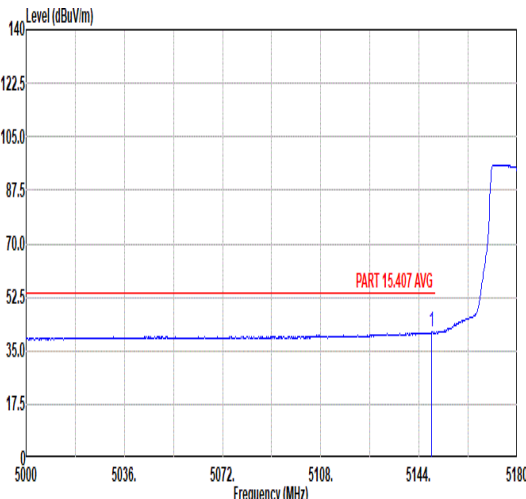
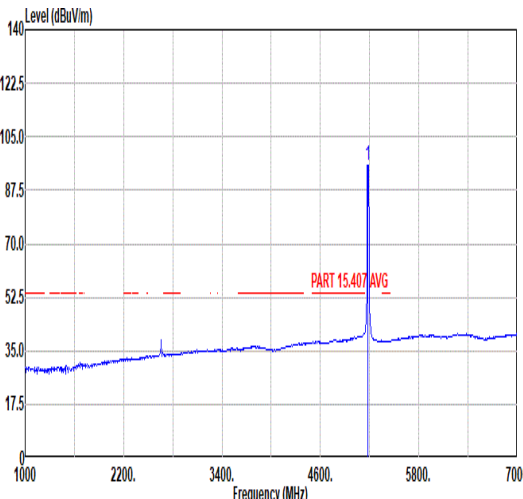


Mode	4																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.50</td><td>50.88</td><td>74.00</td><td>-23.12</td><td>41.71</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>174</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.50	50.88	74.00	-23.12	41.71	33.99	7.92	32.74	100	174	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>105.41</td><td>-----</td><td>-----</td><td>96.18</td><td>34.01</td><td>7.94</td><td>32.72</td><td>100</td><td>174</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	105.41	-----	-----	96.18	34.01	7.94	32.72	100	174
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5148.50	50.88	74.00	-23.12	41.71	33.99	7.92	32.74	100	174	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	105.41	-----	-----	96.18	34.01	7.94	32.72	100	174	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.68</td><td>41.01</td><td>54.00</td><td>-12.99</td><td>31.84</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>174</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.68	41.01	54.00	-12.99	31.84	33.99	7.92	32.74	100	174	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.76</td><td>-----</td><td>-----</td><td>86.56</td><td>34.00</td><td>7.93</td><td>32.73</td><td>100</td><td>174</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.76	-----	-----	86.56	34.00	7.93	32.73	100	174
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5148.68	41.01	54.00	-12.99	31.84	33.99	7.92	32.74	100	174	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	95.76	-----	-----	86.56	34.00	7.93	32.73	100	174	AVERAGE																																																																															



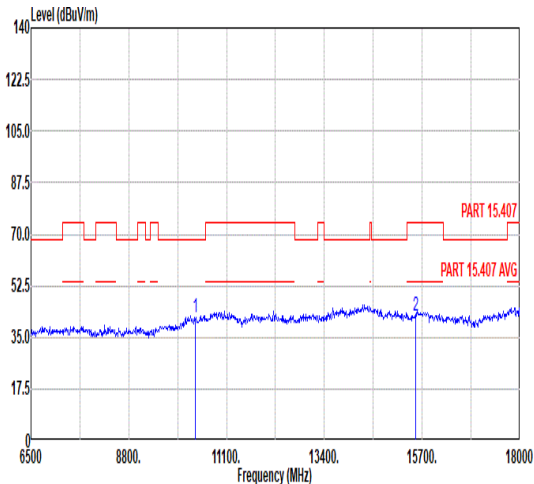
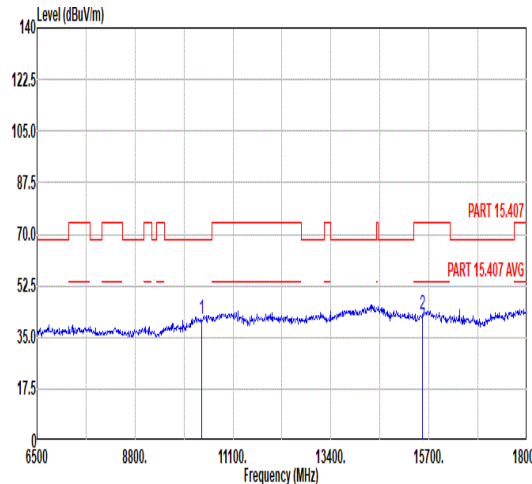


Mode	4																																																																																																																		
	Harmonic																																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																																		
ANT	1																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																												
Peak Avg																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>41.60</td><td>68.30</td><td>-26.70</td><td>58.30</td><td>37.16</td><td>10.73</td><td>64.59</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>42.49</td><td>74.00</td><td>-31.51</td><td>53.73</td><td>39.42</td><td>12.72</td><td>63.38</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	41.60	68.30	-26.70	58.30	37.16	10.73	64.59	--	--	Peak	2	15540.00	42.49	74.00	-31.51	53.73	39.42	12.72	63.38	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>41.31</td><td>68.30</td><td>-26.99</td><td>58.01</td><td>37.16</td><td>10.73</td><td>64.59</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>42.86</td><td>74.00</td><td>-31.14</td><td>54.10</td><td>39.42</td><td>12.72</td><td>63.38</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	41.31	68.30	-26.99	58.01	37.16	10.73	64.59	--	--	Peak	2	15540.00	42.86	74.00	-31.14	54.10	39.42	12.72	63.38	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	10360.00	41.60	68.30	-26.70	58.30	37.16	10.73	64.59	--	--	Peak																																																																																																								
2	15540.00	42.49	74.00	-31.51	53.73	39.42	12.72	63.38	--	--	Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	10360.00	41.31	68.30	-26.99	58.01	37.16	10.73	64.59	--	--	Peak																																																																																																								
2	15540.00	42.86	74.00	-31.14	54.10	39.42	12.72	63.38	--	--	Peak																																																																																																								

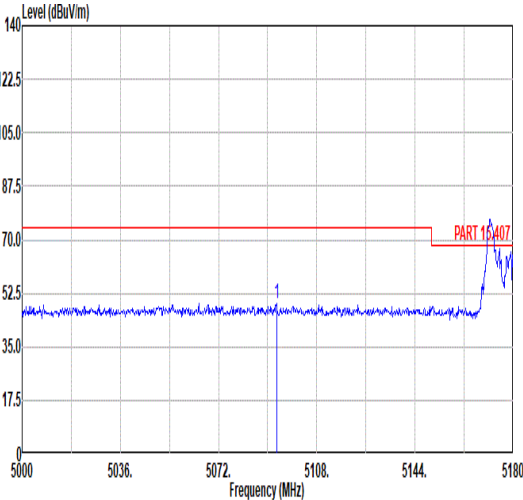
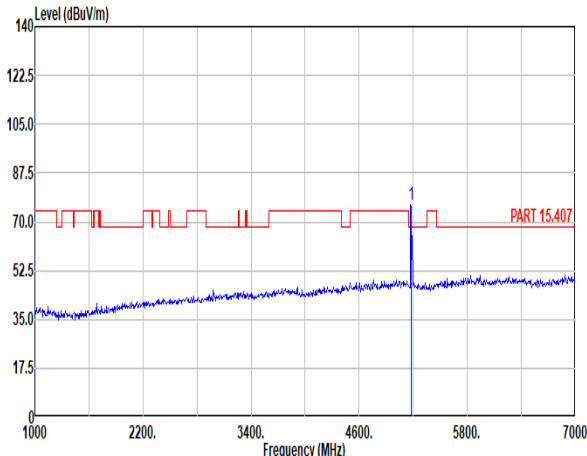
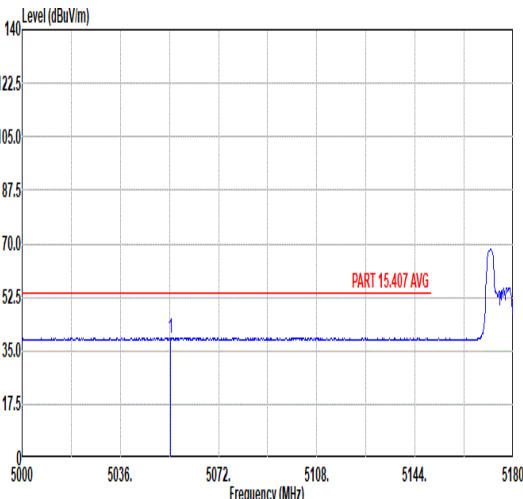
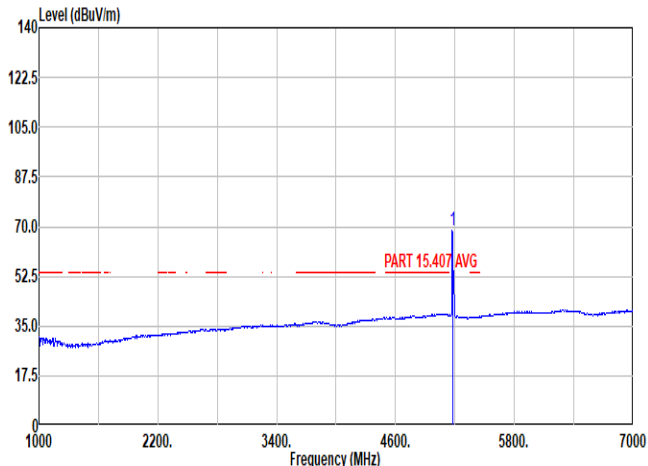


Mode	5																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5093.24</td><td>48.94</td><td>74.00</td><td>-25.06</td><td>39.86</td><td>33.96</td><td>7.88</td><td>32.76</td><td>200</td><td>178</td><td>PEAK</td><td></td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	5093.24	48.94	74.00	-25.06	39.86	33.96	7.88	32.76	200	178	PEAK		<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>76.14</td><td>68.30</td><td>7.84</td><td>66.94</td><td>34.00</td><td>7.93</td><td>32.73</td><td>200</td><td>178</td><td>PEAK</td><td></td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	76.14	68.30	7.84	66.94	34.00	7.93	32.73	200	178	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5093.24	48.94	74.00	-25.06	39.86	33.96	7.88	32.76	200	178	PEAK																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5180.00	76.14	68.30	7.84	66.94	34.00	7.93	32.73	200	178	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5054.36</td><td>39.30</td><td>54.00</td><td>-14.70</td><td>30.30</td><td>33.93</td><td>7.85</td><td>32.78</td><td>200</td><td>178</td><td>AVERAGE</td><td></td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	5054.36	39.30	54.00	-14.70	30.30	33.93	7.85	32.78	200	178	AVERAGE		<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>68.90</td><td>-----</td><td>-----</td><td>-----</td><td>59.70</td><td>34.00</td><td>7.93</td><td>32.73</td><td>200</td><td>178</td><td>AVERAGE</td><td></td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	68.90	-----	-----	-----	59.70	34.00	7.93	32.73	200	178	AVERAGE
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5054.36	39.30	54.00	-14.70	30.30	33.93	7.85	32.78	200	178	AVERAGE																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5180.00	68.90	-----	-----	-----	59.70	34.00	7.93	32.73	200	178	AVERAGE																																																																														

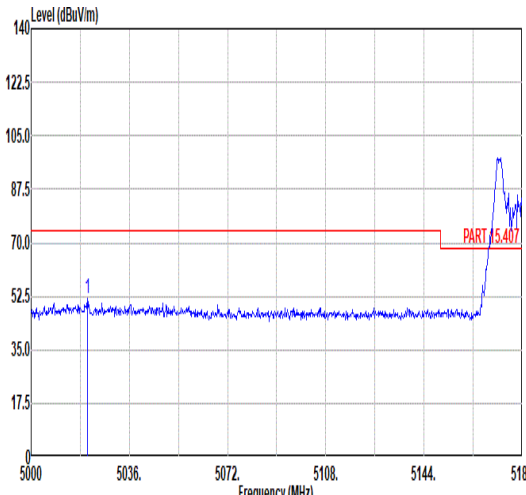
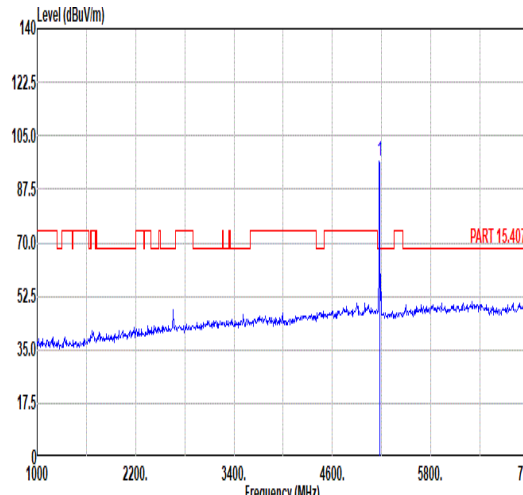
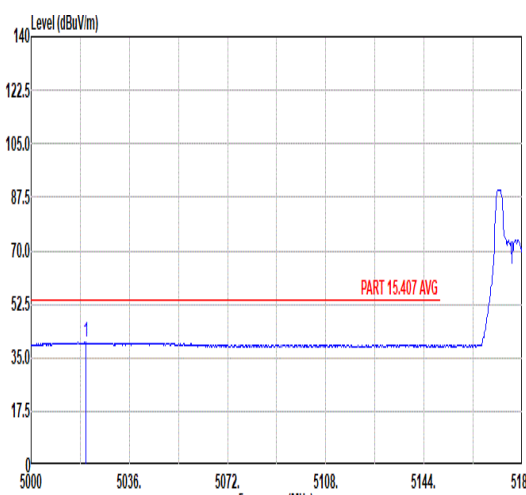
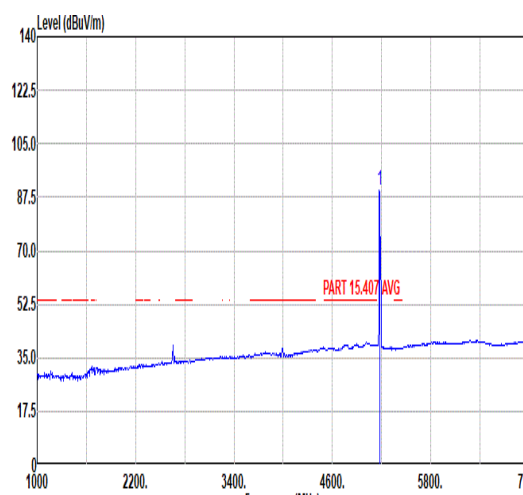


Mode	5																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5020.52</td><td>51.82</td><td>74.00</td><td>-22.18</td><td>42.86</td><td>33.92</td><td>7.83</td><td>32.79</td><td>298</td><td>179</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5020.52	51.82	74.00	-22.18	42.86	33.92	7.83	32.79	298	179	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>96.61</td><td>-----</td><td>-----</td><td>87.41</td><td>34.00</td><td>7.93</td><td>32.73</td><td>298</td><td>179</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	96.61	-----	-----	87.41	34.00	7.93	32.73	298	179
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5020.52	51.82	74.00	-22.18	42.86	33.92	7.83	32.79	298	179	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	96.61	-----	-----	87.41	34.00	7.93	32.73	298	179	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5019.98</td><td>40.15</td><td>54.00</td><td>-13.85</td><td>31.20</td><td>33.91</td><td>7.83</td><td>32.79</td><td>298</td><td>179</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5019.98	40.15	54.00	-13.85	31.20	33.91	7.83	32.79	298	179	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>89.99</td><td>-----</td><td>-----</td><td>80.79</td><td>34.00</td><td>7.93</td><td>32.73</td><td>298</td><td>179</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	89.99	-----	-----	80.79	34.00	7.93	32.73	298	179
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5019.98	40.15	54.00	-13.85	31.20	33.91	7.83	32.79	298	179	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	89.99	-----	-----	80.79	34.00	7.93	32.73	298	179	AVERAGE																																																																															

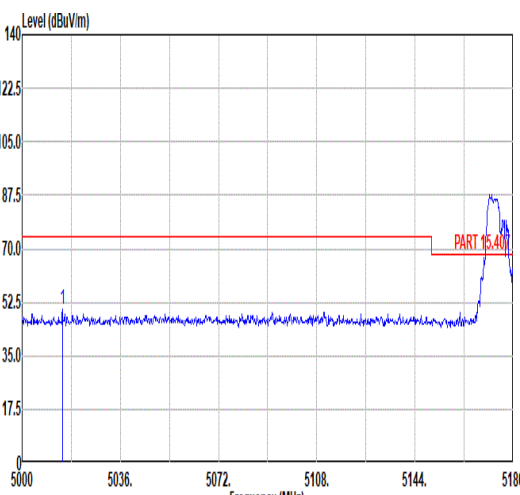
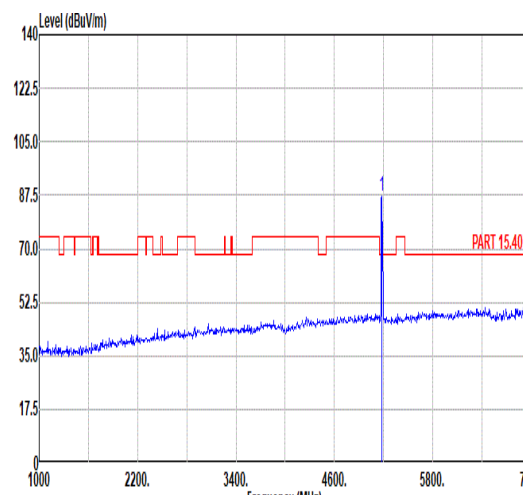
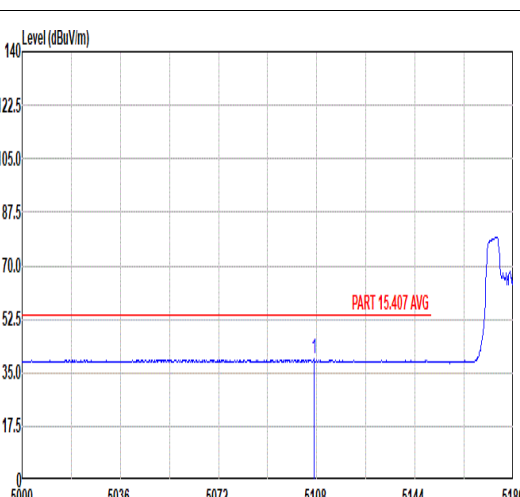
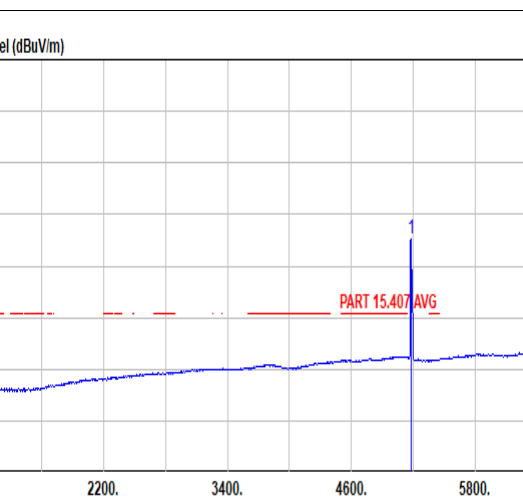


Mode	6																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5014.76</td><td>50.32</td><td>74.00</td><td>-23.68</td><td>41.37</td><td>33.91</td><td>7.83</td><td>32.79</td><td>274</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5014.76	50.32	74.00	-23.68	41.37	33.91	7.83	32.79	274	360	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>86.96</td><td>-----</td><td>-----</td><td>77.74</td><td>34.01</td><td>7.94</td><td>32.73</td><td>274</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	86.96	-----	-----	77.74	34.01	7.94	32.73	274	360
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5014.76	50.32	74.00	-23.68	41.37	33.91	7.83	32.79	274	360	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	86.96	-----	-----	77.74	34.01	7.94	32.73	274	360	PEAK																																																																																
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5106.92</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>30.27</td><td>33.97</td><td>7.89</td><td>32.76</td><td>274</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5106.92	39.37	54.00	-14.63	30.27	33.97	7.89	32.76	274	360	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>79.08</td><td>-----</td><td>-----</td><td>69.86</td><td>34.01</td><td>7.94</td><td>32.73</td><td>274</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	79.08	-----	-----	69.86	34.01	7.94	32.73	274	360
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5106.92	39.37	54.00	-14.63	30.27	33.97	7.89	32.76	274	360	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	79.08	-----	-----	69.86	34.01	7.94	32.73	274	360	AVERAGE																																																																																

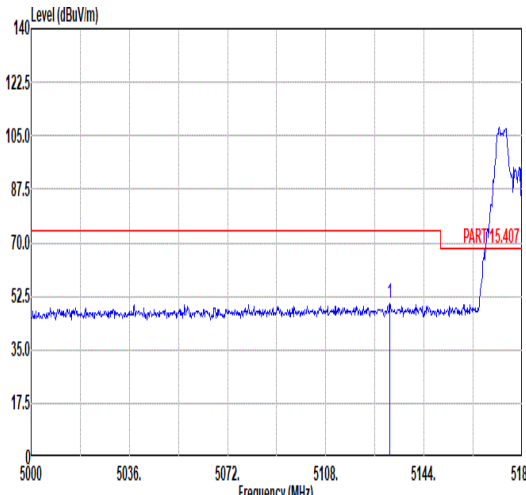
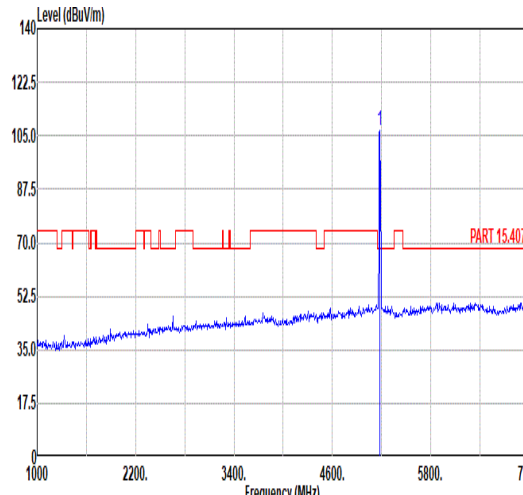
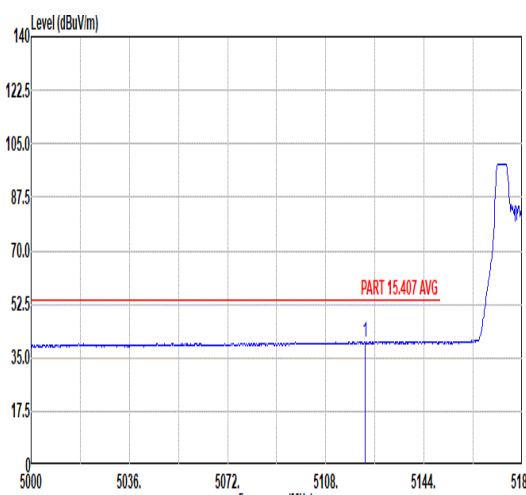
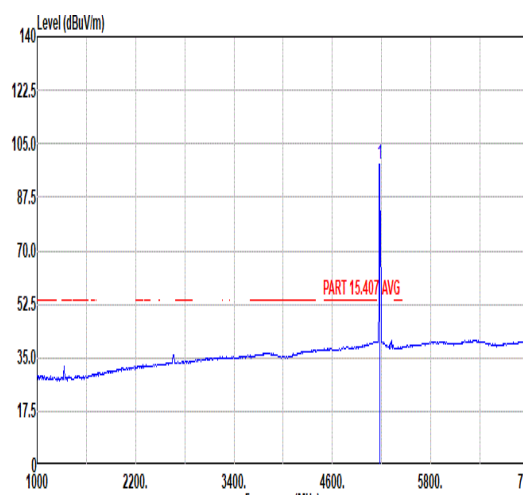


Mode	6																																																																																												
	Band Edge																																																																																												
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical					Fundamental																																																																																							
Peak																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5131.58</td><td>50.37</td><td>74.00</td><td>-23.63</td><td>41.23</td><td>33.98</td><td>7.91</td><td>32.75</td><td>100</td><td>171</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5131.58	50.37	74.00	-23.63	41.23	33.98	7.91	32.75	100	171	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>106.53</td><td>-----</td><td>-----</td><td>97.31</td><td>34.01</td><td>7.94</td><td>32.73</td><td>100</td><td>171</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	106.53	-----	-----	97.31	34.01	7.94	32.73	100	171
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5131.58	50.37	74.00	-23.63	41.23	33.98	7.91	32.75	100	171	PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5180.00	106.53	-----	-----	97.31	34.01	7.94	32.73	100	171	PEAK																																																																																		
Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5122.40</td><td>40.27</td><td>54.00</td><td>-13.73</td><td>31.15</td><td>33.97</td><td>7.90</td><td>32.75</td><td>100</td><td>171</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5122.40	40.27	54.00	-13.73	31.15	33.97	7.90	32.75	100	171	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>98.32</td><td>-----</td><td>-----</td><td>89.12</td><td>34.00</td><td>7.93</td><td>32.73</td><td>100</td><td>171</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	98.32	-----	-----	89.12	34.00	7.93	32.73	100	171
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5122.40	40.27	54.00	-13.73	31.15	33.97	7.90	32.75	100	171	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5180.00	98.32	-----	-----	89.12	34.00	7.93	32.73	100	171	AVERAGE																																																																																		

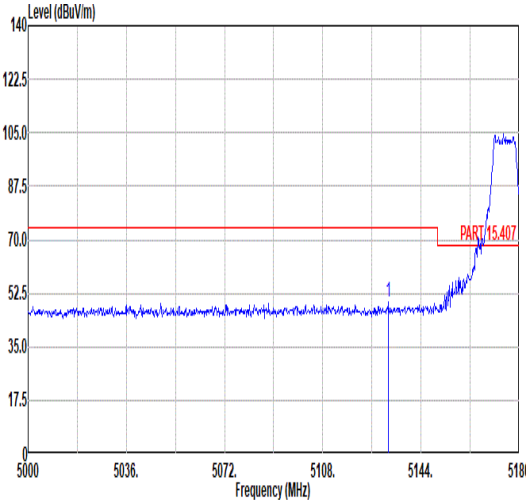
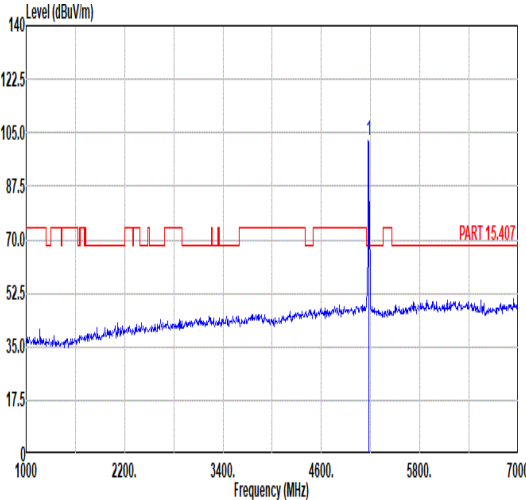
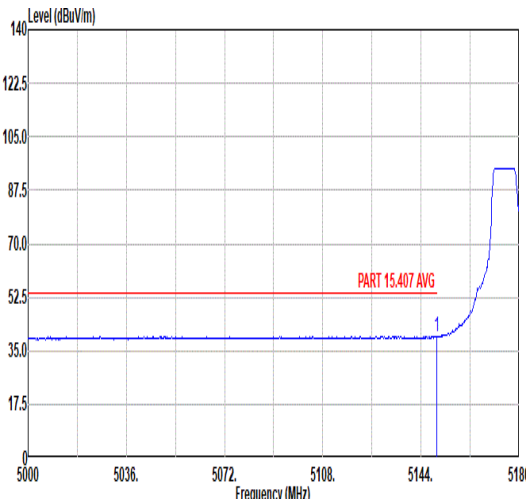
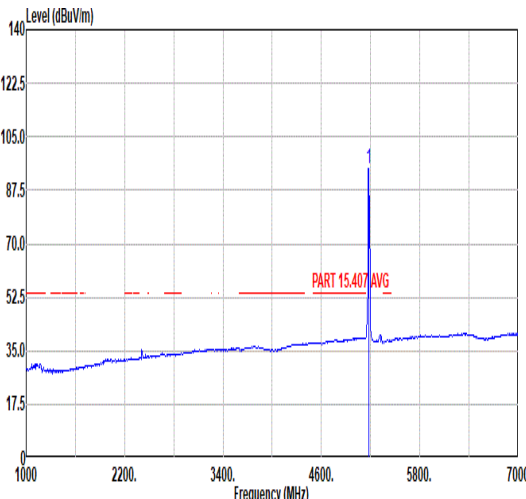


Mode	7																																																																															
	Band Edge																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5132.12</td><td>49.44</td><td>74.00</td><td>-24.56</td><td>40.30</td><td>33.98</td><td>7.91</td><td>32.75</td><td>300</td><td>219 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5132.12	49.44	74.00	-24.56	40.30	33.98	7.91	32.75	300	219 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.44</td><td>-----</td><td>-----</td><td>93.24</td><td>34.00</td><td>7.93</td><td>32.73</td><td>300</td><td>219 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	102.44	-----	-----	93.24	34.00	7.93	32.73	300	219 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5132.12	49.44	74.00	-24.56	40.30	33.98	7.91	32.75	300	219 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5180.00	102.44	-----	-----	93.24	34.00	7.93	32.73	300	219 PEAK																																																																						
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>30.58</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>219 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.76	39.75	54.00	-14.25	30.58	33.99	7.92	32.74	300	219 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.55</td><td>-----</td><td>-----</td><td>85.35</td><td>34.00</td><td>7.93</td><td>32.73</td><td>300</td><td>219 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	94.55	-----	-----	85.35	34.00	7.93	32.73	300	219 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5149.76	39.75	54.00	-14.25	30.58	33.99	7.92	32.74	300	219 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5180.00	94.55	-----	-----	85.35	34.00	7.93	32.73	300	219 AVERAGE																																																																						

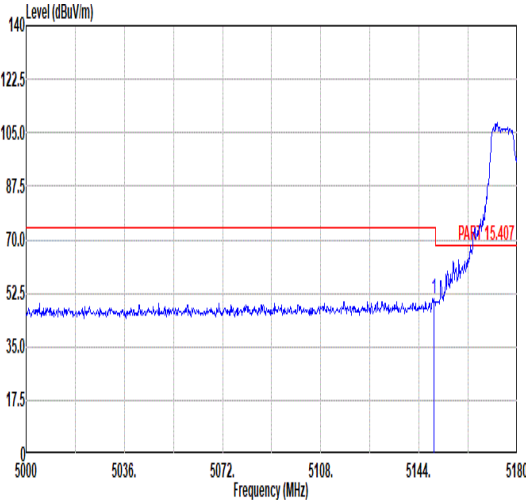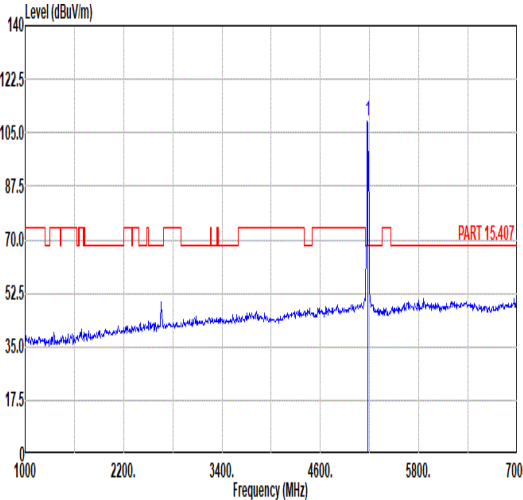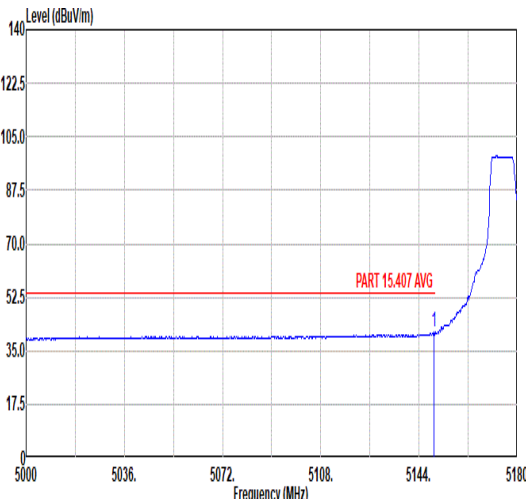
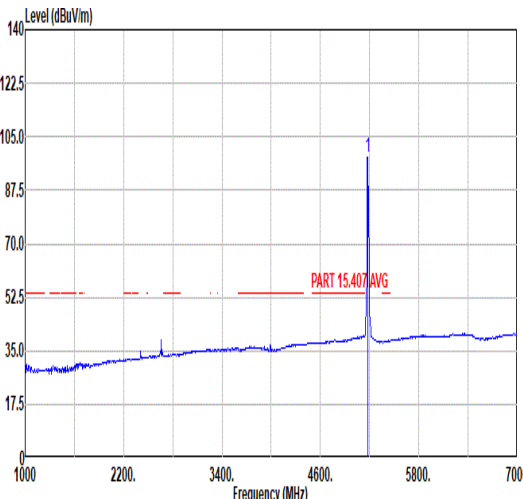


Mode	7																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>50.80</td><td>74.00</td><td>-23.20</td><td>41.63</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>169</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.58	50.80	74.00	-23.20	41.63	33.99	7.92	32.74	100	169	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>108.60</td><td>-----</td><td>-----</td><td>99.40</td><td>34.00</td><td>7.93</td><td>32.73</td><td>100</td><td>169</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	108.60	-----	-----	99.40	34.00	7.93	32.73	100	169
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.58	50.80	74.00	-23.20	41.63	33.99	7.92	32.74	100	169	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	108.60	-----	-----	99.40	34.00	7.93	32.73	100	169	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.40</td><td>41.39</td><td>54.00</td><td>-12.61</td><td>32.22</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>169</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.40	41.39	54.00	-12.61	32.22	33.99	7.92	32.74	100	169	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.30</td><td>-----</td><td>-----</td><td>89.10</td><td>34.00</td><td>7.93</td><td>32.73</td><td>100</td><td>169</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	98.30	-----	-----	89.10	34.00	7.93	32.73	100	169
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.40	41.39	54.00	-12.61	32.22	33.99	7.92	32.74	100	169	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	98.30	-----	-----	89.10	34.00	7.93	32.73	100	169	AVERAGE																																																																															

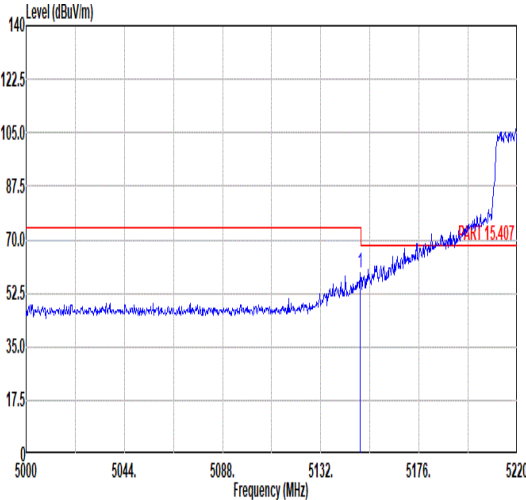
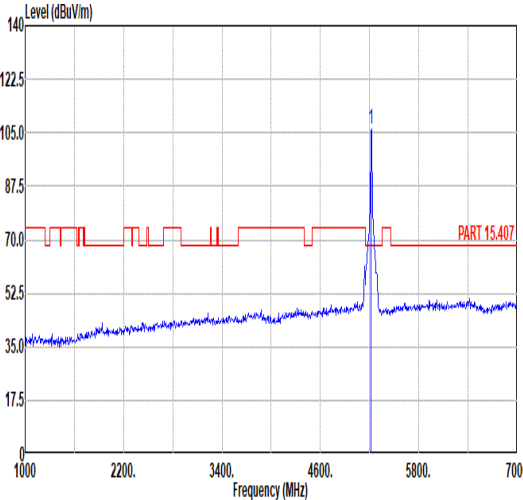
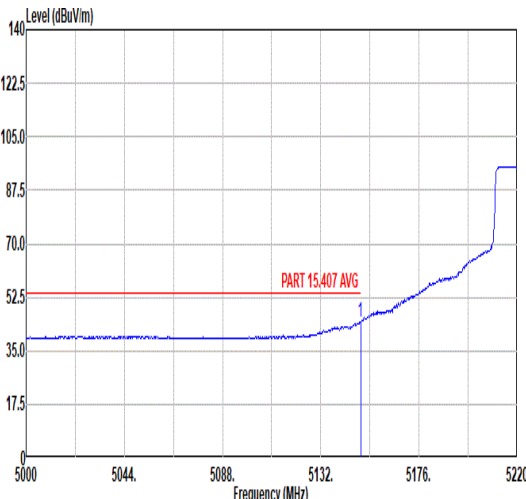
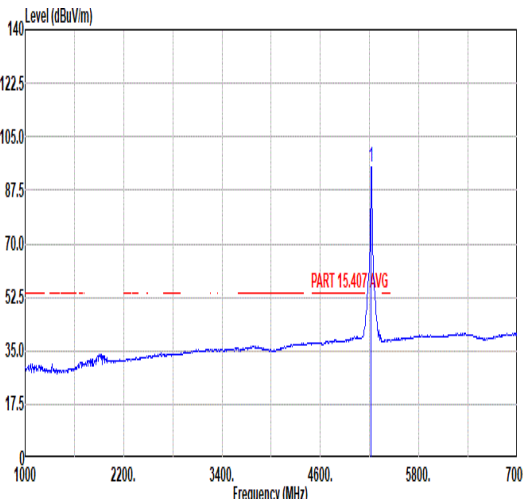


Mode	8																																																																																													
	Band Edge - L																																																																																													
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.60</td><td>58.96</td><td>74.00</td><td>-15.04</td><td>49.79</td><td>33.99</td><td>7.92</td><td>32.74</td><td>268</td><td>214</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.60	58.96	74.00	-15.04	49.79	33.99	7.92	32.74	268	214	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5220.00</td><td>106.04</td><td>-----</td><td>-----</td><td>96.70</td><td>34.04</td><td>8.01</td><td>32.71</td><td>268</td><td>214</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5220.00	106.04	-----	-----	96.70	34.04	8.01	32.71	268	214
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5149.60	58.96	74.00	-15.04	49.79	33.99	7.92	32.74	268	214	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5220.00	106.04	-----	-----	96.70	34.04	8.01	32.71	268	214	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.82</td><td>44.57</td><td>54.00</td><td>-9.43</td><td>35.40</td><td>33.99</td><td>7.92</td><td>32.74</td><td>268</td><td>214</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.82	44.57	54.00	-9.43	35.40	33.99	7.92	32.74	268	214	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5220.00</td><td>95.21</td><td>-----</td><td>-----</td><td>85.90</td><td>34.03</td><td>7.99</td><td>32.71</td><td>268</td><td>214</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5220.00	95.21	-----	-----	85.90	34.03	7.99	32.71	268	214
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5149.82	44.57	54.00	-9.43	35.40	33.99	7.92	32.74	268	214	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5220.00	95.21	-----	-----	85.90	34.03	7.99	32.71	268	214	AVERAGE																																																																																			

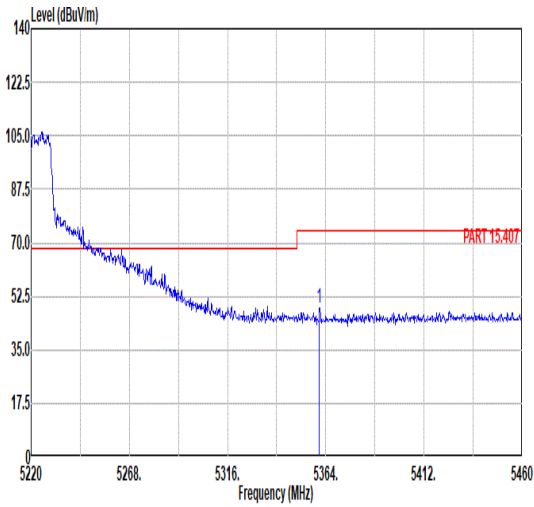
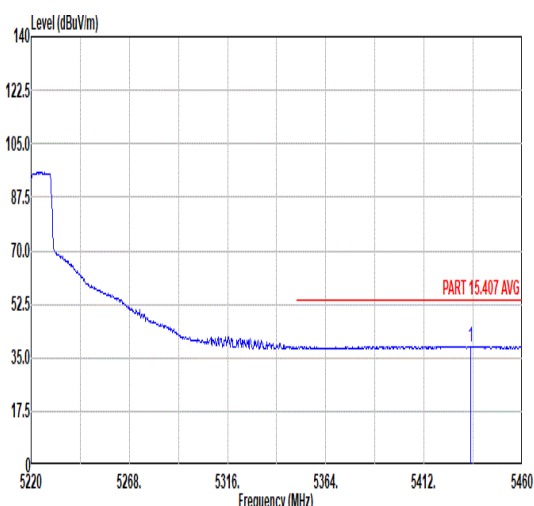


Mode	8																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																		
ANT	1																																																		
Pol.	Horizontal										Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5360.88</td><td>48.38</td><td>74.00</td><td>-25.62</td><td>38.55</td><td>34.12</td><td>8.36</td><td>32.65</td><td>268</td><td>214</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5360.88	48.38	74.00	-25.62	38.55	34.12	8.36	32.65	268	214	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5360.88	48.38	74.00	-25.62	38.55	34.12	8.36	32.65	268	214	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5434.80</td><td>38.78</td><td>54.00</td><td>-15.22</td><td>28.80</td><td>34.16</td><td>8.44</td><td>32.62</td><td>268</td><td>214</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5434.80	38.78	54.00	-15.22	28.80	34.16	8.44	32.62	268	214	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5434.80	38.78	54.00	-15.22	28.80	34.16	8.44	32.62	268	214	AVERAGE																																								

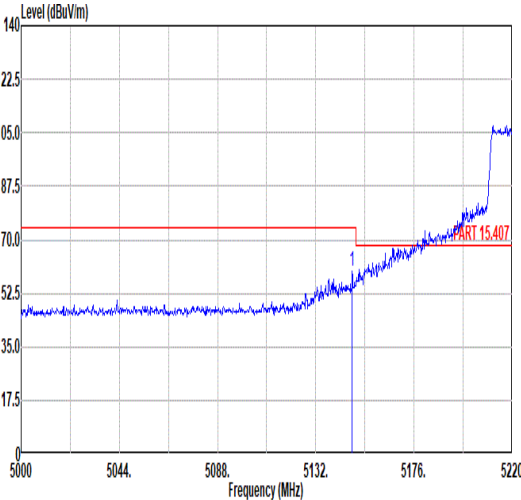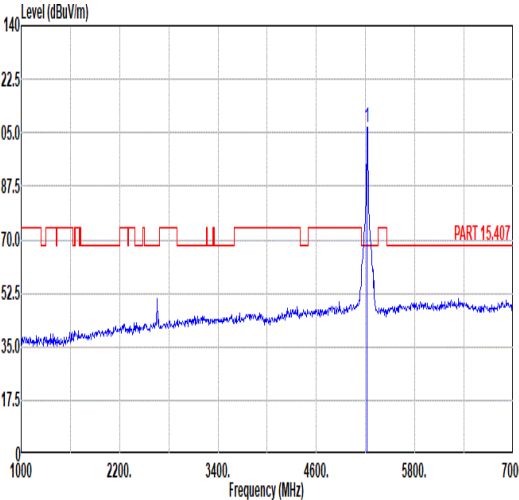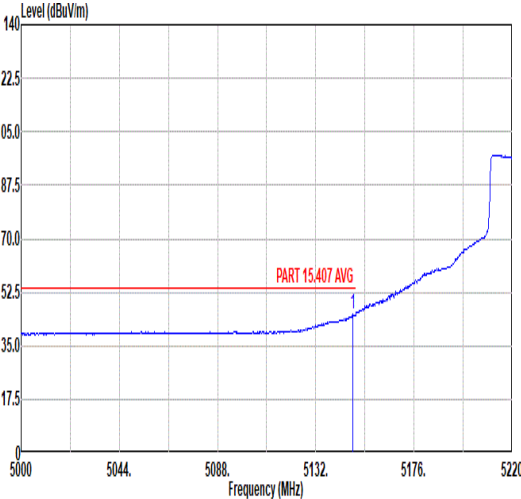
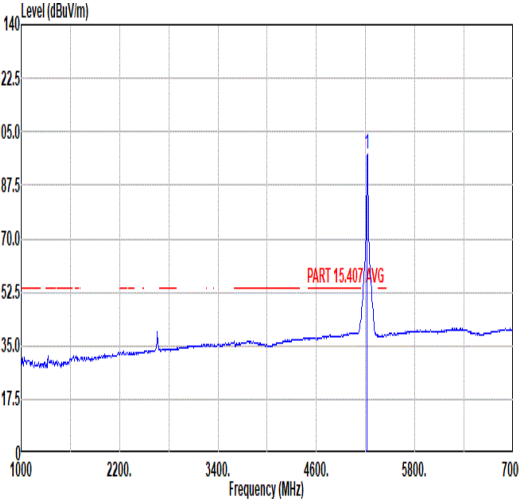


Mode	8																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.28</td><td>59.74</td><td>74.00</td><td>-14.26</td><td>50.57</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>175</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.28	59.74	74.00	-14.26	50.57	33.99	7.92	32.74	100	175	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>106.65</td><td>-----</td><td>-----</td><td>97.34</td><td>34.03</td><td>7.99</td><td>32.71</td><td>100</td><td>175</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	106.65	-----	-----	97.34	34.03	7.99	32.71	100	175
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5148.28	59.74	74.00	-14.26	50.57	33.99	7.92	32.74	100	175	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5220.00	106.65	-----	-----	97.34	34.03	7.99	32.71	100	175	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.50</td><td>45.43</td><td>54.00</td><td>-8.57</td><td>36.26</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>175</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.50	45.43	54.00	-8.57	36.26	33.99	7.92	32.74	100	175	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>97.49</td><td>-----</td><td>-----</td><td>88.15</td><td>34.04</td><td>8.01</td><td>32.71</td><td>100</td><td>175</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	97.49	-----	-----	88.15	34.04	8.01	32.71	100	175
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5148.50	45.43	54.00	-8.57	36.26	33.99	7.92	32.74	100	175	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5220.00	97.49	-----	-----	88.15	34.04	8.01	32.71	100	175	AVERAGE																																																																															



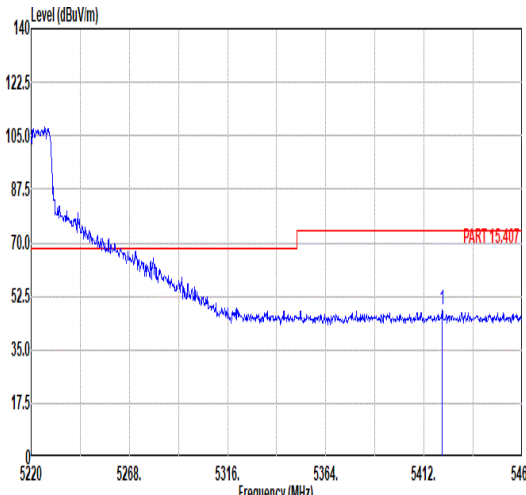
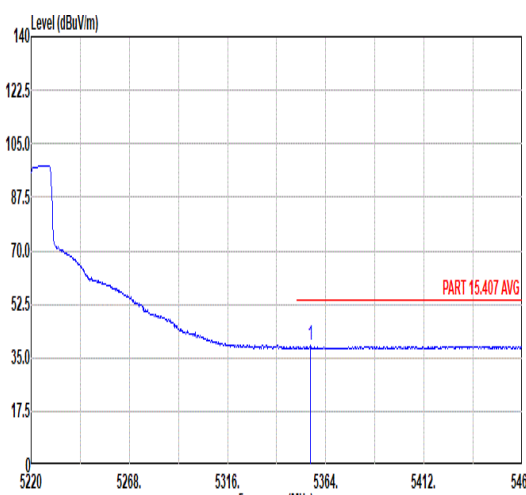


Mode	8																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5420.88</td><td>48.13</td><td>74.00</td><td>-25.87</td><td>38.15</td><td>34.15</td><td>8.46</td><td>32.63</td><td>100</td><td>175</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5420.88	48.13	74.00	-25.87	38.15	34.15	8.46	32.63	100	175	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5420.88	48.13	74.00	-25.87	38.15	34.15	8.46	32.63	100	175	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.56</td><td>38.84</td><td>54.00</td><td>-15.16</td><td>29.03</td><td>34.11</td><td>8.35</td><td>32.65</td><td>100</td><td>175</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5356.56	38.84	54.00	-15.16	29.03	34.11	8.35	32.65	100	175	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5356.56	38.84	54.00	-15.16	29.03	34.11	8.35	32.65	100	175	AVERAGE																																								

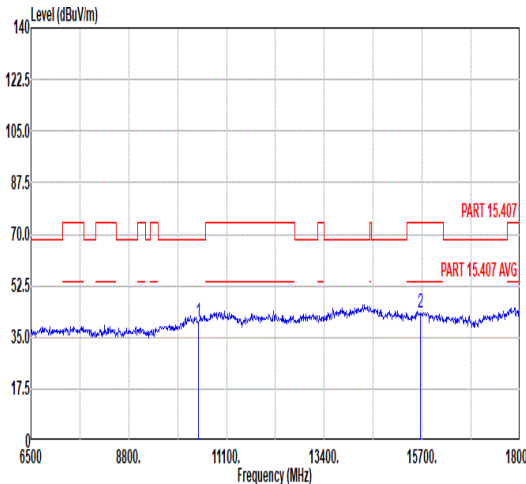
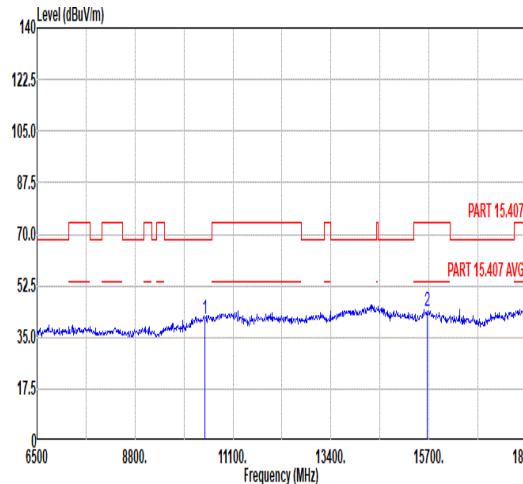


Mode	8																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>40.37</td><td>68.30</td><td>-27.93</td><td>56.99</td><td>37.35</td><td>10.79</td></tr><tr><td>2</td><td>15660.00</td><td>43.28</td><td>74.00</td><td>-30.72</td><td>54.72</td><td>39.46</td><td>12.72</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	40.37	68.30	-27.93	56.99	37.35	10.79	2	15660.00	43.28	74.00	-30.72	54.72	39.46	12.72	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>41.21</td><td>68.30</td><td>-27.09</td><td>57.83</td><td>37.35</td><td>10.79</td></tr><tr><td>2</td><td>15660.00</td><td>44.04</td><td>74.00</td><td>-29.96</td><td>55.48</td><td>39.46</td><td>12.72</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	41.21	68.30	-27.09	57.83	37.35	10.79	2	15660.00	44.04	74.00	-29.96	55.48	39.46	12.72
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	40.37	68.30	-27.93	56.99	37.35	10.79																																																																																									
2	15660.00	43.28	74.00	-30.72	54.72	39.46	12.72																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	41.21	68.30	-27.09	57.83	37.35	10.79																																																																																									
2	15660.00	44.04	74.00	-29.96	55.48	39.46	12.72																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>40.37</td><td>68.30</td><td>-27.93</td><td>56.99</td><td>37.35</td><td>10.79</td></tr><tr><td>2</td><td>15660.00</td><td>43.28</td><td>74.00</td><td>-30.72</td><td>54.72</td><td>39.46</td><td>12.72</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	40.37	68.30	-27.93	56.99	37.35	10.79	2	15660.00	43.28	74.00	-30.72	54.72	39.46	12.72	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>41.21</td><td>68.30</td><td>-27.09</td><td>57.83</td><td>37.35</td><td>10.79</td></tr><tr><td>2</td><td>15660.00</td><td>44.04</td><td>74.00</td><td>-29.96</td><td>55.48</td><td>39.46</td><td>12.72</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	41.21	68.30	-27.09	57.83	37.35	10.79	2	15660.00	44.04	74.00	-29.96	55.48	39.46	12.72	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	40.37	68.30	-27.93	56.99	37.35	10.79																																																																																									
2	15660.00	43.28	74.00	-30.72	54.72	39.46	12.72																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	41.21	68.30	-27.09	57.83	37.35	10.79																																																																																									
2	15660.00	44.04	74.00	-29.96	55.48	39.46	12.72																																																																																									

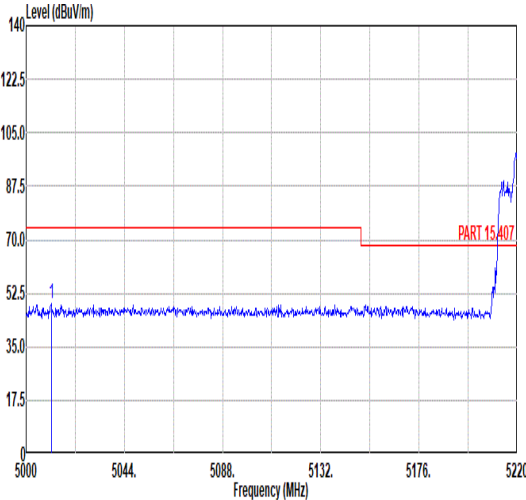
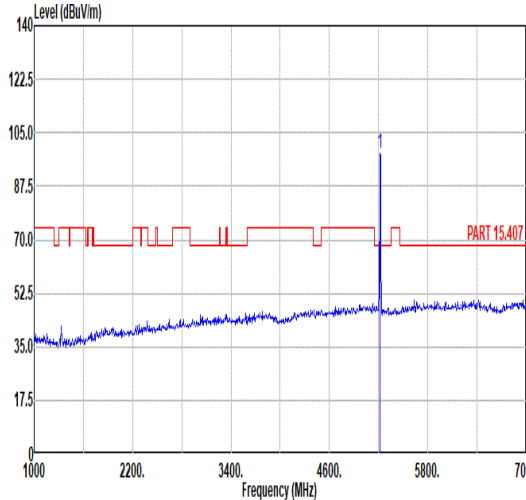
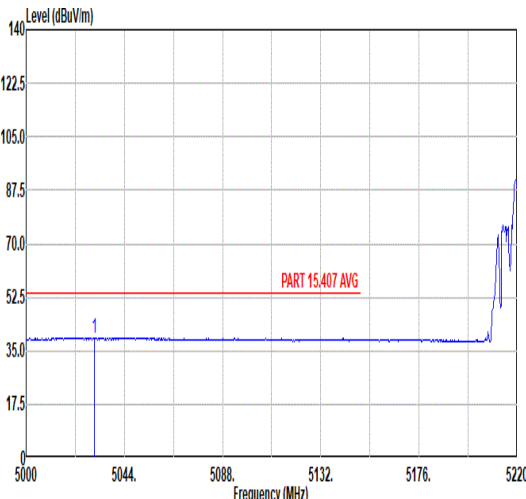
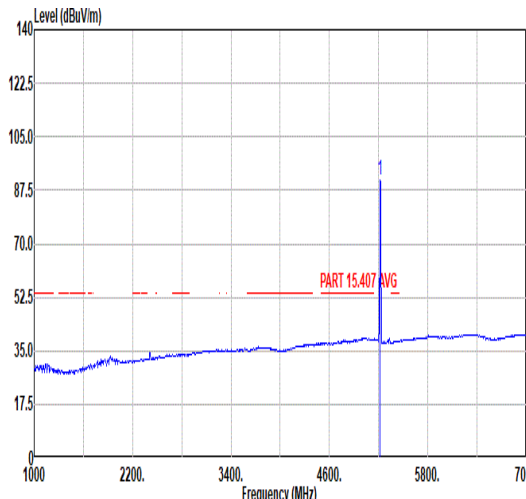


Mode	9																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU26/4_5220MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5011.22</td><td>48.89</td><td>74.00</td><td>-25.11</td><td>39.94</td><td>33.91</td><td>7.83</td><td>32.79</td><td>327</td><td>208</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5011.22	48.89	74.00	-25.11	39.94	33.91	7.83	32.79	327	208	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>98.09</td><td>-----</td><td>-----</td><td>88.79</td><td>34.03</td><td>7.98</td><td>32.71</td><td>327</td><td>208</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	98.09	-----	-----	88.79	34.03	7.98	32.71	327	208
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5011.22	48.89	74.00	-25.11	39.94	33.91	7.83	32.79	327	208	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5220.00	98.09	-----	-----	88.79	34.03	7.98	32.71	327	208	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5030.58</td><td>39.28</td><td>54.00</td><td>-14.72</td><td>30.31</td><td>33.92</td><td>7.84</td><td>32.79</td><td>327</td><td>208</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5030.58	39.28	54.00	-14.72	30.31	33.92	7.84	32.79	327	208	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>90.78</td><td>-----</td><td>-----</td><td>81.48</td><td>34.03</td><td>7.98</td><td>32.71</td><td>327</td><td>208</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	90.78	-----	-----	81.48	34.03	7.98	32.71	327	208
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5030.58	39.28	54.00	-14.72	30.31	33.92	7.84	32.79	327	208	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5220.00	90.78	-----	-----	81.48	34.03	7.98	32.71	327	208	AVERAGE																																																																															

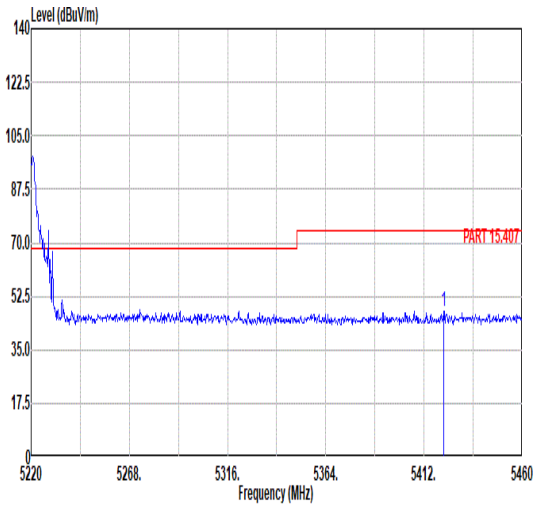
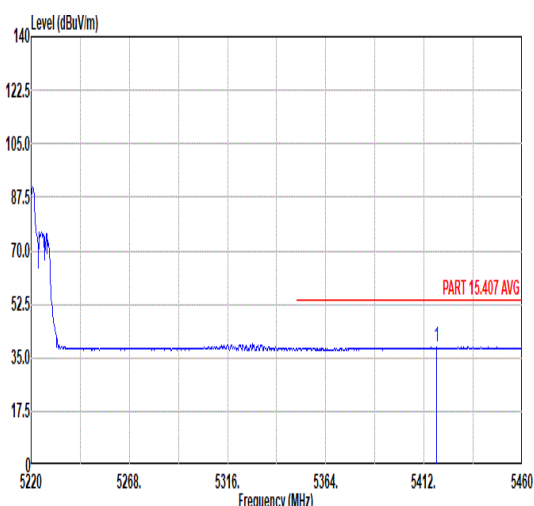


Mode	9																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU26/4_5220MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5421.60</td><td>47.53</td><td>74.00</td><td>-26.47</td><td>37.55</td><td>34.15</td><td>8.46</td><td>32.63</td><td>327</td><td>208</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5421.60	47.53	74.00	-26.47	37.55	34.15	8.46	32.63	327	208	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5421.60	47.53	74.00	-26.47	37.55	34.15	8.46	32.63	327	208	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5418.24</td><td>38.44</td><td>54.00</td><td>-15.56</td><td>28.45</td><td>34.15</td><td>8.47</td><td>32.63</td><td>327</td><td>208</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5418.24	38.44	54.00	-15.56	28.45	34.15	8.47	32.63	327	208	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5418.24	38.44	54.00	-15.56	28.45	34.15	8.47	32.63	327	208	AVERAGE																																								

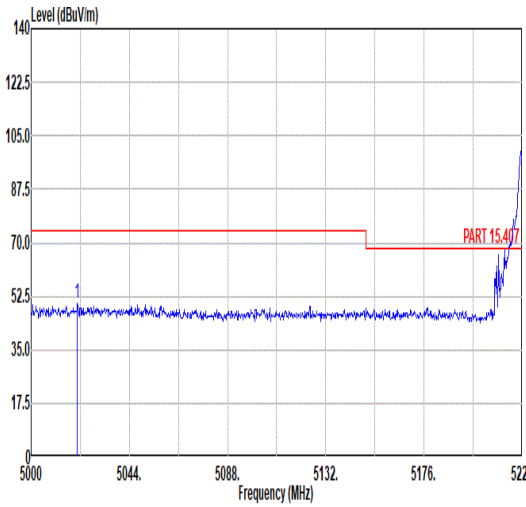
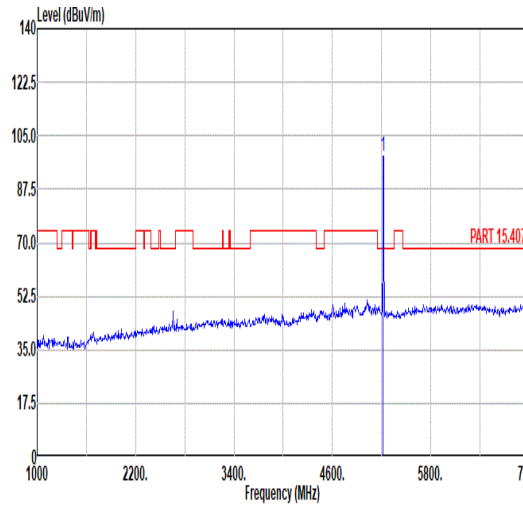
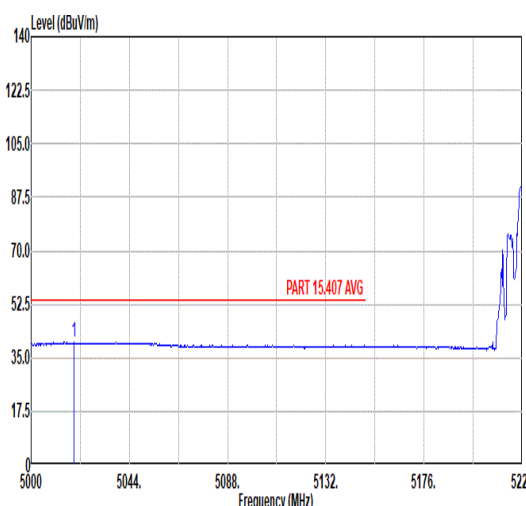
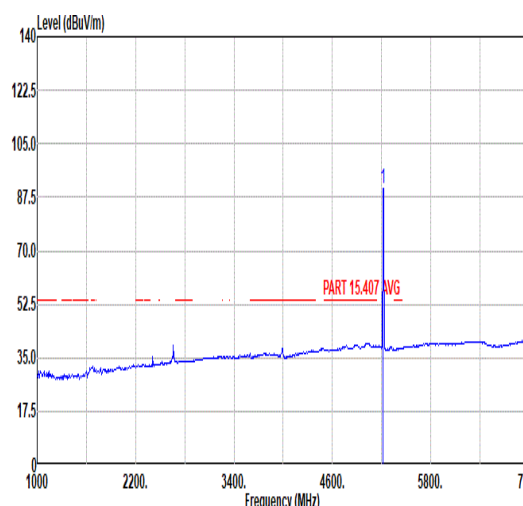


Mode	9																																																																																						
	Band Edge - L																																																																																						
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU26/4_5220MHz																																																																																						
ANT	1																																																																																						
Pol.	Vertical					Fundamental																																																																																	
Peak																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5020.68</td><td>50.34</td><td>74.00</td><td>-23.66</td><td>41.38</td><td>33.92</td><td>7.83</td><td>32.79</td><td>263</td><td>179 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5020.68	50.34	74.00	-23.66	41.38	33.92	7.83	32.79	263	179 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>98.46</td><td>-----</td><td>-----</td><td>89.15</td><td>34.03</td><td>7.99</td><td>32.71</td><td>263</td><td>179 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	98.46	-----	-----	89.15	34.03	7.99	32.71	263
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5020.68	50.34	74.00	-23.66	41.38	33.92	7.83	32.79	263	179 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5220.00	98.46	-----	-----	89.15	34.03	7.99	32.71	263	179 PEAK																																																																													
Avg																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5019.14</td><td>40.08</td><td>54.00</td><td>-13.92</td><td>31.13</td><td>33.91</td><td>7.83</td><td>32.79</td><td>263</td><td>179 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5019.14	40.08	54.00	-13.92	31.13	33.91	7.83	32.79	263	179 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>90.57</td><td>-----</td><td>-----</td><td>81.27</td><td>34.03</td><td>7.98</td><td>32.71</td><td>263</td><td>179 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	90.57	-----	-----	81.27	34.03	7.98	32.71	263
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5019.14	40.08	54.00	-13.92	31.13	33.91	7.83	32.79	263	179 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5220.00	90.57	-----	-----	81.27	34.03	7.98	32.71	263	179 AVERAGE																																																																													

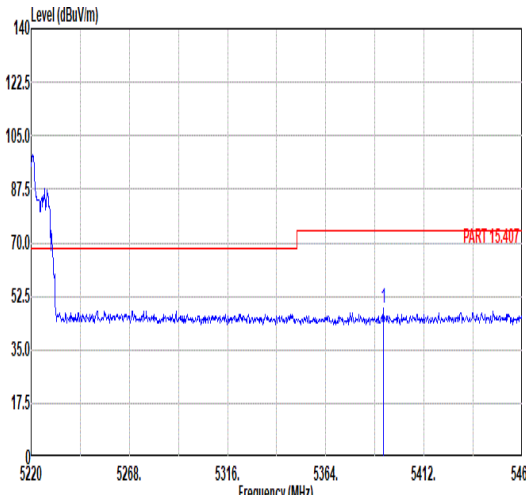
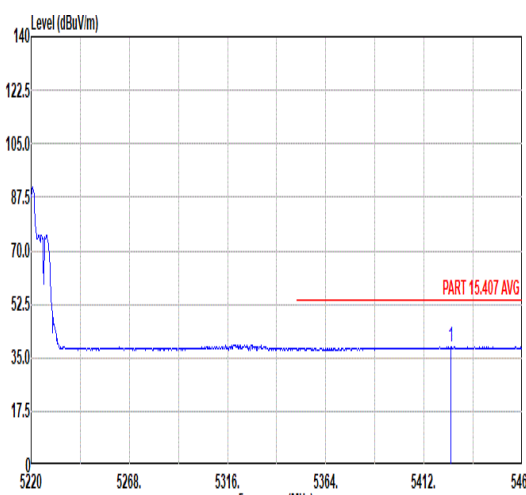


Mode	9																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU26/4_5220MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5392.08</td><td>48.51</td><td>74.00</td><td>-25.49</td><td>38.58</td><td>34.13</td><td>8.44</td><td>32.64</td><td>263</td><td>179</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5392.08	48.51	74.00	-25.49	38.58	34.13	8.44	32.64	263	179	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5392.08	48.51	74.00	-25.49	38.58	34.13	8.44	32.64	263	179	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5424.96</td><td>38.49</td><td>54.00</td><td>-15.51</td><td>28.51</td><td>34.15</td><td>8.46</td><td>32.63</td><td>263</td><td>179</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5424.96	38.49	54.00	-15.51	28.51	34.15	8.46	32.63	263	179	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5424.96	38.49	54.00	-15.51	28.51	34.15	8.46	32.63	263	179	AVERAGE																																								

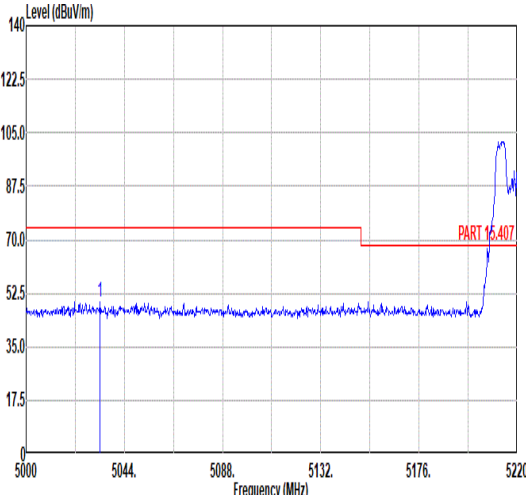
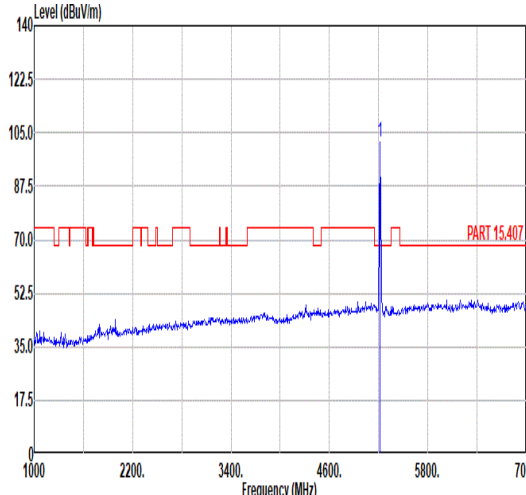
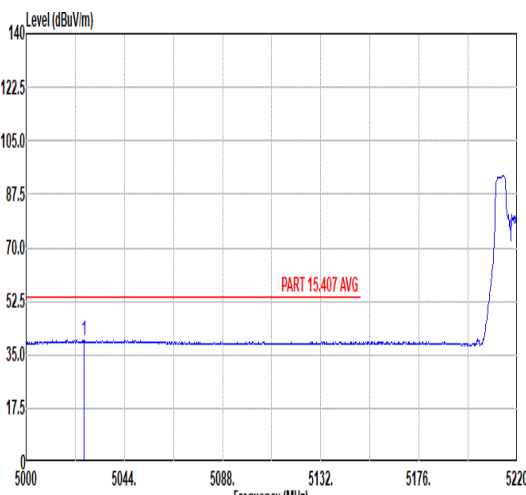
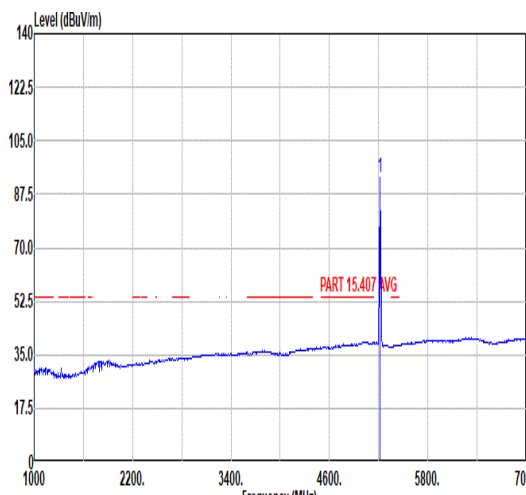


Mode	10																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU52/37_5220MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5033.22</td><td>49.73</td><td>74.00</td><td>-24.27</td><td>40.76</td><td>33.92</td><td>7.84</td><td>32.79</td><td>300</td><td>218</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5033.22	49.73	74.00	-24.27	40.76	33.92	7.84	32.79	300	218	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>102.16</td><td>-----</td><td>-----</td><td>92.88</td><td>34.03</td><td>7.96</td><td>32.71</td><td>300</td><td>218</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	102.16	-----	-----	92.88	34.03	7.96	32.71	300	218
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5033.22	49.73	74.00	-24.27	40.76	33.92	7.84	32.79	300	218	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5220.00	102.16	-----	-----	92.88	34.03	7.96	32.71	300	218	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5025.96</td><td>39.63</td><td>54.00</td><td>-14.37</td><td>30.66</td><td>33.92</td><td>7.84</td><td>32.79</td><td>300</td><td>218</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5025.96	39.63	54.00	-14.37	30.66	33.92	7.84	32.79	300	218	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>92.93</td><td>-----</td><td>-----</td><td>83.65</td><td>34.03</td><td>7.96</td><td>32.71</td><td>300</td><td>218</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	92.93	-----	-----	83.65	34.03	7.96	32.71	300	218
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5025.96	39.63	54.00	-14.37	30.66	33.92	7.84	32.79	300	218	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5220.00	92.93	-----	-----	83.65	34.03	7.96	32.71	300	218	AVERAGE																																																																																

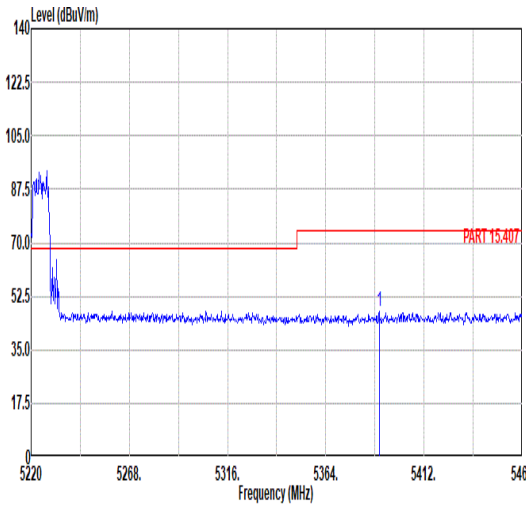
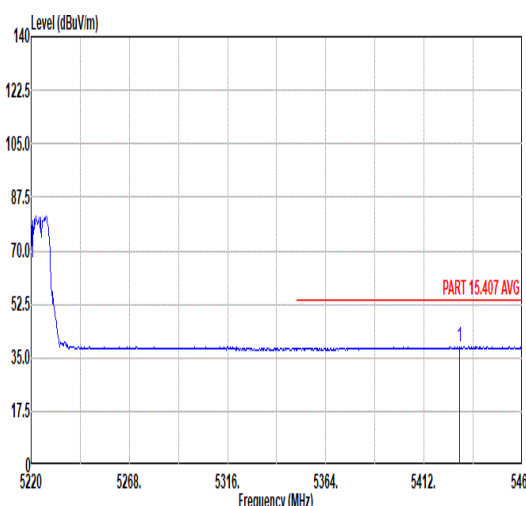


Mode	10																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU52/37_5220MHz																																																	
ANT	1																																																	
Pol.	Horizontal					Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5390.16</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>37.75</td><td>34.13</td><td>8.44</td><td>32.64</td><td>300</td><td>218</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5390.16	47.68	74.00	-26.32	37.75	34.13	8.44	32.64	300	218	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5390.16	47.68	74.00	-26.32	37.75	34.13	8.44	32.64	300	218	PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5429.28</td><td>38.49</td><td>54.00</td><td>-15.51</td><td>28.51</td><td>34.16</td><td>8.45</td><td>32.63</td><td>300</td><td>218</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5429.28	38.49	54.00	-15.51	28.51	34.16	8.45	32.63	300	218	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5429.28	38.49	54.00	-15.51	28.51	34.16	8.45	32.63	300	218	AVERAGE																																							

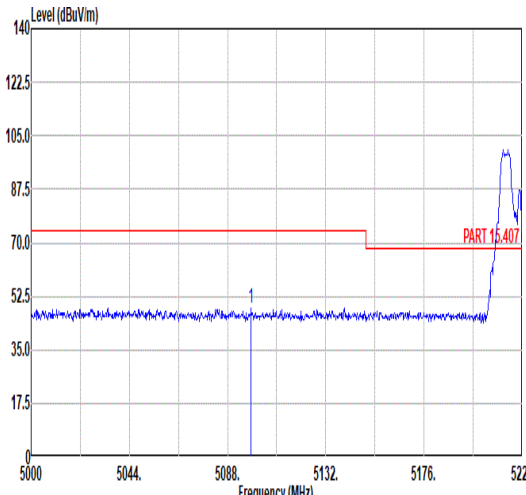
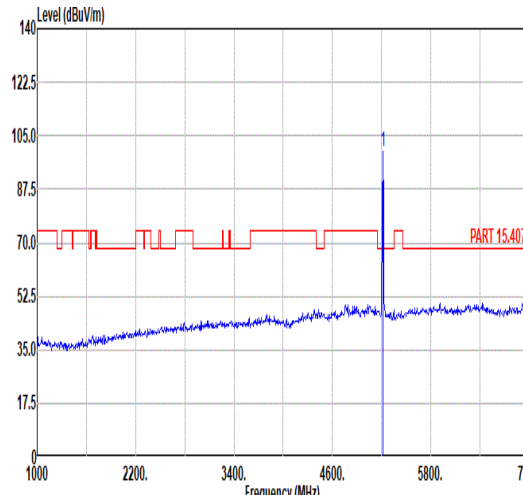
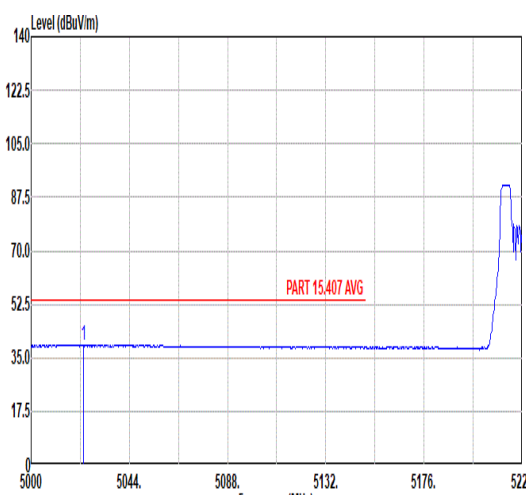
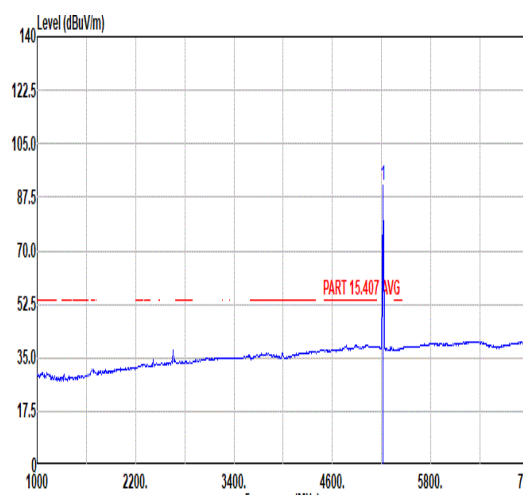


Mode	10																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU52/37_5220MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical					Fundamental																																																																																					
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5098.56</td><td>48.56</td><td>74.00</td><td>-25.44</td><td>39.48</td><td>33.96</td><td>7.88</td><td>32.76</td><td>300</td><td>182</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5098.56	48.56	74.00	-25.44	39.48	33.96	7.88	32.76	300	182	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>99.87</td><td>-----</td><td>-----</td><td>90.59</td><td>34.03</td><td>7.96</td><td>32.71</td><td>300</td><td>182</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	99.87	-----	-----	90.59	34.03	7.96	32.71	300	182
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5098.56	48.56	74.00	-25.44	39.48	33.96	7.88	32.76	300	182	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5220.00	99.87	-----	-----	90.59	34.03	7.96	32.71	300	182	PEAK																																																																																
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5023.32</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>30.37</td><td>33.92</td><td>7.83</td><td>32.79</td><td>300</td><td>182</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5023.32	39.33	54.00	-14.67	30.37	33.92	7.83	32.79	300	182	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>91.37</td><td>-----</td><td>-----</td><td>82.09</td><td>34.03</td><td>7.96</td><td>32.71</td><td>300</td><td>182</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	91.37	-----	-----	82.09	34.03	7.96	32.71	300	182
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5023.32	39.33	54.00	-14.67	30.37	33.92	7.83	32.79	300	182	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5220.00	91.37	-----	-----	82.09	34.03	7.96	32.71	300	182	AVERAGE																																																																																

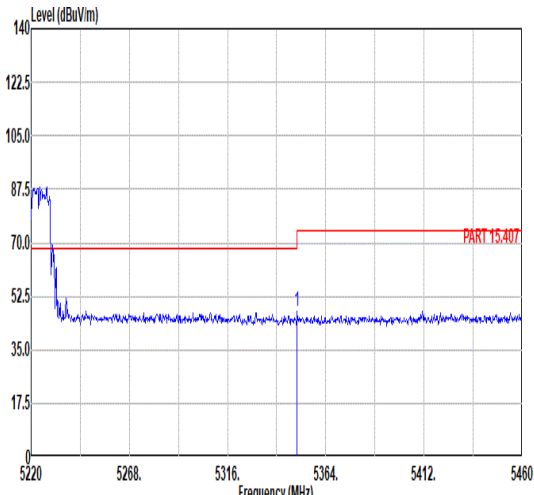
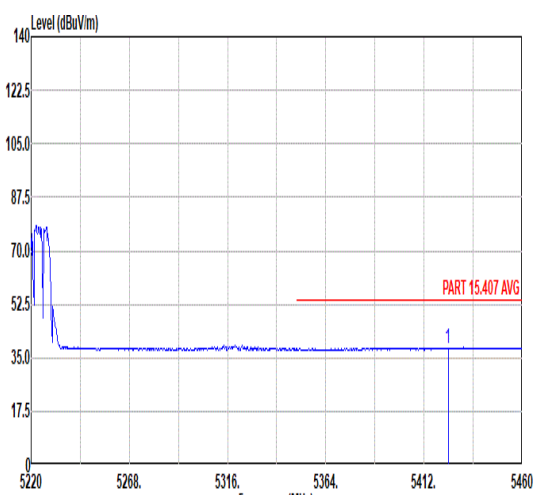


Mode	10																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU52/37_5220MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.08</td><td>47.58</td><td>74.00</td><td>-26.42</td><td>37.80</td><td>34.11</td><td>8.33</td><td>32.66</td><td>300</td><td>182</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.08	47.58	74.00	-26.42	37.80	34.11	8.33	32.66	300	182	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5350.08	47.58	74.00	-26.42	37.80	34.11	8.33	32.66	300	182	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5423.76</td><td>38.30</td><td>54.00</td><td>-15.70</td><td>28.32</td><td>34.15</td><td>8.46</td><td>32.63</td><td>300</td><td>182</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5423.76	38.30	54.00	-15.70	28.32	34.15	8.46	32.63	300	182	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5423.76	38.30	54.00	-15.70	28.32	34.15	8.46	32.63	300	182	AVERAGE																																								

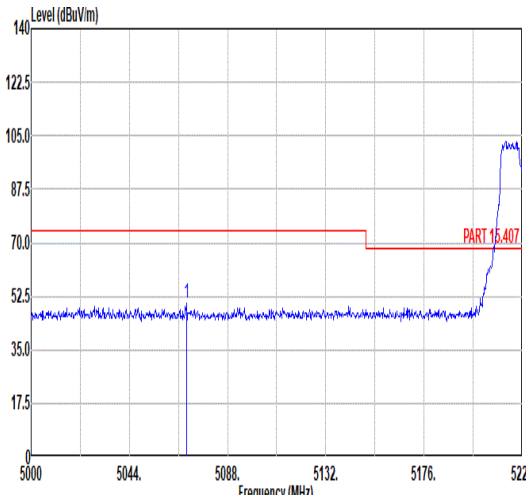
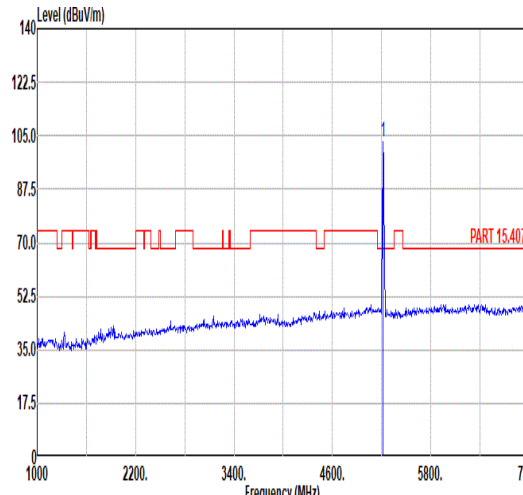
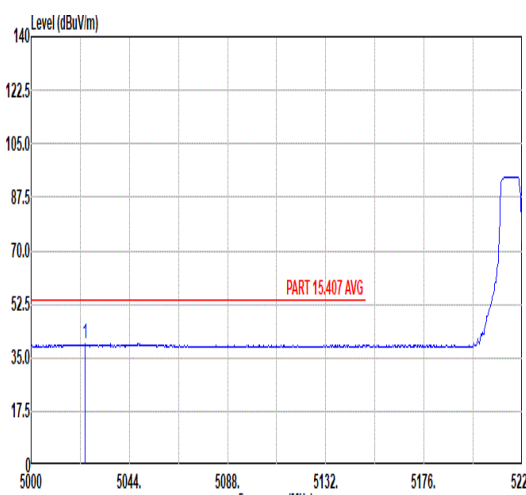
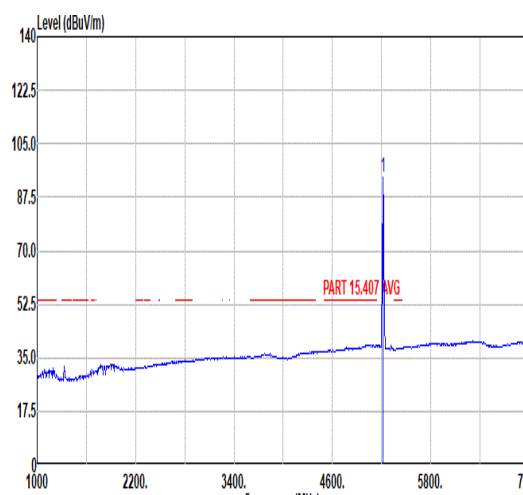


Mode	11																																																
	Band Edge - L																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU106/53_5220MHz																																																
ANT	1																																																
Pol.	Horizontal																																																
Peak																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5069.74</td><td>49.98</td><td>74.00</td><td>-24.02</td><td>40.94</td><td>33.94</td><td>7.87</td><td>32.77</td><td>300</td><td>212 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5069.74	49.98	74.00	-24.02	40.94	33.94	7.87	32.77	300
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5069.74	49.98	74.00	-24.02	40.94	33.94	7.87	32.77	300	212 PEAK																																							
Fundamental																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>102.86</td><td>-----</td><td>-----</td><td>93.56</td><td>34.03</td><td>7.98</td><td>32.71</td><td>300</td><td>212 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	102.86	-----	-----	93.56	34.03	7.98	32.71	300
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5220.00	102.86	-----	-----	93.56	34.03	7.98	32.71	300	212 PEAK																																							
Avg																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5024.20</td><td>39.49</td><td>54.00</td><td>-14.51</td><td>30.53</td><td>33.92</td><td>7.83</td><td>32.79</td><td>300</td><td>212 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5024.20	39.49	54.00	-14.51	30.53	33.92	7.83	32.79	300
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5024.20	39.49	54.00	-14.51	30.53	33.92	7.83	32.79	300	212 AVERAGE																																							
AVERAGE																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>94.02</td><td>-----</td><td>-----</td><td>84.72</td><td>34.03</td><td>7.98</td><td>32.71</td><td>300</td><td>212 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	94.02	-----	-----	84.72	34.03	7.98	32.71	300
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5220.00	94.02	-----	-----	84.72	34.03	7.98	32.71	300	212 AVERAGE																																							

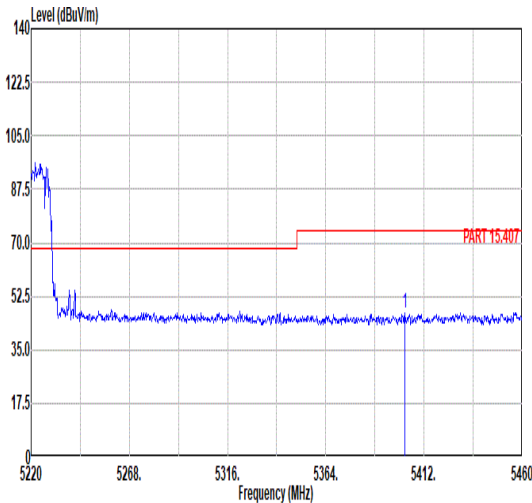
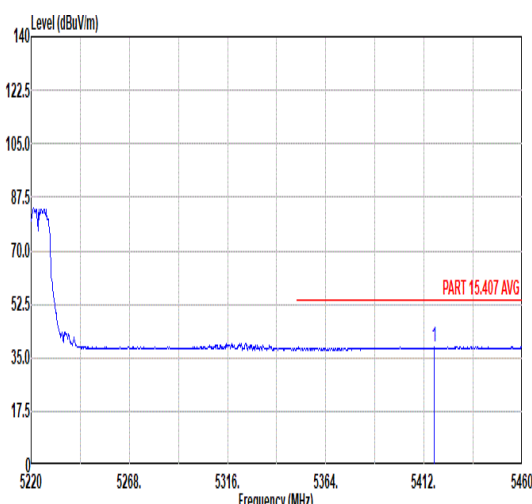


Mode	11																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU106/53_5220MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5402.64</td><td>47.16</td><td>74.00</td><td>-26.84</td><td>37.19</td><td>34.14</td><td>8.47</td><td>32.64</td><td>300</td><td>212</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5402.64	47.16	74.00	-26.84	37.19	34.14	8.47	32.64	300	212	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5402.64	47.16	74.00	-26.84	37.19	34.14	8.47	32.64	300	212	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5416.80</td><td>38.57</td><td>54.00</td><td>-15.43</td><td>28.58</td><td>34.15</td><td>8.47</td><td>32.63</td><td>300</td><td>212</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5416.80	38.57	54.00	-15.43	28.58	34.15	8.47	32.63	300	212	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5416.80	38.57	54.00	-15.43	28.58	34.15	8.47	32.63	300	212	AVERAGE																																								

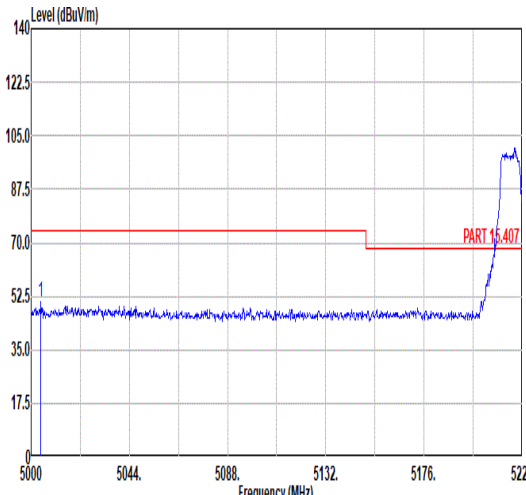
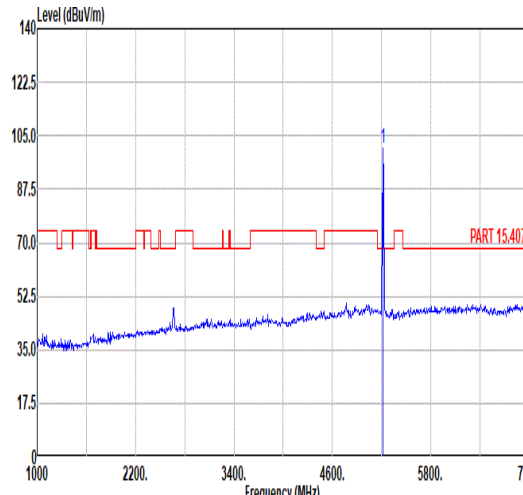
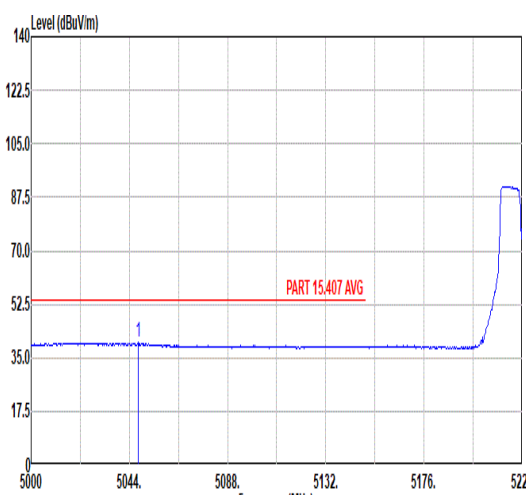
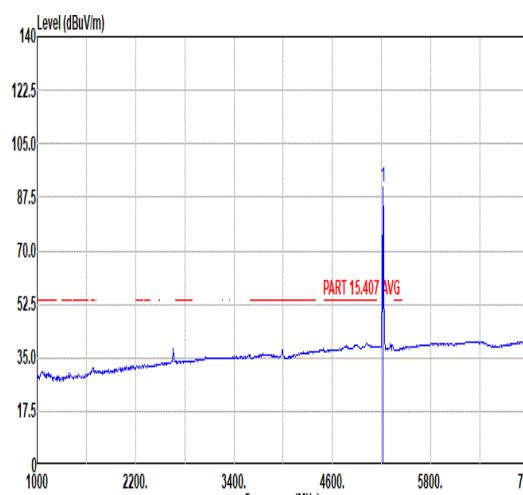


Mode	11																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU106/53_5220MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5004.40</td><td>50.47</td><td>74.00</td><td>-23.53</td><td>41.54</td><td>33.91</td><td>7.82</td><td>32.80</td><td>300</td><td>179</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5004.40	50.47	74.00	-23.53	41.54	33.91	7.82	32.80	300	179	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>100.94</td><td>-----</td><td>-----</td><td>91.64</td><td>34.03</td><td>7.98</td><td>32.71</td><td>300</td><td>179</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	100.94	-----	-----	91.64	34.03	7.98	32.71	300	179
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5004.40	50.47	74.00	-23.53	41.54	33.91	7.82	32.80	300	179	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5220.00	100.94	-----	-----	91.64	34.03	7.98	32.71	300	179	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5047.96</td><td>39.96</td><td>54.00</td><td>-14.04</td><td>30.96</td><td>33.93</td><td>7.85</td><td>32.78</td><td>300</td><td>179</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5047.96	39.96	54.00	-14.04	30.96	33.93	7.85	32.78	300	179	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>90.84</td><td>-----</td><td>-----</td><td>81.56</td><td>34.03</td><td>7.96</td><td>32.71</td><td>300</td><td>179</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	90.84	-----	-----	81.56	34.03	7.96	32.71	300	179
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5047.96	39.96	54.00	-14.04	30.96	33.93	7.85	32.78	300	179	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5220.00	90.84	-----	-----	81.56	34.03	7.96	32.71	300	179	AVERAGE																																																																																	

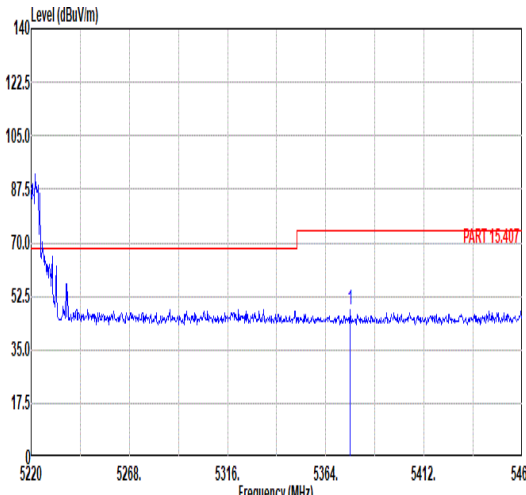
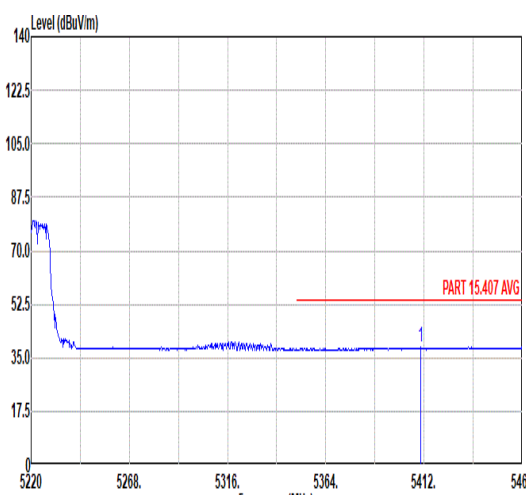


Mode	11																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_RU106/53_5220MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5376.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>38.02</td><td>34.12</td><td>8.40</td><td>32.65</td><td>300</td><td>179</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5376.00	47.89	74.00	-26.11	38.02	34.12	8.40	32.65	300	179	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5376.00	47.89	74.00	-26.11	38.02	34.12	8.40	32.65	300	179	PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5410.56</td><td>38.47</td><td>54.00</td><td>-15.53</td><td>28.48</td><td>34.14</td><td>8.48</td><td>32.63</td><td>300</td><td>179</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5410.56	38.47	54.00	-15.53	28.48	34.14	8.48	32.63	300	179	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5410.56	38.47	54.00	-15.53	28.48	34.14	8.48	32.63	300	179	AVERAGE																															

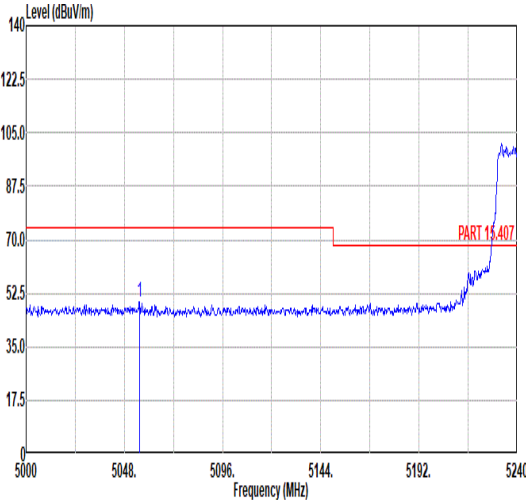
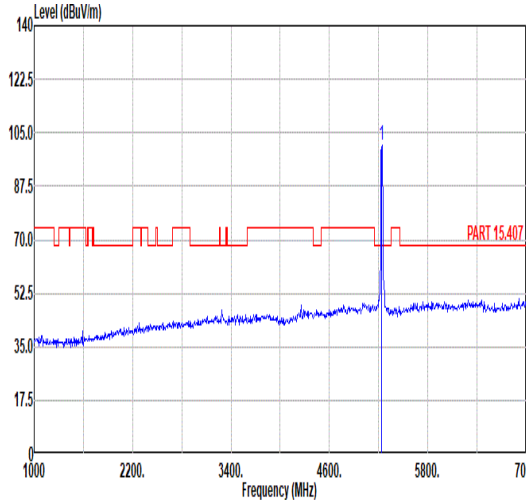
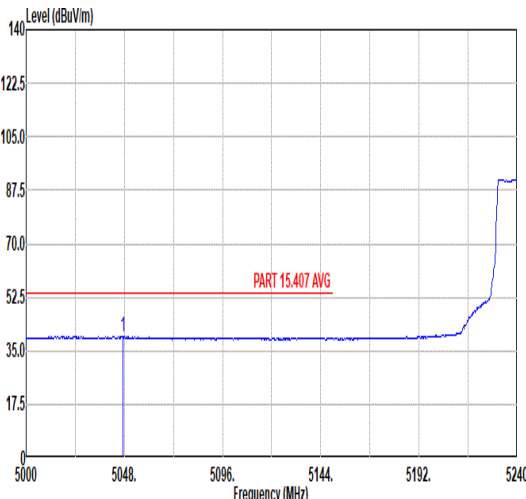
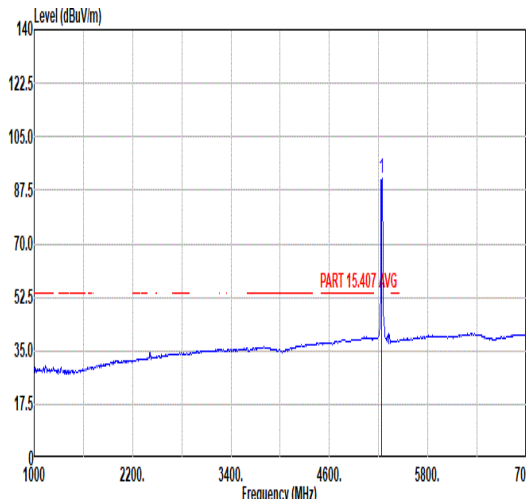


Mode	12																																																																																													
	Band Edge - L																																																																																													
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_Full RU_5240MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5047.28</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>40.51</td><td>33.94</td><td>7.86</td><td>32.78</td><td>227</td><td>221</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5047.28	49.53	74.00	-24.47	40.51	33.94	7.86	32.78	227	221	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5240.00</td><td>100.67</td><td>-----</td><td>-----</td><td>91.28</td><td>34.05</td><td>8.04</td><td>32.70</td><td>227</td><td>221</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5240.00	100.67	-----	-----	91.28	34.05	8.04	32.70	227	221
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5047.28	49.53	74.00	-24.47	40.51	33.94	7.86	32.78	227	221	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	100.67	-----	-----	91.28	34.05	8.04	32.70	227	221	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5047.28</td><td>39.70</td><td>54.00</td><td>-14.30</td><td>30.70</td><td>33.93</td><td>7.85</td><td>32.78</td><td>227</td><td>221</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5047.28	39.70	54.00	-14.30	30.70	33.93	7.85	32.78	227	221	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5240.00</td><td>91.49</td><td>-----</td><td>-----</td><td>82.08</td><td>34.05</td><td>8.06</td><td>32.70</td><td>227</td><td>221</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5240.00	91.49	-----	-----	82.08	34.05	8.06	32.70	227	221
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5047.28	39.70	54.00	-14.30	30.70	33.93	7.85	32.78	227	221	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	91.49	-----	-----	82.08	34.05	8.06	32.70	227	221	AVERAGE																																																																																			

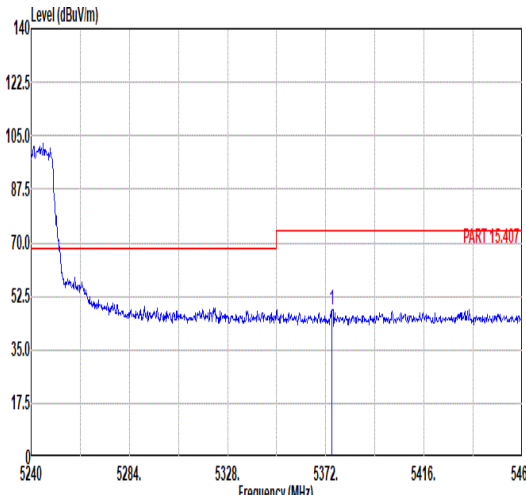
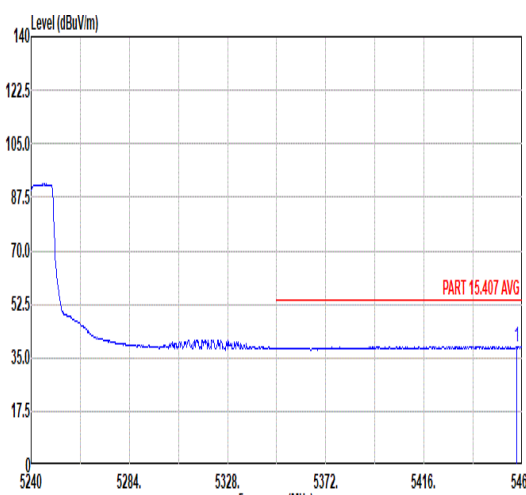


Mode	12																																								
	Band Edge - R																																								
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_Full RU_5240MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5374.86</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>38.36</td><td>34.12</td><td>8.39</td><td>32.65</td><td>227</td><td>221 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5374.86	48.22	74.00	-25.78	38.36	34.12	8.39	32.65	227	221 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5374.86	48.22	74.00	-25.78	38.36	34.12	8.39	32.65	227	221 PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.58</td><td>38.73</td><td>54.00</td><td>-15.27</td><td>28.76</td><td>34.17</td><td>8.41</td><td>32.61</td><td>227</td><td>221 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.58	38.73	54.00	-15.27	28.76	34.17	8.41	32.61	227	221 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5457.58	38.73	54.00	-15.27	28.76	34.17	8.41	32.61	227	221 AVERAGE																															

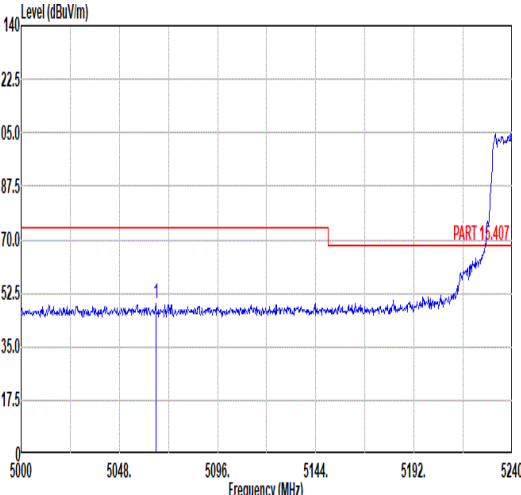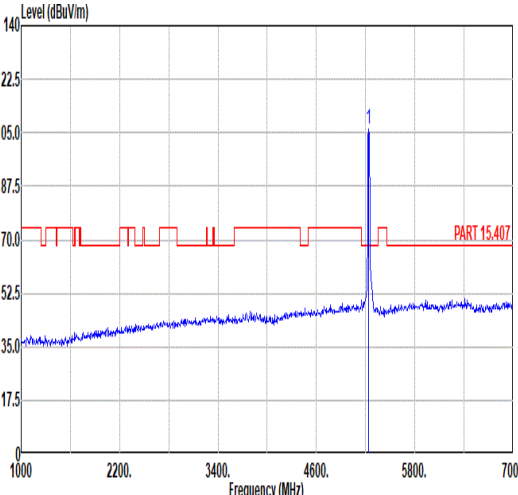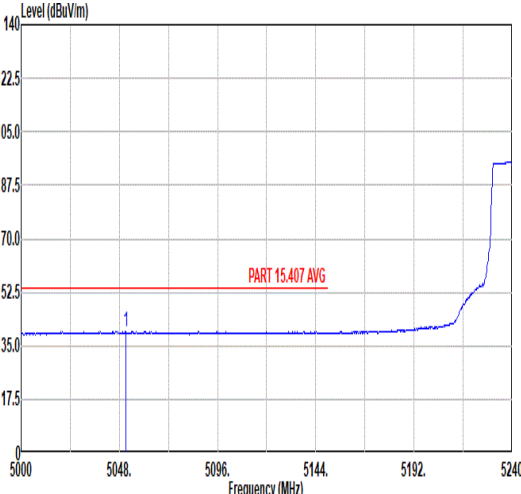
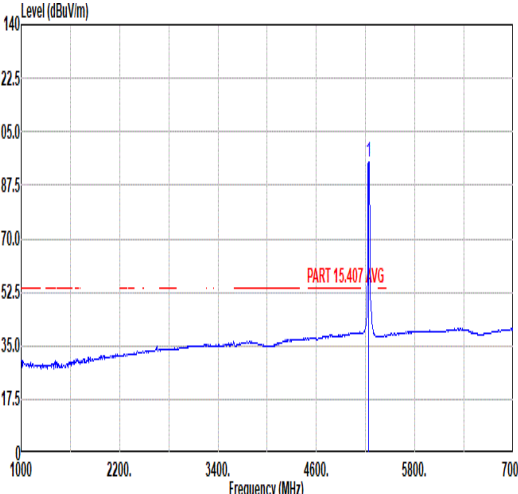


Mode	12																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_Full RU_5240MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5065.76</td><td>48.98</td><td>74.00</td><td>-25.02</td><td>39.95</td><td>33.94</td><td>7.86</td><td>32.77</td><td>100</td><td>165</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5065.76	48.98	74.00	-25.02	39.95	33.94	7.86	32.77	100	165	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>106.21</td><td>-----</td><td>-----</td><td>96.85</td><td>34.04</td><td>8.02</td><td>32.70</td><td>100</td><td>165</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	106.21	-----	-----	96.85	34.04	8.02	32.70	100	165
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5065.76	48.98	74.00	-25.02	39.95	33.94	7.86	32.77	100	165	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	106.21	-----	-----	96.85	34.04	8.02	32.70	100	165	PEAK																																																																																
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5051.12</td><td>39.58</td><td>54.00</td><td>-14.42</td><td>30.58</td><td>33.93</td><td>7.85</td><td>32.78</td><td>100</td><td>165</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5051.12	39.58	54.00	-14.42	30.58	33.93	7.85	32.78	100	165	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>95.21</td><td>-----</td><td>-----</td><td>85.80</td><td>34.05</td><td>8.06</td><td>32.70</td><td>100</td><td>165</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	95.21	-----	-----	85.80	34.05	8.06	32.70	100	165
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5051.12	39.58	54.00	-14.42	30.58	33.93	7.85	32.78	100	165	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	95.21	-----	-----	85.80	34.05	8.06	32.70	100	165	AVERAGE																																																																																



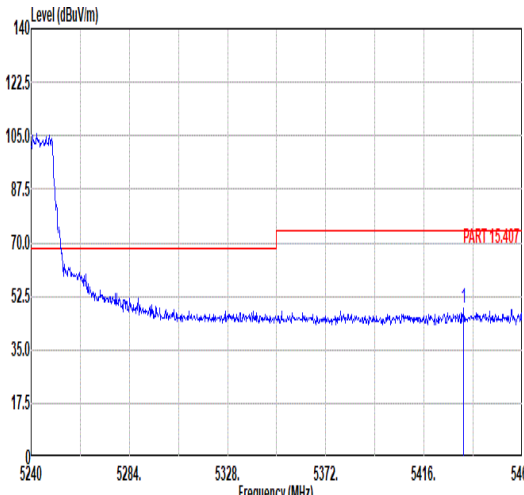
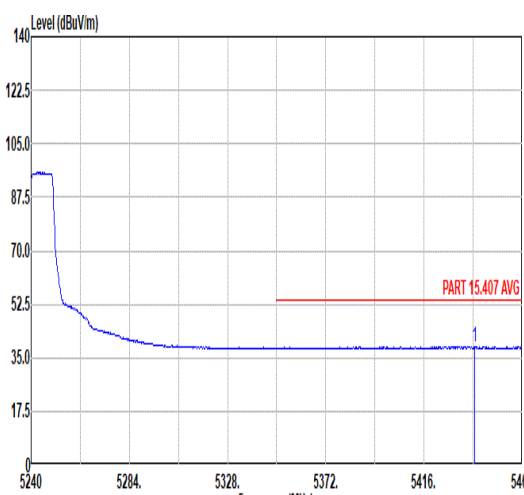


Mode	12																																									
	Band Edge - R																																									
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_Full RU_5240MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5433.82</td><td>48.59</td><td>74.00</td><td>-25.41</td><td>38.61</td><td>34.16</td><td>8.44</td><td>32.62</td><td>100</td><td>165</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5433.82	48.59	74.00	-25.41	38.61	34.16	8.44	32.62	100	165	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5433.82	48.59	74.00	-25.41	38.61	34.16	8.44	32.62	100	165	PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5438.66</td><td>38.66</td><td>54.00</td><td>-15.34</td><td>28.68</td><td>34.16</td><td>8.44</td><td>32.62</td><td>100</td><td>165</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5438.66	38.66	54.00	-15.34	28.68	34.16	8.44	32.62	100	165	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5438.66	38.66	54.00	-15.34	28.68	34.16	8.44	32.62	100	165	AVERAGE																															

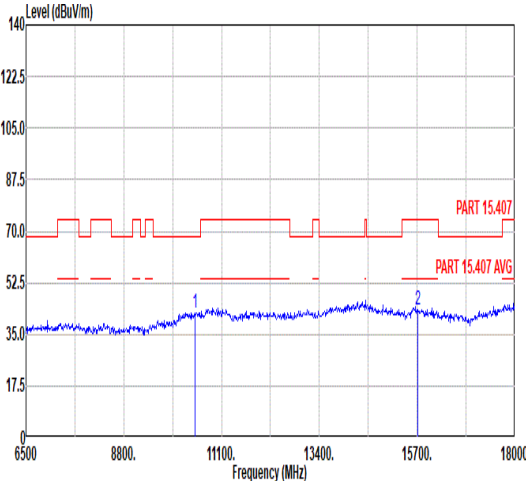
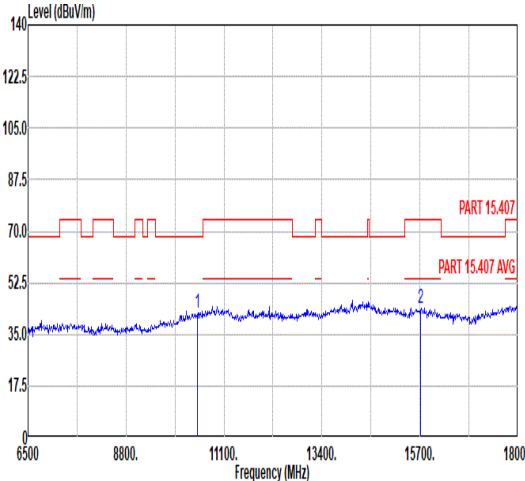


Mode	12																																																																																																												
	Harmonic																																																																																																												
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																												
ANT	1																																																																																																												
Pol.	Horizontal					Vertical																																																																																																							
Peak Avg																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>42.22</td><td>68.30</td><td>-26.08</td><td>58.80</td><td>37.45</td><td>10.82</td><td>64.85</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>43.47</td><td>74.00</td><td>-30.53</td><td>55.01</td><td>39.49</td><td>12.71</td><td>63.74</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	42.22	68.30	-26.08	58.80	37.45	10.82	64.85	--	Peak	2	15720.00	43.47	74.00	-30.53	55.01	39.49	12.71	63.74	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>42.44</td><td>68.30</td><td>-25.86</td><td>59.02</td><td>37.45</td><td>10.82</td><td>64.85</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>43.79</td><td>74.00</td><td>-30.21</td><td>55.33</td><td>39.49</td><td>12.71</td><td>63.74</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	42.44	68.30	-25.86	59.02	37.45	10.82	64.85	--	Peak	2	15720.00	43.79	74.00	-30.21	55.33	39.49	12.71	63.74	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																				
1	10480.00	42.22	68.30	-26.08	58.80	37.45	10.82	64.85	--	Peak																																																																																																			
2	15720.00	43.47	74.00	-30.53	55.01	39.49	12.71	63.74	--	Peak																																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																				
1	10480.00	42.44	68.30	-25.86	59.02	37.45	10.82	64.85	--	Peak																																																																																																			
2	15720.00	43.79	74.00	-30.21	55.33	39.49	12.71	63.74	--	Peak																																																																																																			

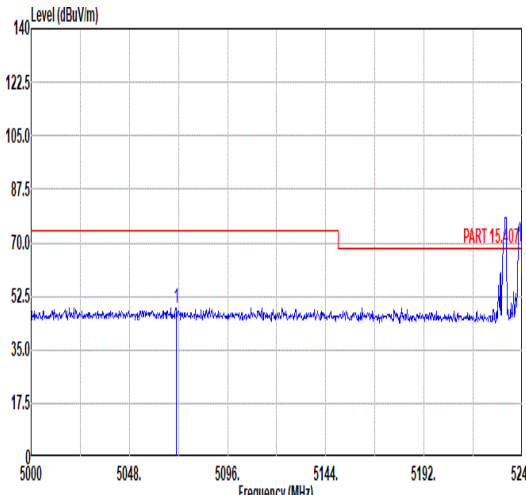
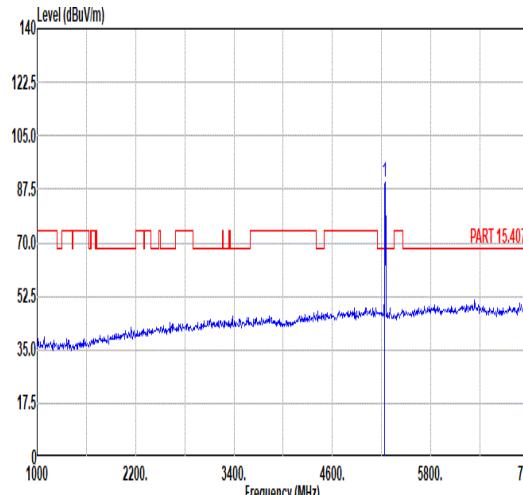
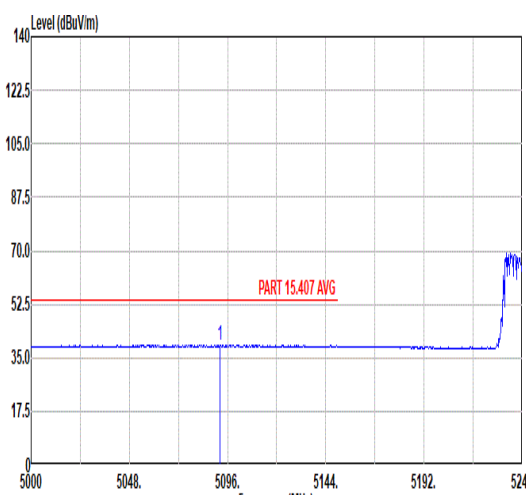
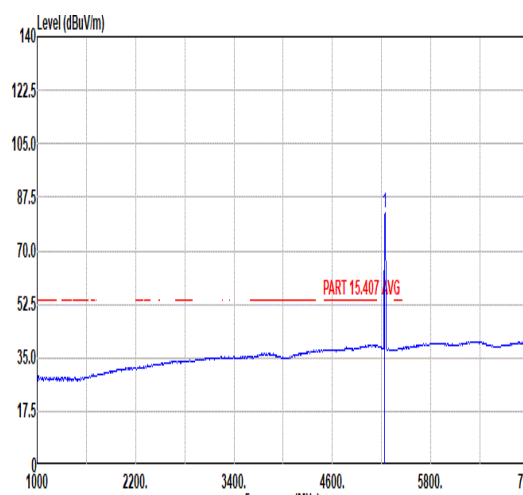


Mode	13																																																																																						
	Band Edge - L																																																																																						
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU26/8_5240MHz																																																																																						
ANT	1																																																																																						
Pol.	Horizontal					Fundamental																																																																																	
Peak																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5070.80</td><td>48.85</td><td>74.00</td><td>-25.15</td><td>39.81</td><td>33.94</td><td>7.87</td><td>32.77</td><td>100</td><td>1 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5070.80	48.85	74.00	-25.15	39.81	33.94	7.87	32.77	100	1 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>89.90</td><td>-----</td><td>-----</td><td>80.49</td><td>34.05</td><td>8.06</td><td>32.70</td><td>100</td><td>1 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	89.90	-----	-----	80.49	34.05	8.06	32.70	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5070.80	48.85	74.00	-25.15	39.81	33.94	7.87	32.77	100	1 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5240.00	89.90	-----	-----	80.49	34.05	8.06	32.70	100	1 PEAK																																																																													
Avg																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5092.40</td><td>39.11</td><td>54.00</td><td>-14.89</td><td>30.03</td><td>33.96</td><td>7.88</td><td>32.76</td><td>100</td><td>1 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5092.40	39.11	54.00	-14.89	30.03	33.96	7.88	32.76	100	1 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>82.56</td><td>-----</td><td>-----</td><td>73.15</td><td>34.05</td><td>8.06</td><td>32.70</td><td>100</td><td>1 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	82.56	-----	-----	73.15	34.05	8.06	32.70	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5092.40	39.11	54.00	-14.89	30.03	33.96	7.88	32.76	100	1 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5240.00	82.56	-----	-----	73.15	34.05	8.06	32.70	100	1 AVERAGE																																																																													

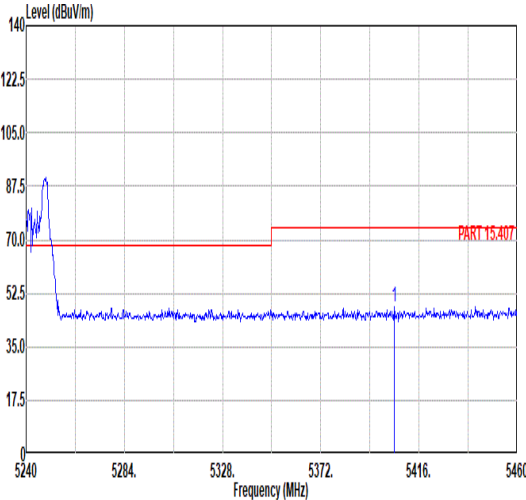
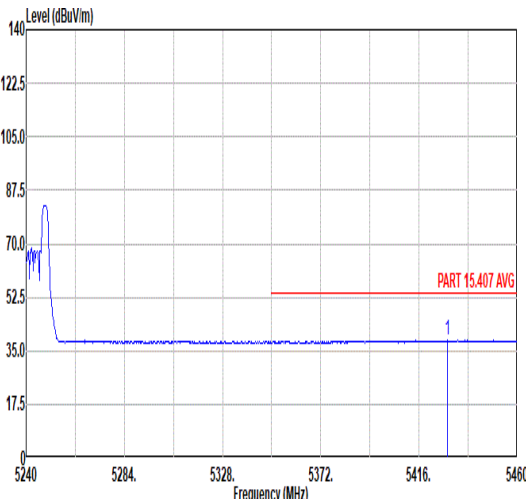


Mode	13																																																	
	Band Edge - R																																																	
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU26/8_5240MHz																																																	
ANT	1																																																	
Pol.	Horizontal						Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5405.00</td><td>47.98</td><td>74.00</td><td>-26.02</td><td>38.01</td><td>34.14</td><td>8.47</td><td>32.64</td><td>100</td><td>1 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5405.00	47.98	74.00	-26.02	38.01	34.14	8.47	32.64	100	1 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5405.00	47.98	74.00	-26.02	38.01	34.14	8.47	32.64	100	1 PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5428.76</td><td>38.55</td><td>54.00</td><td>-15.45</td><td>28.57</td><td>34.16</td><td>8.45</td><td>32.63</td><td>100</td><td>1 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5428.76	38.55	54.00	-15.45	28.57	34.16	8.45	32.63	100	1 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5428.76	38.55	54.00	-15.45	28.57	34.16	8.45	32.63	100	1 AVERAGE																																								

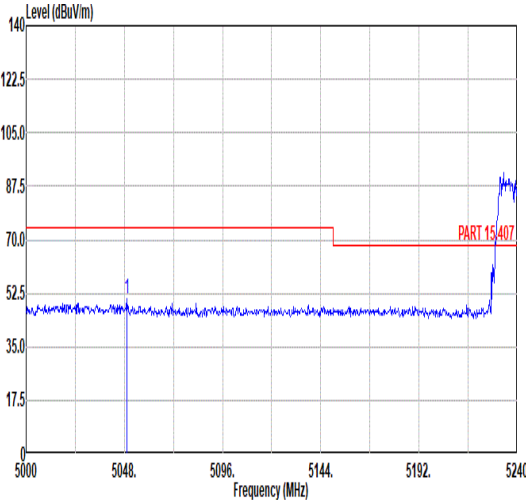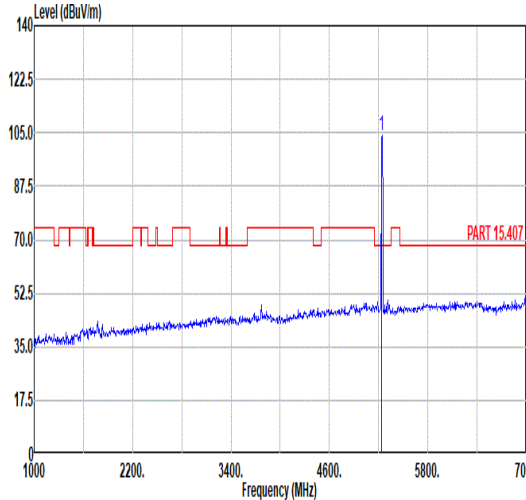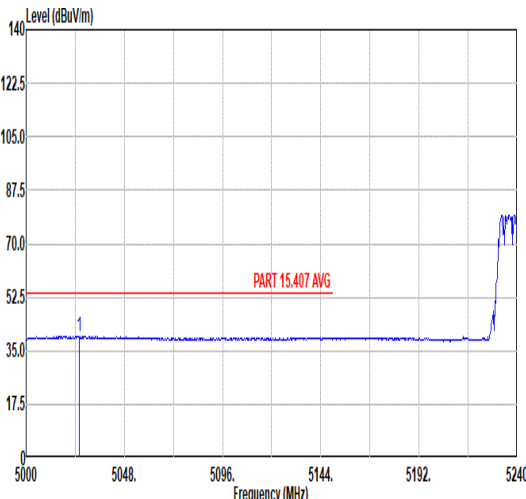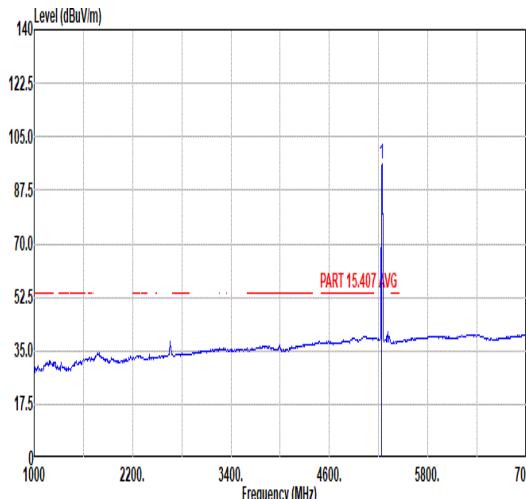

Mode	13																																																																																													
	Band Edge - L																																																																																													
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU26/8_5240MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5049.20</td><td>50.52</td><td>74.00</td><td>-23.48</td><td>41.52</td><td>33.93</td><td>7.85</td><td>32.78</td><td>300</td><td>211</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5049.20	50.52	74.00	-23.48	41.52	33.93	7.85	32.78	300	211	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>104.12</td><td>-----</td><td>-----</td><td>94.71</td><td>34.05</td><td>8.06</td><td>32.70</td><td>300</td><td>211</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5240.00	104.12	-----	-----	94.71	34.05	8.06	32.70	300	211
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5049.20	50.52	74.00	-23.48	41.52	33.93	7.85	32.78	300	211	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	104.12	-----	-----	94.71	34.05	8.06	32.70	300	211	PEAK																																																																																			
Avg																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5025.92</td><td>39.83</td><td>54.00</td><td>-14.17</td><td>30.86</td><td>33.92</td><td>7.84</td><td>32.79</td><td>300</td><td>211</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5025.92	39.83	54.00	-14.17	30.86	33.92	7.84	32.79	300	211	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>96.27</td><td>-----</td><td>-----</td><td>86.86</td><td>34.05</td><td>8.06</td><td>32.70</td><td>300</td><td>211</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5240.00	96.27	-----	-----	86.86	34.05	8.06	32.70	300	211
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5025.92	39.83	54.00	-14.17	30.86	33.92	7.84	32.79	300	211	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	96.27	-----	-----	86.86	34.05	8.06	32.70	300	211	AVERAGE																																																																																			

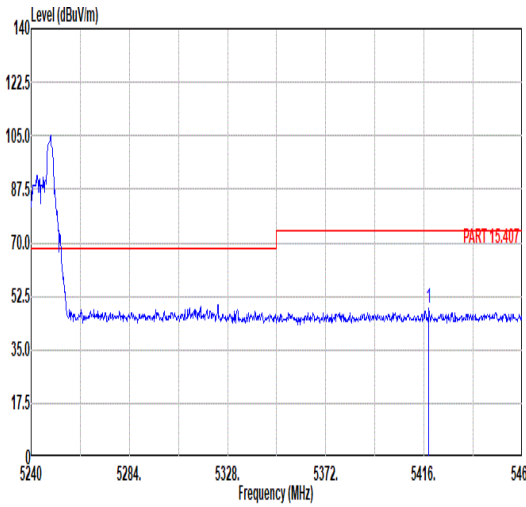
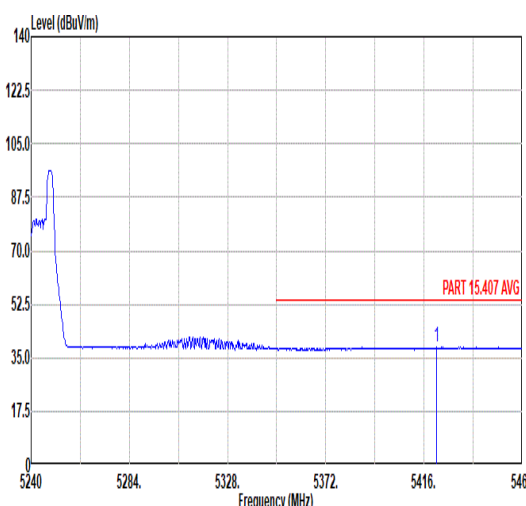


Mode	13																																																		
	Band Edge - R																																																		
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU26/8_5240MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5418.20</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>38.36</td><td>34.15</td><td>8.47</td><td>32.63</td><td>300</td><td>211</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5418.20	48.35	74.00	-25.65	38.36	34.15	8.47	32.63	300	211	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5418.20	48.35	74.00	-25.65	38.36	34.15	8.47	32.63	300	211	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5421.50</td><td>38.55</td><td>54.00</td><td>-15.45</td><td>28.57</td><td>34.15</td><td>8.46</td><td>32.63</td><td>300</td><td>211</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5421.50	38.55	54.00	-15.45	28.57	34.15	8.46	32.63	300	211	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5421.50	38.55	54.00	-15.45	28.57	34.15	8.46	32.63	300	211	AVERAGE																																								



Mode	14																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU52/40_5240MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5047.04</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>41.10</td><td>33.93</td><td>7.85</td><td>32.78</td><td>300</td><td>217</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5047.04	50.10	74.00	-23.90	41.10	33.93	7.85	32.78	300	217	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>100.97</td><td>-----</td><td>-----</td><td>91.56</td><td>34.05</td><td>8.06</td><td>32.70</td><td>300</td><td>217</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	100.97	-----	-----	91.56	34.05	8.06	32.70	300	217
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5047.04	50.10	74.00	-23.90	41.10	33.93	7.85	32.78	300	217	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	100.97	-----	-----	91.56	34.05	8.06	32.70	300	217	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5050.88</td><td>39.50</td><td>54.00</td><td>-14.50</td><td>30.50</td><td>33.93</td><td>7.85</td><td>32.78</td><td>300</td><td>217</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5050.88	39.50	54.00	-14.50	30.50	33.93	7.85	32.78	300	217	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>93.25</td><td>-----</td><td>-----</td><td>83.84</td><td>34.05</td><td>8.06</td><td>32.70</td><td>300</td><td>217</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	93.25	-----	-----	83.84	34.05	8.06	32.70	300	217
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5050.88	39.50	54.00	-14.50	30.50	33.93	7.85	32.78	300	217	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	93.25	-----	-----	83.84	34.05	8.06	32.70	300	217	AVERAGE																																																																																

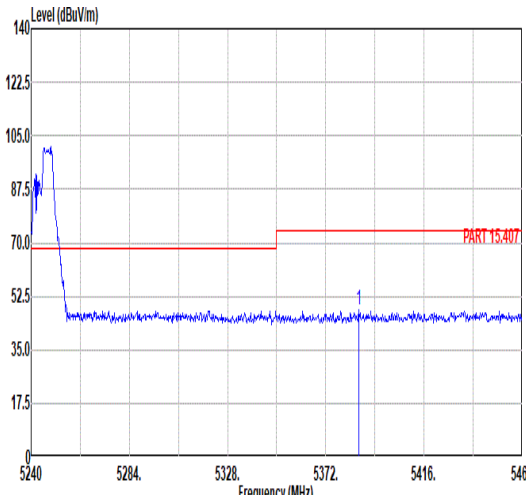
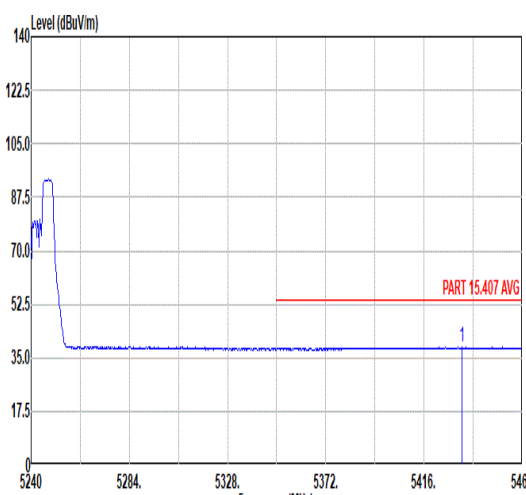


Mode	14																																																			
	Band Edge - R																																																			
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU52/40_5240MHz																																																			
ANT	1																																																			
Pol.	Horizontal						Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5386.74</td><td>48.12</td><td>74.00</td><td>-25.88</td><td>38.20</td><td>34.13</td><td>8.43</td><td>32.64</td><td>300</td><td>217</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5386.74	48.12	74.00	-25.88	38.20	34.13	8.43	32.64	300	217	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5386.74	48.12	74.00	-25.88	38.20	34.13	8.43	32.64	300	217	PEAK																																									
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5433.16</td><td>38.53</td><td>54.00</td><td>-15.47</td><td>28.54</td><td>34.16</td><td>8.45</td><td>32.62</td><td>300</td><td>217</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5433.16	38.53	54.00	-15.47	28.54	34.16	8.45	32.62	300	217	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5433.16	38.53	54.00	-15.47	28.54	34.16	8.45	32.62	300	217	AVERAGE																																									







Mode	14																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU52/40_5240MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5017.76</td><td>50.48</td><td>74.00</td><td>-23.52</td><td>41.53</td><td>33.91</td><td>7.83</td><td>32.79</td><td>292</td><td>184</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5017.76	50.48	74.00	-23.52	41.53	33.91	7.83	32.79	292	184	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>97.73</td><td>-----</td><td>-----</td><td>88.32</td><td>34.05</td><td>8.06</td><td>32.70</td><td>292</td><td>184</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	97.73	-----	-----	88.32	34.05	8.06	32.70	292	184
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5017.76	50.48	74.00	-23.52	41.53	33.91	7.83	32.79	292	184	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	97.73	-----	-----	88.32	34.05	8.06	32.70	292	184	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5044.16</td><td>39.88</td><td>54.00</td><td>-14.12</td><td>30.88</td><td>33.93</td><td>7.85</td><td>32.78</td><td>292</td><td>184</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5044.16	39.88	54.00	-14.12	30.88	33.93	7.85	32.78	292	184	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>90.26</td><td>-----</td><td>-----</td><td>80.85</td><td>34.05</td><td>8.06</td><td>32.70</td><td>292</td><td>184</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	90.26	-----	-----	80.85	34.05	8.06	32.70	292	184
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5044.16	39.88	54.00	-14.12	30.88	33.93	7.85	32.78	292	184	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	90.26	-----	-----	80.85	34.05	8.06	32.70	292	184	AVERAGE																																																																																

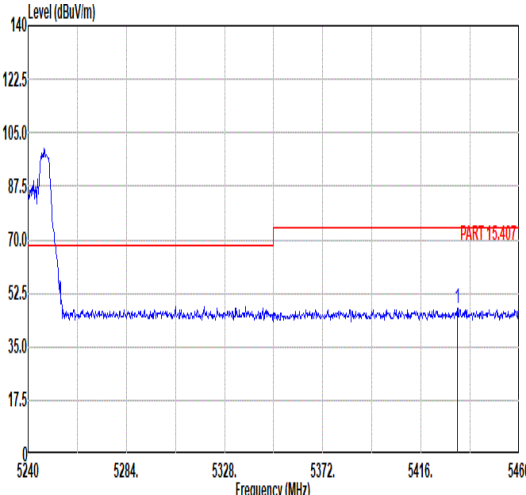
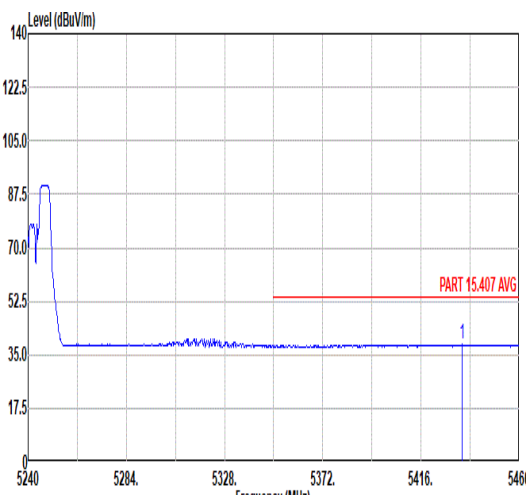


Mode	14																																																		
	Band Edge - R																																																		
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU52/40_5240MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5432.28</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>37.58</td><td>34.16</td><td>8.45</td><td>32.62</td><td>292</td><td>184</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5432.28	47.57	74.00	-26.43	37.58	34.16	8.45	32.62	292	184	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5432.28	47.57	74.00	-26.43	37.58	34.16	8.45	32.62	292	184	PEAK																																								
Avg	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5434.26</td><td>38.50</td><td>54.00</td><td>-15.50</td><td>28.52</td><td>34.16</td><td>8.44</td><td>32.62</td><td>292</td><td>184</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5434.26	38.50	54.00	-15.50	28.52	34.16	8.44	32.62	292	184	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5434.26	38.50	54.00	-15.50	28.52	34.16	8.44	32.62	292	184	AVERAGE																																								

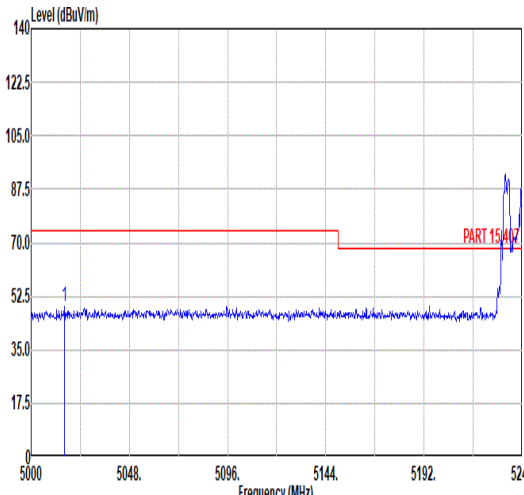
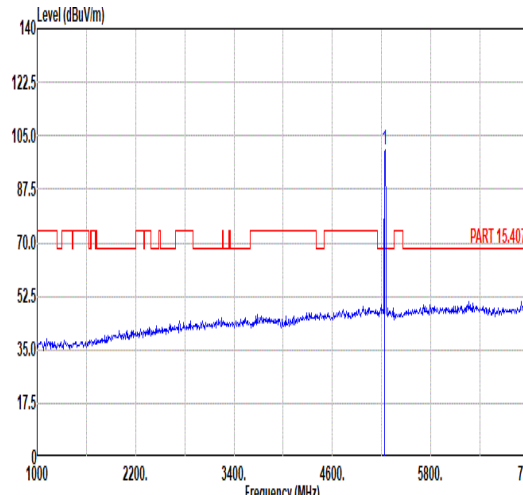
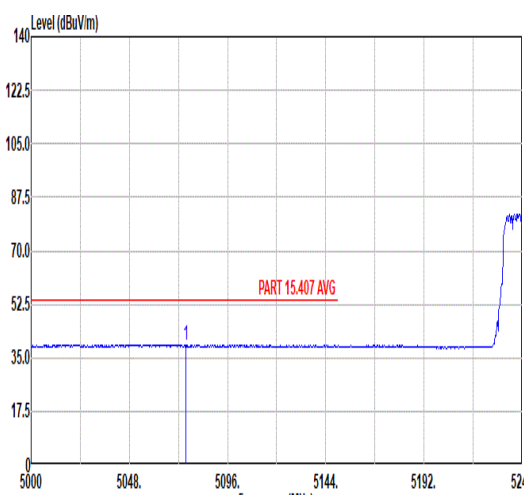
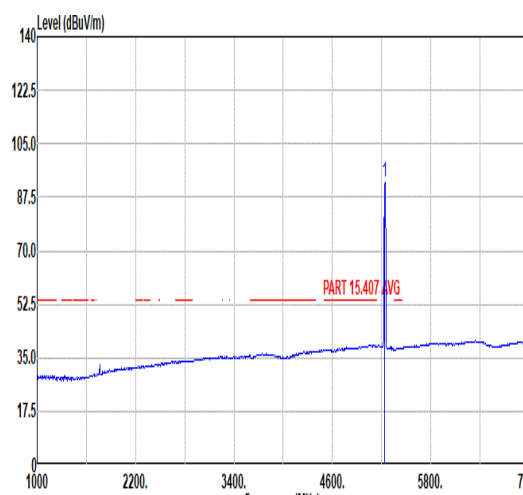


Mode	15																																																																																													
	Band Edge - L																																																																																													
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU106/54_5240MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5016.32</td><td>49.14</td><td>74.00</td><td>-24.86</td><td>40.19</td><td>33.91</td><td>7.83</td><td>32.79</td><td>104</td><td>110</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5016.32	49.14	74.00	-24.86	40.19	33.91	7.83	32.79	104	110	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5240.00</td><td>100.52</td><td>-----</td><td>-----</td><td>91.13</td><td>34.05</td><td>8.04</td><td>32.70</td><td>104</td><td>110</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5240.00	100.52	-----	-----	91.13	34.05	8.04	32.70	104	110
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5016.32	49.14	74.00	-24.86	40.19	33.91	7.83	32.79	104	110	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	100.52	-----	-----	91.13	34.05	8.04	32.70	104	110	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5075.60</td><td>39.28</td><td>54.00</td><td>-14.72</td><td>30.23</td><td>33.95</td><td>7.87</td><td>32.77</td><td>104</td><td>110</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5075.60	39.28	54.00	-14.72	30.23	33.95	7.87	32.77	104	110	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5240.00</td><td>92.27</td><td>-----</td><td>-----</td><td>82.86</td><td>34.05</td><td>8.06</td><td>32.70</td><td>104</td><td>110</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5240.00	92.27	-----	-----	82.86	34.05	8.06	32.70	104	110
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5075.60	39.28	54.00	-14.72	30.23	33.95	7.87	32.77	104	110	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	92.27	-----	-----	82.86	34.05	8.06	32.70	104	110	AVERAGE																																																																																			

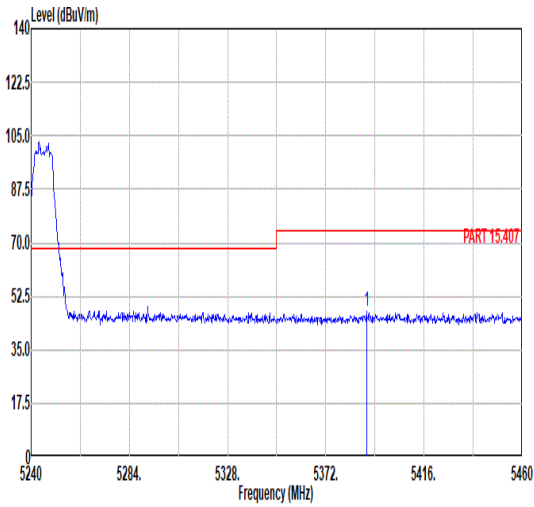
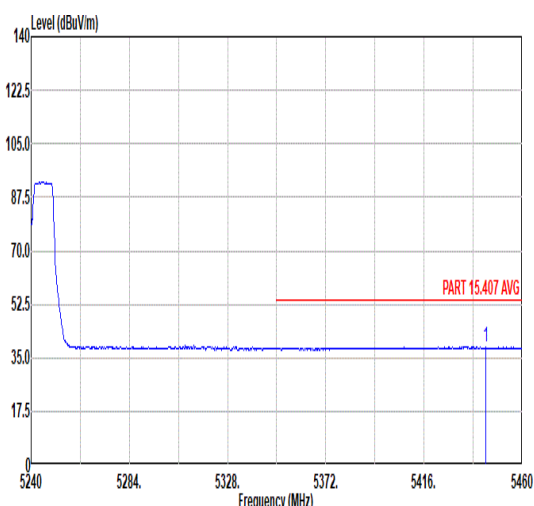


Mode	15																																																			
	Band Edge - R																																																			
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU106/54_5240MHz																																																			
ANT	1																																																			
Pol.	Horizontal							Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5390.26</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>37.62</td><td>34.13</td><td>8.44</td><td>32.64</td><td>104</td><td>110</td><td>PEAK</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5390.26	47.55	74.00	-26.45	37.62	34.13	8.44	32.64	104	110	PEAK	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5390.26	47.55	74.00	-26.45	37.62	34.13	8.44	32.64	104	110	PEAK																																									
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5443.50</td><td>38.51</td><td>54.00</td><td>-15.49</td><td>28.54</td><td>34.16</td><td>8.43</td><td>32.62</td><td>104</td><td>110</td><td>AVERAGE</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5443.50	38.51	54.00	-15.49	28.54	34.16	8.43	32.62	104	110	AVERAGE	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5443.50	38.51	54.00	-15.49	28.54	34.16	8.43	32.62	104	110	AVERAGE																																									

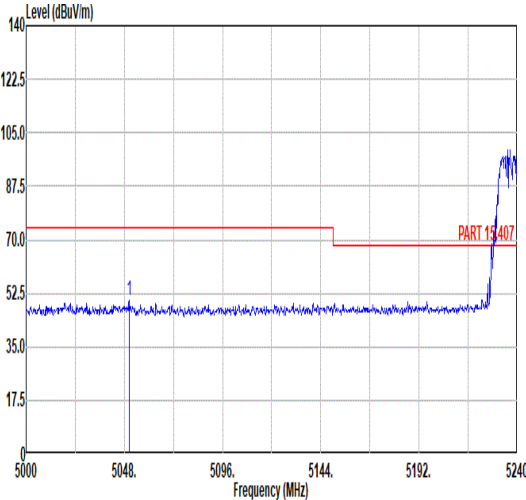
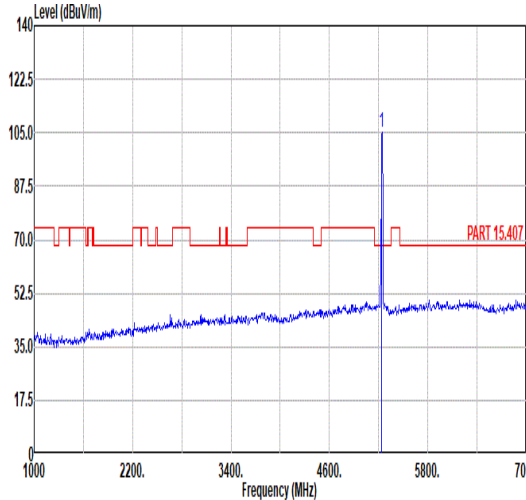
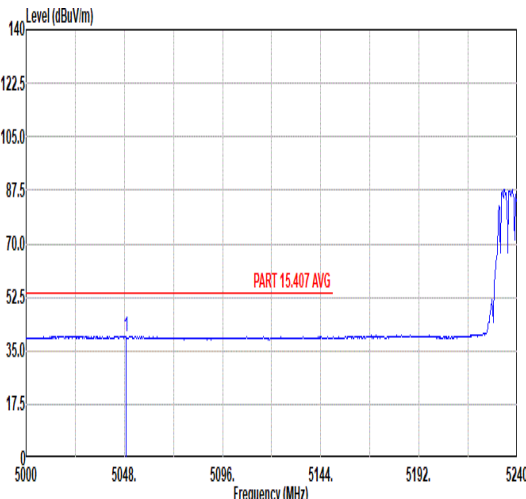
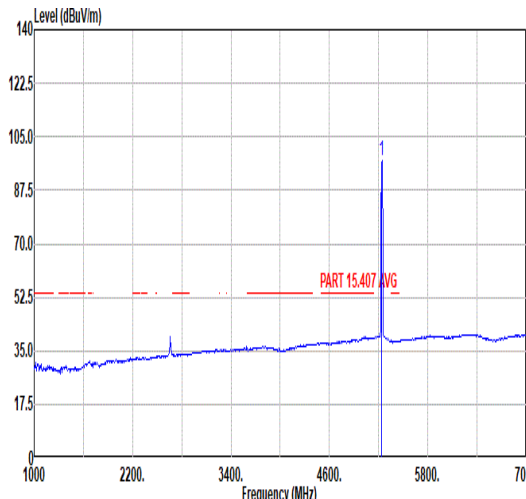


Mode	15																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU106/54_5240MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5050.40</td><td>49.98</td><td>74.00</td><td>-24.02</td><td>40.98</td><td>33.93</td><td>7.85</td><td>32.78</td><td>100</td><td>181</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5050.40	49.98	74.00	-24.02	40.98	33.93	7.85	32.78	100	181	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>105.32</td><td>-----</td><td>-----</td><td>95.91</td><td>34.05</td><td>8.06</td><td>32.70</td><td>100</td><td>181</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	105.32	-----	-----	95.91	34.05	8.06	32.70	100	181
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5050.40	49.98	74.00	-24.02	40.98	33.93	7.85	32.78	100	181	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5240.00	105.32	-----	-----	95.91	34.05	8.06	32.70	100	181	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5048.96</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>30.75</td><td>33.93</td><td>7.85</td><td>32.78</td><td>100</td><td>181</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5048.96	39.75	54.00	-14.25	30.75	33.93	7.85	32.78	100	181	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>97.35</td><td>-----</td><td>-----</td><td>87.94</td><td>34.05</td><td>8.06</td><td>32.70</td><td>100</td><td>181</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	97.35	-----	-----	87.94	34.05	8.06	32.70	100	181
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5048.96	39.75	54.00	-14.25	30.75	33.93	7.85	32.78	100	181	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5240.00	97.35	-----	-----	87.94	34.05	8.06	32.70	100	181	AVERAGE																																																																															

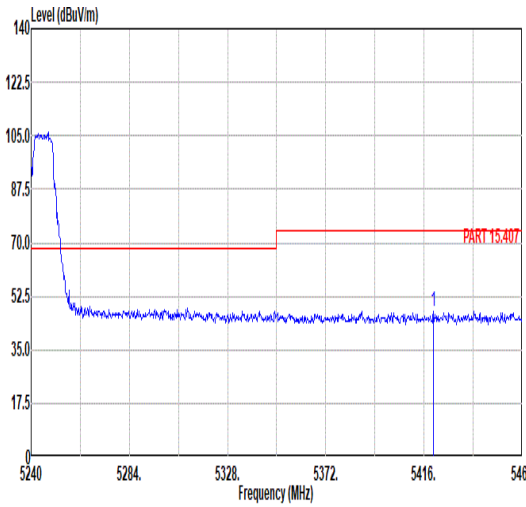
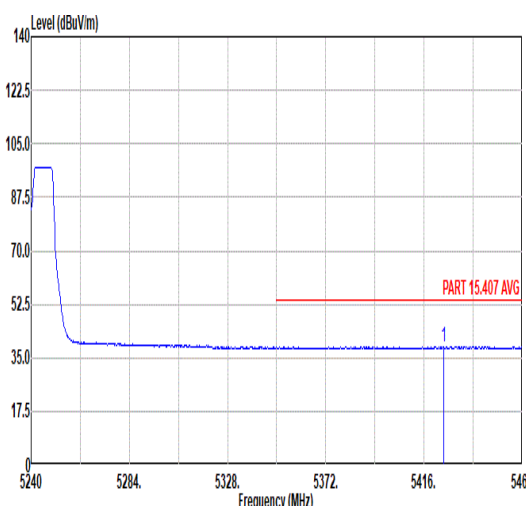


Mode	15																																																		
	Band Edge - R																																																		
	U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU106/54_5240MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5420.18</td><td>47.48</td><td>74.00</td><td>-26.52</td><td>37.50</td><td>34.15</td><td>8.46</td><td>32.63</td><td>100</td><td>181</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5420.18	47.48	74.00	-26.52	37.50	34.15	8.46	32.63	100	181	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5420.18	47.48	74.00	-26.52	37.50	34.15	8.46	32.63	100	181	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5424.80</td><td>38.58</td><td>54.00</td><td>-15.42</td><td>28.60</td><td>34.15</td><td>8.46</td><td>32.63</td><td>100</td><td>181</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5424.80	38.58	54.00	-15.42	28.60	34.15	8.46	32.63	100	181	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5424.80	38.58	54.00	-15.42	28.60	34.15	8.46	32.63	100	181	AVERAGE																																								

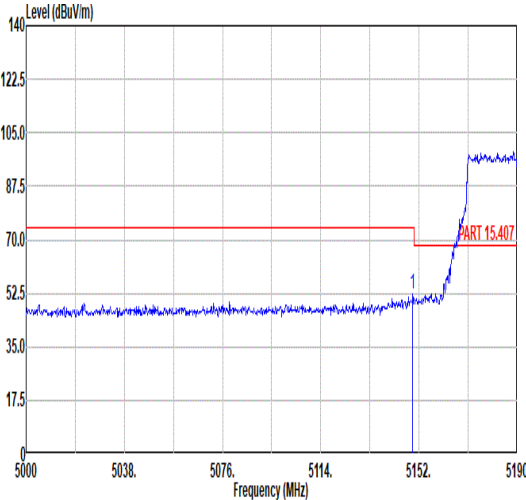
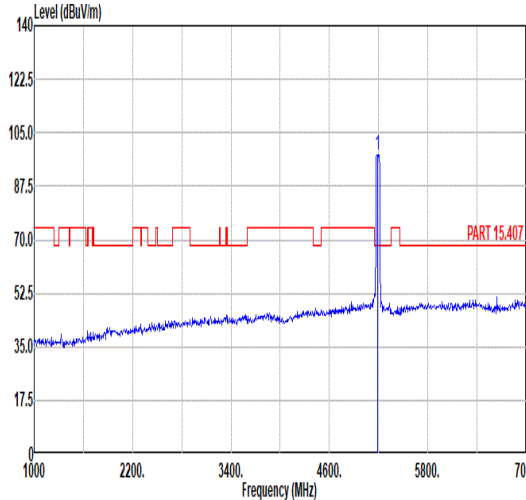
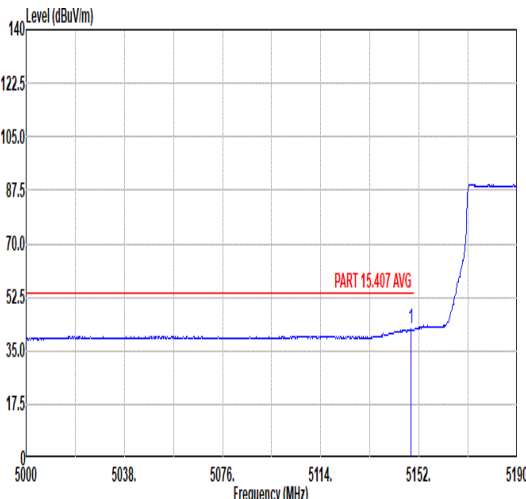
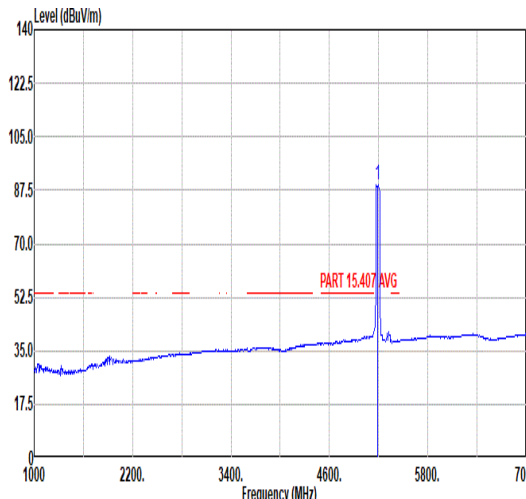




Mode	16																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.53</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>43.01</td><td>33.99</td><td>7.92</td><td>32.74</td><td>265</td><td>209</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.53	52.18	74.00	-21.82	43.01	33.99	7.92	32.74	265	209	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>97.92</td><td>-----</td><td>-----</td><td>88.66</td><td>34.02</td><td>7.96</td><td>32.72</td><td>265</td><td>209</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	97.92	-----	-----	88.66	34.02	7.96	32.72	265	209
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5149.53	52.18	74.00	-21.82	43.01	33.99	7.92	32.74	265	209	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5190.00	97.92	-----	-----	88.66	34.02	7.96	32.72	265	209	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.96</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>32.89</td><td>33.99</td><td>7.92</td><td>32.74</td><td>265</td><td>209</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.96	42.06	54.00	-11.94	32.89	33.99	7.92	32.74	265	209	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>89.31</td><td>-----</td><td>-----</td><td>80.06</td><td>34.02</td><td>7.95</td><td>32.72</td><td>265</td><td>209</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	89.31	-----	-----	80.06	34.02	7.95	32.72	265	209
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5148.96	42.06	54.00	-11.94	32.89	33.99	7.92	32.74	265	209	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5190.00	89.31	-----	-----	80.06	34.02	7.95	32.72	265	209	AVERAGE																																																																																	

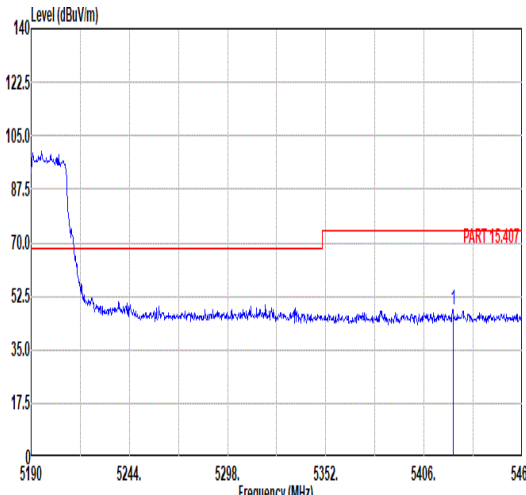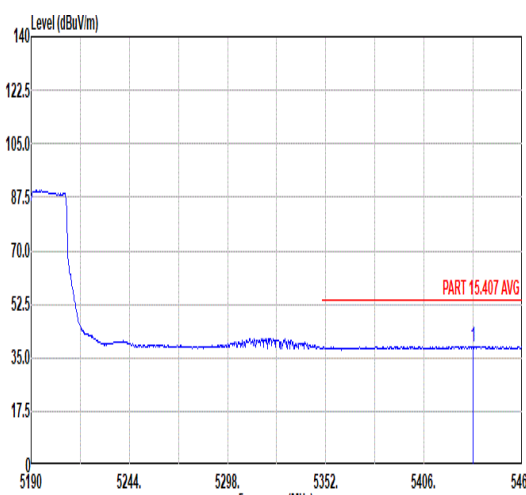



Mode	16																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5421.93</td><td>48.10</td><td>74.00</td><td>-25.90</td><td>38.12</td><td>34.15</td><td>8.46</td><td>32.63</td><td>265</td><td>209</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5421.93	48.10	74.00	-25.90	38.12	34.15	8.46	32.63	265	209	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5421.93	48.10	74.00	-25.90	38.12	34.15	8.46	32.63	265	209	PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5433.00</td><td>38.59</td><td>54.00</td><td>-15.41</td><td>28.60</td><td>34.16</td><td>8.45</td><td>32.62</td><td>265</td><td>209</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5433.00	38.59	54.00	-15.41	28.60	34.16	8.45	32.62	265	209	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5433.00	38.59	54.00	-15.41	28.60	34.16	8.45	32.62	265	209	AVERAGE																															

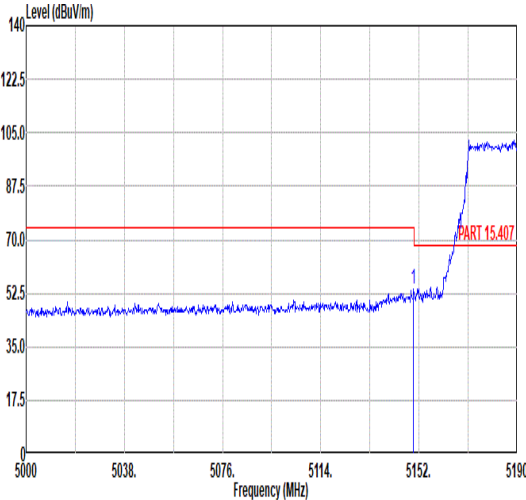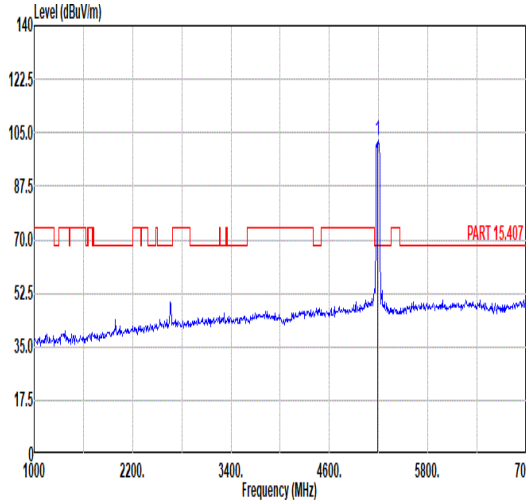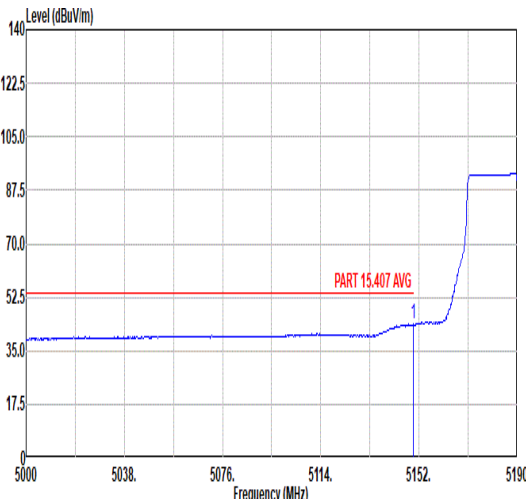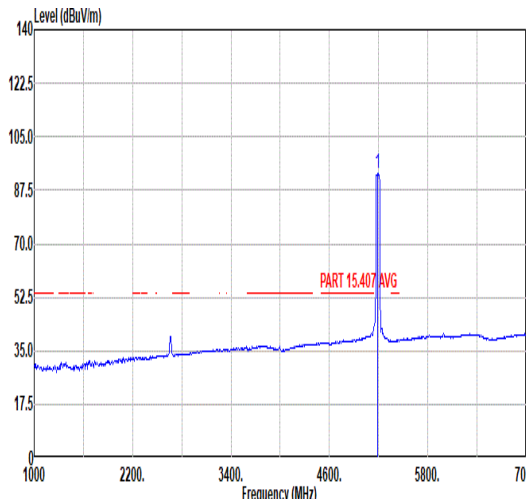





Mode	16																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>44.58</td><td>33.99</td><td>7.92</td><td>32.74</td><td>108</td><td>178</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	53.75	74.00	-20.25	44.58	33.99	7.92	32.74	108	178	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>102.73</td><td>-----</td><td>-----</td><td>93.48</td><td>34.02</td><td>7.95</td><td>32.72</td><td>108</td><td>178</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	102.73	-----	-----	93.48	34.02	7.95	32.72	108	178
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.91	53.75	74.00	-20.25	44.58	33.99	7.92	32.74	108	178	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5190.00	102.73	-----	-----	93.48	34.02	7.95	32.72	108	178	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>34.48</td><td>33.99</td><td>7.92</td><td>32.74</td><td>108</td><td>178</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	43.65	54.00	-10.35	34.48	33.99	7.92	32.74	108	178	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>93.11</td><td>-----</td><td>-----</td><td>83.86</td><td>34.02</td><td>7.95</td><td>32.72</td><td>108</td><td>178</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	93.11	-----	-----	83.86	34.02	7.95	32.72	108	178
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.91	43.65	54.00	-10.35	34.48	33.99	7.92	32.74	108	178	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5190.00	93.11	-----	-----	83.86	34.02	7.95	32.72	108	178	AVERAGE																																																																															

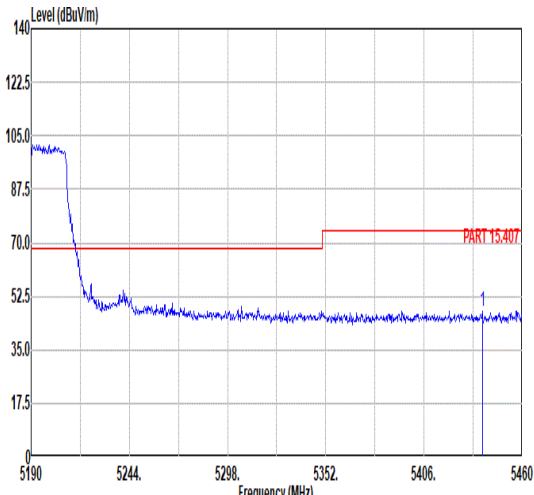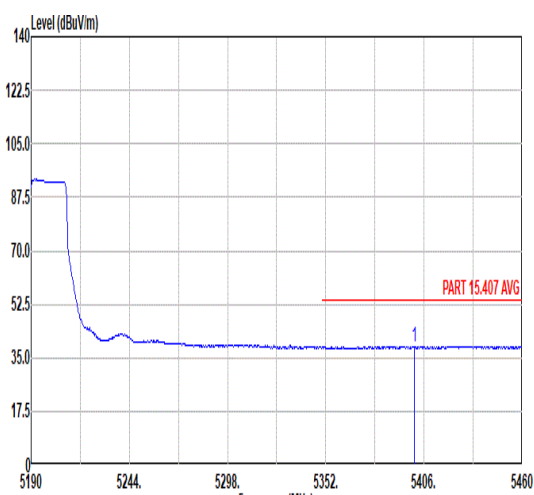Mode	16																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																	
ANT	1																																																	
Pol.	Vertical					Fundamental																																												
Peak	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5438.13</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>37.61</td><td>34.16</td><td>8.44</td><td>32.62</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>108</td><td>178 PEAK</td></tr></tbody></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5438.13	47.59	74.00	-26.41	37.61	34.16	8.44	32.62							108	178 PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																											
1 5438.13	47.59	74.00	-26.41	37.61	34.16	8.44	32.62																																											
						108	178 PEAK																																											
Avg	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5400.60</td><td>38.75</td><td>54.00</td><td>-15.25</td><td>28.79</td><td>34.14</td><td>8.46</td><td>32.64</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>108</td><td>178 AVERAGE</td></tr></tbody></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5400.60	38.75	54.00	-15.25	28.79	34.14	8.46	32.64							108	178 AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																											
1 5400.60	38.75	54.00	-15.25	28.79	34.14	8.46	32.64																																											
						108	178 AVERAGE																																											

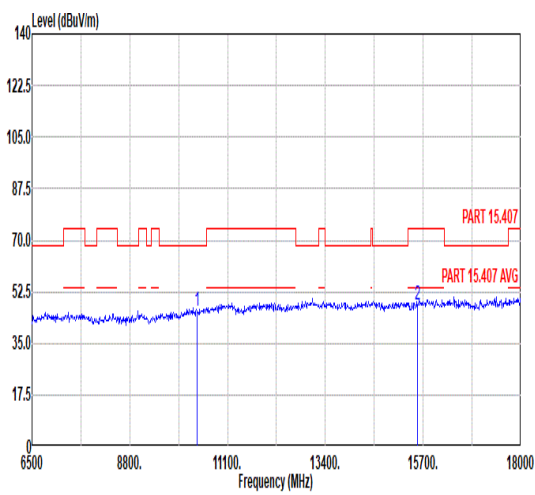
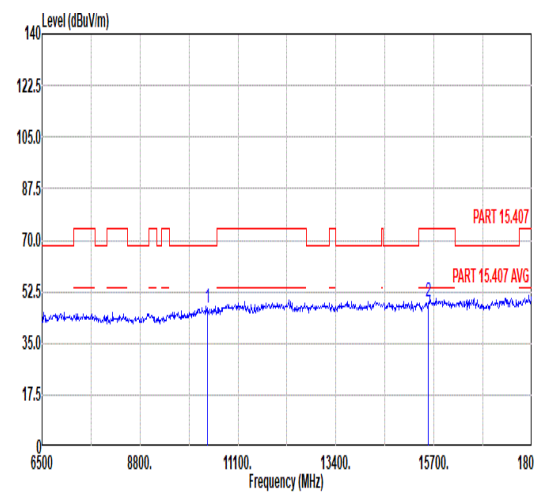


Mode	16																																																																																																									
	Harmonic																																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10380.00</td><td>46.11</td><td>68.30</td><td>-22.19</td><td>57.14</td><td>37.21</td><td>10.74</td><td>58.98</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>48.31</td><td>74.00</td><td>-25.69</td><td>55.13</td><td>39.43</td><td>12.72</td><td>58.97</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	10380.00	46.11	68.30	-22.19	57.14	37.21	10.74	58.98	--	--	Peak	2	15570.00	48.31	74.00	-25.69	55.13	39.43	12.72	58.97	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10380.00</td><td>46.97</td><td>68.30</td><td>-21.33</td><td>58.00</td><td>37.21</td><td>10.74</td><td>58.98</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>49.34</td><td>74.00</td><td>-24.66</td><td>56.16</td><td>39.43</td><td>12.72</td><td>58.97</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	10380.00	46.97	68.30	-21.33	58.00	37.21	10.74	58.98	--	--	Peak	2	15570.00	49.34	74.00	-24.66	56.16	39.43	12.72	58.97	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
1	10380.00	46.11	68.30	-22.19	57.14	37.21	10.74	58.98	--	--	Peak																																																																																															
2	15570.00	48.31	74.00	-25.69	55.13	39.43	12.72	58.97	--	--	Peak																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
1	10380.00	46.97	68.30	-21.33	58.00	37.21	10.74	58.98	--	--	Peak																																																																																															
2	15570.00	49.34	74.00	-24.66	56.16	39.43	12.72	58.97	--	--	Peak																																																																																															

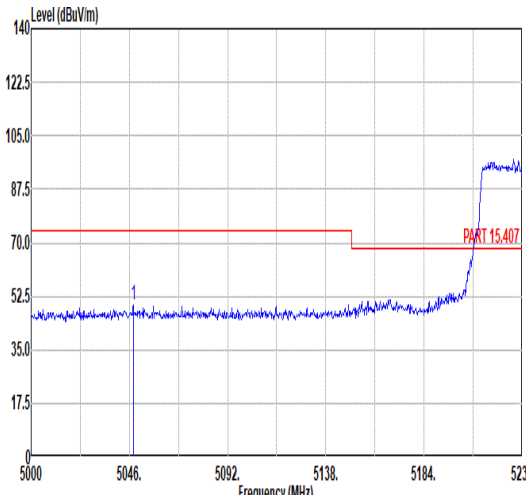
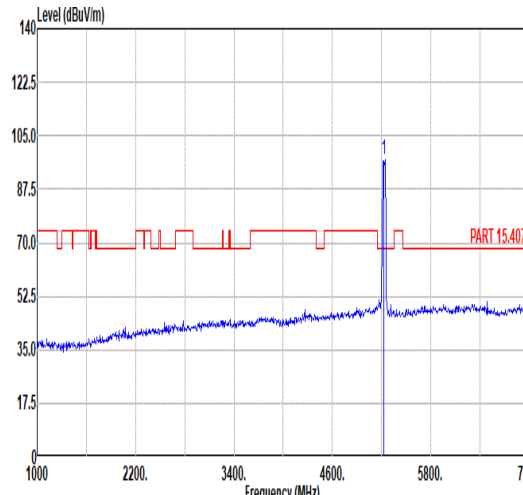
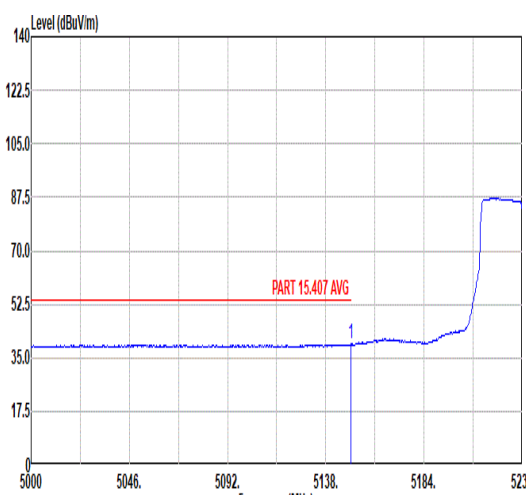
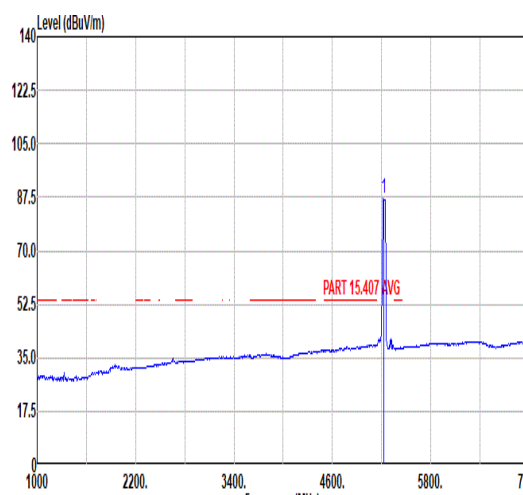


Mode	17																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5047.84</td><td>49.71</td><td>74.00</td><td>-24.29</td><td>40.71</td><td>33.93</td><td>7.85</td><td>32.78</td><td>275</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5047.84	49.71	74.00	-24.29	40.71	33.93	7.85	32.78	275	225	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>97.45</td><td>-----</td><td>-----</td><td>88.06</td><td>34.05</td><td>8.04</td><td>32.70</td><td>275</td><td>225</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	97.45	-----	-----	88.06	34.05	8.04	32.70	275	225
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5047.84	49.71	74.00	-24.29	40.71	33.93	7.85	32.78	275	225	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5230.00	97.45	-----	-----	88.06	34.05	8.04	32.70	275	225	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.73</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>30.22</td><td>33.99</td><td>7.92</td><td>32.74</td><td>275</td><td>225</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.73	39.39	54.00	-14.61	30.22	33.99	7.92	32.74	275	225	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>87.03</td><td>-----</td><td>-----</td><td>77.73</td><td>34.03</td><td>7.98</td><td>32.71</td><td>275</td><td>225</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	87.03	-----	-----	77.73	34.03	7.98	32.71	275	225
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.73	39.39	54.00	-14.61	30.22	33.99	7.92	32.74	275	225	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5230.00	87.03	-----	-----	77.73	34.03	7.98	32.71	275	225	AVERAGE																																																																															

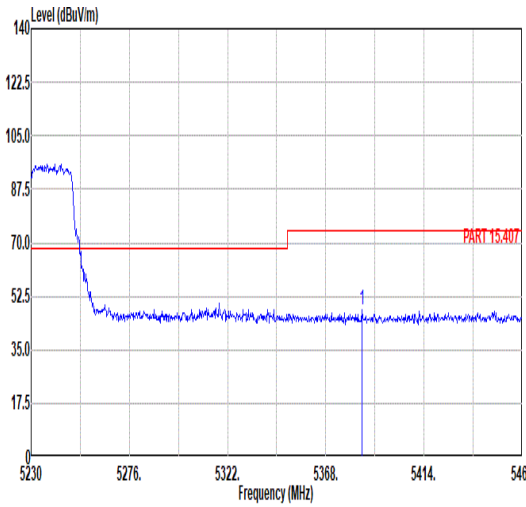
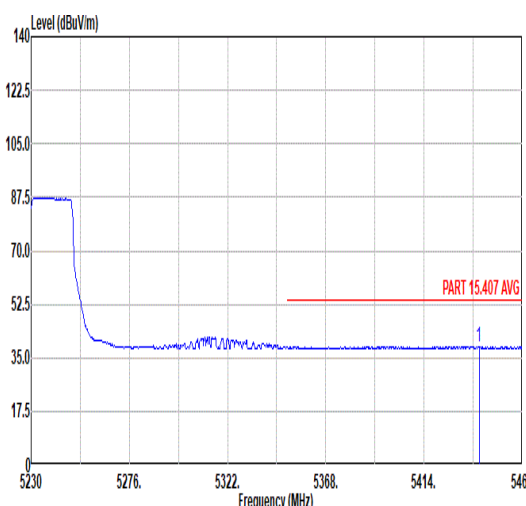


Mode	17																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5385.02</td><td>48.17</td><td>74.00</td><td>-25.83</td><td>38.26</td><td>34.13</td><td>8.42</td><td>32.64</td><td>275</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5385.02	48.17	74.00	-25.83	38.26	34.13	8.42	32.64	275	225	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5385.02	48.17	74.00	-25.83	38.26	34.13	8.42	32.64	275	225	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.76</td><td>38.66</td><td>54.00</td><td>-15.34</td><td>28.68</td><td>34.16</td><td>8.44</td><td>32.62</td><td>275</td><td>225</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5439.76	38.66	54.00	-15.34	28.68	34.16	8.44	32.62	275	225	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5439.76	38.66	54.00	-15.34	28.68	34.16	8.44	32.62	275	225	AVERAGE																																								

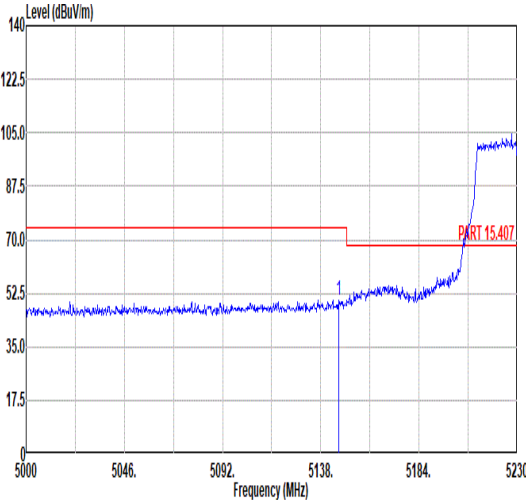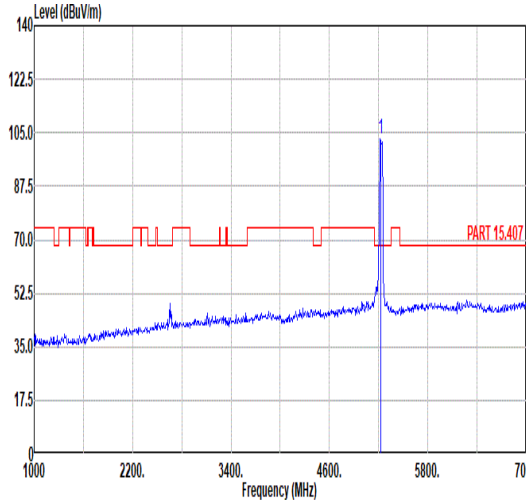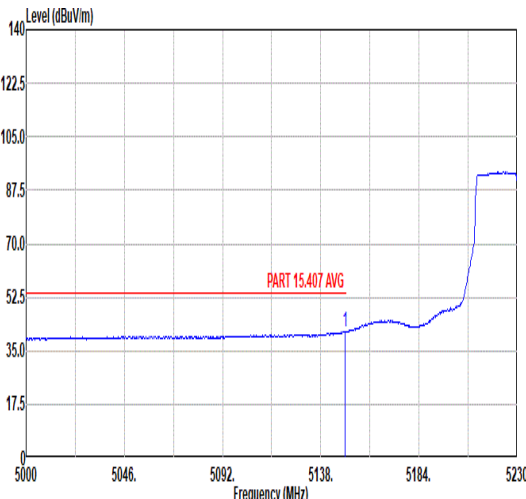
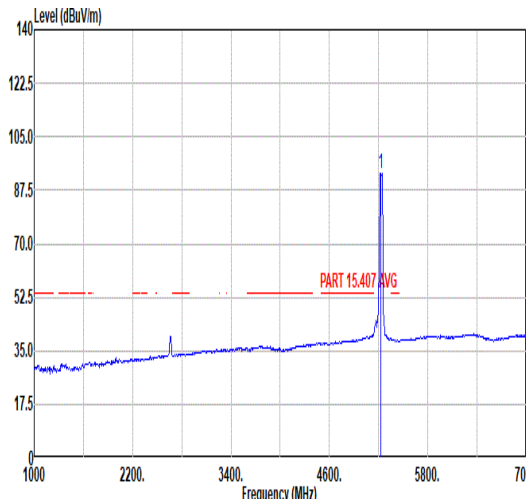


Mode	17																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.28</td><td>50.29</td><td>74.00</td><td>-23.71</td><td>41.12</td><td>33.99</td><td>7.92</td><td>32.74</td><td>108</td><td>178</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5146.28	50.29	74.00	-23.71	41.12	33.99	7.92	32.74	108	178	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>102.98</td><td>-----</td><td>-----</td><td>93.68</td><td>34.03</td><td>7.98</td><td>32.71</td><td>108</td><td>178</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	102.98	-----	-----	93.68	34.03	7.98	32.71	108	178
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5146.28	50.29	74.00	-23.71	41.12	33.99	7.92	32.74	108	178	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5230.00	102.98	-----	-----	93.68	34.03	7.98	32.71	108	178	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.27</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>32.19</td><td>33.99</td><td>7.92</td><td>32.74</td><td>108</td><td>178</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.27	41.36	54.00	-12.64	32.19	33.99	7.92	32.74	108	178	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>93.16</td><td>-----</td><td>-----</td><td>83.85</td><td>34.03</td><td>7.99</td><td>32.71</td><td>108</td><td>178</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	93.16	-----	-----	83.85	34.03	7.99	32.71	108	178
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.27	41.36	54.00	-12.64	32.19	33.99	7.92	32.74	108	178	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5230.00	93.16	-----	-----	83.85	34.03	7.99	32.71	108	178	AVERAGE																																																																															

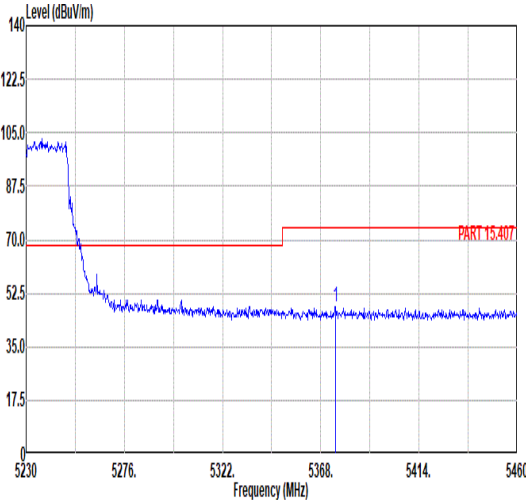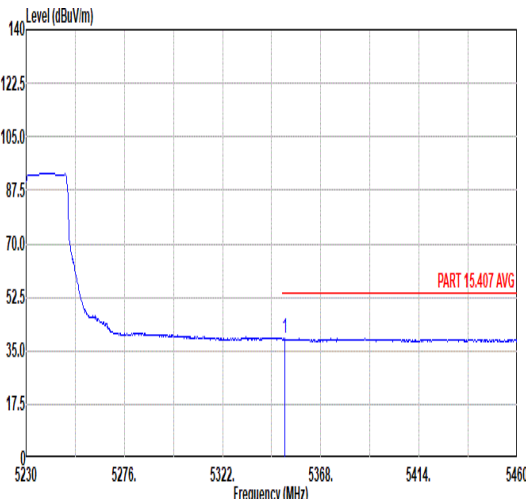

Mode	17																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5374.90</td><td>48.03</td><td>74.00</td><td>-25.97</td><td>38.17</td><td>34.12</td><td>8.39</td><td>32.65</td><td>108</td><td>178</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5374.90	48.03	74.00	-25.97	38.17	34.12	8.39	32.65	108	178	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5374.90	48.03	74.00	-25.97	38.17	34.12	8.39	32.65	108	178	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.98</td><td>39.03</td><td>54.00</td><td>-14.97</td><td>29.25</td><td>34.11</td><td>8.33</td><td>32.66</td><td>108</td><td>178</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.98	39.03	54.00	-14.97	29.25	34.11	8.33	32.66	108	178	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5350.98	39.03	54.00	-14.97	29.25	34.11	8.33	32.66	108	178	AVERAGE																																								

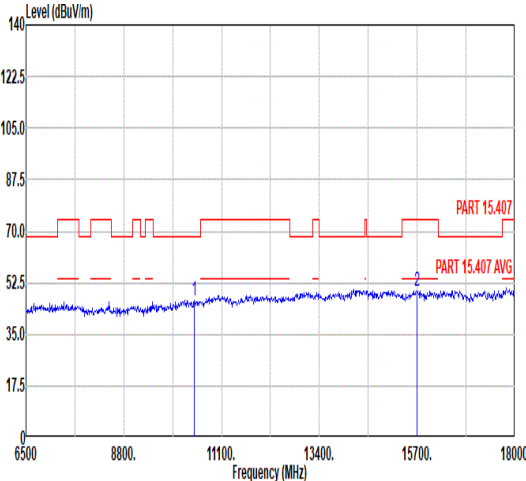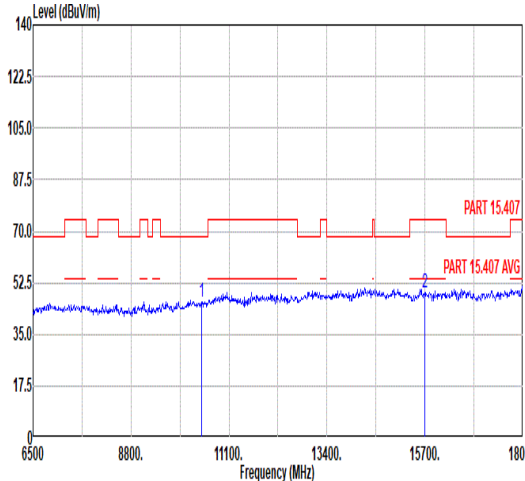

Mode	17																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10460.00</td><td>46.63</td><td>68.30</td><td>-21.67</td><td>57.32</td><td>37.40</td><td>10.80</td><td>58.89</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>49.61</td><td>74.00</td><td>-24.39</td><td>56.50</td><td>39.48</td><td>12.72</td><td>59.09</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10460.00	46.63	68.30	-21.67	57.32	37.40	10.80	58.89	--	--	Peak	2	15690.00	49.61	74.00	-24.39	56.50	39.48	12.72	59.09	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10460.00</td><td>46.10</td><td>68.30</td><td>-22.20</td><td>56.79</td><td>37.40</td><td>10.80</td><td>58.89</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>49.00</td><td>74.00</td><td>-25.00</td><td>55.89</td><td>39.48</td><td>12.72</td><td>59.09</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10460.00	46.10	68.30	-22.20	56.79	37.40	10.80	58.89	--	--	Peak	2	15690.00	49.00	74.00	-25.00	55.89	39.48	12.72	59.09	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10460.00	46.63	68.30	-21.67	57.32	37.40	10.80	58.89	--	--	Peak																																																																																																									
2	15690.00	49.61	74.00	-24.39	56.50	39.48	12.72	59.09	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10460.00	46.10	68.30	-22.20	56.79	37.40	10.80	58.89	--	--	Peak																																																																																																									
2	15690.00	49.00	74.00	-25.00	55.89	39.48	12.72	59.09	--	--	Peak																																																																																																									