

Design company:shenzhen HuaSai Electric Technology Co.Ltd.

spce:ANT_XZR01

Room 201, Building A, No.1 Qianwan 1st Road, Qianhai Shenzhen Hong Kong Cooperation Zone, Shenzhen
(settled in Shenzhen Qianhai Business Secretary Co., Ltd.)

Product specification

Quick Reference Date

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	60.2 %	
Gain (dBi)	-0.48 (Avg Gain XY-plane)	
Maximum Power (dBm)	1.68(XZ-plane)	
Minimum Power (dBm)	-3.83(XZ-plane)	
Avg. Power (dBm)	-0.48(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V. S .W. R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board




Antenna Gain



Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	60.2 %


Return Loss

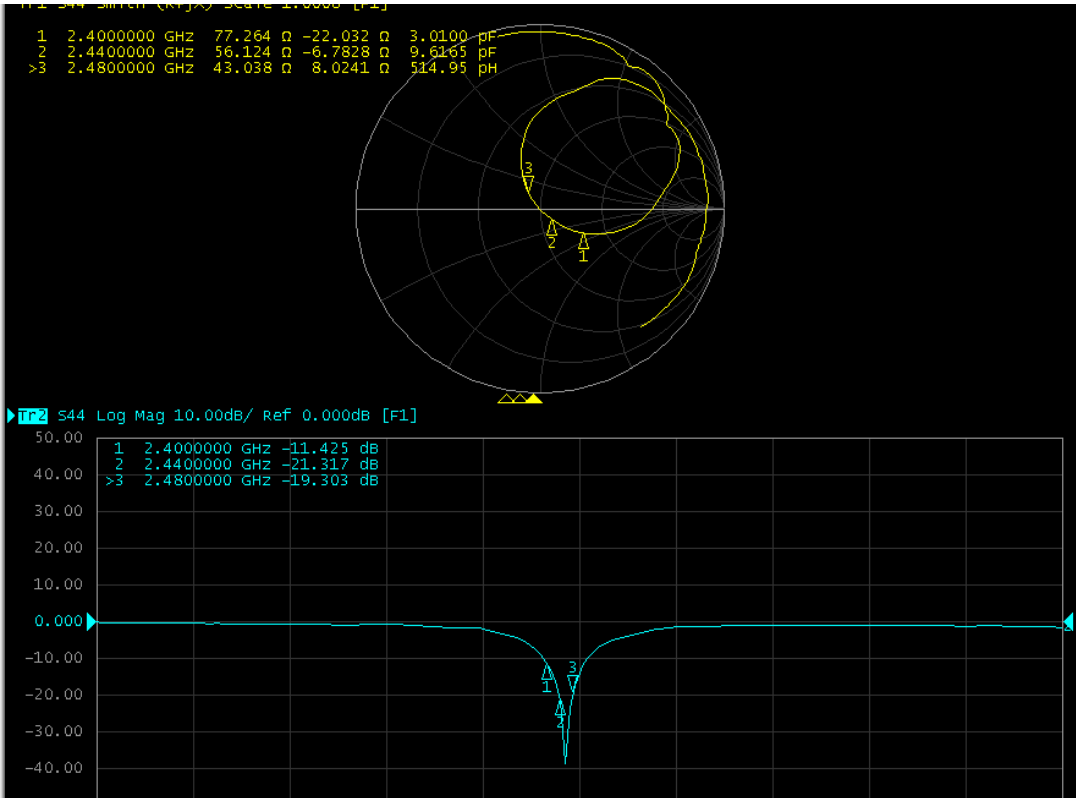


The Environment of Antenna Radiation Pattern

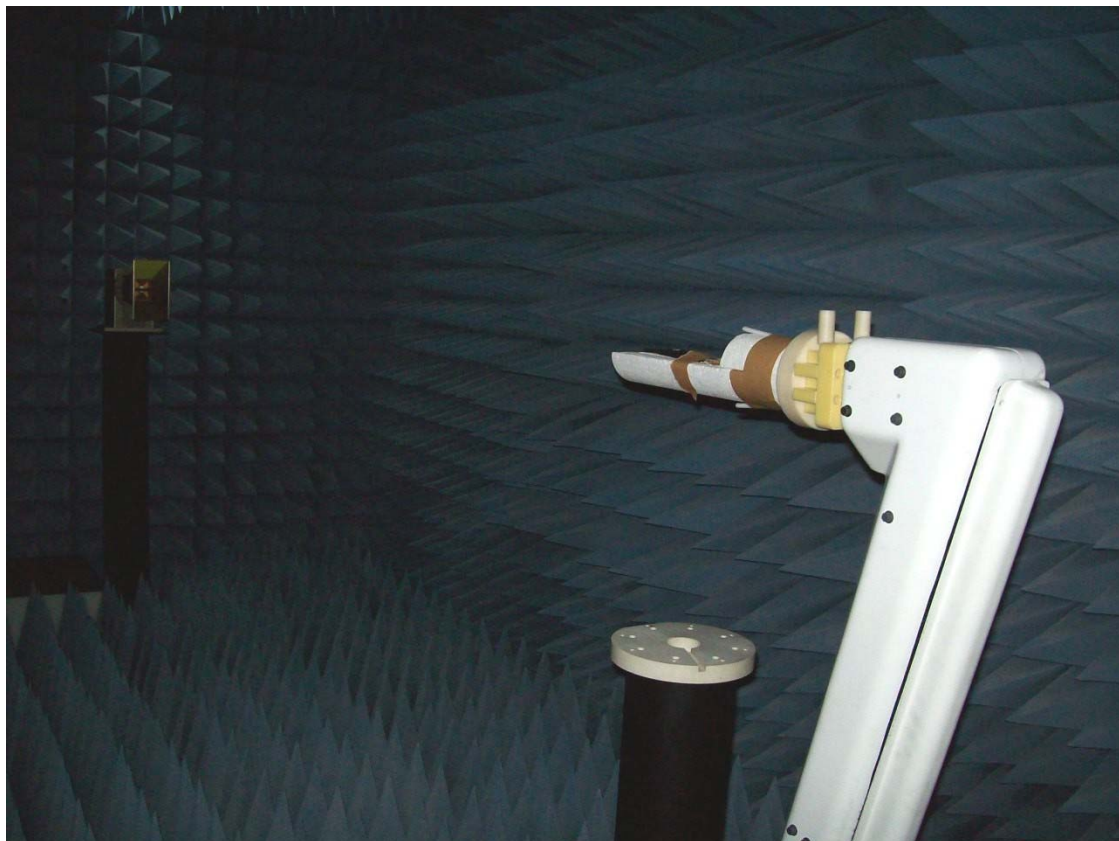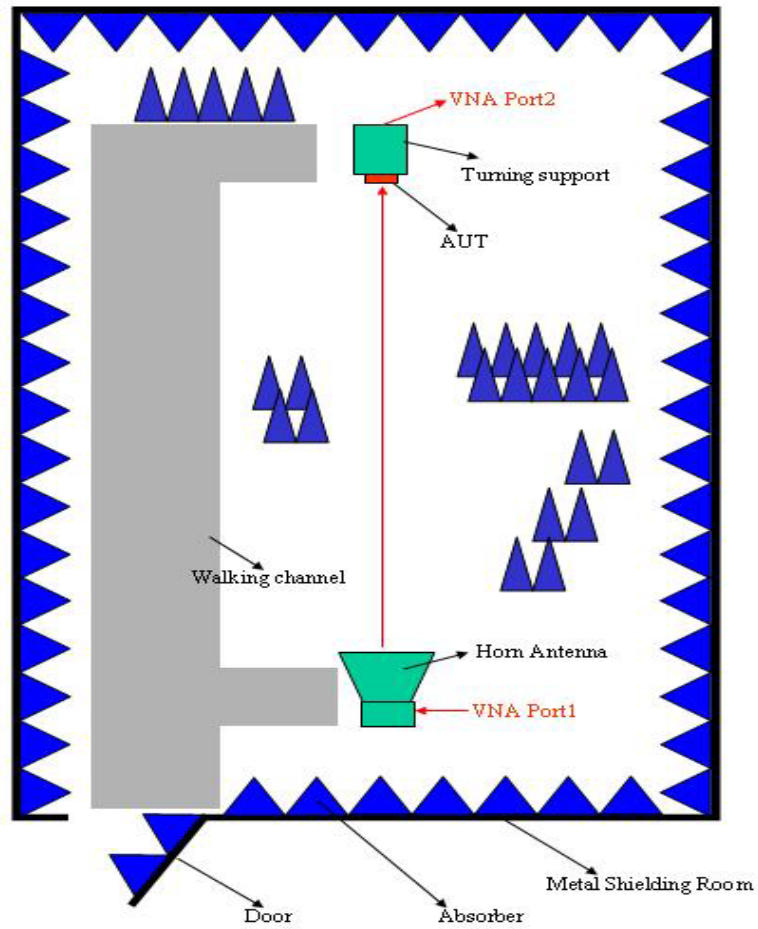


3D radiation pattern diagram

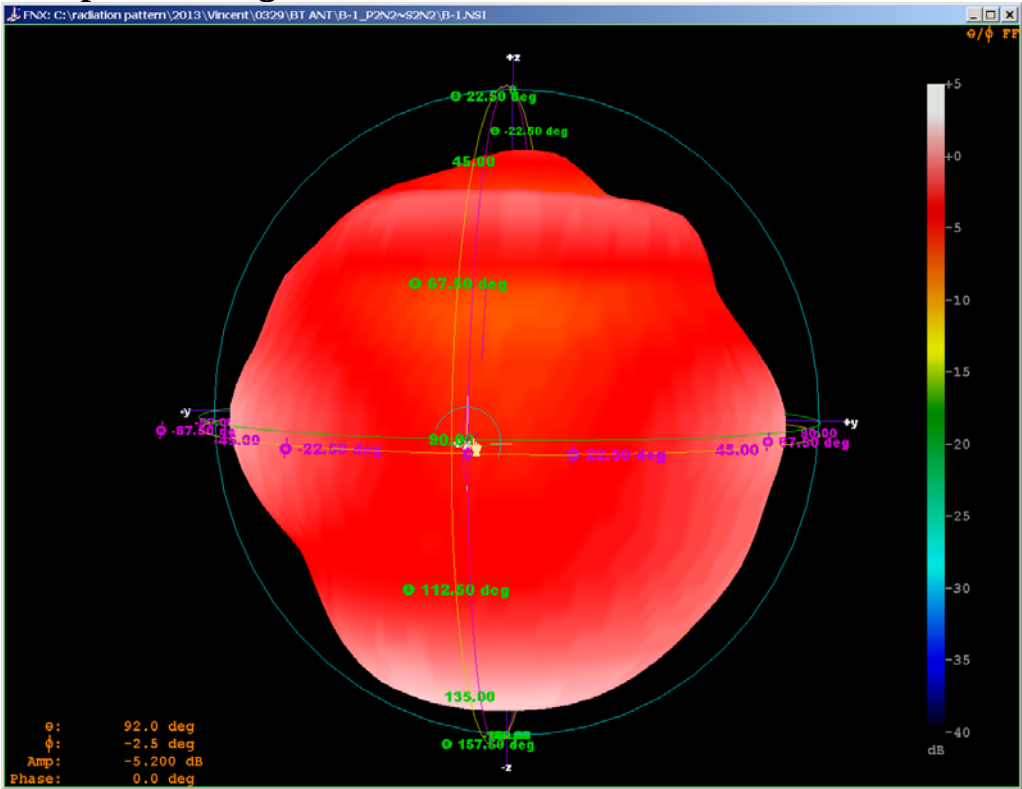

XY-plane

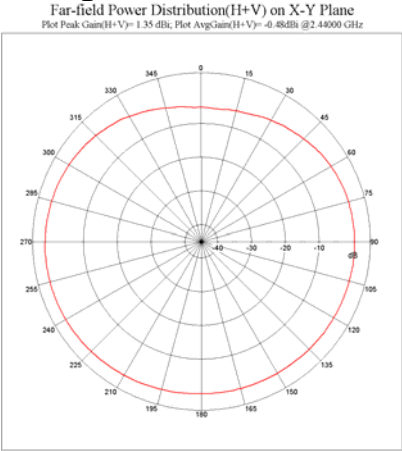

XZ-plane

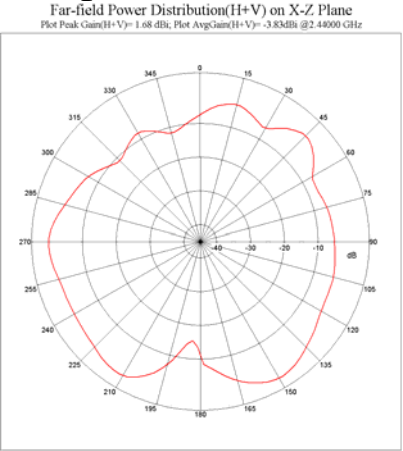

YZ-plane

