



6.4.4 Measurement Results

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	9.08	2407.40	2416.48	0.5	PASS
11B-CDD	Ant2	2412	10.04	2406.92	2416.96	0.5	PASS
11B-CDD	Ant1	2437	10.08	2431.92	2442.00	0.5	PASS
11B-CDD	Ant2	2437	10.04	2431.92	2441.96	0.5	PASS
11B-CDD	Ant2	2462	10.08	2456.92	2467.00	0.5	PASS
11B-CDD	Ant1	2462	10.08	2456.92	2467.00	0.5	PASS
11G-CDD	Ant1	2412	14.96	2404.44	2419.40	0.5	PASS
11G-CDD	Ant2	2412	15.12	2404.40	2419.52	0.5	PASS
11G-CDD	Ant1	2437	15.08	2429.40	2444.48	0.5	PASS
11G-CDD	Ant2	2437	13.16	2430.68	2443.84	0.5	PASS
11G-CDD	Ant1	2462	15.00	2454.44	2469.44	0.5	PASS
11G-CDD	Ant2	2462	15.08	2454.44	2469.52	0.5	PASS
11N20MIMO	Ant1	2412	15.08	2404.40	2419.48	0.5	PASS
11N20MIMO	Ant2	2412	15.04	2404.40	2419.44	0.5	PASS
11N20MIMO	Ant1	2437	15.68	2428.80	2444.48	0.5	PASS
11N20MIMO	Ant2	2437	15.00	2429.48	2444.48	0.5	PASS
11N20MIMO	Ant1	2462	14.64	2454.84	2469.48	0.5	PASS
11N20MIMO	Ant2	2462	14.20	2455.32	2469.52	0.5	PASS
11N40MIMO	Ant1	2422	35.04	2404.48	2439.52	0.5	PASS
11N40MIMO	Ant2	2422	34.96	2404.48	2439.44	0.5	PASS
11N40MIMO	Ant1	2437	35.04	2419.40	2454.44	0.5	PASS
11N40MIMO	Ant2	2437	35.04	2419.48	2454.52	0.5	PASS
11N40MIMO	Ant1	2452	35.04	2434.48	2469.52	0.5	PASS
11N40MIMO	Ant2	2452	33.84	2435.68	2469.52	0.5	PASS

Test graphs as below

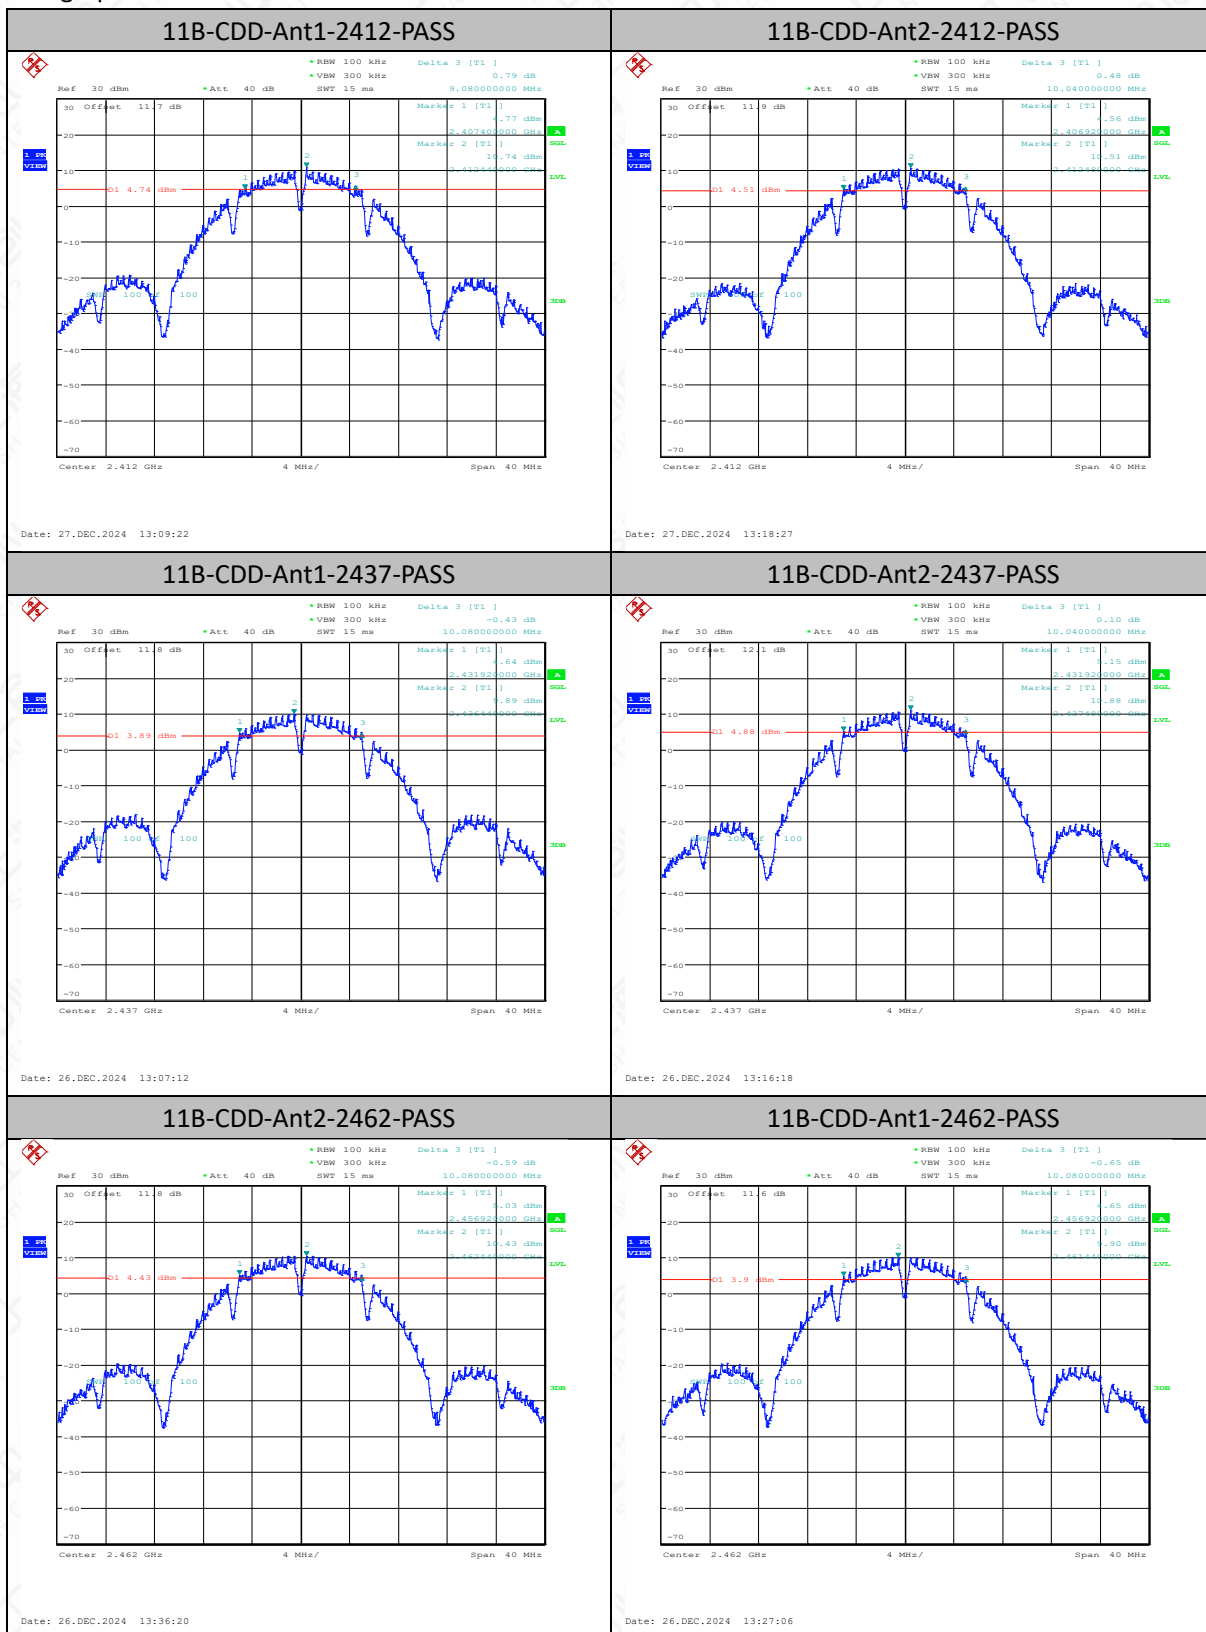


11G-CDD-Ant1-2412-PASS

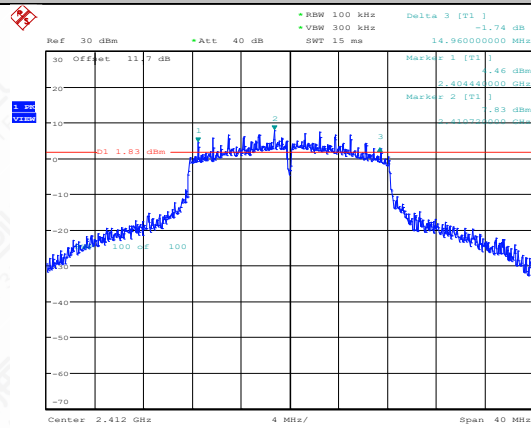


Date: 26.DEC.2024 09:54:25

11G-CDD-Ant2-2412-PASS

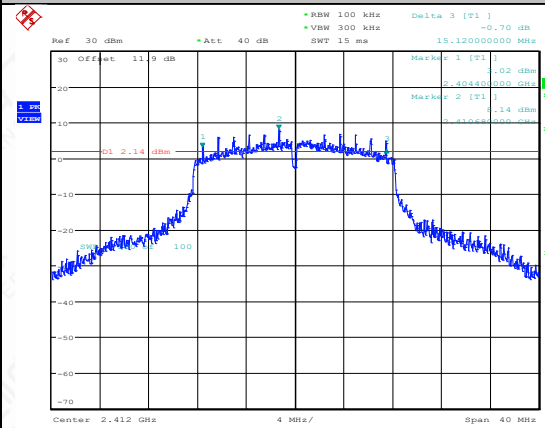


Date: 26.DEC.2024 10:03:57

11G-CDD-Ant1-2437-PASS

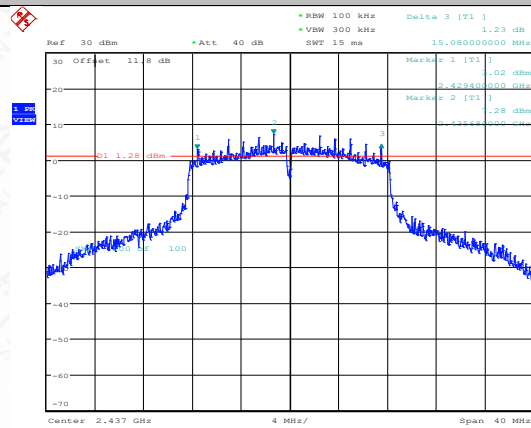


Date: 26.DEC.2024 10:17:18

11G-CDD-Ant2-2437-PASS

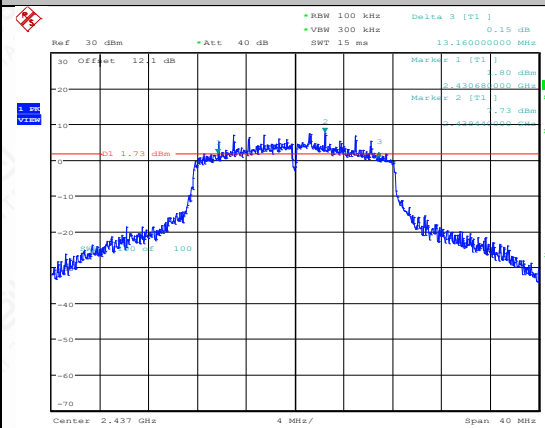


Date: 26.DEC.2024 10:26:43

11G-CDD-Ant1-2462-PASS

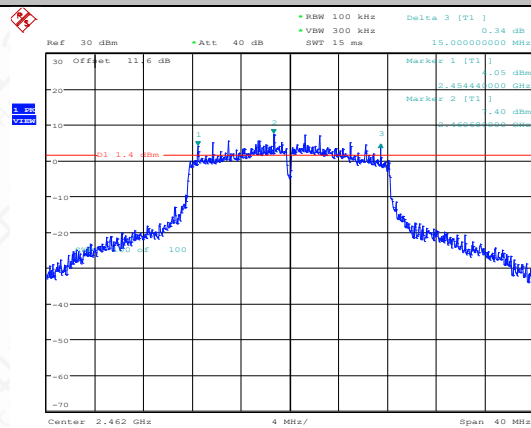


Date: 26.DEC.2024 10:36:48

11G-CDD-Ant2-2462-PASS

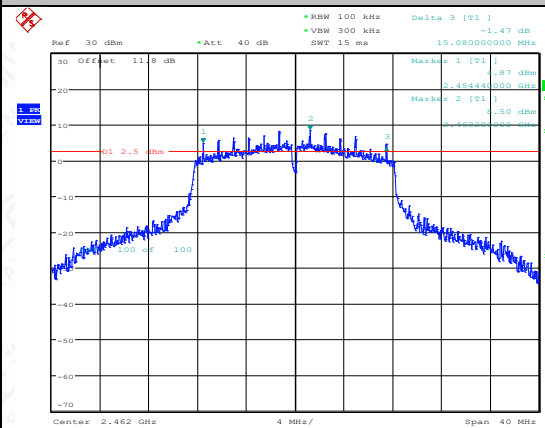


Date: 26.DEC.2024 10:46:26


11N20MIMO-Ant1-2412-PASS

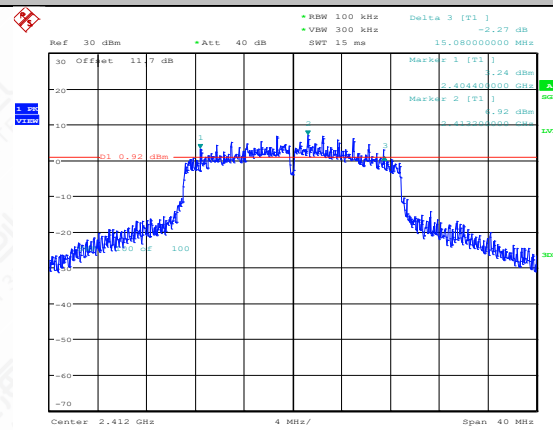


11N20MIMO-Ant2-2412-PASS

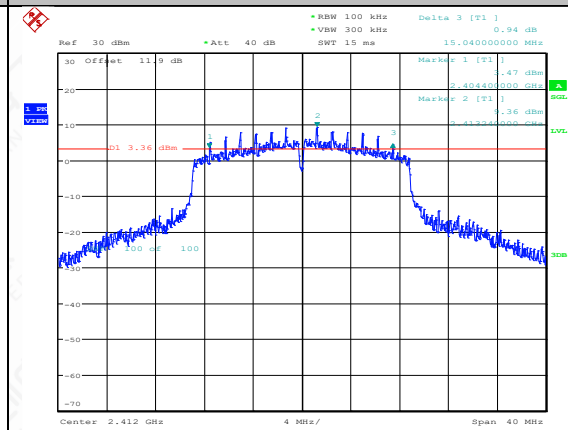


11N20MIMO-Ant1-2437-PASS

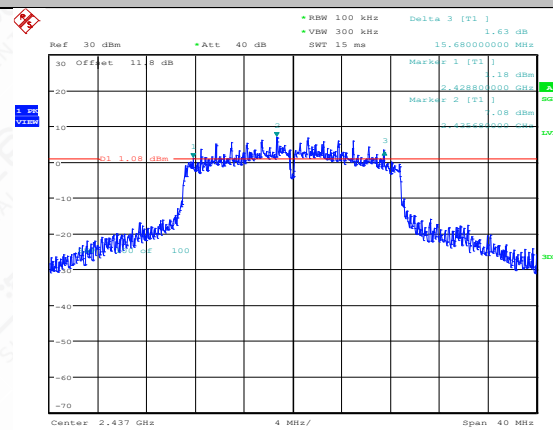


11N20MIMO-Ant2-2437-PASS

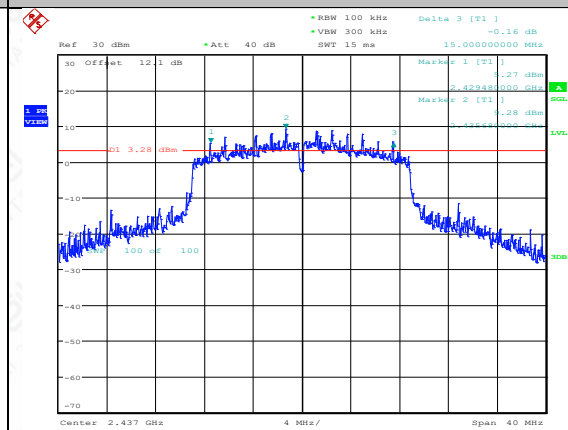


11N20MIMO-Ant1-2462-PASS

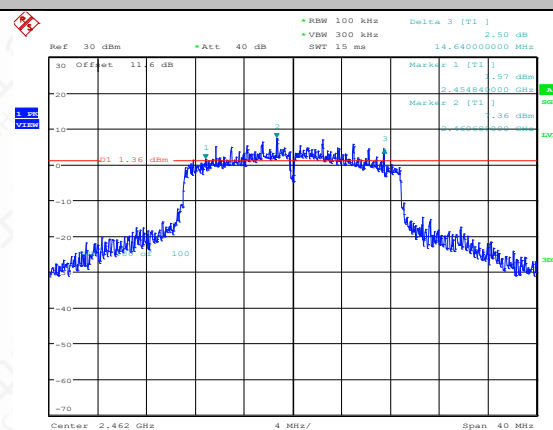


11N20MIMO-Ant2-2462-PASS

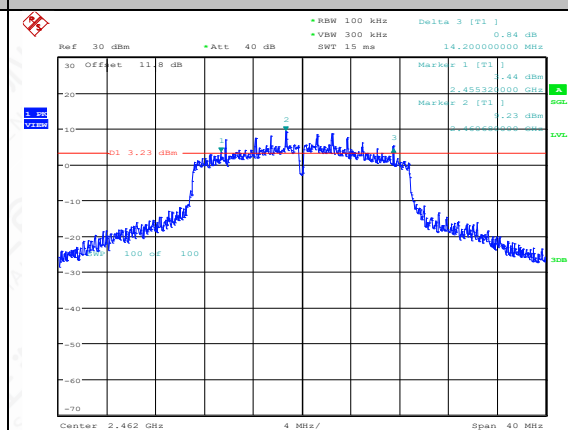


11N40MIMO-Ant1-2422-PASS

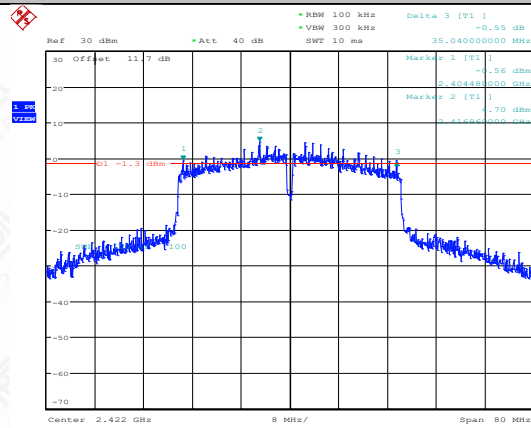


11N40MIMO-Ant2-2422-PASS

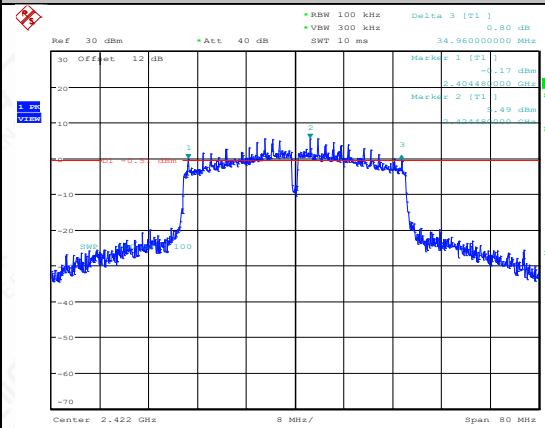


11N40MIMO-Ant1-2437-PASS

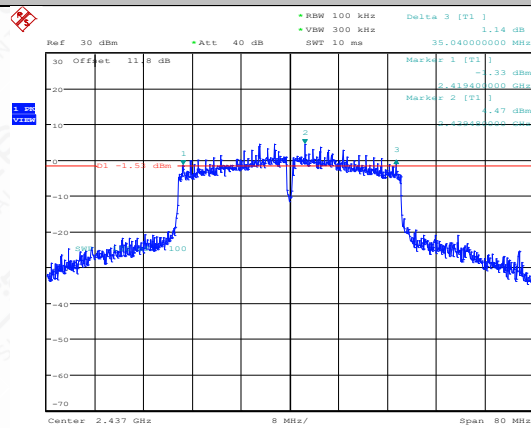


11N40MIMO-Ant2-2437-PASS

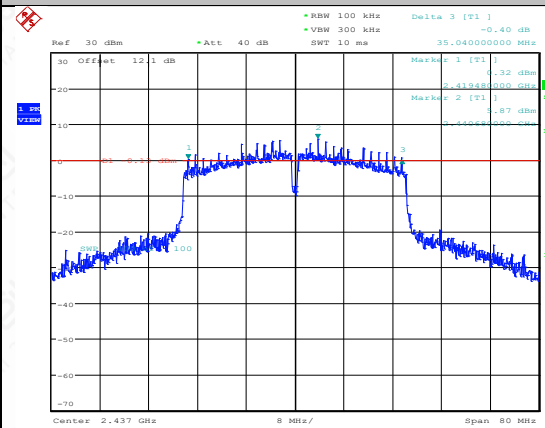

11N40MIMO-Ant1-2452-PASS

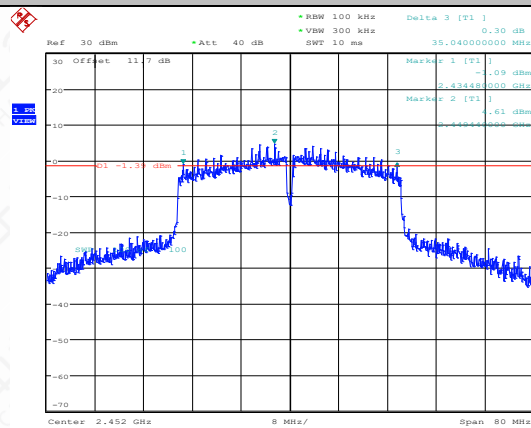

11N40MIMO-Ant2-2452-PASS

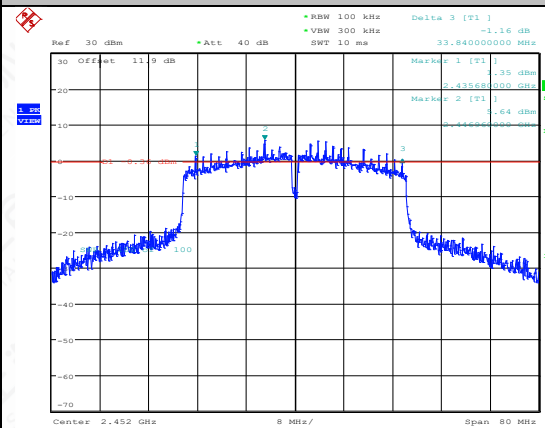

6.5 99% Occupied Bandwidth

6.5.1 Measurement Limit


Standard	Limit
RSS-Gen 6.7	N/A

6.5.2 Test procedures

The measurement is according to ANSI C63.10 clause 6.9.3.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW shall be in the range of 1% to 5% of the OBW.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

6.5.3 Test setup

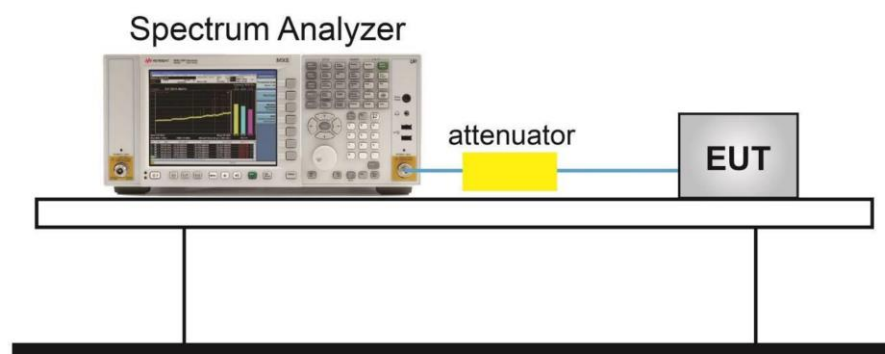



6.5.4 Measurement Result


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant2	2412	15.28	2404.3200	2419.6000	---	---
11B	Ant1	2412	14.96	2404.5200	2419.4800	---	---
11B	Ant2	2437	15.32	2429.3200	2444.6400	---	---
11B	Ant1	2437	14.96	2429.5200	2444.4800	---	---
11B	Ant2	2462	15.2	2454.3600	2469.5600	---	---
11B	Ant1	2462	15.08	2454.4000	2469.4800	---	---

11B-CDD	Ant1	2412	15.64	2404.1200	2419.7600	---	---
11B-CDD	Ant2	2412	15.12	2404.4400	2419.5600	---	---
11B-CDD	Ant1	2437	15.84	2429.0400	2444.8800	---	---
11B-CDD	Ant2	2437	15.28	2429.3200	2444.6000	---	---
11B-CDD	Ant1	2462	15.4	2454.2400	2469.6400	---	---
11B-CDD	Ant2	2462	15.4	2454.2400	2469.6400	---	---
11G	Ant2	2412	17.84	2403.0000	2420.8400	---	---
11G	Ant1	2412	17.4	2403.2800	2420.6800	---	---
11G	Ant2	2437	17.96	2427.9600	2445.9200	---	---
11G	Ant1	2437	17.56	2428.1600	2445.7200	---	---
11G	Ant2	2462	17.68	2453.0400	2470.7200	---	---
11G	Ant1	2462	17.56	2453.1200	2470.6800	---	---
11G-CDD	Ant1	2412	17.52	2403.1600	2420.6800	---	---
11G-CDD	Ant2	2412	17.56	2403.2000	2420.7600	---	---
11G-CDD	Ant1	2437	17.4	2428.2400	2445.6400	---	---
11G-CDD	Ant2	2437	17.64	2428.1200	2445.7600	---	---
11G-CDD	Ant1	2462	17.24	2453.3200	2470.5600	---	---
11G-CDD	Ant2	2462	17.76	2453.0400	2470.8000	---	---
11N20SISO	Ant2	2412	19.08	2402.4400	2421.5200	---	---
11N20SISO	Ant1	2412	18.64	2402.7600	2421.4000	---	---
11N20SISO	Ant2	2437	19.04	2427.5600	2446.6000	---	---
11N20SISO	Ant1	2437	18.68	2427.7200	2446.4000	---	---
11N20SISO	Ant2	2462	18.76	2452.6400	2471.4000	---	---
11N20SISO	Ant1	2462	18.96	2452.5200	2471.4800	---	---
11N20MIMO	Ant1	2412	18.48	2402.7200	2421.2000	---	---
11N20MIMO	Ant2	2412	18.92	2402.6800	2421.6000	---	---
11N20MIMO	Ant1	2437	18.32	2427.8400	2446.1600	---	---
11N20MIMO	Ant2	2437	19.44	2427.4400	2446.8800	---	---
11N20MIMO	Ant1	2462	18.2	2452.8800	2471.0800	---	---
11N20MIMO	Ant2	2462	19.56	2452.2000	2471.7600	---	---
11N40SISO	Ant2	2422	37.28	2403.2800	2440.5600	---	---
11N40SISO	Ant1	2422	36.56	2403.7600	2440.3200	---	---
11N40SISO	Ant1	2437	36.56	2418.6800	2455.2400	---	---
11N40SISO	Ant2	2437	37.04	2418.4400	2455.4800	---	---
11N40SISO	Ant1	2452	36.72	2433.5200	2470.2400	---	---
11N40SISO	Ant2	2452	36.88	2433.5200	2470.4000	---	---
11N40MIMO	Ant1	2422	37.12	2403.4400	2440.5600	---	---
11N40MIMO	Ant2	2422	36.72	2403.6800	2440.4000	---	---
11N40MIMO	Ant1	2437	37.2	2418.3600	2455.5600	---	---
11N40MIMO	Ant2	2437	36.72	2418.6000	2455.3200	---	---
11N40MIMO	Ant1	2452	36.96	2433.5200	2470.4800	---	---
11N40MIMO	Ant2	2452	36.88	2433.4400	2470.3200	---	---


Test graphs as below

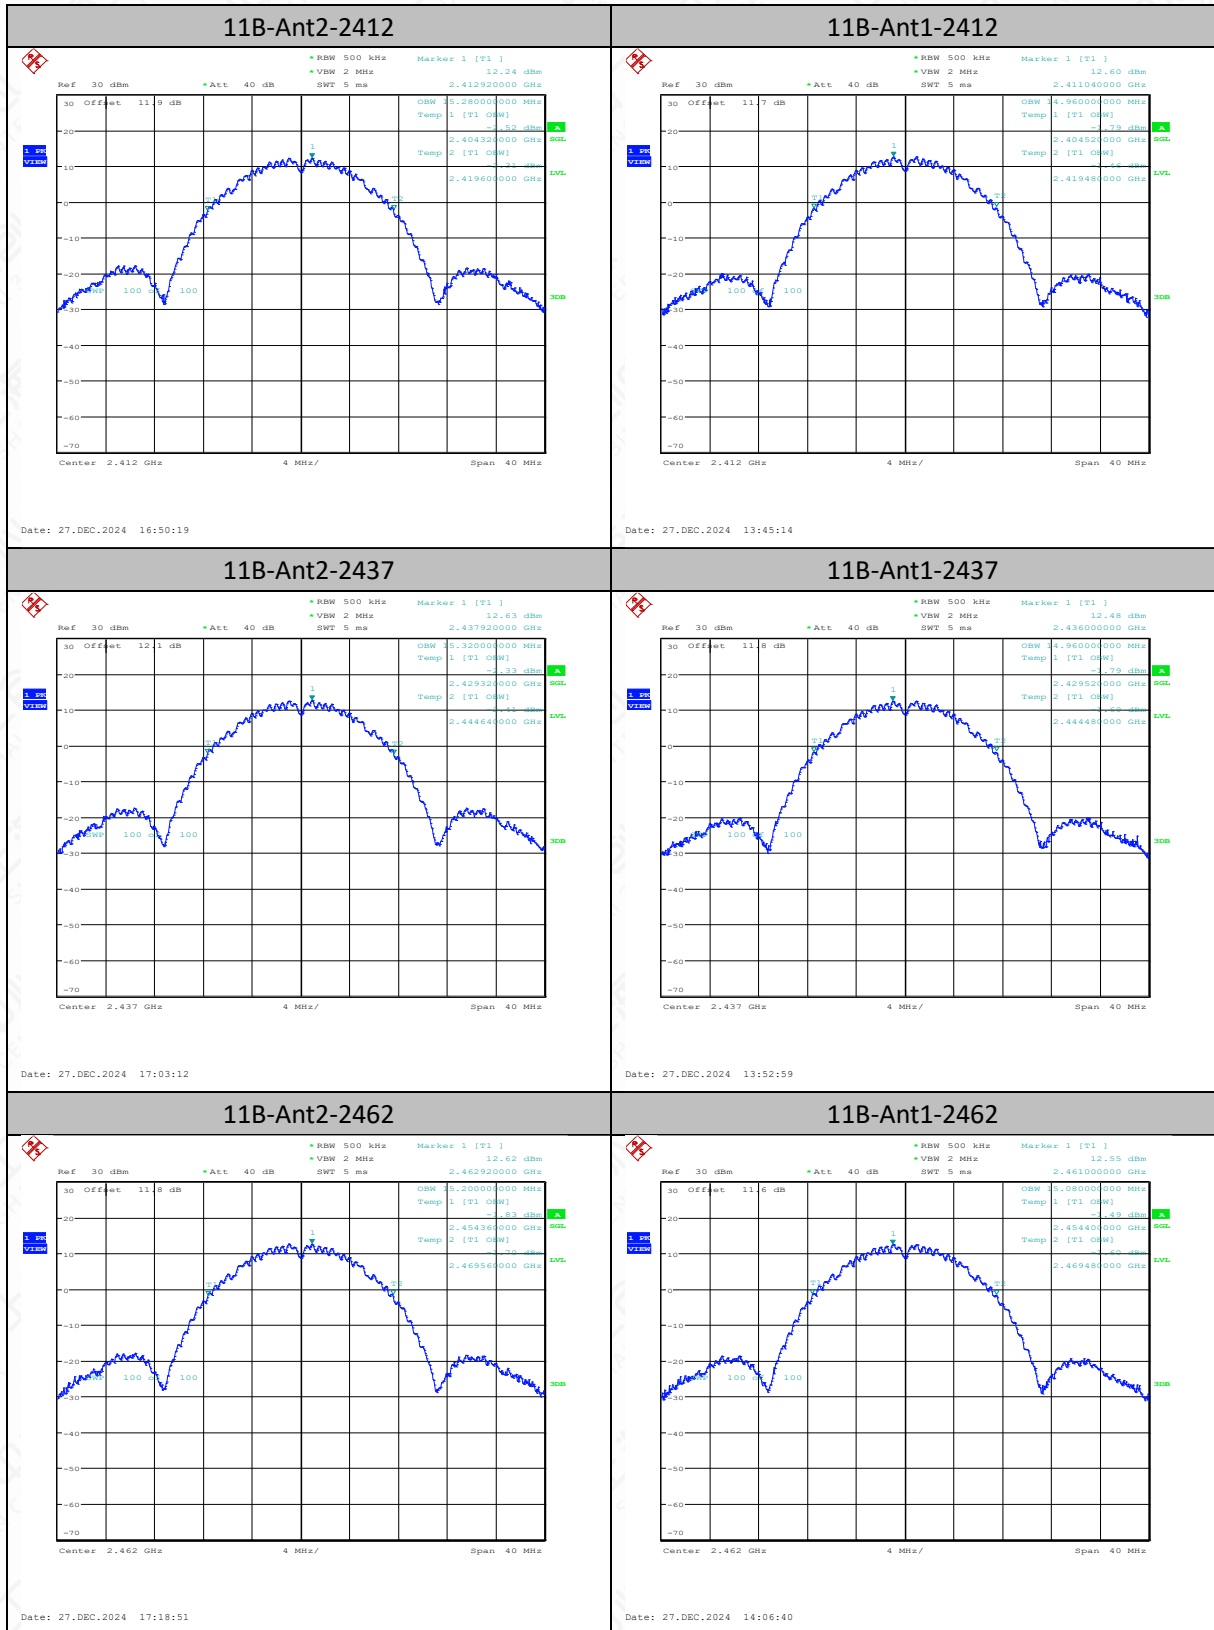

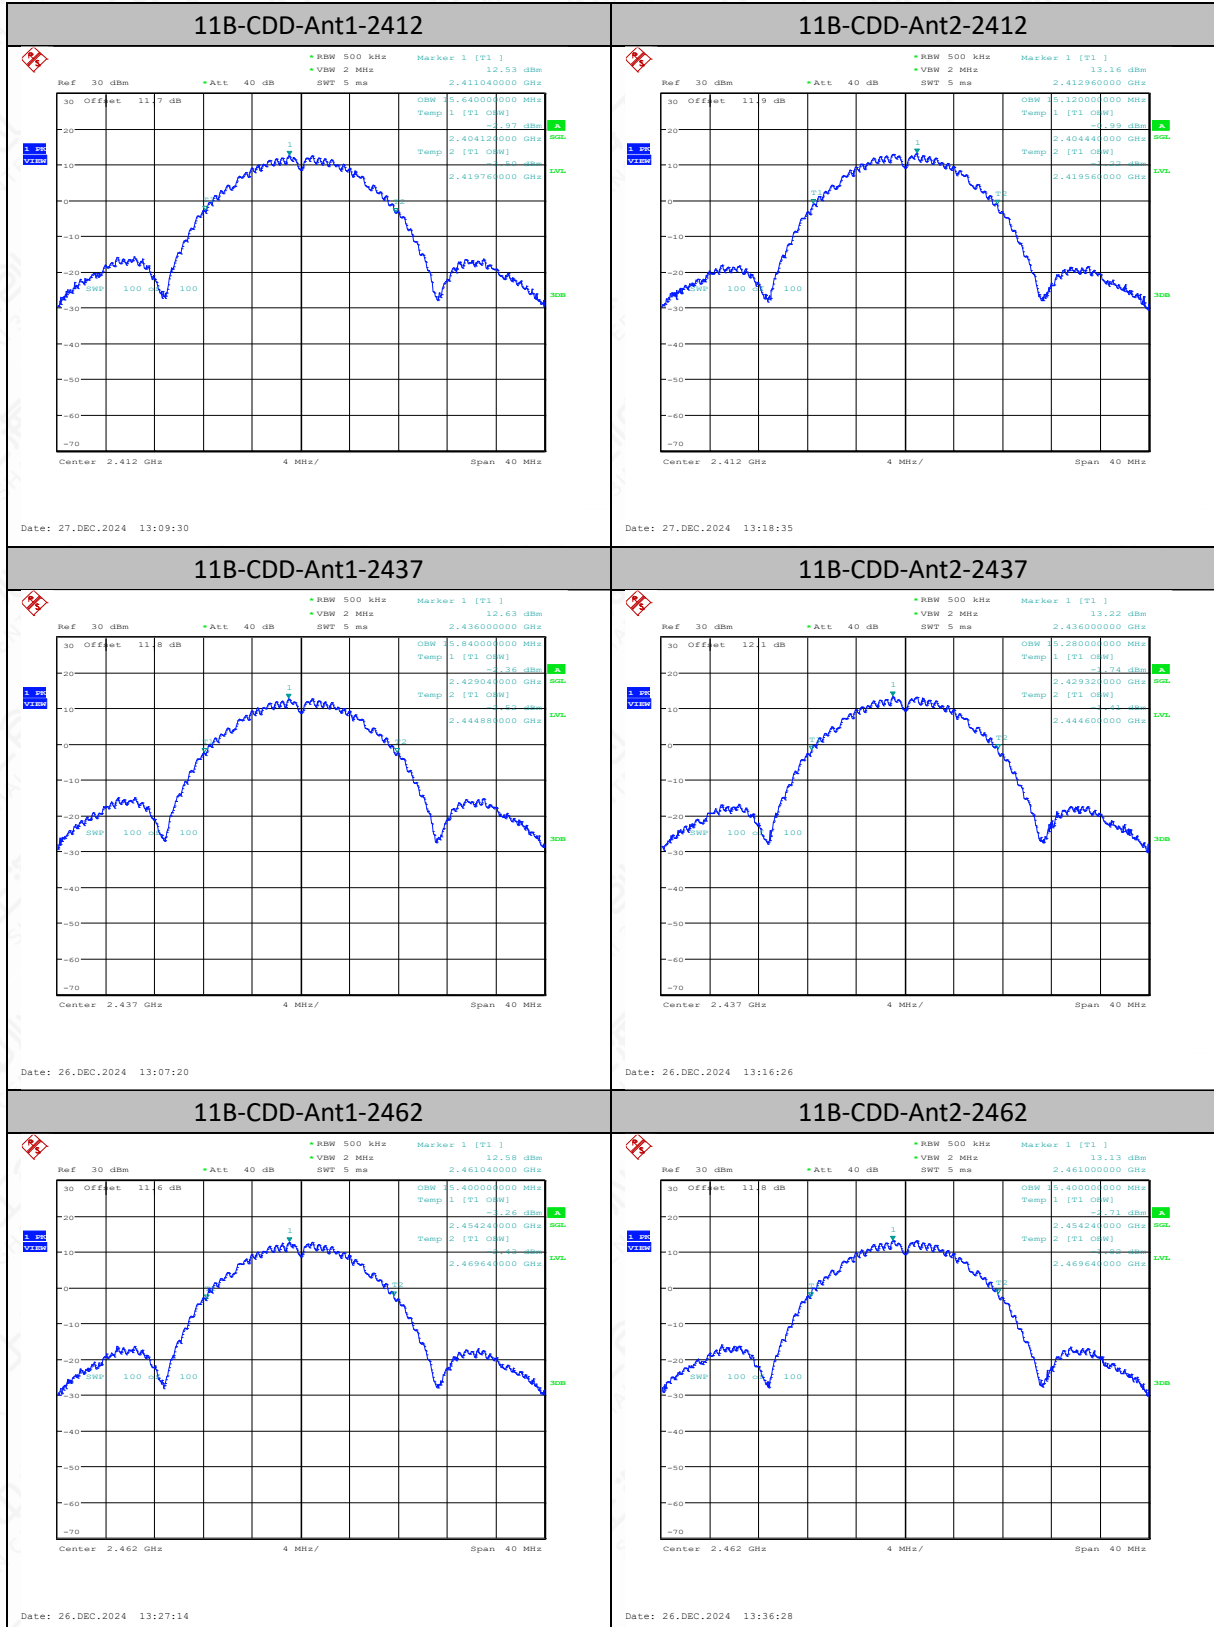


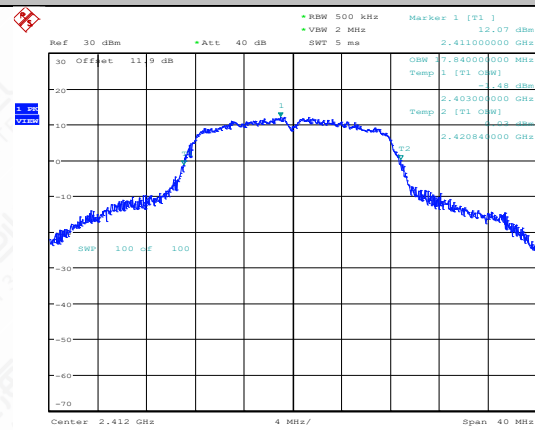11G-Ant2-2412


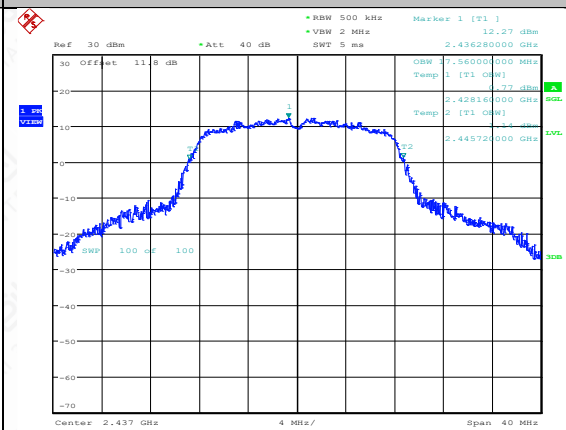
Date: 30.DEC.2024 09:31:03

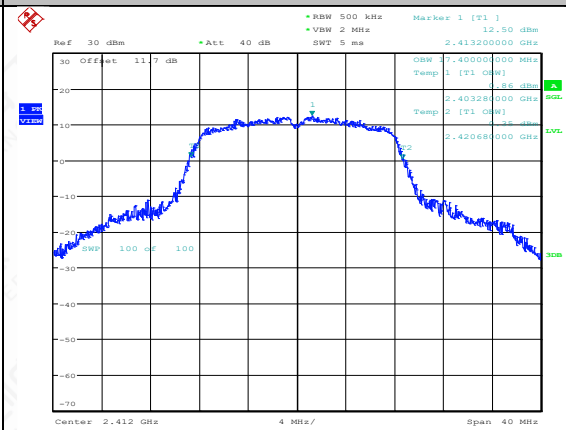11G-Ant1-2412


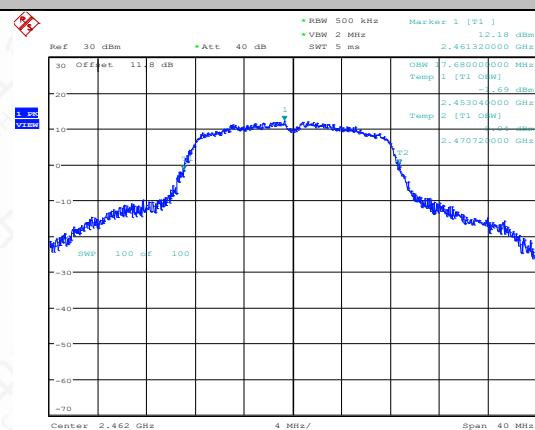
Date: 27.DEC.2024 14:42:05

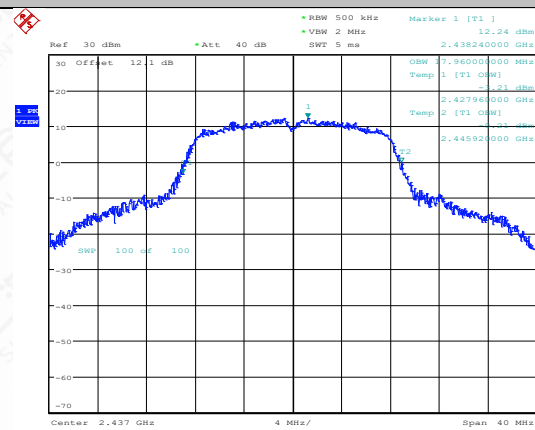11G-Ant2-2437


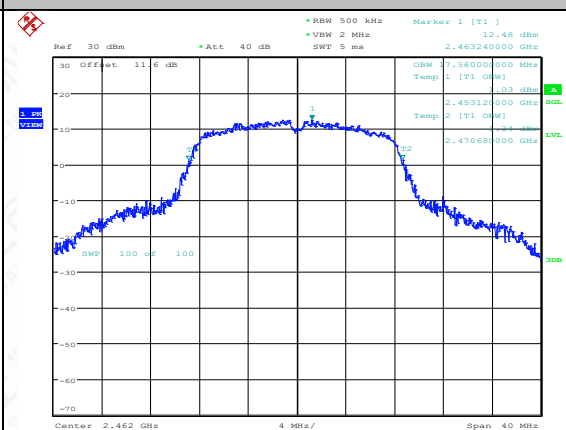
Date: 30.DEC.2024 09:40:15

11G-Ant1-2437


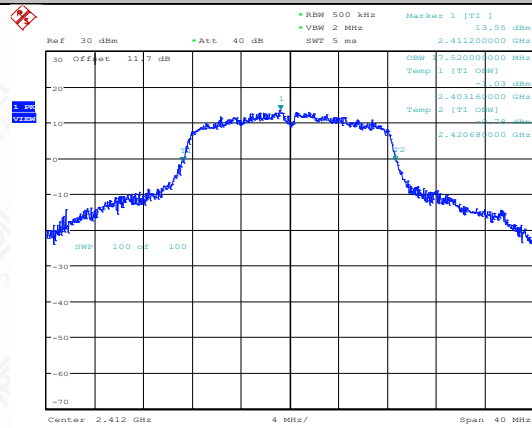
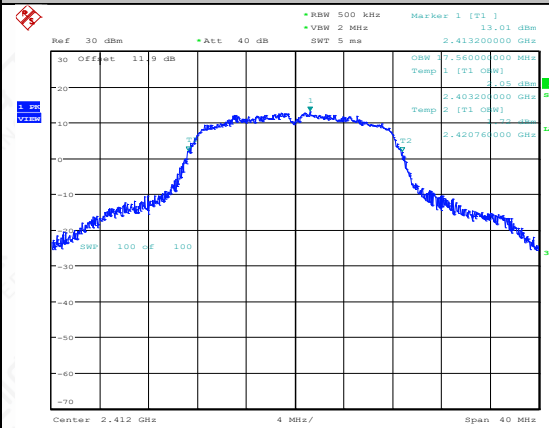
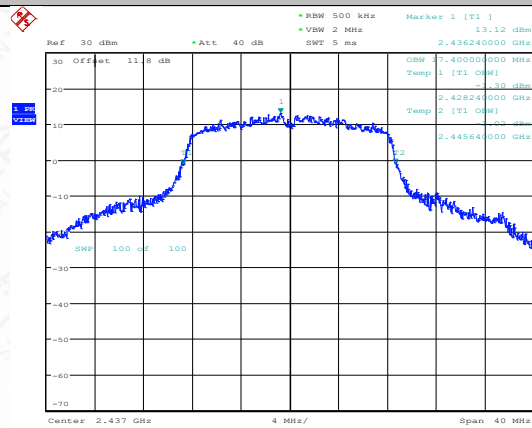
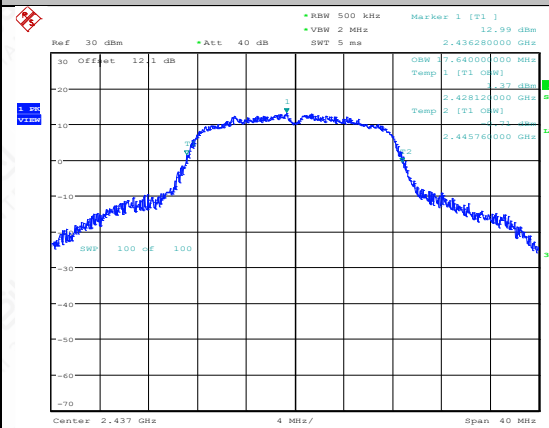
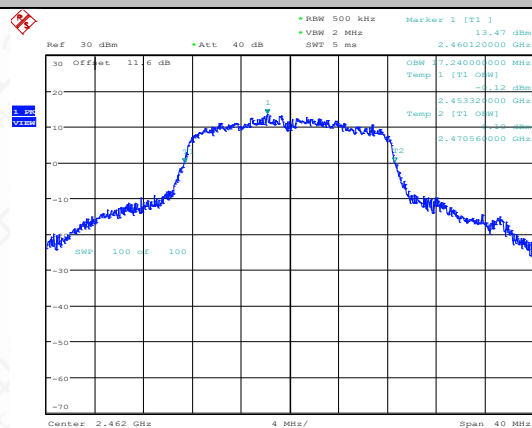
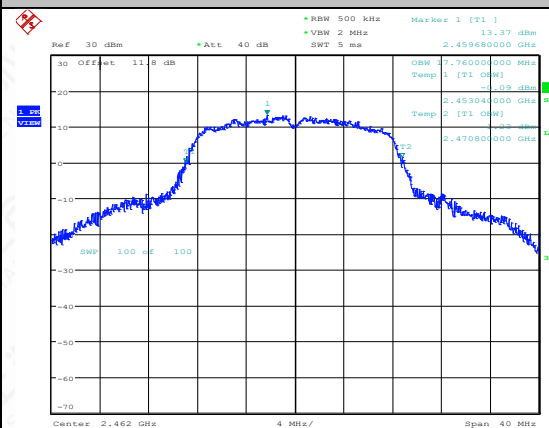
Date: 27.DEC.2024 14:51:42


11G-Ant2-2462


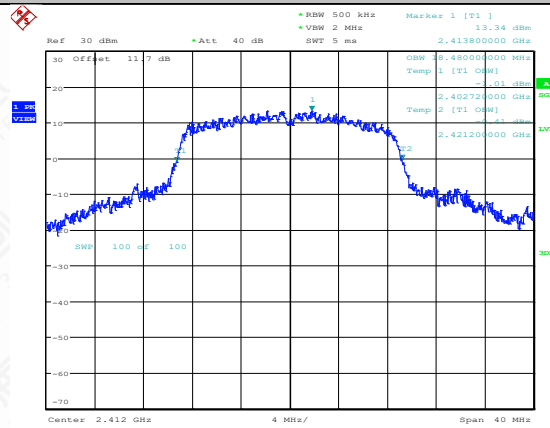
Date: 30.DEC.2024 09:48:04

11G-Ant1-2462


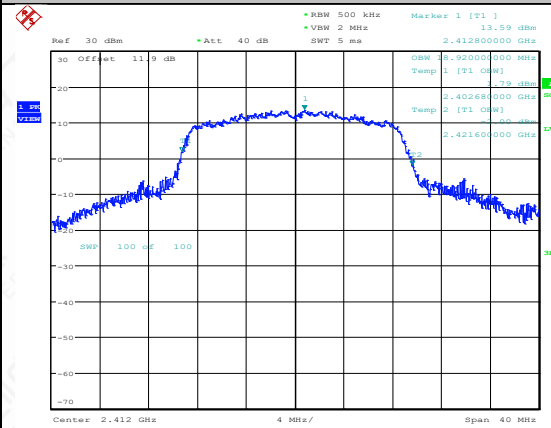
Date: 27.DEC.2024 15:05:30

11G-CDD-Ant1-2412

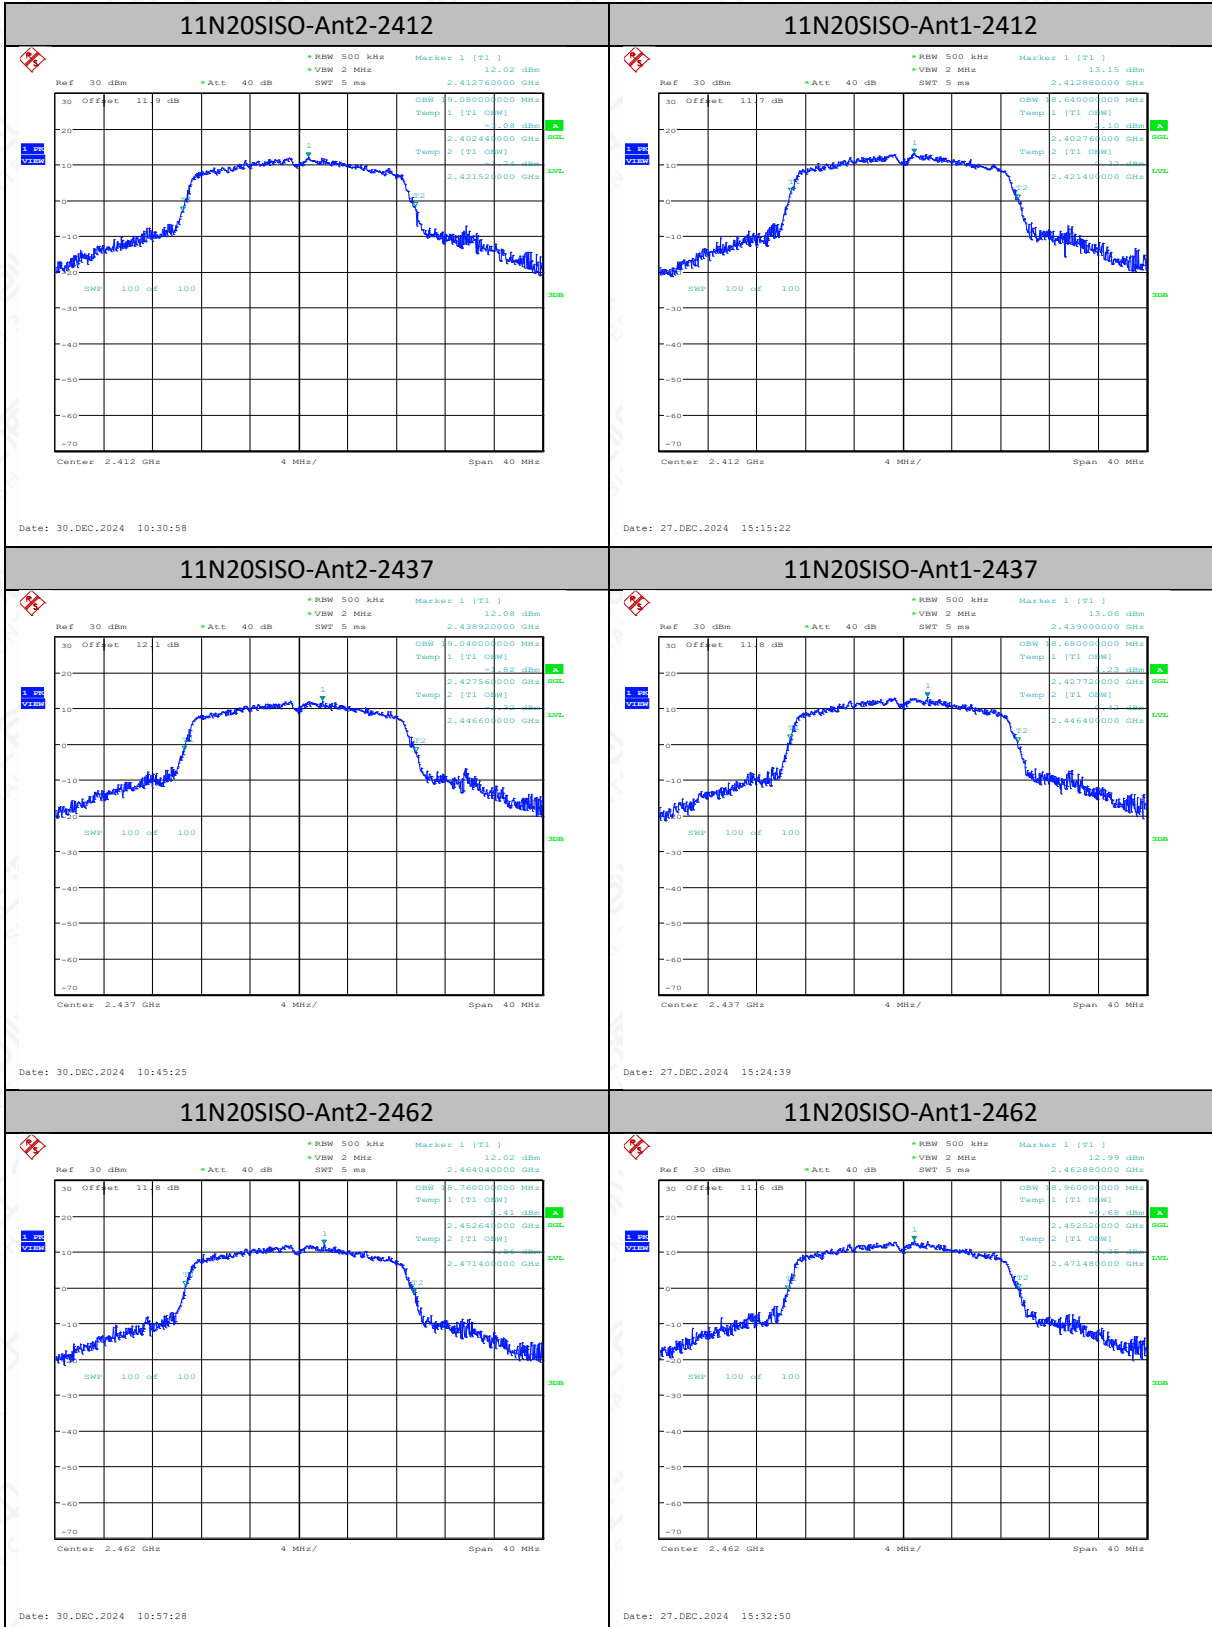11G-CDD-Ant2-2412

11G-CDD-Ant1-2437

11G-CDD-Ant2-2437

11G-CDD-Ant1-2462

11G-CDD-Ant2-2462


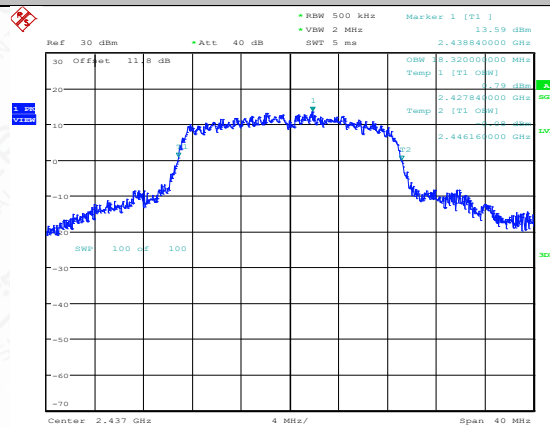


11N20MIMO-Ant1-2412


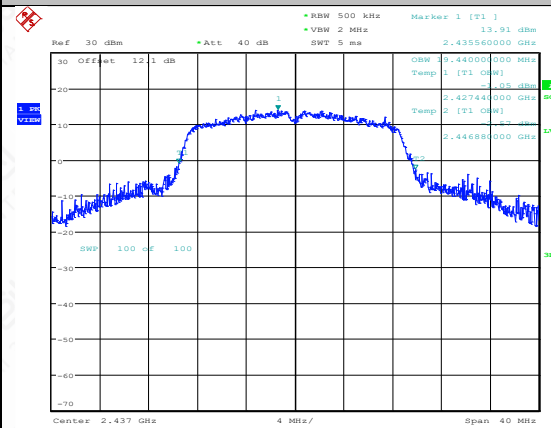
Date: 26.DEC.2024 14:10:13

11N20MIMO-Ant2-2412


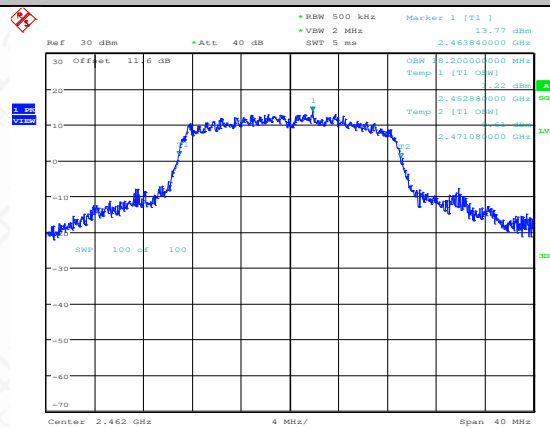
Date: 26.DEC.2024 14:20:53

11N20MIMO-Ant1-2437


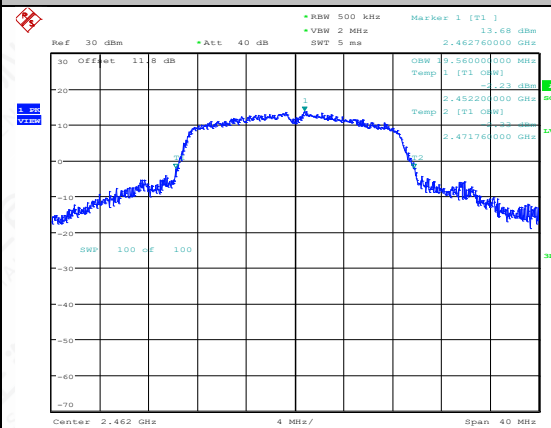
Date: 26.DEC.2024 14:35:41

11N20MIMO-Ant2-2437


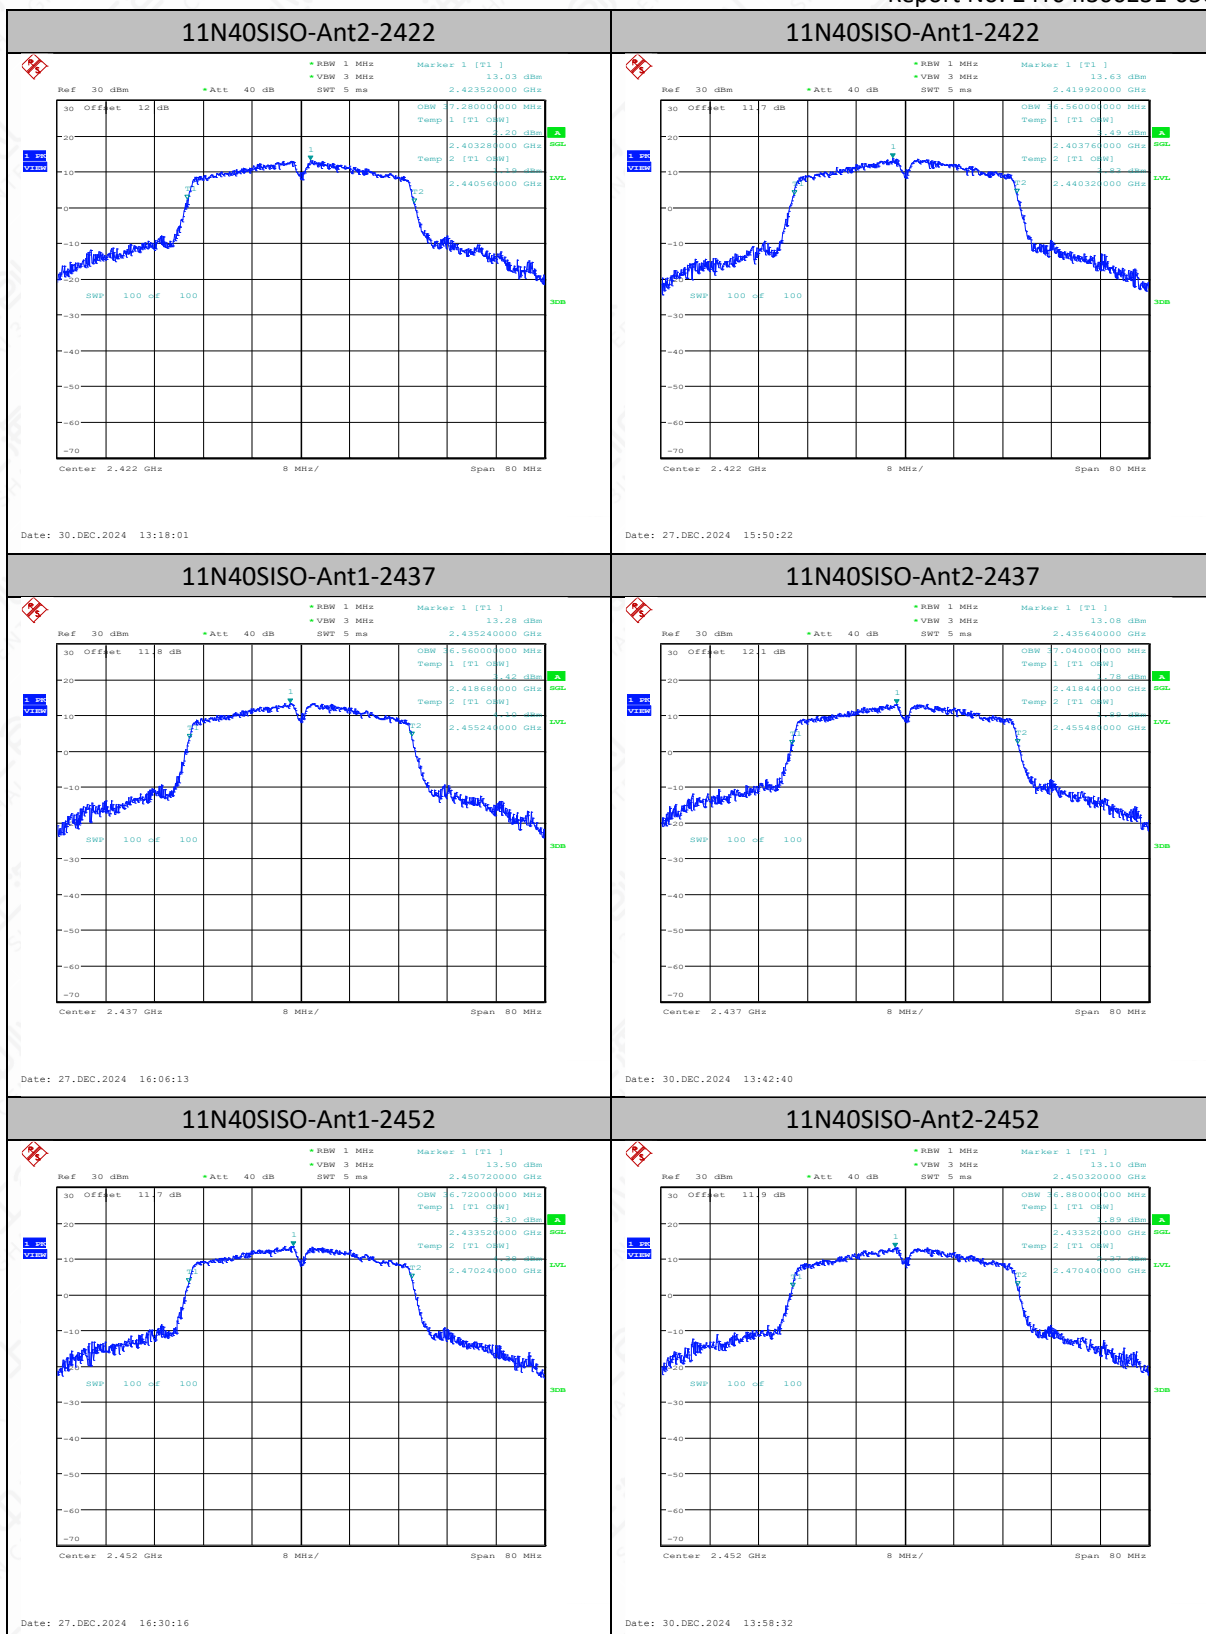
Date: 26.DEC.2024 14:45:44


11N20MIMO-Ant1-2462


Date: 26.DEC.2024 14:56:51


11N20MIMO-Ant2-2462


Date: 26.DEC.2024 15:07:26

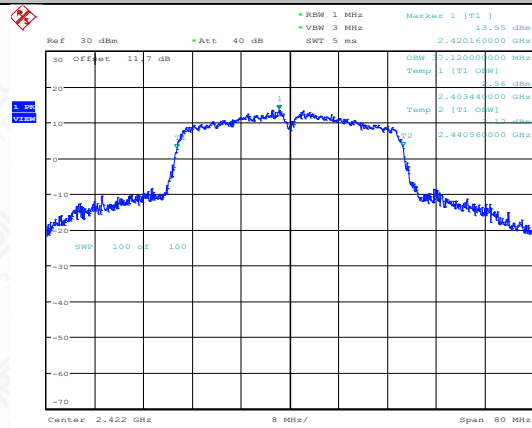


11N40MIMO-Ant1-2422


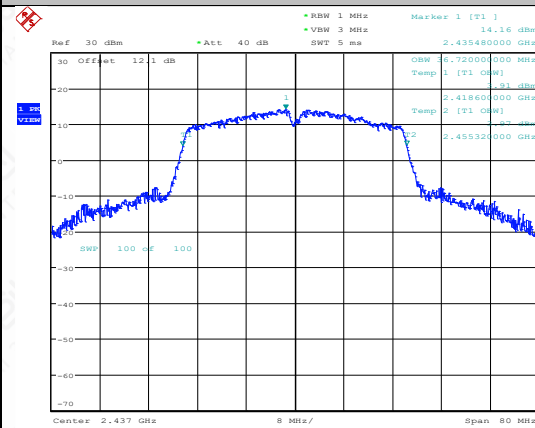
Date: 26.DEC.2024 15:20:09

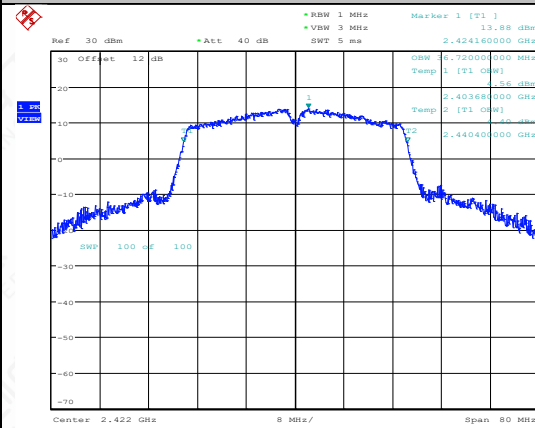11N40MIMO-Ant2-2422


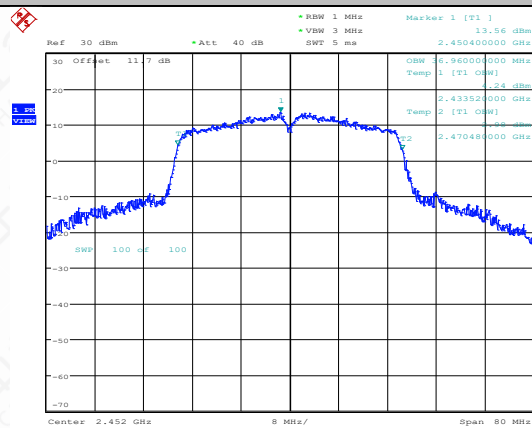
Date: 26.DEC.2024 15:38:31

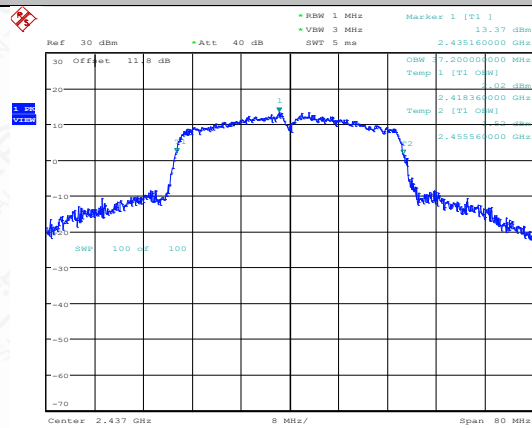11N40MIMO-Ant1-2437


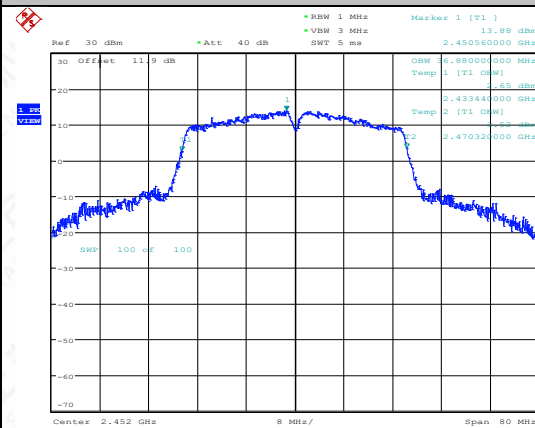
Date: 26.DEC.2024 15:57:08

11N40MIMO-Ant2-2437


Date: 26.DEC.2024 16:15:47

11N40MIMO-Ant1-2452


Date: 26.DEC.2024 16:35:03

11N40MIMO-Ant2-2452


Date: 26.DEC.2024 16:53:23

6.6 Band Edges Compliance

6.6.1 Measurement limit

Standard	Limit(dBc)
FCC 47 Part 15.247(d)	>30
RSS-247 5.5	>30

6.6.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.11.

The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement. Enable EUT transmitter maximum power continuously.

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level.

Emission level measurement


1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW $\geq [3 \times \text{RBW}]$.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.


Note: Not recorded emission from 9 KHz to 30 MHz as emission level at least 20dBc lower than emission limit.

6.6.3 Measurement results - Conducted


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B-CDD	Ant2	Low	2412	10.09	-22.32	≤-19.91	PASS
11B-CDD	Ant1	Low	2412	-4.23	-43.3	≤-34.23	PASS
11B-CDD	Ant1	High	2462	9.74	-35.54	≤-20.26	PASS
11B-CDD	Ant2	High	2462	10.24	-43.35	≤-19.76	PASS
11G-CDD	Ant1	Low	2412	-0.53	-35.99	≤-30.53	PASS
11G-CDD	Ant2	Low	2412	8.78	-21.27	≤-21.22	PASS
11G-CDD	Ant1	High	2462	7.43	-36.62	≤-22.57	PASS
11G-CDD	Ant2	High	2462	6.50	-35.71	≤-23.5	PASS
11N20MIMO	Ant1	Low	2412	-0.56	-38.46	≤-30.56	PASS
11N20MIMO	Ant2	Low	2412	0.01	-40.89	≤-29.99	PASS
11N20MIMO	Ant2	High	2462	9.40	-28.24	≤-20.6	PASS
11N20MIMO	Ant1	High	2462	7.25	-32.1	≤-22.75	PASS
11N40MIMO	Ant1	Low	2422	-6.33	-43.55	≤-36.33	PASS
11N40MIMO	Ant2	Low	2422	-6.42	-43.72	≤-36.42	PASS
11N40MIMO	Ant2	High	2452	5.57	-26.26	≤-24.43	PASS
11N40MIMO	Ant1	High	2452	-5.48	-43.41	≤-35.48	PASS

Test Graphs

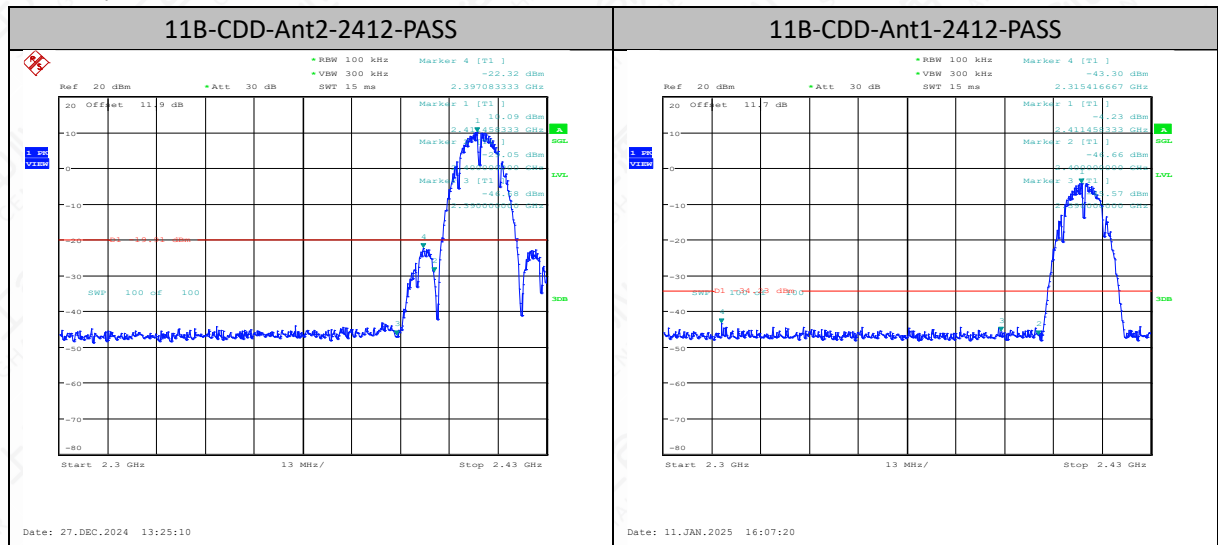

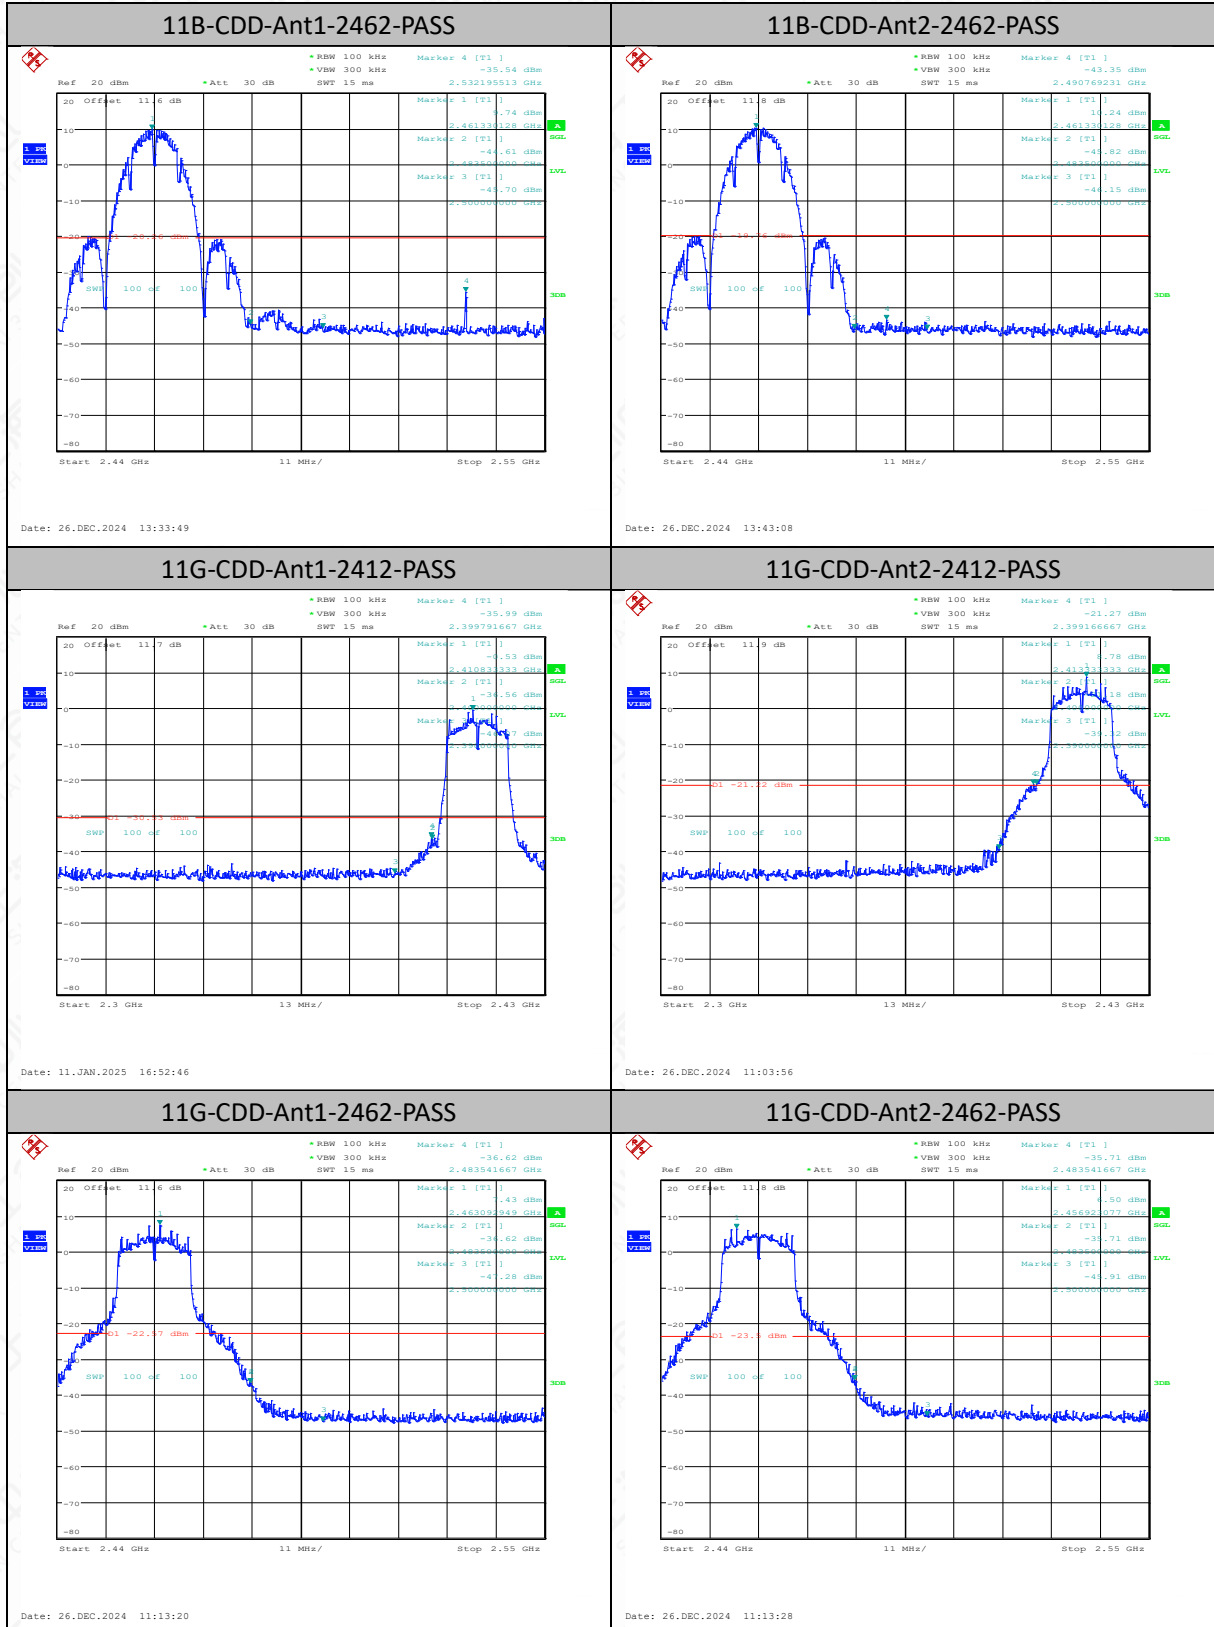


11N20MIMO-Ant1-2412-PASS

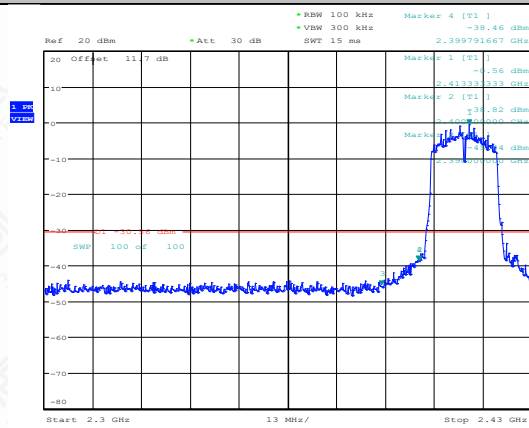


Date: 14.JAN.2025 10:04:55

11N20MIMO-Ant2-2412-PASS

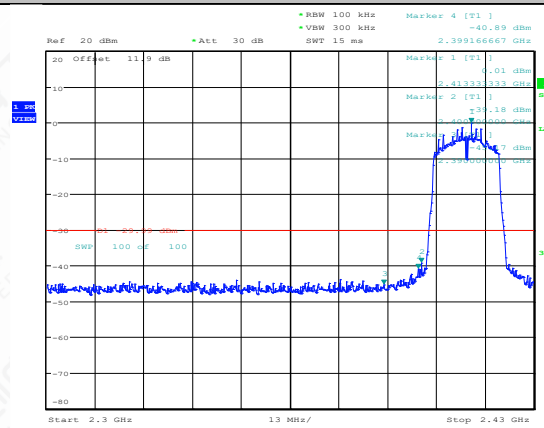


Date: 14.JAN.2025 10:13:07

11N20MIMO-Ant2-2462-PASS

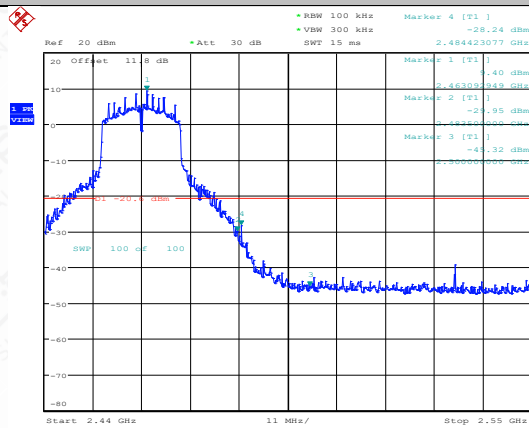


Date: 26.DEC.2024 15:15:52

11N20MIMO-Ant1-2462-PASS

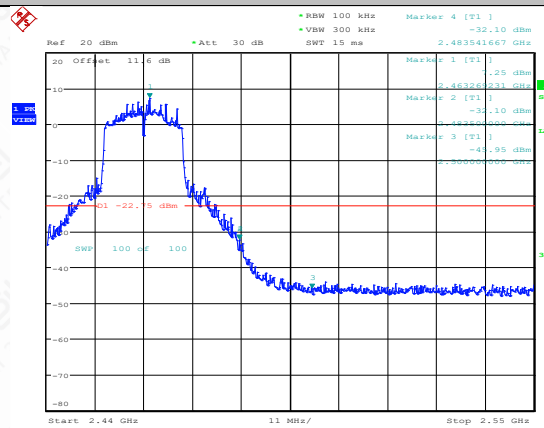


Date: 26.DEC.2024 15:04:41

11N40MIMO-Ant1-2422-PASS

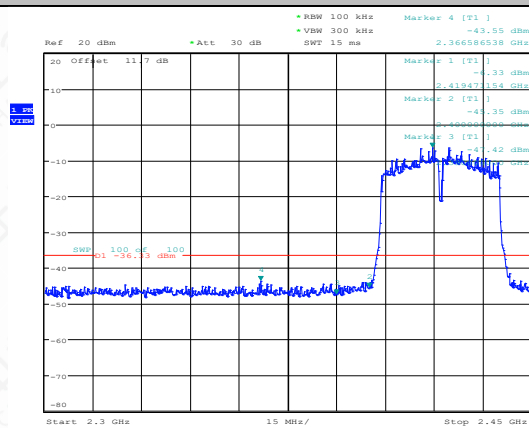


Date: 14.JAN.2025 11:04:18


11N40MIMO-Ant2-2422-PASS

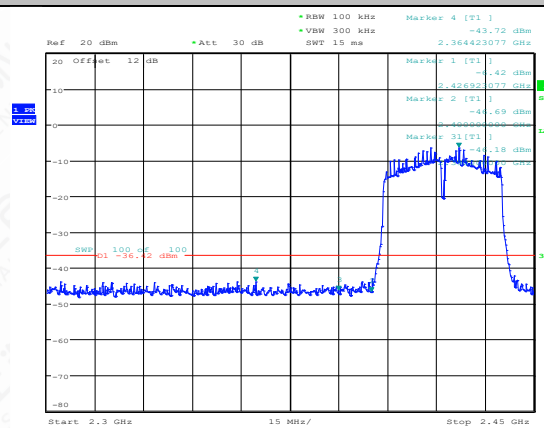


Date: 14.JAN.2025 11:19:01

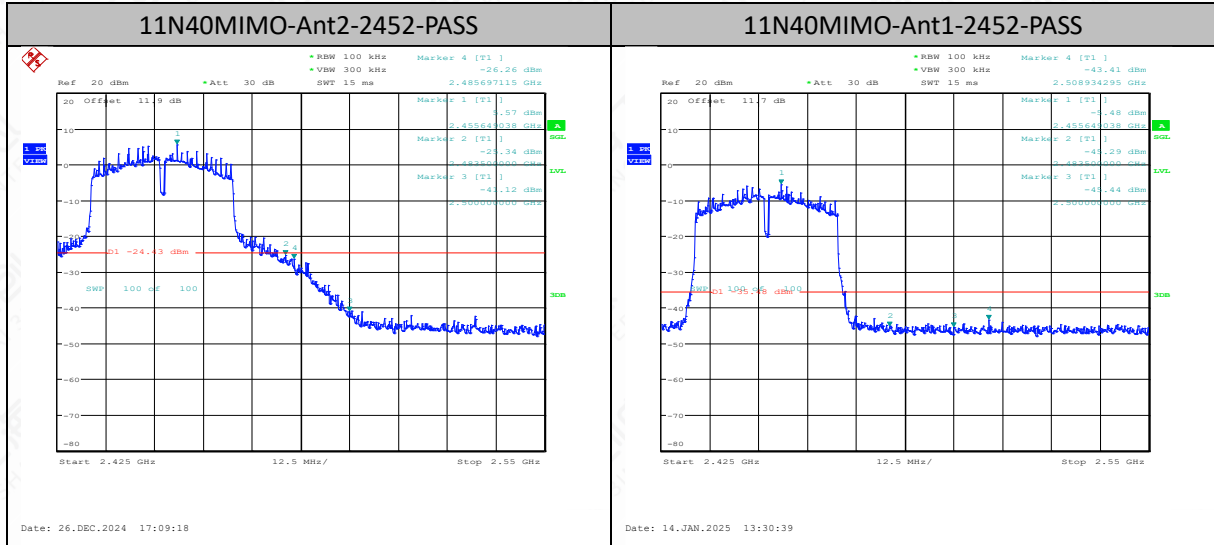


6.6.4 Measurement Results - Radiated

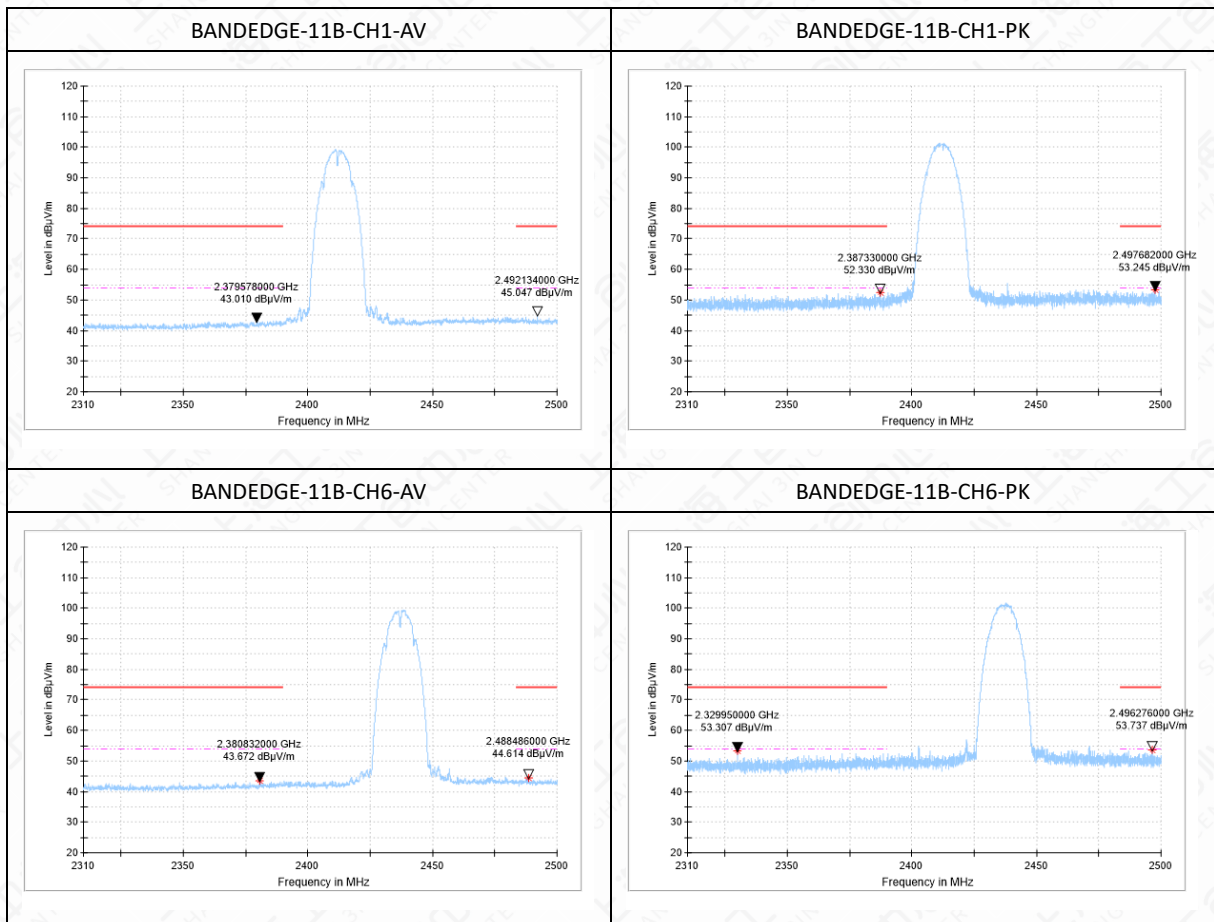


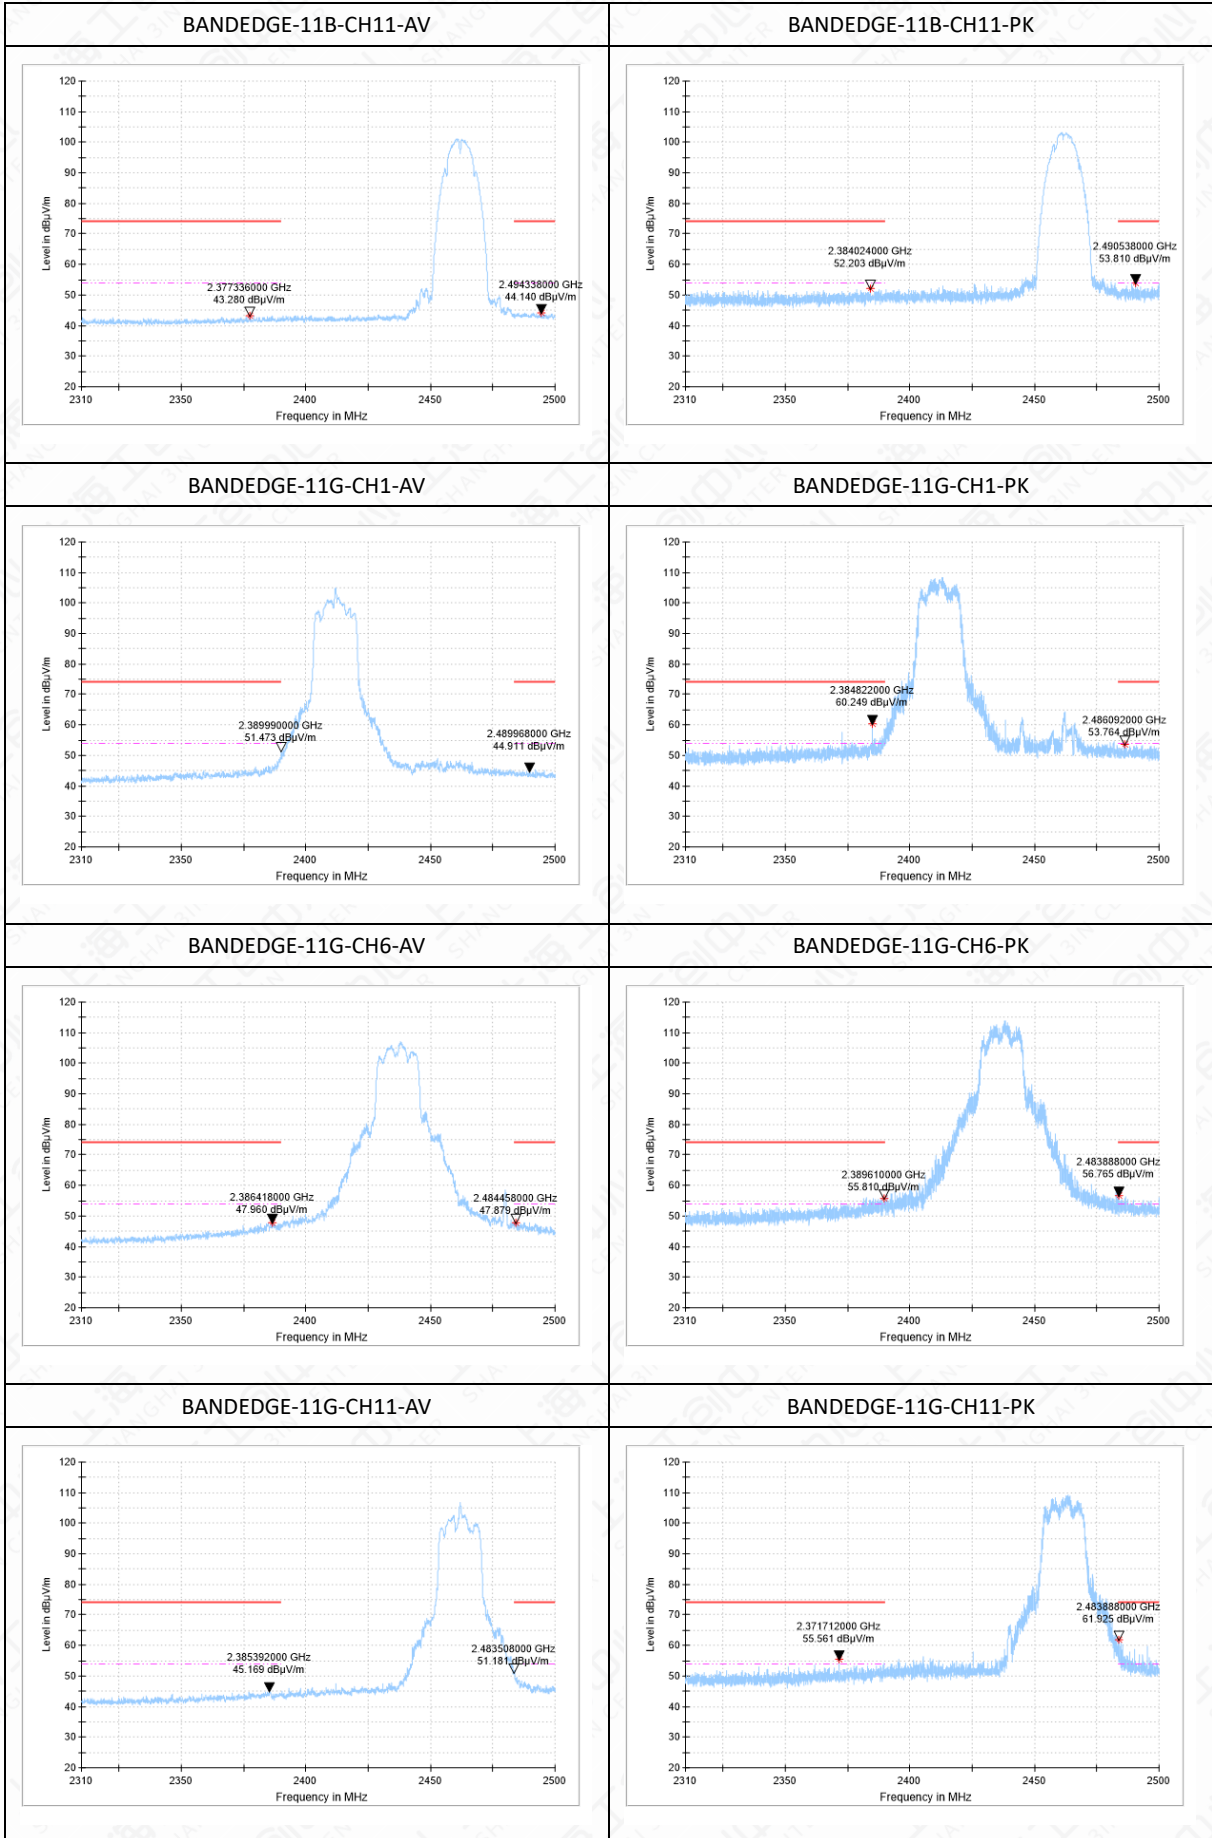


BANDEGE-11N(20M)-CH1-AV-

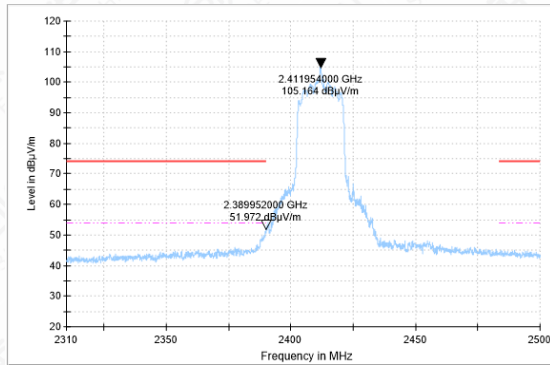


BANDEGE-11N(20M)-CH1-PK

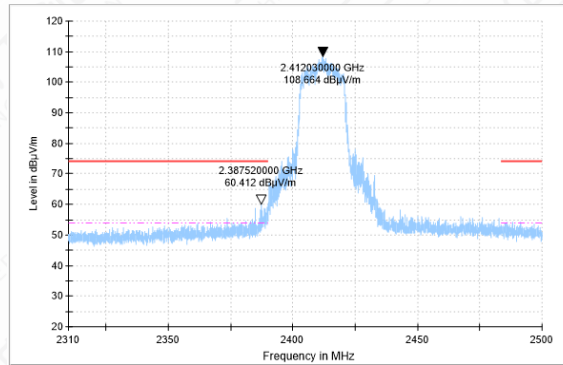


BANDEGE-11N(20M)-CH6-AV

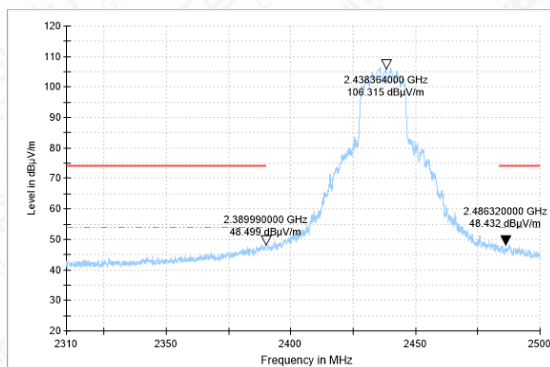


BANDEGE-11N(20M)-CH6-PK-

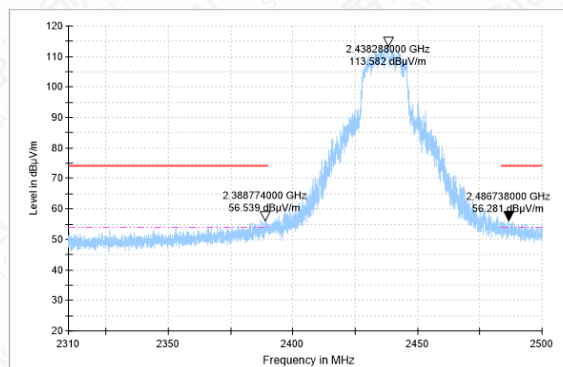


BANDEGE-11N(20M)-CH11-AV-

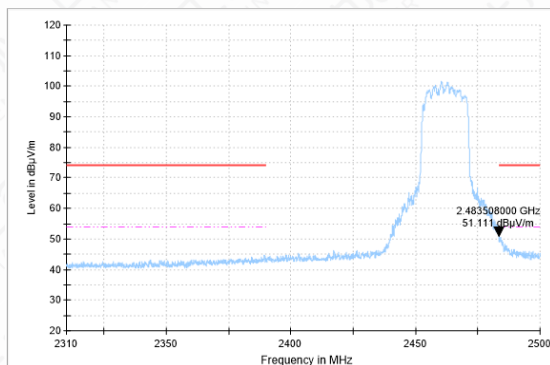


BANDEGE-11N(20M)-CH11-PK

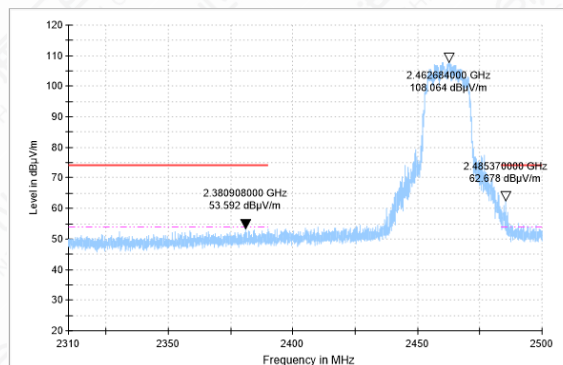


BANDEGE-11N(40M)-CH3-AV

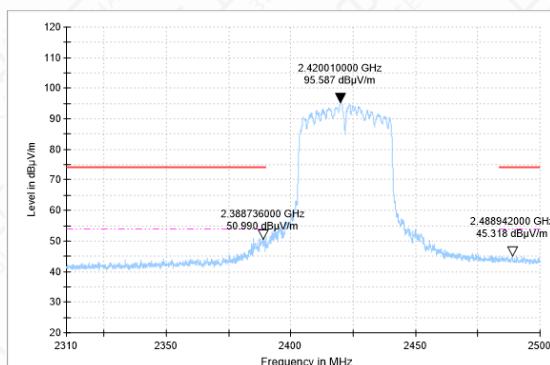


BANDEGE-11N(40M)-CH3-PK

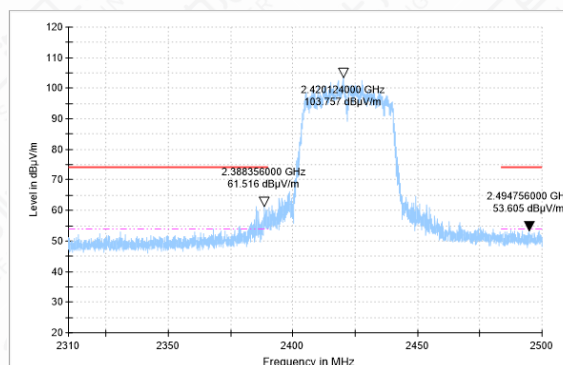


BANDEGE-11N(40M)-CH6-AV

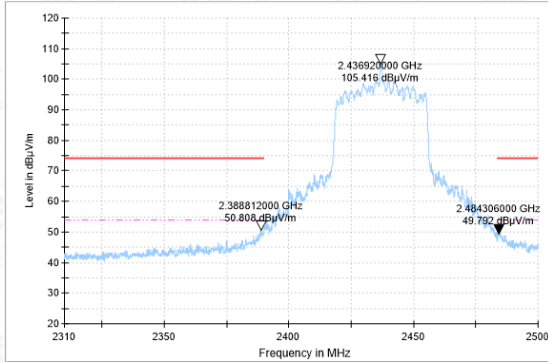


BANDEGE-11N(40M)-CH6-PK

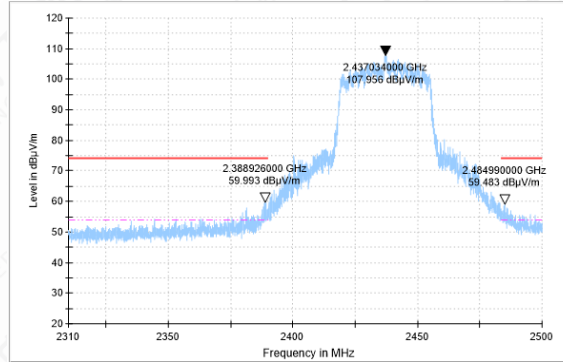

BANDEGE-11N(40M)-CH9-AV

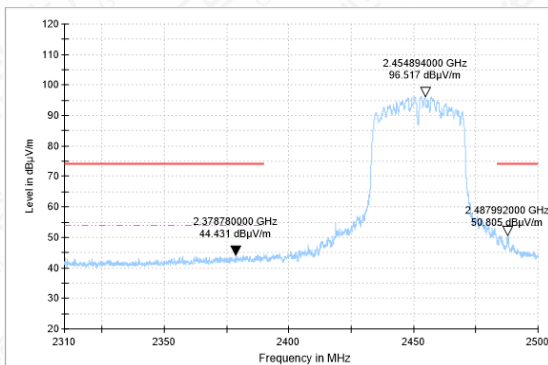

BANDEGE-11N(40M)-CH9-PK

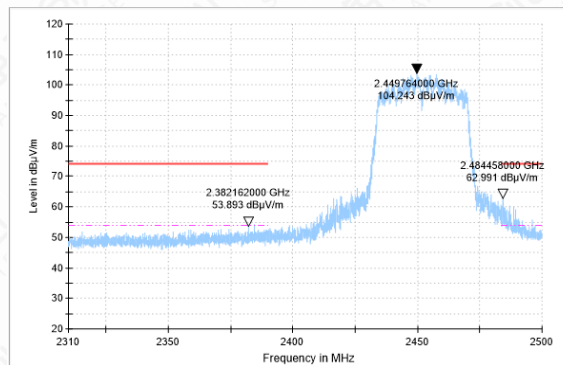

6.7 Transmitter Spurious Emission-conducted

6.7.1 Measurement Limit

Standard	Limit
FCC 47 Part 15.247(d)	30dB below highest level power in 100KHz bandwidth
RSS-247 5.5	30dB below highest level power in 100KHz bandwidth

6.7.2 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.

Enable EUT transmitter maximum power continuously.


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level.

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW $\geq [3 \times \text{RBW}]$.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

6.7.3 Test Setup

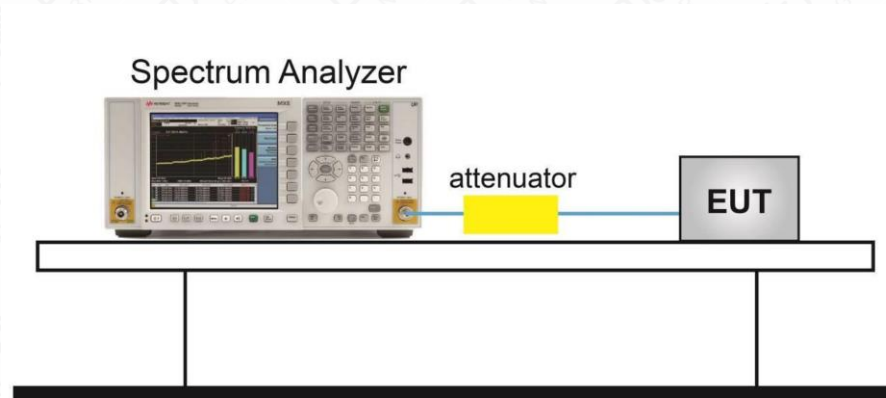


6.7.4 Measurement Result


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B-CDD	Ant1	2412	0~Reference	9.76	9.76	---	PASS
11B-CDD	Ant2	2412	0~Reference	10.34	10.34	---	PASS
11B-CDD	Ant1	2412	30~1000	9.76	-32.81	≤-20.24	PASS
11B-CDD	Ant2	2412	30~1000	10.34	-32.2	≤-19.66	PASS
11B-CDD	Ant1	2412	1000~26500	9.76	-29.22	≤-20.24	PASS
11B-CDD	Ant2	2412	1000~26500	10.34	-38.84	≤-19.66	PASS
11B-CDD	Ant1	2437	0~Reference	9.88	9.88	---	PASS
11B-CDD	Ant2	2437	0~Reference	10.44	10.44	---	PASS
11B-CDD	Ant2	2437	30~1000	10.44	-31.77	≤-19.56	PASS
11B-CDD	Ant1	2437	30~1000	9.88	-32.49	≤-20.12	PASS
11B-CDD	Ant1	2437	1000~26500	9.88	-30.07	≤-20.12	PASS
11B-CDD	Ant2	2437	1000~26500	10.44	-46.88	≤-19.56	PASS
11B-CDD	Ant1	2462	0~Reference	9.73	9.73	---	PASS
11B-CDD	Ant2	2462	0~Reference	10.32	10.32	---	PASS
11B-CDD	Ant1	2462	30~1000	9.73	-32.09	≤-20.27	PASS
11B-CDD	Ant2	2462	30~1000	10.32	-31.38	≤-19.68	PASS
11B-CDD	Ant1	2462	1000~26500	9.73	-31.03	≤-20.27	PASS
11B-CDD	Ant2	2462	1000~26500	10.32	-42.29	≤-19.68	PASS
11G-CDD	Ant1	2412	0~Reference	6.27	6.27	---	PASS
11G-CDD	Ant2	2412	0~Reference	6.82	6.82	---	PASS
11G-CDD	Ant1	2412	30~1000	6.27	-43.48	≤-23.73	PASS
11G-CDD	Ant2	2412	30~1000	6.82	-44.17	≤-23.18	PASS
11G-CDD	Ant1	2412	1000~26500	6.27	-39.99	≤-23.73	PASS
11G-CDD	Ant2	2412	1000~26500	6.82	-47.49	≤-23.18	PASS
11G-CDD	Ant1	2437	0~Reference	7.35	7.35	---	PASS


11G-CDD	Ant2	2437	0~Reference	6.94	6.94	---	PASS
11G-CDD	Ant1	2437	30~1000	7.35	-46.32	≤-22.65	PASS
11G-CDD	Ant2	2437	30~1000	6.94	-41.93	≤-23.06	PASS
11G-CDD	Ant1	2437	1000~26500	7.35	-40.67	≤-22.65	PASS
11G-CDD	Ant2	2437	1000~26500	6.94	-51.52	≤-23.06	PASS
11G-CDD	Ant1	2462	0~Reference	7.25	7.25	---	PASS
11G-CDD	Ant2	2462	0~Reference	8.06	8.06	---	PASS
11G-CDD	Ant1	2462	30~1000	7.25	-44.36	≤-22.75	PASS
11G-CDD	Ant2	2462	30~1000	8.06	-43.88	≤-21.94	PASS
11G-CDD	Ant1	2462	1000~26500	7.25	-42.14	≤-22.75	PASS
11G-CDD	Ant2	2462	1000~26500	8.06	-50.44	≤-21.94	PASS
11N20MIMO	Ant1	2412	0~Reference	6.70	6.70	---	PASS
11N20MIMO	Ant2	2412	0~Reference	7.94	7.94	---	PASS
11N20MIMO	Ant2	2412	30~1000	7.94	-43.35	≤-22.06	PASS
11N20MIMO	Ant1	2412	30~1000	6.70	-46.48	≤-23.3	PASS
11N20MIMO	Ant2	2412	1000~26500	7.94	-47.47	≤-22.06	PASS
11N20MIMO	Ant1	2412	1000~26500	6.70	-39.75	≤-23.3	PASS
11N20MIMO	Ant1	2437	0~Reference	4.83	4.83	---	PASS
11N20MIMO	Ant2	2437	0~Reference	8.82	8.82	---	PASS
11N20MIMO	Ant2	2437	30~1000	8.82	-40.85	≤-21.18	PASS
11N20MIMO	Ant1	2437	30~1000	4.83	-46.38	≤-25.17	PASS
11N20MIMO	Ant1	2437	1000~26500	4.83	-39.46	≤-25.17	PASS
11N20MIMO	Ant2	2437	1000~26500	8.82	-50.75	≤-21.18	PASS
11N20MIMO	Ant1	2462	0~Reference	7.18	7.18	---	PASS
11N20MIMO	Ant2	2462	0~Reference	8.63	8.63	---	PASS
11N20MIMO	Ant1	2462	30~1000	7.18	-43.4	≤-22.82	PASS
11N20MIMO	Ant2	2462	30~1000	8.63	-42.76	≤-21.37	PASS
11N20MIMO	Ant1	2462	1000~26500	7.18	-41.67	≤-22.82	PASS
11N20MIMO	Ant2	2462	1000~26500	8.63	-48.2	≤-21.37	PASS
11N40MIMO	Ant1	2422	0~Reference	2.07	2.07	---	PASS
11N40MIMO	Ant2	2422	0~Reference	3.84	3.84	---	PASS
11N40MIMO	Ant1	2422	30~1000	2.07	-34.31	≤-27.93	PASS
11N40MIMO	Ant2	2422	30~1000	3.84	-44.93	≤-26.16	PASS
11N40MIMO	Ant1	2422	1000~26500	2.07	-42.9	≤-27.93	PASS
11N40MIMO	Ant2	2422	1000~26500	3.84	-48.68	≤-26.16	PASS
11N40MIMO	Ant1	2437	0~Reference	2.52	2.52	---	PASS
11N40MIMO	Ant2	2437	0~Reference	5.74	5.74	---	PASS
11N40MIMO	Ant1	2437	30~1000	2.52	-34.58	≤-27.48	PASS
11N40MIMO	Ant2	2437	30~1000	5.74	-42.54	≤-24.26	PASS
11N40MIMO	Ant1	2437	1000~26500	2.52	-42.97	≤-27.48	PASS
11N40MIMO	Ant2	2437	1000~26500	5.74	-50.81	≤-24.26	PASS
11N40MIMO	Ant1	2452	0~Reference	3.58	3.58	---	PASS
11N40MIMO	Ant2	2452	0~Reference	5.53	5.53	---	PASS


11N40MIMO	Ant2	2452	30~1000	5.53	-44.13	≤-24.47	PASS
11N40MIMO	Ant1	2452	30~1000	3.58	-35.82	≤-26.42	PASS
11N40MIMO	Ant2	2452	1000~26500	5.53	-51.01	≤-24.47	PASS
11N40MIMO	Ant1	2452	1000~26500	3.58	-40.99	≤-26.42	PASS

Test Graphs

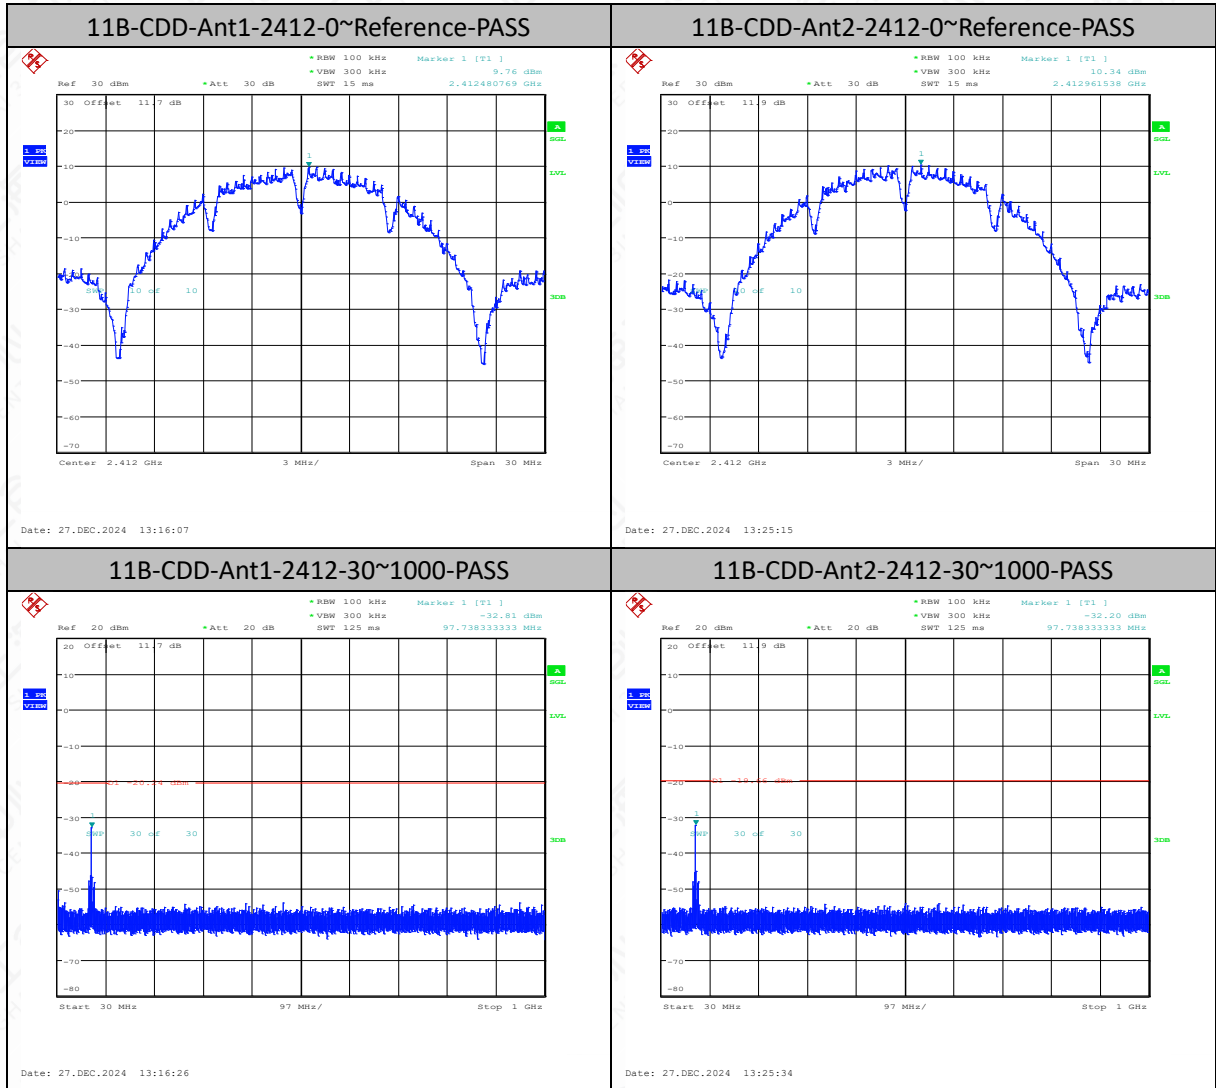


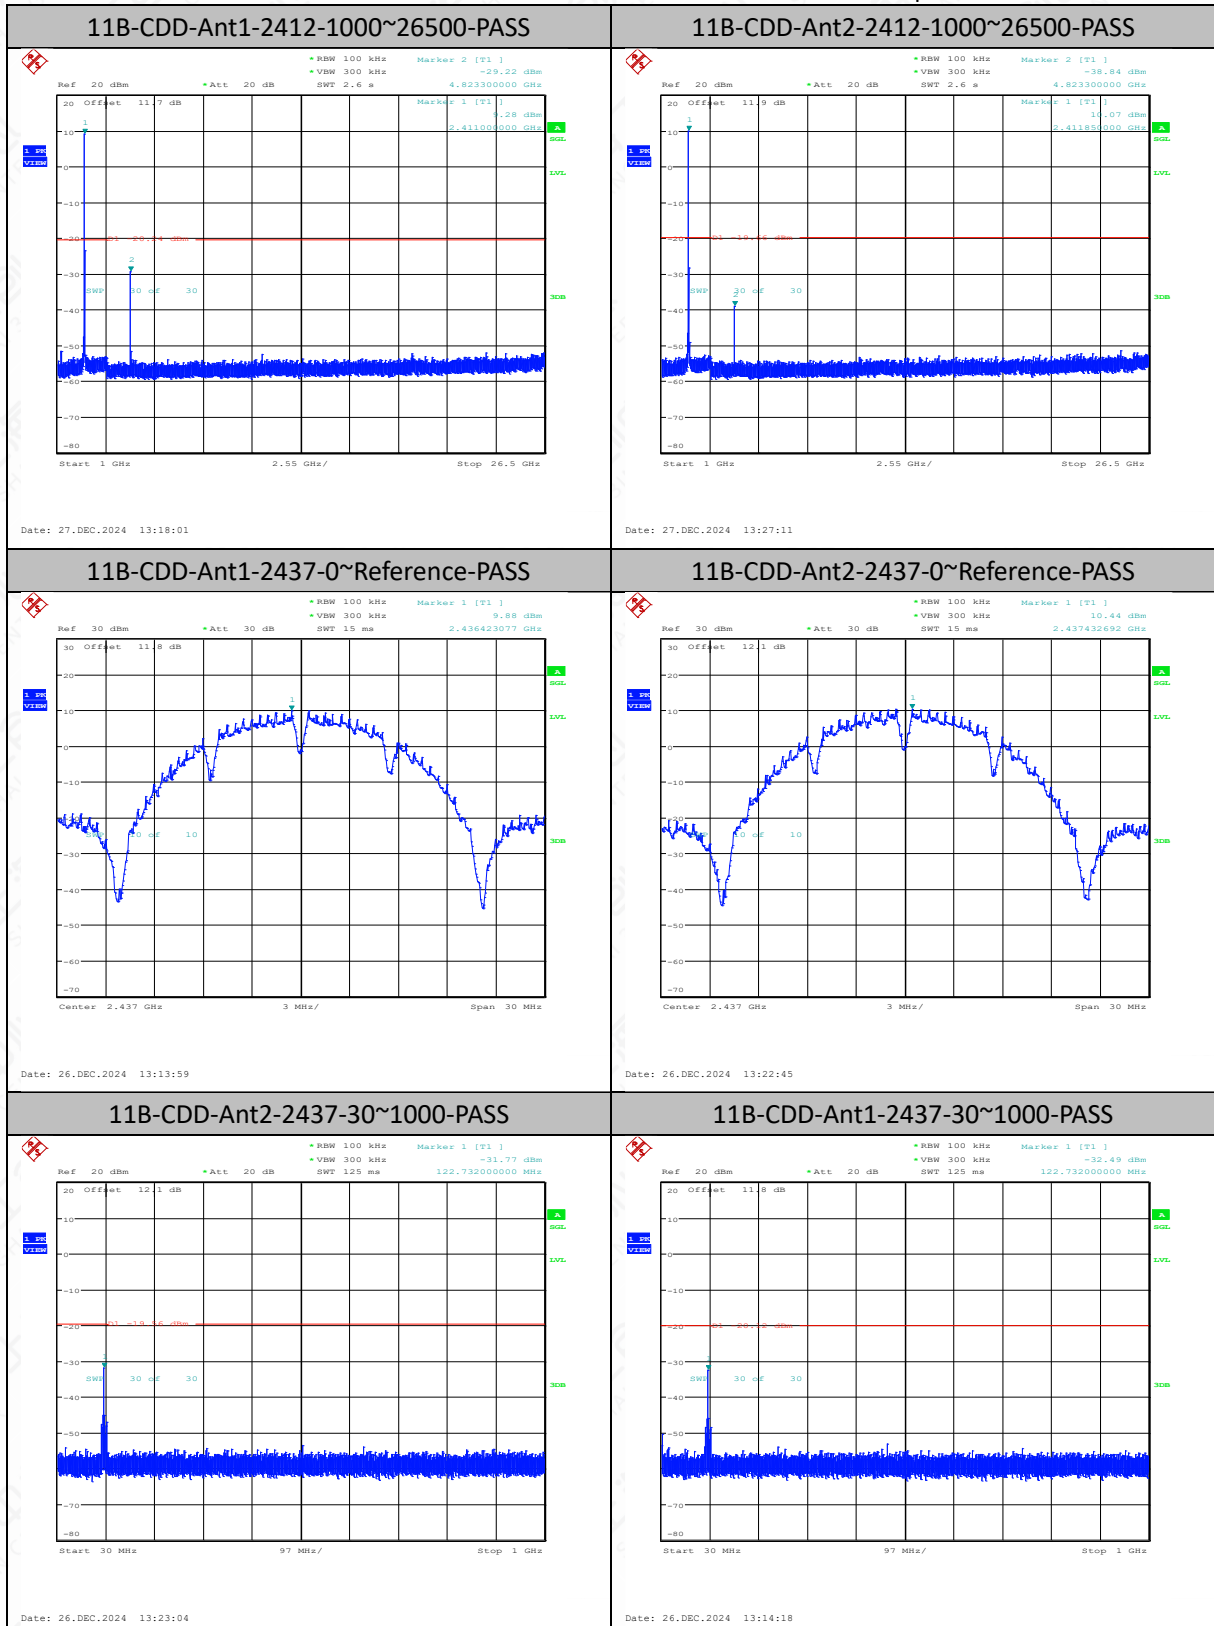

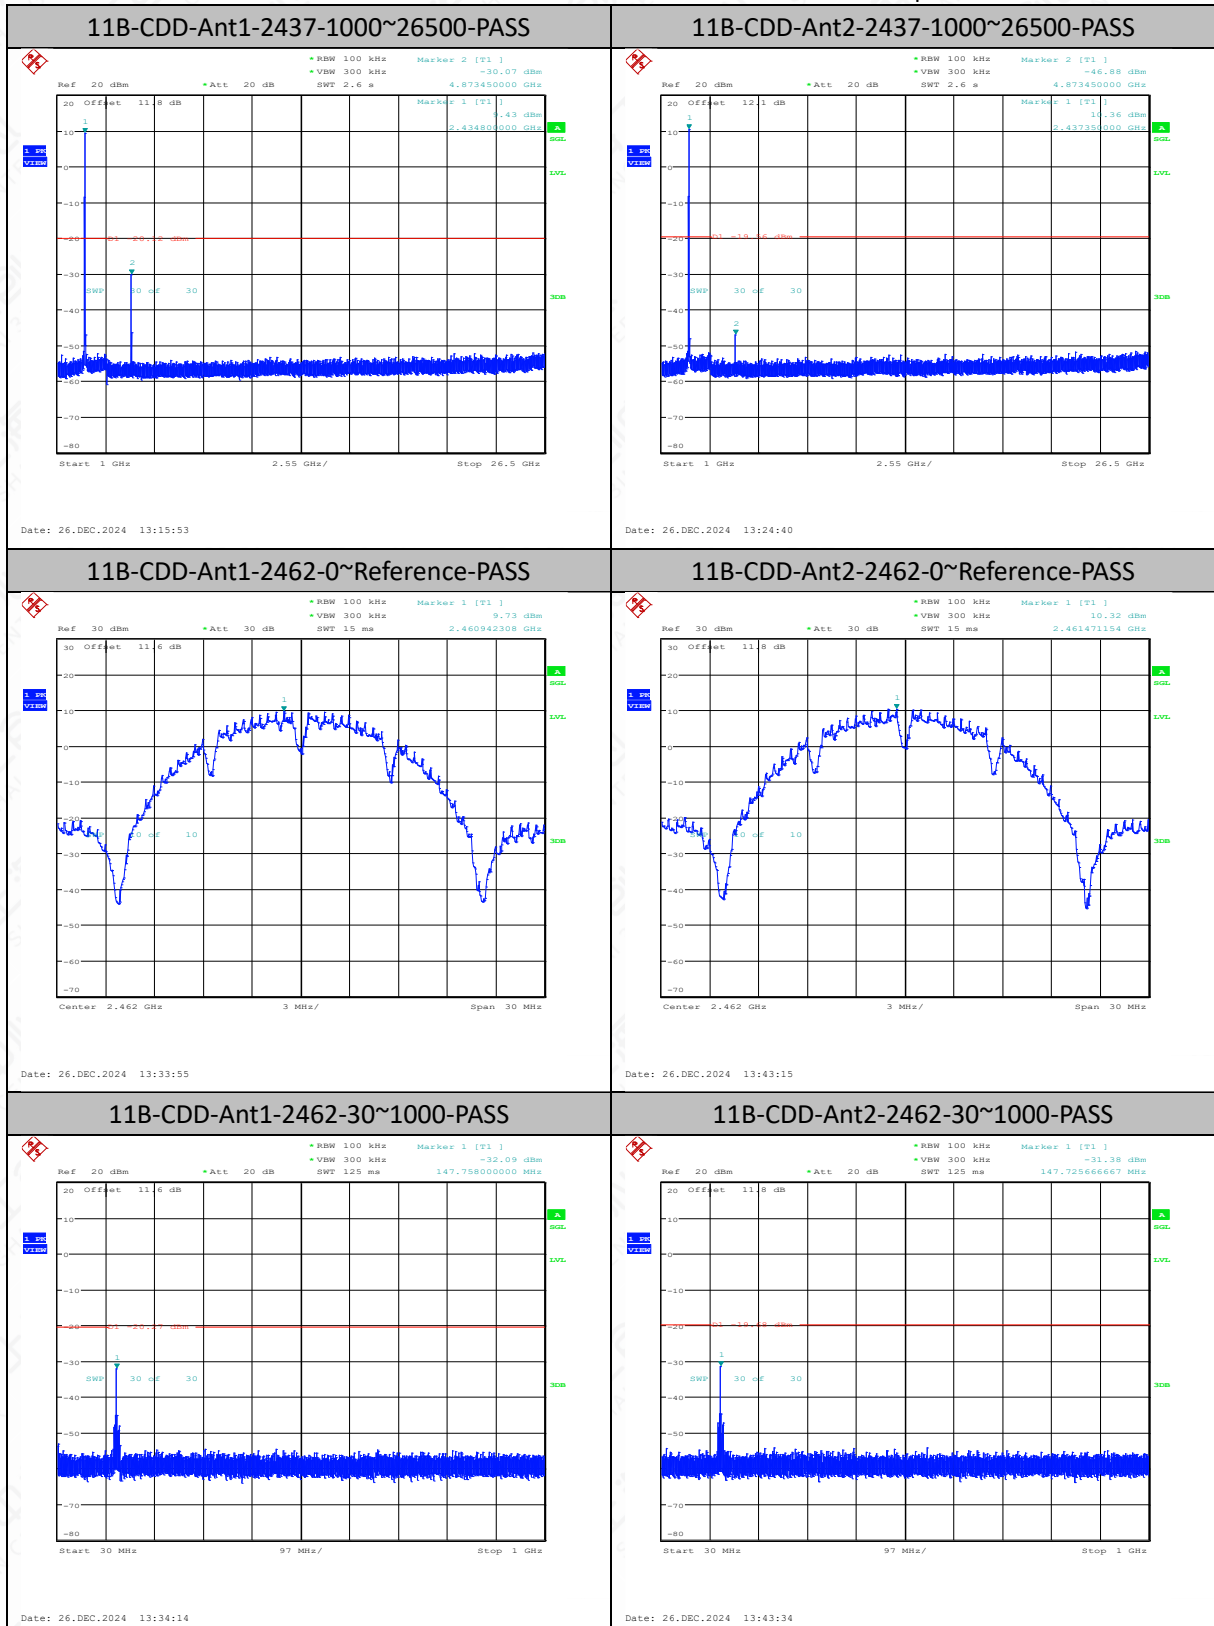

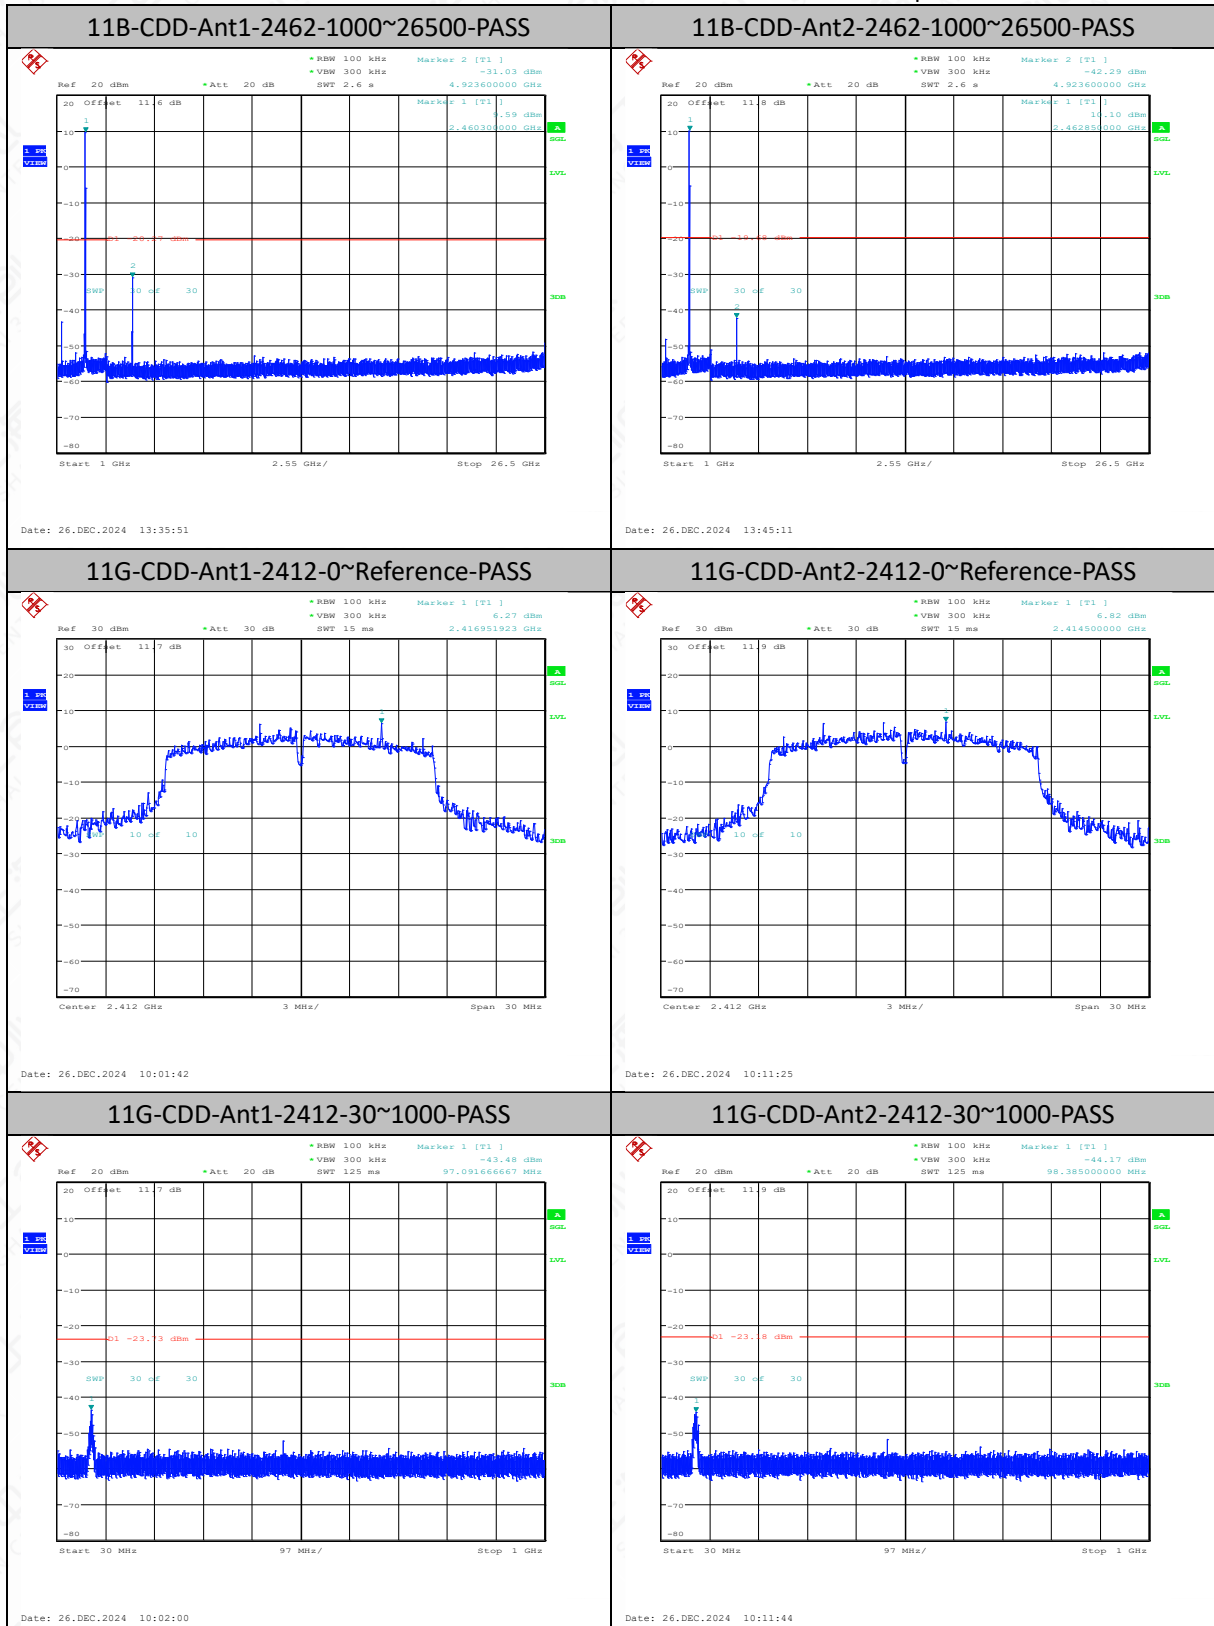


11G-CDD-Ant1-2412-1000~26500-PASS

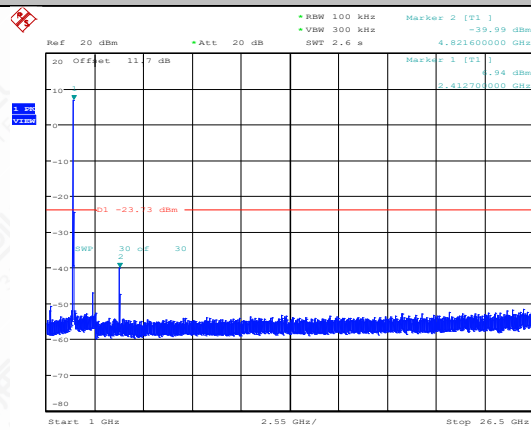


Date: 26.DEC.2024 10:03:31

11G-CDD-Ant2-2412-1000~26500-PASS

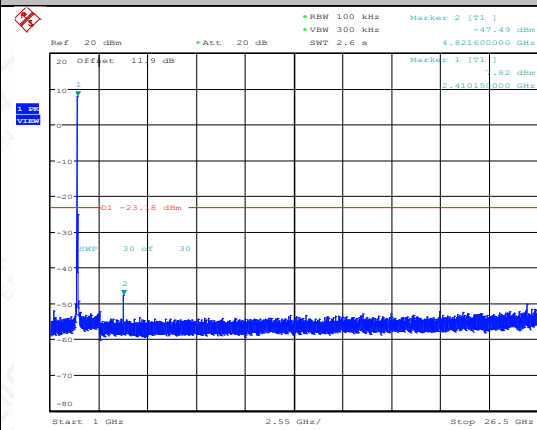


Date: 26.DEC.2024 10:13:15

11G-CDD-Ant1-2437-0~Reference-PASS

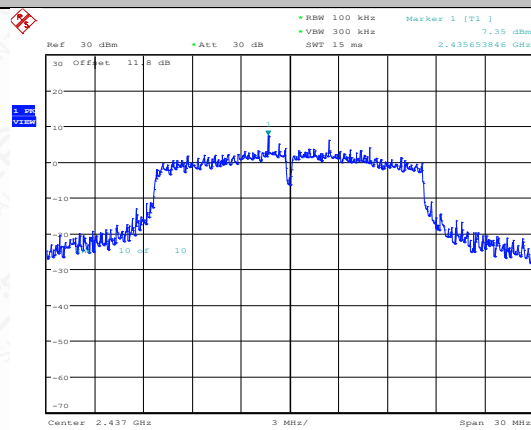


Date: 26.DEC.2024 10:24:28

11G-CDD-Ant2-2437-0~Reference-PASS

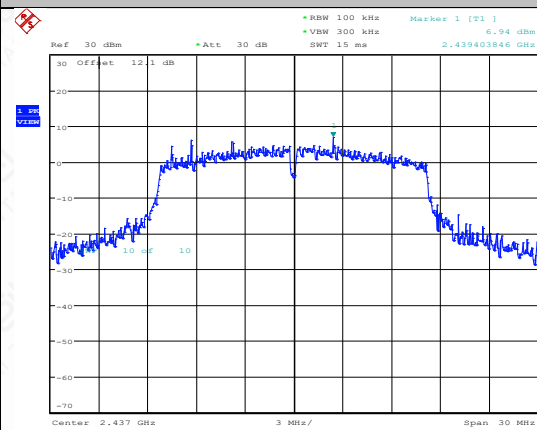


Date: 26.DEC.2024 10:34:06

11G-CDD-Ant1-2437-30~1000-PASS

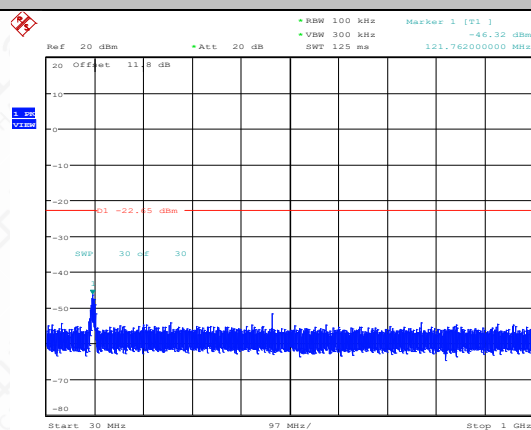


Date: 26.DEC.2024 10:24:47

11G-CDD-Ant2-2437-30~1000-PASS

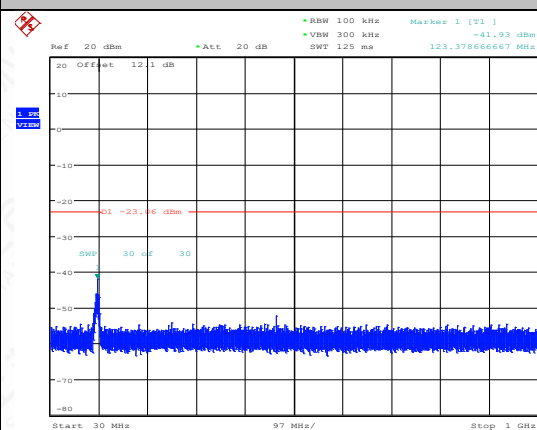


Date: 26.DEC.2024 10:34:24

11G-CDD-Ant1-2437-1000~26500-PASS

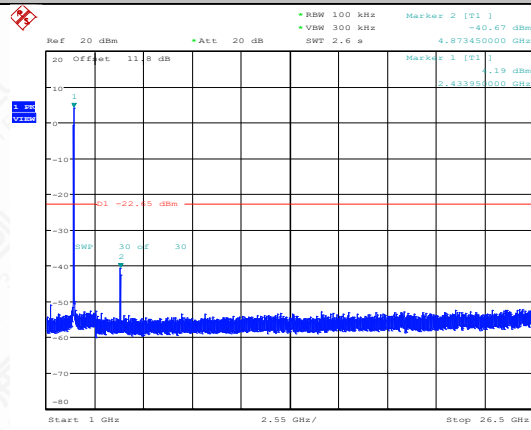


Date: 26.DEC.2024 10:26:18

11G-CDD-Ant2-2437-1000~26500-PASS

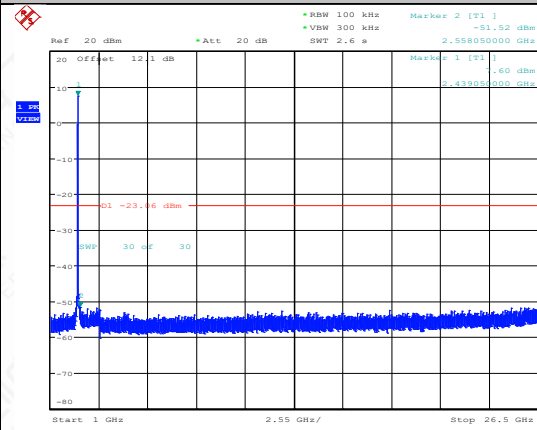


Date: 26.DEC.2024 10:35:55

11G-CDD-Ant1-2462-0~Reference-PASS

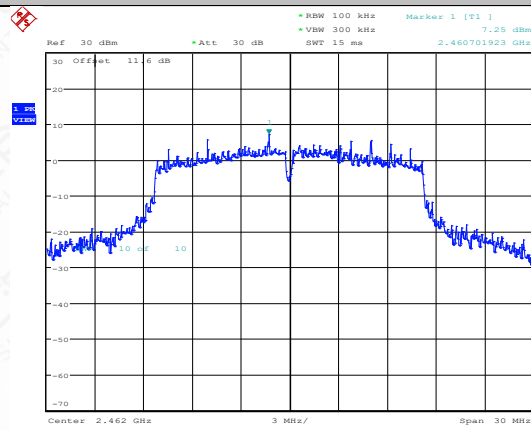


Date: 26.DEC.2024 10:44:08

11G-CDD-Ant2-2462-0~Reference-PASS

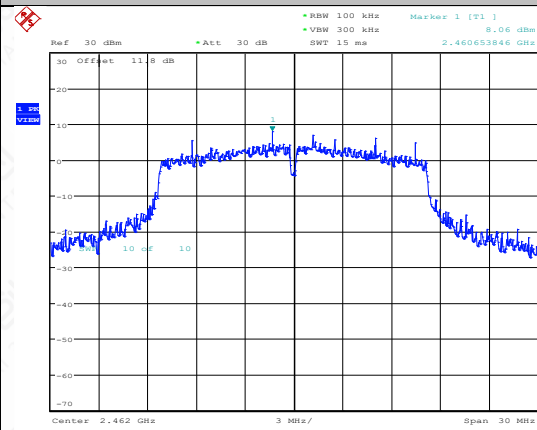


Date: 26.DEC.2024 10:53:57

11G-CDD-Ant1-2462-30~1000-PASS

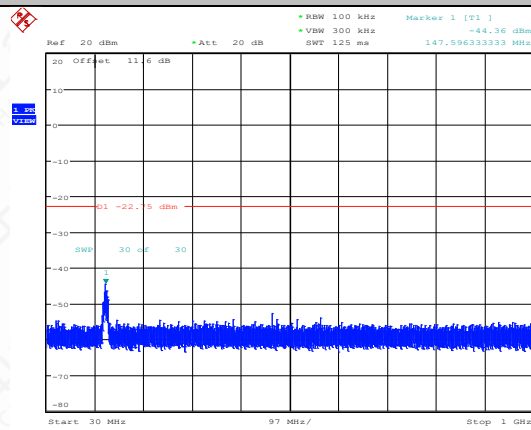


Date: 26.DEC.2024 10:44:26


11G-CDD-Ant2-2462-30~1000-PASS

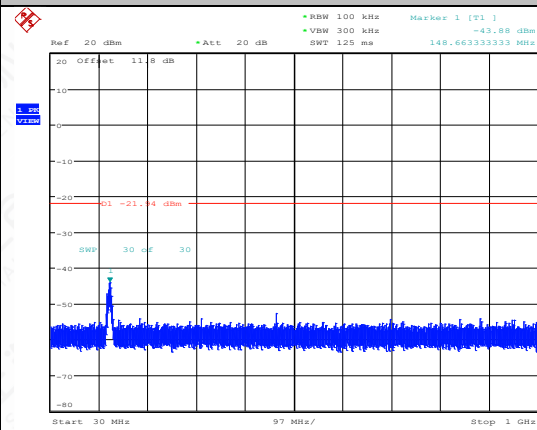

Date: 26.DEC.2024 10:54:16

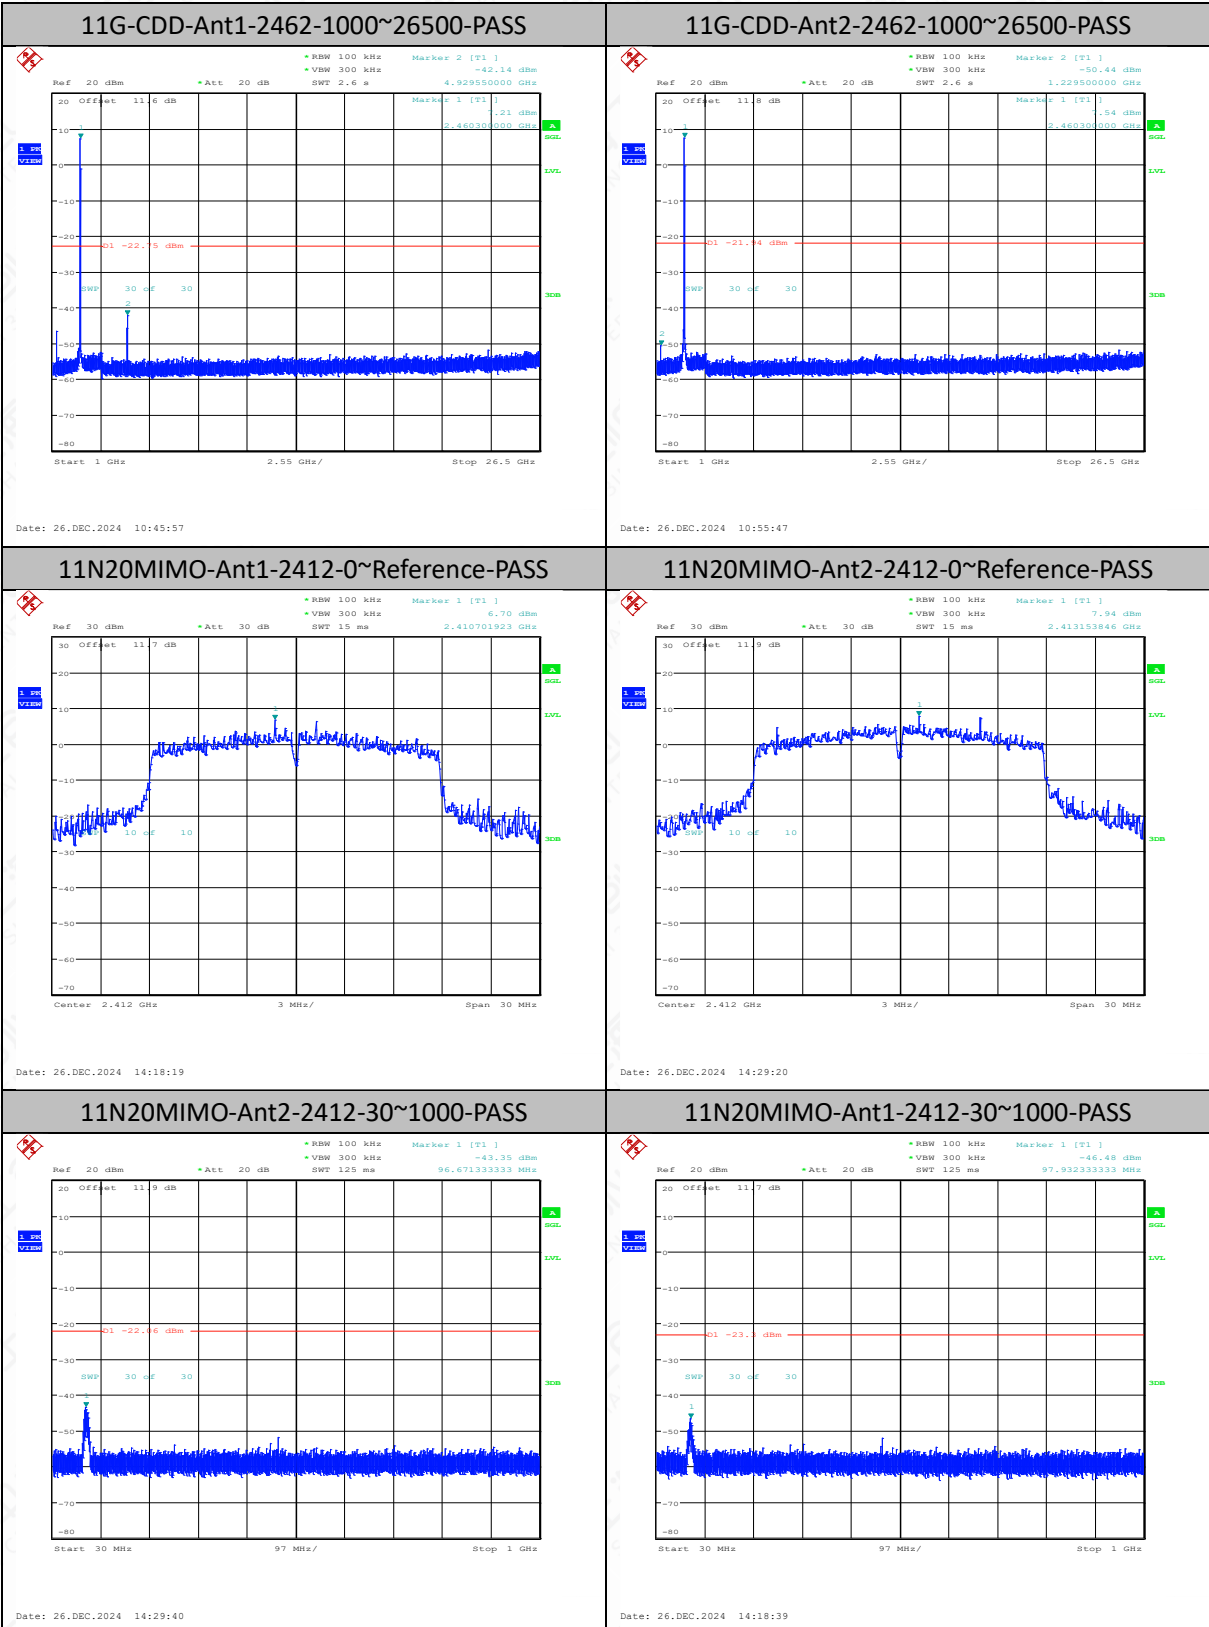


11N20MIMO-Ant2-2412-1000~26500-PASS

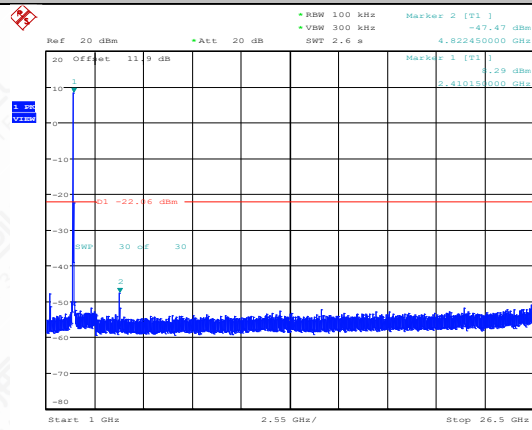


Date: 26.DEC.2024 14:31:19

11N20MIMO-Ant1-2412-1000~26500-PASS

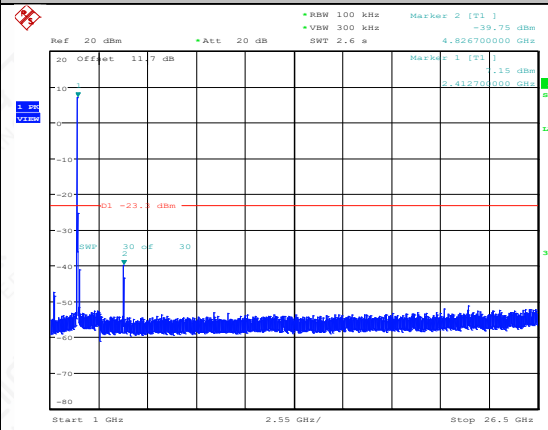


Date: 26.DEC.2024 14:20:18

11N20MIMO-Ant1-2437-0~Reference-PASS

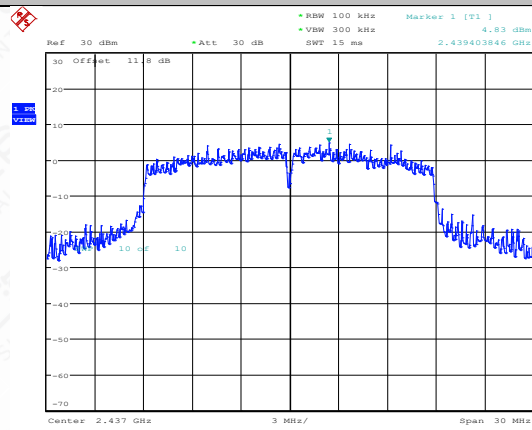


Date: 26.DEC.2024 14:43:11

11N20MIMO-Ant2-2437-0~Reference-PASS

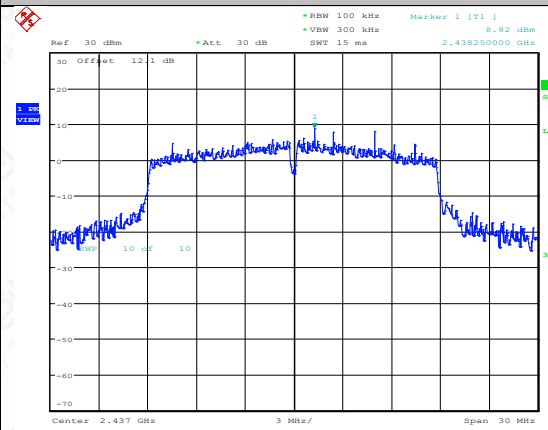


Date: 26.DEC.2024 14:53:46

11N20MIMO-Ant2-2437-30~1000-PASS

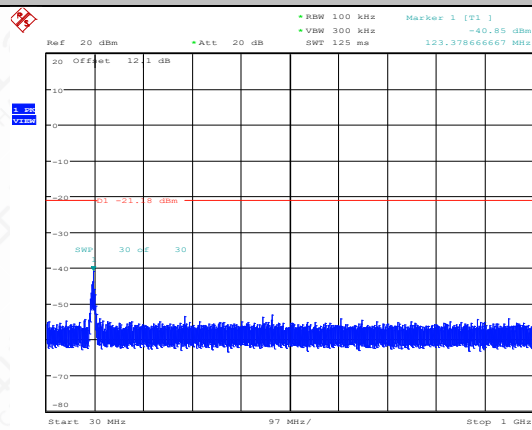


Date: 26.DEC.2024 14:54:06


11N20MIMO-Ant1-2437-30~1000-PASS

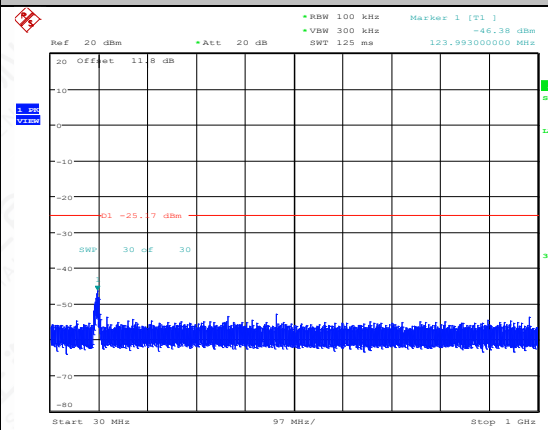

Date: 26.DEC.2024 14:43:31

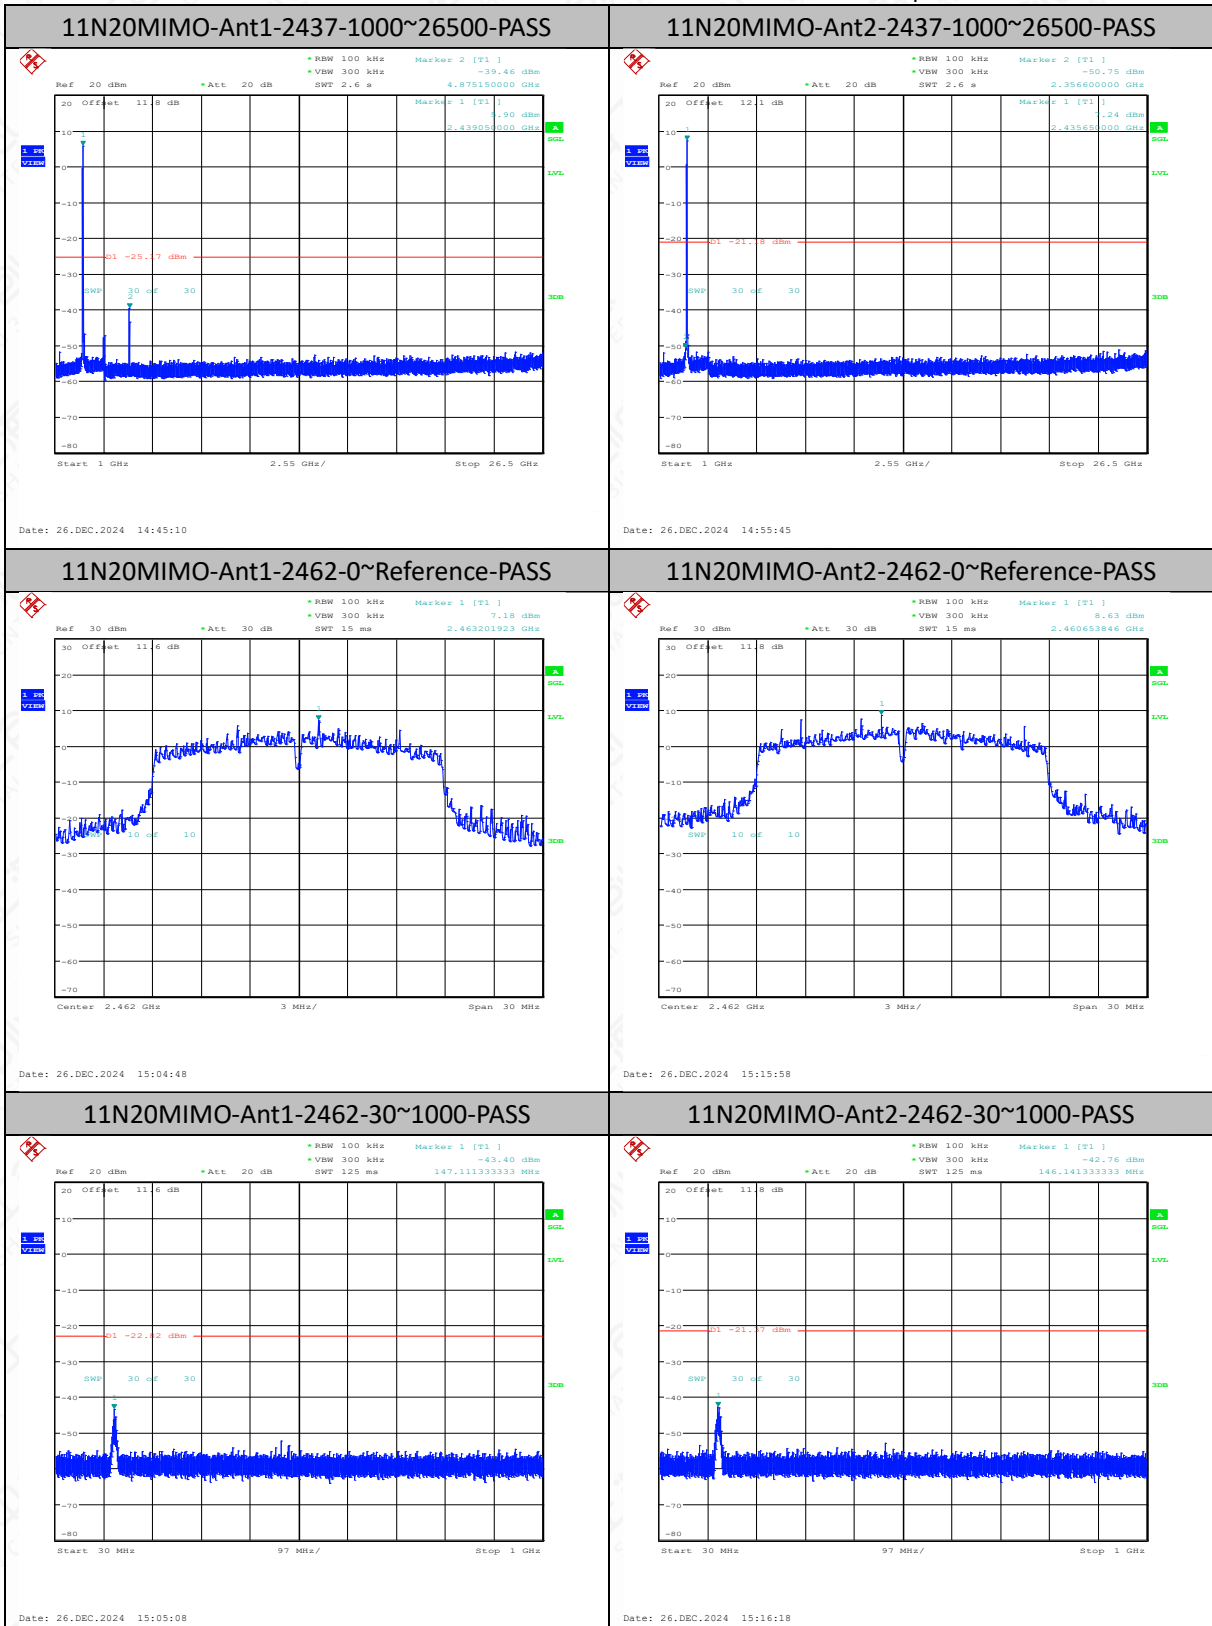


11N20MIMO-Ant1-2462-1000~26500-PASS

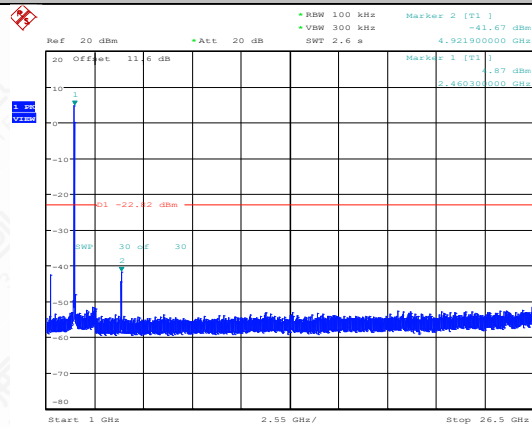


Date: 26.DEC.2024 15:06:47

11N20MIMO-Ant2-2462-1000~26500-PASS

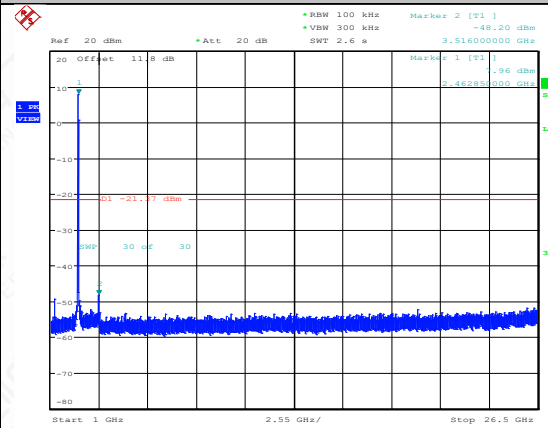


Date: 26.DEC.2024 15:17:58

11N40MIMO-Ant1-2422-0~Reference-PASS

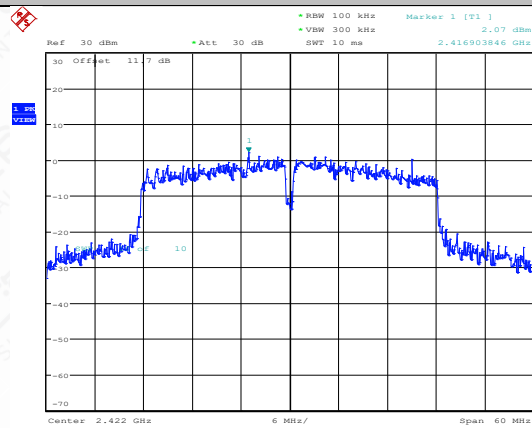


Date: 26.DEC.2024 15:35:58

11N40MIMO-Ant2-2422-0~Reference-PASS

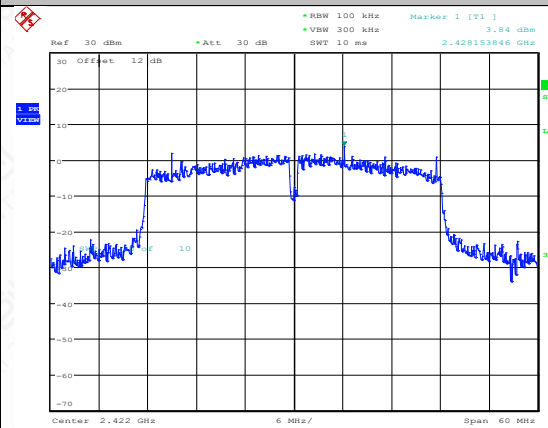


Date: 26.DEC.2024 15:53:35

11N40MIMO-Ant1-2422-30~1000-PASS

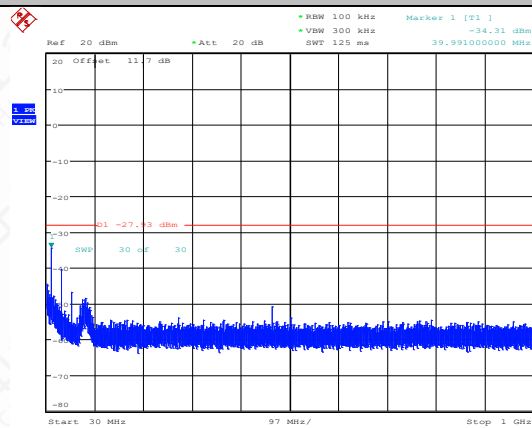

Date: 26.DEC.2024 15:36:18

11N40MIMO-Ant2-2422-30~1000-PASS

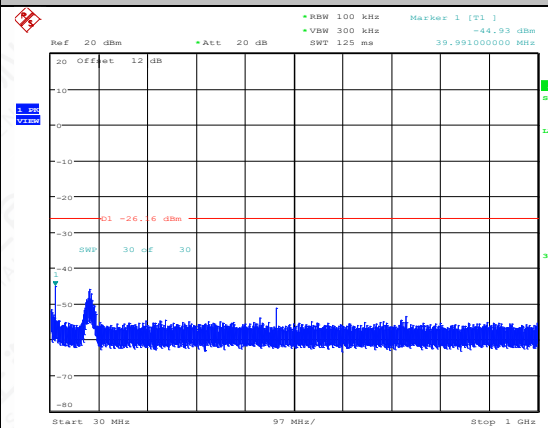

Date: 26.DEC.2024 15:53:55