



27/06/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

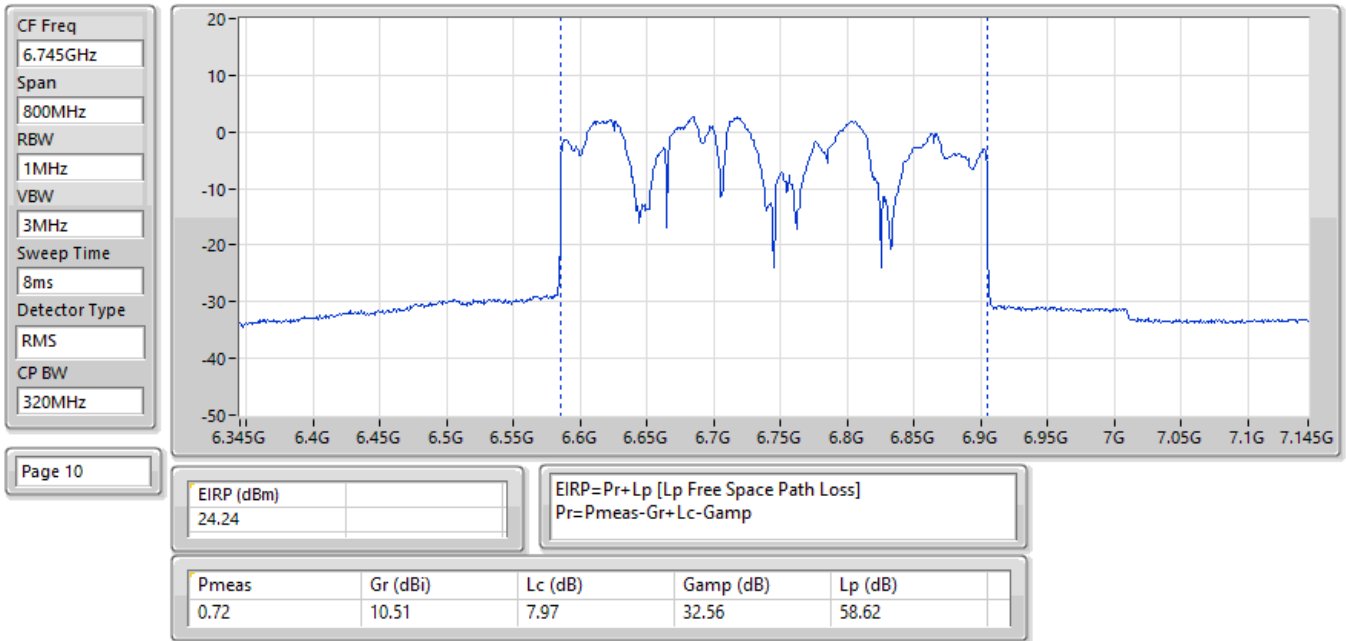

27/06/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

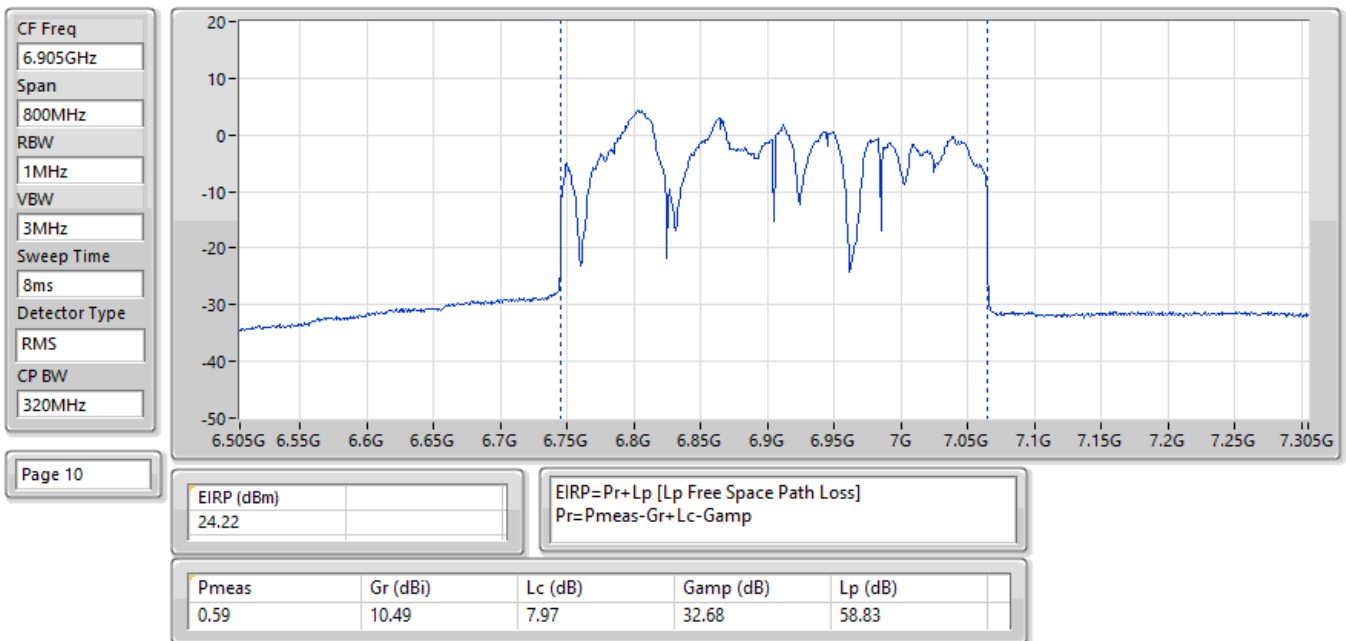

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	0.60	4.82
802.11ax HEW40_Nss1,(MCS0)_1TX	0.75	4.97
802.11ax HEW80_Nss1,(MCS0)_1TX	0.71	4.93
802.11ax HEW160_Nss1,(MCS0)_1TX	-1.00	3.22
6.425-6.525GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	0.81	4.97
802.11ax HEW40_Nss1,(MCS0)_1TX	0.80	4.96
802.11ax HEW80_Nss1,(MCS0)_1TX	0.81	4.97
802.11ax HEW160_Nss1,(MCS0)_1TX	-1.71	2.45
6.525-6.875GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	0.18	4.96
802.11ax HEW40_Nss1,(MCS0)_1TX	0.17	4.95
802.11ax HEW80_Nss1,(MCS0)_1TX	0.20	4.98
802.11ax HEW160_Nss1,(MCS0)_1TX	-1.70	3.08
6.875-7.125GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	-0.02	4.87
802.11ax HEW40_Nss1,(MCS0)_1TX	0.08	4.97
802.11ax HEW80_Nss1,(MCS0)_1TX	-0.06	4.83
802.11ax HEW160_Nss1,(MCS0)_1TX	-3.81	1.08

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5955MHz	Pass	4.22	0.58	0.58	Inf	4.80	5.00
6195MHz	Pass	4.22	0.59	0.59	Inf	4.81	5.00
6415MHz	Pass	4.22	0.60	0.60	Inf	4.82	5.00
6435MHz	Pass	4.16	0.78	0.78	Inf	4.94	5.00
6475MHz	Pass	4.16	0.81	0.81	Inf	4.97	5.00
6515MHz	Pass	4.16	0.70	0.70	Inf	4.86	5.00
6535MHz	Pass	4.78	0.18	0.18	Inf	4.96	5.00
6695MHz	Pass	4.78	0.16	0.16	Inf	4.94	5.00
6875MHz	Pass	4.78	0.12	0.12	Inf	4.90	5.00
6895MHz	Pass	4.89	-0.02	-0.02	Inf	4.87	5.00
6995MHz	Pass	4.89	-0.03	-0.03	Inf	4.86	5.00
7095MHz	Pass	4.89	-0.05	-0.05	Inf	4.84	5.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5965MHz	Pass	4.22	0.73	0.73	Inf	4.95	5.00
6205MHz	Pass	4.22	0.65	0.65	Inf	4.87	5.00
6405MHz	Pass	4.22	0.75	0.75	Inf	4.97	5.00
6445MHz	Pass	4.16	0.74	0.74	Inf	4.90	5.00
6485MHz	Pass	4.16	0.68	0.68	Inf	4.84	5.00
6525MHz	Pass	4.16	0.80	0.80	Inf	4.96	5.00
6565MHz	Pass	4.78	0.14	0.14	Inf	4.92	5.00
6685MHz	Pass	4.78	0.13	0.13	Inf	4.91	5.00
6885MHz	Pass	4.78	0.17	0.17	Inf	4.95	5.00
6925MHz	Pass	4.89	-0.00	0.00	Inf	4.89	5.00
7005MHz	Pass	4.89	0.08	0.08	Inf	4.97	5.00
7085MHz	Pass	4.89	-0.02	-0.02	Inf	4.87	5.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5985MHz	Pass	4.22	-0.17	-0.17	Inf	4.05	5.00
6225MHz	Pass	4.22	0.71	0.71	Inf	4.93	5.00
6385MHz	Pass	4.22	0.63	0.63	Inf	4.85	5.00
6465MHz	Pass	4.16	0.71	0.71	Inf	4.87	5.00
6545MHz	Pass	4.16	0.81	0.81	Inf	4.97	5.00
6625MHz	Pass	4.78	0.08	0.08	Inf	4.86	5.00
6705MHz	Pass	4.78	0.20	0.20	Inf	4.98	5.00
6785MHz	Pass	4.78	-0.00	0.00	Inf	4.78	5.00
6865MHz	Pass	4.78	0.05	0.05	Inf	4.83	5.00
6945MHz	Pass	4.89	-0.09	-0.09	Inf	4.80	5.00
7025MHz	Pass	4.89	-0.06	-0.06	Inf	4.83	5.00
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
6025MHz	Pass	4.22	-2.74	-2.74	Inf	1.48	5.00
6185MHz	Pass	4.22	-1.00	-1.00	Inf	3.22	5.00
6345MHz	Pass	4.22	-1.17	-1.17	Inf	3.05	5.00
6505MHz	Pass	4.16	-1.71	-1.71	Inf	2.45	5.00
6665MHz	Pass	4.78	-1.70	-1.70	Inf	3.08	5.00
6825MHz	Pass	4.78	-2.28	-2.28	Inf	2.50	5.00
6985MHz	Pass	4.89	-3.81	-3.81	Inf	1.08	5.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5955MHz

02/07/2025

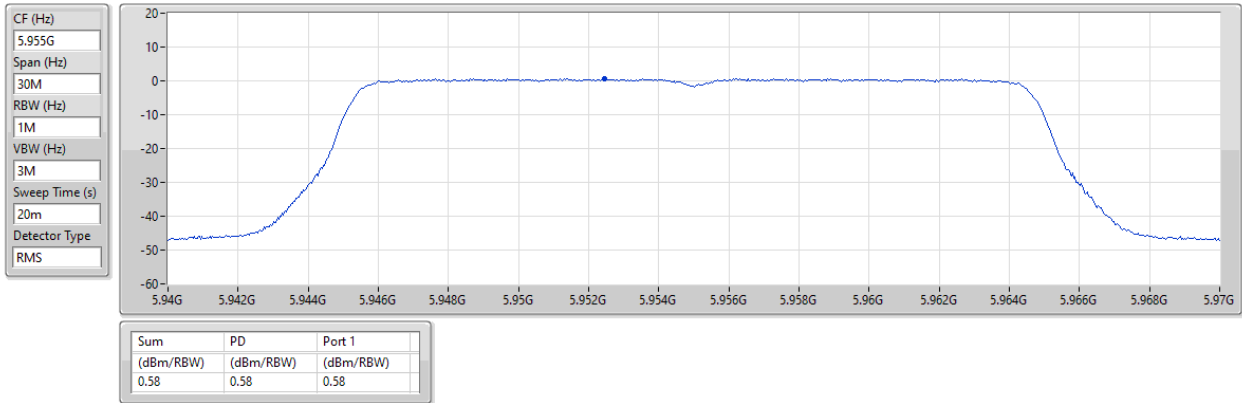


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6195MHz

02/07/2025

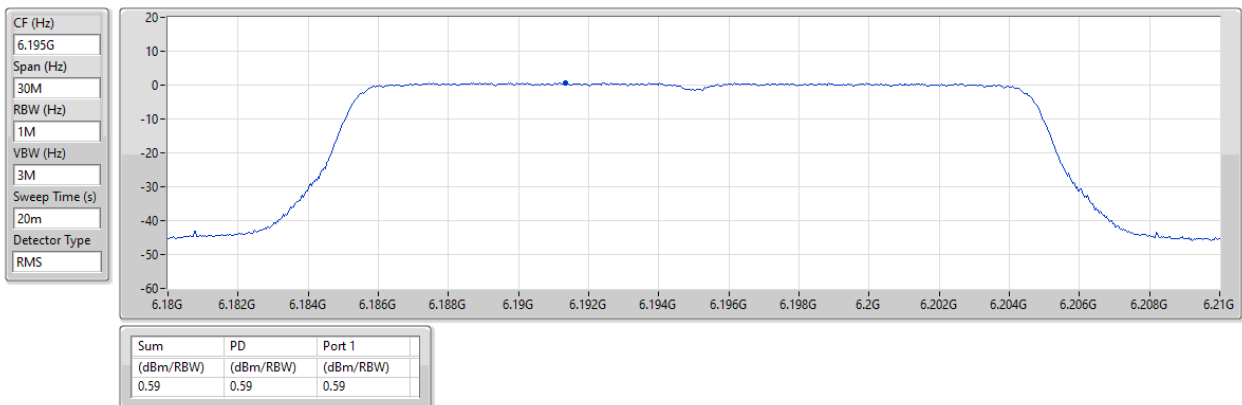

5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6415MHz

02/07/2025

CF (Hz)
6.415G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

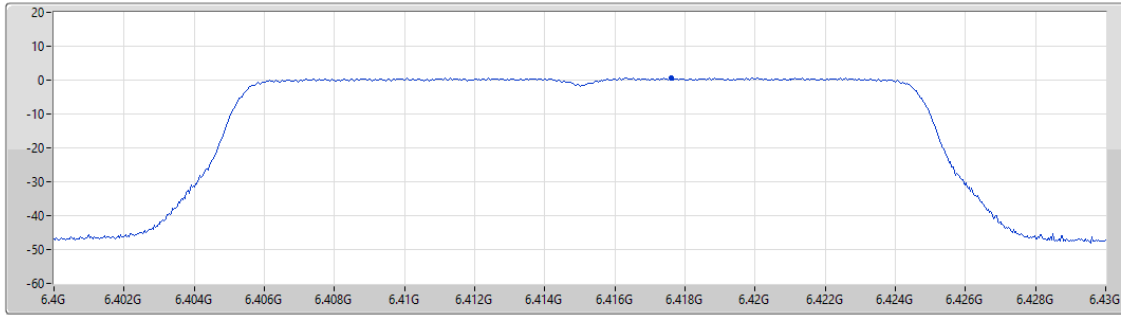

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.60	0.60	0.60

6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6435MHz

02/07/2025

CF (Hz)
6.435G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

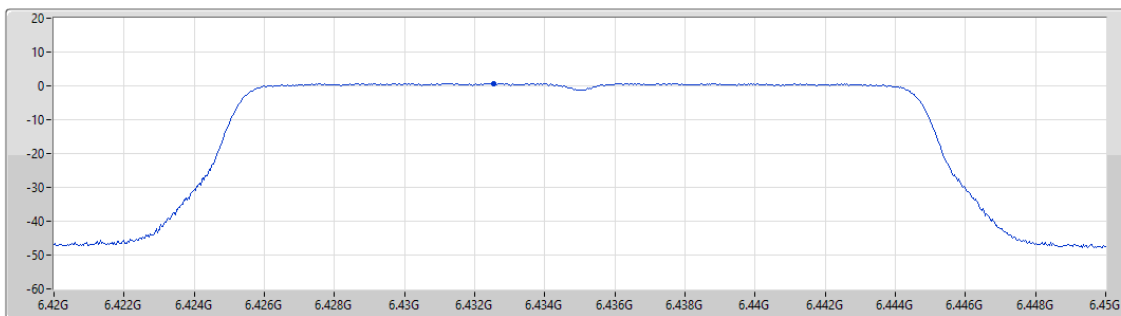

Port 1


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.78	0.78	0.78

6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6475MHz

02/07/2025

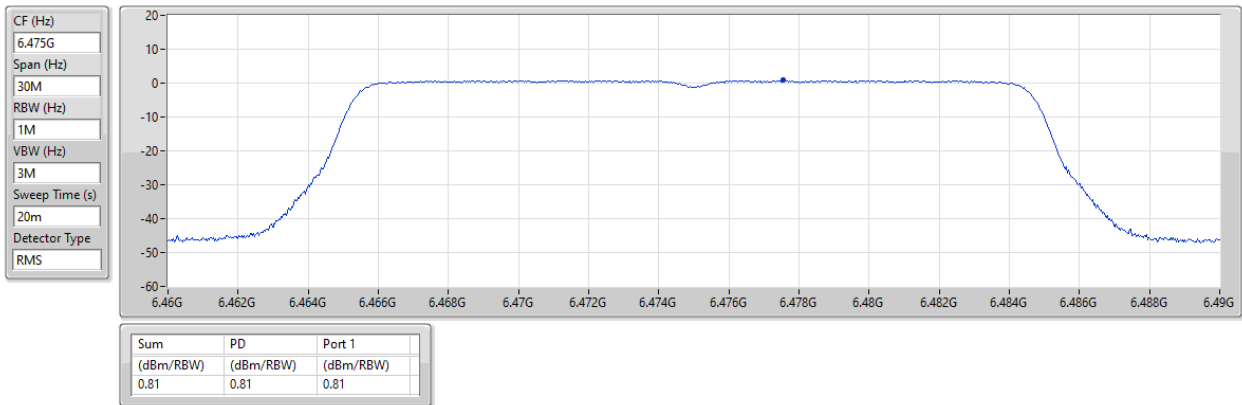


6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6515MHz

02/07/2025

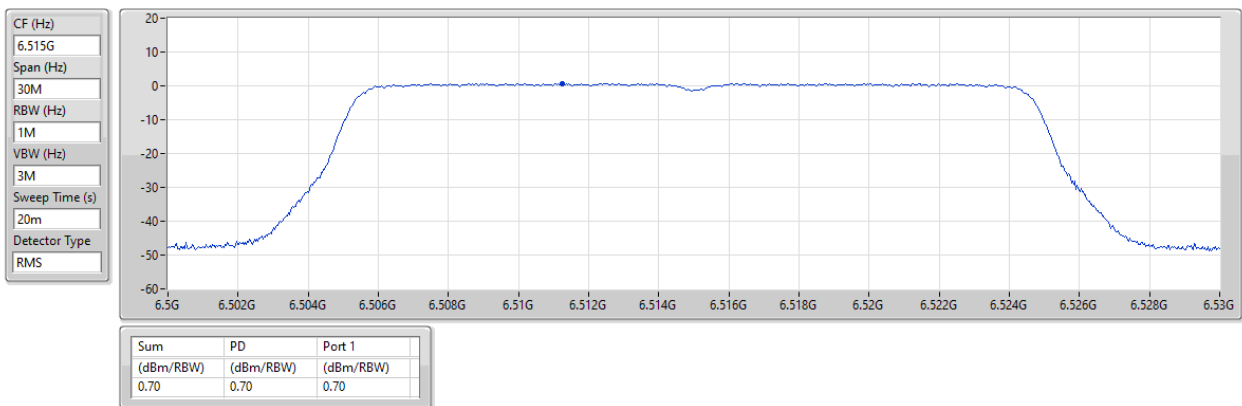

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6535MHz

02/07/2025

CF (Hz)
6.535G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

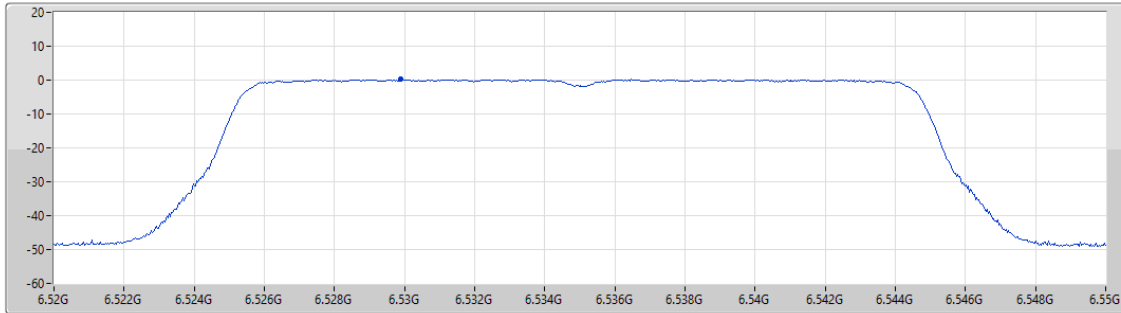

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.18	0.18	0.18

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6695MHz

02/07/2025

CF (Hz)
6.695G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

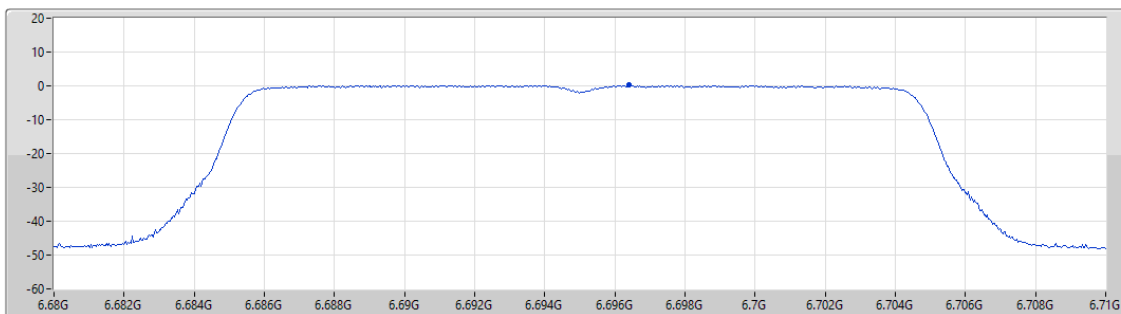

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.16	0.16	0.16

6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6875MHz

02/07/2025

CF (Hz)
6.875G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

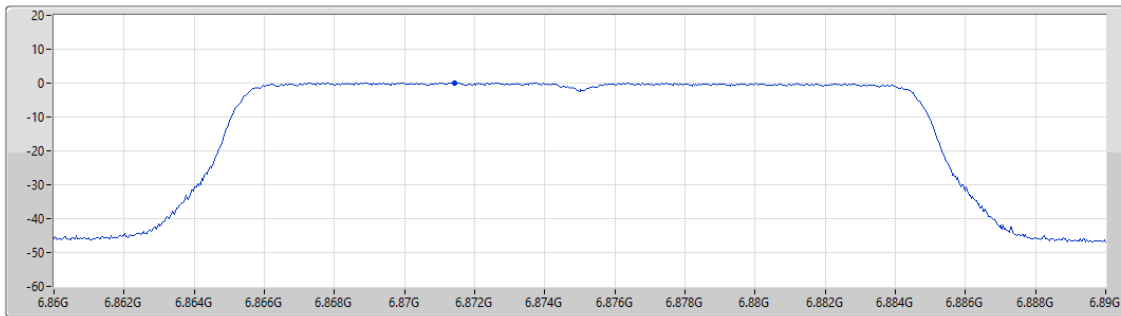

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.12	0.12	0.12

6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6895MHz

02/07/2025

CF (Hz)
6.895G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

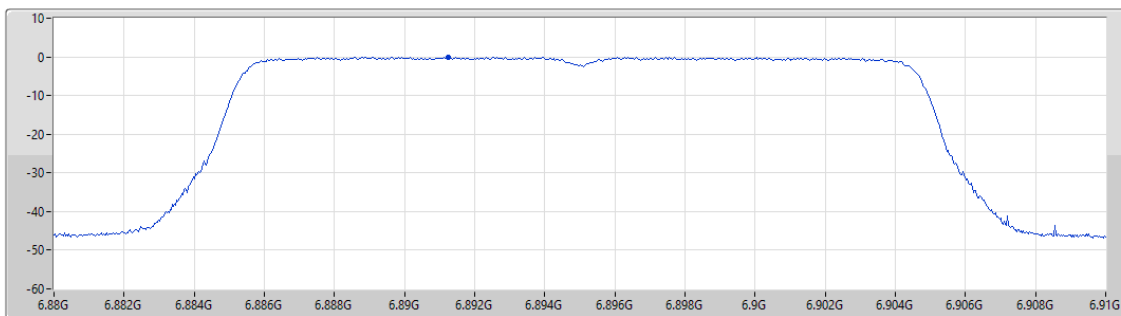

Port 1


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.02	-0.02	-0.02

6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6995MHz

02/07/2025

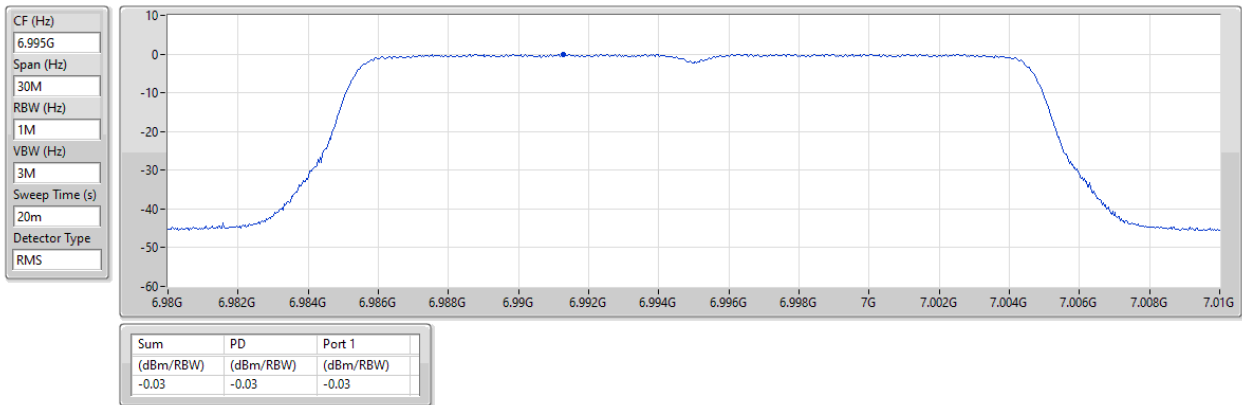


6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

7095MHz

02/07/2025

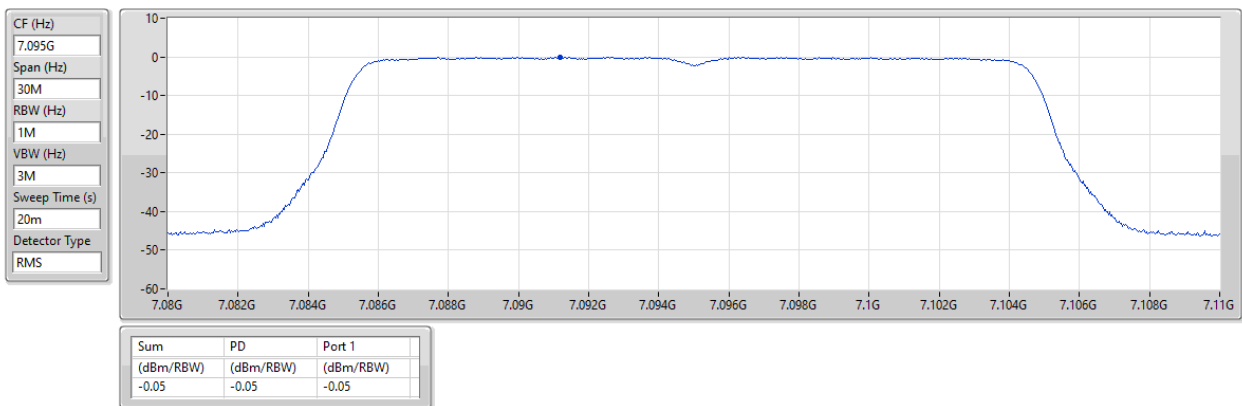


5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

5965MHz

02/07/2025

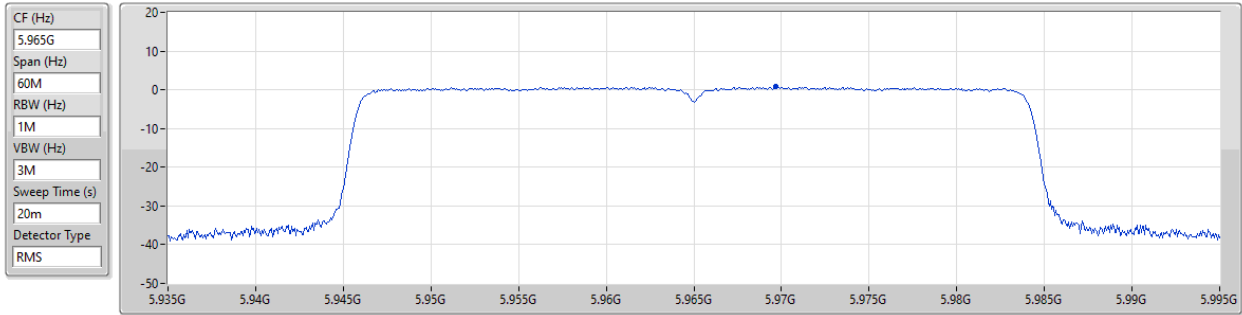


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.73	0.73	0.73

5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

6205MHz

02/07/2025

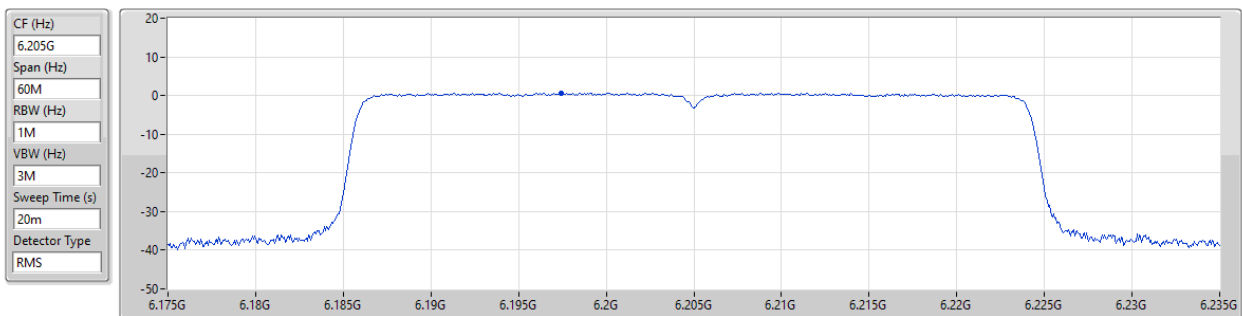

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.65	0.65	0.65

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6405MHz

02/07/2025

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

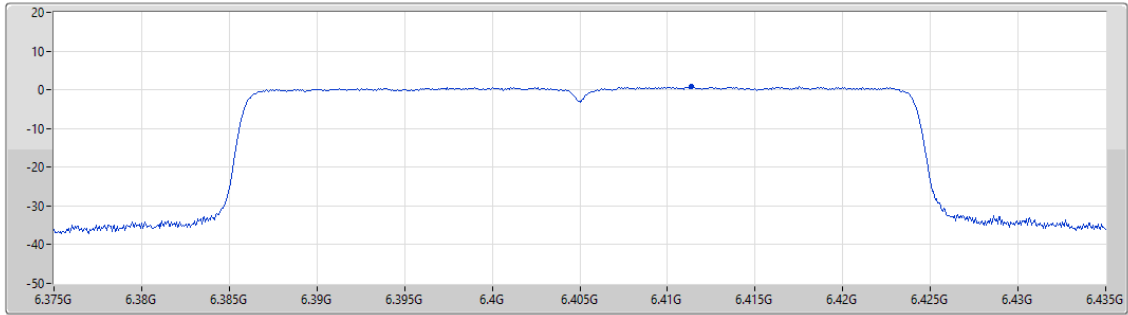

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6445MHz

02/07/2025

CF (Hz)
6.445G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

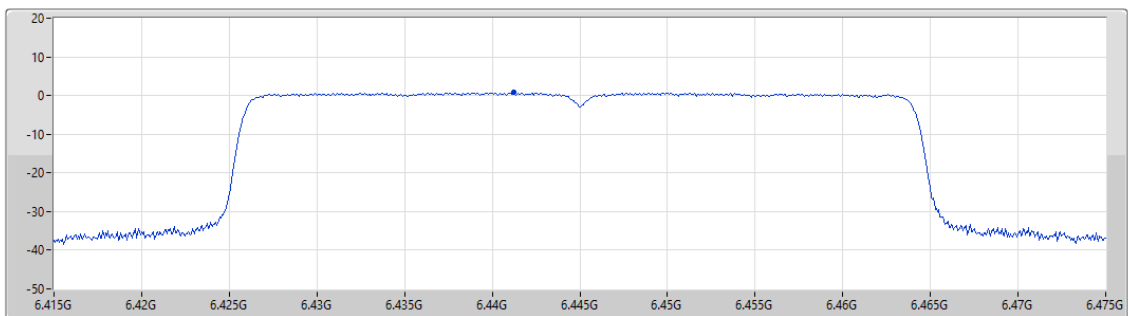

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6485MHz

02/07/2025

CF (Hz)
6.485G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

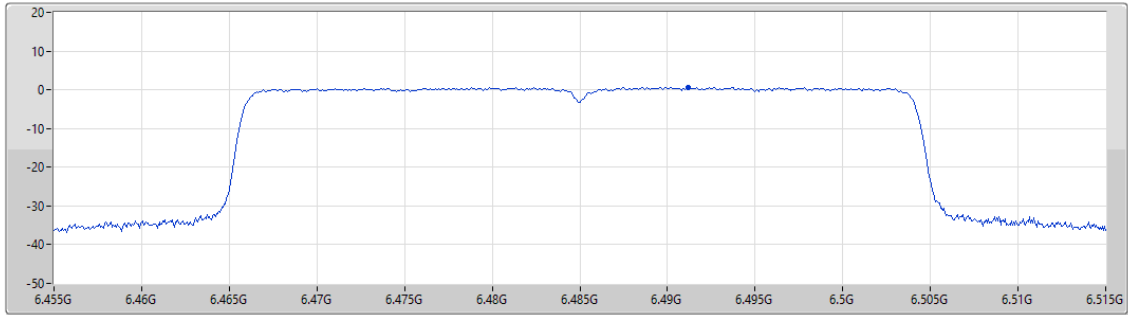

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.68	0.68	0.68

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6525MHz

02/07/2025

CF (Hz)
6.525G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

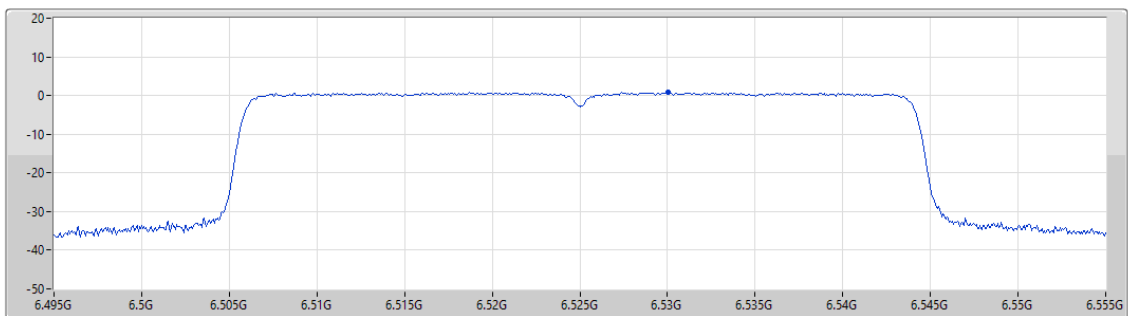

Port 1


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.80	0.80	0.80

6.525-6.875GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

6565MHz

02/07/2025

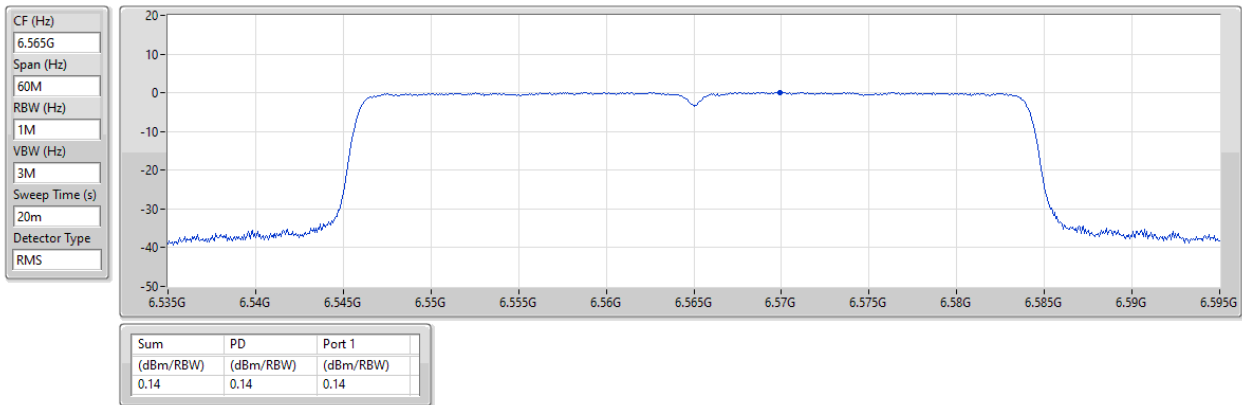


6.525-6.875GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

6685MHz

02/07/2025

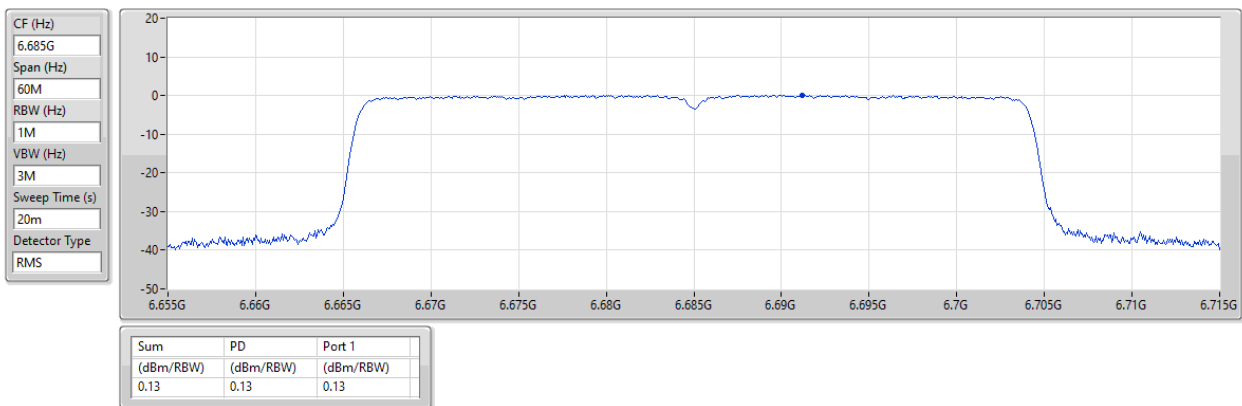


6.525-6.875GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

6885MHz

02/07/2025

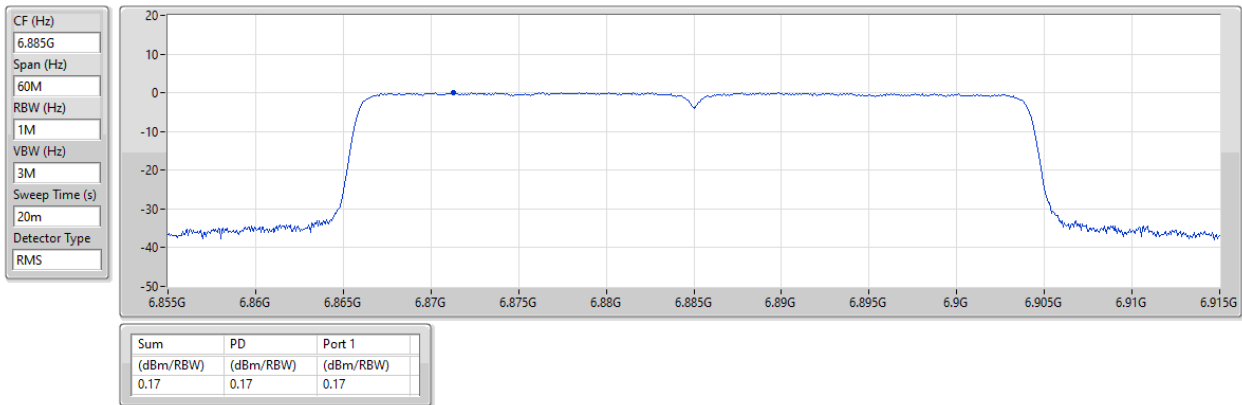


6.875-7.125GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

6925MHz

02/07/2025

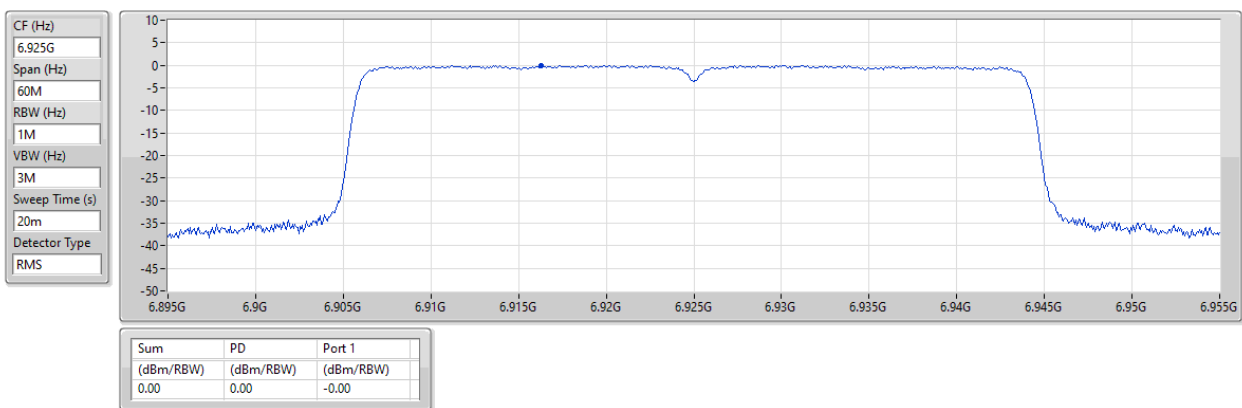


6.875-7.125GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

7005MHz

02/07/2025

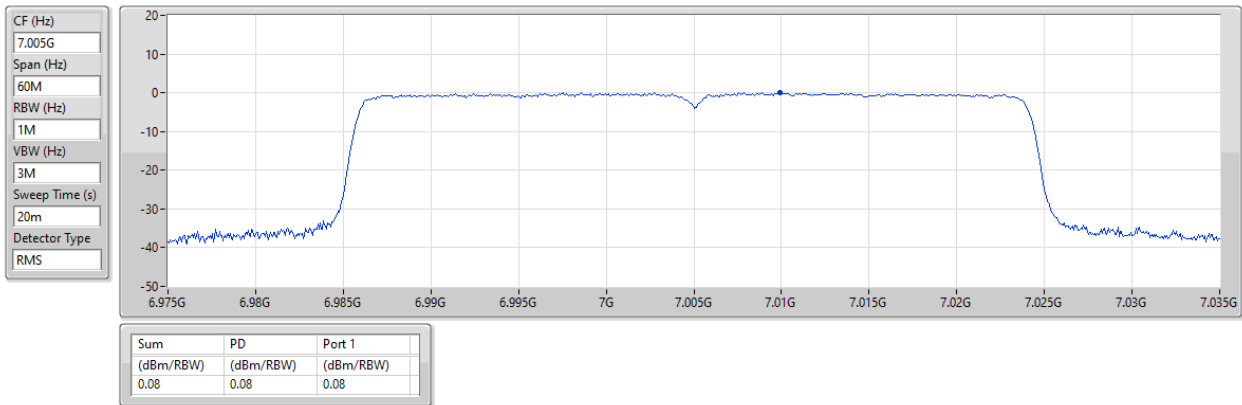


6.875-7.125GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

7085MHz

02/07/2025

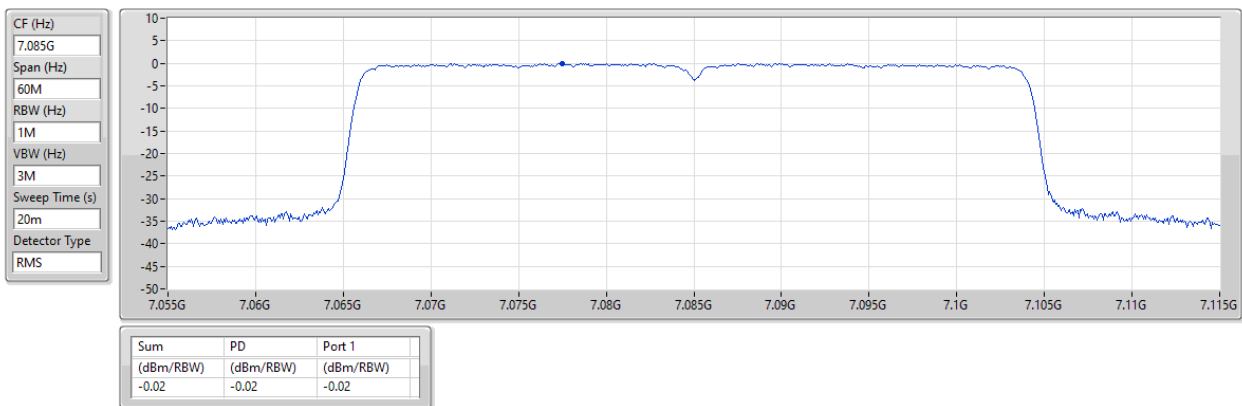


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5985MHz

02/07/2025

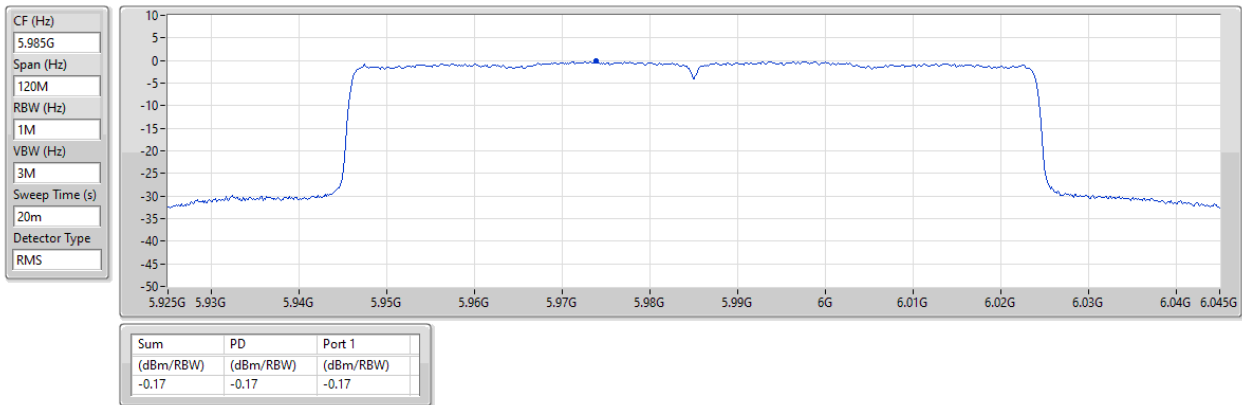


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6225MHz

02/07/2025

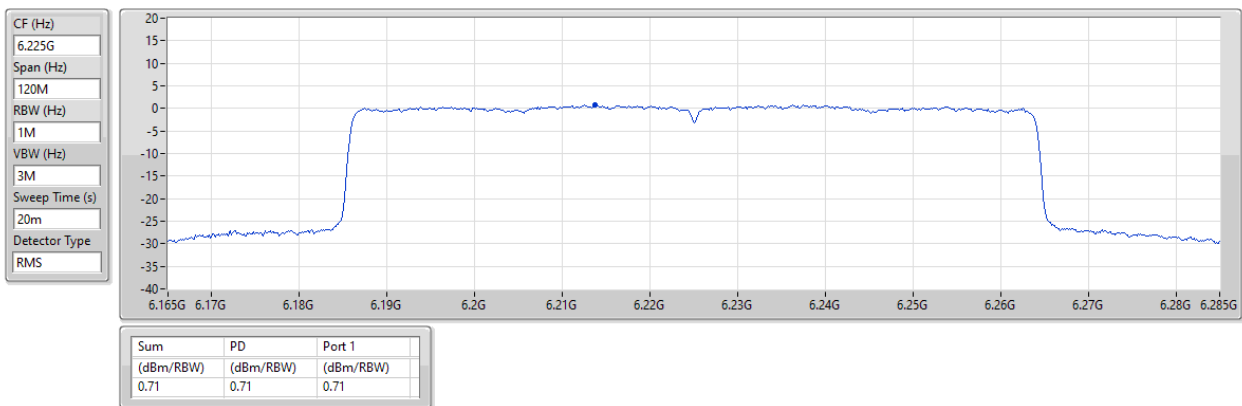


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6385MHz

02/07/2025

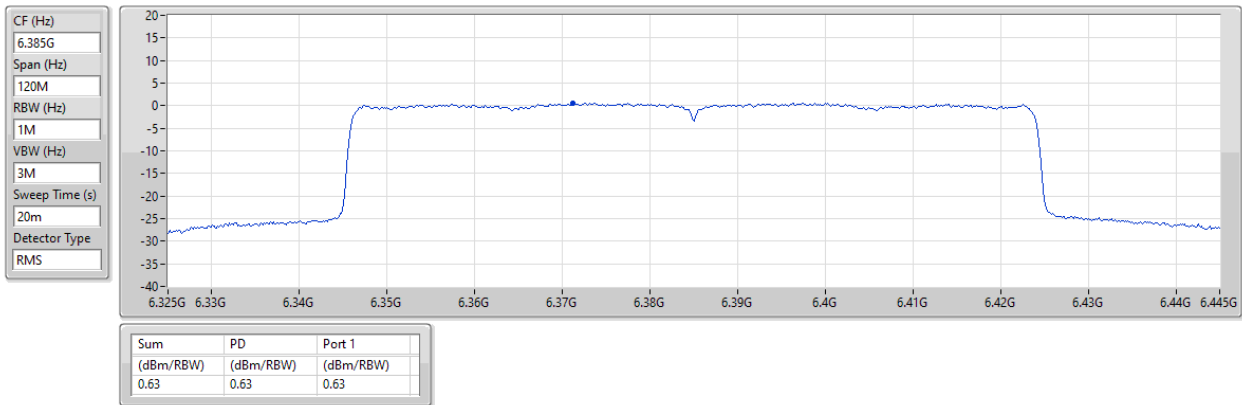


6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6465MHz

02/07/2025

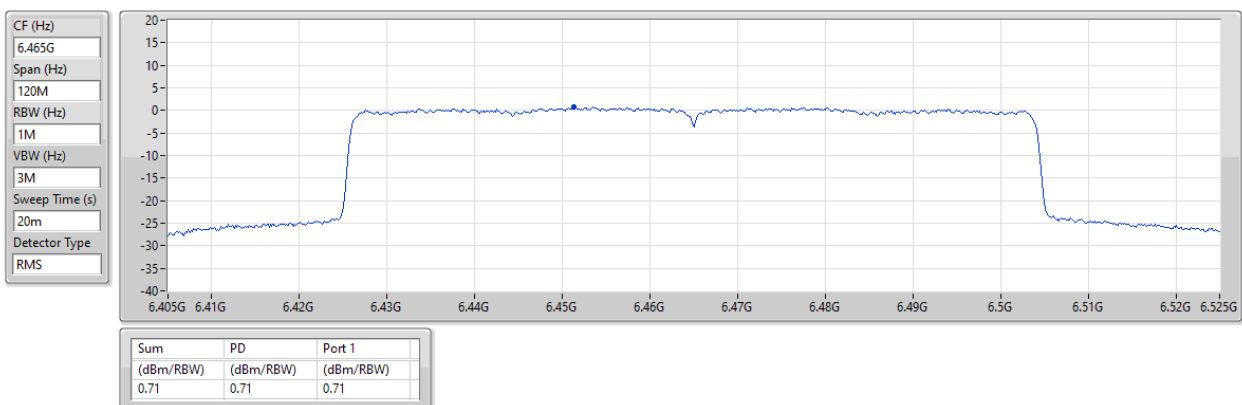


6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6545MHz

02/07/2025

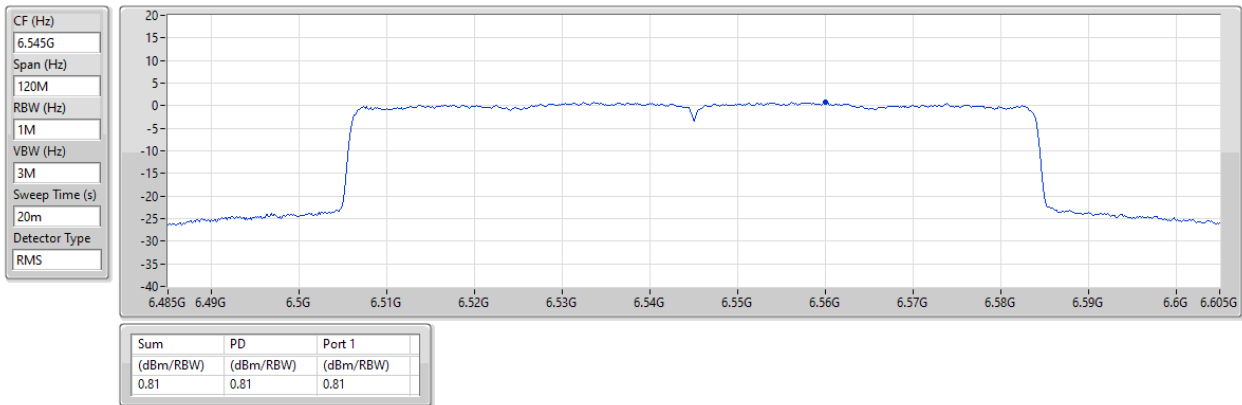


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6625MHz

02/07/2025

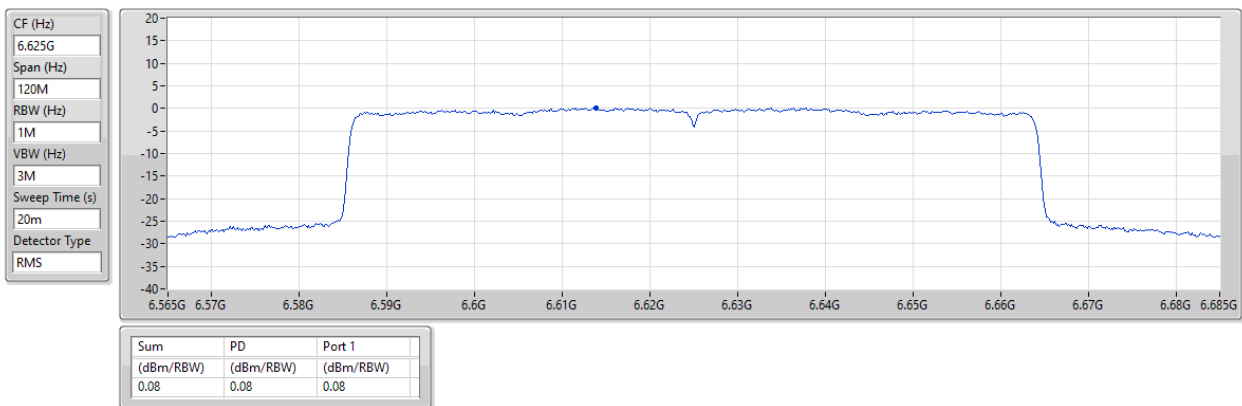


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6705MHz

02/07/2025

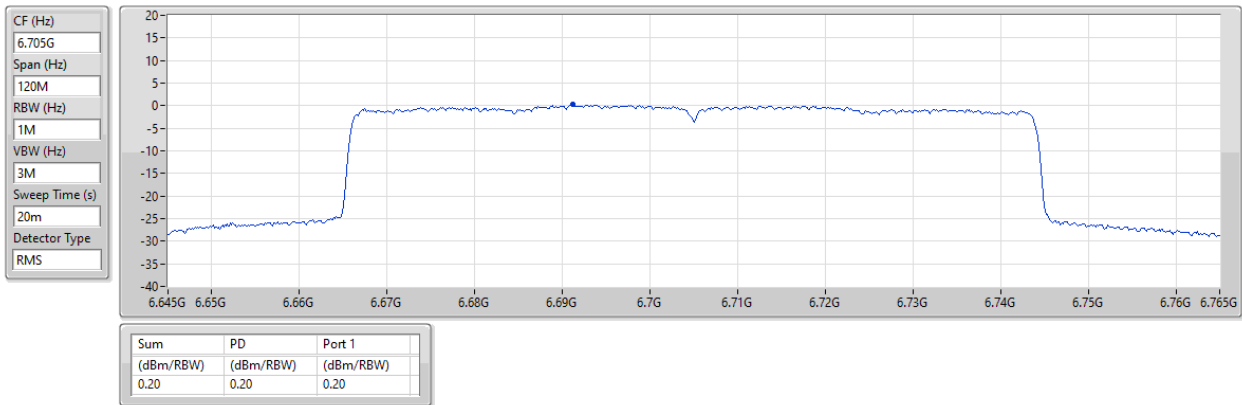


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6785MHz

02/07/2025

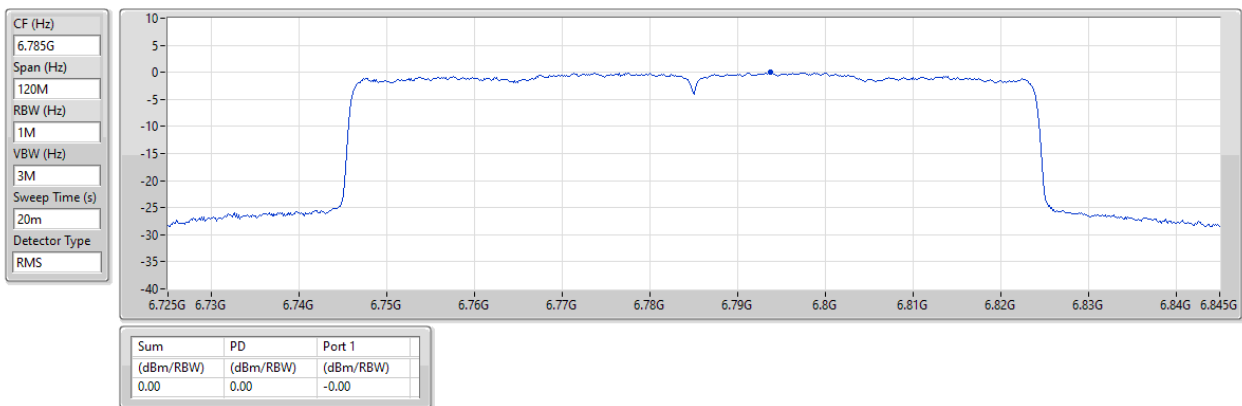

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6865MHz

02/07/2025

CF (Hz)
6.865G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

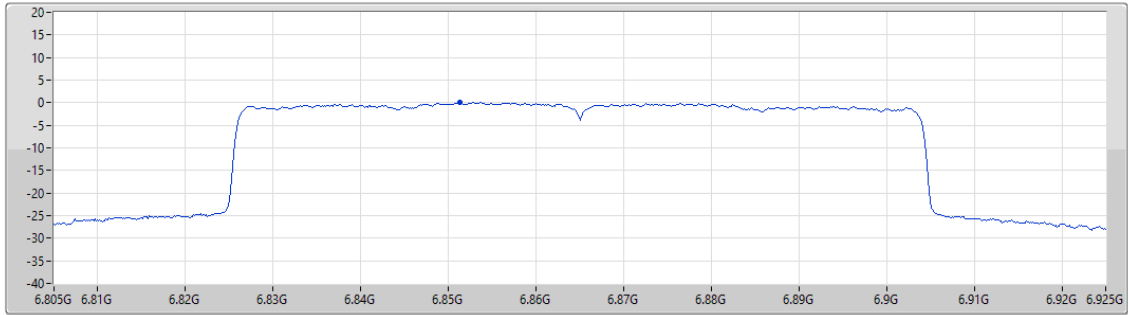

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.05	0.05	0.05

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6945MHz

02/07/2025

CF (Hz)
6.945G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

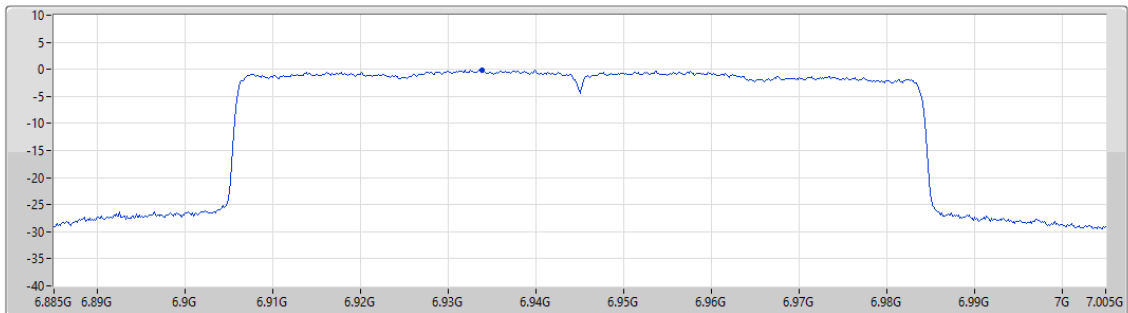


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.09	-0.09	-0.09

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

7025MHz

02/07/2025

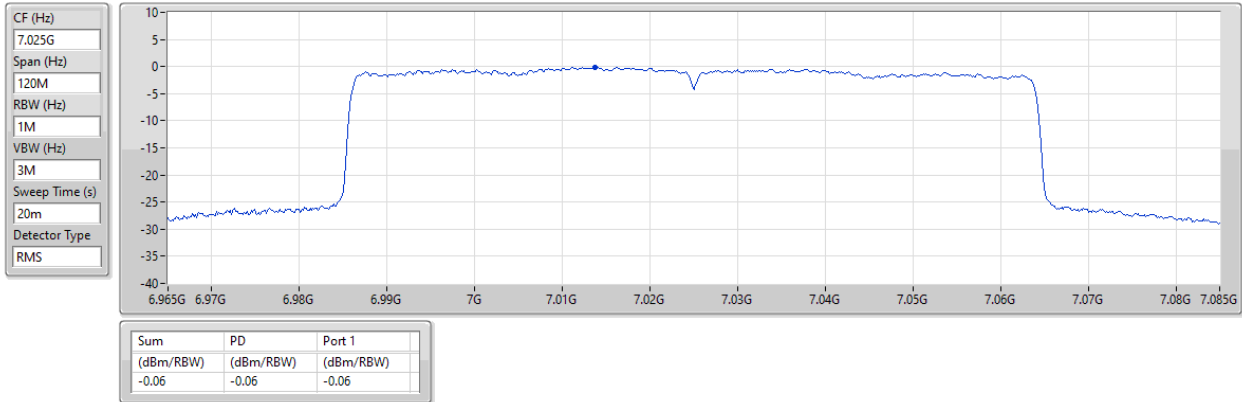


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6025MHz

02/07/2025

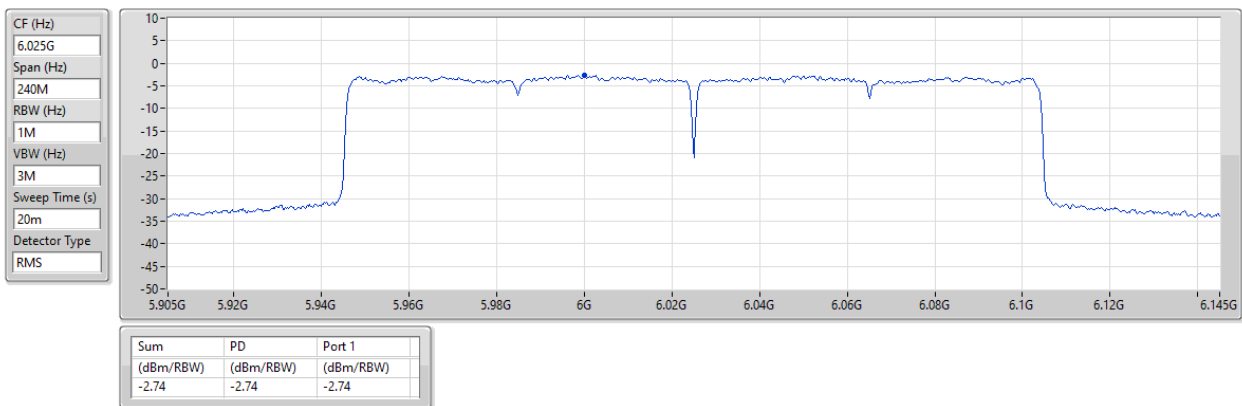

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6185MHz

02/07/2025

CF (Hz)
6.185G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

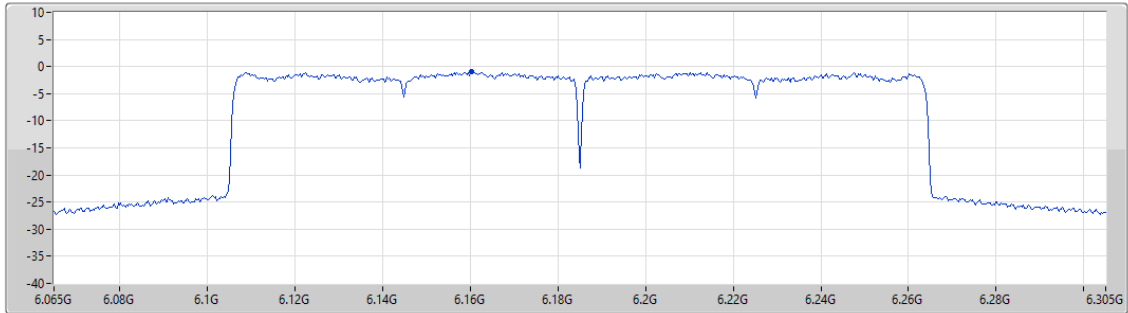

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.00	-1.00	-1.00

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6345MHz

02/07/2025

CF (Hz)
6.345G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

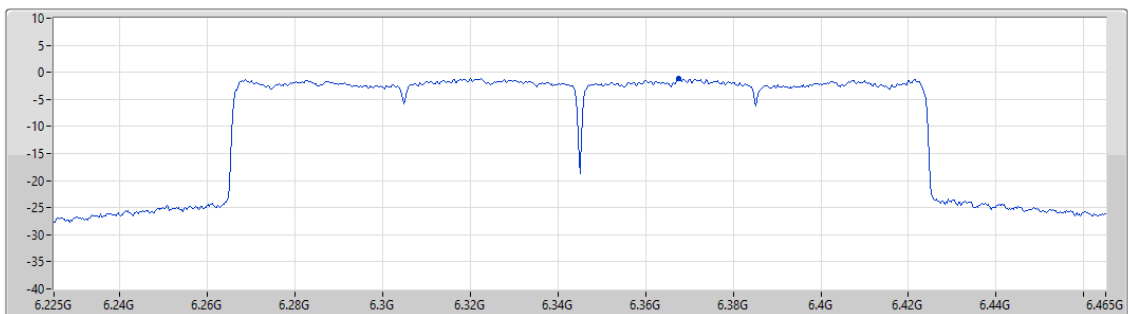

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.17	-1.17	-1.17

6.425-6.525GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6505MHz

02/07/2025

CF (Hz)
6.505G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

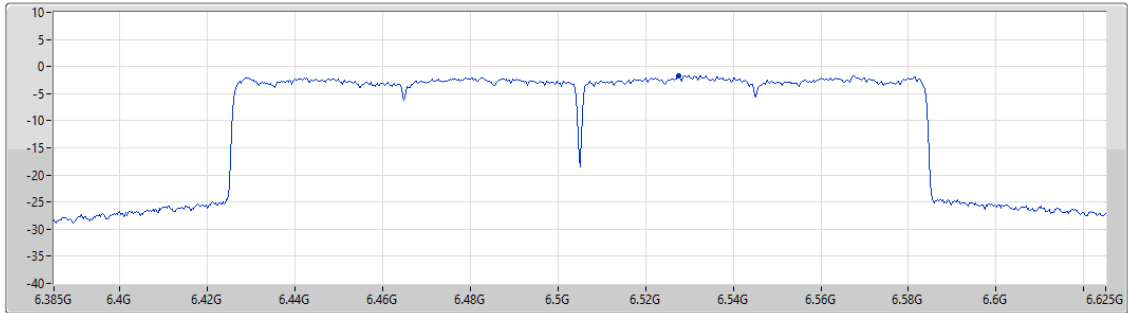

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.71	-1.71	-1.71

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6665MHz

02/07/2025

CF (Hz)
6.665G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

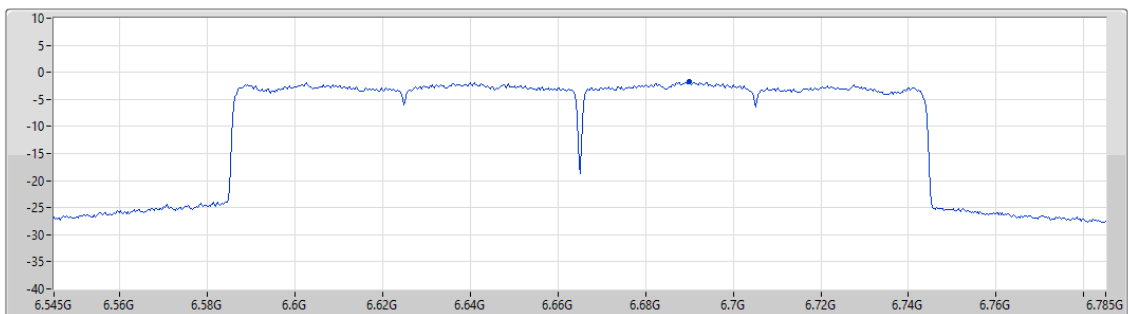


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.70	-1.70	-1.70

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6825MHz

02/07/2025

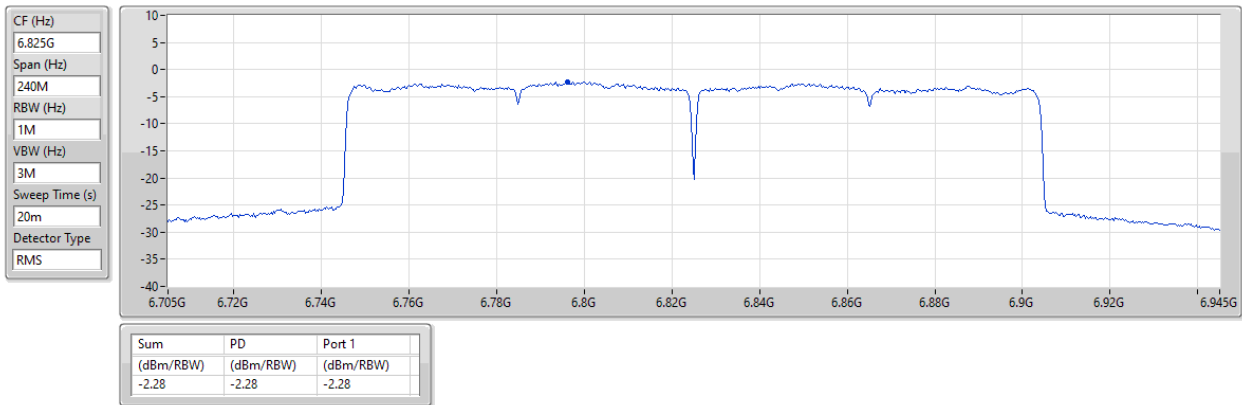


6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6985MHz

02/07/2025

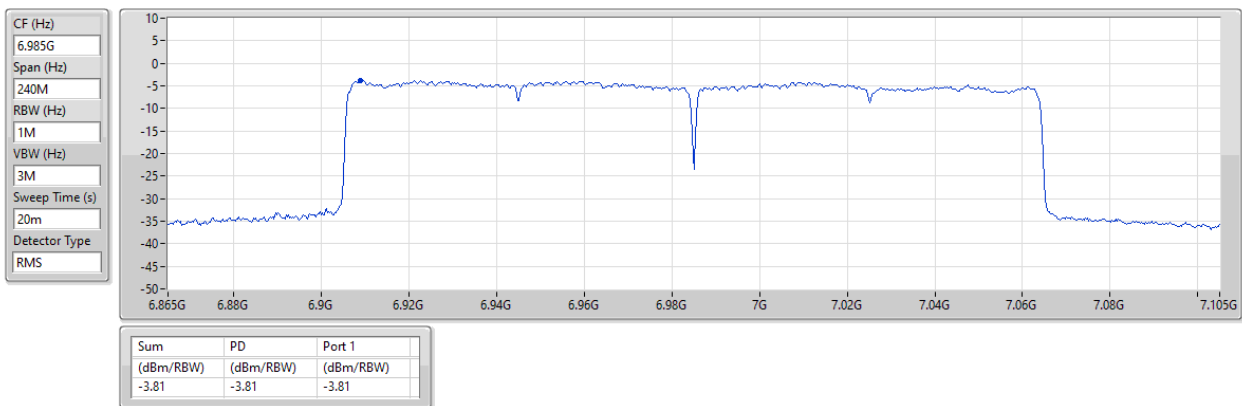

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	1.18	4.92
802.11ax HEW40_Nss1,(MCS0)_1TX	1.20	4.94
802.11ax HEW80_Nss1,(MCS0)_1TX	1.23	4.97
802.11ax HEW160_Nss1,(MCS0)_1TX	-0.95	2.79
6.425-6.525GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	1.53	4.95
802.11ax HEW40_Nss1,(MCS0)_1TX	1.55	4.97
802.11ax HEW80_Nss1,(MCS0)_1TX	1.04	4.46
802.11ax HEW160_Nss1,(MCS0)_1TX	-0.95	2.47
6.525-6.875GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	1.96	4.91
802.11ax HEW40_Nss1,(MCS0)_1TX	1.98	4.93
802.11ax HEW80_Nss1,(MCS0)_1TX	1.03	3.98
802.11ax HEW160_Nss1,(MCS0)_1TX	-0.75	2.20
6.875-7.125GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	1.39	4.96
802.11ax HEW40_Nss1,(MCS0)_1TX	1.36	4.93
802.11ax HEW80_Nss1,(MCS0)_1TX	-0.43	3.14
802.11ax HEW160_Nss1,(MCS0)_1TX	-3.09	0.48

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5955MHz	Pass	3.74	1.08	1.08	4.82	5.00
6195MHz	Pass	3.74	1.18	1.18	4.92	5.00
6415MHz	Pass	3.74	1.18	1.18	4.92	5.00
6435MHz	Pass	3.42	1.33	1.33	4.75	5.00
6475MHz	Pass	3.42	1.53	1.53	4.95	5.00
6515MHz	Pass	3.42	1.29	1.29	4.71	5.00
6535MHz	Pass	2.95	1.96	1.96	4.91	5.00
6695MHz	Pass	2.95	1.88	1.88	4.83	5.00
6875MHz	Pass	2.95	1.93	1.93	4.88	5.00
6895MHz	Pass	3.57	1.39	1.39	4.96	5.00
6995MHz	Pass	3.57	1.18	1.18	4.75	5.00
7095MHz	Pass	3.57	1.34	1.34	4.91	5.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5965MHz	Pass	3.74	1.17	1.17	4.91	5.00
6205MHz	Pass	3.74	1.08	1.08	4.82	5.00
6405MHz	Pass	3.74	1.20	1.20	4.94	5.00
6445MHz	Pass	3.42	1.47	1.47	4.89	5.00
6485MHz	Pass	3.42	1.53	1.53	4.95	5.00
6525MHz	Pass	3.42	1.55	1.55	4.97	5.00
6565MHz	Pass	2.95	1.86	1.86	4.81	5.00
6685MHz	Pass	2.95	1.98	1.98	4.93	5.00
6885MHz	Pass	2.95	1.92	1.92	4.87	5.00
6925MHz	Pass	3.57	1.36	1.36	4.93	5.00
7005MHz	Pass	3.57	1.19	1.19	4.76	5.00
7085MHz	Pass	3.57	1.31	1.31	4.88	5.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5985MHz	Pass	3.74	0.49	0.49	4.23	5.00
6225MHz	Pass	3.74	1.23	1.23	4.97	5.00
6385MHz	Pass	3.74	0.62	0.62	4.36	5.00
6465MHz	Pass	3.42	0.81	0.81	4.23	5.00
6545MHz	Pass	3.42	1.04	1.04	4.46	5.00
6625MHz	Pass	2.95	1.03	1.03	3.98	5.00
6705MHz	Pass	2.95	0.54	0.54	3.49	5.00
6785MHz	Pass	2.95	0.31	0.31	3.26	5.00
6865MHz	Pass	2.95	-0.20	-0.20	2.75	5.00
6945MHz	Pass	3.57	-0.43	-0.43	3.14	5.00
7025MHz	Pass	3.57	-1.10	-1.10	2.47	5.00
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-	-
6025MHz	Pass	3.74	-1.82	-1.82	1.92	5.00
6185MHz	Pass	3.74	-1.40	-1.40	2.34	5.00
6345MHz	Pass	3.74	-0.95	-0.95	2.79	5.00
6505MHz	Pass	3.42	-0.95	-0.95	2.47	5.00
6665MHz	Pass	2.95	-0.75	-0.75	2.20	5.00
6825MHz	Pass	2.95	-1.67	-1.67	1.28	5.00
6985MHz	Pass	3.57	-3.09	-3.09	0.48	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

5955MHz

16/07/2025

CF (Hz)
5.955G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

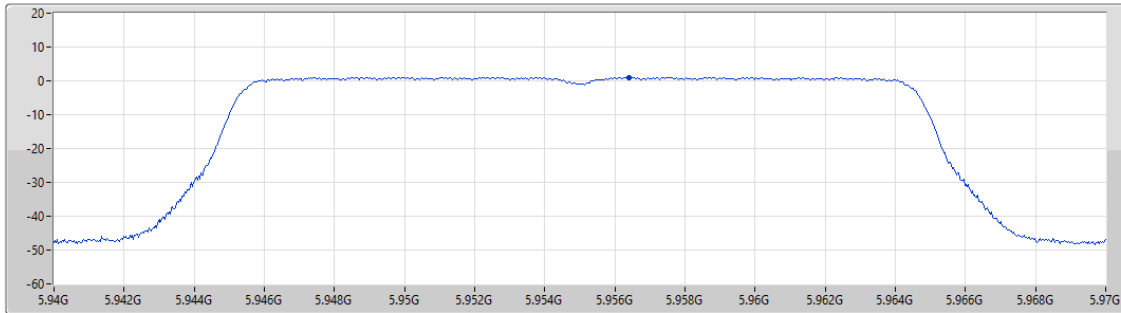

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.08	1.08	1.08


5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6195MHz

16/07/2025

CF (Hz)
6.195G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

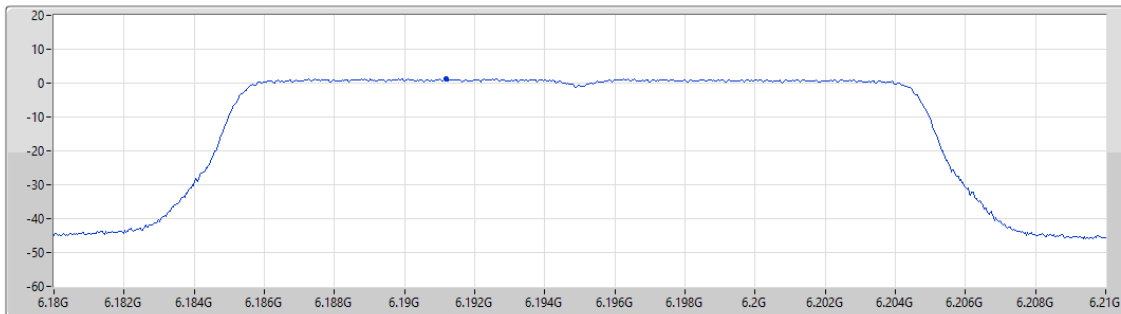

Port 1


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.18	1.18	1.18

5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6415MHz

16/07/2025

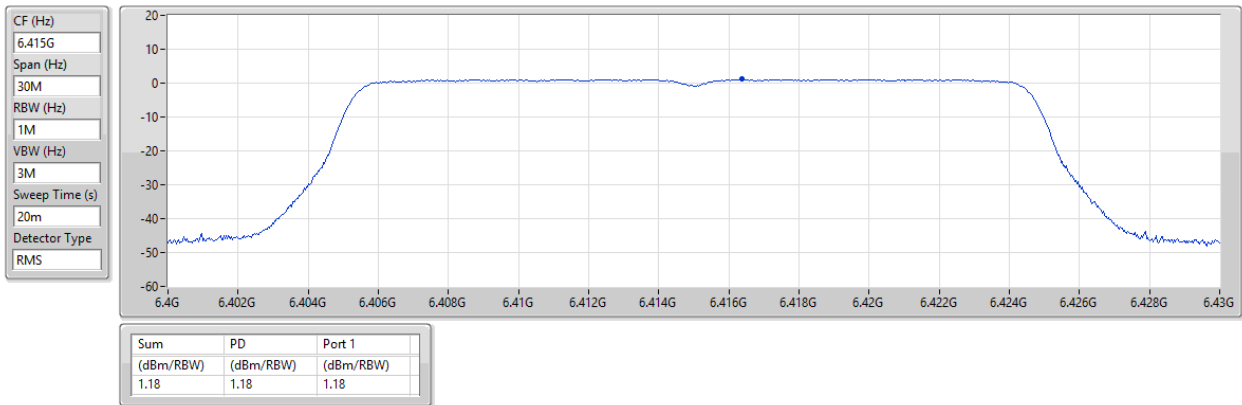


6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6435MHz

16/07/2025

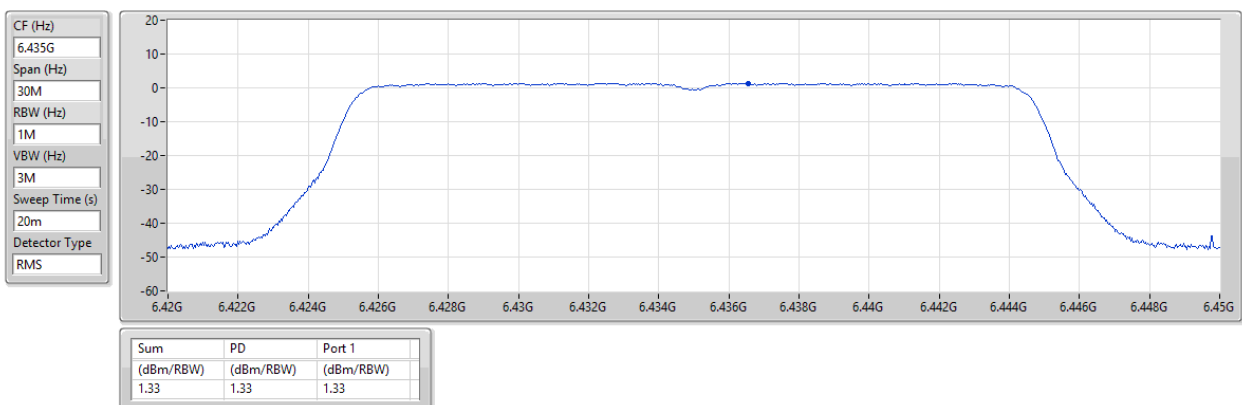


6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6475MHz

16/07/2025

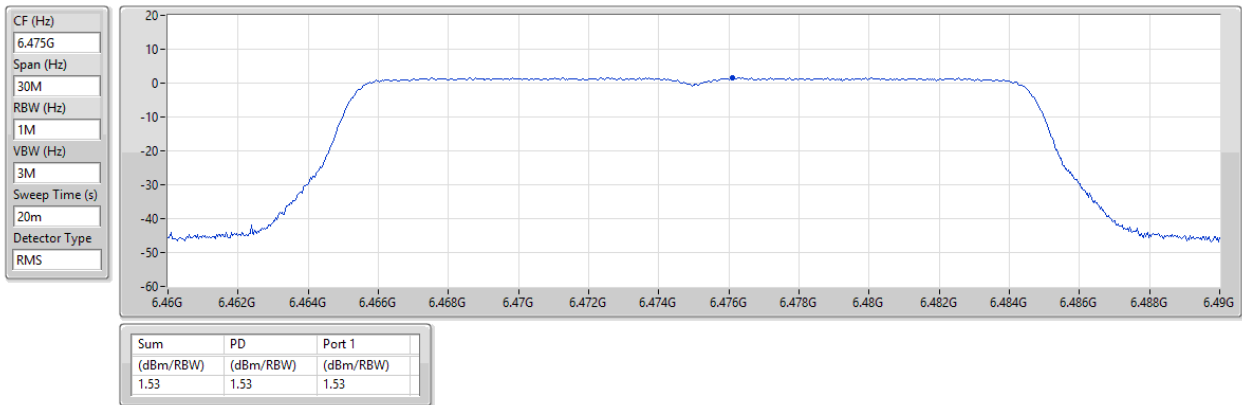


6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6515MHz

16/07/2025

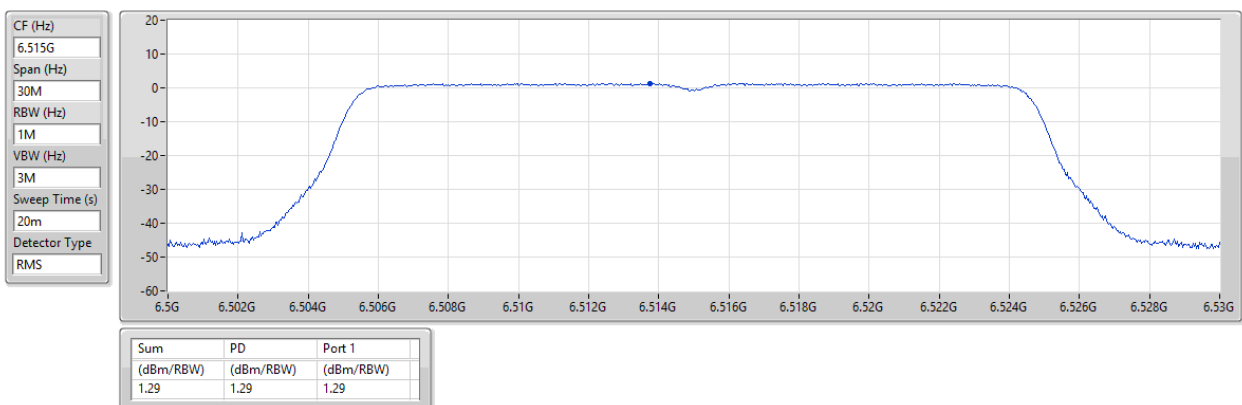


6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6535MHz

16/07/2025

CF (Hz)
6.535G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

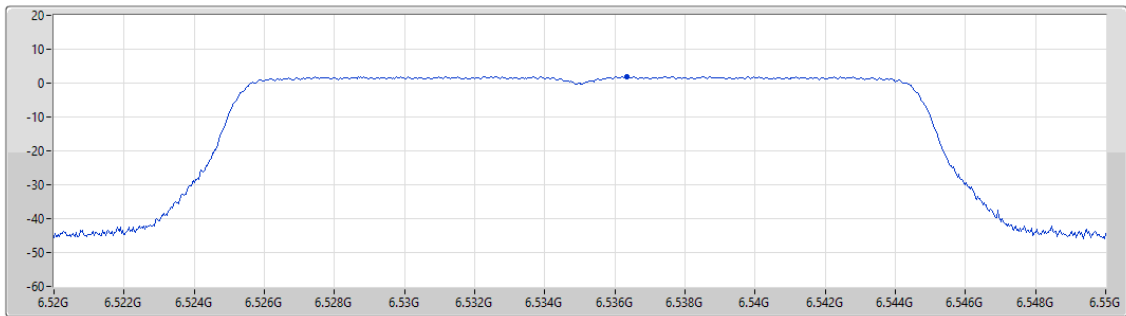

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.96	1.96	1.96


6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6695MHz

16/07/2025

CF (Hz)
6.695G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

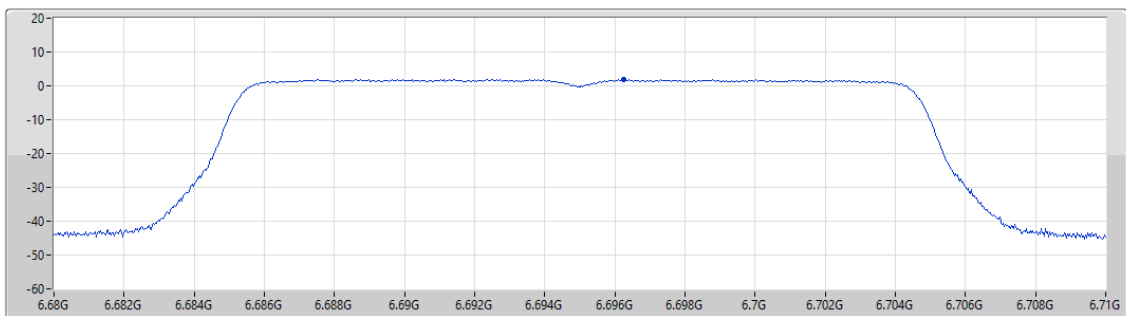


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.88	1.88	1.88

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6875MHz

16/07/2025

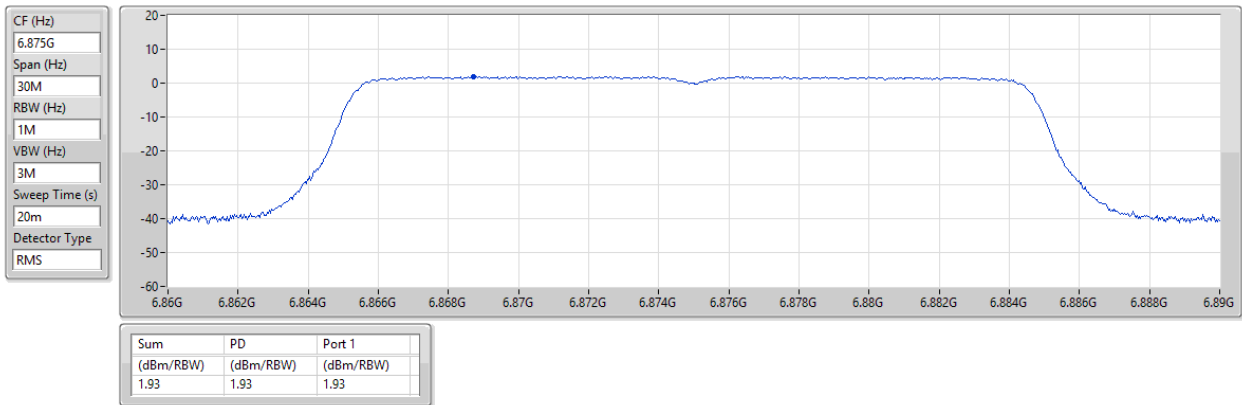


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

6895MHz

16/07/2025

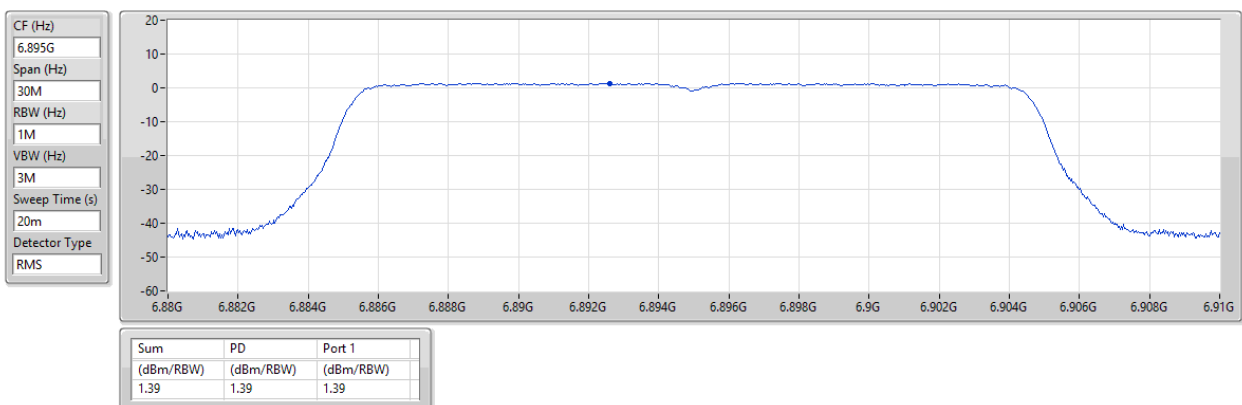


6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

6995MHz

16/07/2025

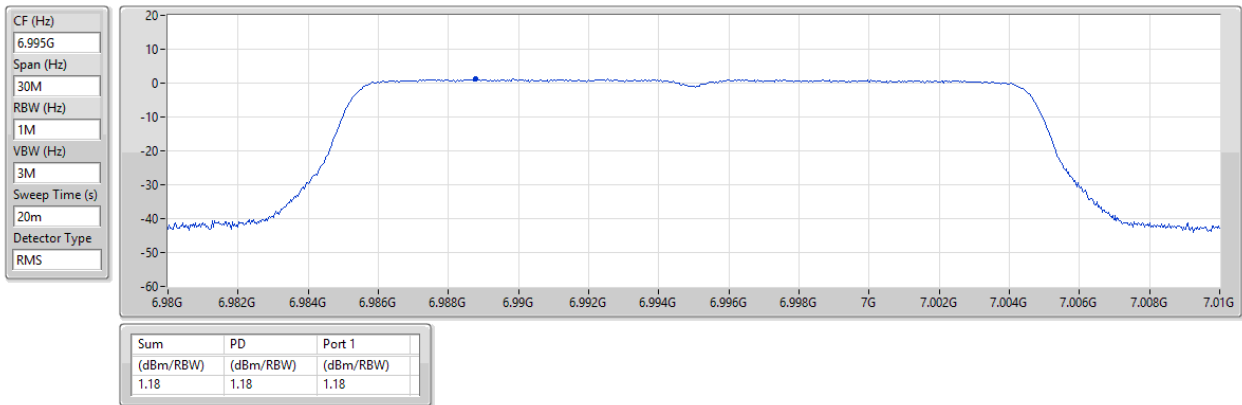


6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

7095MHz

16/07/2025

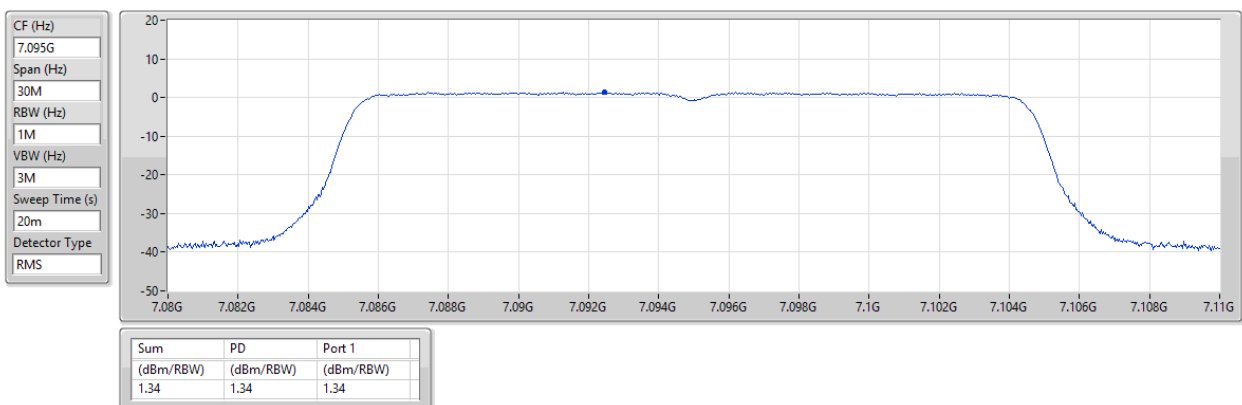

5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

5965MHz

16/07/2025

CF (Hz)
5.965G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

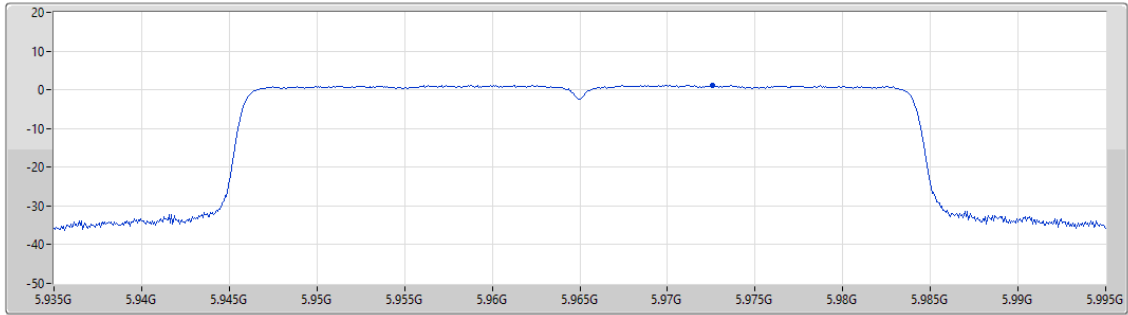

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.17	1.17	1.17

5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

6205MHz

16/07/2025

CF (Hz)
6.205G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

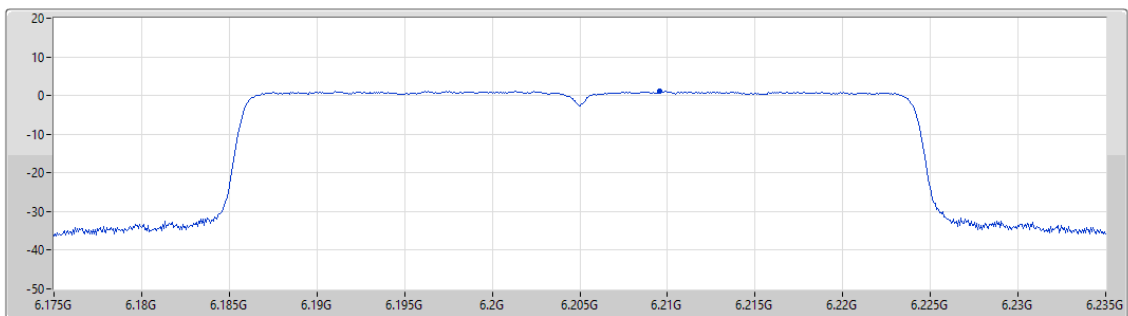

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.08	1.08	1.08

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6405MHz

16/07/2025

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

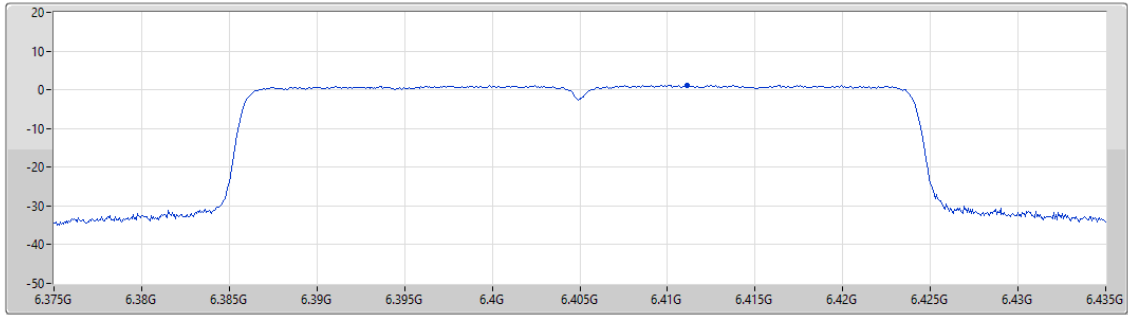

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.20	1.20	1.20

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6445MHz

16/07/2025

CF (Hz)
6.445G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

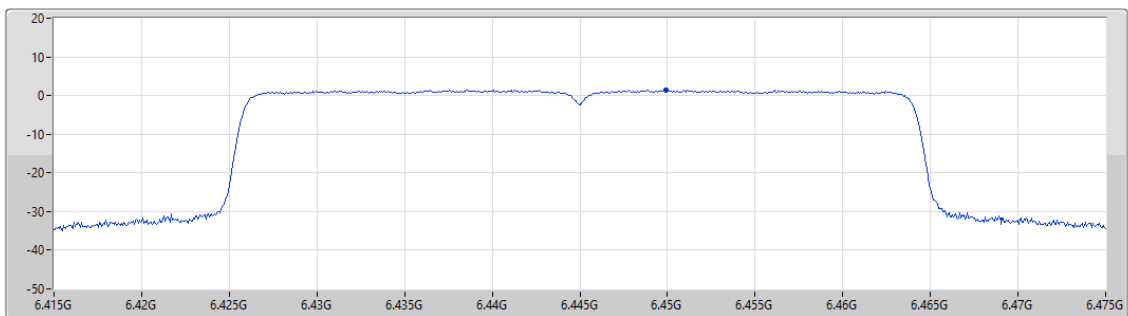

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.47	1.47	1.47

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6485MHz

16/07/2025

CF (Hz)
6.485G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

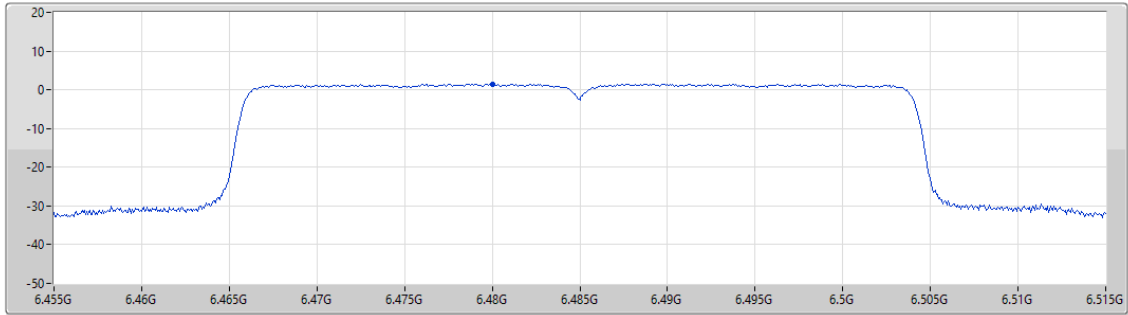

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.53	1.53	1.53

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6525MHz

16/07/2025

CF (Hz)
6.525G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

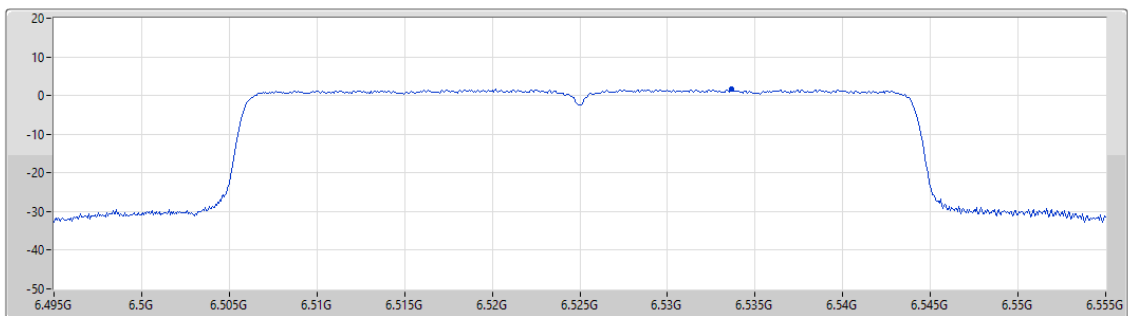


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.55	1.55	1.55

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6565MHz

16/07/2025

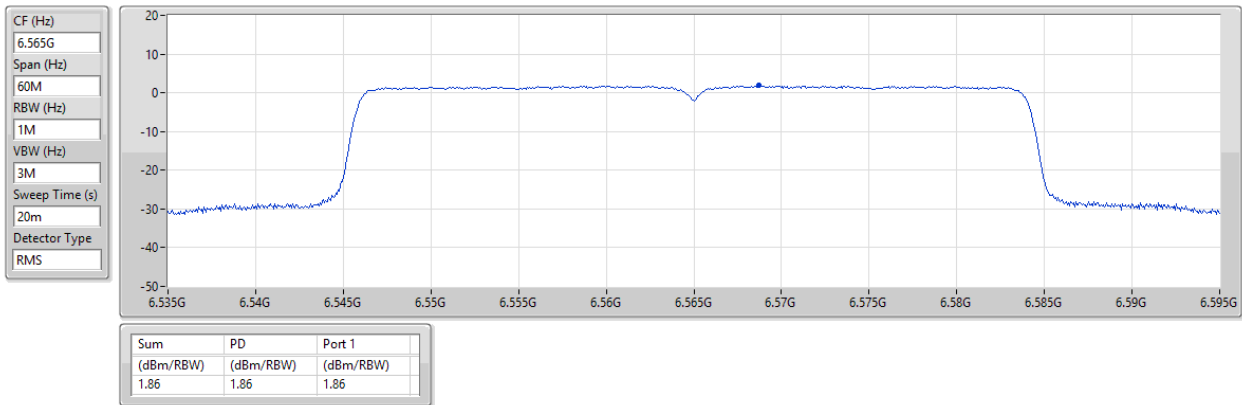


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6685MHz

16/07/2025

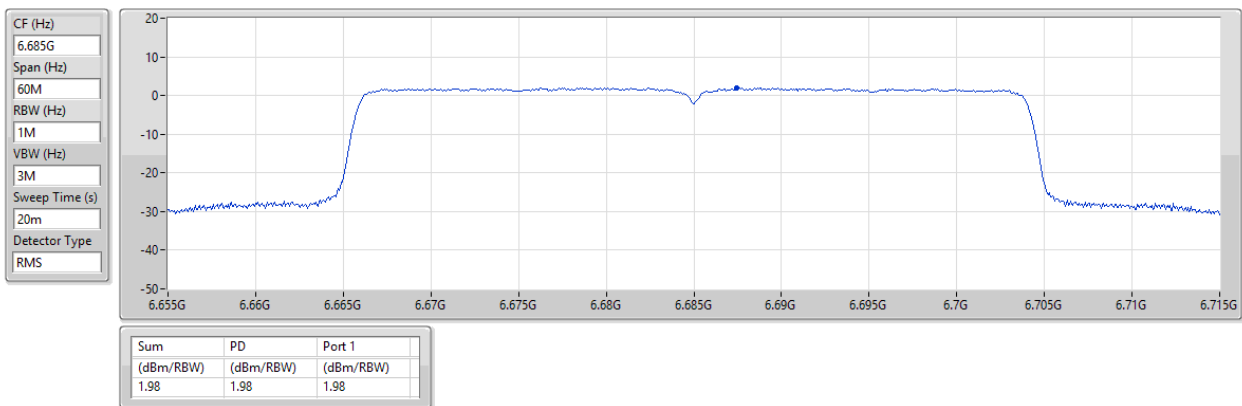


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6885MHz

16/07/2025

CF (Hz)
6.885G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

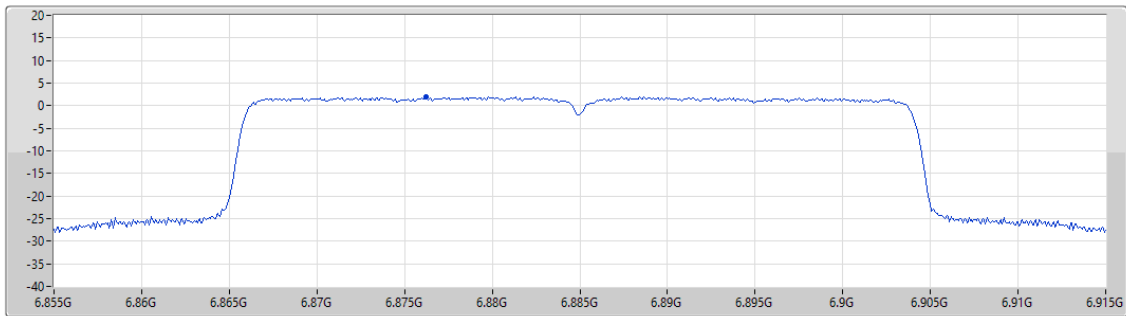

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.92	1.92	1.92


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

6925MHz

16/07/2025

CF (Hz)
6.925G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

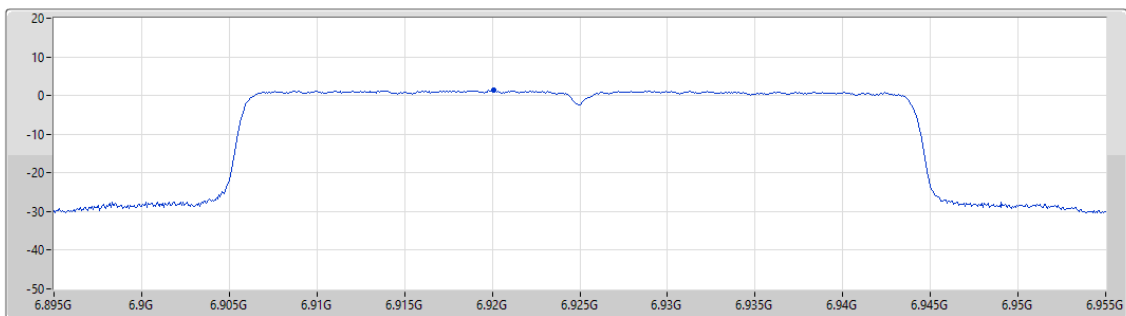


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.36	1.36	1.36

6.875-7.125GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

7005MHz

16/07/2025

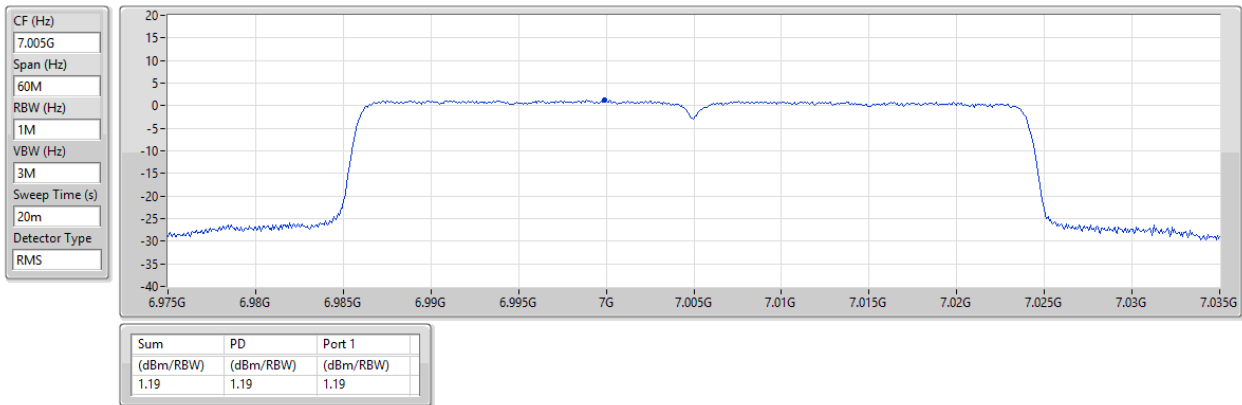


6.875-7.125GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

PSD

7085MHz

16/07/2025

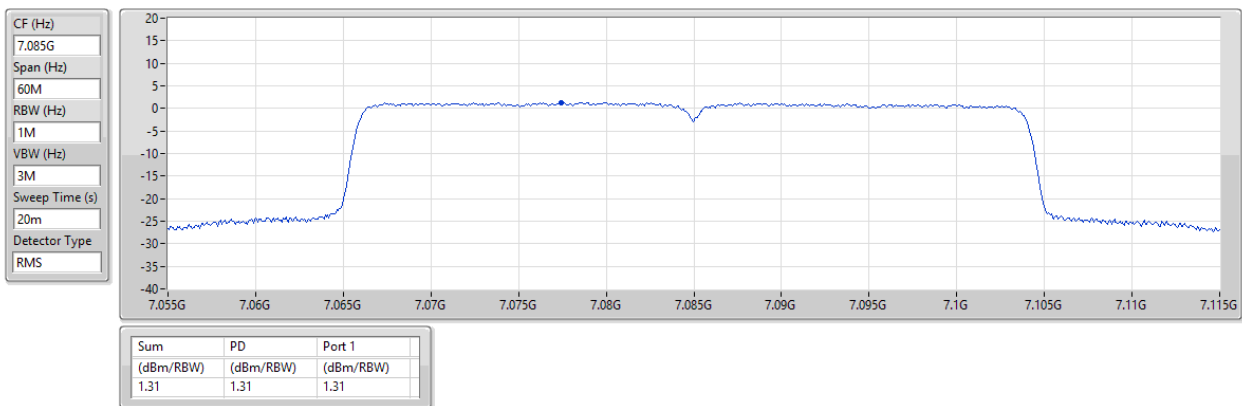


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5985MHz

16/07/2025

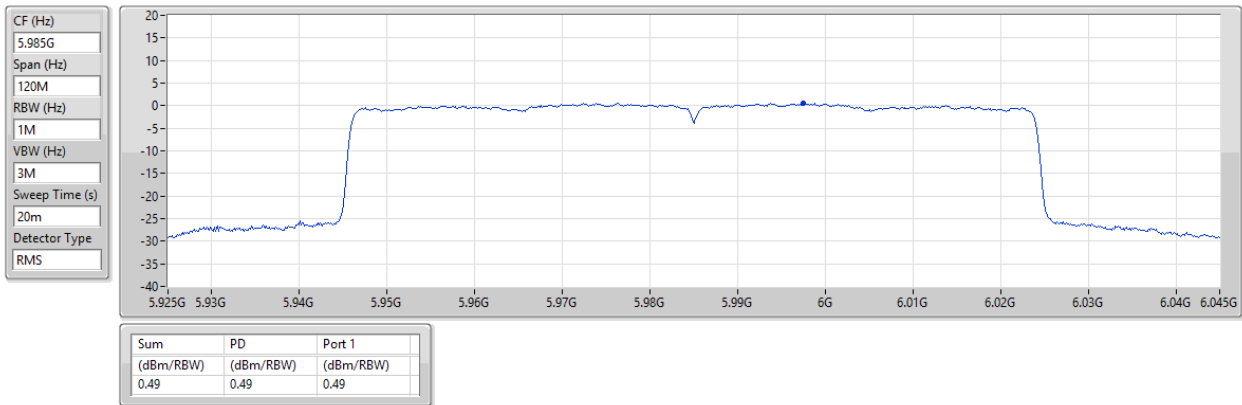


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6225MHz

16/07/2025

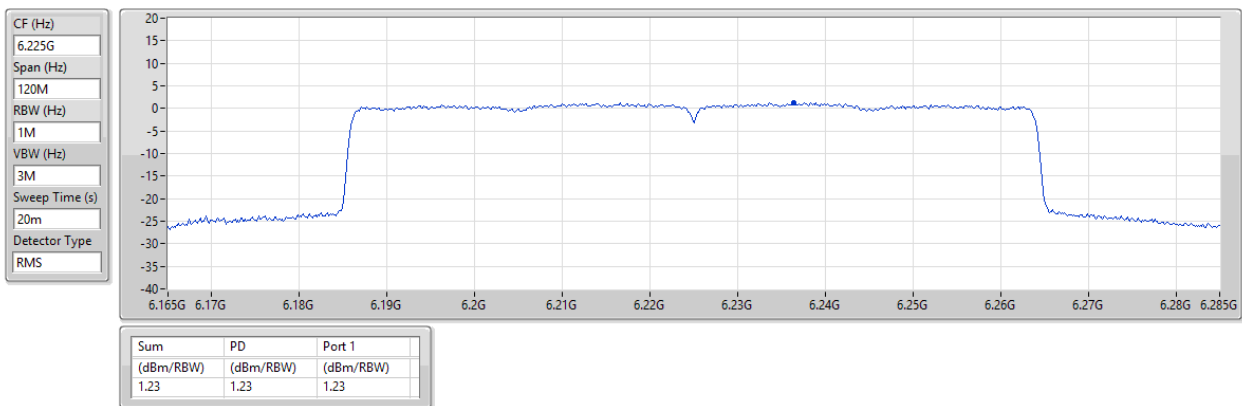

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6385MHz

16/07/2025

CF (Hz)
6.385G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

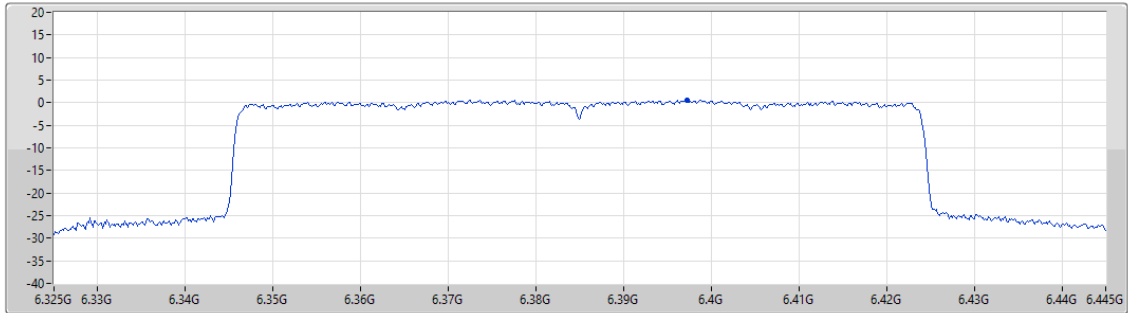

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.62	0.62	0.62

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6465MHz

16/07/2025

CF (Hz)
6.465G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

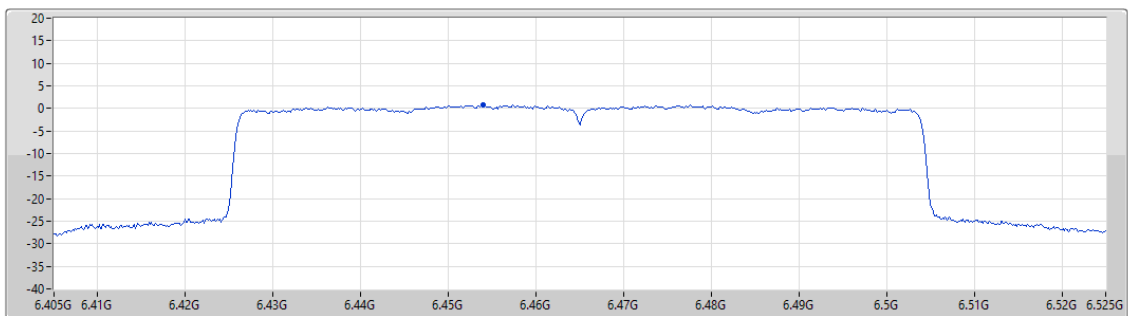


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.81	0.81	0.81

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6545MHz

16/07/2025

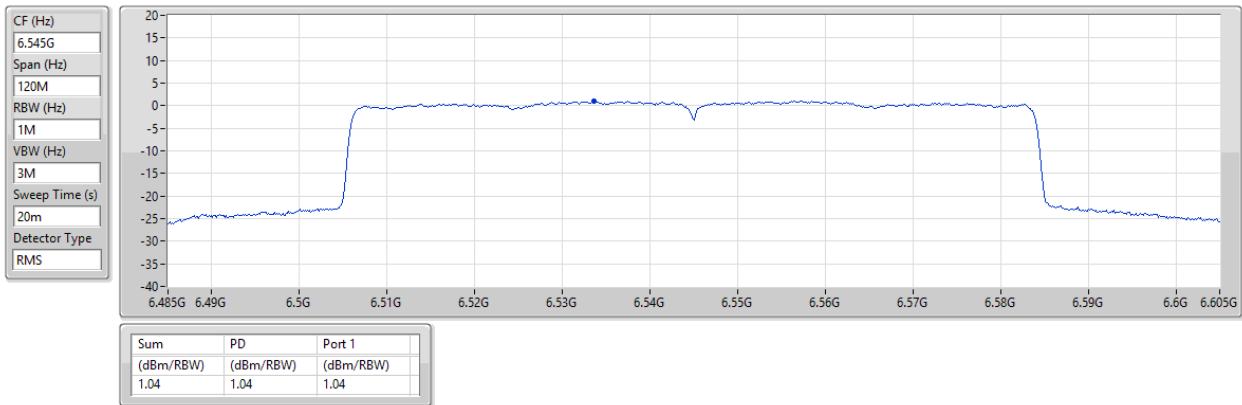


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6625MHz

16/07/2025

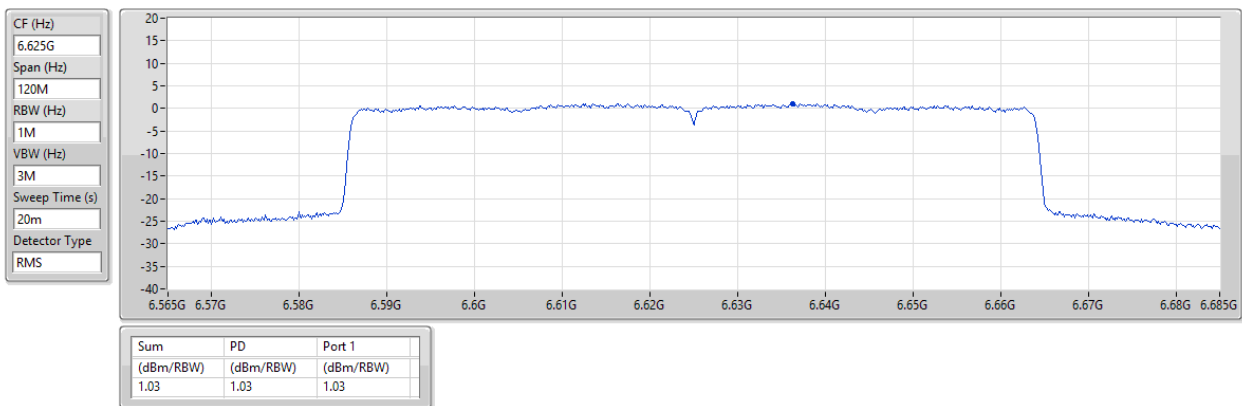


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6705MHz

16/07/2025

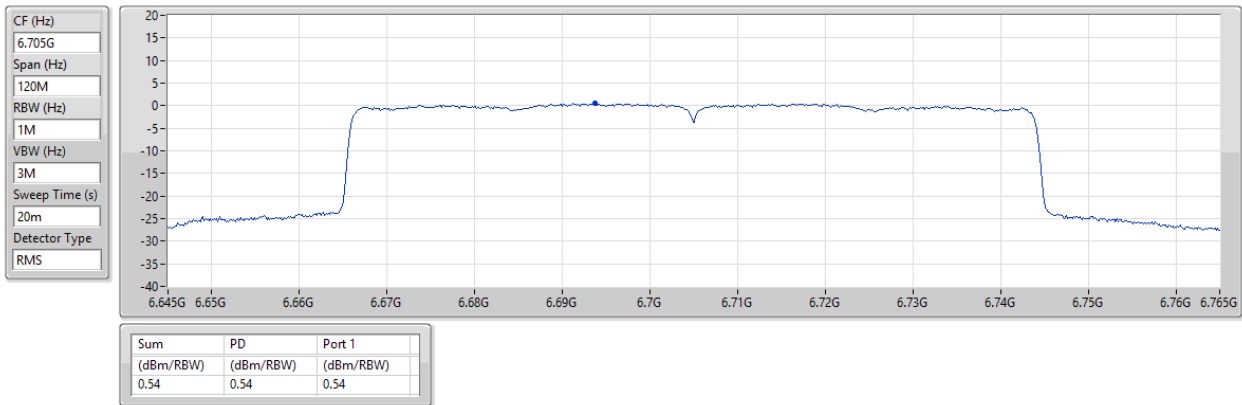


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6785MHz

16/07/2025

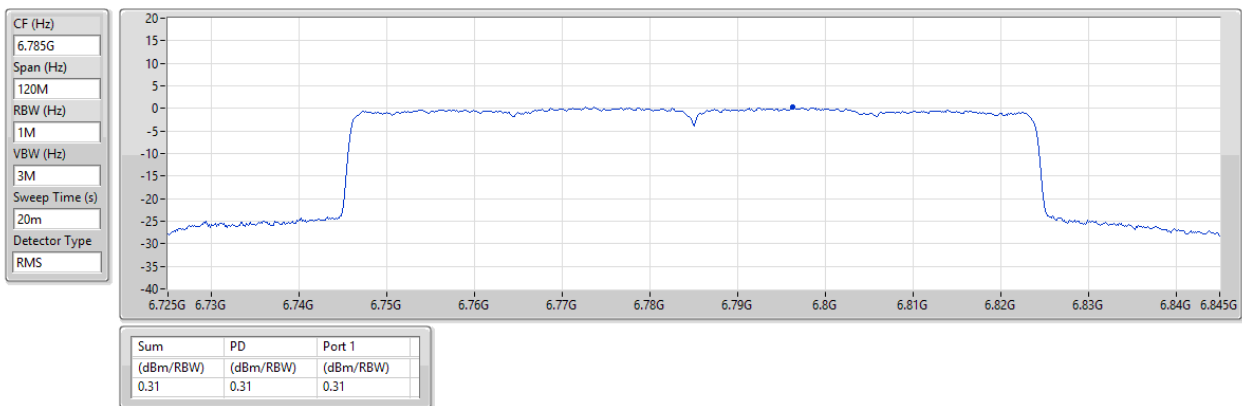


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6865MHz

16/07/2025

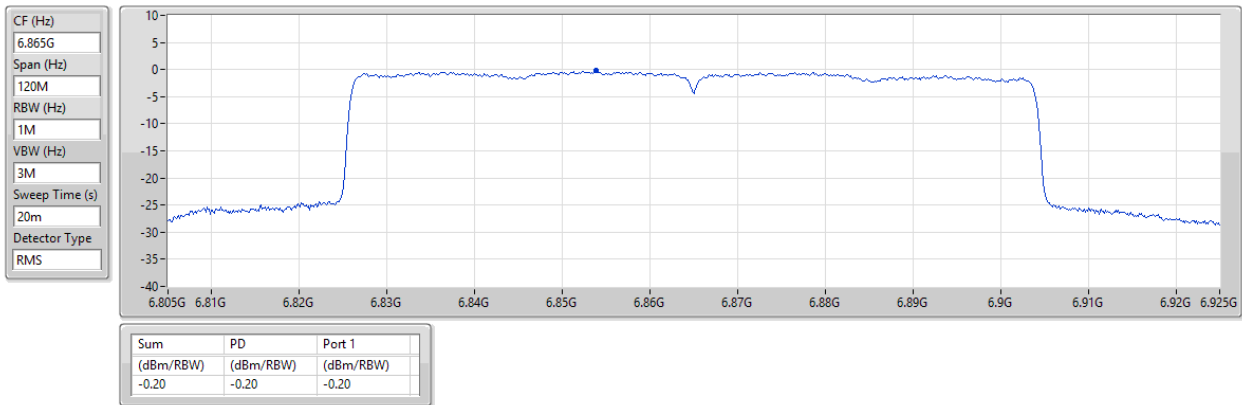


6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

6945MHz

16/07/2025

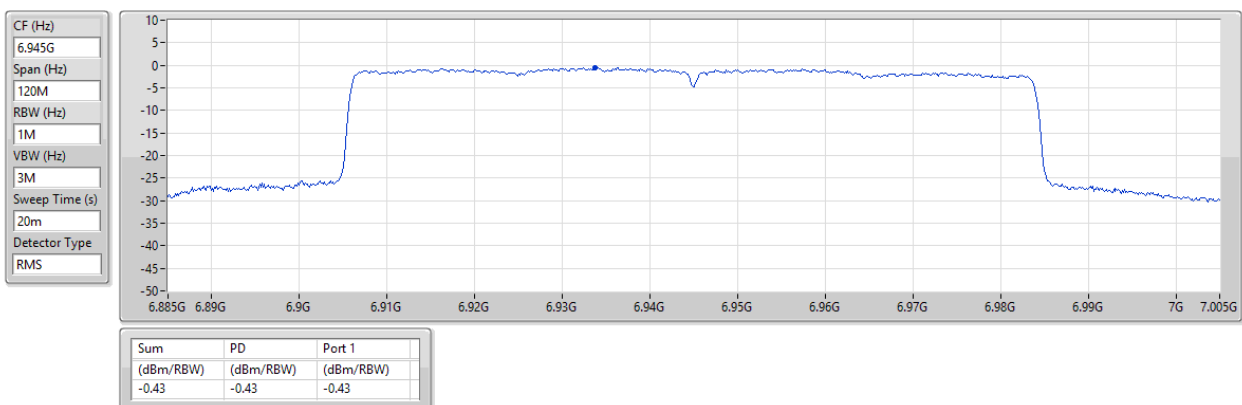


6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

7025MHz

16/07/2025

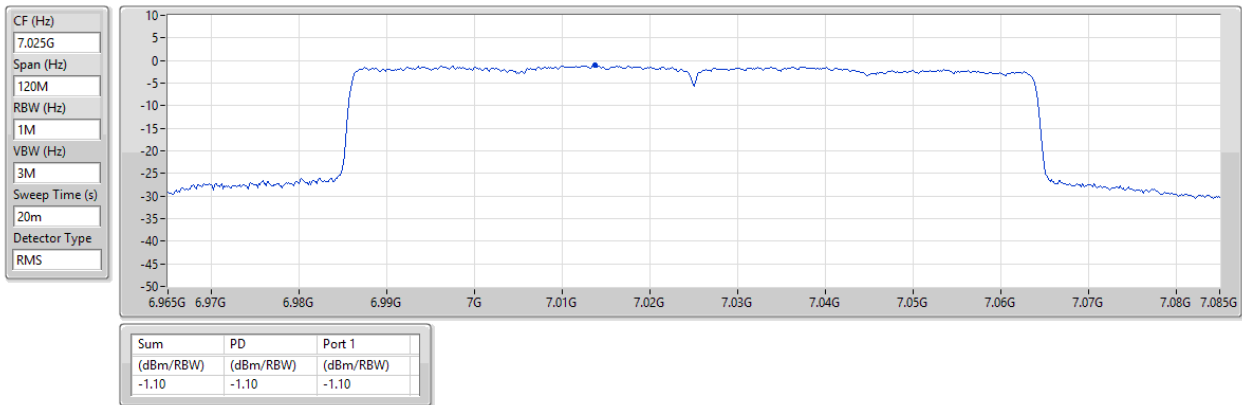


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6025MHz

16/07/2025

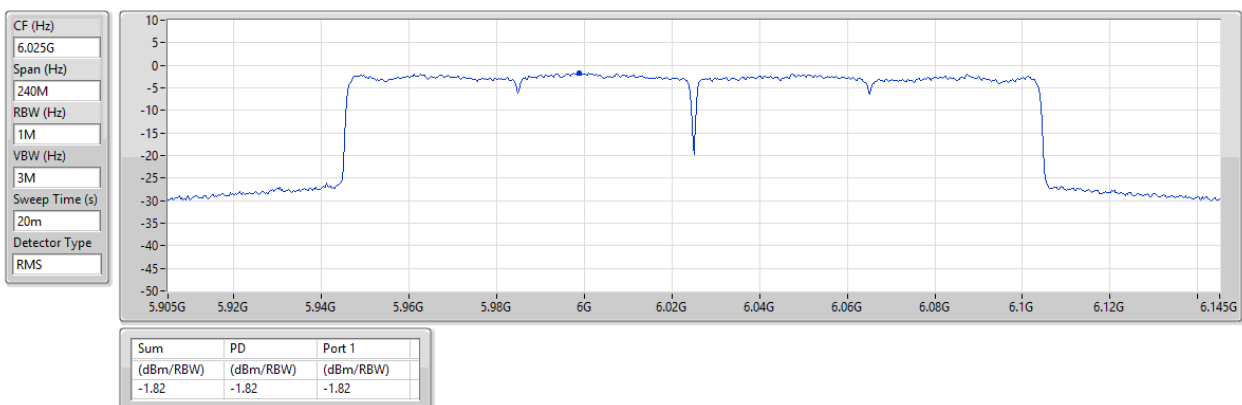


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6185MHz

16/07/2025

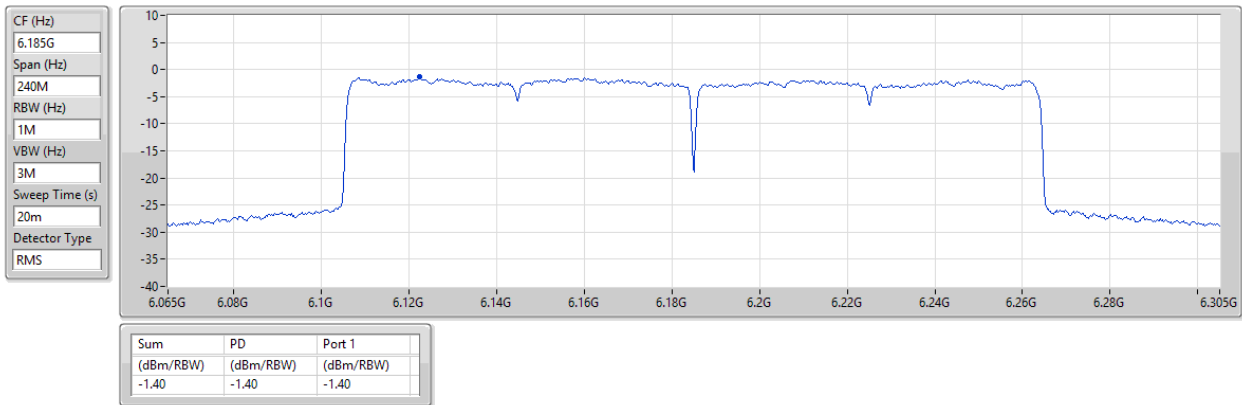


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6345MHz

16/07/2025

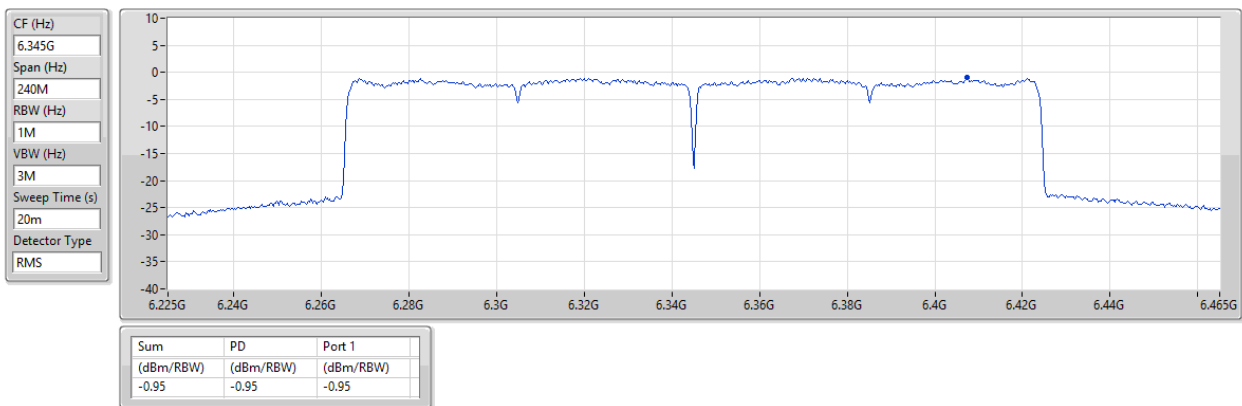


6.425-6.525GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6505MHz

16/07/2025

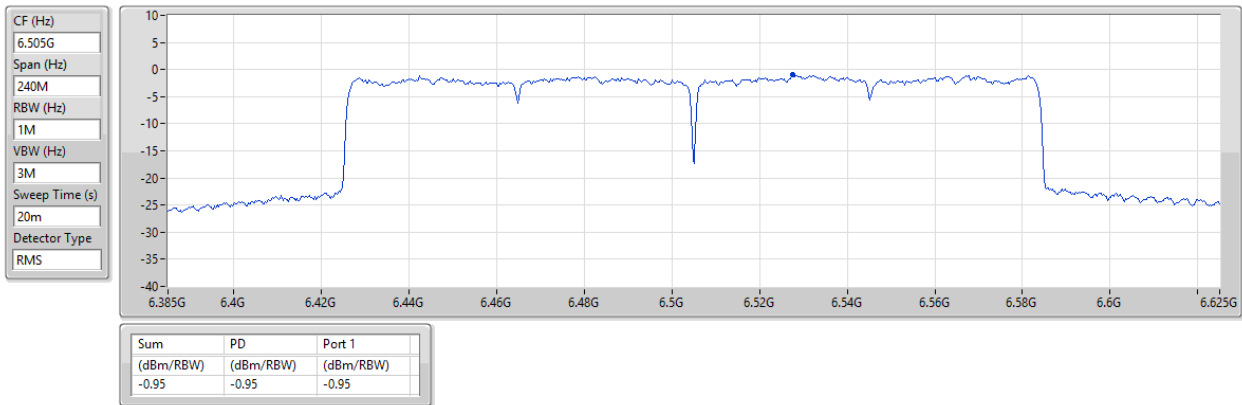


6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6665MHz

16/07/2025

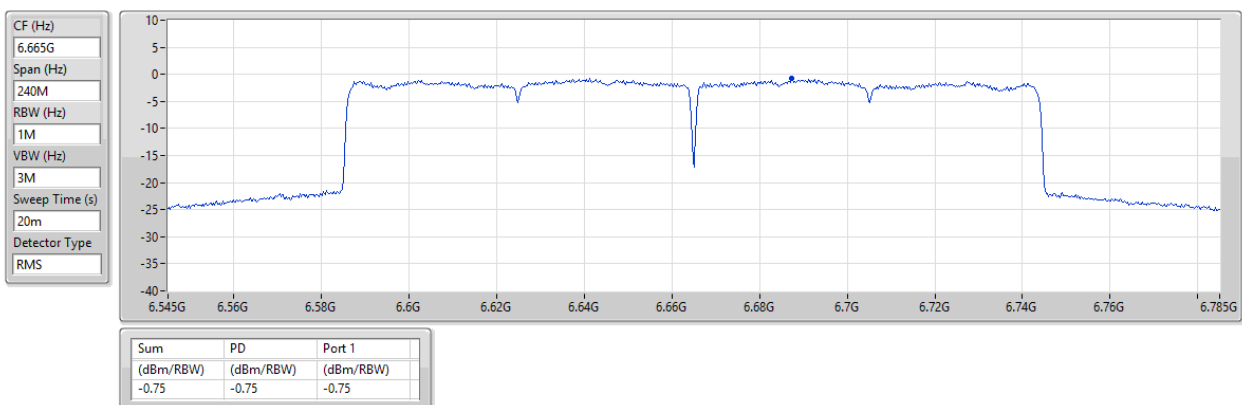


6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6825MHz

16/07/2025

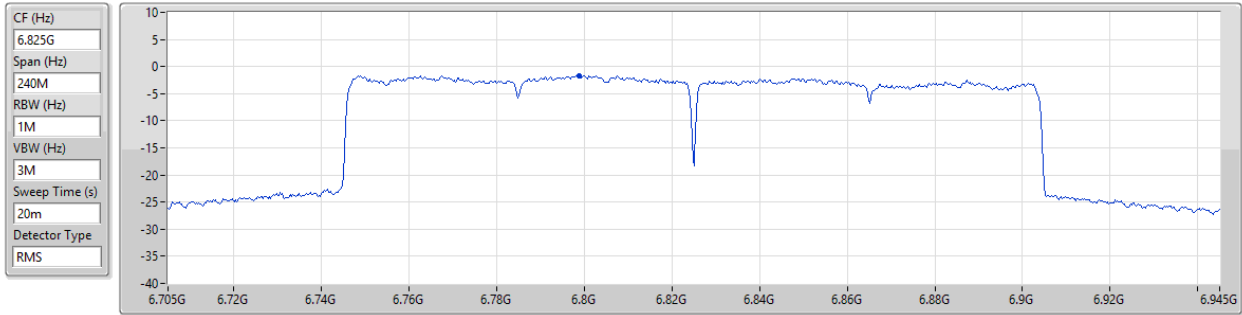


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.67	-1.67	-1.67

6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

6985MHz

16/07/2025

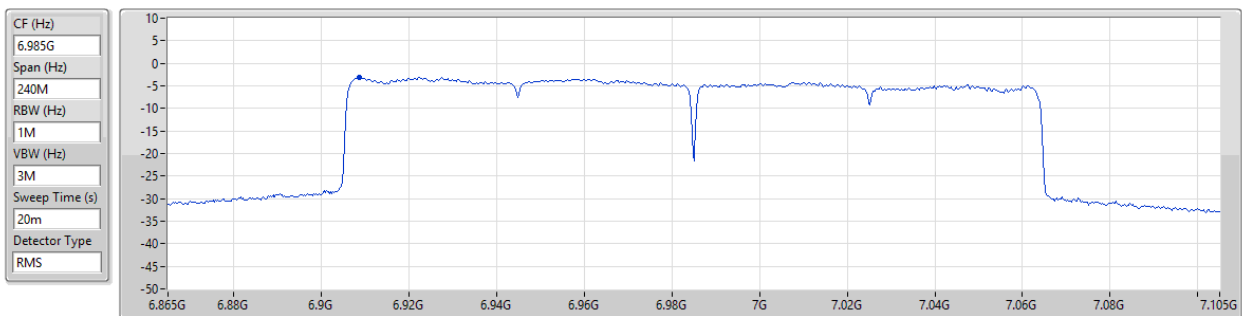

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.09	-3.09	-3.09

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	4.88
802.11be EHT40_Nss1,(MCS0)_4TX	4.82
802.11be EHT80_Nss1,(MCS0)_4TX	4.91
802.11be EHT160_Nss1,(MCS0)_4TX	4.90
802.11be EHT320_Nss1,(MCS0)_4TX	4.94
6.425-6.525GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	4.96
802.11be EHT40_Nss1,(MCS0)_4TX	4.87
802.11be EHT80_Nss1,(MCS0)_4TX	4.74
802.11be EHT160_Nss1,(MCS0)_4TX	4.90
802.11be EHT320_Nss1,(MCS0)_4TX	4.73
6.525-6.875GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	4.95
802.11be EHT40_Nss1,(MCS0)_4TX	4.94
802.11be EHT80_Nss1,(MCS0)_4TX	4.99
802.11be EHT160_Nss1,(MCS0)_4TX	4.90
802.11be EHT320_Nss1,(MCS0)_4TX	4.77
6.875-7.125GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	4.98
802.11be EHT40_Nss1,(MCS0)_4TX	4.89
802.11be EHT80_Nss1,(MCS0)_4TX	4.82
802.11be EHT160_Nss1,(MCS0)_4TX	4.49

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	4.75	5.00
6195MHz	Pass	4.88	5.00
6415MHz	Pass	4.68	5.00
6435MHz	Pass	4.96	5.00
6475MHz	Pass	4.88	5.00
6515MHz	Pass	4.75	5.00
6535MHz	Pass	4.95	5.00
6695MHz	Pass	4.88	5.00
6875MHz	Pass	4.83	5.00
6895MHz	Pass	4.85	5.00
6995MHz	Pass	4.98	5.00
7095MHz	Pass	4.97	5.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	4.78	5.00
6205MHz	Pass	4.82	5.00
6405MHz	Pass	4.79	5.00
6445MHz	Pass	4.87	5.00
6485MHz	Pass	4.63	5.00
6525MHz	Pass	4.82	5.00
6565MHz	Pass	4.94	5.00
6685MHz	Pass	4.67	5.00
6885MHz	Pass	4.86	5.00
6925MHz	Pass	4.89	5.00
7005MHz	Pass	4.79	5.00
7085MHz	Pass	4.67	5.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	4.91	5.00
6225MHz	Pass	4.69	5.00
6385MHz	Pass	4.88	5.00
6465MHz	Pass	4.73	5.00
6545MHz	Pass	4.74	5.00
6625MHz	Pass	4.92	5.00
6705MHz	Pass	4.84	5.00
6785MHz	Pass	4.96	5.00
6865MHz	Pass	4.99	5.00
6945MHz	Pass	4.82	5.00
7025MHz	Pass	4.71	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	4.80	5.00
6185MHz	Pass	4.71	5.00
6345MHz	Pass	4.90	5.00
6505MHz	Pass	4.90	5.00
6665MHz	Pass	4.90	5.00
6825MHz	Pass	4.72	5.00
6985MHz	Pass	4.49	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	4.87	5.00
6265MHz	Pass	4.94	5.00
6425MHz	Pass	4.84	5.00
6585MHz	Pass	4.73	5.00
6745MHz	Pass	4.77	5.00
6905MHz	Pass	-0.48	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


25/06/2025

EIRP PSD;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

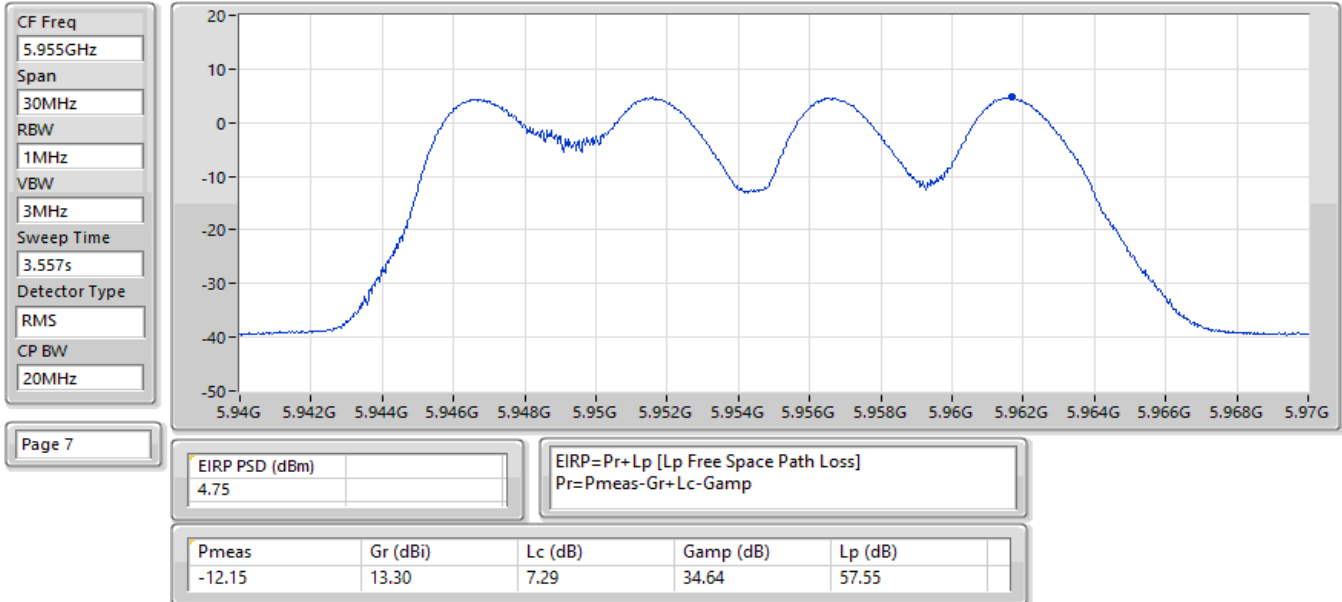


25/06/2025

EIRP PSD;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

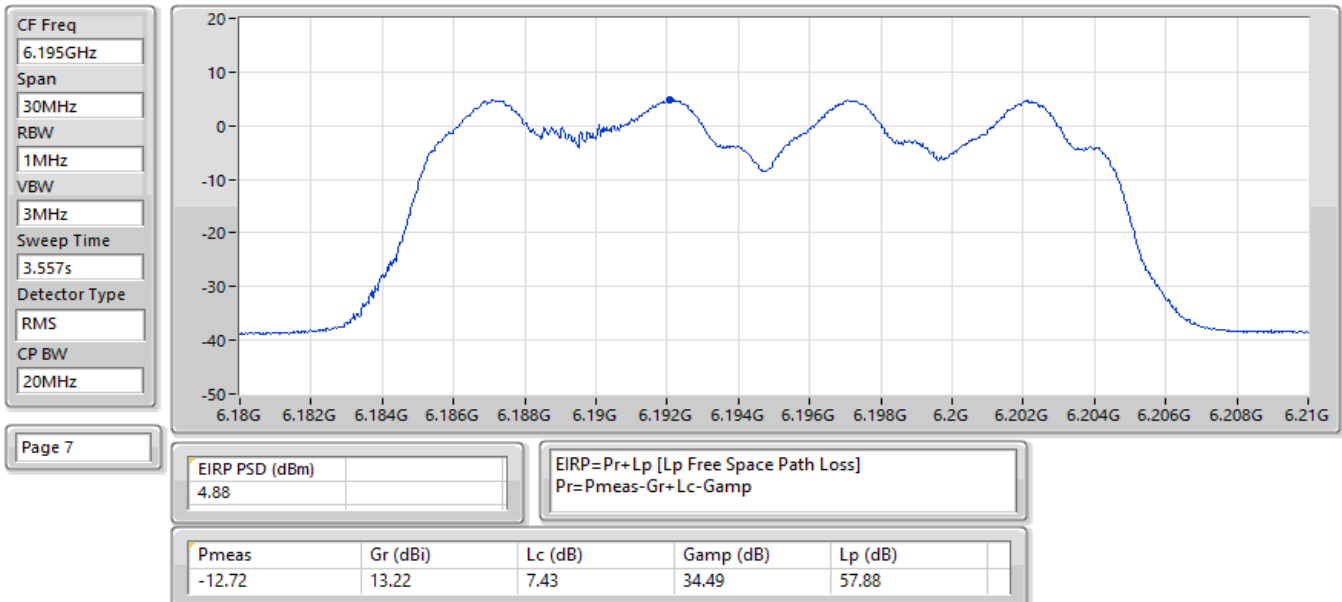


25/06/2025

EIRP PSD;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

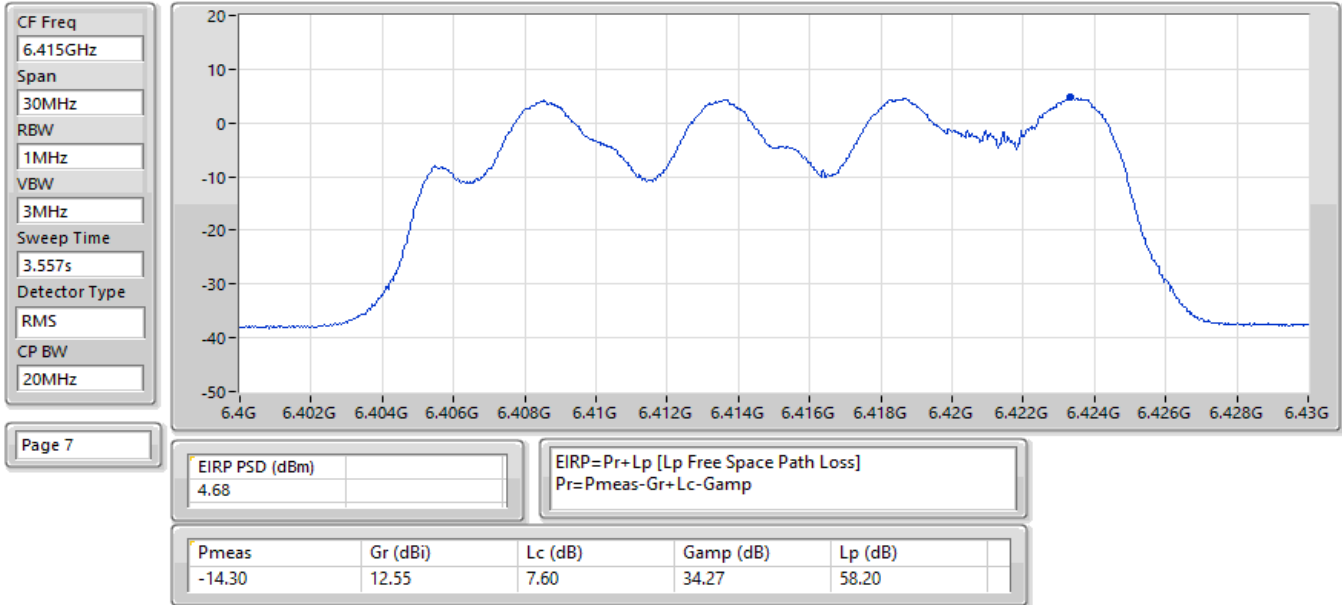


25/06/2025

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6435MHz;TX

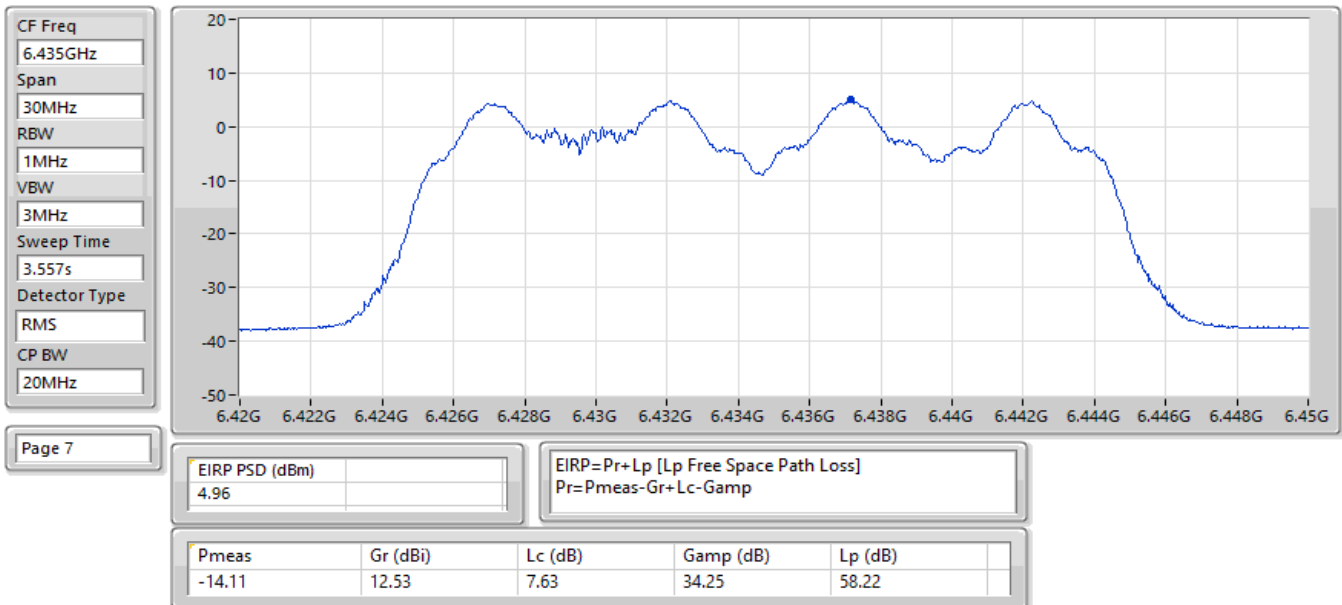


25/06/2025

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

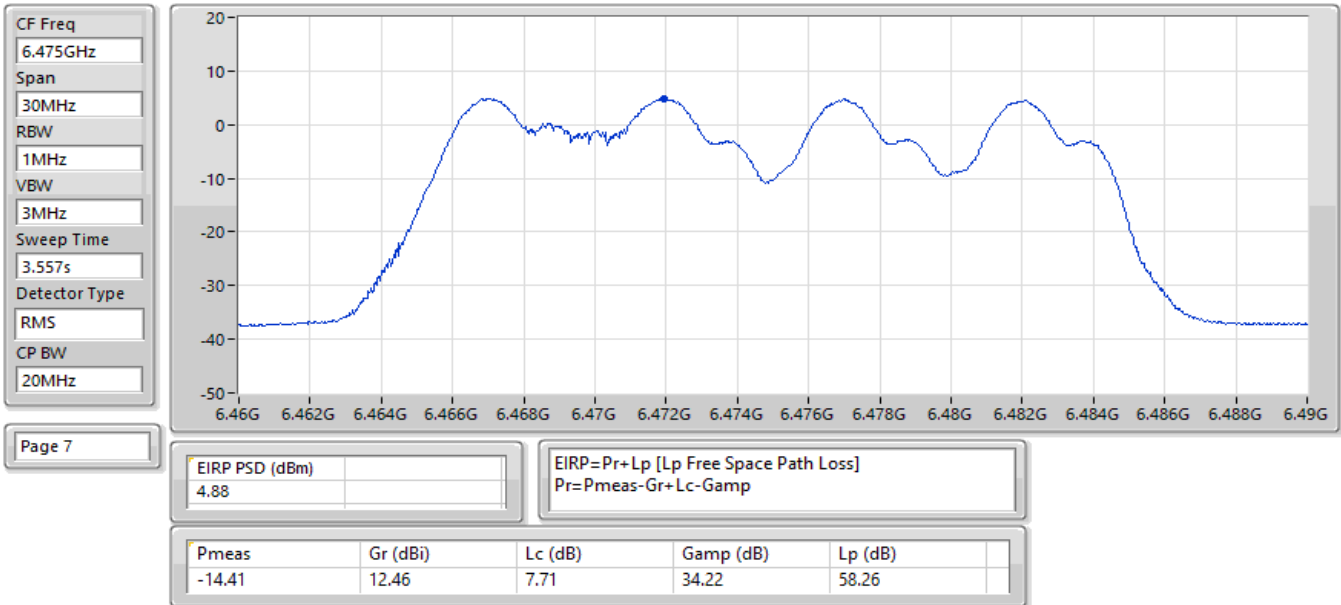


25/06/2025

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

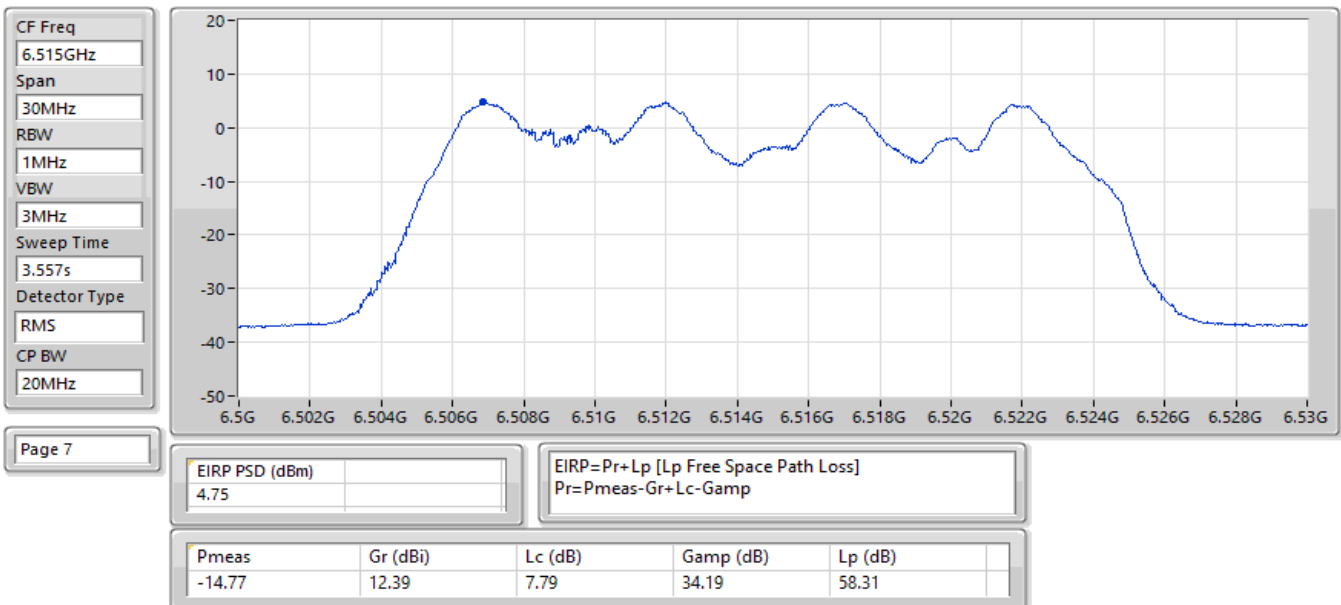


25/06/2025

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

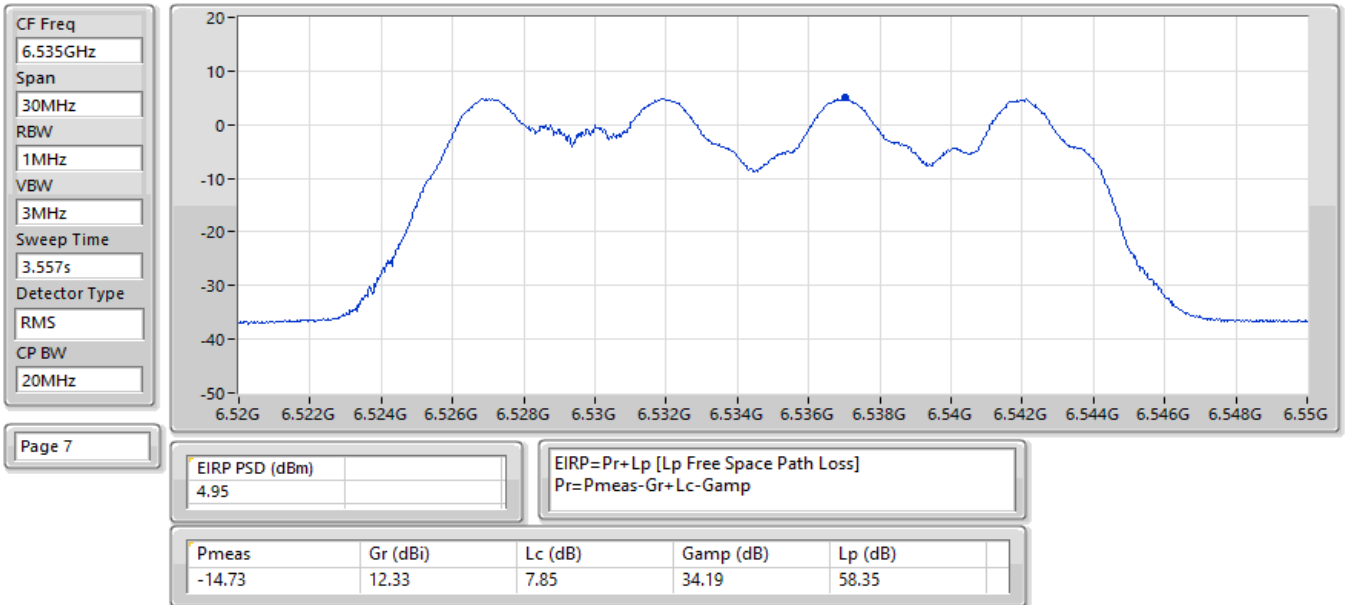


25/06/2025

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

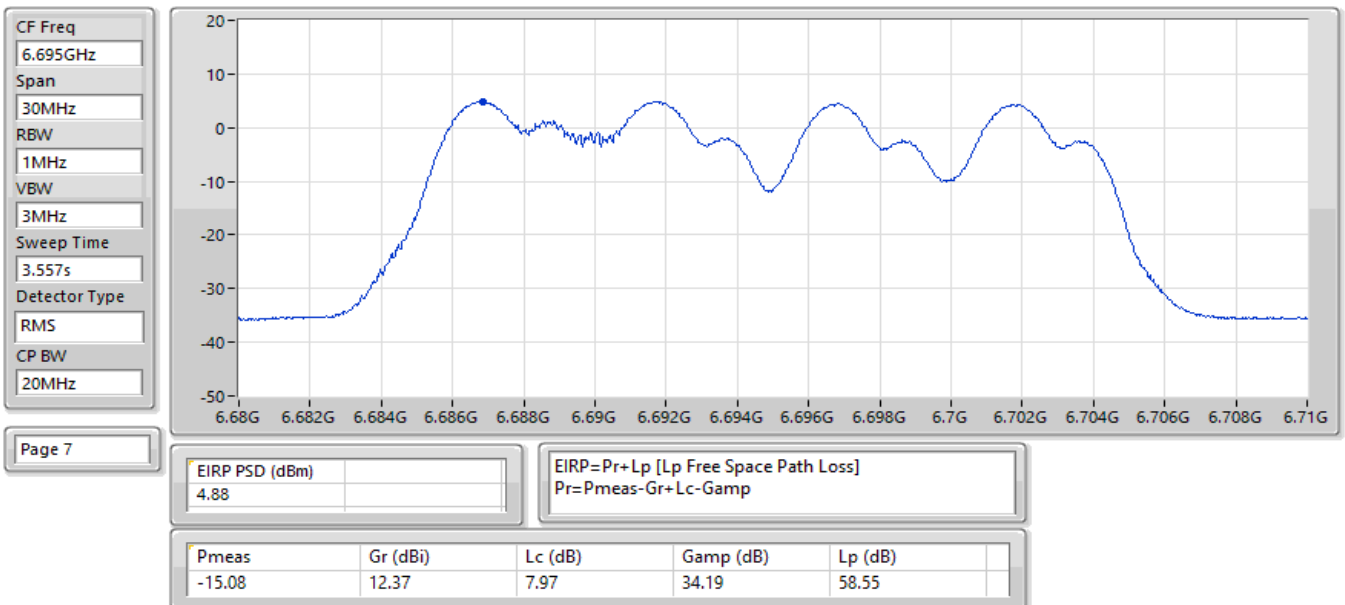


26/06/2025

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

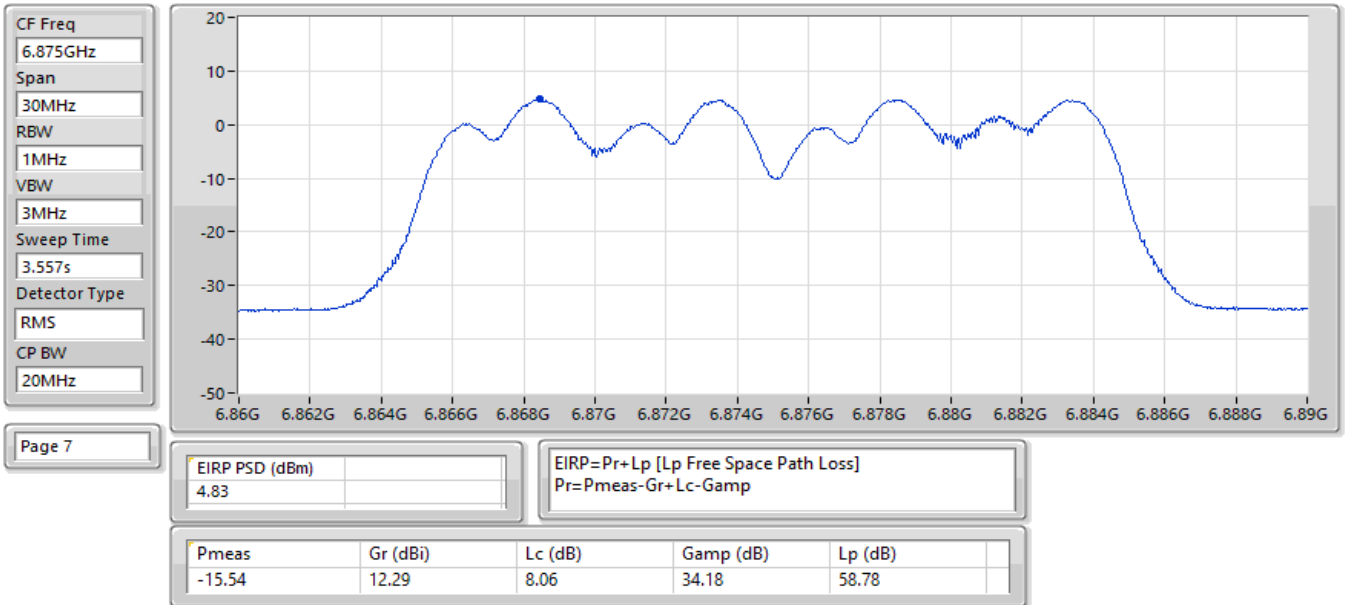


26/06/2025

EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

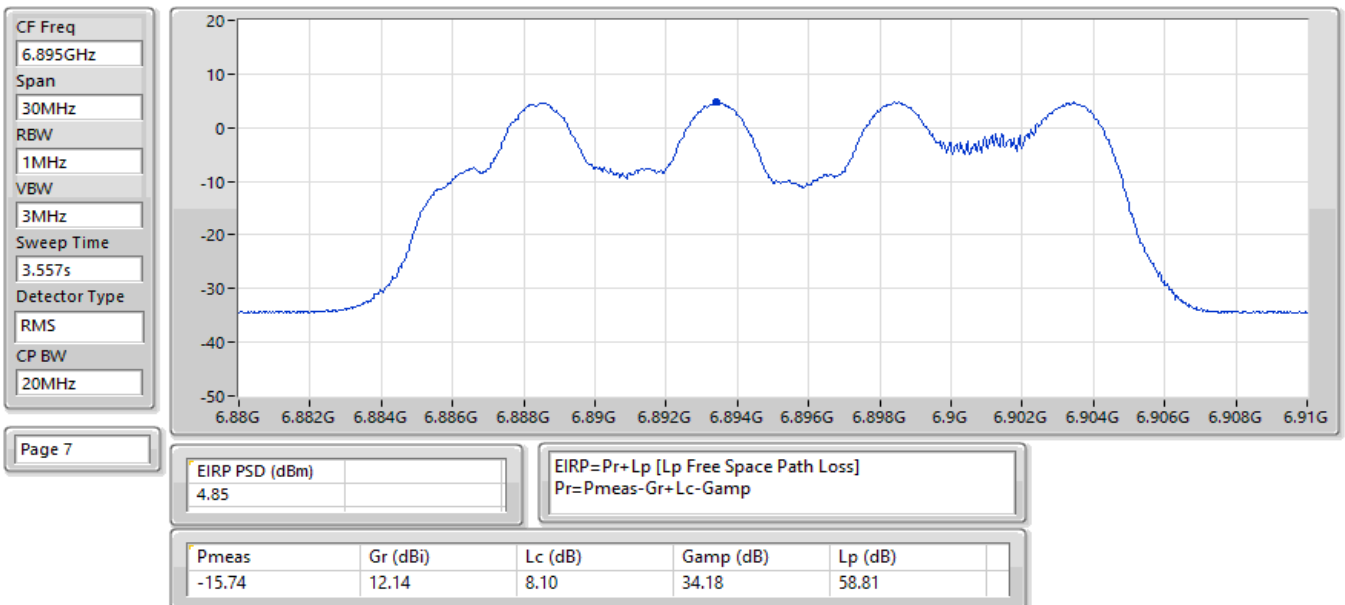


26/06/2025

EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

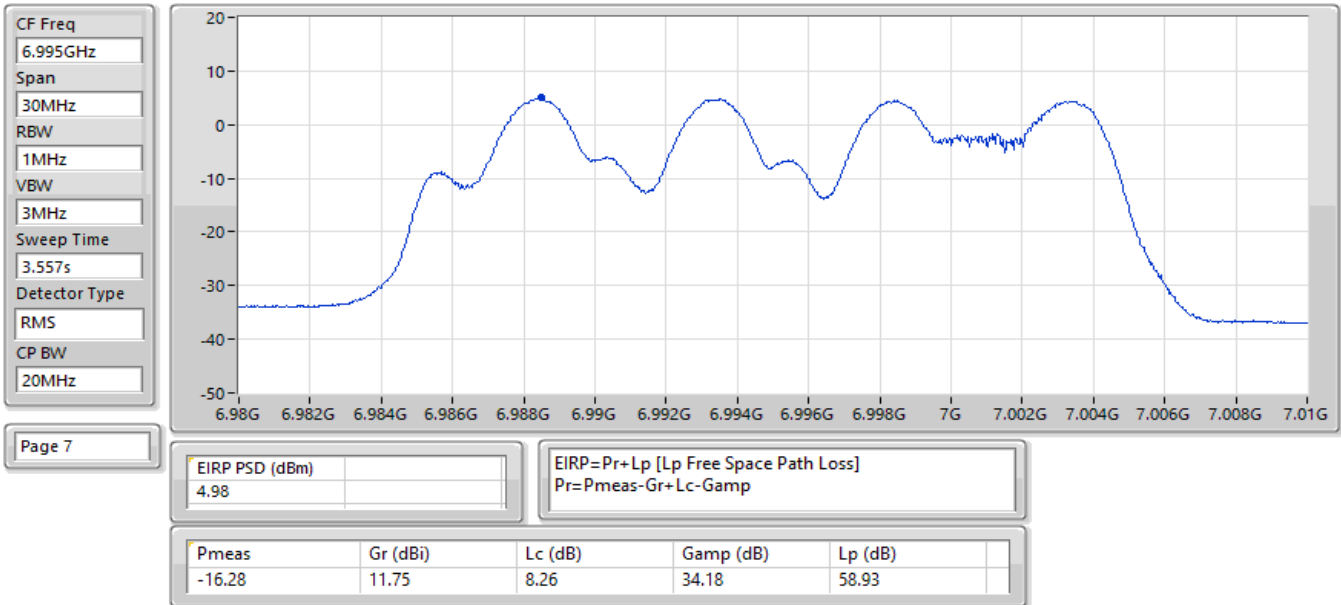


26/06/2025

EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

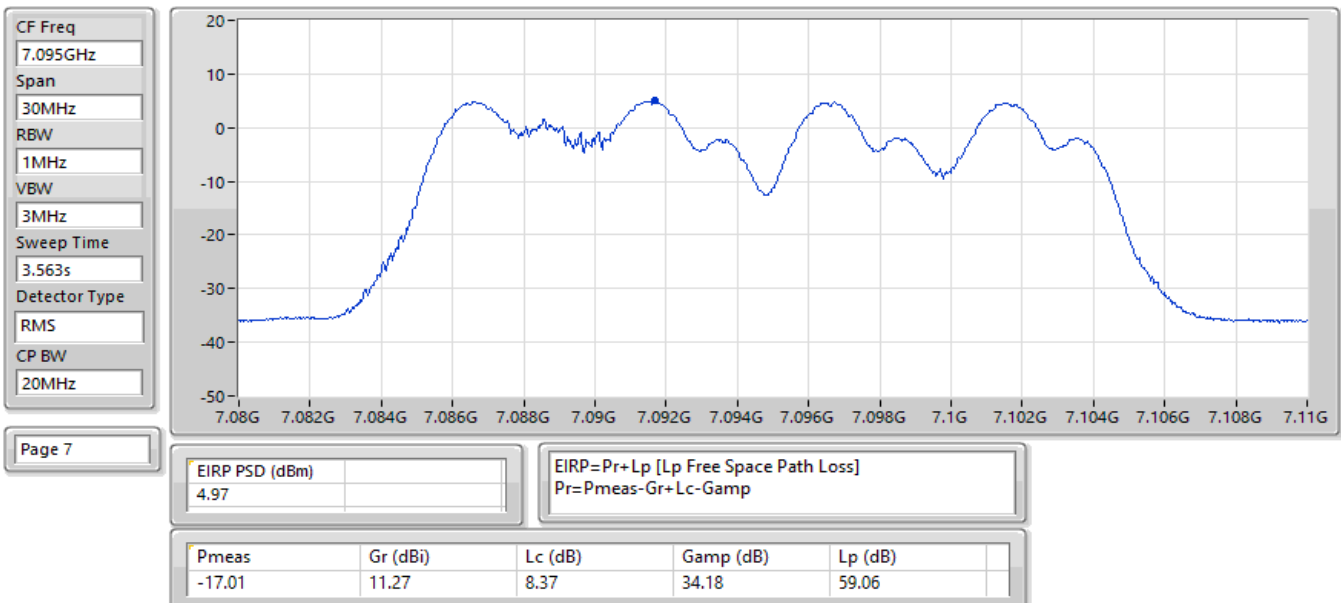


26/06/2025

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

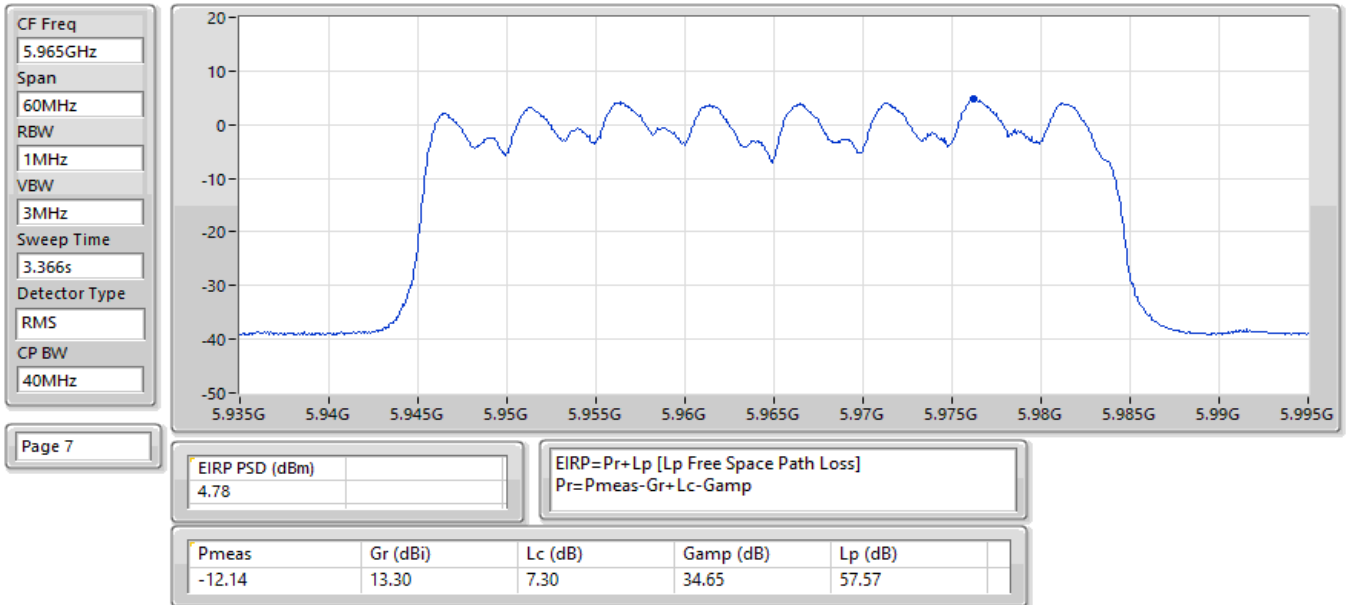


26/06/2025

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

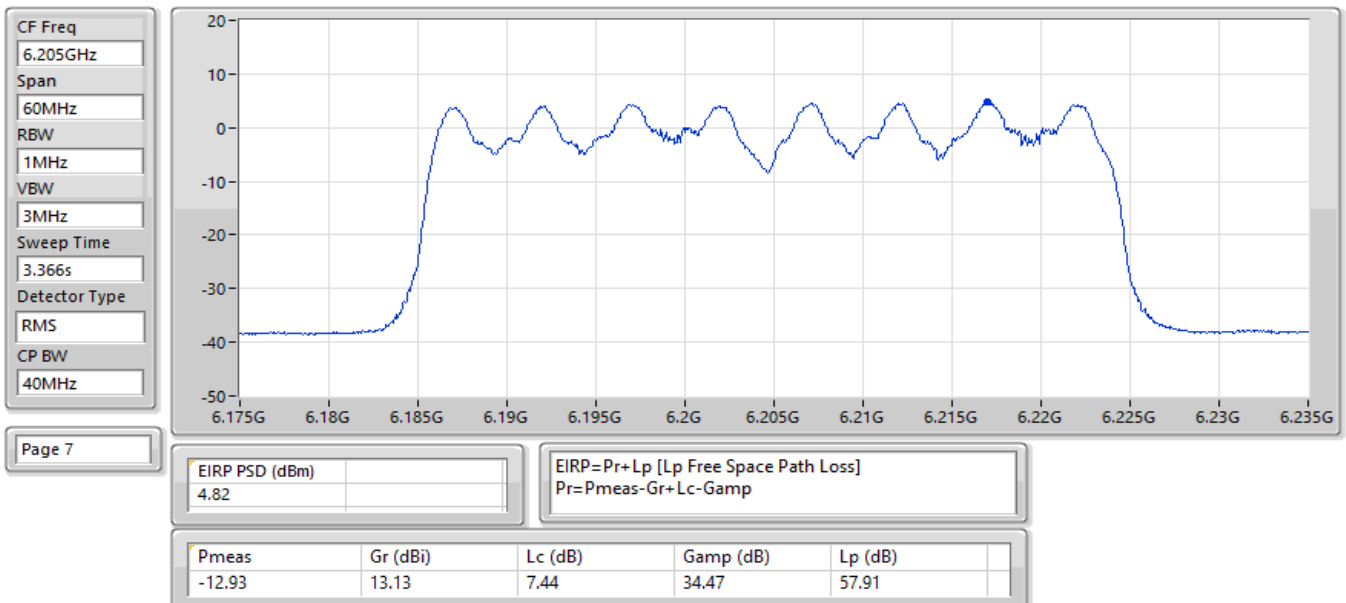


26/06/2025

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

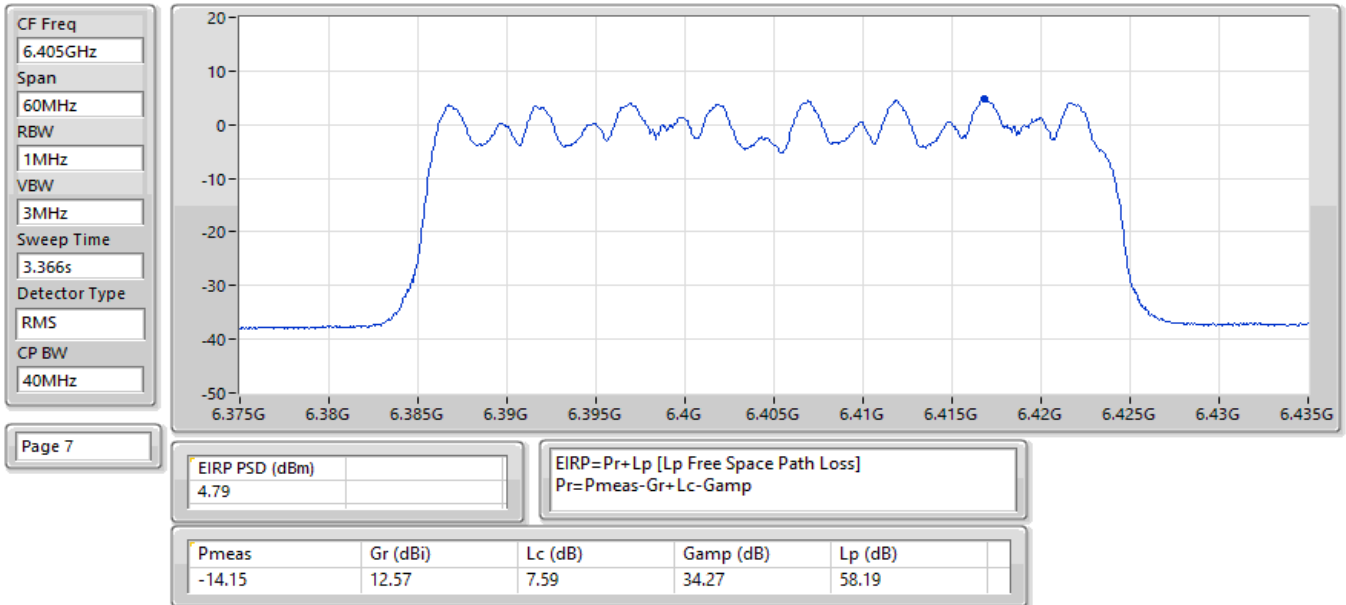


26/06/2025

EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

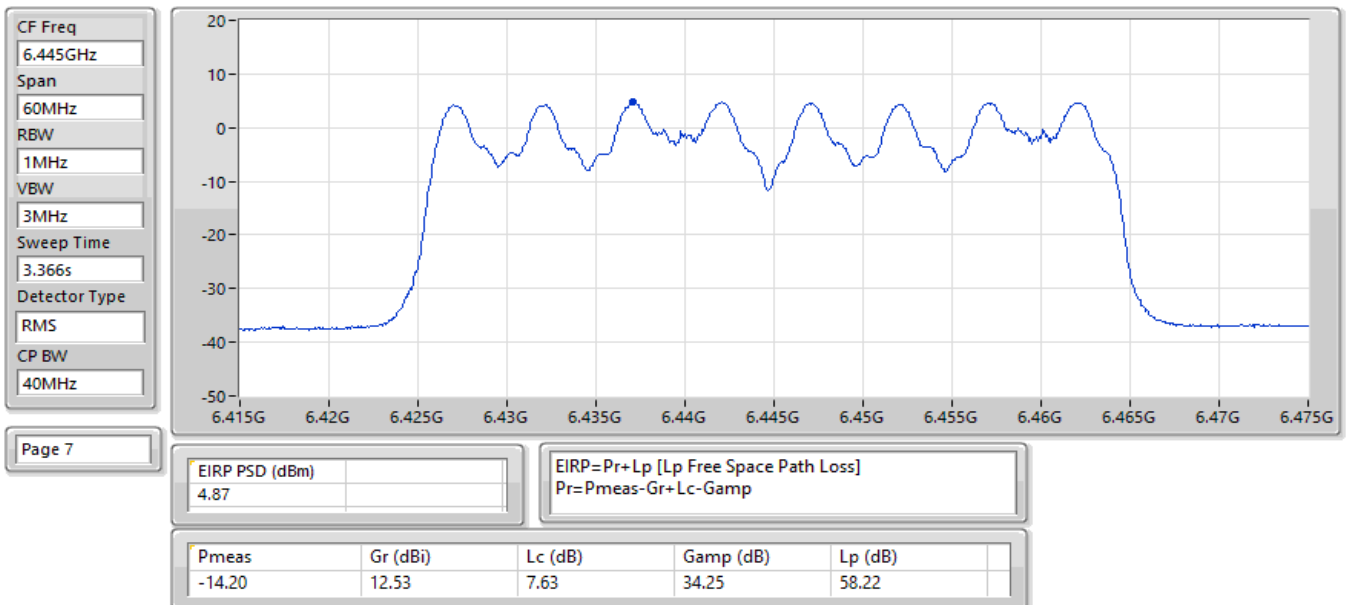


26/06/2025

EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

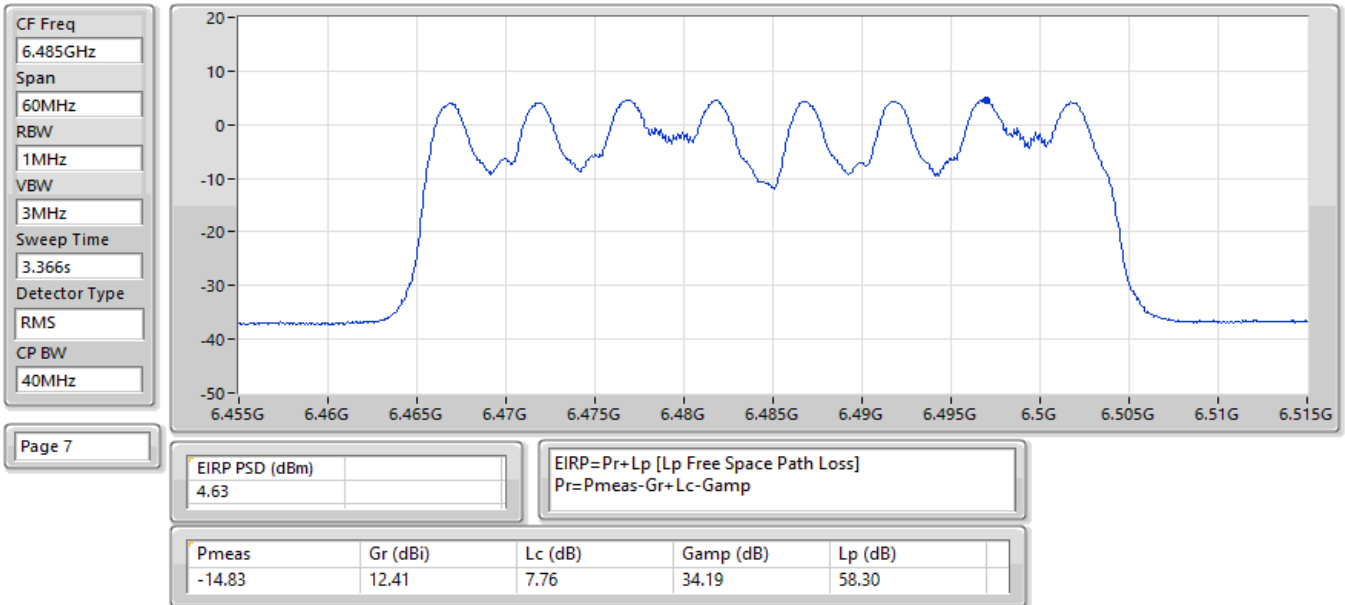


26/06/2025

EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

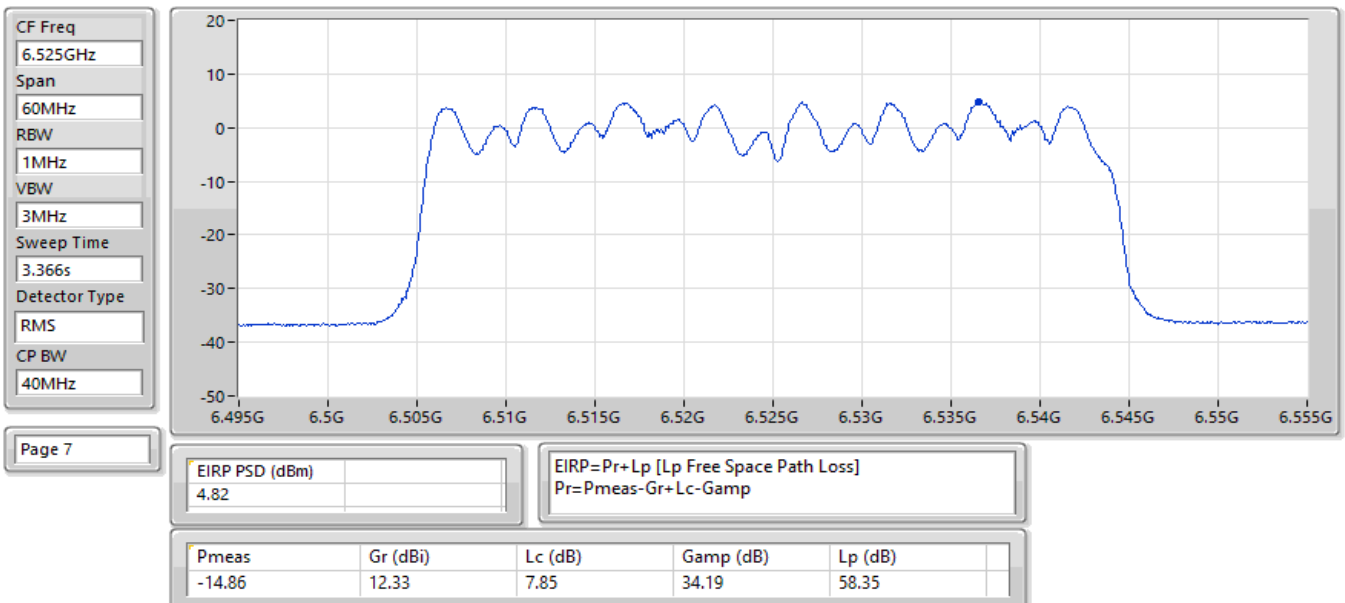


26/06/2025

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

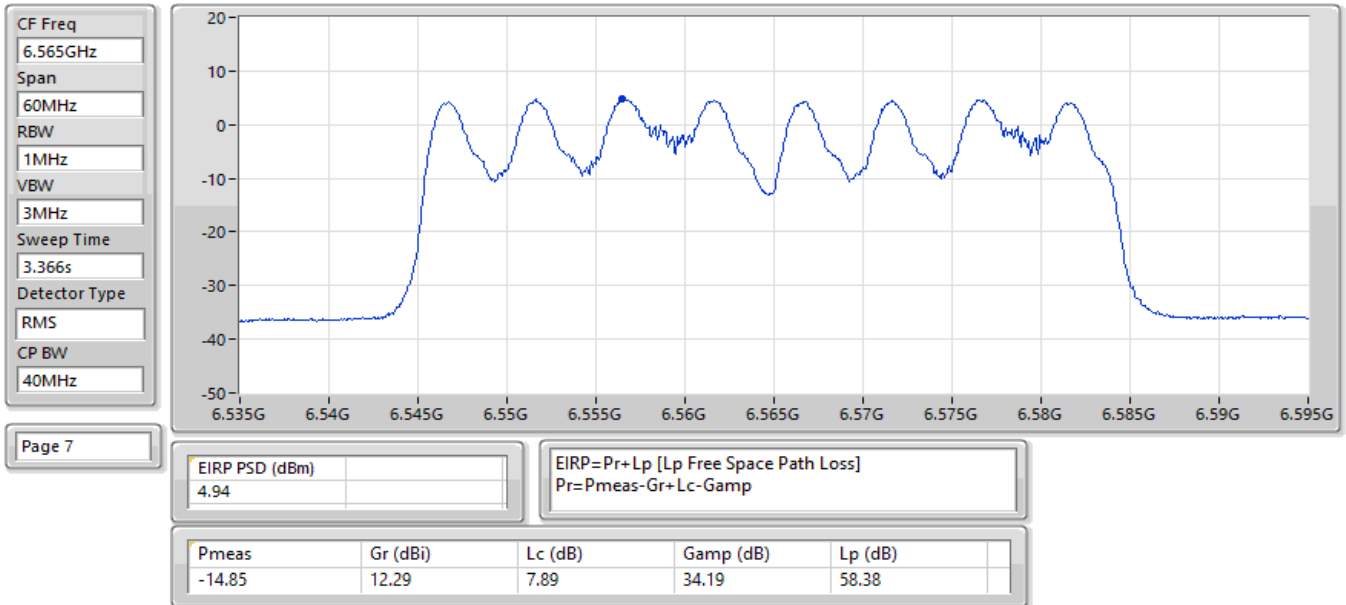


26/06/2025

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

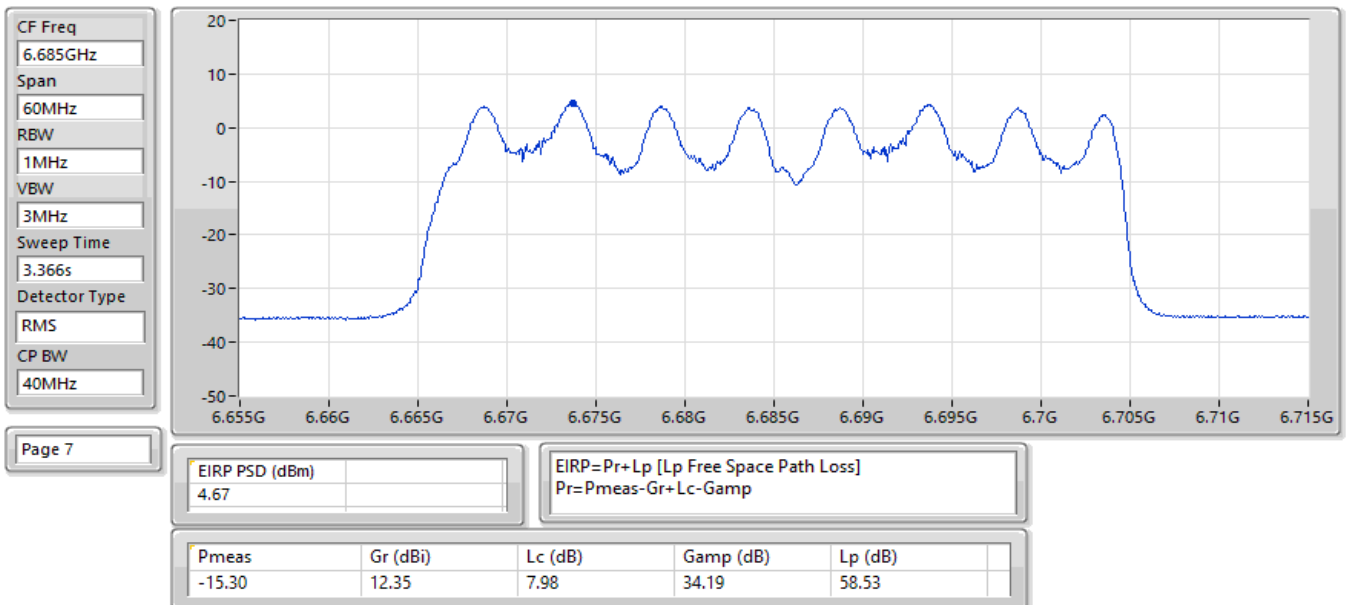


26/06/2025

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

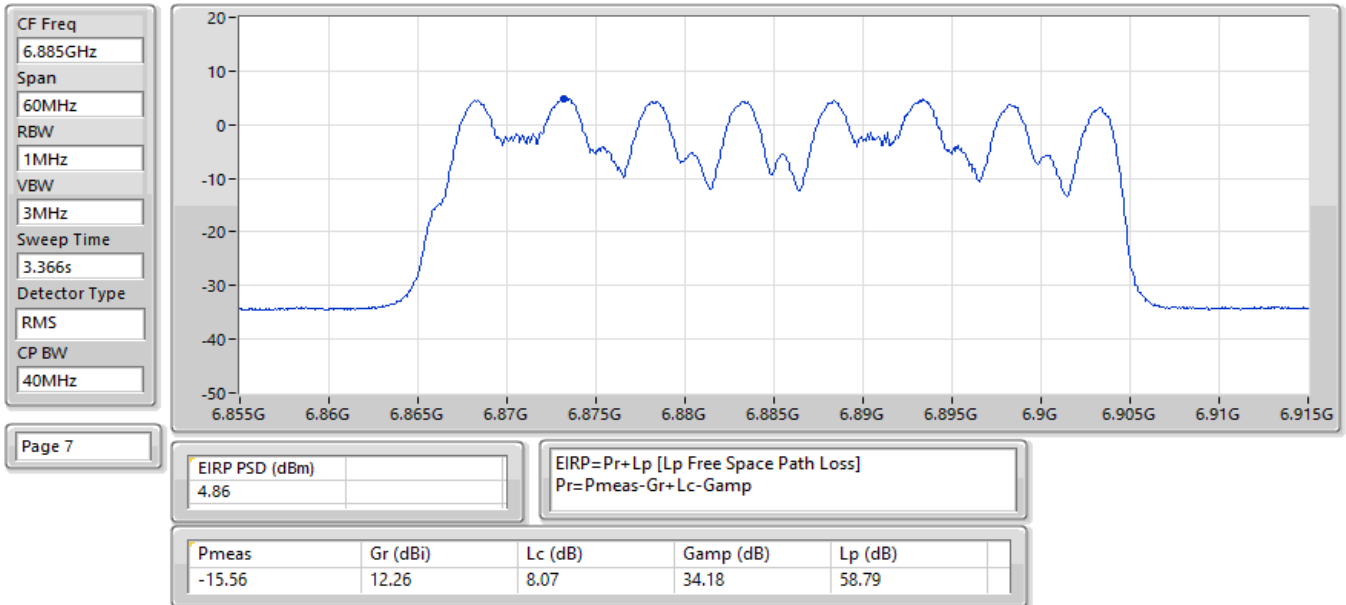


26/06/2025

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

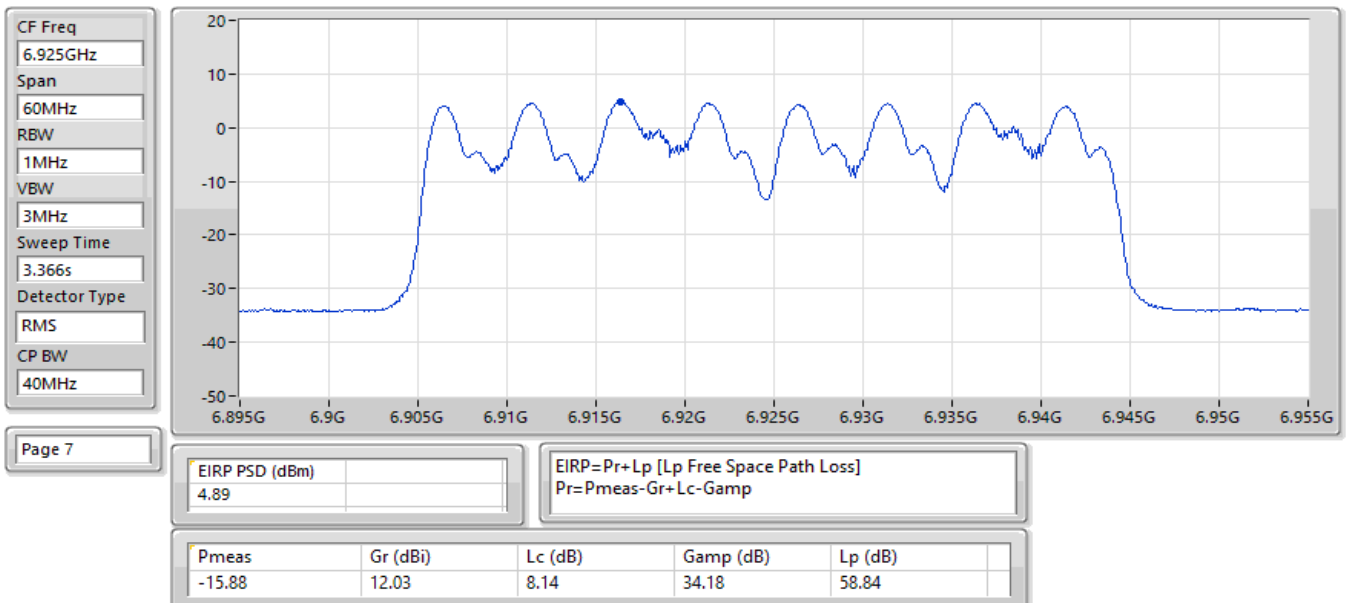


27/06/2025

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

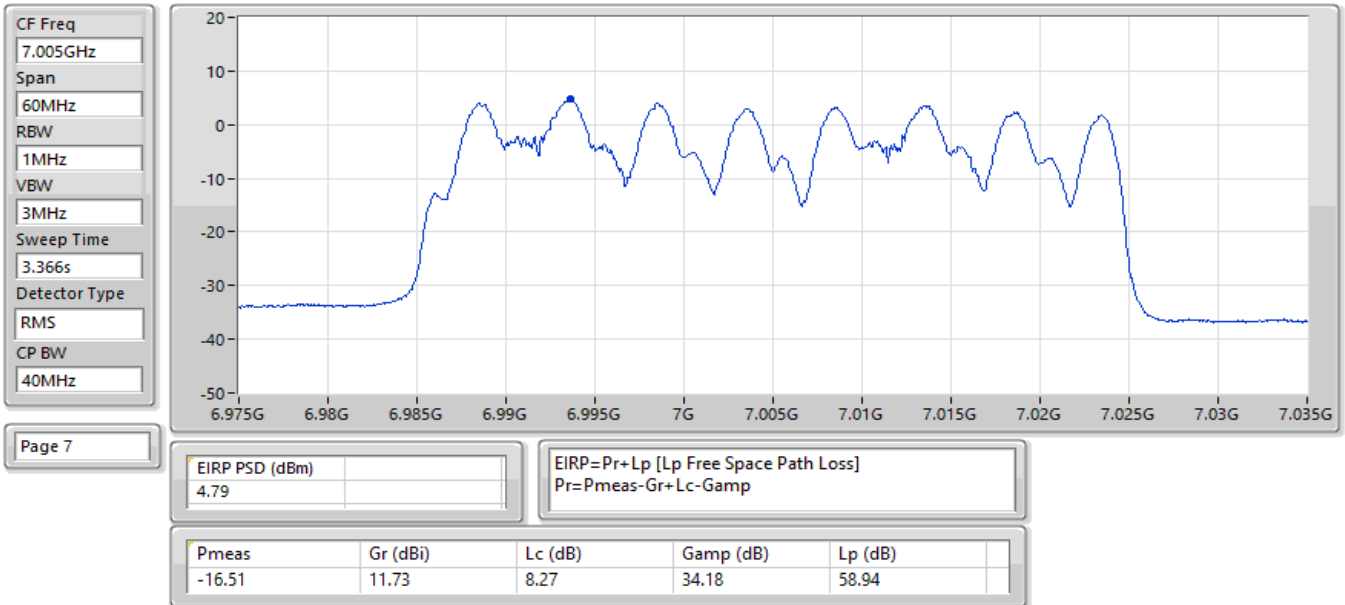


27/06/2025

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

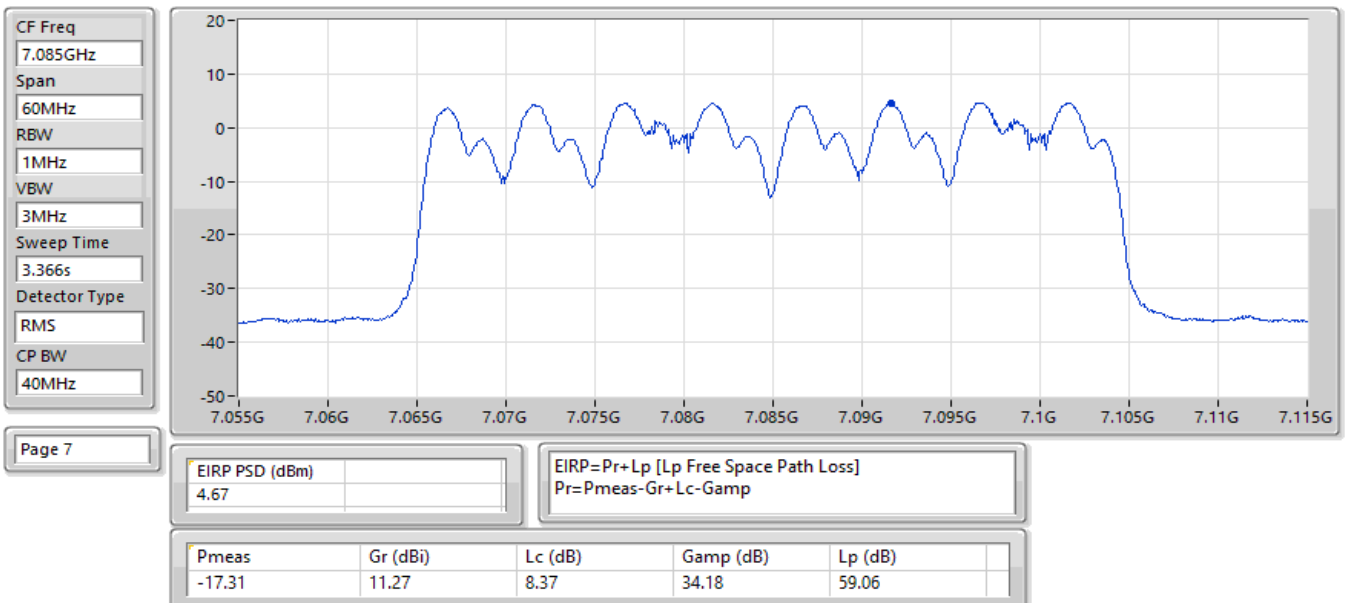


27/06/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

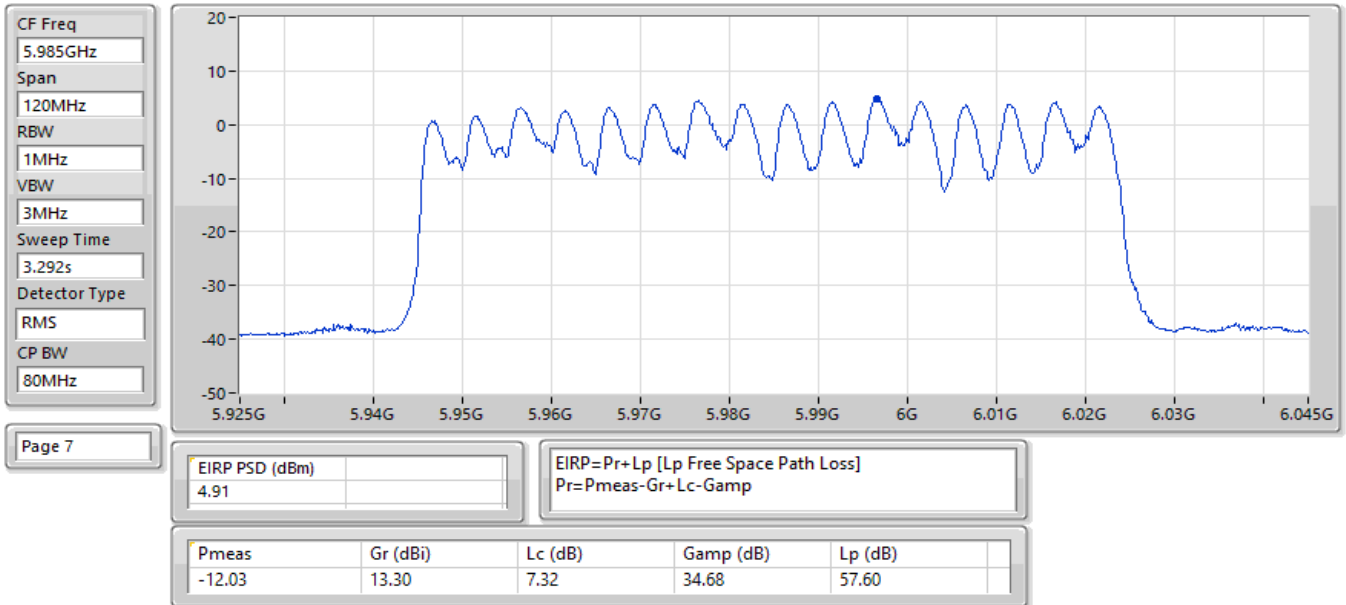


27/06/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

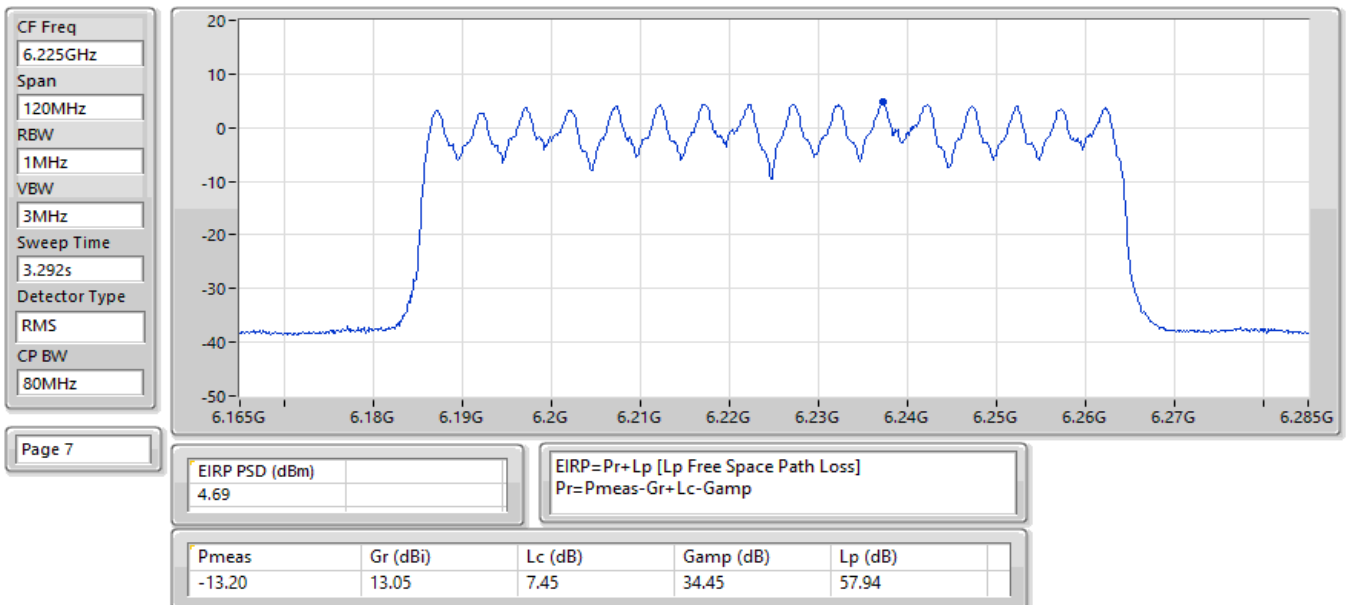


27/06/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

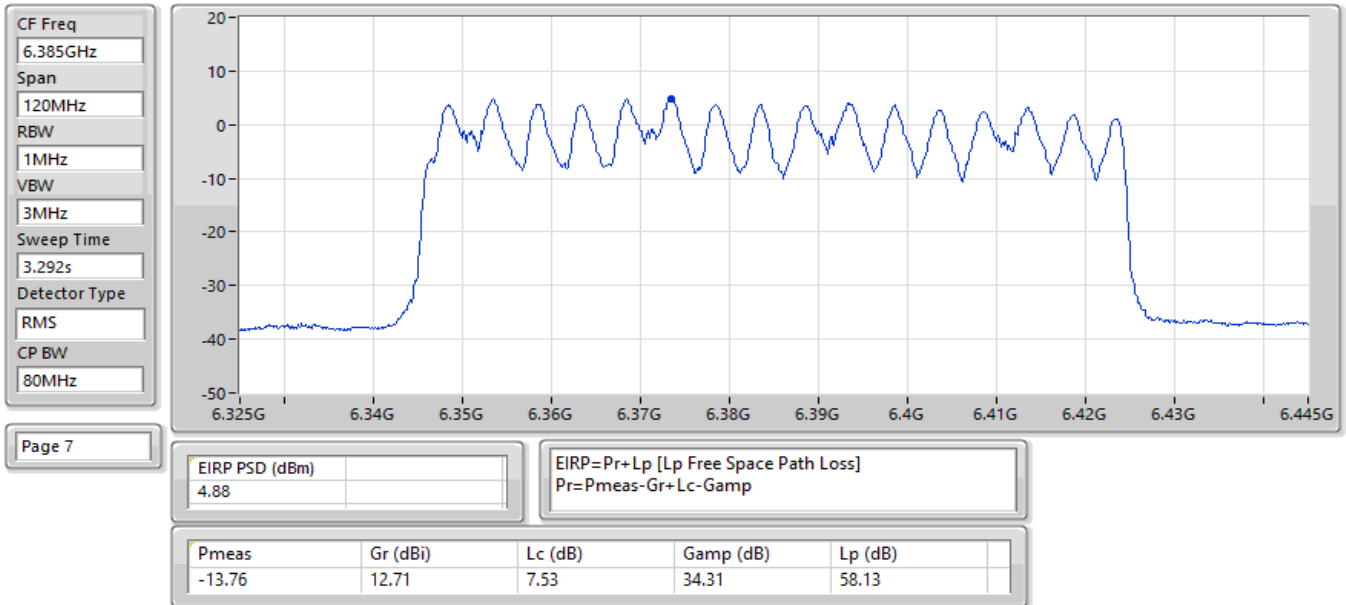


27/06/2025

EIRP PSD;Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

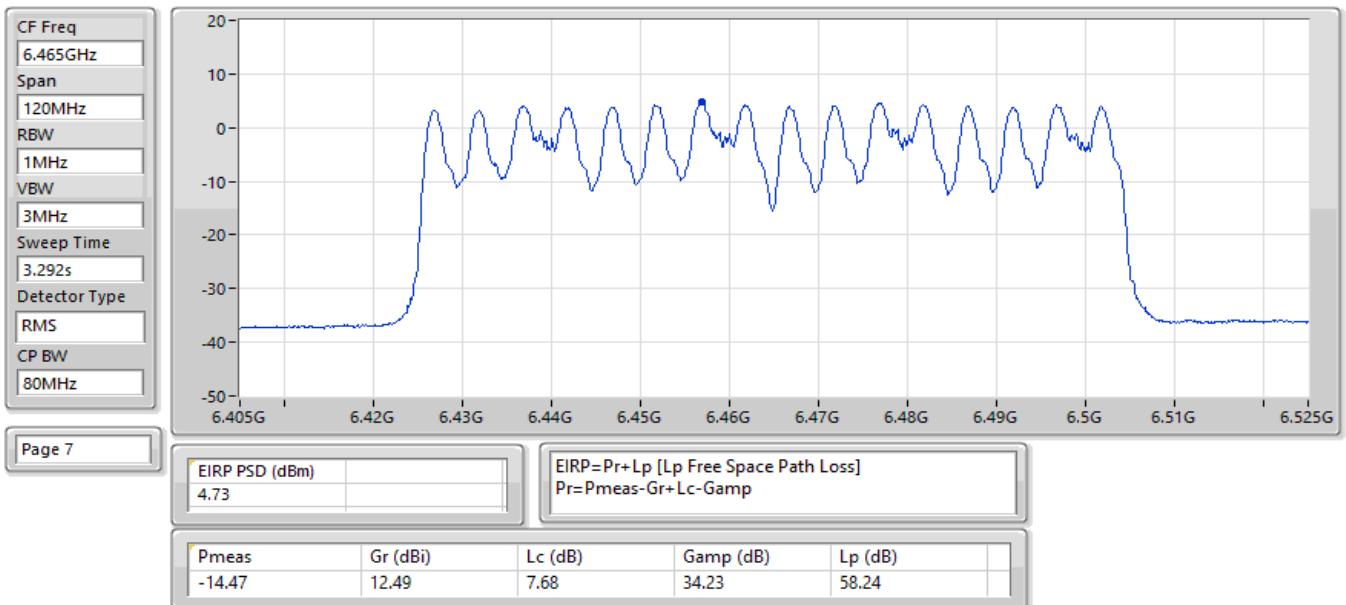


27/06/2025

EIRP PSD;Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

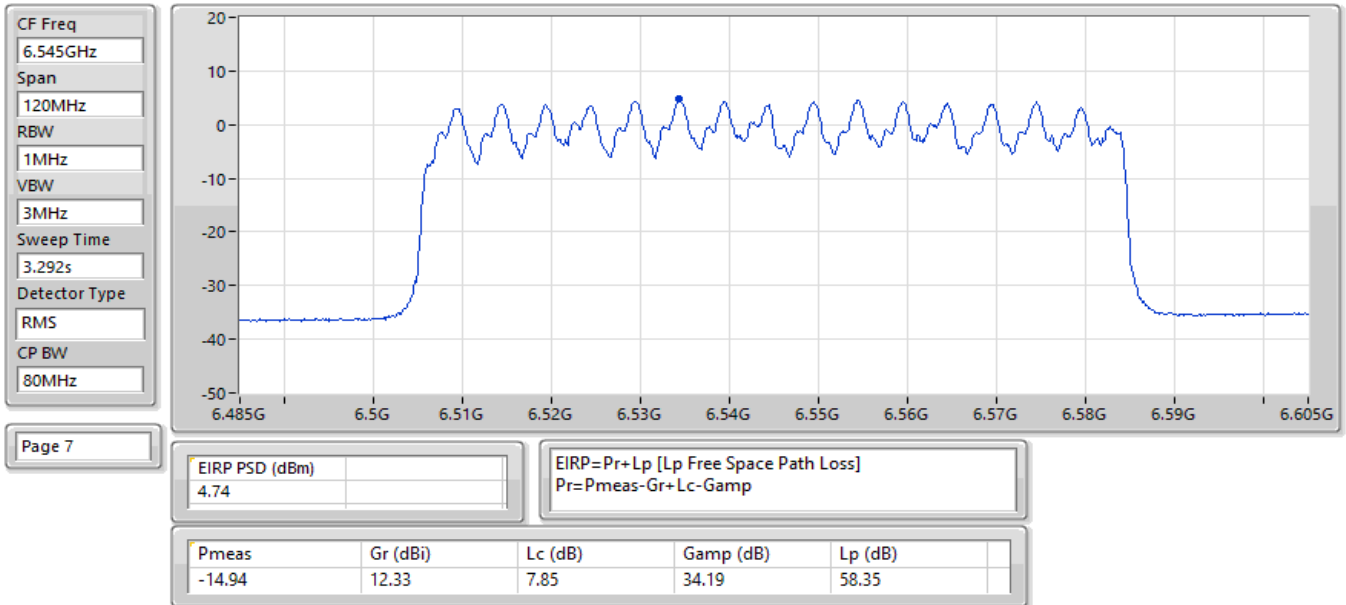


27/06/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

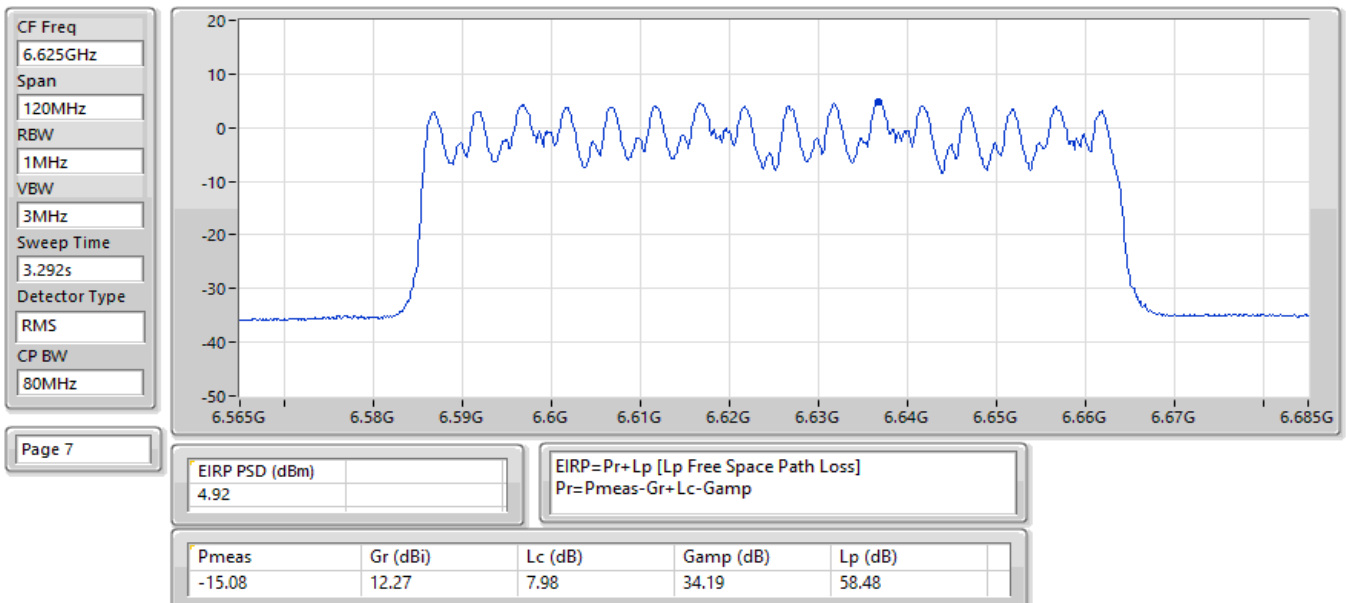


27/06/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

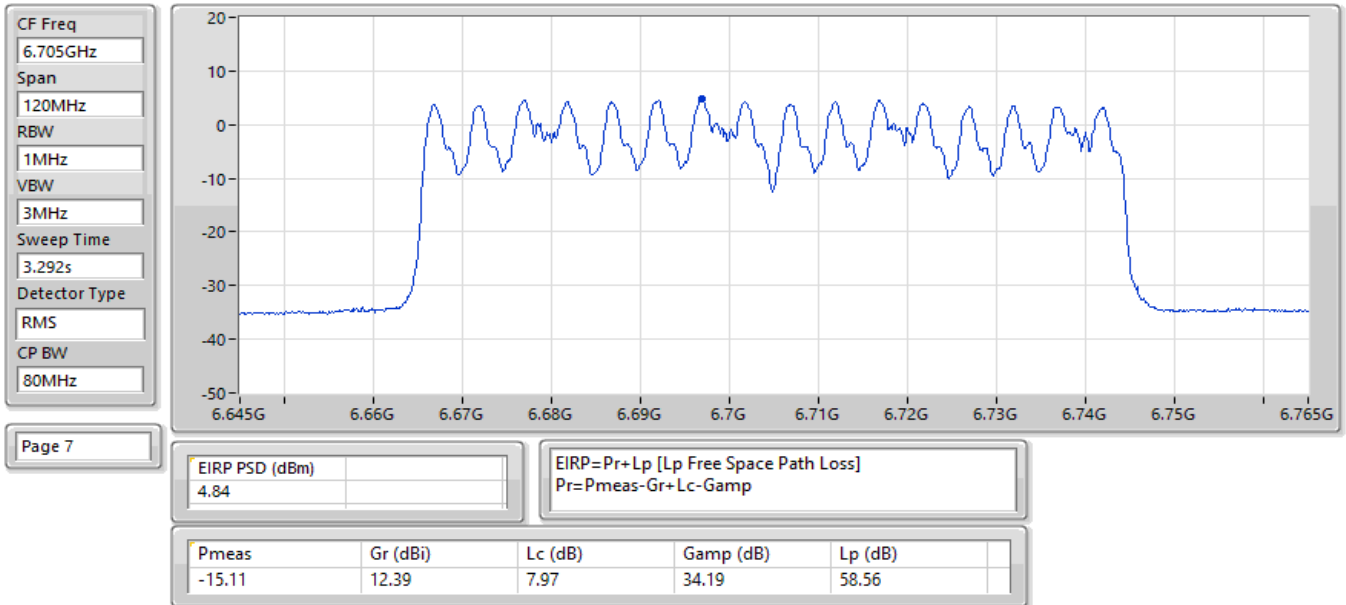


27/06/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

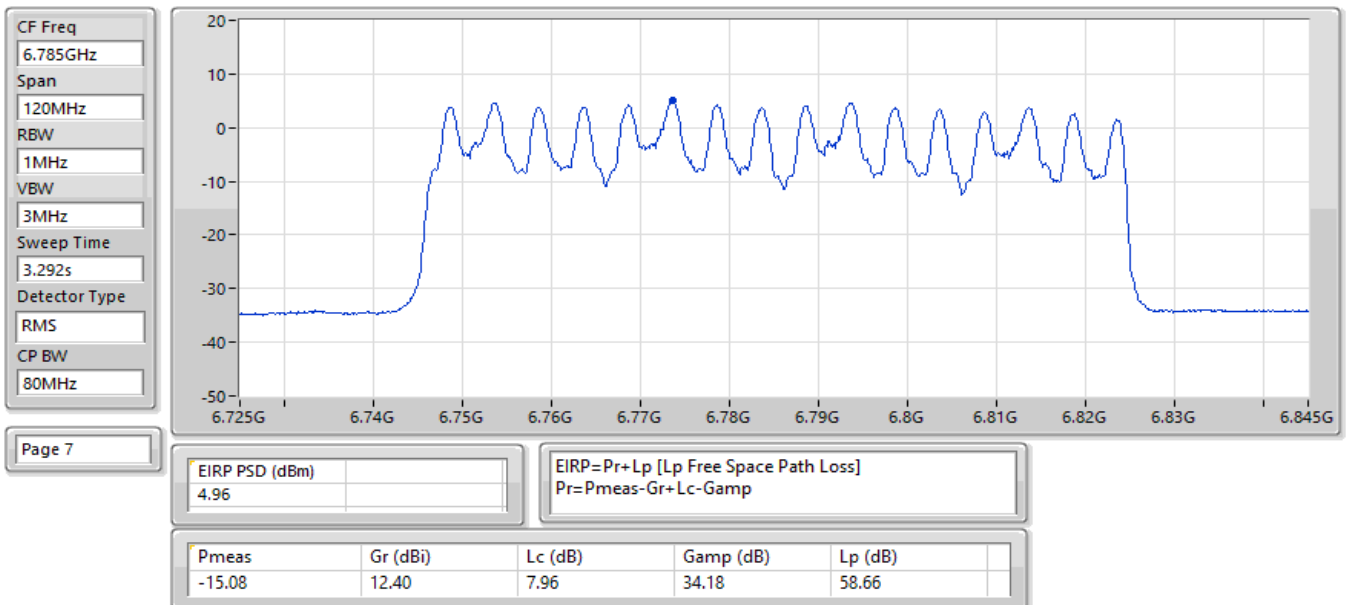


27/06/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

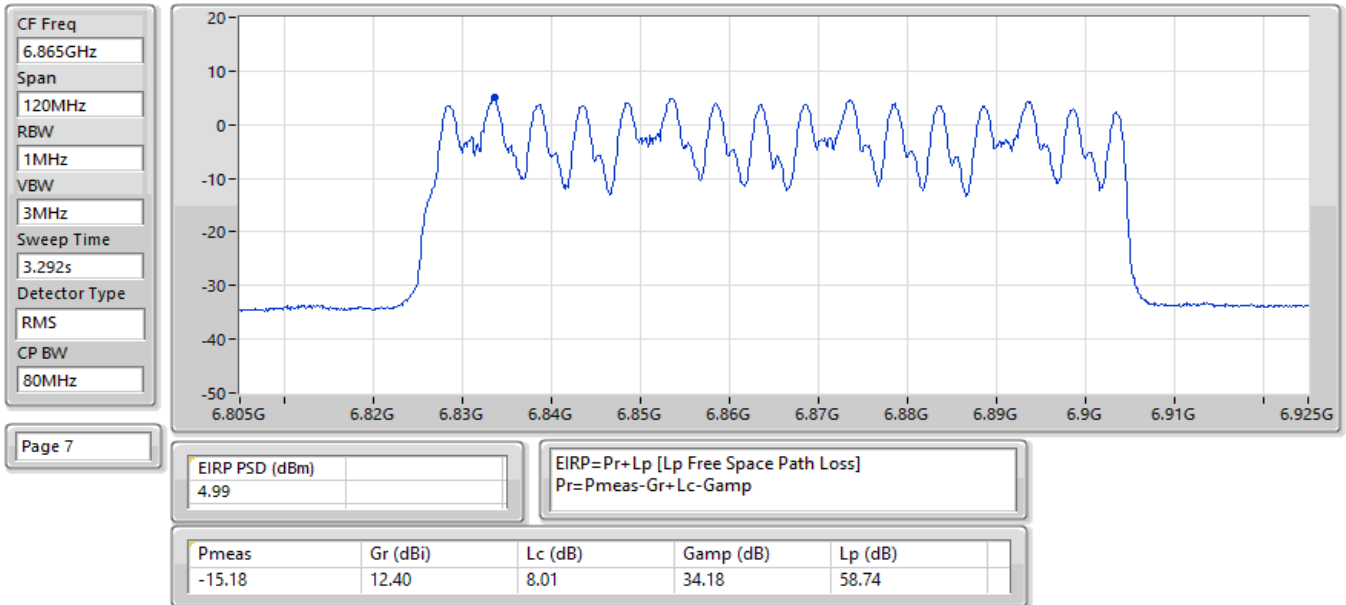


27/06/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

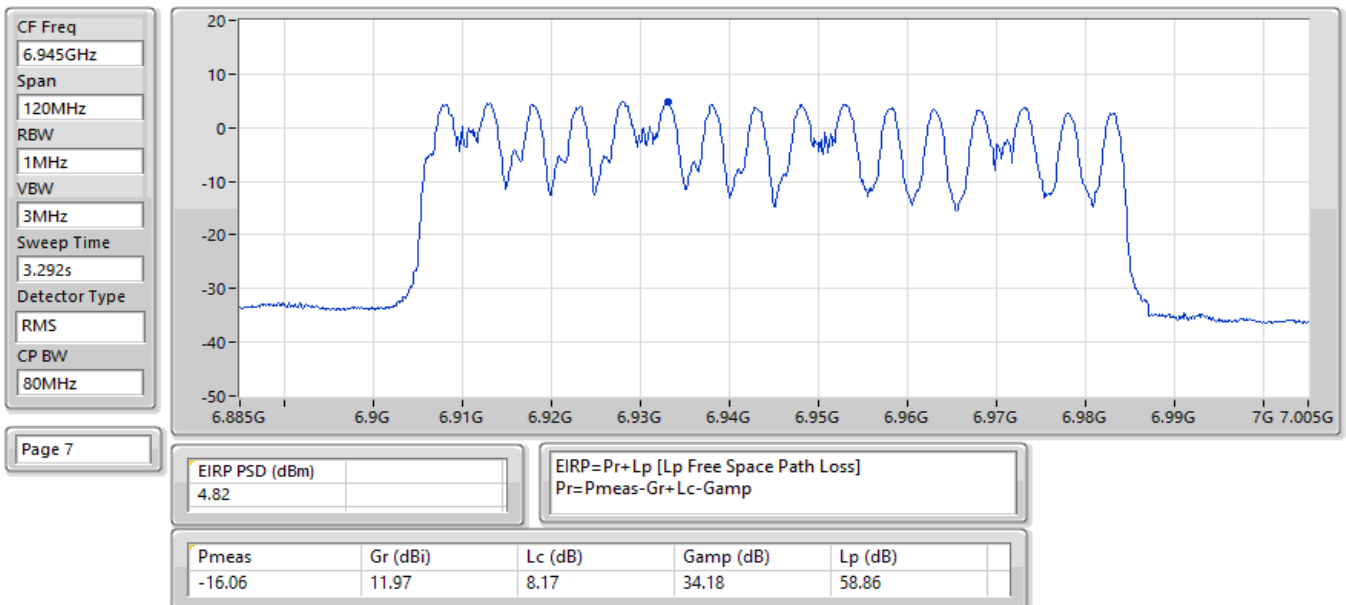


27/06/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

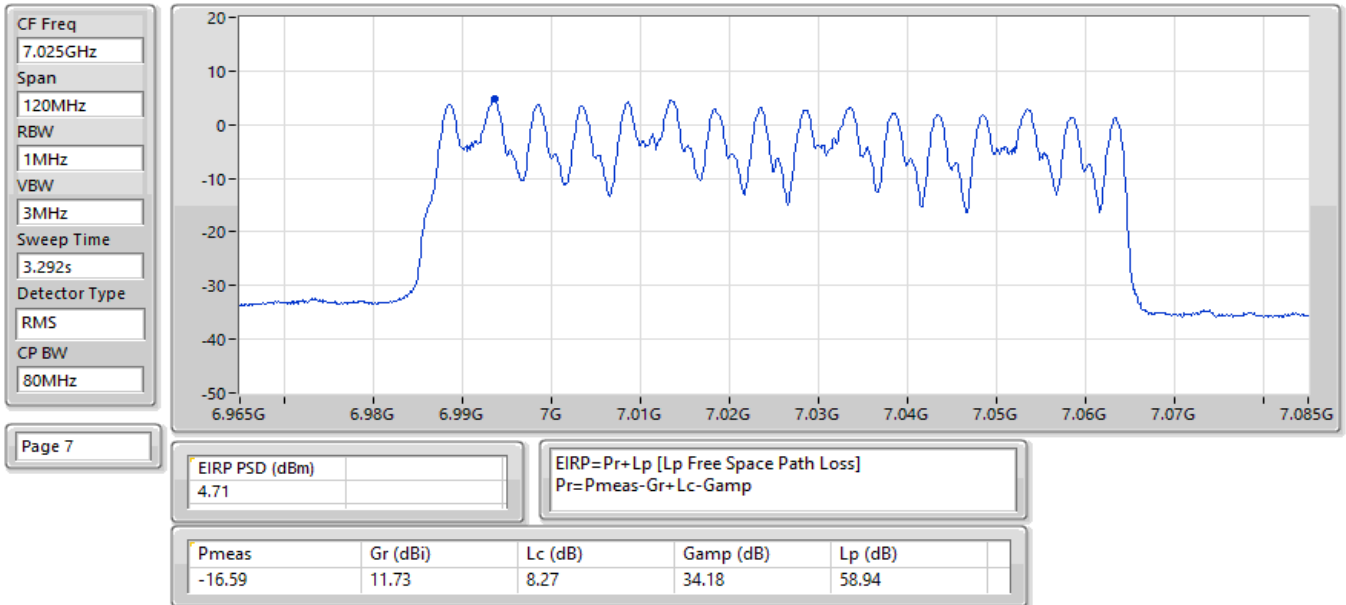


28/06/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

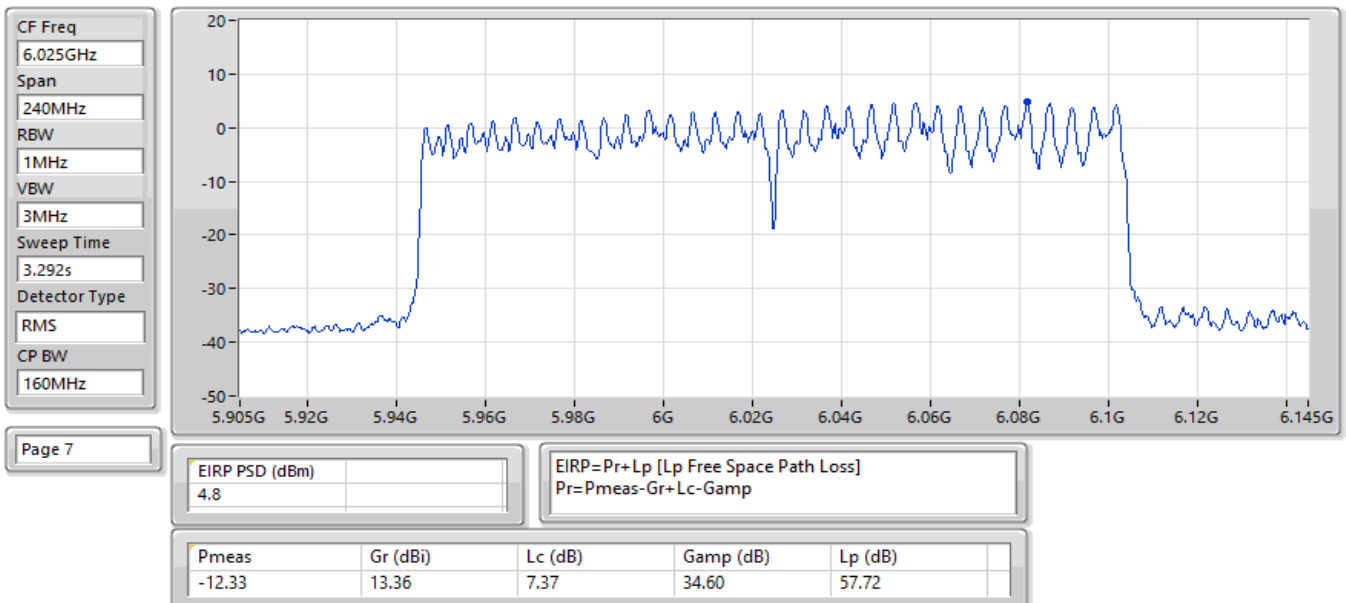


28/06/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

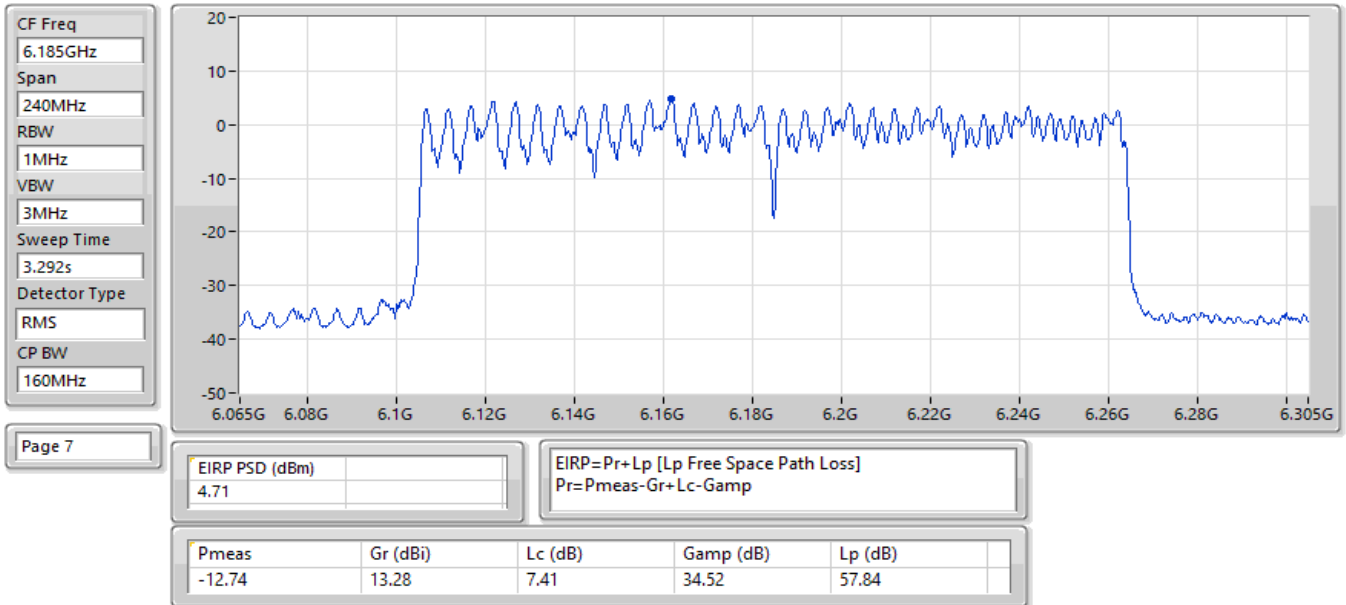


28/06/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

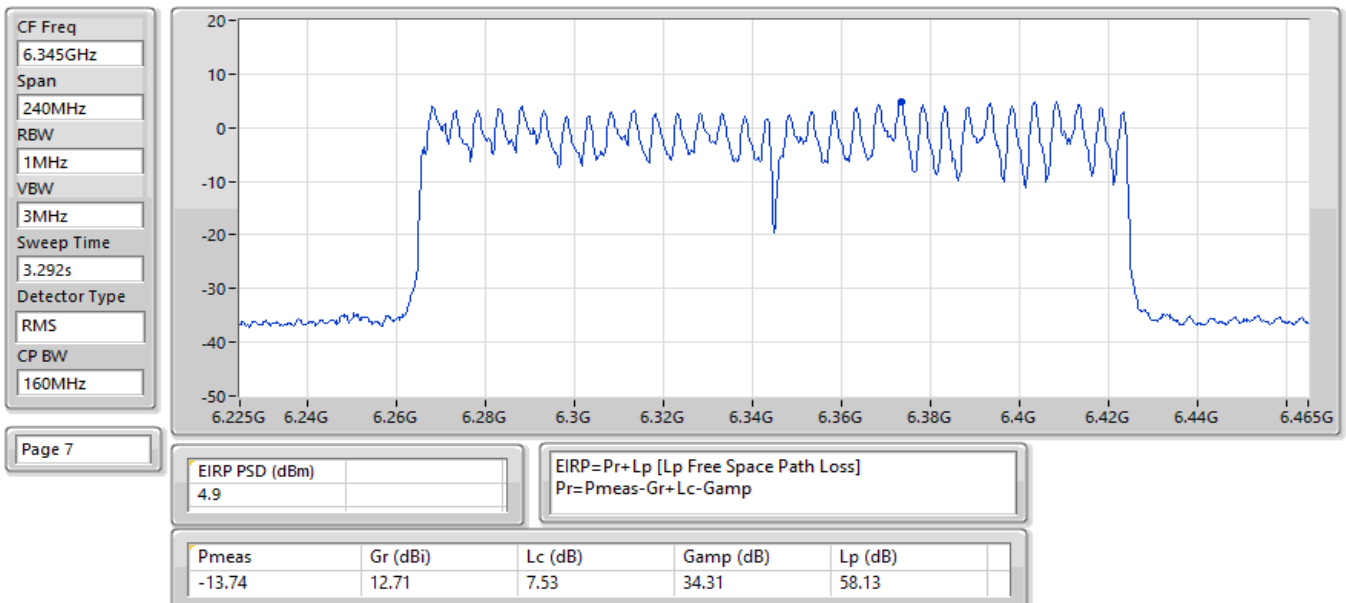


28/06/2025

EIRP PSD;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

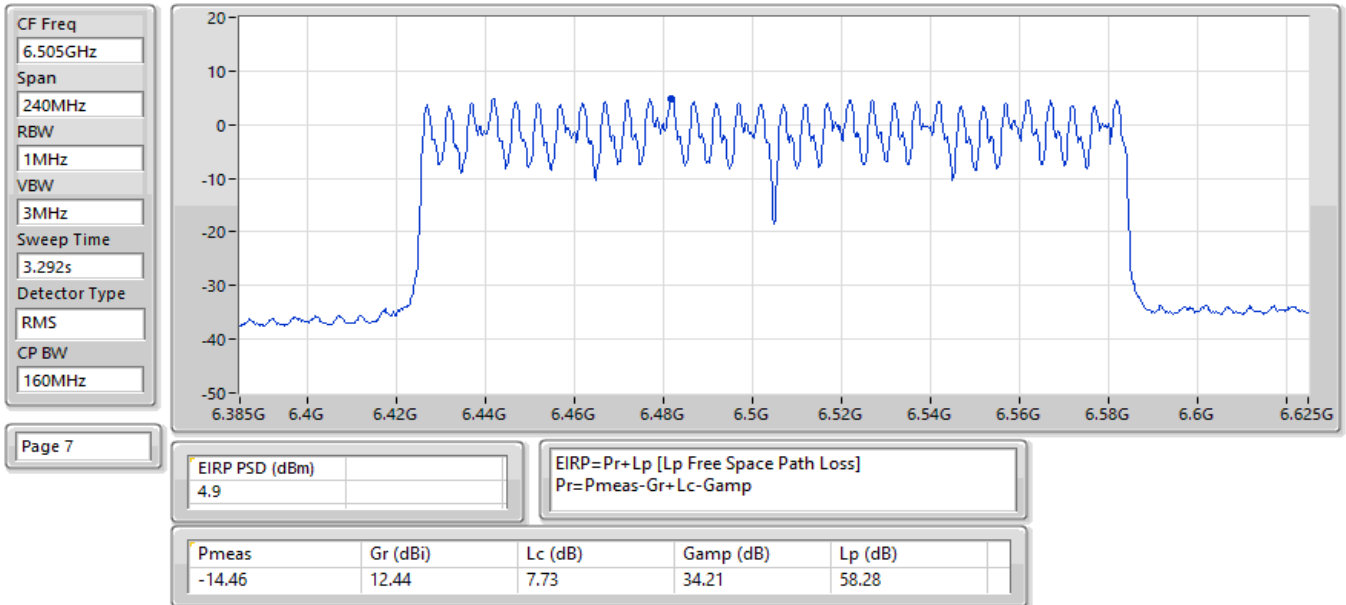


28/06/2025

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

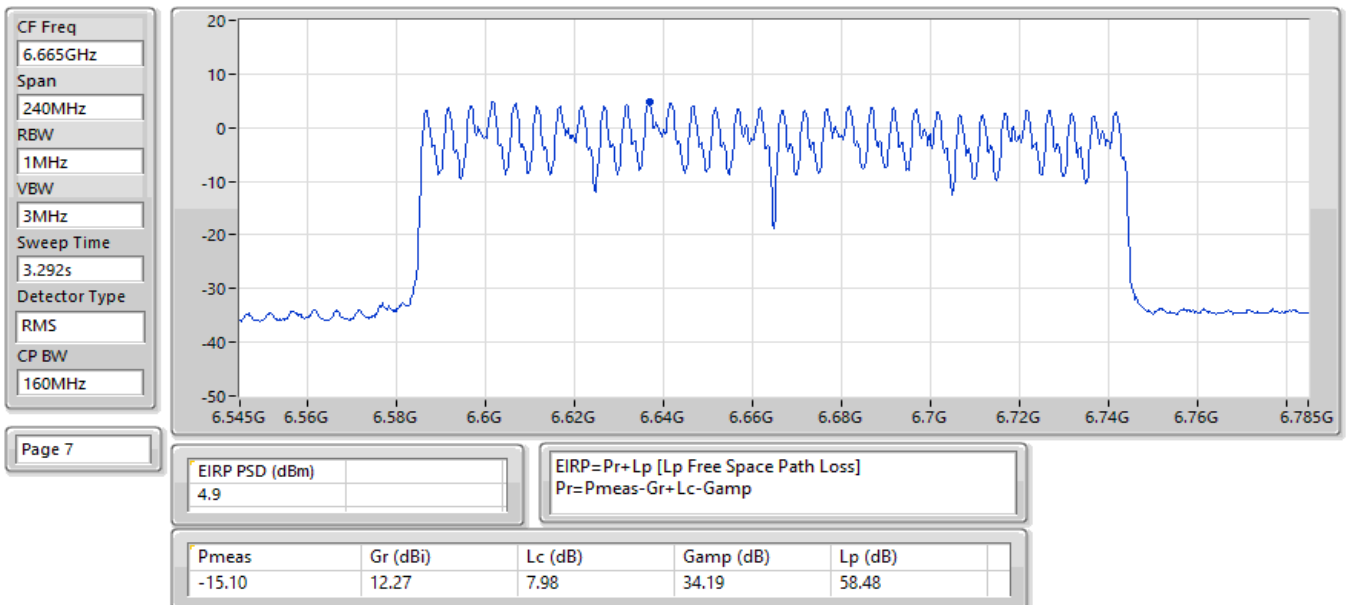


28/06/2025

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

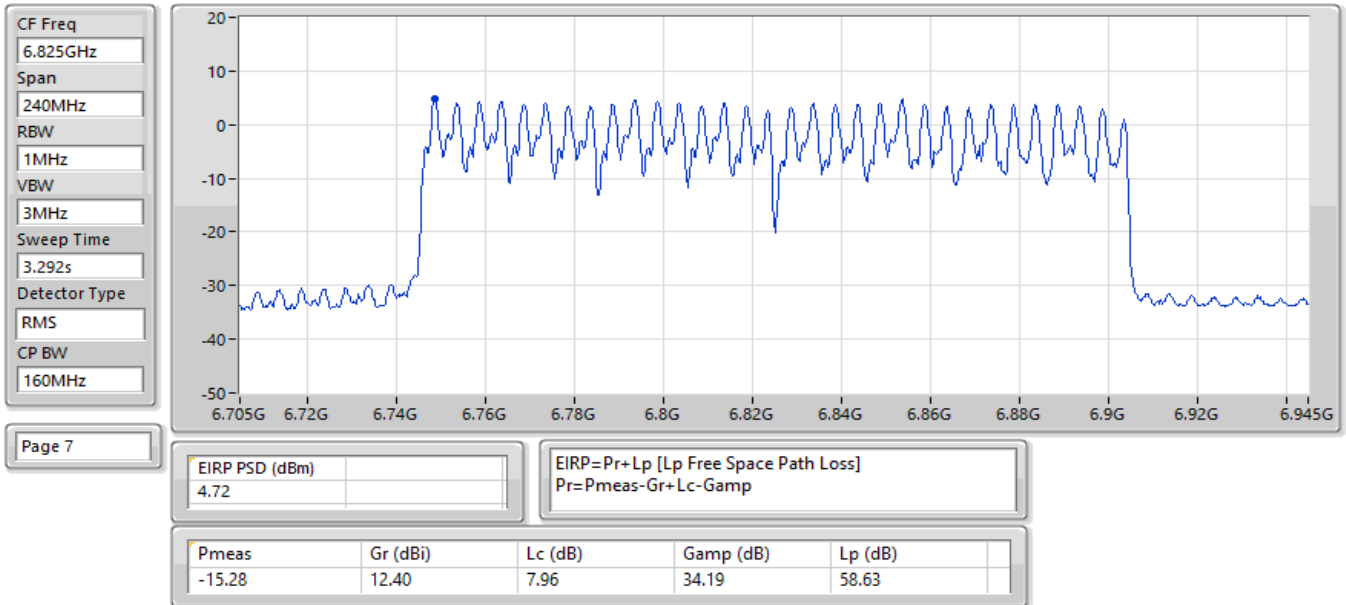


28/06/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

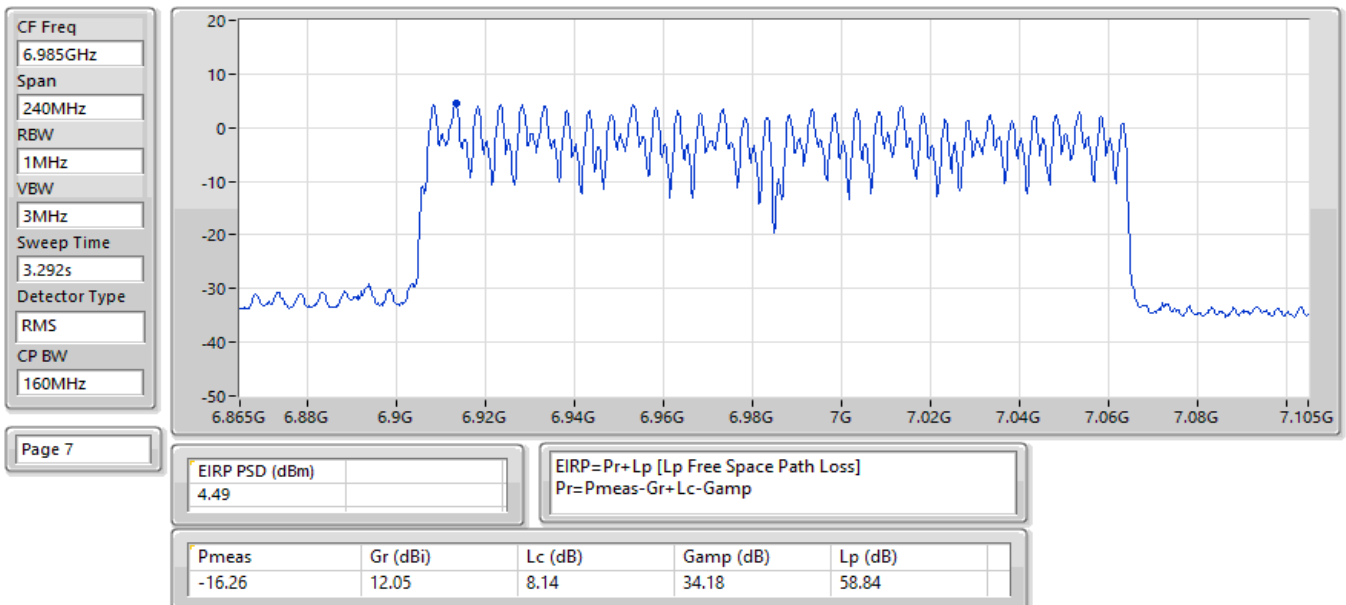


28/06/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

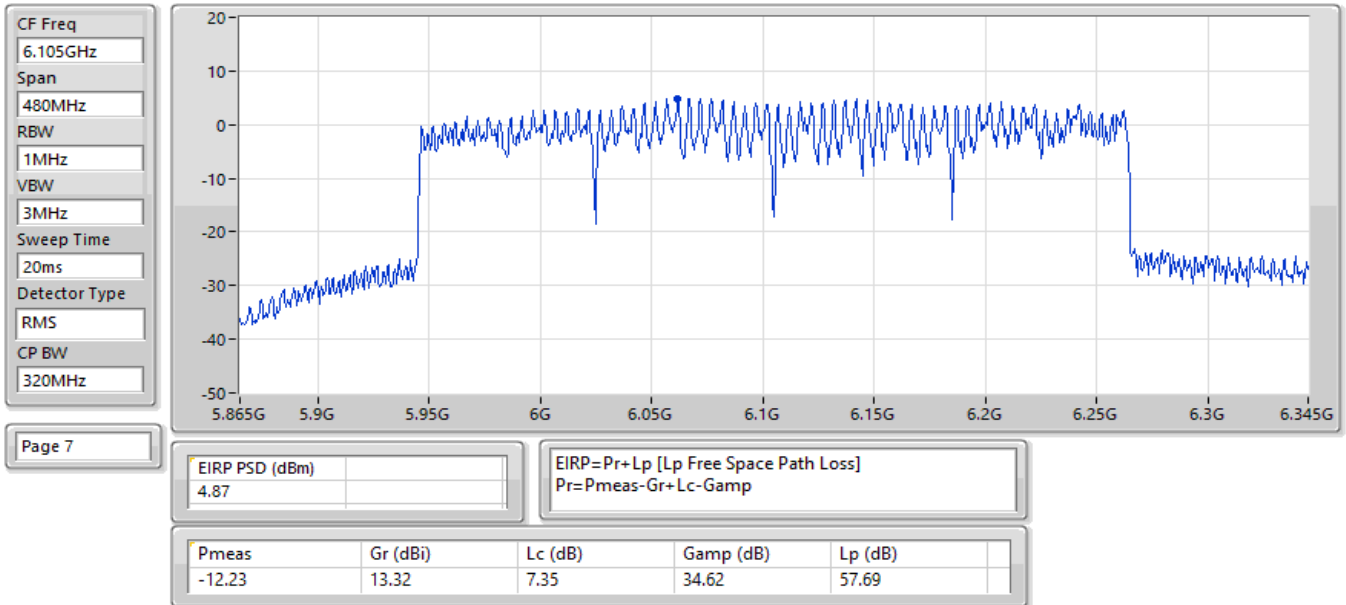


28/06/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

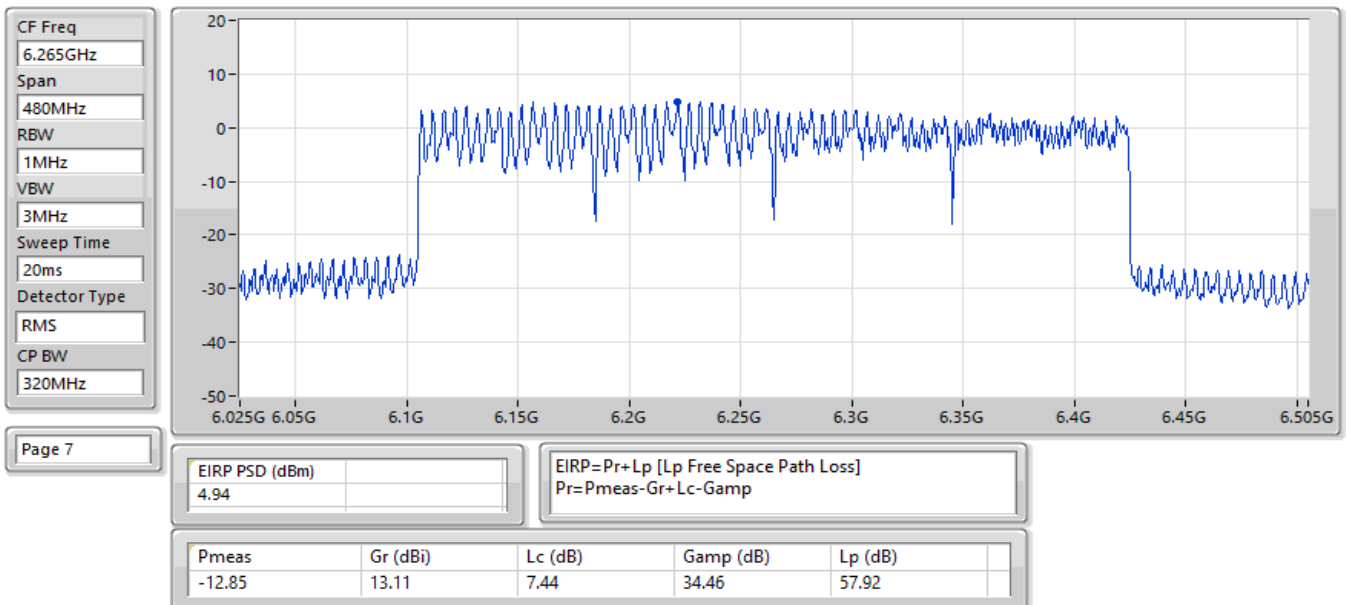


28/06/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6425MHz;TX

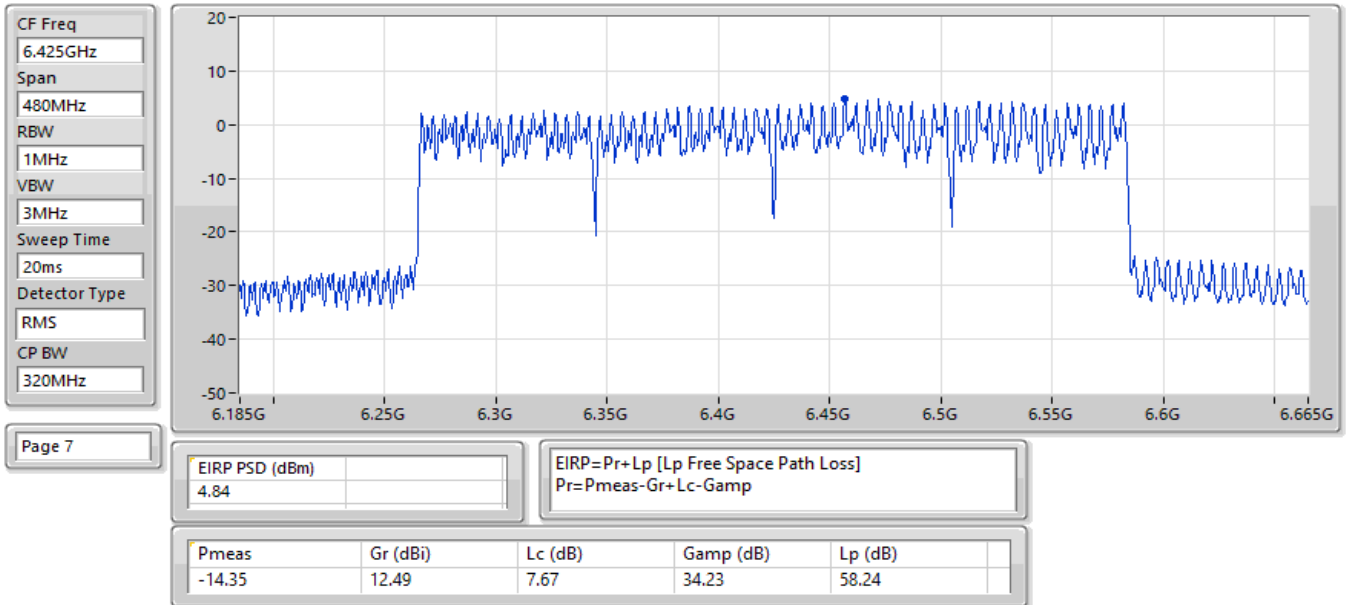


28/06/2025

EIRP PSD;Band:6.4G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

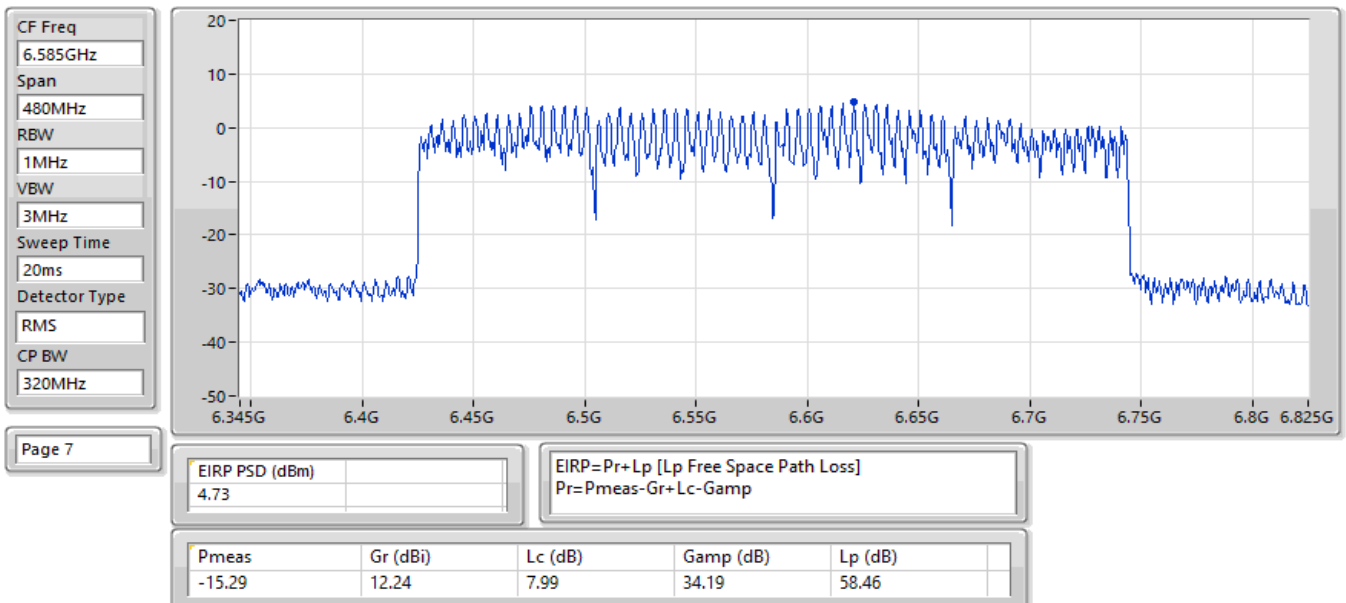


28/06/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

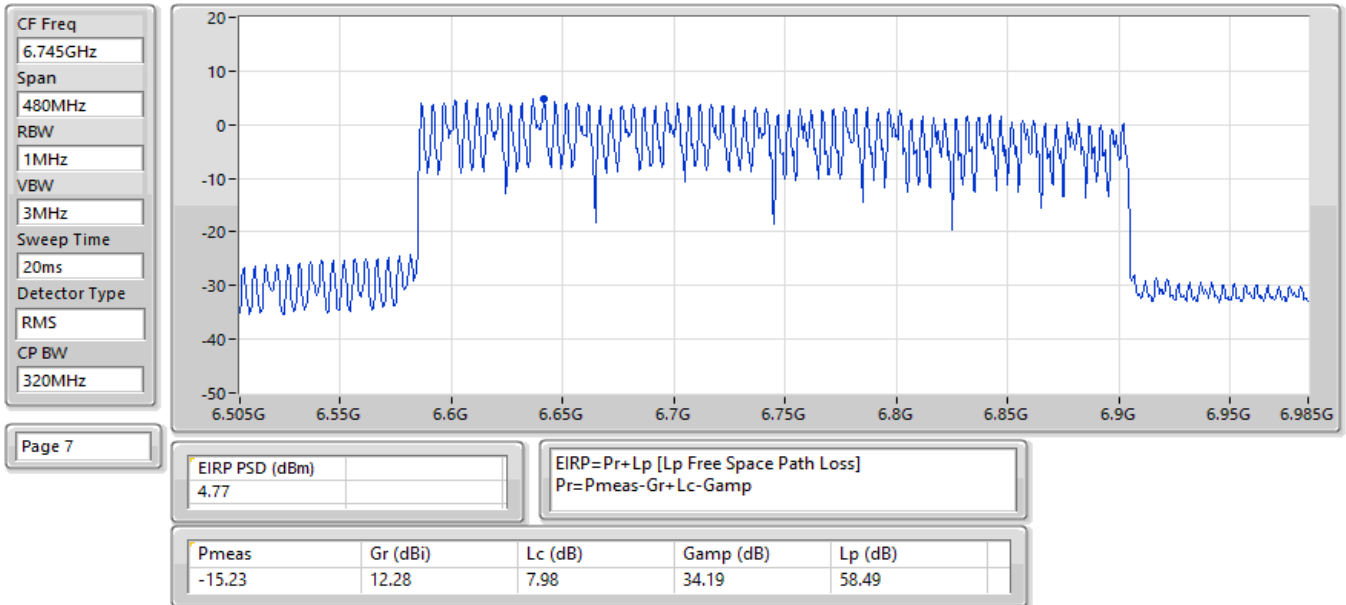

28/06/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

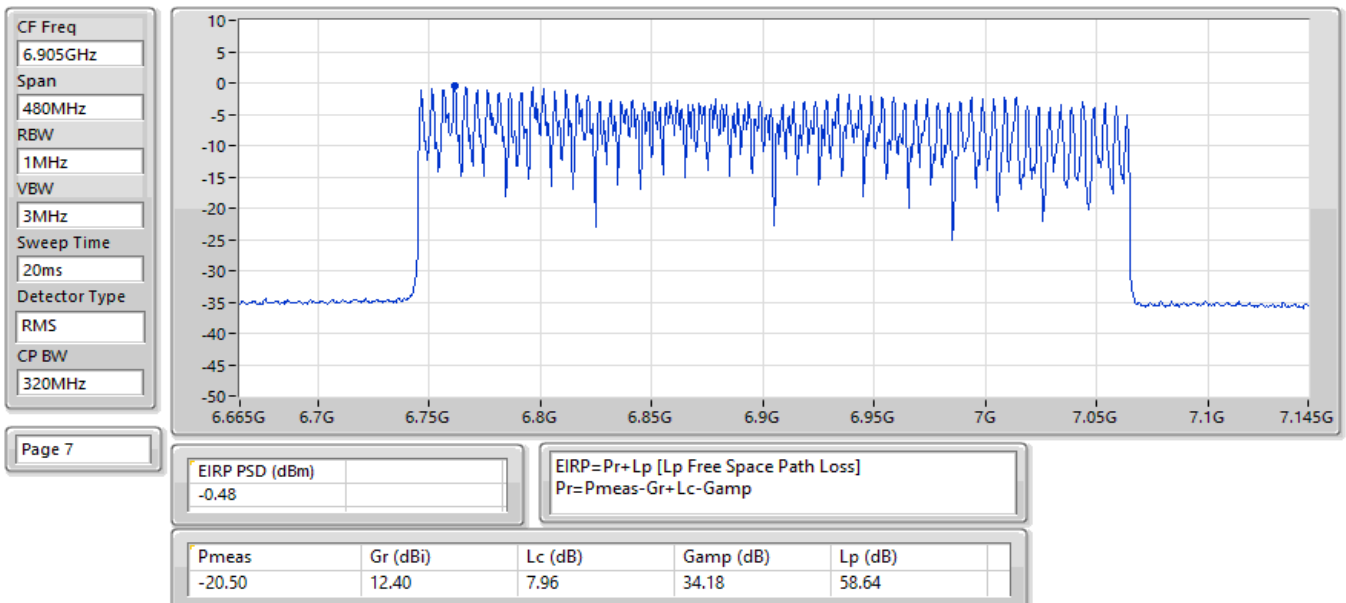

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.97
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.91
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.89
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.93
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.89
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.94
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.93
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.85
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.94
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.89
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.84
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.91
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.92
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.94
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.90
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.90
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.93
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.91
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.95

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**


Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	4.74	5.00
6195MHz	Pass	4.97	5.00
6415MHz	Pass	4.97	5.00
6435MHz	Pass	4.70	5.00
6475MHz	Pass	4.94	5.00
6515MHz	Pass	4.86	5.00
6535MHz	Pass	4.84	5.00
6695MHz	Pass	4.66	5.00
6875MHz	Pass	4.82	5.00
6895MHz	Pass	4.79	5.00
6995MHz	Pass	4.90	5.00
7095MHz	Pass	4.77	5.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	4.78	5.00
6205MHz	Pass	4.77	5.00
6405MHz	Pass	4.91	5.00
6445MHz	Pass	4.86	5.00
6485MHz	Pass	4.93	5.00
6525MHz	Pass	4.93	5.00
6565MHz	Pass	4.78	5.00
6685MHz	Pass	4.91	5.00
6885MHz	Pass	4.89	5.00
6925MHz	Pass	4.93	5.00
7005MHz	Pass	4.83	5.00
7085MHz	Pass	4.87	5.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	4.89	5.00
6225MHz	Pass	4.83	5.00
6385MHz	Pass	4.81	5.00
6465MHz	Pass	4.85	5.00
6545MHz	Pass	4.84	5.00
6625MHz	Pass	4.87	5.00
6705MHz	Pass	4.86	5.00
6785MHz	Pass	4.87	5.00
6865MHz	Pass	4.92	5.00
6945MHz	Pass	4.91	5.00
7025MHz	Pass	4.82	5.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	4.70	5.00
6185MHz	Pass	4.93	5.00
6345MHz	Pass	4.80	5.00
6505MHz	Pass	4.94	5.00
6665MHz	Pass	4.81	5.00
6825MHz	Pass	4.94	5.00
6985MHz	Pass	4.95	5.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	4.58	5.00
6265MHz	Pass	4.89	5.00
6425MHz	Pass	4.76	5.00
6585MHz	Pass	4.89	5.00
6745MHz	Pass	4.90	5.00
6905MHz	Pass	4.87	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

28/06/2025

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

CF Freq
5.955GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

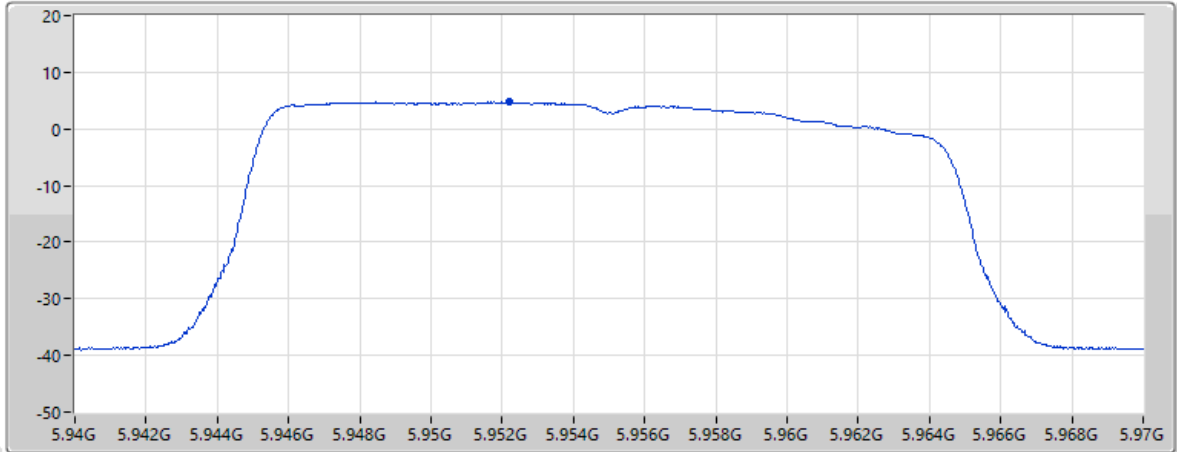


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.74		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-12.16	13.30	7.29	34.63	57.54

28/06/2025

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

CF Freq
6.195GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

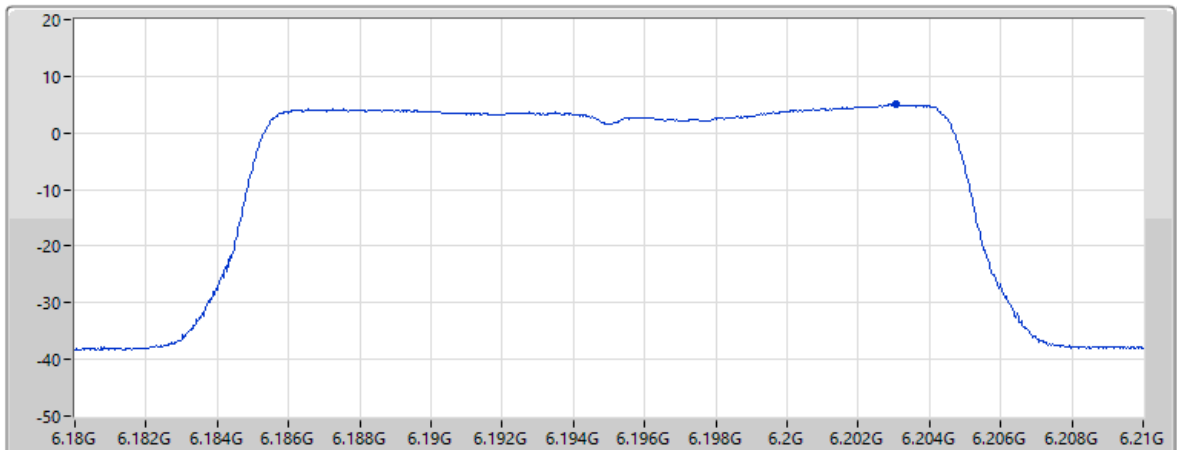


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.97		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-12.68	13.19	7.43	34.48	57.89


28/06/2025

EIRP PSD; Band: 6.2G; be20, BF; BWch: 20MHz; Nss: 1, (M0); Nant: 4; Ch: 6415MHz; TX

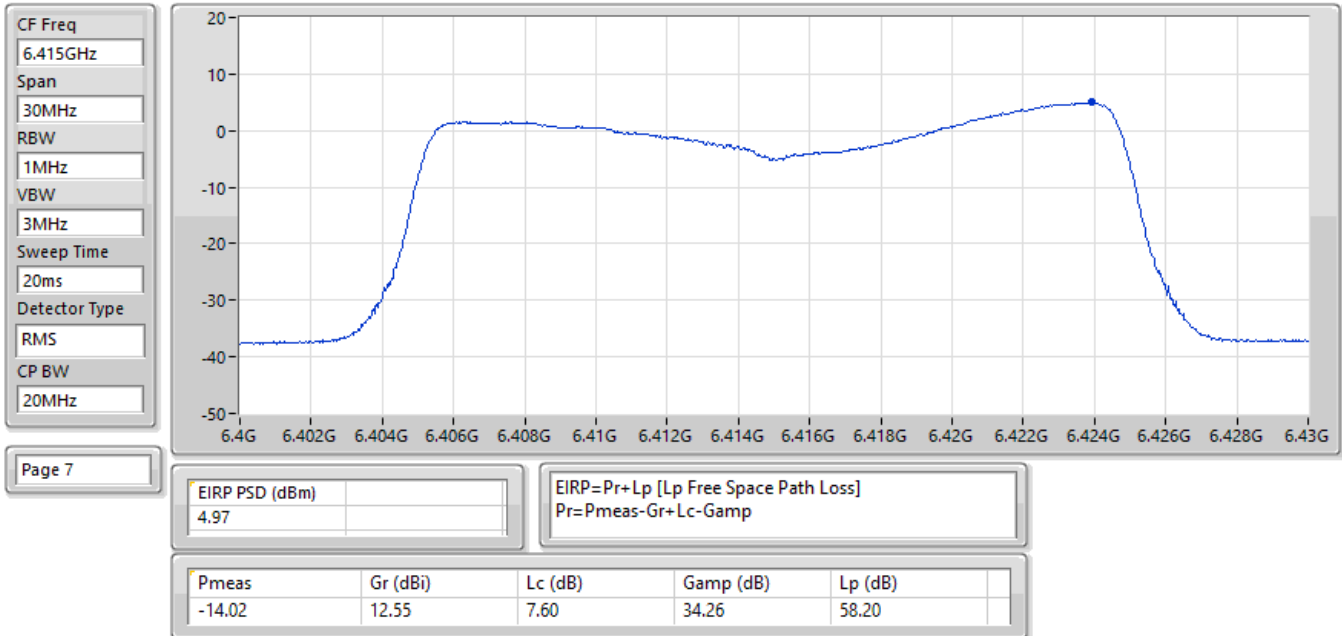


28/06/2025

EIRP PSD; Band: 6.4G; be20, BF; BWch: 20MHz; Nss: 1, (M0); Nant: 4; Ch: 6435MHz; TX

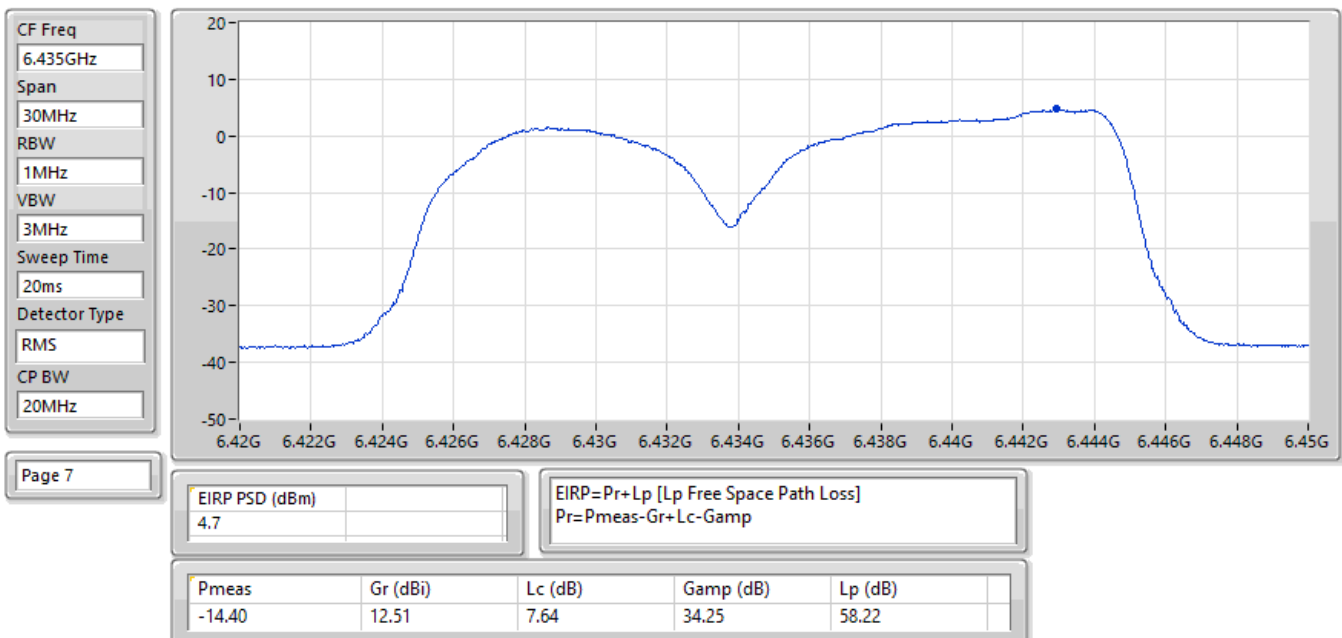


28/06/2025

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

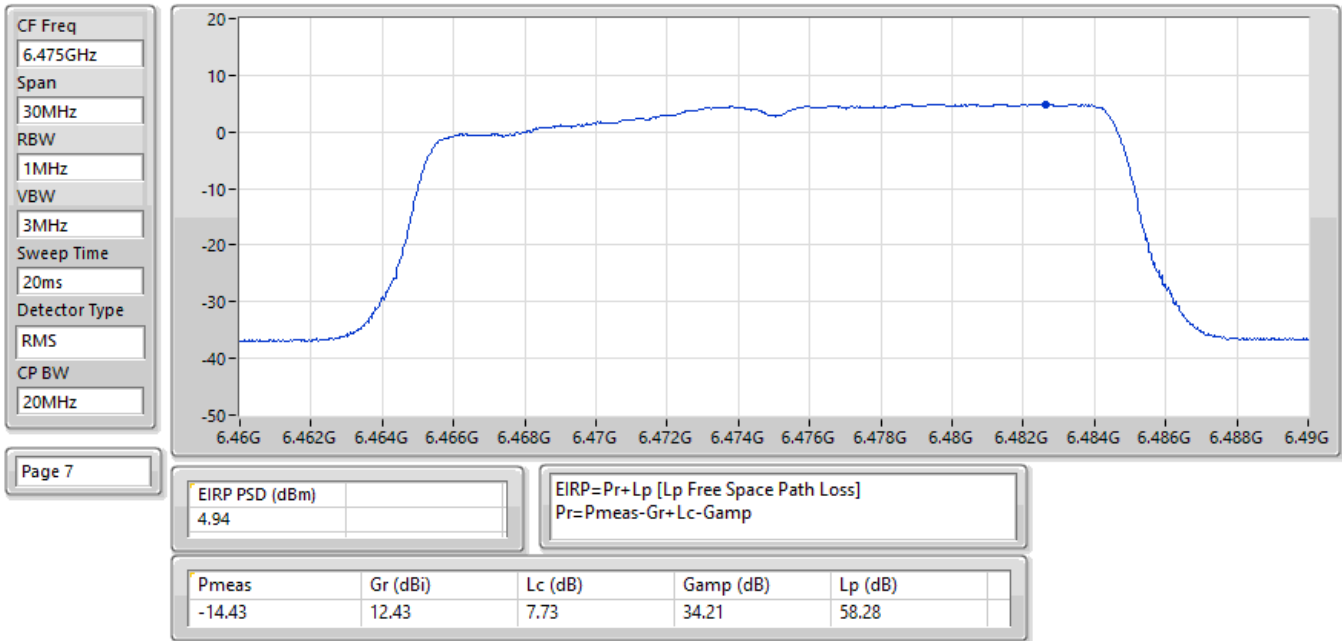

28/06/2025

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

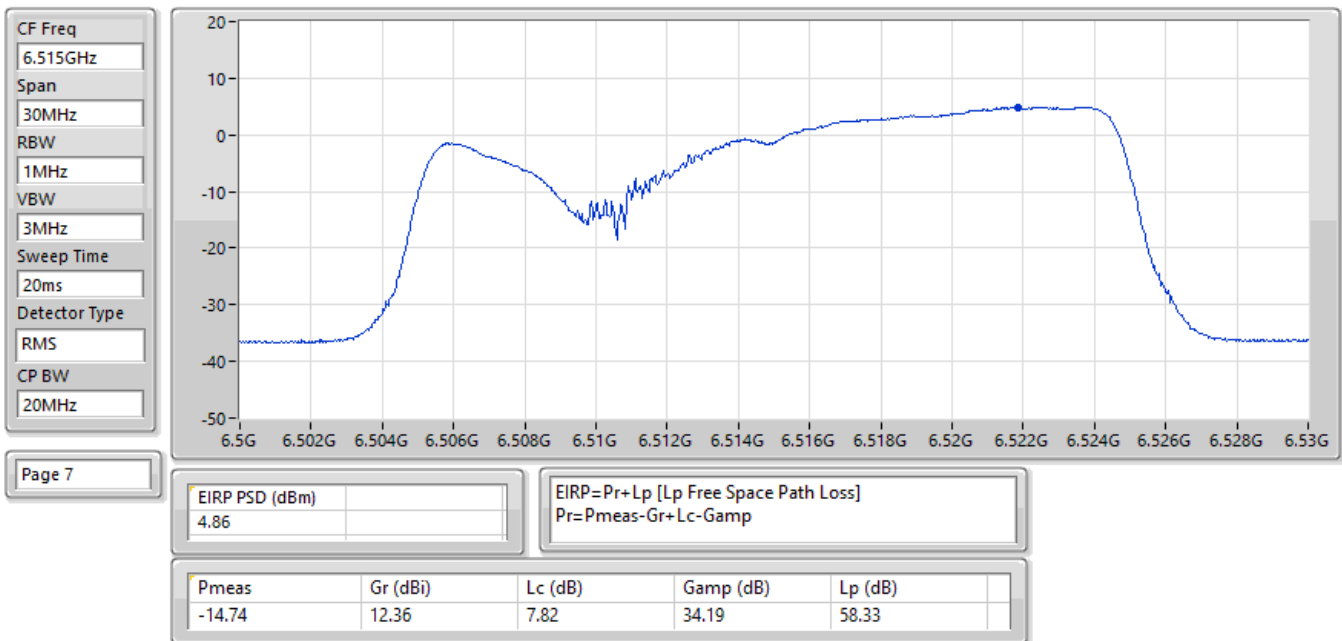

28/06/2025

EIRP PSD: Band: 6.7G; be20, BF; BWch: 20MHz; Nss: 1, (M0); Nant: 4; Ch: 6535MHz; TX

CF Freq
6.535GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

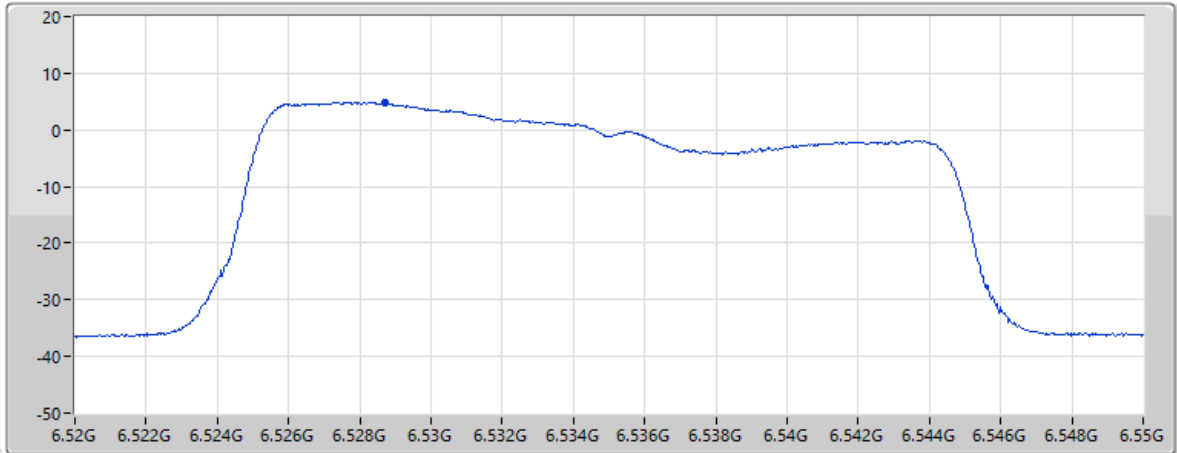

Page 7

EIRP PSD (dBm)
4.84

EIRP = Pr + Lp [Lp Free Space Path Loss]
Pr = Pmeas - Gr + Lc - Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.80	12.34	7.83	34.19	58.34

28/06/2025

EIRP PSD: Band: 6.7G; be20, BF; BWch: 20MHz; Nss: 1, (M0); Nant: 4; Ch: 6695MHz; TX

CF Freq
6.695GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

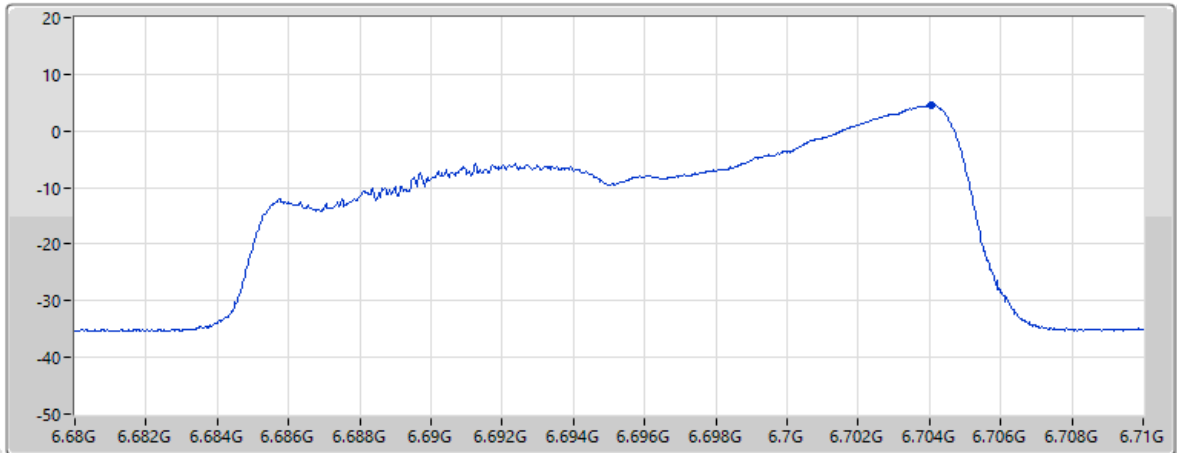

Page 7


EIRP PSD (dBm)
4.66

EIRP = Pr + Lp [Lp Free Space Path Loss]
Pr = Pmeas - Gr + Lc - Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.29	12.40	7.97	34.19	58.57


28/06/2025

EIRP PSD: Band: 6.7G; be20, BF; BWch: 20MHz; Nss: 1, (M0); Nant: 4; Ch: 6875MHz; TX

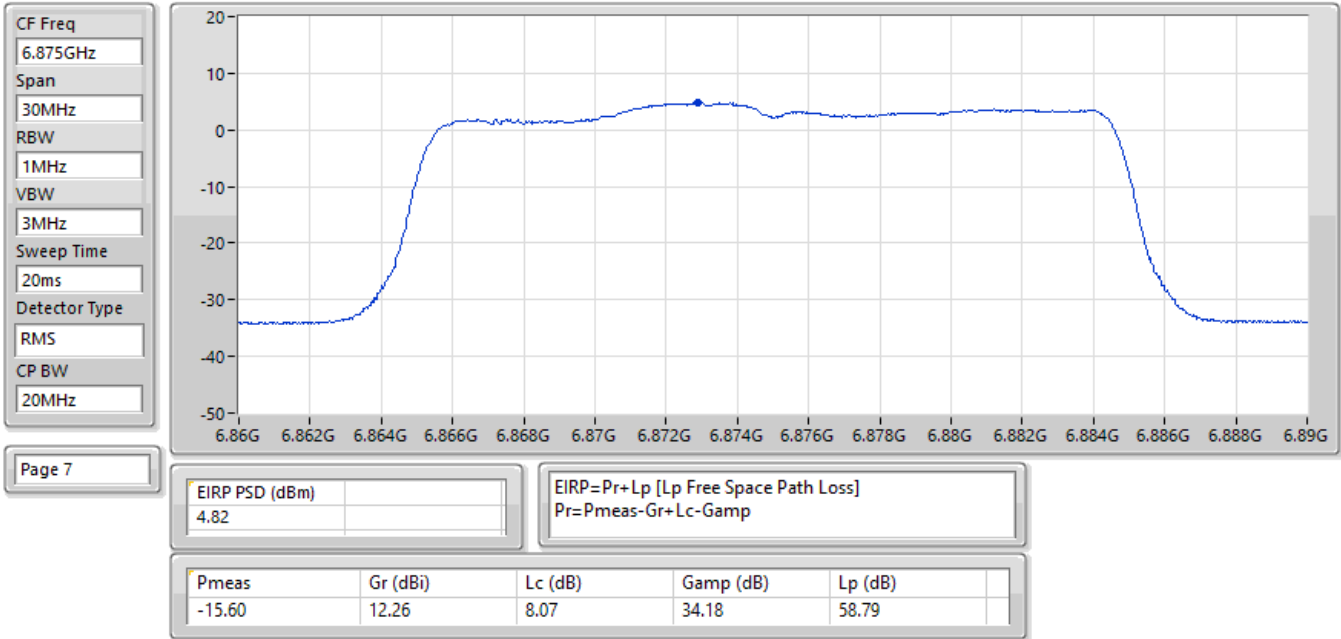


28/06/2025

EIRP PSD: Band: 7.0G; be20, BF; BWch: 20MHz; Nss: 1, (M0); Nant: 4; Ch: 6895MHz; TX

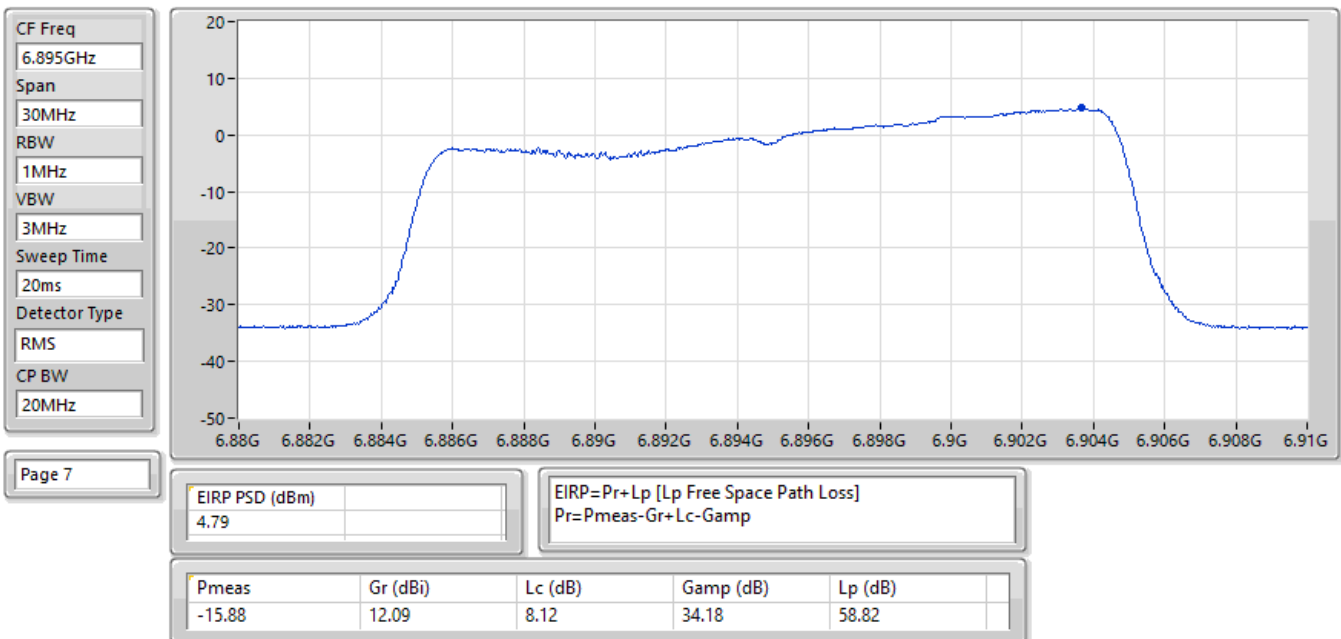


28/06/2025

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

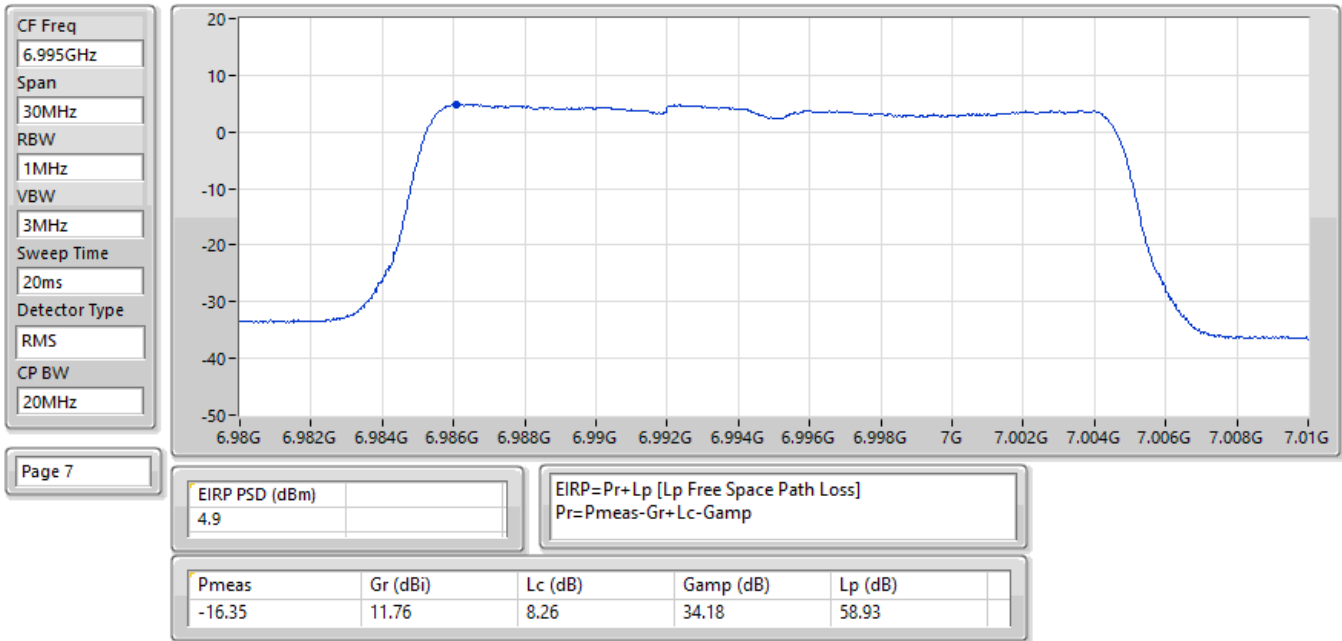


28/06/2025

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

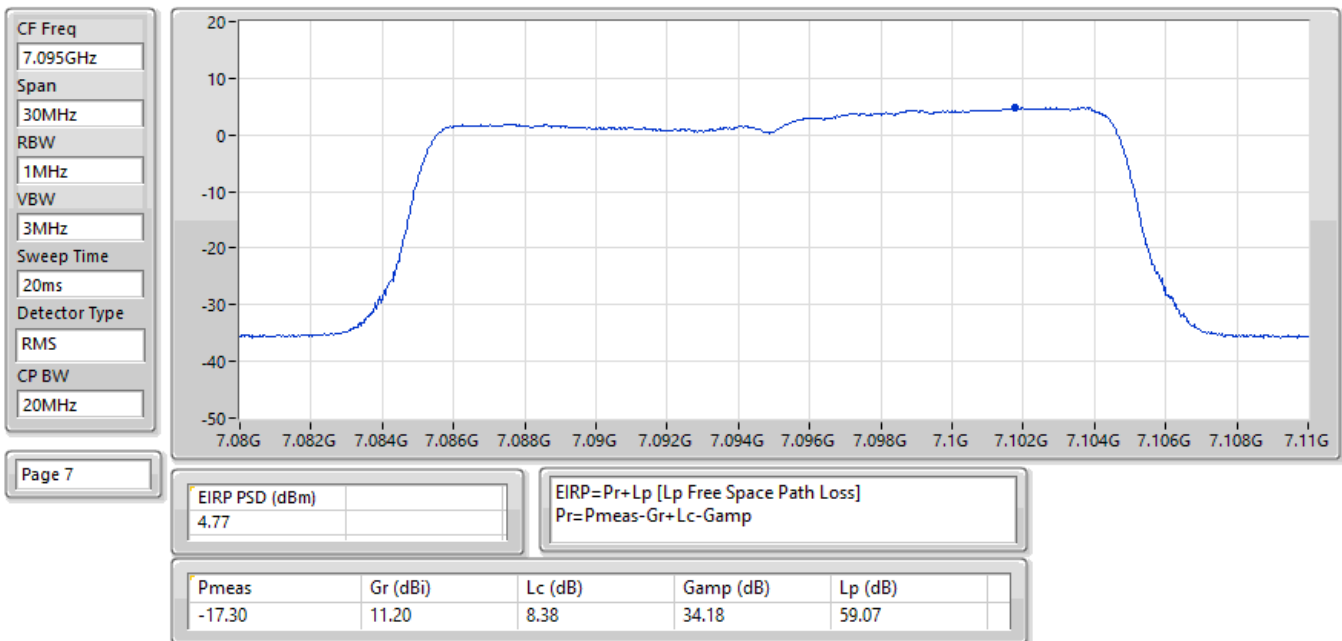


28/06/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

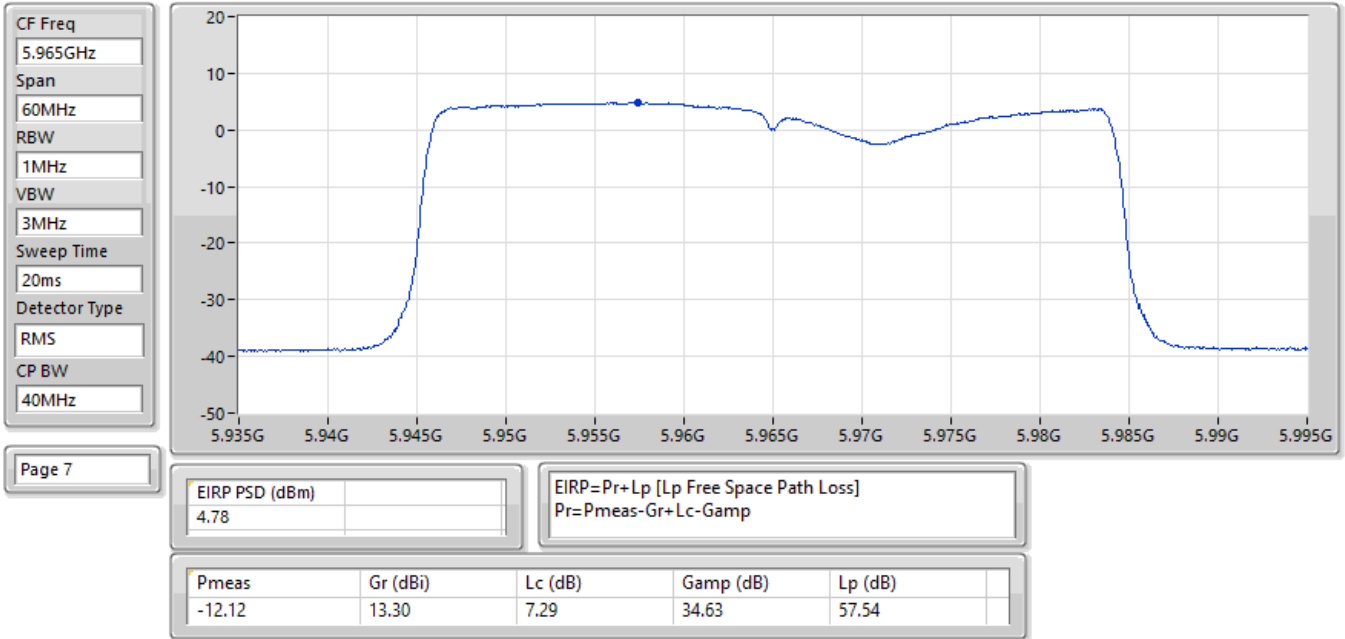


28/06/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

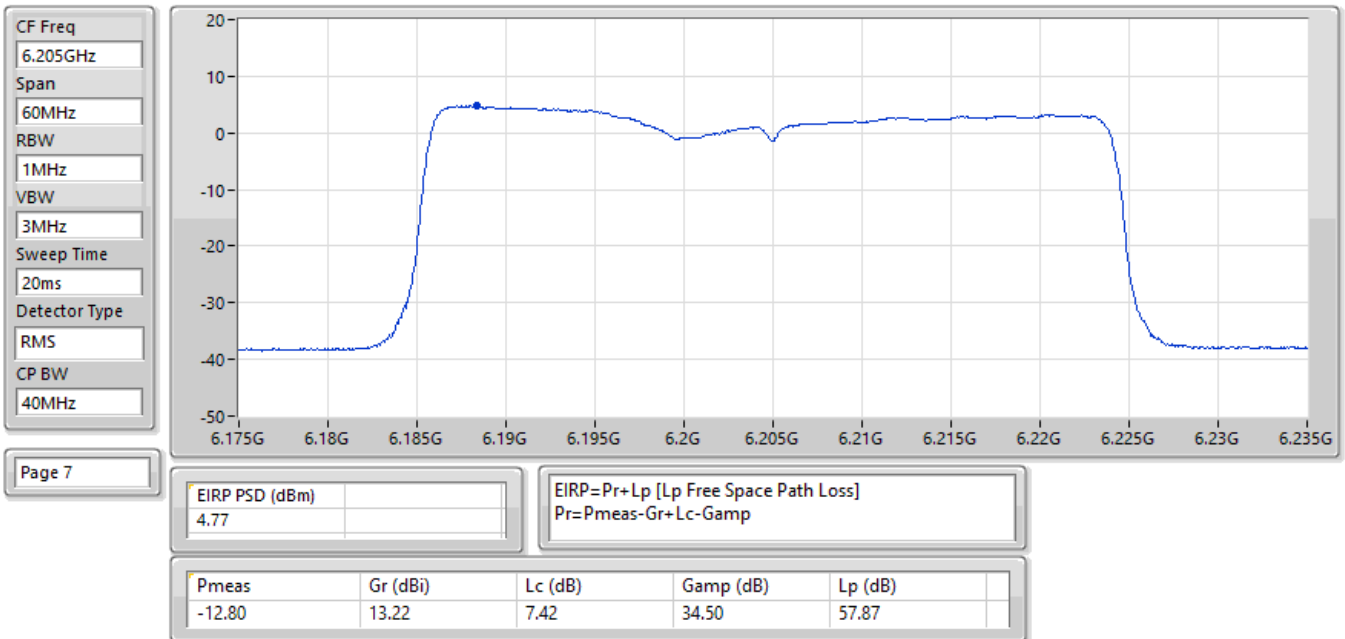


28/06/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

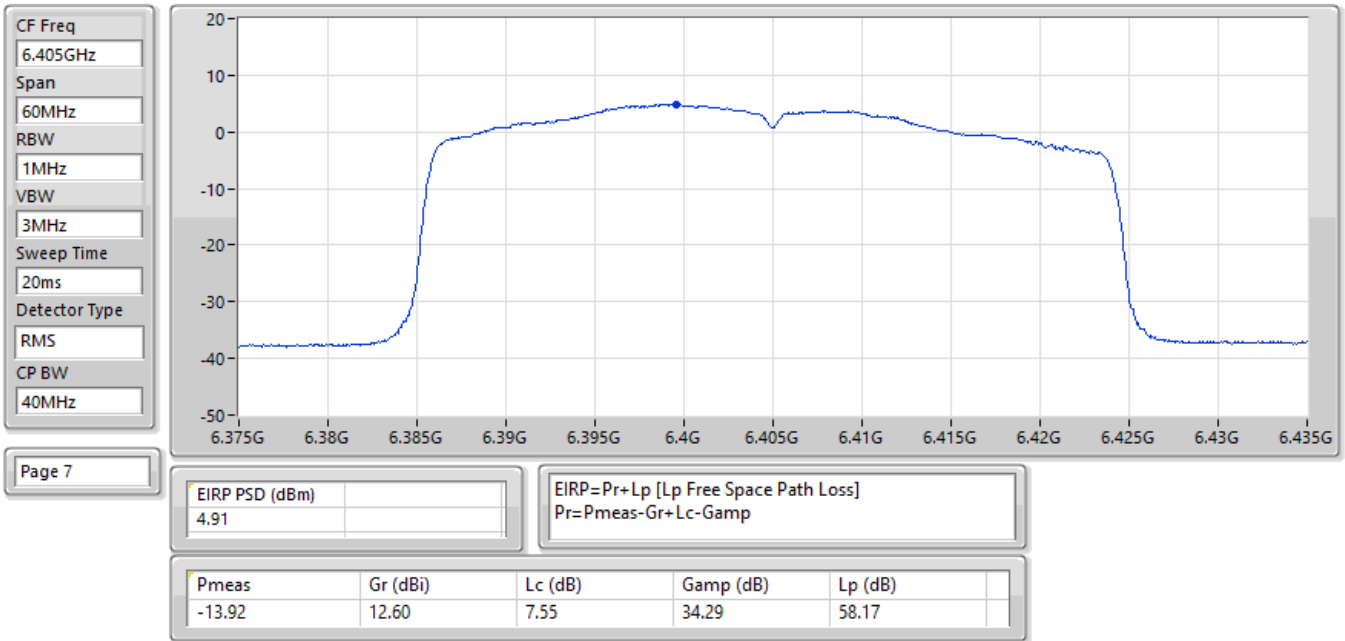


28/06/2025

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

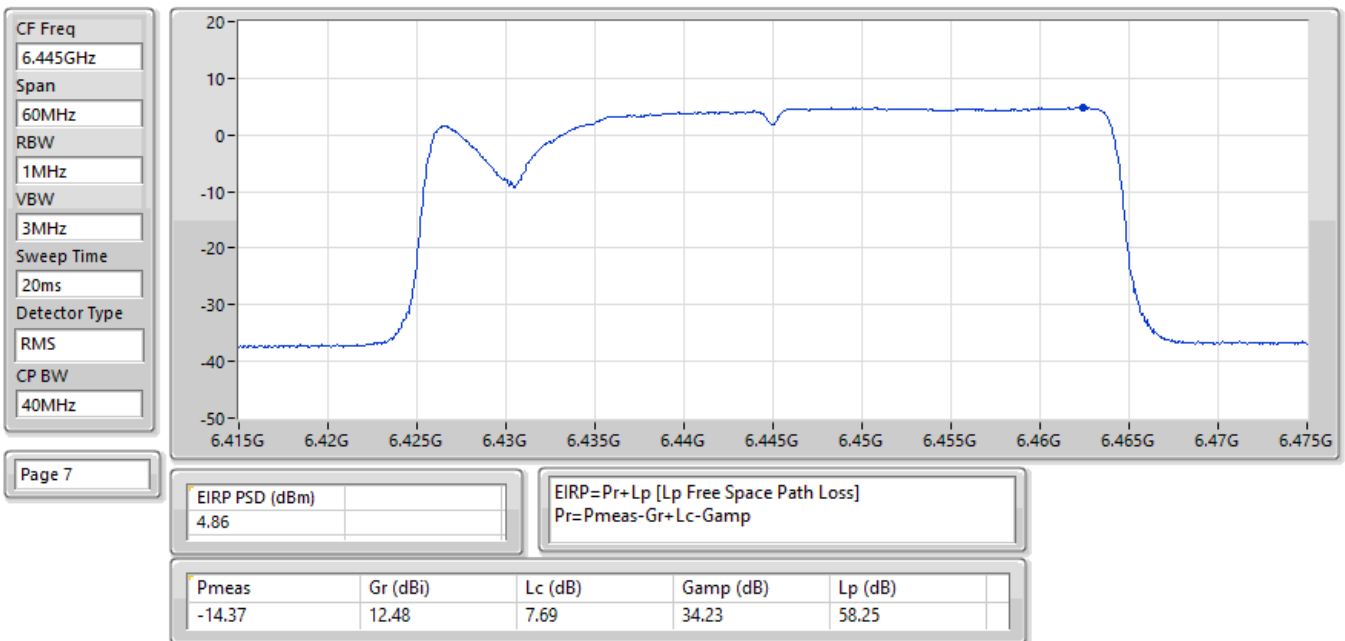


28/06/2025

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

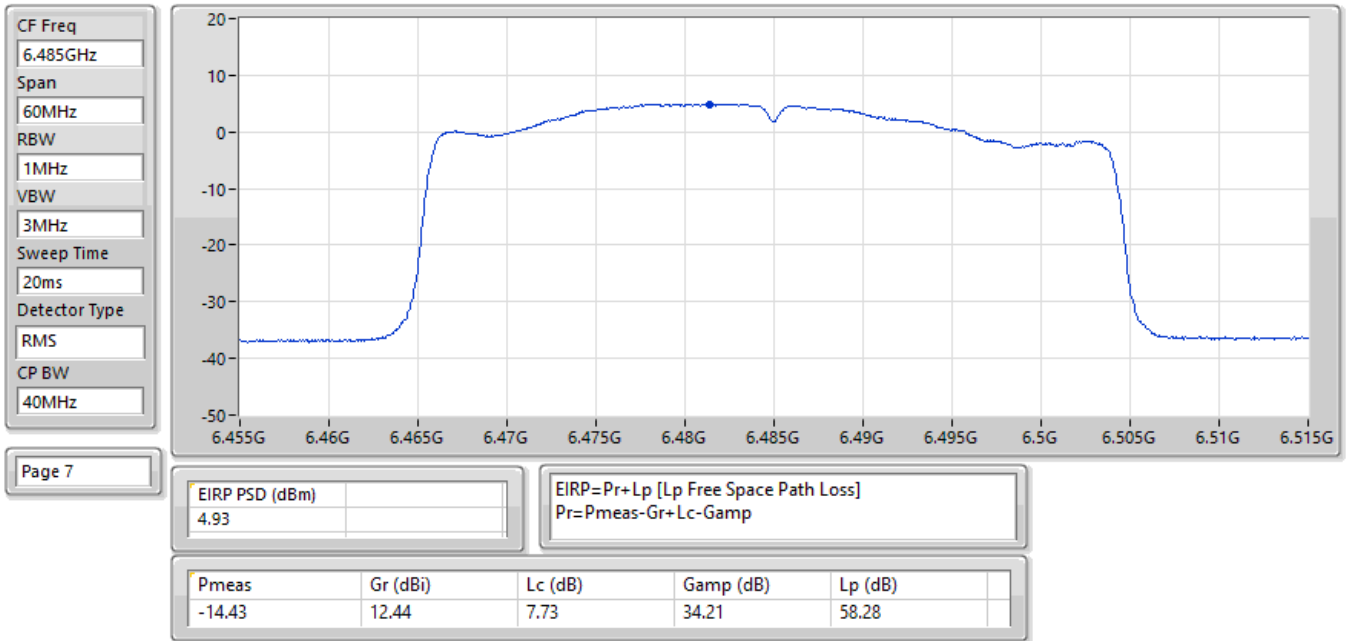


28/06/2025

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

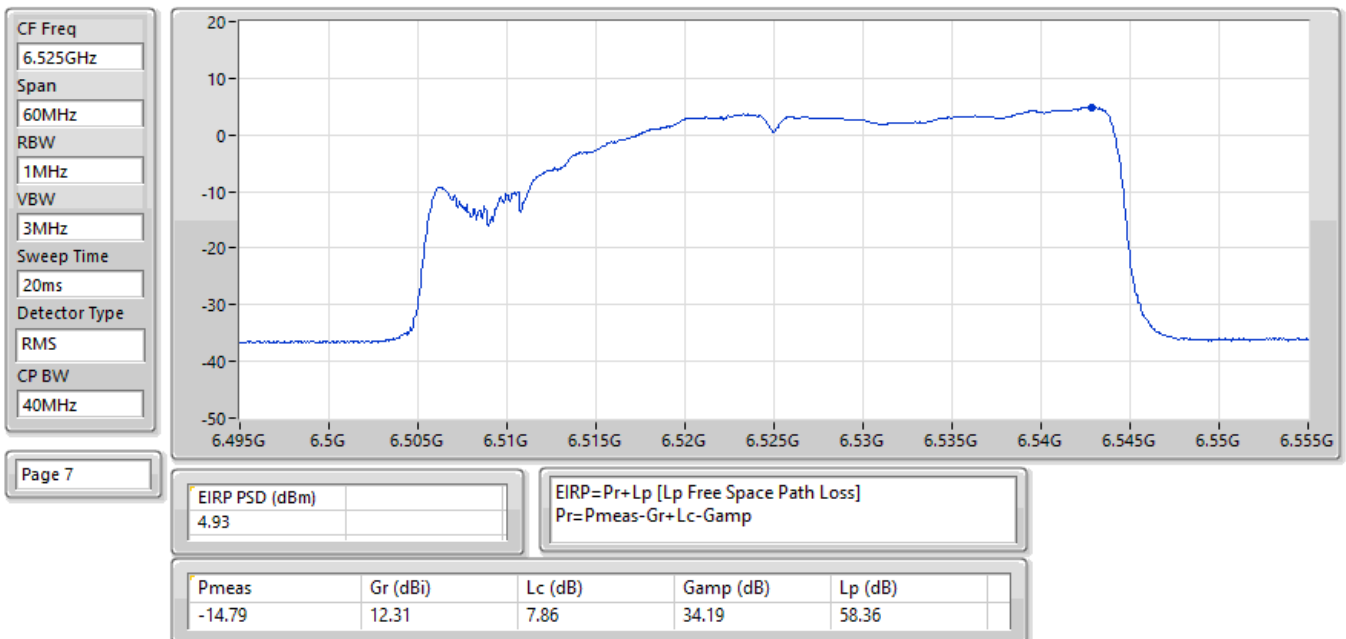


28/06/2025

EIRP PSD; Band: 6.7G; be40, BF; BWch: 40MHz; Nss: 1, (M0); Nant: 4; Ch: 6565MHz; TX

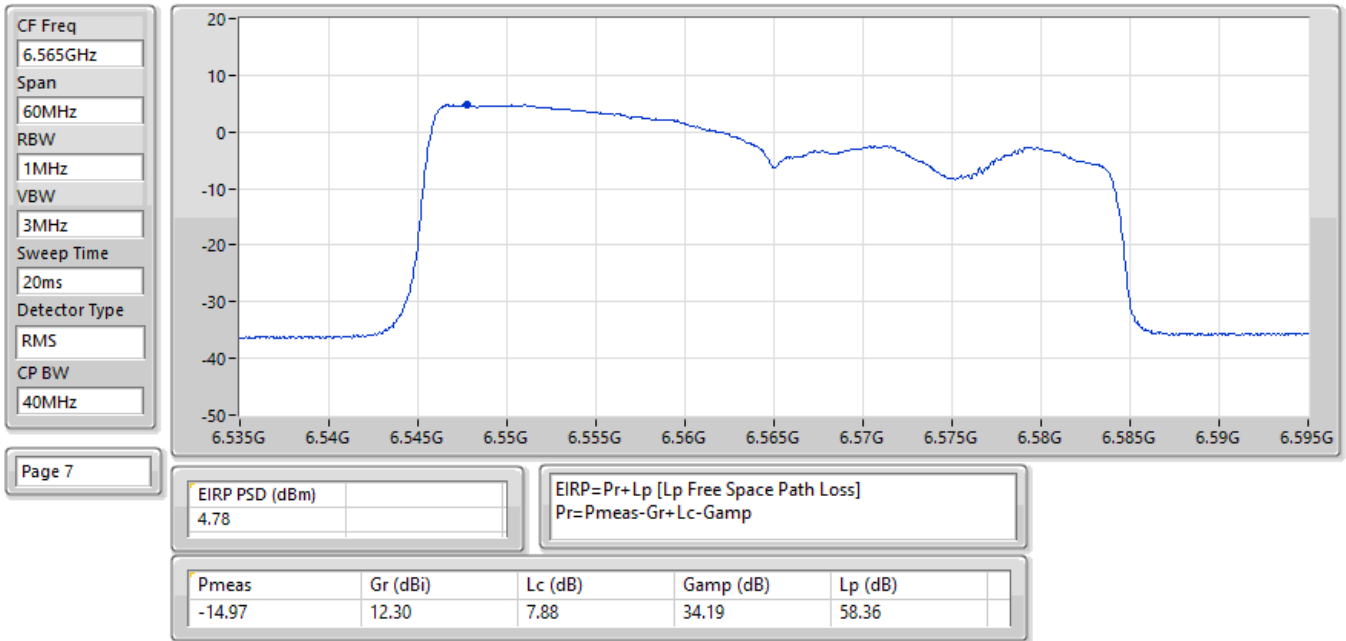

28/06/2025


EIRP PSD; Band: 6.7G; be40, BF; BWch: 40MHz; Nss: 1, (M0); Nant: 4; Ch: 6685MHz; TX

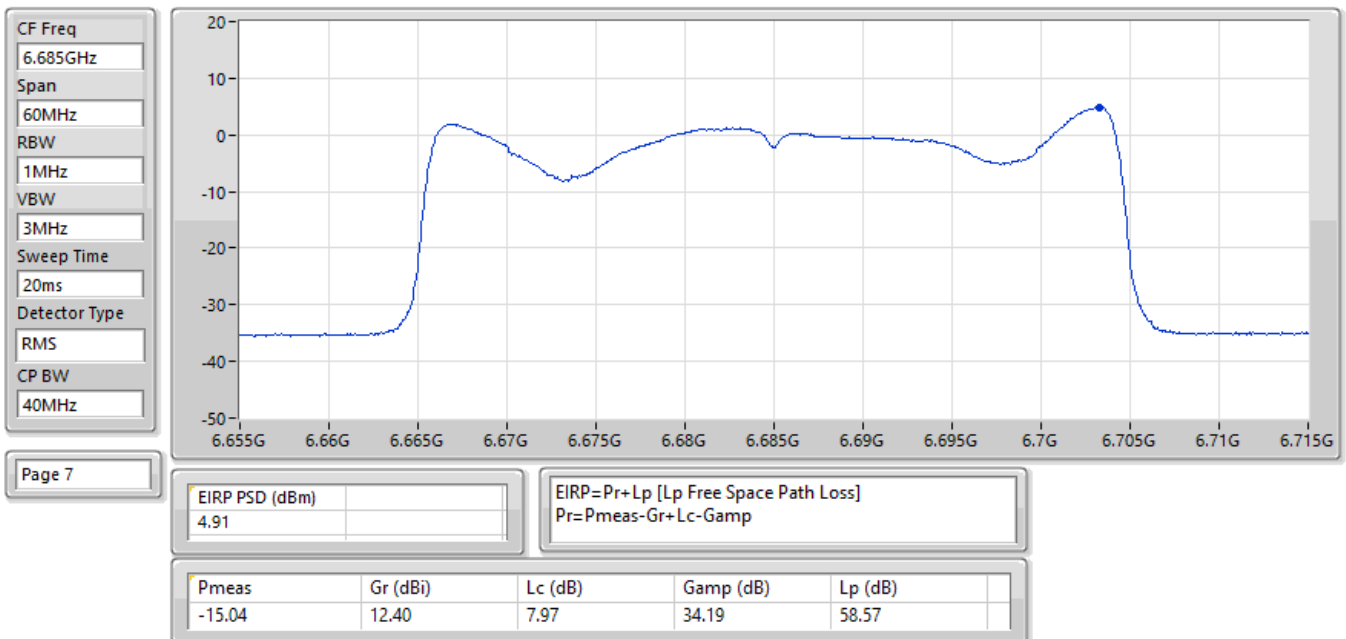

28/06/2025

EIRP PSD; Band: 6.7G; be40, BF; BWch: 40MHz; Nss: 1, (M0); Nant: 4; Ch: 6885MHz; TX

CF Freq
6.885GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

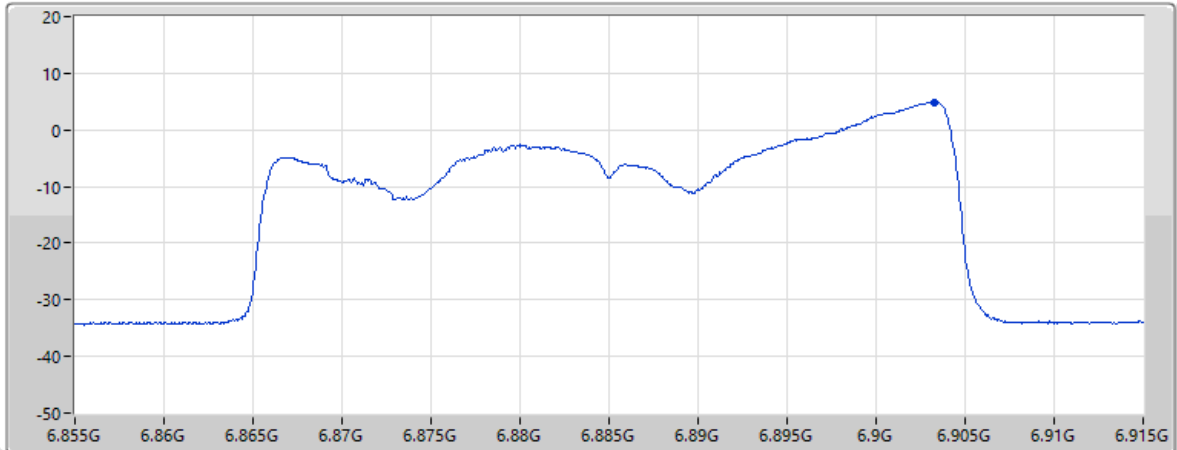


Page 7

EIRP PSD (dBm)		EIRP = Pr + Lp [Lp Free Space Path Loss] Pr = Pmeas - Gr + Lc - Gamp		
4.89				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.78	12.09	8.12	34.18	58.82

28/06/2025

EIRP PSD; Band: 7.0G; be40, BF; BWch: 40MHz; Nss: 1, (M0); Nant: 4; Ch: 6925MHz; TX

CF Freq
6.925GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

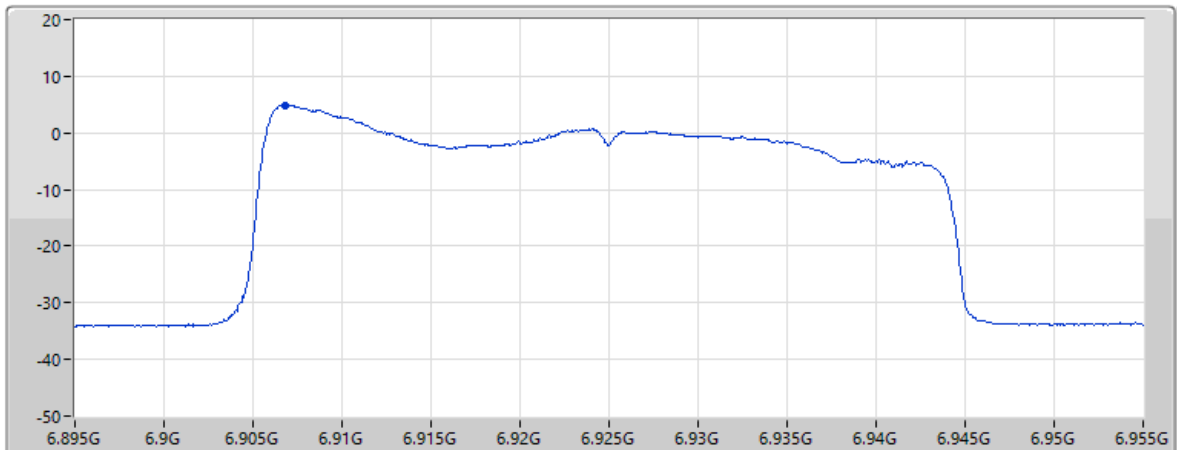


Page 7

EIRP PSD (dBm)		EIRP = Pr + Lp [Lp Free Space Path Loss] Pr = Pmeas - Gr + Lc - Gamp		
4.93				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.78	12.07	8.13	34.18	58.83


28/06/2025

EIRP PSD; Band: 7.0G; be40, BF; BWch: 40MHz; Nss: 1, (M0); Nant: 4; Ch: 7005MHz; TX

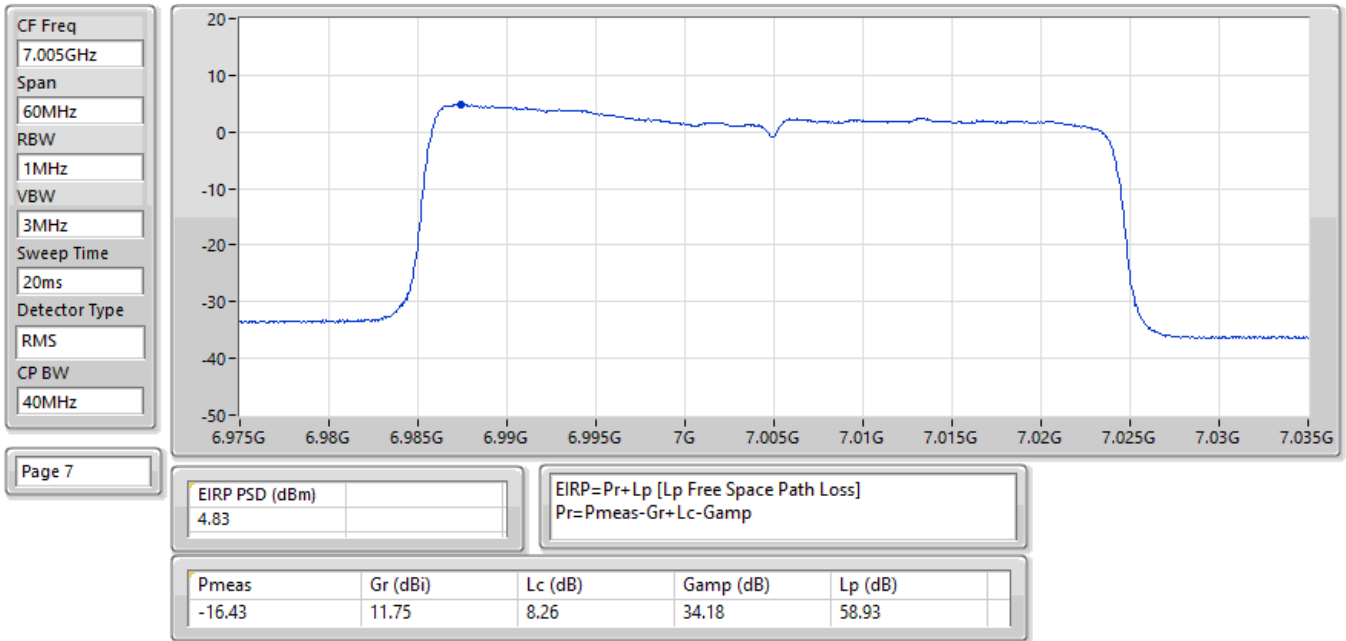


28/06/2025

EIRP PSD; Band: 7.0G; be40, BF; BWch: 40MHz; Nss: 1, (M0); Nant: 4; Ch: 7085MHz; TX

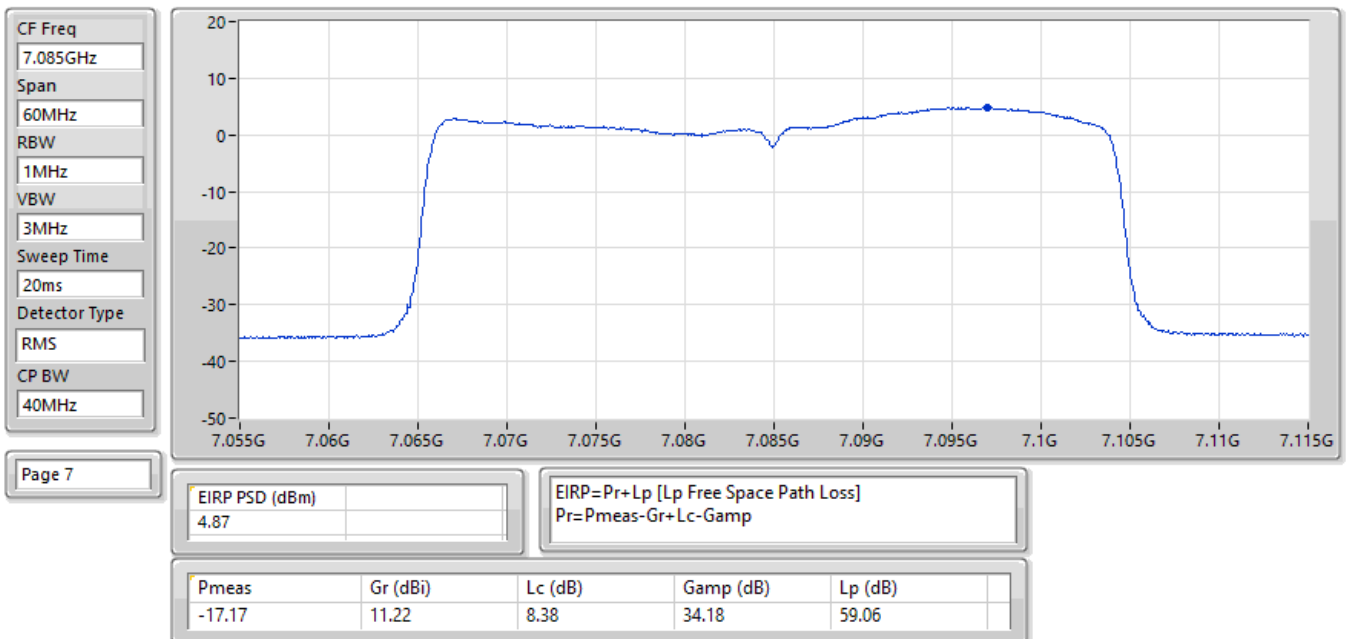


28/06/2025

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

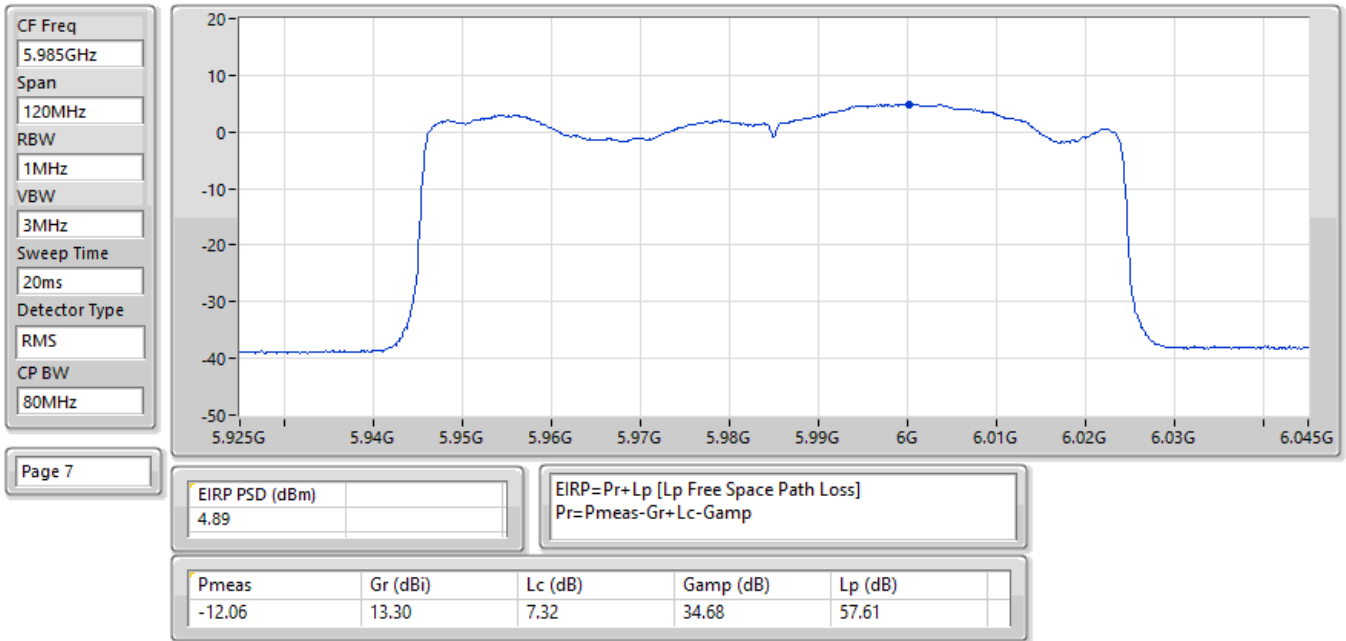

28/06/2025

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

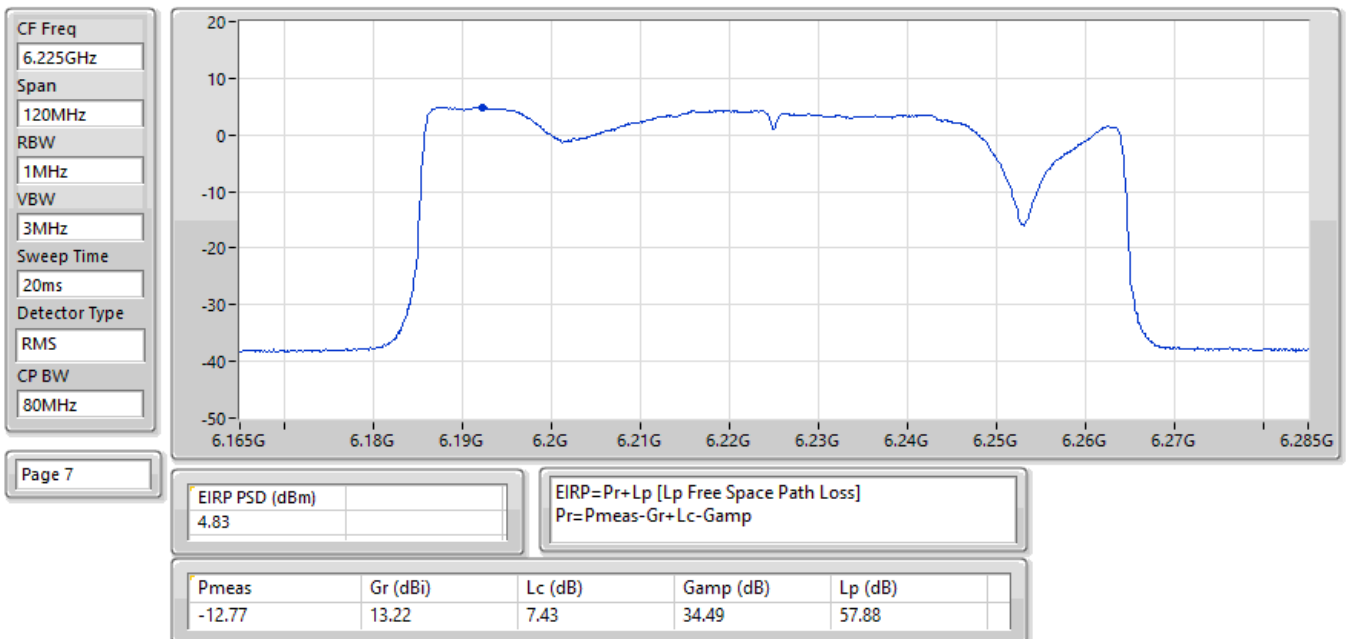

28/06/2025

EIRP PSD; Band: 6.2G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6385MHz; TX

CF Freq
6.385GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

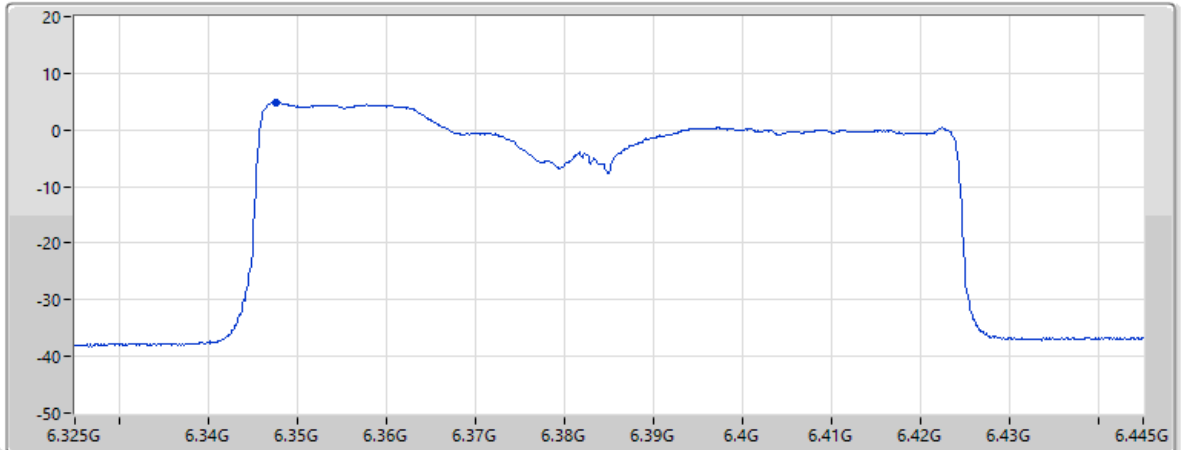

Page 7

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.81				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-13.65	12.81	7.52	34.34	58.09

28/06/2025

EIRP PSD; Band: 6.4G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6465MHz; TX

CF Freq
6.465GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

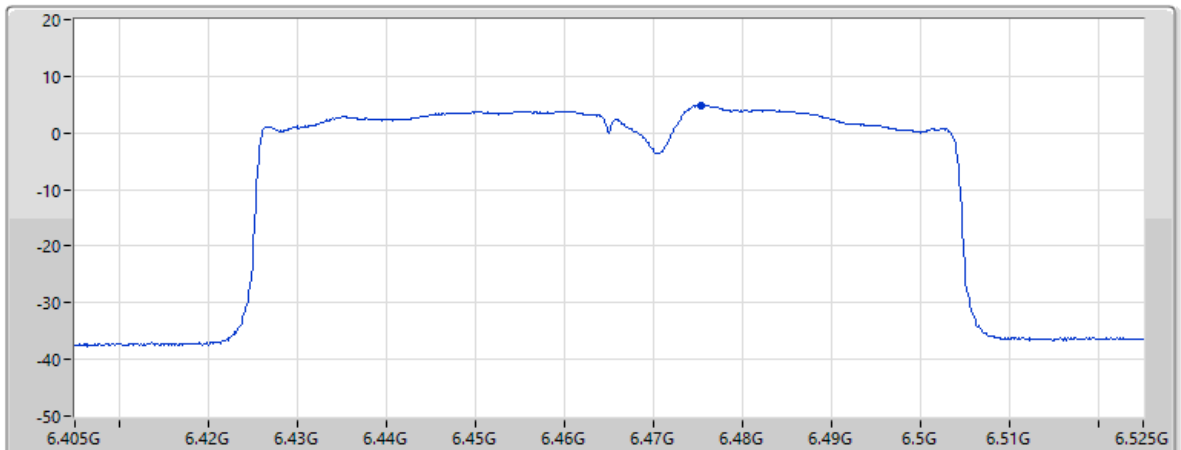

Page 7

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.85				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.48	12.45	7.72	34.21	58.27

28/06/2025

EIRP PSD; Band: 6.4G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6545MHz; TX

CF Freq
6.545GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

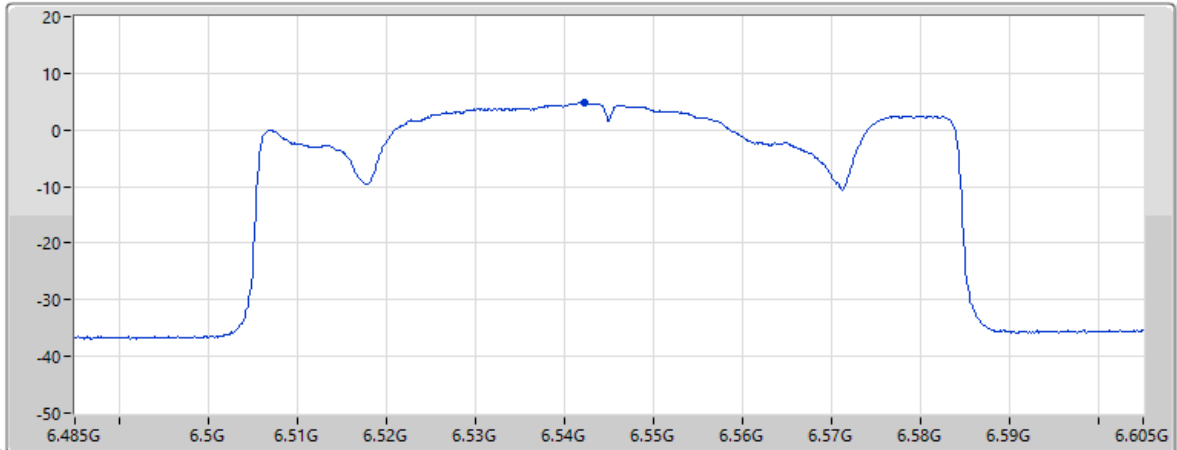

Page 7

EIRP PSD (dBm)	EIRP = Pr + Lp [Lp Free Space Path Loss] Pr = Pmeas - Gr + Lc - Gamp			
4.84				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.87	12.32	7.86	34.19	58.36

29/06/2025

EIRP PSD; Band: 6.7G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6625MHz; TX

CF Freq
6.625GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

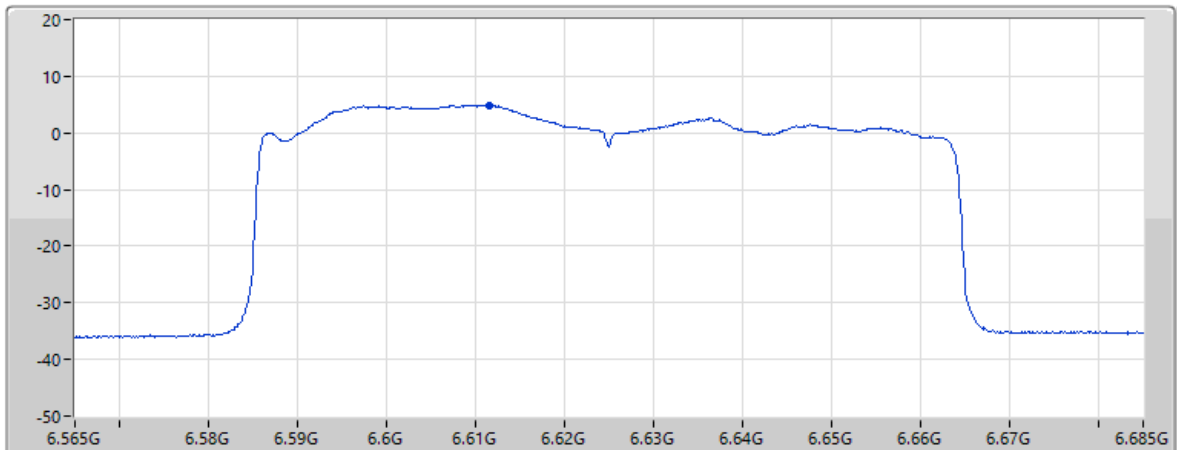


Page 7

EIRP PSD (dBm)	EIRP = Pr + Lp [Lp Free Space Path Loss] Pr = Pmeas - Gr + Lc - Gamp			
4.87				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.16	12.22	7.99	34.19	58.45

29/06/2025

EIRP PSD: Band: 6.7G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6705MHz; TX

CF Freq
6.705GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

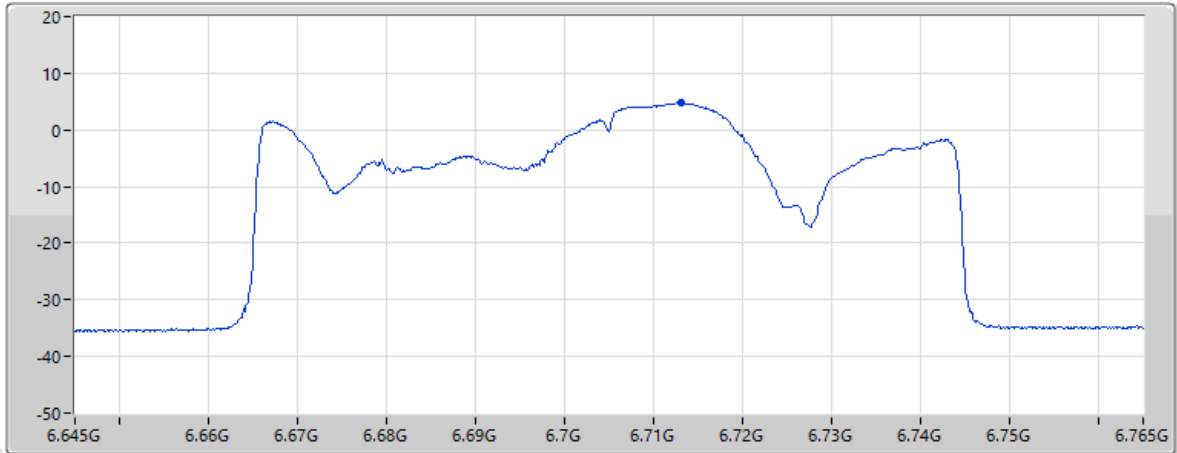


Page 7

EIRP PSD (dBm)		EIRP = Pr + Lp [Lp Free Space Path Loss]		
4.86		Pr = Pmeas - Gr + Lc - Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.10	12.40	7.97	34.19	58.58

30/06/2025

EIRP PSD: Band: 6.7G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6785MHz; TX

CF Freq
6.785GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

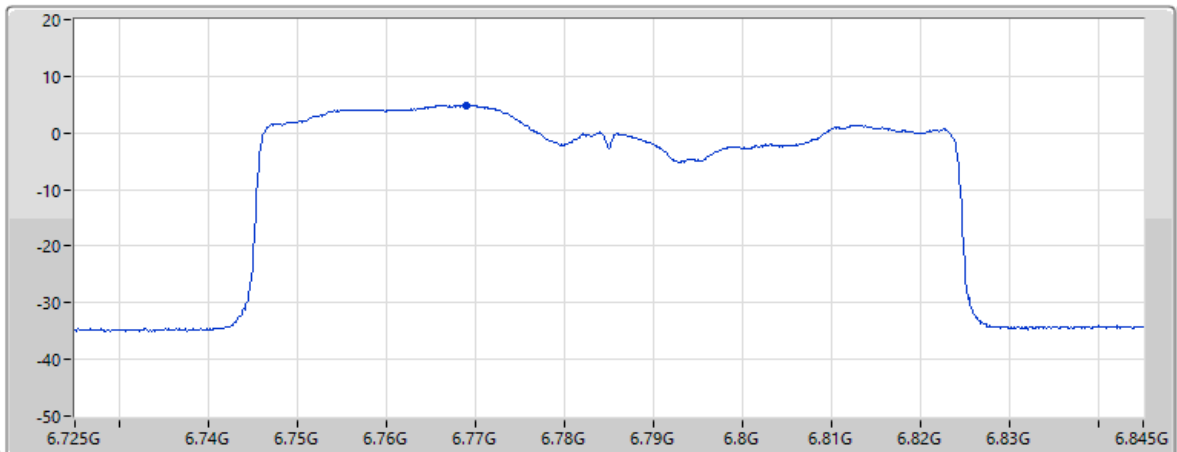


Page 7

EIRP PSD (dBm)		EIRP = Pr + Lp [Lp Free Space Path Loss]		
4.87		Pr = Pmeas - Gr + Lc - Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.16	12.40	7.96	34.18	58.65


30/06/2025

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

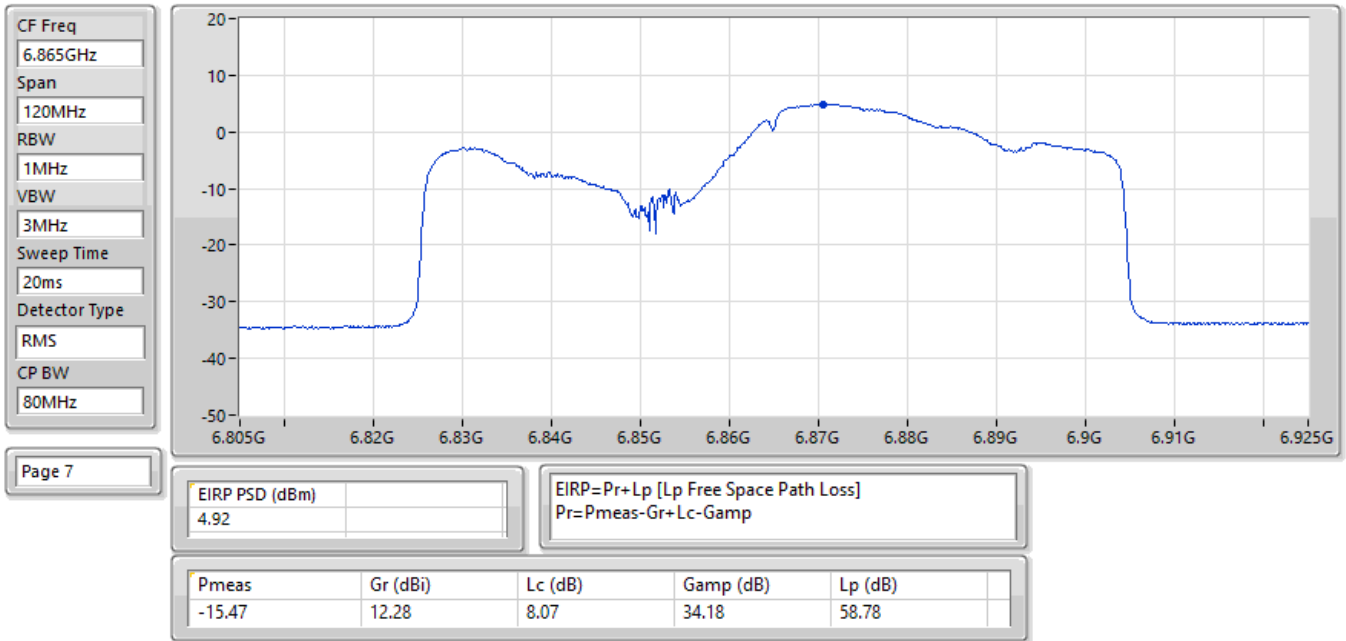


30/06/2025

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

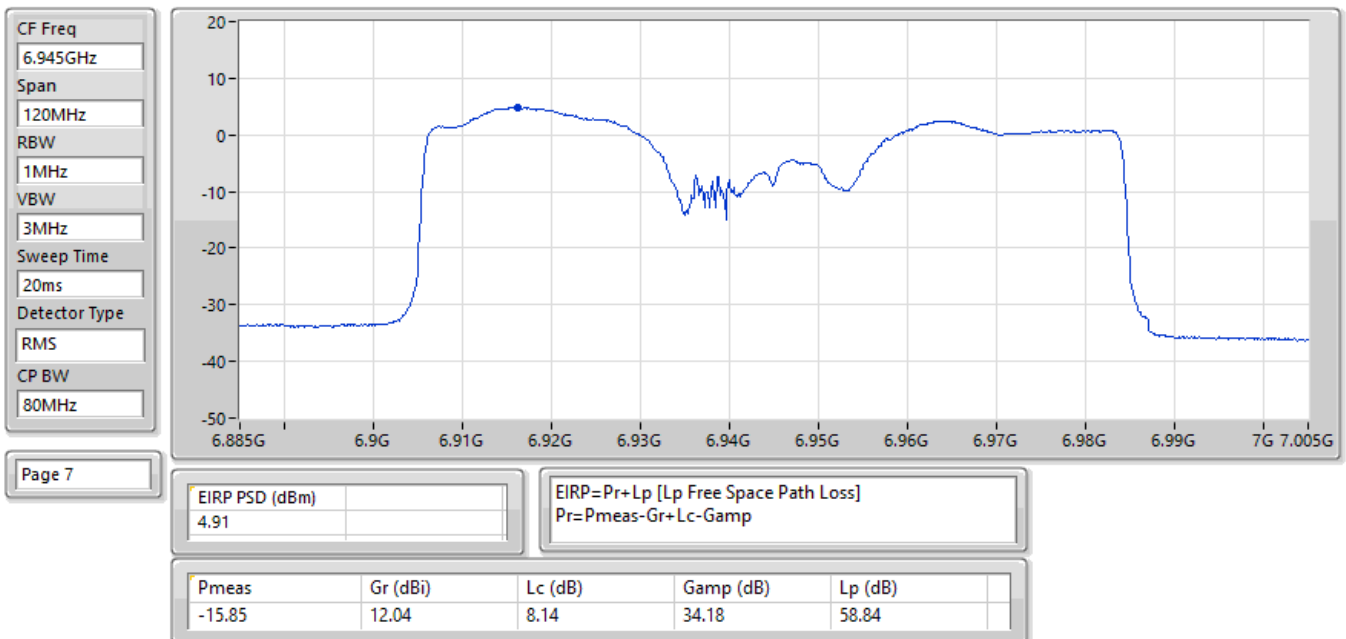


01/07/2025

EIRP PSD; Band: 7.0G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 7025MHz; TX

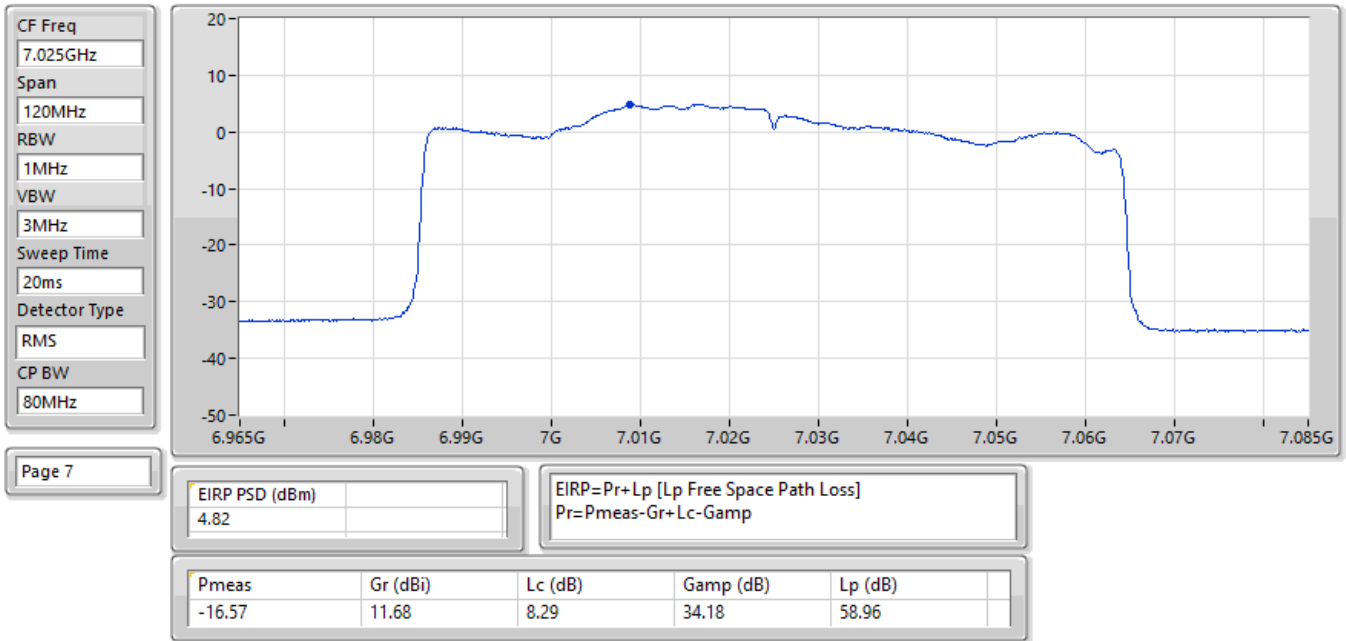


01/07/2025

EIRP PSD; Band: 6.2G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6025MHz; TX

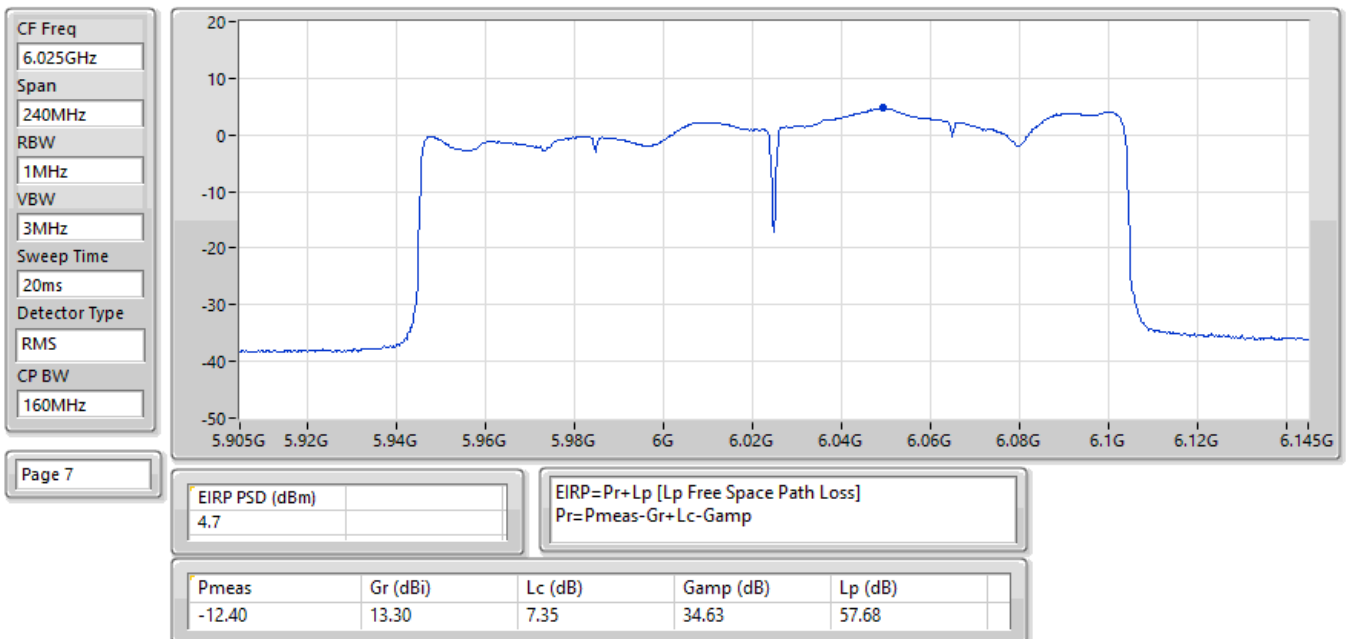


01/07/2025

EIRP PSD; Band: 6.2G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6185MHz; TX

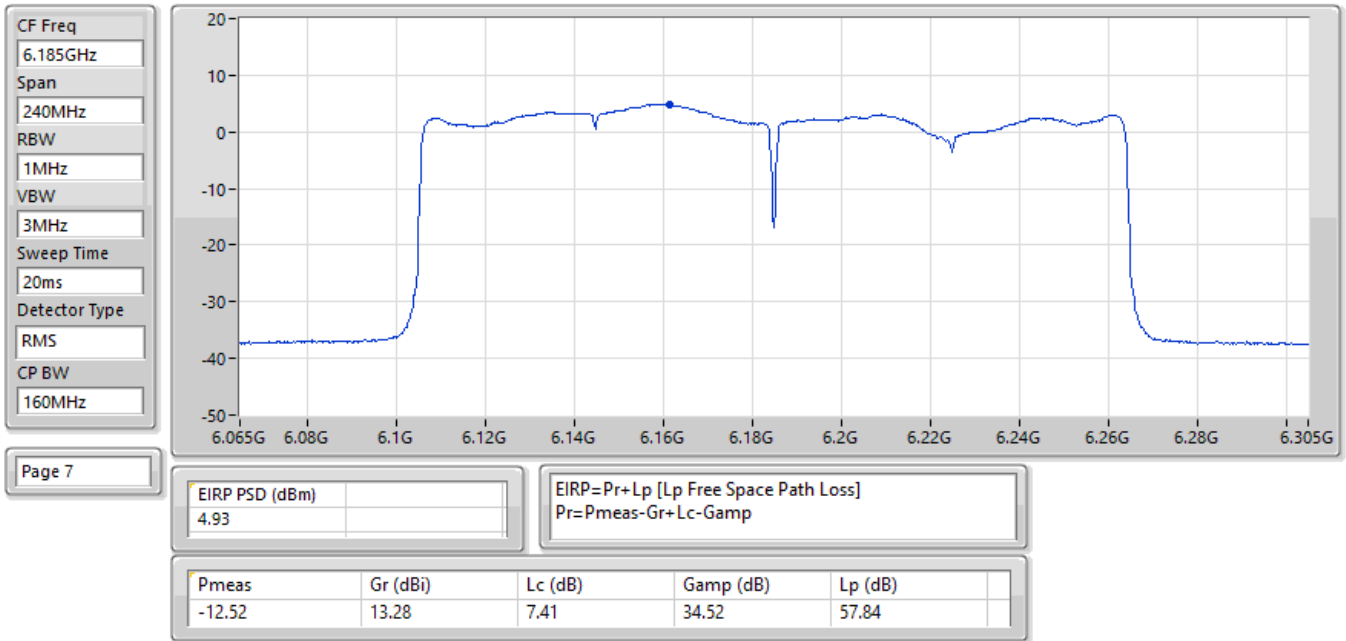


01/07/2025

EIRP PSD; Band: 6.2G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6345MHz; TX

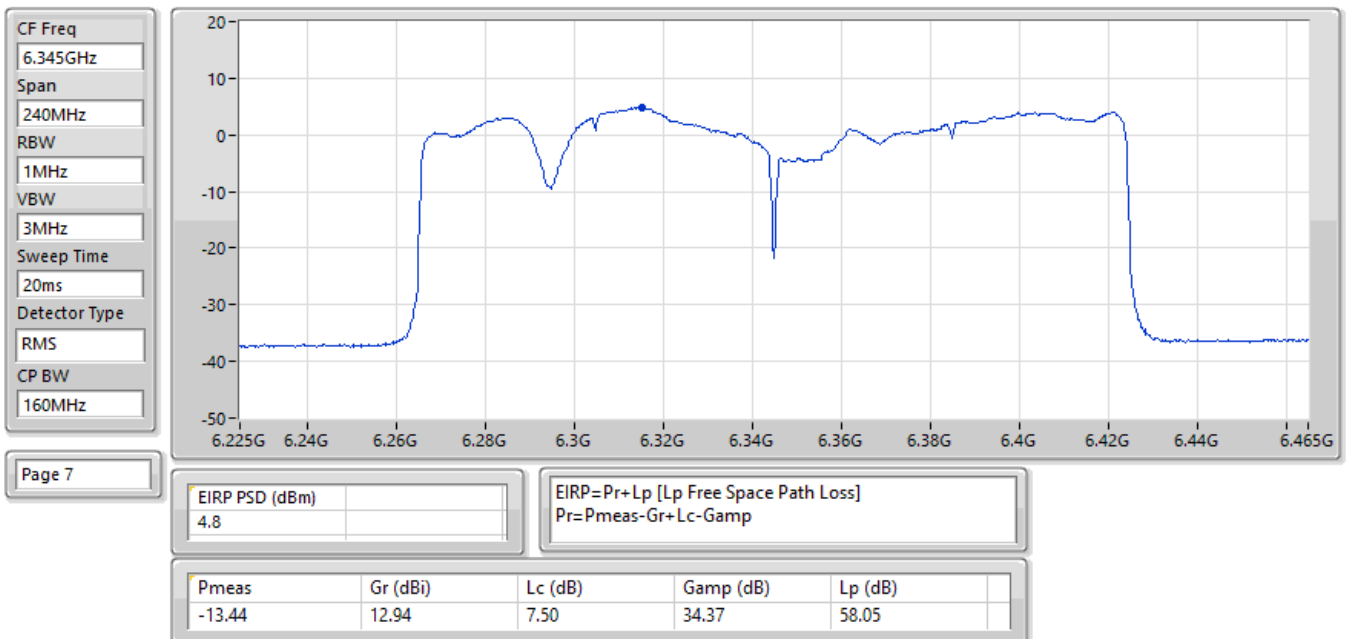


01/07/2025

EIRP PSD; Band: 6.4G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6505MHz; TX

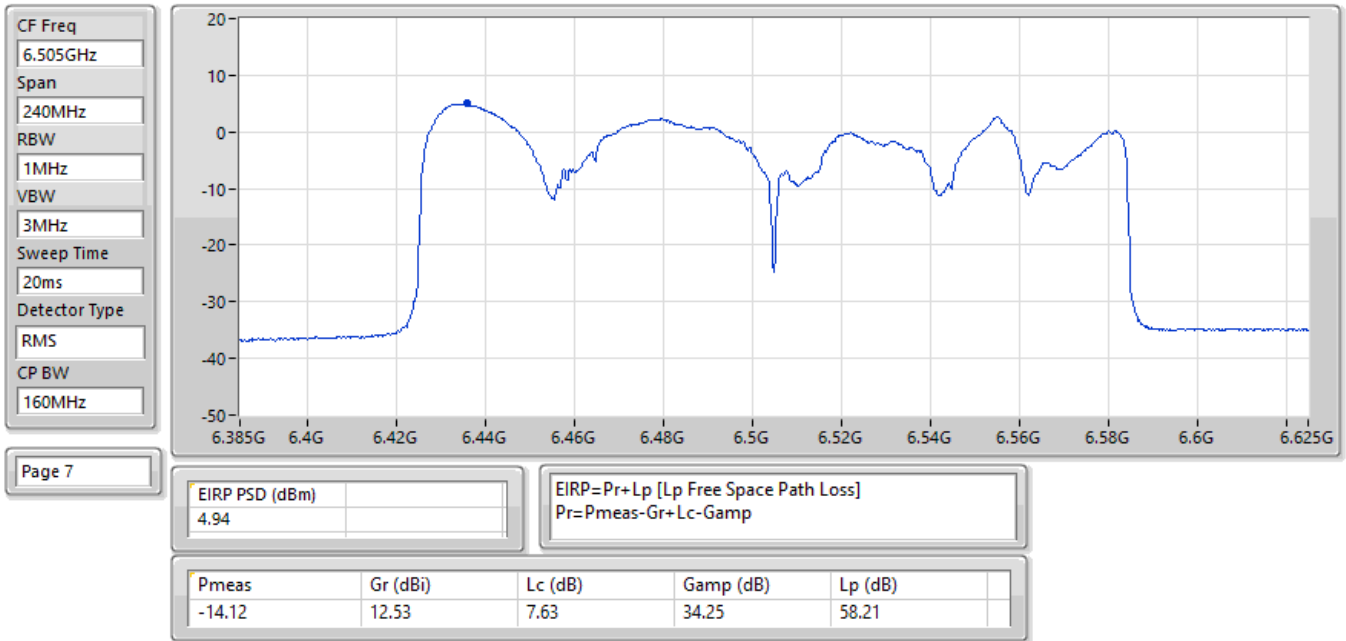


01/07/2025

EIRP PSD; Band: 6.7G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6665MHz; TX

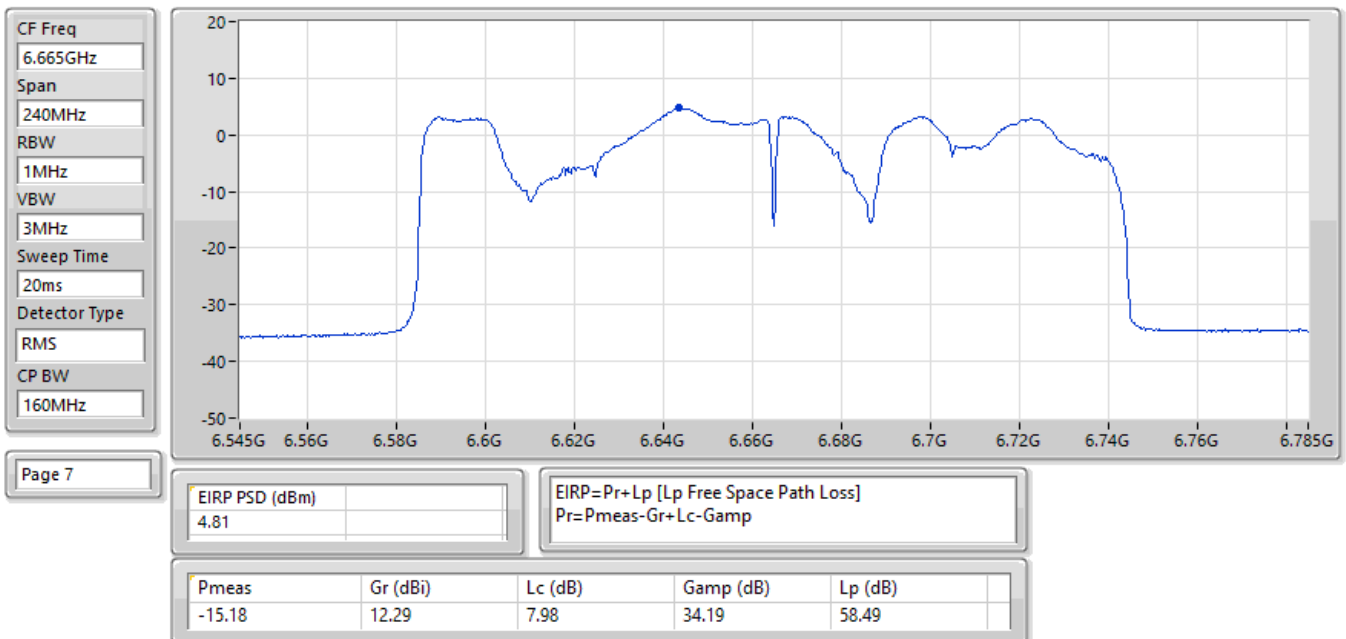


01/07/2025

EIRP PSD; Band: 6.7G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6825MHz; TX

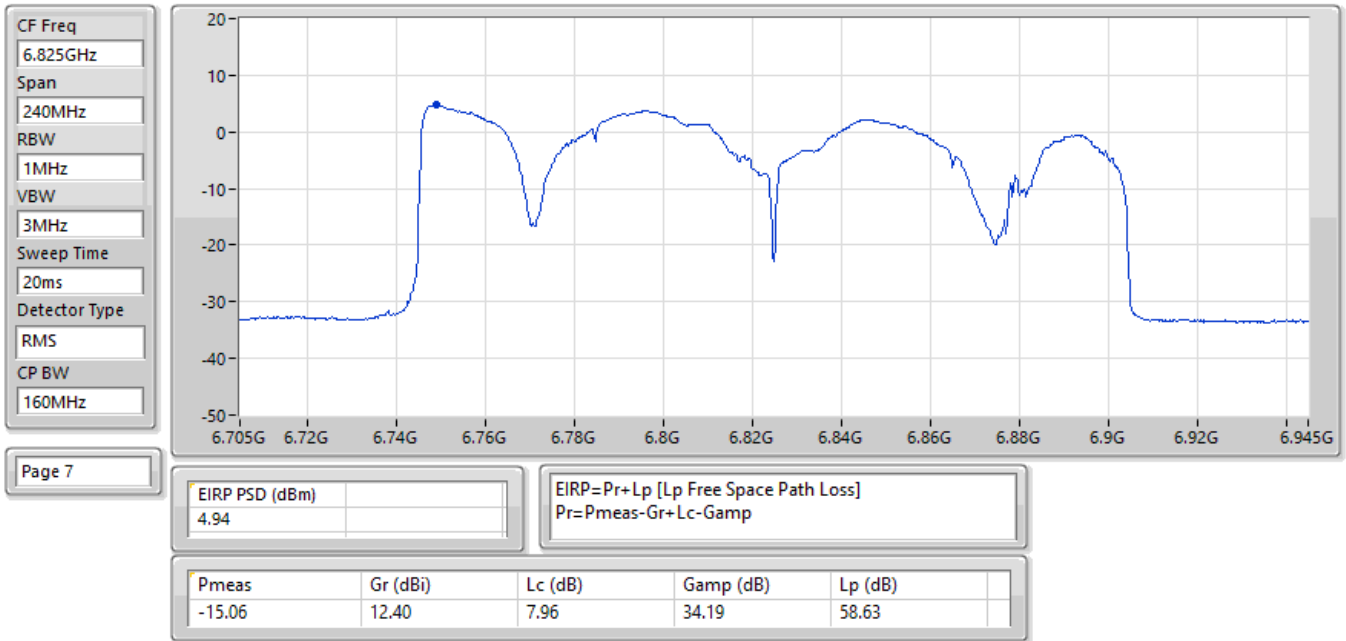


01/07/2025

EIRP PSD; Band: 7.0G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6985MHz; TX

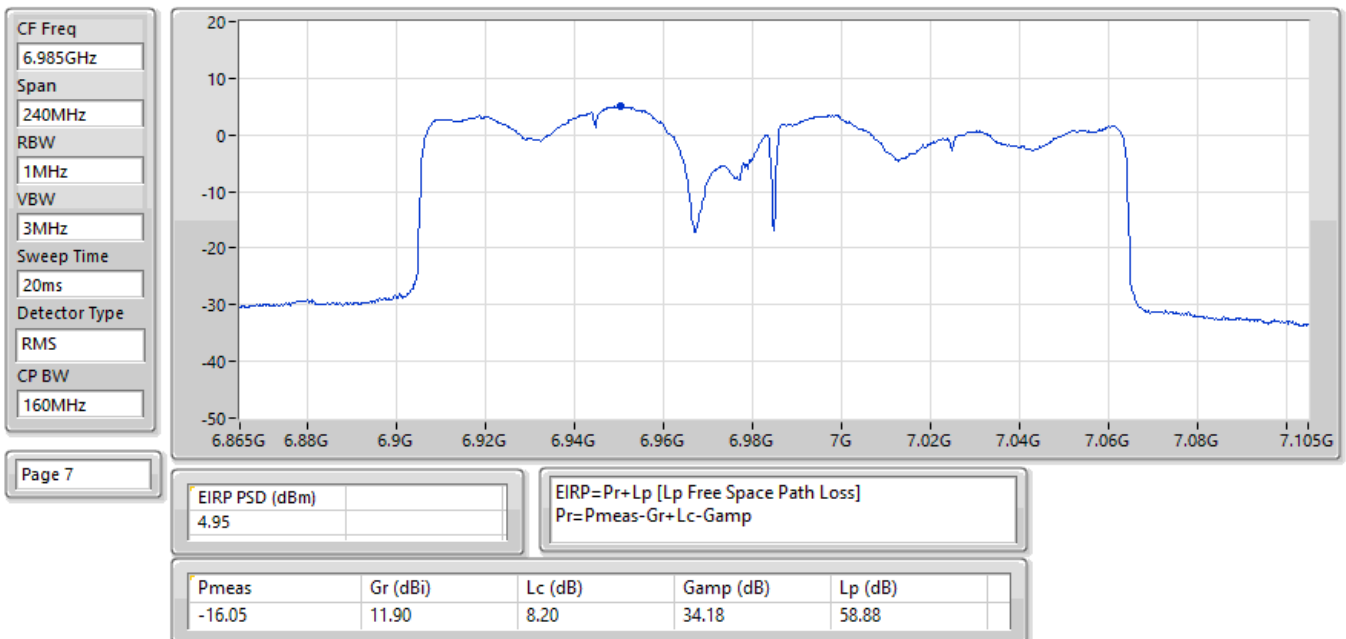


01/07/2025

EIRP PSD; Band: 6.2G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6105MHz; TX

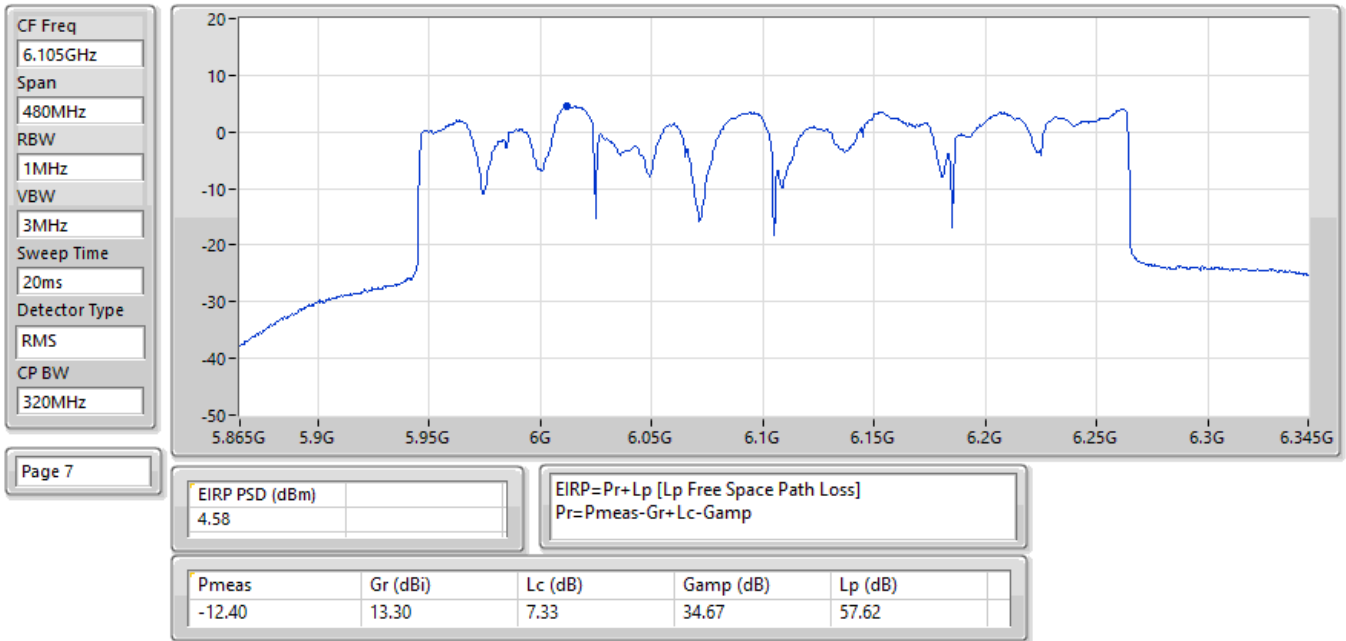


01/07/2025

EIRP PSD; Band: 6.2G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6265MHz; TX

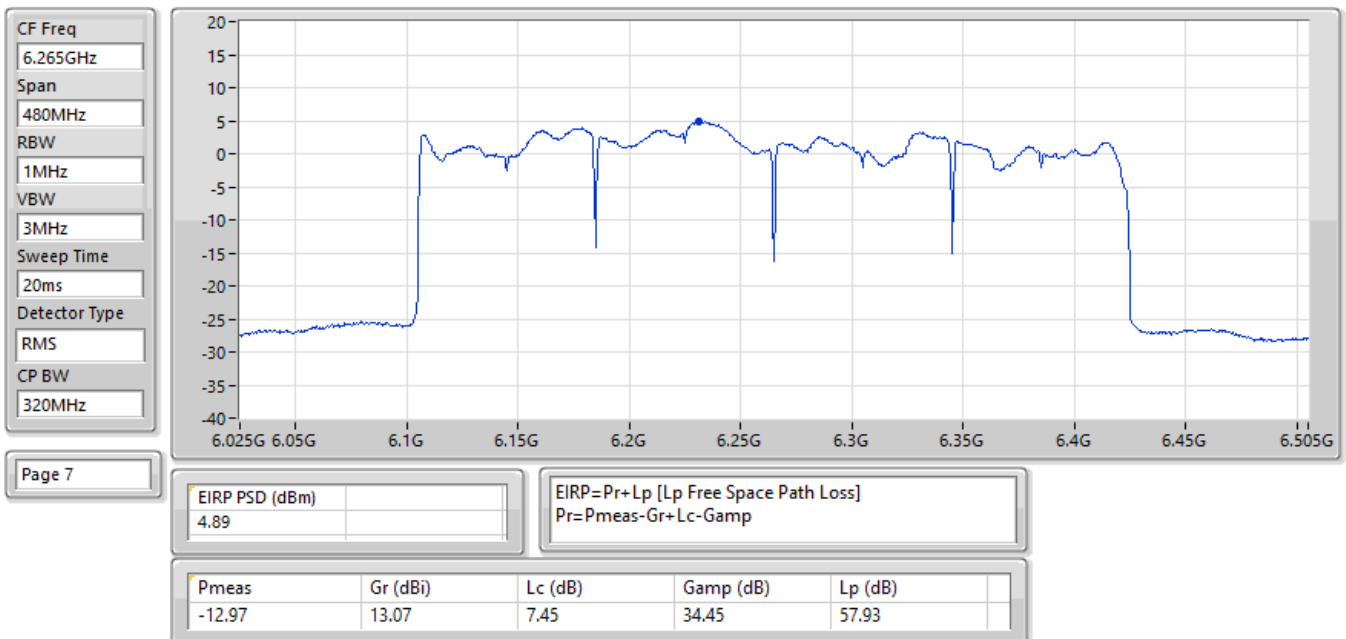


01/07/2025

EIRP PSD; Band: 6.2G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6425MHz; TX

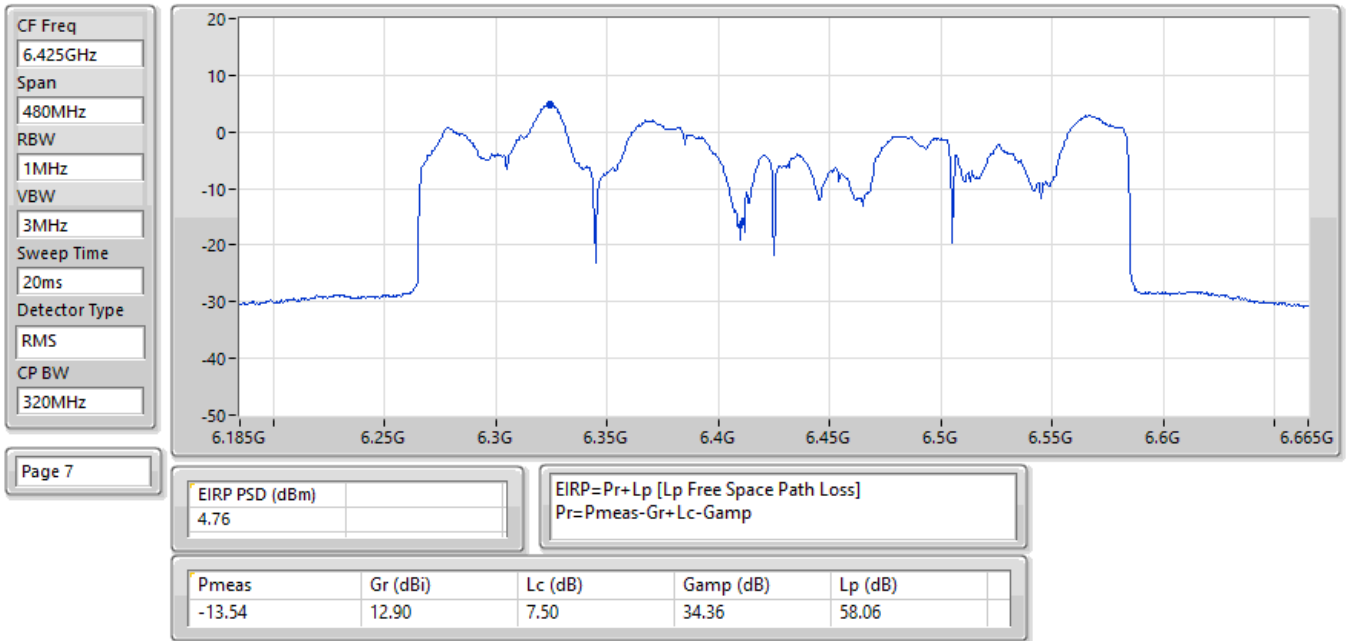


01/07/2025

EIRP PSD; Band: 6.4G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6585MHz; TX

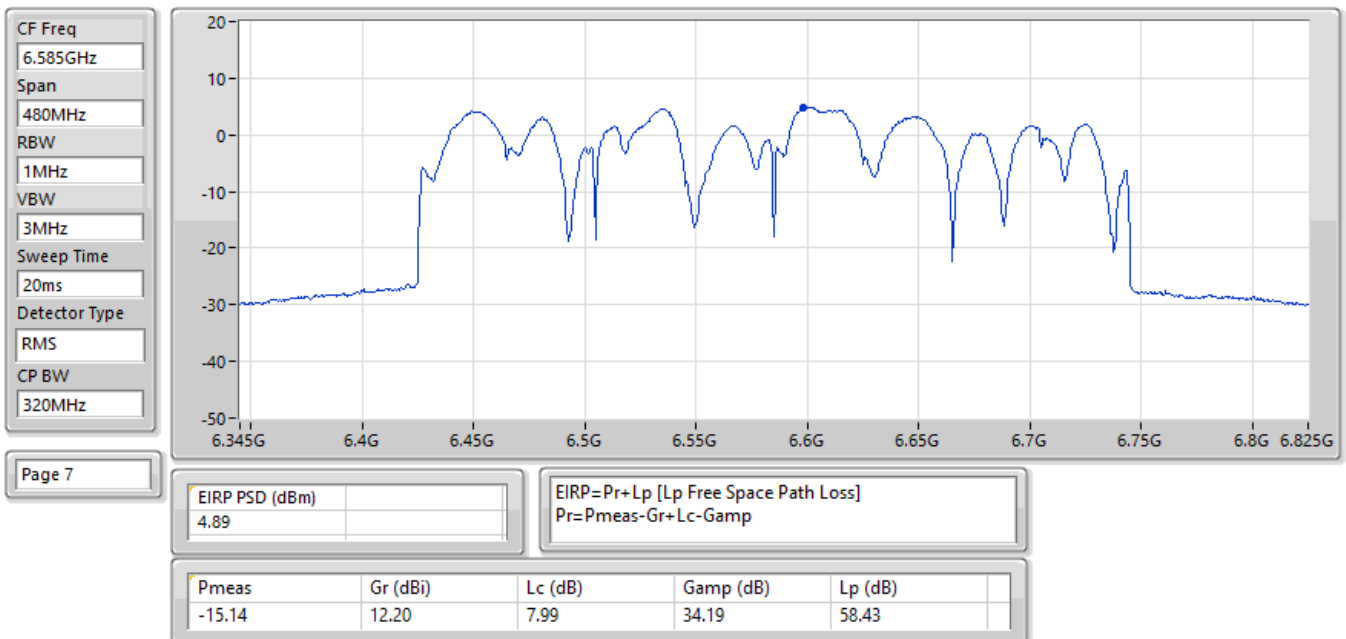


01/07/2025

EIRP PSD; Band: 6.7G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6745MHz; TX

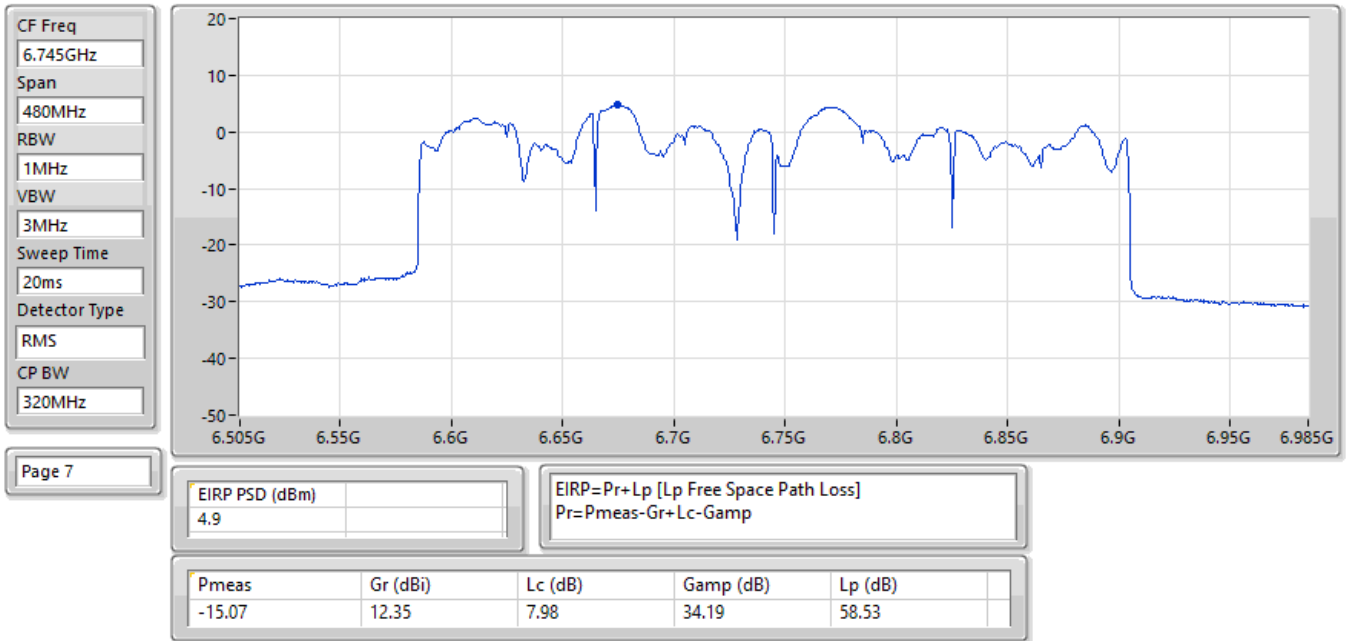

01/07/2025

EIRP PSD; Band: 6.7G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6905MHz; TX

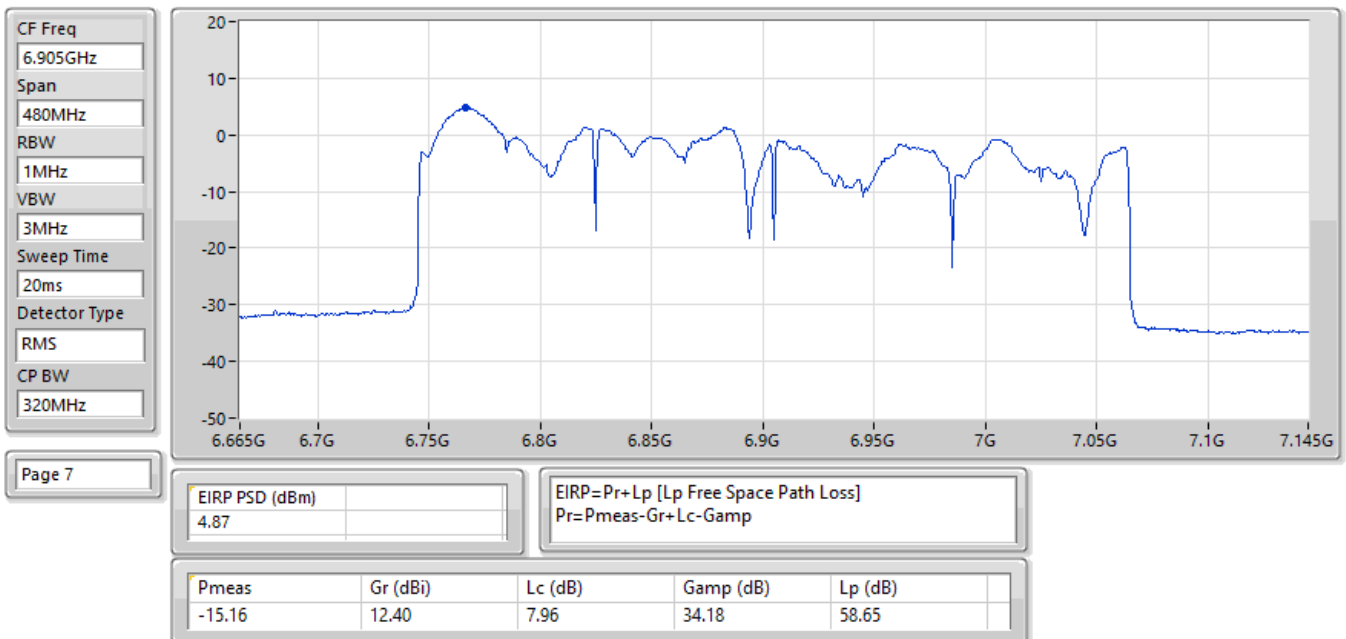

Summary


Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	4.97
802.11be EHT40_Nss1,(MCS0)_4TX	4.94
802.11be EHT80_Nss1,(MCS0)_4TX	4.88
802.11be EHT160_Nss1,(MCS0)_4TX	4.99
802.11be EHT320_Nss1,(MCS0)_4TX	4.90
6.425-6.525GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	4.97
802.11be EHT40_Nss1,(MCS0)_4TX	4.92
802.11be EHT80_Nss1,(MCS0)_4TX	4.97
802.11be EHT160_Nss1,(MCS0)_4TX	4.84
802.11be EHT320_Nss1,(MCS0)_4TX	4.95
6.525-6.875GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	4.95
802.11be EHT40_Nss1,(MCS0)_4TX	4.99
802.11be EHT80_Nss1,(MCS0)_4TX	4.91
802.11be EHT160_Nss1,(MCS0)_4TX	4.95
802.11be EHT320_Nss1,(MCS0)_4TX	4.80
6.875-7.125GHz	-
802.11be EHT20_Nss1,(MCS0)_4TX	4.98
802.11be EHT40_Nss1,(MCS0)_4TX	4.92
802.11be EHT80_Nss1,(MCS0)_4TX	4.98
802.11be EHT160_Nss1,(MCS0)_4TX	4.90

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	4.86	5.00
6195MHz	Pass	4.97	5.00
6415MHz	Pass	4.93	5.00
6435MHz	Pass	4.97	5.00
6475MHz	Pass	4.75	5.00
6515MHz	Pass	4.89	5.00
6535MHz	Pass	4.94	5.00
6695MHz	Pass	4.78	5.00
6875MHz	Pass	4.95	5.00
6895MHz	Pass	4.98	5.00
6995MHz	Pass	4.87	5.00
7095MHz	Pass	4.93	5.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	4.86	5.00
6205MHz	Pass	4.85	5.00
6405MHz	Pass	4.94	5.00
6445MHz	Pass	4.89	5.00
6485MHz	Pass	4.49	5.00
6525MHz	Pass	4.92	5.00
6565MHz	Pass	4.79	5.00
6685MHz	Pass	4.82	5.00
6885MHz	Pass	4.99	5.00
6925MHz	Pass	4.88	5.00
7005MHz	Pass	4.92	5.00
7085MHz	Pass	4.86	5.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	4.87	5.00
6225MHz	Pass	4.78	5.00
6385MHz	Pass	4.88	5.00
6465MHz	Pass	4.97	5.00
6545MHz	Pass	4.84	5.00
6625MHz	Pass	4.85	5.00
6705MHz	Pass	4.91	5.00
6785MHz	Pass	4.83	5.00
6865MHz	Pass	4.77	5.00
6945MHz	Pass	4.75	5.00
7025MHz	Pass	4.98	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	4.99	5.00
6185MHz	Pass	4.90	5.00
6345MHz	Pass	4.80	5.00
6505MHz	Pass	4.84	5.00
6665MHz	Pass	4.95	5.00
6825MHz	Pass	4.90	5.00
6985MHz	Pass	4.90	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	4.39	5.00
6265MHz	Pass	4.90	5.00
6425MHz	Pass	4.78	5.00
6585MHz	Pass	4.95	5.00
6745MHz	Pass	4.80	5.00
6905MHz	Pass	0.92	5.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

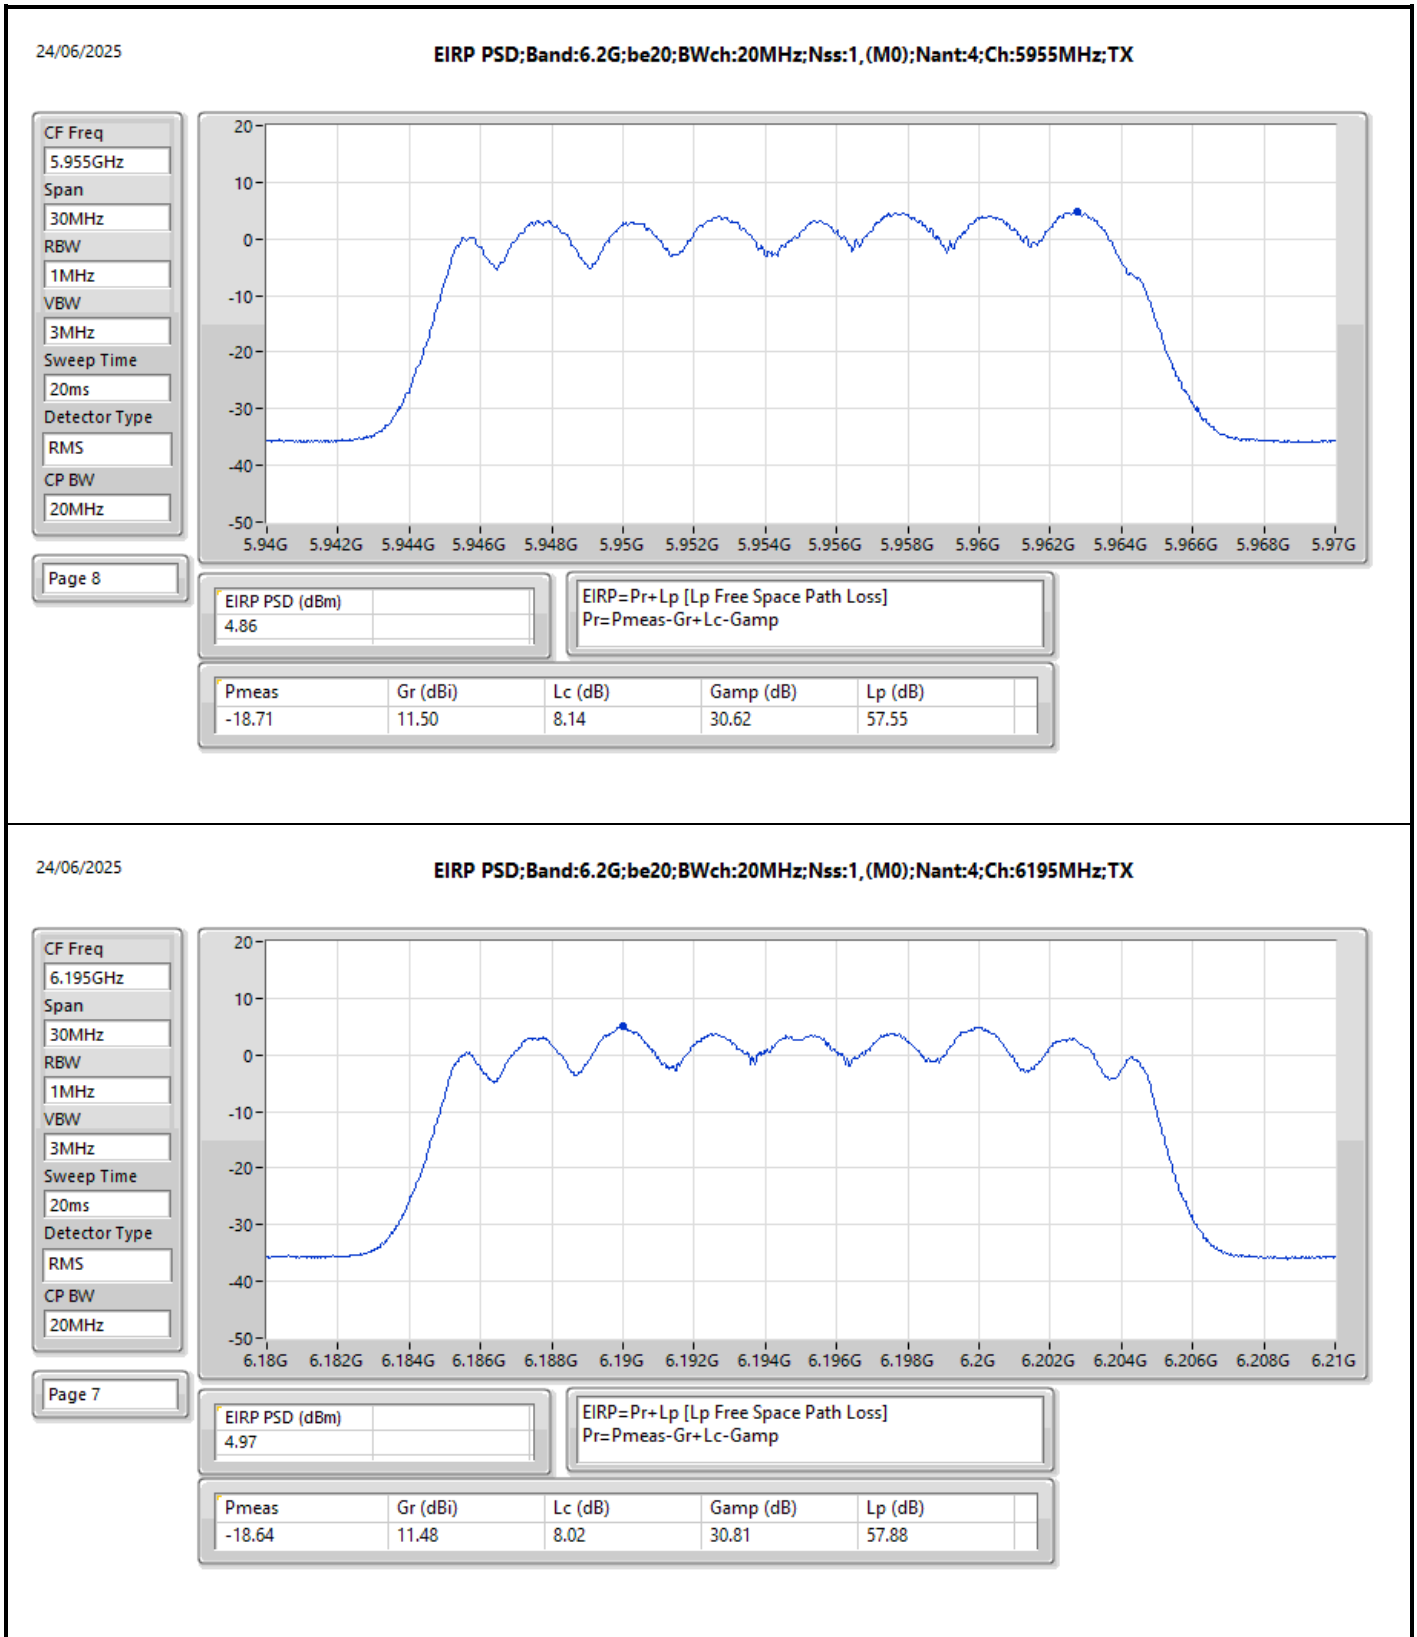

24/06/2025

EIRP PSD;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

CF Freq
6.415GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

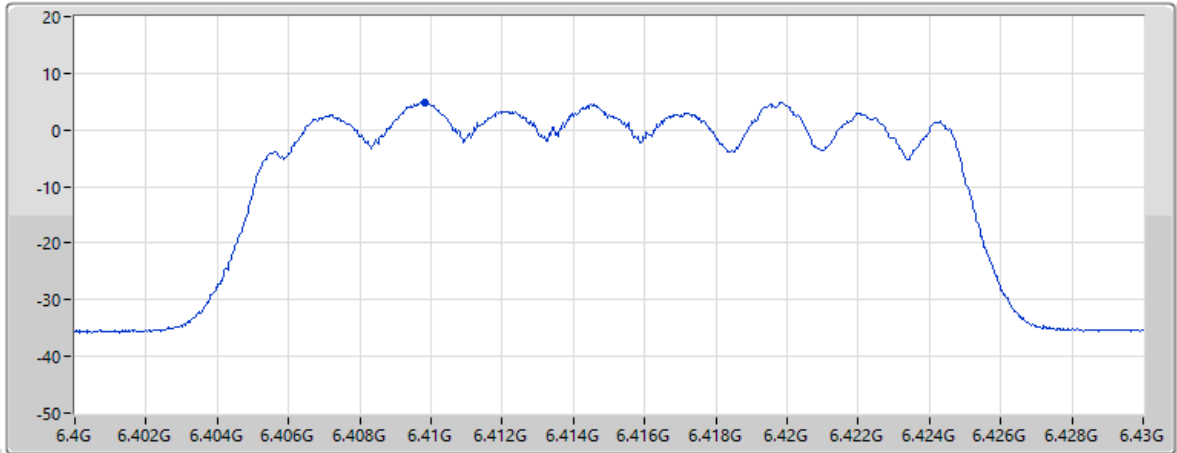


Page 7

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.93				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.66	11.92	8.37	31.04	58.18

24/06/2025

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6435MHz;TX

CF Freq
6.435GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

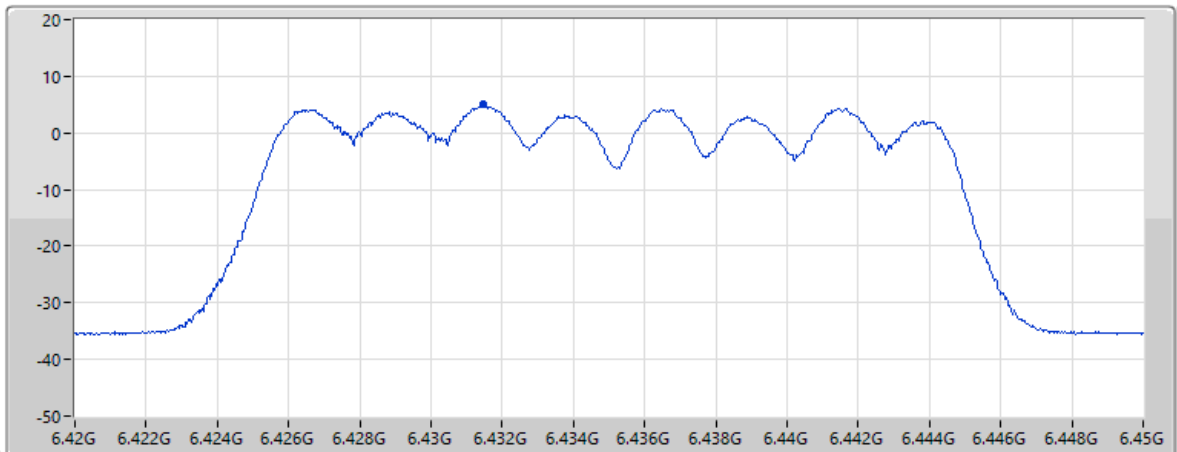


Page 7

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.97				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.61	11.96	8.40	31.07	58.21

24/06/2025

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

CF Freq
6.475GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

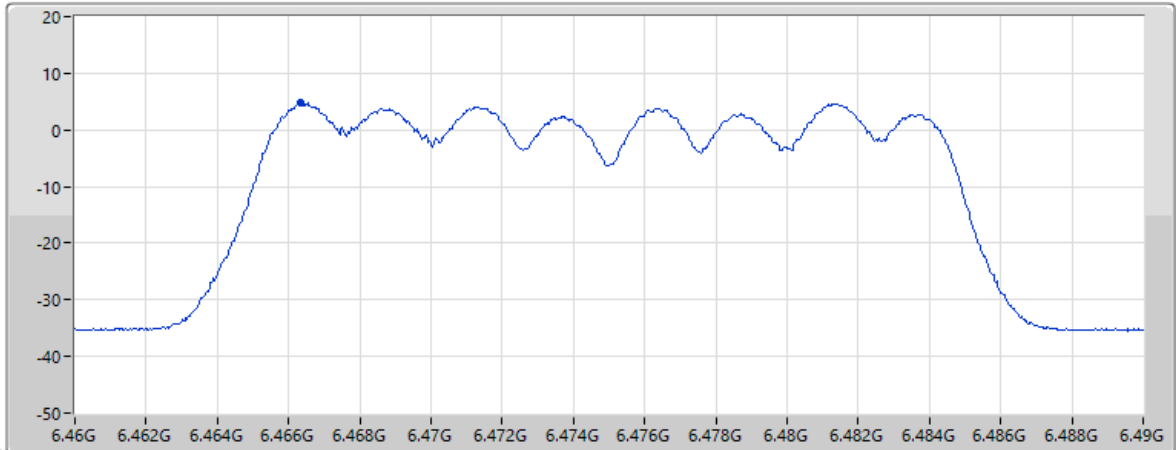


Page 7

EIRP PSD (dBm)	4.75	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.86	12.00	8.45	31.10	58.26

25/06/2025

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

CF Freq
6.515GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

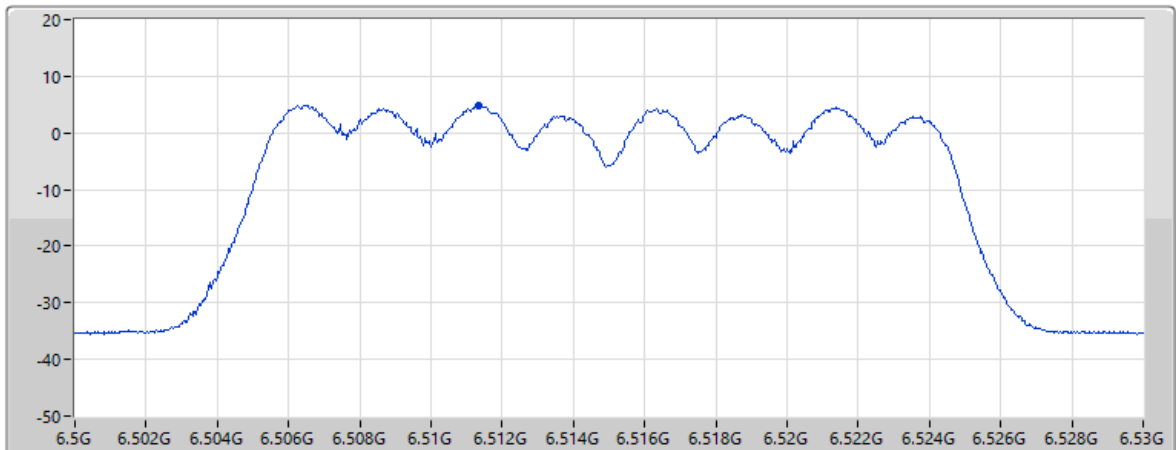


Page 7

EIRP PSD (dBm)	4.89	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.79	12.00	8.51	31.15	58.32

25/06/2025

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

CF Freq
6.535GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

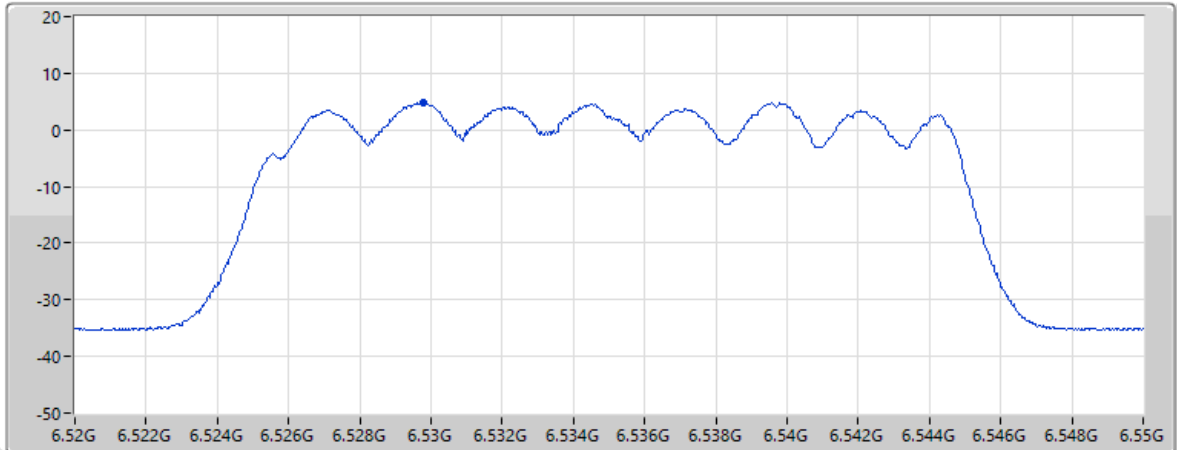


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.94				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.78	12.00	8.54	31.16	58.34

25/06/2025

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

CF Freq
6.695GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

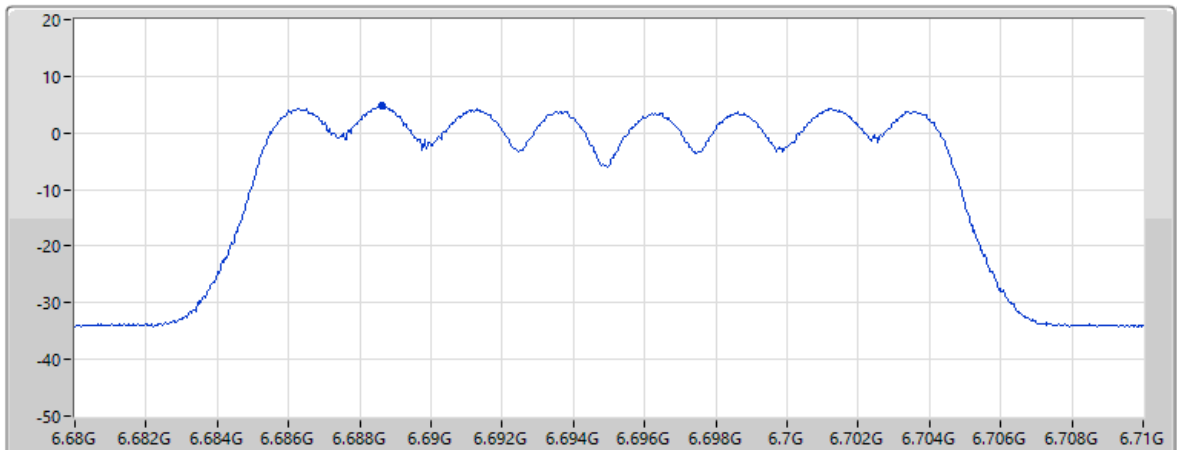


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.78				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.72	11.62	8.82	31.25	58.55


25/06/2025

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

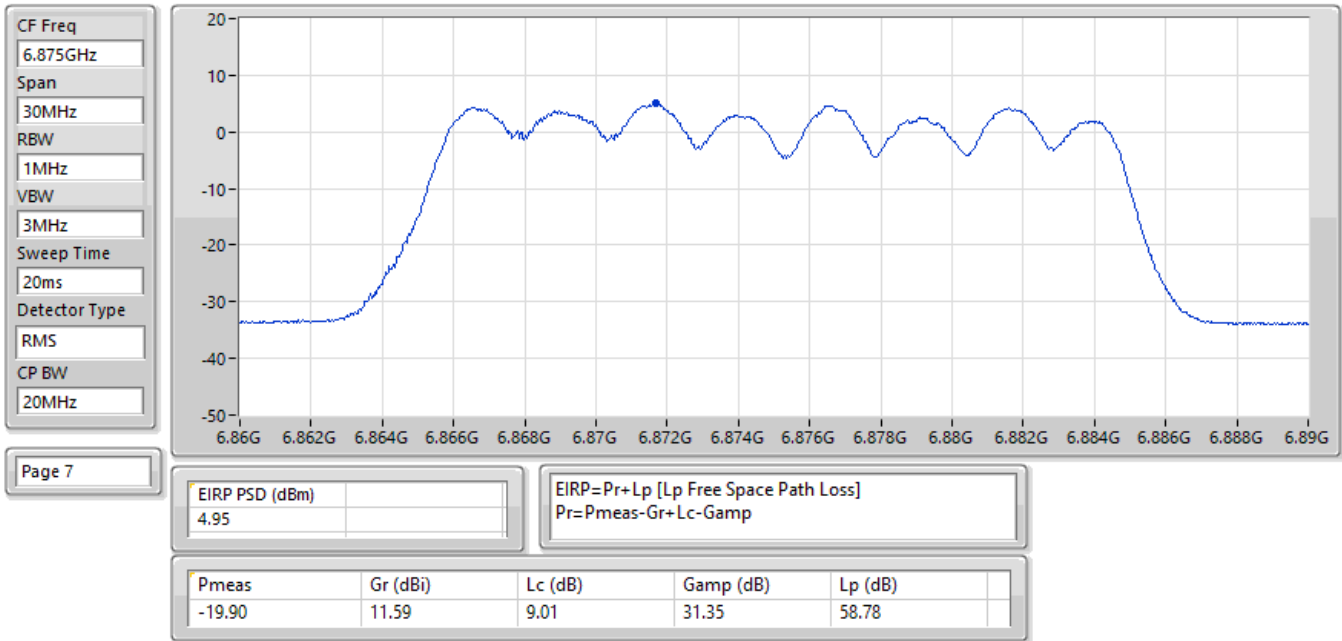

25/06/2025


EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

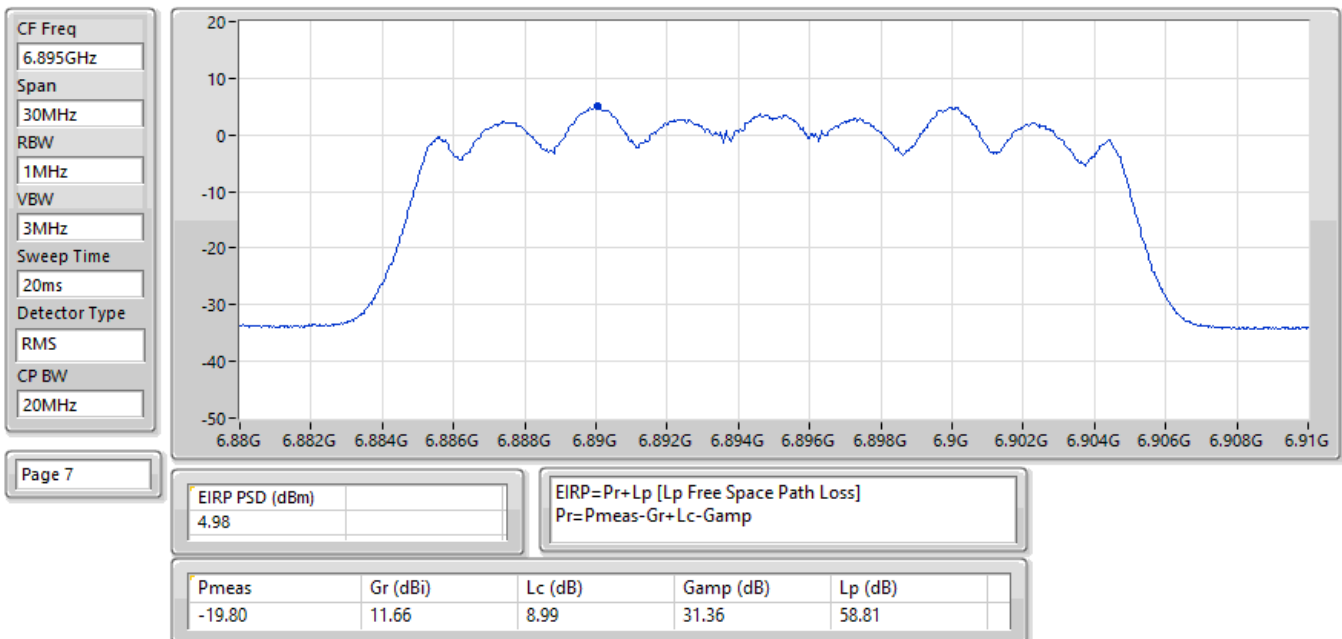

25/06/2025

EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

CF Freq
6.995GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

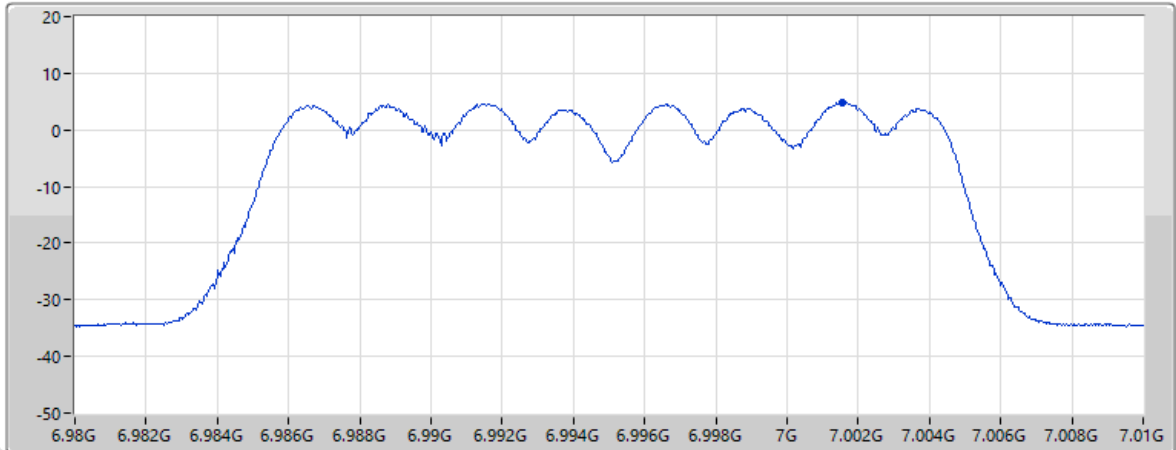


Page 7

EIRP PSD (dBm)	4.87	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.76	11.80	8.90	31.42	58.95

25/06/2025

EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

CF Freq
7.095GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

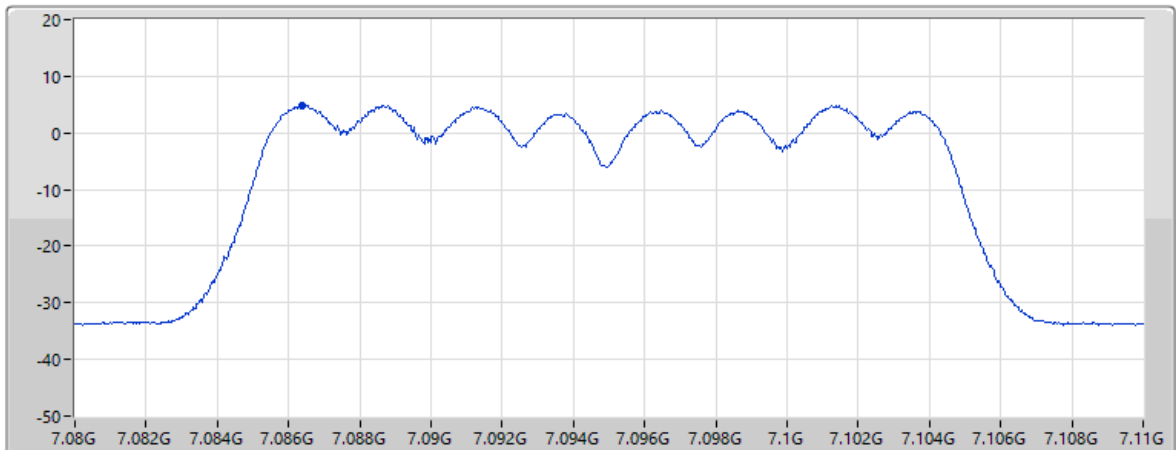


Page 7

EIRP PSD (dBm)	4.93	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.91	11.73	8.94	31.42	59.05

25/06/2025

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

CF Freq
5.965GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

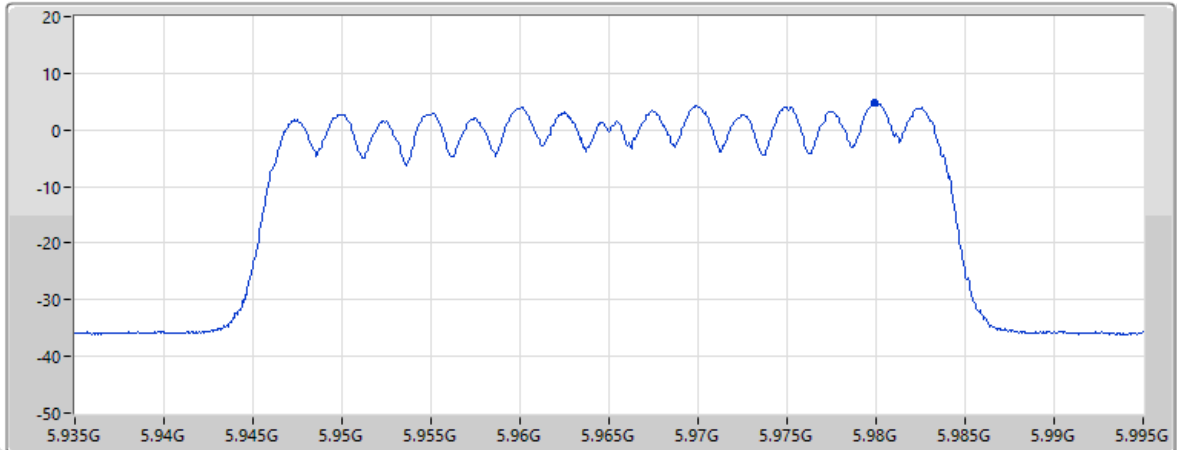


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.86				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.74	11.50	8.13	30.61	57.58

25/06/2025

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

CF Freq
6.205GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

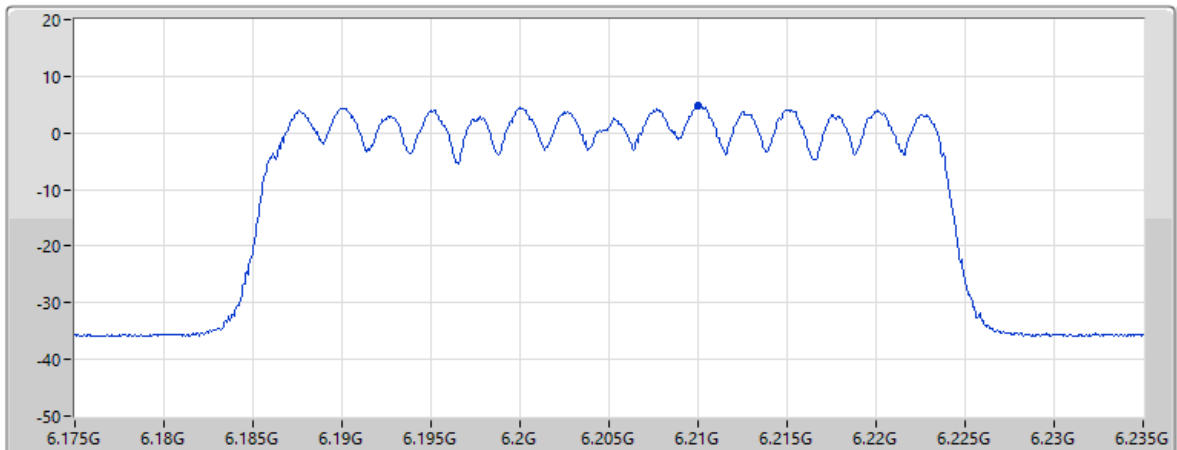


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.85				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.75	11.50	8.03	30.83	57.90

25/06/2025

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

CF Freq
6.405GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

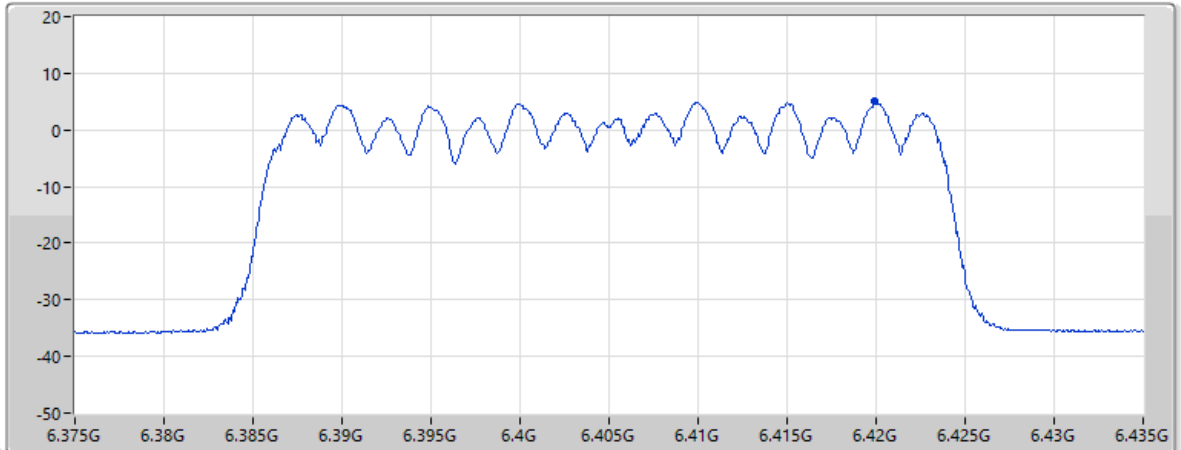


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.94				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.64	11.94	8.39	31.06	58.19

25/06/2025

EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

CF Freq
6.445GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

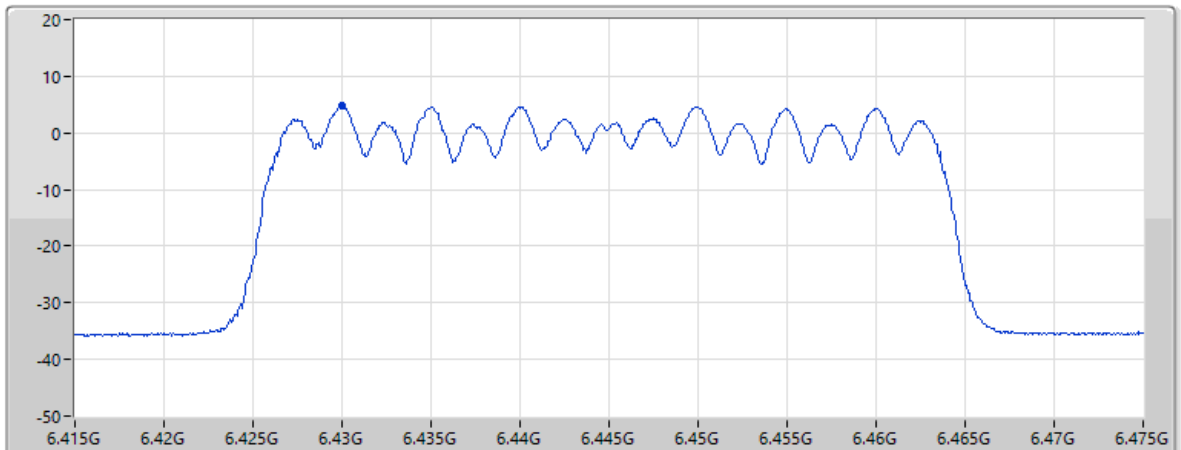


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.89				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.69	11.96	8.40	31.07	58.21


25/06/2025

EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

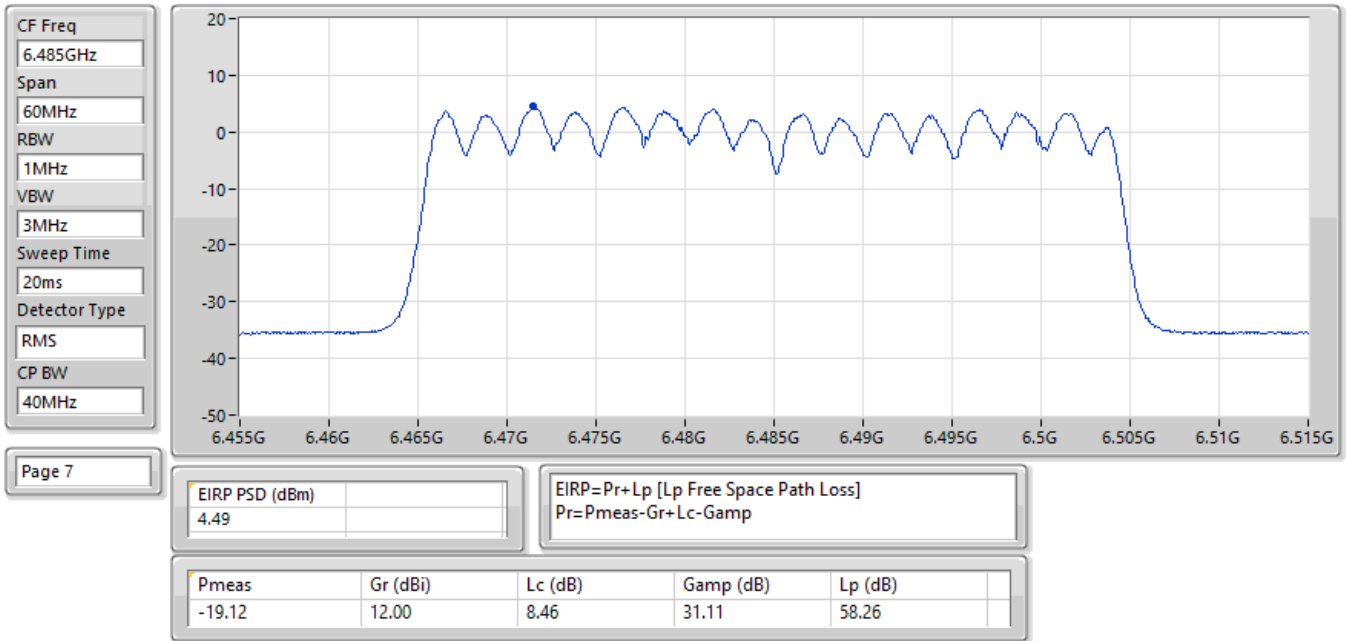

25/06/2025


EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

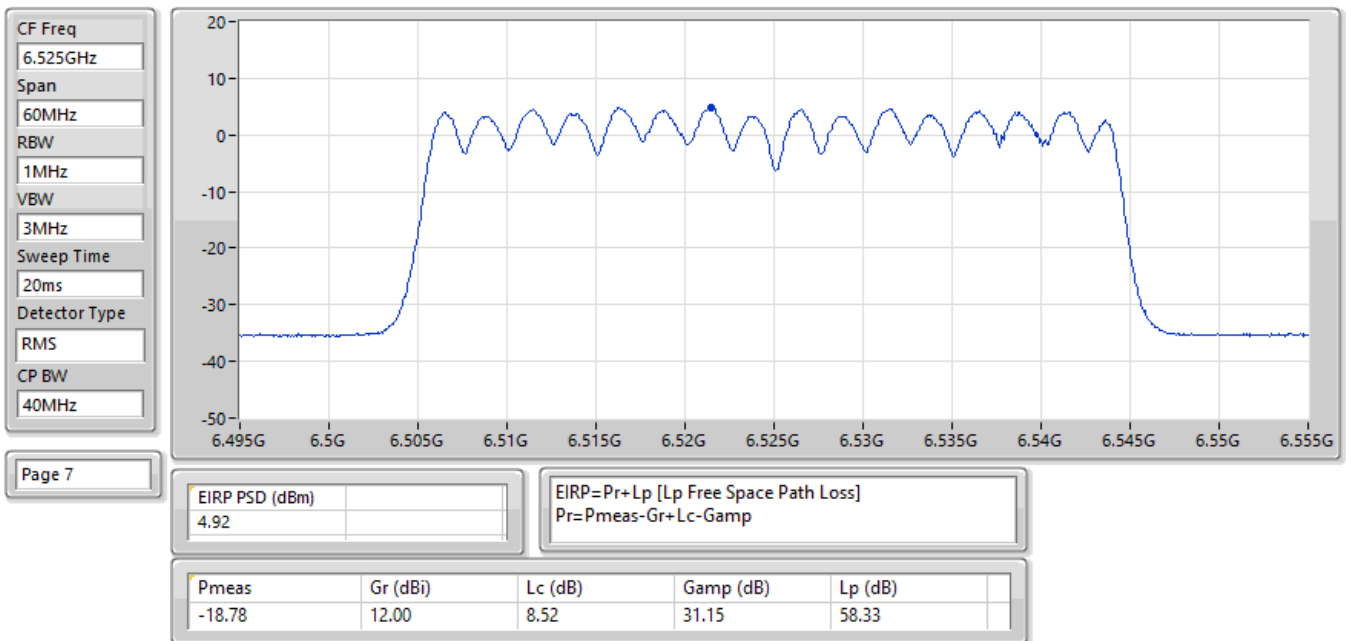

25/06/2025

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

CF Freq
6.565GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

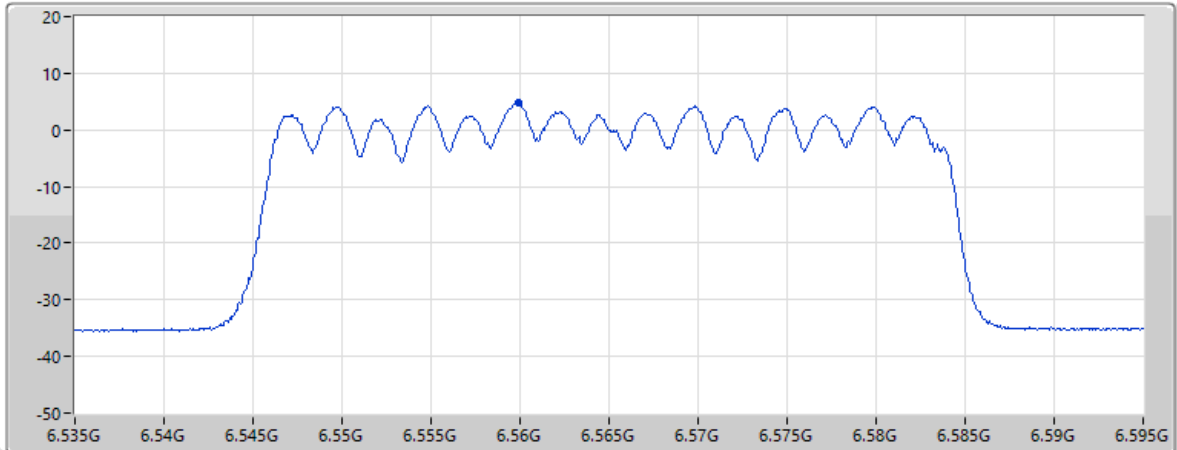

Page 7

EIRP PSD (dBm)
4.79


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.02	11.98	8.58	31.17	58.38

25/06/2025

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

CF Freq
6.685GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

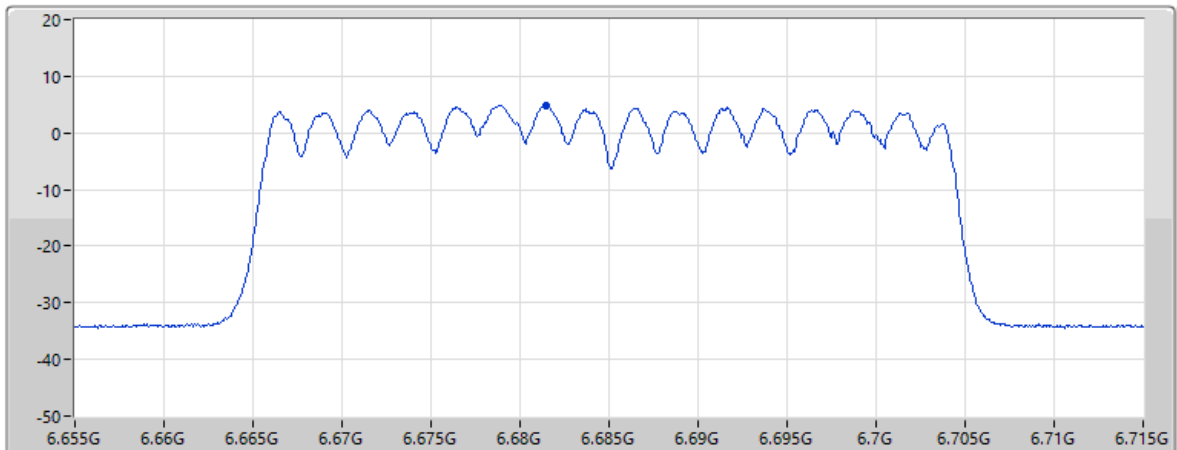

Page 7

EIRP PSD (dBm)
4.82


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.65	11.64	8.81	31.24	58.54

25/06/2025

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

CF Freq
6.885GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

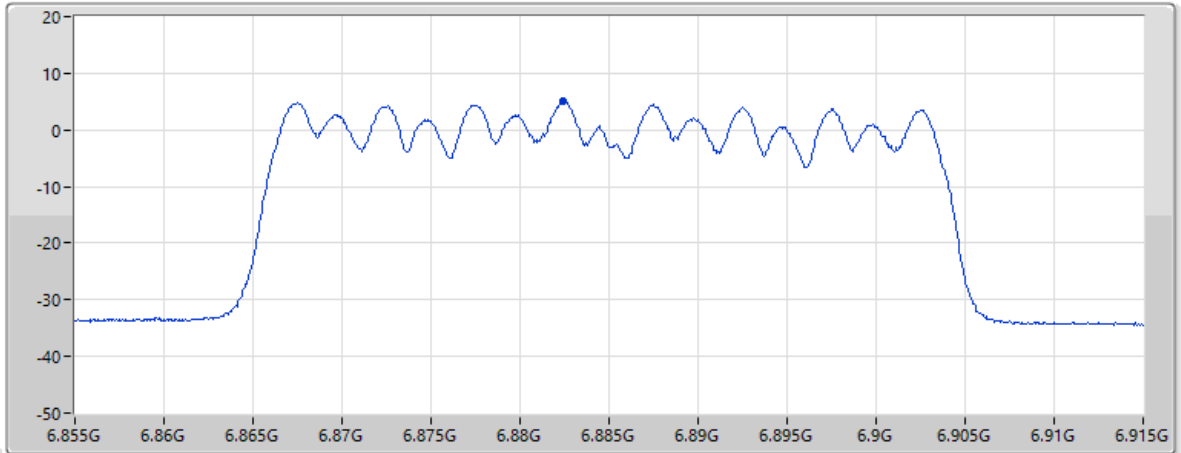

Page 8

EIRP PSD (dBm)
4.99


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.83	11.63	9.00	31.35	58.80

25/06/2025

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

CF Freq
6.925GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

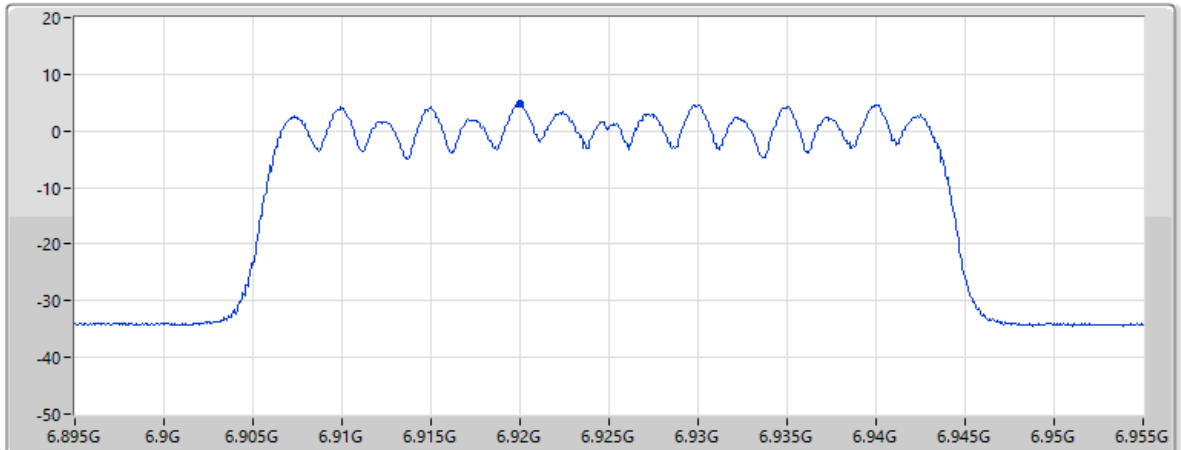

Page 7

EIRP PSD (dBm)
4.88


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.81	11.74	8.97	31.38	58.84

25/06/2025

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

CF Freq
7.005GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

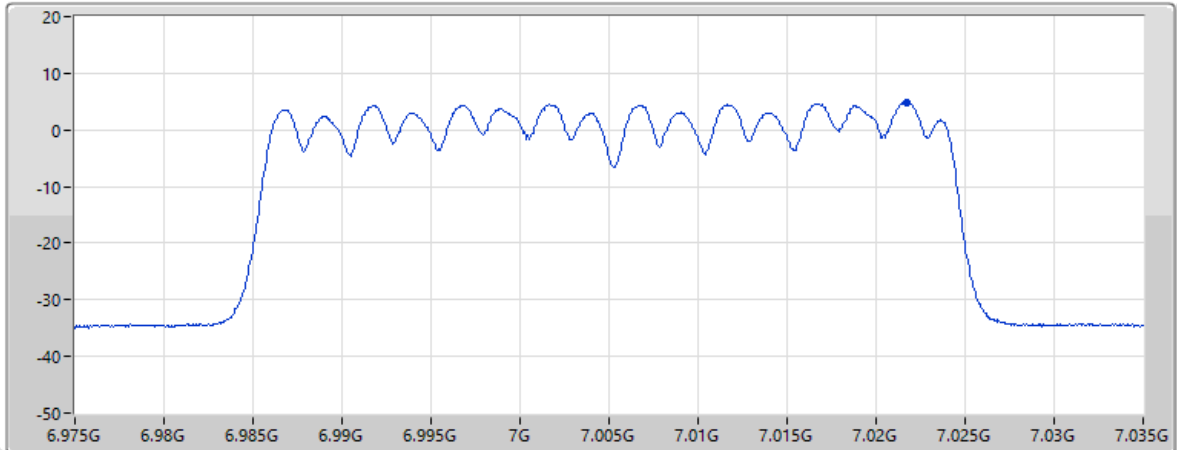


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.92				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.74	11.80	8.91	31.42	58.97

25/06/2025

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

CF Freq
7.085GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

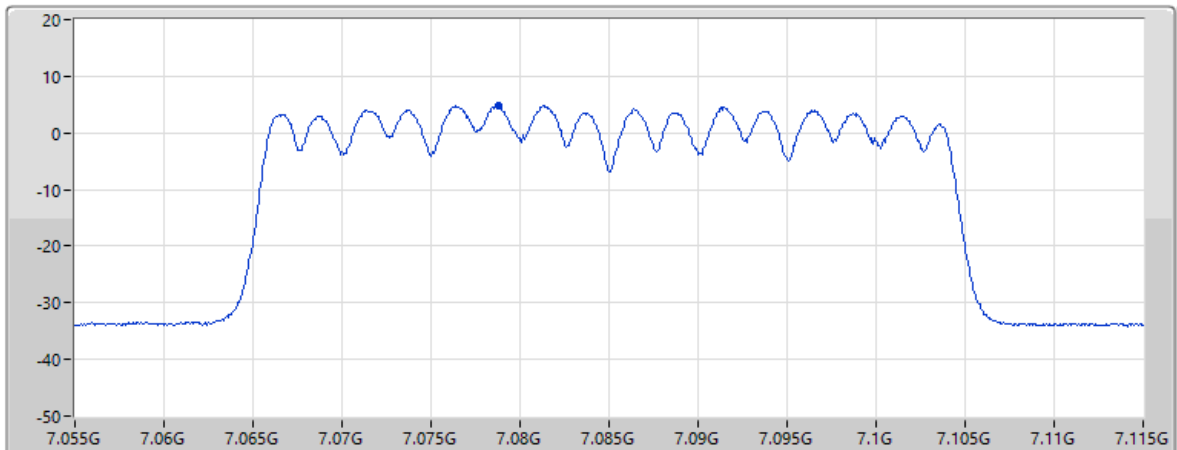


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.86				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.96	11.74	8.94	31.42	59.04


25/06/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

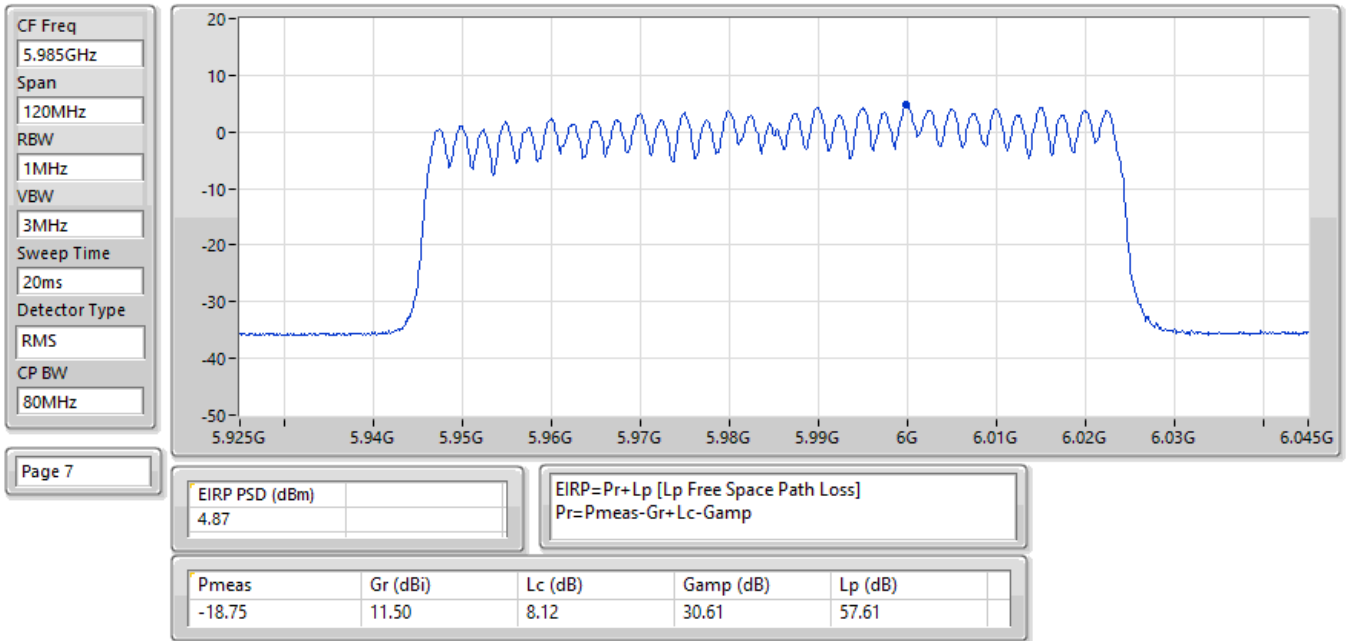


25/06/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

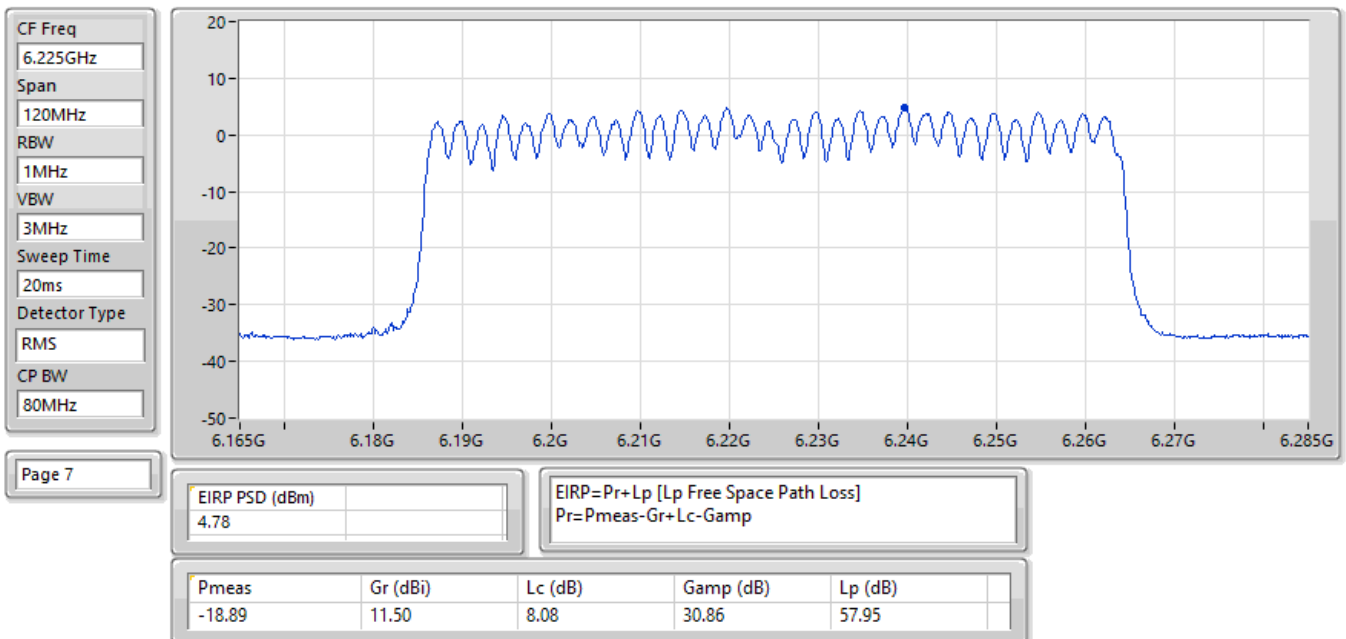


25/06/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

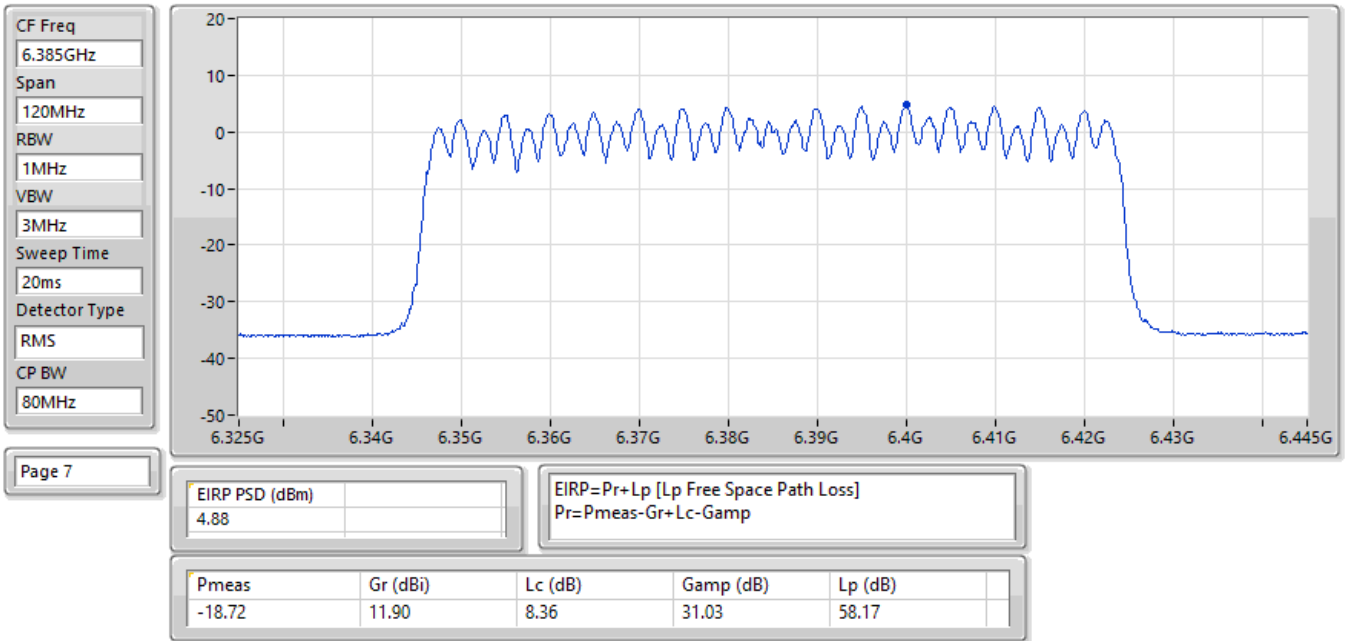


25/06/2025

EIRP PSD;Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

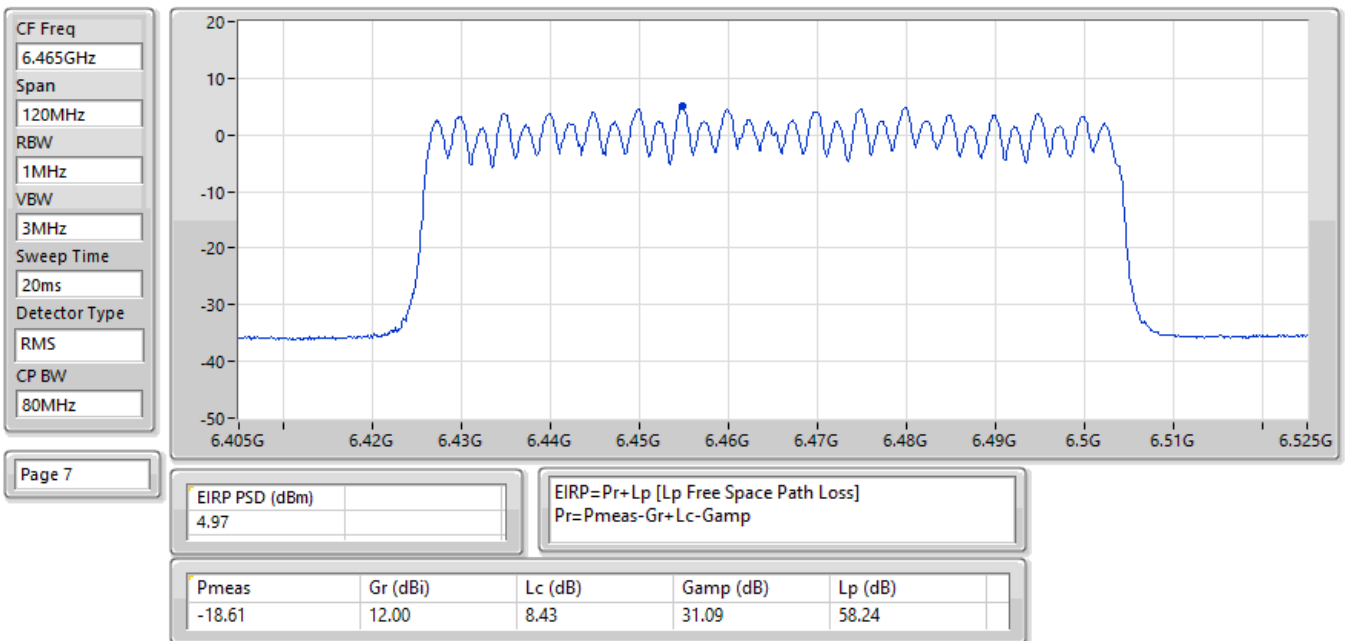


25/06/2025

EIRP PSD;Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

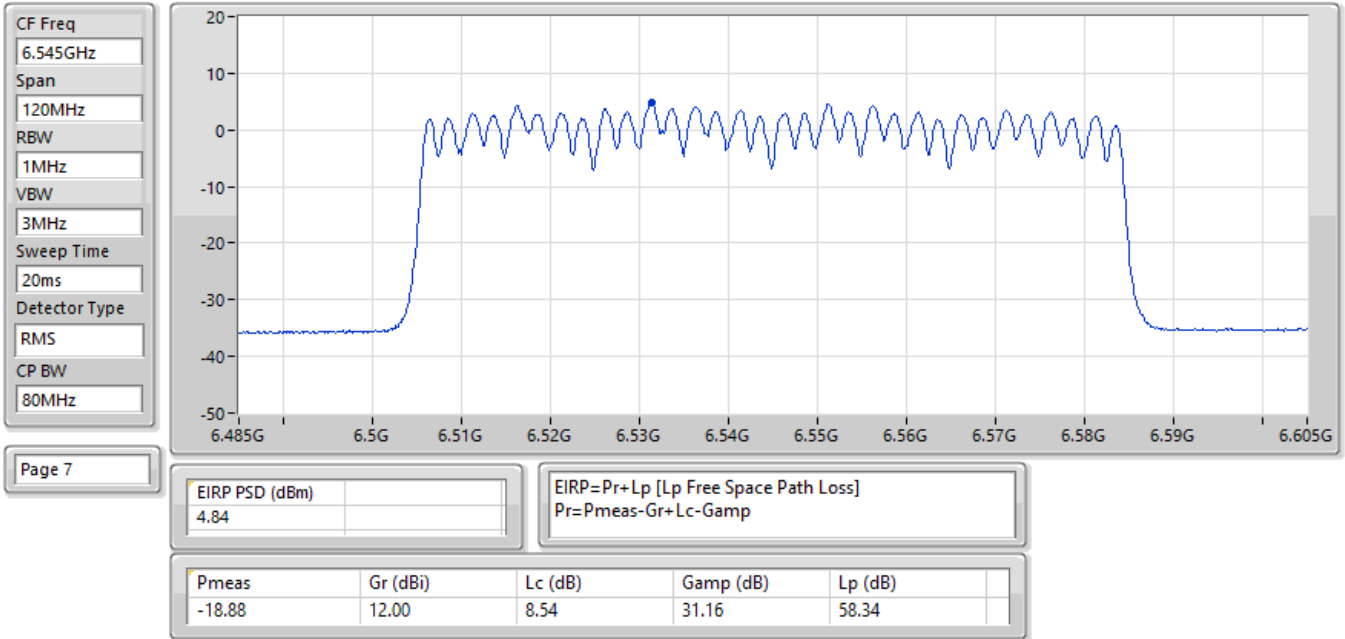

25/06/2025


EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

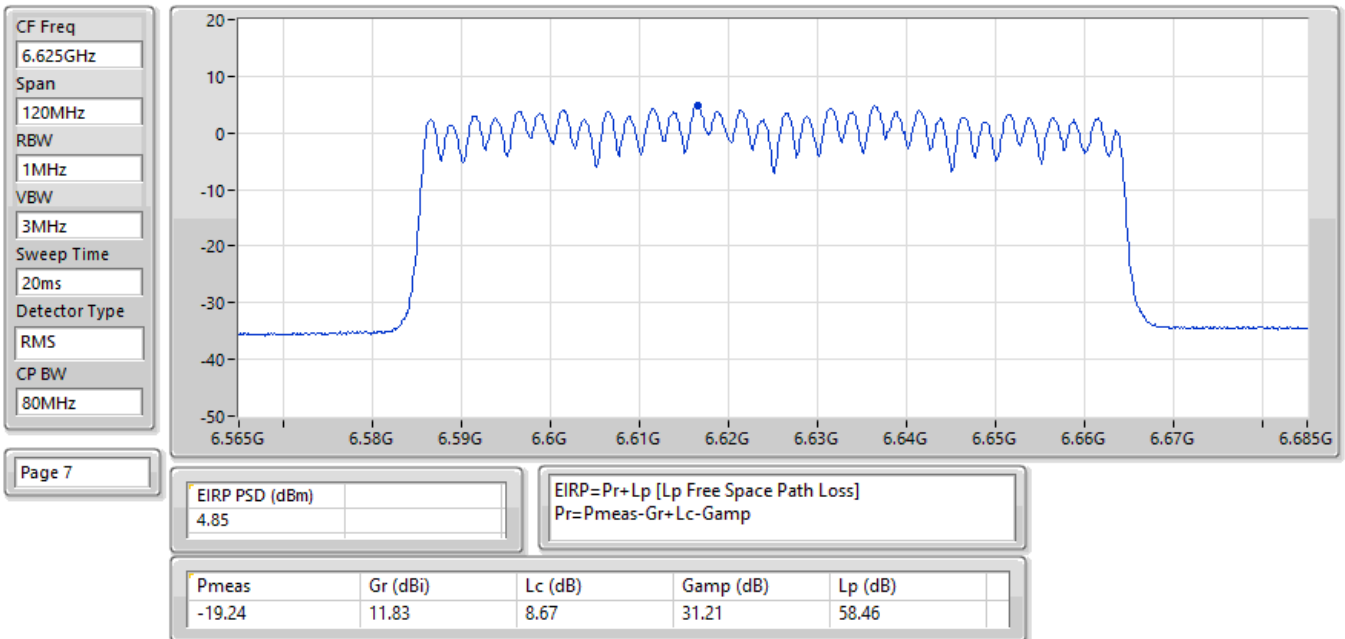

25/06/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

CF Freq
6.705GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

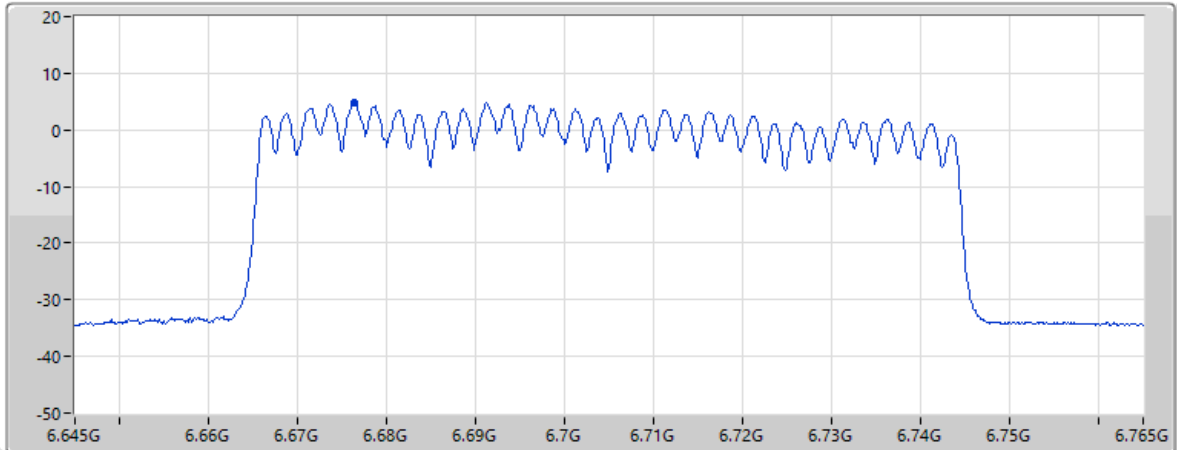


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.91				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.53	11.65	8.80	31.24	58.53

25/06/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

CF Freq
6.785GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

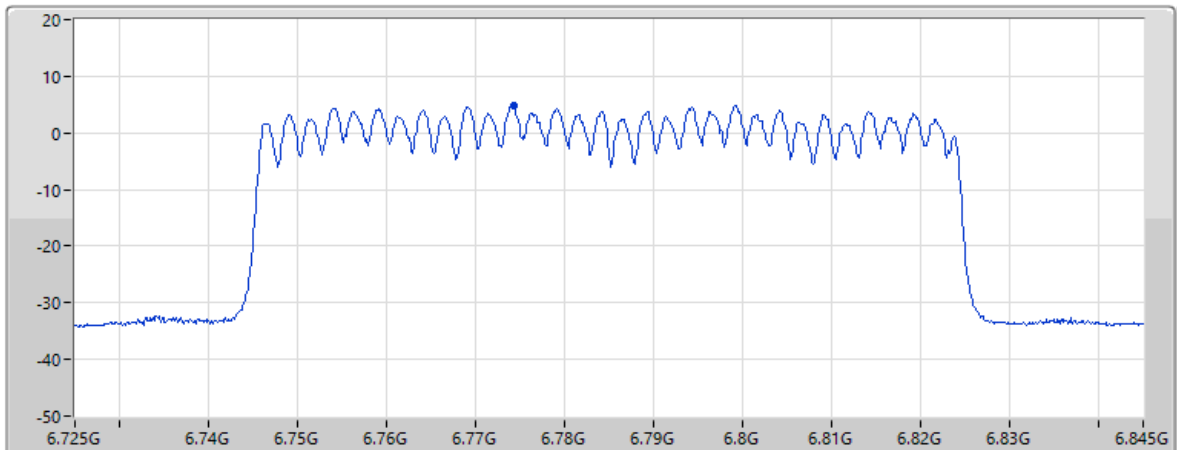


Page 8

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.83				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.00	11.55	9.01	31.29	58.66

25/06/2025

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

CF Freq
6.865GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

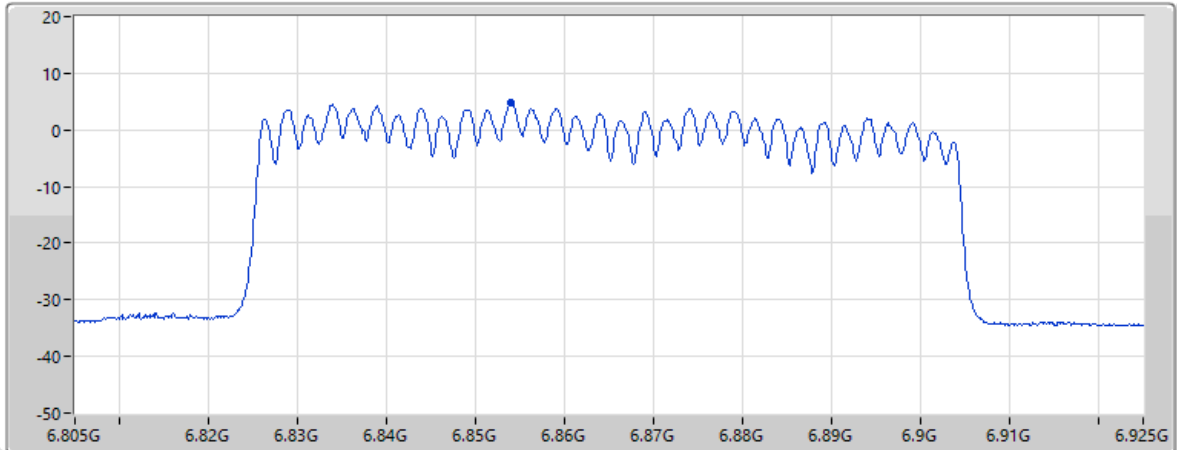


Page 8

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.77				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.15	11.52	9.02	31.34	58.76

25/06/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

CF Freq
6.945GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

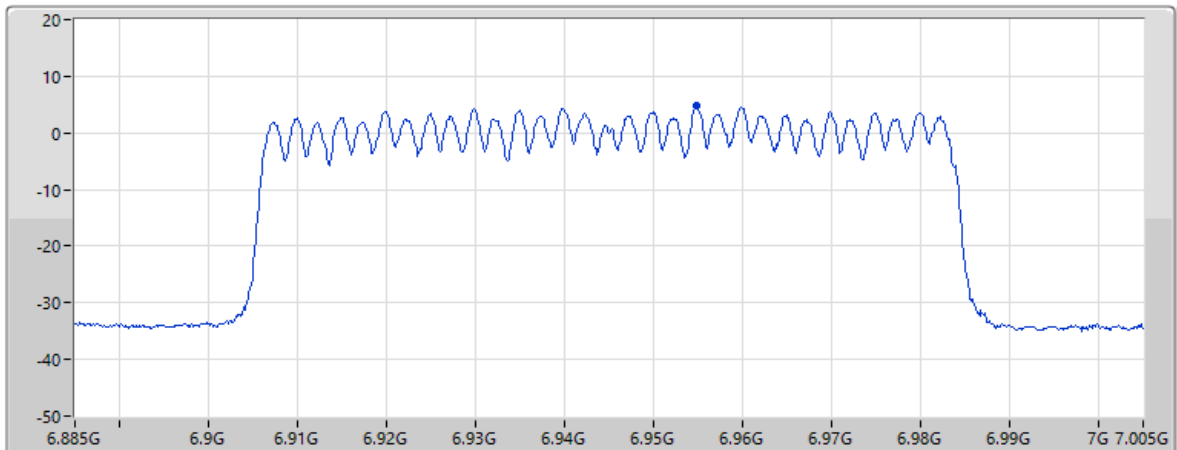


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.75				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.89	11.80	8.94	31.39	58.89


25/06/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

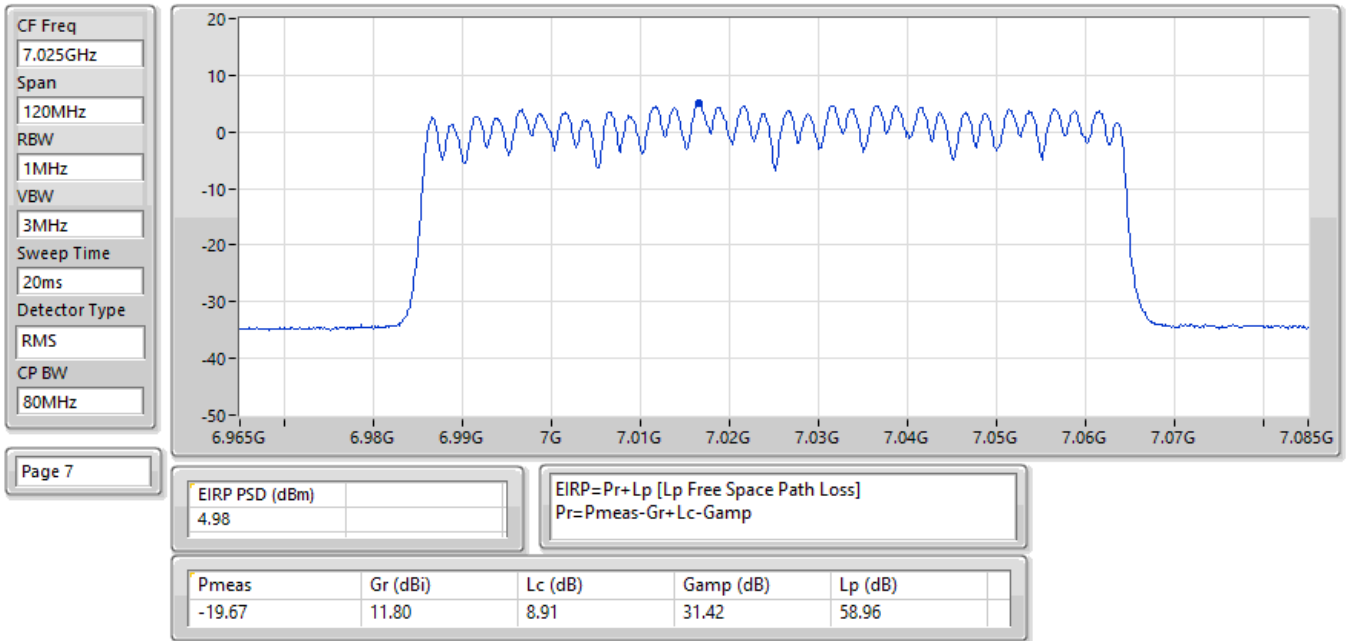


25/06/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

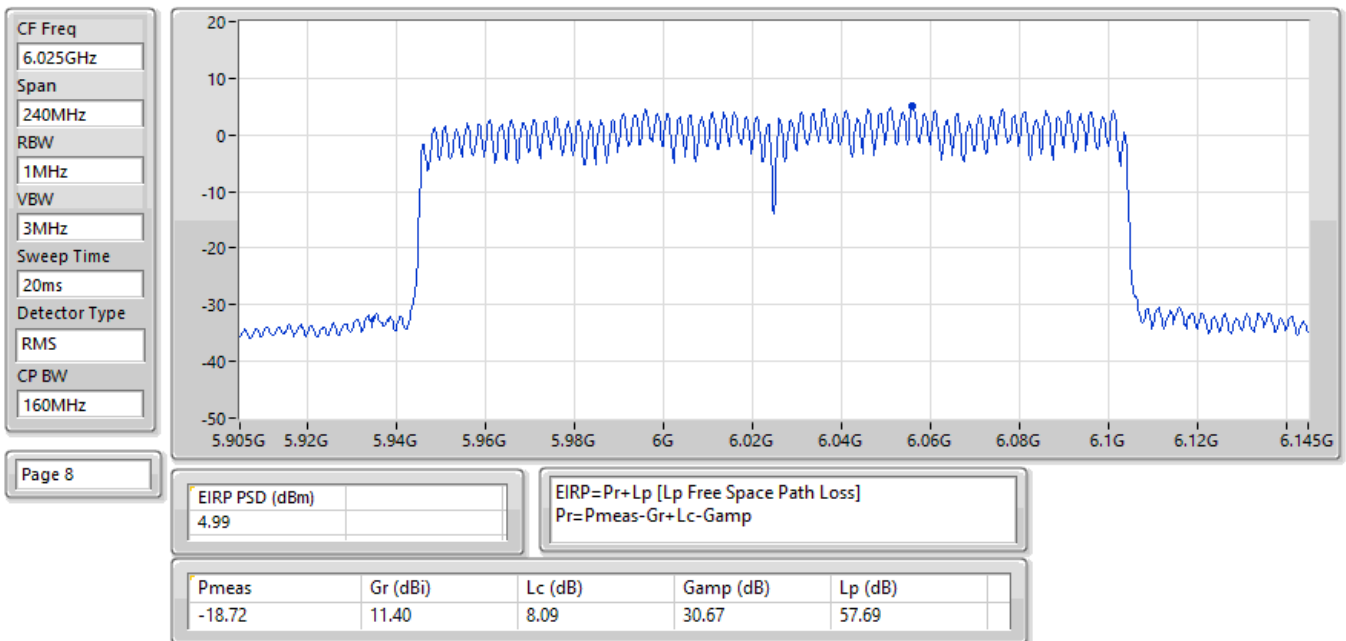


26/06/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

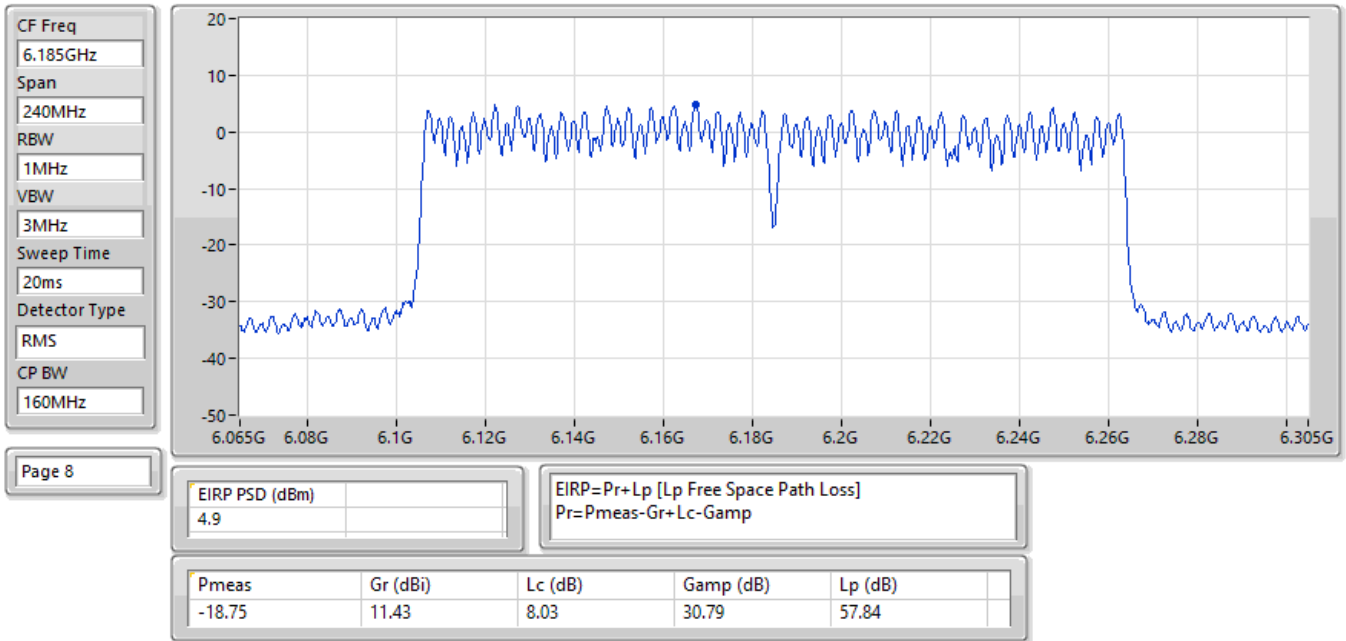

26/06/2025


EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

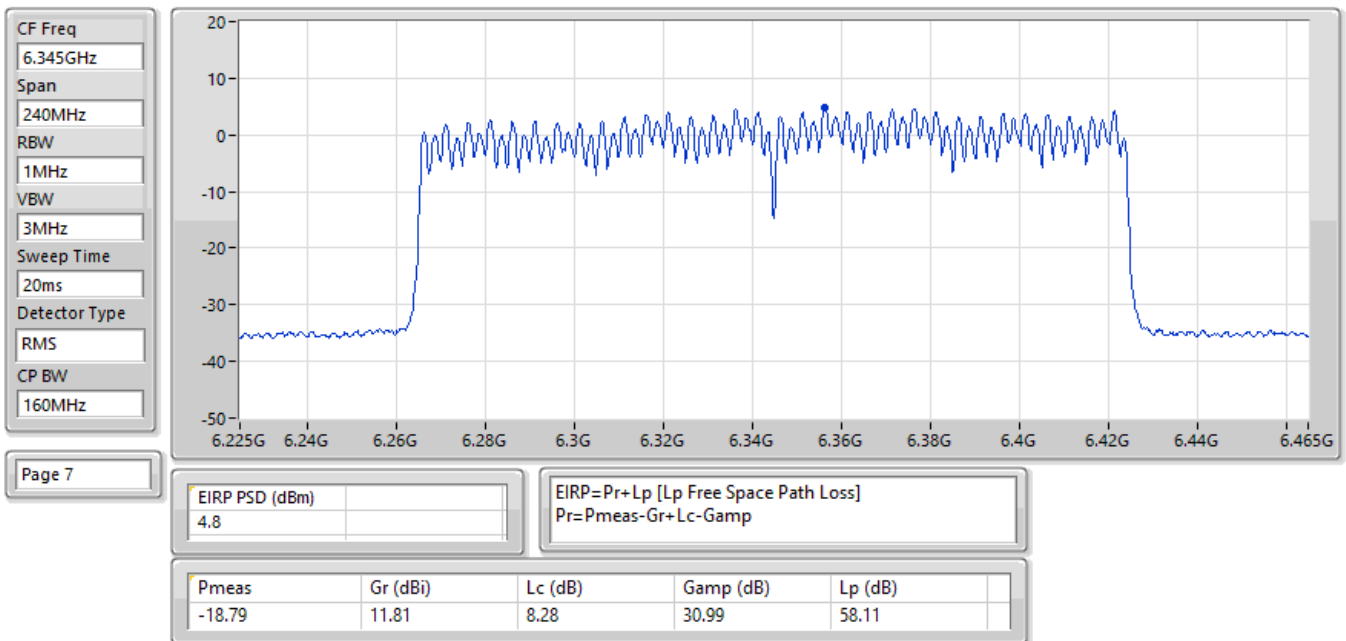

26/06/2025

EIRP PSD;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

CF Freq
6.505GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

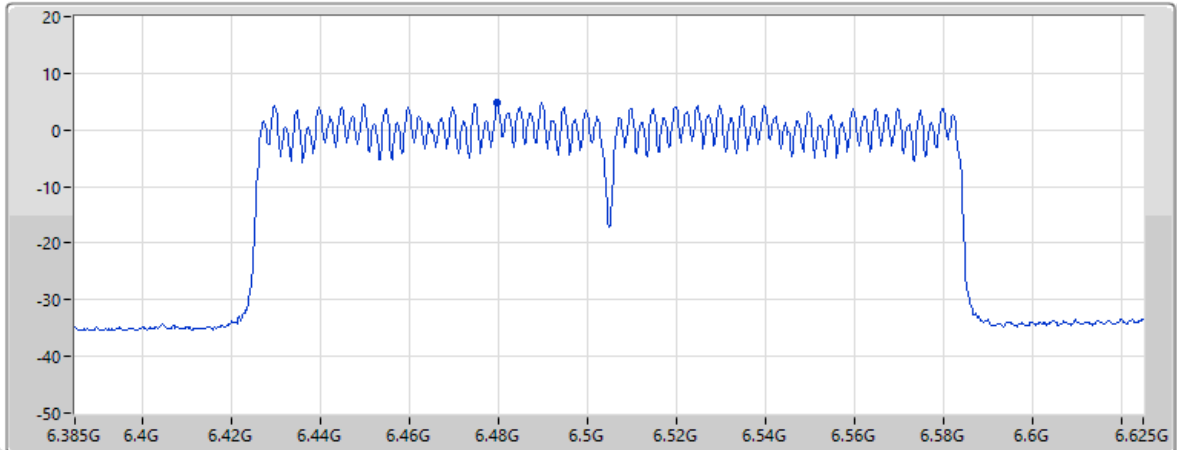


Page 7

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.84				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.78	12.00	8.47	31.12	58.27

26/06/2025

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

CF Freq
6.665GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

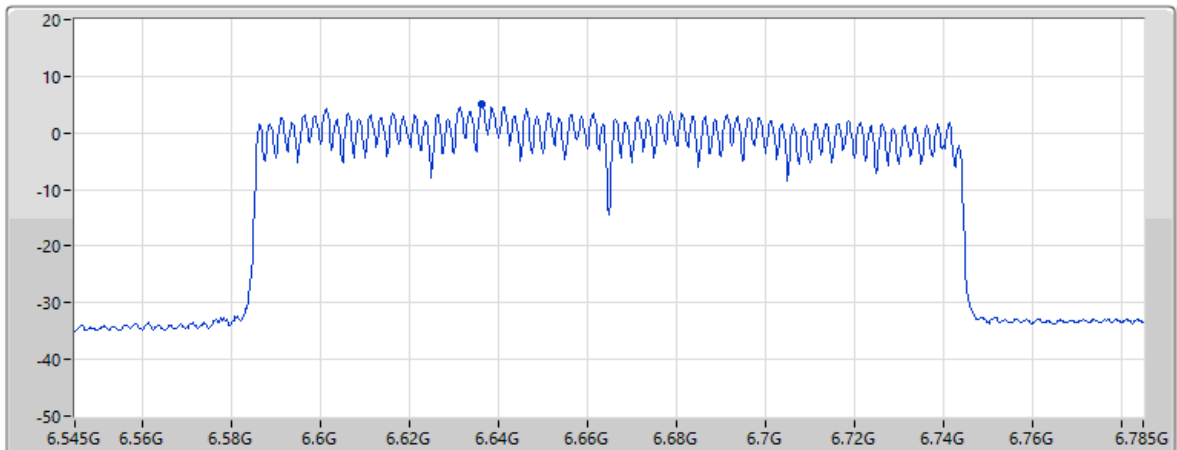


Page 7

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.95				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.27	11.75	8.71	31.22	58.48


26/06/2025

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

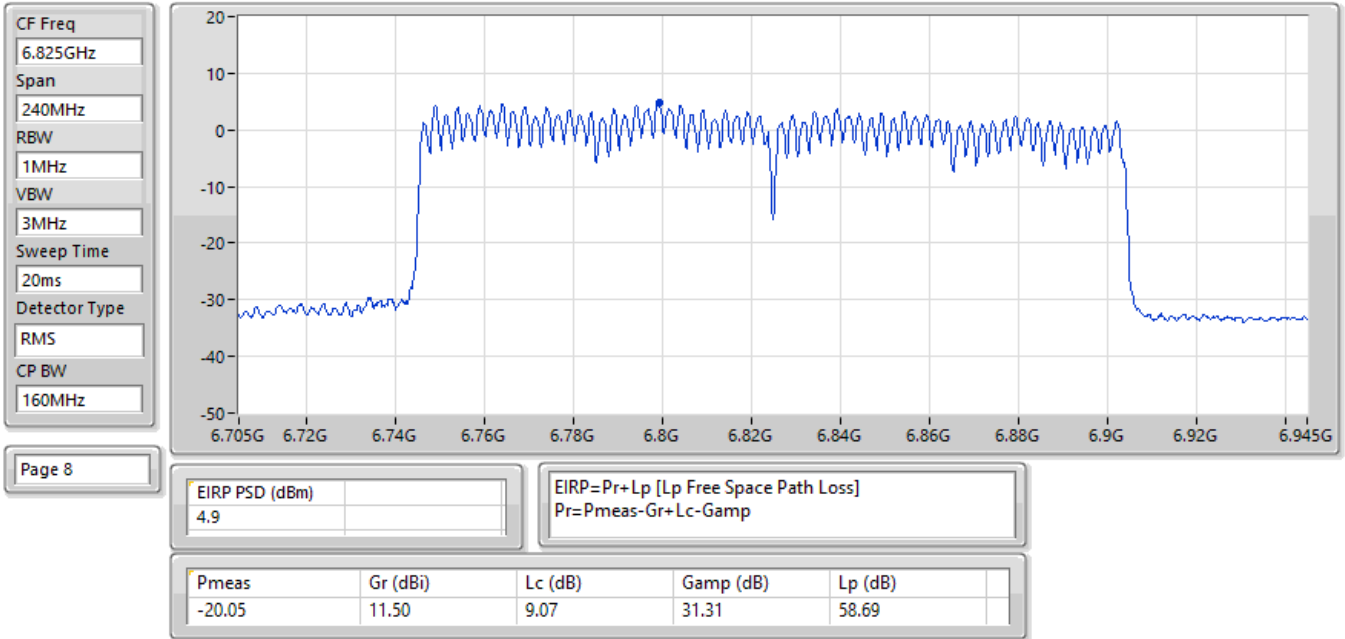

26/06/2025


EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

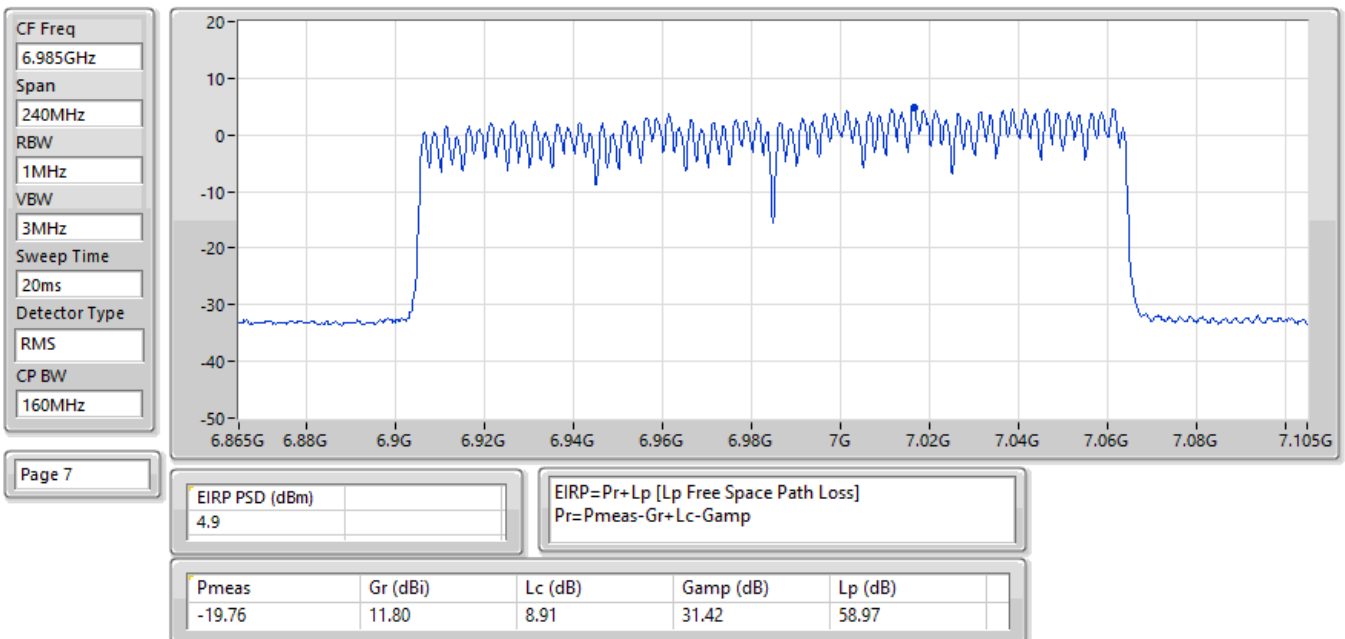

26/06/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

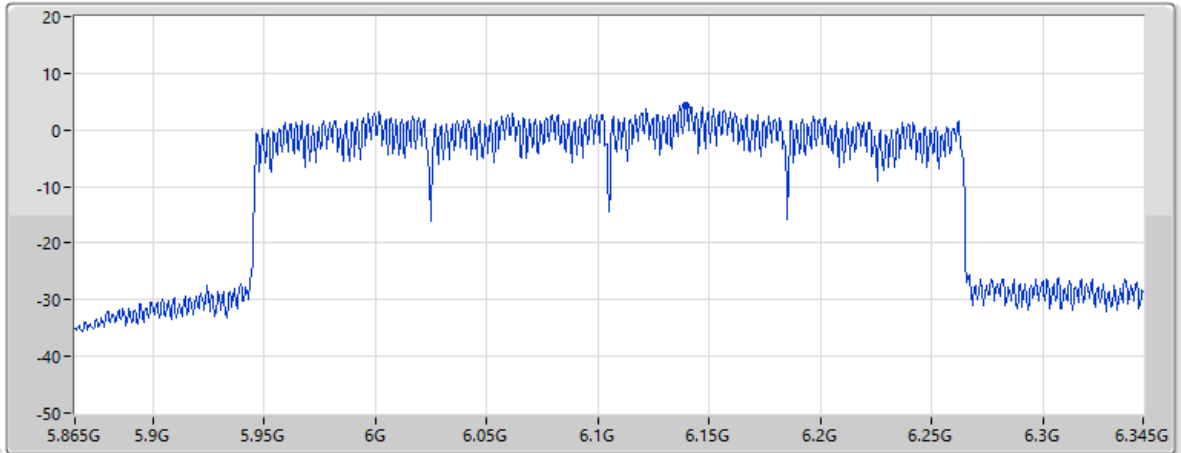


Page 7

EIRP PSD (dBm)	4.39	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.30	11.40	8.04	30.76	57.81

26/06/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

CF Freq
6.265GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

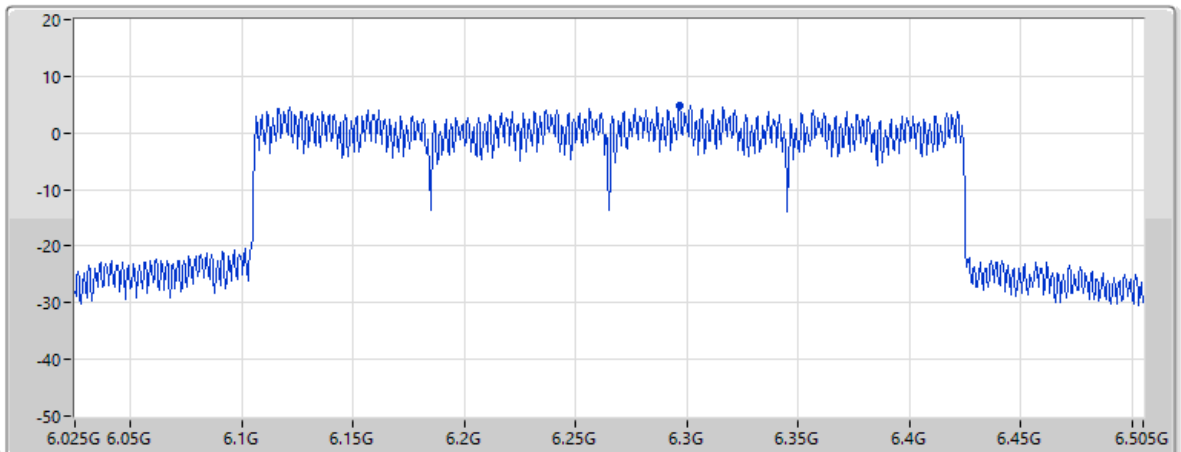

Page 7

EIRP PSD (dBm)	4.9	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.69	11.69	8.18	30.92	58.02

26/06/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6425MHz;TX

CF Freq
6.425GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

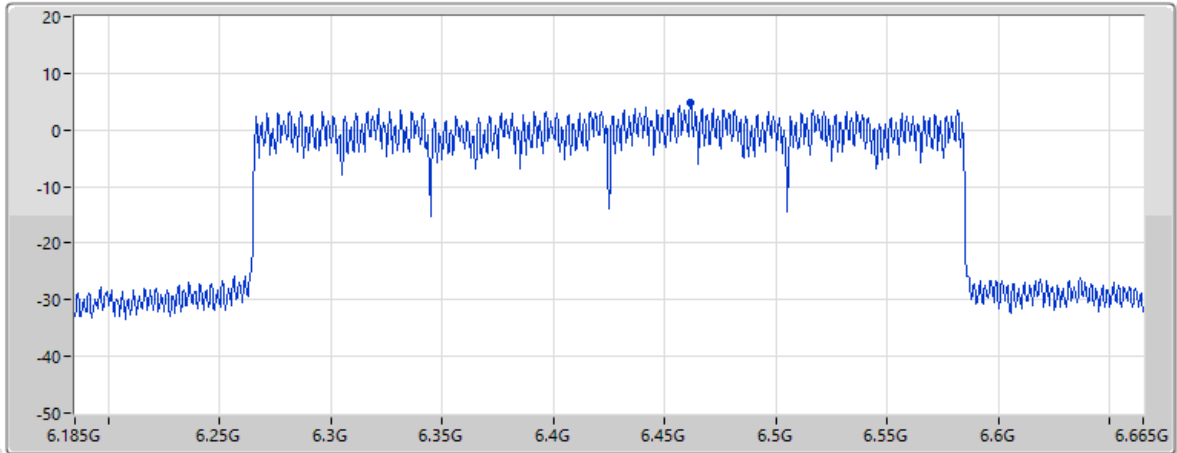

Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.78				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.81	12.00	8.44	31.10	58.25

26/06/2025

EIRP PSD;Band:6.4G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

CF Freq
6.585GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

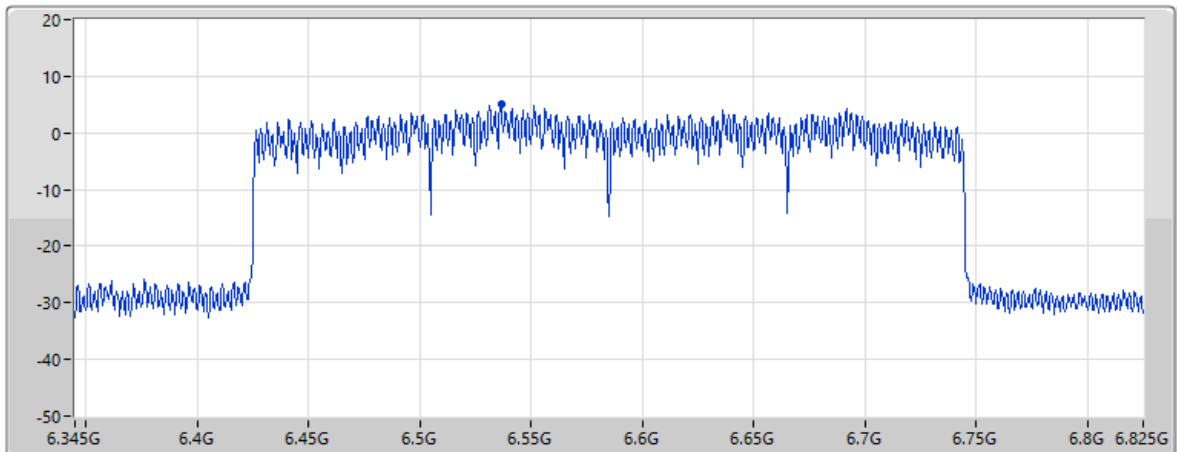

Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.95				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.78	12.00	8.54	31.16	58.35

26/06/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

CF Freq
6.745GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

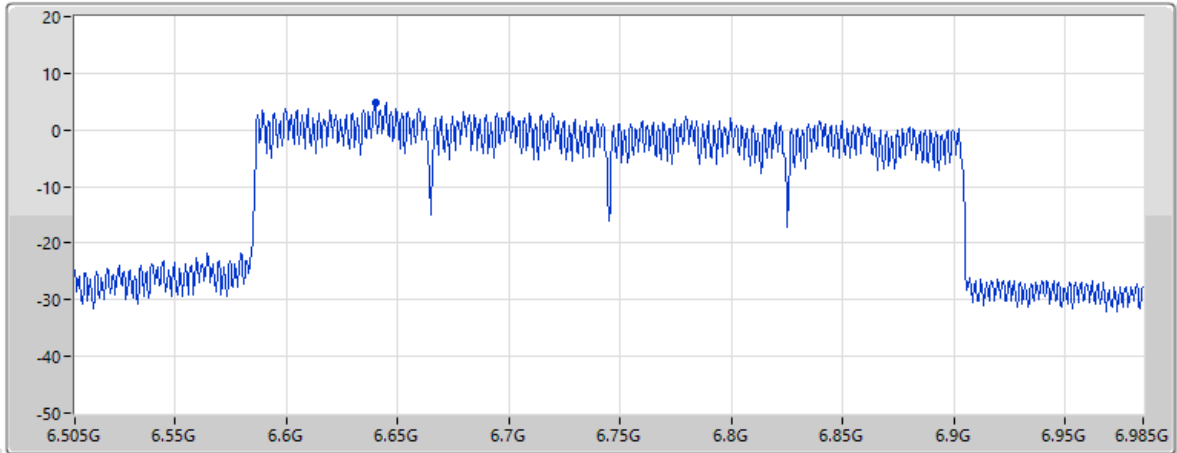

Page 7

EIRP PSD (dBm)	4.8	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.45	11.74	8.72	31.22	58.49

26/06/2025

EIRP PSD;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

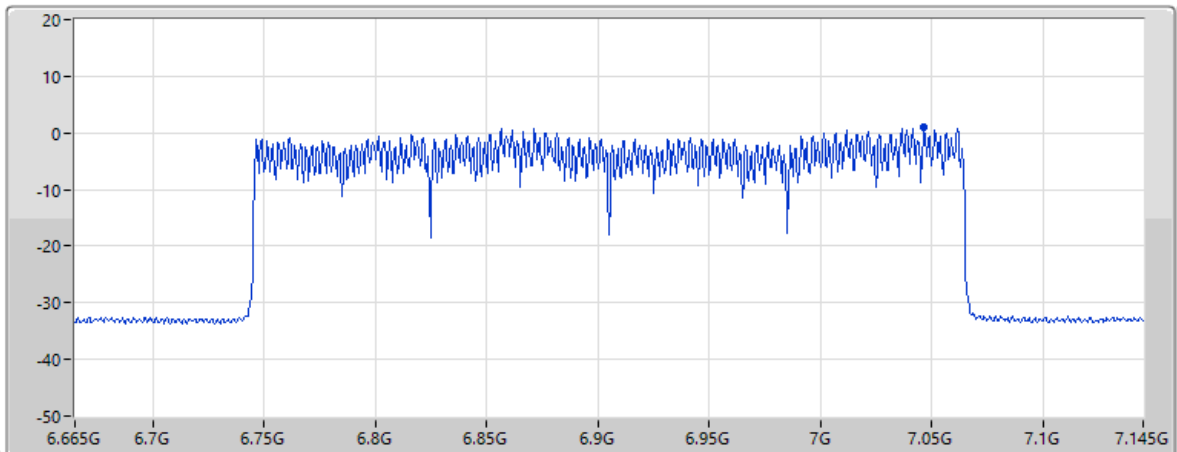

Page 7

EIRP PSD (dBm)	0.92	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-23.78	11.80	8.92	31.42	59.00

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.92
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.94
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.91
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.95
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.88
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.86
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.86
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.97
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.60
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.87
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.97
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.88
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.86
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.98
802.11be EHT320-BF_Nss1,(MCS0)_4TX	4.90
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.89
802.11be EHT40-BF_Nss1,(MCS0)_4TX	4.98
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.96
802.11be EHT160-BF_Nss1,(MCS0)_4TX	4.79

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


**Result**

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	4.92	5.00
6195MHz	Pass	4.89	5.00
6415MHz	Pass	4.92	5.00
6435MHz	Pass	4.86	5.00
6475MHz	Pass	4.83	5.00
6515MHz	Pass	4.74	5.00
6535MHz	Pass	3.22	5.00
6695MHz	Pass	4.97	5.00
6875MHz	Pass	4.85	5.00
6895MHz	Pass	4.84	5.00
6995MHz	Pass	4.87	5.00
7095MHz	Pass	4.89	5.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	4.94	5.00
6205MHz	Pass	4.91	5.00
6405MHz	Pass	4.91	5.00
6445MHz	Pass	4.85	5.00
6485MHz	Pass	4.86	5.00
6525MHz	Pass	4.85	5.00
6565MHz	Pass	4.88	5.00
6685MHz	Pass	4.87	5.00
6885MHz	Pass	4.83	5.00
6925MHz	Pass	4.96	5.00
7005MHz	Pass	4.85	5.00
7085MHz	Pass	4.98	5.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	4.88	5.00
6225MHz	Pass	4.72	5.00
6385MHz	Pass	4.91	5.00
6465MHz	Pass	4.97	5.00
6545MHz	Pass	4.91	5.00
6625MHz	Pass	4.78	5.00
6705MHz	Pass	4.70	5.00
6785MHz	Pass	4.73	5.00
6865MHz	Pass	4.86	5.00
6945MHz	Pass	4.93	5.00
7025MHz	Pass	4.96	5.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	4.80	5.00
6185MHz	Pass	4.84	5.00
6345MHz	Pass	4.95	5.00
6505MHz	Pass	4.60	5.00
6665MHz	Pass	4.87	5.00
6825MHz	Pass	4.98	5.00
6985MHz	Pass	4.79	5.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	4.81	5.00
6265MHz	Pass	4.88	5.00
6425MHz	Pass	4.86	5.00
6585MHz	Pass	4.87	5.00
6745MHz	Pass	4.90	5.00
6905MHz	Pass	4.83	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


26/06/2025

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

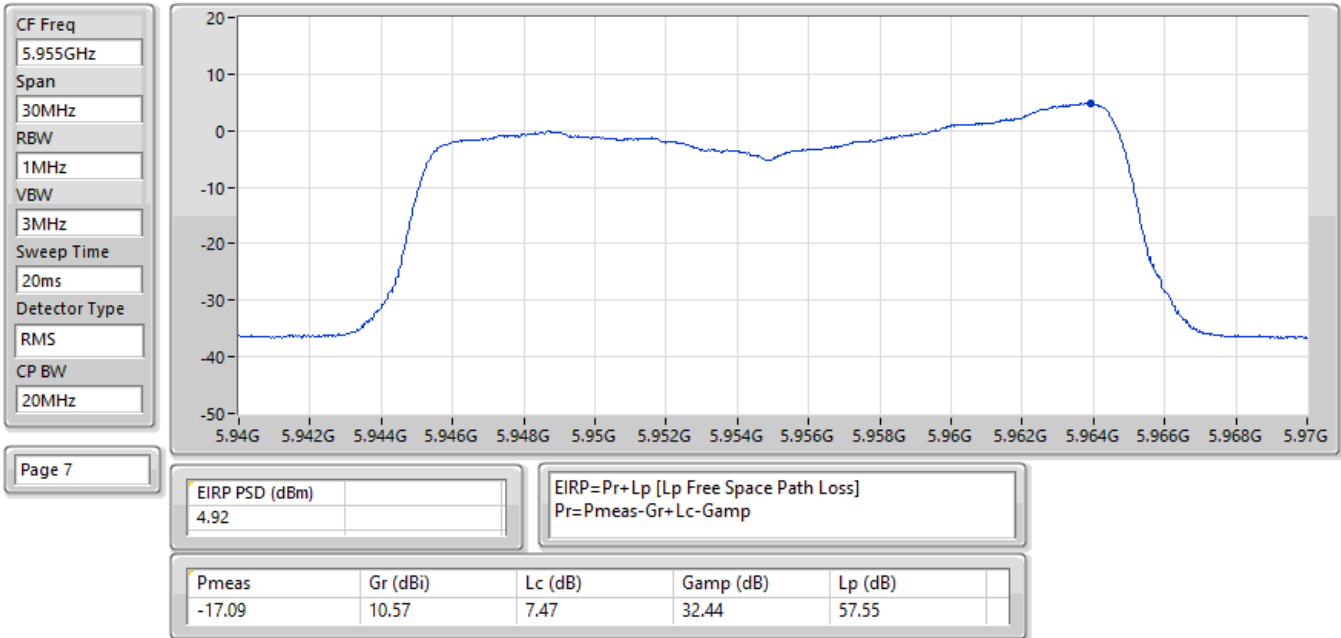


26/06/2025

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

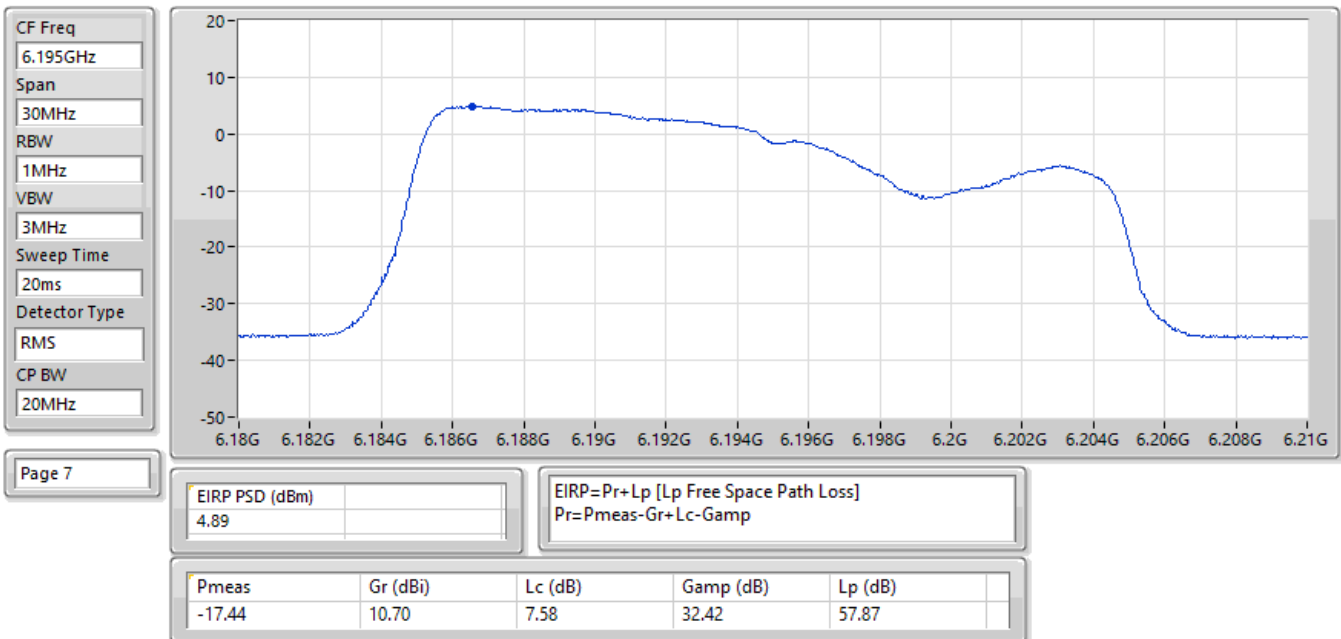


26/06/2025

EIRP PSD; Band: 6.2G; be20, BF; BWch: 20MHz; Nss: 1, (M0); Nant: 4; Ch: 6415MHz; TX

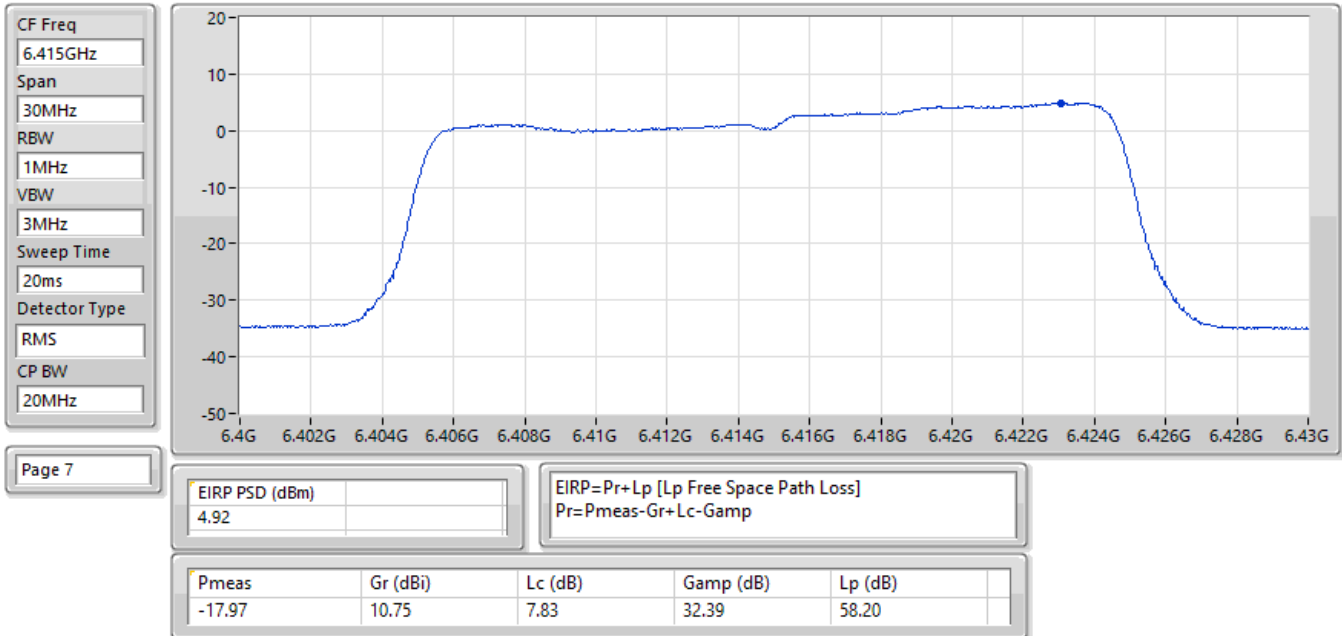

26/06/2025


EIRP PSD; Band: 6.4G; be20, BF; BWch: 20MHz; Nss: 1, (M0); Nant: 4; Ch: 6435MHz; TX

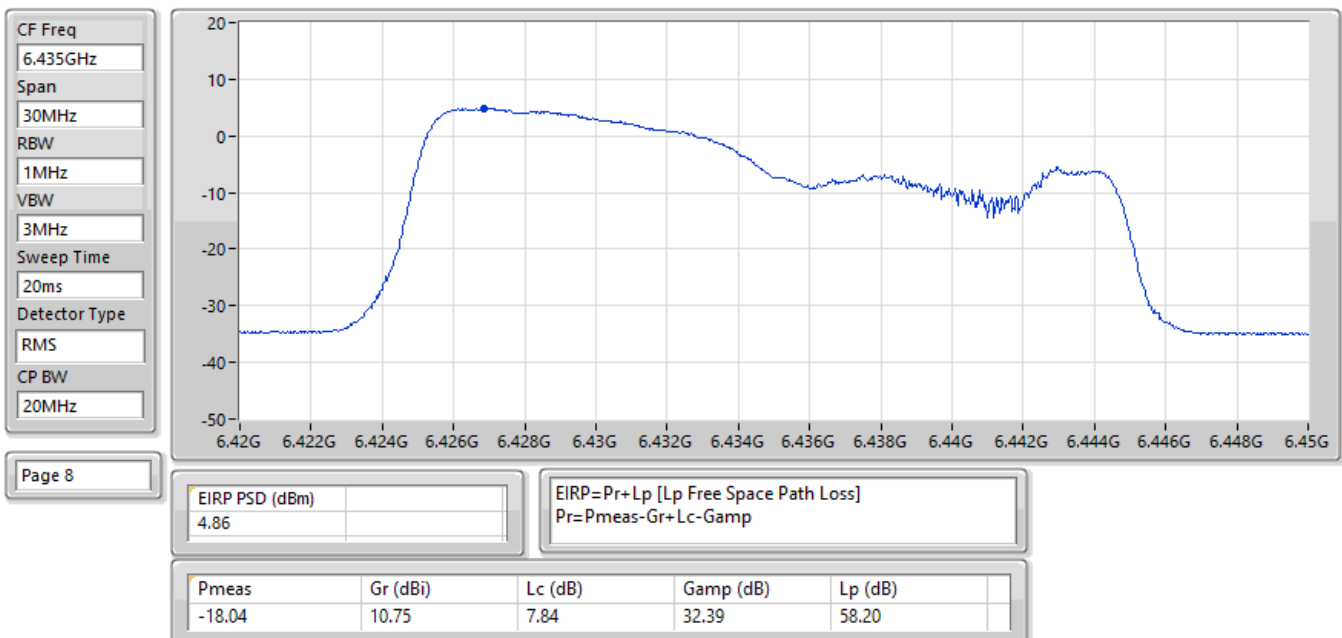

26/06/2025

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

CF Freq
6.475GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

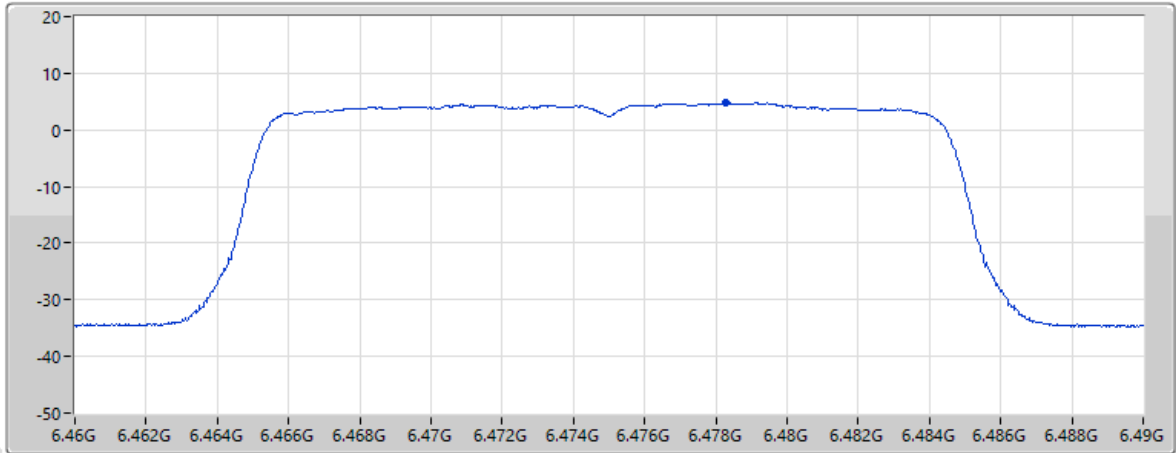


Page 8

EIRP PSD (dBm)	4.83	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.13	10.80	7.87	32.38	58.27

26/06/2025

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

CF Freq
6.515GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

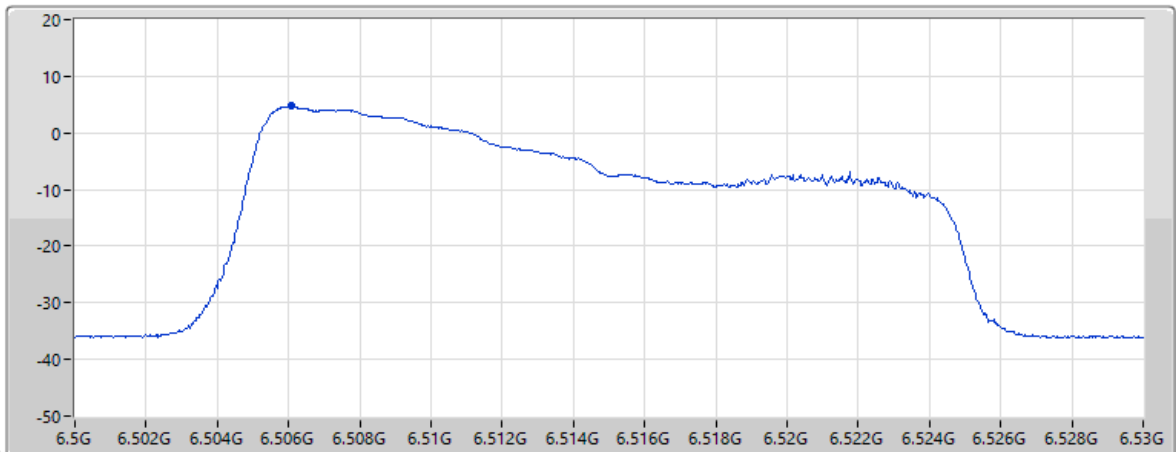


Page 7

Vertical

EIRP PSD (dBm)	4.74	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.29	10.79	7.89	32.38	58.31


26/06/2025

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

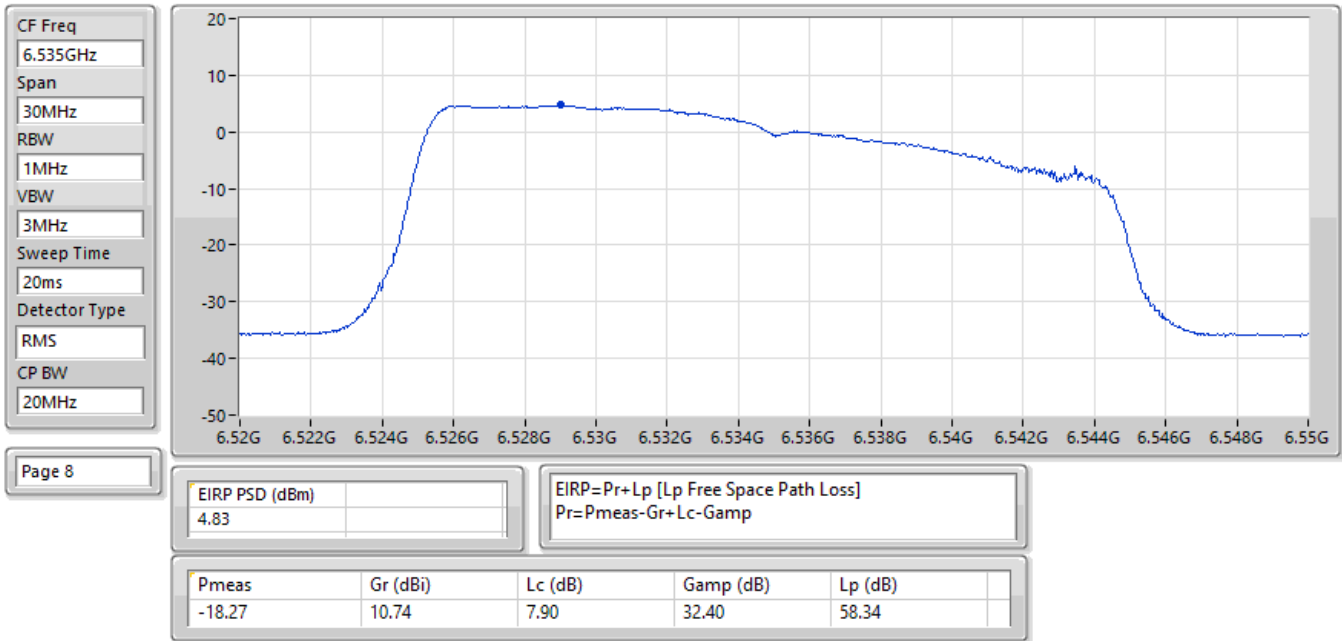

26/06/2025


EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

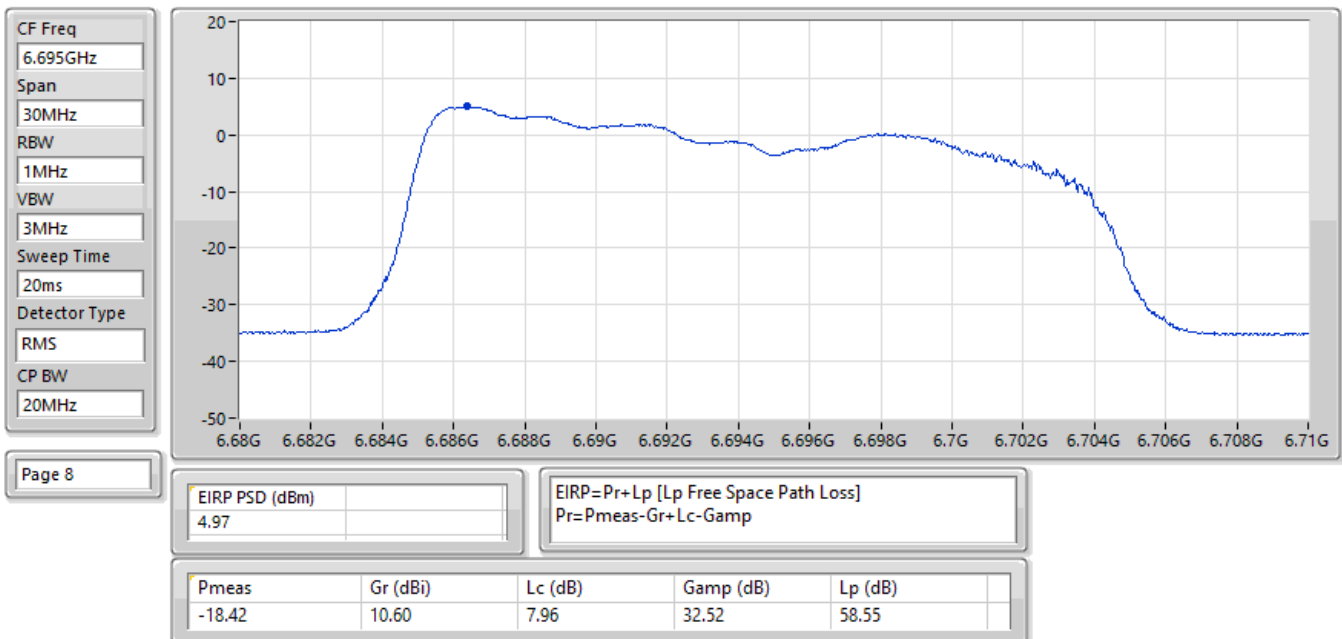

26/06/2025

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

CF Freq
6.875GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

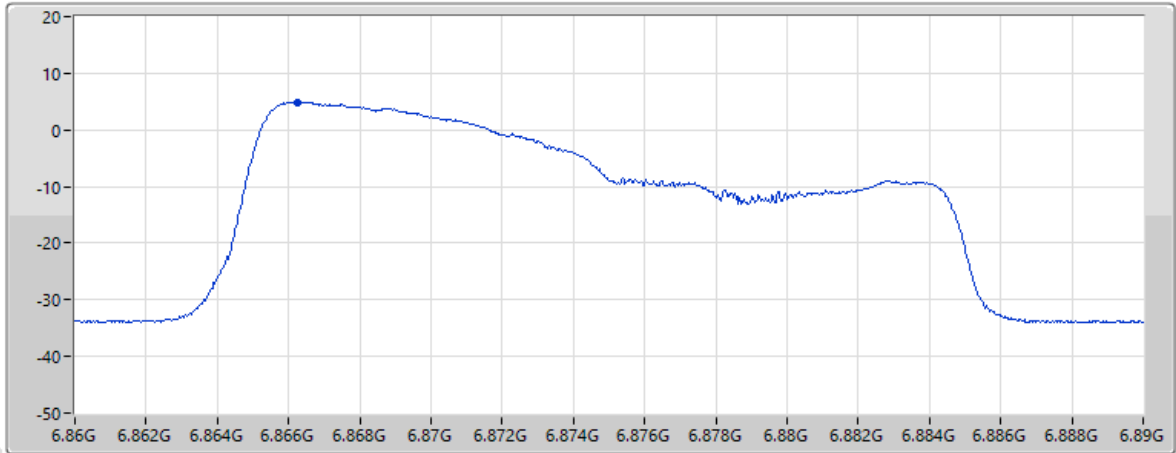

Page 8

EIRP PSD (dBm)

4.85

EIRP=Pr+Lp [Lp Free Space Path Loss]

Pr=Pmeas-Gr+Lc-Gamp

Pmeas

Gr (dBi)

Lc (dB)

Gamp (dB)

Lp (dB)

-18.75

10.50

7.97


32.65

58.78

26/06/2025

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

CF Freq
6.895GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

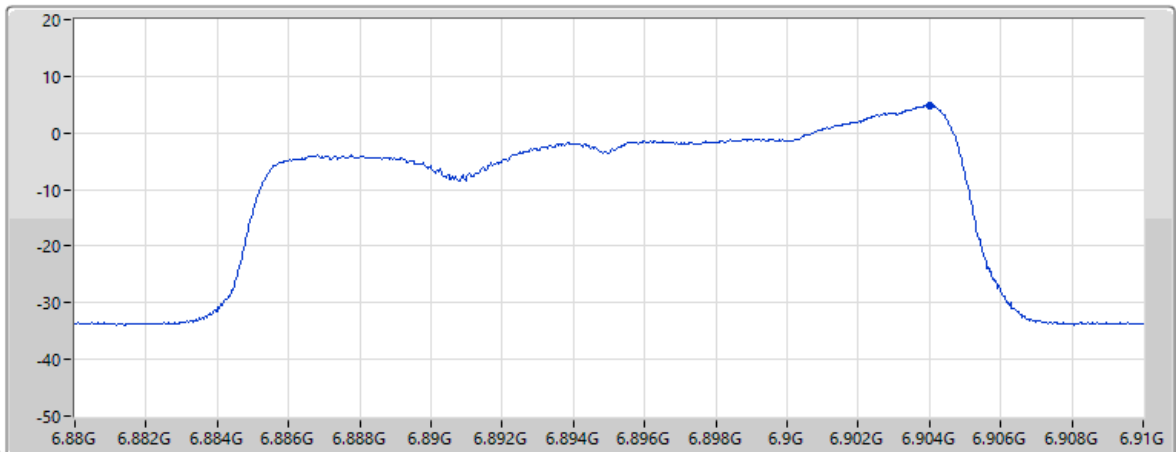

Page 8

Horizontal


EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]
4.84		Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)	
-18.78	10.49	7.97	32.68	58.82	

26/06/2025

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

CF Freq
6.995GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

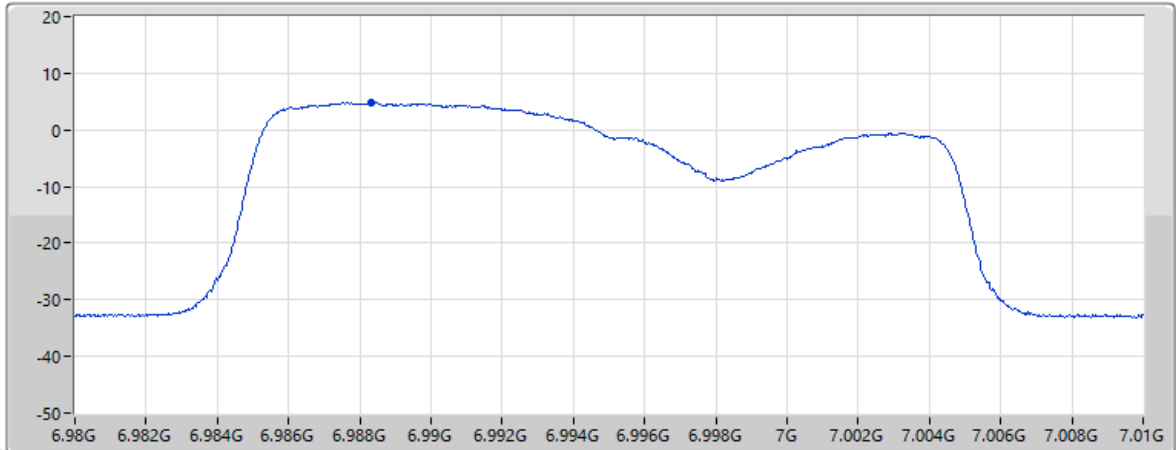


Page 7

EIRP PSD (dBm)	4.87	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.88	10.40	7.96	32.74	58.93

26/06/2025

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

CF Freq
7.095GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

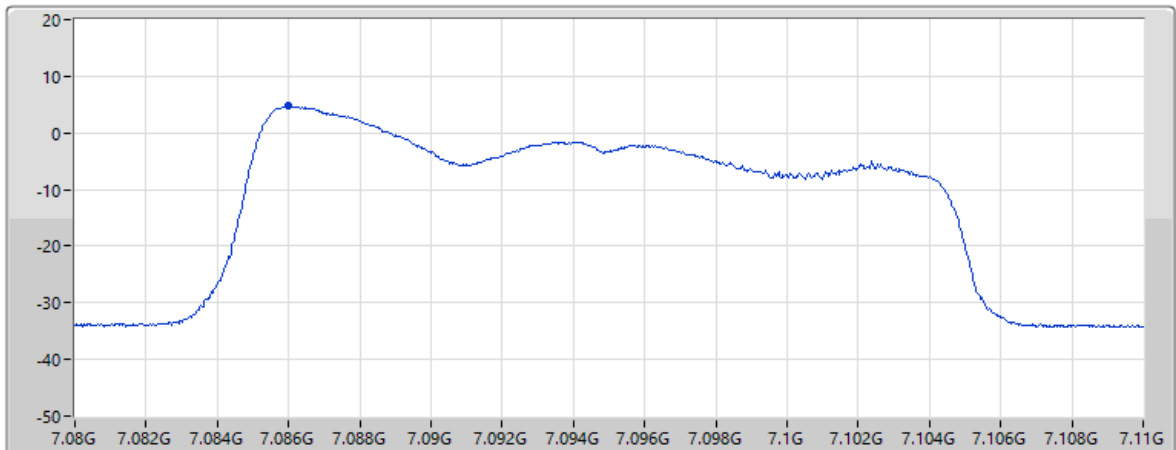


Page 7

EIRP PSD (dBm)	4.89	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.92	10.47	7.95	32.72	59.05


26/06/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

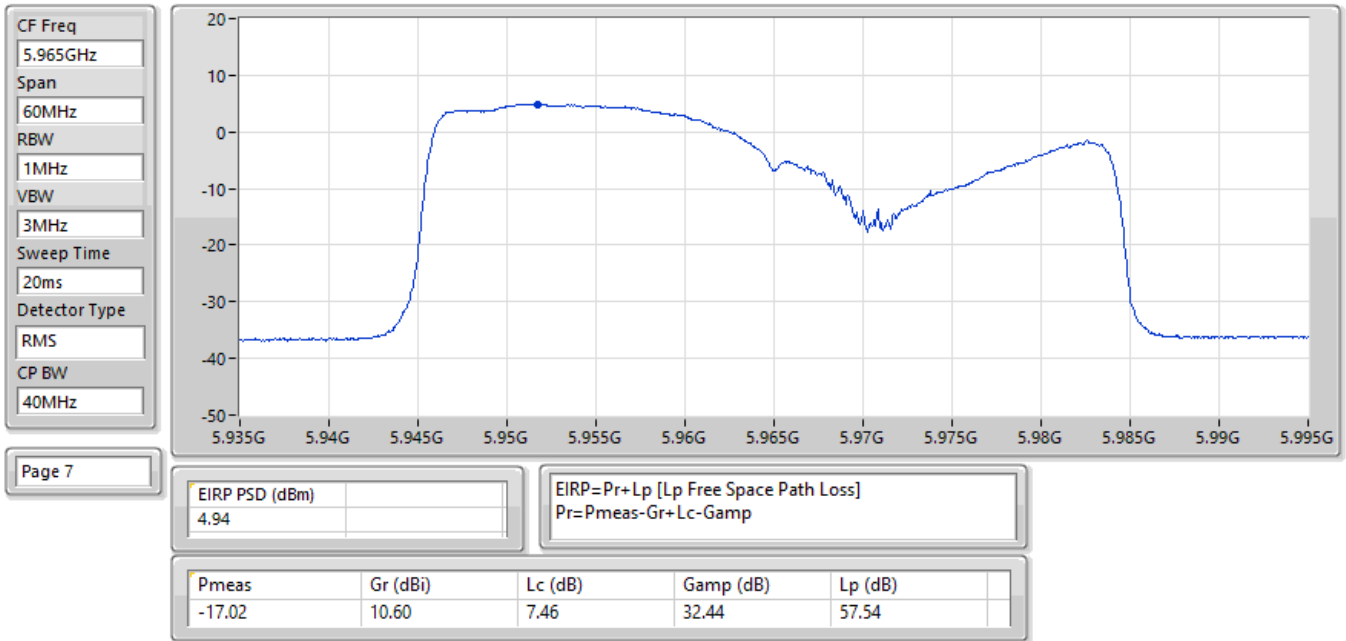


26/06/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

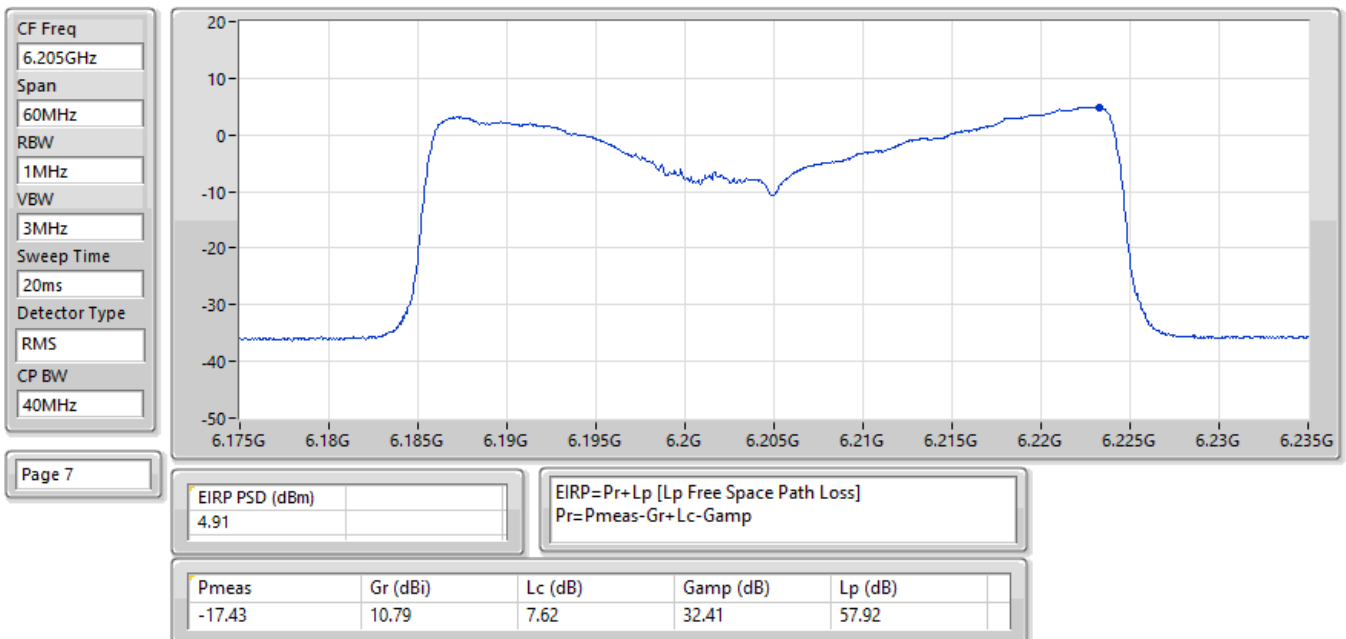


26/06/2025

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

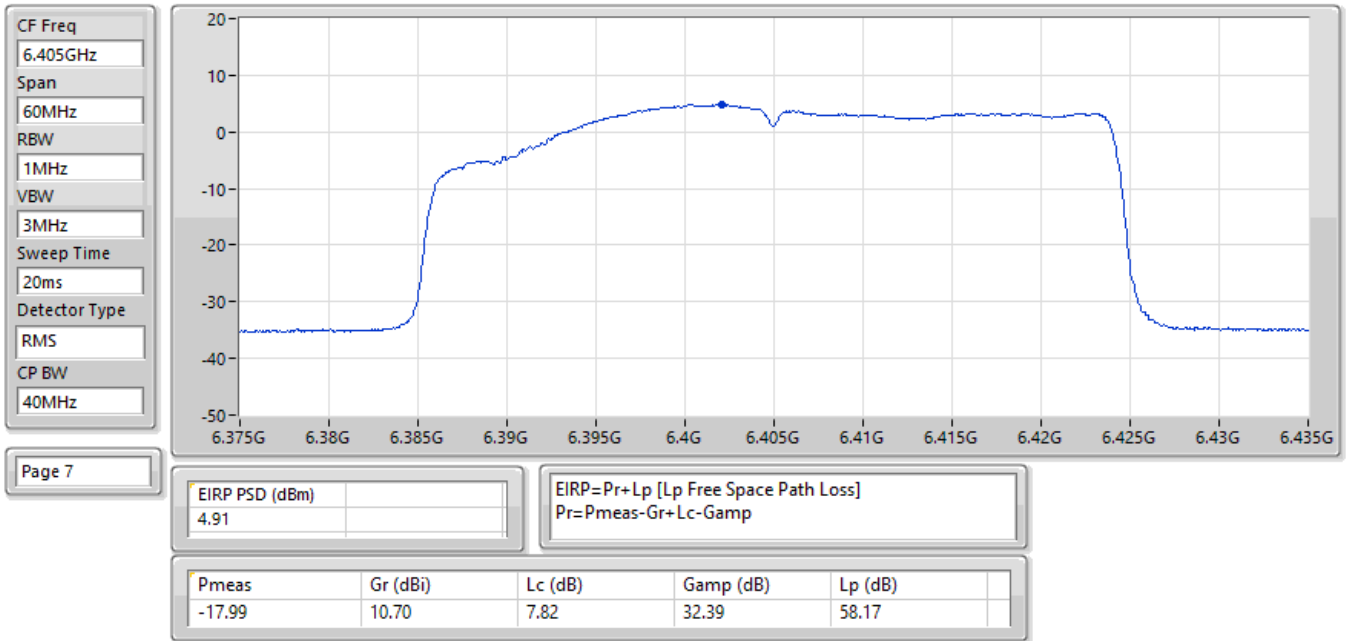


26/06/2025

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

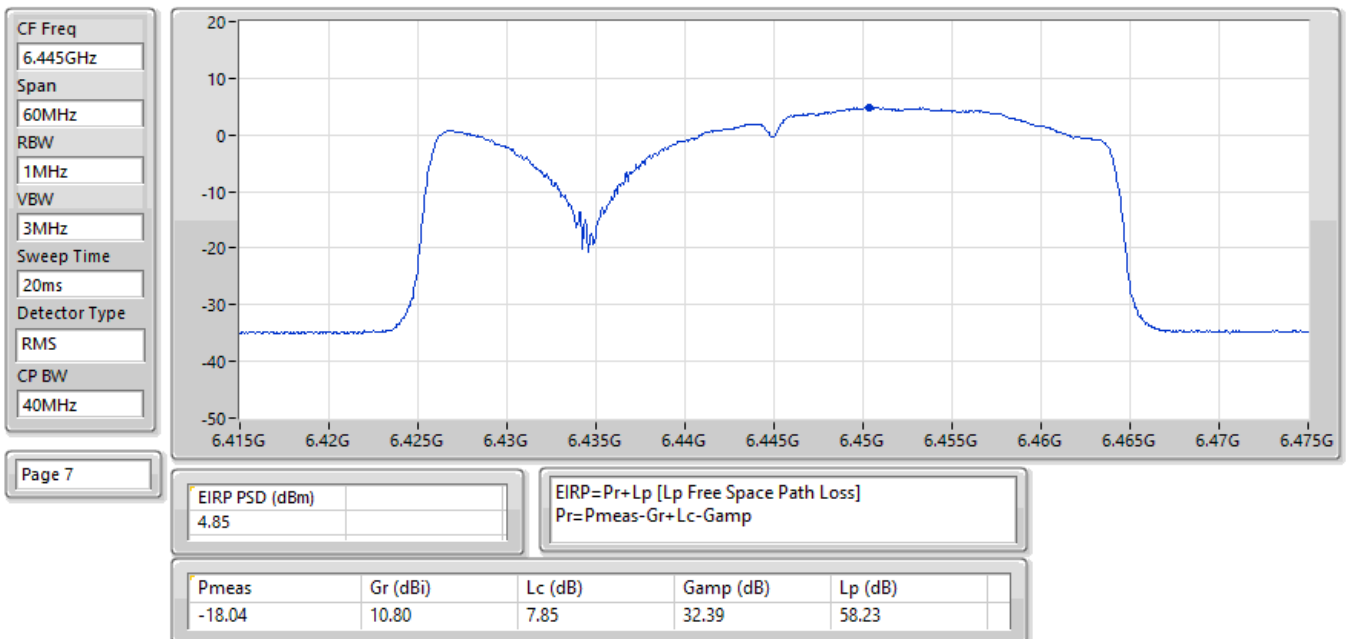


26/06/2025

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

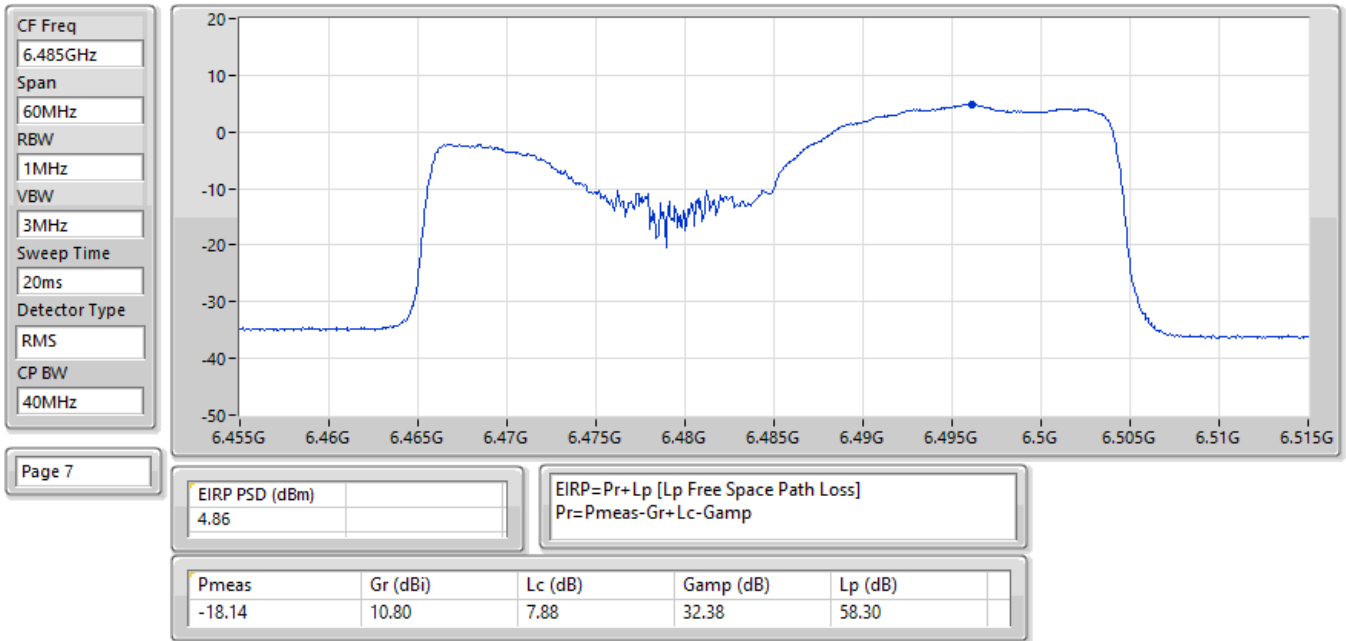


26/06/2025

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

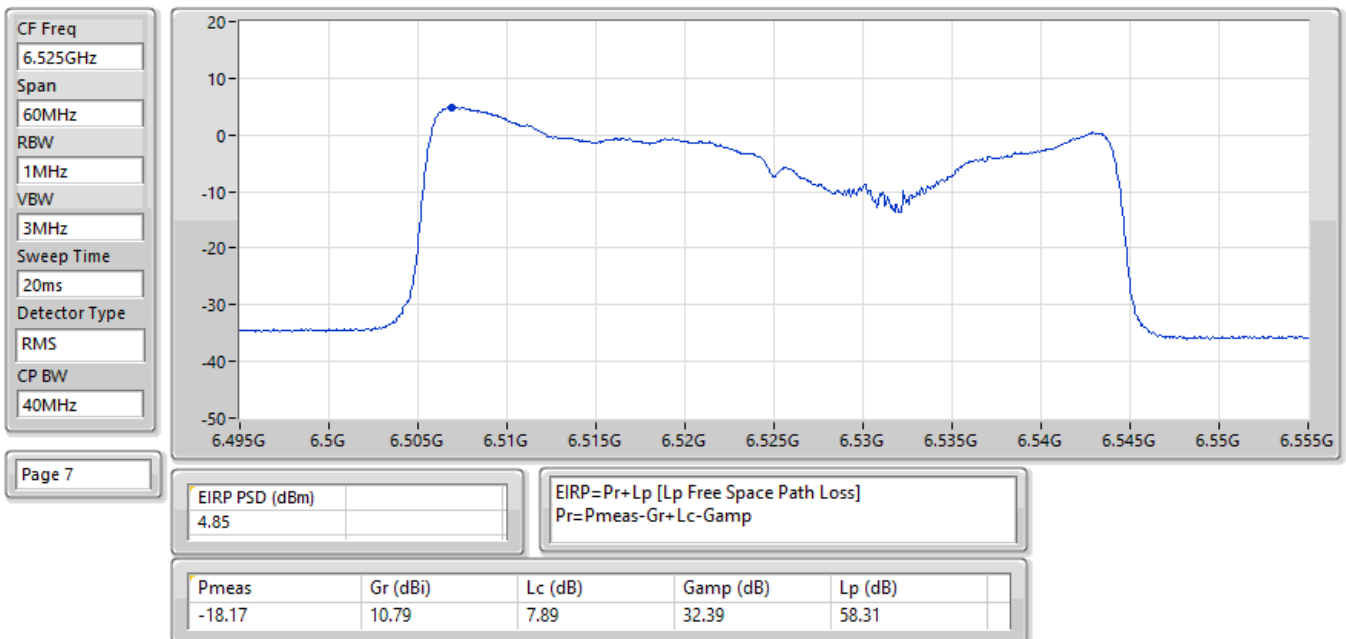


27/06/2025

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

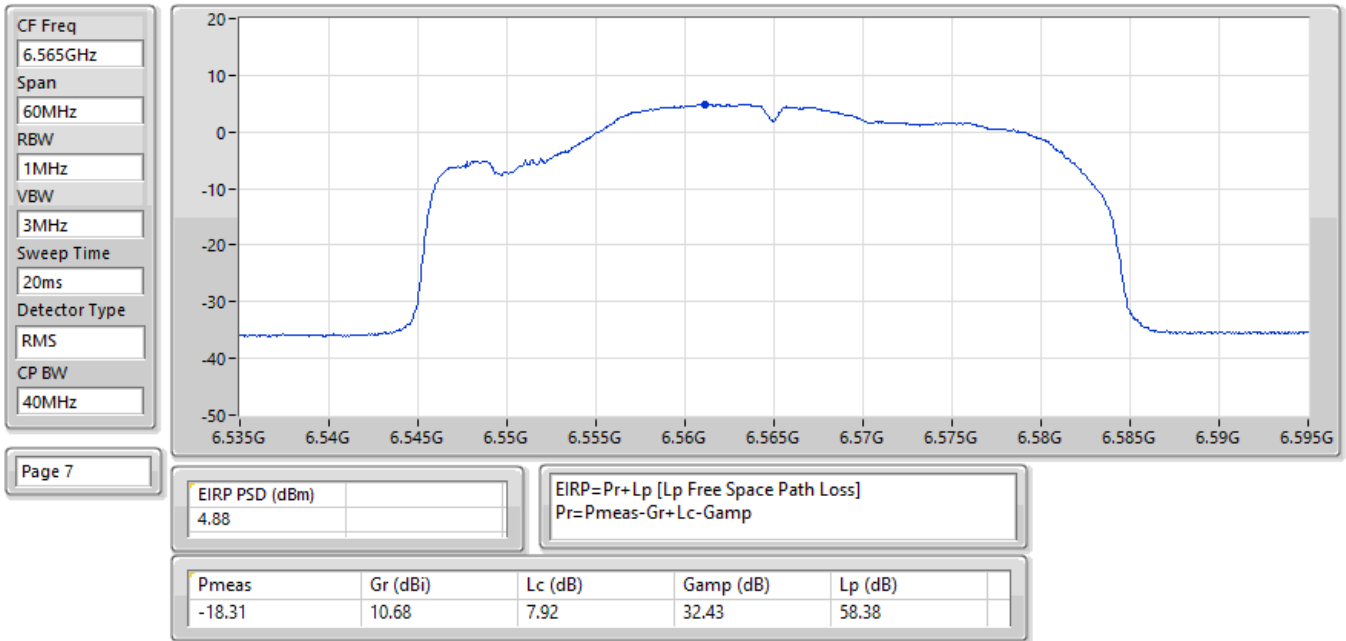


27/06/2025

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

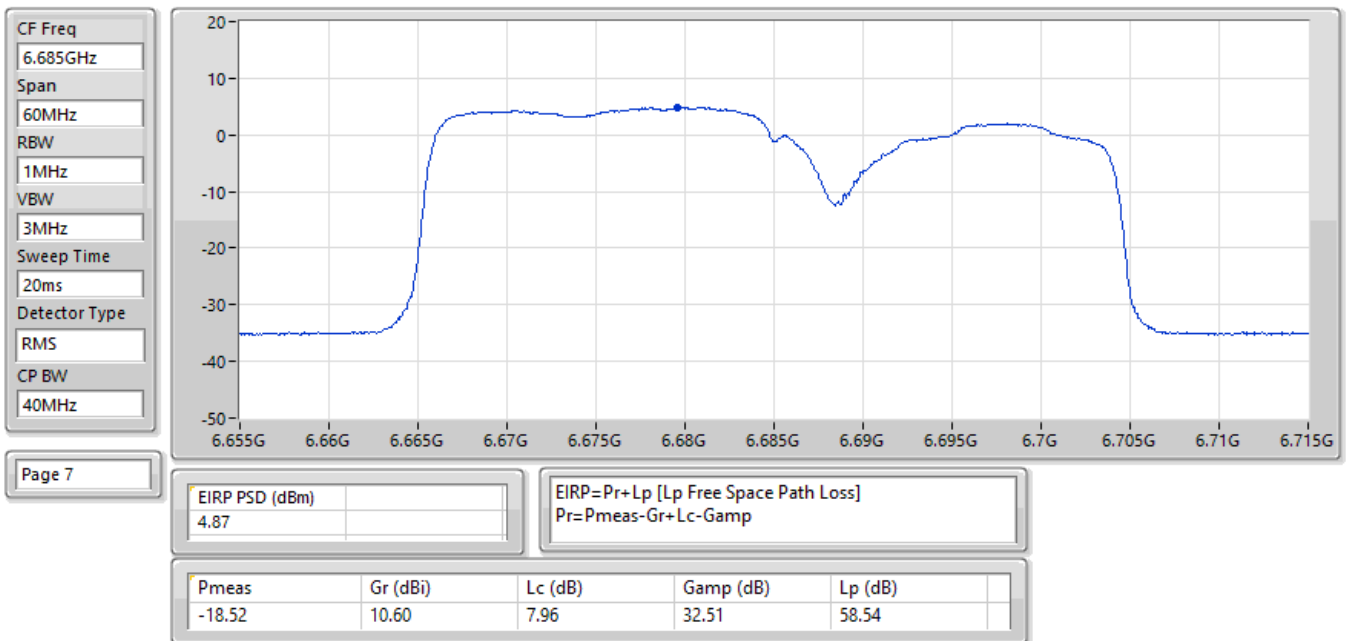


27/06/2025

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

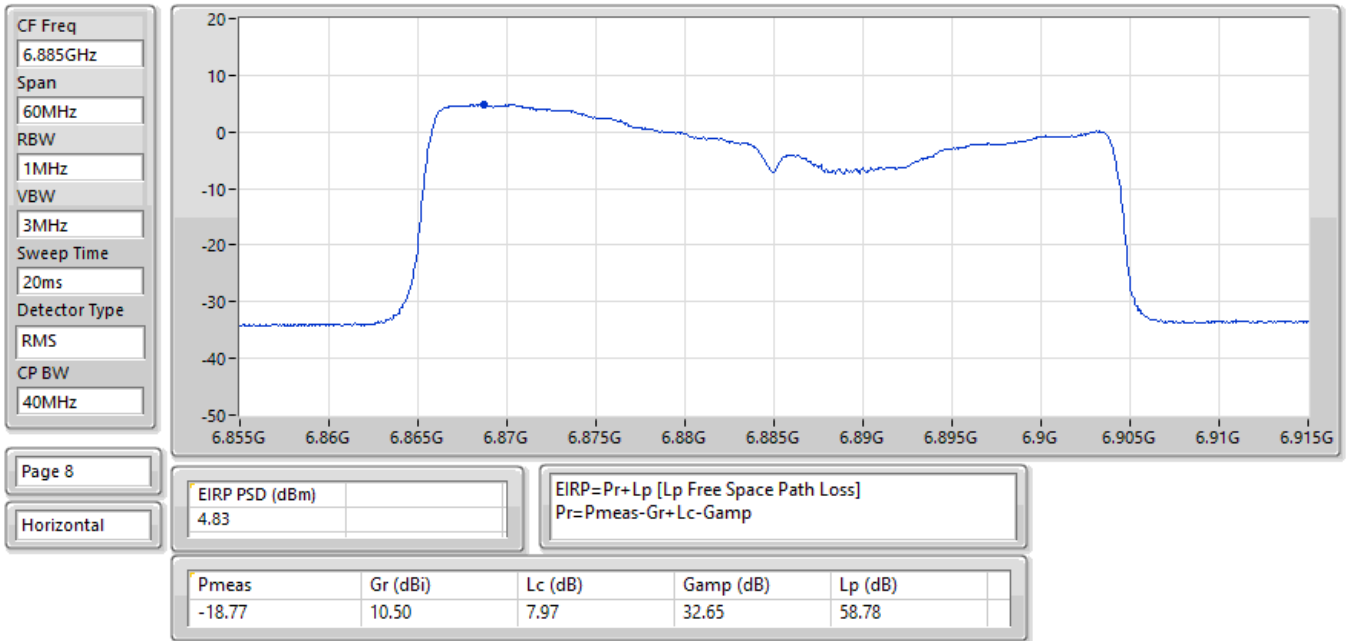


27/06/2025

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

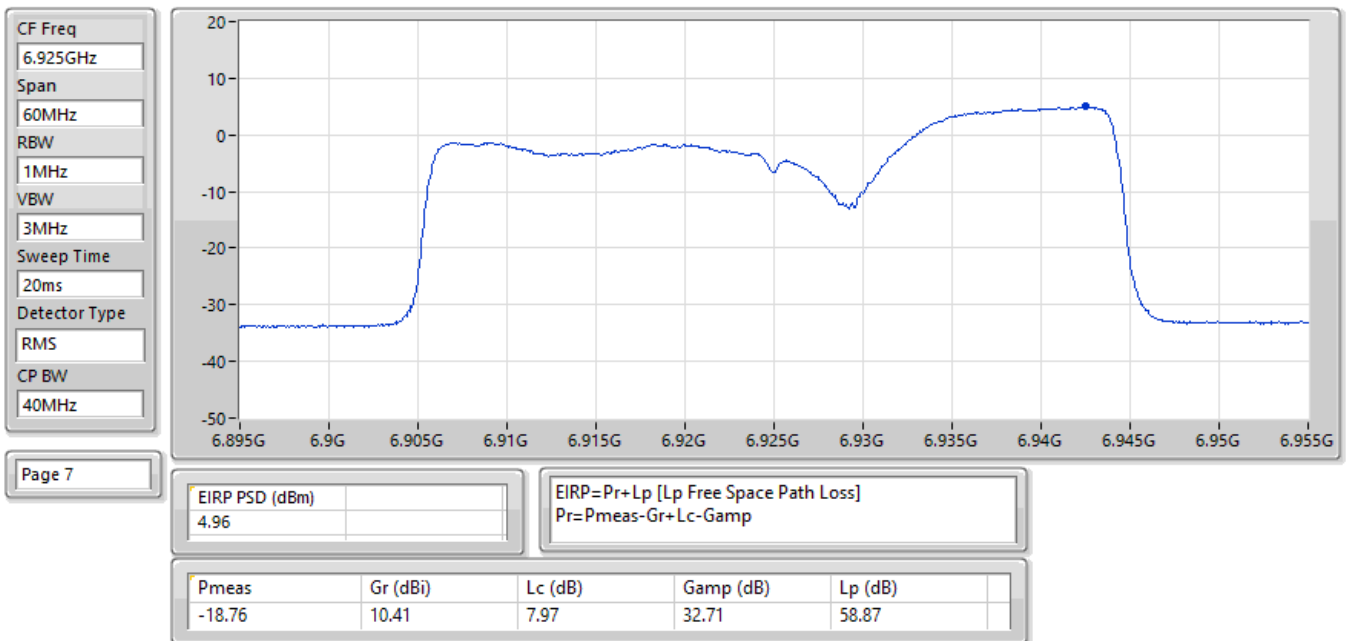


27/06/2025

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

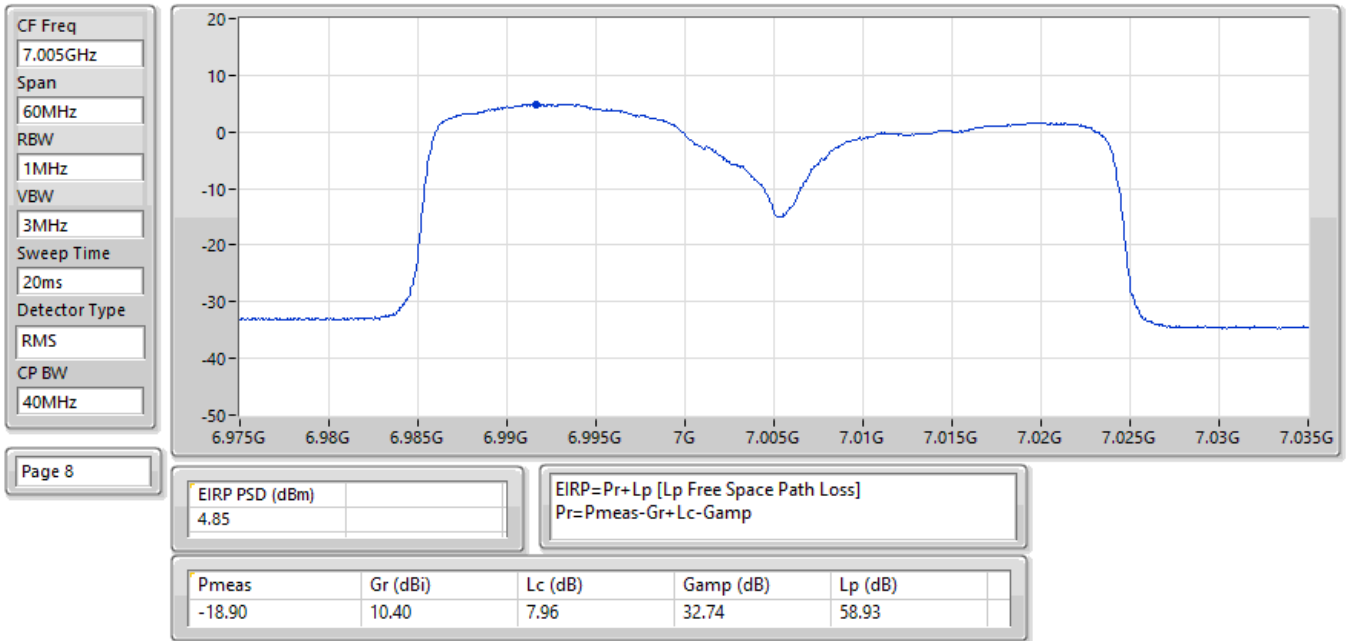

27/06/2025


EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

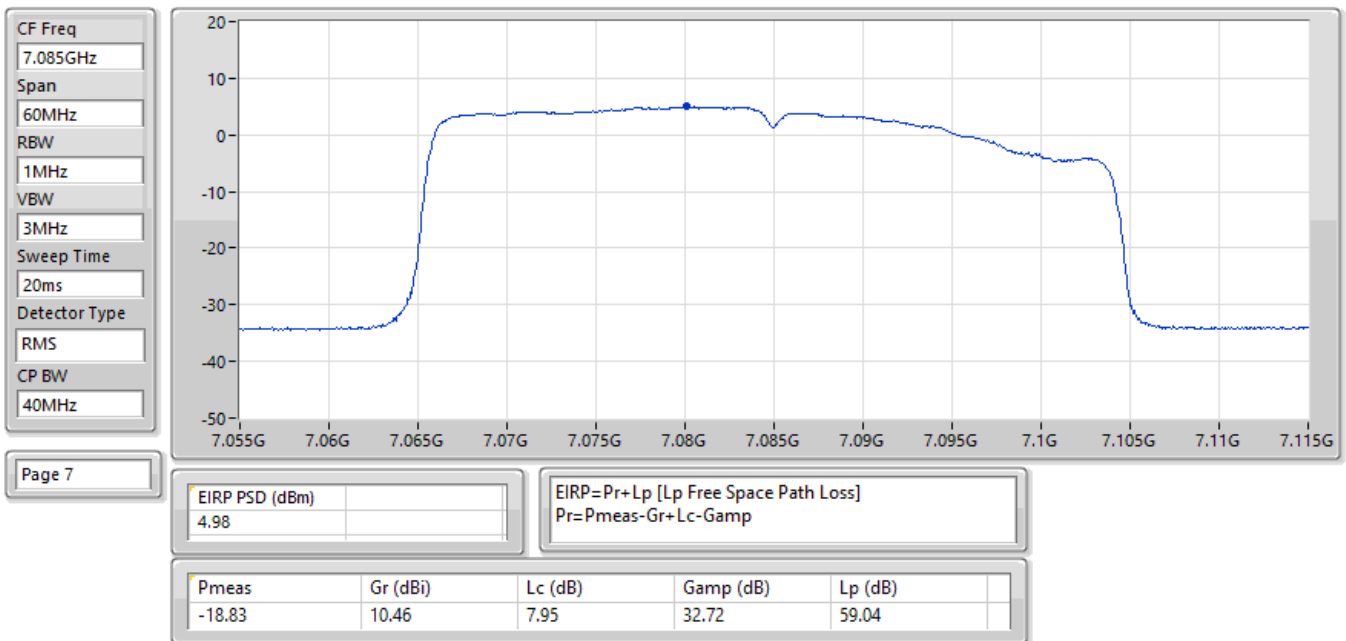

27/06/2025

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

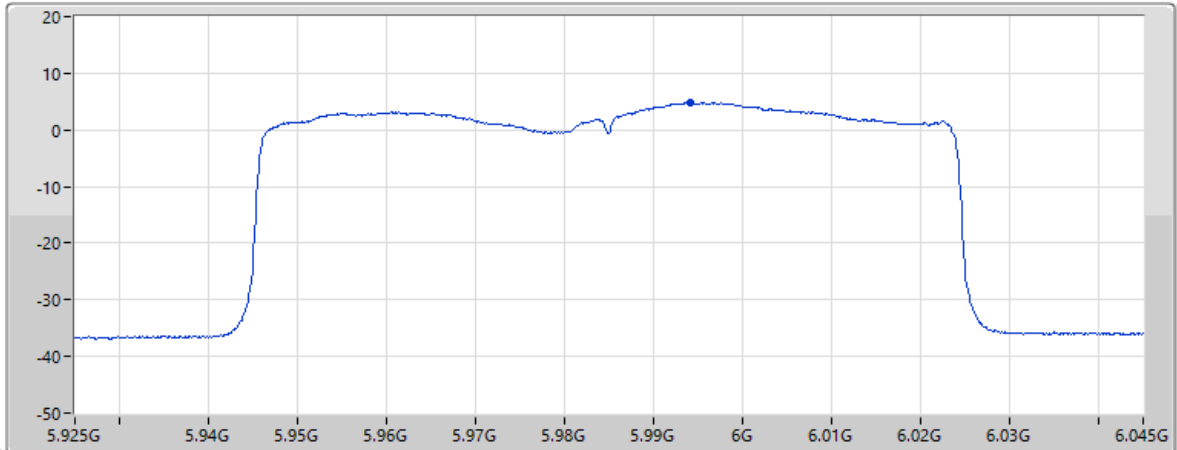


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.88				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.27	10.51	7.50	32.44	57.60

27/06/2025

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

CF Freq
6.225GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

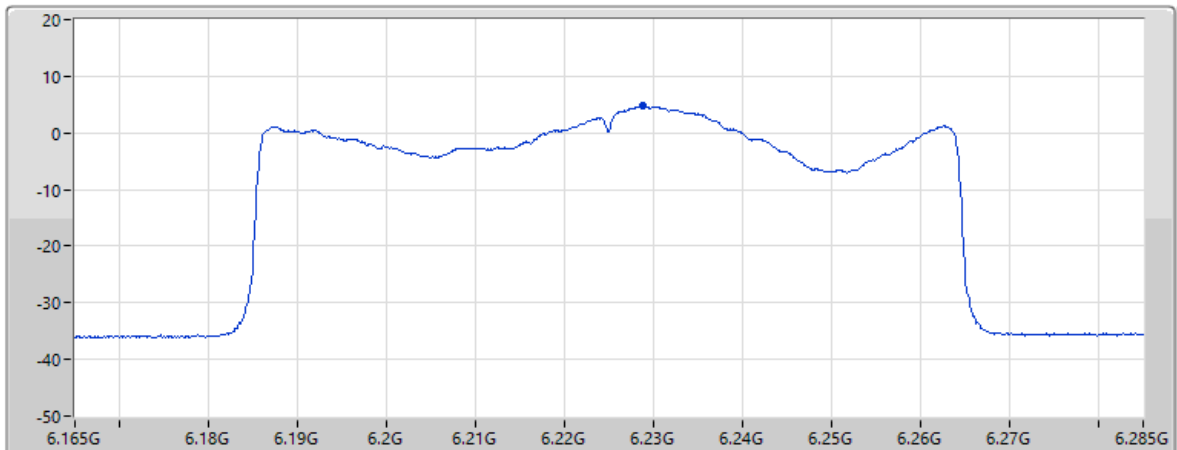


Page 7

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.72				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-17.61	10.81	7.62	32.41	57.93


27/06/2025

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

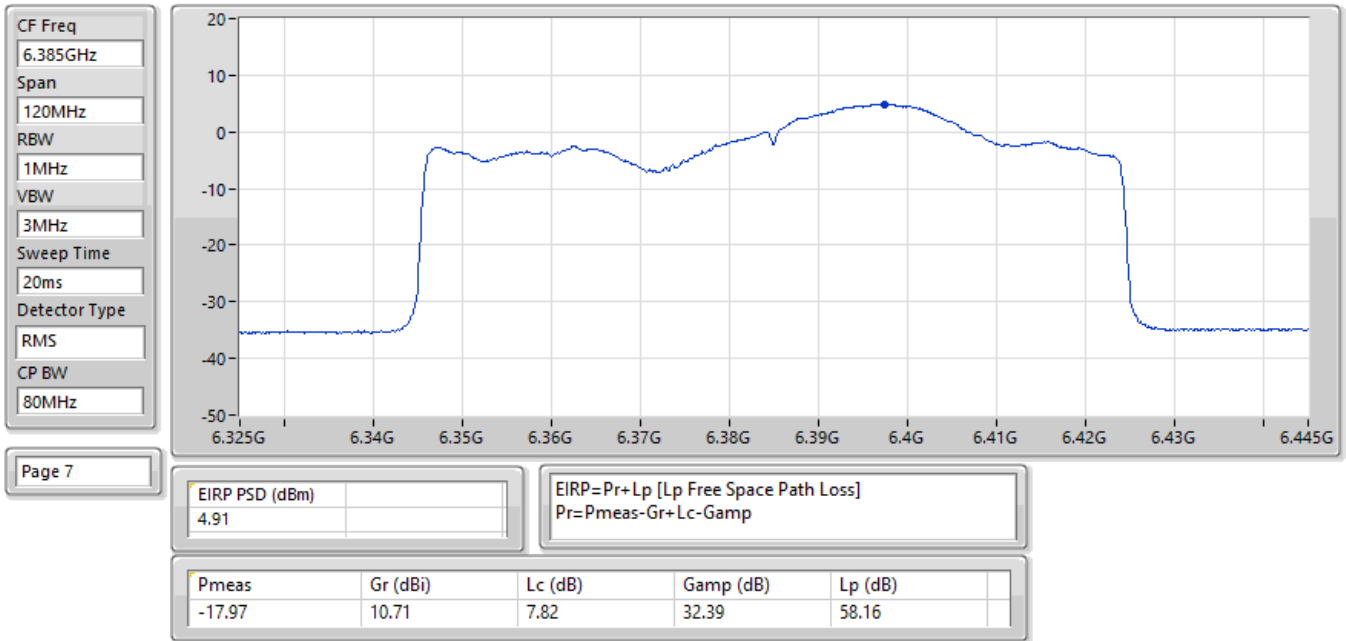


27/06/2025

EIRP PSD;Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

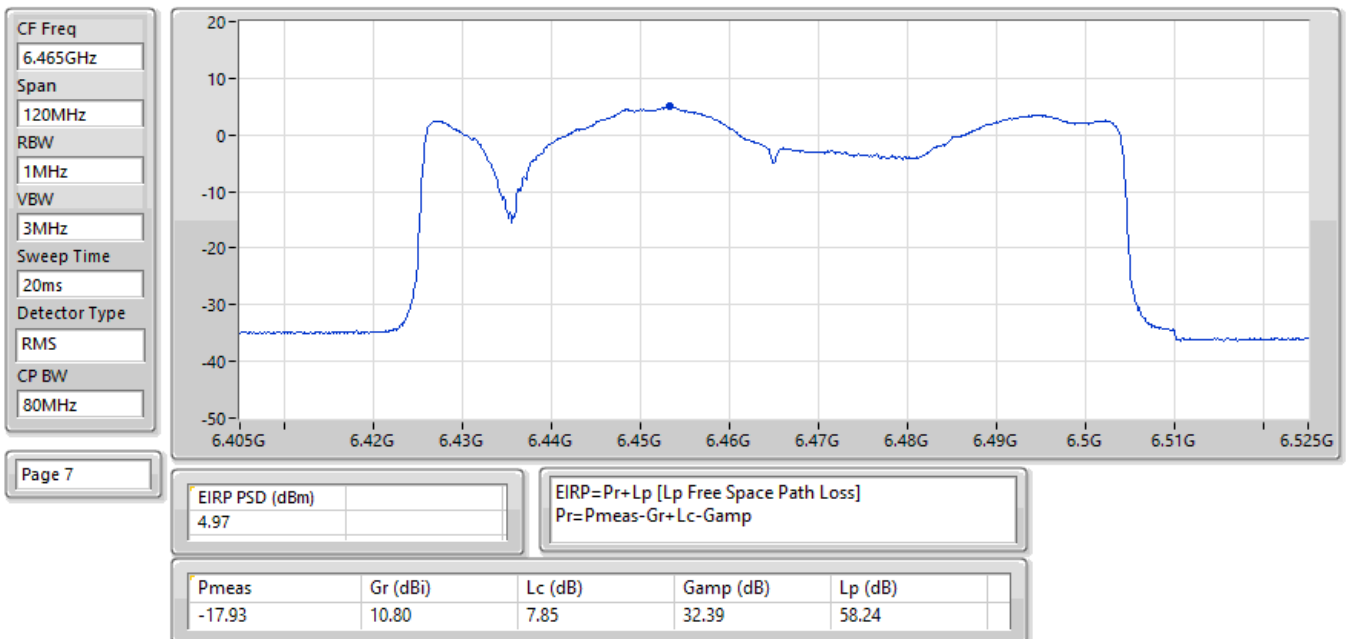


27/06/2025

EIRP PSD: Band: 6.4G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6545MHz; TX

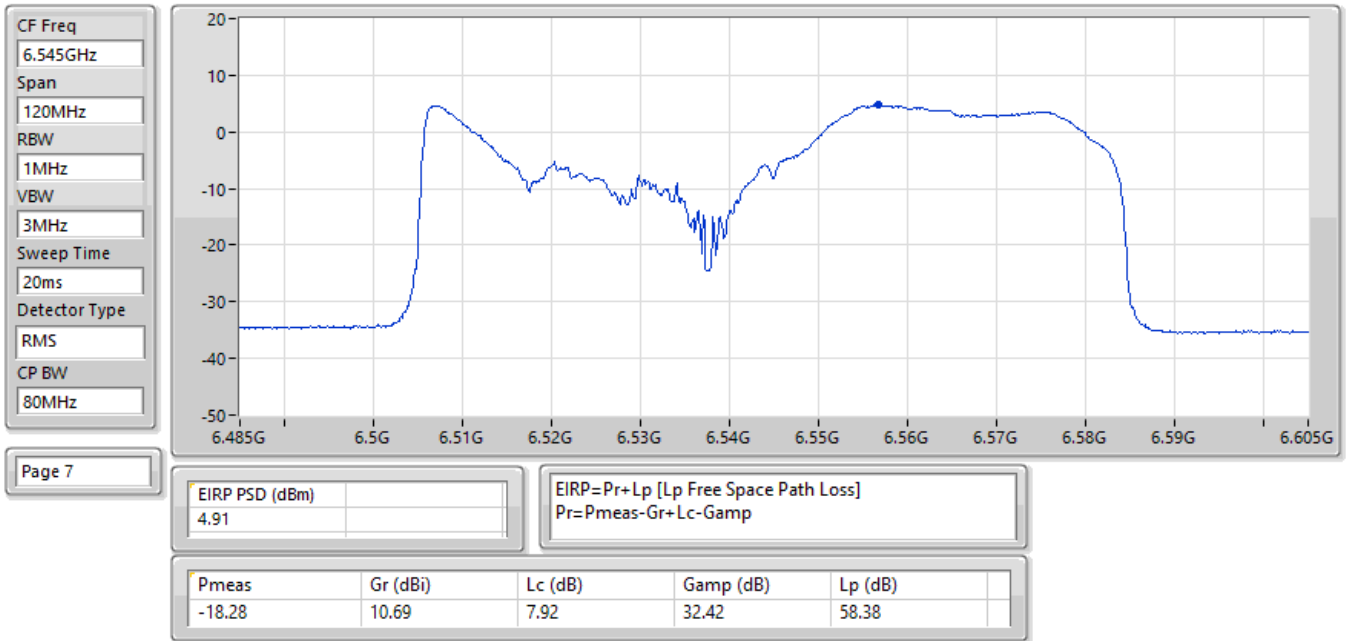


27/06/2025

EIRP PSD: Band: 6.7G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6625MHz; TX

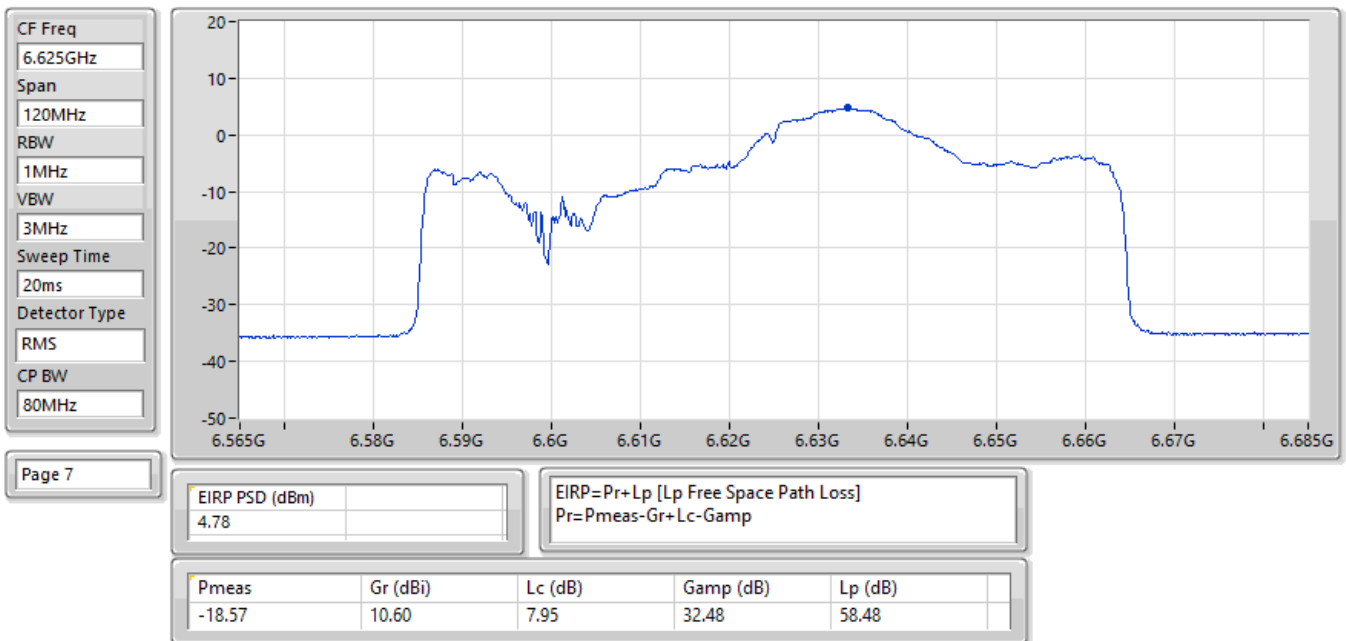


27/06/2025

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

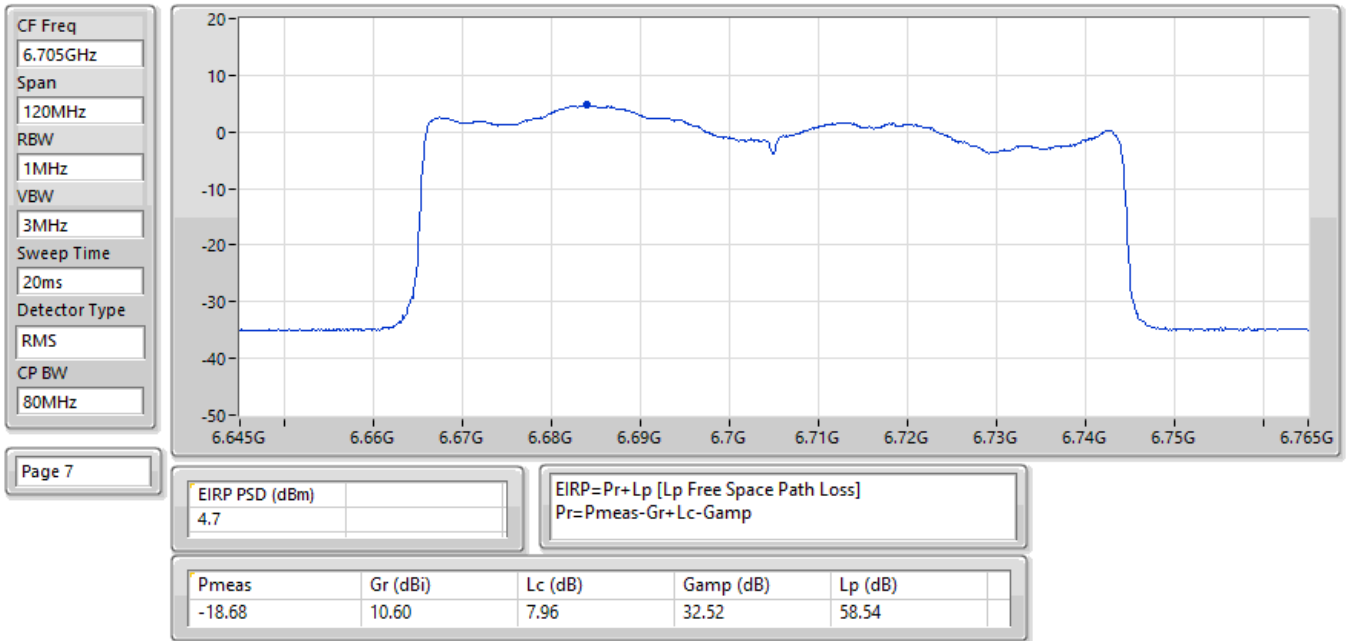

27/06/2025

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

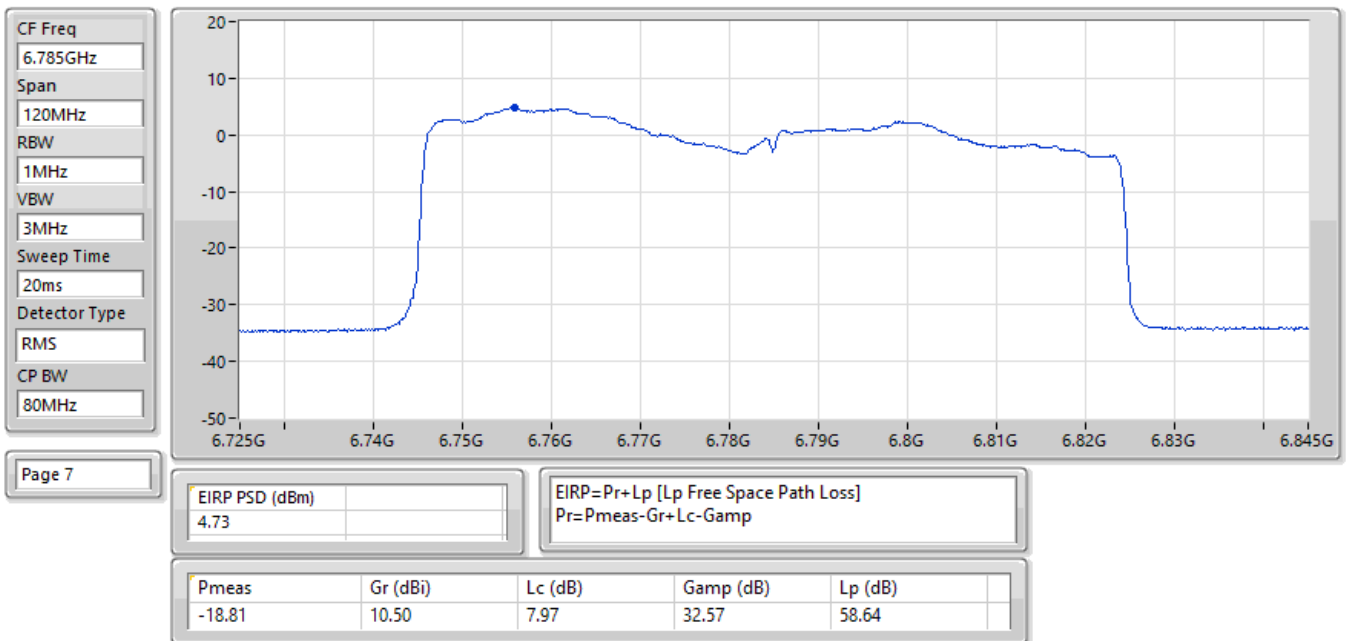

27/06/2025

EIRP PSD; Band: 6.7G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6865MHz; TX

CF Freq
6.865GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

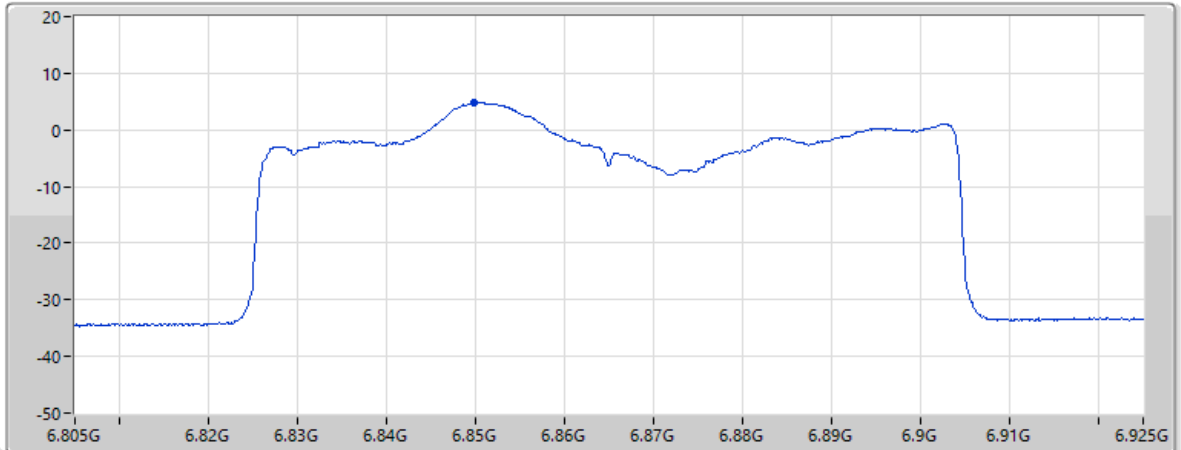

Page 8

EIRP PSD (dBm)		EIRP = Pr + Lp [Lp Free Space Path Loss]		
4.86		Pr = Pmeas - Gr + Lc - Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.74	10.50	7.98	32.64	58.76

27/06/2025

EIRP PSD; Band: 7.0G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 6945MHz; TX

CF Freq
6.945GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

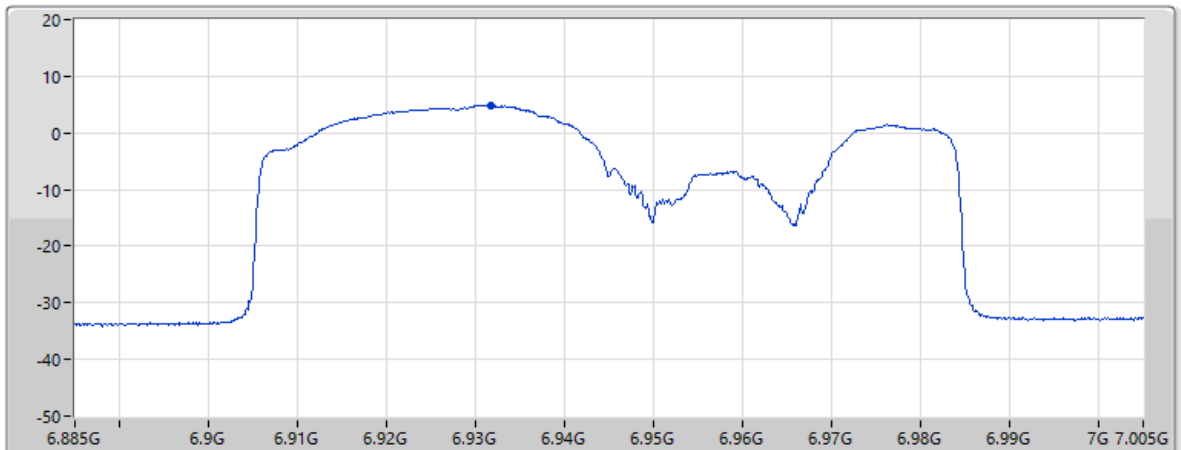


Page 8

EIRP PSD (dBm)		EIRP = Pr + Lp [Lp Free Space Path Loss]		
4.93		Pr = Pmeas - Gr + Lc - Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-18.76	10.44	7.97	32.70	58.86


27/06/2025

EIRP PSD; Band: 7.0G; be80, BF; BWch: 80MHz; Nss: 1, (M0); Nant: 4; Ch: 7025MHz; TX

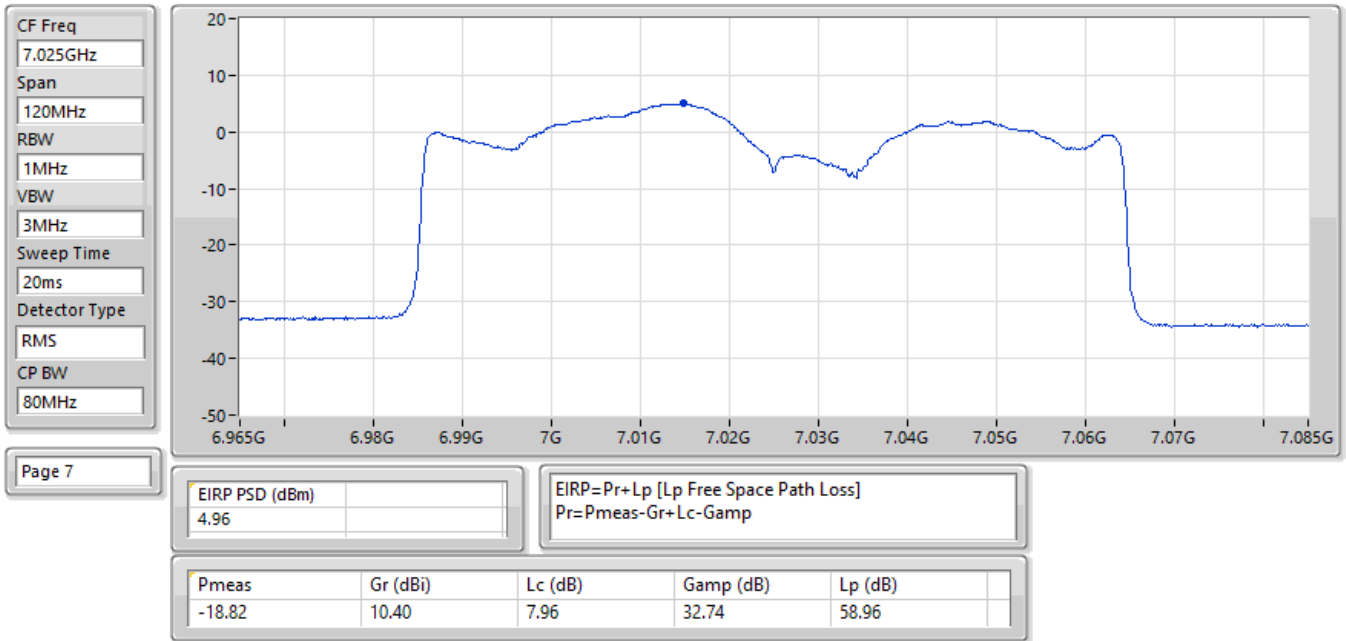


27/06/2025

EIRP PSD; Band: 6.2G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6025MHz; TX

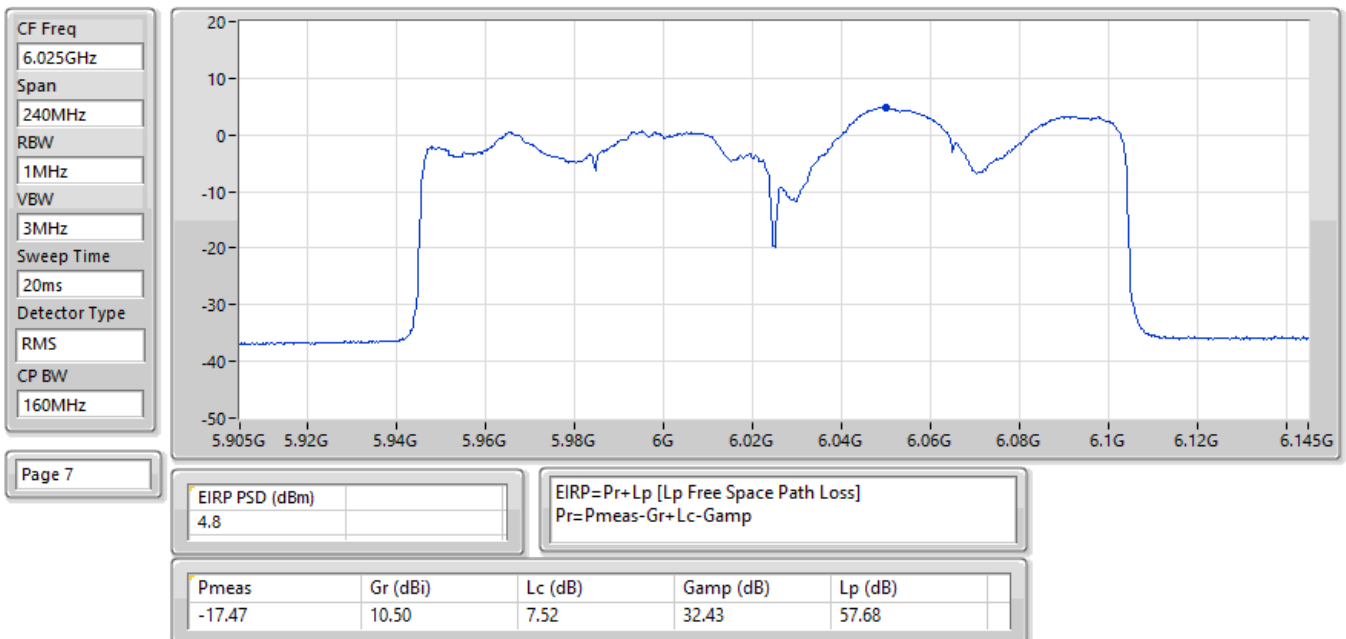


27/06/2025

EIRP PSD; Band: 6.2G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6185MHz; TX

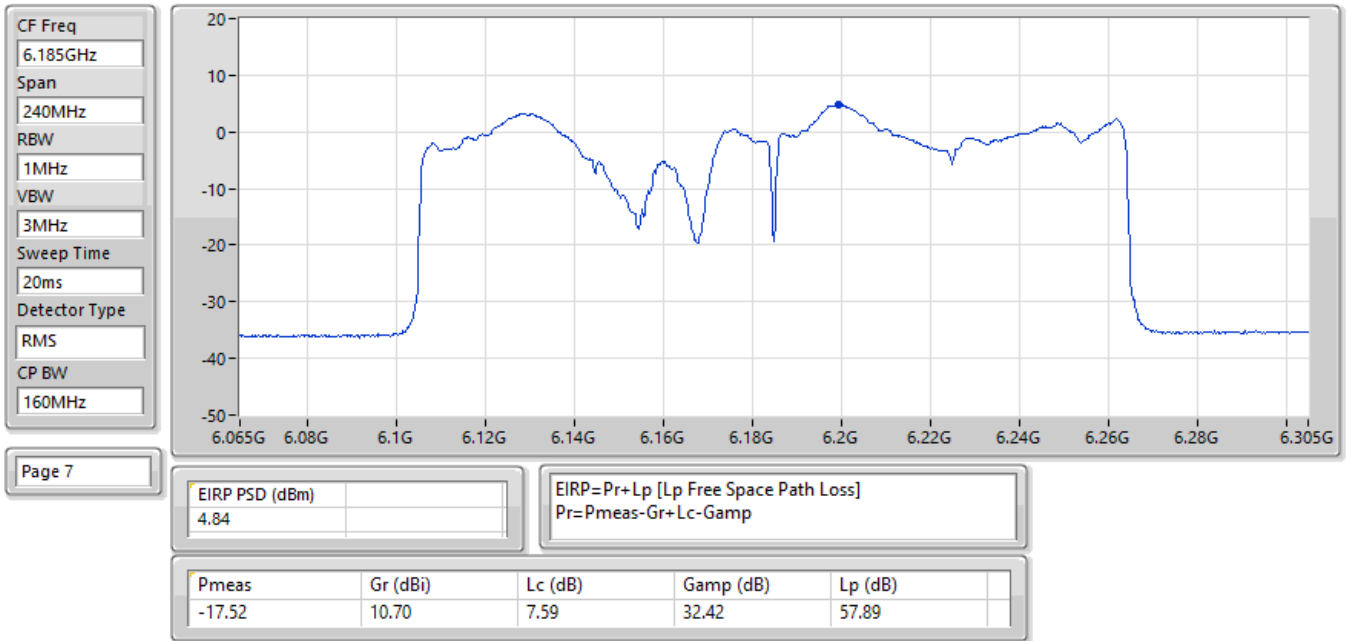


27/06/2025

EIRP PSD; Band: 6.2G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6345MHz; TX

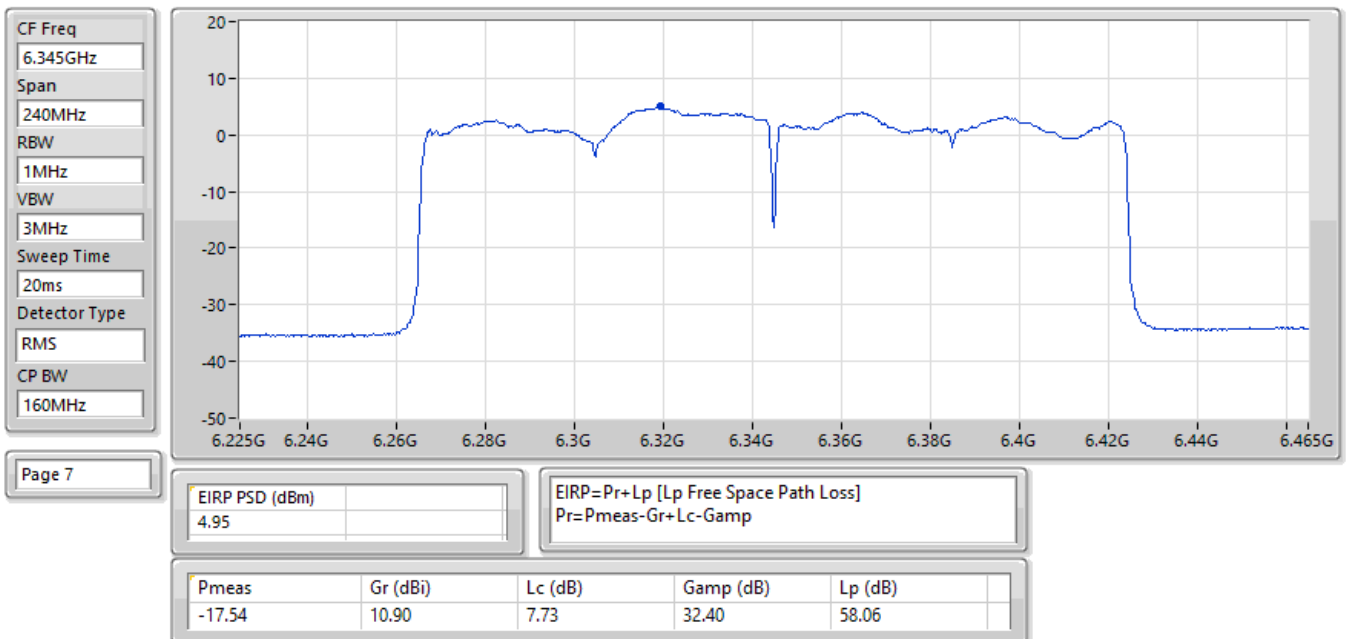


27/06/2025

EIRP PSD; Band: 6.4G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6505MHz; TX

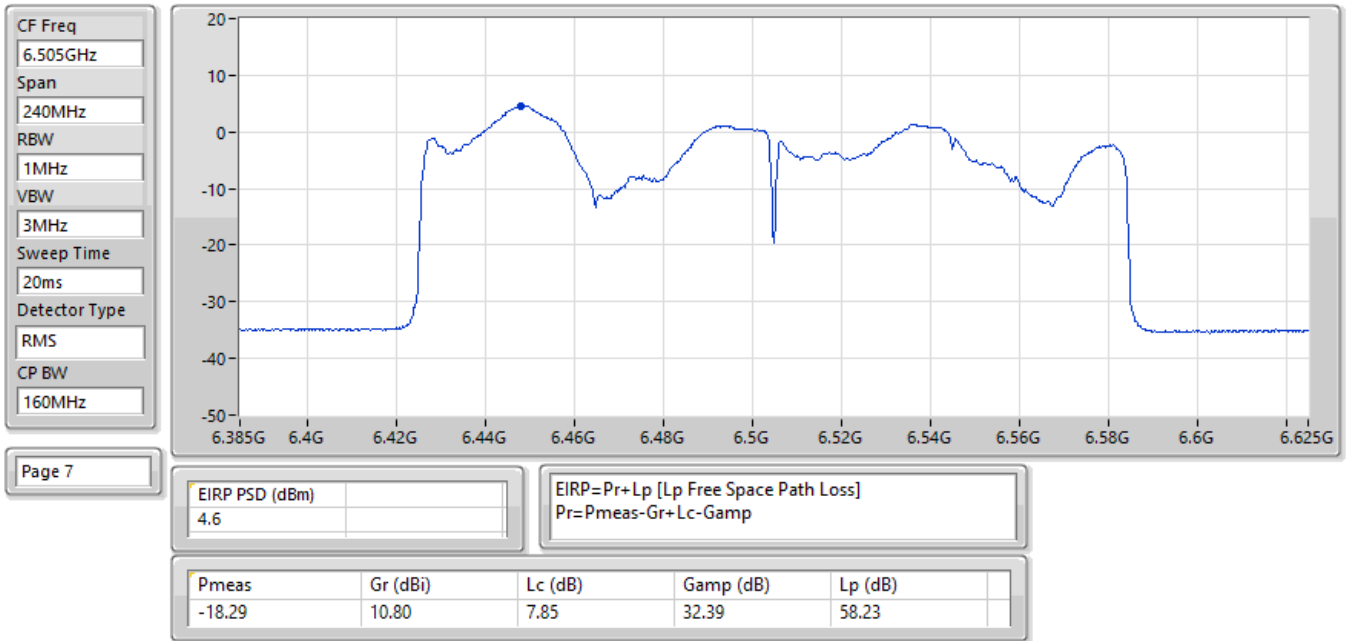


27/06/2025

EIRP PSD; Band: 6.7G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6665MHz; TX

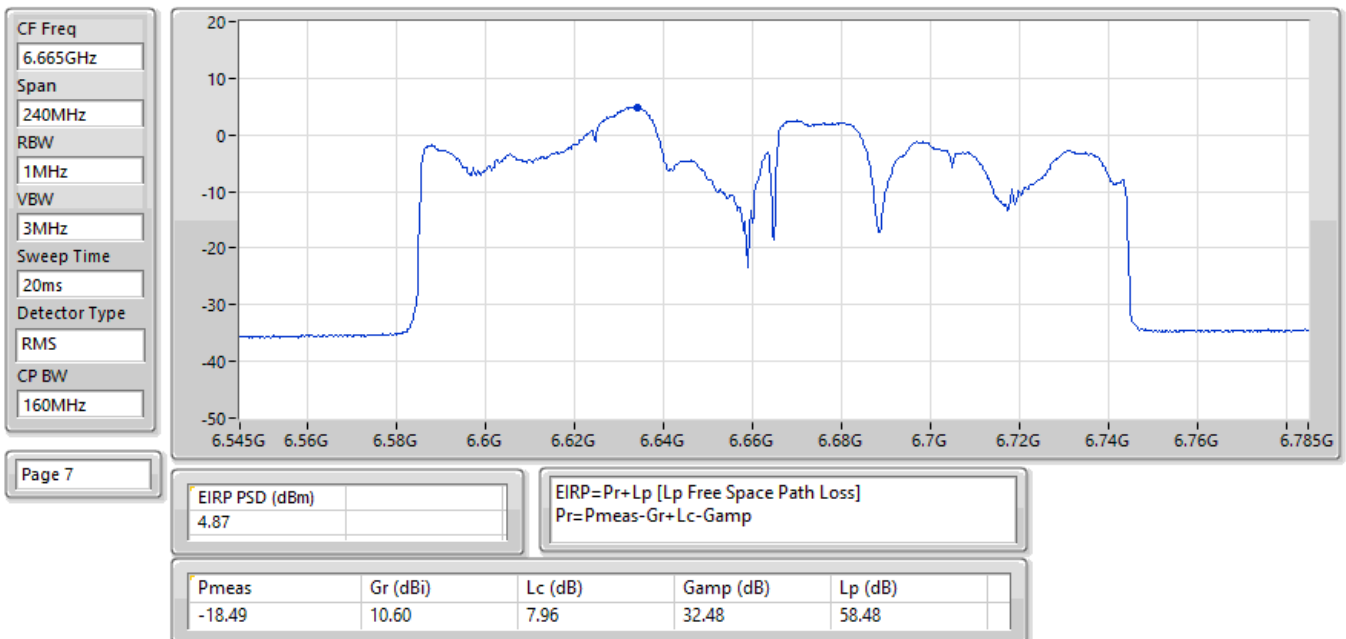


27/06/2025

EIRP PSD; Band: 6.7G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6825MHz; TX

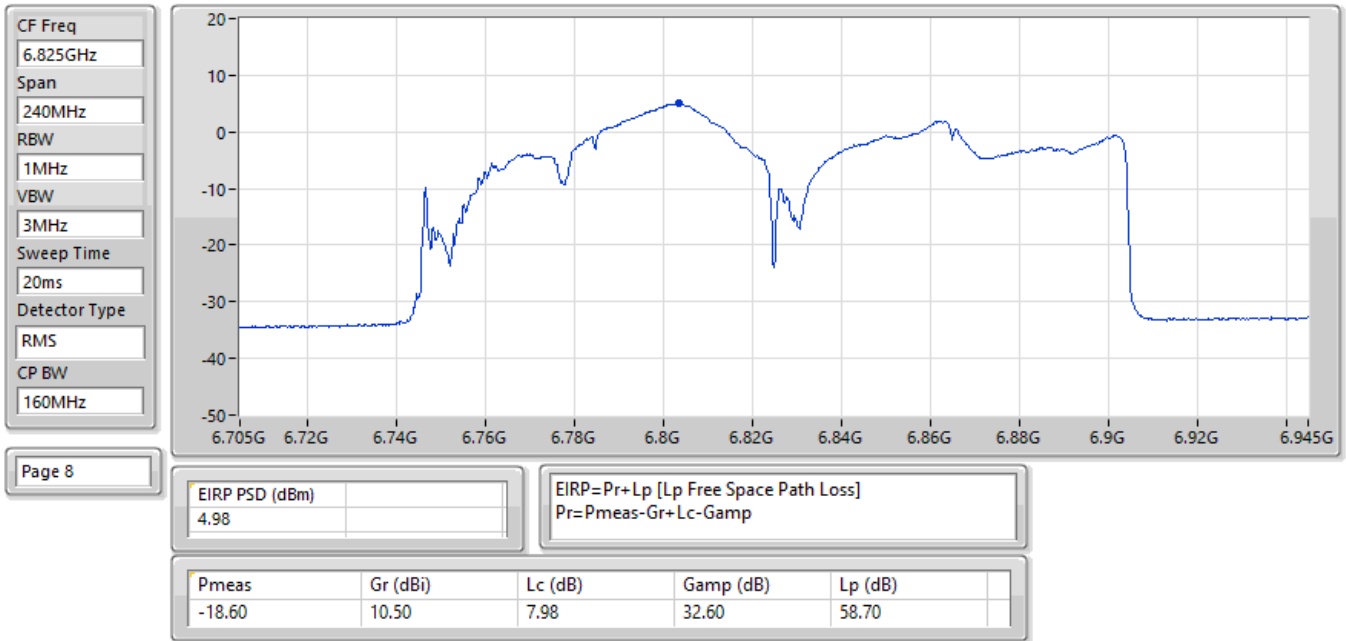


27/06/2025

EIRP PSD; Band: 7.0G; be160, BF; BWch: 160MHz; Nss: 1, (M0); Nant: 4; Ch: 6985MHz; TX

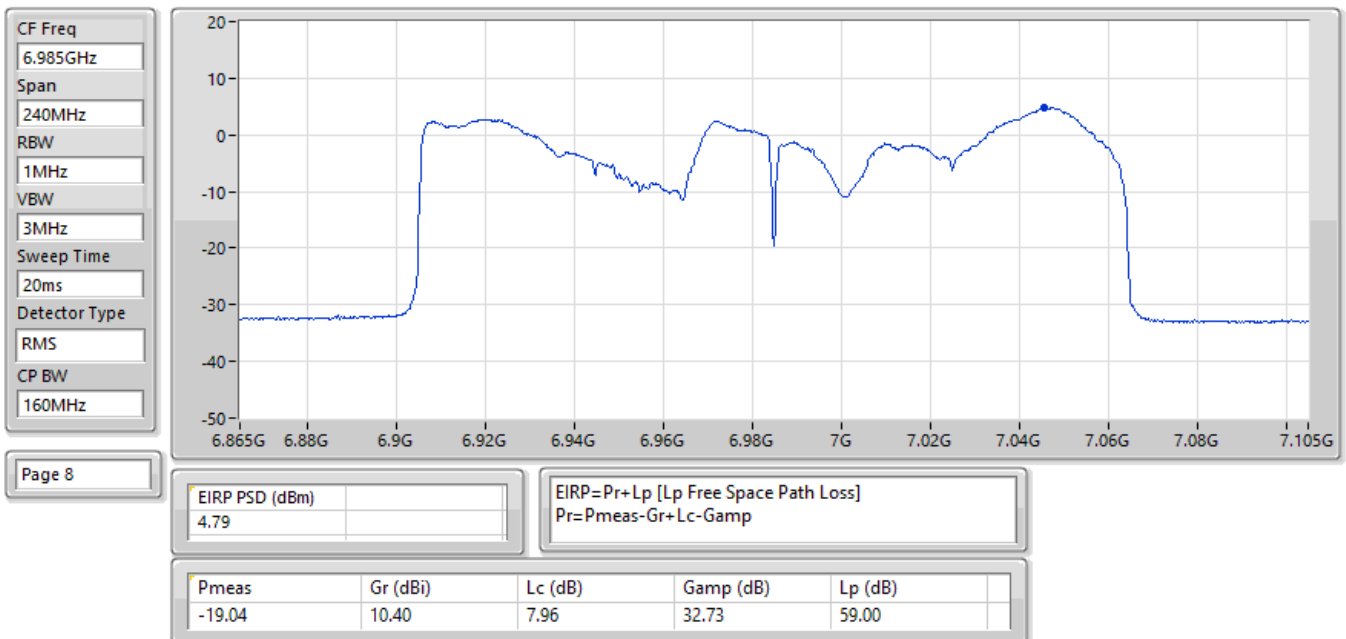


27/06/2025

EIRP PSD; Band: 6.2G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6105MHz; TX

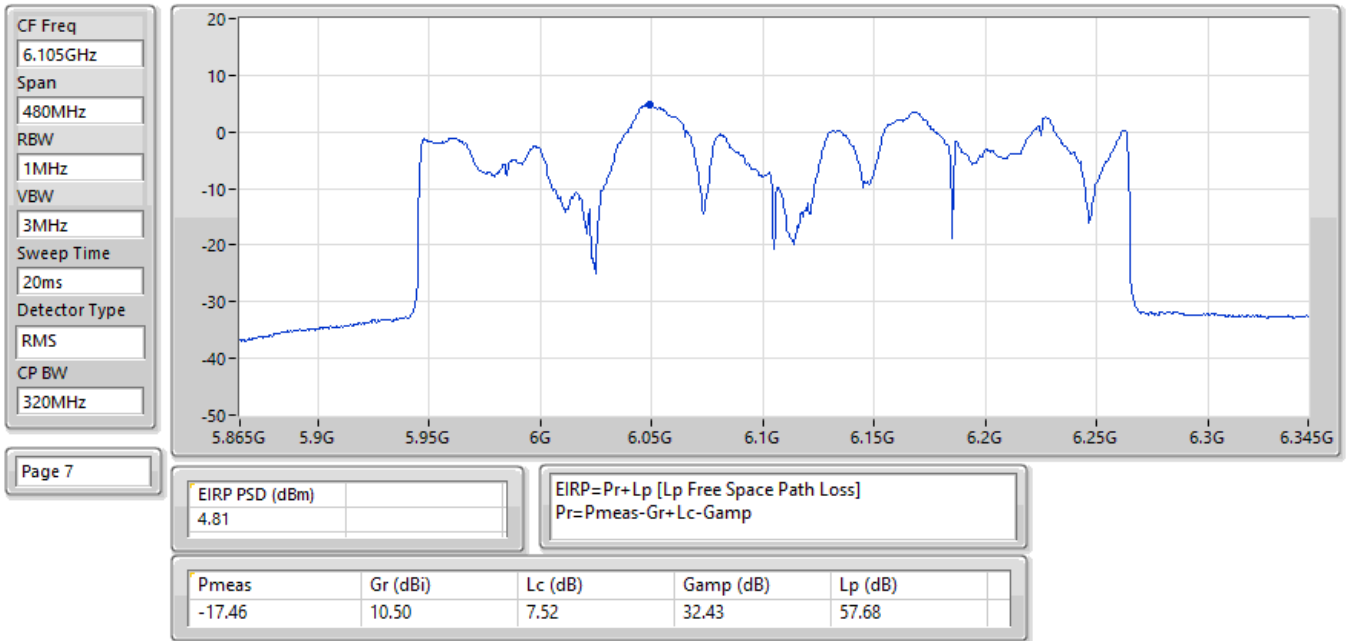


27/06/2025

EIRP PSD; Band: 6.2G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6265MHz; TX

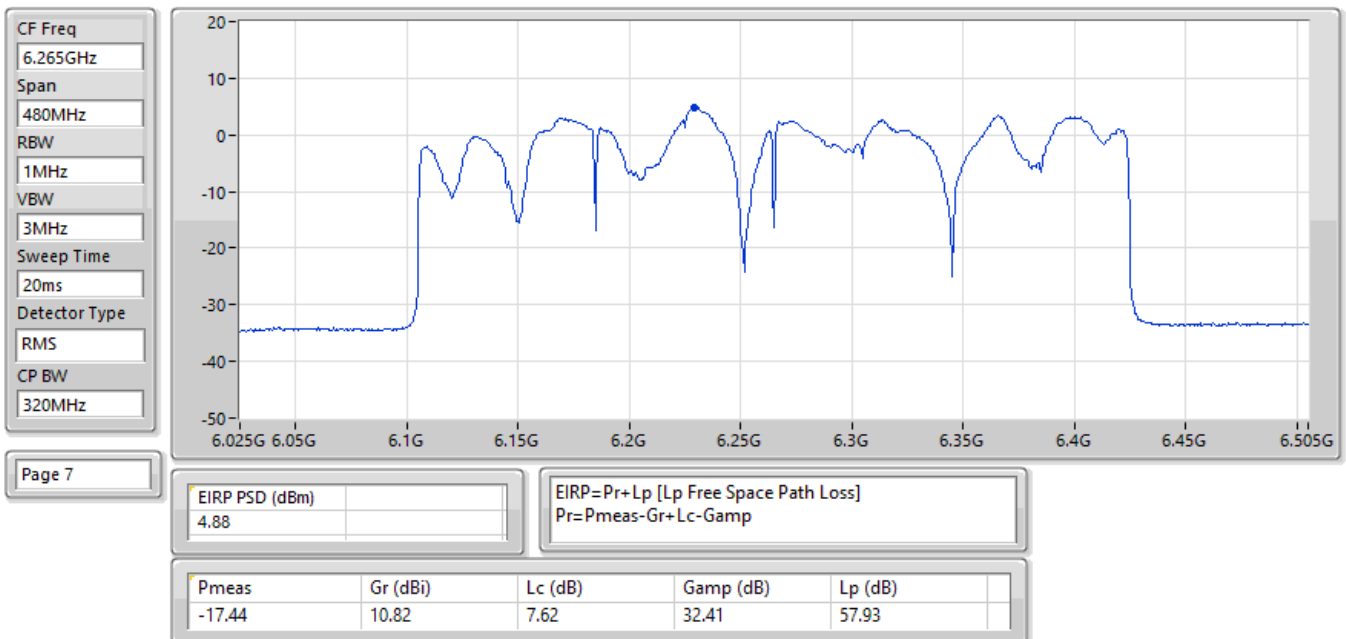


27/06/2025

EIRP PSD; Band: 6.2G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6425MHz; TX

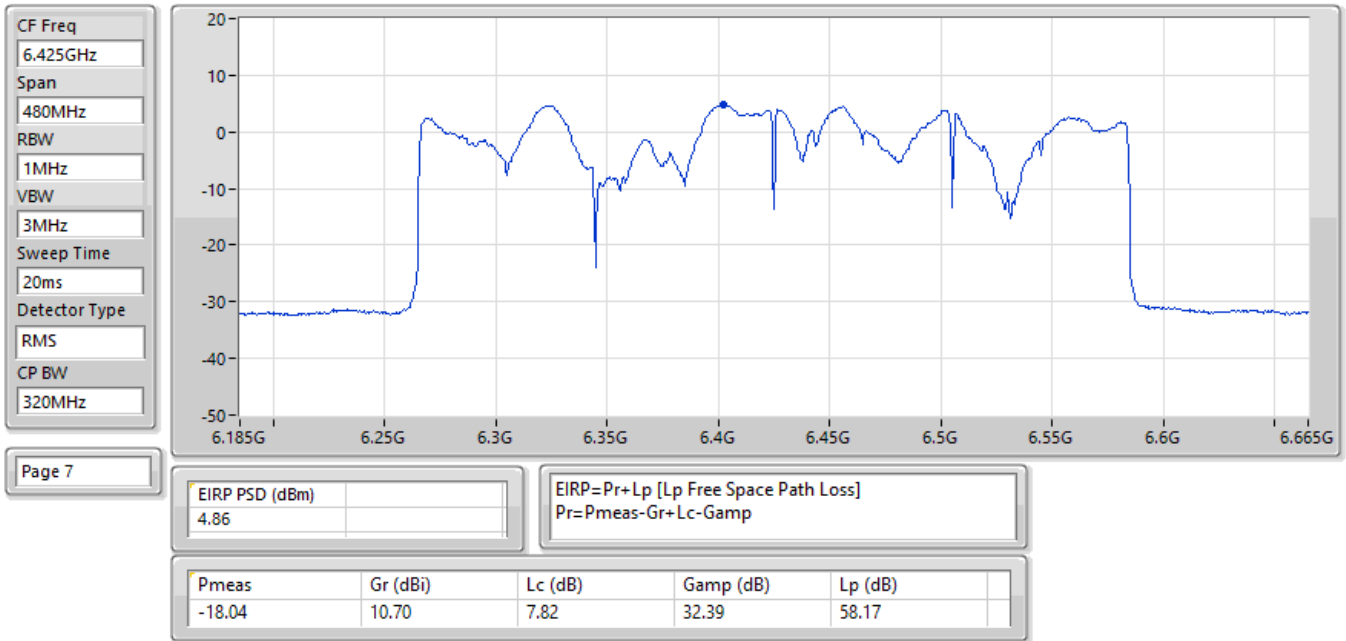


27/06/2025

EIRP PSD; Band: 6.4G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6585MHz; TX

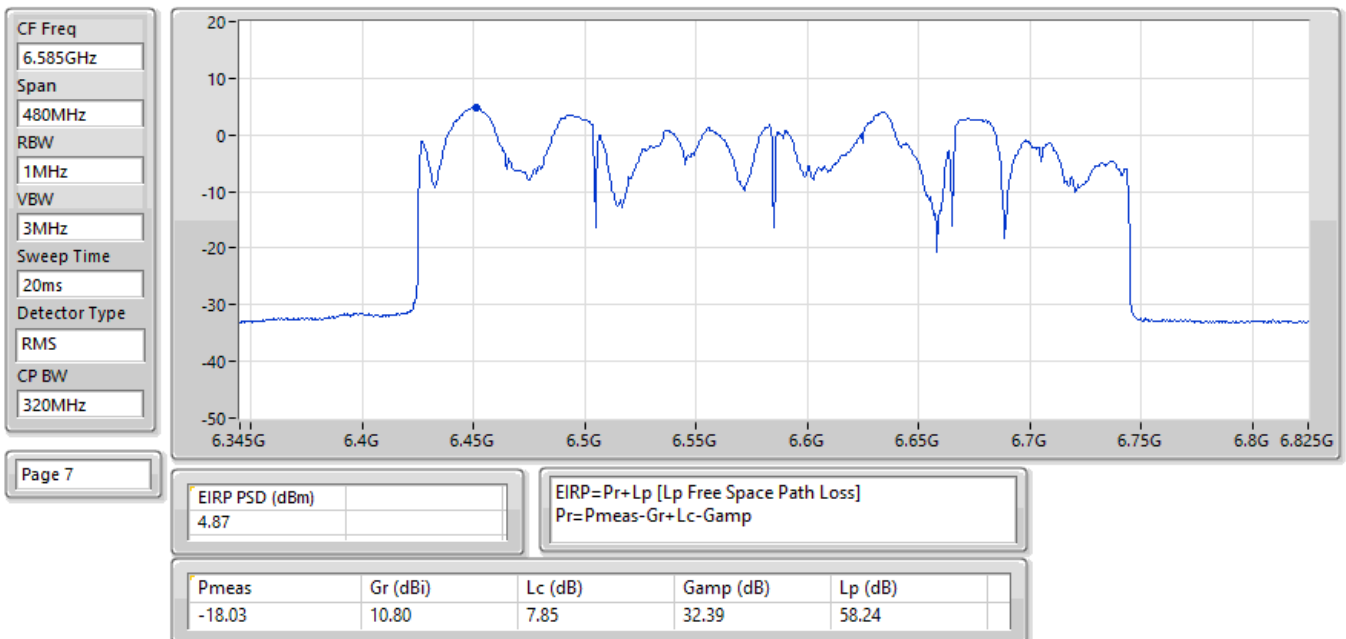


27/06/2025

EIRP PSD; Band: 6.7G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6745MHz; TX

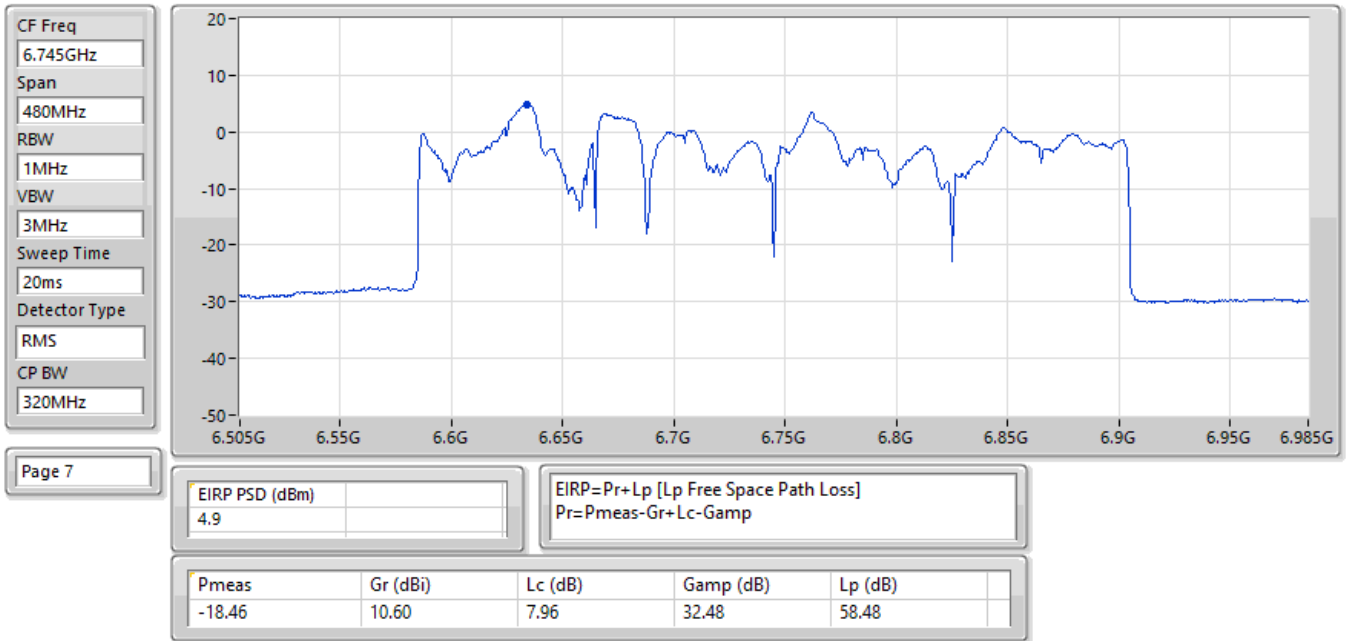

27/06/2025

EIRP PSD; Band: 6.7G; be320, BF; BWch: 320MHz; Nss: 1, (M0); Nant: 4; Ch: 6905MHz; TX

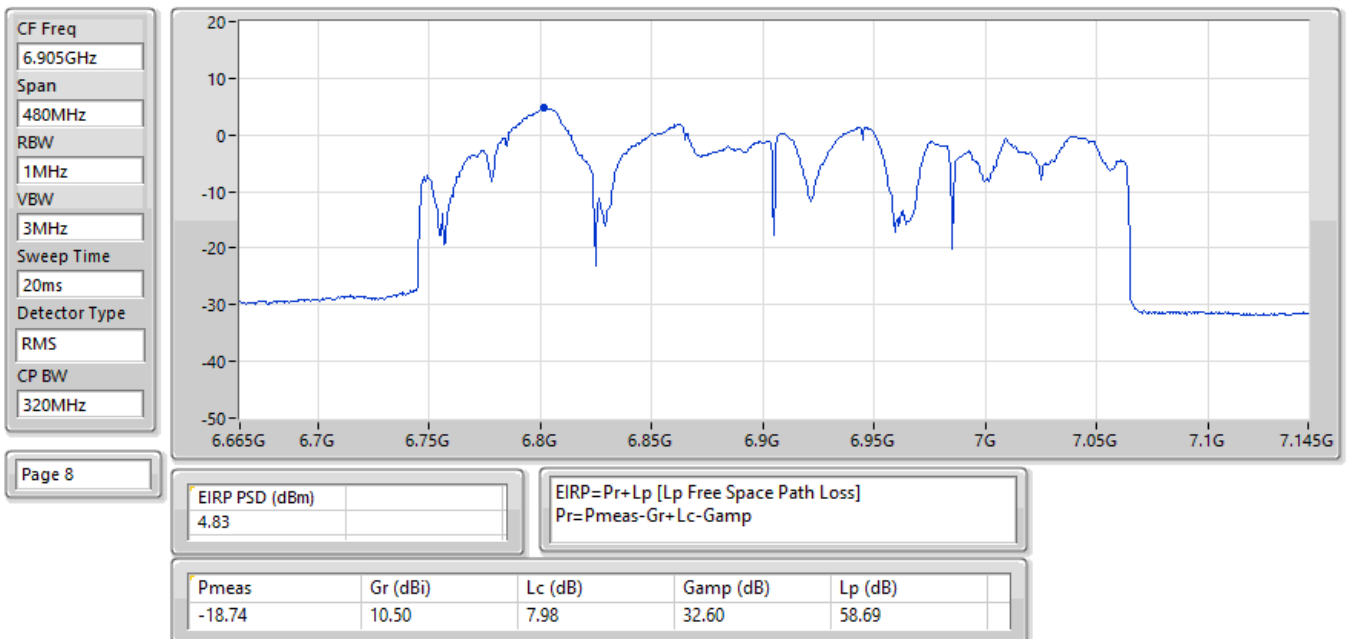



Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	4.89
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX	4.77
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	4.81
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	4.63
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	4.48
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	-0.50

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX	-	-	-
5985MHz	Pass	4.89	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
7025MHz	Pass	4.63	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 7_4TX	-	-	-
6025MHz	Pass	4.77	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX	-	-	-
6025MHz	Pass	4.70	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 4_4TX	-	-	-
6985MHz	Pass	4.38	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-
6985MHz	Pass	4.48	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 8_4TX	-	-	-
6105MHz	Pass	4.71	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-
6105MHz	Pass	4.81	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 6_4TX	-	-	-
6105MHz	Pass	4.81	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 5_4TX	-	-	-
6905MHz	Pass	-0.53	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	-	-	-
6905MHz	Pass	-0.50	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 10_4TX	-	-	-
6905MHz	Pass	-0.54	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

22/07/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 4;Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

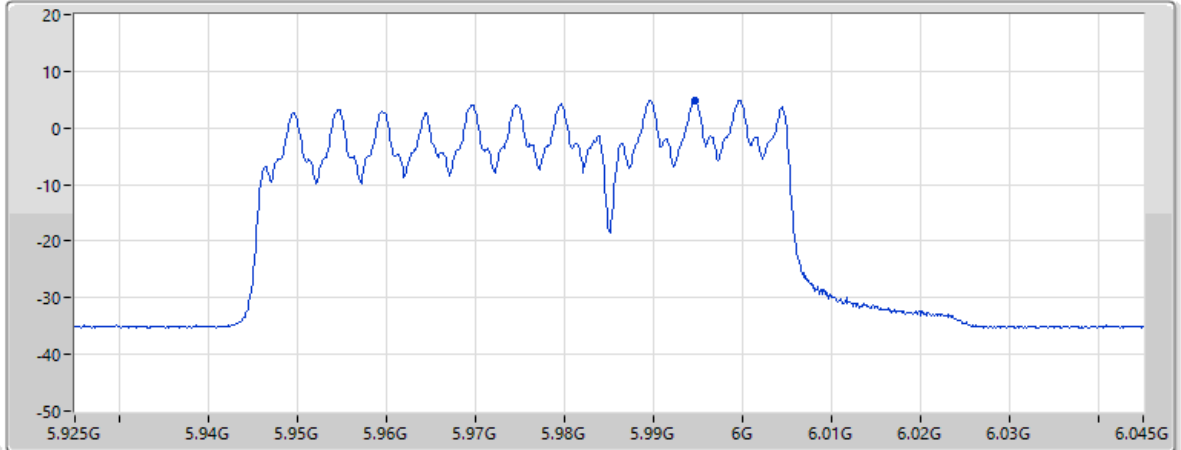

Page 7

Vertical

EIRP PSD (dBm)	4.89	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.20	11.50	8.12	30.13	57.60

22/07/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 3;Nant:4;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

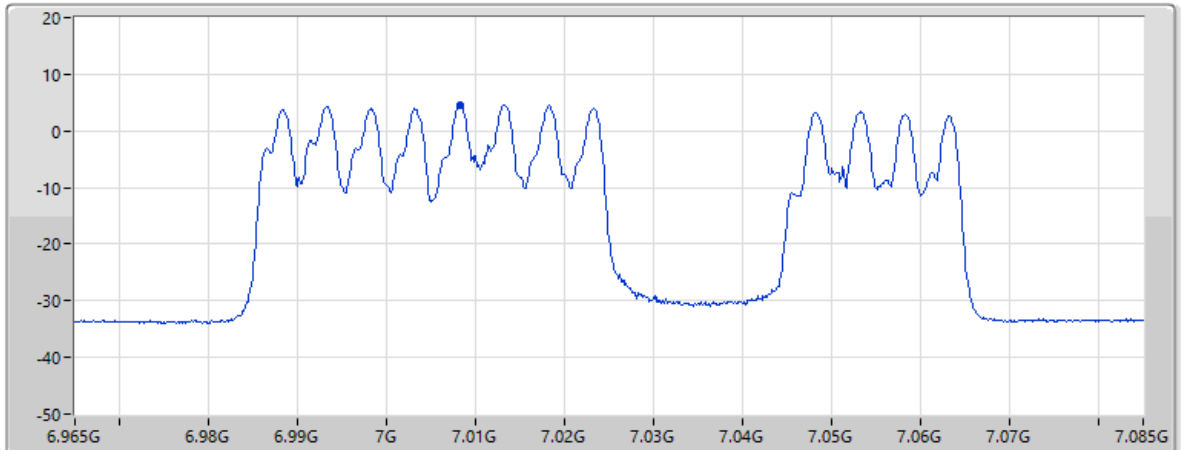


Page 7

Vertical

EIRP PSD (dBm)	4.63	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.53	11.80	8.90	30.89	58.95


22/07/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 MRU 7;Nant:4;Ch:6025MHz;TX

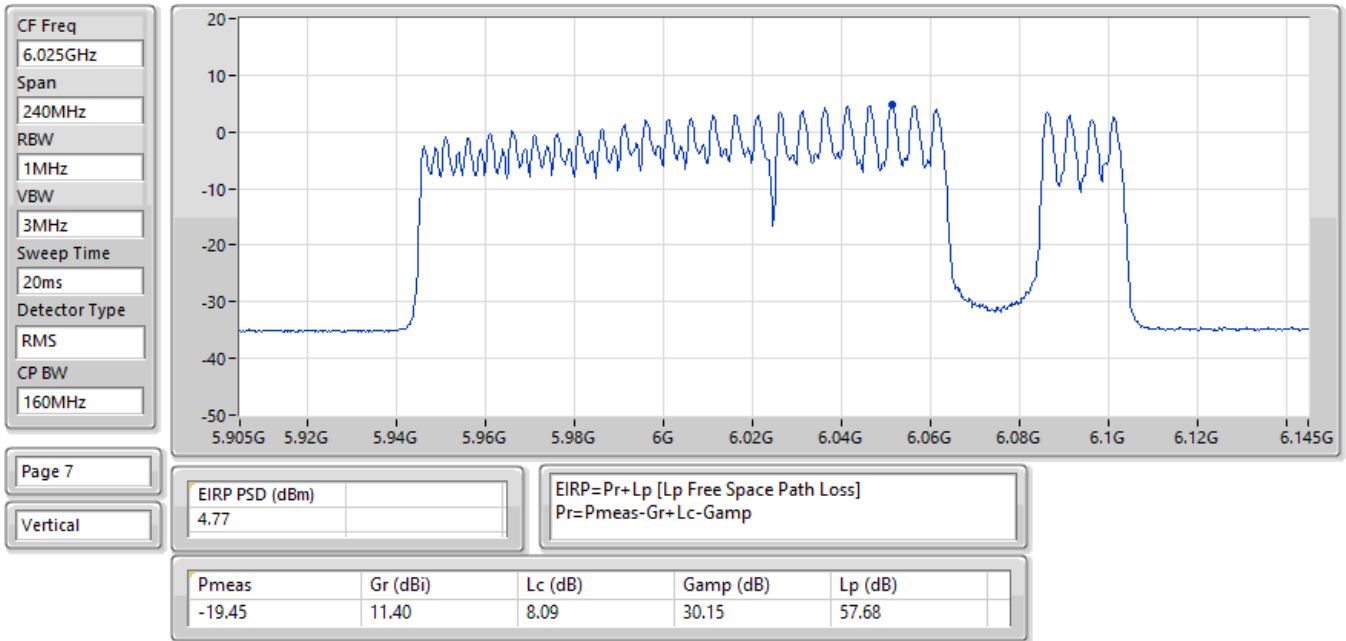


22/07/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 4;Nant:4;Ch:6025MHz;TX

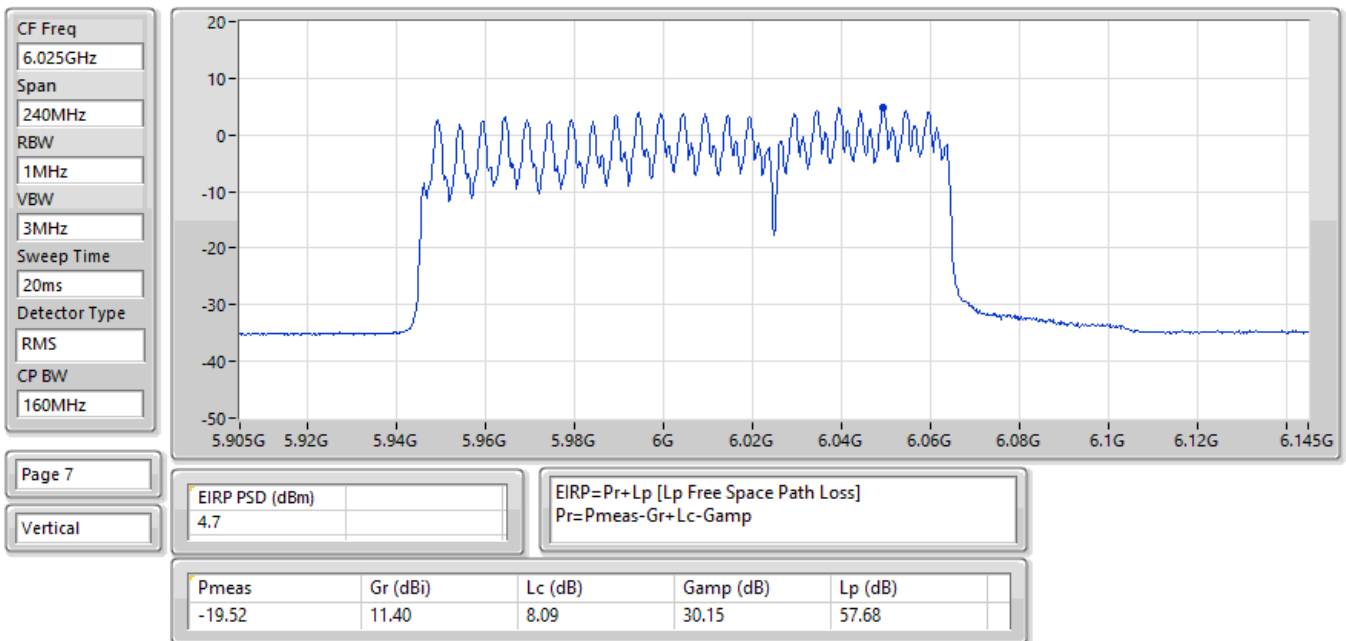


22/07/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 MRU 4;Nant:4;Ch:6985MHz;TX

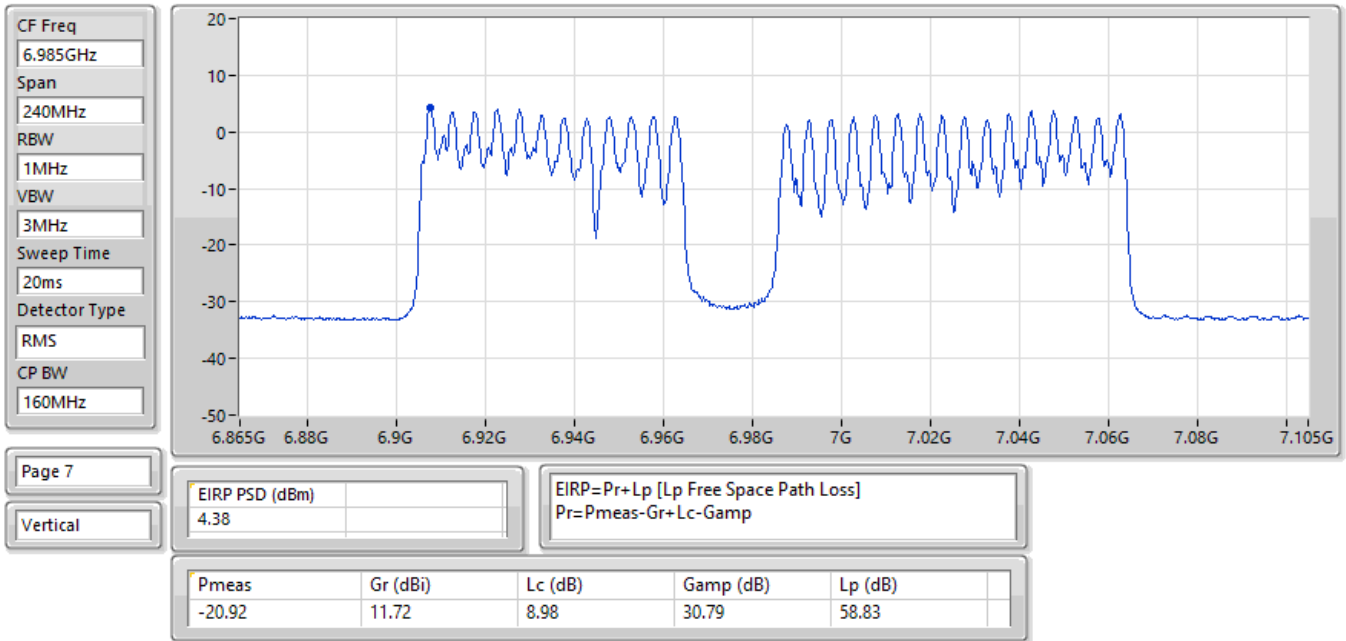


22/07/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 2;Nant:4;Ch:6985MHz;TX

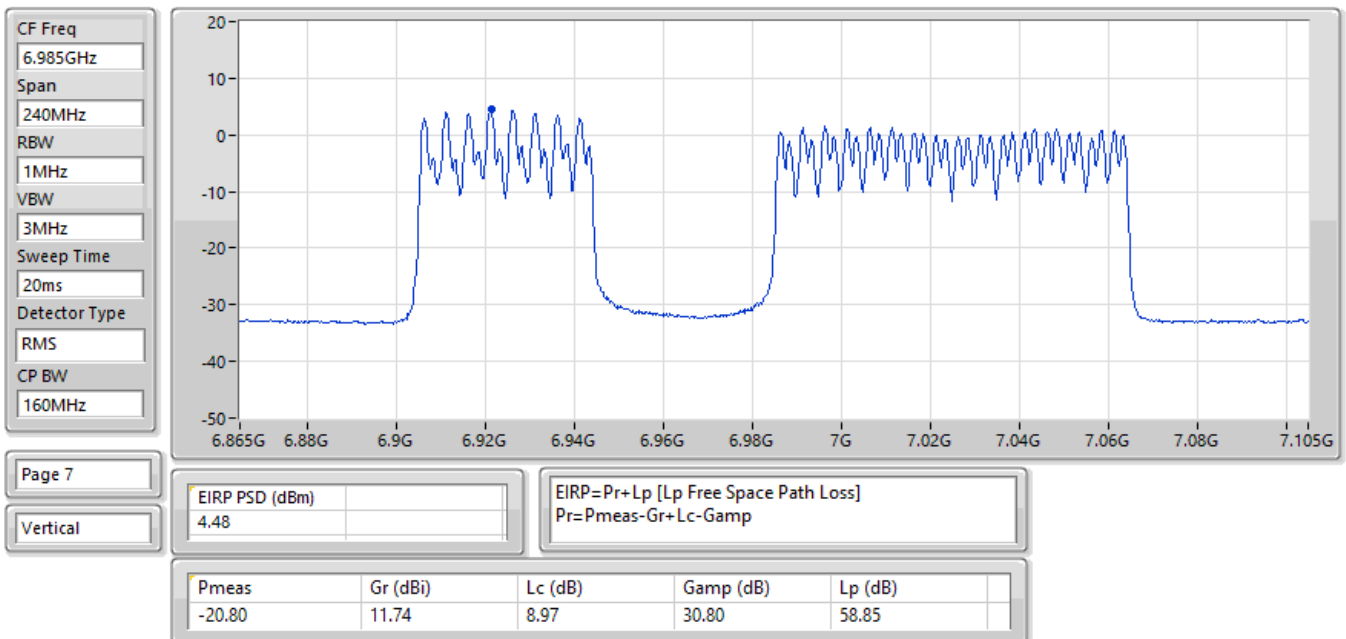


22/07/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+RU484 MRU 8;Nant:4;Ch:6105MHz;TX

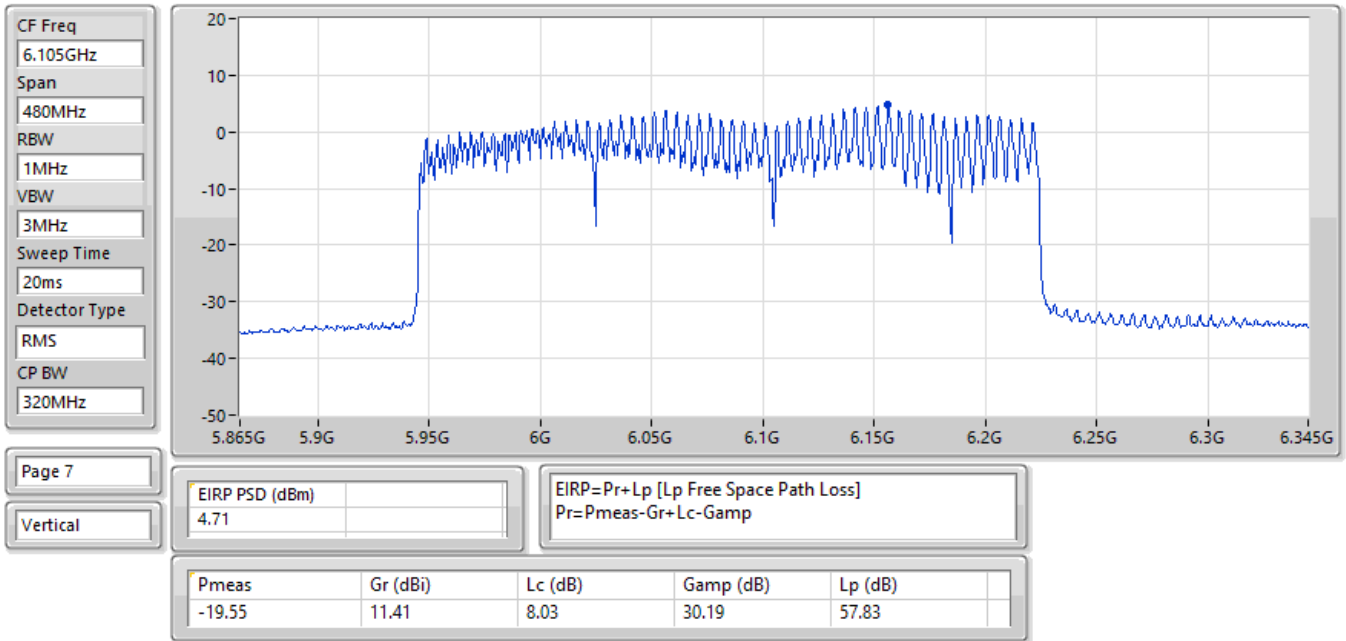


22/07/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 MRU 4;Nant:4;Ch:6105MHz;TX

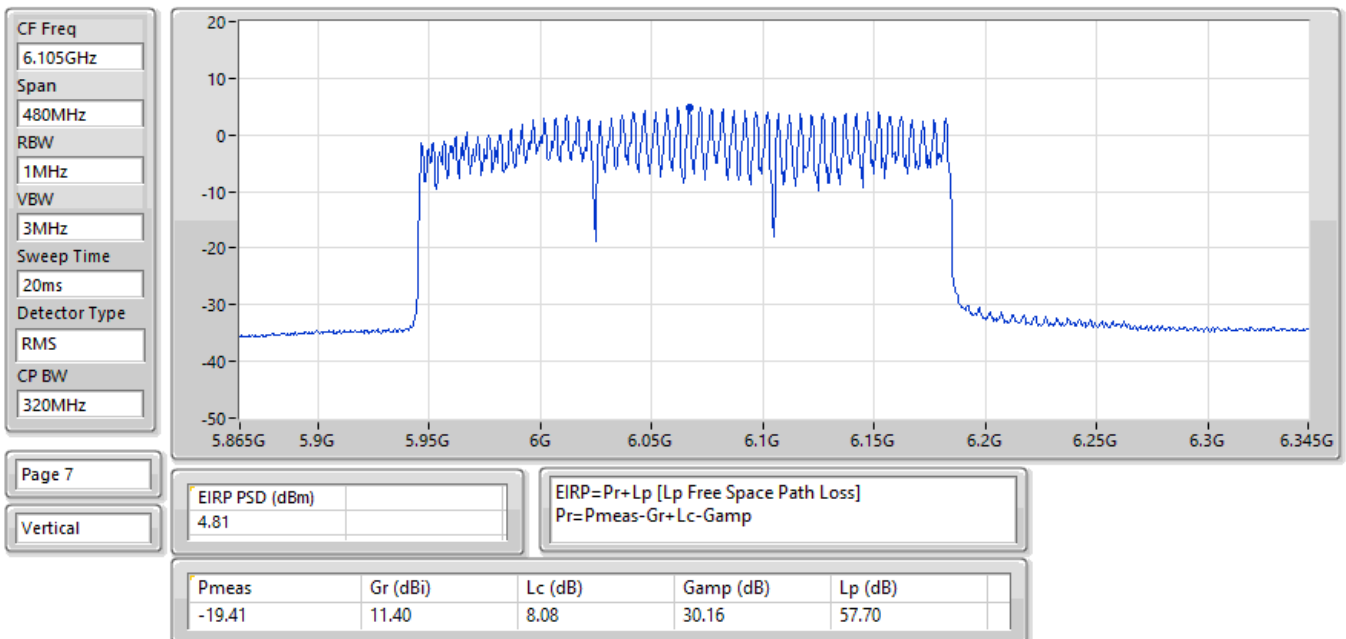


22/07/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 MRU 6;Nant:4;Ch:6105MHz;TX

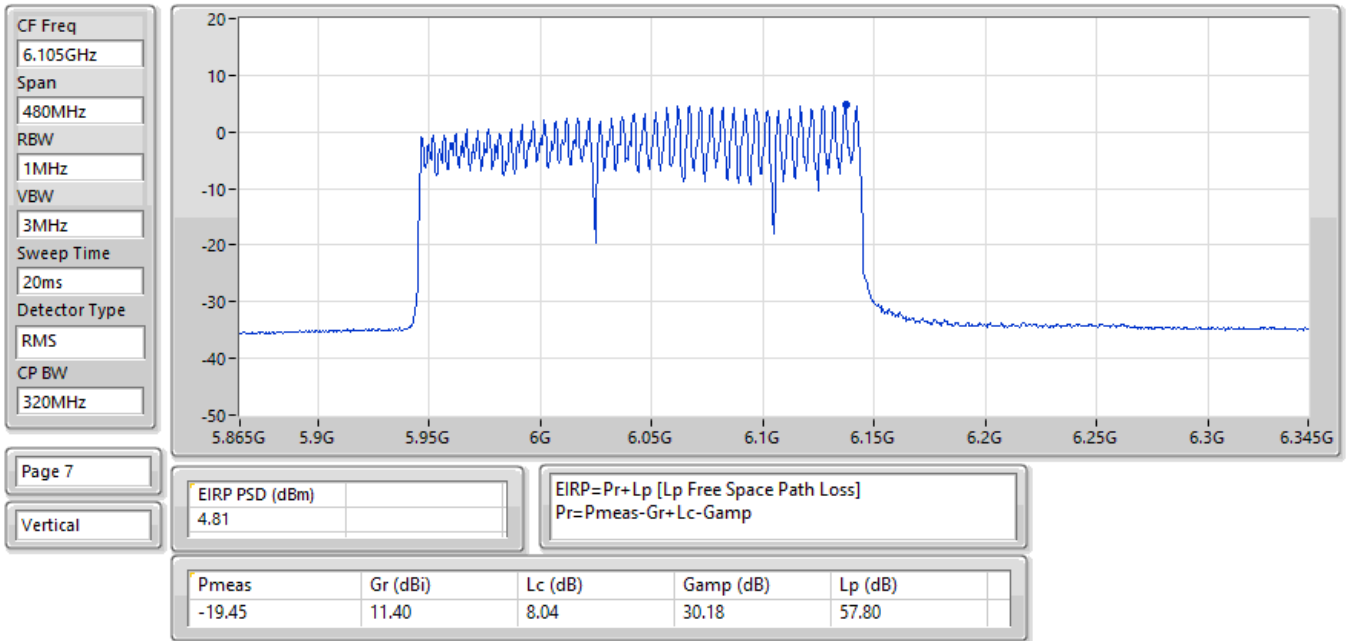


22/07/2025

EIRP PSD;Band:7.0G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+RU484 MRU 5;Nant:4;Ch:6905MHz;TX

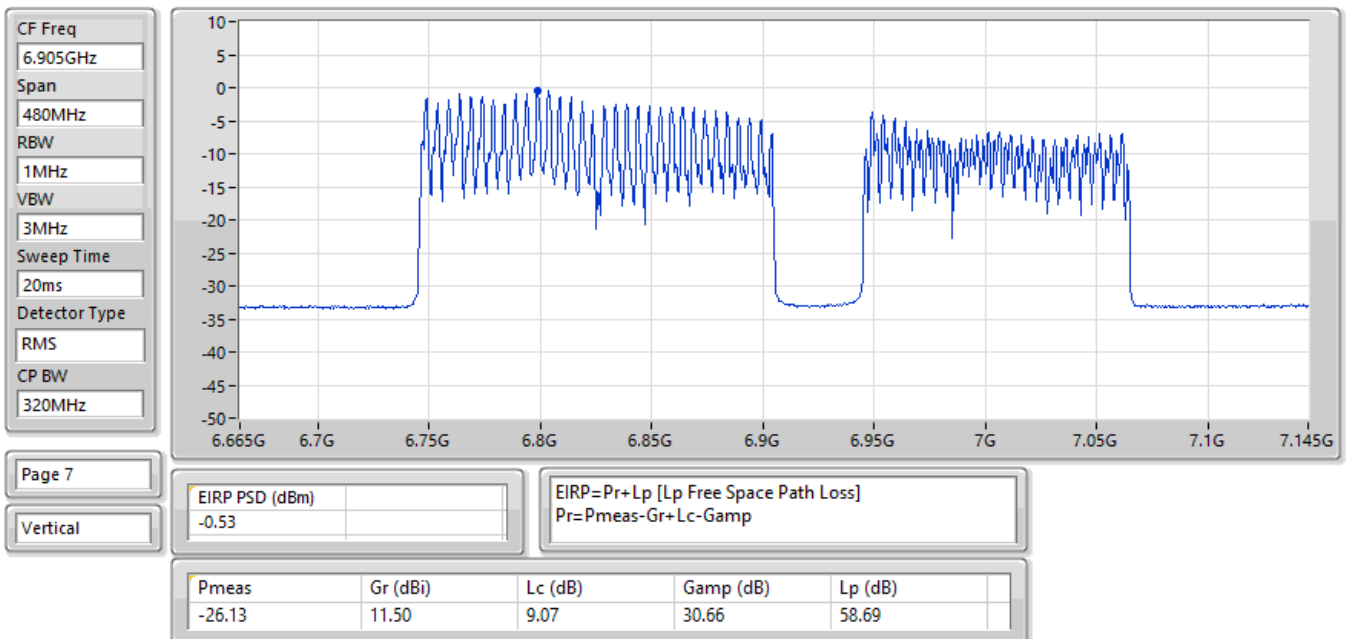


22/07/2025

EIRP PSD;Band:7.0G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 MRU 2;Nant:4;Ch:6905MHz;TX

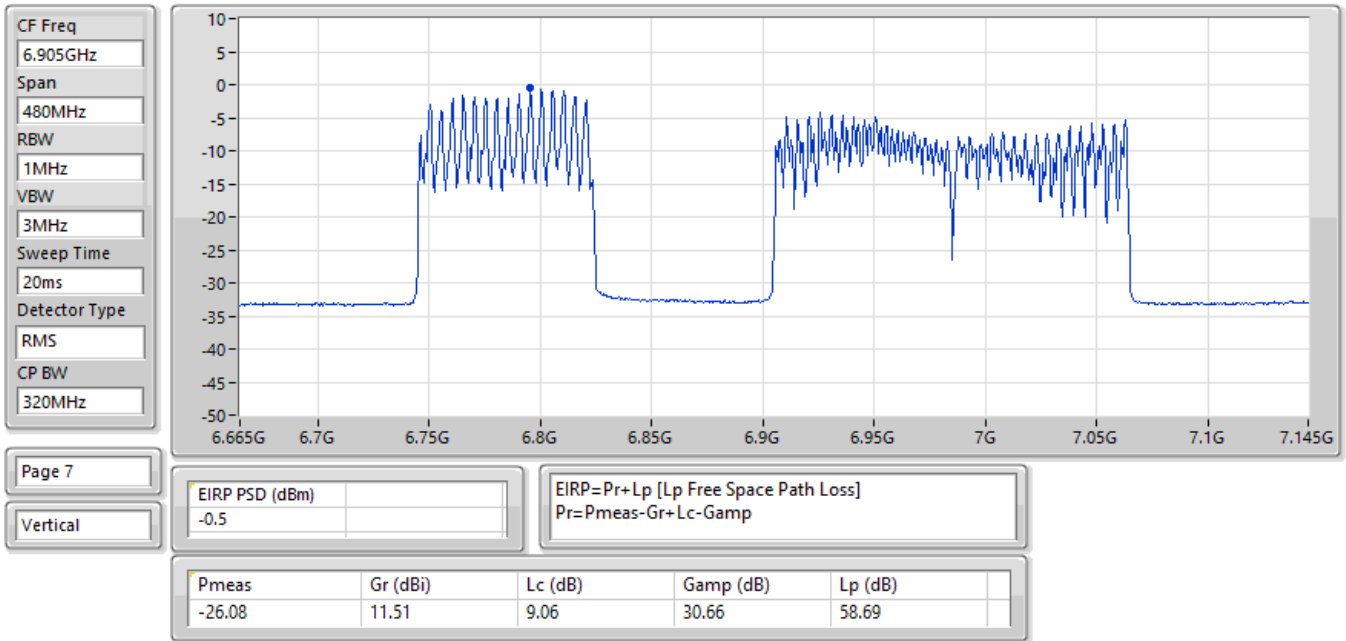

22/07/2025

EIRP PSD;Band:7.0G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 MRU 10;Nant:4;Ch:6905MHz;TX

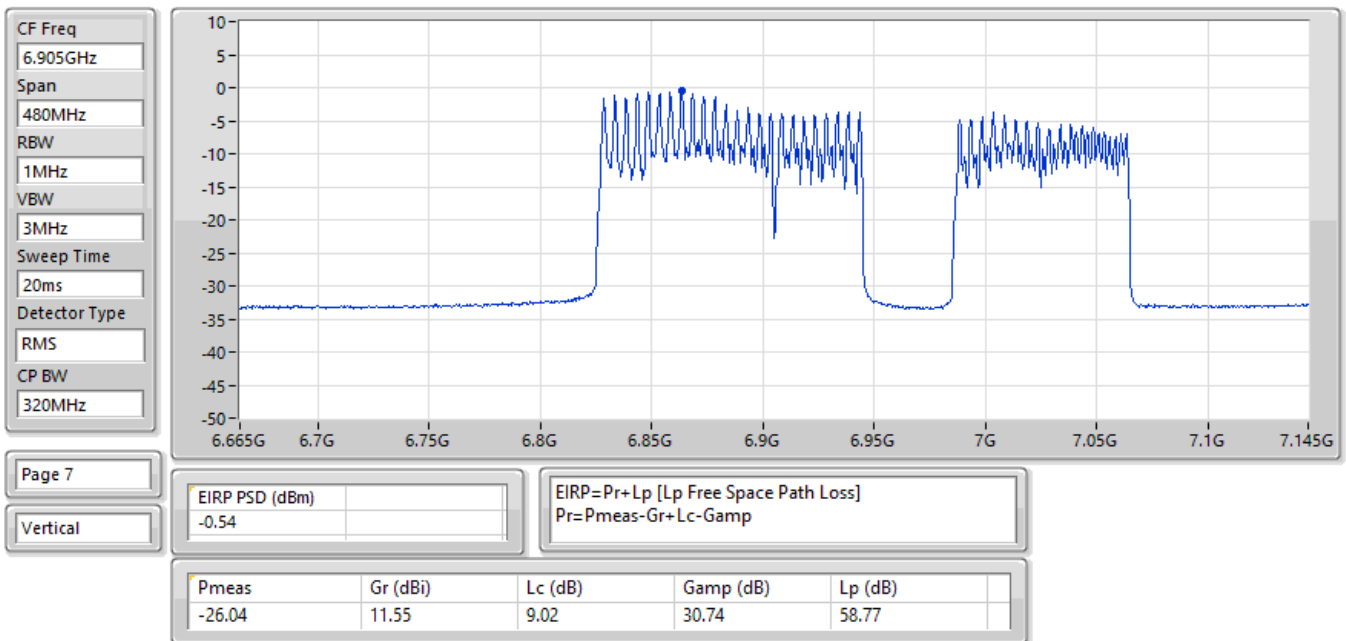



Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	4.73
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX	4.93
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 3_4TX	4.36
6.875-7.125GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX	4.94
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX	4.89
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 9_4TX	0.87

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-
5985MHz	Pass	4.73	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX	-	-	-
7025MHz	Pass	4.94	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 6_4TX	-	-	-
6025MHz	Pass	4.87	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX	-	-	-
6025MHz	Pass	4.93	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX	-	-	-
6985MHz	Pass	4.89	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-
6985MHz	Pass	4.77	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 5_4TX	-	-	-
6105MHz	Pass	4.08	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 3_4TX	-	-	-
6105MHz	Pass	4.27	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 3_4TX	-	-	-
6105MHz	Pass	4.36	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 MRU 4_4TX	-	-	-
6905MHz	Pass	-0.03	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 2_4TX	-	-	-
6905MHz	Pass	-0.51	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 9_4TX	-	-	-
6905MHz	Pass	0.87	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

05/08/2025

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 3;Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

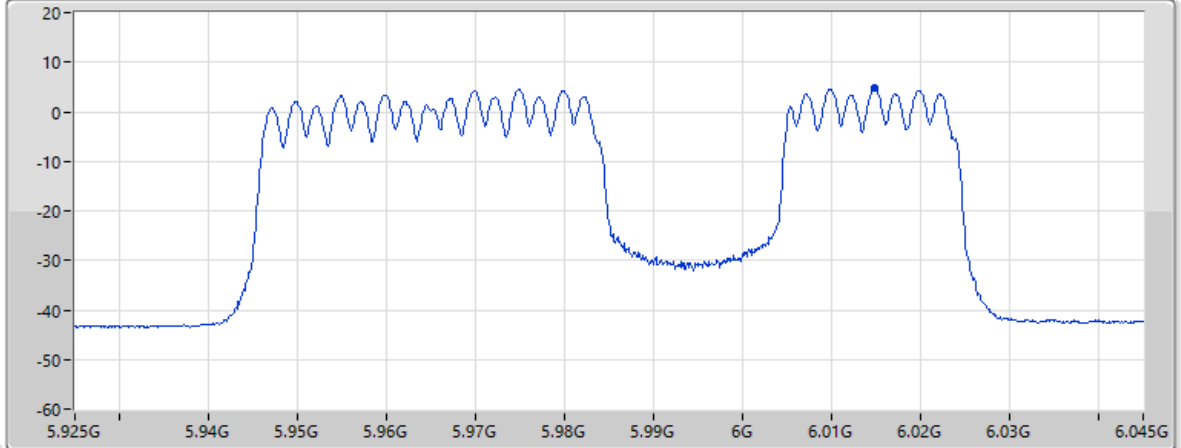

Page 7

Vertical

EIRP PSD (dBm)	4.73	EIRP=Pr+Lp [Lp Free Space Path Loss]	Pr=Pmeas-Gr+Lc-Gamp
Pmeas	-5.46	Gr (dBi)	13.40
Lc (dB)	9.15	Gamp (dB)	43.19
Lp (dB)	57.63		

05/08/2025

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0),RU484+RU242 MRU 2;Nant:4;Ch:7025MHz;TX

CF Freq
7.025GHz

Span
120MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

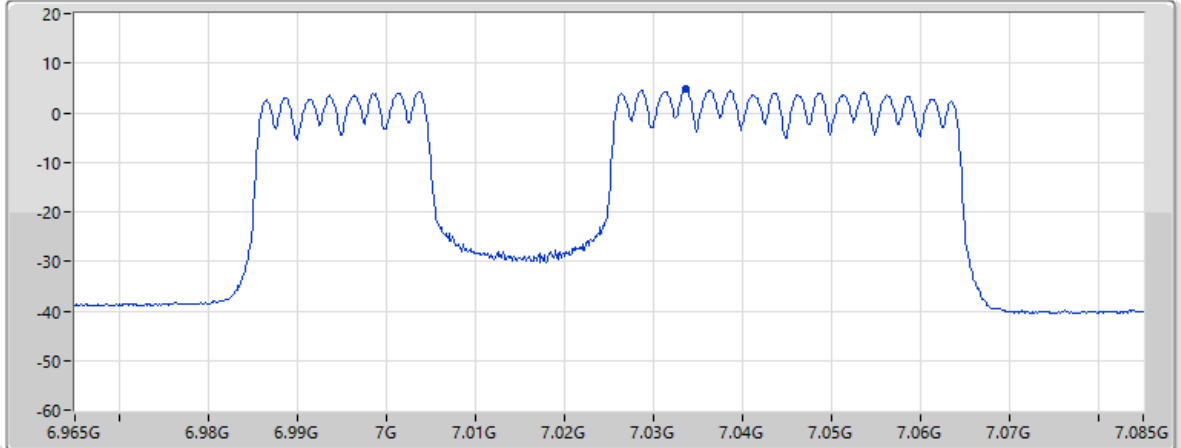


Page 7

Vertical

EIRP PSD (dBm)	4.94	EIRP=Pr+Lp [Lp Free Space Path Loss]	Pr=Pmeas-Gr+Lc-Gamp
Pmeas	-9.42	Gr (dBi)	11.97
Lc (dB)	10.06	Gamp (dB)	42.72
Lp (dB)	58.99		


05/08/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 MRU 6;Nant:4;Ch:6025MHz;TX

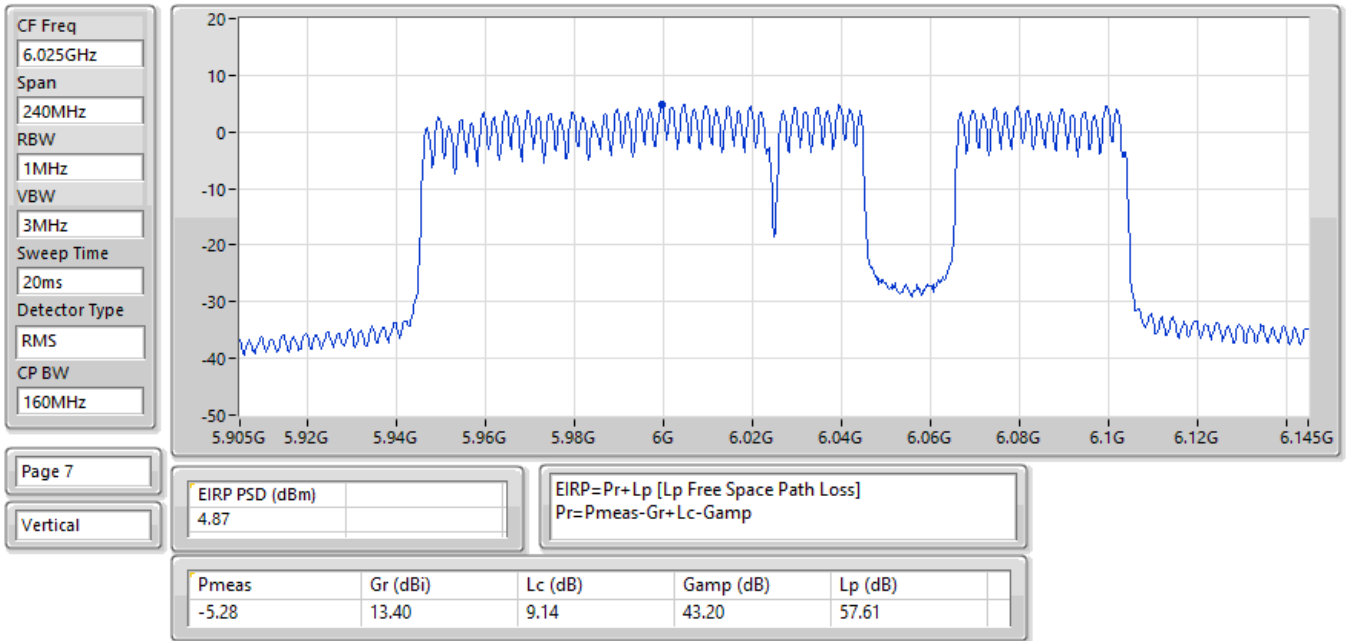


05/08/2025

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 4;Nant:4;Ch:6025MHz;TX

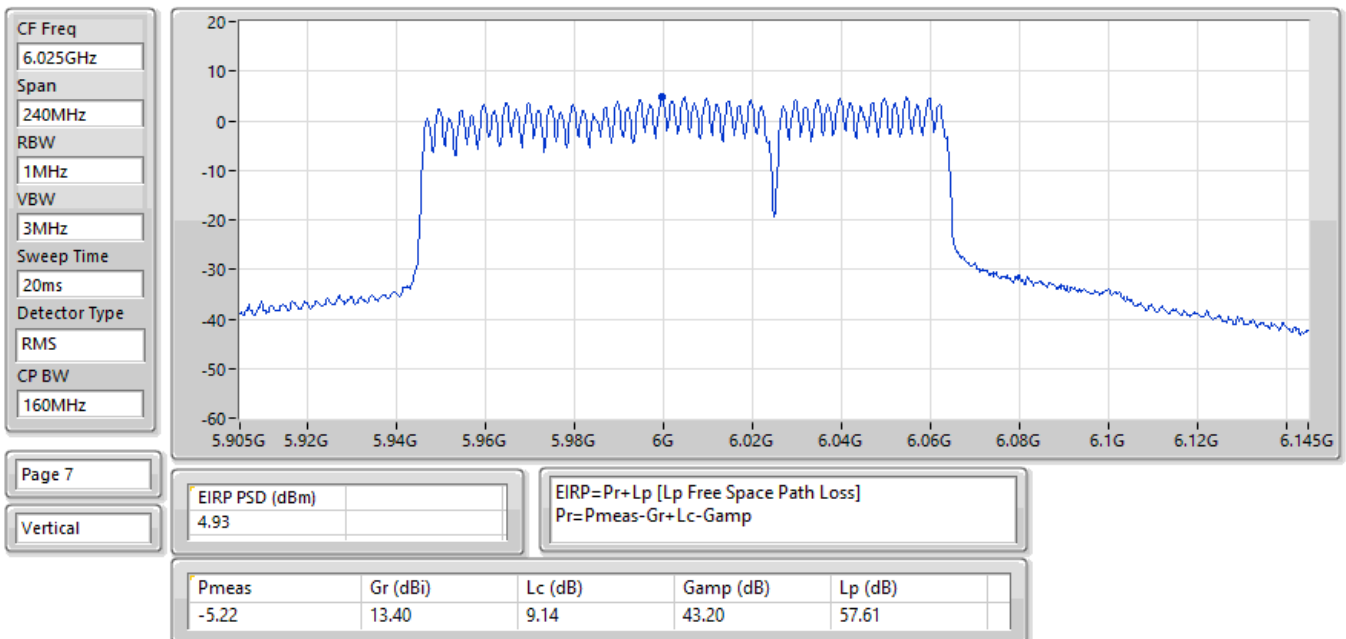


05/08/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484+RU242 MRU 5;Nant:4;Ch:6985MHz;TX

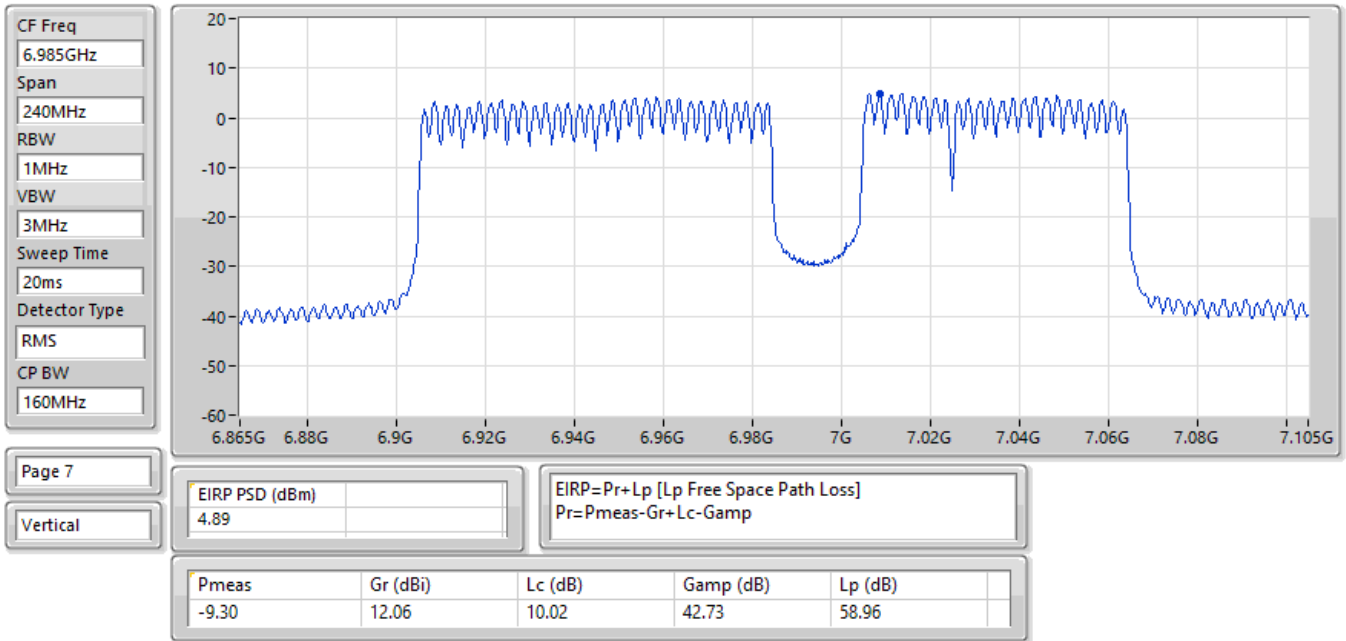


05/08/2025

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0),RU996+RU484 MRU 2;Nant:4;Ch:6985MHz;TX

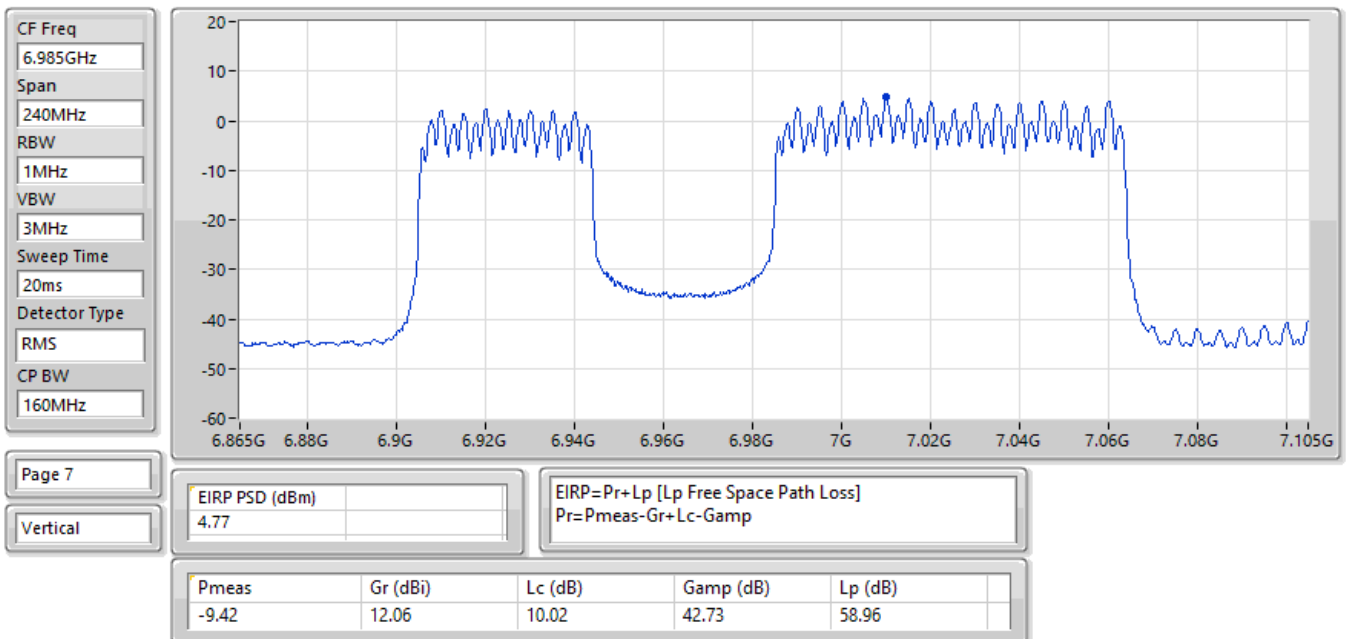


06/08/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+ RU484 MRU 5;Nant:4;Ch:6105MHz;TX

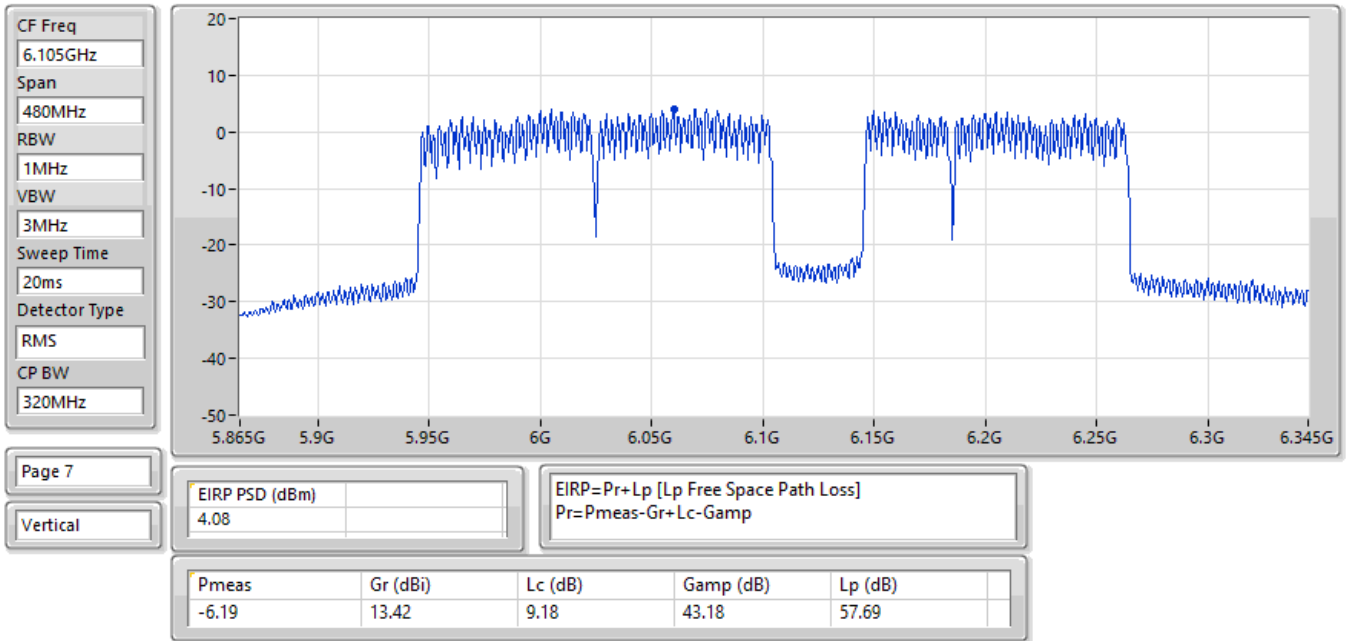


06/08/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 MRU 3;Nant:4;Ch:6105MHz;TX

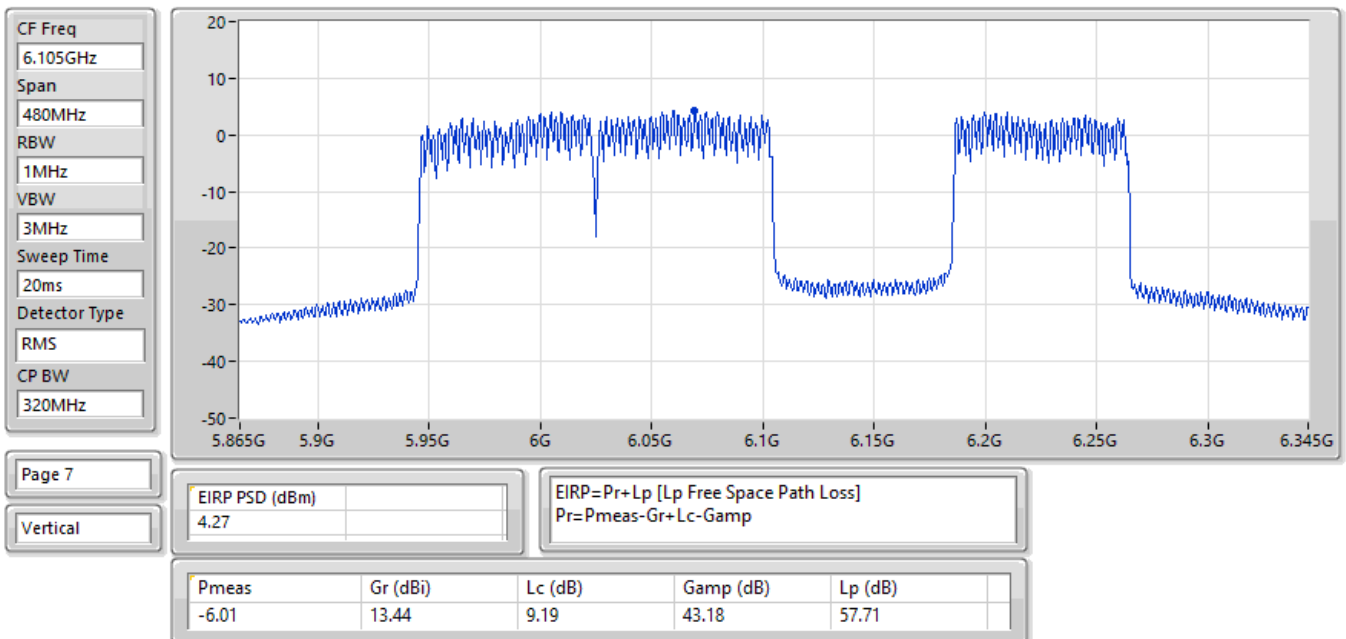


06/08/2025

EIRP PSD;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+ RU484 MRU 3;Nant:4;Ch:6105MHz;TX

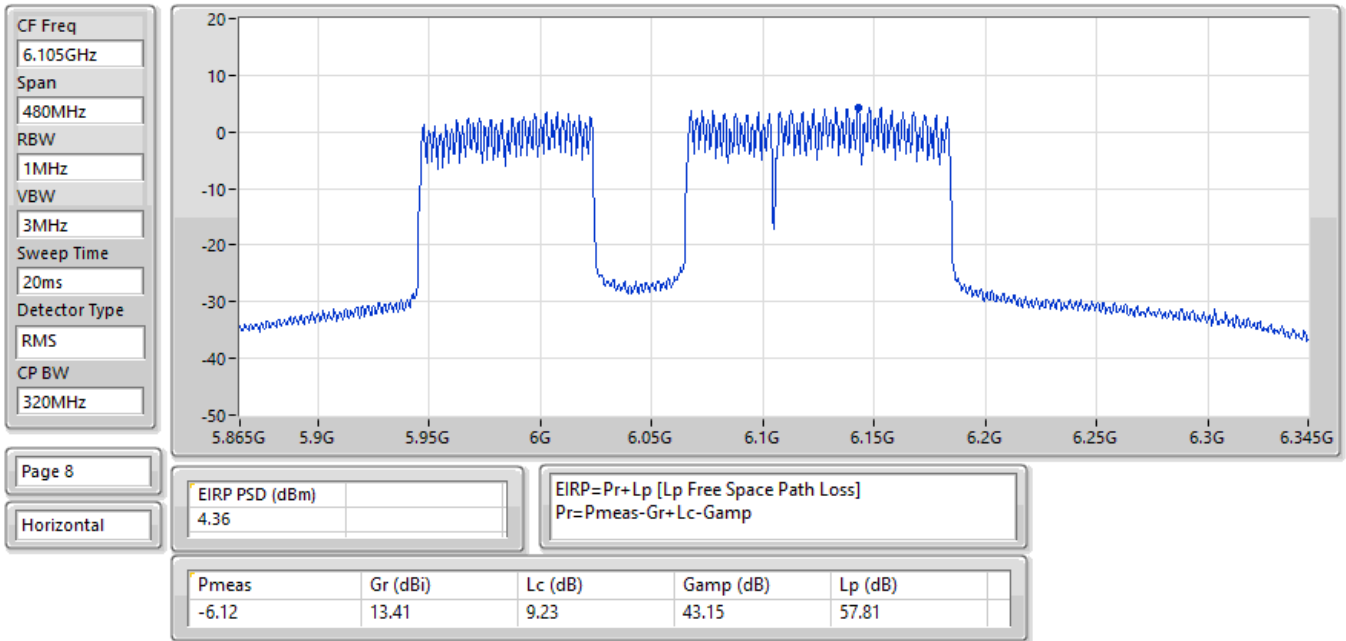

06/08/2025

EIRP PSD;Band:7.0G;be320;BWch:320MHz;Nss:1,(M0),3xRU996+ RU484 MRU 4;Nant:4;Ch:6905MHz;TX

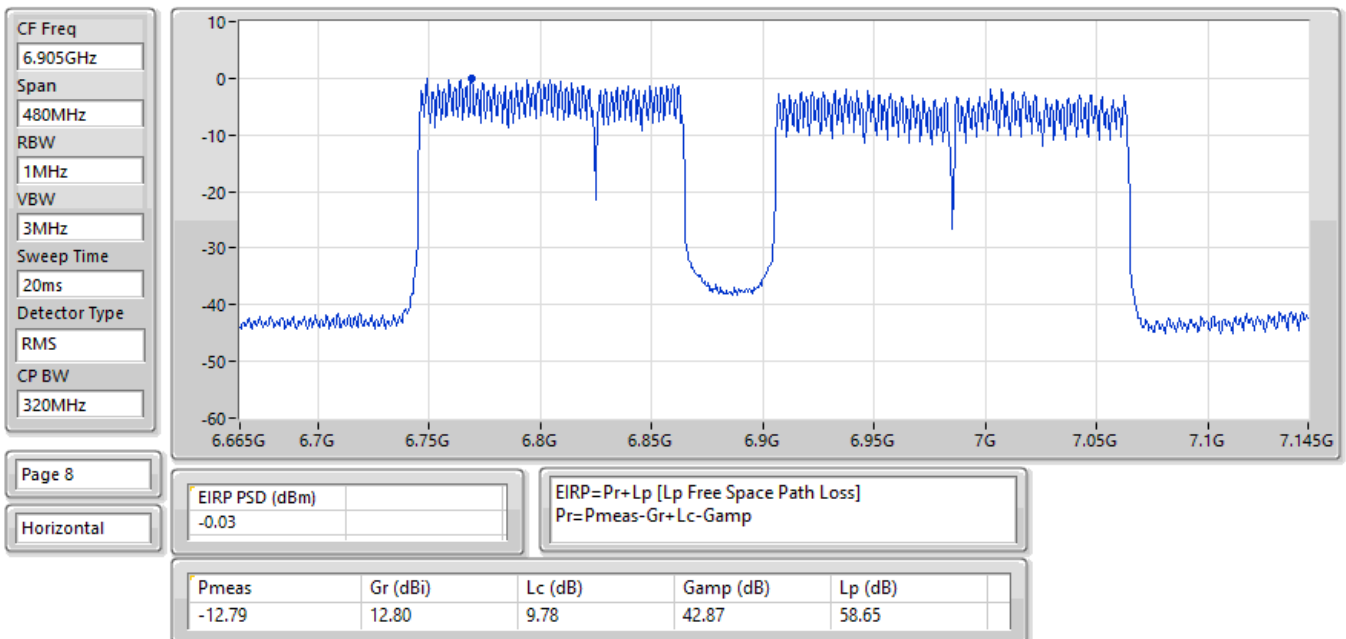

06/08/2025

EIRP PSD;Band:7.0G;be320;BWch:320MHz;Nss:1,(M0),3xRU996 MRU 2;Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

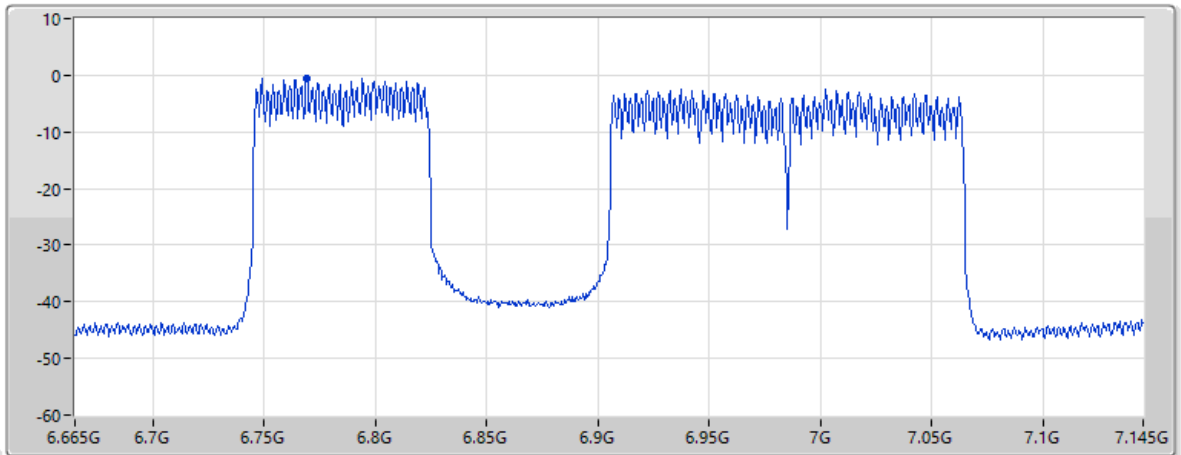

Page 8

Horizontal

EIRP PSD (dBm)	-0.51	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-13.27	12.80	9.78	42.87	58.65

06/08/2025

EIRP PSD;Band:7.0G;be320;BWch:320MHz;Nss:1,(M0),2xRU996+RU484 MRU 9;Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz

Span
480MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
320MHz

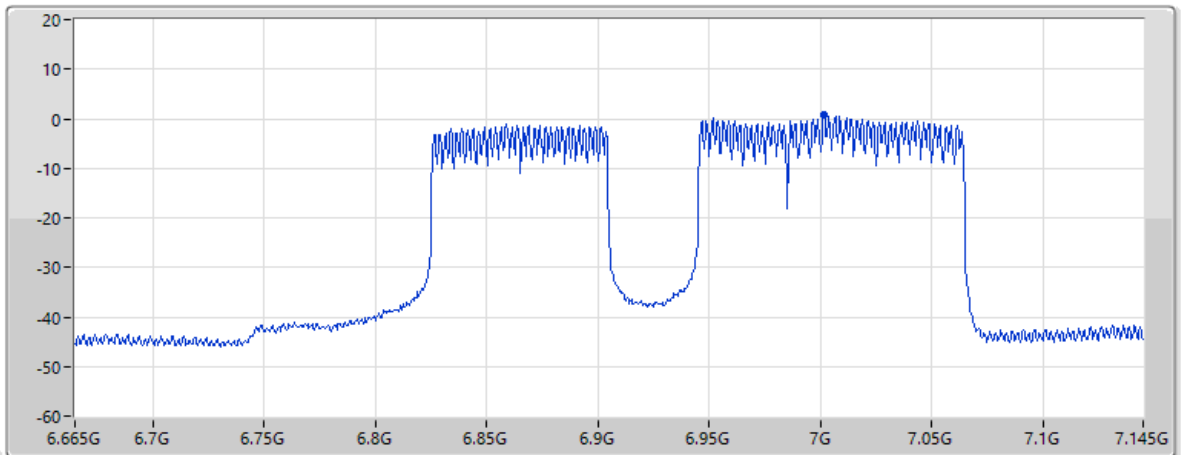

Page 7

Vertical

EIRP PSD (dBm)	0.87	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-13.26	12.09	10.01	42.74	58.95




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 15	Pass	QP	55.22M	35.51	40.00	-4.49	Vertical

Mode 15

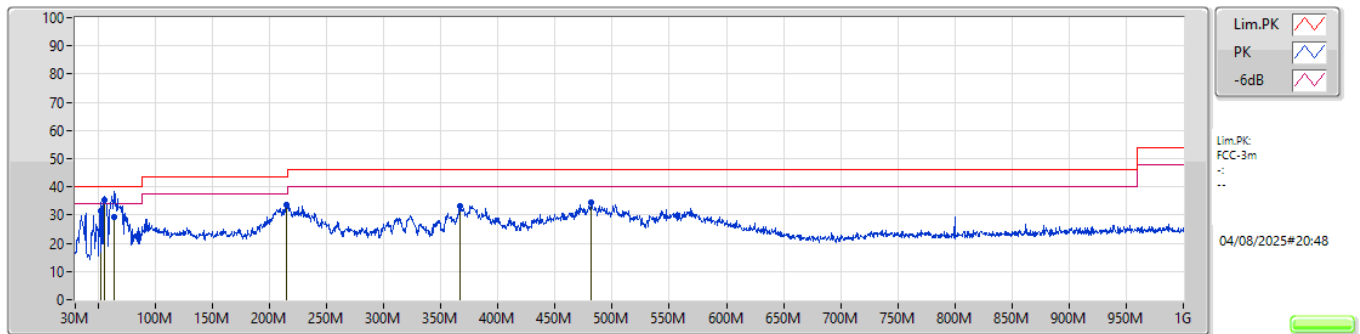

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
QP	52.8M	31.52	40.00	-8.48	-34.23	3	Vertical	66	1.00	-	65.75	19.90	0.80	54.93		
QP	55.22M	35.51	40.00	-4.49	-34.36	3	Vertical	138	1.00	"Worst"	69.87	19.76	0.83	54.95		
QP	64.44M	29.23	40.00	-10.77	-35.47	3	Vertical	233	2.00	"	64.70	18.35	0.89	54.71		
PK	214.79M	33.50	43.50	-10.00	-36.88	3	Vertical	25	2.00	-	70.38	15.71	1.79	54.38		
PK	366.59M	33.37	46.00	-12.63	-30.58	3	Vertical	79	2.00	-	63.95	20.87	2.54	53.99		
PK	482.02M	34.49	46.00	-11.51	-27.66	3	Vertical	142	1.00	-	62.15	23.27	2.99	53.92		

Mode 15

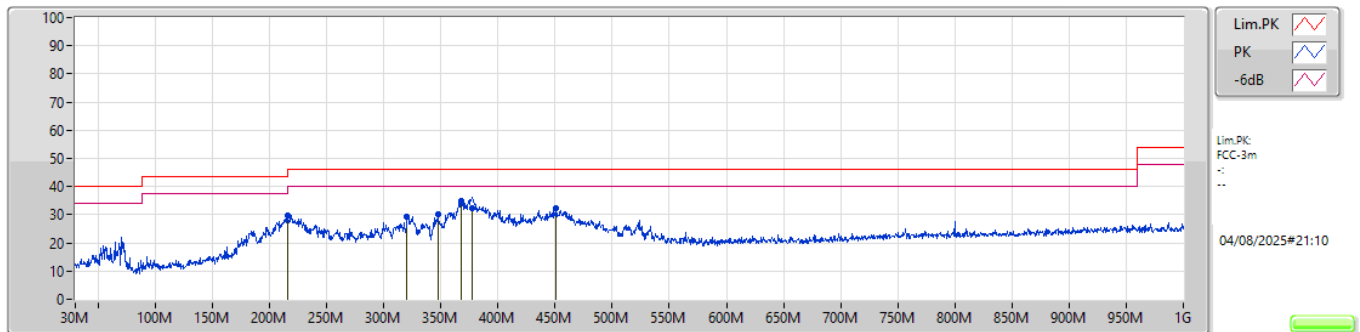

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	215.76M	29.55	43.50	-13.95	-36.85	3	Horizontal	56	1.00	-	66.40	15.73	1.80	54.38		
PK	320.52M	29.12	46.00	-16.88	-31.77	3	Horizontal	156	2.00	-	60.89	19.89	2.35	54.01		
PK	347.68M	30.35	46.00	-15.65	-30.91	3	Horizontal	128	2.00	-	61.26	20.22	2.49	53.62		
PK	367.56M	34.82	46.00	-11.18	-30.55	3	Horizontal	43	1.00	"Worst"	65.37	20.92	2.54	54.01		
QP	377.26M	32.30	46.00	-13.70	-30.41	3	Horizontal	66	1.00	"	62.71	21.27	2.57	54.25		
PK	450.98M	32.14	46.00	-13.86	-28.42	3	Horizontal	90	1.00	-	60.56	22.82	2.96	54.20		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW40_Nss1.(MCS0)_1TX	Pass	RMS	5.925G	68.18	68.20	-0.02	3	Vertical	25	2.25	-

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5955MHz_TX

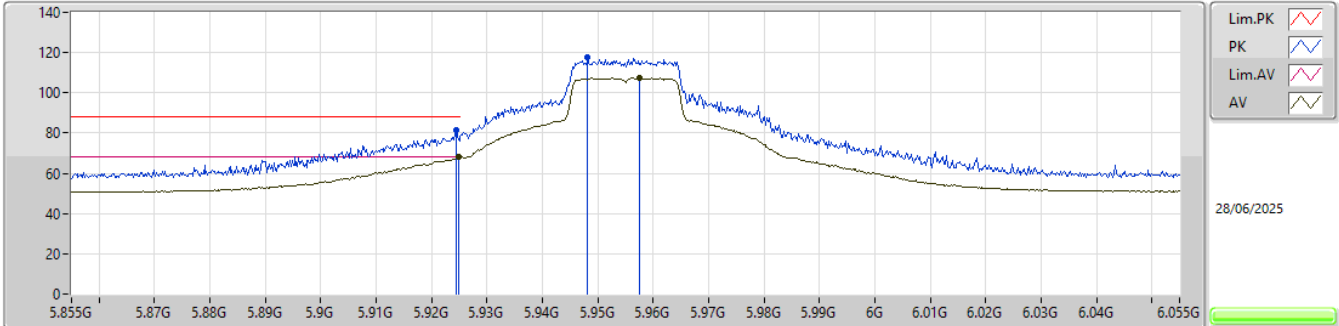


EUT_Z_1TX
Setting 84
03-E-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9244G	81.24	88.20	-6.96	73.75	3	Vertical	23	2.31	-	34.60	8.09	35.20			
RMS	5.9248G	67.98	68.20	-0.22	60.49	3	Vertical	23	2.31	-	34.60	8.09	35.20			
PK	5.9482G	117.59	Inf	-Inf	109.98	3	Vertical	23	2.31	-	34.69	8.12	35.20			
RMS	5.9576G	107.36	Inf	-Inf	99.72	3	Vertical	23	2.31	-	34.70	8.13	35.19			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5955MHz_TX

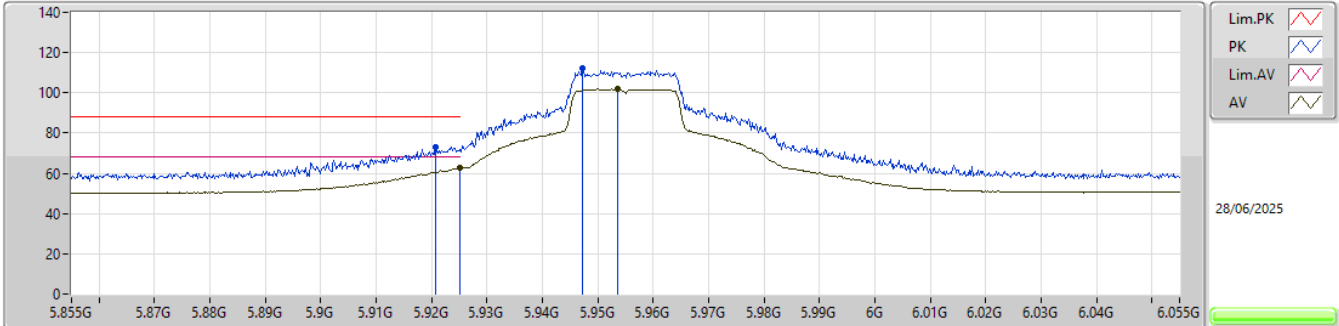


EUT_Z_1TX
Setting 84
03-E-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9208G	73.17	88.20	-15.03	65.70	3	Horizontal	0	2.27	-	34.58	8.09	35.20			
RMS	5.925G	62.75	68.20	-5.45	55.26	3	Horizontal	0	2.27	-	34.60	8.09	35.20			
PK	5.9472G	111.94	Inf	-Inf	104.34	3	Horizontal	0	2.27	-	34.69	8.11	35.20			
RMS	5.9536G	101.83	Inf	-Inf	94.20	3	Horizontal	0	2.27	-	34.70	8.12	35.19			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5955MHz_TX

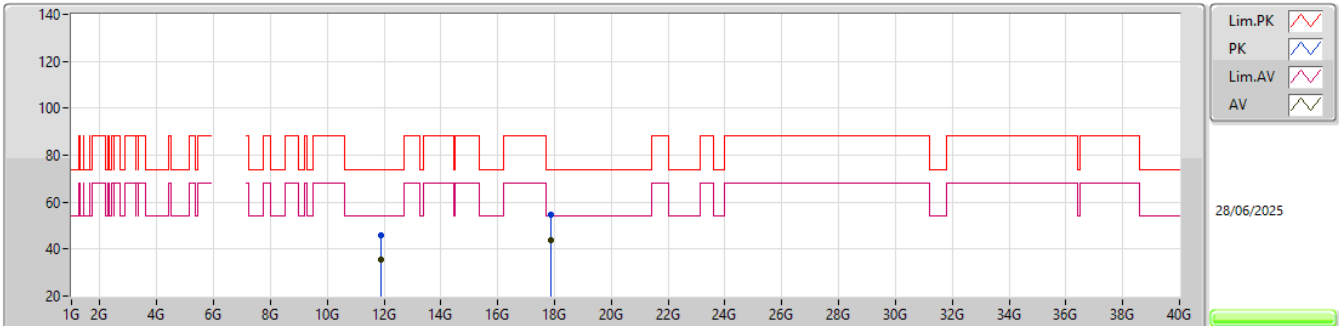EUT_Z_1TX
Setting 84
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.89902G	46.09	74.00	-27.91	60.84	3	Vertical	271	3.00	-	39.30	11.79	65.84			
AV	11.90058G	35.51	54.00	-18.49	50.26	3	Vertical	271	3.00	-	39.30	11.79	65.84			
PK	17.85942G	54.50	74.00	-19.50	59.60	3	Vertical	38	2.56	-	44.74	14.18	64.02			
AV	17.8725G	43.90	54.00	-10.10	48.93	3	Vertical	38	2.56	-	44.79	14.19	64.01			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5955MHz_TX

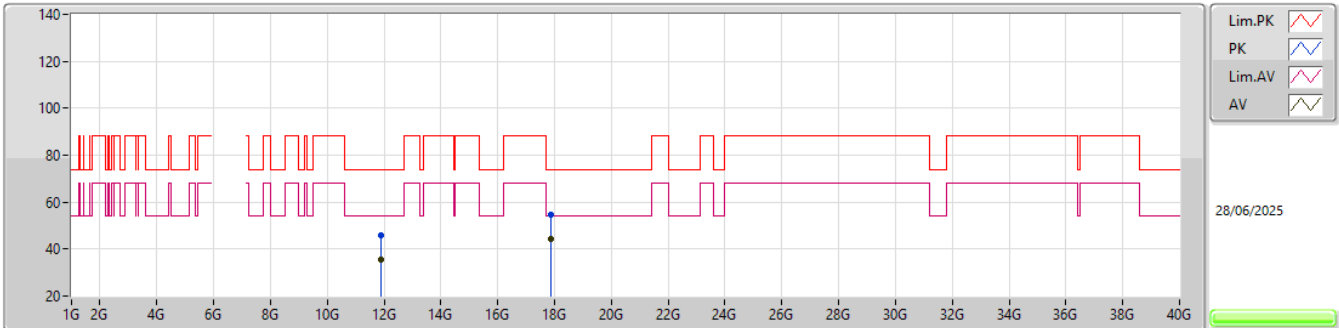EUT_Z_1TX
Setting 84
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.91192G	45.74	74.00	-28.26	60.50	3	Horizontal	213	1.80	-	39.28	11.79	65.83				
AV	11.90196G	35.59	54.00	-18.41	50.34	3	Horizontal	213	1.80	-	39.30	11.79	65.84				
PK	17.85366G	54.48	74.00	-19.52	59.62	3	Horizontal	165	2.33	-	44.71	14.18	64.03				
AV	17.87694G	44.13	54.00	-9.87	49.14	3	Horizontal	165	2.33	-	44.81	14.19	64.01				

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5955MHz_TX

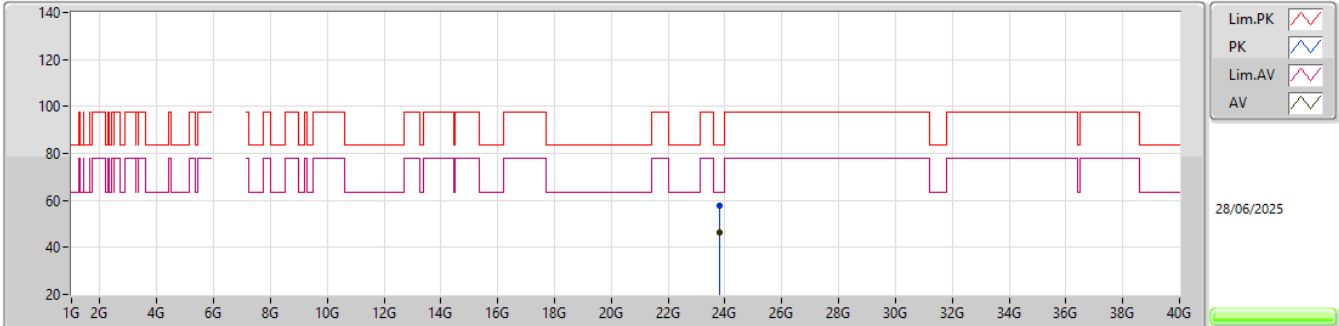


EUT_Z_1TX
Setting 84
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81439G	57.79	83.54	-25.75	47.94	1	Vertical	25	1.76	-	38.87	18.13	47.15			
AV	23.81901G	46.58	63.54	-16.96	36.73	1	Vertical	25	1.76	-	38.86	18.13	47.14			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5955MHz_TX

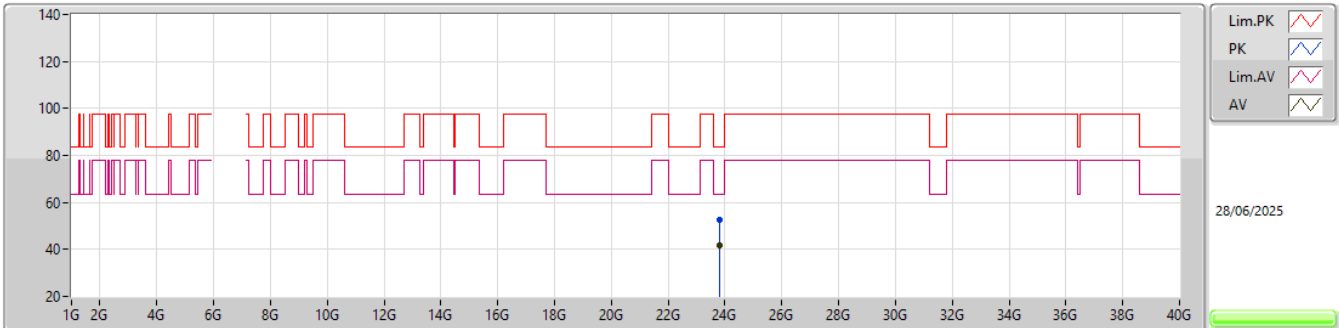EUT_Z_1TX
Setting 84
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81721G	52.73	83.54	-30.81	42.87	1	Horizontal	111	1.80	-	38.87	18.13	47.14			
AV	23.82168G	41.85	63.54	-21.69	32.00	1	Horizontal	111	1.80	-	38.86	18.13	47.14			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6195MHz_TX

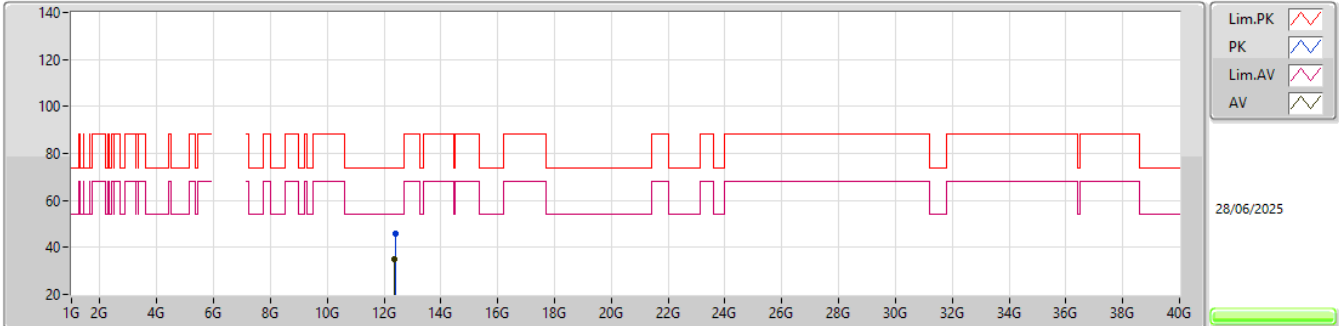


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40491G	45.86	74.00	-28.14	60.86	3	Vertical	222	1.90	-	38.80	11.80	65.60			
AV	12.37758G	35.23	54.00	-18.77	50.24	3	Vertical	222	1.90	-	38.80	11.80	65.61			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


6195MHz_TX

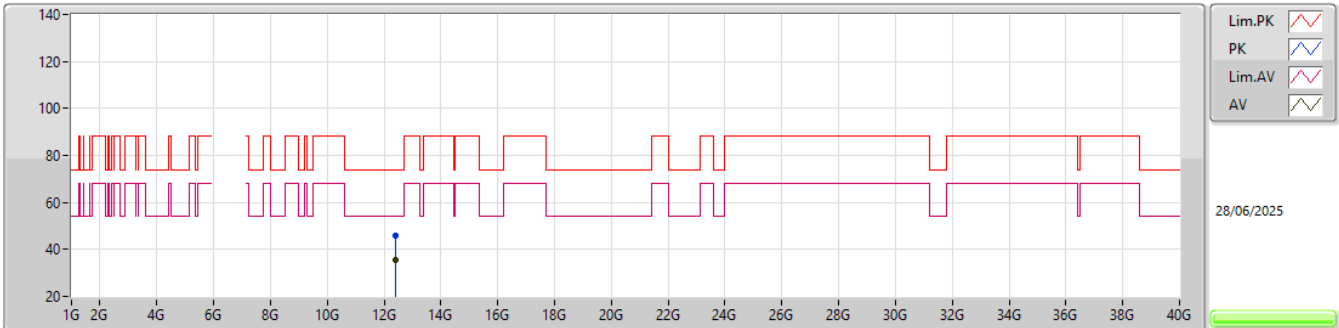EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39654G	45.77	74.00	-28.23	60.78	3	Horizontal	63	2.61	-	38.80	11.80	65.61			
AV	12.39513G	35.42	54.00	-18.58	50.43	3	Horizontal	63	2.61	-	38.80	11.80	65.61			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6195MHz_TX

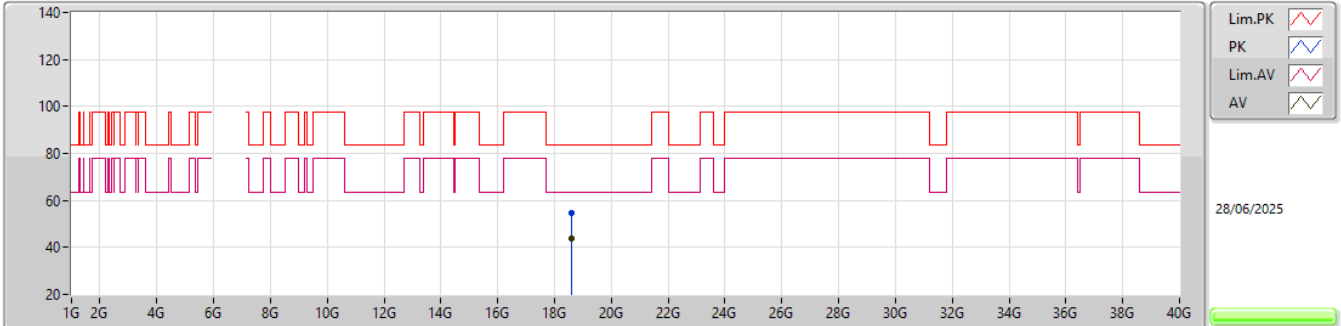


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.59223G	54.74	83.54	-28.80	50.78	1	Vertical	358	1.80	-	37.88	15.72	49.64			
AV	18.58803G	43.99	63.54	-19.55	40.05	1	Vertical	358	1.80	-	37.88	15.71	49.65			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6195MHz_TX

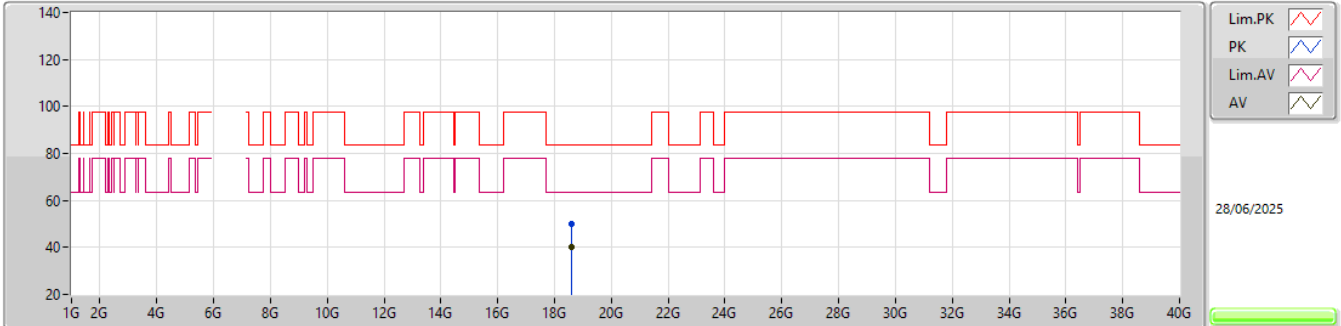


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.58821G	49.92	83.54	-33.62	45.98	1	Horizontal	283	2.00	-	37.88	15.71	49.65			
AV	18.58308G	39.99	63.54	-23.55	36.06	1	Horizontal	283	2.00	-	37.87	15.71	49.65			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6415MHz_TX

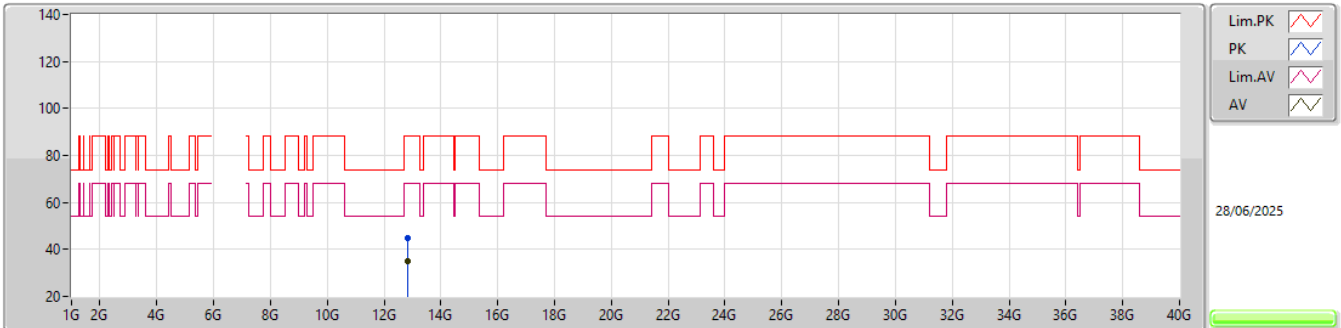


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81584G	45.01	88.20	-43.19	59.24	3	Vertical	134	2.96	-	39.13	11.77	65.13			
RMS	12.81566G	35.09	68.20	-33.11	49.32	3	Vertical	134	2.96	-	39.13	11.77	65.13			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6415MHz_TX

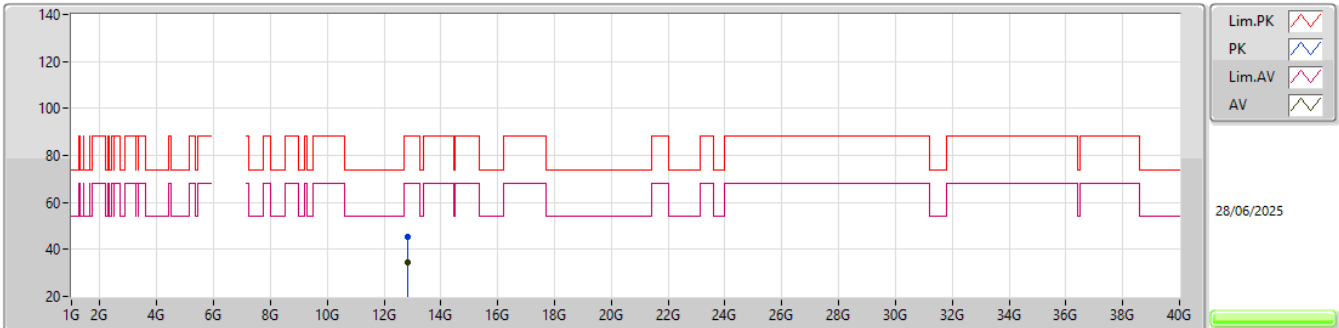


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82004G	45.49	88.20	-42.71	59.71	3	Horizontal	258	1.12	-	39.14	11.77	65.13			
RMS	12.82943G	34.71	68.20	-33.49	48.90	3	Horizontal	258	1.12	-	39.16	11.77	65.12			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6415MHz_TX

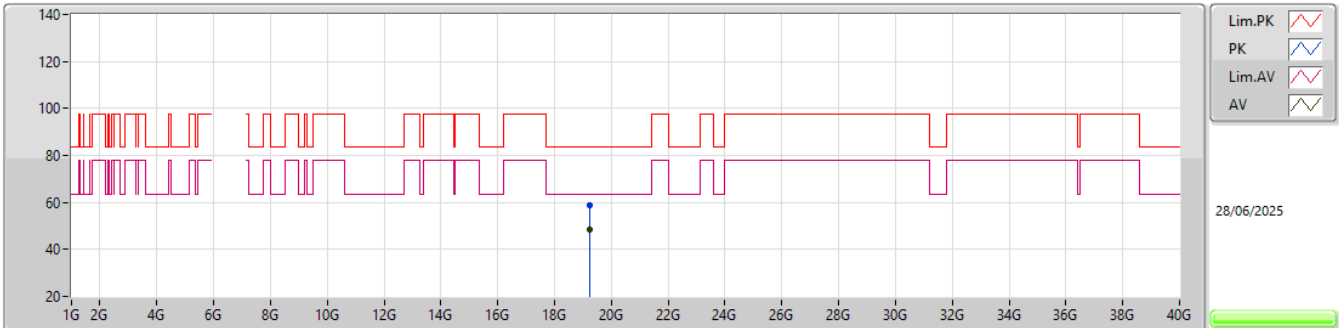


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.24182G	59.00	83.54	-24.54	54.54	1	Vertical	194	1.80	-	37.90	16.01	49.45			
AV	19.24833G	48.51	63.54	-15.03	44.05	1	Vertical	194	1.80	-	37.90	16.01	49.45			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6415MHz_TX

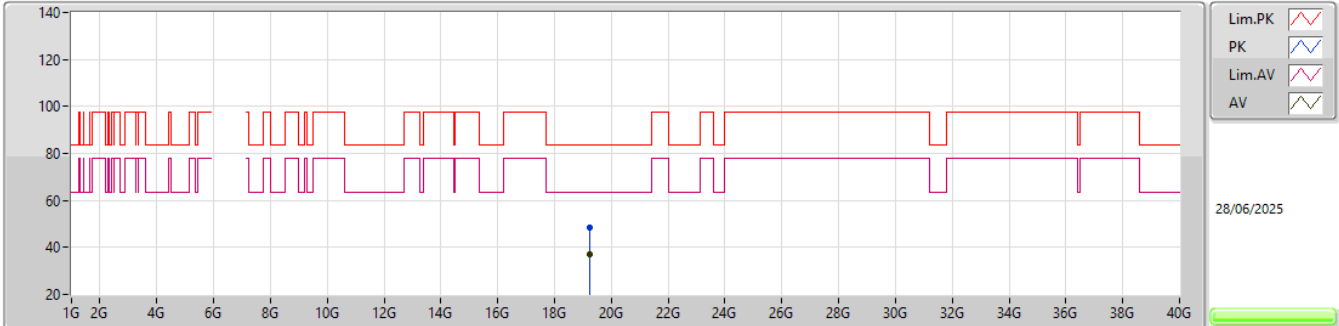


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2486G	48.64	83.54	-34.90	44.18	1	Horizontal	258	1.64	-	37.90	16.01	49.45			
AV	19.24917G	37.20	63.54	-26.34	32.74	1	Horizontal	258	1.64	-	37.90	16.01	49.45			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6435MHz_TX

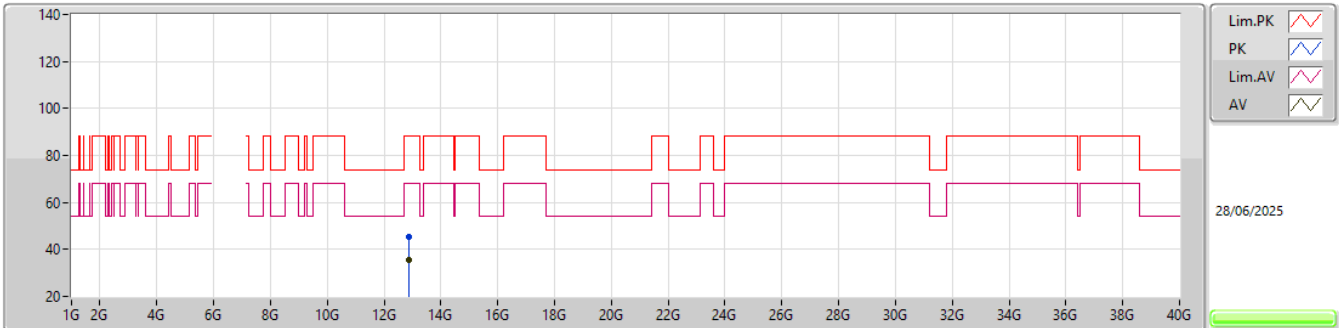


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8709G	45.19	88.20	-43.01	59.25	3	Vertical	334	2.23	-	39.24	11.76	65.06			
RMS	12.87873G	35.34	68.20	-32.86	49.37	3	Vertical	334	2.23	-	39.26	11.76	65.05			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6435MHz_TX

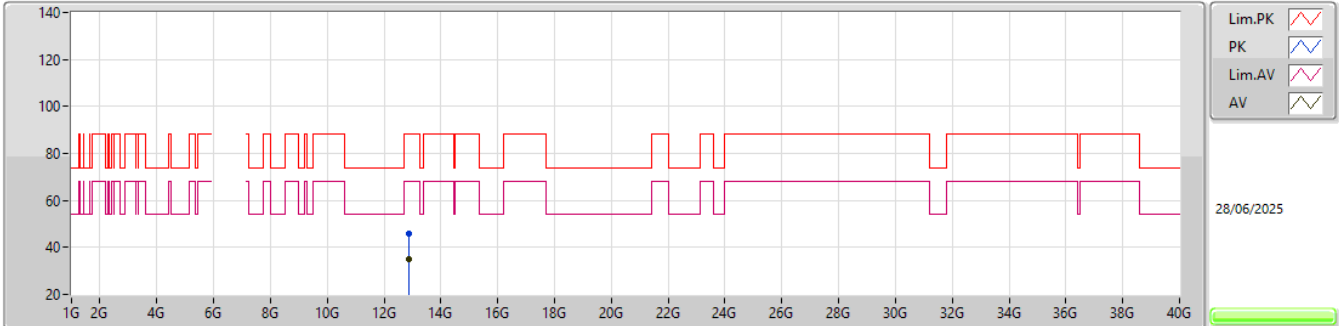


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.87768G	45.89	88.20	-42.31	59.92	3	Horizontal	235	2.43	-	39.26	11.76	65.05			
RMS	12.86625G	35.24	68.20	-32.96	49.30	3	Horizontal	235	2.43	-	39.23	11.77	65.06			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6435MHz_TX

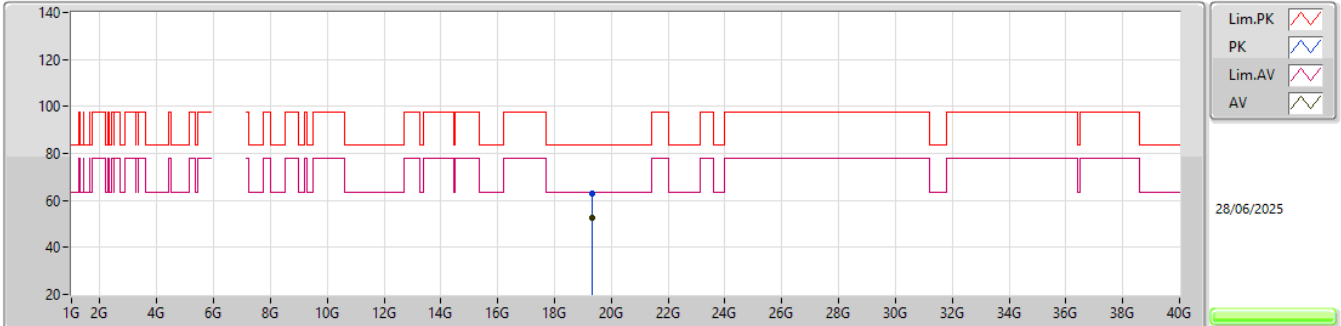


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.31715G	62.87	83.54	-20.67	58.44	1	Vertical	72	1.81	-	37.90	16.02	49.49			
AV	19.30602G	52.70	63.54	-10.84	48.27	1	Vertical	72	1.81	-	37.90	16.02	49.49			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6435MHz_TX

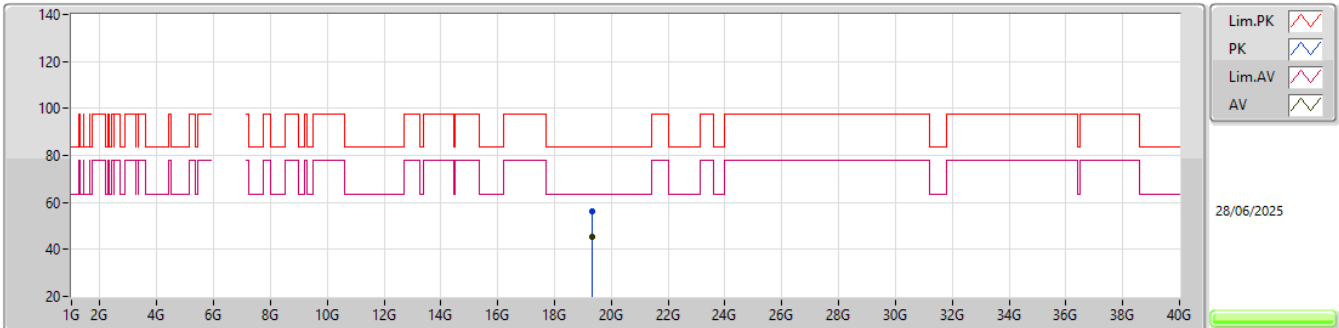


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.3167G	56.35	83.54	-27.19	51.92	1	Horizontal	44	1.80	-	37.90	16.02	49.49			
AV	19.31097G	45.16	63.54	-18.38	40.73	1	Horizontal	44	1.80	-	37.90	16.02	49.49			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6475MHz_TX

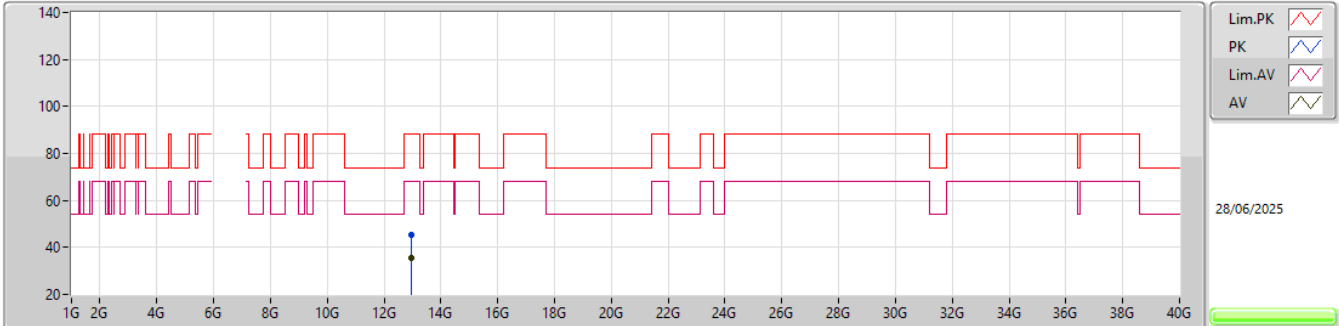


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95861G	45.25	88.20	-42.95	58.93	3	Vertical	80	2.79	-	39.50	11.76	64.94			
RMS	12.95426G	35.38	68.20	-32.82	49.06	3	Vertical	80	2.79	-	39.50	11.76	64.94			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6475MHz_TX

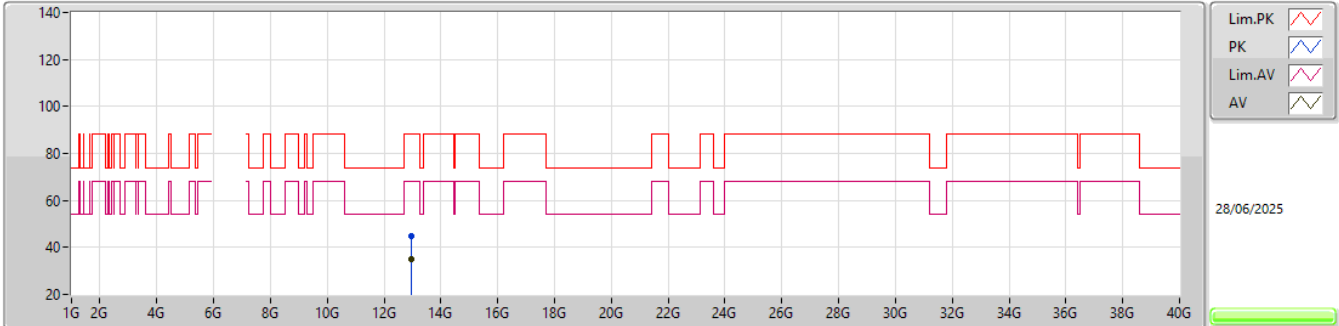


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96494G	45.07	88.20	-43.13	58.74	3	Horizontal	141	1.61	-	39.50	11.76	64.93			
RMS	12.95324G	35.00	68.20	-33.20	48.68	3	Horizontal	141	1.61	-	39.50	11.76	64.94			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6475MHz_TX

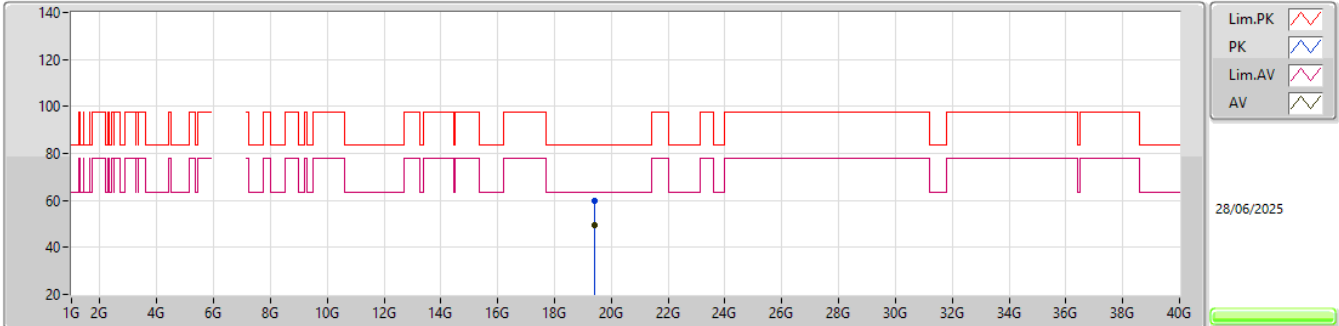


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42164G	59.89	83.54	-23.65	55.56	1	Vertical	150	1.80	-	37.84	16.04	49.55			
AV	19.42668G	49.34	63.54	-14.20	45.00	1	Vertical	150	1.80	-	37.85	16.05	49.56			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6475MHz_TX

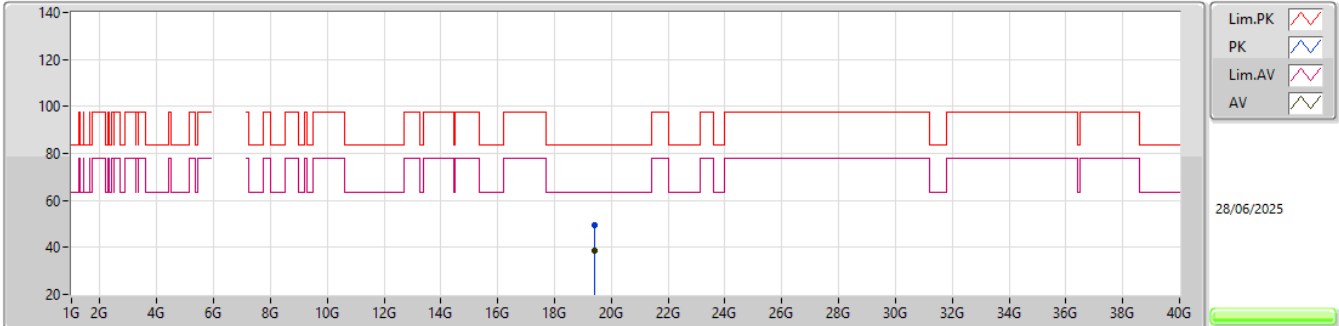


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.41939G	49.62	83.54	-33.92	45.29	1	Horizontal	124	2.51	-	37.84	16.04	49.55			
AV	19.42929G	38.56	63.54	-24.98	34.21	1	Horizontal	124	2.51	-	37.86	16.05	49.56			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6515MHz_TX

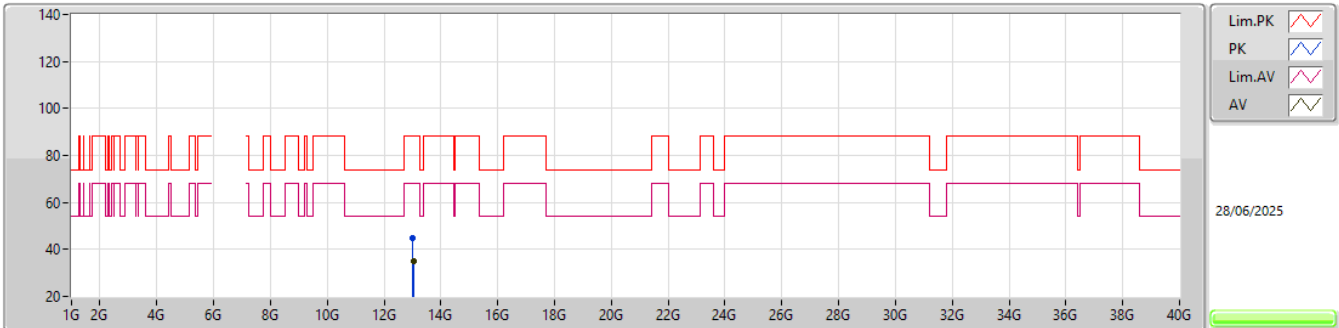


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.01857G	44.72	88.20	-43.48	58.35	3	Vertical	59	2.88	-	39.50	11.75	64.88			
RMS	13.02511G	34.82	68.20	-33.38	48.45	3	Vertical	59	2.88	-	39.50	11.75	64.88			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6515MHz_TX

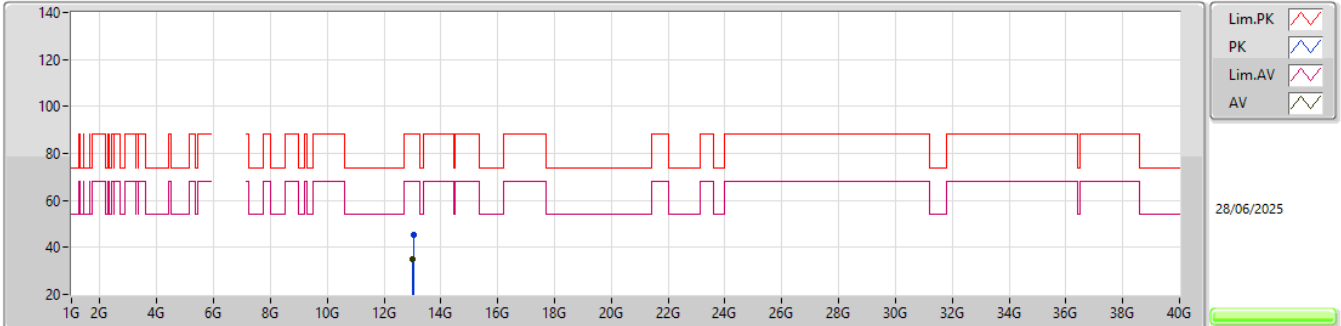


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.03336G	45.18	88.20	-43.02	58.81	3	Horizontal	177	1.84	-	39.50	11.75	64.88			
RMS	13.02241G	35.04	68.20	-33.16	48.67	3	Horizontal	177	1.84	-	39.50	11.75	64.88			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6515MHz_TX

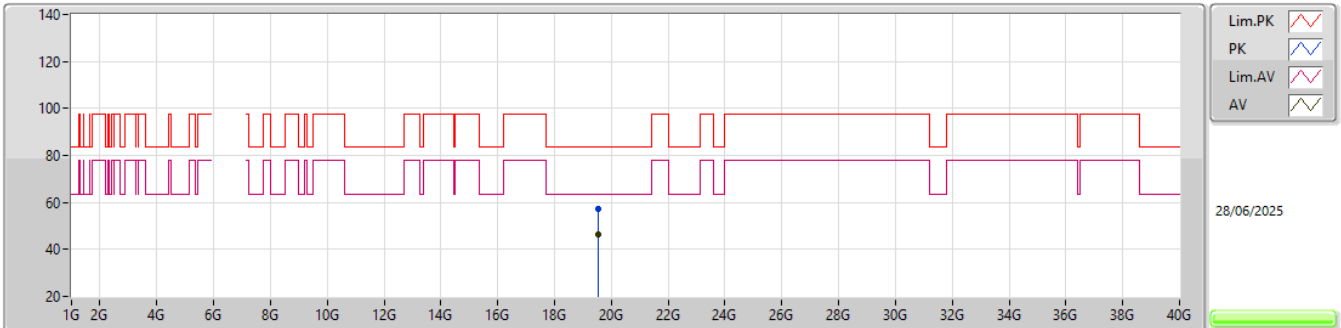


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54998G	57.38	83.54	-26.16	53.07	1	Vertical	152	1.80	-	37.80	16.08	49.57			
AV	19.54788G	46.62	63.54	-16.92	42.31	1	Vertical	152	1.80	-	37.80	16.08	49.57			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6515MHz_TX

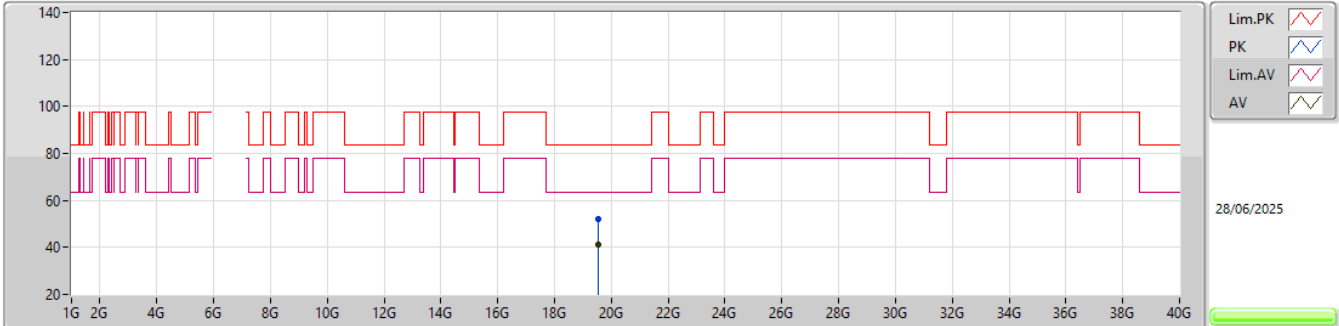


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.53966G	51.90	83.54	-31.64	47.60	1	Horizontal	298	1.80	-	37.80	16.07	49.57			
AV	19.53726G	41.11	63.54	-22.43	36.81	1	Horizontal	298	1.80	-	37.80	16.07	49.57			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6535MHz_TX

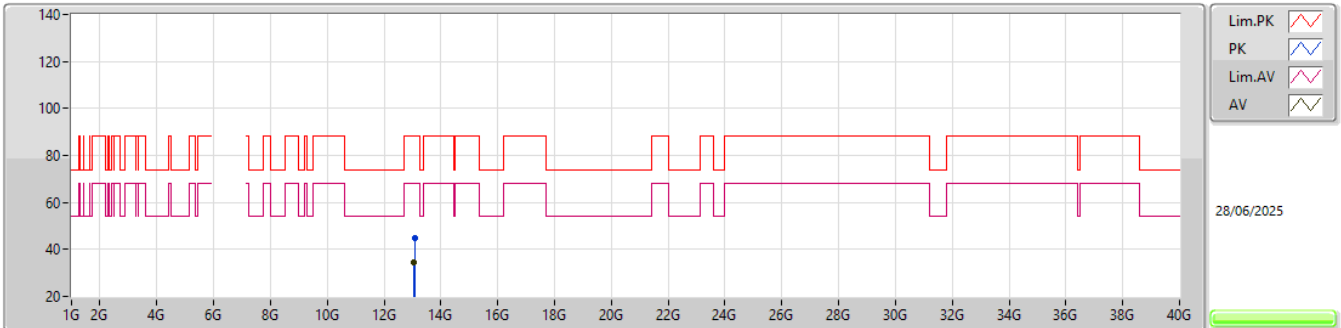


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.08005G	44.81	88.20	-43.39	58.37	3	Vertical	358	1.39	-	39.56	11.75	64.87			
RMS	13.05812G	34.46	68.20	-33.74	48.06	3	Vertical	358	1.39	-	39.52	11.75	64.87			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6535MHz_TX

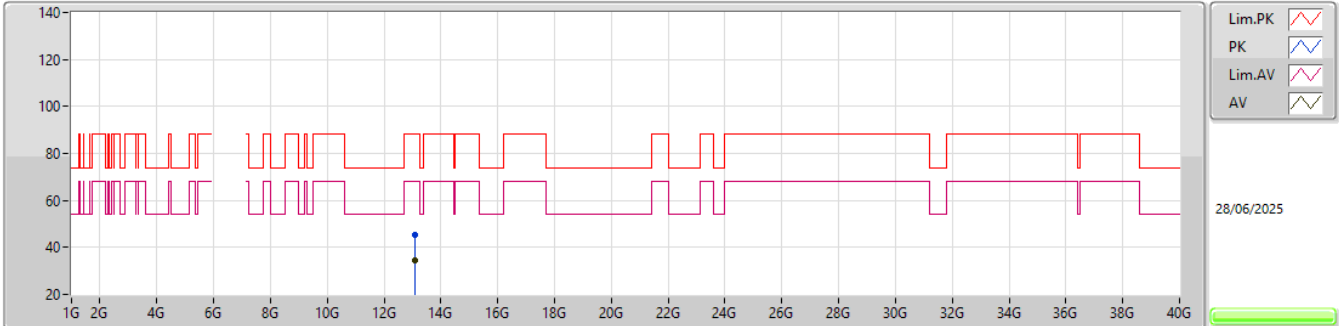


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.07789G	45.28	88.20	-42.92	58.84	3	Horizontal	267	1.47	-	39.56	11.75	64.87			
RMS	13.085G	34.39	68.20	-33.81	47.94	3	Horizontal	267	1.47	-	39.57	11.75	64.87			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6535MHz_TX

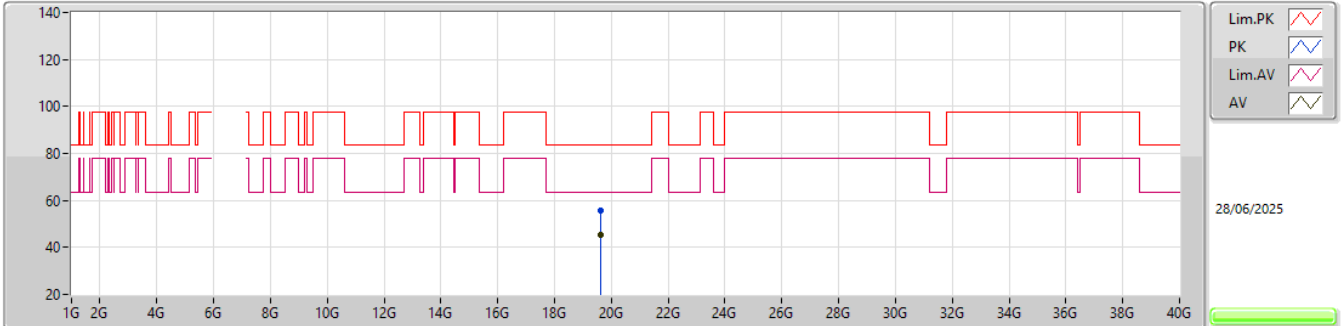


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.61073G	55.87	83.54	-27.67	51.41	1	Vertical	213	1.80	-	37.88	16.10	49.52			
AV	19.60347G	45.11	63.54	-18.43	40.65	1	Vertical	213	1.80	-	37.89	16.10	49.53			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6535MHz_TX

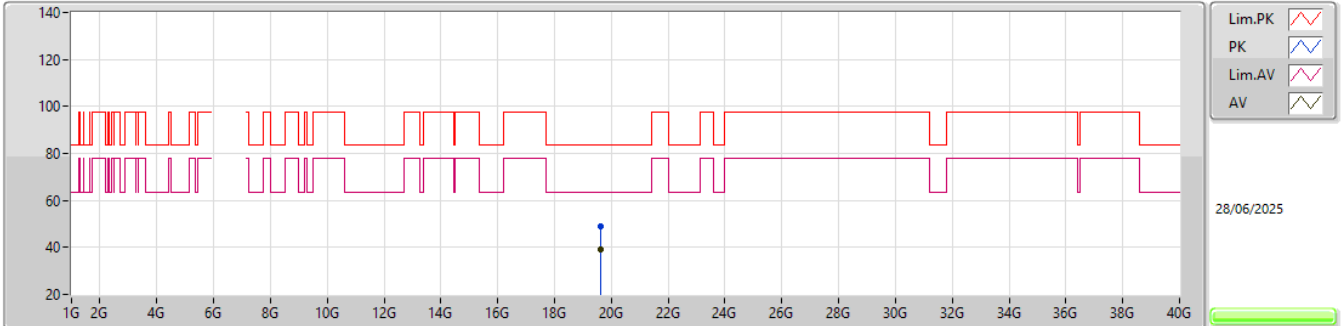


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6188G	48.92	83.54	-34.62	44.48	1	Horizontal	177	2.04	-	37.86	16.10	49.52			
AV	19.60806G	38.96	63.54	-24.58	34.51	1	Horizontal	177	2.04	-	37.88	16.10	49.53			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6695MHz_TX

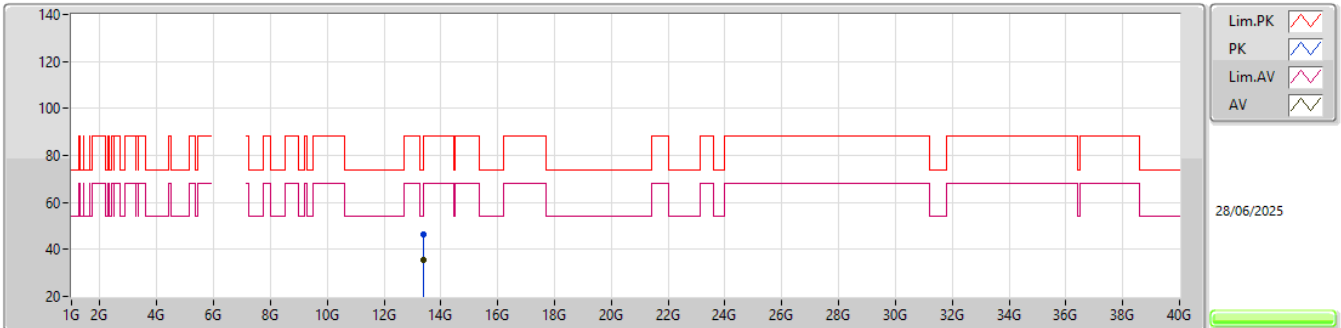


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39489G	46.19	74.00	-27.81	59.11	3	Vertical	117	1.54	-	40.19	11.73	64.84			
AV	13.39693G	35.72	54.00	-18.28	48.64	3	Vertical	117	1.54	-	40.19	11.73	64.84			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6695MHz_TX

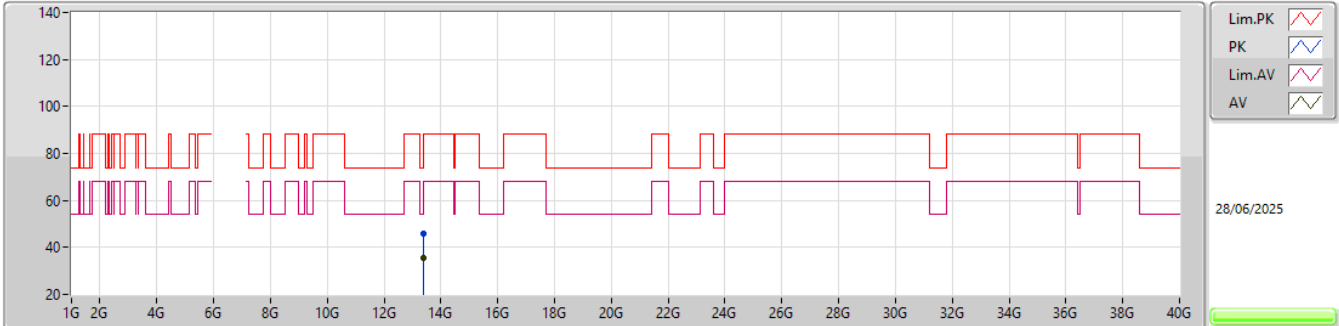


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39957G	45.67	74.00	-28.33	58.58	3	Horizontal	4	1.59	-	40.20	11.73	64.84			
AV	13.38394G	35.43	54.00	-18.57	48.37	3	Horizontal	4	1.59	-	40.17	11.73	64.84			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6695MHz_TX

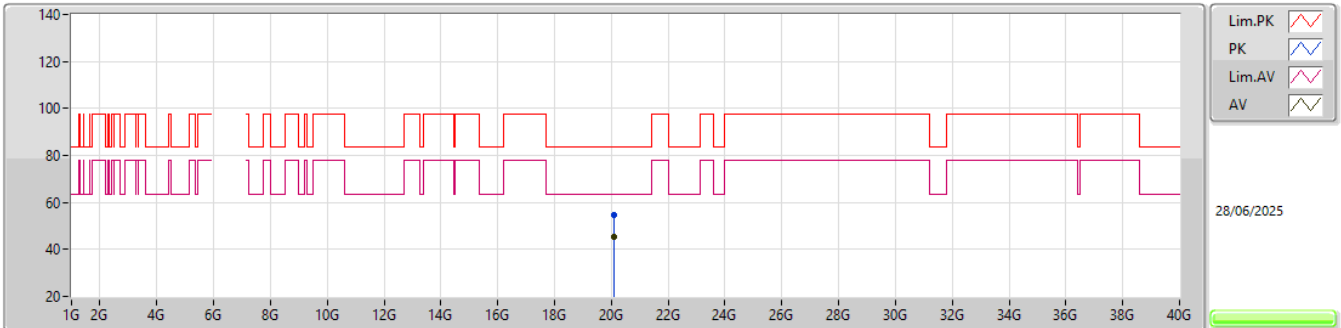


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.08983G	54.54	83.54	-29.00	49.63	1	Vertical	287	1.58	-	37.88	16.28	49.25			
AV	20.08473G	45.14	63.54	-18.40	40.25	1	Vertical	287	1.58	-	37.87	16.27	49.25			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6695MHz_TX

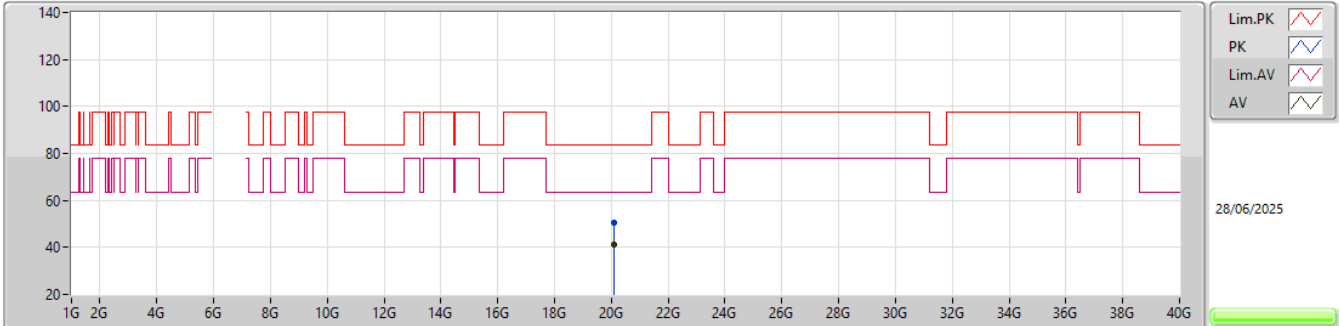


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.07618G	50.61	83.54	-32.93	45.75	1	Horizontal	235	1.80	-	37.85	16.27	49.26			
AV	20.09037G	41.07	63.54	-22.47	36.16	1	Horizontal	235	1.80	-	37.88	16.28	49.25			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6875MHz_TX

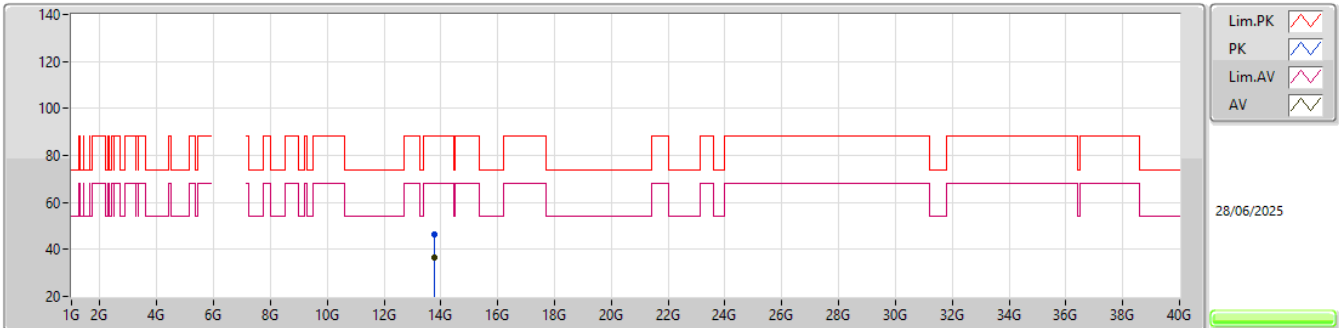


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.75891G	46.63	88.20	-41.57	58.94	3	Vertical	141	2.71	-	40.70	11.70	64.71			
RMS	13.75744G	36.63	68.20	-31.57	48.94	3	Vertical	141	2.71	-	40.70	11.70	64.71			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6875MHz_TX

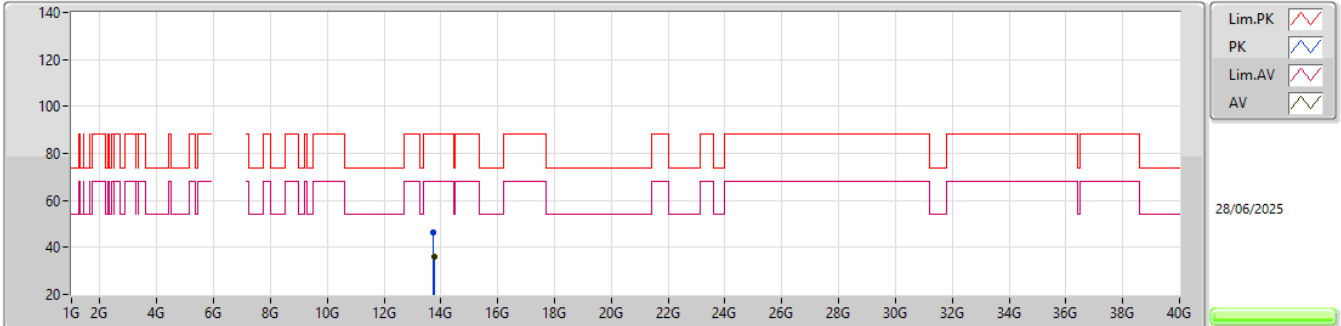


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74973G	46.22	88.20	-41.98	58.54	3	Horizontal	221	2.21	-	40.70	11.70	64.72			
RMS	13.75189G	36.08	68.20	-32.12	48.39	3	Horizontal	221	2.21	-	40.70	11.70	64.71			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6875MHz_TX

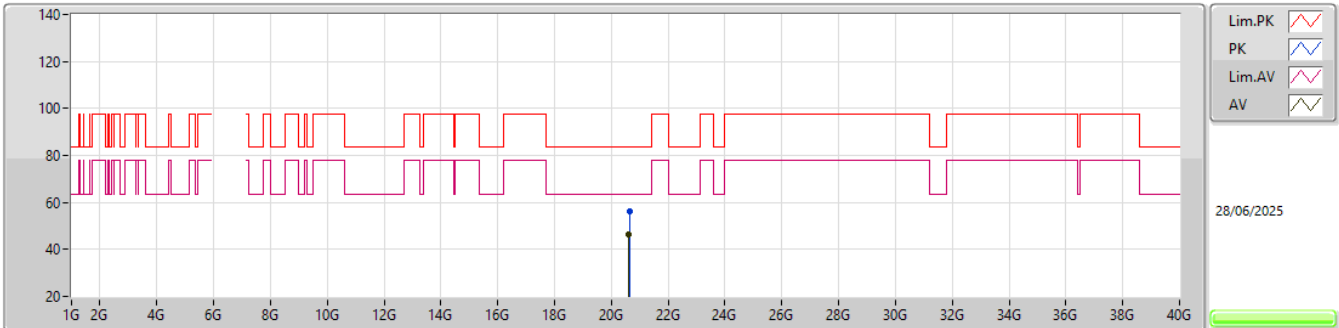


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.63004G	56.45	83.54	-27.09	51.14	1	Vertical	50	1.87	-	38.00	16.47	49.16			
AV	20.62284G	46.27	63.54	-17.27	40.97	1	Vertical	50	1.87	-	38.00	16.47	49.17			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6875MHz_TX

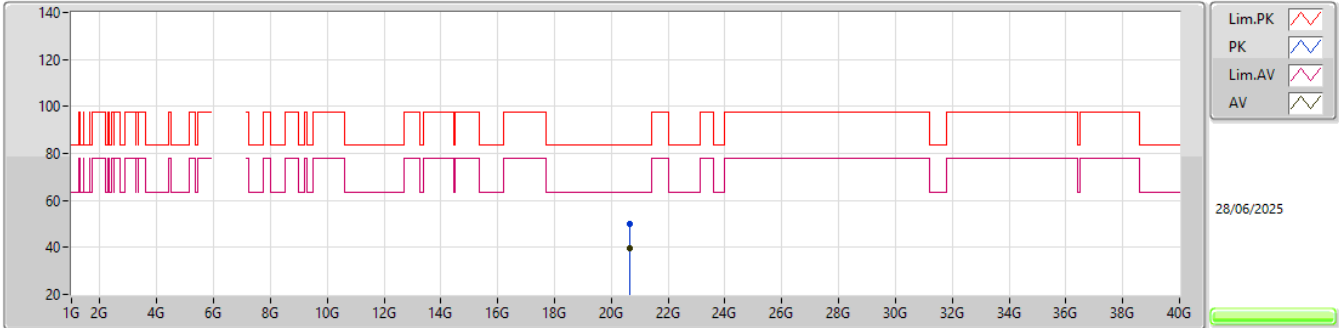


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.63949G	49.94	83.54	-33.60	44.63	1	Horizontal	253	1.35	-	38.00	16.47	49.16			
AV	20.63094G	39.59	63.54	-23.95	34.28	1	Horizontal	253	1.35	-	38.00	16.47	49.16			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6895MHz_TX

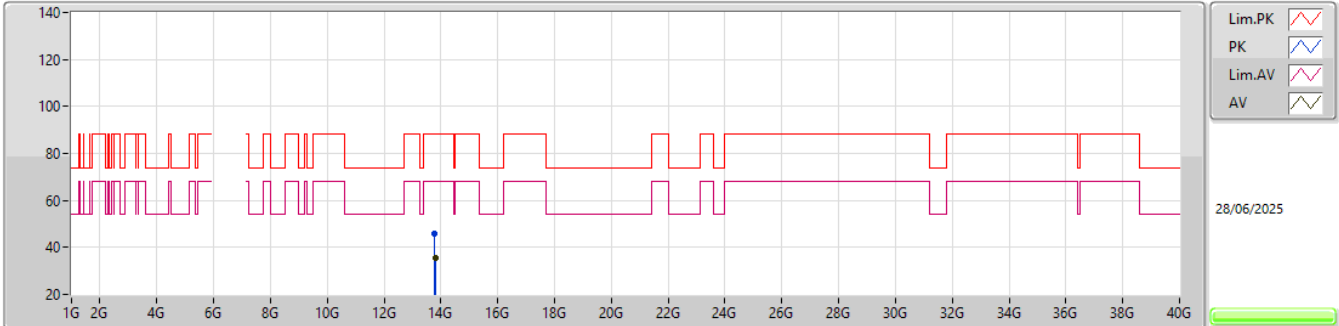


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.78436G	46.12	88.20	-42.08	58.42	3	Vertical	62	2.45	-	40.70	11.70	64.70			
RMS	13.79777G	35.34	68.20	-32.86	47.63	3	Vertical	62	2.45	-	40.70	11.70	64.69			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6895MHz_TX

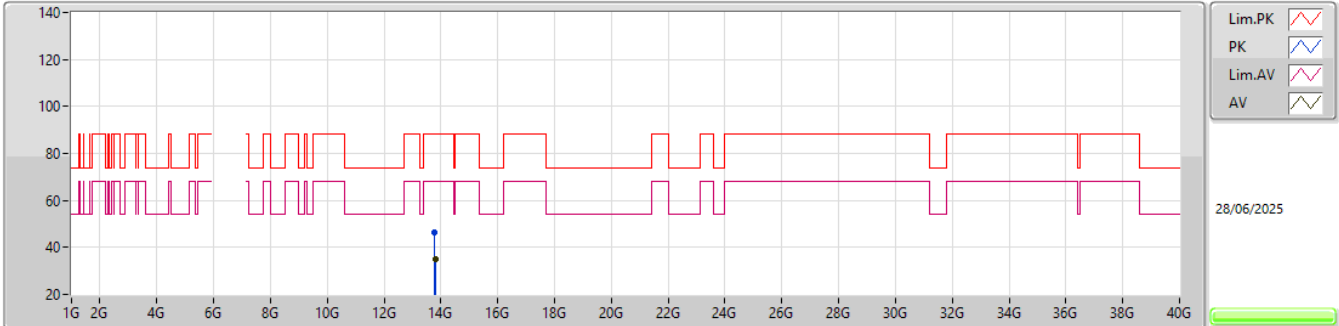


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.78541G	46.21	88.20	-41.99	58.51	3	Horizontal	182	1.62	-	40.70	11.70	64.70			
RMS	13.79789G	35.17	68.20	-33.03	47.46	3	Horizontal	182	1.62	-	40.70	11.70	64.69			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6895MHz_TX

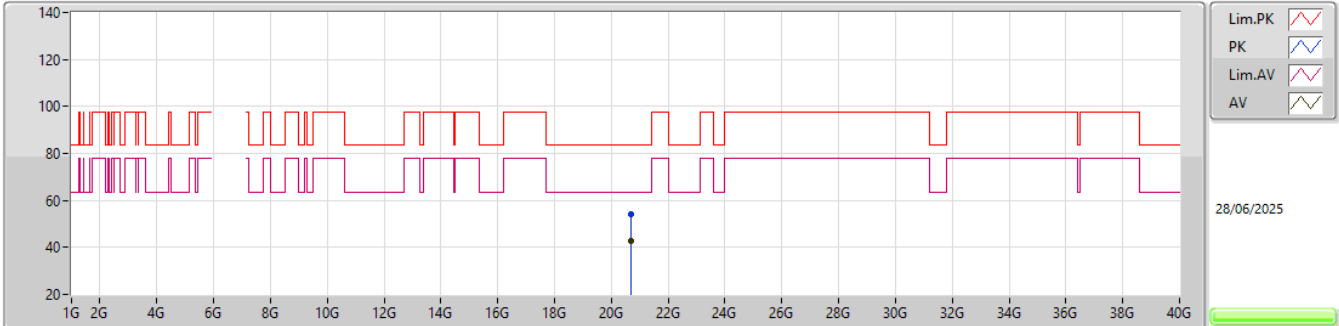


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.69664G	54.20	83.54	-29.34	48.96	1	Vertical	43	1.19	-	37.91	16.46	49.13			
AV	20.68113G	42.98	63.54	-20.56	37.72	1	Vertical	43	1.19	-	37.94	16.46	49.14			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6895MHz_TX

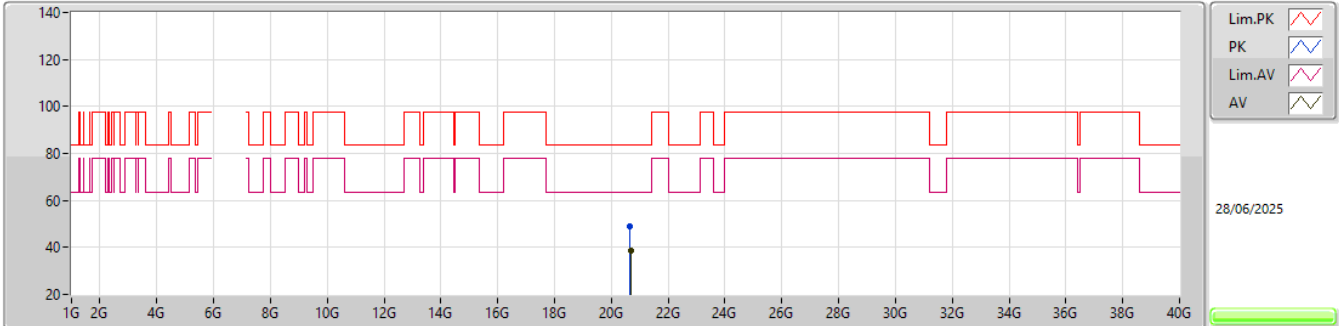


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.67039G	48.77	83.54	-34.77	43.48	1	Horizontal	15	1.80	-	37.96	16.47	49.14			
AV	20.69478G	38.81	63.54	-24.73	33.57	1	Horizontal	15	1.80	-	37.91	16.46	49.13			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6995MHz_TX

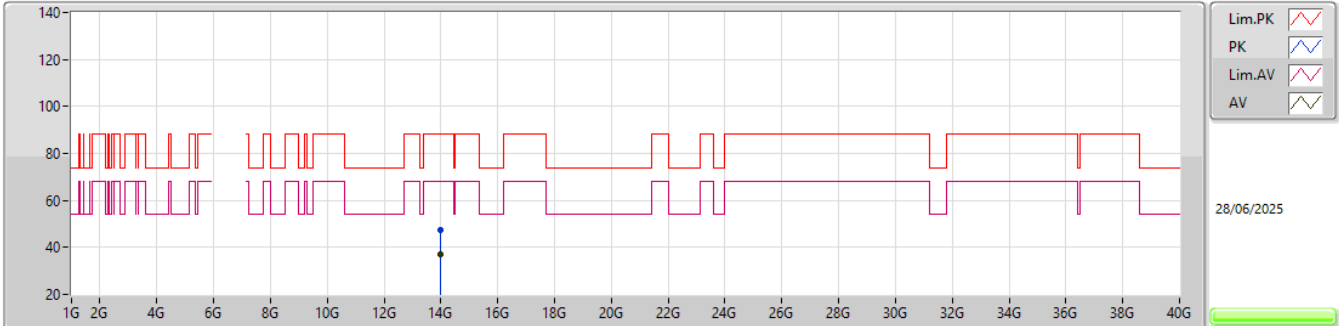


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.9774G	47.16	88.20	-41.04	59.08	3	Vertical	48	1.51	-	41.01	11.68	64.61			
RMS	13.99132G	37.14	68.20	-31.06	48.99	3	Vertical	48	1.51	-	41.07	11.68	64.60			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6995MHz_TX

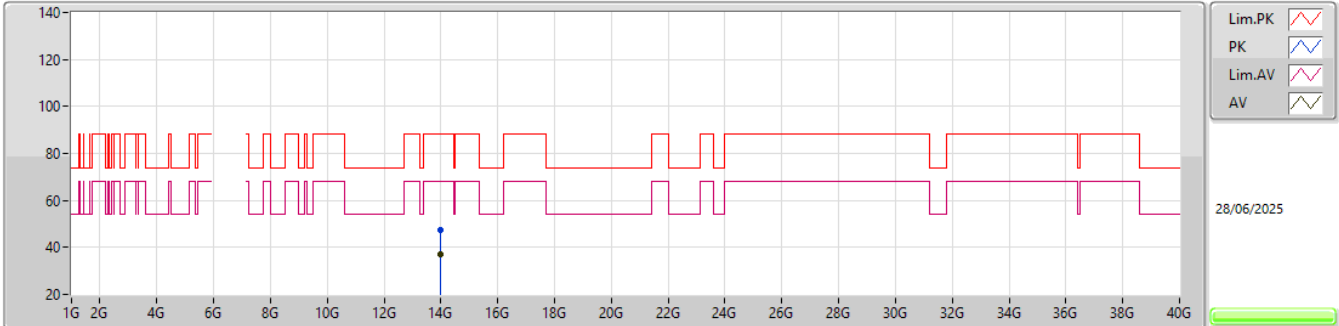


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.97578G	47.35	88.20	-40.85	59.28	3	Horizontal	321	1.39	-	41.00	11.68	64.61			
RMS	13.9954G	37.23	68.20	-30.97	49.07	3	Horizontal	321	1.39	-	41.08	11.68	64.60			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6995MHz_TX

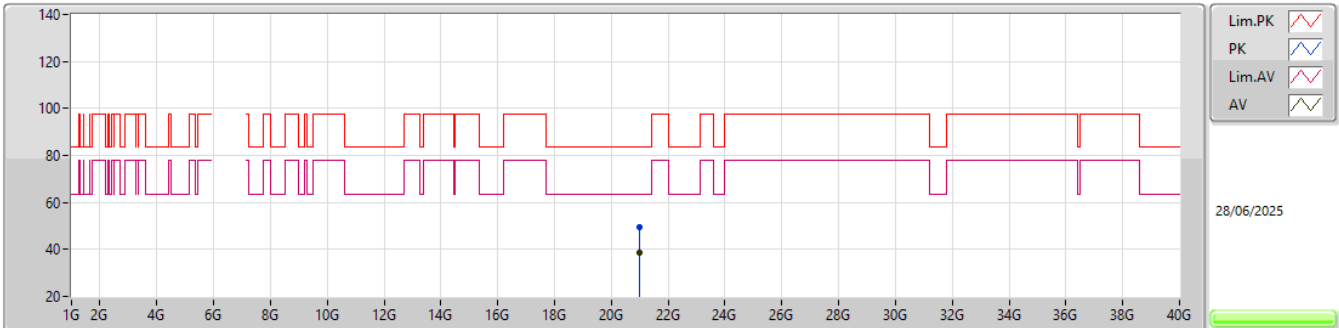


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.99097G	49.28	83.54	-34.26	43.77	1	Vertical	4	1.83	-	38.06	16.42	48.97			
AV	20.98719G	38.87	63.54	-24.67	33.38	1	Vertical	4	1.83	-	38.05	16.42	48.98			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

6995MHz_TX

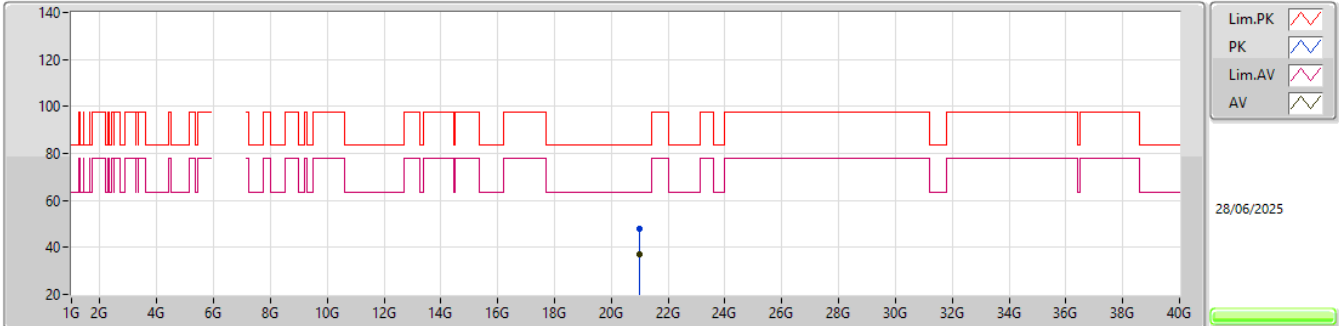


EUT_Z_1TX
Setting 108
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.99073G	48.13	83.54	-35.41	42.62	1	Horizontal	84	1.26	-	38.06	16.42	48.97			
AV	20.97138G	37.20	63.54	-26.34	31.77	1	Horizontal	84	1.26	-	37.99	16.42	48.98			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

7095MHz_TX

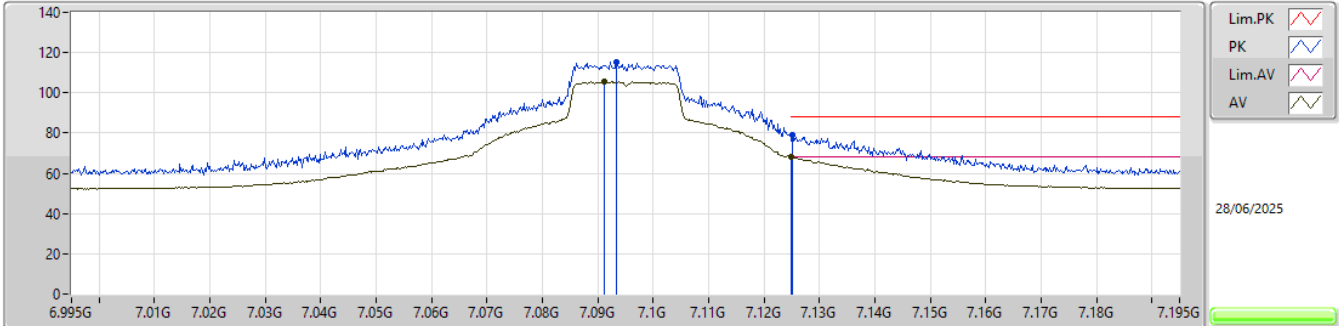


EUT_Z_1TX
Setting 89
03-E-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0934G	115.51	Inf	-Inf	106.50	3	Vertical	15	2.16	-	35.70	8.45	35.14			
RMS	7.0912G	105.54	Inf	-Inf	96.53	3	Vertical	15	2.16	-	35.70	8.45	35.14			
PK	7.1252G	79.28	88.20	-8.92	70.09	3	Vertical	15	2.16	-	35.85	8.48	35.14			
RMS	7.125G	67.89	68.20	-0.31	58.70	3	Vertical	15	2.16	-	35.85	8.48	35.14			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


7095MHz_TX

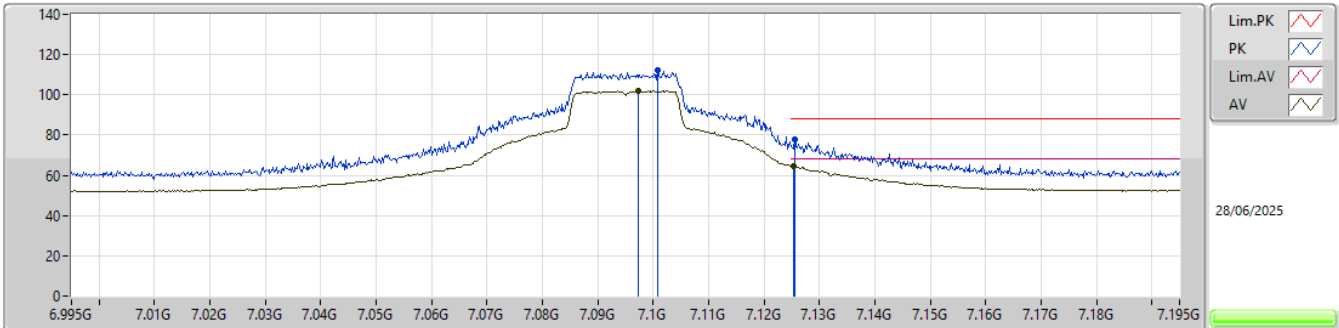EUT_Z_1TX
Setting 89
03-E-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.1008G	112.50	Inf	-Inf	103.48	3	Horizontal	24	2.17	-	35.70	8.46	35.14			
RMS	7.0972G	101.85	Inf	-Inf	92.84	3	Horizontal	24	2.17	-	35.70	8.45	35.14			
PK	7.1256G	78.11	88.20	-10.09	68.92	3	Horizontal	24	2.17	-	35.85	8.48	35.14			
RMS	7.1254G	64.68	68.20	-3.52	55.49	3	Horizontal	24	2.17	-	35.85	8.48	35.14			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

7095MHz_TX

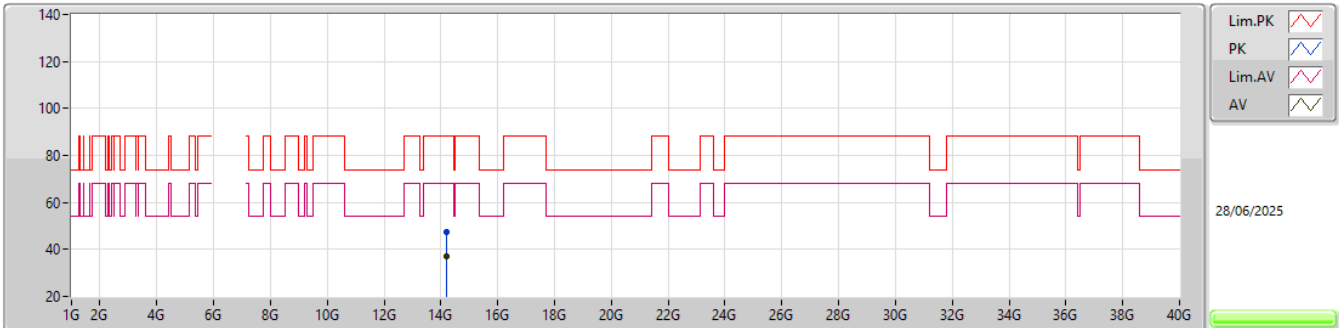


EUT_Z_1TX
Setting 89
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.1999G	47.24	88.20	-40.96	58.28	3	Vertical	216	1.46	-	41.60	11.84	64.48			
RMS	14.19717G	36.86	68.20	-31.34	47.91	3	Vertical	216	1.46	-	41.59	11.84	64.48			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

7095MHz_TX

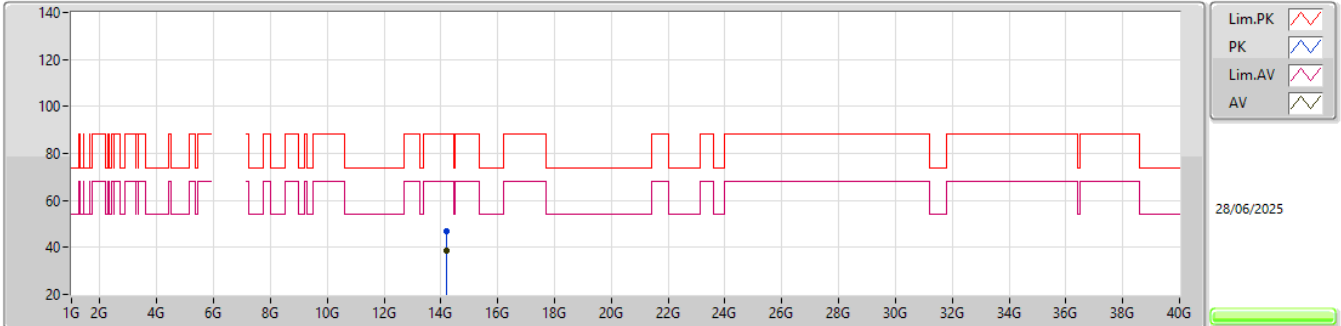


EUT_Z_1TX
Setting 89
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.18094G	47.11	88.20	-41.09	58.26	3	Horizontal	215	1.29	-	41.52	11.82	64.49			
RMS	14.19072G	38.59	68.20	-29.61	49.69	3	Horizontal	215	1.29	-	41.56	11.83	64.49			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

7095MHz_TX

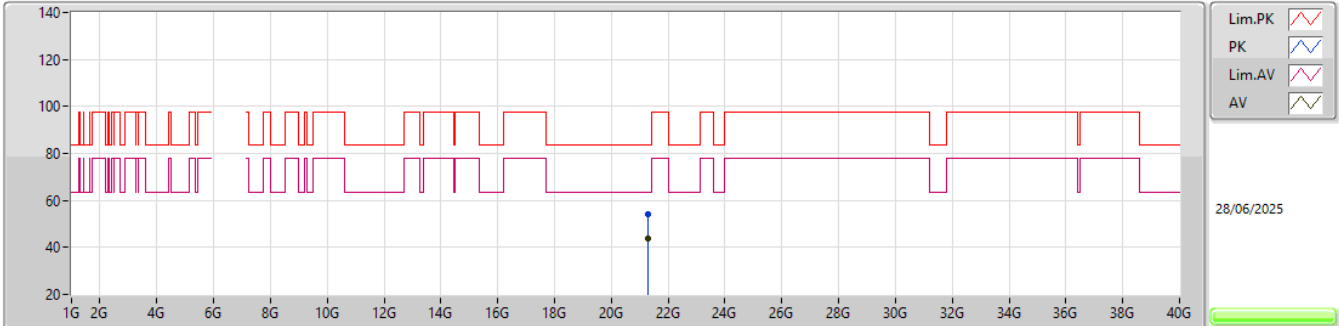


EUT_Z_1TX
Setting 89
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.29952G	54.38	83.54	-29.16	48.38	1	Vertical	188	1.17	-	38.10	16.74	48.84			
AV	21.28905G	43.58	63.54	-19.96	37.59	1	Vertical	188	1.17	-	38.10	16.73	48.84			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


7095MHz_TX

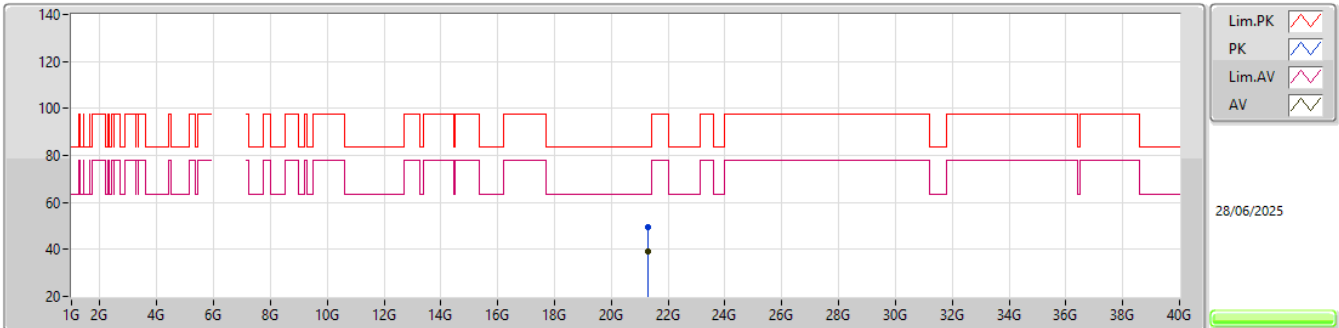EUT_Z_1TX
Setting 89
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.27603G	49.69	83.54	-33.85	43.73	1	Horizontal	350	1.92	-	38.10	16.71	48.85			
AV	21.28533G	39.20	63.54	-24.34	33.22	1	Horizontal	350	1.92	-	38.10	16.72	48.84			

5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5965MHz_TX

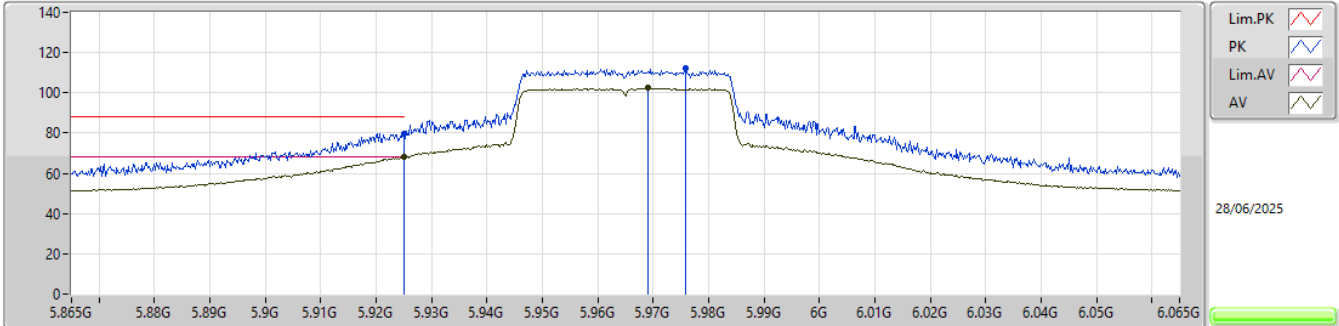


EUT_Z_1TX
Setting 74
03-E-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	79.68	88.20	-8.52	72.19	3	Vertical	25	2.25	-	34.60	8.09	35.20			
RMS	5.925G	68.18	68.20	-0.02	60.69	3	Vertical	25	2.25	-	34.60	8.09	35.20			
PK	5.9758G	112.32	Inf	-Inf	104.67	3	Vertical	25	2.25	-	34.70	8.14	35.19			
RMS	5.969G	102.29	Inf	-Inf	94.64	3	Vertical	25	2.25	-	34.70	8.14	35.19			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5965MHz_TX

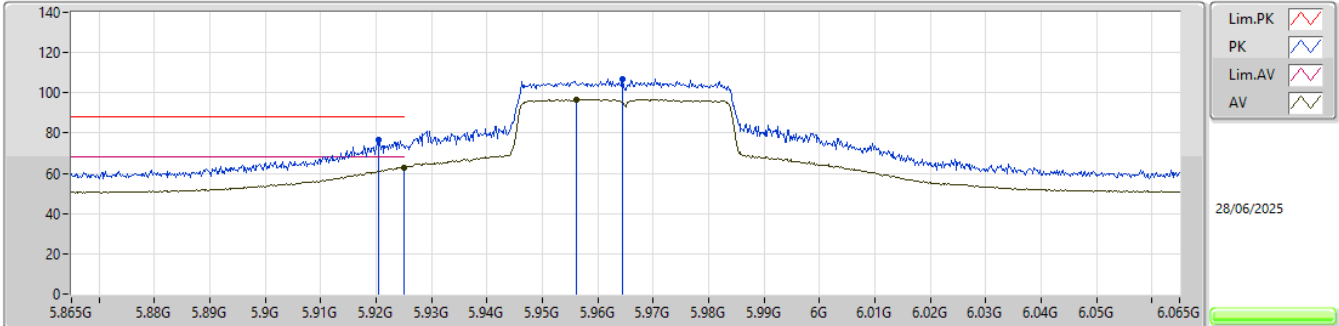


EUT_Z_1TX
Setting 74
03-E-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9204G	76.60	88.20	-11.60	69.13	3	Horizontal	1	2.36	-	34.58	8.09	35.20			
RMS	5.925G	62.99	68.20	-5.21	55.50	3	Horizontal	1	2.36	-	34.60	8.09	35.20			
PK	5.9644G	106.95	Inf	-Inf	99.31	3	Horizontal	1	2.36	-	34.70	8.13	35.19			
RMS	5.9562G	96.78	Inf	-Inf	89.15	3	Horizontal	1	2.36	-	34.70	8.12	35.19			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5965MHz_TX

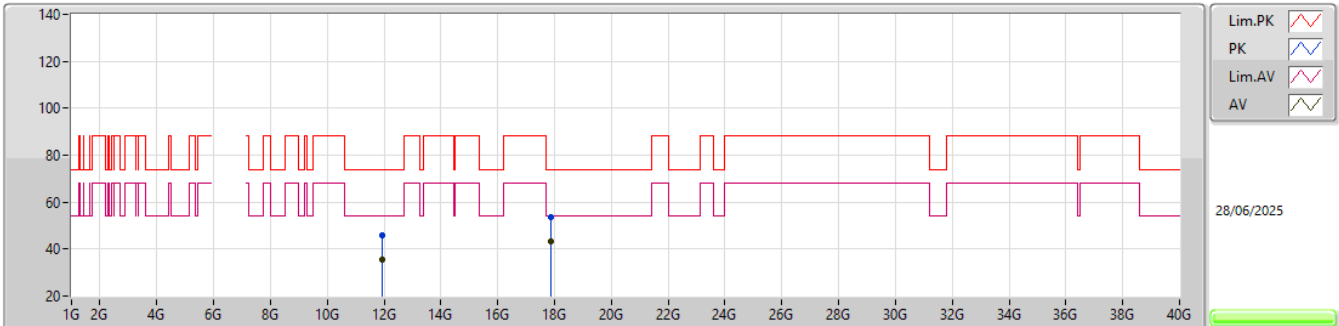EUT_Z_1TX
Setting 74
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.93885G	45.68	74.00	-28.32	60.46	3	Vertical	321	1.39	-	39.22	11.81	65.81			
AV	11.9159G	35.26	54.00	-18.74	50.02	3	Vertical	321	1.39	-	39.27	11.80	65.83			
PK	17.88582G	53.44	74.00	-20.56	58.42	3	Vertical	286	2.17	-	44.84	14.19	64.01			
AV	17.88417G	43.31	54.00	-10.69	48.29	3	Vertical	286	2.17	-	44.84	14.19	64.01			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5965MHz_TX

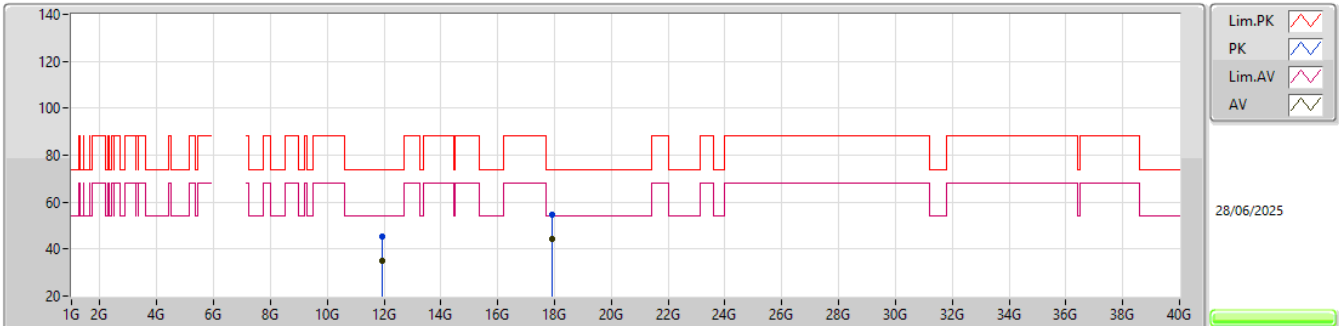EUT_Z_1TX
Setting 74
03-E-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.92175G	45.34	74.00	-28.66	60.10	3	Horizontal	72	2.21	-	39.26	11.80	65.82				
AV	11.93876G	35.09	54.00	-18.91	49.87	3	Horizontal	72	2.21	-	39.22	11.81	65.81				
PK	17.89437G	54.56	74.00	-19.44	59.48	3	Horizontal	164	2.51	-	44.88	14.20	64.00				
AV	17.89473G	44.29	54.00	-9.71	49.21	3	Horizontal	164	2.51	-	44.88	14.20	64.00				

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5965MHz_TX

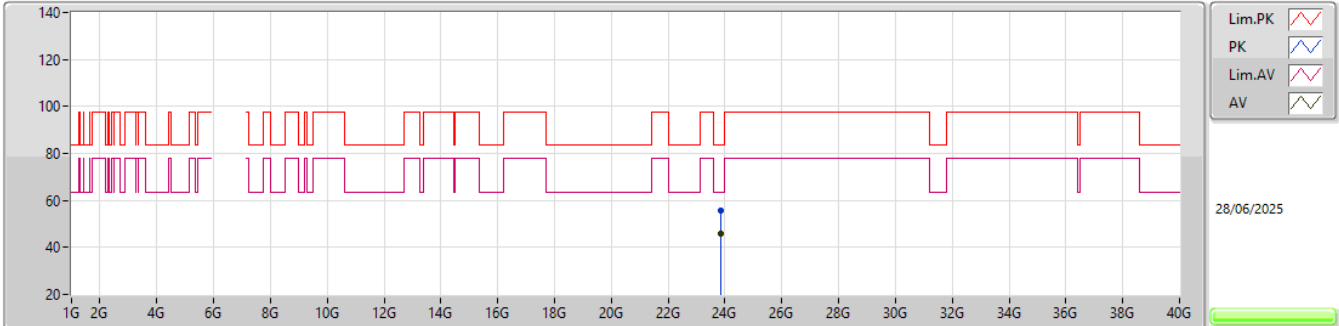

EUT_Z_1TX
Setting 74
03-E-V-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86048G	55.51	83.54	-28.03	45.68	1	Vertical	68	1.02	-	38.82	18.13	47.12			
AV	23.86855G	46.06	63.54	-17.48	36.20	1	Vertical	68	1.02	-	38.84	18.14	47.12			