




## F4 Bluetooth Headset User Manual

### Sketch Map

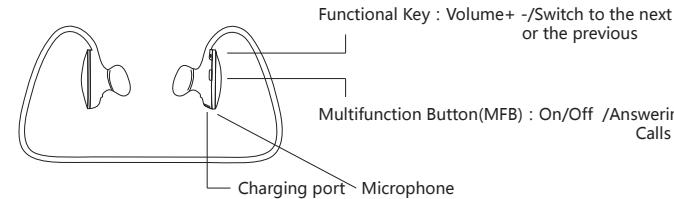

### Specification

Size : 103\*91\*30mm ; Weight : 12g  
 Bluetooth Version : V3.0  
 Supporting Protocol : HSP, HFP, A2DP, AVRCP  
 Transmission Distance : 10M  
 Match Code Name : F4 Plus  
 Password : 0000

Frequency Response : 20Hz ~ 20KHz  
 Music playing time : around 5 hours  
 Calling time : around 5 hours  
 Stand-by time : around 150 hours  
 Working temperature : 0 ~ 40°C  
 Storage temperature : -20 ~ 60°C

### Operating Instruction

#### ► Starting up :

When the power is off, keep pressing the MFB for 3 Secs, the trumpet would utter a warning sound, the blue light would flash. When it's done, the headphone will connect automatically to the bluetooth device.

#### ► Shutting down

When the power is on, keep pressing the MFB for 4 Secs, the trumpet would utter a warning sound, the red light would flash. At the same time the working connection would disconnect.

#### ► Pairing

When the power is off, press the MFB for 6 Secs, the trumpet would utter a warning sound, the red light and the blue light flash alternately, which means the device is under pairing condition. After three minutes pairing, the pairing process would stop automatically if no device connected.

#### ► Answering a call :

When the device stand by or playing music, press the MFB to answer a call. When the call is finished, music playing will resume.

#### ► Ending a call :

When the call is on, press the MFB and end the call, music playing would resume.

#### ► Rejecting a call :

When a call comes and you don't want to answer it, press the MFB for 2 Secs to reject it.

#### ► Mute mode

When on a call, press the volume +/- button for 2 Secs, you can enter the mute mode. Every 10 seconds there would be an sound reminding you are in a mute mode.



宾果国际有限公司 深圳市宾果电子有限公司  
 地址：深圳市福田区滨河大道5022号联合广场A座3705室 邮编：518035  
 客服电话：400 883 9611 传真：+86-755-8325 5319  
 客服信箱：service@bingle-tech.com.cn www.bingle-tech.com.cn

Bingle International Co., Ltd. Shenzhen Bingle Electronic Co., Ltd.  
 Add: Room3705, United Plaza A, 5022 Binghe Road, Futian District, Shenzhen, 518035 China.  
 Tel : 400 883 9611 Fax : +86-755-8325 5319 E-mail : service@bingle-tech.com.cn

©深圳市宾果电子有限公司版权所有,未经事先书面许可,不得复制、修改、发行或以其他方式使用本资料的任何部分。  
 © All rights reserved by Shenzhen Bingle Electronic Co., Ltd.  
 责任声明：本说明书的资料跟实物可能会有轻微差别，均以实物为准。资料若有变更，恕不另行通知。

### Operating Instruction

#### ► Remove the mute mode :

When in a mute mode, press the Volume +/- button for 2 secs and you can disfunction it

#### ► Connecting to two devices :

a. When one device is connecting to the headset, disconnect it  
 b. Press the volume +/- button simultaneously, the red light and blue light would flash alternately, reentering to the pairing status.  
 c. Switch on the bluetooth of the second device and start searching, the "F4" would show up on the screen, connect it.  
 d. Connect the first device to the headset.  
 e. Connection completed.

#### ► Call forwarding :

While on the line with the first call and the second call come in, press the MFB for 2 Secs, reject the second call and resume the first. Press the volume +/- simultaneously you can answer the second call and keep the first waiting. Repeat this movement and you press +/- back to the 1st phone call.

#### ► Cancelling voice dialing :

can resume the first call. If you just press the MFB, you cut the first call and answer the second.

#### ► Redialing :

When the headset stand by or is playing music, press the MFB twice quickly, the phone will redial your most recent dial and the music will stop.

#### ► Voice dialing :

When the device stands by, keep pressing the MFB, you can activate the voice dialing function of your phone. For further details, please refer to the manual of your phone.

#### ► The previous music :

Press the - button for 2 Secs and the music will switch to the previous piece.

#### ► The next music :

Press the + button for 2 Secs and the music will switch to the next piece.

### Operating Instruction

#### ► Reconnecting :

If the headset and your phone disconnect, press the MFB and it will reconnect.

#### ► Music pause and playing :

While music is playing, press the MFB once and music pause. Press it again and it resumes.

#### ► Volume up :

Press the + button and the volume turn up. When it reaches the maximum, there would be a

#### ► Volume down :

Press the - button and the volume turn down. When it reaches the minimum, there would be a

#### ► Indication Status of the LED light.

Charging—Red light on  
 Charging Completed—Blue light on  
 Standby mode and connecting mode—Blue light flash twice within 5 Secs  
 On the line—Blue light flash twice within 3 secs.  
 Calls come—Blue light flash rapidly  
 Low Battery—Red light flash once with 20 S  
 Pairing—Red light and blue light flash

### Pakage Contents

Headset x1 , Charging line x1 , Specification x1 , Warranty Card X1

### Matters need attention

1. Don't crash, strike, drop, distort the headset and don't disassemble it.
2. Stay away magnetic field and moisture and keep it under the temperature of -10°C-60°C.
3. Don't use corrosive liquid to clean the headset.
4. Don't overcharge the battery.
5. Charge and release the battery regularly to

## **FCC WARNING**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.