

Equipment : Mevo

Brand Name : Mevo

Model No. : A10101A

FCC ID : 2AHGTA10101A

Standard : 47 CFR FCC Part 15.407

Applicant : Livestream, Inc.

195 Morgan Ave, Brooklyn, NY 11237

Manufacturer : Chicony Electronics (Dong Guan) Co.,Ltd.

San Zhong Guan Li Qu, Qingxi Town, Dongguan

City Guangdong 523651 China

Operate Mode : Client without radar detection

The product sample received on Feb. 18, 2016 and completely tested on Apr. 21, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC 06-96 Appendix and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Kevin Liang / Assistant Manager

Testing Laboratory 1190

Report No.: FZ621807

SPORTON INTERNATIONAL INC. Page No. : 1 of 20
TEL: 886-3-327-3456 Report Version : Rev. 01



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Accessories and Support Equipment	6
1.3	Testing Applied Standards	6
1.4	Testing Location Information	6
1.5	Measurement Uncertainty	
2	TEST CONFIGURATION OF EUT	8
2.1	DFS and TPC Information	8
2.2	The Worst Case Measurement Configuration	8
3	DYNAMIC FREQUENCY SELECTION (DFS) TEST RESULT	9
3.1	General DFS Information	9
3.2	Radar Test Waveform Calibration	11
3.3	In-service Monitoring	17
4	TEST EQUIPMENT AND CALIBRATION DATA	20

APPENDIX A. TEST PHOTOS

TEL: 886-3-327-3456 FAX: 886-3-327-0973 **Report No.: FZ621807**

Summary of Test Result

Report No.: FZ621807

	Conformance Test Specifications (FCC 06-96 Appendix)								
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result				
-	7.8.1	DFS: UNII Detection Bandwidth Measurement	N/A (Client w/o test)	80% of the 99% BW	N/A				
-	7.8.2.1	DFS: Initial Channel Availability Check Time	N/A (Client w/o test)	CAC ≥ 60 sec	N/A				
-	7.8.2.2	DFS: Radar Burst at the Beginning of the Channel Availability Check Time	N/A (Client w/o test)	Detection Threshold: -64 dBm	N/A				
-	7.8.2.3	DFS: Radar Burst at the End of the Channel Availability Check Time	N/A (Client w/o test)	Detection Threshold: -64 dBm	N/A				
3.3	7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	CMT < 10sec	CMT ≤ 10sec	Complied				
3.3	7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	CCTT < 60 ms	CCTT ≤ 60 ms starting at CMT 200ms	Complied				
3.3	7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	NOP > 30 min	NOP ≥ 30 min	Complied				
-	7.8.4	DFS: Statistical Performance Check	N/A (Client w/o test)	Table 5 - 7 (KDB 905462)	N/A				
-	5.8.1	DFS: Uniform Spreading	N/A (Client w/o this function)	Uniform Spreading for DFS Band	N/A				
3.1.4	8.1	User Access Restrictions	Manufacturer attestation NOT accessible to user	DFS controls	Complied				

SPORTON INTERNATIONAL INC. : 3 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



Revision History

Report No.	Version	Description	Issued Date
FZ621807	Rev. 01	Initial issue of report	Jun. 24, 2016

SPORTON INTERNATIONAL INC.
TEL: 886-3-327-3456

FAX: 886-3-327-0973

Page No. : 4 of 20

Report No.: FZ621807

Report Version : Rev. 01



1 General Description

1.1 Information

1.1.1 RF General Information

IEEE Std. 802.11	Channel Bandwidth (MHz)			
a, n (HT20)	20			
n (HT40)	40			
802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.				

Report No.: FZ621807

1.1.2 Antenna Information

	Antenna Category
	Equipment placed on the market without antennas
\boxtimes	Integral antenna (antenna permanently attached)
	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
	External antenna (dedicated antennas)
	☐ Single power level with corresponding antenna(s).
	☐ Multiple power level and corresponding antenna(s).

Antenna General Information				
No.	Ant. Cat.	Ant. Type	Ant. Connector	Gain _(dBi)
1	Integral	PIFA	Fixed on board	2.79

For conducted tests, antenna ports are used for the tests and Master lowest antenna gain [2] dBi that was used to set the DFS Detection Threshold level during calibration of the test setup.

1.1.3 Type of EUT

	Identify EUT				
EU	Γ Serial Number	N/A			
Pre	sentation of Equipment	☑ Production ; ☐ Pre-Production ; ☐ Prototype			
		Type of EUT			
\boxtimes	Stand-alone				
	Combined (EUT where the radio part is fully integrated within another device)				
	Combined Equipment - Brand Name / Model No.:				
	Plug-in radio (EUT intended for a variety of host systems)				
	Host System - Brand Name / Model No.:				
	Other:				

SPORTON INTERNATIONAL INC. : 5 of 20
TEL: 886-3-327-3456 : Report Version : Rev. 01

1.2 Accessories and Support Equipment

Accessories Information						
AC Adaptor	Brand Name	Mevo	Model Name	KSA29B0500200D5		
AC Adapter	Power Rating	I/P: 100-240V ~50/60Hz 0.5A MAX; O/P: 5.0V === 2.0A				
USB Cable	Signal Line	3 meter, D-shielded cable, with w/o ferrite core				

Report No.: FZ621807

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment						
No.	Equipment	Brand Name	Model Name	FCC ID		
1	AP (Master)	Edimax	EW-7679WAC	NDD9576791401		
2	Notebook	Dell	Latitude E5540	DoC		
3	AC Adapter for Notebook	Dell	FA90PS0-00	DoC		
4	Notebook	Dell	Latitude E5550	DoC		
5	AC Adapter for Notebook	Dell	LA65NM130	DoC		

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 905462 D02 v02
- 47 CFR FCC Part 15.407

1.4 Testing Location Information

	Testing Location						
	HWA YA	ADD	:	: No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.			
		TEL	:	886-3-327-3456 FAX : 886-3-327-0973			
Test Condition			Test Site No.	Test Engineer	Test Environment		
DFS Site			DF01-HY	Sam	25.2℃ / 60.4%		

SPORTON INTERNATIONAL INC. : 6 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FZ621807

Measurement Uncertainty					
Test Item	Uncertainty				
Radio frequency	± 8.7 X 10 ⁻⁷				
RF output power, conducted	±0.6 dB				
All emissions, conducted	±0.8 dB				
All emissions, radiated	±2.8 dB				
Temperature	±0.8 ℃				
Humidity	±3 %				
DC and low frequency voltages	±3 %				
Time	±1.4 %				

SPORTON INTERNATIONAL INC. Page No. : 7 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01

2 Test Configuration of EUT

2.1 DFS and TPC Information

The DFS Related Operating Mode(s) of the Equipment								
☐ Master	Master Master							
☐ Cilent with ra	dar detection							
	t radar detection							
Software/Firmware Version 6.26.3.6(r572568) FWID 01-15d9f945								
Communication	Mode		☐ Frame Based					
IEEE Std. Frequency 802.11 Range (MHz)		TPC (Transmit Power Control)	Passive Scan					
	⊠ 5250-5350	No	Yes					
11a/n(HT20) / n (HT40)		No	Yes					
` ,	⊠ 5600-5650	No	Yes					

Report No.: FZ621807

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests						
Tests Item Dynamic Frequency Selection (DFS)						
Test Condition	Test Condition Conducted measurement at transmit chains					
	Modulation Mode					
	HT40					

SPORTON INTERNATIONAL INC. Page No. : 8 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

Table D.1: DFS requirement values					
Parameter	Value				
Non-occupancy period	Minimum 30 minutes				
Channel Availability Check Time	60 seconds				
Channel Move Time	10 seconds See Note 1.				
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. See Notes 1 and 2.				
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.				

Report No.: FZ621807

- Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
- Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
- Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Table D.2: Interference threshold values					
Maximum Transmit Power	Value (See Notes 1, 2, and 3)				
EIRP ≥ 200 milliwatt	-64 dBm				
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm				
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm				

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

SPORTON INTERNATIONAL INC. Page No. : 9 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

	DFS Operational mode					
Requirement	Master	Client without radar detection	Client with radar detection			
Non-Occupancy Period	Yes	Not required	Yes			
DFS Detection Threshold	Yes	Not required	Yes			
Channel Availability Check Time	Yes	Not required	Not required			
U-NII Detection Bandwidth	Yes	Not required	Yes			

Report No.: FZ621807

3.1.3 Applicability of DFS Requirements during Normal Operation

		DFS Operational mode					
Requirement	Master	Client without radar detection	Client with radar detection				
DFS Detection Threshold	Yes	Not required	Yes				
Channel Closing Transmission Time	Yes	Yes	Yes				
Channel Move Time	Yes	Yes	Yes				
U-NII Detection Bandwidth	Yes	Not required	Yes				

3.1.4 User Access Restrictions

	User Access Restrictions														
\boxtimes	DFS	controls	(hardware	or	software)	related	to	radar	detection	are	NOT	accessible	to	the	user.
	Manu	ufacturer	statement c	onfir	rming that	informa	tior	regar	ding the pa	ıram	eters o	of the detect	ed	Rada	ar
	Wave	eforms is	not available	e to	the end u	ser									

3.1.5 Channel Loading/Data Streaming

\boxtimes	IP Based (Load Based) - stream the test file from the Master to the Client.
	Performed NTIA approved WAV file. (EUT w/o video function application)
	Performed NTIA approved MPEG2 file. (EUT with video function application)
	Alternative streaming e.g., FTP with about 17 to 20% loading and submit proposal to FCC.
	Frame Based - stream the test file from the Master to the Client.
	fixed talk/listen ratio, set the ratio to 45%/55%
NTI	A test file refer as: http://ntiacsd.ntia.doc.gov/dfs/

SPORTON INTERNATIONAL INC. Page No. : 10 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$ \operatorname{Roundup} \left\{ \left(\frac{1}{360} \right). \\ \left(\frac{19 \cdot 10^6}{\operatorname{PRI}_{\mu \text{sec}}} \right) \right\} $		
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A		60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregat	te (Radar Types 1-4	ł)	80%	120	

Report No.: FZ621807

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

SPORTON INTERNATIONAL INC. Page No. : 11 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per <i>Burst</i>	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Report No.: FZ621807

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- Each Burst consists of 1 to $\overline{3}$ pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length (12,000,000 / Burst_Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst_Count) (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

SPORTON INTERNATIONAL INC. Page No. : 12 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



3.2.3 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

Report No.: FZ621807

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.


3.2.4 Master DFS Threshold Level

Master DFS Threshold Level					
DFS Threshold level:	-62	dBm	□ at the antenna connector		
			in front of the antenna		
The Interference Radar Detection Threshold Level is (-64dBm) + {2 dB} = -62dBm. That had been taken					
into account the master output power range and antenna gain.					


SPORTON INTERNATIONAL INC. Page No. : 13 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



3.2.5 Calibration Setup

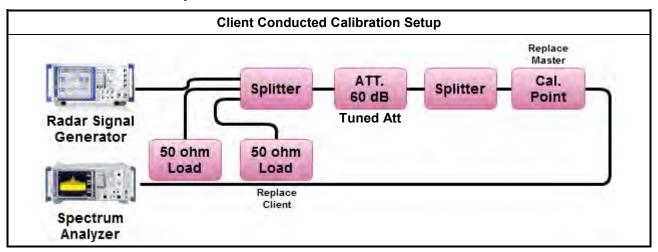

Report No.: FZ621807

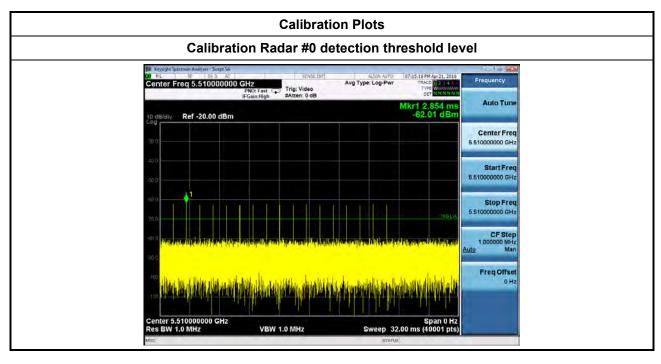


SPORTON INTERNATIONAL INC. Page No. : 14 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01




3.2.6 Test Setup

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

Report No.: FZ621807

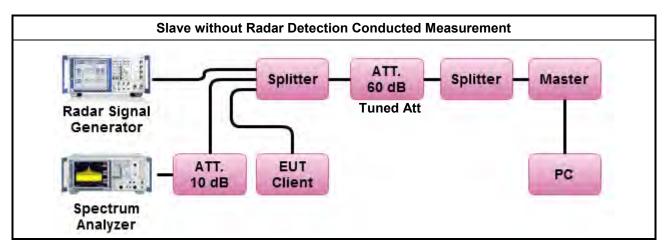

SPORTON INTERNATIONAL INC. Page No. : 15 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01

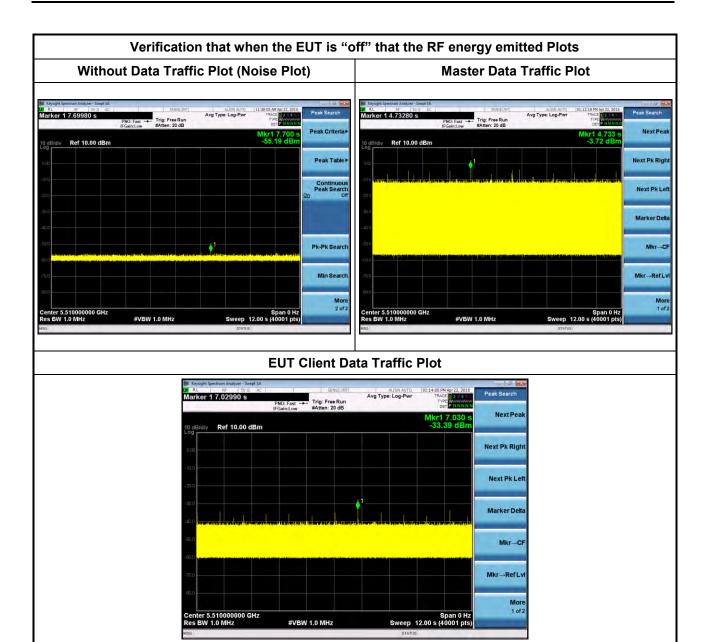

Report No.: FZ621807

SPORTON INTERNATIONAL INC. Page No. : 16 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01

3.3 In-service Monitoring

3.3.1 In-service Monitoring Limit

In-service Monitoring Limit					
Channel Move Time	10 sec				
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.				
Non-occupancy period	Minimum 30 minutes				

Report No.: FZ621807

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method

- Refer as FCC KDB 905462 D02 v02, clause 7.8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
- Refer as FCC KDB 905462 D02 v02, clause 8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 10 sec plot needs to be reported for the Short Pulse Radar Types 0 and one for the Long Pulse Radar Type in a 22 sec plot. And zoom-in a 600 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
- Refer as FCC KDB 905462 D02 v02, clause 7.8.3 verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.


SPORTON INTERNATIONAL INC. Page No. : 17 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01





Report No.: FZ621807

Test Result of In-service Monitoring

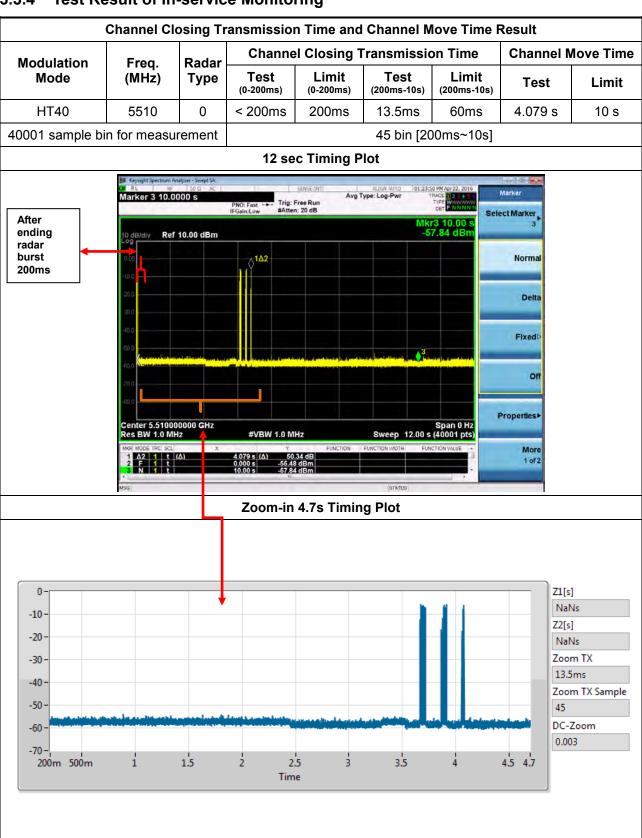


SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 18 of 20 Report Version : Rev. 01



Non-Occupancy Period Result								
Modulation	Freq. (MHz)	Non-Occupancy Period						
Mode		Measured	Limit	Result				
HT40	5510	>30min	30min	Complied				
2000 sec Timing Plot								

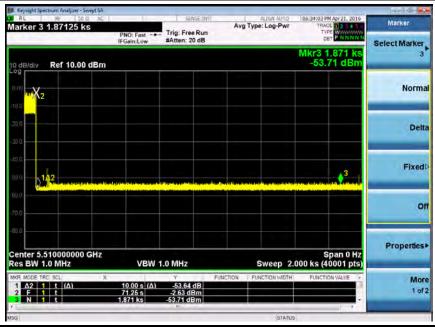

FAX: 886-3-327-0973

Page No. : 19 of 20 Report Version : Rev. 01

Report No.: FZ621807



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	Keysight	N9010A	MY55150165	9KHz~7GHz	Nov. 03, 2015	Nov. 02, 2016
Vector Signal Generator	Keysight	N5171B	MY53051240	9KHz ~ 6GHz	Nov. 02, 2015	Nov. 01, 2016

Report No.: FZ621807

SPORTON INTERNATIONAL INC. Page No. : 20 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01