

FCC REPORT

(WIFI)

Applicant: APRIX LATINOAMERICA S.A.

Address of Applicant: ADVANCED 099 BLDG SUITE 4 C CALLE BEATRIZ M DE CABAL PANAMA

Equipment Under Test (EUT)

Product Name: Tablet PC

Model No.: Aprix Tab8ii, Tab X1, Tab X2, Tab 10ii

Trade mark: APRIX/KONNEN

FCC ID: 2AHJQ-APT8IIB

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 09 May, 2019

Date of Test: 09 May, to 30 May, 2019

Date of report issued: 24 Nov., 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	24 Nov., 2020	Original

Remark:
The new Product Name, Model No., FCC ID: 2AHJQ-APT8IIB and the certified FCC ID: 2AHJQ-APT8IIA are electrically identical, so the test data of the new FCC ID: 2AHJQ-APT8IIB is all derived from the FCC test report of the certified FCC ID: 2AHJQ-APT8IIA.

Tested by:



Date:

24 Nov., 2020

Test Engineer

Reviewed by:



Date:

24 Nov., 2020

Project Engineer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U. T.	5
5.3 TEST ENVIRONMENT AND TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 MEASUREMENT UNCERTAINTY	6
5.6 LABORATORY FACILITY	6
5.7 LABORATORY LOCATION	7
5.8 TEST INSTRUMENTS LIST	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT	8
6.2 CONDUCTED EMISSION	9
6.3 CONDUCTED OUTPUT POWER	12
6.4 OCCUPY BANDWIDTH	15
6.5 POWER SPECTRAL DENSITY	20
6.6 BAND EDGE	23
6.6.1 Conducted Emission Method	23
6.6.2 Radiated Emission Method	26
6.7 SPURIOUS EMISSION	43
6.7.1 Conducted Emission Method	43
6.7.2 Radiated Emission Method	46
7 TEST SETUP PHOTO	54
8 EUT CONSTRUCTIONAL DETAILS	55

4 Test Summary

Test Items	Section in CFR 47	Result
Antenna requirement	15.203 & 15.247 (b)	Pass*
AC Power Line Conducted Emission	15.207	Pass*
Conducted Peak Output Power	15.247 (b)(3)	Pass*
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass*
Power Spectral Density	15.247 (e)	Pass*
Band Edge	15.247 (d)	Pass*
Spurious Emission	15.205 & 15.209	Pass*

Pass: The EUT complies with the essential requirements in the standard.

Pass: The new Product Name, Model No., FCC ID: 2AHJQ-APT8IIB and the certified FCC ID: 2AHJQ-APT8IIA are electrically identical, so the test data of the new FCC ID: 2AHJQ-APT8IIB is all derived from the FCC test report of the certified FCC ID: 2AHJQ-APT8IIA.*

N/A: N/A: Not Applicable.

5 General Information

5.1 Client Information

Applicant:	APRIX LATINOAMERICA S.A.
Address:	ADVANCED 099 BLDG SUITE 4 C CALLE BEATRIZ M DE CABAL PANAMA
Manufacturer:	Todos industrial limited
Address:	Room 308, Building #5, Cofoc (Fuan) Robotics Industrial Park, No.90, Dayang Road, Fuyong Street, Shenzhen City, P.R. China

5.2 General Description of E.U.T.

Product Name:	Tablet PC
Model No.:	Aprix Tab8ii, Tab X1, Tab X2, Tab 10ii
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel numbers:	11 for 802.11b/802.11g/802.11(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	1.31dBi
Power supply:	Rechargeable Li-ion polymer Battery DC3.8V/4500mAh
AC adapter:	Model No.:AS013Z-0502000UU Input: AC100-240V, 50/60Hz 0.45 A Output: DC 5.0V, 2.0A
Remark:	Model No.: Aprix Tab8ii, Tab X1, Tab X2, Tab 10ii, were identical inside, the electrical circuit design, layout, components used and internal wiring, the only difference being model name.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for 802.11b/g/n(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Note: 1. For 802.11n-HT40 mode, the channel number is from 3 to 9; 2. Channel 1, 6 & 11 selected for 802.11b/g/n-HT20 as Lowest, Middle and Highest channel. Channel 3, 6 & 9 selected for 802.11n-HT40 as Lowest, Middle and Highest channel, Channel.							

5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate, the follow list were the worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.54 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.84 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-18-2019	03-17-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2018	11-20-2019
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2018	11-20-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020
RF Switch Unit	MVRFTEST	MW200	N/A	N/A	N/A
Test Software	MVRFTEST	MTS200	Version: 2.0.0.0		


Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-18-2019	03-17-2020
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-18-2019	03-17-2020
LISN	CHASE	MN2050D	1447	03-18-2019	03-17-2020
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2019
Cable	HP	10503A	N/A	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		

6 Test results and Measurement Data

6.1 Antenna requirement


Standard requirement:	FCC Part 15 C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The Wi-Fi antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is 1.31 dBi.	
	

6.2 Conducted Emission

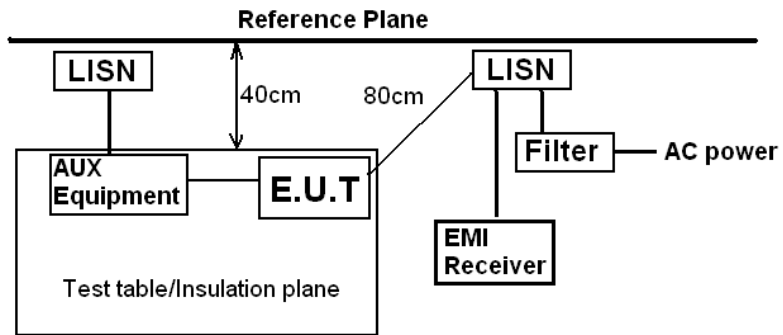Test Requirement:	FCC Part 15 C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test procedure	- The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. - The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). - Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.		
Test setup:	 Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.8 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data:

Product name:	Tablet PC	Product model:	APRIX TAB8II
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

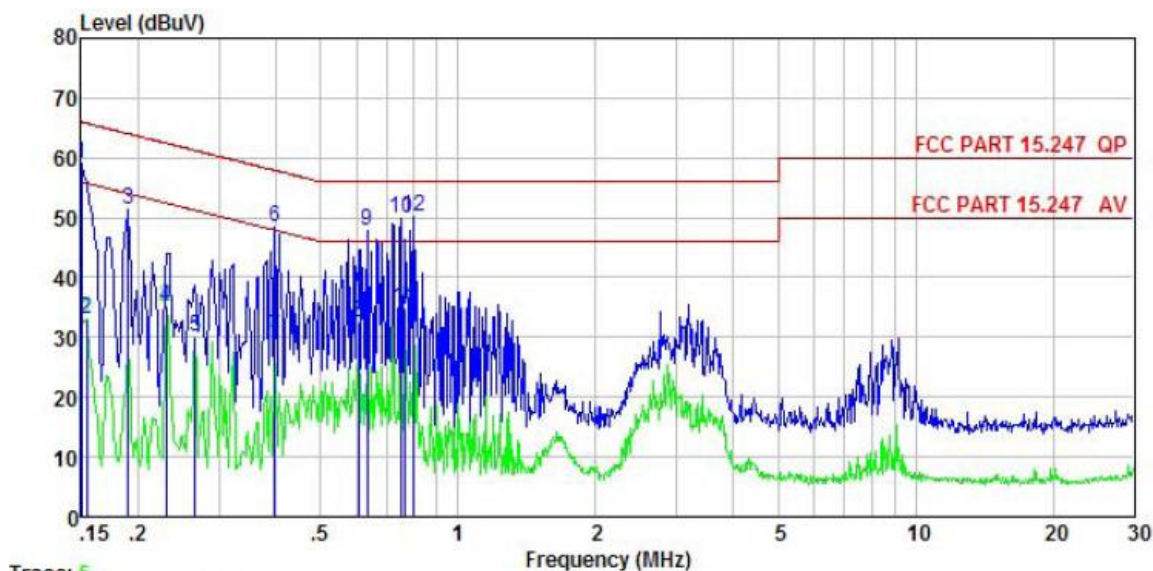


Trace: 5

	Freq	Read	LISN	Cable	Level	Limit	Over	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	48.80	-0.45	10.78	59.13	66.00	-6.87	QP
2	0.154	22.66	-0.45	10.78	32.99	55.78	-22.79	Average
3	0.190	41.10	-0.42	10.76	51.44	64.02	-12.58	QP
4	0.230	24.86	-0.40	10.75	35.21	52.44	-17.23	Average
5	0.266	19.64	-0.39	10.75	30.00	51.25	-21.25	Average
6	0.398	38.19	-0.37	10.72	48.54	57.90	-9.36	QP
7	0.398	19.85	-0.37	10.72	30.20	47.90	-17.70	Average
8	0.608	22.08	-0.38	10.77	32.47	46.00	-13.53	Average
9	0.634	37.37	-0.38	10.77	47.76	56.00	-8.24	QP
10	0.751	39.60	-0.38	10.79	50.01	56.00	-5.99	QP
11	0.767	24.47	-0.38	10.80	34.89	46.00	-11.11	Average
12	0.796	39.86	-0.38	10.81	50.29	56.00	-5.71	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	Tablet PC	Product model:	APRIX TAB8II
Test by:	Mike	Test mode:	Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

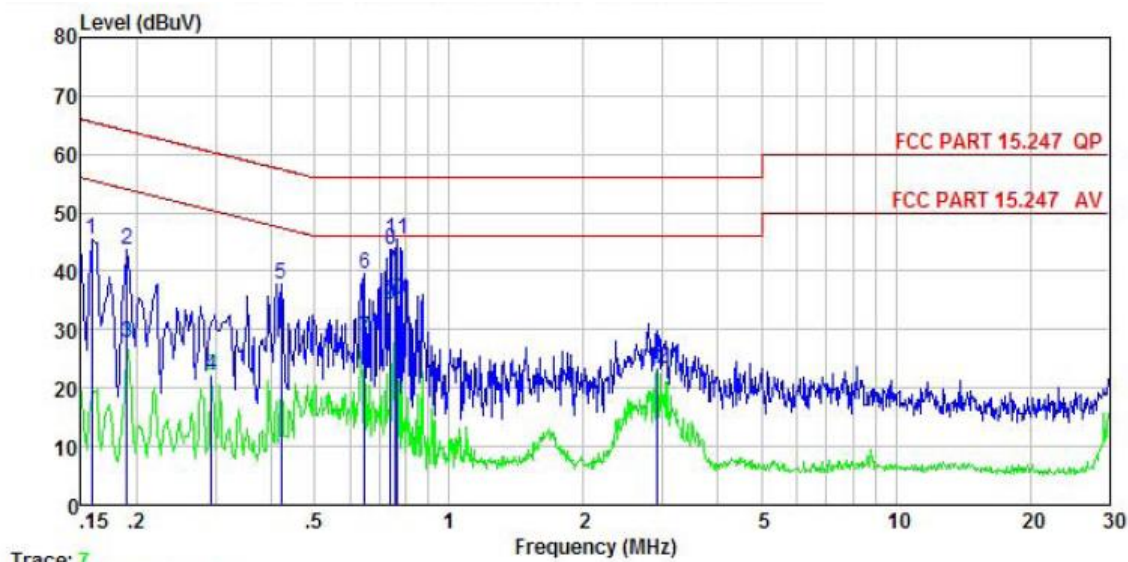


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.158	35.24	-0.68	10.77	45.33	65.56	-20.23	QP
2	0.190	33.65	-0.69	10.76	43.72	64.02	-20.30	QP
3	0.190	17.63	-0.69	10.76	27.70	54.02	-26.32	Average
4	0.294	11.94	-0.63	10.74	22.05	50.41	-28.36	Average
5	0.421	27.83	-0.64	10.73	37.92	57.42	-19.50	QP
6	0.647	29.56	-0.64	10.77	39.69	56.00	-16.31	QP
7	0.647	18.52	-0.64	10.77	28.65	46.00	-17.35	Average
8	0.739	33.64	-0.64	10.79	43.79	56.00	-12.21	QP
9	0.739	24.08	-0.64	10.79	34.23	46.00	-11.77	Average
10	0.755	25.04	-0.64	10.79	35.19	46.00	-10.81	Average
11	0.763	35.27	-0.64	10.80	45.43	56.00	-10.57	QP
12	2.915	13.16	-0.67	10.92	23.41	46.00	-22.59	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.


6.3 Conducted Output Power

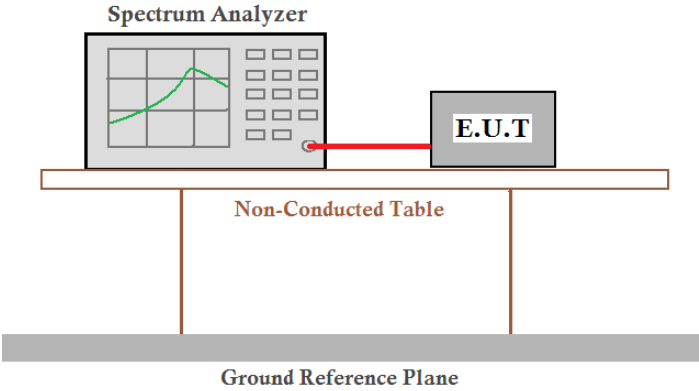Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

Test CH	Maximum Conducted Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	5.09	4.23	3.32	2.86	30.00	Pass
Middle	4.92	4.10	3.57	2.87		
Highest	4.90	4.36	3.69	3.06		

Test plot as follows:

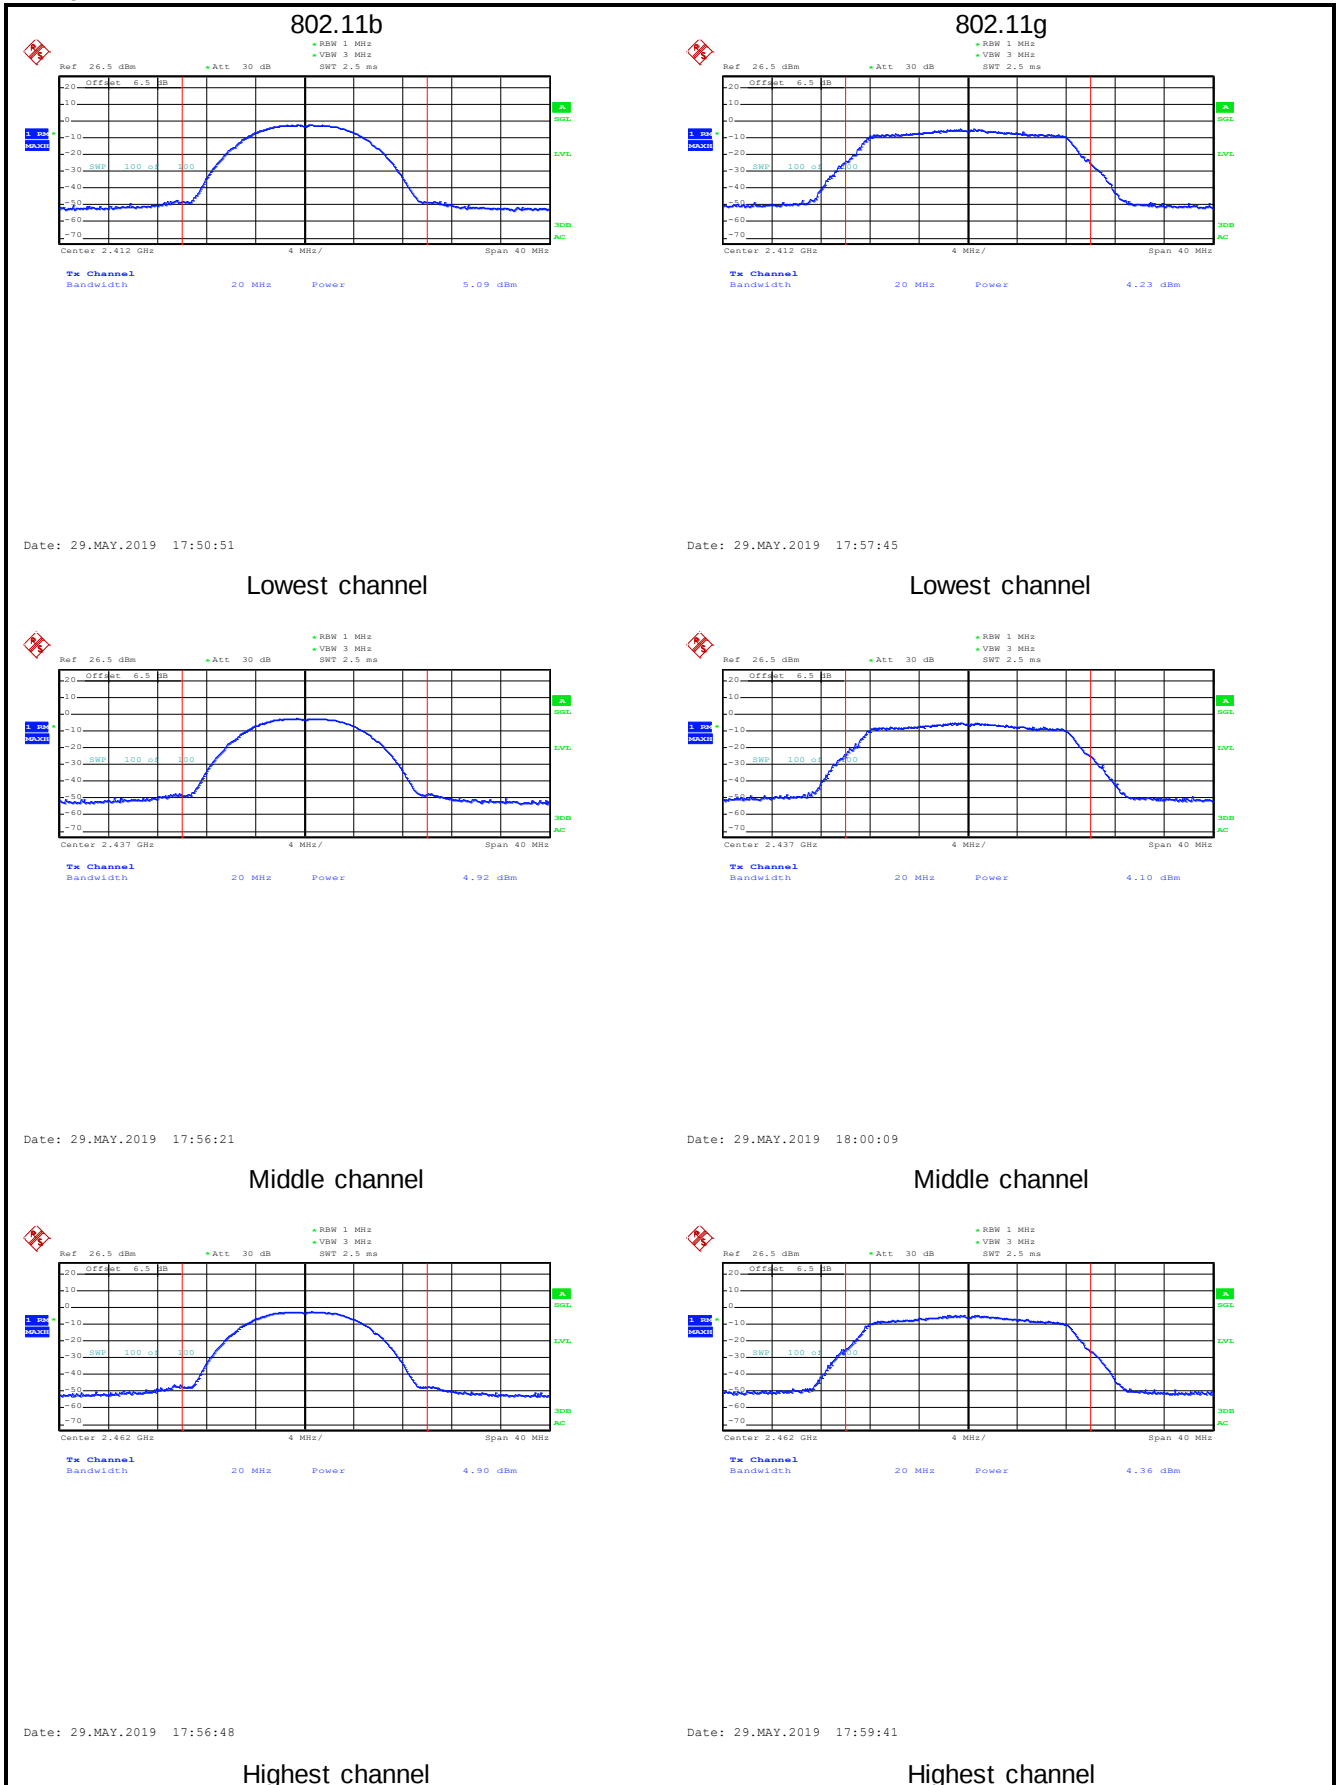


802.11n(HT20)

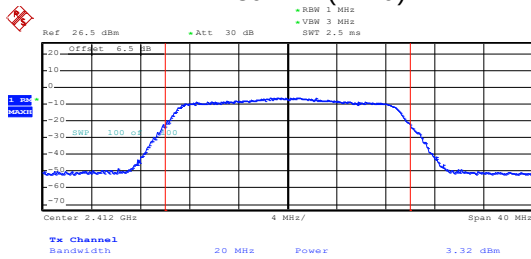


Date: 29.MAY.2019 18:02:01

802.11n(HT40)

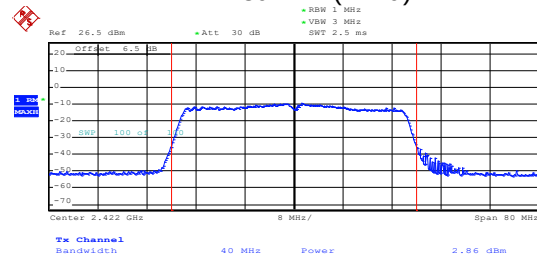


Date: 29.MAY.2019 18:08:25

Lowest channel

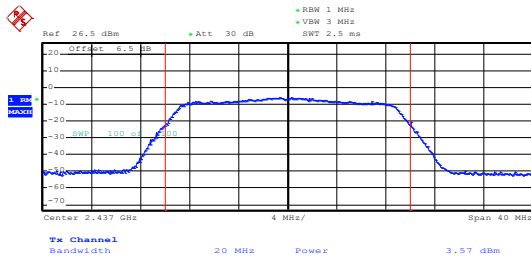


Date: 29.MAY.2019 18:04:59

Lowest channel

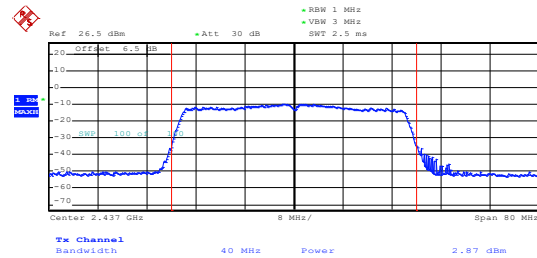


Date: 29.MAY.2019 18:08:53

Middle channel

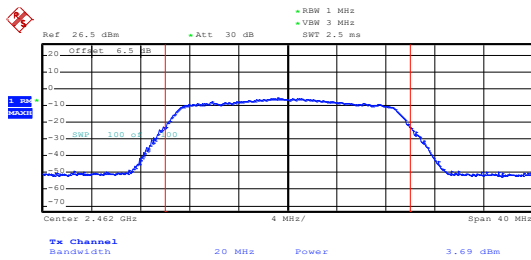

Date: 29.MAY.2019 18:06:13


Middle channel

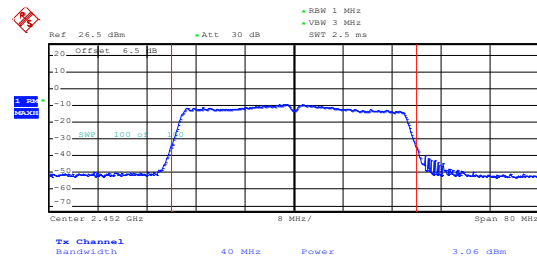

Date: 29.MAY.2019 18:09:37

Highest channel


6.4 Occupy Bandwidth

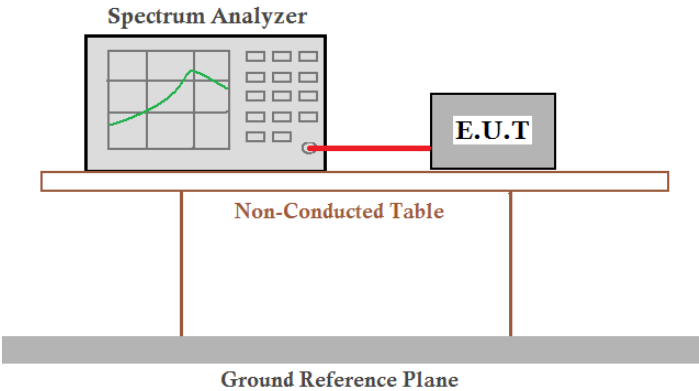Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	>500kHz
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:


Test CH	6dB Emission Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	9.04	16.56	17.76	36.64	>500	Pass
Middle	9.04	16.48	17.76	36.64		
Highest	8.64	16.48	17.60	36.16		
Test CH	99% Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	10.48	16.48	17.68	36.16	N/A	N/A
Middle	10.48	16.56	17.68	36.16		
Highest	10.64	16.40	17.68	36.00		

Test plot as follows:

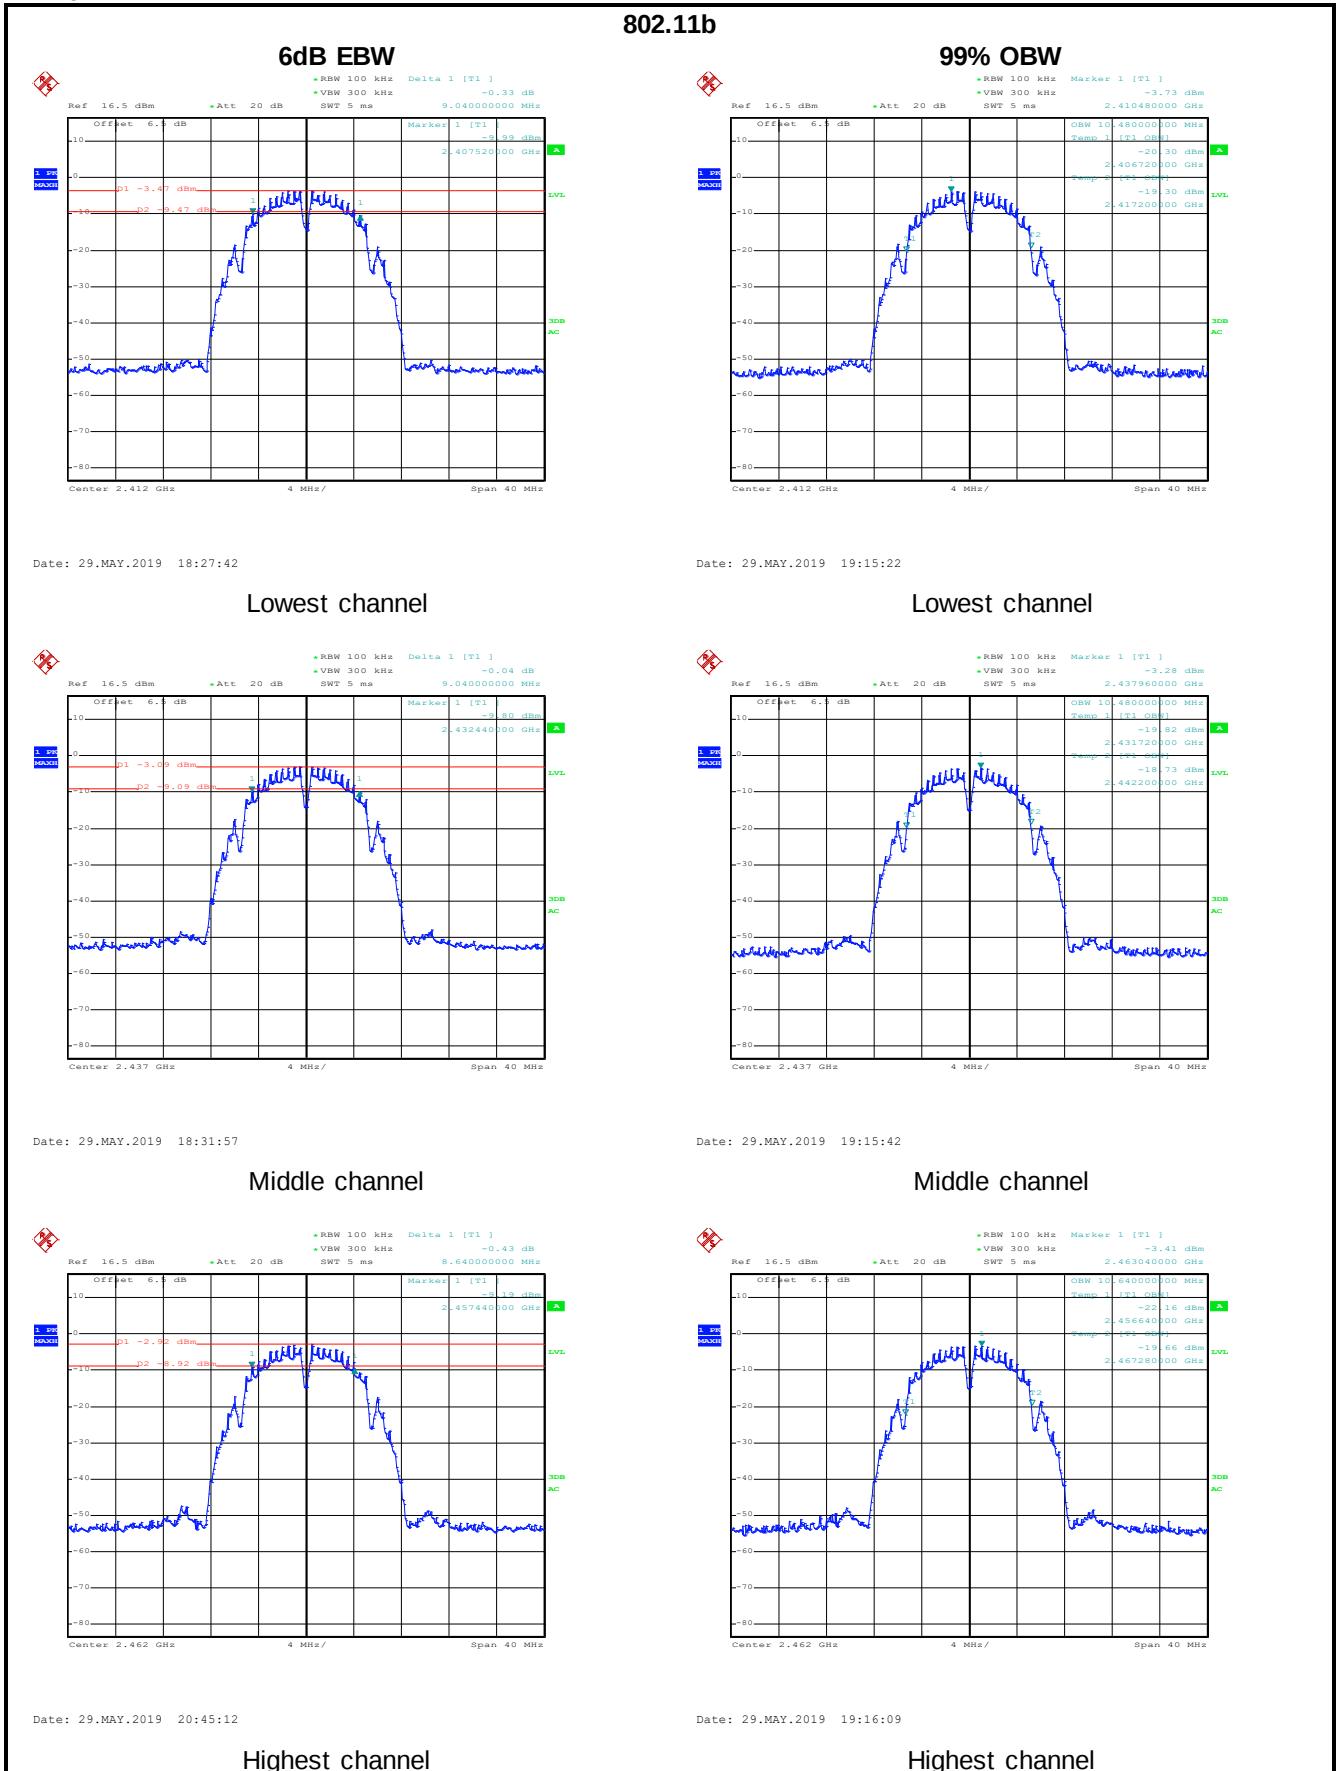


802.11g

6dB EBW

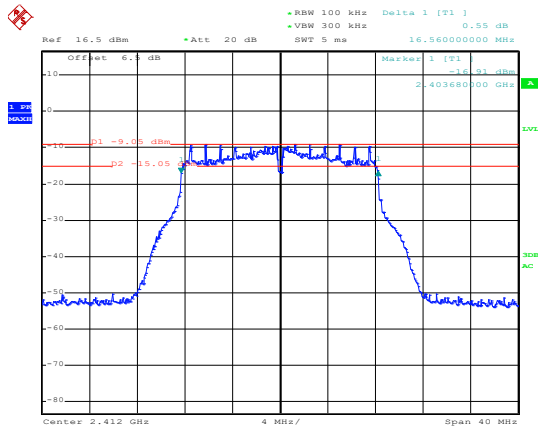


Date: 29.MAY.2019 18:22:51

99% OBW

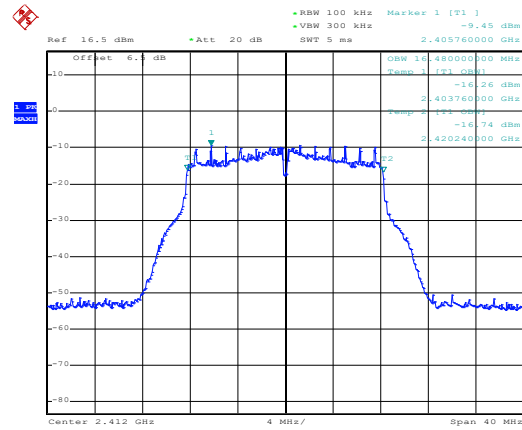


Date: 29.MAY.2019 19:16:42

Lowest channel

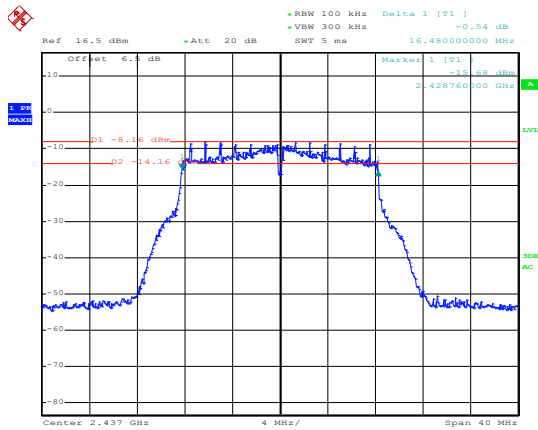


Date: 29.MAY.2019 18:23:55

Lowest channel

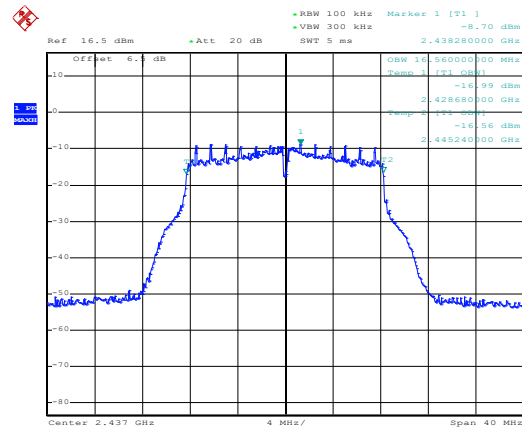


Date: 29.MAY.2019 19:17:38

Middle channel

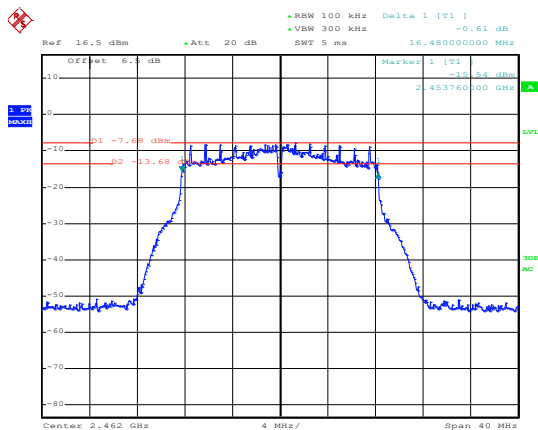

Date: 29.MAY.2019 18:25:05

Middle channel

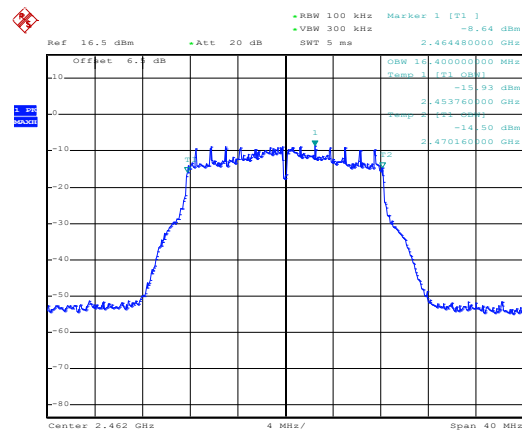


Date: 29.MAY.2019 19:18:04

Highest channel

Highest channel


802.11n(HT20)

6dB EBW

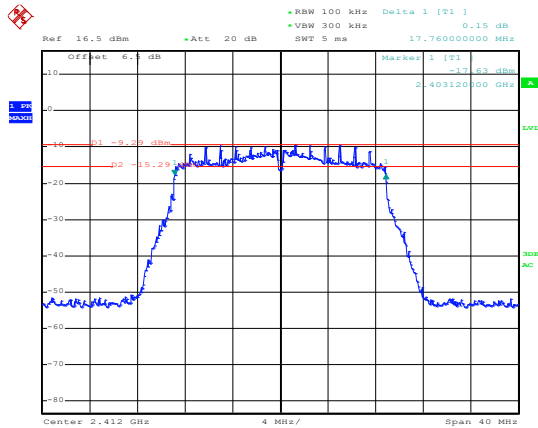


Date: 29.MAY.2019 18:16:56

99% OBW

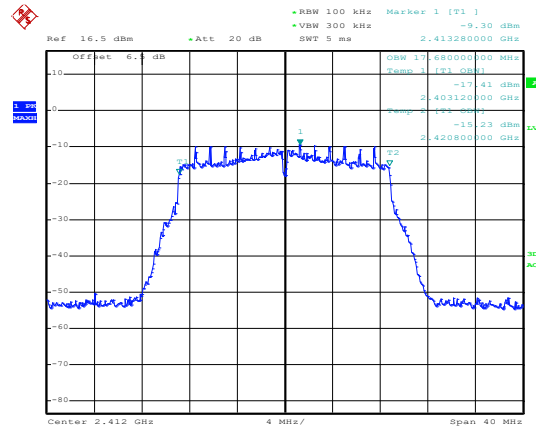


Date: 29.MAY.2019 19:18:47

Lowest channel

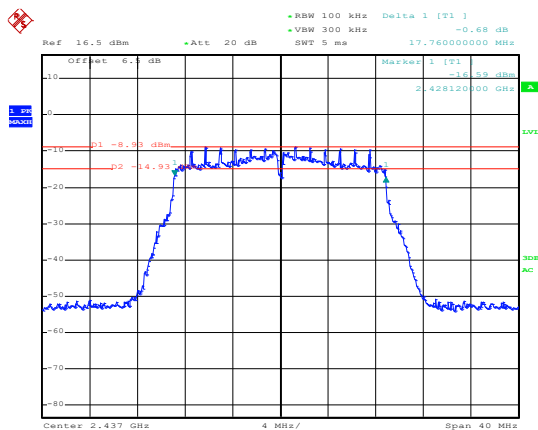


Date: 29.MAY.2019 18:18:50

Lowest channel

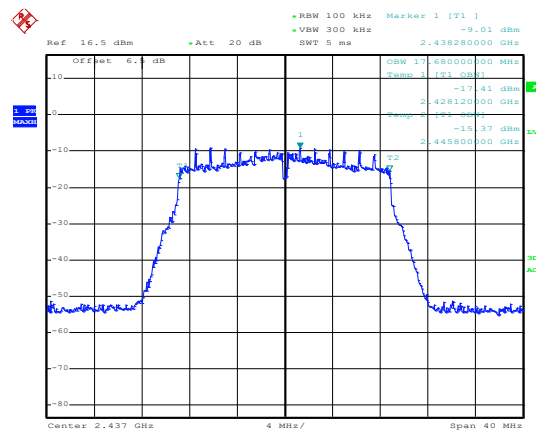


Date: 29.MAY.2019 19:19:28

Middle channel

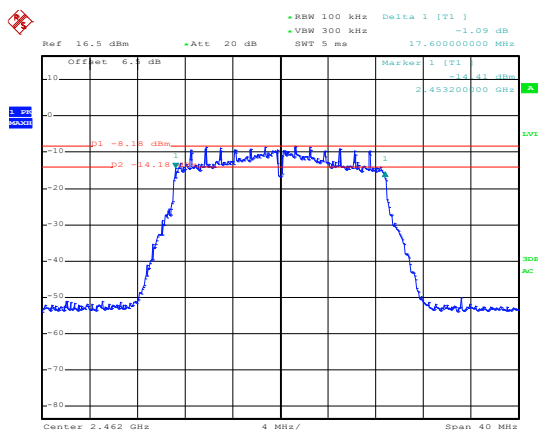

Date: 29.MAY.2019 18:20:25

Middle channel

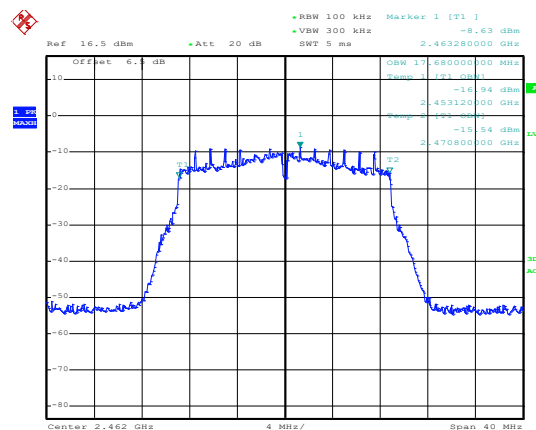


Date: 29.MAY.2019 19:19:51

Highest channel

Highest channel


802.11n(HT40)

6dB EBW

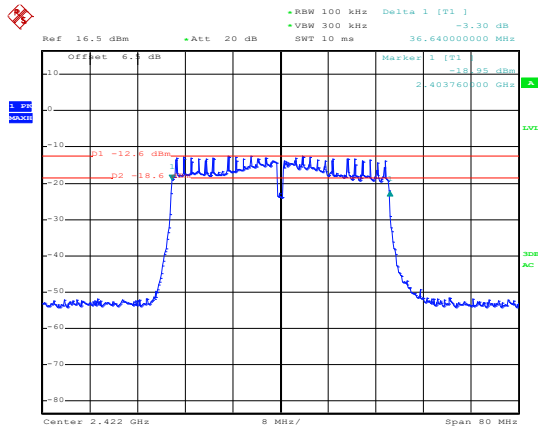


Date: 29.MAY.2019 18:15:11

99% OBW

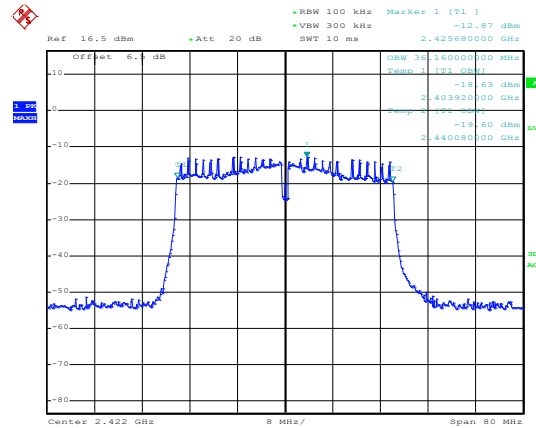


Date: 29.MAY.2019 19:20:28

Lowest channel

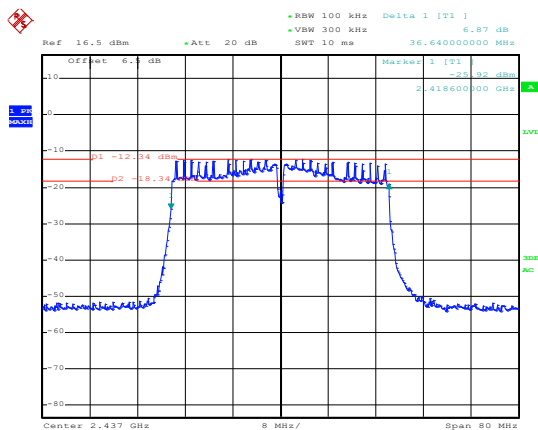


Date: 29.MAY.2019 20:47:26

Lowest channel

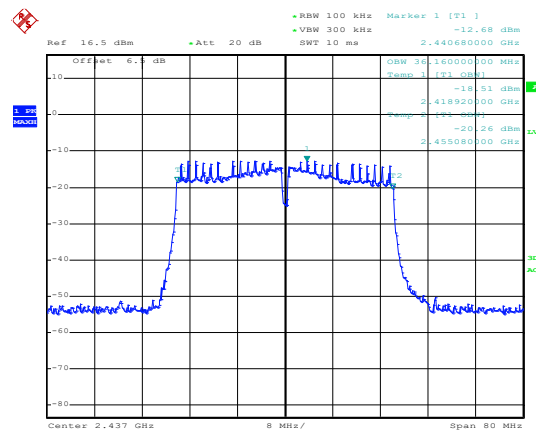


Date: 29.MAY.2019 19:20:53

Middle channel

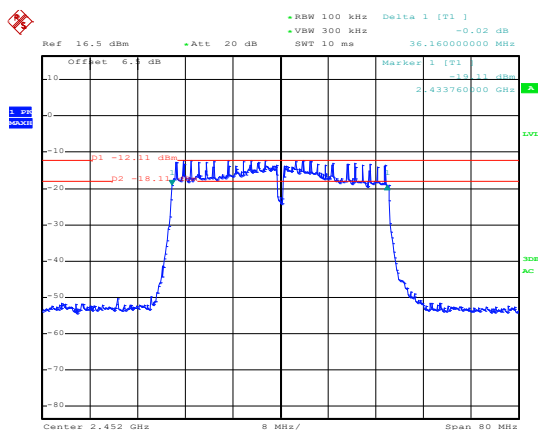

Date: 29.MAY.2019 18:12:40

Middle channel

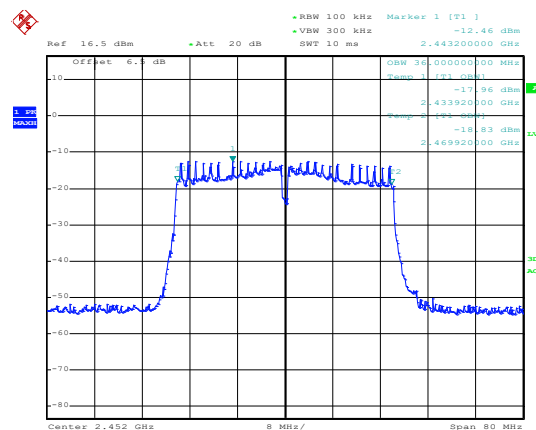


Date: 29.MAY.2019 19:21:18

Highest channel

Highest channel


6.5 Power Spectral Density

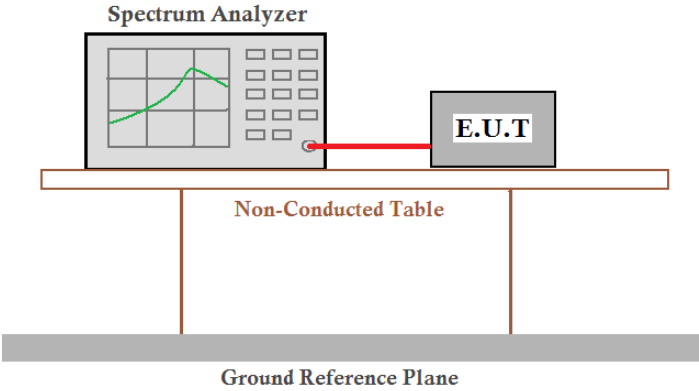Test Requirement:	FCC Part 15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	8dBm
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

Test CH	Power Spectral Density (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-3.89	-9.14	-9.48	-12.63	8.00	Pass
Middle	-3.33	-8.72	-9.02	-12.66		
Highest	-3.20	-8.40	-8.64	-12.42		

Test plot as follows:

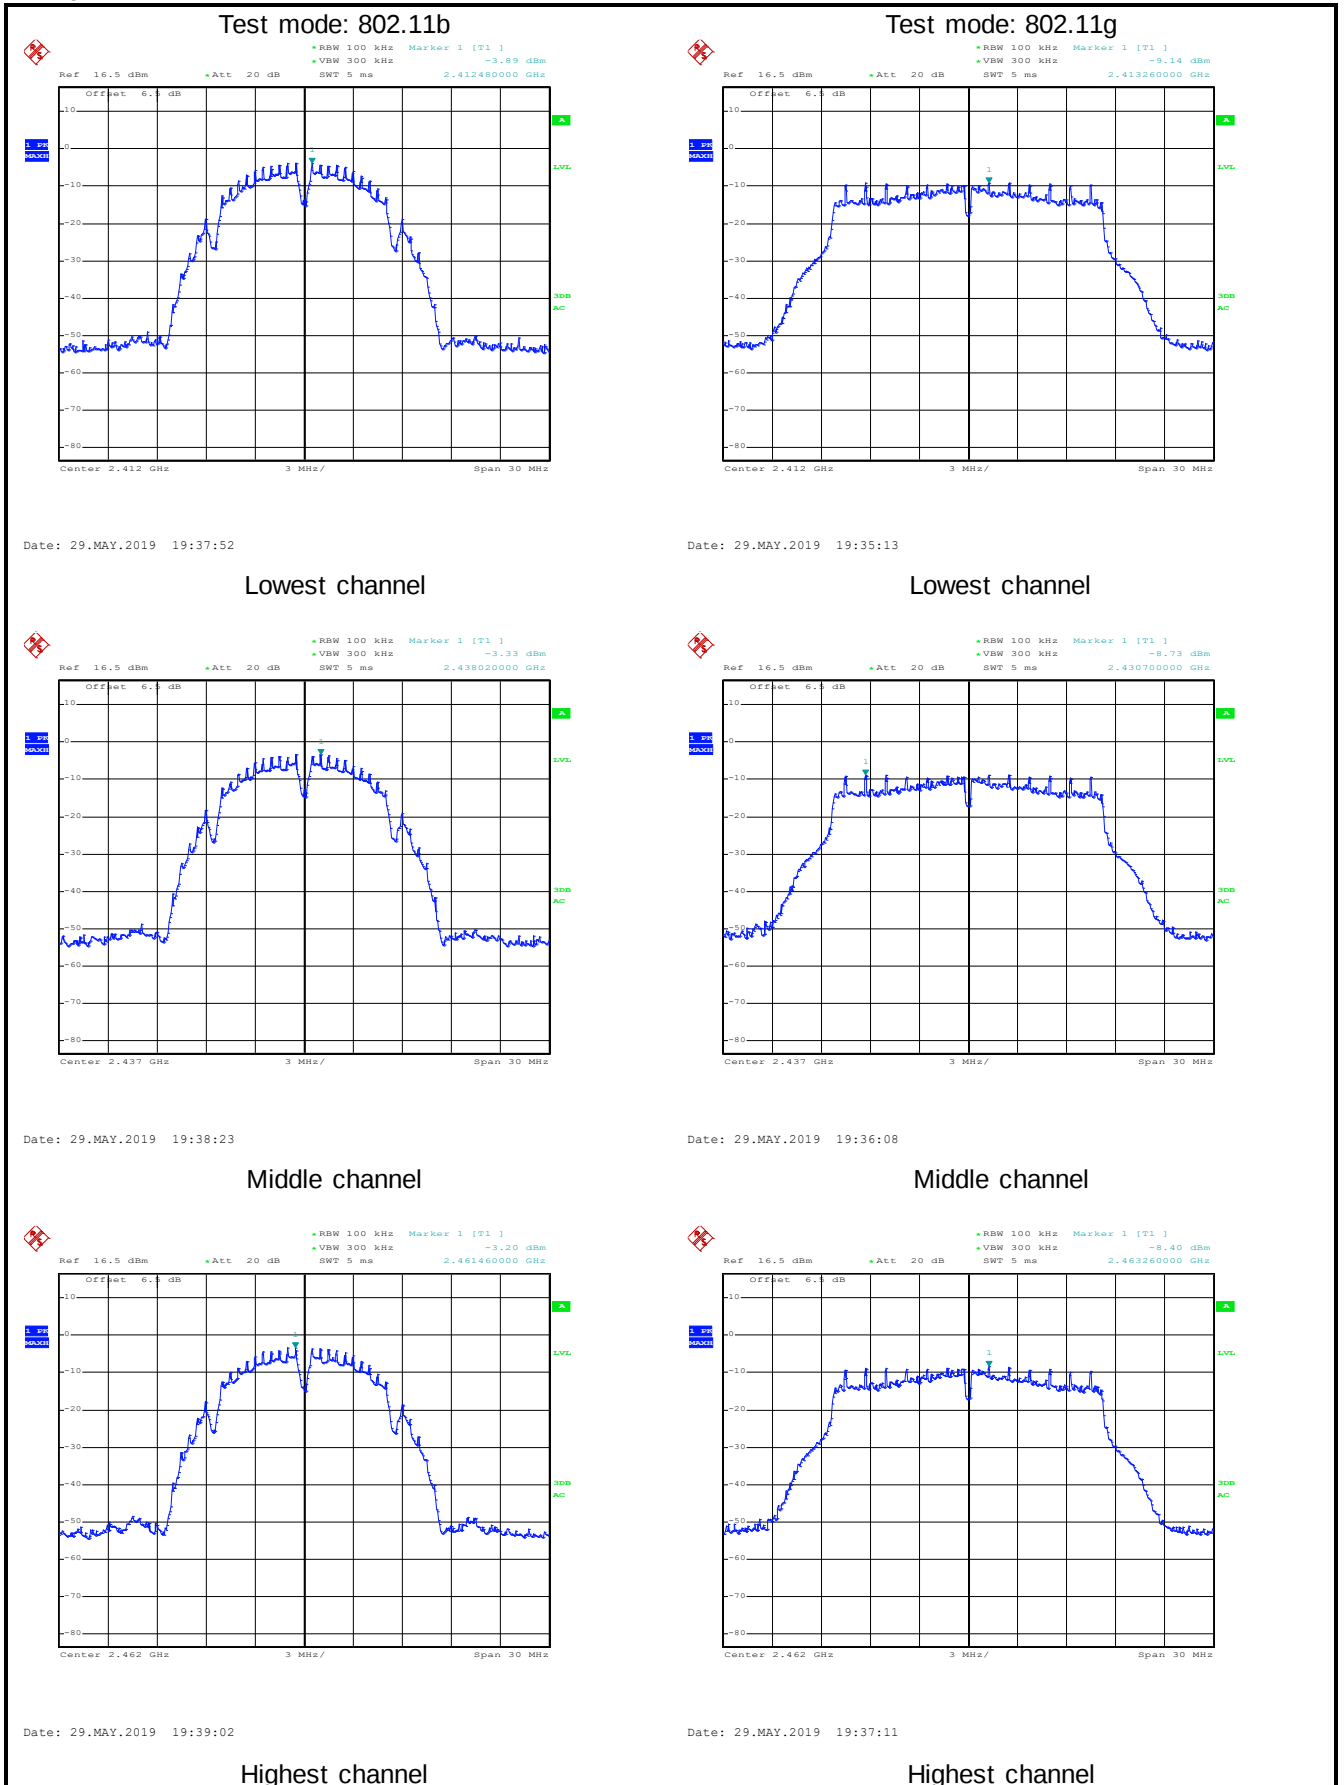


Test mode: 802.11n(HT20)

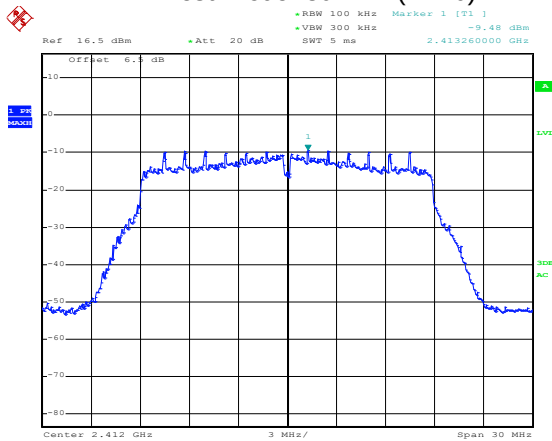


Date: 29.MAY.2019 19:29:53

Test mode: 802.11n(HT40)

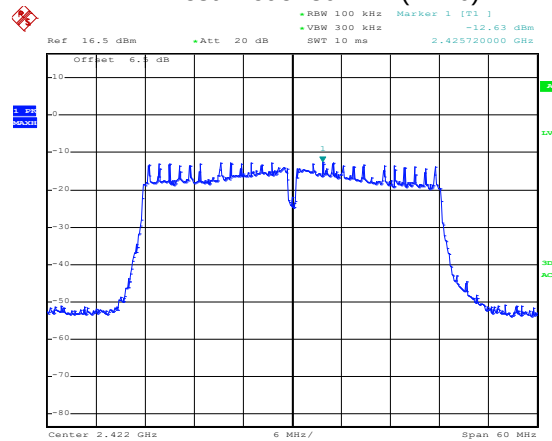


Date: 29.MAY.2019 19:32:58

Lowest channel

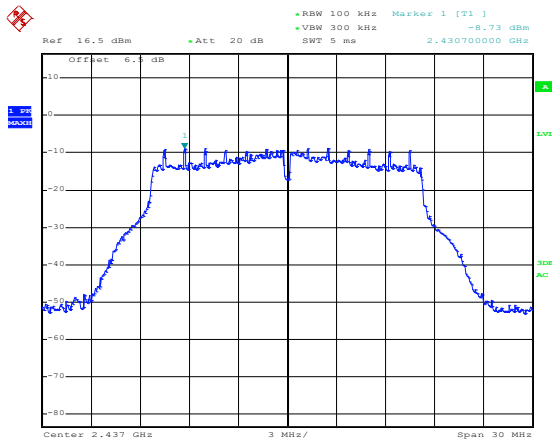


Date: 29.MAY.2019 19:36:08

Lowest channel

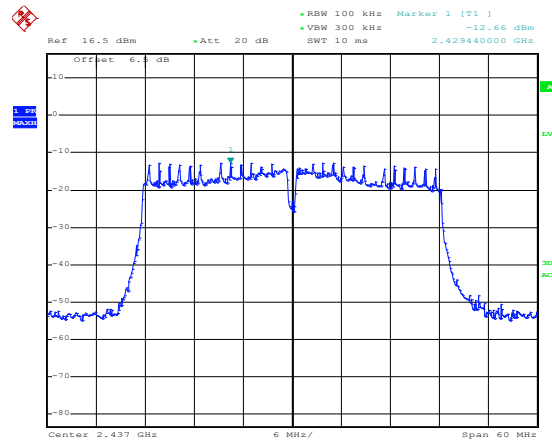


Date: 29.MAY.2019 19:33:35

Middle channel

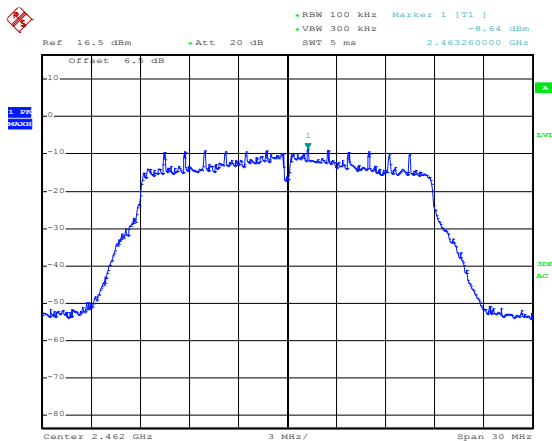

Date: 29.MAY.2019 19:31:21

Middle channel

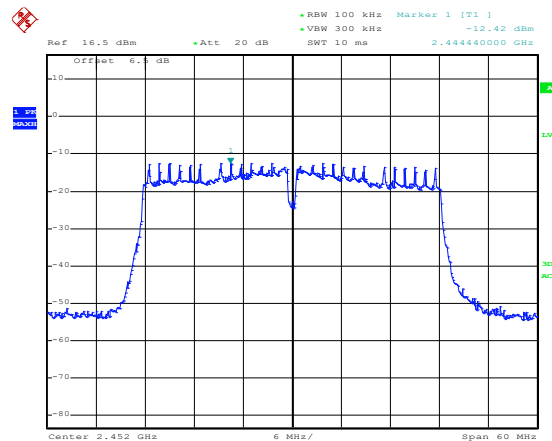


Date: 29.MAY.2019 19:34:16

Highest channel


Highest channel

6.6 Band Edge


6.6.1 Conducted Emission Method

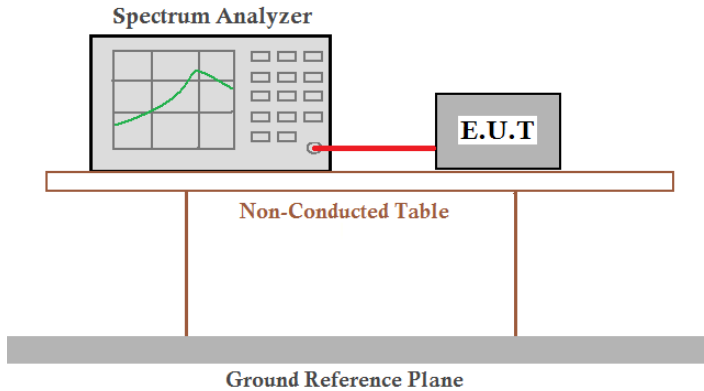Test Requirement:	FCC Part 15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

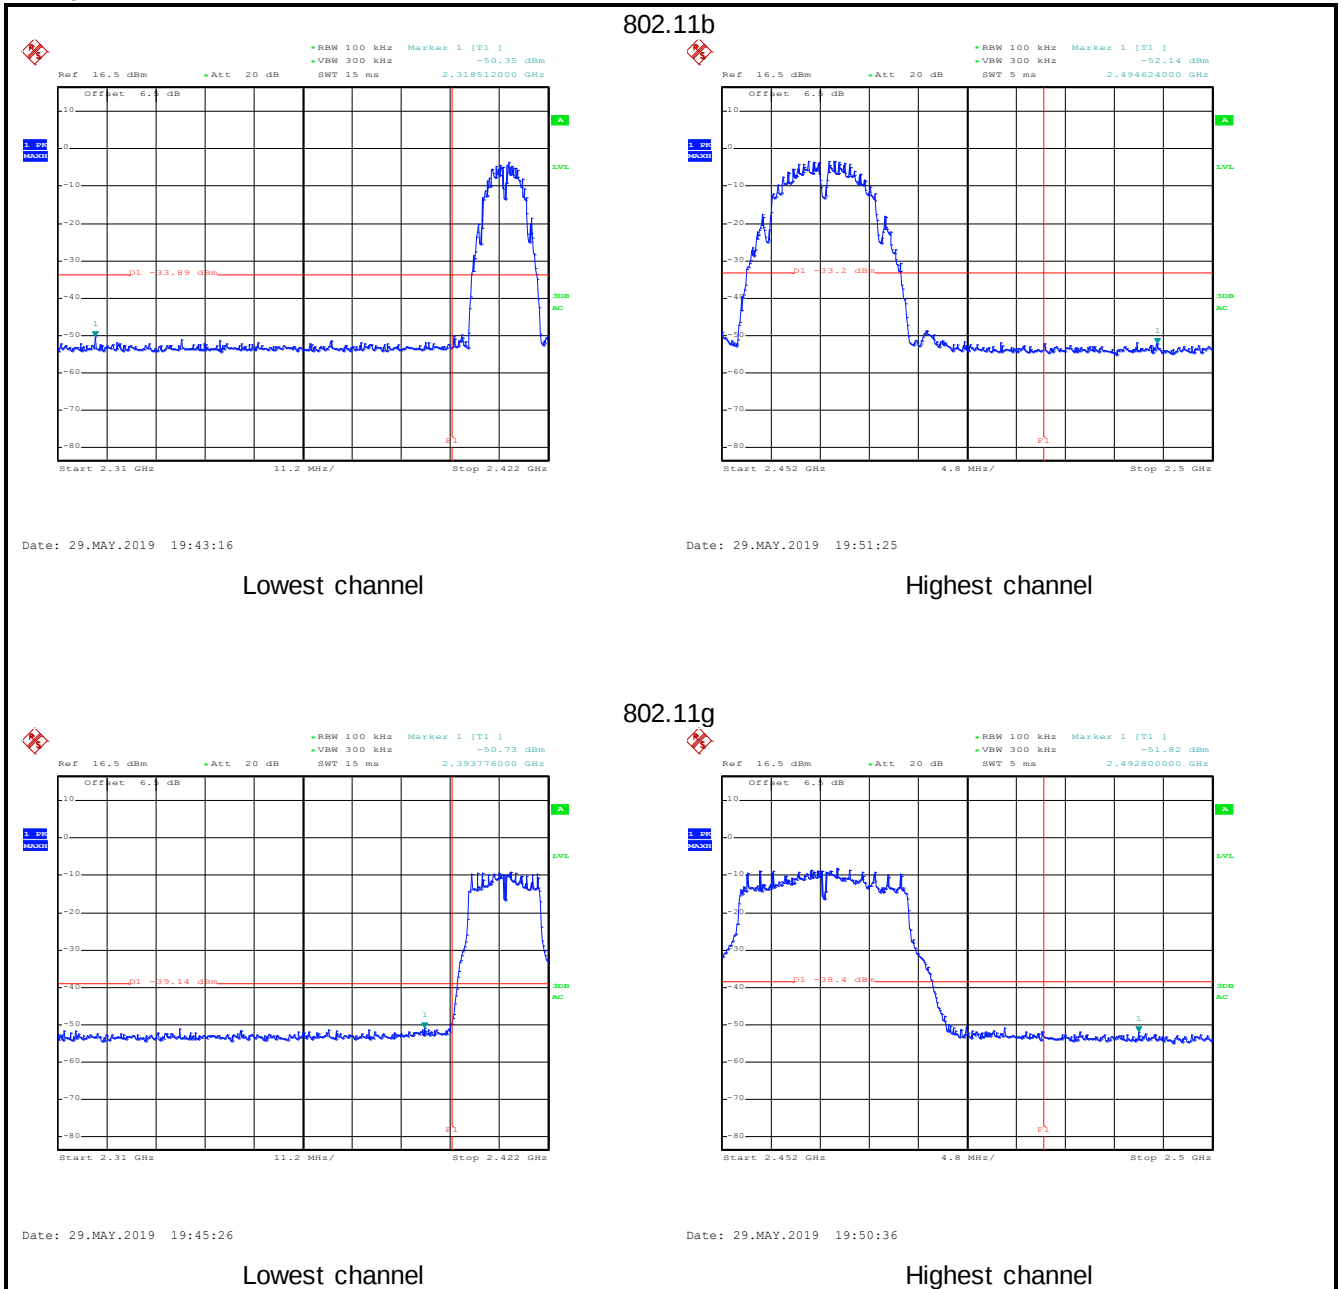


802.11n(HT20)

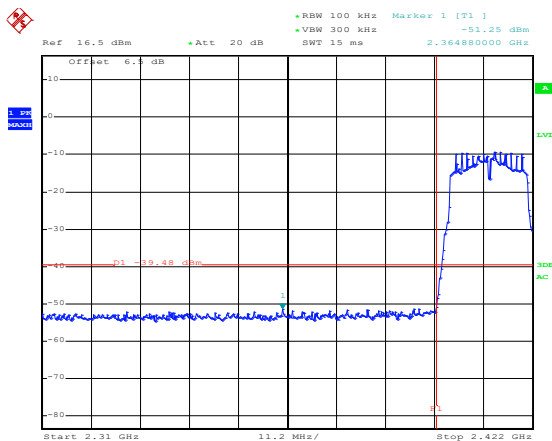

Date: 29.MAY.2019 19:46:25


Lowest channel

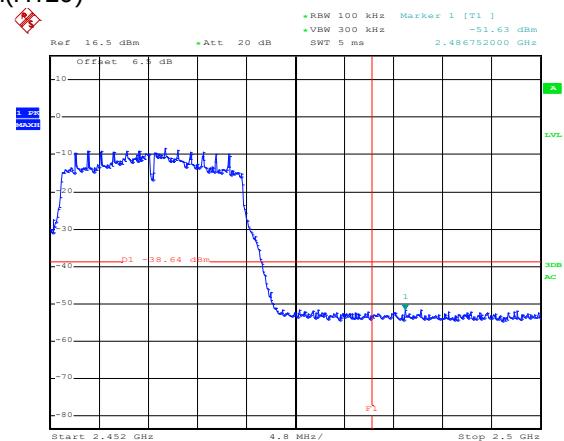

Date: 29.MAY.2019 19:49:29


Highest channel

802.11n(HT40)

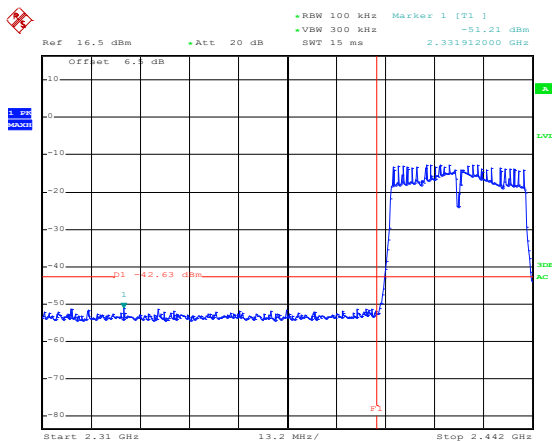

Date: 29.MAY.2019 19:47:25


Lowest channel

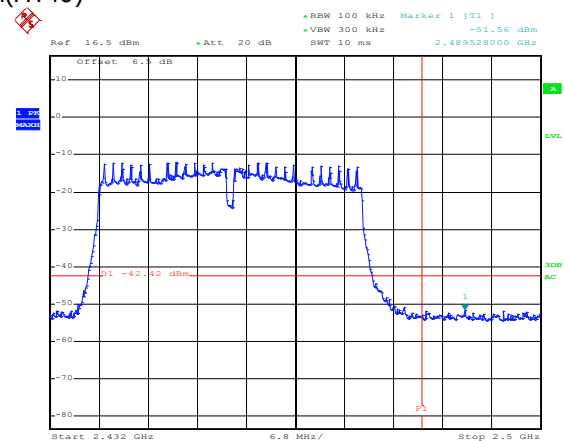

Date: 29.MAY.2019 20:50:10


Highest channel

6.6.2 Radiated Emission Method

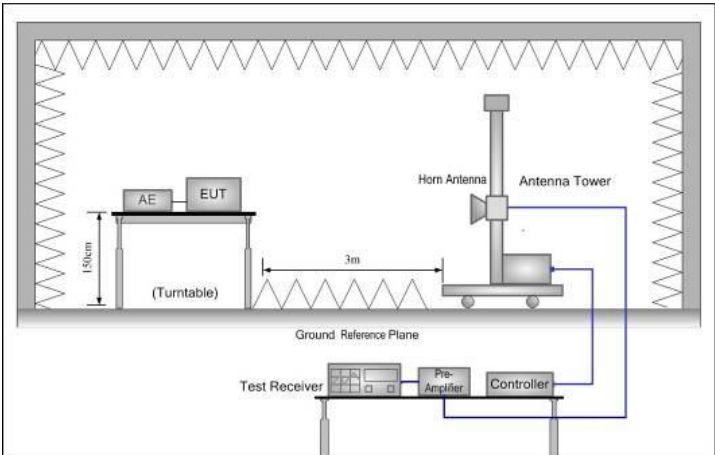Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013 and KDB 558074				
Test Frequency Range:	2.3GHz to 2.5GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:					
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				

802.11b mode:

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowestchannel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

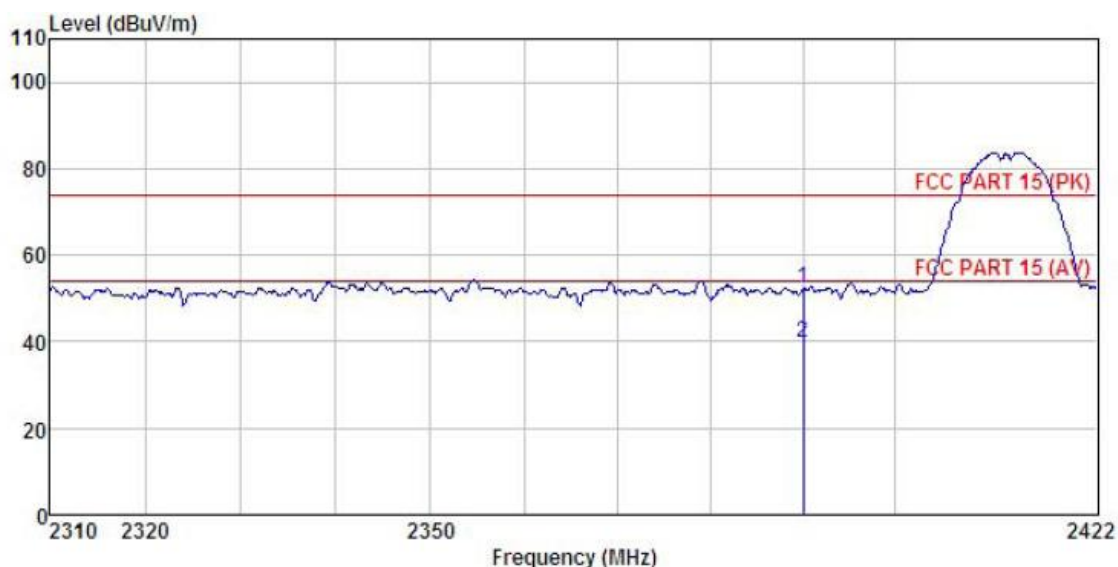


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.46	27.07	4.69	0.00	52.22	74.00	-21.78	Peak
2	2390.000	8.12	27.07	4.69	0.00	39.88	54.00	-14.12	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

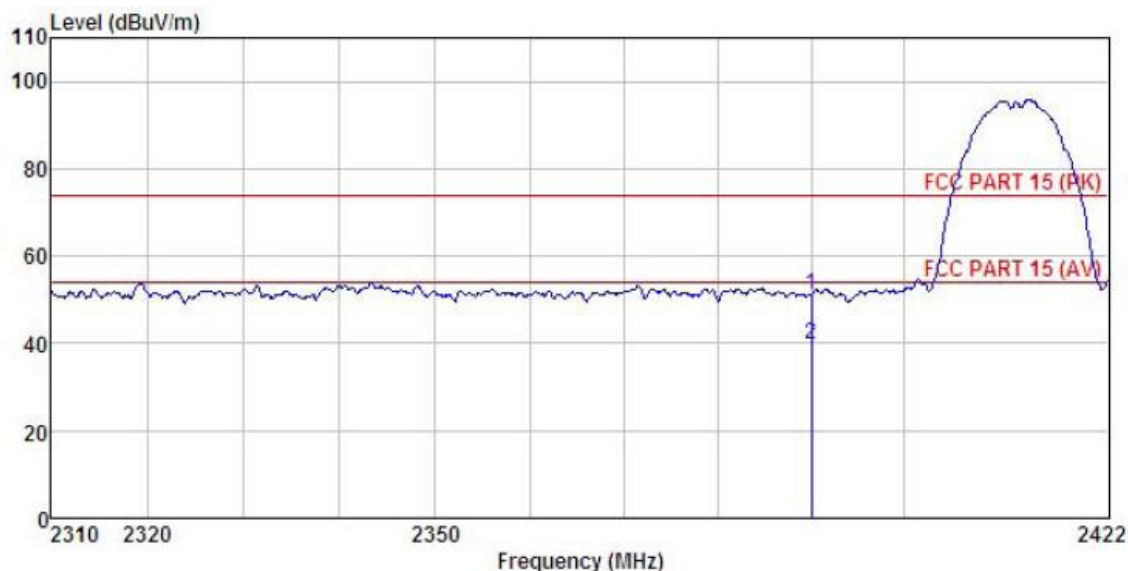


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2390.000	19.42	27.08	4.69	0.00	51.19	74.00
2	2390.000	8.05	27.08	4.69	0.00	39.82	54.00

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

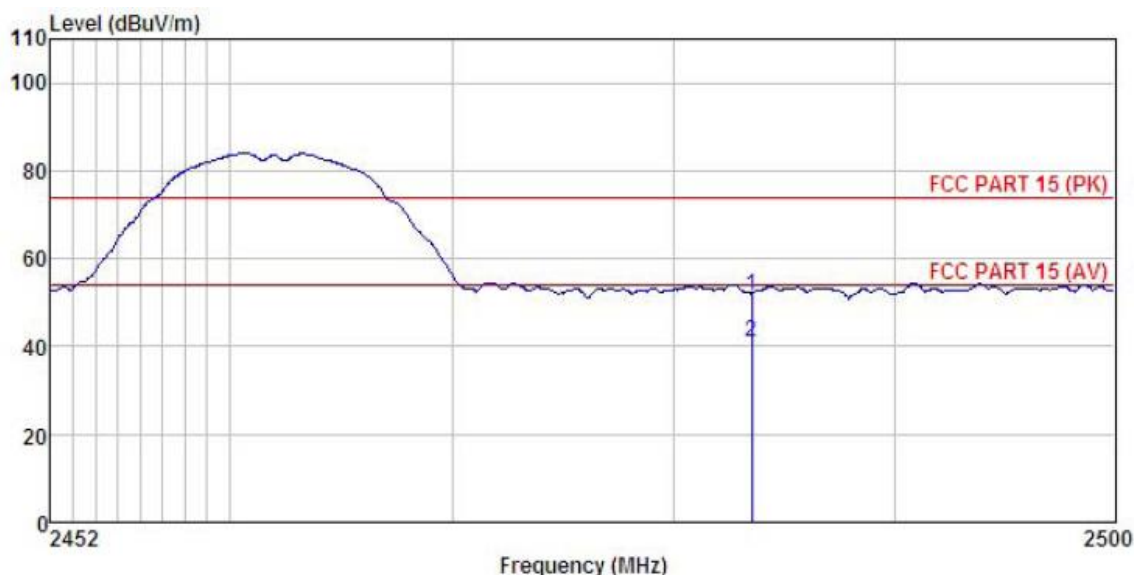


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	19.31	27.36	4.81	0.00	51.48	74.00	-22.52	Peak
2	2483.500	8.64	27.36	4.81	0.00	40.81	54.00	-13.19	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

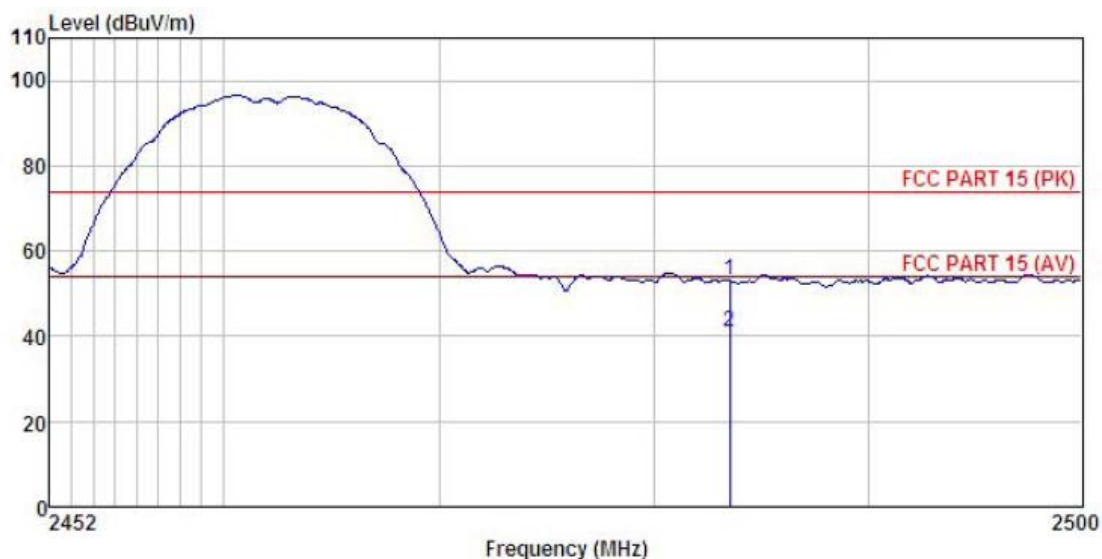


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.00	27.35	4.81	0.00	53.16	74.00	-20.84	Peak
2	2483.500	8.69	27.35	4.81	0.00	40.85	54.00	-13.15	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11g mode:

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowestchannel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

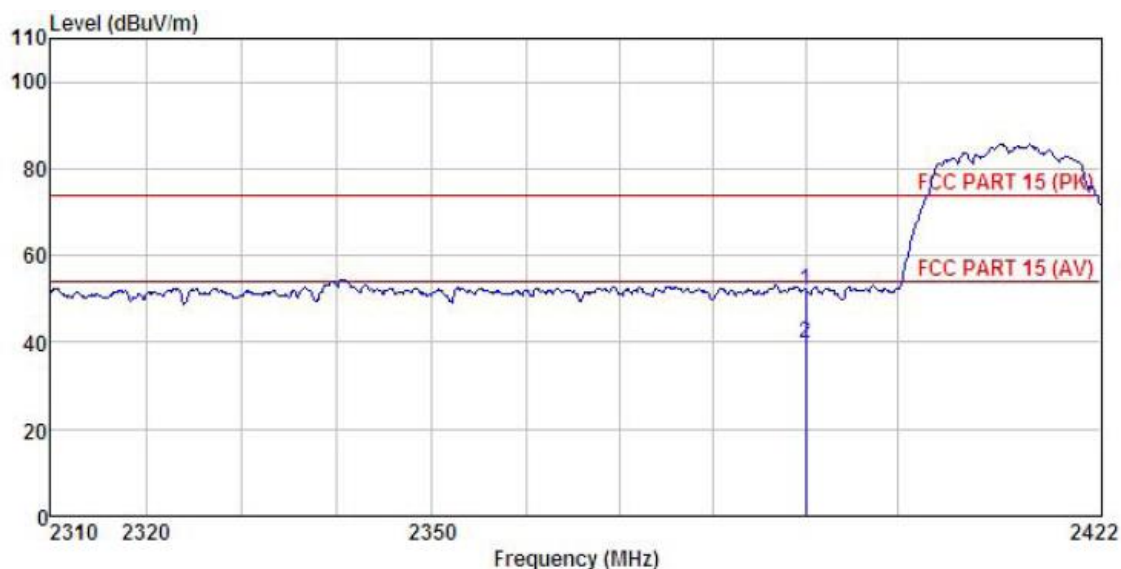


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.27	27.07	4.69	0.00	52.03	74.00	-21.97	Peak
2	2390.000	8.17	27.07	4.69	0.00	39.93	54.00	-14.07	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

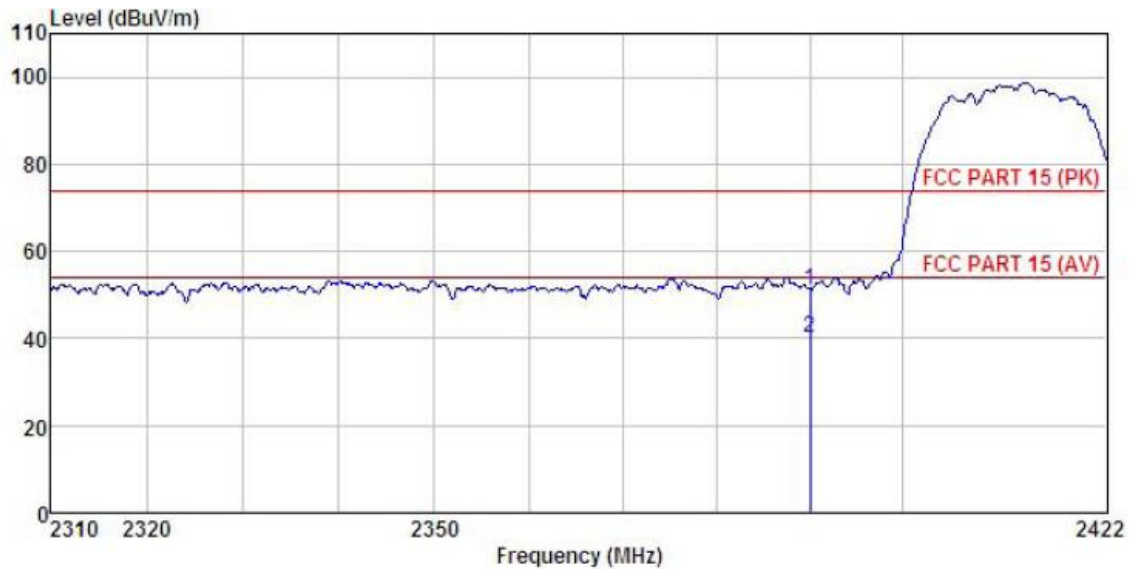


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.52	27.08	4.69	0.00	51.29	74.00	-22.71	Peak
2	2390.000	8.24	27.08	4.69	0.00	40.01	54.00	-13.99	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highestchannel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

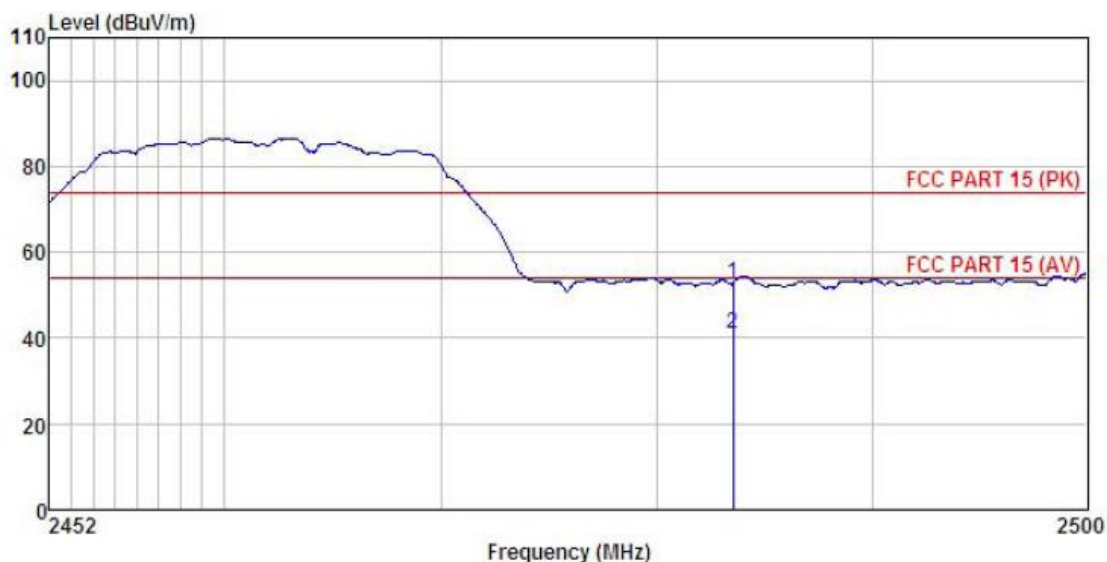


	Freq	ReadAntenna	Cable Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Level	Line
	MHz	dBuV	dB/m	dB	dB	dBuV/m
1	2483.500	20.76	27.36	4.81	0.00	52.93
2	2483.500	8.63	27.36	4.81	0.00	40.80

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

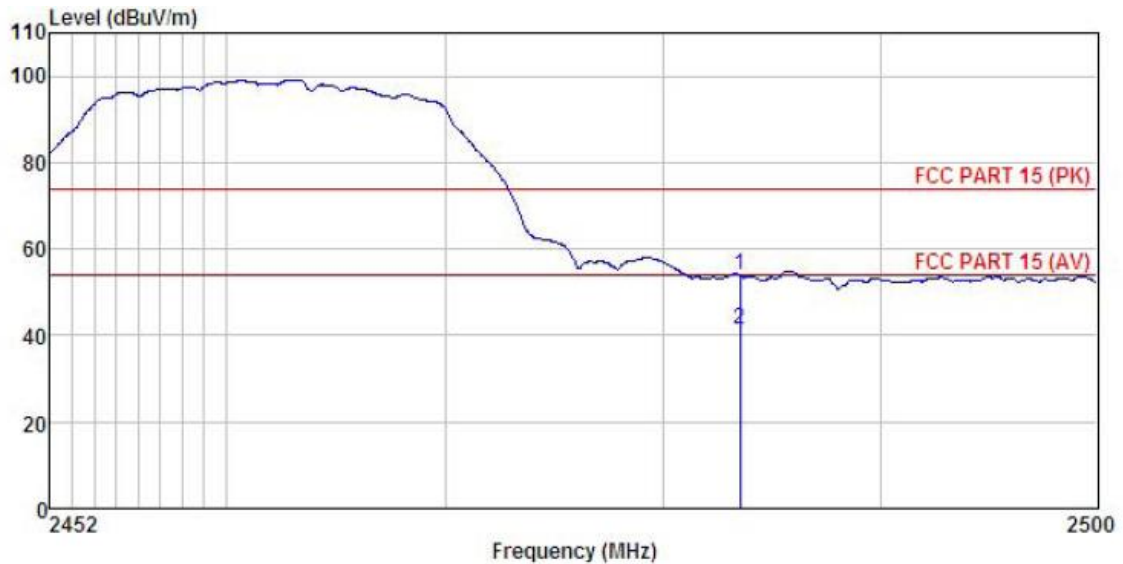


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.81	27.35	4.81	0.00	53.97	74.00	-20.03	Peak
2	2483.500	9.19	27.35	4.81	0.00	41.35	54.00	-12.65	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n(HT20):

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowestchannel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

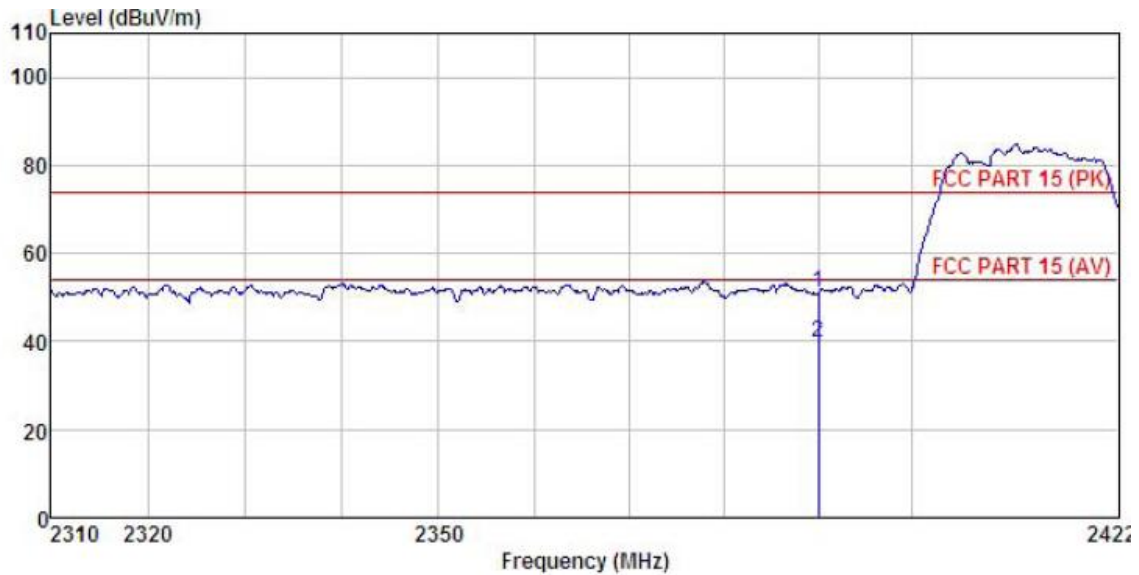


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.55	27.07	4.69	0.00	51.31	74.00	-22.69	Peak
2	2390.000	8.21	27.07	4.69	0.00	39.97	54.00	-14.03	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

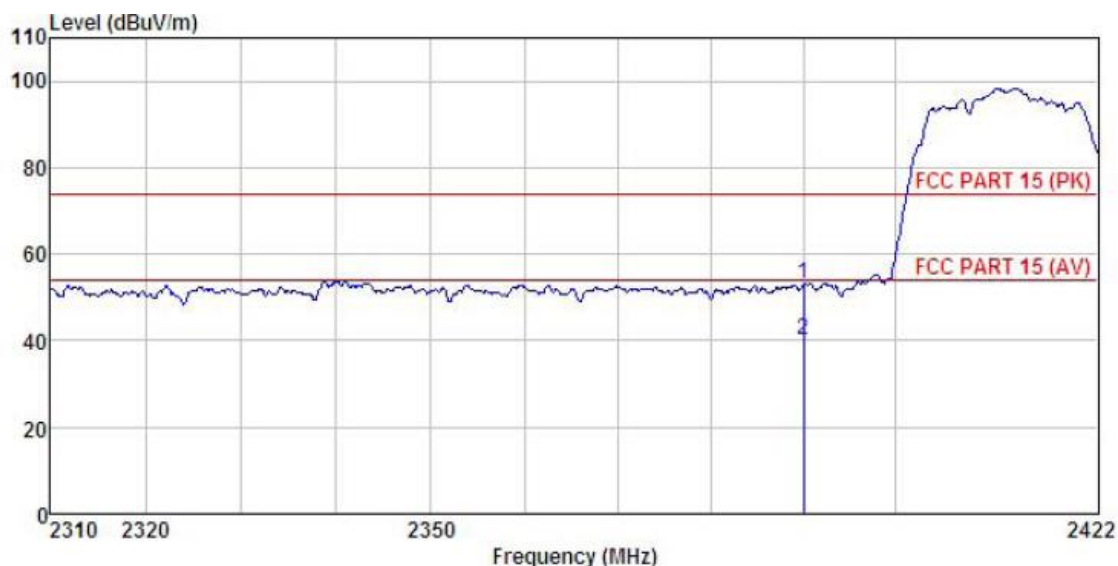


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.55	27.08	4.69	0.00	53.32	74.00	-20.68	Peak
2	2390.000	8.31	27.08	4.69	0.00	40.08	54.00	-13.92	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

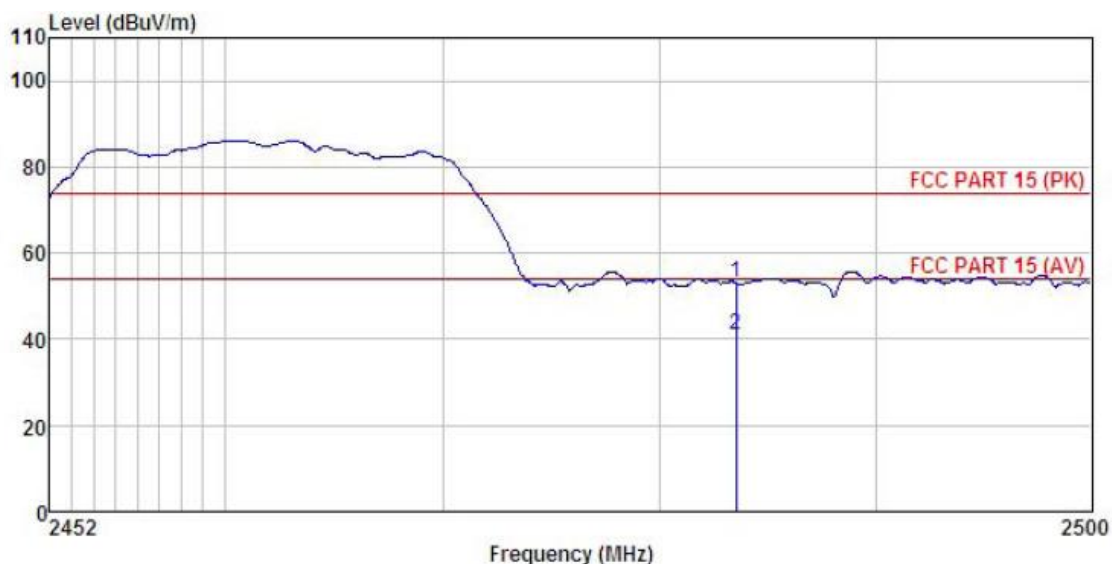


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.87	27.36	4.81	0.00	53.04	74.00	-20.96	Peak
2	2483.500	8.72	27.36	4.81	0.00	40.89	54.00	-13.11	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

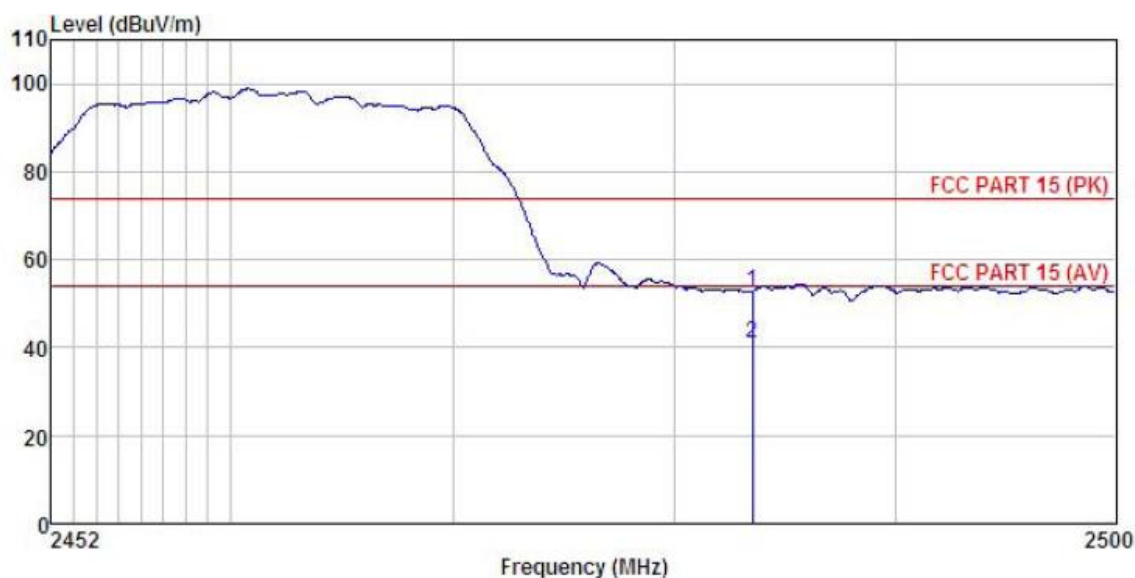


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.68	27.35	4.81	0.00	52.84	74.00	-21.16	Peak
2	2483.500	9.02	27.35	4.81	0.00	41.18	54.00	-12.82	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n(HT40):

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowestchannel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

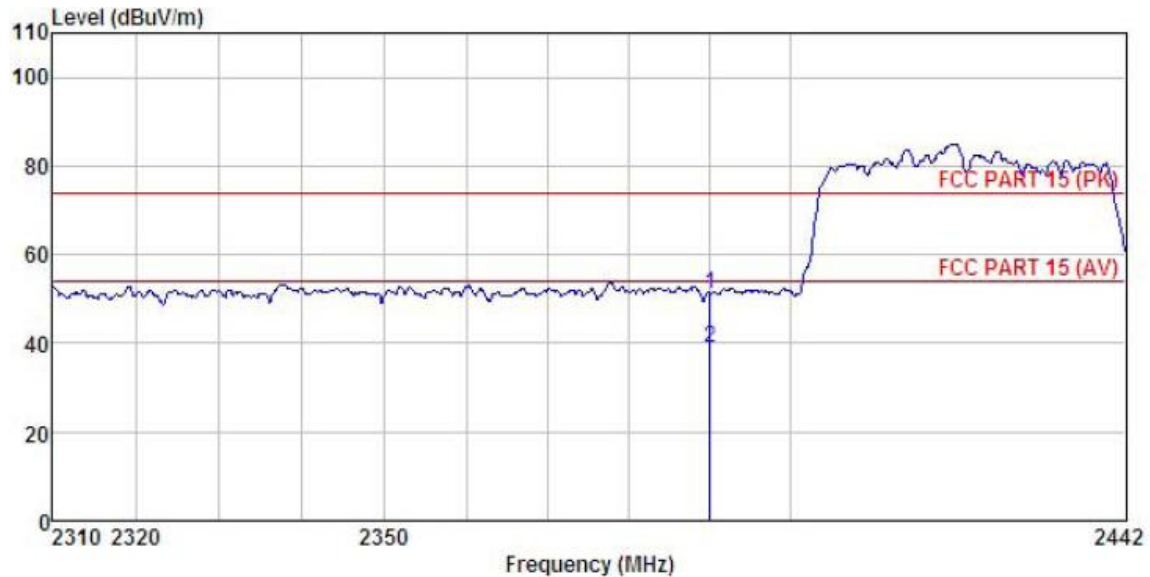


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.51	27.07	4.69	0.00	51.27	74.00	-22.73	Peak
2	2390.000	7.35	27.07	4.69	0.00	39.11	54.00	-14.89	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

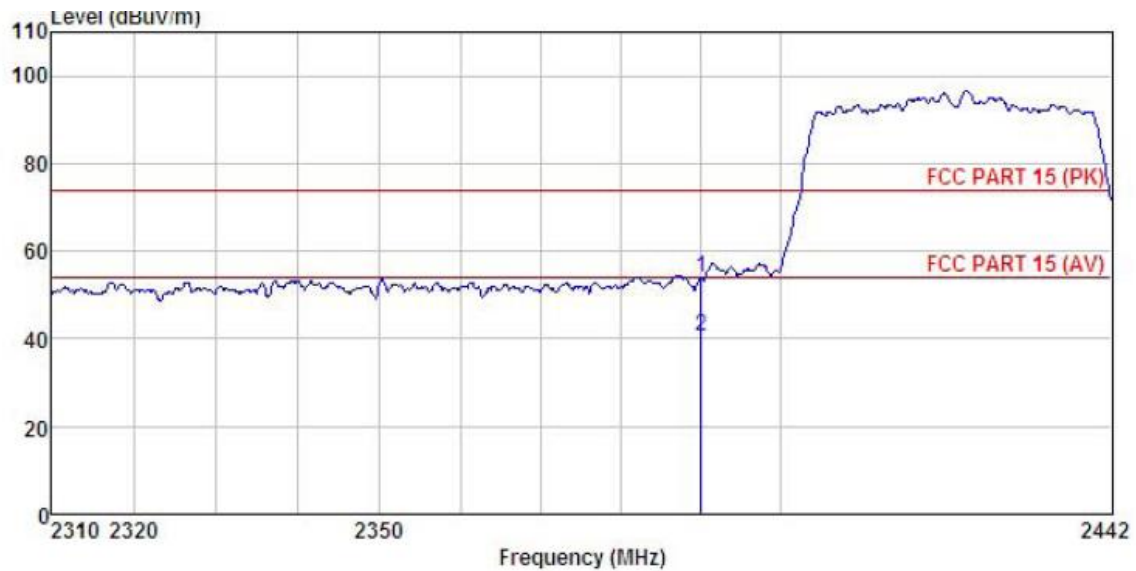


	Read Freq	Antenna Level	Cable Factor	Preamp Loss	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	22.23	27.08	4.69	0.00	54.00	74.00	-20.00 Peak
2	2390.000	8.73	27.08	4.69	0.00	40.50	54.00	-13.50 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highestchannel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

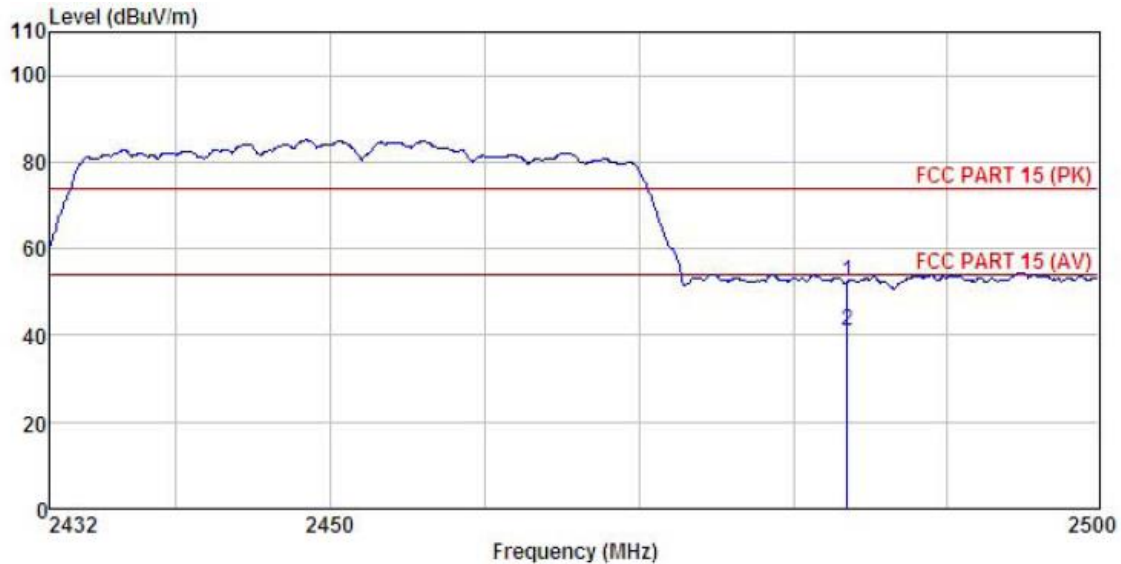


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	20.37	27.36	4.81	0.00	52.54	74.00 -21.46 Peak
2	2483.500	8.79	27.36	4.81	0.00	40.96	54.00 -13.04 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

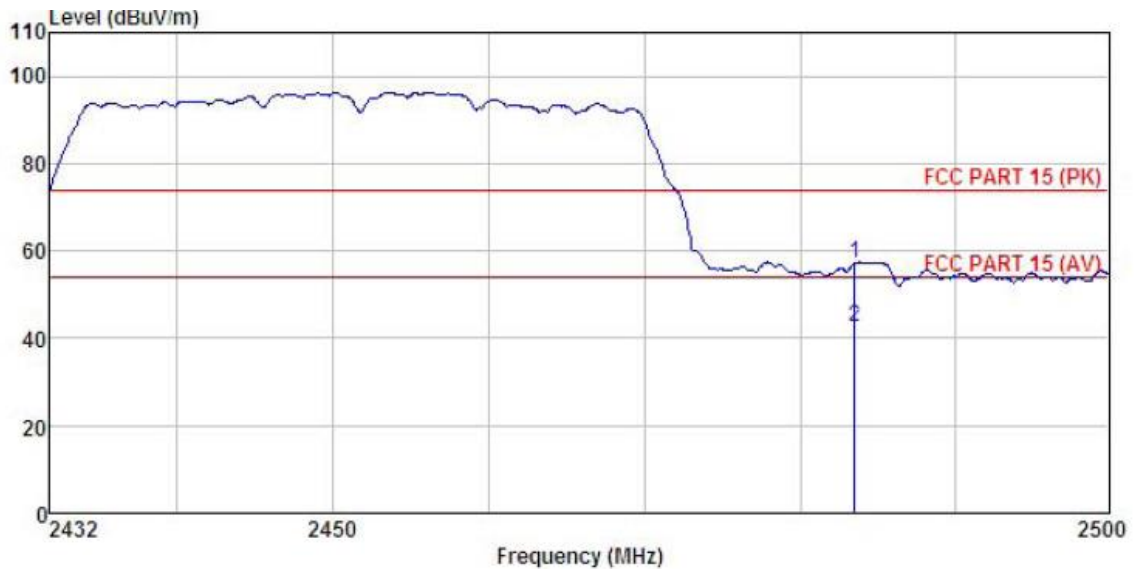


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.00	27.35	4.81	0.00	57.16	74.00	-16.84	Peak
2	2483.500	10.35	27.35	4.81	0.00	42.51	54.00	-11.49	Average

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.7 Spurious Emission

6.7.1 Conducted Emission Method

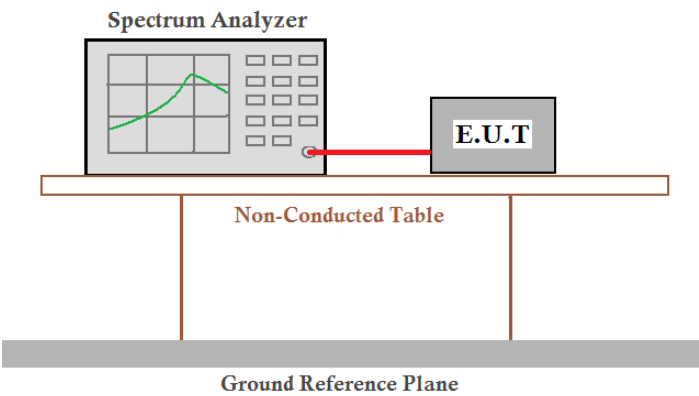
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 The diagram illustrates the test setup for conducted emission testing. A Spectrum Analyzer is connected to an Equipment Under Test (E.U.T.) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

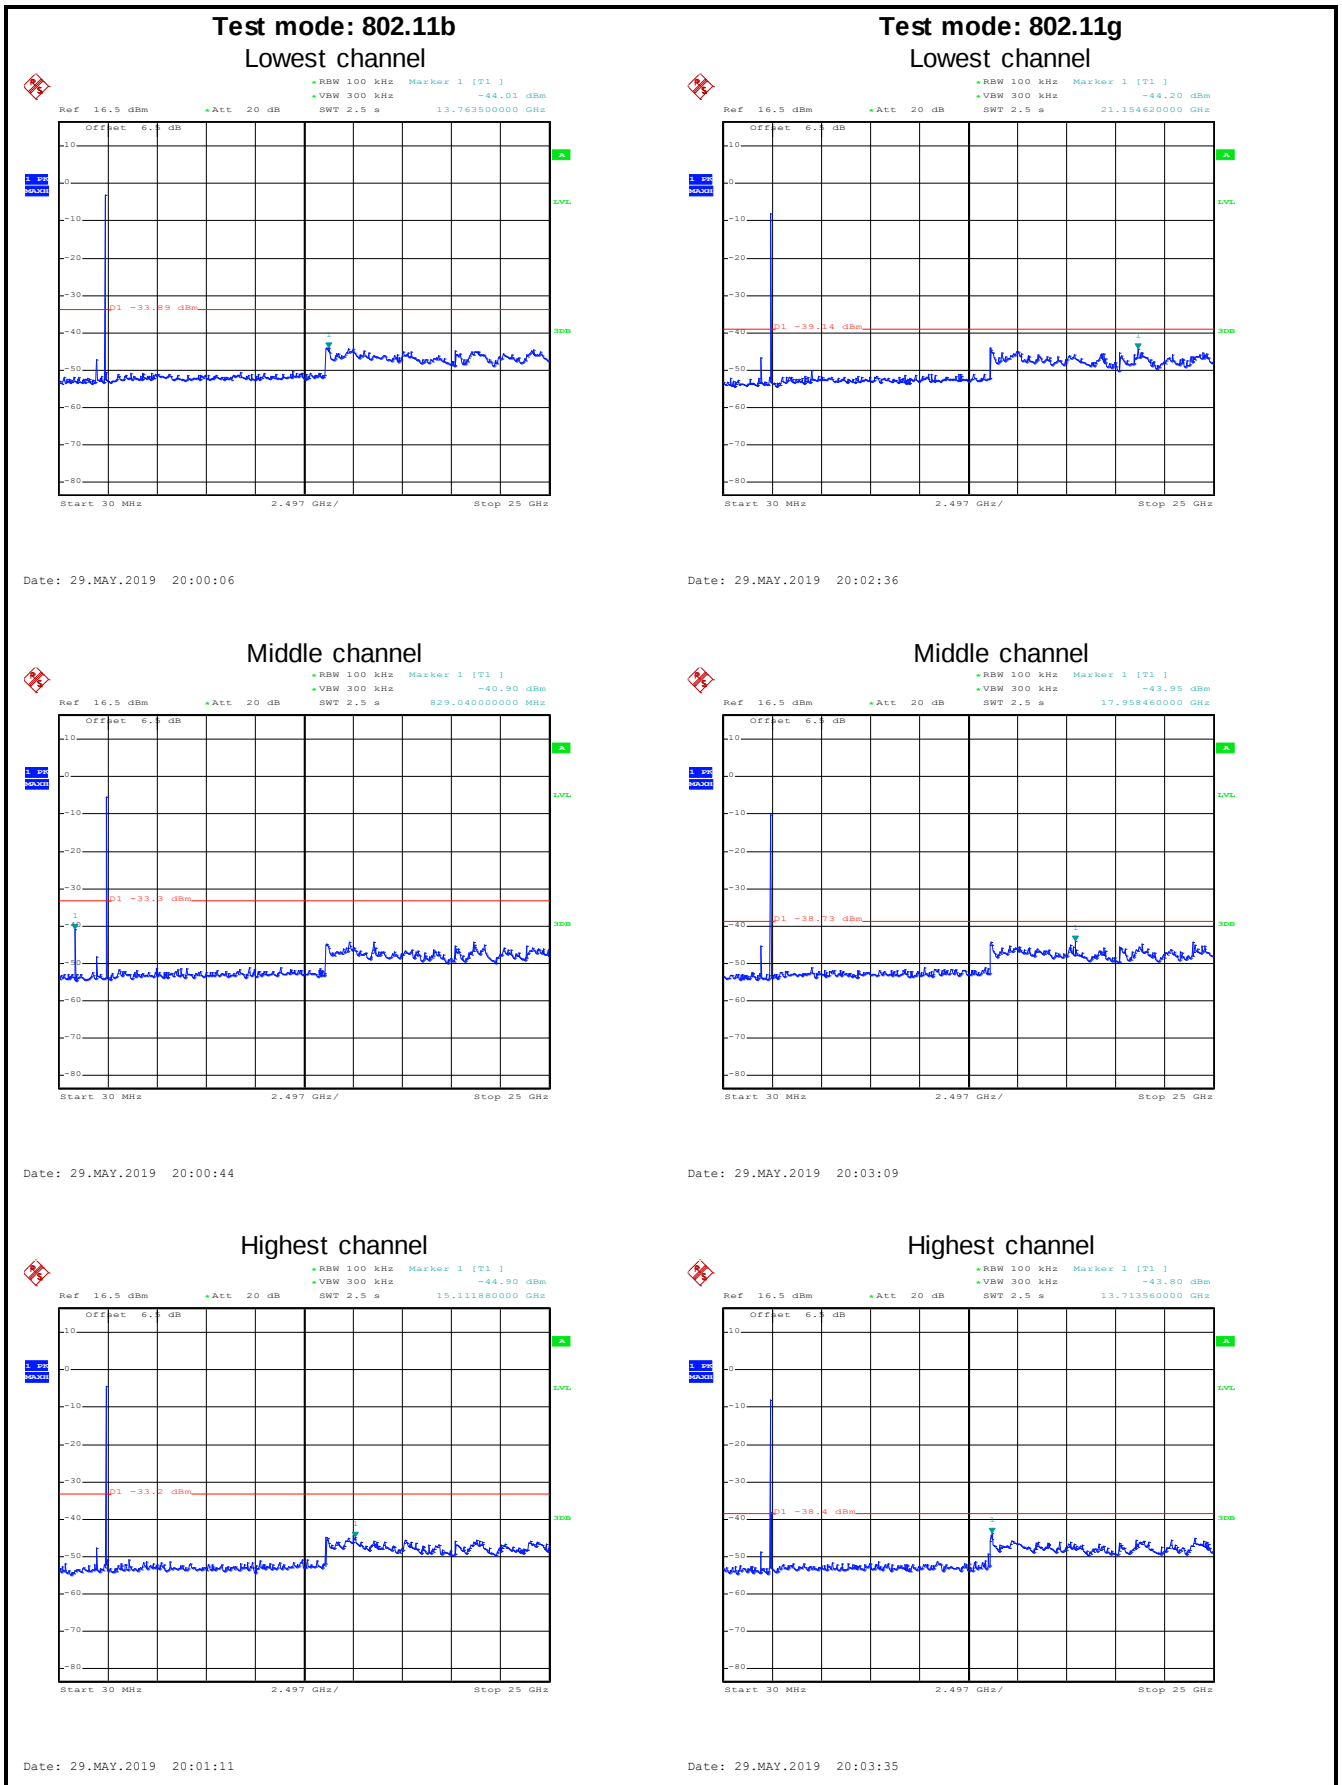

Test mode: 802.11n(HT20)


Lowest channel

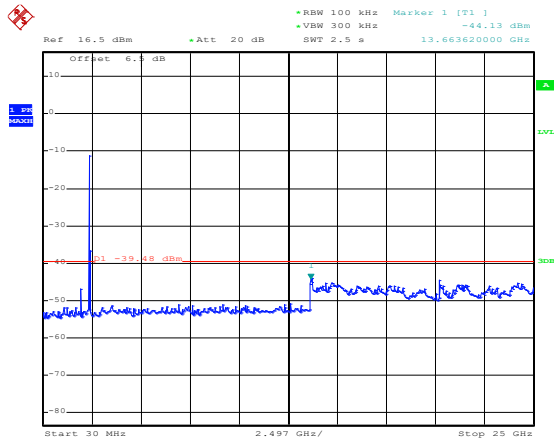

Date: 29.MAY.2019 20:04:29


Test mode: 802.11n(HT40)

Lowest channel

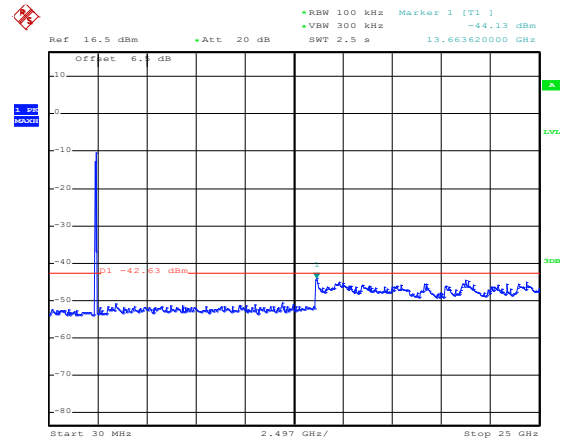


Date: 29.MAY.2019 20:06:27

Middle channel

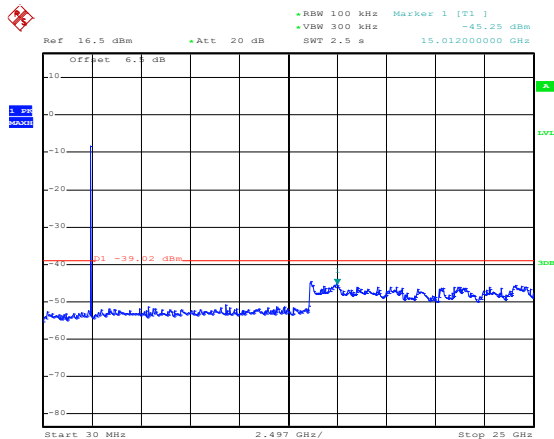


Date: 29.MAY.2019 20:05:16

Middle channel

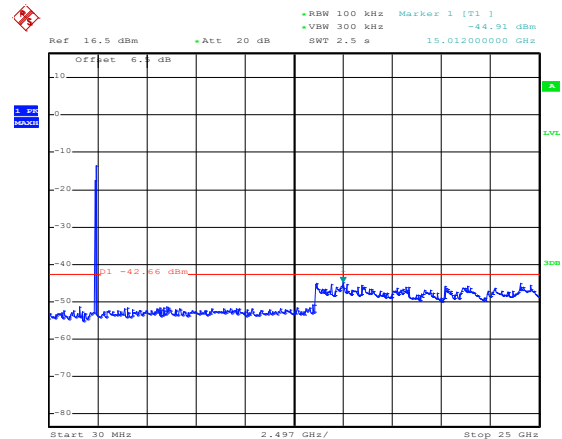


Date: 29.MAY.2019 20:07:24

Highest channel

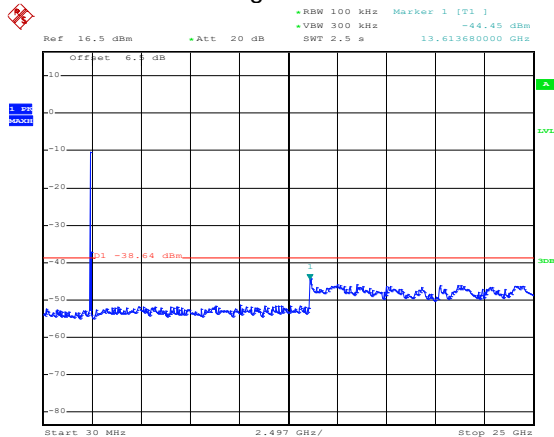


Date: 29.MAY.2019 20:05:51


Highest channel

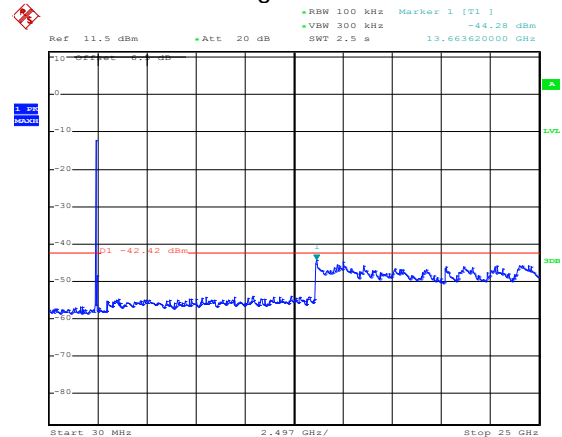

Date: 29.MAY.2019 21:04:03

6.7.2 Radiated Emission Method

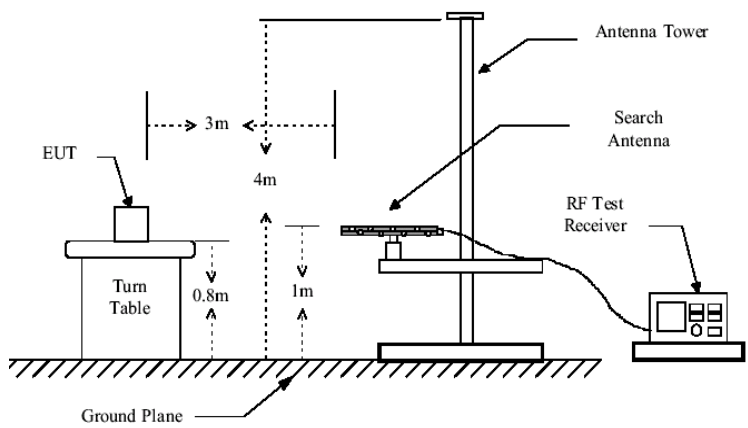
Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			74.0		Peak Value
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:	Below 1GHz  Above 1GHz				

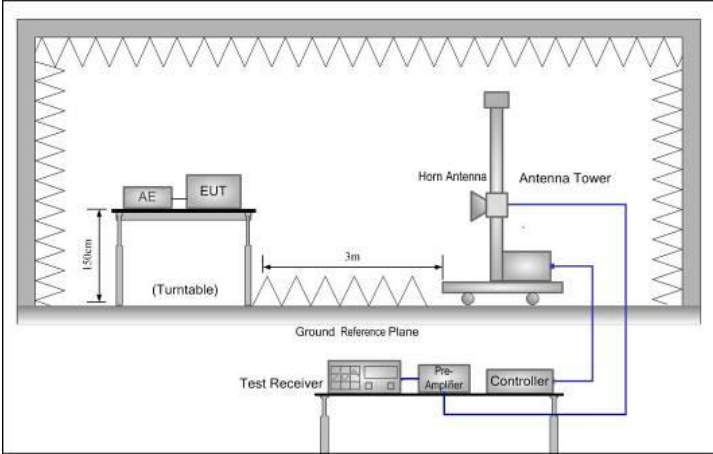	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):

Below 1GHz:

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

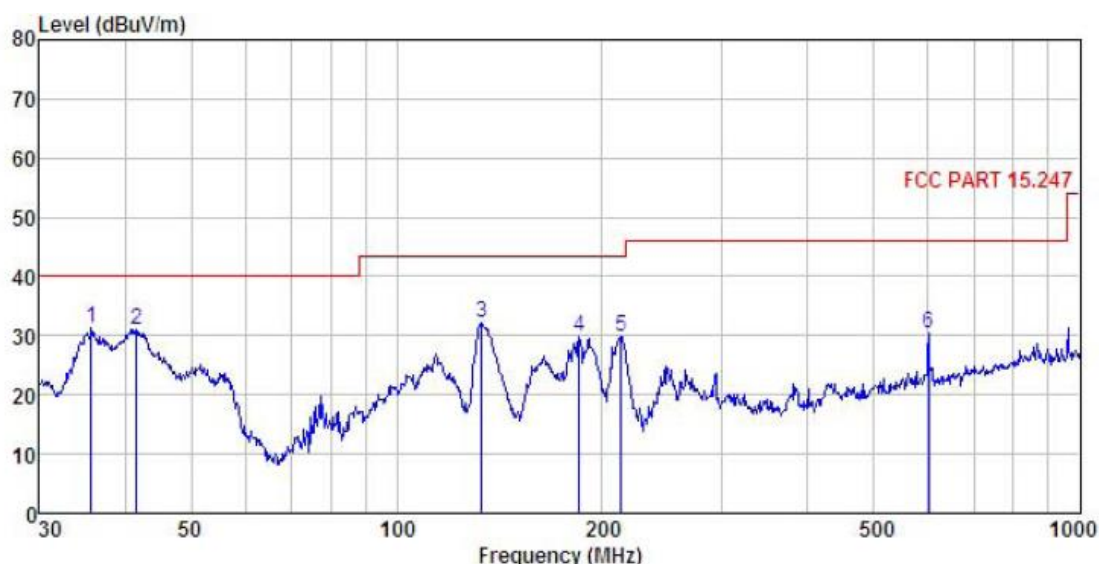


	Freq	ReadAntenna	Cable Preamp	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level
		dBuV	dB/m	dB	dB	dBuV/m
						dBuV/m
1	35.749	48.76	11.39	1.07	29.94	31.28
2	41.567	47.36	12.37	1.24	29.89	31.08
3	133.151	49.36	9.95	2.32	29.31	32.32
4	185.138	45.96	10.13	2.77	28.93	29.93
5	213.015	44.61	11.19	2.85	28.75	29.90
6	601.427	35.93	19.51	3.94	28.93	30.45

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Tablet PC	Product Model:	APRIX TAB8II
Test By:	Mike	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp:24℃ Humi:57%

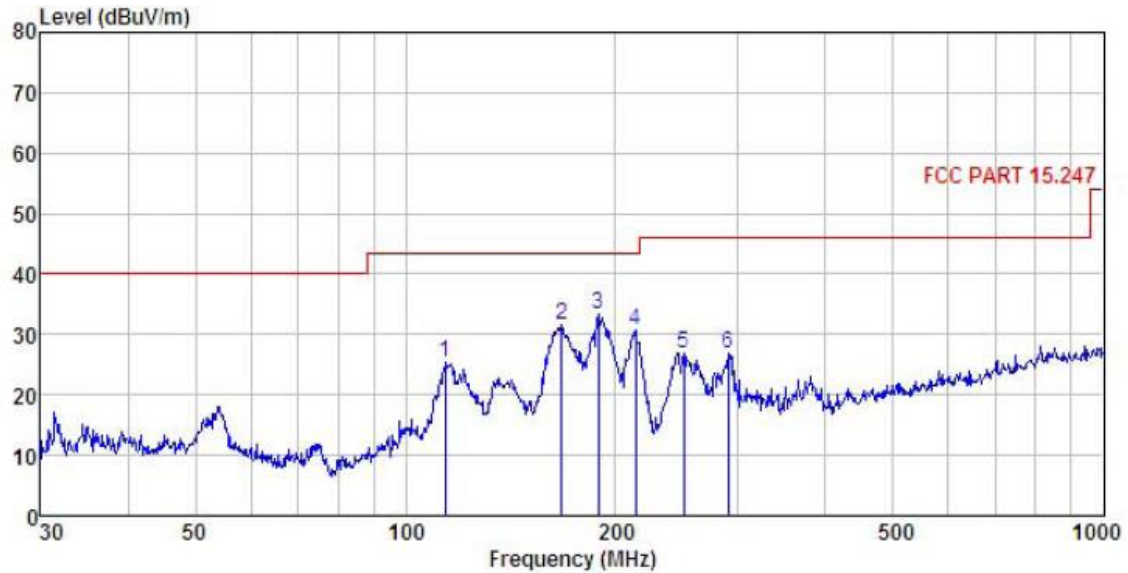

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	114.114	41.25	11.34	2.10	29.43	25.26	43.50	-18.24	QP
2	167.237	48.47	9.54	2.64	29.07	31.58	43.50	-11.92	QP
3	189.074	49.25	10.26	2.79	28.91	33.39	43.50	-10.11	QP
4	213.763	45.41	11.23	2.85	28.74	30.75	43.50	-12.75	QP
5	250.301	40.04	12.70	2.81	28.54	27.01	46.00	-18.99	QP
6	290.017	39.08	13.43	2.91	28.47	26.95	46.00	-19.05	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz

802.11b								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.68	30.94	6.81	41.82	42.61	74.00	-31.39	Vertical
4824.00	46.44	30.94	6.81	41.82	42.37	74.00	-31.63	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	37.73	30.94	6.81	41.82	33.66	54.00	-20.34	Vertical
4824.00	37.44	30.94	6.81	41.82	33.37	54.00	-20.63	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.86	31.20	6.85	41.84	43.07	74.00	-30.93	Vertical
4874.00	46.24	31.20	6.85	41.84	42.45	74.00	-31.55	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	37.18	31.20	6.85	41.84	33.39	54.00	-20.61	Vertical
4874.00	37.24	31.20	6.85	41.84	33.45	54.00	-20.55	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.89	31.46	6.89	41.86	43.38	74.00	-30.62	Vertical
4924.00	46.71	31.46	6.89	41.86	43.20	74.00	-30.80	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	36.76	31.46	6.89	41.86	33.25	54.00	-20.75	Vertical
4924.00	36.24	31.46	6.89	41.86	32.73	54.00	-21.27	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11g								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.52	30.94	6.81	41.82	42.45	74.00	-31.55	Vertical
4824.00	46.37	30.94	6.81	41.82	42.30	74.00	-31.70	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	37.41	30.94	6.81	41.82	33.34	54.00	-20.66	Vertical
4824.00	37.38	30.94	6.81	41.82	33.31	54.00	-20.69	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.91	31.20	6.85	41.84	43.12	74.00	-30.88	Vertical
4874.00	46.19	31.20	6.85	41.84	42.40	74.00	-31.60	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	36.47	31.20	6.85	41.84	32.68	54.00	-21.32	Vertical
4874.00	36.16	31.20	6.85	41.84	32.37	54.00	-21.63	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.85	31.46	6.89	41.86	43.34	74.00	-30.66	Vertical
4924.00	46.26	31.46	6.89	41.86	42.75	74.00	-31.25	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	37.09	31.46	6.89	41.86	33.58	54.00	-20.42	Vertical
4924.00	36.83	31.46	6.89	41.86	33.32	54.00	-20.68	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11n(HT20)								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	45.25	36.06	6.81	41.82	46.30	74.00	-27.70	Vertical
4824.00	46.01	36.06	6.81	41.82	47.06	74.00	-26.94	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	38.12	36.06	6.81	41.82	39.17	54.00	-14.83	Vertical
4824.00	37.37	36.06	6.81	41.82	38.42	54.00	-15.58	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.52	36.32	6.85	41.84	47.85	74.00	-26.15	Vertical
4874.00	46.37	36.32	6.85	41.84	47.70	74.00	-26.30	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	36.49	36.32	6.85	41.84	37.82	54.00	-16.18	Vertical
4874.00	36.38	36.32	6.85	41.84	37.71	54.00	-16.29	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.58	36.58	6.89	41.86	48.19	74.00	-25.81	Vertical
4924.00	46.73	36.58	6.89	41.86	48.34	74.00	-25.66	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	36.12	36.58	6.89	41.86	37.73	54.00	-16.27	Vertical
4924.00	36.09	36.58	6.89	41.86	37.70	54.00	-16.30	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11n(HT40)								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	46.48	36.06	6.81	41.82	47.53	74.00	-26.47	Vertical
4844.00	46.72	36.06	6.81	41.82	47.77	74.00	-26.23	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	38.16	36.06	6.81	41.82	39.21	54.00	-14.79	Vertical
4844.00	36.47	36.06	6.81	41.82	37.52	54.00	-16.48	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.52	36.32	6.85	41.84	47.85	74.00	-26.15	Vertical
4874.00	46.24	36.32	6.85	41.84	47.57	74.00	-26.43	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	37.42	36.32	6.85	41.84	38.75	54.00	-15.25	Vertical
4874.00	36.15	36.32	6.85	41.84	37.48	54.00	-16.52	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	46.79	36.45	6.87	41.85	48.26	74.00	-25.74	Vertical
4904.00	46.38	36.45	6.87	41.85	47.85	74.00	-26.15	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	37.21	36.45	6.87	41.85	38.68	54.00	-15.32	Vertical
4904.00	37.10	36.45	6.87	41.85	38.57	54.00	-15.43	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								