



Annex for Bluetooth

Test Report No.: CTL2508251021-WF01

TABLE OF CONTENTS

1. Bandwidth3

 1.1 Test Result3

 1.1.1 OBW3

 1.1.2 20dB BW3

 1.2 Test Graph4

 1.2.1 OBW4

 1.2.2 20dB BW9

2. Maximum Conducted Output Power14

 2.1 Test Result14

 2.1.1 Power14

3. Carrier Frequency Separation15

 3.1 Test Result15

 3.1.1 Ant115

 3.2 Test Graph16

 3.2.1 Ant116

4. Number of Hopping Frequencies18

 4.1 Test Result18

 4.1.1 HoppNum18

 4.2 Test Graph19

 4.2.1 HoppNum19



5. Time of Occupancy (Dwell Time)21

 5.1 Test Result 21

 5.1.1 Ant1 21

 5.2 Test Graph 22

 5.2.1 Ant1 22

6. Unwanted Emissions In Non-restricted Frequency Bands31

 6.1 Test Result 31

 6.1.1 Ref 31

 7.1.2 CSE 31

 6.2 Test Graph 32

 6.2.1 Ref 32

 6.2.2 CSE 37

FCCID: 2AHPZ-MPD6M

1. Bandwidth

1.1 Test Result

1.1.1 OBW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.852	/	Pass
		2441	DH5	1	0.859	/	Pass
		2480	DH5	1	0.854	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.168	/	Pass
		2441	2DH5	1	1.168	/	Pass
		2480	2DH5	1	1.172	/	Pass
8DPSK	SISO	2402	3DH5	1	1.179	/	Pass
		2441	3DH5	1	1.181	/	Pass
		2480	3DH5	1	1.179	/	Pass


1.1.2 20dB BW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.955	/	Pass
		2441	DH5	1	0.956	/	Pass
		2480	DH5	1	0.958	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.284	/	Pass
		2441	2DH5	1	1.287	/	Pass
		2480	2DH5	1	1.287	/	Pass
8DPSK	SISO	2402	3DH5	1	1.309	/	Pass
		2441	3DH5	1	1.308	/	Pass
		2480	3DH5	1	1.308	/	Pass

FCCID: 2AHPZ-MPD6M


1.2 Test Graph

1.2.1 OBW

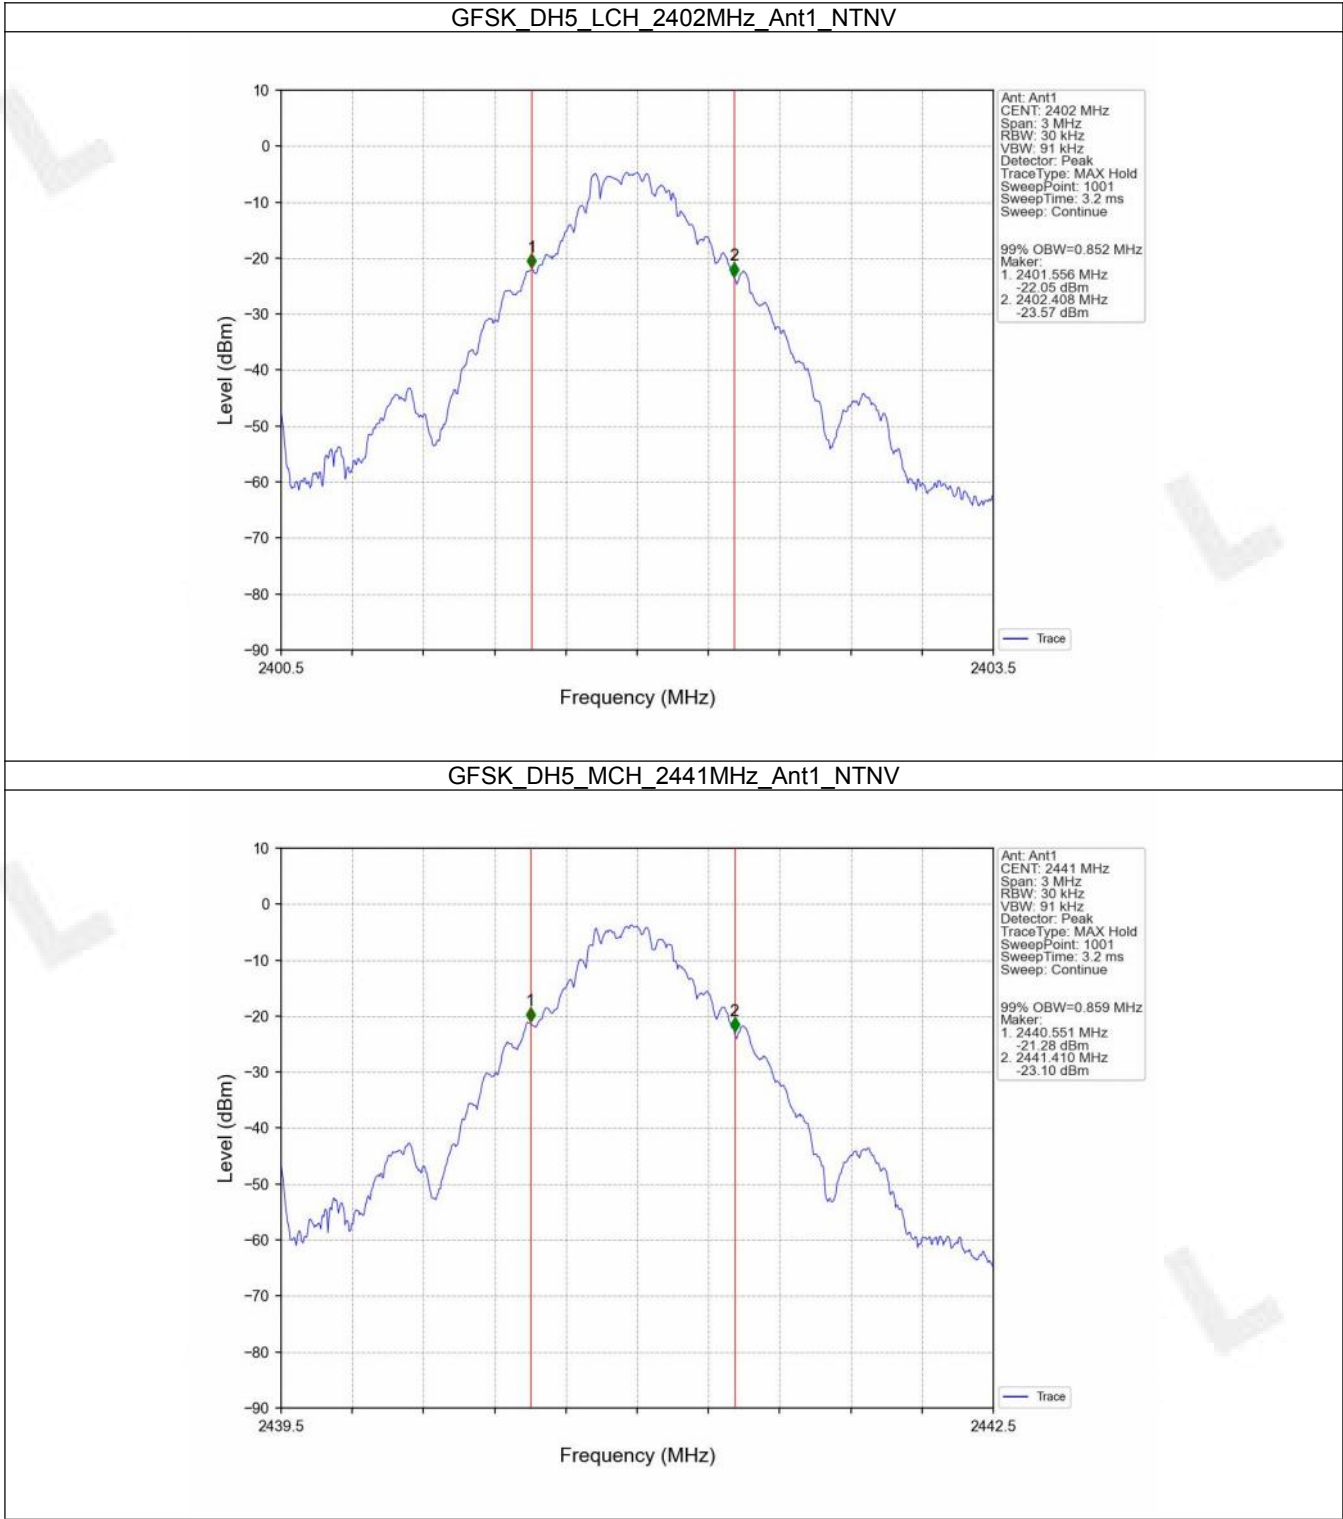


FCCID: 2AHPZ-MPD6M

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

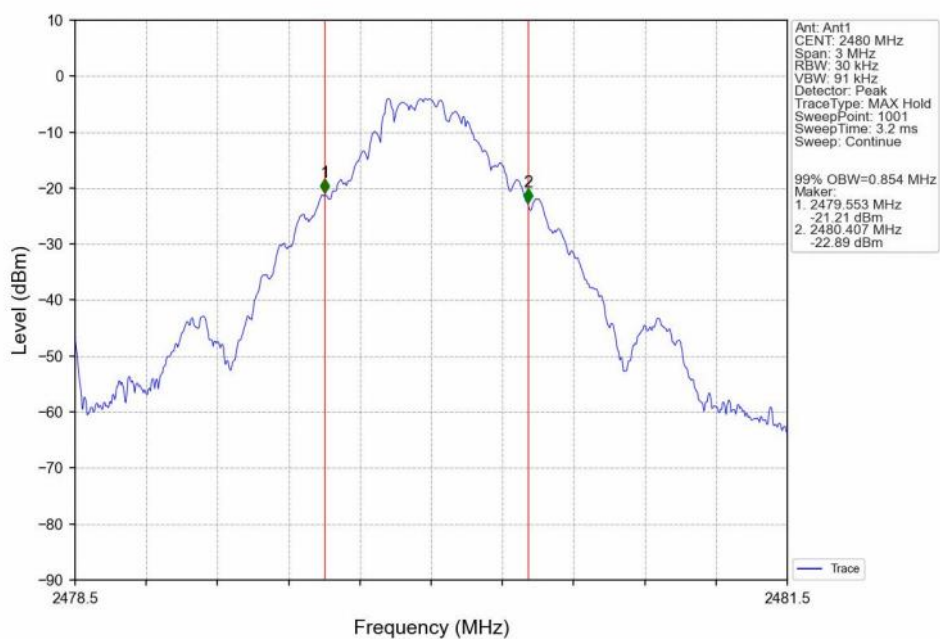


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

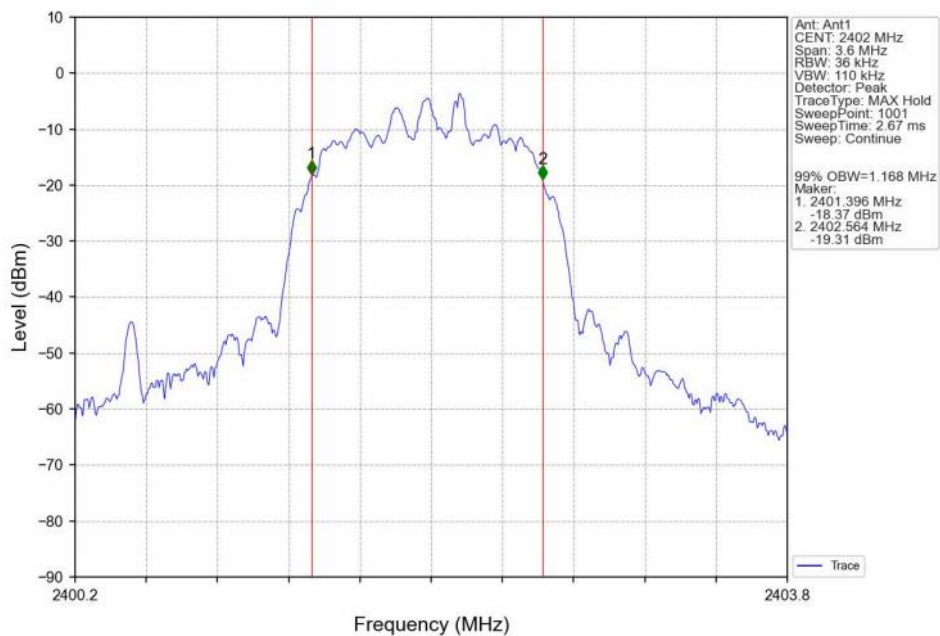


FCCID: 2AHPZ-MPD6M


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

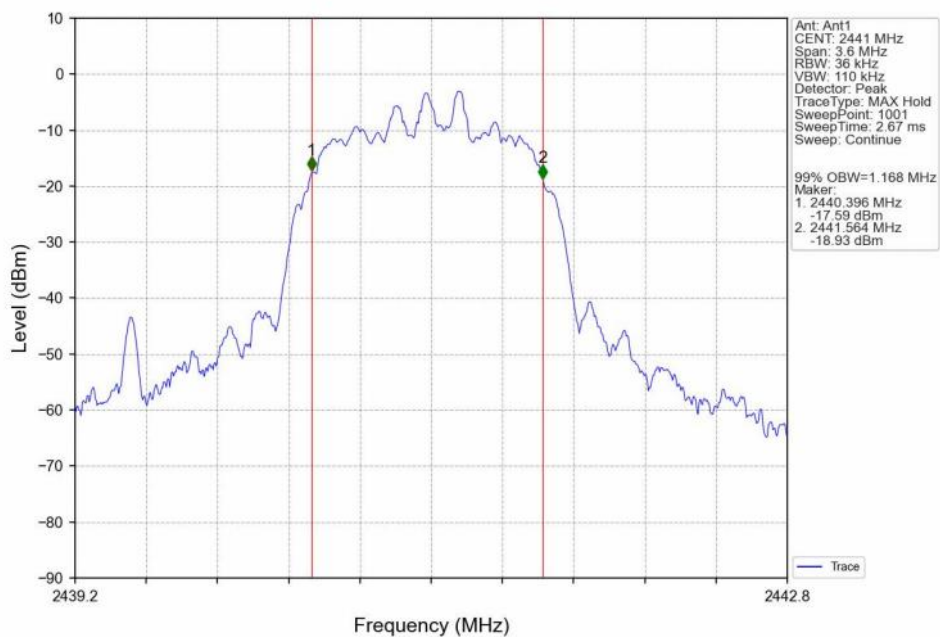


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

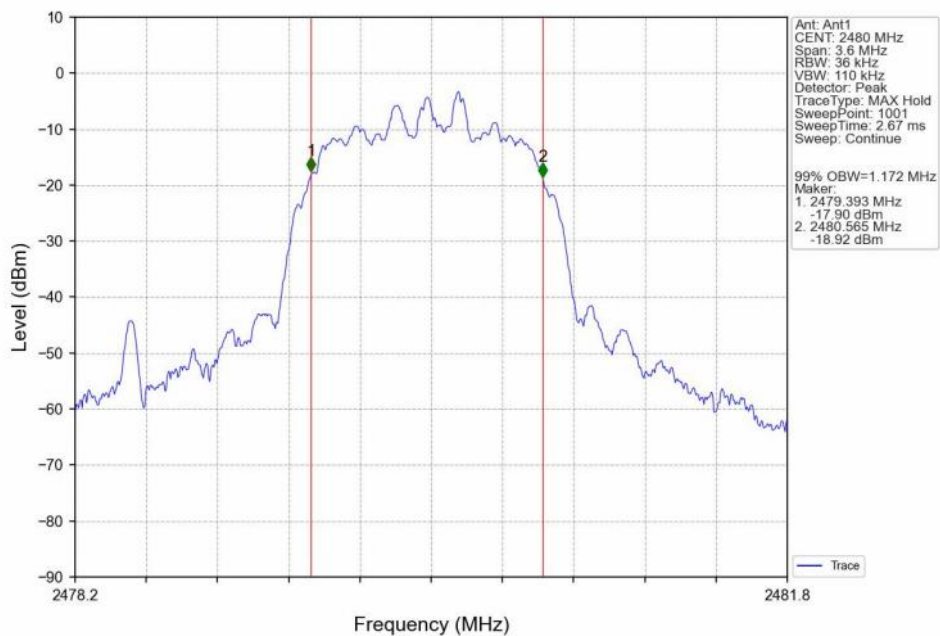

FCCID: 2AHPZ-MPD6M

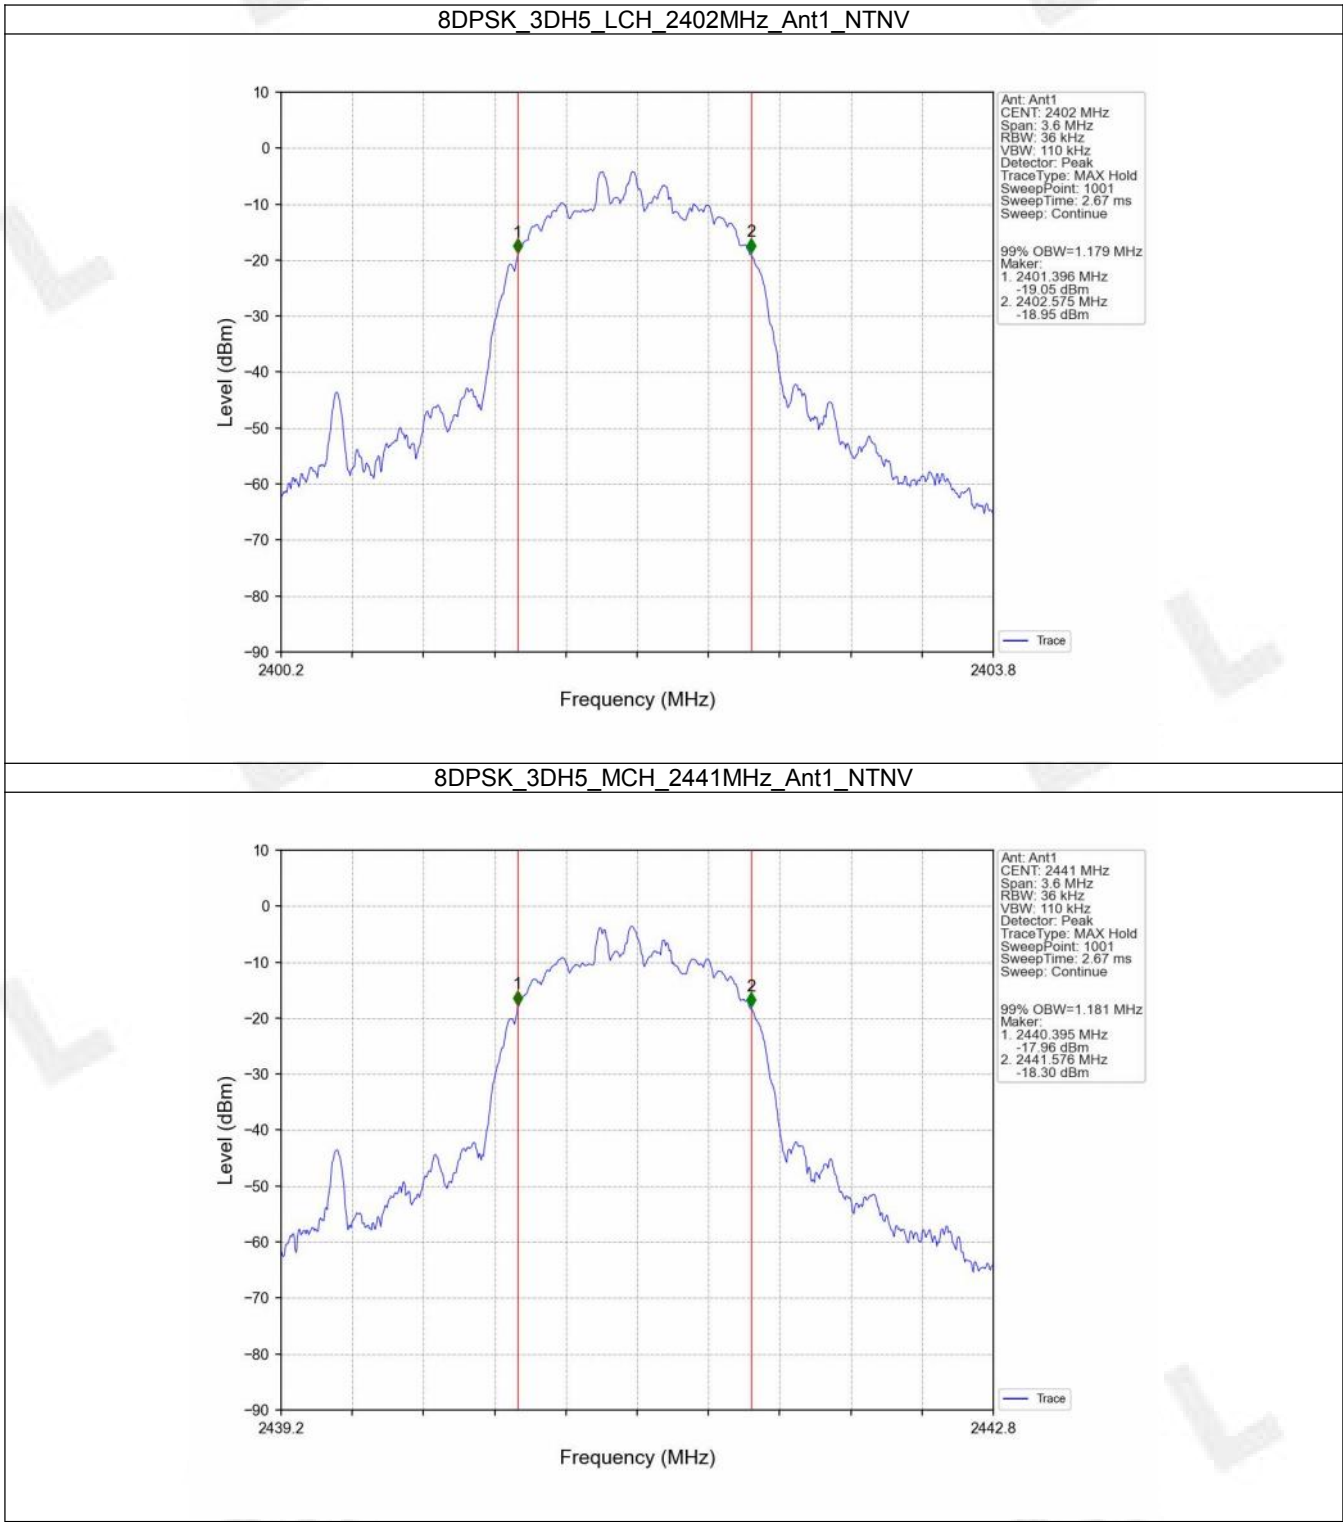


FCCID: 2AHPZ-MPD6M

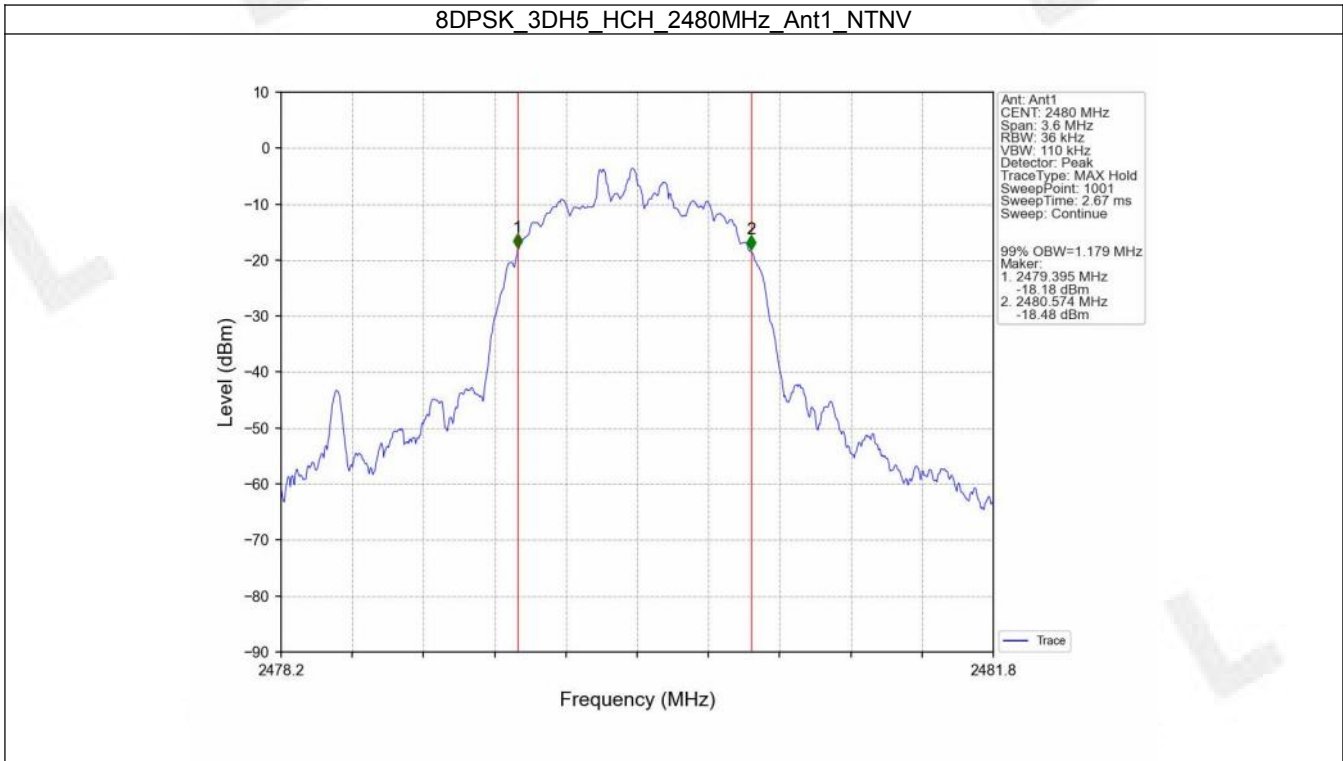


FCCID: 2AHPZ-MPD6M

1.2.2 20dB BW

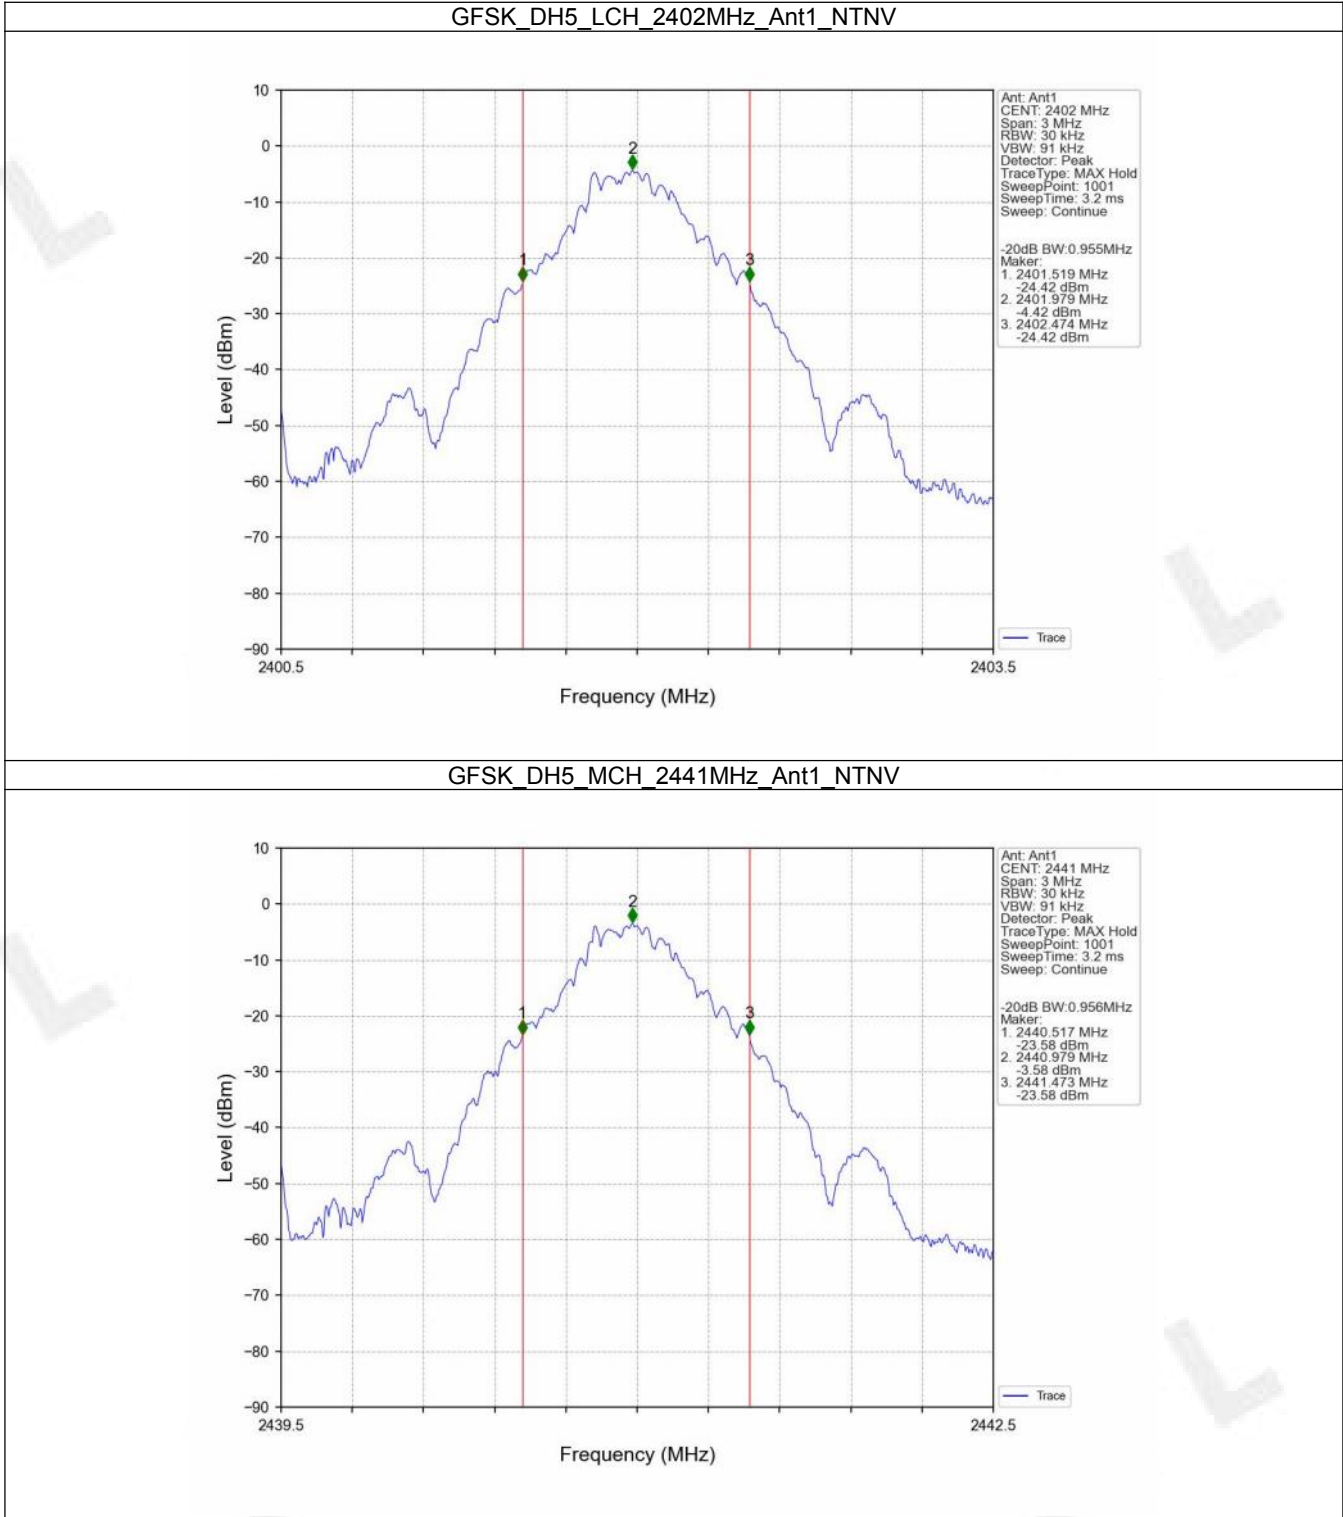


FCCID: 2AHPZ-MPD6M

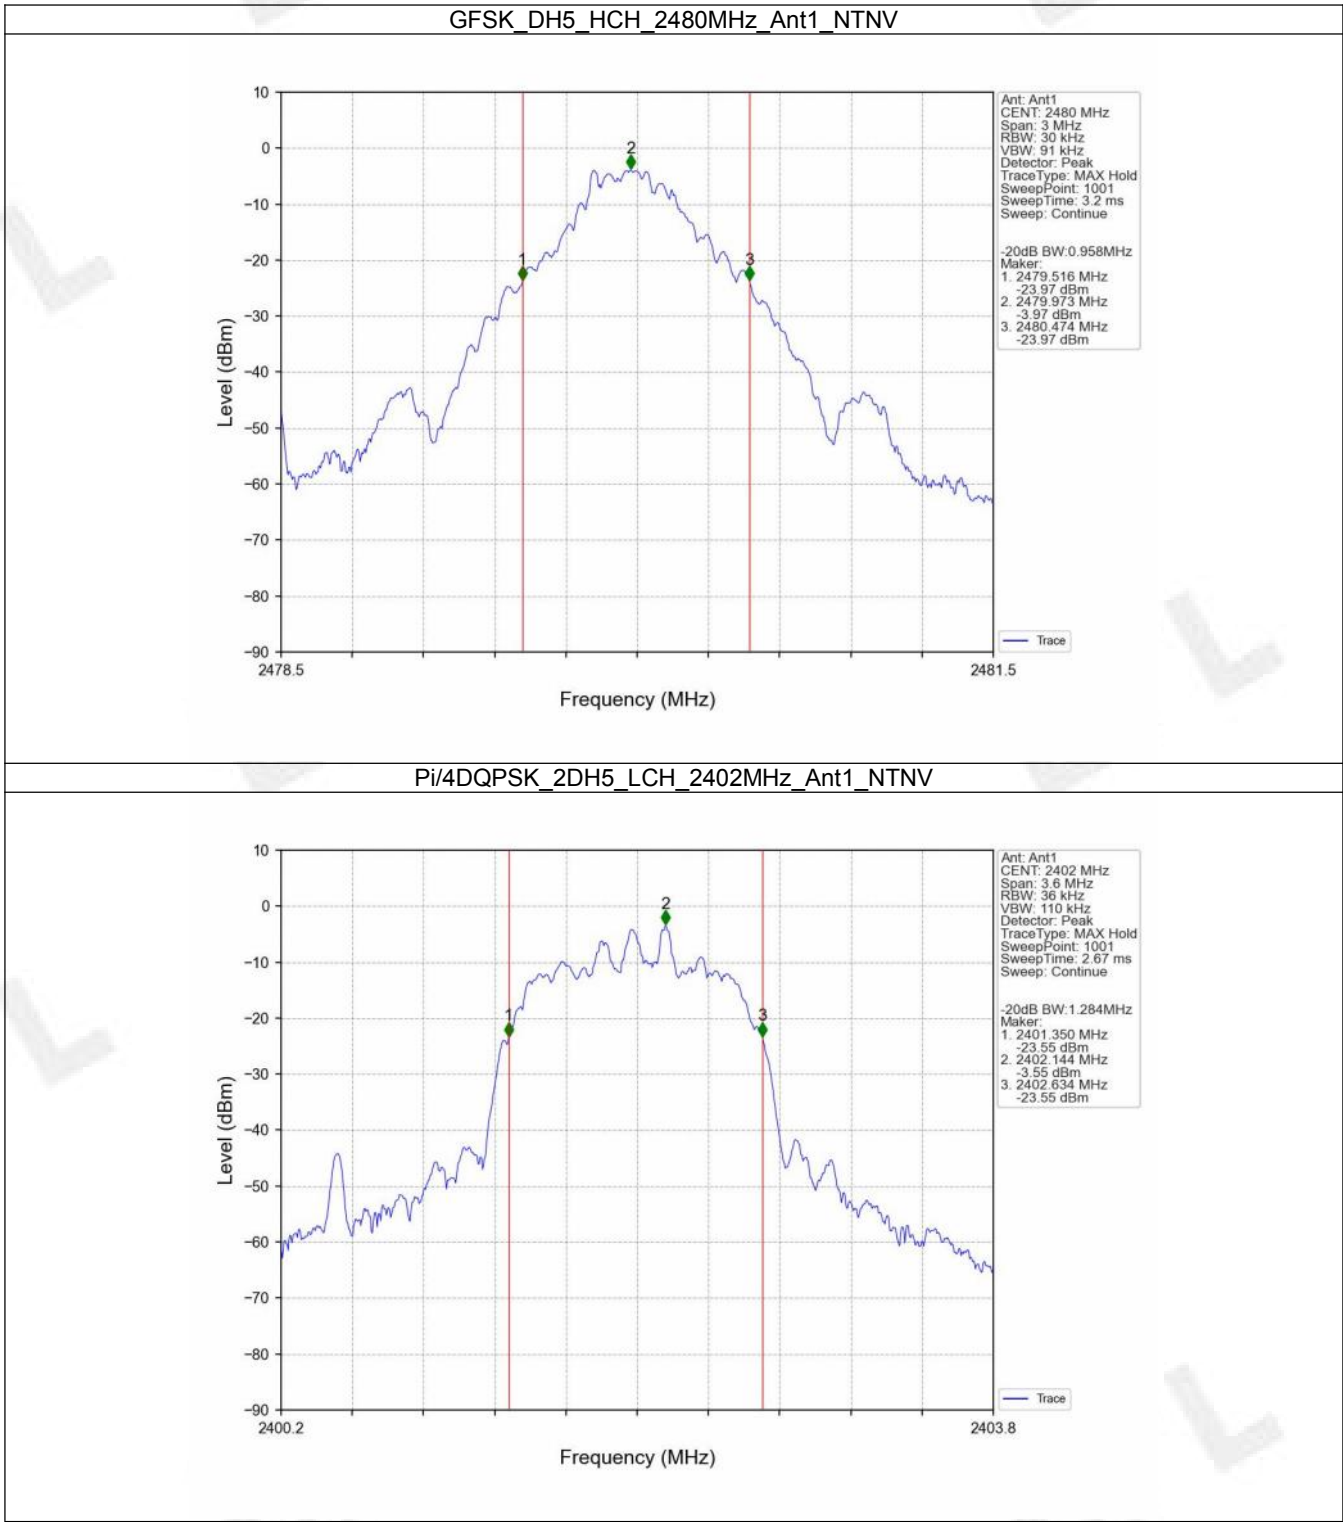


FCCID: 2AHPZ-MPD6M

Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

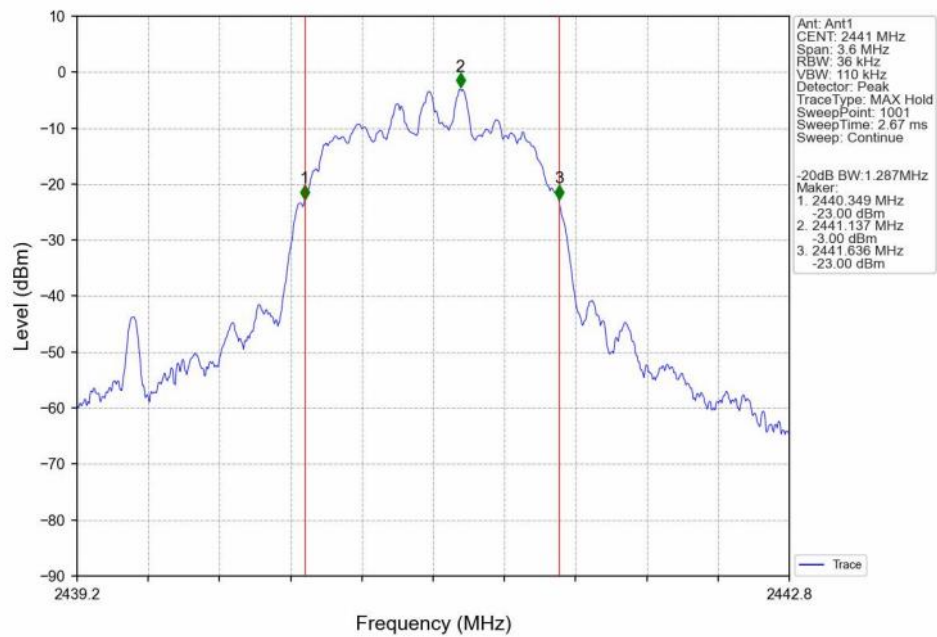


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

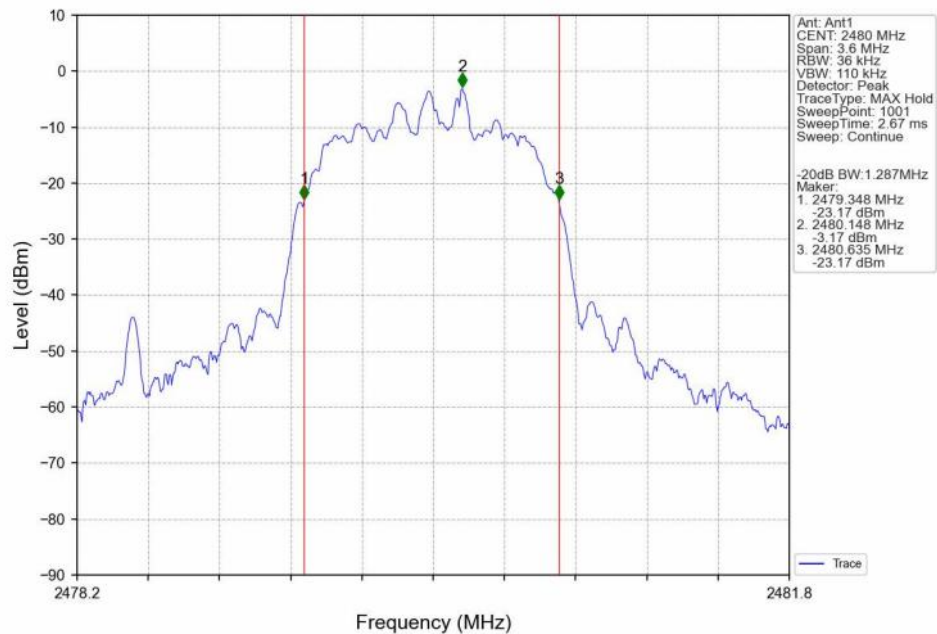


FCCID: 2AHPZ-MPD6M


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

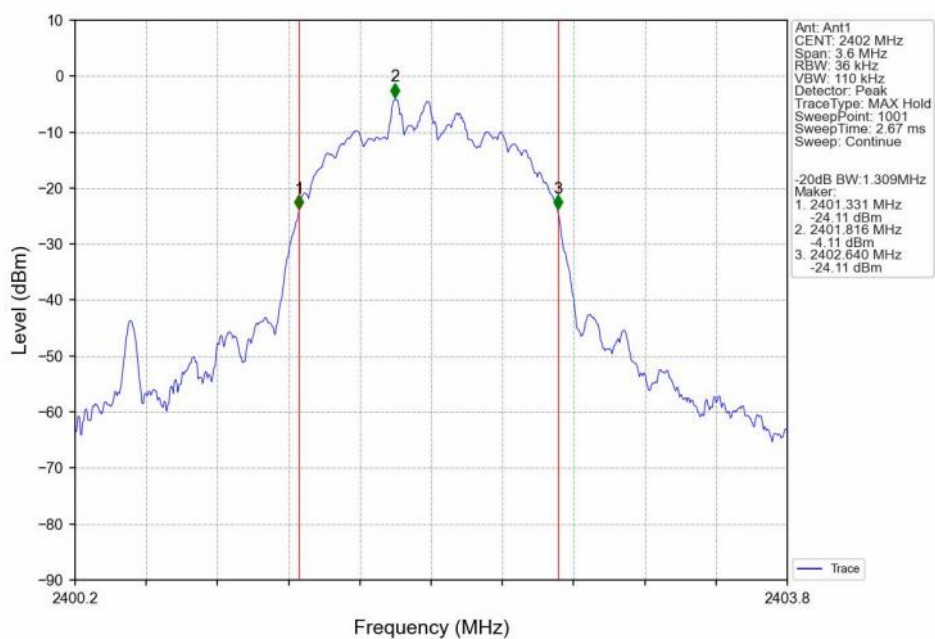

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

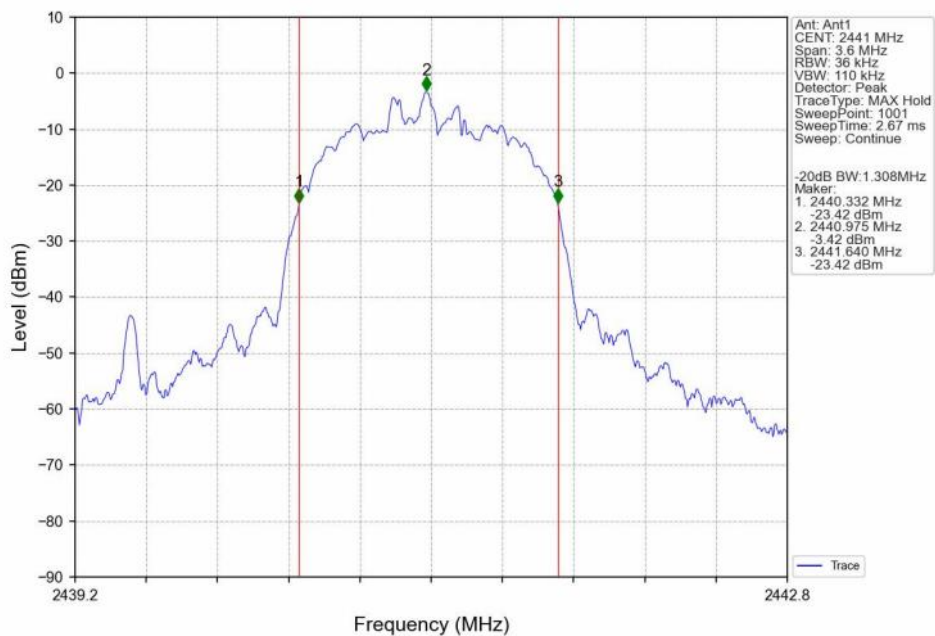

FCCID: 2AHPZ-MPD6M

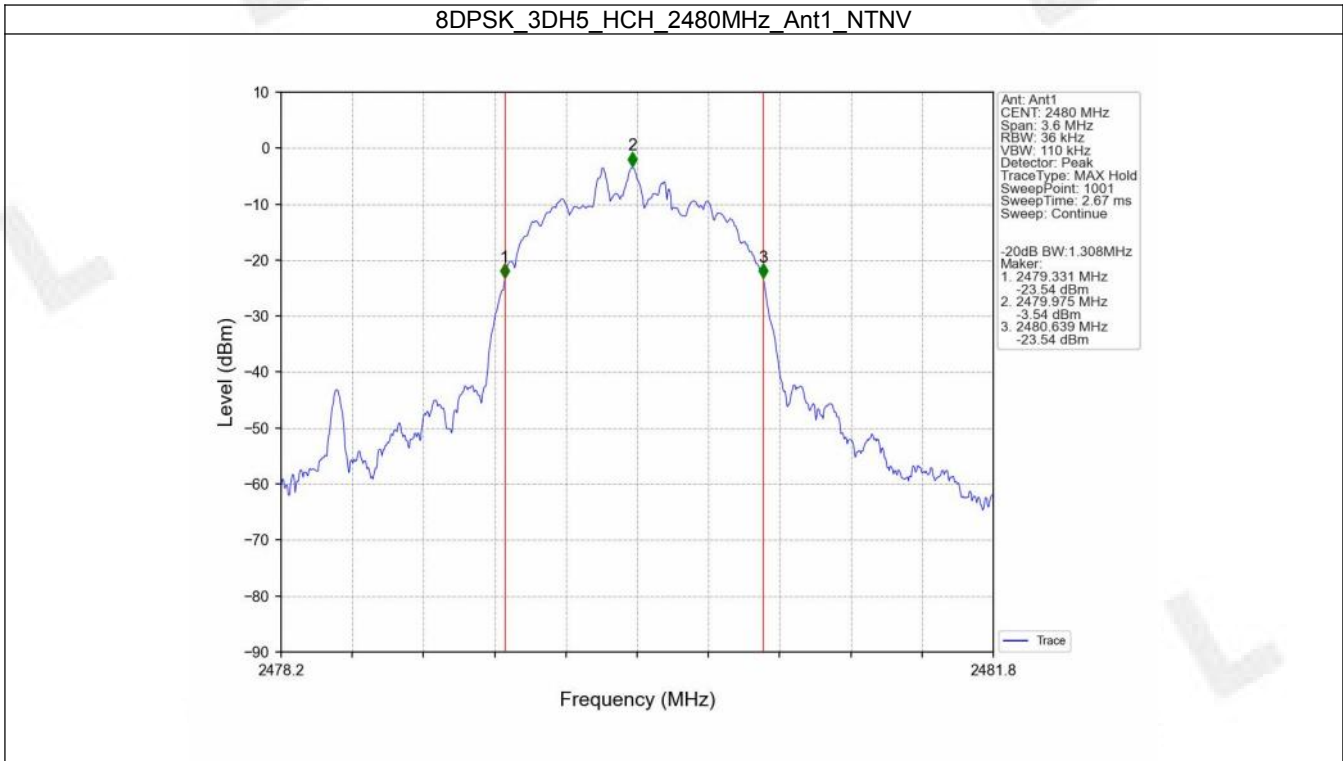

FCCID: 2AHPZ-MPD6M

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-2.24	<=30	Pass
		2441	DH5	-1.41	<=30	Pass
		2480	DH5	-1.47	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	-1.14	<=20.97	Pass
		2441	2DH5	-0.48	<=20.97	Pass
		2480	2DH5	-0.61	<=20.97	Pass
8DPSK	SISO	2402	3DH5	-0.77	<=20.97	Pass
		2441	3DH5	-0.11	<=20.97	Pass
		2480	3DH5	-0.17	<=20.97	Pass

Note1: Antenna Gain: Ant1: -0.68dBi;

FCCID: 2AHPZ-MPD6M

3. Carrier Frequency Separation

3.1 Test Result


3.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	0.958	≥ 0.958	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.287	≥ 0.858	Pass
8DPSK	SISO	HOPP	3DH5	1.003	1.309	≥ 0.873	Pass


FCCID: 2AHPZ-MPD6M

3.2 Test Graph

3.2.1 Ant1

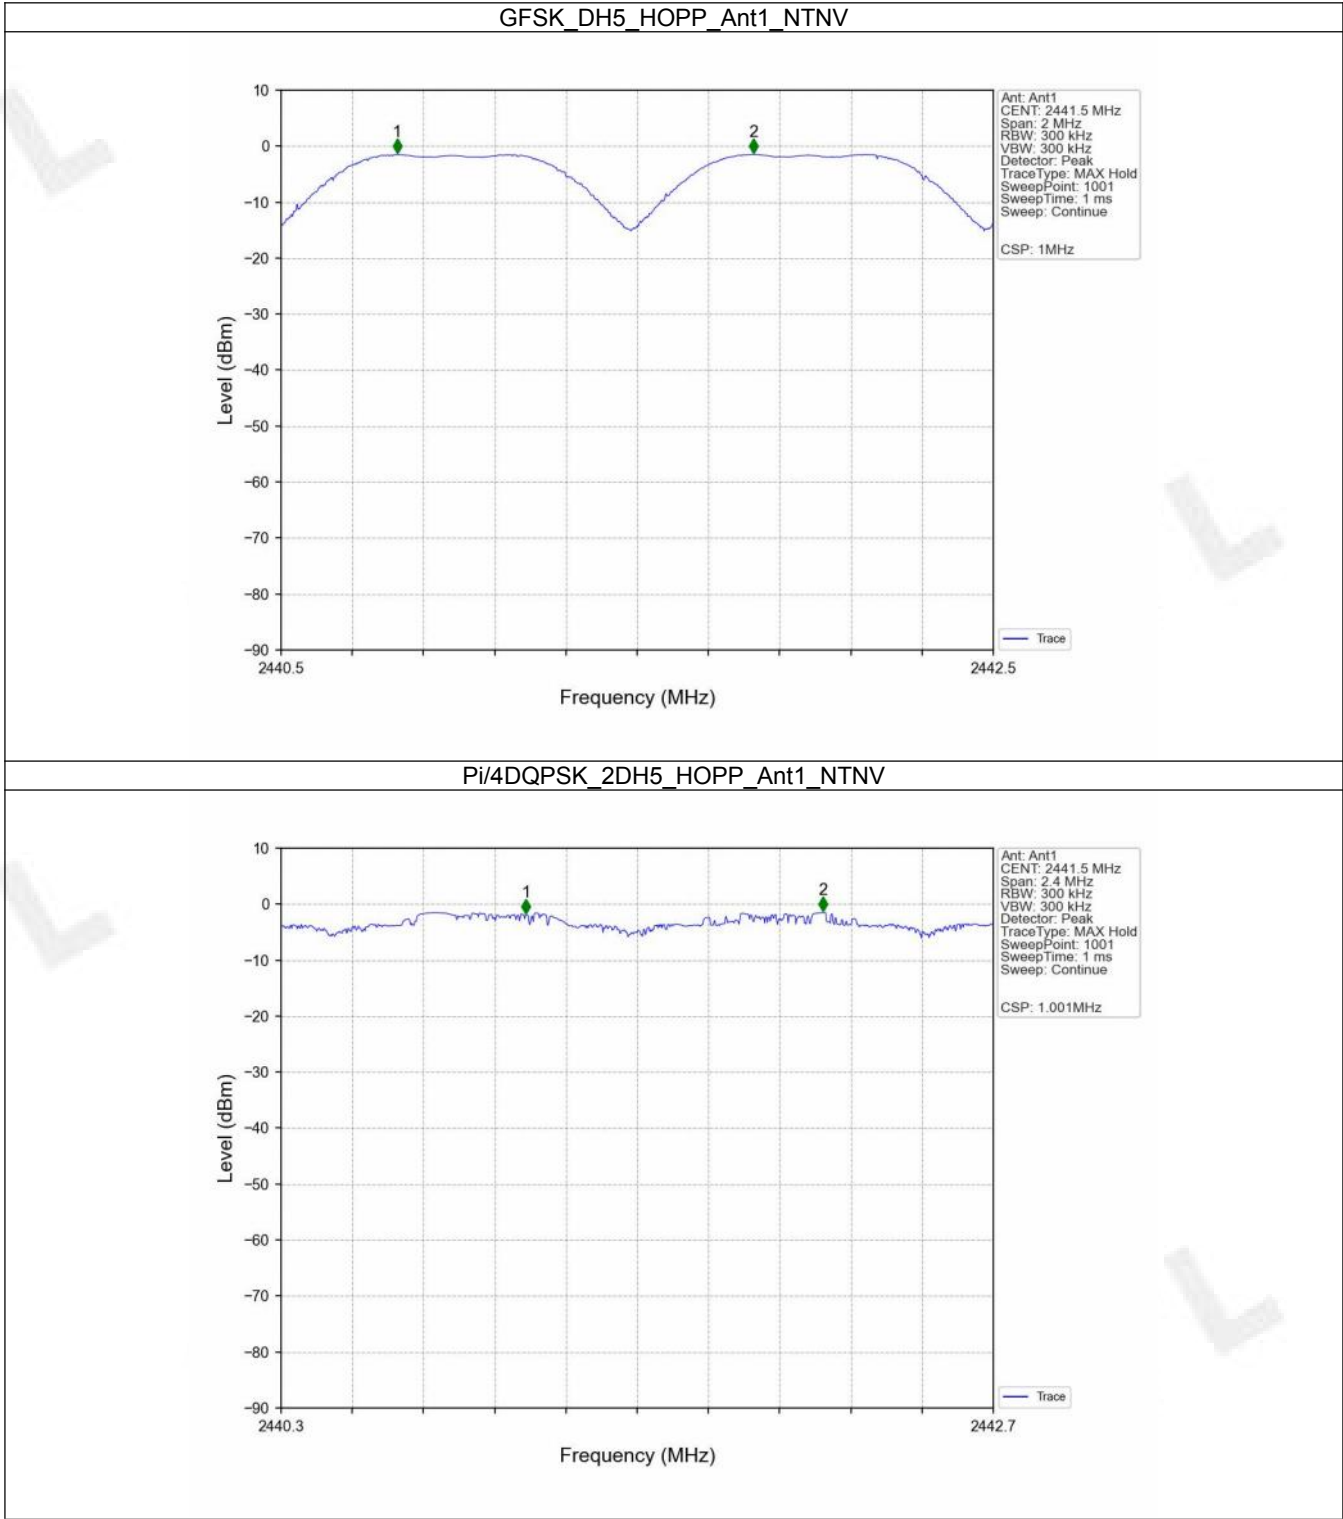

FCCID: 2AHPZ-MPD6M

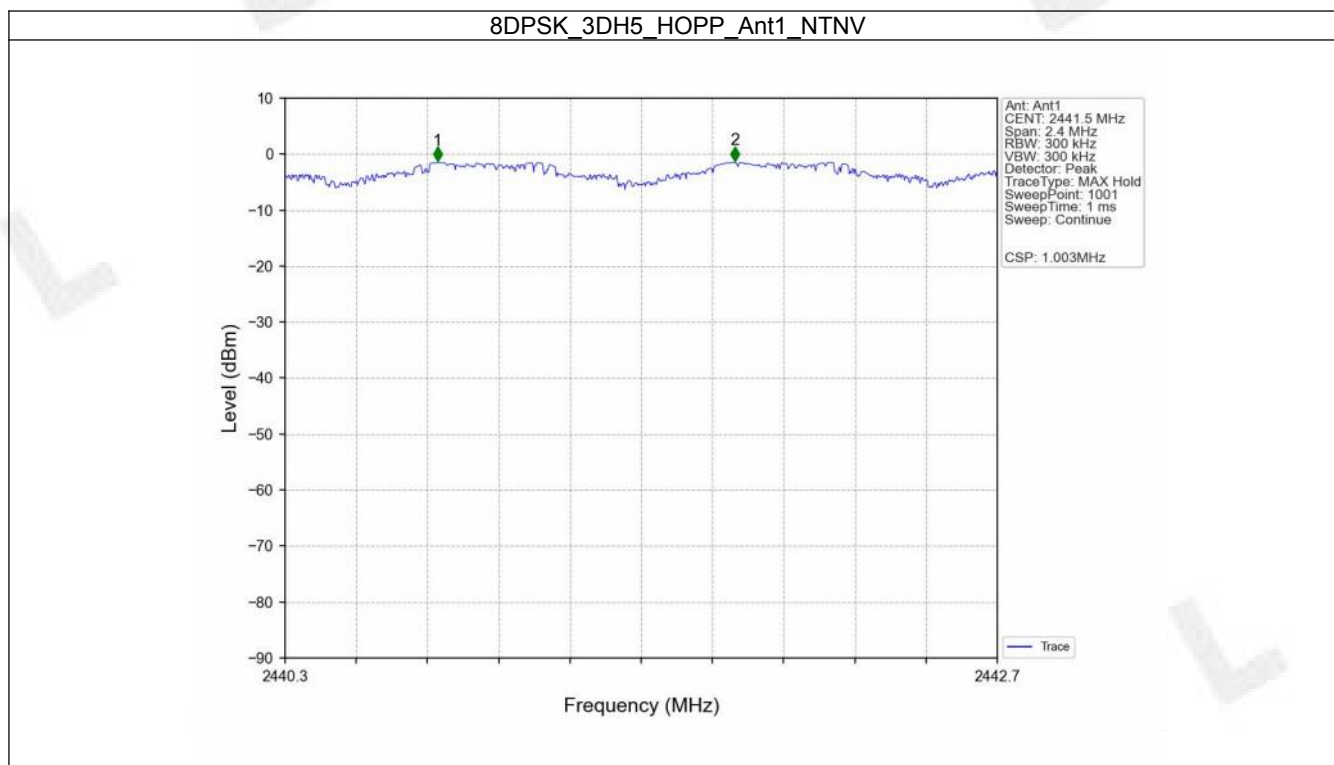

FCCID: 2AHPZ-MPD6M

4. Number of Hopping Frequencies

4.1 Test Result


4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass


FCCID: 2AHPZ-MPD6M

4.2 Test Graph

4.2.1 HoppNum

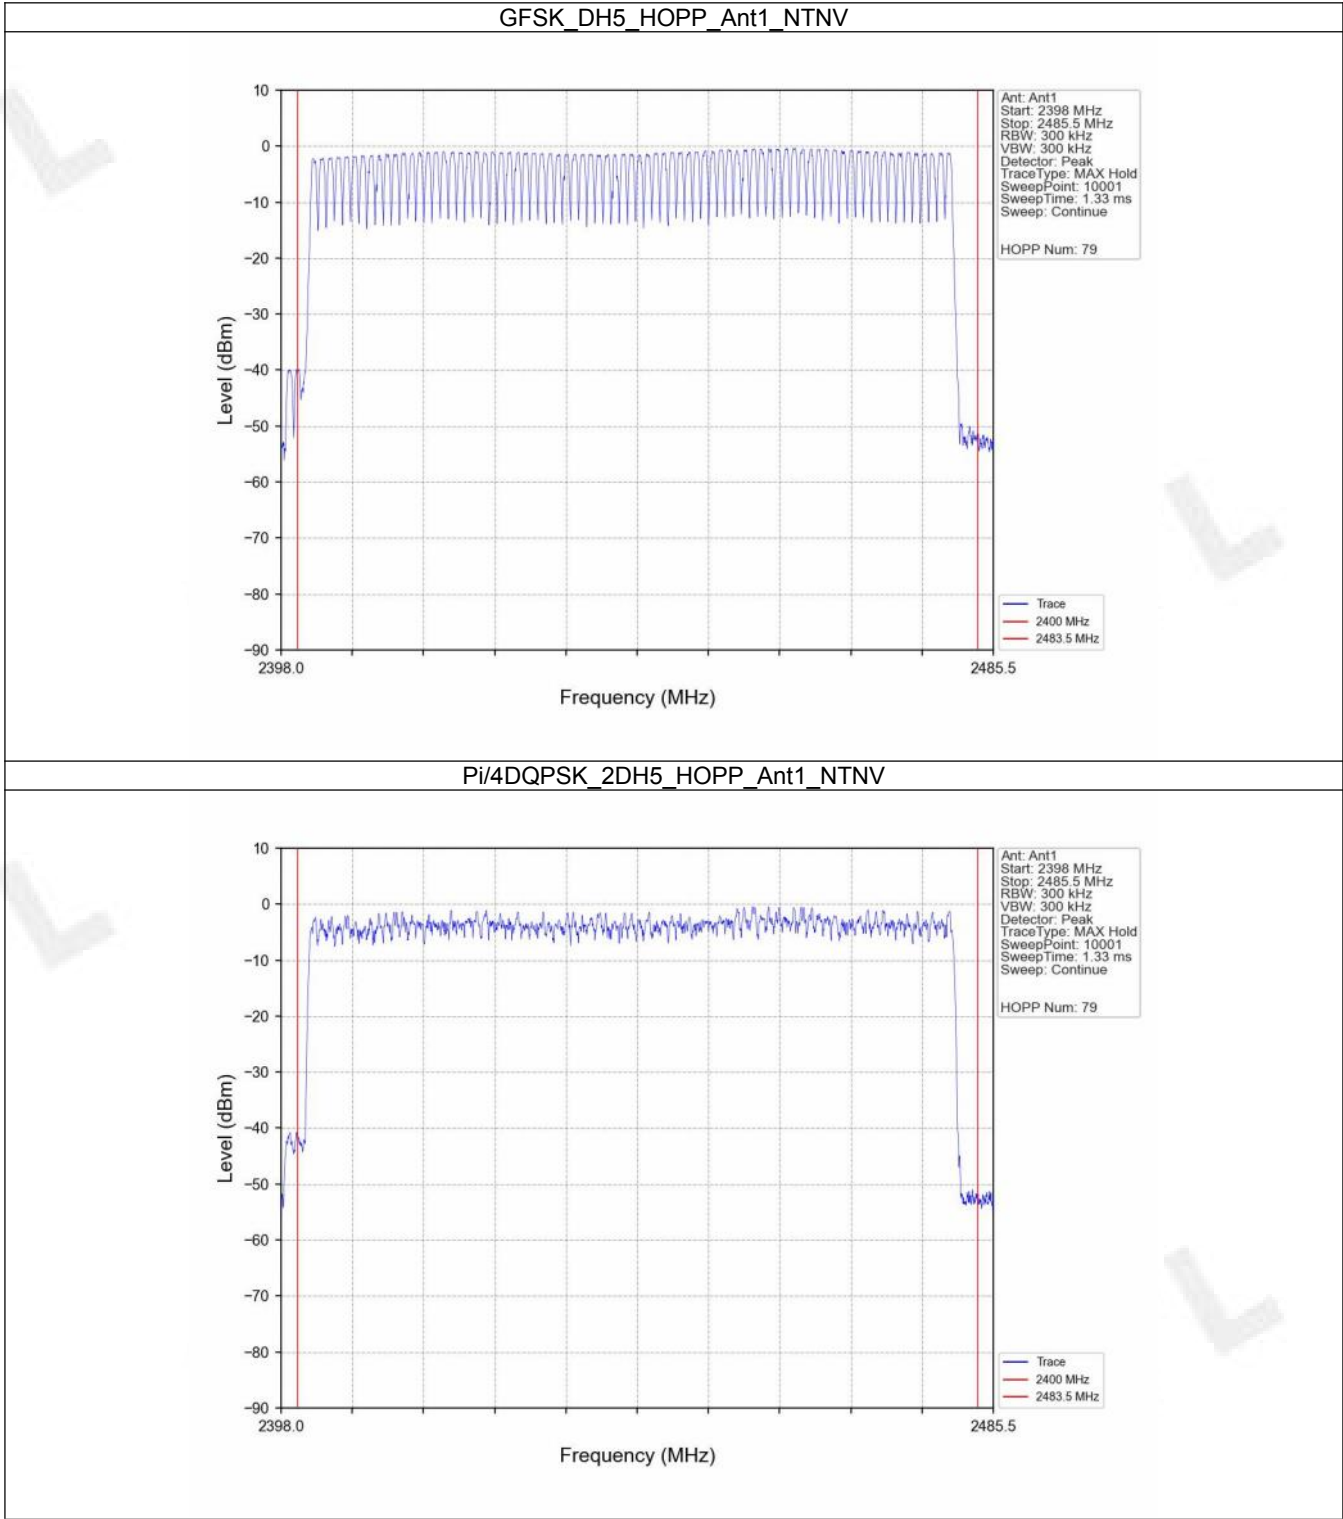

FCCID: 2AHPZ-MPD6M

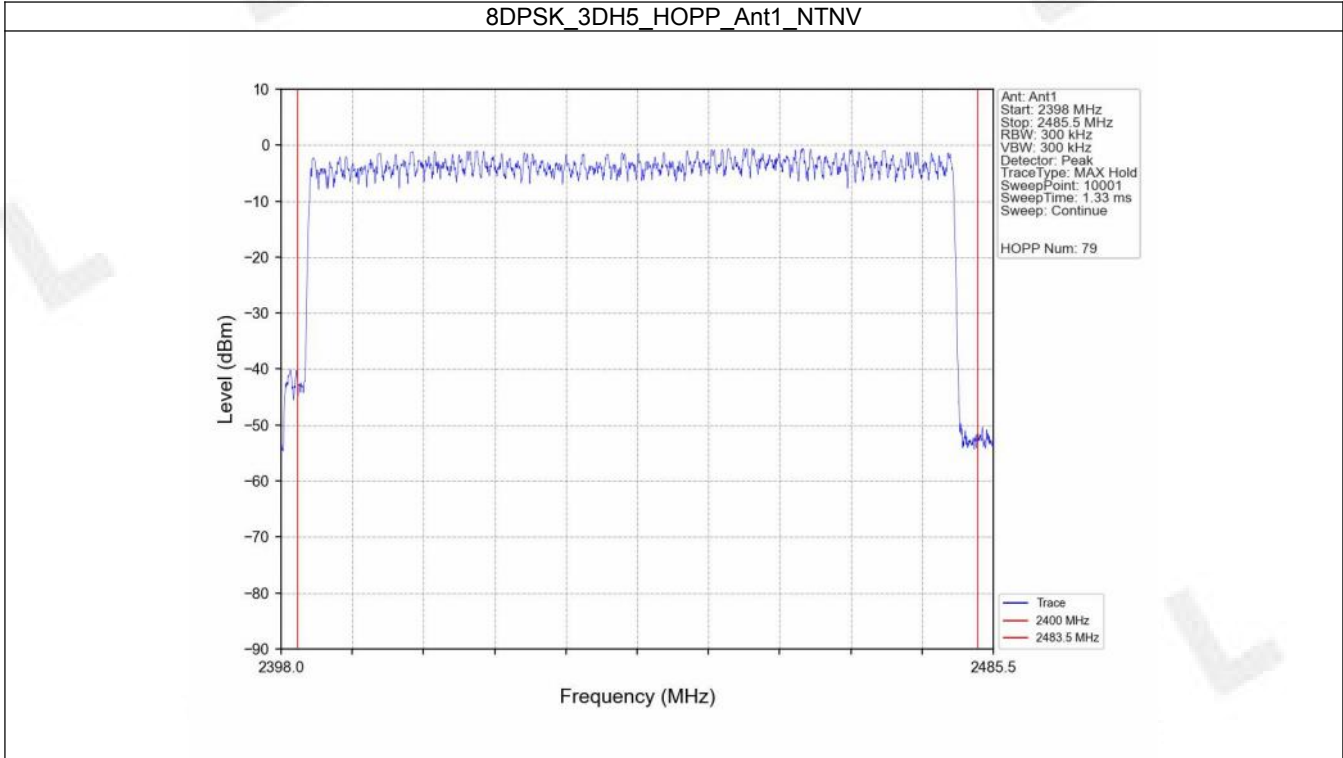

FCCID: 2AHPZ-MPD6M

5. Time of Occupancy (Dwell Time)

5.1 Test Result


5.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.378	31.600	319	120.582	<=400	Pass
			DH3	1.638	31.600	150	245.700	<=400	Pass
			DH5	2.888	31.600	120	346.560	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.392	31.600	317	124.264	<=400	Pass
			2DH3	1.640	31.600	163	267.320	<=400	Pass
			2DH5	2.888	31.600	110	317.680	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.392	31.600	320	125.440	<=400	Pass
			3DH3	2.896	31.600	124	359.104	<=400	Pass
			3DH5	2.892	31.600	104	300.768	<=400	Pass


FCCID: 2AHPZ-MPD6M

5.2 Test Graph


5.2.1 Ant1

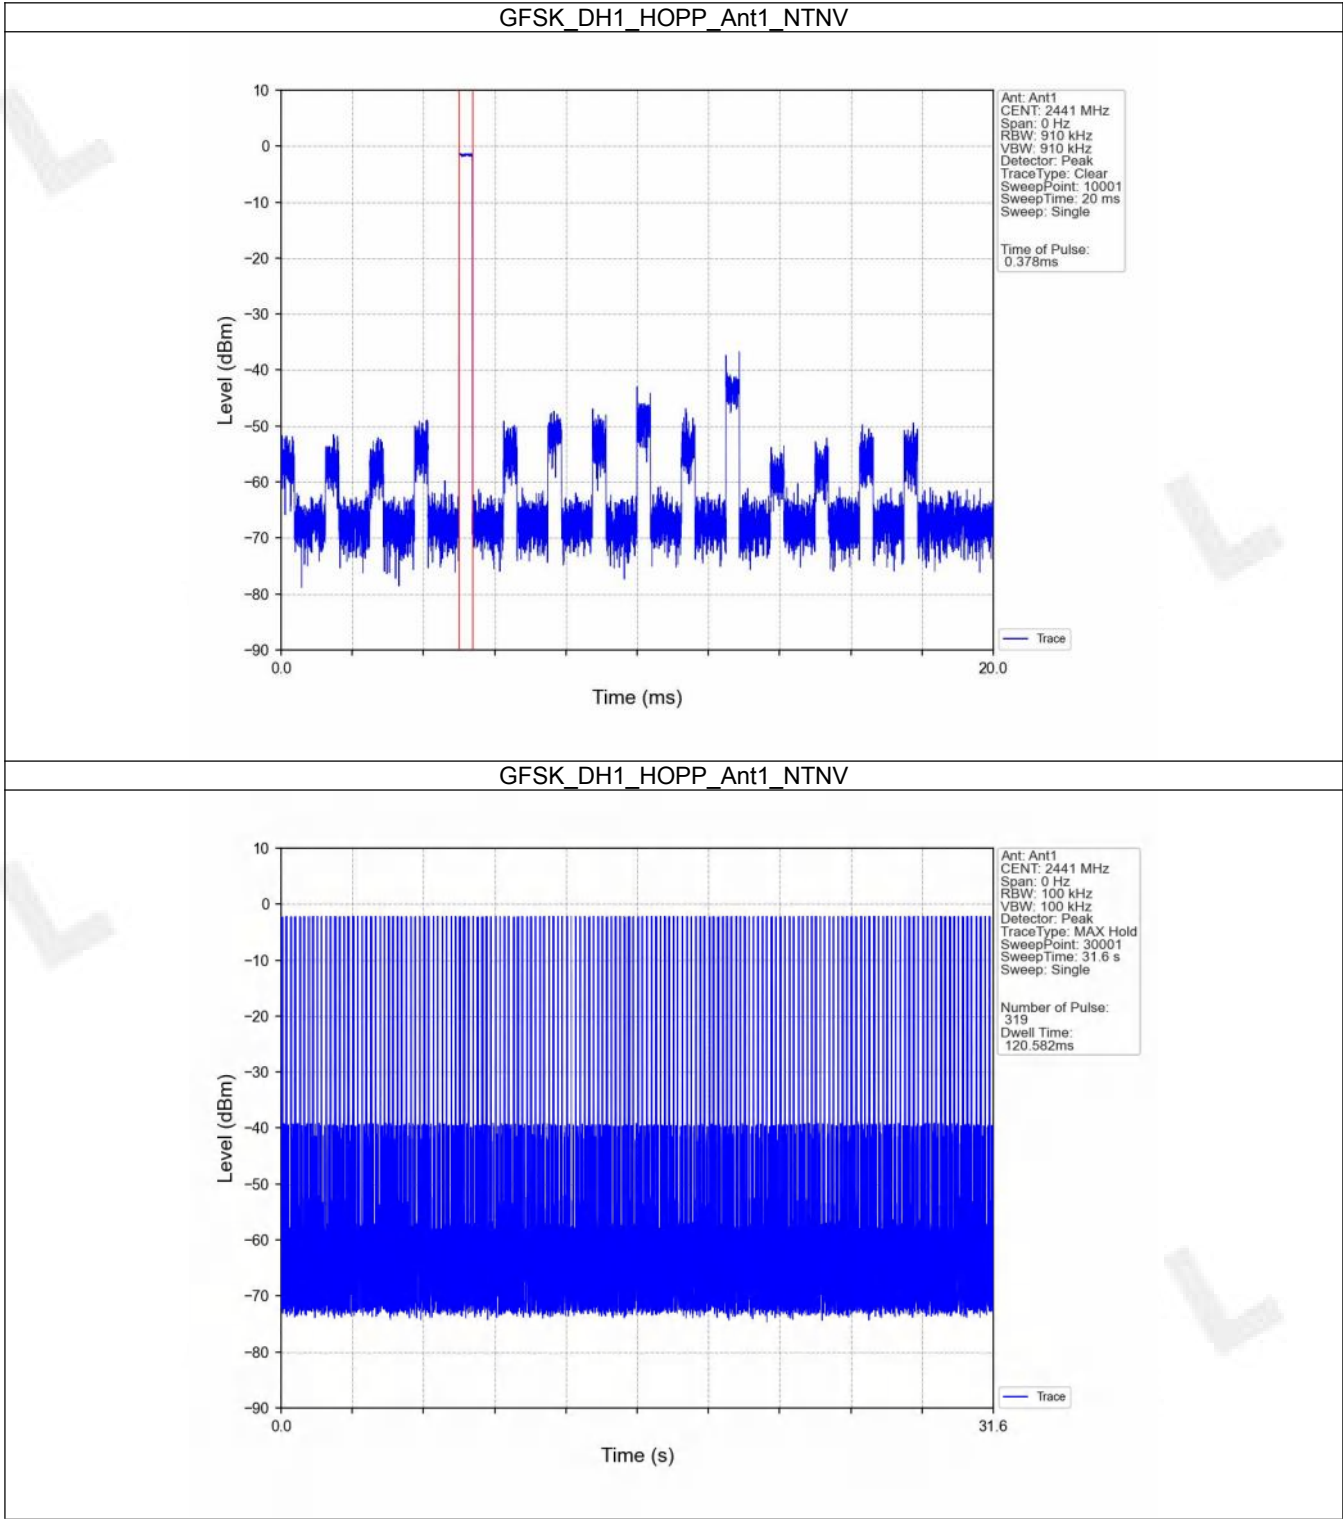


FCCID: 2AHPZ-MPD6M

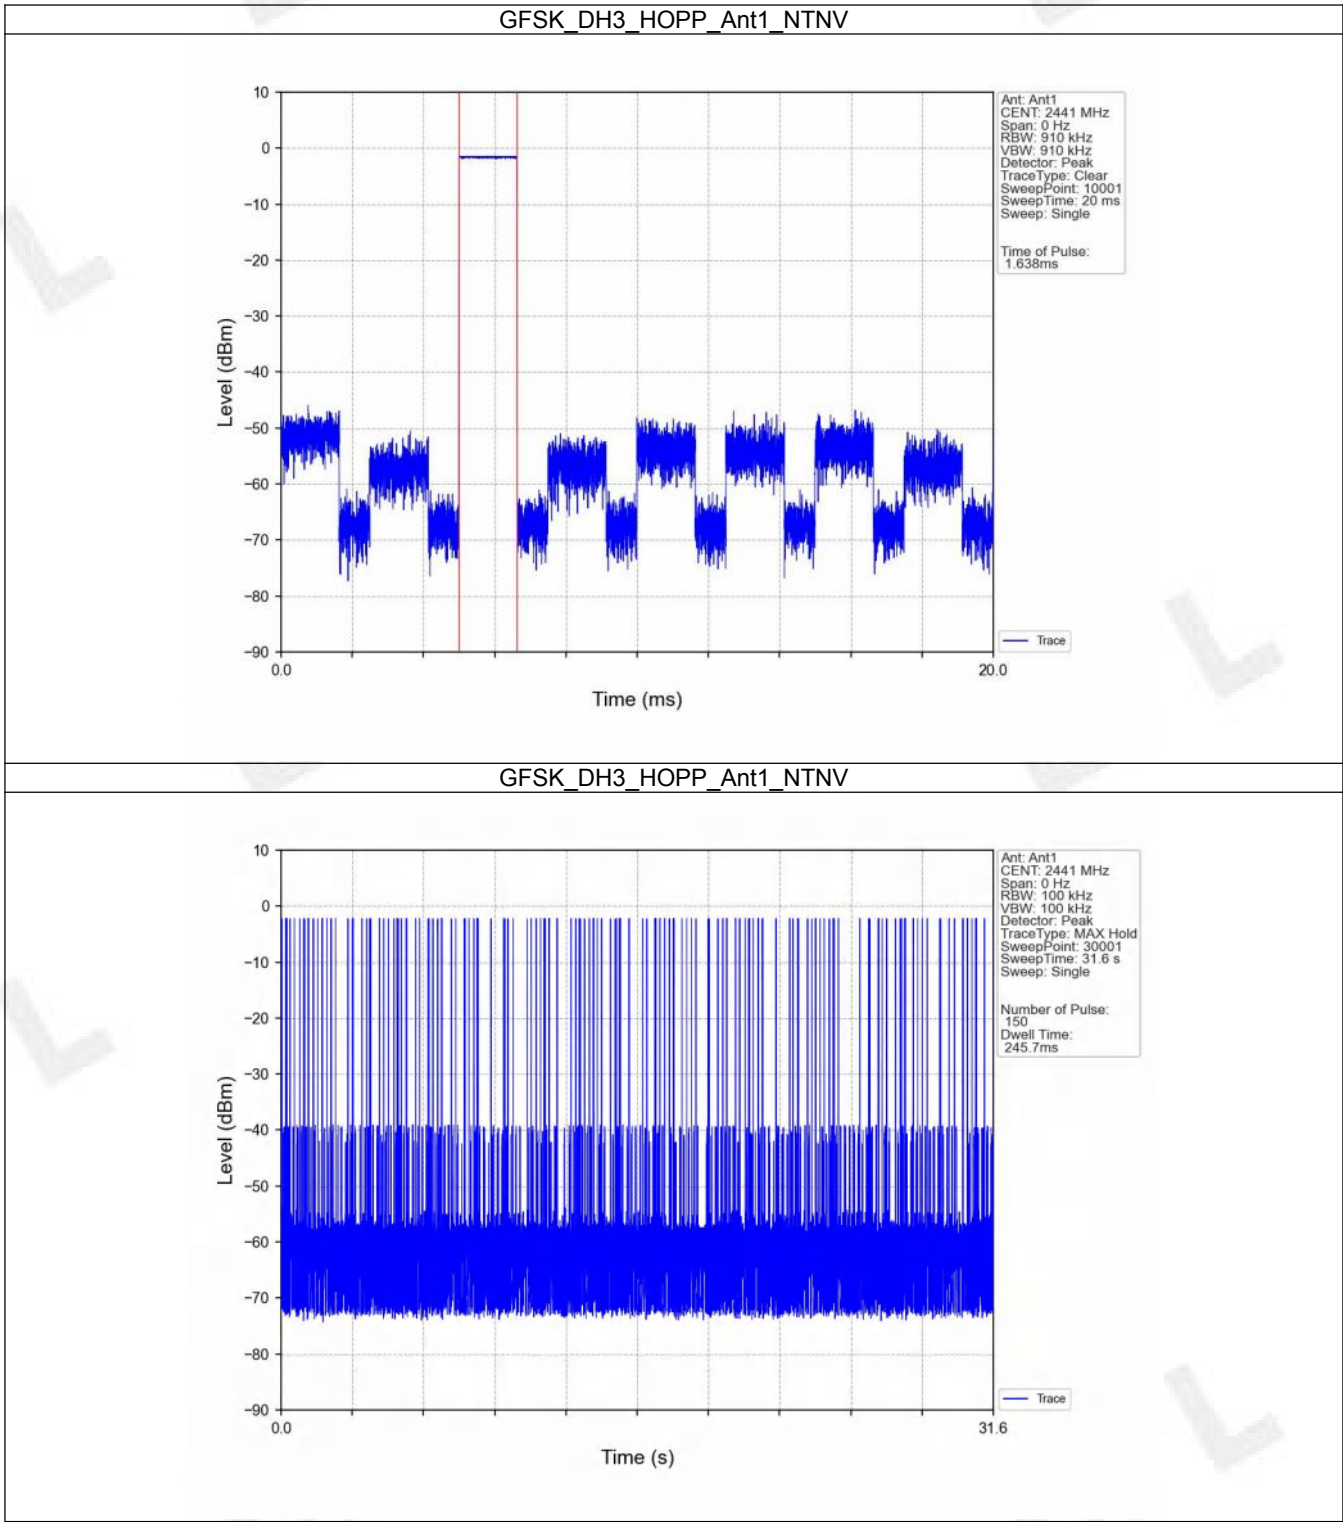


FCCID: 2AHPZ-MPD6M

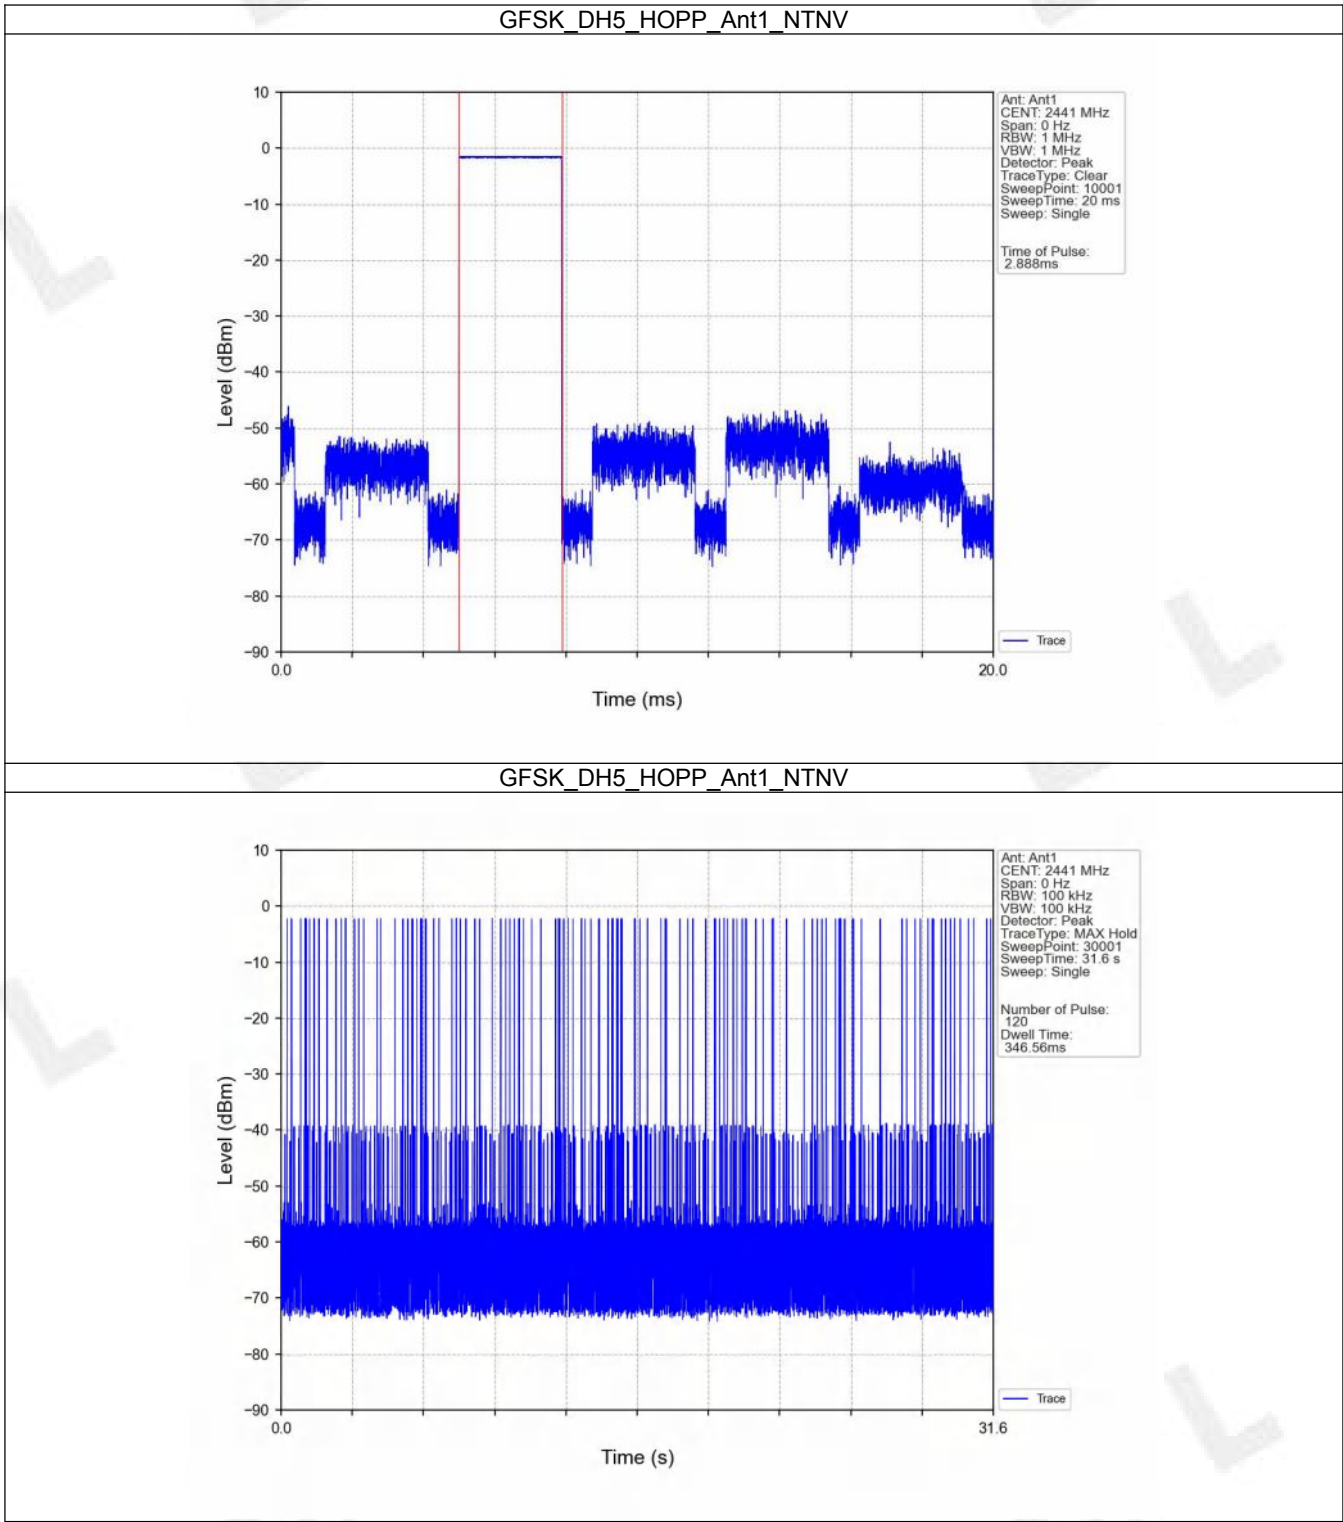


FCCID: 2AHPZ-MPD6M

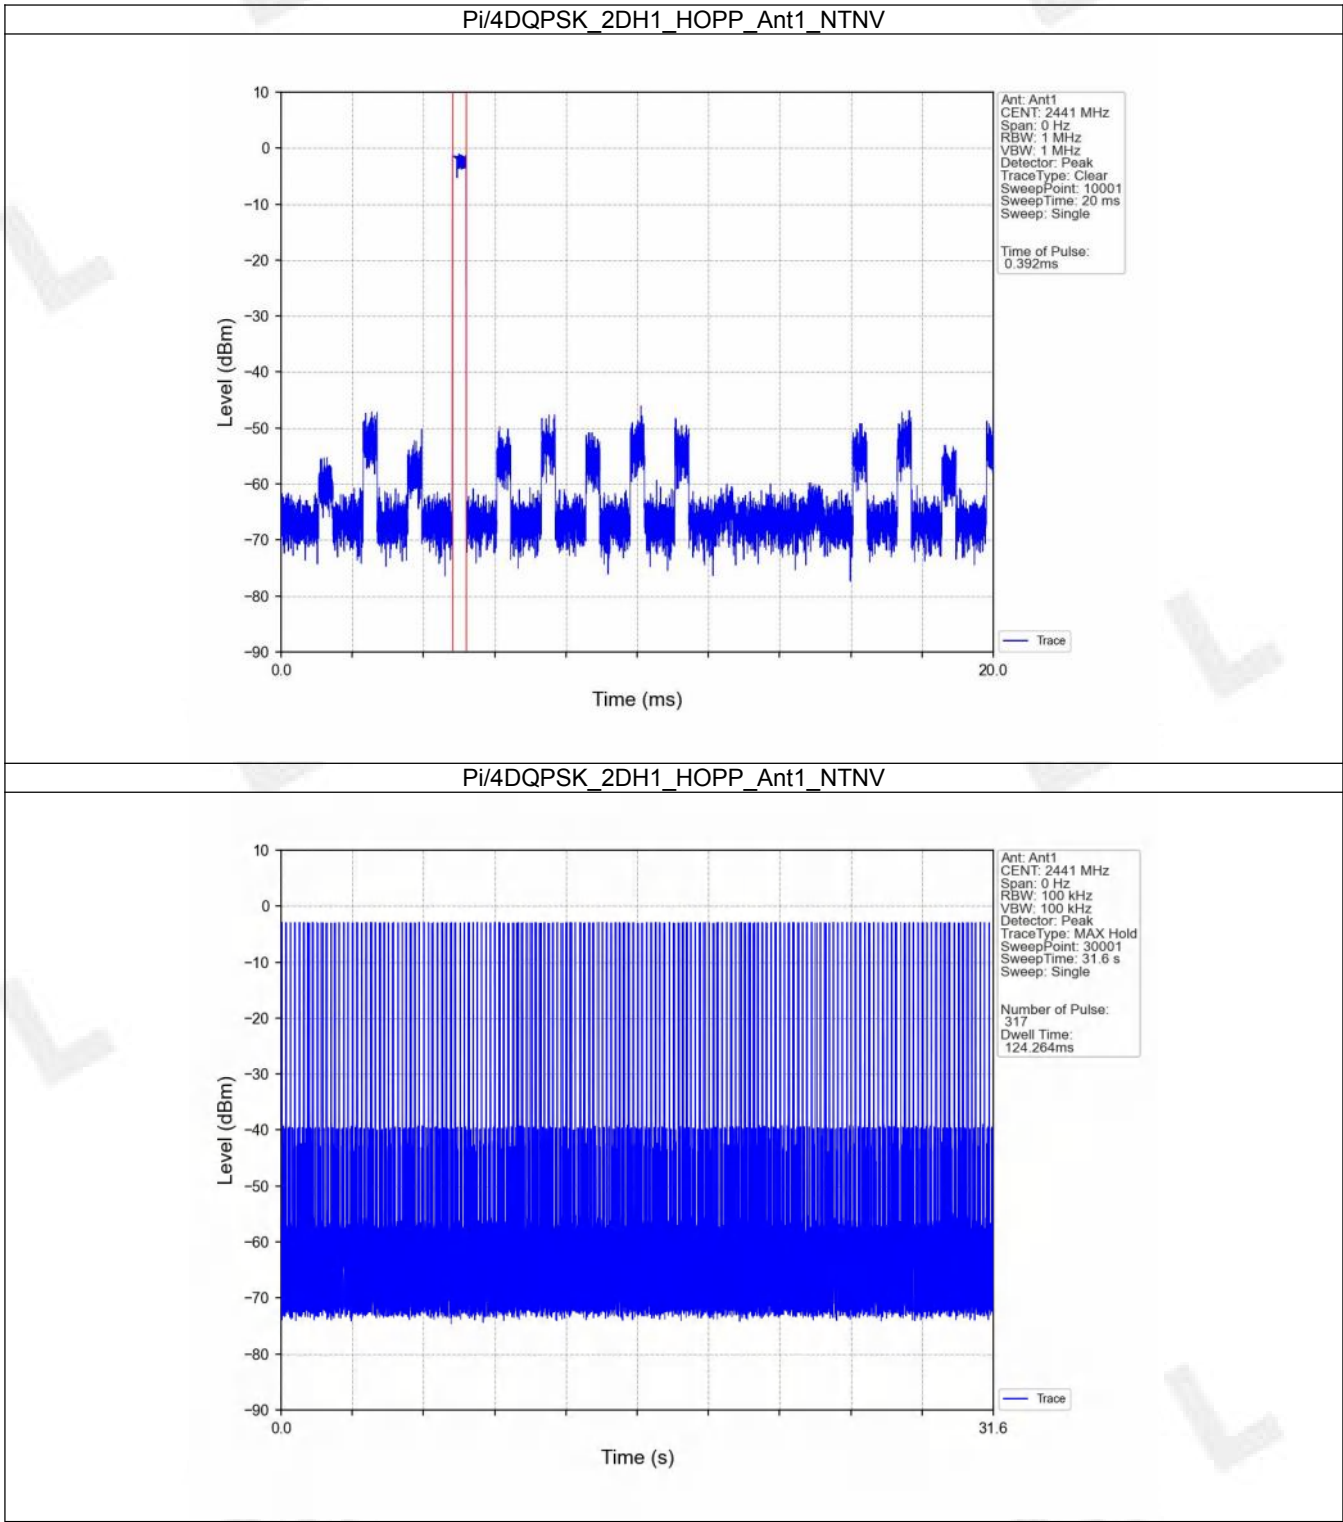

FCCID: 2AHPZ-MPD6M

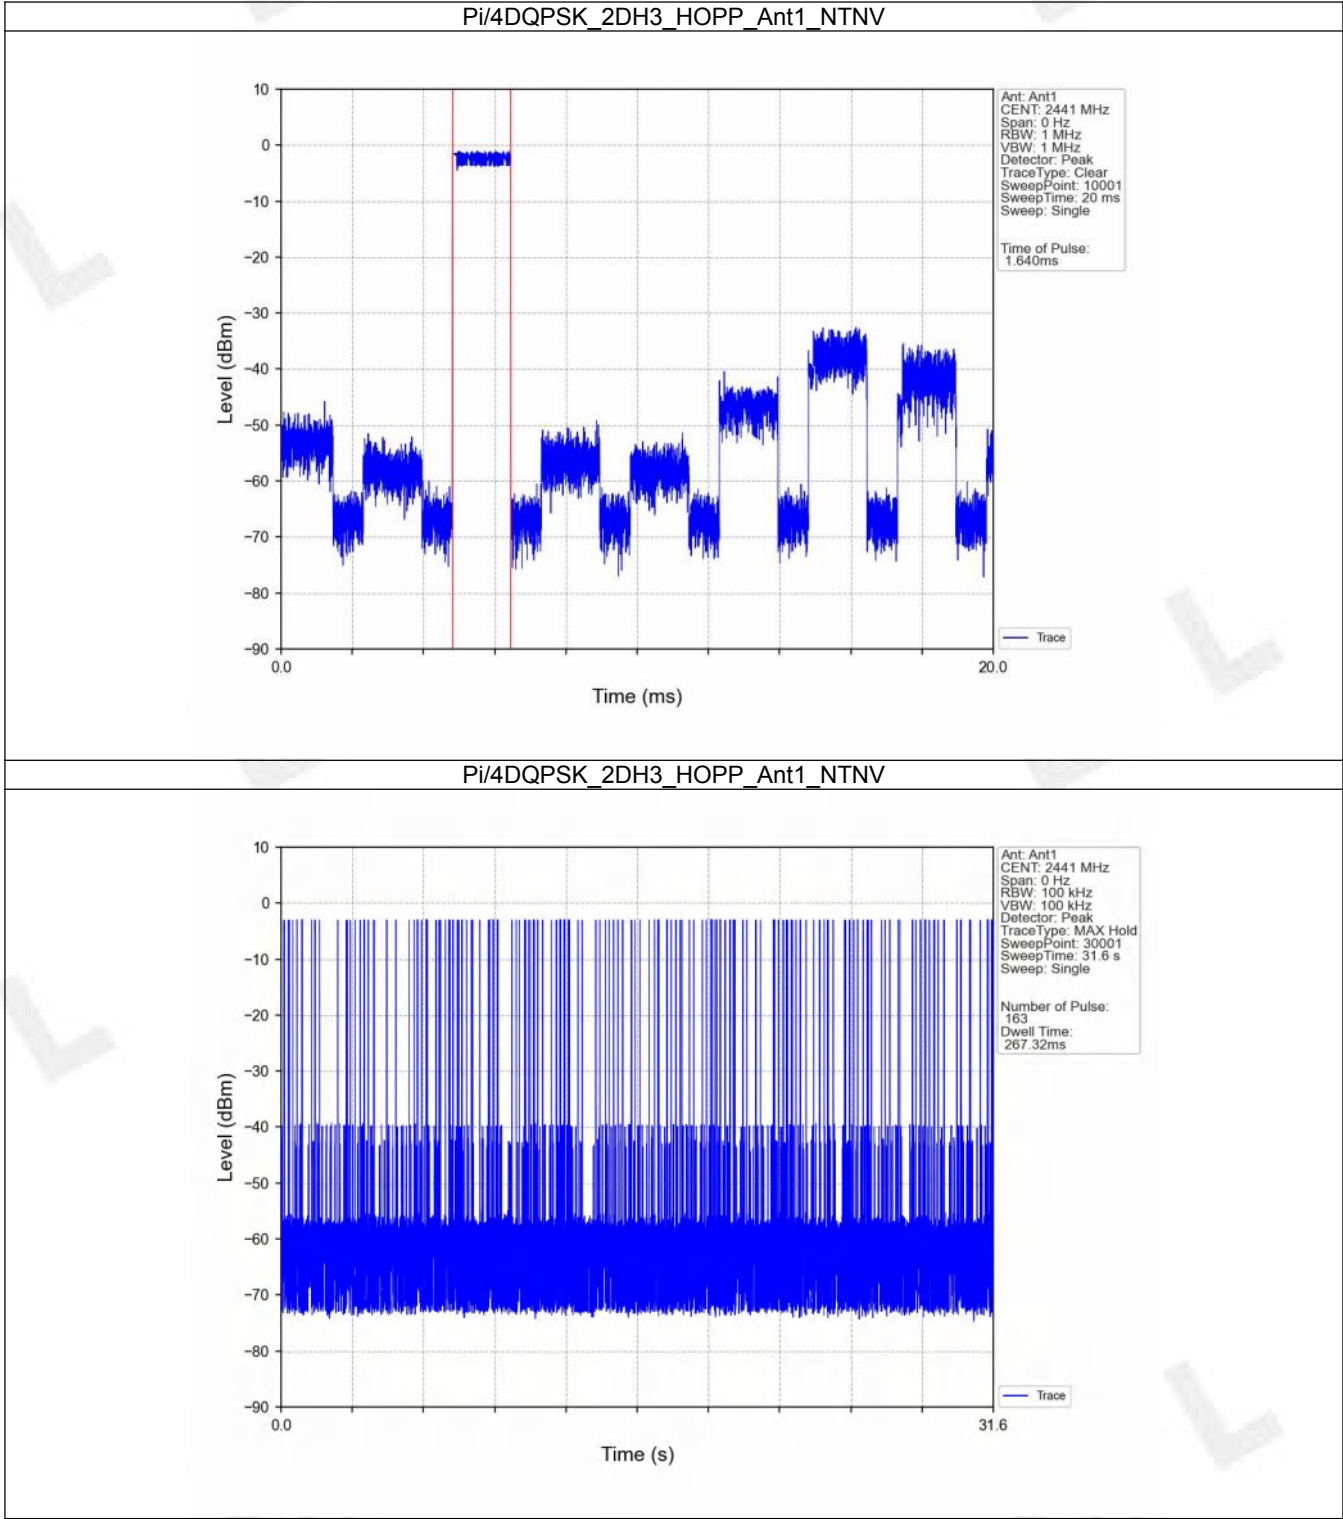


FCCID: 2AHPZ-MPD6M

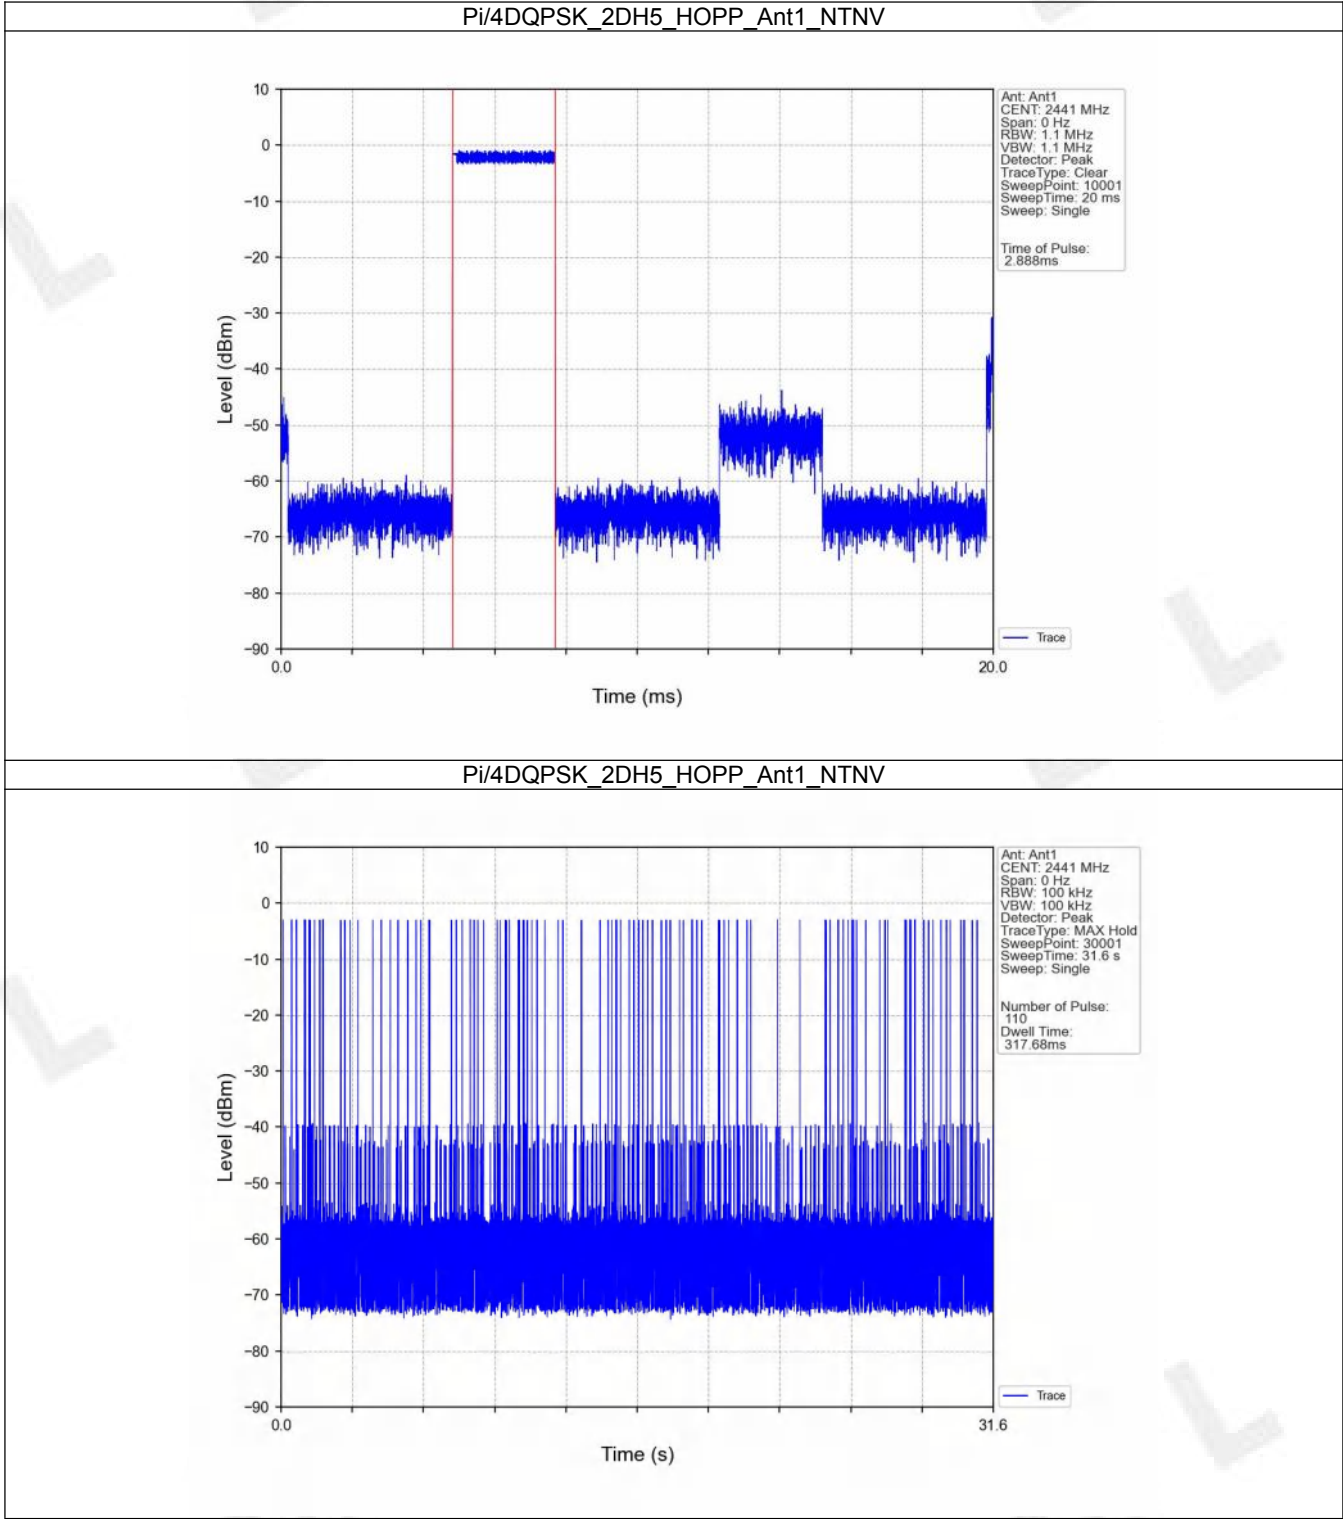


FCCID: 2AHPZ-MPD6M


8DPSK_3DH1_HOPP_Ant1_NTNV

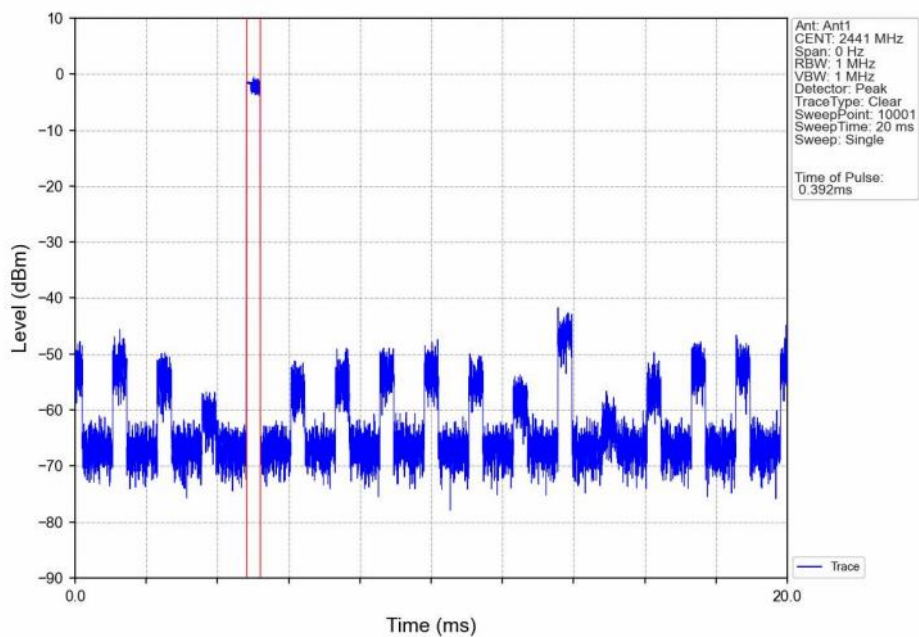


8DPSK_3DH1_HOPP_Ant1_NTNV

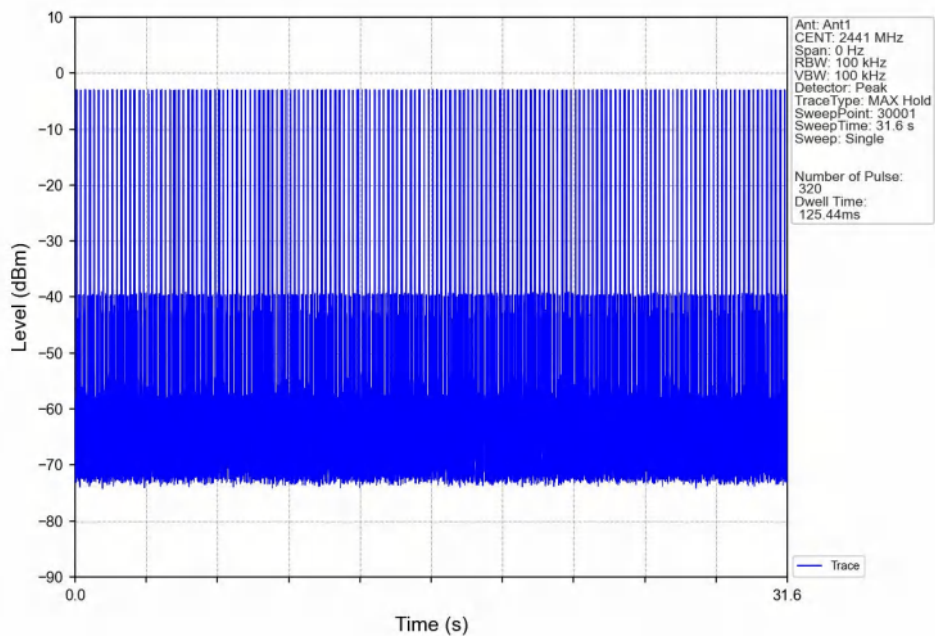

FCCID: 2AHPZ-MPD6M

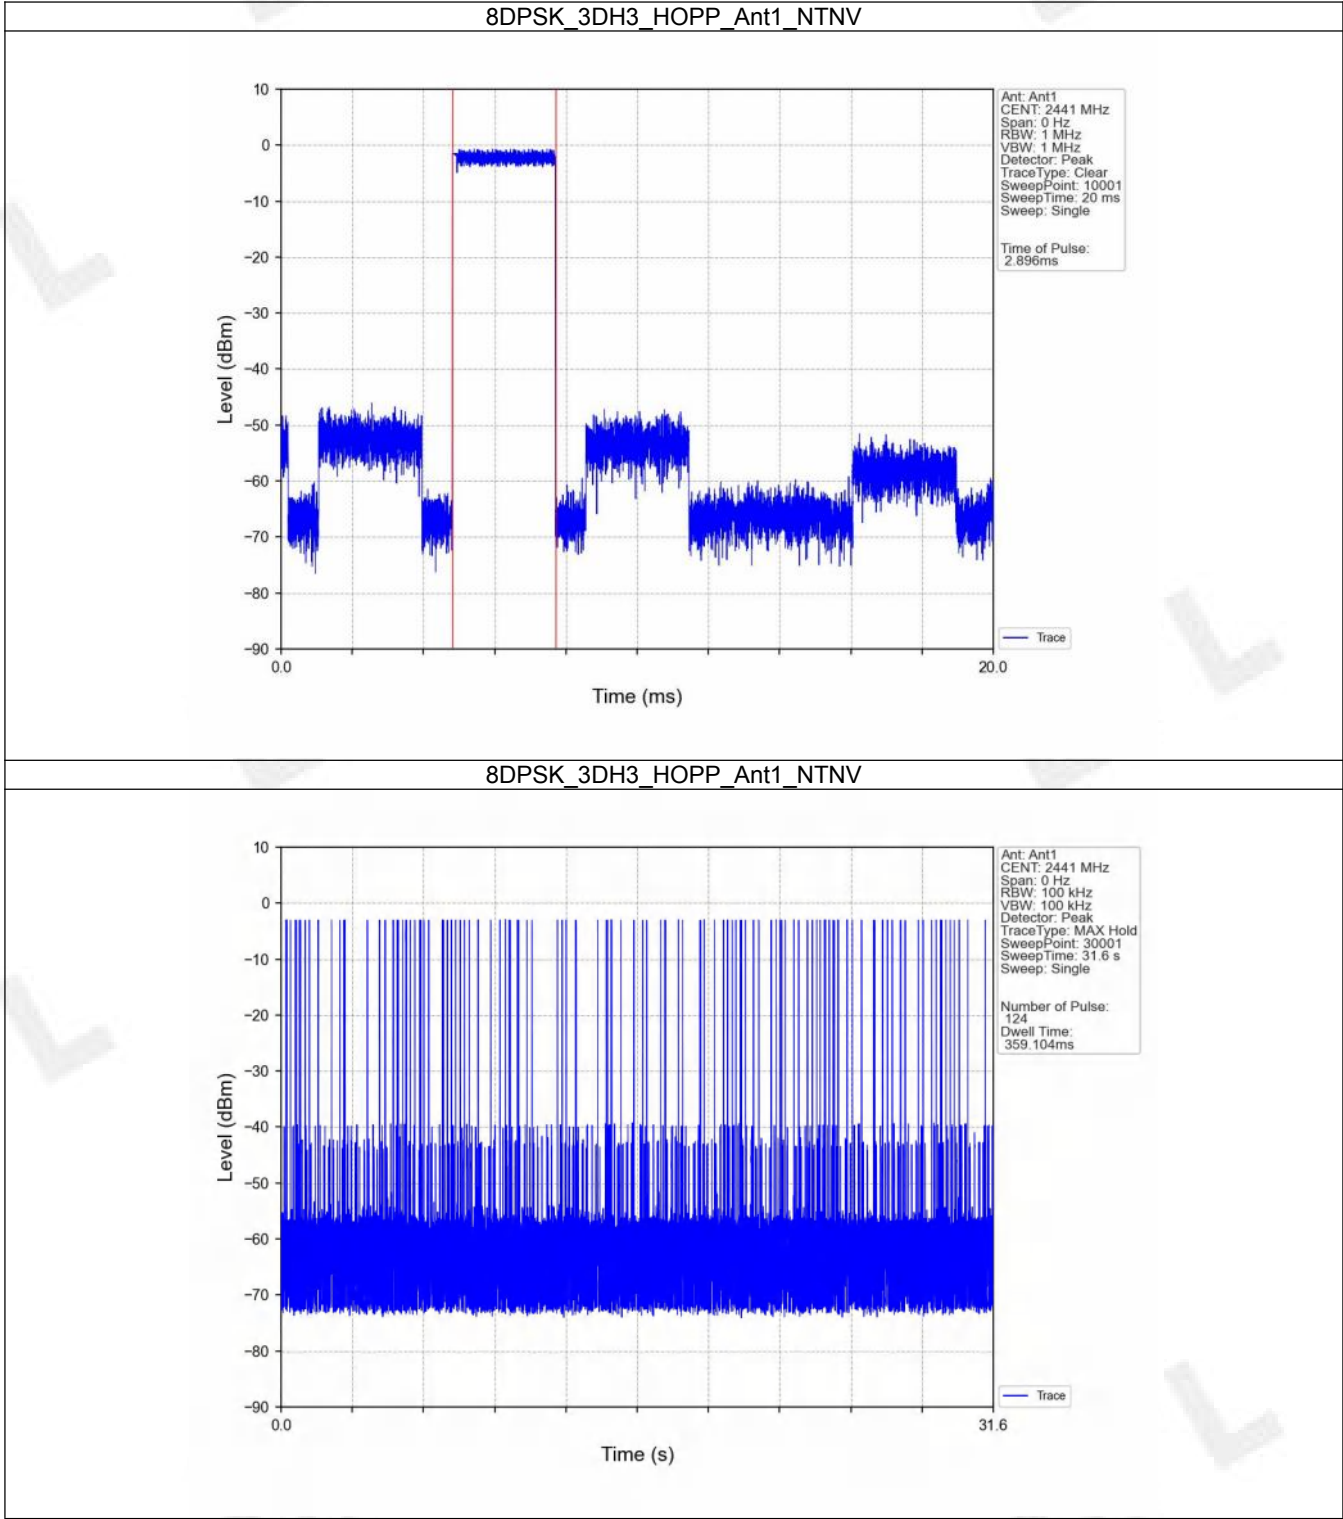

FCCID: 2AHPZ-MPD6M

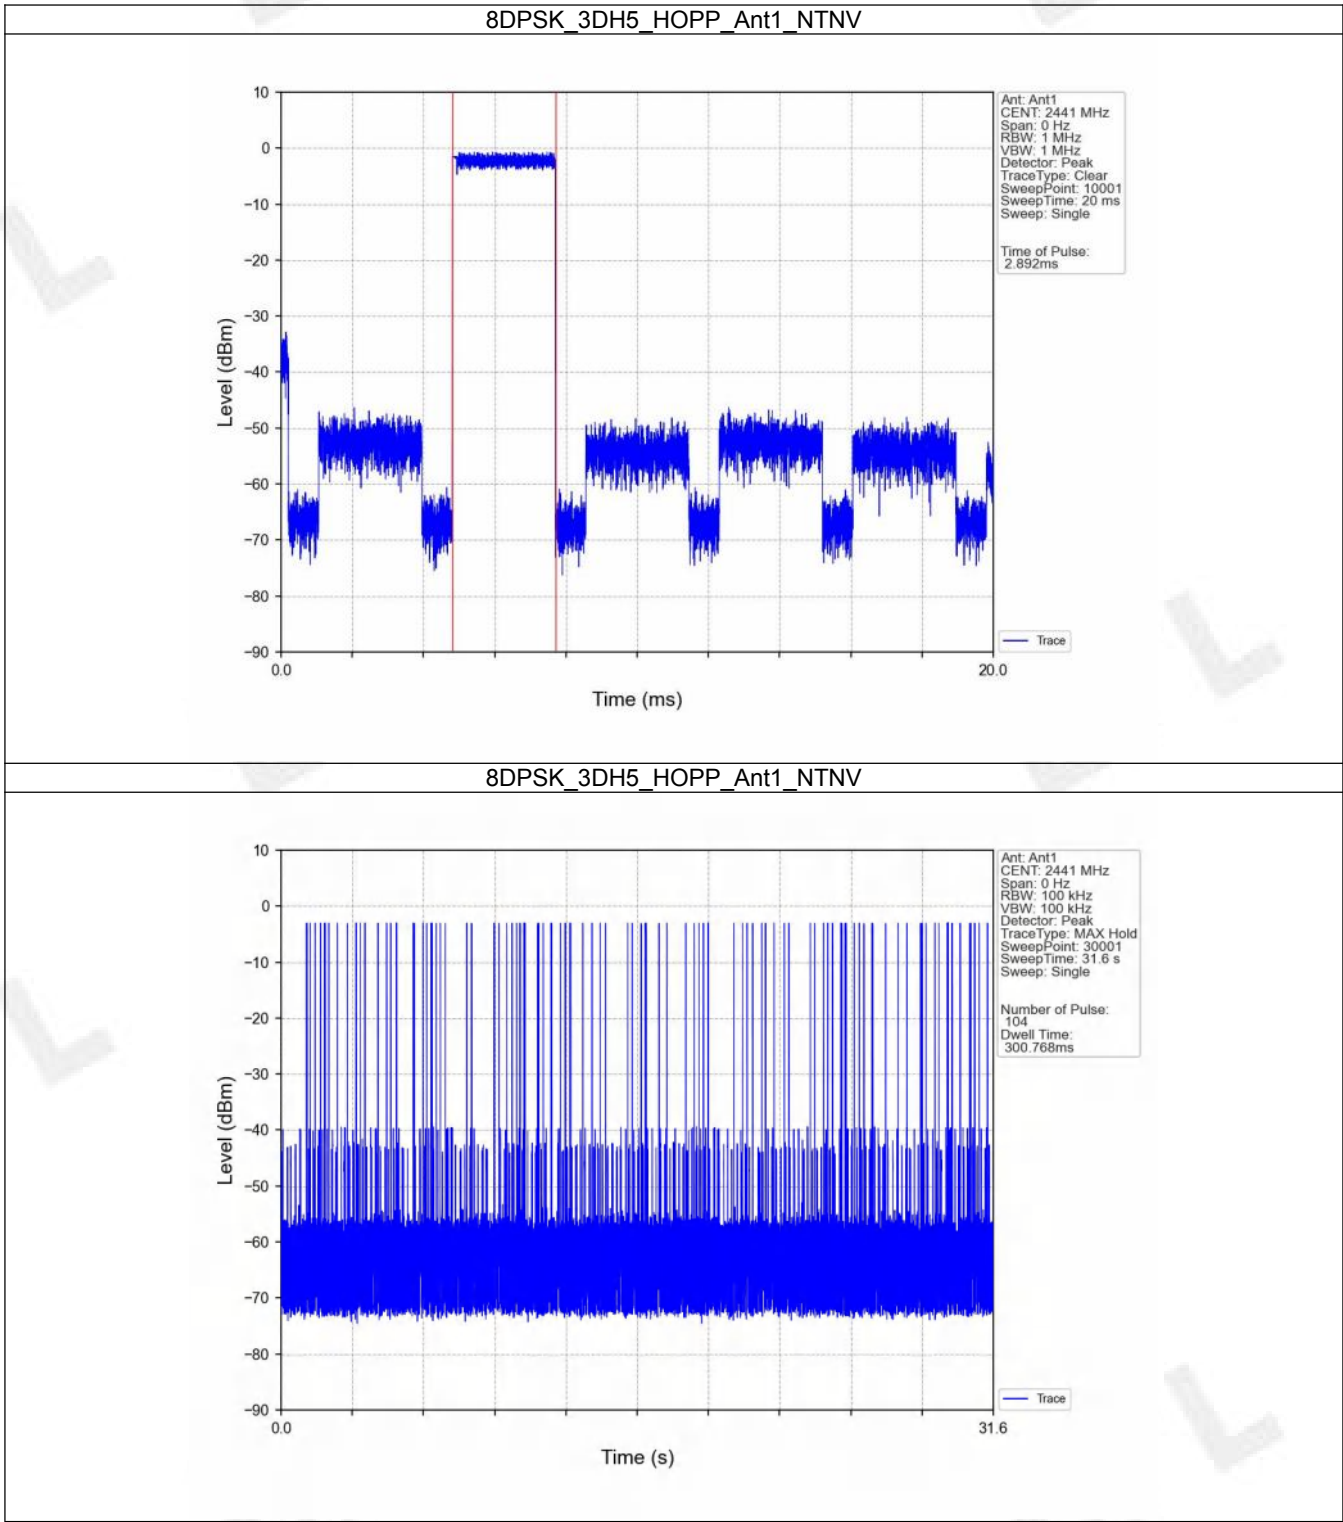

FCCID: 2AHPZ-MPD6M

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-2.30
		2441	DH5	1	-1.47
		2480	DH5	1	-1.52
Pi/4DQPSK	SISO	2402	2DH5	1	-2.14
		2441	2DH5	1	-1.52
		2480	2DH5	1	-1.59
8DPSK	SISO	2402	3DH5	1	-2.21
		2441	3DH5	1	-1.50
		2480	3DH5	1	-1.59

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

7.1.2 CSE


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	-1.47	-21.47	Pass
		2441	DH5	1	-1.47	-21.47	Pass
		2480	DH5	1	-1.47	-21.47	Pass
		HOPP	DH5	1	-1.47	-21.47	Pass
					-1.47	-21.47	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-1.52	-21.52	Pass
		2441	2DH5	1	-1.52	-21.52	Pass
		2480	2DH5	1	-1.52	-21.52	Pass
		HOPP	2DH5	1	-1.52	-21.52	Pass
					-1.52	-21.52	Pass
8DPSK	SISO	2402	3DH5	1	-1.50	-21.50	Pass
		2441	3DH5	1	-1.50	-21.50	Pass
		2480	3DH5	1	-1.50	-21.50	Pass
		HOPP	3DH5	1	-1.50	-21.50	Pass
					-1.50	-21.50	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


FCCID: 2AHPZ-MPD6M

6.2 Test Graph

6.2.1 Ref

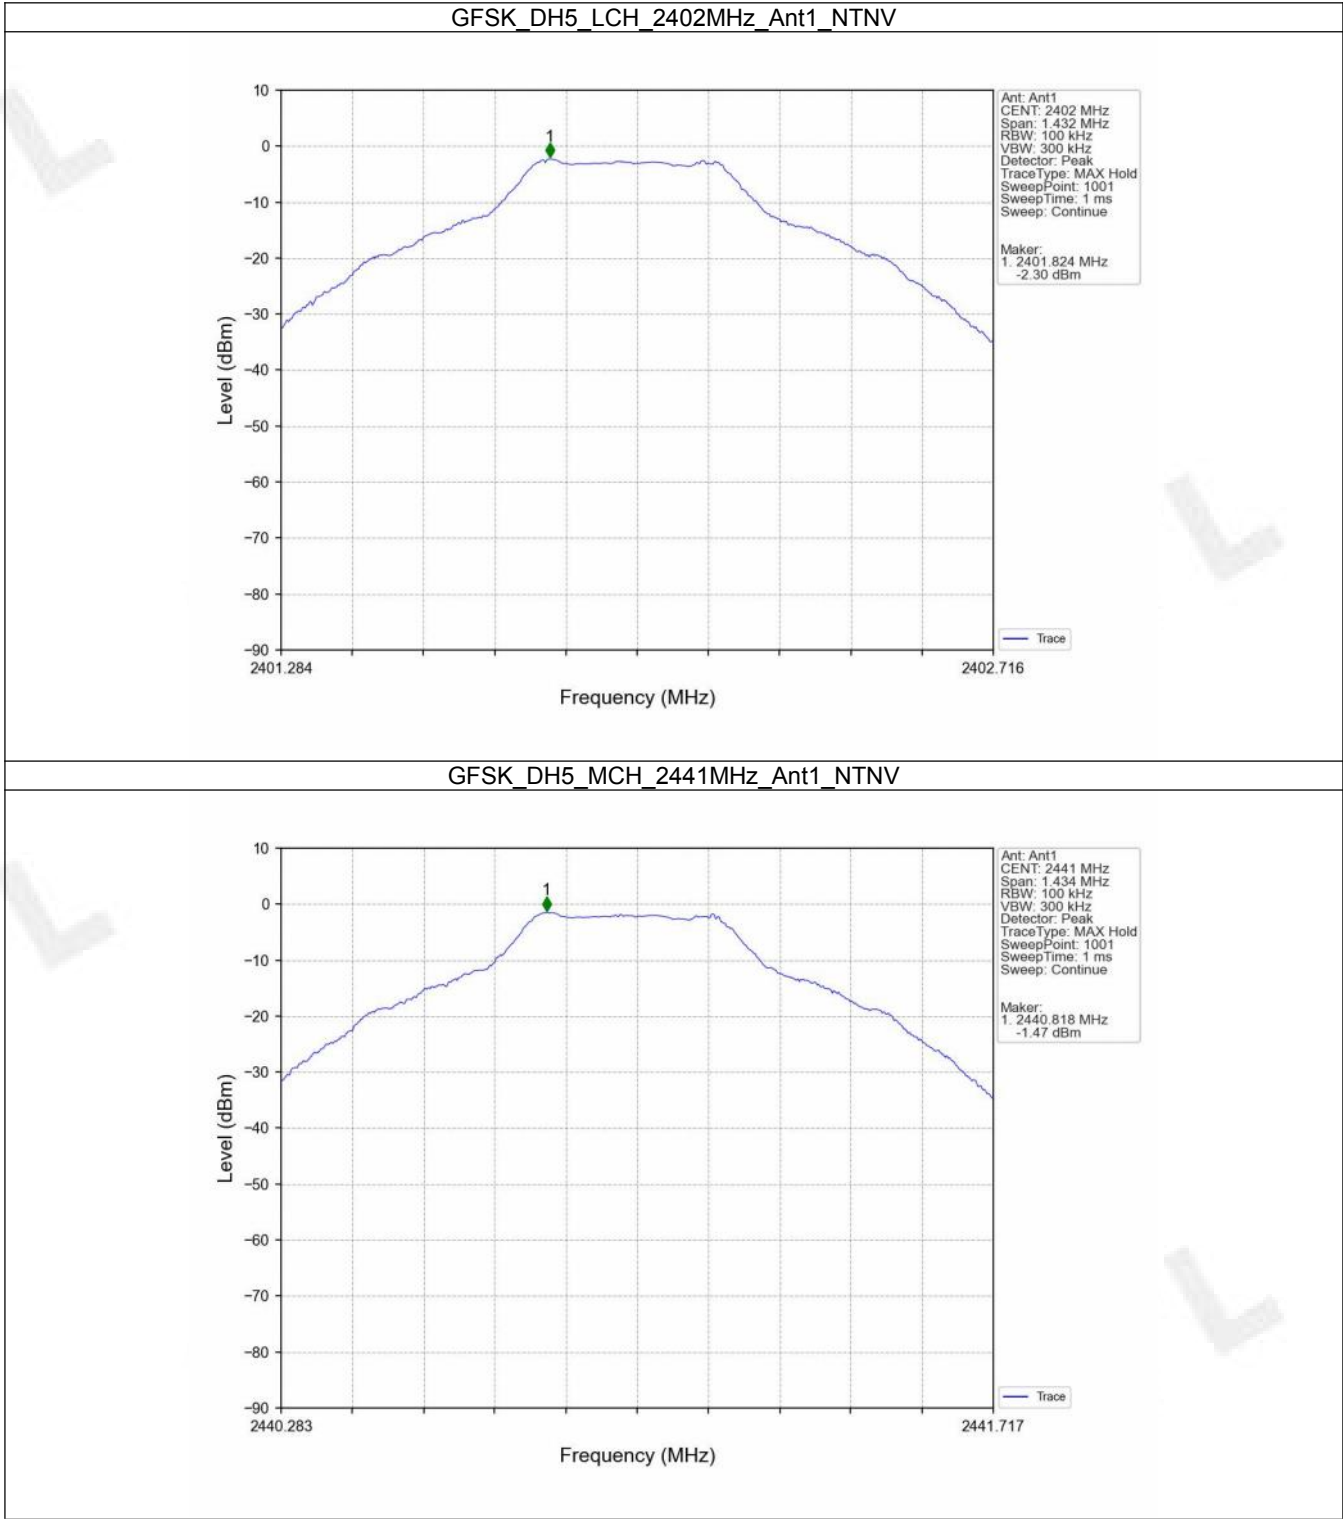


FCCID: 2AHPZ-MPD6M

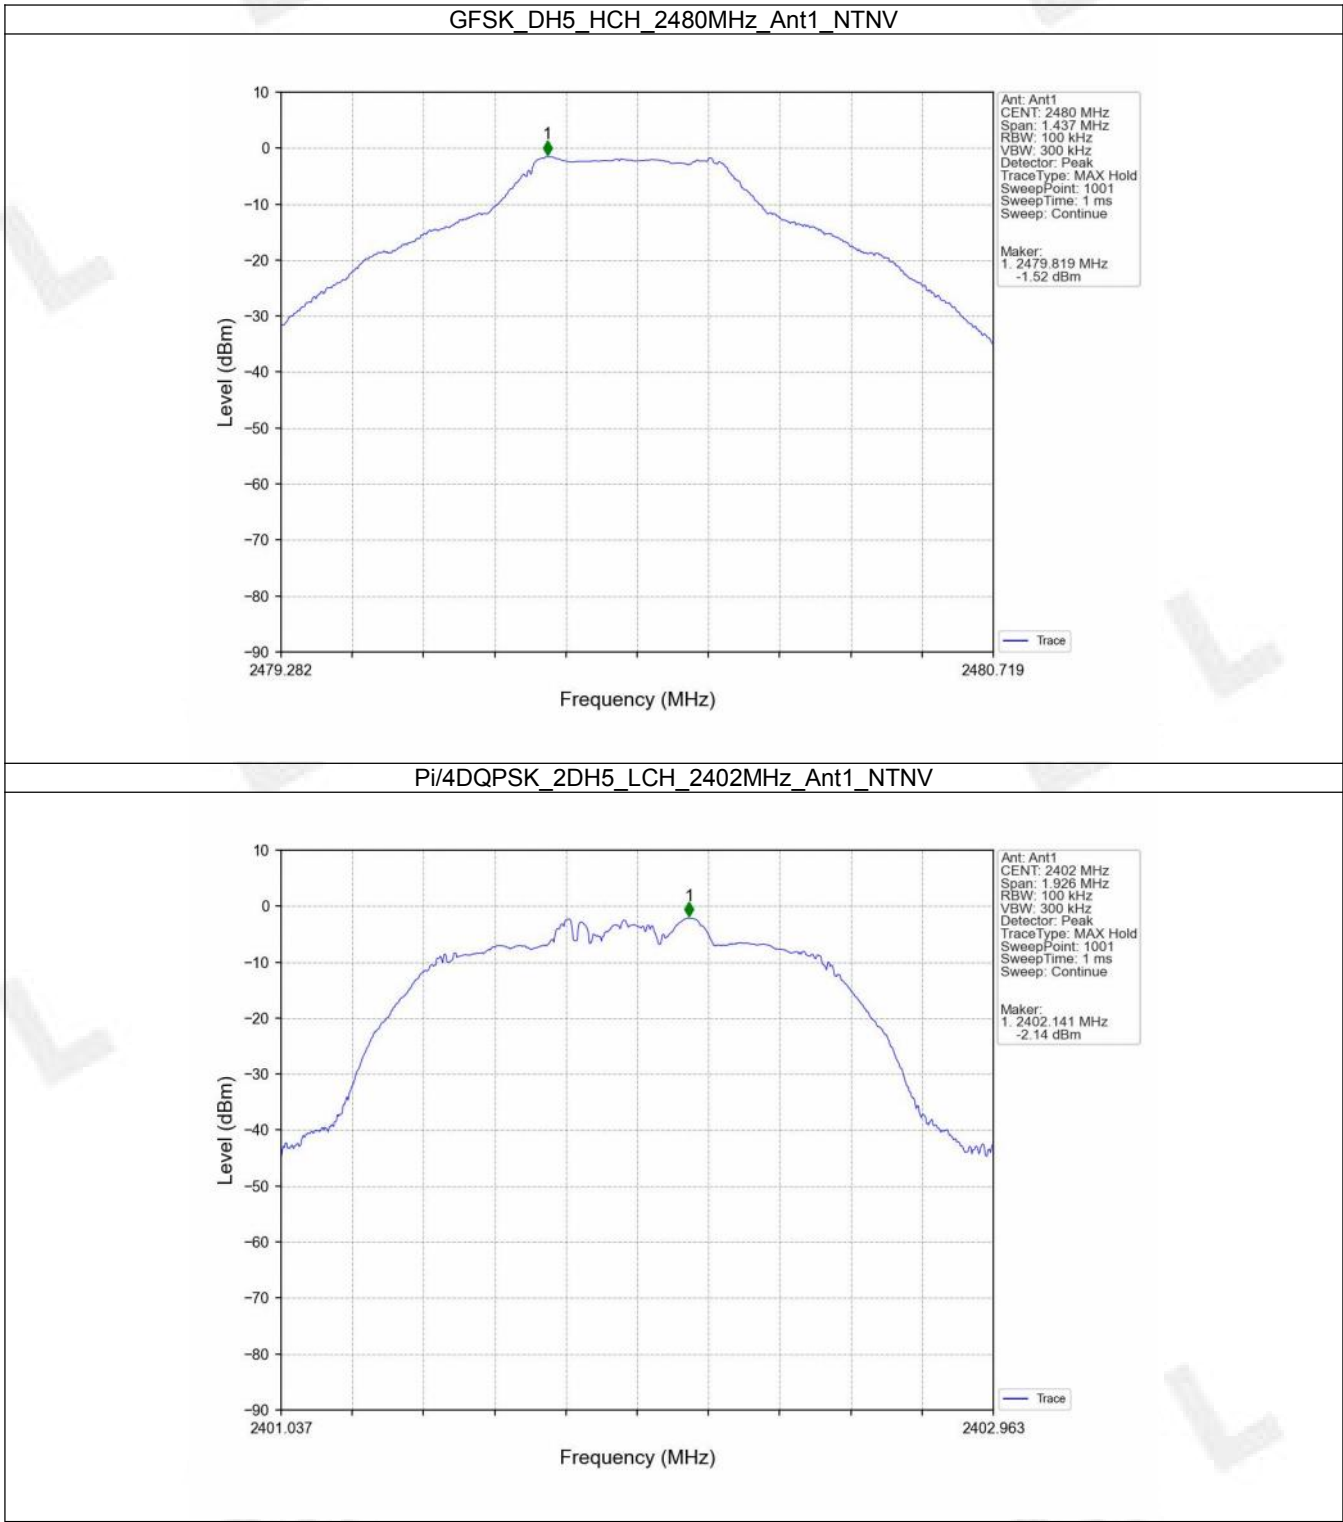


FCCID: 2AHPZ-MPD6M


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

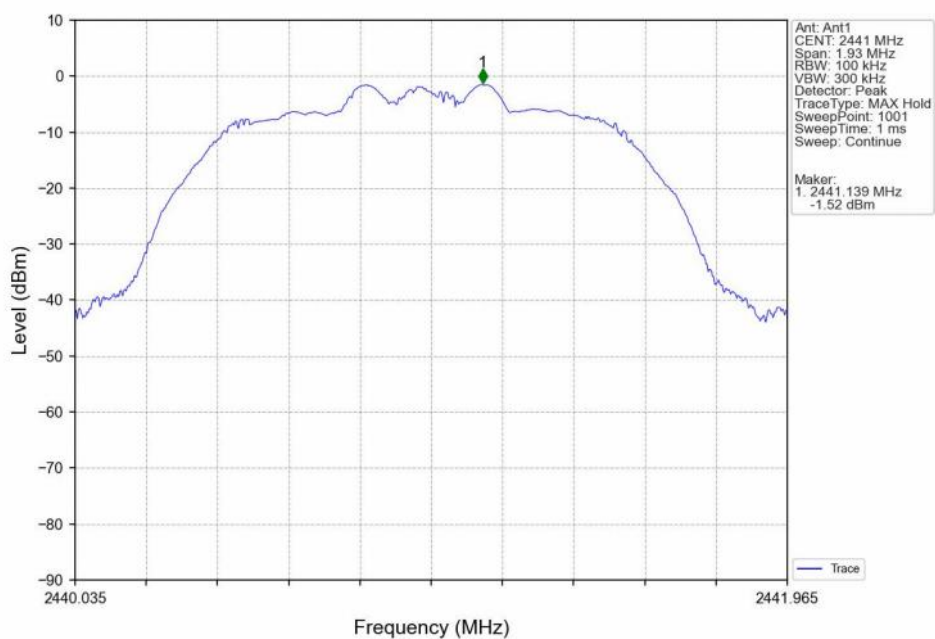


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

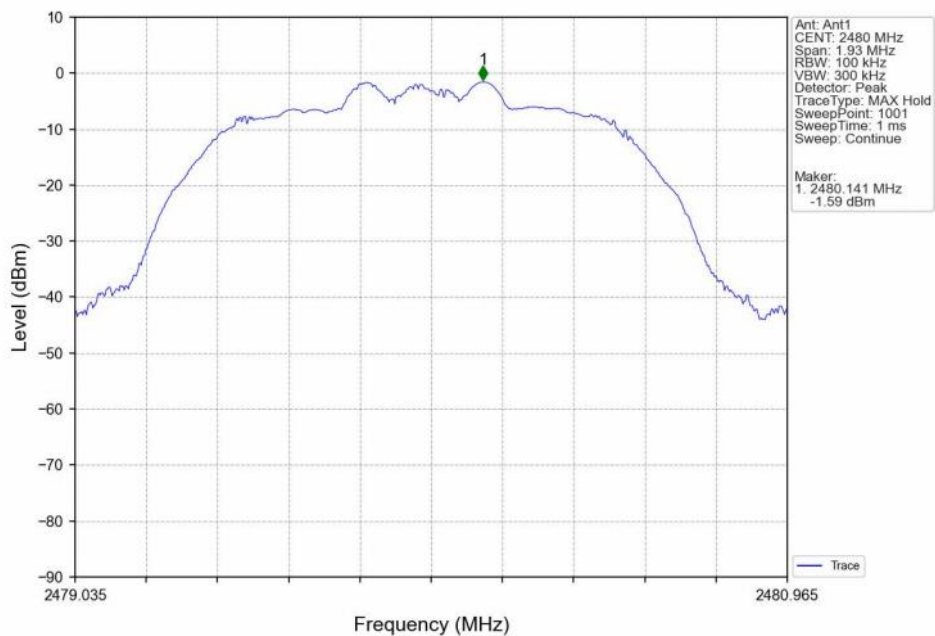

FCCID: 2AHPZ-MPD6M

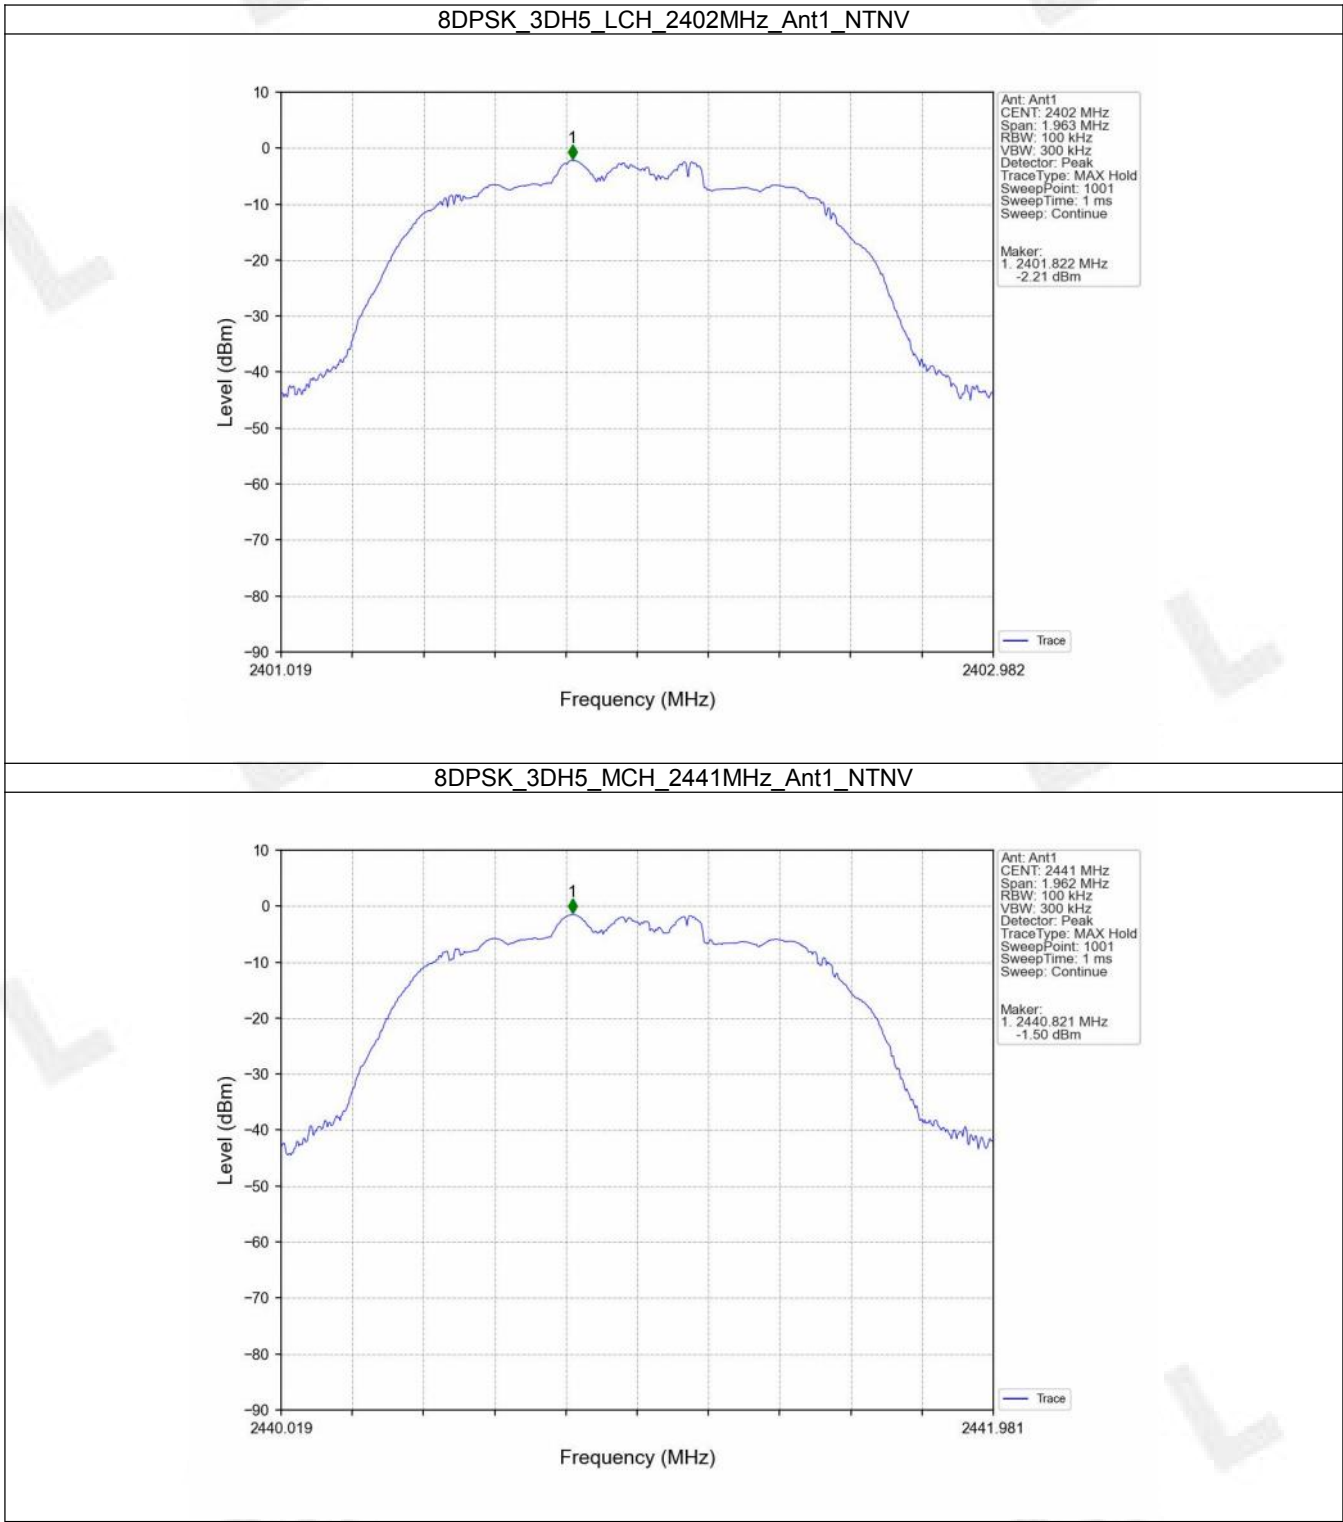


FCCID: 2AHPZ-MPD6M

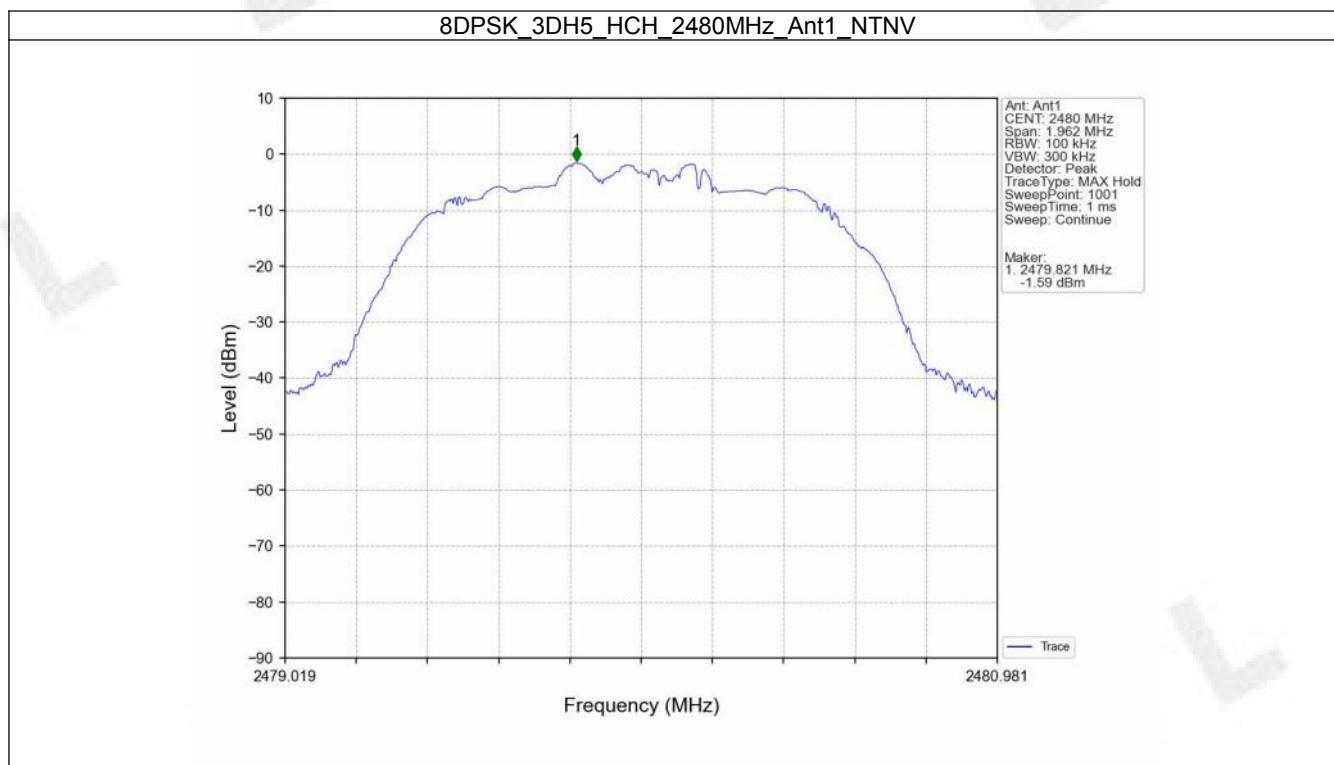


FCCID: 2AHPZ-MPD6M


6.2.2 CSE

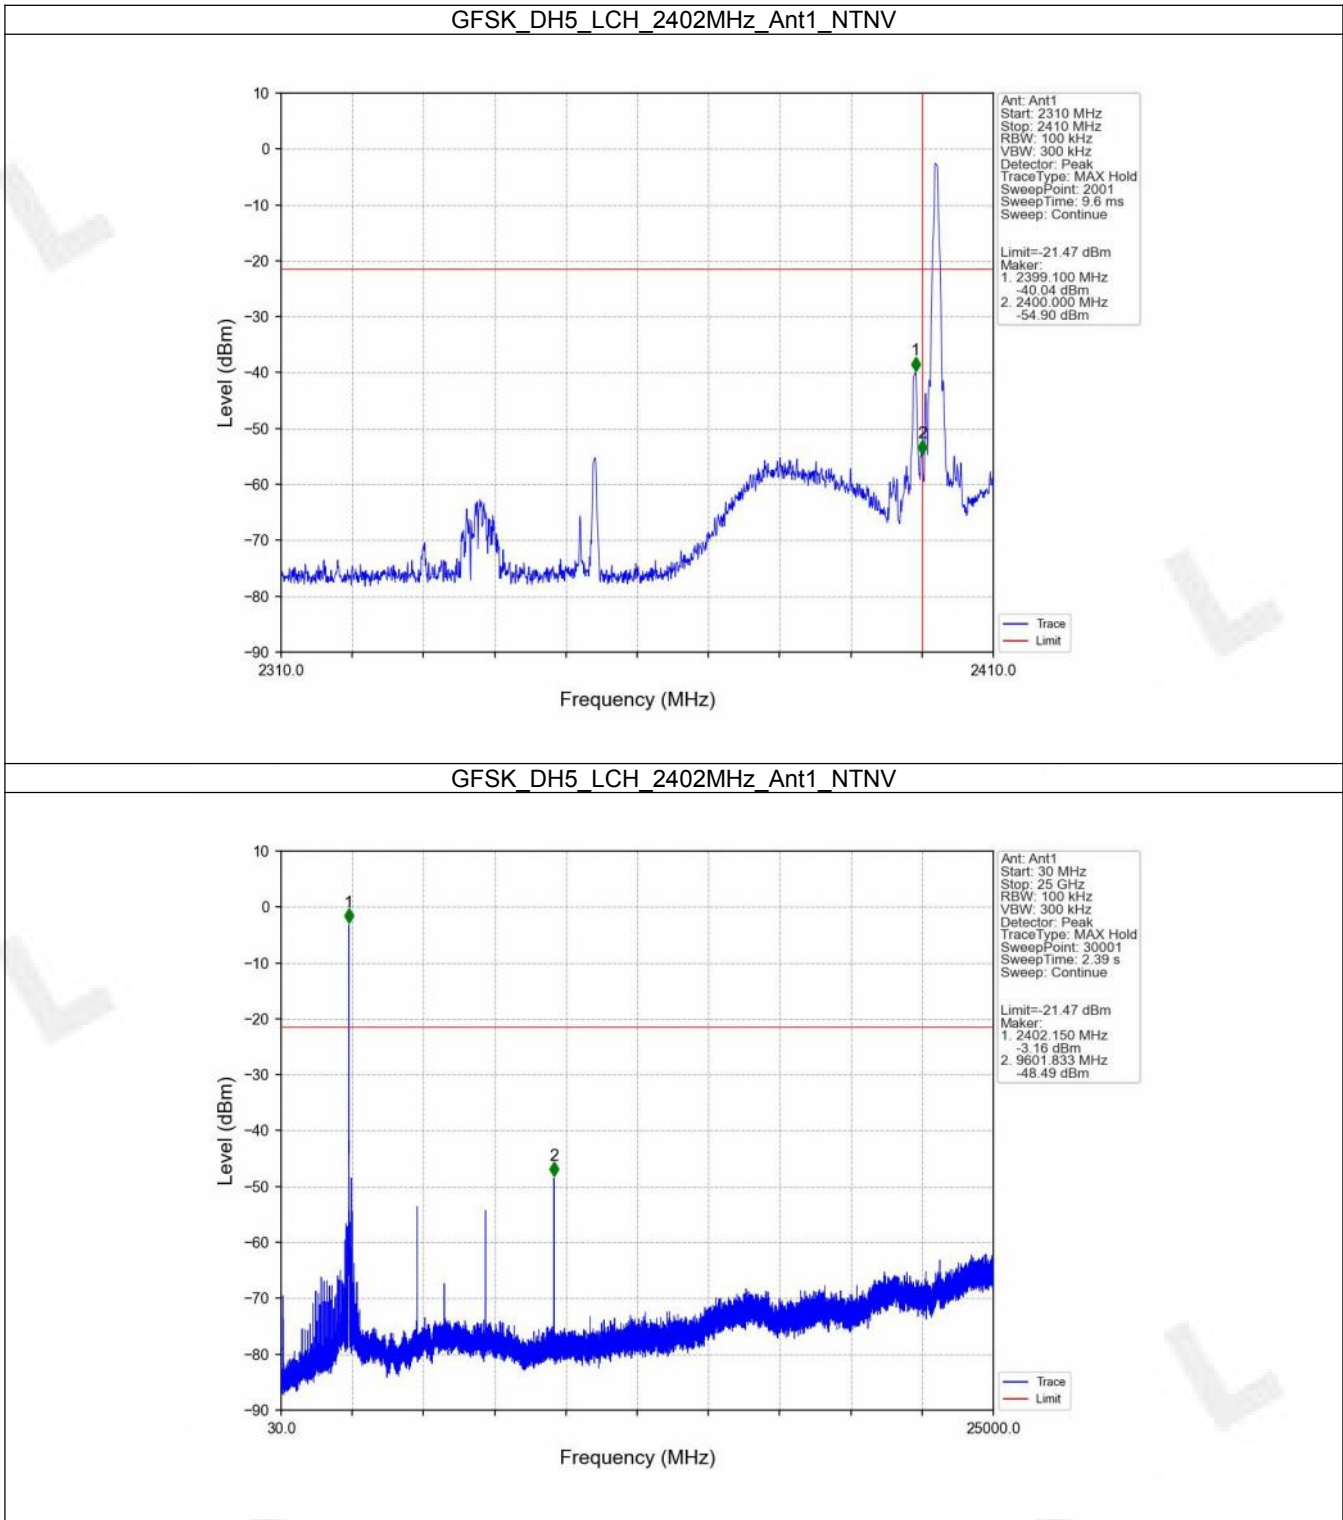


FCCID: 2AHPZ-MPD6M

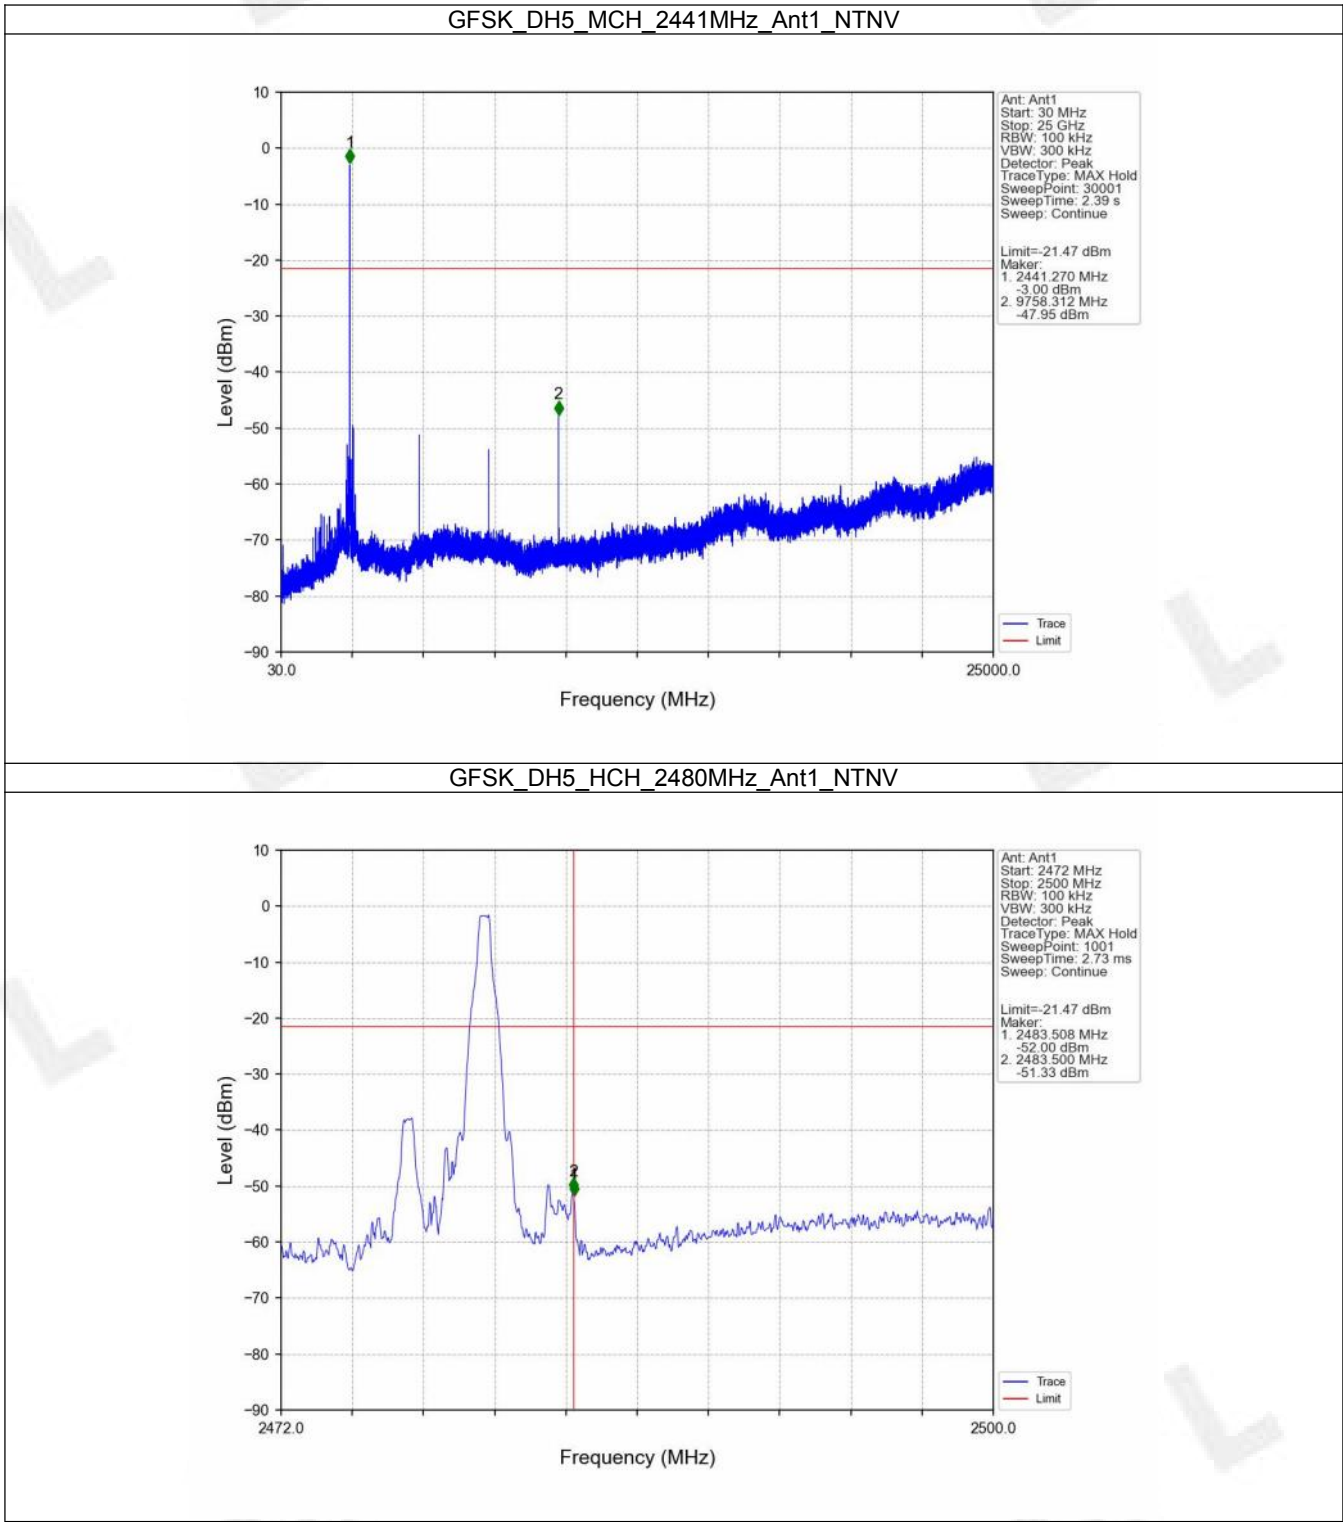


FCCID: 2AHPZ-MPD6M

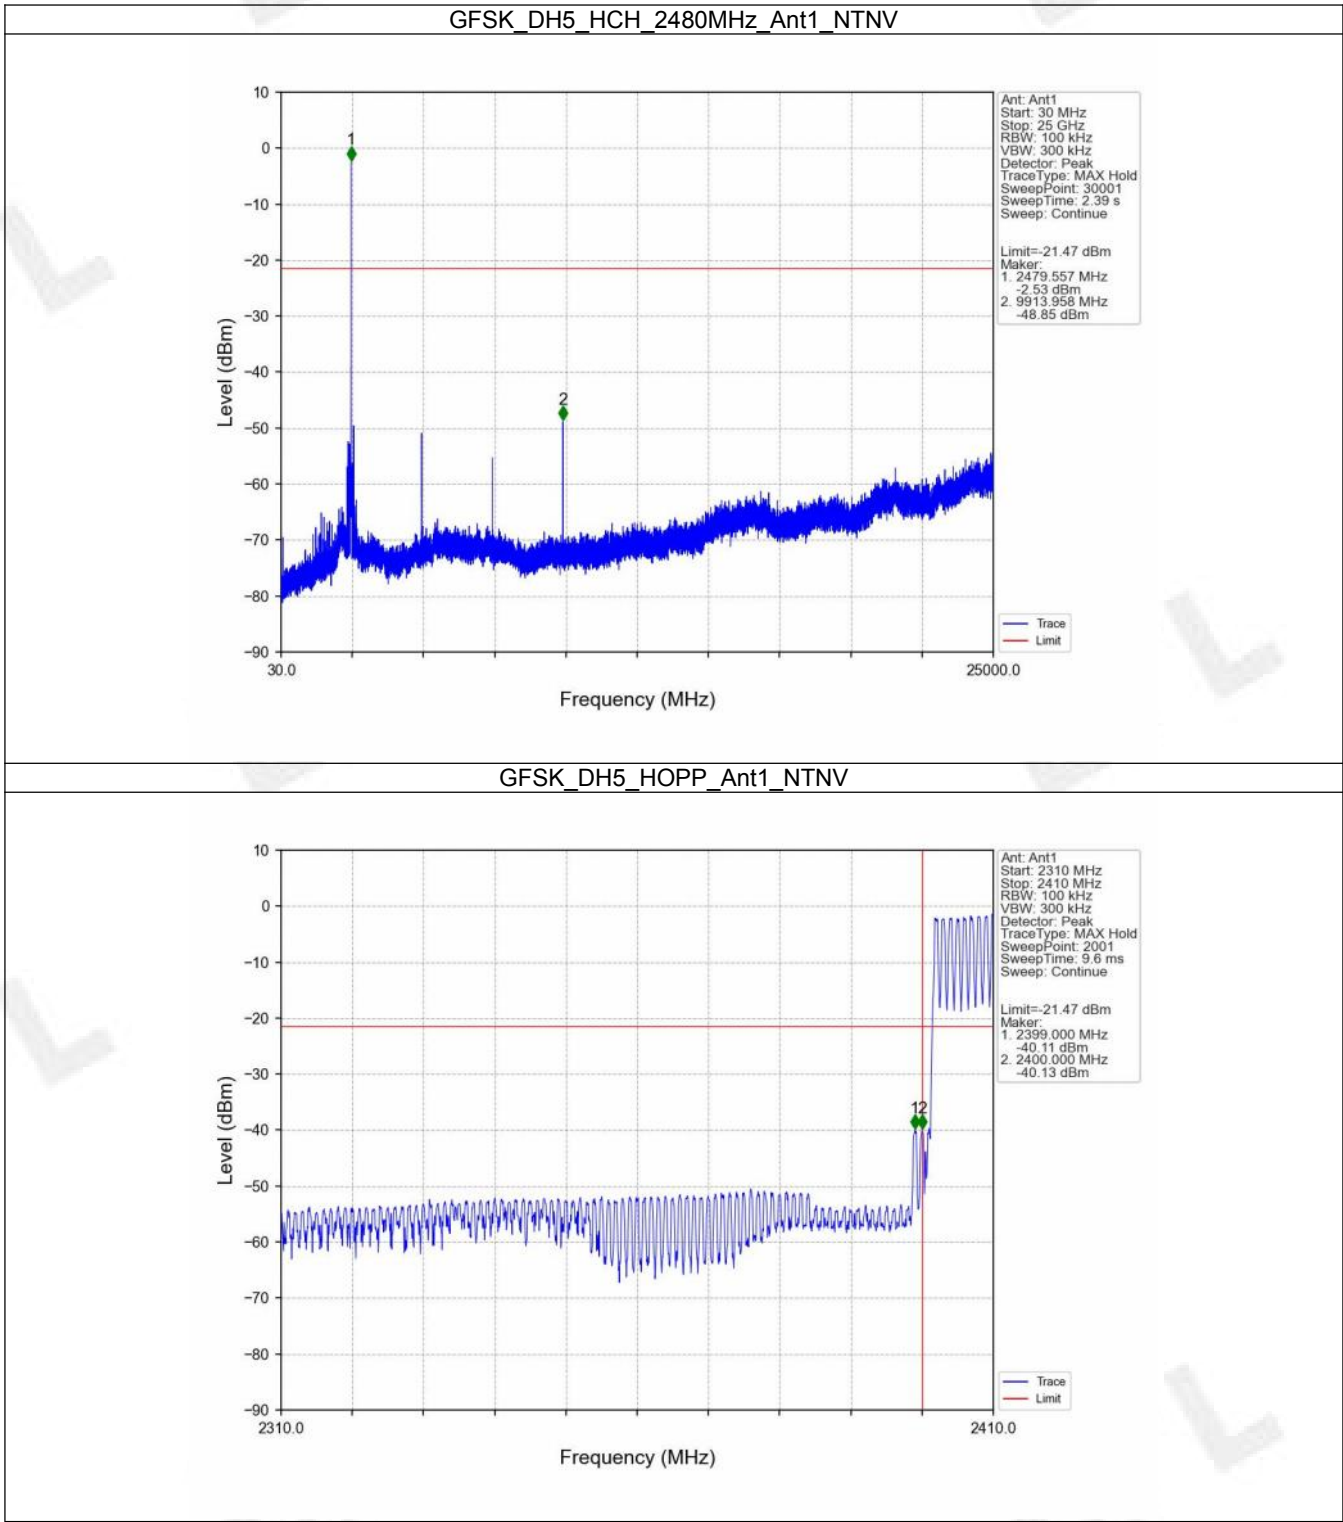


FCCID: 2AHPZ-MPD6M

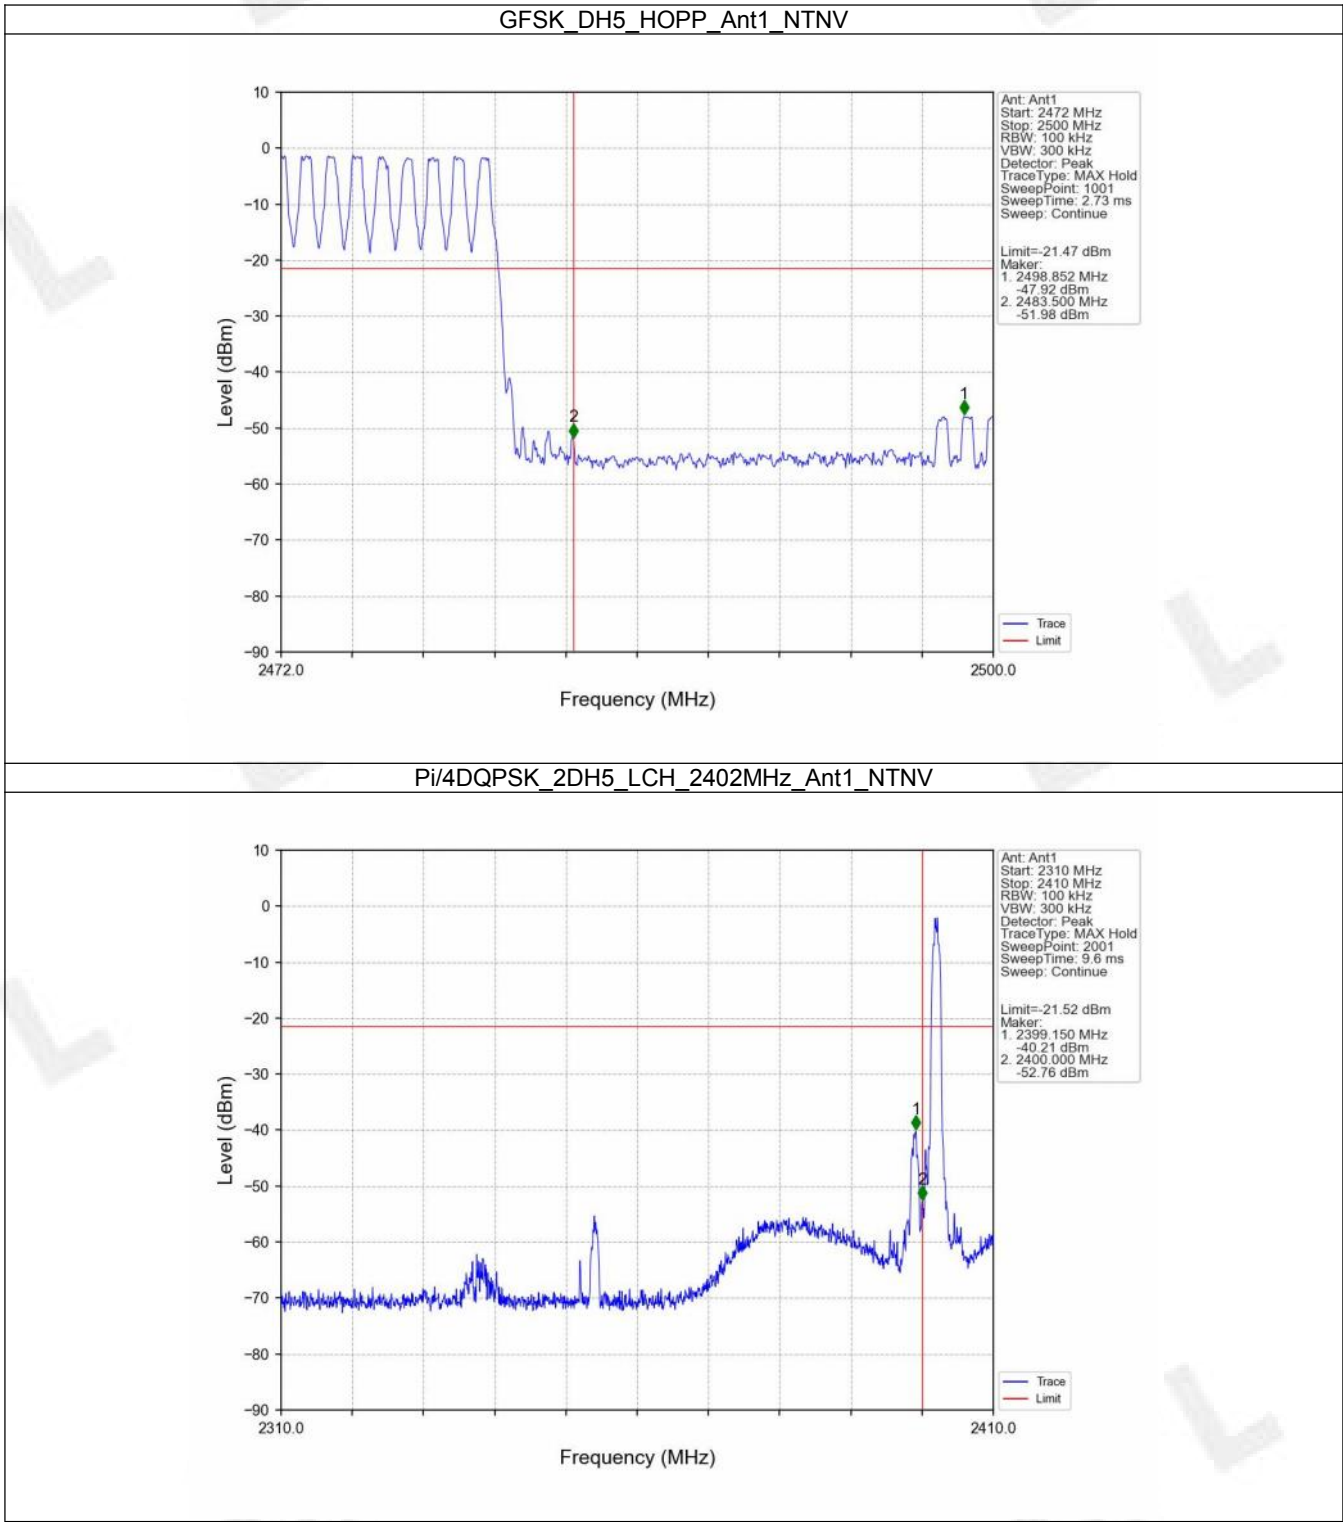


FCCID: 2AHPZ-MPD6M

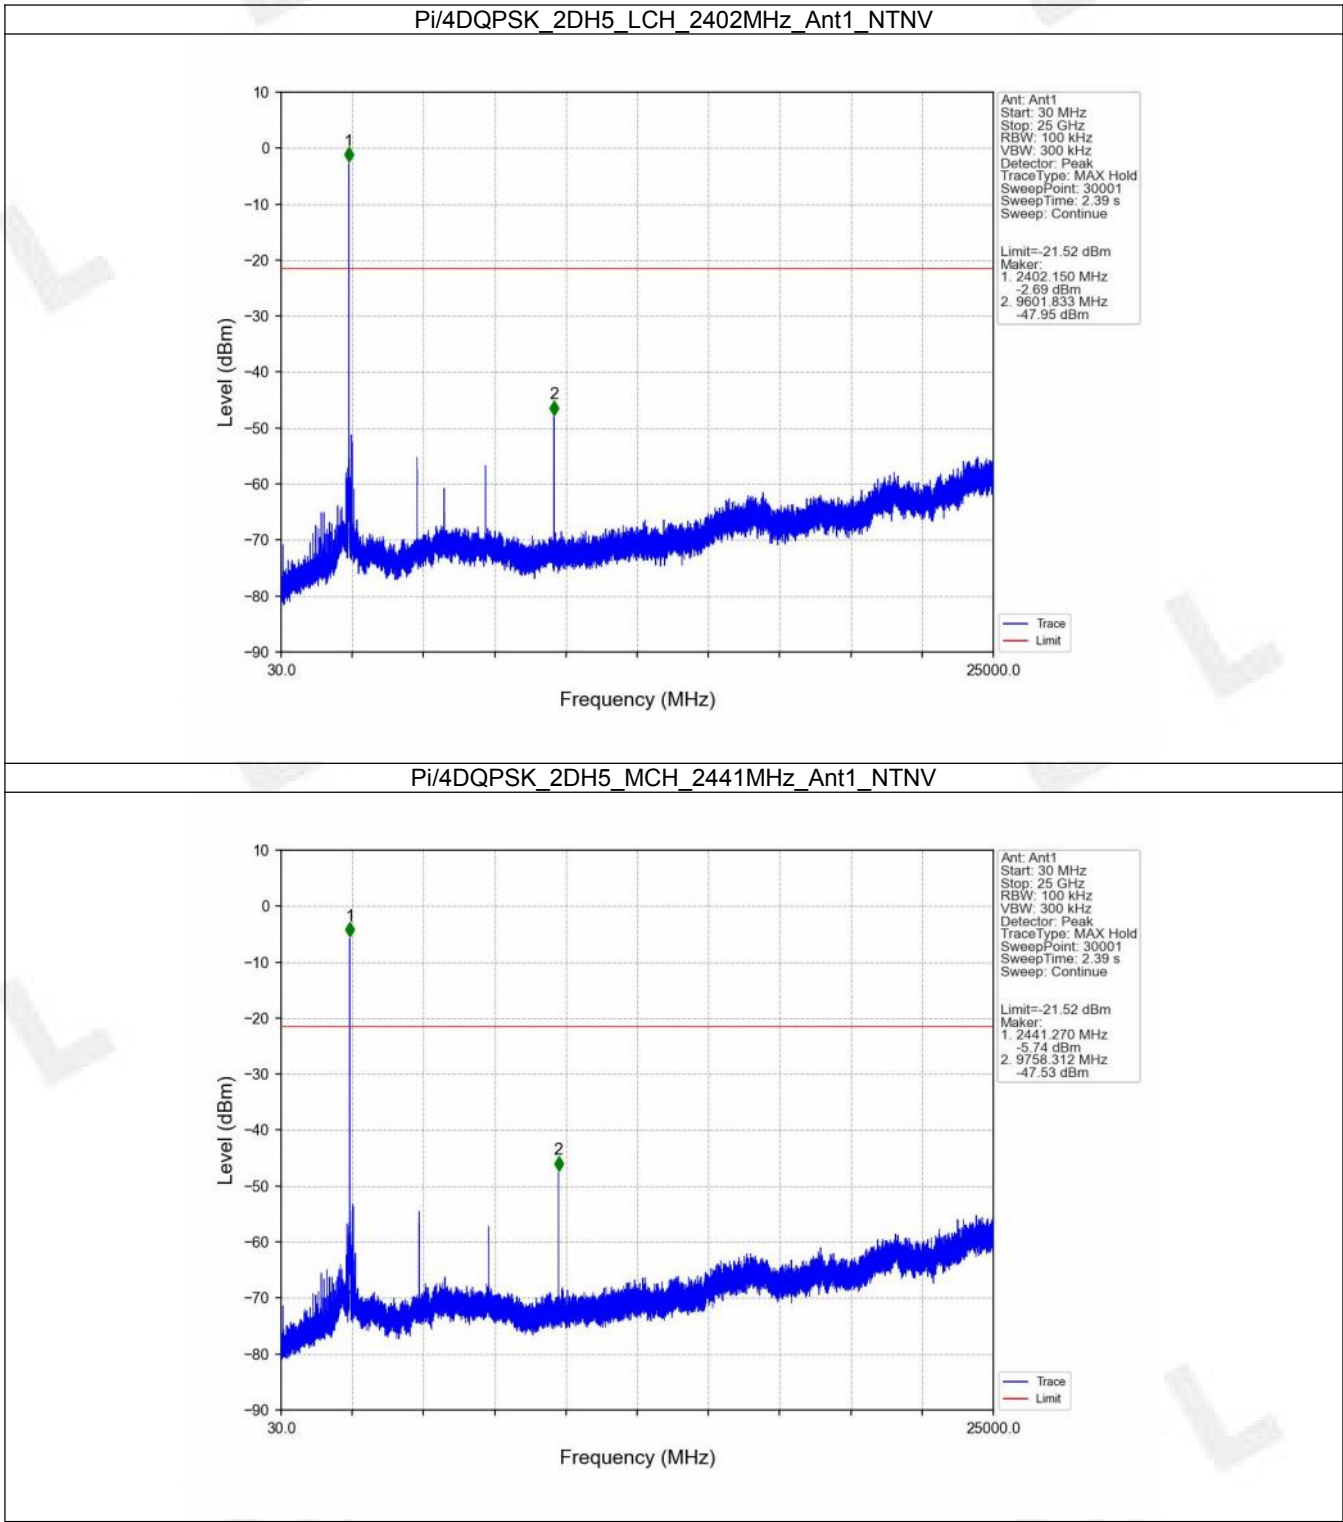


FCCID: 2AHPZ-MPD6M

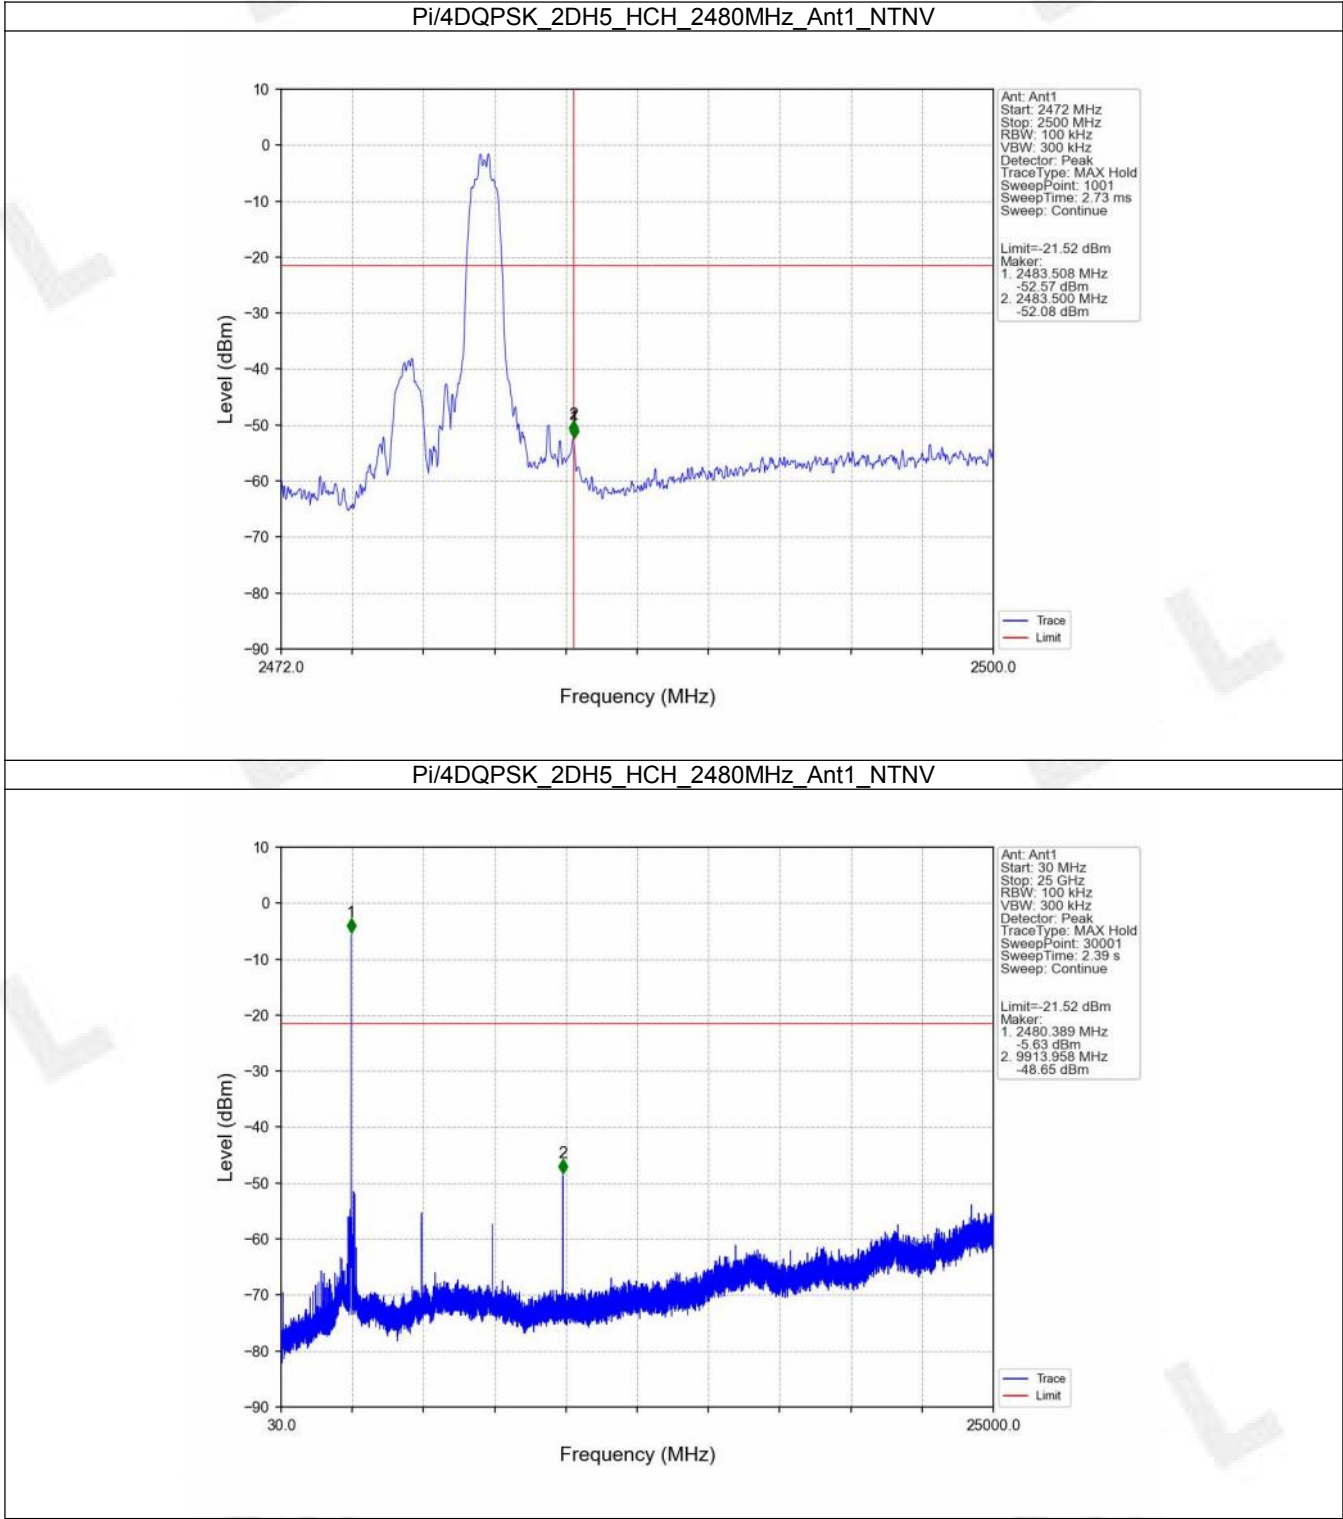


FCCID: 2AHPZ-MPD6M

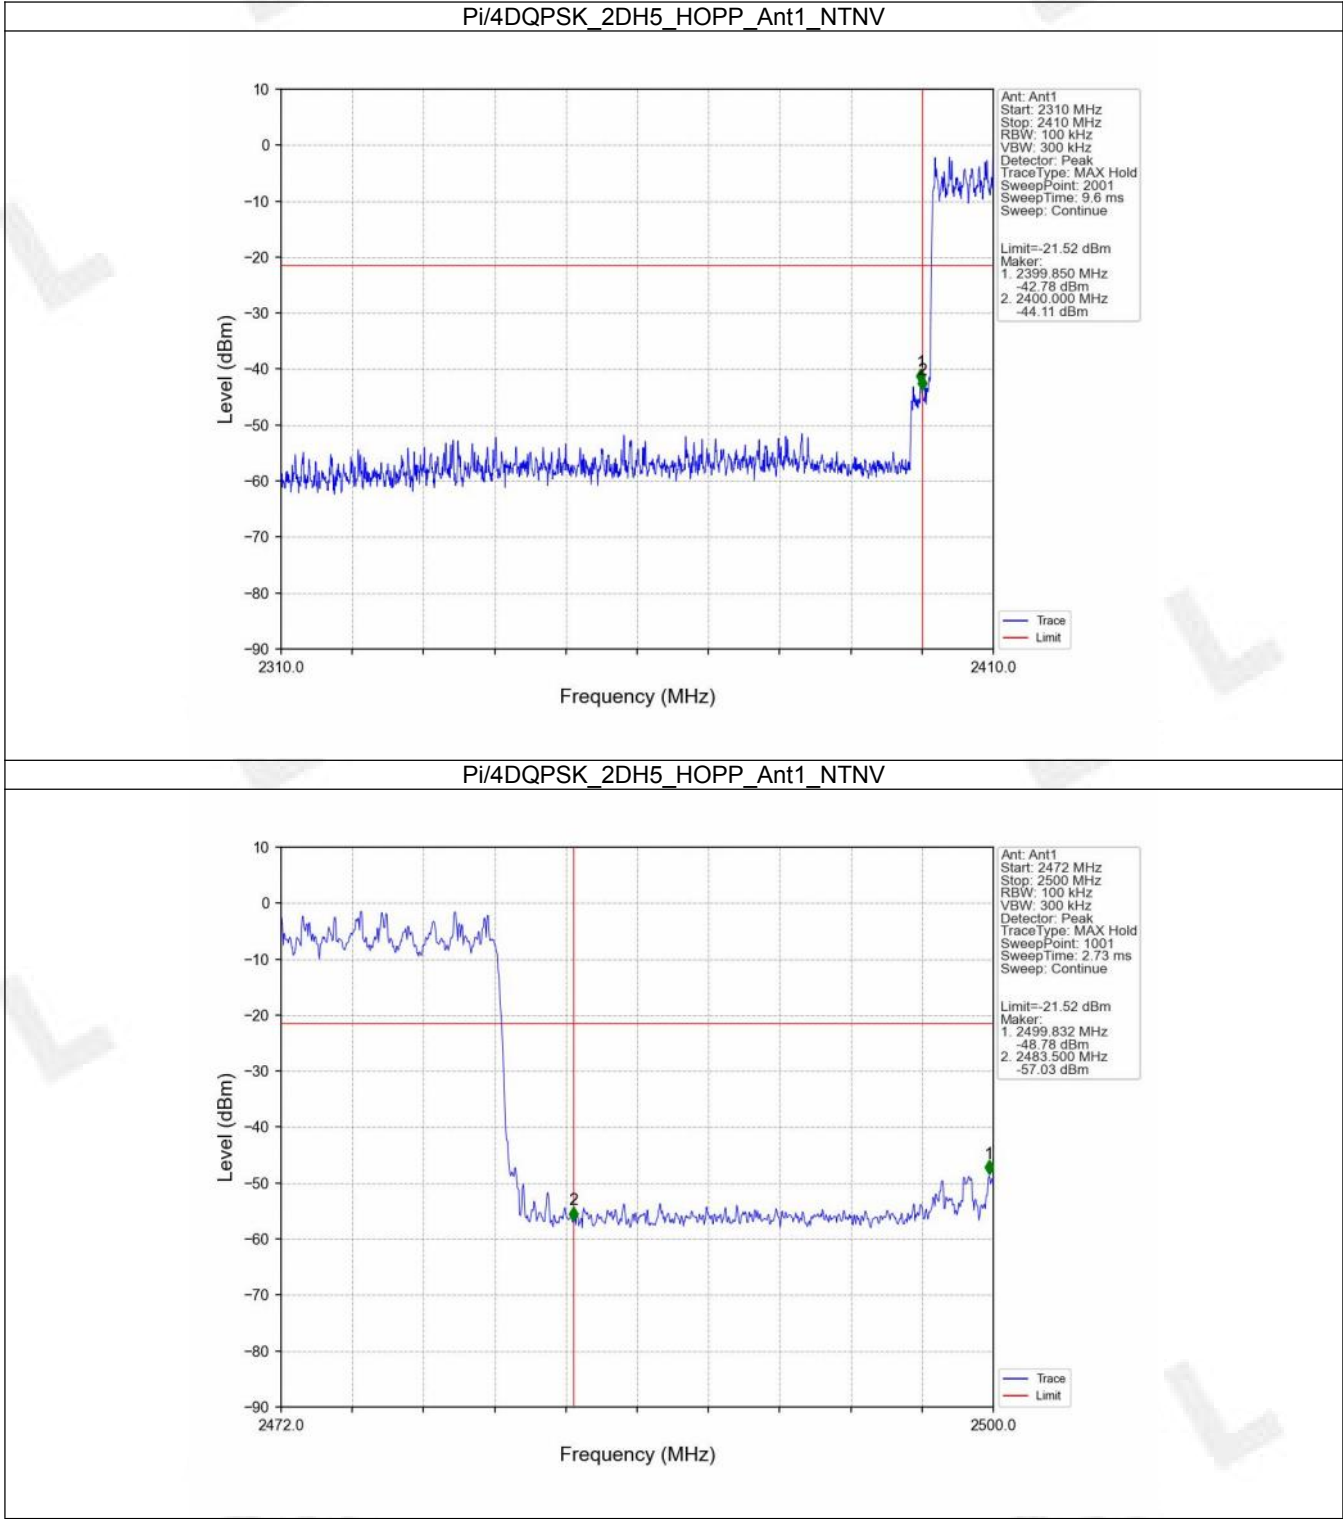


FCCID: 2AHPZ-MPD6M

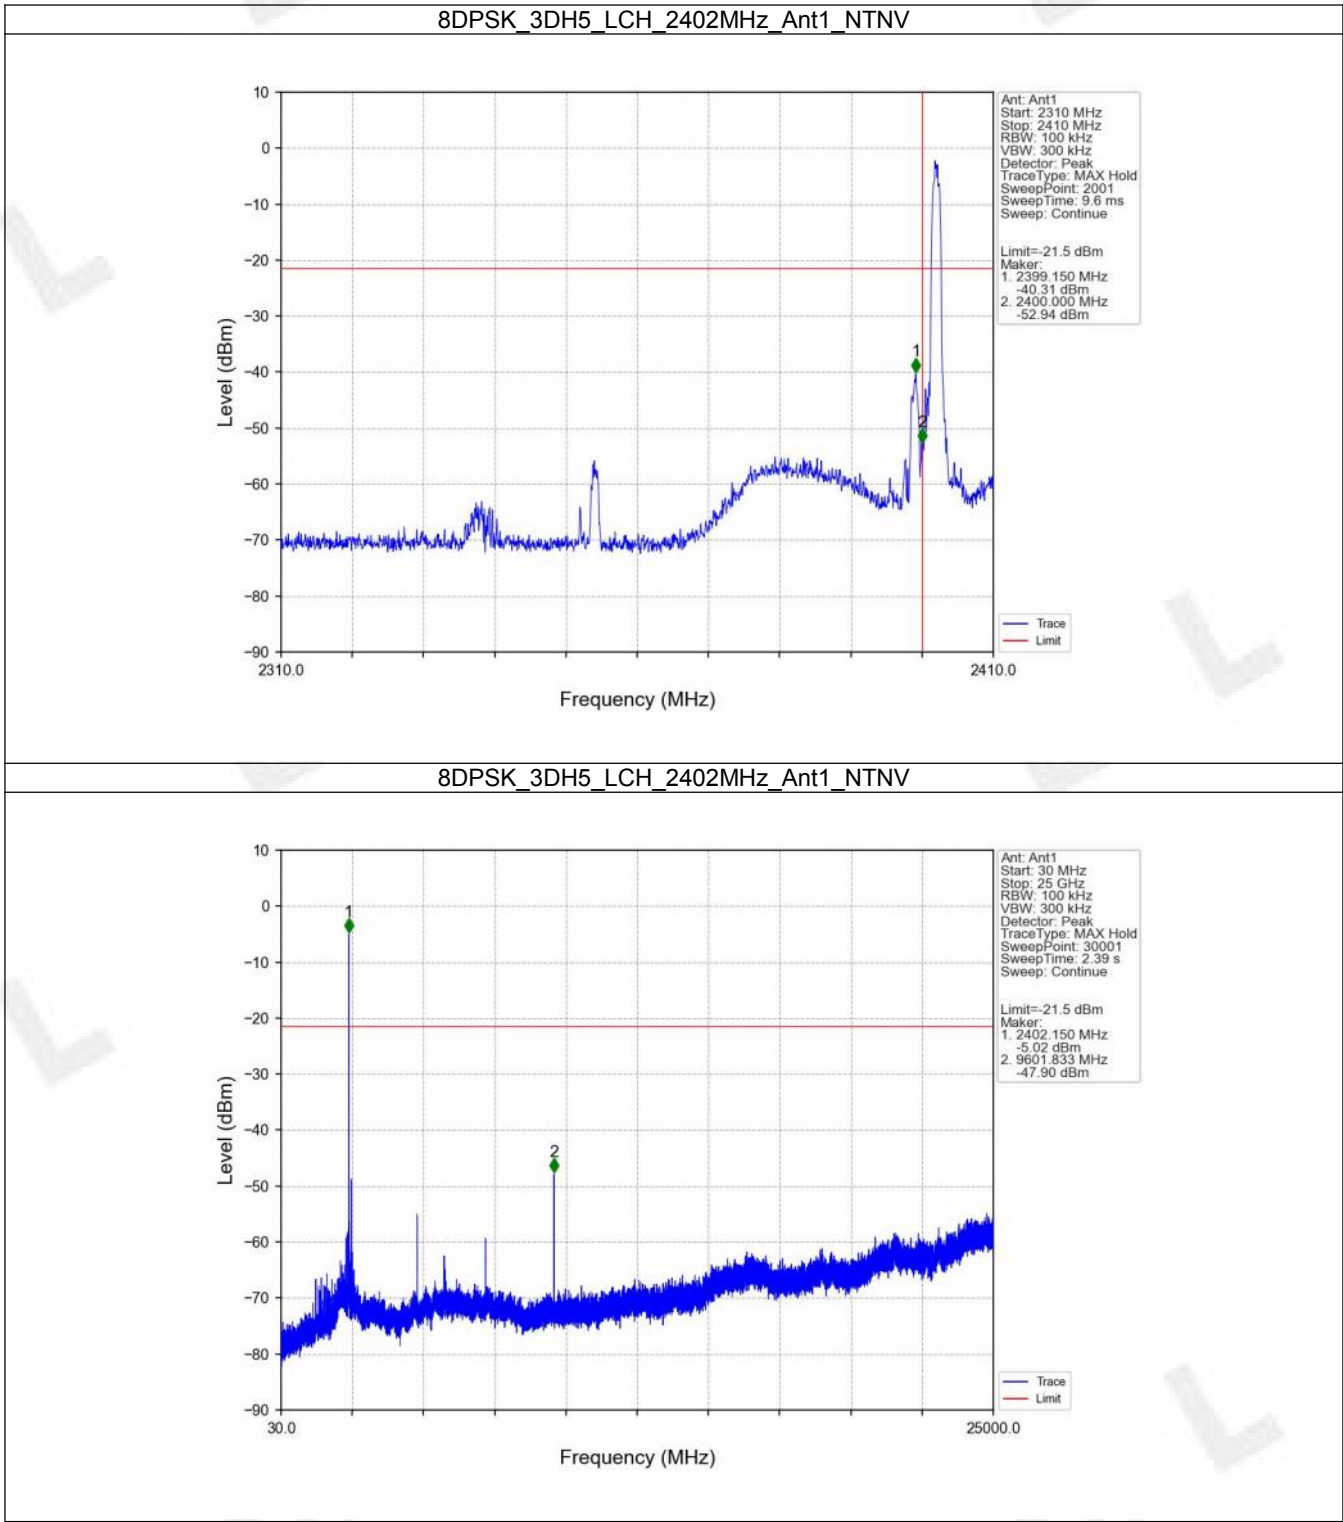

FCCID: 2AHPZ-MPD6M

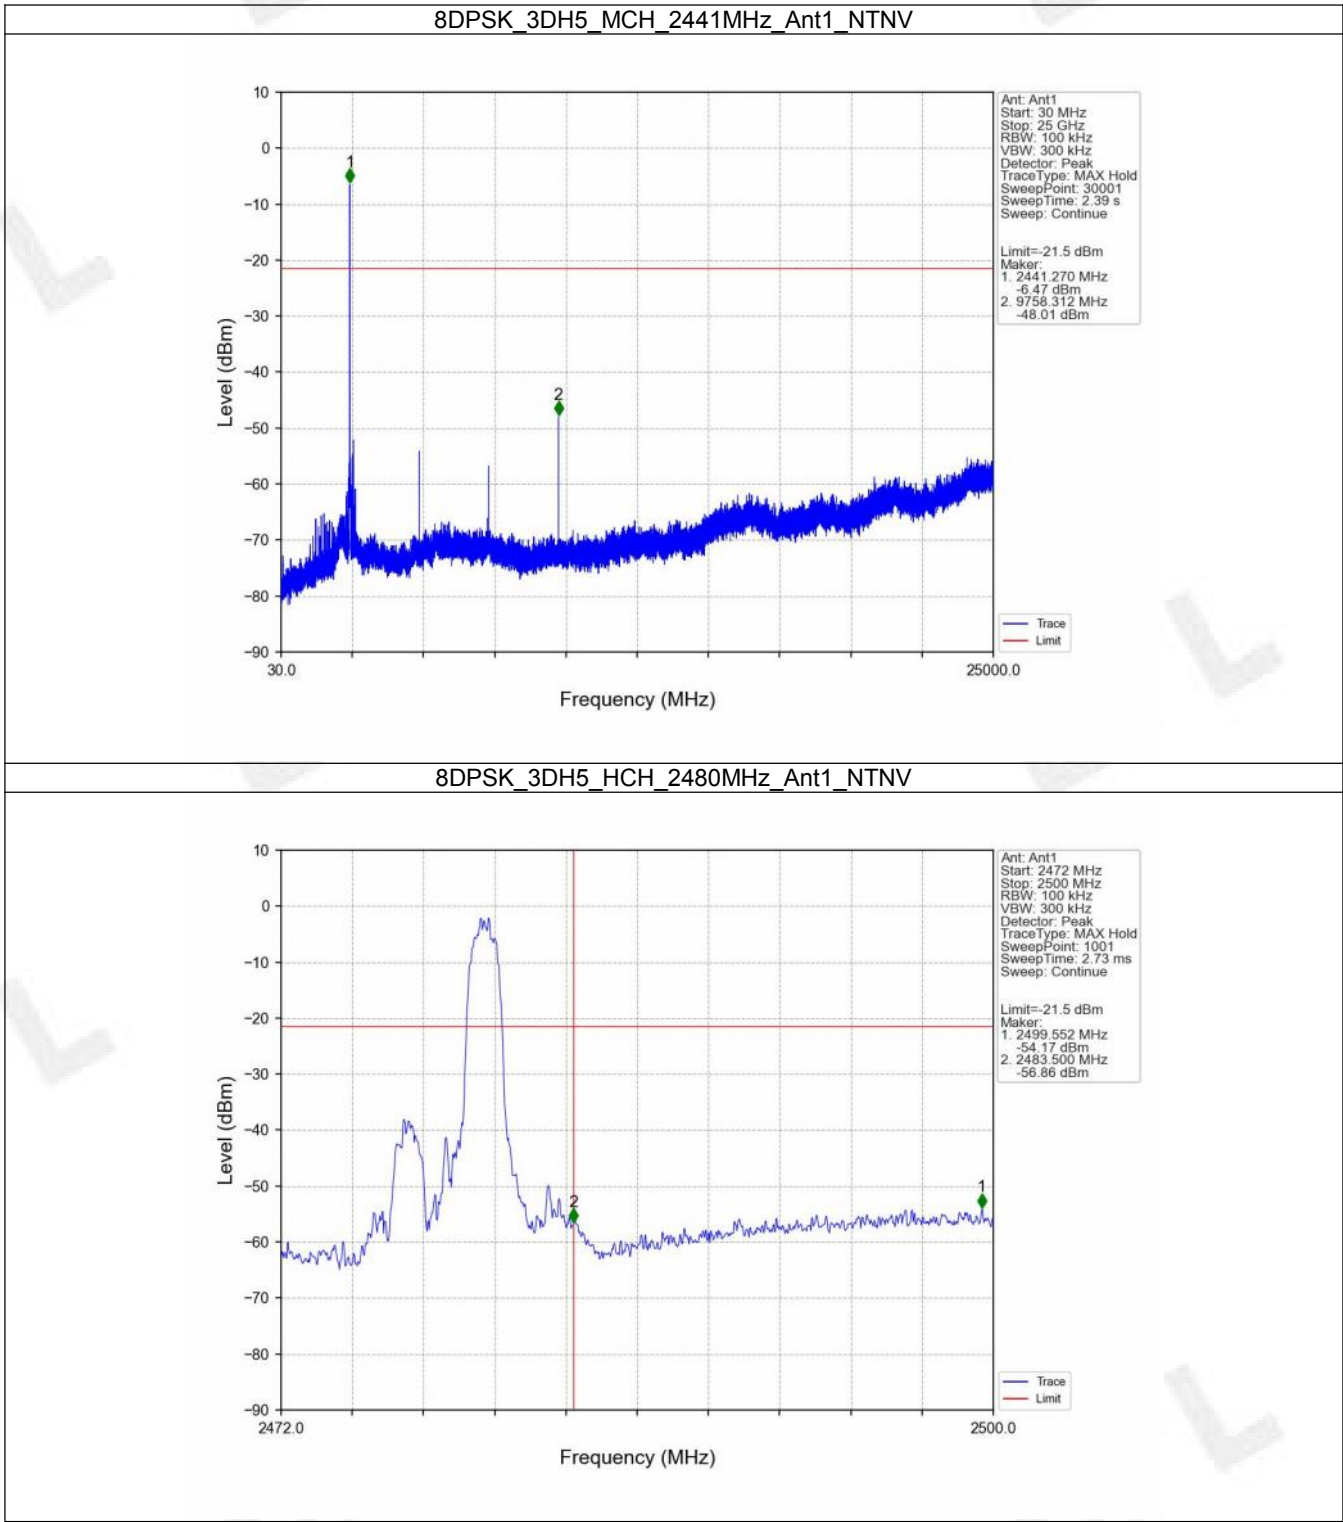

FCCID: 2AHPZ-MPD6M

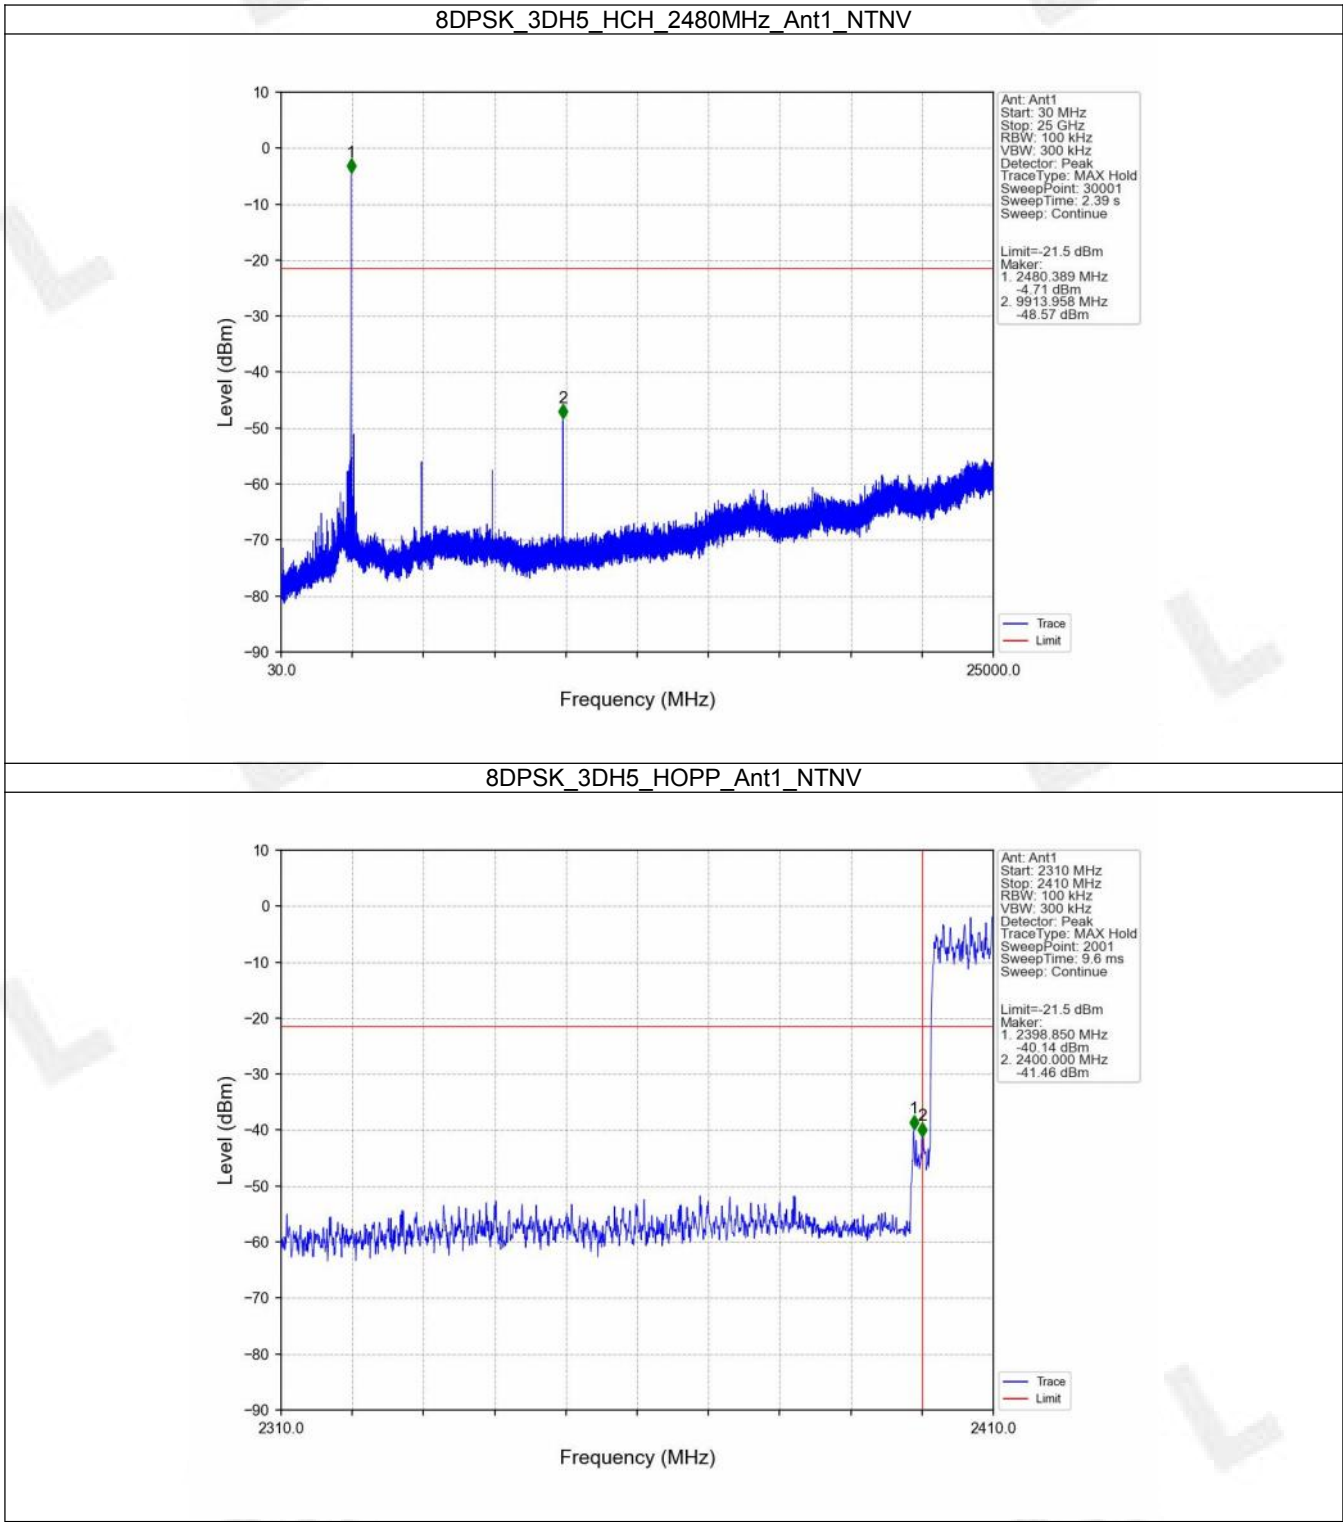

FCCID: 2AHPZ-MPD6M

