

GPS Phone Watch

Model NO.: R11-R19

User Manual

Version 1.0

| | |
|---|----------|
| 1. Products Introduction..... | 1 |
| 2. Appearance and interface | 1 |
| 2.1. Appearance..... | 1 |
| 2.2. Interface | 2 |
| 3. How to use the watch | 3 |
| 3.1. Install the APP and register user account..... | 3 |
| 3.2. Register your watch in APP | 4 |
| 3.3. Track your watch in APP | 4 |
| 3.3.1. Locate immediately | 4 |
| 3.3.2. Historical location playback..... | 4 |
| 3.3.3. Call the watch..... | 4 |
| 3.3.4. Voice monitoring | 4 |
| 3.4. Set wearer profile | 4 |
| 3.5. Message center..... | 5 |
| 3.6. Set safe zone..... | 5 |
| 3.7. Edit family contact list | 6 |
| 3.8. Advanced setting..... | 6 |
| 3.9. Notes | 7 |
| 4. Feedback and Contact | 7 |

1. Product Introduction

Available colors: Black


GPS Phone Watch R11 is designed especially for old person. It is able to realize the features such as real-time tracking, emergency alarm, safe zone alarm, voice message, two way voice communication, water resistance etc. We can get to know the exact situation of wearer remotely by APP on mobile to take care of your beloved one by the watch at any time anywhere.



Picture 1

2. Appearance and interface

2.1 Appearance

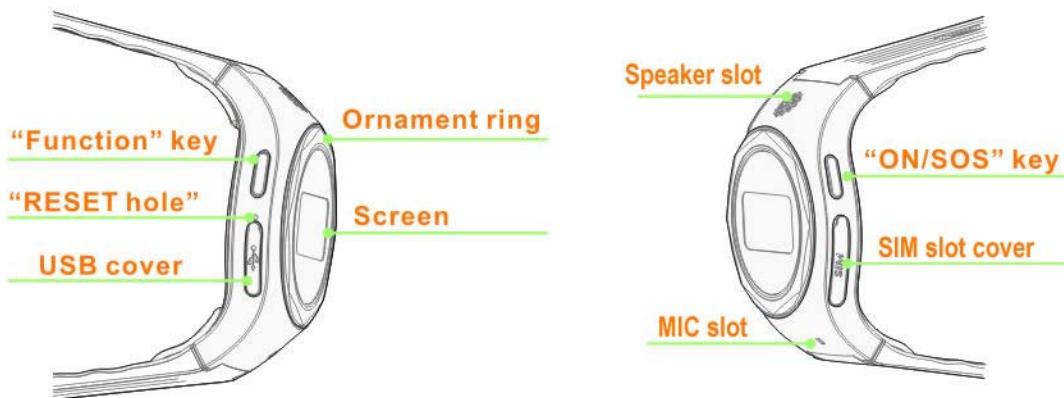

Picture 2

2.2 Interface




Picture 3


3. How to use the watch

3.1 Install the APP and register user account

Please access to website <http://www.myrope.cn/support/app.htm> to download the APP in your mobile, and then use your phone number or email address to register new user from the APP. Please use the correct number and email address since it will be used for receiving verifying code and recover the password in case you forgot, besides, your call will be rejected by watch if your phone number is wrong.

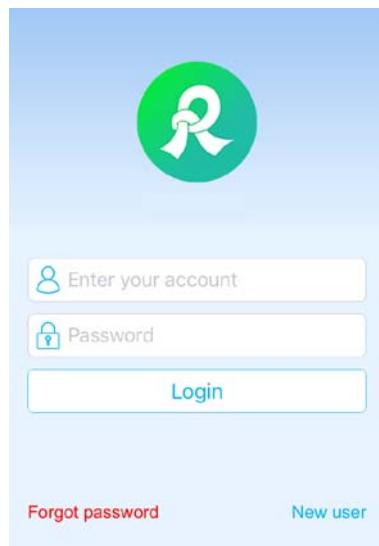

Picture 4

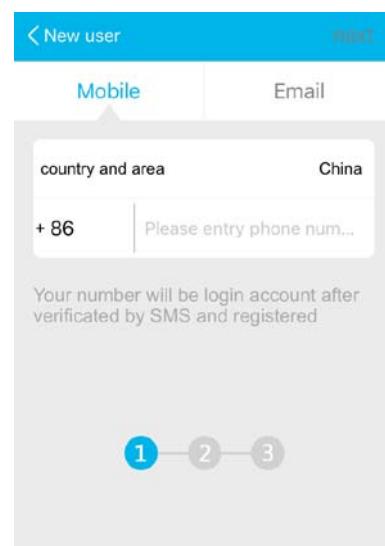


Picture 5

3.2 Register your watch in APP

Register your watch:

Please purchase a micro SIM card and ensure it has caller ID, SMS, voice communication and GPRS features, please insert the SIM card to the slot with chipset upwards as per the picture 6 displayed when the watch is powered off.



Picture 6

After registered user account, it will auto-redirect the interface to adding watch page, please select the correct model and scan the QR code on the bottom of the watch, and fill other information that the APP required. Please do make sure the SIM card phone number in the watch is correct, otherwise, the watch cannot be located in map, please note the country code is not required when you input the phone number of SIM card. If you want to add more watches, please click the icon like  at the right side of top banner.




Picture 7

3.3 Track your watch in APP

3.3.1 Locate immediately


After registered the watch, we suggest you take the watch in the open air for several seconds, the APP will show correct GPS location later on. The watch will continuously upload the GPS location every minute while you are moving, and switch into saving battery mode when you stop. If you want to know the latest location as soon as possible, please click Loc button to get the current location immediately. If you are staying under roof, the watch will switch to LBS location mode, and there would be indicator respectively clarifying in the map.

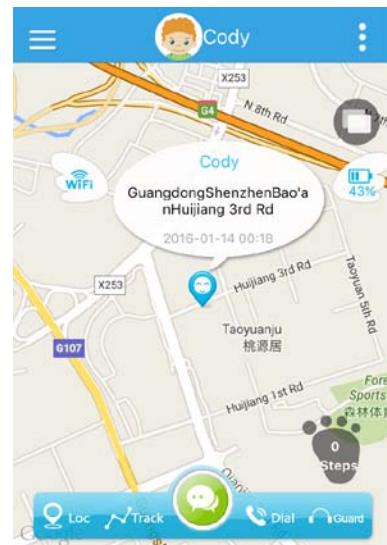


Picture 8

3.3.2 Historical location playback

Please click the “Track” button below the map in APP, and select the date when the interface pops up. You will get the historical location accordingly as per the picture 10 after confirming OK button, and if you need more detailed information from history, please tick the LB&WIFI option.

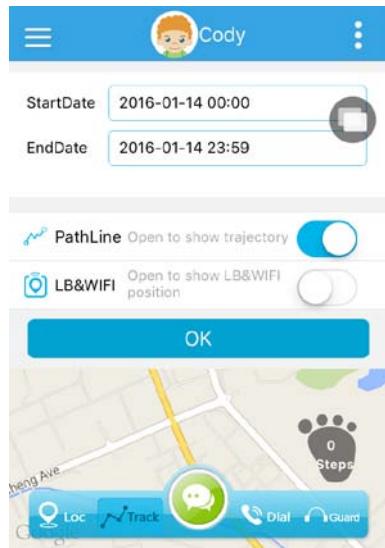

Picture 9

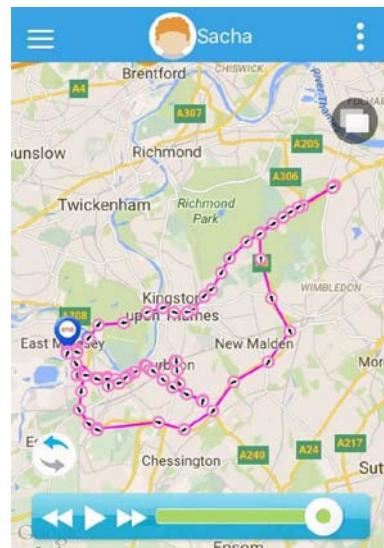

Picture 10

3.3.3 Call the watch


Please click the “Dial” button to call the watch, please note that only the phone number from the family list can call to the watch. Wearer can answer the call by shortly press the “Function” key in watch and reject it by shortly press the “Power on” key.

3.3.4 Voice monitoring

Pls click the “Guard” button below the map in APP, your mobile will call to the watch without ring tone and be picked up automatically, then you can listen the voice around the wearer silently. Please note that only the administrator and backup administrator can use this function.

3.4 Set wearer profile

You can change the image, phone number, and other detailed information of wearer here.

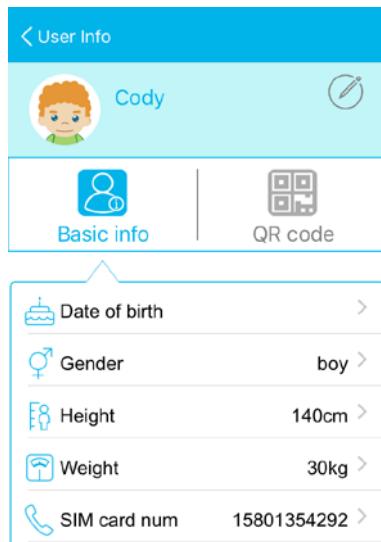


Picture 11


3.5 Message center

Guard messages: it contains all kinds of alerts information such as Exit alerts, Enter alerts, Low battery alerts, SOS alerts etc.

System messages: it is notifying that who is next one registering the watch in their APP.

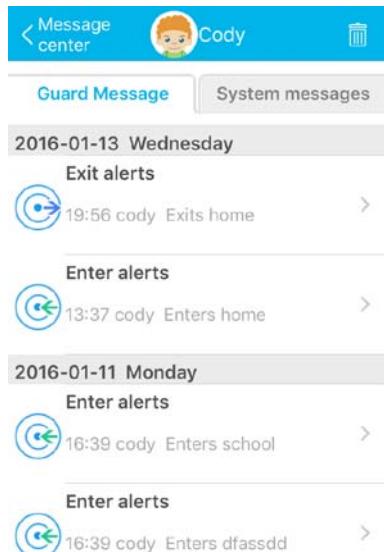


Picture 12

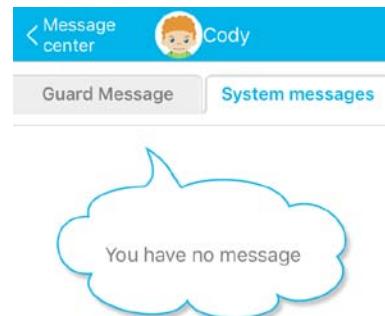


Picture 13

3.6 Set safe zone

The APP allows you to set maximum 10 safe zones for the watch. You can edit the fence size if you are creating or have created by changing the diameter on map from 500m to 2000m. There is setting option below which is used for set Exit or Enter alerts for the registered watches in APP.

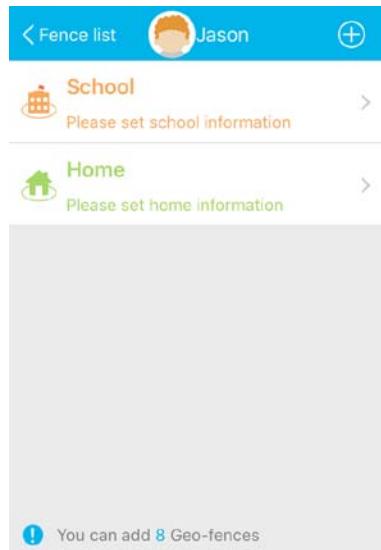

Picture 14

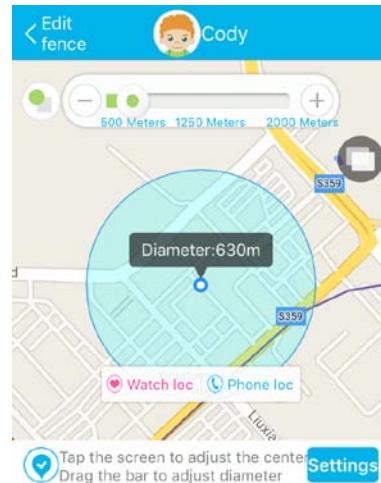


GuangdongShenzhenBao'anYangtian Rd, 8

Picture 15

3.7 Edit family contact list

Your APP user account registered phone number is binding to the family contact list automatically, and you can add maximum 15 more phone numbers into this list.

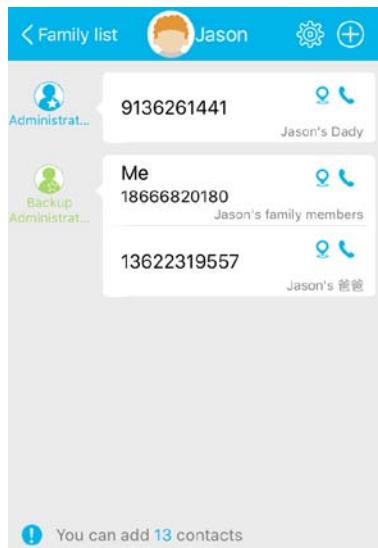

Picture 16

3.8 Advanced settings

Power off the watch remotely


After inserting the SIM card, the watch cannot be powered off by press the “ON/SOS button”, it can only be switched off remotely by parents through APP

Position mode

There are two different modes for location: Precision mode and Manual mode

The Precision mode means the watch will auto-upload the location data to APP every 60S.

The Manual mode means the watch is required to upload location data when you click the “Loc” button in APP, in this mode, you can prolong the battery life of watch.

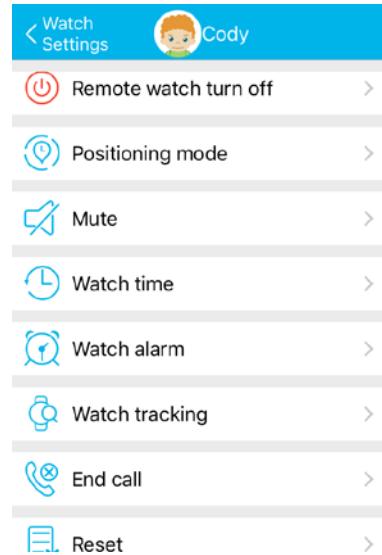

Picture 17

Mute


The watch will ring once receiving call or voice message, if you enable the mute feature, it will be silent when receiving call or voice message.

Watch time

You can correct the time on the watch from here, it will be automatically synchronize with the watch.



You can set alarm clock here to remind wearer to get up or visit some place etc. Wearer can end the alarm by pressing the power on button in watch.



If you forget where the watch is , please use this function to make the watch ring until you click any key on the watch.



You can help kids to hang up the phone call of others if they forget to do it or are in an emergency.



You will delete all family contact list and recover the watch to factory setting mode. Please be careful to use this feature.

3.9 Notes

- The watch can be powered off by pressing the “ON/SOS” button without SIM card inside, otherwise, you will have to switch it off from APP
- Please recharge the watch by USB cable. First charging time should be no less than 12 hours, and daily charging time should be no less than 8 hours.
- This watch is water resistance only, please note that it cannot be used in swimming pool or taking shower.

4. Feedback and Contact

We are glad to see you choose the R11 watch, for more details, please check on our website <http://www.myrope.cn/>, if you have any questions or want to give us suggestion, please submit on the website, or contact us in other ways:

Address: Room 306-309, Floor 3rd, NO.1 Idea Bank of TGK Technology Park, Chuangye Road 2, The 72nd Zone of Bao'an, Shenzhen, China

Phone: +86-755-23085553

E-Mail: sales@myrope.cn, service@myrope.cn

CE statements:

Due to the used enclosure material, the product shall only be connected to a USB Interface of version 2.0 or higher. The connection to so called power USB is prohibited.

The maximum operating ambient temperature of the equipment declared by the manufacturer is 40°C.

CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

The SAR limit of Europe is 2.0 W/kg. Device types R11-R19 has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use at the ear is 0.237W/kg and when properly worn on the wrist is 1.335 W/kg.

EU Regulatory Conformance

CE0980

Hereby, Rope Innovation Co.,Ltd declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types R1X (X could be 1~9) has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use when properly worn on the wrist is 1.839 W/kg and for head is 0.534 W/kg.

FCC statements:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.