

FCC RADIO TEST REPORT

FCC ID: 2AHZ5KP5

Product: Smartphone

Trade Mark: CUBOT

Model No.: KINGKONG POWER 5

Family Model: N/A

Report No.: S25031906402005

Issue Date: May. 12, 2025

Prepared for

Shenzhen Huafurui Technology Co., Ltd.

Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993
Jiaxian Road, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan
District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS.....	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	9
6.2	SUPPORT EQUIPMENT.....	10
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
7	TEST REQUIREMENTS.....	13
7.1	FIELD STRENGTH OF SPURIOUS RADIATION	13
7.2	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER.....	24
7.3	CONDUCTED OUTPUT POWER.....	30
7.4	FREQUENCY STABILITY	32
7.5	PEAK-TO-AVERAGE RATIO	38
7.6	26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	40
7.7	CONDUCTED BAND EDGE	42
7.8	CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL	43

1 TEST RESULT CERTIFICATION

Applicant's name	Shenzhen Huafurui Technology Co., Ltd.
Address	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Shenzhen, China
Manufacturer's Name	Shenzhen Huafurui Technology Co., Ltd.
Address	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Shenzhen, China
Product description	
Product name	Smartphone
Model and/or type reference	KINGKONG POWER 5
Family Model	N/A
Test sample number	S250319064002
Date (s) of performance of tests ..	Mar. 19, 2025 ~ May. 12, 2025

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
47 CFR Part 2, Part 22H, Part 24E, Part 27 ANSI/TIA-603-E-2016 FCC KDB 971168 D01 Power Meas License Digital Systems v03 ANSI C63.26:2015	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Prepared : Allen Liu
By : Allen Liu
(Project Engineer)

Reviewed : Aaron Cheng
By : Aaron Cheng
(Supervisor)

Approved : Alex Li
By : Alex Li
(Manager)

2 SUMMARY OF TEST RESULTS

FCC Part22H / FCC Part24E / FCC Part 27 & ANSI C63.26-2015

FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
24.232 27.50 KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917 24.238 KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917 24.238 27.53 KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913 KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232 27.50 KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917 24.238 27.53 KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917 24.238 27.53 KDB 971168 D01 Clause 6	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No. 24 Xinfan East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab.

: The Certificate Registration Number is L5516.

IC-Registration

: The Certificate Registration Number is 9270A.

CAB identifier:CN0074

FCC- Accredited

: Test Firm Registration Number: 463705.

A2LA-Lab.

: Designation Number: CN1184

: The Certificate Registration Number is 4298.01

Name of Firm

: Shenzhen NTEK Testing Technology Co., Ltd.

Site Location

: No. 24 Xinfan East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{\text{c}}(y)$)	2.5dB

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	Smartphone
Trade Mark	CUBOT
FCC ID	2AHZ5KP5
Model No.	KINGKONG POWER 5
Family Model	N/A
Model Difference	N/A
Operating Frequency	<input checked="" type="checkbox"/> GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; <input checked="" type="checkbox"/> UMTS FDD Band V: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz; <input checked="" type="checkbox"/> PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; <input checked="" type="checkbox"/> UMTS FDD Band II: TX1852.4MHz~1907.6MHz /RX1932.4MHz~1987.6MHz; <input checked="" type="checkbox"/> UMTS-FDD Band IV:TX1710MHz~1755MHz /RX2110MHz~2155MHz
Modulation	<input checked="" type="checkbox"/> GMSK for GSM/GPRS; <input checked="" type="checkbox"/> 8PSK for EGPRS; <input checked="" type="checkbox"/> QPSK for UMTS bands;
Power Class	4, tested with power level 5(GSM 850) 1, tested with power level 0(GSM 1900) 3, tested with power control "all 1"(WCDMA Band II/IV/V)
GPRS Class	<input checked="" type="checkbox"/> Multi-Class12 <input checked="" type="checkbox"/> Only 4 timeslots are used for GPRS
Antenna Type	PIFA Antenna
Antenna Gain	GSM850:-2.4dBi; GSM1900:-1.1dBi; WCDMA B2:-1.1dBi; B4:-1.13dBi; B5:-2.4dBi
Power supply	<input checked="" type="checkbox"/> DC supply: DC 3.87V from Battery or DC 5V/9V/12V from Adapter 1 or DC 5V/9V/12V/15V/20V from Adapter 2. <input checked="" type="checkbox"/> Battery supply: DC 3.87V, 15300mAh, 59.211Wh <input checked="" type="checkbox"/> Adapter supply: Adapter 1: Model:HJ-PD33W-US Input:100-240V~50-60Hz 0.8A Output: 5.0V---3.0A 15.0W OR 9.0V---3.0A 27.0W OR 12.0V---2.75A 33.0W MAX Adapter 2: Model:TD-203G200170UF01 Input:100-240V~50-60Hz 0.6A Output: 5.0V---3.0A 15.0W OR 9.0V---3.0A 27.0W OR 12.0V---2.5A 30.0W OR 15.0V---2.0A 30.0W OR 20.0V---1.5A 30.0W PPS:3.3V-16V/2A OR 3.3V-11V/3A
HW Version	E233-C1
SW Version	CUBOT_KINGKONG_POWER_5_F011C_V08

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

The High Voltage 4.45V and Low Voltage 3.29V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Revision History

5 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester(CMU 200) to ensure max power transmission and proper modulation. Three channels (The low channel, the middle channel and the high channel) were chosen for testing on GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V, HSDPA band IV, HSUPA band IV frequency band.

Note: GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V, HSDPA band IV, HSUPA band IV modes have been tested during the test. the worst condition (GSM850, GSM1900, RMC 12.2k) be recorded in the test report if no other modes test data.

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850/UMTS FDD Band V/ UMTS FDD Band IV.
2. 30 MHz to 10th harmonic for GSM1900/UMTS FDD Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	For Conducted Test Cases	For Radiated Test Cases
GSM 850	GSM Link	GSM Link
GSM 1900	GSM Link	GSM Link
UMTS Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band IV	RMC 12.2Kbps Link	RMC 12.2Kbps Link

Test Frequency and Channels:


Frequency Band	<input checked="" type="checkbox"/> GSM 850		<input checked="" type="checkbox"/> GSM 1900		<input checked="" type="checkbox"/> UMTS Band II		<input checked="" type="checkbox"/> UMTS Band V	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	251	848.8	810	1909.8	9538	1907.6	4233	846.6
CH_M	189	836.4	661	1880.0	9400	1880.0	4182	836.4
CH_L	128	824.2	512	1850.2	9262	1852.4	4132	826.4

Frequency Band	<input checked="" type="checkbox"/> UMTS Band IV	
	Channel	Frequency (MHz)
CH_H	1513	1752.6
CH_M	1412	1732.4
CH_L	1312	1712.4


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For Radiated Test Cases

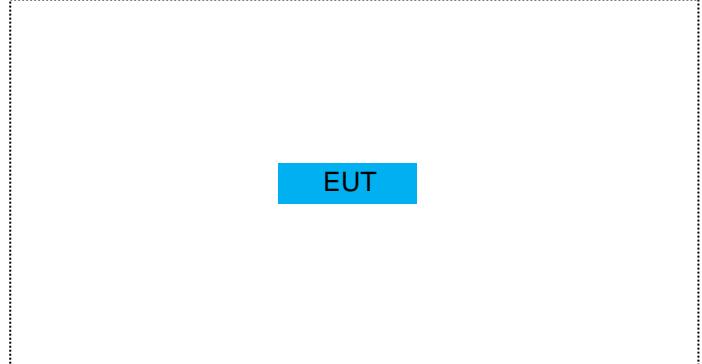


For Conducted Output Power

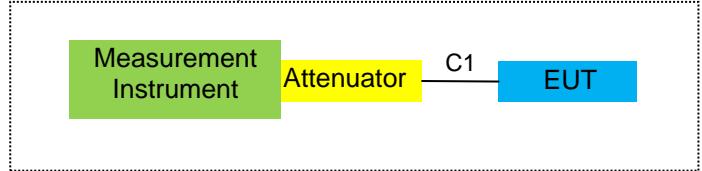

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

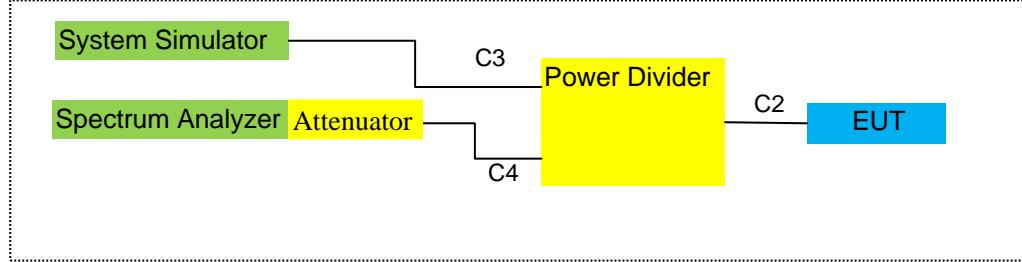

For Frequency Stability

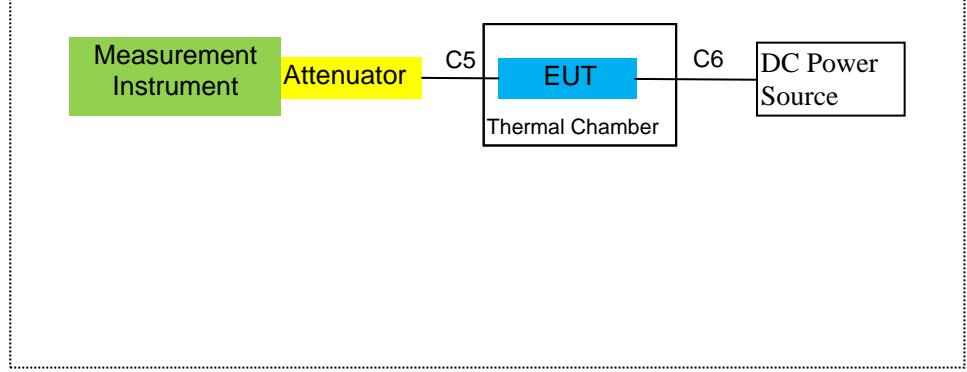

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
	Smartphone	CUBOT	KINGKONG POWER 5	N/A	EUT

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	YES	NO	0.1m
C-2	RF Cable	YES	NO	0.1m
C-3	RF Cable	YES	NO	0.1m
C-4	RF Cable	YES	NO	0.2m
C-5	RF Cable	YES	NO	0.2m
C-6	DC Cable	NO	NO	1.0m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 「Length」 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2024.04.25 2025.04.17	2025.04.24 2026.04.16	1 year
2	Test Receiver	R&S	ESPI	101318	2024.04.26 2025.04.17	2025.04.25 2026.04.16	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2024.05.12 2025.05.11	2025.05.11 2026.05.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
5	Broadband Horn Antenna	SCHWARZBECK	BBHA 9120 D	2816	2024.5.18	2027.5.17	3 year
6	Broadband Horn Antenna	SCHWARZBECK	BBHA 9120 D	2817	2024.5.18	2027.5.17	3 year
7	Amplifier	EM	EM-30180	060538	2024.04.26 2025.04.17	2025.04.25 2026.04.16	1 year
8	Active Loop Antenna	SCHWARZBECK	FMZB 1519 B	055	2024.05.17	2027.05.16	3 year
9	Power Meter	R&S	NRVS	100696	2024.04.26 2025.04.17	2025.04.25 2026.04.16	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2024.04.26 2025.04.17	2025.04.25 2026.04.16	1 year
11	Test Cable	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
12	Test Cable	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	Test Receiver	R&S	ESCI	101160	2024.04.26 2025.04.17	2025.04.25 2026.04.16	1 year
15	LISN	R&S	ENV216	101313	2024.04.25 2025.04.17	2025.04.24 2026.04.16	1 year
16	LISN	EMCO	3816/2	00042990	2024.04.25 2025.04.17	2025.04.24 2026.04.16	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
18	Field strength probe	narda	EP601	711WX81278	2024.04.25 2025.04.17	2025.04.24 2026.04.16	1 year
19	Test Cable	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
20	Test Cable	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
21	Test Cable	N/A	C03	N/A	2023.05.06	2026.05.05	3 year
22	Spectrum Analyzer	Agilent	E4440A	MY41000130	2024.04.26 2025.04.17	2025.04.25 2026.04.16	1 year
23	EMI Test Receiver	R&S	ESCI	101160	2024.04.26 2025.04.17	2025.04.25 2026.04.16	1 year
24	Universal Radio Communication Tester	R&S	CMU200	105747	2024.04.26 2025.04.17	2025.04.25 2026.04.16	1 year

25	High and Low Temperature Box	WEISS	WT 20/40 EMC Simpac	5822611946 0030	2024.05.30	2027.05.29	3 year
26	DC Power Source	N/A	PS-6005D	2017040292 3	2024.04.25	2027.04.24	3 year
27	MXG Vector Signal Generator	Agilent	N5183B	MY57280984	2024.5.30	2025.5.29	1 year
28	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	584	2024.5.25	2025.5.24	1 year
29	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	586	2024.5.25	2025.5.24	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

Measurement Software

Item	Manufacturer	Software Name	Software Version	Description
1	MWRFtest	MTS 8200	2.0	RF Conducted Test
2	Farad	EZ-EMC_RE	AIT-03A	RadiatedTest
3	Farad	EZ-EMC_CE	AIT-03A	AC Conducted Test

7 TEST REQUIREMENTS

7.1 FIELD STRENGTH OF SPURIOUS RADIATION

7.1.1 Applicable Standard

According to FCC KDB 971168 D01 v03 Section 5.8 and ANSI/TIA-603-E-2016 Section 2.2.12

7.1.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


7.1.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

According to the ANSI/TIA-603-E-2016 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz The resolution bandwidth is set as outlined in Part 24.238, Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II / WCDMA Band V / WCDMA Band IV / GSM 850 / GSM 1900.

TEST CONFIGURATION

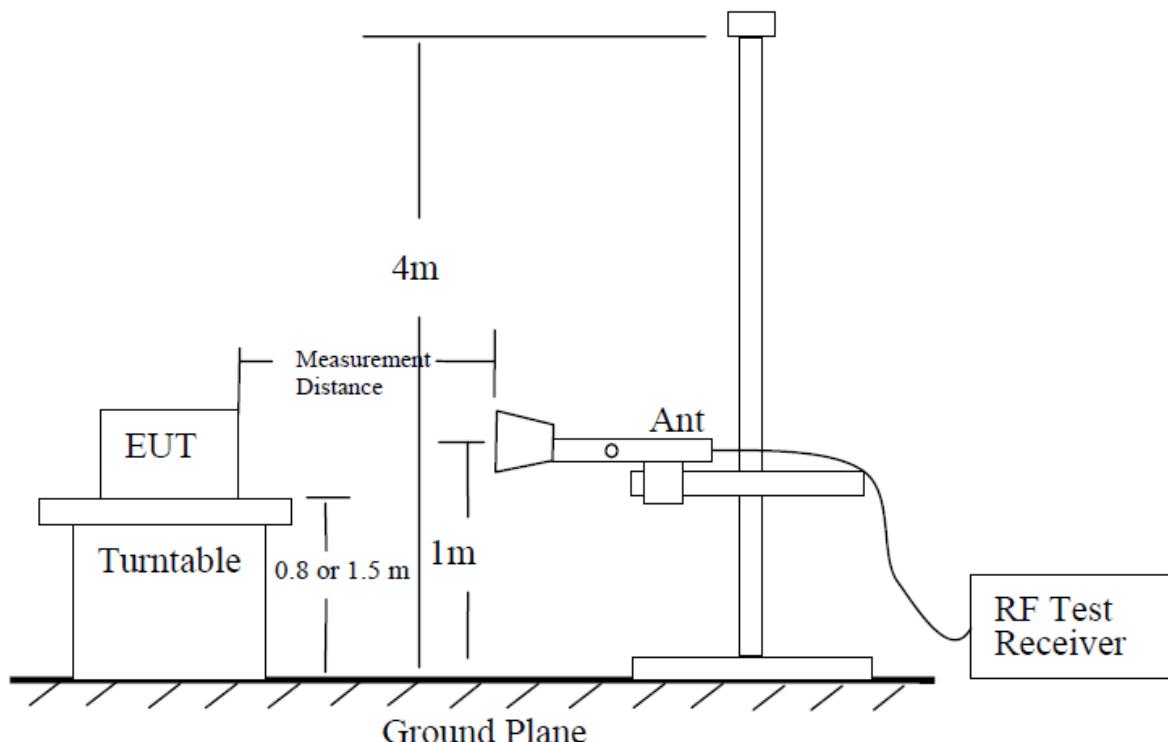

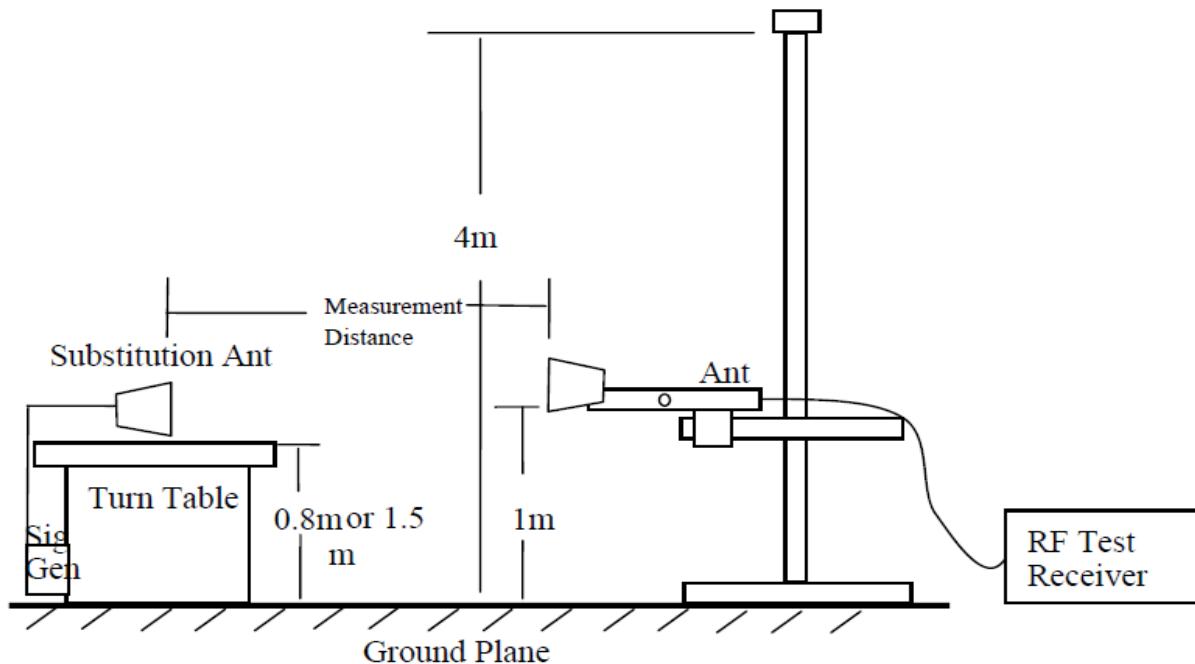

7.1.5 Test Procedure

1. EUT was placed on a 0.8 meter(For frequency above 1G, EUT should be placed on 1.5m) high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (SG Level) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (SG Level) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Cable Loss) ,the Substitution Antenna Gain should be recorded after test.
The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{SG Level} - \text{Cable Loss} + \text{Antenna Gain}$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

7.1.6 Test Results

EUT:	Smartphone	Model No.:	KINGKONG POWER 5
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu

■ Radiated Spurious Emission

GSM 850							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 128/824.2 MHz							
1648.4	-51.21	2.80	27.50	-26.51	-13	-13.51	Vertical
1648.4	-51.11	2.80	27.50	-26.41	-13	-13.41	Horizontal
2472.6	-47.94	2.91	27.80	-23.05	-13	-10.05	Vertical
2472.6	-44.1	2.91	27.80	-19.21	-13	-6.21	Horizontal
3296.8	-50.66	4.02	29.87	-24.81	-13	-11.81	Vertical
3296.8	-53.95	4.02	29.87	-28.10	-13	-15.10	Horizontal
131.2	-48.05	1.35	17.77	-31.63	-13	-18.63	Vertical
116.8	-53.72	1.77	17.83	-37.66	-13	-24.66	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-53.43	2.80	27.48	-28.75	-13	-15.75	Vertical
1673.2	-46.98	2.80	27.48	-22.30	-13	-9.30	Horizontal
2509.8	-45.68	2.91	27.70	-20.89	-13	-7.89	Vertical
2509.8	-51.57	2.91	27.70	-26.78	-13	-13.78	Horizontal
3346.4	-51.4	4.02	29.82	-25.60	-13	-12.60	Vertical
3346.4	-51.14	4.02	29.82	-25.34	-13	-12.34	Horizontal
208.8	-51	1.44	15.26	-37.19	-13	-24.19	Vertical
131.6	-51.54	1.51	17.23	-35.82	-13	-22.82	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-45.93	2.80	27.42	-21.31	-13	-8.31	Vertical
1697.6	-47.43	2.80	27.42	-22.81	-13	-9.81	Horizontal
2546.4	-51.88	2.91	27.68	-27.11	-13	-14.11	Vertical
2546.4	-50.24	2.91	27.68	-25.47	-13	-12.47	Horizontal
3395.2	-53.87	4.02	29.80	-28.09	-13	-15.09	Vertical
3395.2	-50.56	4.02	29.80	-24.78	-13	-11.78	Horizontal
95.0	-46.6	1.74	16.46	-31.88	-13	-18.88	Vertical
208.3	-46.32	1.68	16.21	-31.79	-13	-18.79	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GPRS 850							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 128/824.2 MHz							
1648.4	-52	2.80	27.50	-27.30	-13	-14.30	Vertical
1648.4	-47.31	2.80	27.50	-22.61	-13	-9.61	Horizontal
2472.6	-53.14	2.91	27.80	-28.25	-13	-15.25	Vertical
2472.6	-44.73	2.91	27.80	-19.84	-13	-6.84	Horizontal
3296.8	-52.91	4.02	29.87	-27.06	-13	-14.06	Vertical
3296.8	-53.86	4.02	29.87	-28.01	-13	-15.01	Horizontal
154.8	-47.46	1.35	16.91	-31.90	-13	-18.90	Vertical
238.4	-46.44	1.59	17.39	-30.63	-13	-17.63	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-45.57	2.80	27.48	-20.89	-13	-7.89	Vertical
1673.2	-45.88	2.80	27.48	-21.20	-13	-8.20	Horizontal
2509.8	-52.97	2.91	27.70	-28.18	-13	-15.18	Vertical
2509.8	-50.96	2.91	27.70	-26.17	-13	-13.17	Horizontal
3346.4	-52.31	4.02	29.82	-26.51	-13	-13.51	Vertical
3346.4	-52.97	4.02	29.82	-27.17	-13	-14.17	Horizontal
110.1	-48.65	1.36	17.36	-32.65	-13	-19.65	Vertical
148.2	-45.69	1.32	15.19	-31.83	-13	-18.83	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-52.96	2.80	27.42	-28.34	-13	-15.34	Vertical
1697.6	-48.33	2.80	27.42	-23.71	-13	-10.71	Horizontal
2546.4	-46.08	2.91	27.68	-21.31	-13	-8.31	Vertical
2546.4	-53.15	2.91	27.68	-28.38	-13	-15.38	Horizontal
3395.2	-53.52	4.02	29.80	-27.74	-13	-14.74	Vertical
3395.2	-49.98	4.02	29.80	-24.20	-13	-11.20	Horizontal
198.1	-47.28	1.46	17.68	-31.06	-13	-18.06	Vertical
220.2	-47.3	1.31	15.79	-32.82	-13	-19.82	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

EGPRS 850							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 128/824.2 MHz							
1648.4	-52.29	2.80	27.50	-27.59	-13	-14.59	Vertical
1648.4	-52.83	2.80	27.50	-28.13	-13	-15.13	Horizontal
2472.6	-51.54	2.91	27.80	-26.65	-13	-13.65	Vertical
2472.6	-49.01	2.91	27.80	-24.12	-13	-11.12	Horizontal
3296.8	-49.61	4.02	29.87	-23.76	-13	-10.76	Vertical
3296.8	-51.74	4.02	29.87	-25.89	-13	-12.89	Horizontal
116.4	-52.56	1.69	16.60	-37.65	-13	-24.65	Vertical
166.1	-50.1	1.44	17.78	-33.75	-13	-20.75	Horizontal
Test Results for Channel 190/836.6 MHz							
1673.2	-46.88	2.80	27.48	-22.20	-13	-9.20	Vertical
1673.2	-51.8	2.80	27.48	-27.12	-13	-14.12	Horizontal
2509.8	-44.15	2.91	27.70	-19.36	-13	-6.36	Vertical
2509.8	-46.01	2.91	27.70	-21.22	-13	-8.22	Horizontal
3346.4	-49.96	4.02	29.82	-24.16	-13	-11.16	Vertical
3346.4	-53.59	4.02	29.82	-27.79	-13	-14.79	Horizontal
160.1	-44.72	1.54	16.14	-30.13	-13	-17.13	Vertical
246.5	-45.4	1.31	17.24	-29.47	-13	-16.47	Horizontal
Test Results for Channel 251/848.8 MHz							
1697.6	-53.07	2.80	27.42	-28.45	-13	-15.45	Vertical
1697.6	-49.73	2.80	27.42	-25.11	-13	-12.11	Horizontal
2546.4	-48.13	2.91	27.68	-23.36	-13	-10.36	Vertical
2546.4	-49.55	2.91	27.68	-24.78	-13	-11.78	Horizontal
3395.2	-50.88	4.02	29.80	-25.10	-13	-12.10	Vertical
3395.2	-44.93	4.02	29.80	-19.15	-13	-6.15	Horizontal
272.1	-47.82	1.73	15.96	-33.59	-13	-20.59	Vertical
163.9	-48.44	1.35	17.53	-32.26	-13	-19.26	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GSM 1900							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 4233/846.6MHz							
3700.4	-57.22	4.04	33.51	-27.75	-13	-14.75	Vertical
3700.4	-56.26	4.04	33.51	-26.79	-13	-13.79	Horizontal
5550.6	-55.62	5.24	35.84	-25.02	-13	-12.02	Vertical
5550.6	-56.67	5.24	35.84	-26.07	-13	-13.07	Horizontal
105.3	-55.45	1.40	15.14	-41.71	-13	-28.71	Vertical
247.6	-59.11	1.45	17.54	-43.02	-13	-30.02	Horizontal
Test Results for Channel 4182/836.4MHz							
3760	-49.62	4.04	33.56	-20.10	-13	-7.10	Vertical
3760	-58.14	4.04	33.56	-28.62	-13	-15.62	Horizontal
5640	-55.9	5.24	35.91	-25.23	-13	-12.23	Vertical
5640	-56.07	5.24	35.91	-25.40	-13	-12.40	Horizontal
187.9	-44.86	1.74	16.40	-30.20	-13	-17.20	Vertical
86.7	-51.72	1.42	15.72	-37.41	-13	-24.41	Horizontal
Test Results for Channel 4132/826.4MHz							
3819.6	-58.53	4.04	34.00	-28.57	-13	-15.57	Vertical
3819.6	-56.67	4.04	34.00	-26.71	-13	-13.71	Horizontal
5729.4	-56.69	5.24	36.04	-25.89	-13	-12.89	Vertical
5729.4	-56.25	5.24	36.04	-25.45	-13	-12.45	Horizontal
217.3	-44.43	1.67	17.51	-28.59	-13	-15.59	Vertical
112.7	-45.37	1.58	17.73	-29.22	-13	-16.22	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

GPRS 1900							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 512/1850.2MHz							
3700.4	-57.26	4.04	33.51	-27.79	-13	-14.79	Vertical
3700.4	-57.57	4.04	33.51	-28.10	-13	-15.10	Horizontal
5550.6	-57.44	5.24	35.84	-26.84	-13	-13.84	Vertical
5550.6	-55.69	5.24	35.84	-25.09	-13	-12.09	Horizontal
249.9	-46.24	1.66	17.06	-30.85	-13	-17.85	Vertical
237.9	-49.09	1.34	15.54	-34.89	-13	-21.89	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-57.96	4.04	33.56	-28.44	-13	-15.44	Vertical
3760	-57.98	4.04	33.56	-28.46	-13	-15.46	Horizontal
5640	-55.9	5.24	35.91	-25.23	-13	-12.23	Vertical
5640	-51.79	5.24	35.91	-21.12	-13	-8.12	Horizontal
168.5	-49.23	1.33	16.18	-34.38	-13	-21.38	Vertical
249.4	-49.47	1.60	17.99	-33.08	-13	-20.08	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-54.69	4.04	34.00	-24.73	-13	-11.73	Vertical
3819.6	-56.08	4.04	34.00	-26.12	-13	-13.12	Horizontal
5729.4	-56.78	5.24	36.04	-25.98	-13	-12.98	Vertical
5729.4	-57.9	5.24	36.04	-27.10	-13	-14.10	Horizontal
206.6	-52.76	1.65	17.27	-37.15	-13	-24.15	Vertical
227.8	-46.03	1.39	15.49	-31.94	-13	-18.94	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

EGPRS 1900							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 512/1850.2MHz							
3700.4	-54.01	4.04	33.51	-24.54	-13	-11.54	Vertical
3700.4	-58.34	4.04	33.51	-28.87	-13	-15.87	Horizontal
5550.6	-54.34	5.24	35.84	-23.74	-13	-10.74	Vertical
5550.6	-55.68	5.24	35.84	-25.08	-13	-12.08	Horizontal
224.9	-46.58	1.41	17.87	-30.12	-13	-17.12	Vertical
105.4	-46.38	1.47	17.45	-30.41	-13	-17.41	Horizontal
Test Results for Channel 661/1880.0MHz							
3760	-58.69	4.04	33.56	-29.17	-13	-16.17	Vertical
3760	-57.73	4.04	33.56	-28.21	-13	-15.21	Horizontal
5640	-54.05	5.24	35.91	-23.38	-13	-10.38	Vertical
5640	-54.62	5.24	35.91	-23.95	-13	-10.95	Horizontal
110.0	-44.78	1.35	15.31	-30.83	-13	-17.83	Vertical
231.5	-52.64	1.48	17.05	-37.07	-13	-24.07	Horizontal
Test Results for Channel 810/1909.8MHz							
3819.6	-54.51	4.04	34.00	-24.55	-13	-11.55	Vertical
3819.6	-58.08	4.04	34.00	-28.12	-13	-15.12	Horizontal
5729.4	-54.13	5.24	36.04	-23.33	-13	-10.33	Vertical
5729.4	-58.38	5.24	36.04	-27.58	-13	-14.58	Horizontal
156.0	-49.64	1.49	17.71	-33.42	-13	-20.42	Vertical
144.9	-52.43	1.55	15.08	-38.90	-13	-25.90	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band II							
Frequency	SG Level	Cable Loss	Antenna Factor	Absolute Level	Limit	Over Limit	Polarity
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dBm)	
Test Results for Channel 9262/1852.4MHz							
3704.8	-55.14	4.04	33.51	-25.67	-13	-12.67	Vertical
3704.8	-57.39	4.04	33.51	-27.92	-13	-14.92	Horizontal
5557.2	-55.1	5.24	35.84	-24.50	-13	-11.50	Vertical
5557.2	-57.44	5.24	35.84	-26.84	-13	-13.84	Horizontal
91.6	-44.27	1.66	17.47	-28.46	-13	-15.46	Vertical
104.4	-48.92	1.38	16.18	-34.12	-13	-21.12	Horizontal
Test Results for Channel 9400/1880MHz							
3760	-54.51	4.04	33.56	-24.99	-13	-11.99	Vertical
3760	-56.8	4.04	33.56	-27.28	-13	-14.28	Horizontal
5640	-57.44	5.24	35.91	-26.77	-13	-13.77	Vertical
5640	-56.71	5.24	35.91	-26.04	-13	-13.04	Horizontal
121.2	-48.09	1.38	16.34	-33.13	-13	-20.13	Vertical
167.8	-51.65	1.34	16.03	-36.96	-13	-23.96	Horizontal
Test Results for Channel 9538/1907.6MHz							
3815.2	-54.21	4.04	34.00	-24.25	-13	-11.25	Vertical
3815.2	-56.22	4.04	34.00	-26.26	-13	-13.26	Horizontal
5722.8	-54.31	5.24	36.04	-23.51	-13	-10.51	Vertical
5722.8	-55.46	5.24	36.04	-24.66	-13	-11.66	Horizontal
135.9	-52.68	1.51	15.52	-38.67	-13	-25.67	Vertical
247.5	-50.4	1.32	17.18	-34.55	-13	-21.55	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band IV							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
3424.8	-51.54	4.02	29.80	-25.76	-13	-12.76	Vertical
3424.8	-51.27	4.02	29.80	-25.49	-13	-12.49	Horizontal
5137.2	-51.76	5.24	35.84	-21.16	-13	-8.16	Vertical
5137.2	-53.63	5.24	35.84	-23.03	-13	-10.03	Horizontal
81.8	-47.88	1.66	15.00	-34.54	-13	-21.54	Vertical
115.1	-52.29	1.58	16.20	-37.67	-13	-24.67	Horizontal
Test Results for Channel 1312/1712.4MHz							
3464.8	-52.97	4.03	30.00	-27.00	-13	-14.00	Vertical
3464.8	-45.17	4.03	30.00	-19.20	-13	-6.20	Horizontal
5197.2	-52.81	5.25	35.86	-22.20	-13	-9.20	Vertical
5197.2	-52.21	5.25	35.86	-21.60	-13	-8.60	Horizontal
246.8	-47.13	1.55	16.39	-32.28	-13	-19.28	Vertical
101.0	-45.24	1.32	16.25	-30.31	-13	-17.31	Horizontal
Test Results for Channel 1412/1732.4MHz							
3505.2	-51.46	2.91	27.68	-26.69	-13	-13.69	Vertical
3505.2	-47.62	2.91	27.68	-22.85	-13	-9.85	Horizontal
5257.8	-52.16	5.26	35.86	-21.56	-13	-8.56	Vertical
5257.8	-51.77	5.26	35.86	-21.17	-13	-8.17	Horizontal
199.0	-48.73	1.33	15.78	-34.28	-13	-21.28	Vertical
193.1	-45.62	1.47	17.42	-29.67	-13	-16.67	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134.121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

WCDMA Band V							
Frequency (MHz)	SG Level (dBm)	Cable Loss (dB)	Antenna Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 4233/846.6MHz							
1693.2	-46.81	2.80	27.50	-22.11	-13	-9.11	Vertical
1693.2	-49.85	2.80	27.50	-25.15	-13	-12.15	Horizontal
2539.8	-53.93	2.91	27.80	-29.04	-13	-16.04	Vertical
2539.8	-44.11	2.91	27.80	-19.22	-13	-6.22	Horizontal
3386.4	-53.9	4.02	29.87	-28.05	-13	-15.05	Vertical
3386.4	-45.52	4.02	29.87	-19.67	-13	-6.67	Horizontal
264.3	-53.84	1.75	15.49	-40.10	-13	-27.10	Vertical
209.9	-46.3	1.37	16.58	-31.09	-13	-18.09	Horizontal
Test Results for Channel 4182/836.4MHz							
1672.8	-53.34	2.80	27.48	-28.66	-13	-15.66	Vertical
1672.8	-45.37	2.80	27.48	-20.69	-13	-7.69	Horizontal
2509.2	-44.88	2.91	27.70	-20.09	-13	-7.09	Vertical
2509.2	-50.29	2.91	27.70	-25.50	-13	-12.50	Horizontal
3345.6	-48.58	4.02	29.82	-22.78	-13	-9.78	Vertical
3345.6	-51.36	4.02	29.82	-25.56	-13	-12.56	Horizontal
255.8	-45.66	1.68	17.84	-29.50	-13	-16.50	Vertical
129.8	-50.14	1.49	16.34	-35.28	-13	-22.28	Horizontal
Test Results for Channel 4132/826.4MHz							
1652.8	-48.38	2.80	27.42	-23.76	-13	-10.76	Vertical
1652.8	-44.36	2.80	27.42	-19.74	-13	-6.74	Horizontal
2479.2	-48.07	2.91	27.68	-23.30	-13	-10.30	Vertical
2479.2	-53.76	2.91	27.68	-28.99	-13	-15.99	Horizontal
3305.6	-45.77	4.02	29.80	-19.99	-13	-6.99	Vertical
3305.6	-49.48	4.02	29.80	-23.70	-13	-10.70	Horizontal
135.6	-48.88	1.36	17.52	-32.72	-13	-19.72	Vertical
190.6	-52.61	1.63	15.02	-39.22	-13	-26.22	Horizontal

Remark:

1. We were tested all Configuration refer 3GPP TS134 121.
2. Absolute Level = SG Level- Cable Loss+ Antenna Gain
3. Over Limit= Absolute Level (dBm)-Limit(dBm)

7.2 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

7.2.1 Applicable Standard

According to FCC KDB 971168 D01 v03 Section 5.2.1/ Section 5.2.2.2 and ANSI/TIA-603-E-2016 Section 2.2.17

7.2.2 Conformance Limit

The substitution method, in ANSI/TIA-603-E-2016, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

7.2.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

(a) For E.R.P and E.I.R.P Measurements

Please refer to the section 7.1.4 in this report.

7.2.5 Test Procedure

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_{r}) at the chamber's probe antenna is recorded.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = \text{SGLevel} - P_{cl} + Ga$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as SGLevel, typically dBW or dBm);

SGLevel = Signal generator output power or PSD, in dBm or dBW;

Ga = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

Pcl = signal attenuation in the connecting cable between the transmitter and antenna, in dB.²

The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.

From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.

The EUT is then put into continuously transmitting mode at its maximum power level.

Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.

This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).

ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Substitution antenna and Receiving Antenna:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Character	Note
1	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	584	30MHz~2GHz	Receiving Antenna
2	Broadband Horn Antenna	SCHWARZBECK	BBHA 9120 D	2816	1GHz~18GHz	Receiving Antenna
3	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	586	30MHz~2GHz	Substitution antenna
4	Broadband Horn Antenna	SCHWARZBECK	BBHA 9120 D	2817	1GHz~18GHz	Substitution antenna

Use the following spectrum analyzer settings:

	GSM/GPRS/EGPRS	UMTS band
Span	500KHz	10MHz
RBW	10KHz	300KHz
VBW	30KHz	1MHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

7.2.6 Test Results

EUT:	Smartphone	Model No.:	KINGKONG POWER 5
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu

■ Effective Radiated Power

Radiated Power (ERP) for GSM850									
Frequency (MHz)	Polarization	SG Level	Pcl	Antenna Factor	Correction	ERP	Limit	ERP	Verdict
		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)	(W)	
824.2	H	13.66	2.11	23.84	2.15	33.24	7	2.108628	Pass
836.6	H	14.52	2.13	23.15	2.15	33.39	7	2.182730	Pass
848.8	H	14.08	2.13	23.06	2.15	32.86	7	1.931968	Pass
824.2	V	14.41	2.11	23.11	2.15	33.26	7	2.118361	Pass
836.6	V	14.06	2.13	23.07	2.15	32.85	7	1.927525	Pass
848.8	V	14.62	2.13	23.25	2.15	33.59	7	2.285599	Pass

Radiated Power (ERP) for GPRS850									
Frequency (MHz)	Polarization	SG Level	Pcl	Antenna Factor	Correction	ERP	Limit	ERP	Verdict
		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)	(W)	
824.2	H	13.83	2.11	23.84	2.15	33.41	7	2.192805	Pass
836.6	H	14.21	2.13	23.15	2.15	33.08	7	2.032357	Pass
848.8	H	14.43	2.13	23.06	2.15	33.21	7	2.094112	Pass
824.2	V	14.37	2.11	23.11	2.15	33.22	7	2.098940	Pass
836.6	V	13.96	2.13	23.07	2.15	32.75	7	1.883649	Pass
848.8	V	14.73	2.13	23.25	2.15	33.70	7	2.344229	Pass

Radiated Power (ERP) for EGPRS850									
Frequency (MHz)	Polarization	SG Level	Pcl	Antenna Factor	Correction	ERP	Limit	ERP	Verdict
		(dBm)	(dB)	(dB)	(dB)	(dBm)	(W)	(W)	
824.2	H	9.80	2.11	23.84	2.15	29.38	7	0.866962	Pass
836.6	H	9.17	2.13	23.15	2.15	28.04	7	0.636796	Pass
848.8	H	9.04	2.13	23.06	2.15	27.82	7	0.605341	Pass
824.2	V	9.27	2.11	23.11	2.15	28.12	7	0.648634	Pass
836.6	V	10.86	2.13	23.07	2.15	29.65	7	0.922571	Pass
848.8	V	10.23	2.13	23.25	2.15	29.20	7	0.831764	Pass

Radiated Power (E.I.R.P) for GSM1900								
Frequency (MHz)	Polarization	SG Level	Pcl	Antenna Factor	EIRP	Limit	EIRP	Verdict
		(dBm)	(dB)	(dB)	(dBm)	(W)	(W)	
1850.2	H	7.77	3.76	28.24	32.25	2	1.678804	Pass
1880	H	7.68	3.91	28.22	31.99	2	1.581248	Pass
1909.8	H	7.61	3.93	28.20	31.88	2	1.541700	Pass
1850.2	V	9.11	3.76	27.32	32.67	2	1.849269	Pass
1880	V	8.82	3.91	27.33	32.24	2	1.674943	Pass
1909.8	V	9.39	3.93	27.31	32.77	2	1.892344	Pass

Radiated Power (E.I.R.P) for GPRS1900								
Frequency (MHz)	Polarization	SG Level	Pcl	Antenna Factor	EIRP	Limit	EIRP	Verdict
		(dBm)	(dB)	(dB)	(dBm)	(W)	(W)	
1850.2	H	8.09	3.76	28.24	32.57	2	1.807174	Pass
1880	H	8.26	3.91	28.22	32.57	2	1.807174	Pass
1909.8	H	8.40	3.93	28.20	32.67	2	1.849269	Pass
1850.2	V	8.80	3.76	27.32	32.36	2	1.721869	Pass
1880	V	8.85	3.91	27.33	32.27	2	1.686553	Pass
1909.8	V	9.34	3.93	27.31	32.72	2	1.870682	Pass

Radiated Power (E.I.R.P) for EGPRS1900								
Frequency	Polarization	SG Level	Pcl	Antenna Factor	EIRP	Limit	EIRP	Verdict
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)	(W)	
1850.2	H	3.86	3.76	28.24	28.34	2	0.682339	Pass
1880	H	3.58	3.91	28.22	27.89	2	0.615177	Pass
1909.8	H	3.82	3.93	28.20	28.09	2	0.644169	Pass
1850.2	V	4.90	3.76	27.32	28.46	2	0.701455	Pass
1880	V	5.27	3.91	27.33	28.69	2	0.739605	Pass
1909.8	V	4.83	3.93	27.31	28.21	2	0.662217	Pass

Radiated Power (E.I.R.P) for UMTS band II								
Frequency	Polarization	SG Level	Pcl	Antenna Factor	EIRP	Limit	EIRP	Verdict
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)	(W)	
1852.4	H	0.59	3.76	28.24	25.07	2	0.321366	Pass
1880	H	1.60	3.91	28.22	25.91	2	0.389942	Pass
1907.6	H	1.90	3.93	28.20	26.17	2	0.414000	Pass
1852.4	V	3.19	3.76	27.32	26.75	2	0.473151	Pass
1880	V	3.18	3.91	27.33	26.60	2	0.457088	Pass
1907.6	V	1.99	3.93	27.31	25.37	2	0.344350	Pass

Radiated Power (E.I.R.P) for UMTS band IV								
Frequency	Polarization	SG Level	Pcl	Antenna Factor	EIRP	Limit	EIRP	Verdict
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)	(W)	
1712.4	H	0.06	3.13	27.63	24.56	1	0.285759	Pass
1732.4	H	0.26	3.27	27.61	24.60	1	0.288403	Pass
1752.6	H	0.36	3.30	27.60	24.66	1	0.292415	Pass
1712.4	V	0.07	3.13	27.63	24.57	1	0.286418	Pass
1732.4	V	0.68	3.27	27.61	25.02	1	0.317687	Pass
1752.6	V	0.19	3.30	27.60	24.49	1	0.281190	Pass

Radiated Power (ERP) for UMTS band V

Frequency (MHz)	Polarization	SG Level (dBm)	Pcl (dB)	Antenna Factor (dB)	Correction (dB)	ERP (dBm)	Limit (W)	ERP (W)	Verdict
826.4	H	5.34	2.11	23.84	2.15	24.92	7	0.310456	Pass
835	H	5.96	2.13	23.15	2.15	24.83	7	0.304089	Pass
846.6	H	5.78	2.13	23.06	2.15	24.56	7	0.285759	Pass
826.4	V	6.66	2.11	23.11	2.15	25.51	7	0.355631	Pass
835	V	5.53	2.13	23.07	2.15	24.32	7	0.270396	Pass
846.6	V	5.02	2.13	23.25	2.15	23.99	7	0.250611	Pass

7.3 CONDUCTED OUTPUT POWER

7.3.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2)) and FCC KDB 971168 D01 v03 Section 5.2

7.3.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

Mobile and portable stations are limited to 2 watts (33dBm)EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

For CDMA2000 Power: Maximum output power is verified on the Low,Middle and High channels according to procedures in section 4.4.5.2.of 3GPP2 C.S0011/TIA-98-E for 1Xrtt, section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rel.0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev.A.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency, The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW \geq 3 \times RBW.

Number of points in sweep \geq 2 \times span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add 10 log (1/0.25) = 6 dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.

7.3.6 Test Results

EUT:	Smartphone	Model No.:	KINGKONG POWER 5
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu

Test data reference attachment

7.4 FREQUENCY STABILITY

7.4.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC KDB 971168 D01 Section 9.0

7.4.2 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

For Temperature Variation

1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

7.4.6 Test Results

EUT:	Smartphone	Model No.:	KINGKONG POWER 5
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

Frequency Error Against Voltage for GSM 850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	6.75	0.008070
3.87	7.88	0.009421
4.45	7.91	0.009457

Frequency Error Against Temperature for GSM 850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	7.96	0.009517
-20	9.42	0.011263
-10	8.71	0.010414
0	6.33	0.007568
10	6.33	0.007568
20	9.1	0.010880
30	7.57	0.009051
40	7.29	0.008716
50	12.22	0.014610

Frequency Error Against Voltage for GPRS850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	7.84	0.009374
3.87	8.49	0.010151
4.45	6.78	0.008106

Frequency Error Against Temperature for GPRS850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	6.74	0.008058
-20	7.91	0.009457
-10	7.73	0.009242
0	6.72	0.008034
10	9.98	0.011932
20	6.74	0.008058
30	6.3	0.007532
40	7.31	0.008740
50	12.08	0.014443

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage = 4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for EGPRS850 band(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	6.37	0.007616
3.87	7.75	0.009266
4.45	8.97	0.010725

Frequency Error Against Temperature for EGPRS850 band(Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	9.95	0.011896
-20	9.74	0.011645
-10	8.64	0.010330
0	6.3	0.007532
10	10	0.011956
20	7.85	0.009385
30	8.95	0.010701
40	8.84	0.010569
50	9.54	0.011406

Frequency Error Against Voltage for PCS 1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	20.86	0.011096
3.87	19.78	0.010521
4.45	18.57	0.009878

Frequency Error Against Temperature for PCS 1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	22.88	0.012170
-20	17.9	0.009521
-10	16.87	0.008973
0	19.22	0.010223
10	16.31	0.008676
20	19.16	0.010191
30	16.96	0.009021
40	18.92	0.010064
50	21.9	0.011649

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage = 4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for GPRS1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	19.69	0.010473
3.87	19.54	0.010394
4.45	19.98	0.010628

Frequency Error Against Temperature for GPRS1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	17.37	0.009239
-20	18.14	0.009649
-10	19.84	0.010553
0	18.95	0.010080
10	20.13	0.010707
20	17	0.009043
30	16.76	0.008915
40	19.88	0.010574
50	19.61	0.010431

Frequency Error Against Voltage for EGPRS1900 band (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	19.66	0.010457
3.87	18.51	0.009846
4.45	18.46	0.009819

Frequency Error Against Temperature for EGPRS1900 band (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	17.57	0.009346
-20	18.2	0.009681
-10	20.57	0.010941
0	18.86	0.010032
10	17.44	0.009277
20	16.39	0.008718
30	17.93	0.009537
40	16.02	0.008521
50	20.15	0.010718

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage = 4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for UMTS band II (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	-17.53	-0.009324
3.87	-15.4	-0.008191
4.45	-16.9	-0.008989

Frequency Error Against Temperature for UMTS band II (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-19.55	-0.010399
-20	-16.52	-0.008787
-10	-15.15	-0.008059
0	-18.29	-0.009729
10	-16.28	-0.008660
20	-16.76	-0.008915
30	-19.31	-0.010271
40	-18.52	-0.009851
50	-19.98	-0.010628

Frequency Error Against Voltage for UMTS band IV (Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	-16.57	-0.009565
3.87	-10.98	-0.006338
4.45	-19.23	-0.011100

Frequency Error Against Temperature for UMTS band IV (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-7.72	-0.004456
-20	-11.09	-0.006402
-10	-13.75	-0.007937
0	-8.03	-0.004635
10	-13.68	-0.007897
20	-16.96	-0.009790
30	-17.58	-0.010148
40	-18.04	-0.010413
50	-20.51	-0.011839

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage = 4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for UMTS band V(Mid CH)		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.29	-19.78	-0.023649
3.87	-16.5	-0.019727
4.45	-18.14	-0.021688

Frequency Error Against Temperature for UMTS band V (Mid CH)		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-19.28	-0.023051
-20	-19.6	-0.023434
-10	-17.18	-0.020540
0	-15.09	-0.018042
10	-17.91	-0.021413
20	-17.58	-0.021019
30	-17.37	-0.020768
40	-18.31	-0.021891
50	-22.91	-0.027391

Note:

1. Normal Voltage = 3.87V; Battery End Point (BEP) = 3.29V; Maximum Voltage =4.45V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

7.5 PEAK-TO-AVERAGE RATIO

7.5.1 Applicable Standard

According to Subclause 5.2.3.4 of ANSI C63.26-2015 and FCC KDB 971168 D01 Section 5.7.1

7.5.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;

b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;

c) Set the number of counts to a value that stabilizes the measured CCDF curve;

d) Set the measurement interval as follows:

1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

7.5.6 Test Results

EUT:	Smartphone	Model No.:	KINGKONG POWER 5
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

The Test data reference attachment:

7.6 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.6.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC KDB 971168 D01 Section 4

7.6.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 4.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

Determine the “-26 dB down amplitude” as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

7.6.6 Test Results

EUT:	Smartphone	Model No.:	KINGKONG POWER 5
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

The Test data reference attachment:

7.7 CONDUCTED BAND EDGE

7.7.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and FCC KDB 971168 D01 Section6.

7.7.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$\begin{aligned} &= P(W) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ &= -13 \text{ dBm.} \end{aligned}$$

7.7.6 Test Results

EUT:	Smartphone	Model No.:	KINGKONG POWER 5
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

The Test data reference attachment:

7.8 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and FCC KDB 971168 D01 Section6.

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$\begin{aligned} &= P(W) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ &= -13 \text{ dBm.} \end{aligned}$$

7.8.6 Test Results

EUT:	Smartphone	Model No.:	KINGKONG POWER 5
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, UMTS band II/ UMTS band V/ UMTS band IV	Test By:	Allen Liu
Results: PASS			

The Test data reference attachment:

END OF REPORT