



Report No.: HK1811161630E

FCC TEST REPORT

**Test report
On Behalf of
SOTEN TECHNOLOGY (HONGKONG) CO., LIMITED
For
Rugged Tablet
Model No.: T101, S101, K101, S70V2, T60**

FCC ID: 2AI62T101

**Prepared for : SOTEN TECHNOLOGY (HONGKONG) CO., LIMITED
FLAT/RM A 20/F KIU FU COMMERCIAL BLDG 300 LOCKHART ROAD WAN CHAI HK**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an
District, Shenzhen City, China**

**Date of Test: Nov. 13, 2018 ~ Jan. 14, 2019
Date of Report: Jan. 15, 2019
Report Number: HK1811161630E**

**TEST RESULT CERTIFICATION**

Applicant's name : SOTEN TECHNOLOGY (HONGKONG) CO., LIMITED
Address..... : FLAT/RM A 20/F KIU FU COMMERCIAL BLDG 300 LOCKHART
ROAD WAN CHAI HK

Manufacture's Name : Shenzhen SOTEN Technology Co., Ltd.
10th Floor,2nd Building,BaiWang Research and development
Address..... : building, No. 5308 Shahe west road,Xili,Nanshan district,ShenZhen,
China

Factory Name : Shenzhen SOTEN Technology Co., Ltd.
10th Floor,2nd Building,BaiWang Research and development
Address..... : building, No. 5308 Shahe west road,Xili,Nanshan district,ShenZhen,
China

Product description : Rugged Tablet

Brand name : HUGEROCK

Mode name : T101, S101, K101, S70V2, T60

Test model name : T101

Difference description : All the same except for the model name.

Standards : FCC Part 22: PUBLIC MOBILE SERVICES
FCC Part 24: PERSONAL COMMUNICATIONS SERVICES

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test : **Nov. 13, 2018 ~ Jan. 14, 2019**

Date (s) of performance of tests..... : **Nov. 13, 2018 ~ Jan. 14, 2019**

Date of Issue : **Jan. 15, 2019**

Test Result..... : **Pass**



Testing Engineer

Gary Qian

(Gary Qian)

Technical Manager

Eden Hu

(Eden Hu)

Authorized Signatory

Jason Zhou

(Jason Zhou)

**Revision History**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 15, 2019	Valid	Initial Release



TABLE OF CONTENTS

1. TEST STANDARDS	7
2.1 PRODUCT DESCRIPTION	8
2.2 RELATED SUBMITTAL(S) / GRANT (S).....	10
2.3 TEST METHODOLOGY.....	10
2.4 TEST FACILITY	11
2.6 SPECIAL ACCESSORIES	12
2.7 EQUIPMENT MODIFICATIONS.....	12
3. SYSTEM TEST CONFIGURATION	13
3.1 EUT CONFIGURATION	13
3.2 EUT EXERCISE	13
3.3 CONFIGURATION OF EUT SYSTEM	13
4. SUMMARY OF TEST RESULTS	14
5. DESCRIPTION OF TEST MODES.....	15
6. OUTPUT POWER	16
6.1 CONDUCTED OUTPUT POWER	16
6.2 RADIATED OUTPUT POWER	22
6.2.1 MEASUREMENT METHOD	22
6.2.2 PROVISIONS APPLICABLE	23
6.3. PEAK-TO-AVERAGE RATIO.....	26
6.3.1 MEASUREMENT METHOD	26
6.3.2 PROVISIONS APPLICABLE	26
6.3.3 MEASUREMENT RESULT	27
7. OCCUPIED BANDWIDTH	28
7.1 MEASUREMENT METHOD	28
7.2 PROVISIONS APPLICABLE	28
7.3 MEASUREMENT RESULT	29
8. BAND EDGE.....	36
8.1 MEASUREMENT METHOD	36
8.2 PROVISIONS APPLICABLE	36
8.3 MEASUREMENT RESULT	37
9. SPURIOUS EMISSION	40
9.1 CONDUCTED SPURIOUS EMISSION	40
9.2 RADIATED SPURIOUS EMISSION	54
9.2.2 TEST SETUP	55
10. FREQUENCY STABILITY.....	60
10.1 MEASUREMENT METHOD	60
10.2 PROVISIONS APPLICABLE	61



10.3 MEASUREMENT RESULT	62
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	71



1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 \(10-1-12 Edition\):](#) PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24\(10-1-12 Edition\):](#) PUBLIC MOBILE SERVICES

[TIA/EIA 603 D June 2010:](#) Land Mobile FM or PM Communications Equipment Measurement and

Performance Standards.



2. SUMMARY

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Rugged Tablet
Model Name	T101
Hardware Version	T101-MainBoard-P3
Software Version	T101-20181026-Q
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input type="checkbox"/> PCS1900 (U.S. Bands) <input checked="" type="checkbox"/> GSM 900 <input type="checkbox"/> DCS 1800 (Non-U.S. Bands) <input checked="" type="checkbox"/> UMTS FDD Band II <input checked="" type="checkbox"/> UMTS FDD Band V (U.S. Bands) <input checked="" type="checkbox"/> UMTS FDD Band I <input checked="" type="checkbox"/> UMTS FDD Band VIII (Non-U.S. Bands)
Antenna Type	PIFA Antenna
Type of Modulation	GSM / GPRS :GMSK EGPRS: GMSK/8PSK WCDMA : QPSK
Antenna gain	GSM850: 0.98dBi; PCS1900: 1.02dBi WCDMA850: 0.97dBi; WCDMA1900:1.0dBi
Power Supply:	DC 3.7V by battery
Battery parameter:	DC3.7V/14600mAh
Dual Card:	GSM /WCDMA/LTE Card Slot
GPRS Class	12
Extreme Vol. Limits:	DC3.1 V to 4.3 V (Normal: DC3.7 V)
Extreme Temp. Tolerance	-10°C to +50°C

*** Note: 1. The High Voltage DC4.3V and Low Voltage DC3.1V were declared by manufacturer
2. The EUT couldn't be operating normally with higher or lower voltage.

*** Note: 1. The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests.
2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst cases a representative.

**GSM/WCDMA Card1 Slot:**

	Maximum ERP/EIRP (dBm)	Max. Average Burst Power (dBm)
GSM 850	31.96	34.25
PCS 1900	28.34	30.34
UMTS BAND II	20.24	22.26
UMTS BAND V	21.65	23.69

GSM Card2 Slot:

	Maximum ERP/EIRP (dBm)	Max. Average Burst Power (dBm)
GSM 850	31.89	34.19
PCS 1900	29.30	30.26



2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AI62T101**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and KDB 971168 D01 Power Means License Digital Systems V03R01.

**2.4 TEST FACILITY**

Site	Shenzhen HUAK Testing Technology Co., Ltd.
Location	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China
Designation Number	CN1229
Test Firm Registration Number : 616276	

ALL TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Receiver	R&S	ESCI 7	HKE-010	2018/12/27	2019/12/26
LISN	R&S	ENV216	HKE-002	2018/12/27	2019/12/26
Spectrum analyzer	Agilent	N9020A	HKE-048	2018/12/27	2019/12/26
Horn antenna	Schwarzbeck	9120D	HKE-013	2018/12/27	2019/12/26
Preamplifier	EMCI	EMC051845SE	HKE-015	2018/12/27	2019/12/26
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	HKE-087	2018/12/27	2019/12/26
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2018/12/27	2019/12/26
Spectrum analyzer	Agilent	N9020A	HKE-048	2018/12/27	2019/12/26
Power Sensor	Agilent	E9300A	HKE-086	2018/12/27	2019/12/26
Wireless Communication Test Set	R&S	CMU200	HKE-026	2018/12/27	2019/12/26



2.6 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	Rugged Tablet	T101	2AI62T101	EUT
2	Adapter	8395-UW01-1070	DC 5.3V 2.0A	Accessory
3	Battery	47206128	DC3.7V/ 14600mAh	Accessory
4	USB	N/A	N/A	Accessory

***Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

**4. SUMMARY OF TEST RESULTS**

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046	Pass
		Radiated Output Power	22.913(a) (2) / 24.232 (c)	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917(a)/24.238(a)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1053/22.917(a)/24.238(a)	Pass
5	Occupied Bandwidth		2.1049	Pass
6	Band Edge		2.1051/22.917(a)/24.238(a)	Pass



5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

*****Note:** GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.



6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

**GSM 850:**

Mode	Frequency (MHz)	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM850	824.2	31.55	-9	22.55
	836.6	33.15	-9	24.15
	848.8	32.01	-9	23.01
GPRS850 (1 Slot)	824.2	32.99	-9	23.99
	836.6	34.25	-9	25.25
	848.8	33.53	-9	24.53
GPRS850 (2 Slot)	824.2	32.17	-6	26.17
	836.6	33.43	-6	27.43
	848.8	32.82	-6	26.82
GPRS850 (3 Slot)	824.2	30.52	-4.26	26.26
	836.6	31.92	-4.26	27.66
	848.8	31.25	-4.26	26.99
GPRS850 (4 Slot)	824.2	29.73	-3	26.73
	836.6	31.16	-3	28.16
	848.8	30.49	-3	27.49

Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)
EDGE (1 Slot)	128	824.2	27.68
	190	836.6	29.05
	251	848.8	28.76
EDGE (2 Slot)	128	824.2	26.95
	190	836.6	27.92
	251	848.8	27.68
EDGE (3 Slot)	128	824.2	25.14
	190	836.6	26.08
	251	848.8	25.85
EDGE (4 Slot)	128	824.2	24.33
	190	836.6	25.20
	251	848.8	25.05



PCS 1900:

Mode	Frequency (MHz)	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900	1850.2	29.83	-9	20.83
	1880	30.31	-9	21.31
	1909.8	29.82	-9	20.82
GPRS1900 (1 Slot)	1850.2	29.92	-9	20.92
	1880	30.34	-9	21.34
	1909.8	29.87	-9	20.87
GPRS1900 (2 Slot)	1850.2	29.38	-6	23.38
	1880	29.85	-6	23.85
	1909.8	29.42	-6	23.42
GPRS1900 (3 Slot)	1850.2	27.79	-4.26	23.53
	1880	28.30	-4.26	24.04
	1909.8	28.04	-4.26	23.78
GPRS1900 (4 Slot)	1850.2	26.69	-3	23.69
	1880	27.20	-3	24.2
	1909.8	26.99	-3	23.99

Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)
EDGE (1 Slot)	512	1850.2	26.12
	661	1880	27.26
	810	1909.8	27.20
EDGE (2 Slot)	512	1850.2	25.26
	661	1880	26.00
	810	1909.8	26.37
EDGE (3 Slot)	512	1850.2	23.53
	661	1880	24.19
	810	1909.8	24.28
EDGE (4 Slot)	512	1850.2	22.73
	661	1880	23.28
	810	1909.8	23.42



UMTS BAND II

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA1900 RMC	1852.4	24	22.13
	1880	24	21.64
	1907.6	24	21.28
WCDMA1900 AMR	1852.4	24	22.26
	1880	24	21.89
	1907.6	24	21.32
HSDPA Subtest 1	1852.4	24	20.52
	1880	24	20.29
	1907.6	24	20.34
HSDPA Subtest 2	1852.4	24	19.88
	1880	24	19.73
	1907.6	24	19.61
HSDPA Subtest 3	1852.4	24	19.98
	1880	24	19.64
	1907.6	24	19.43
HSDPA Subtest 4	1852.4	24	19.96
	1880	24	19.55
	1907.6	24	19.30
HSUPA Subtest 1	1852.4	24	19.98
	1880	24	19.77
	1907.6	24	19.84
HSUPA Subtest 2	1852.4	24	19.89
	1880	24	19.73
	1907.6	24	19.75
HSUPA Subtest 3	1852.4	24	19.03
	1880	24	19.87
	1907.6	24	19.78
HSUPA Subtest 4	1852.4	24	19.96
	1880	24	19.78
	1907.6	24	19.80
HSUPA Subtest 5	1852.4	24	19.38
	1880	24	19.17
	1907.6	24	19.36



UMTS BAND V

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA850 RMC	826.4	24	23.17
	836.4	24	23.69
	846.6	24	23.44
WCDMA850 AMR	826.4	24	23.34
	836.4	24	23.73
	846.6	24	23.61
HSDPA Subtest 1	826.4	24	22.11
	836.4	24	22.04
	846.6	24	22.71
HSDPA Subtest 2	826.4	24	21.42
	836.4	24	22.04
	846.6	24	22.03
HSDPA Subtest 3	826.4	24	21.42
	836.4	24	21.96
	846.6	24	21.95
HSDPA Subtest 4	826.4	24	21.28
	836.4	24	21.87
	846.6	24	21.88
HSUPA Subtest 1	826.4	24	19.83
	836.4	24	20.43
	846.6	24	20.48
HSUPA Subtest 2	826.4	24	19.92
	836.4	24	20.53
	846.6	24	20.56
HSUPA Subtest 3	826.4	24	20.86
	836.4	24	21.46
	846.6	24	21.49
HSUPA Subtest 4	826.4	24	19.48
	836.4	24	20.08
	846.6	24	19.97
HSUPA Subtest 5	826.4	24	20.21
	836.4	24	19.91
	846.6	24	19.95



According to 3GPP 25.101 sub-clause6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $ARpl = Pin + 2.15 - Pr$. The $ARpl$ is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = PMea + ARpl$
4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
6. The EUT is then put into continuously transmitting mode at its maximum power level.
7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
9. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$...

**6.2.2 PROVISIONS APPLICABLE**

Mode	FCC Part Section(s)	Nominal Peak Power
GSM/EDGE 850	22.913(a)(2)	<=38.45dBm (7W). ERP
GSM/EDGE 1900	24.232(c)	<=33dBm (2W). EIRP
UMTS BAND II	24.232(c)	<=33dBm (2W).EIRP
UMTS BANDV	22.913(a)(2)	<=38.45dBm (7W).ERP



6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM/EDGE 850				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	30.76	Horizontal	Pass
	836.6	31.96	Horizontal	Pass
	848.8	31.32	Horizontal	Pass
	824.2	29.71	Vertical	Pass
	836.6	30.92	Vertical	Pass
	848.8	30.26	Vertical	Pass
EDGE	824.2	25.67	Horizontal	Pass
	836.6	27.05	Horizontal	Pass
	848.8	26.78	Horizontal	Pass
	824.2	24.67	Vertical	Pass
	836.6	26.04	Vertical	Pass
	848.8	25.76	Vertical	Pass

Radiated Power (E.I.R.P) for GSM/EDGE 1900				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	27.91	Horizontal	Pass
	1880.0	28.34	Horizontal	Pass
	1909.8	27.89	Horizontal	Pass
	1850.2	26.91	Vertical	Pass
	1880.0	27.33	Vertical	Pass
	1909.8	26.87	Vertical	Pass
EDGE	1850.2	24.11	Horizontal	Pass
	1880.0	25.26	Horizontal	Pass
	1909.8	25.22	Horizontal	Pass
	1850.2	23.11	Vertical	Pass
	1880.0	24.25	Vertical	Pass
	1909.8	24.2	Vertical	Pass



Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P (dBm)	Polarization Of Max. E.I.R.P	
UMTS	1852.4	20.24	Horizontal	Pass
	1880	19.86	Horizontal	Pass
	1907.6	19.3	Horizontal	Pass
	1852.4	19.22	Vertical	Pass
	1880	18.83	Vertical	Pass
	1907.6	18.26	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
UMTS	826.4	21.18	Horizontal	Pass
	836.4	21.65	Horizontal	Pass
	846.6	21.41	Horizontal	Pass
	826.4	20.2	Vertical	Pass
	836.4	20.66	Vertical	Pass
	846.6	20.41	Vertical	Pass

Note: Above is the worst mode data.



6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.



6.3.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	2.64	2.64	2.64
Peak-To-Average Ratio (dB)/EDGE	3.11	3.15	3.07

Modes	PCS1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	2.70	2.70	2.70
Peak-To-Average Ratio (dB)/EDGE	3.34	3.36	3.37

Modes	UMTS BAND II		
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.4	1880	1907.6
Peak-To-Average Ratio (dB)	2.79	2.58	2.44

Modes	UMTS BAND V		
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency (MHz)	826.4	836.4	846.6
Peak-To-Average Ratio (dB)	2.83	2.63	2.50



7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
2. RBW=1~5% of the expected OBW, VBW>=3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power



7.3 MEASUREMENT RESULT

Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GSM	LCH	247.3	309	PASS
		MCH	249.2	316	PASS
		HCH	247.9	314	PASS
	EDGE	LCH	365.0	508	PASS
		MCH	355.0	503	PASS
		HCH	373.8	522	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GSM	LCH	249.8	313	PASS
		MCH	245.6	321	PASS
		HCH	247.2	313	PASS
	EDGE	LCH	325.1	438	PASS
		MCH	319.4	416	PASS
		HCH	313.4	426	PASS



For GSM

Test Band=GSM850/PCS1900

Test Mode=GSM/EDGE

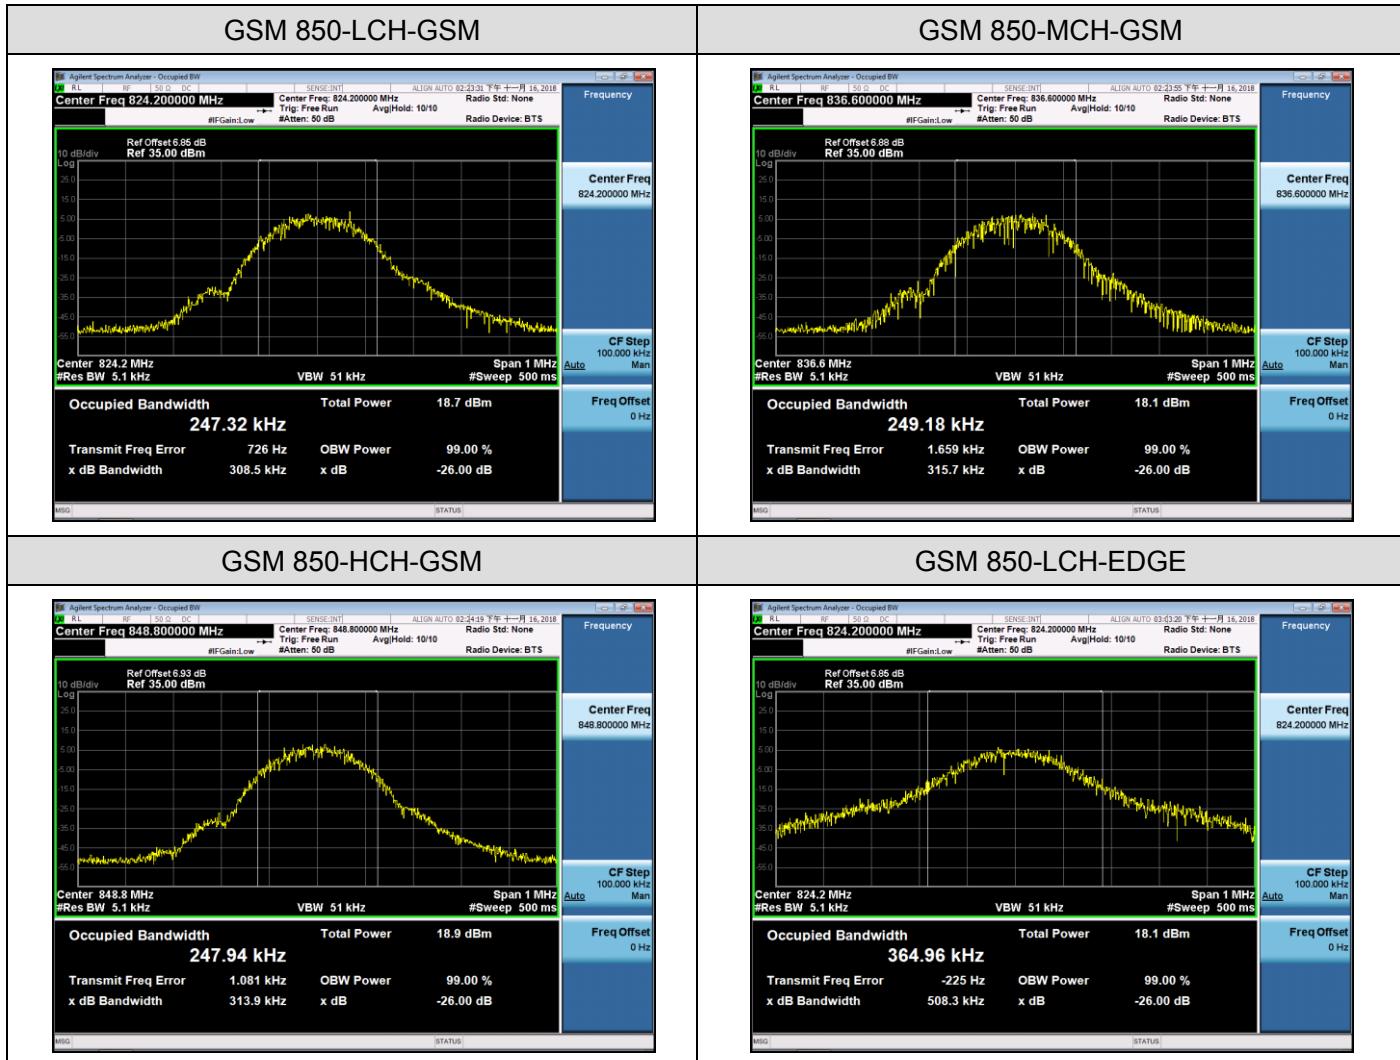




GSM 850-MCH-EDGE



GSM 850-HCH-EDGE




GSM 1900-LCH-GSM

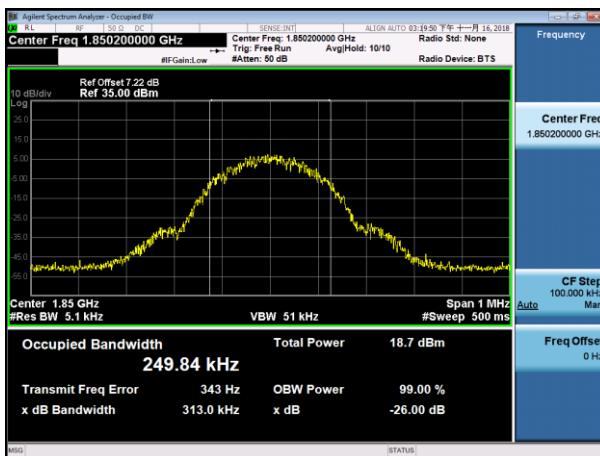

GSM 1900-MCH-GSM




GSM 1900-HCH-GSM

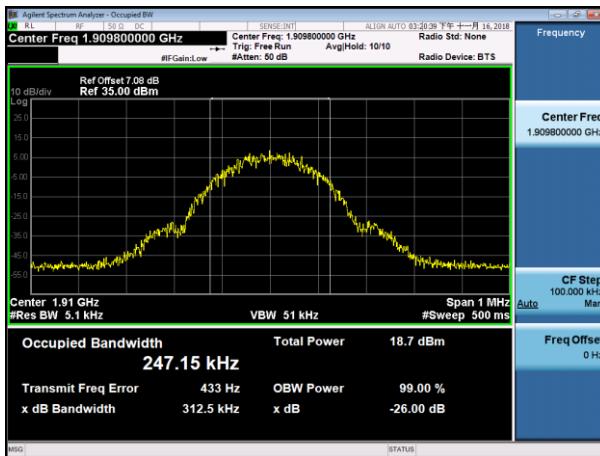

GSM 1900-LCH-EGPRS



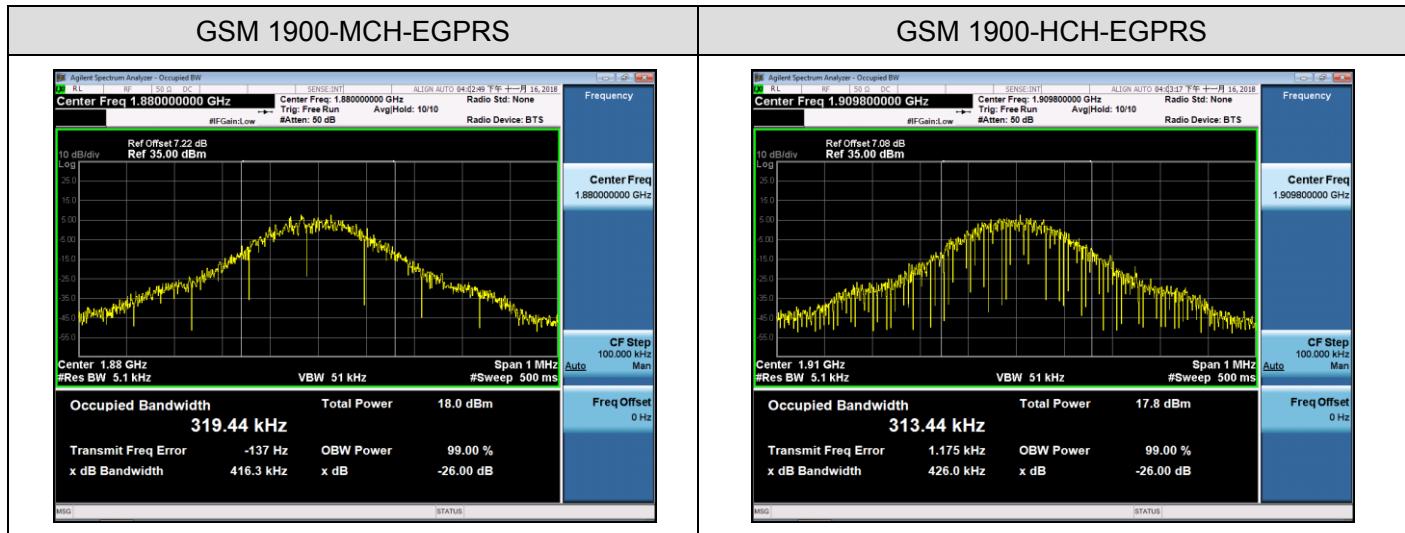




Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 850	UMTS	LCH	4195.3	4847	PASS
		MCH	4210.4	4882	PASS
		HCH	4204.7	4863	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1900	UMTS	LCH	4219.3	4868	PASS
		MCH	4219.5	4879	PASS
		HCH	4214.4	4868	PASS

**For WCDMA****Test Band=WCDMA850/ WCDMA1900****Test Mode=UMTS**

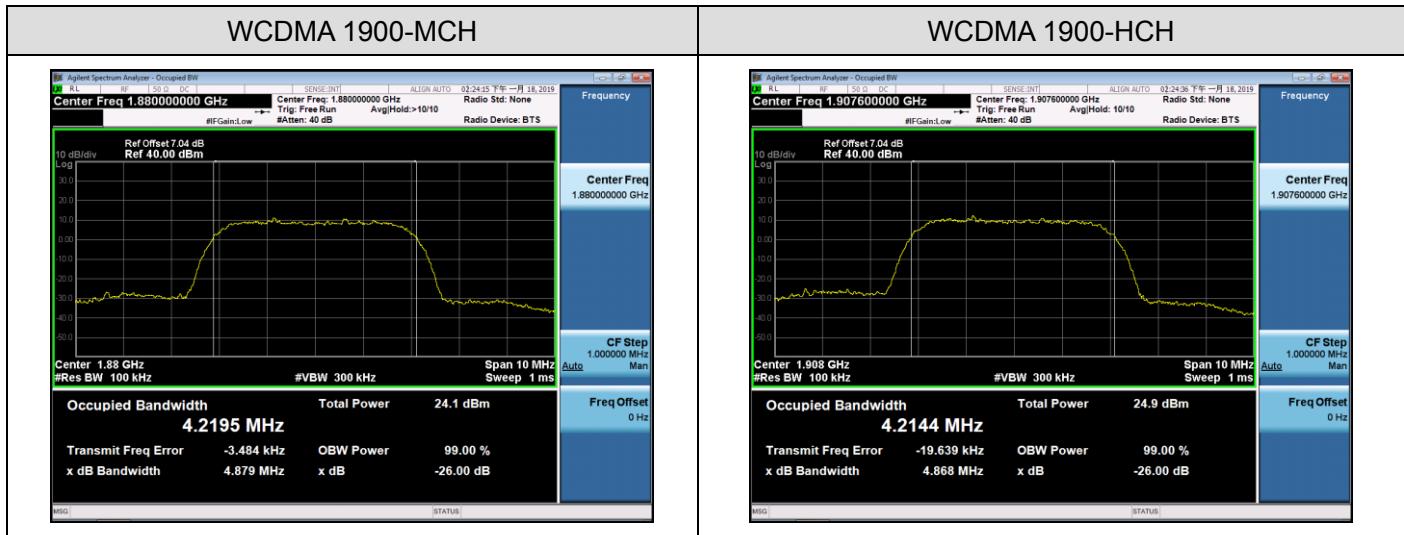



8. BAND EDGE

8.1 MEASUREMENT METHOD

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
4. Span was set large enough so as to capture all out of band emissions near the band edge.
5. $RBW > 1\%$ of the emission bandwidth, $VBW \geq 3 \times RBW$, Detector=RMS, Number of points $\geq 2 \times \text{Span}/RBW$, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a), 24.238(a)and KDB 971168 D1 V03R01.




8.3 MEASUREMENT RESULT


Test Results

For GSM

Test Band=GSM850/GSM1900

Test Mode=GSM/EDGE

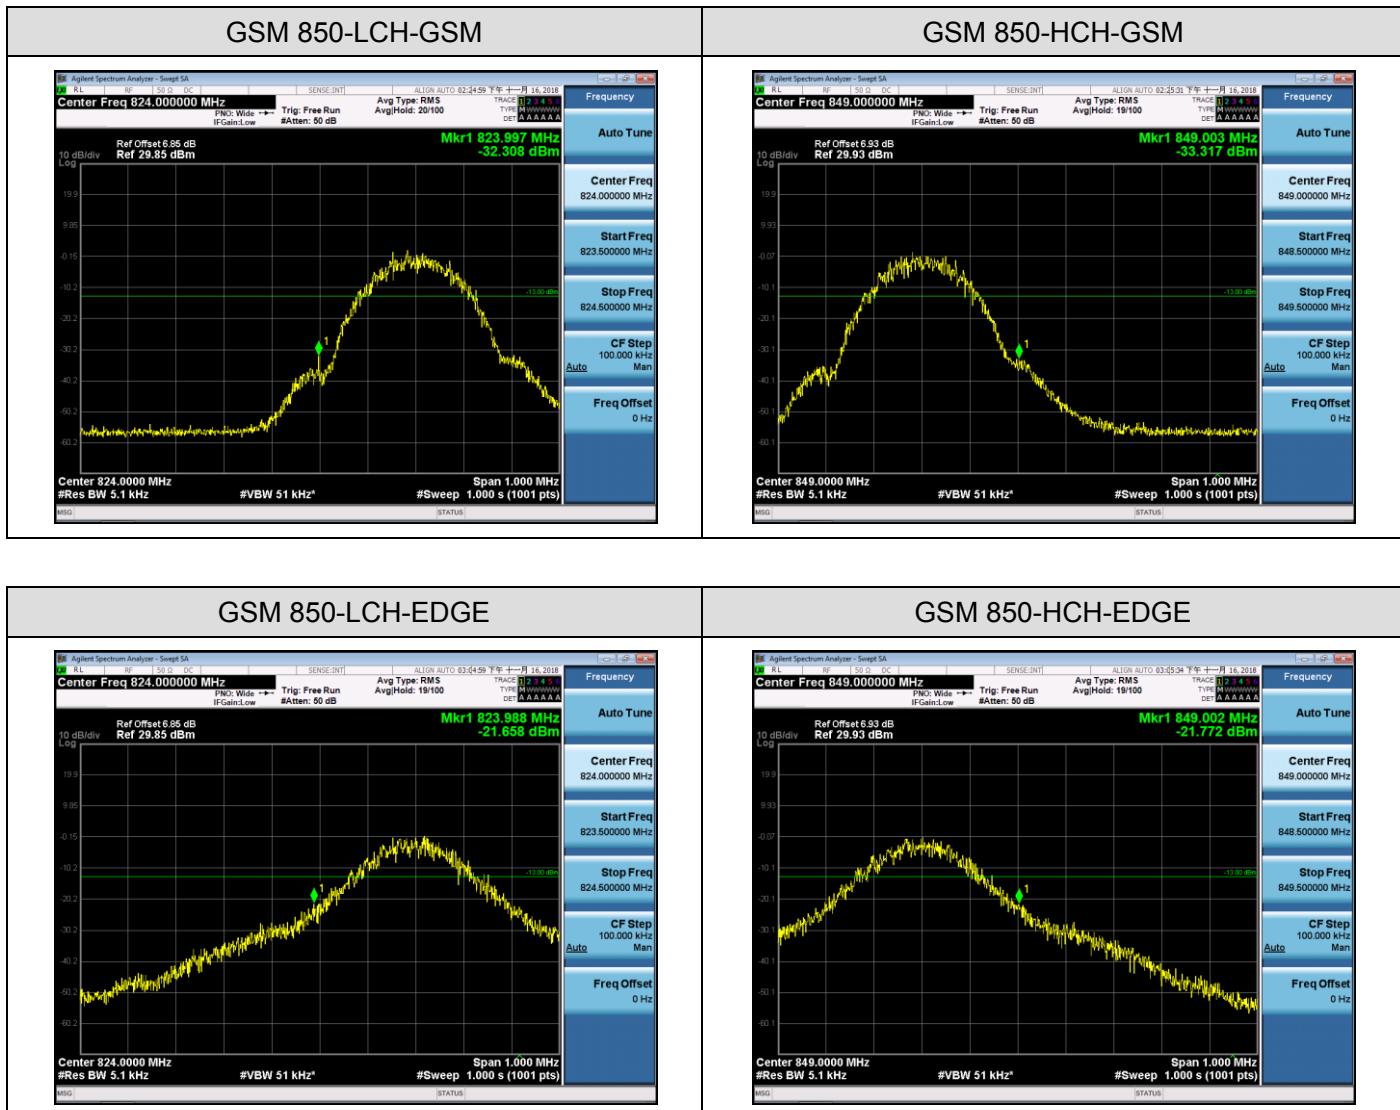

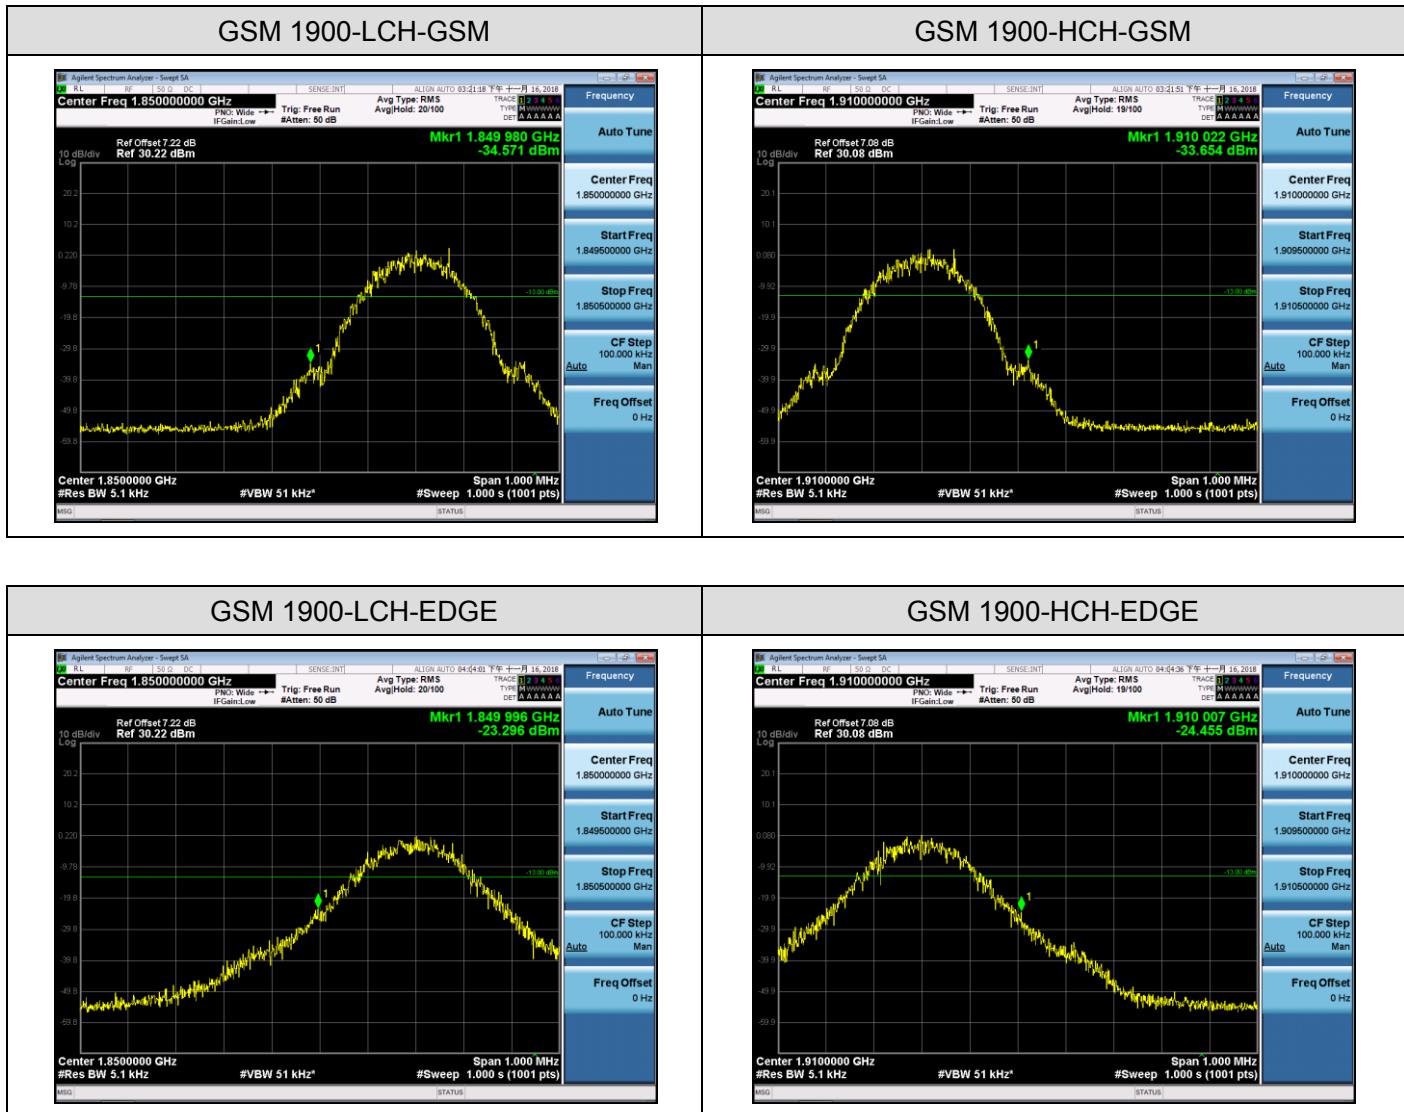

**For WCDMA****Test Band=WCDMA850/ WCDMA1900****Test Mode=UMTS**