


Site: AC2	Time: 2019/10/05 - 13:49
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

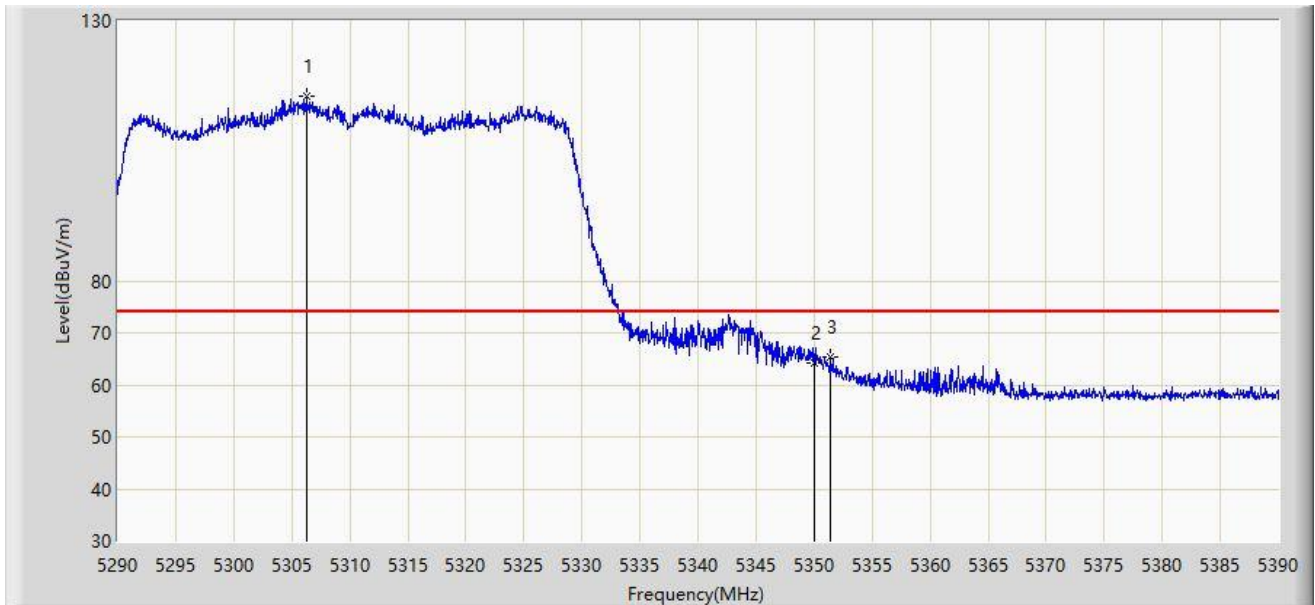


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.250	115.532	112.109	N/A	N/A	3.423	PK
2			5350.000	64.136	60.436	-9.864	74.000	3.701	PK
3			5351.400	65.433	61.728	-8.567	74.000	3.705	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 13:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

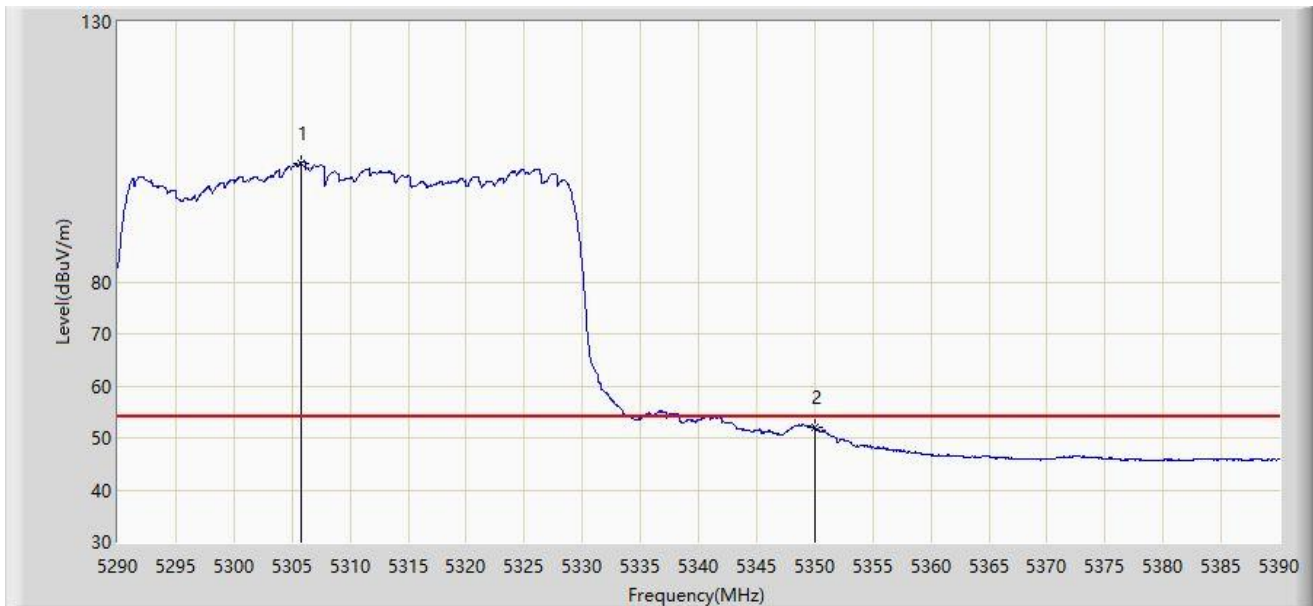


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.800	102.859	99.440	N/A	N/A	3.419	AV
2			5350.000	51.904	48.204	-2.096	54.000	3.701	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 13:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

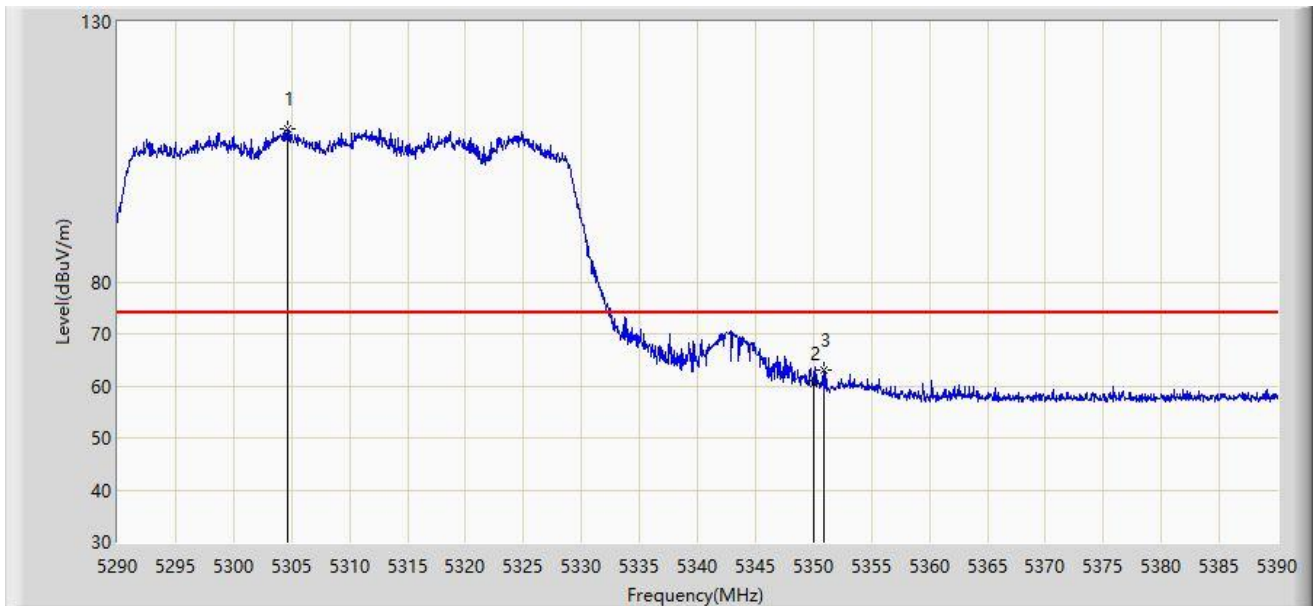


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5304.600	109.439	106.030	N/A	N/A	3.409	PK
2			5350.000	60.340	56.640	-13.660	74.000	3.701	PK
3			5350.850	63.104	59.401	-10.896	74.000	3.704	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 13:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

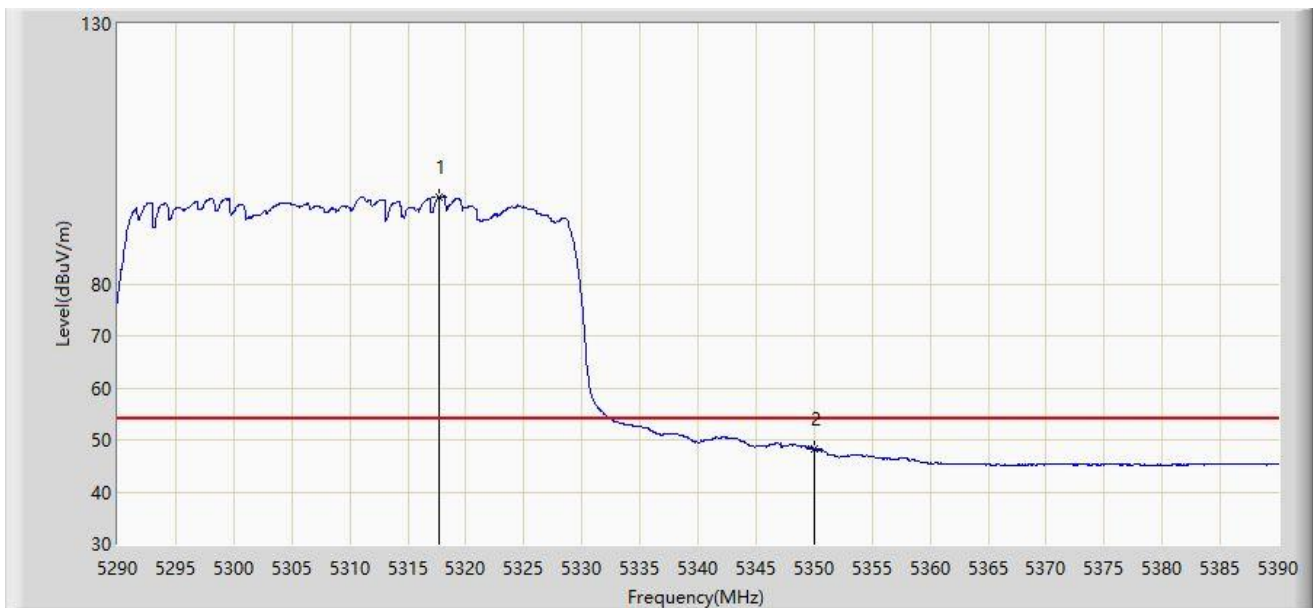


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.700	96.622	93.099	N/A	N/A	3.524	AV
2			5350.000	48.266	44.566	-5.734	54.000	3.701	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 13:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

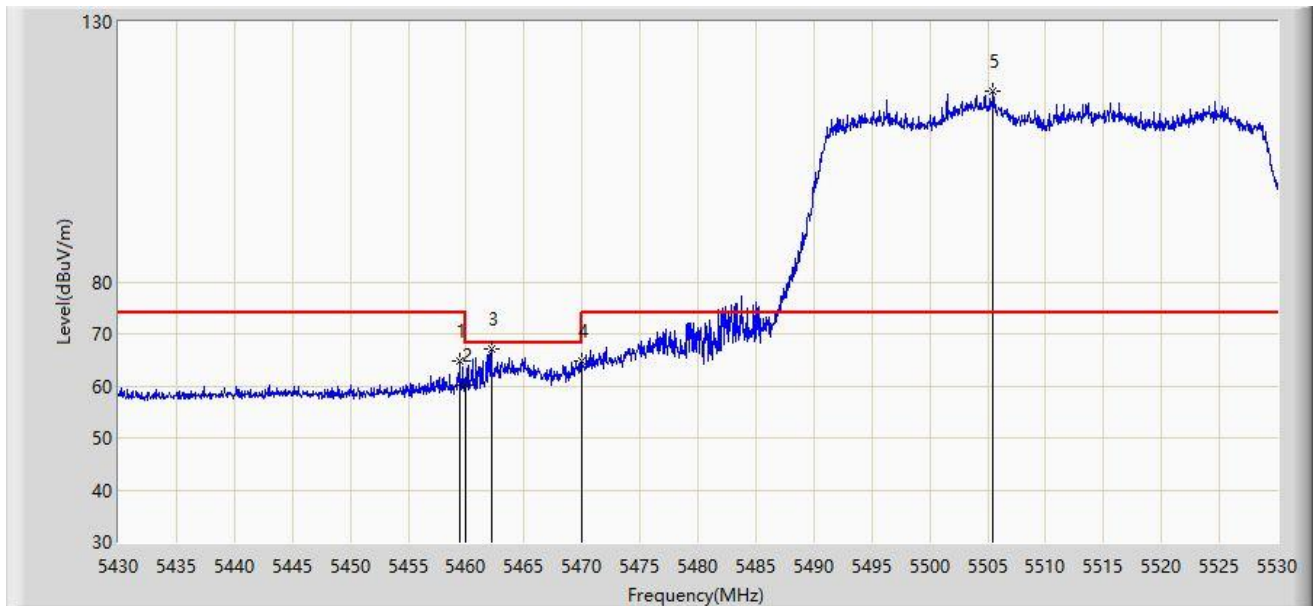


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.450	64.914	60.814	-9.086	74.000	4.099	PK
2			5460.000	60.208	56.113	-13.792	74.000	4.095	PK
3			5462.150	67.154	63.078	-1.046	68.200	4.076	PK
4			5470.000	64.884	60.879	-3.316	68.200	4.005	PK
5		*	5505.450	116.606	112.328	N/A	N/A	4.278	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 13:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

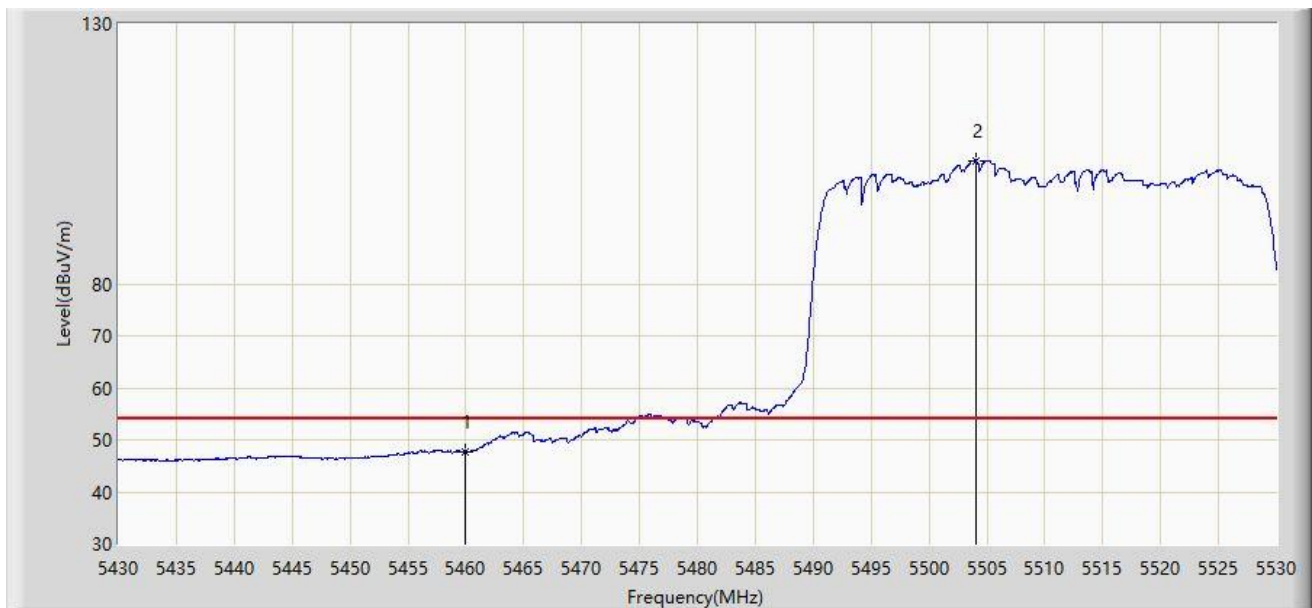


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.807	43.712	-6.193	54.000	4.095	AV
2		*	5504.000	103.768	99.493	N/A	N/A	4.276	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

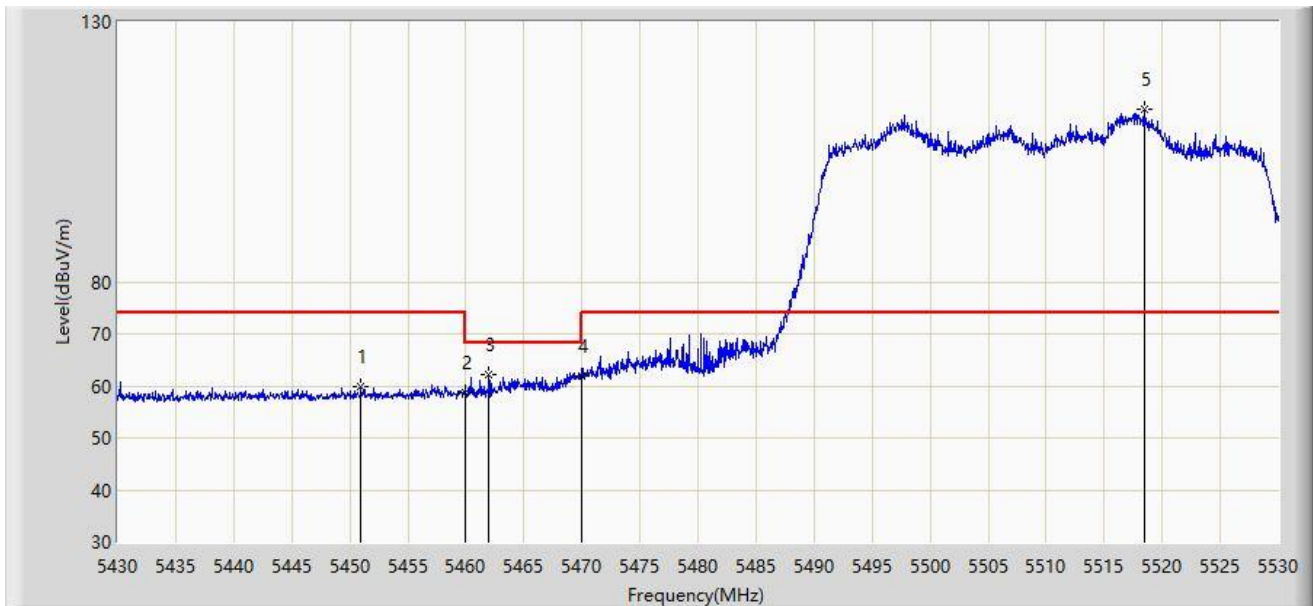


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.950	59.951	55.804	-14.049	74.000	4.147	PK
2			5460.000	58.613	54.518	-15.387	74.000	4.095	PK
3			5462.000	62.263	58.186	-5.937	68.200	4.077	PK
4			5470.000	61.884	57.879	-6.316	68.200	4.005	PK
5		*	5518.450	113.221	109.081	N/A	N/A	4.139	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

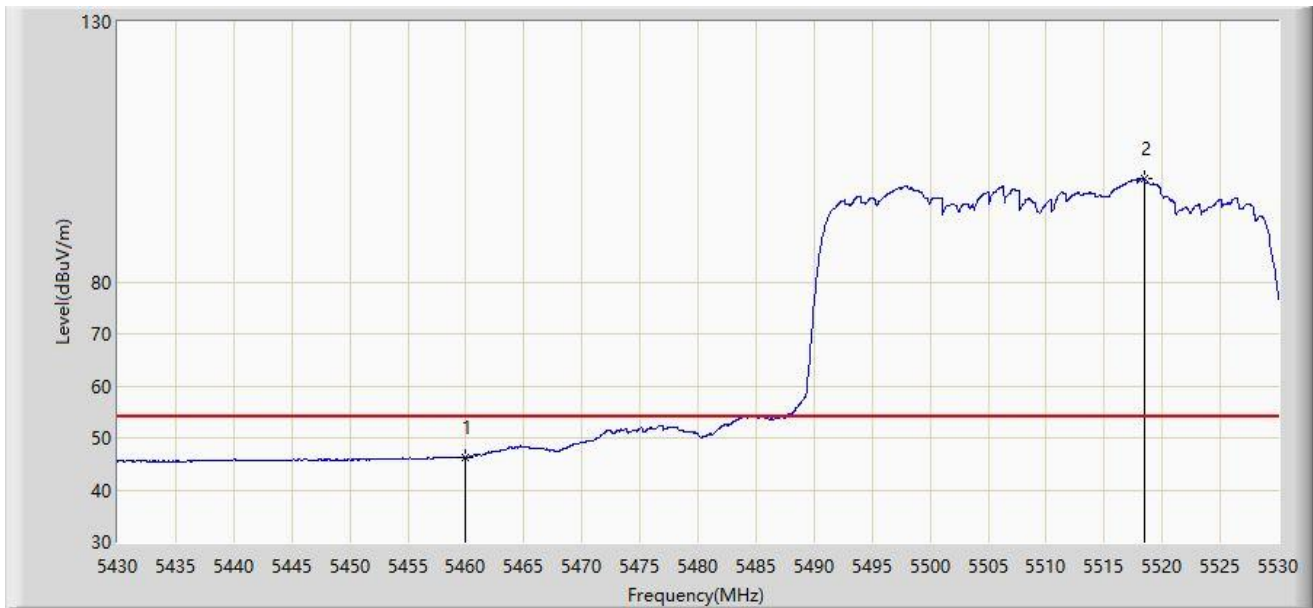


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.268	42.173	-7.732	54.000	4.095	AV
2		*	5518.450	99.766	95.626	N/A	N/A	4.139	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz	

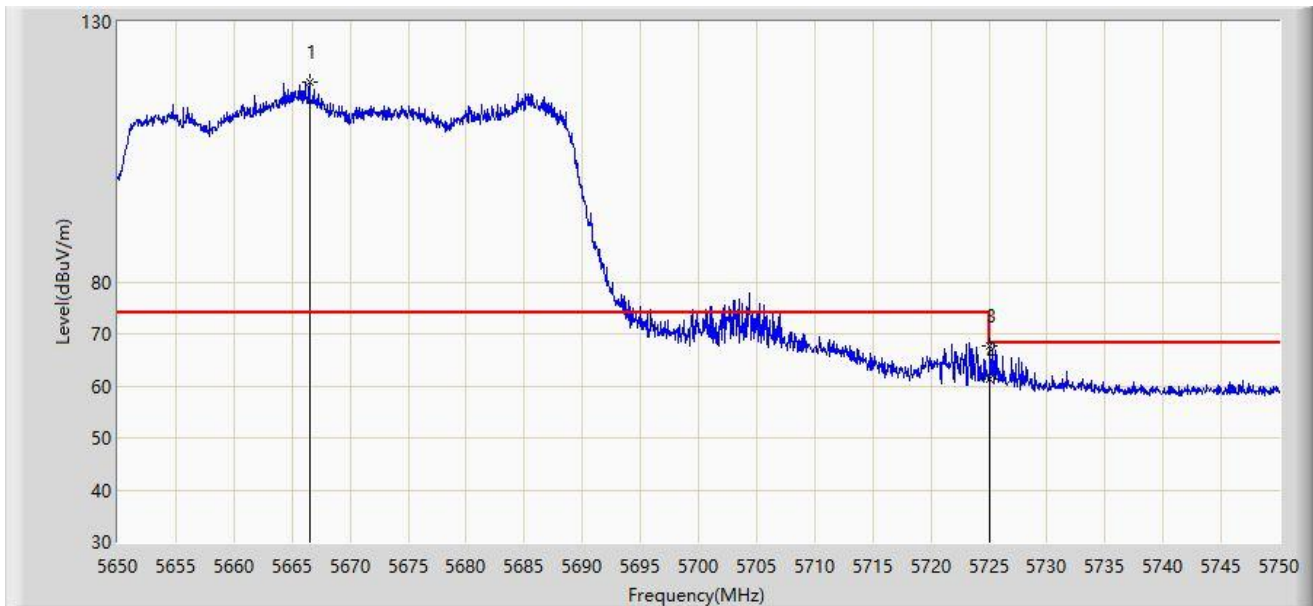


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5666.500	118.329	113.612	N/A	N/A	4.717	PK
2			5725.000	61.383	56.362	-6.817	68.200	5.021	PK
3			5725.100	67.541	62.518	-0.659	68.200	5.023	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz	

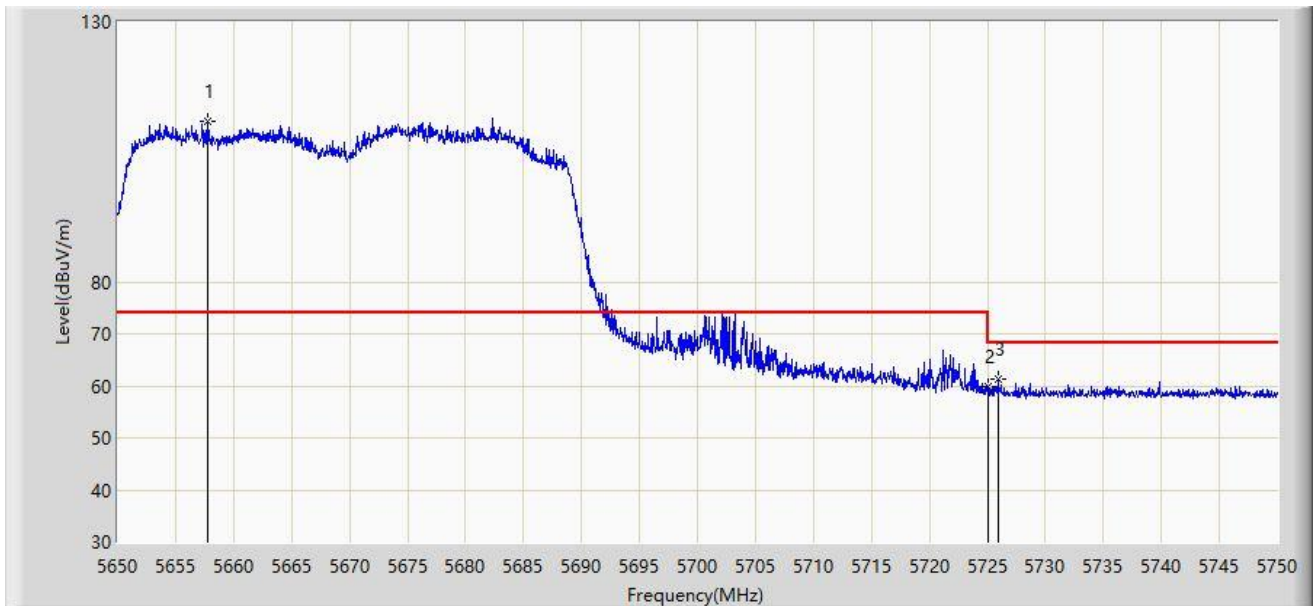


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5657.800	110.969	106.409	N/A	N/A	4.560	PK
2			5725.000	59.745	54.724	-8.455	68.200	5.021	PK
3			5725.900	61.203	56.160	-6.997	68.200	5.043	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 16:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at channel 5290MHz	

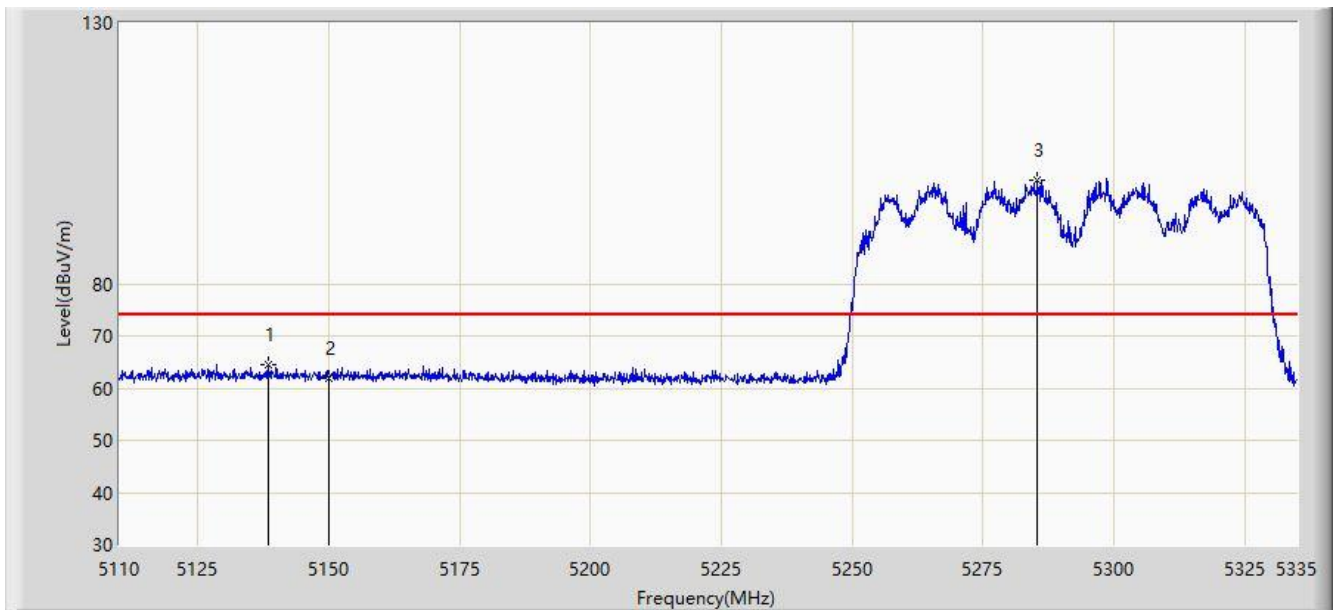


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.350	64.424	55.852	-9.576	74.000	8.572	PK
2			5150.000	61.971	53.443	-12.029	74.000	8.528	PK
3		*	5285.500	99.914	91.798	25.914	74.000	8.115	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 16:29
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at channel 5290MHz	

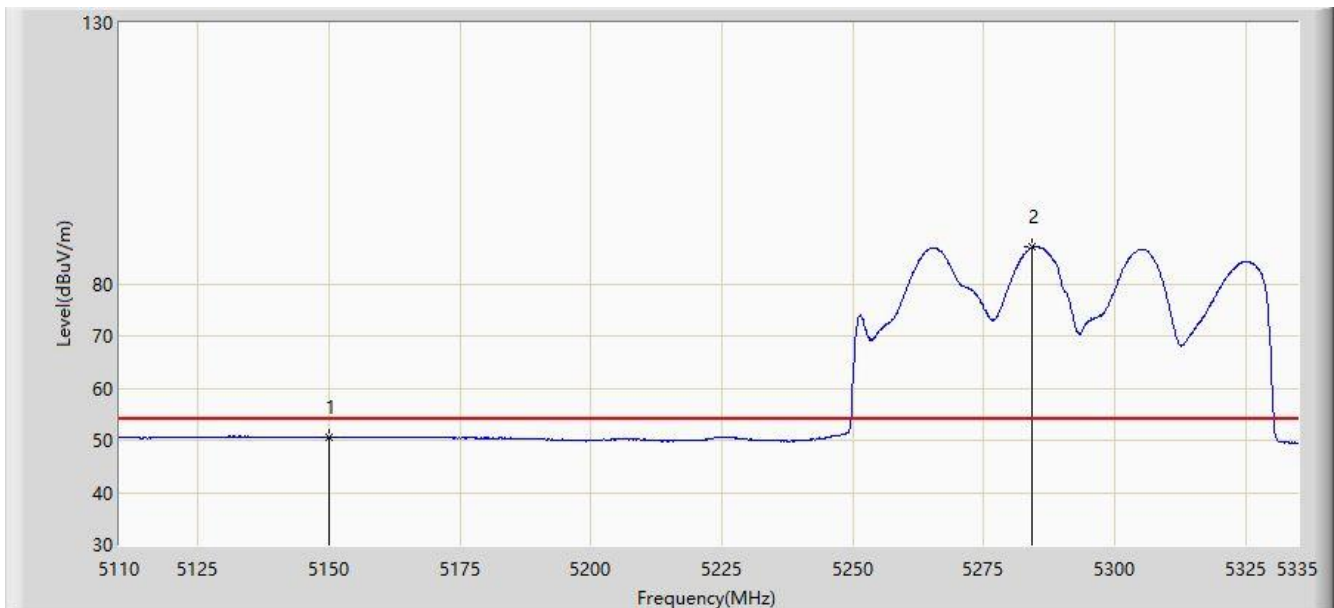


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.515	41.987	-3.485	54.000	8.528	AV
2		*	5284.375	87.004	78.900	33.004	54.000	8.104	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 16:39
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at channel 5290MHz	

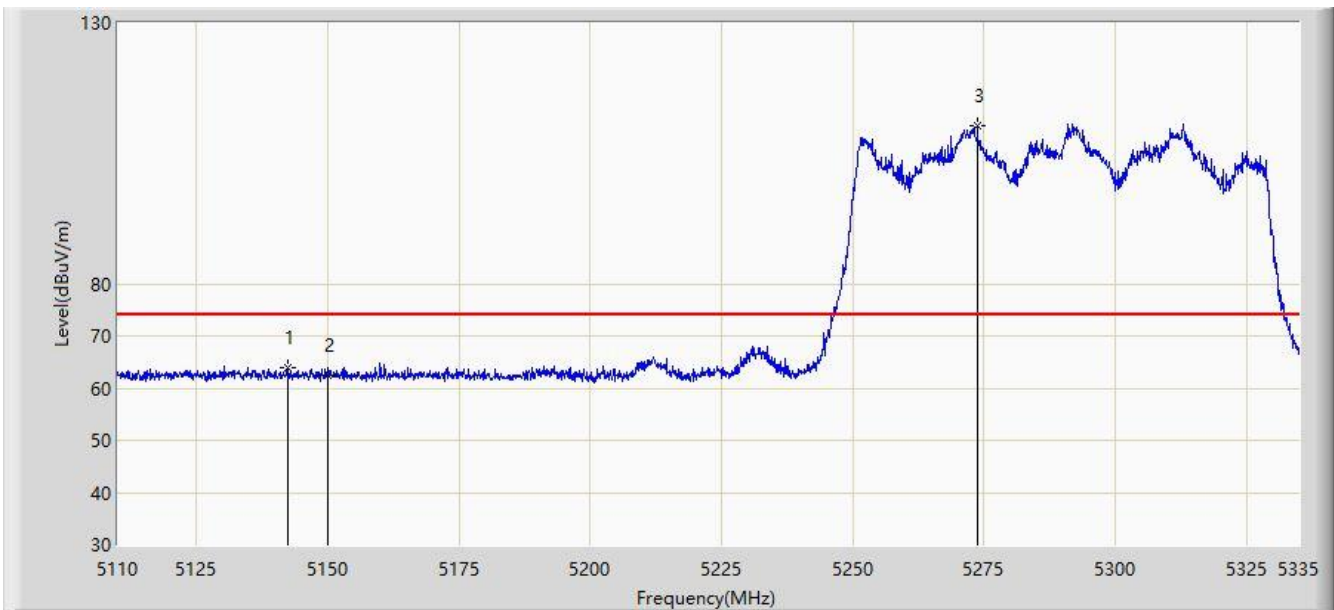


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.400	63.774	55.227	-10.226	74.000	8.547	PK
2			5150.000	62.413	53.885	-11.587	74.000	8.528	PK
3		*	5273.800	110.321	102.173	36.321	74.000	8.148	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 16:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at channel 5290MHz	

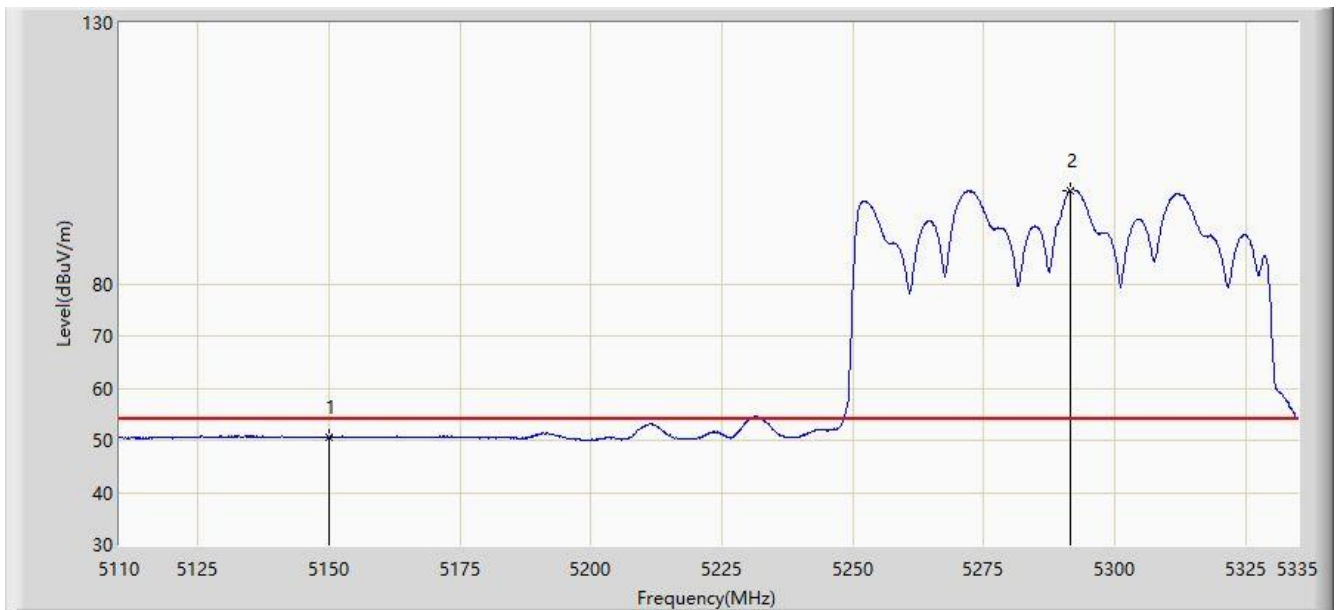


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.634	42.106	-3.366	54.000	8.528	AV
2		*	5291.687	97.876	89.695	43.876	54.000	8.181	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

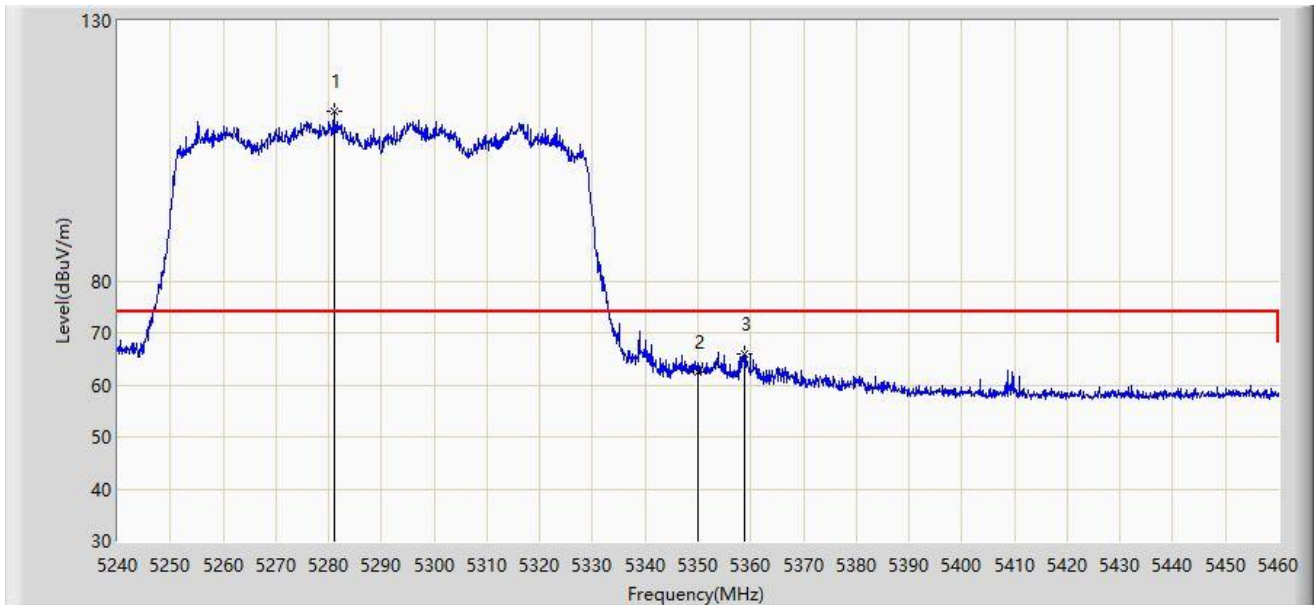


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.030	112.653	109.168	N/A	N/A	3.486	PK
2			5350.000	62.517	58.817	-11.483	74.000	3.701	PK
3			5358.690	65.856	62.109	-8.144	74.000	3.747	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

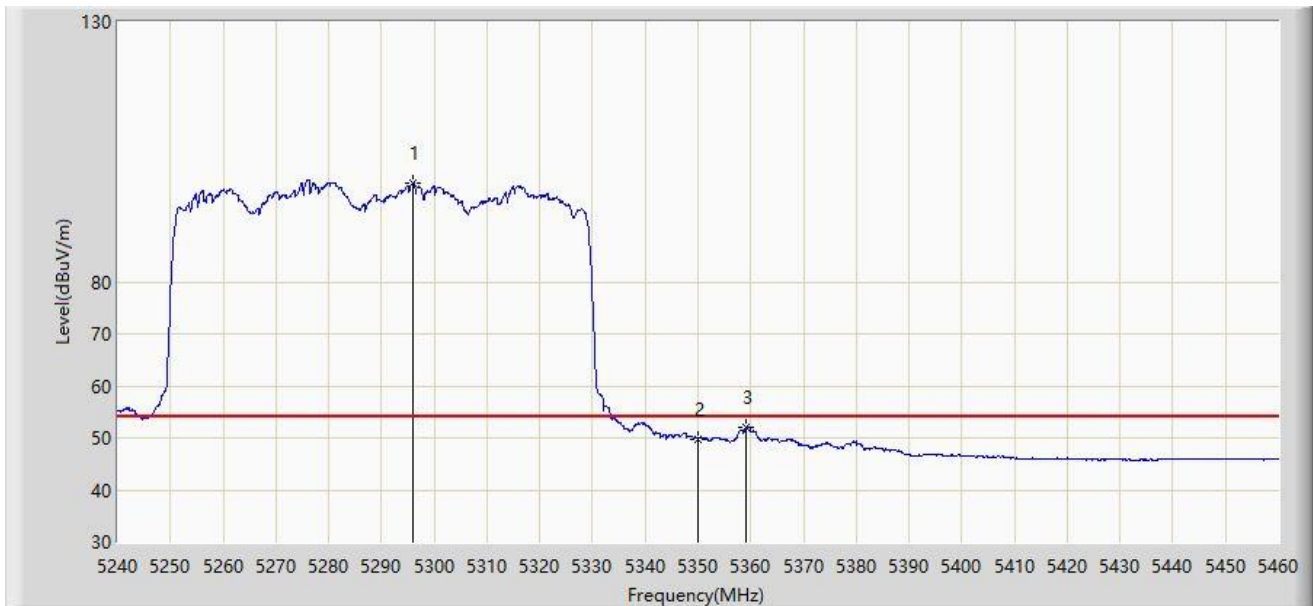


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5296.100	99.120	95.719	N/A	N/A	3.401	AV
2			5350.000	49.642	45.942	-4.358	54.000	3.701	AV
3			5359.130	51.925	48.175	-2.075	54.000	3.750	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:45
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

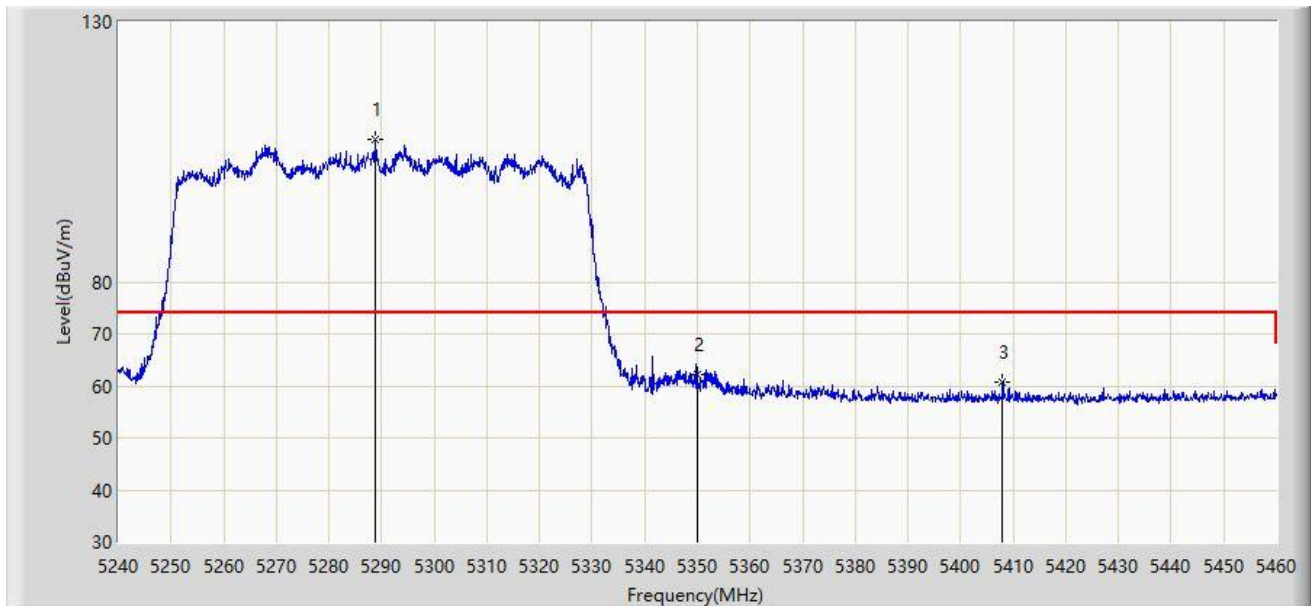


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5288.840	107.282	103.831	N/A	N/A	3.450	PK
2			5350.000	62.089	58.389	-11.911	74.000	3.701	PK
3			5407.970	60.739	56.667	-13.261	74.000	4.071	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

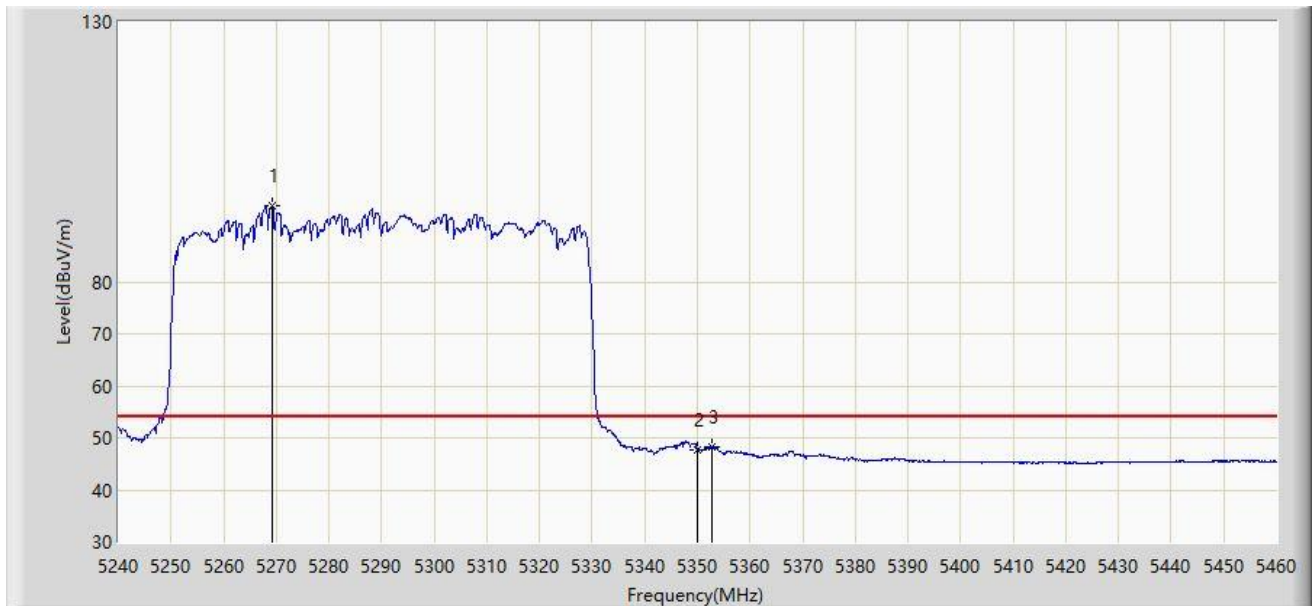


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5269.260	94.498	91.006	N/A	N/A	3.492	AV
2			5350.000	47.671	43.971	-6.329	54.000	3.701	AV
3			5352.750	48.191	44.480	-5.809	54.000	3.712	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:48
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

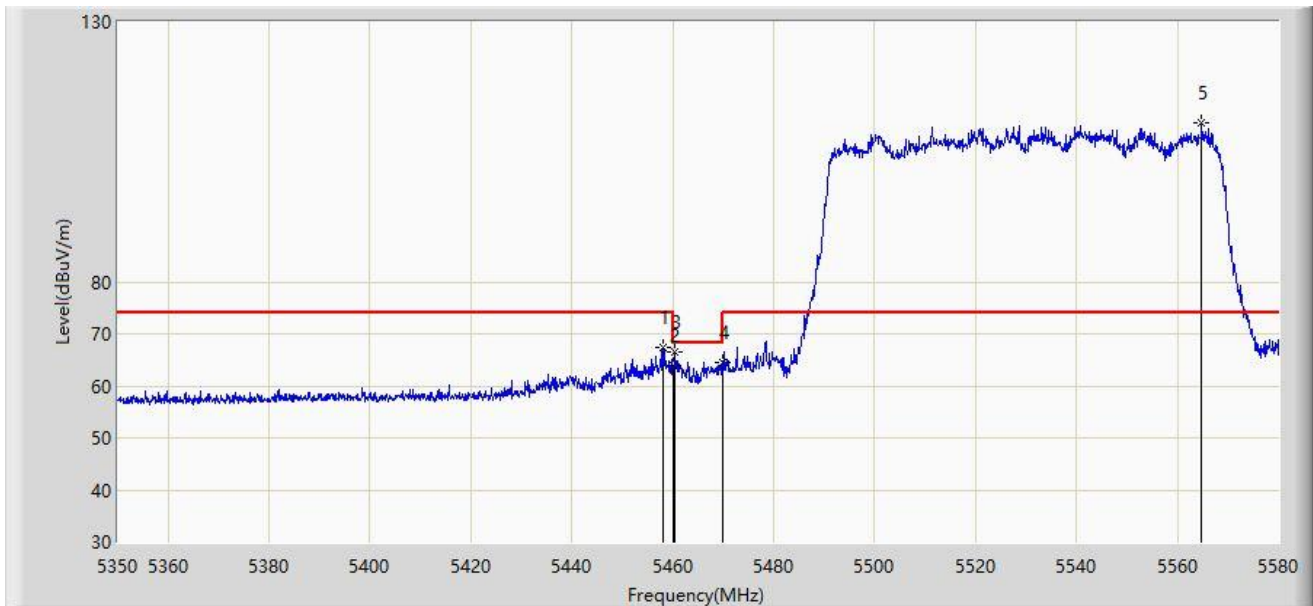


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.985	67.513	63.400	-6.487	74.000	4.113	PK
2			5460.000	63.776	59.681	-10.224	74.000	4.095	PK
3			5460.515	66.386	62.296	-1.814	68.200	4.091	PK
4			5470.000	64.450	60.445	-3.750	68.200	4.005	PK
5		*	5564.820	110.482	106.142	N/A	N/A	4.341	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

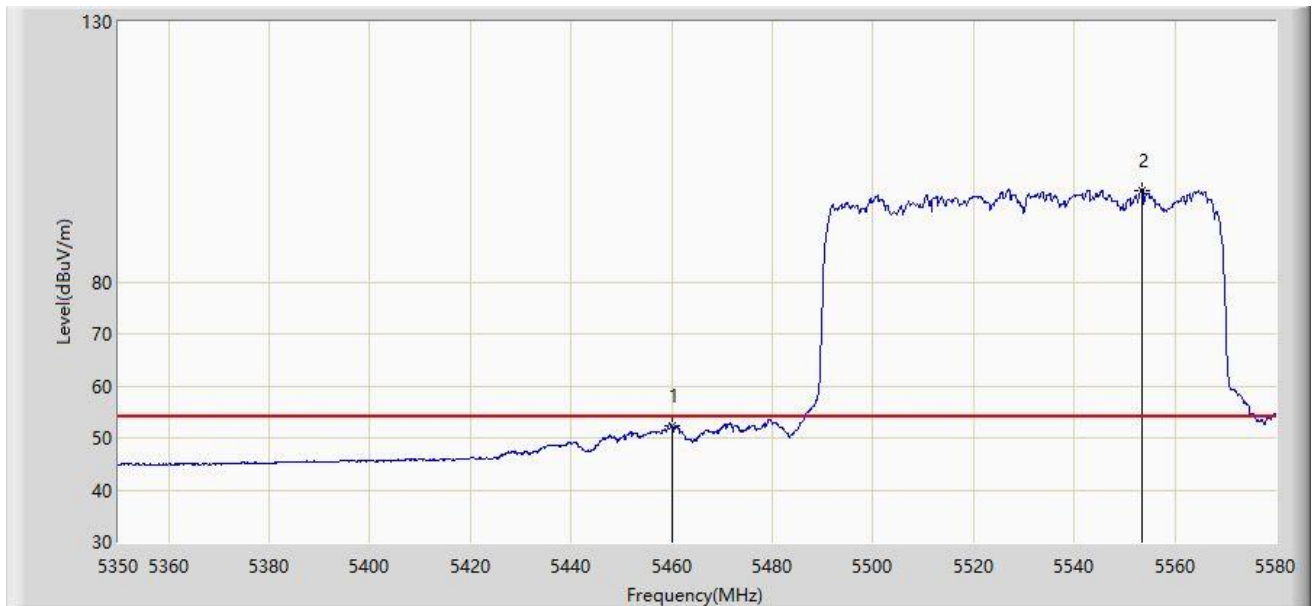


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	52.373	48.278	-1.627	54.000	4.095	AV
2		*	5553.435	97.638	93.335	N/A	N/A	4.303	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

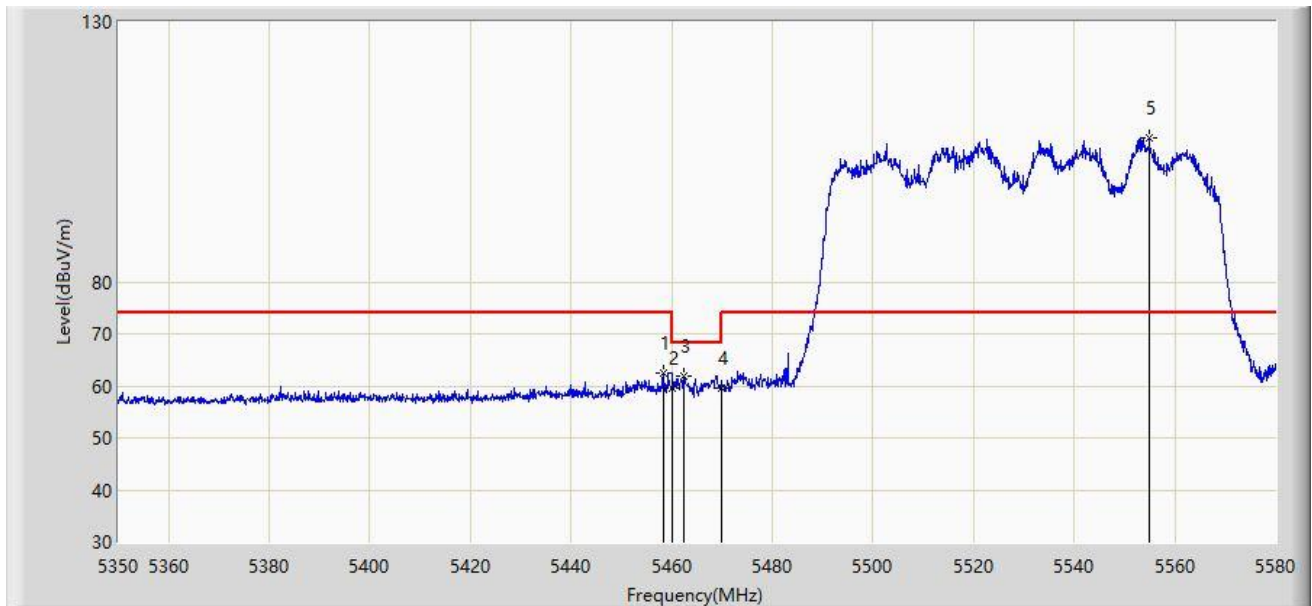


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.330	62.473	58.363	-11.527	74.000	4.110	PK
2			5460.000	59.655	55.560	-14.345	74.000	4.095	PK
3			5462.470	61.858	57.785	-6.342	68.200	4.073	PK
4			5470.000	59.656	55.651	-8.544	68.200	4.005	PK
5		*	5554.930	107.568	103.246	N/A	N/A	4.322	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

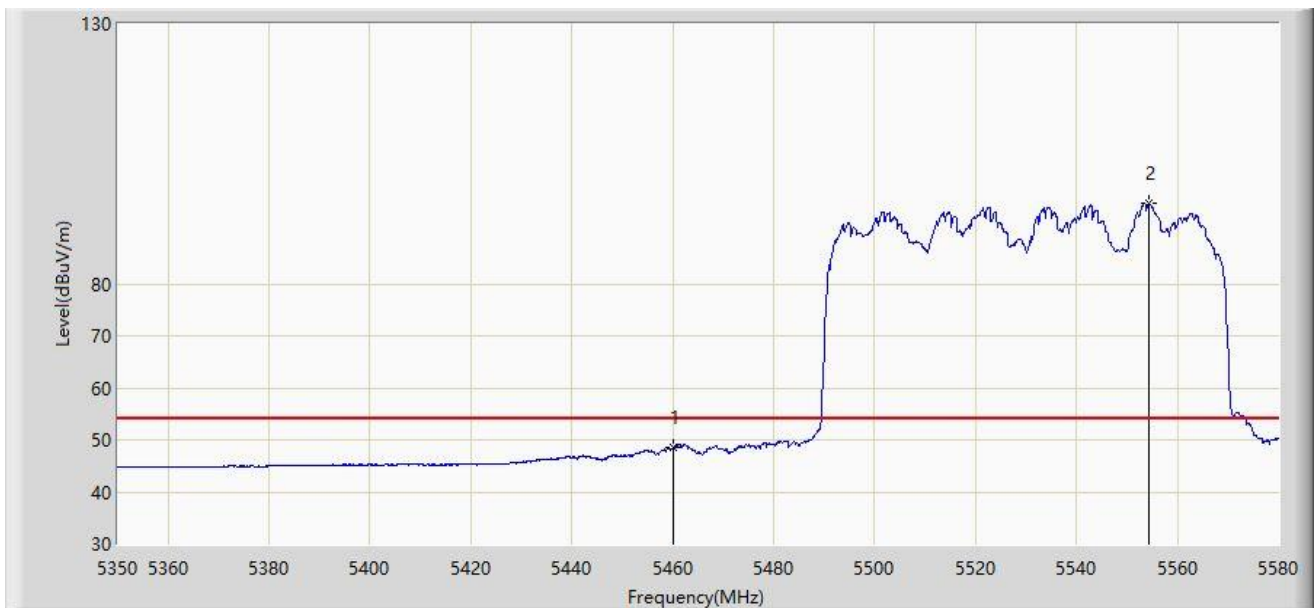


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.439	44.344	-5.561	54.000	4.095	AV
2		*	5554.470	95.398	91.082	N/A	N/A	4.315	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 14:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz	

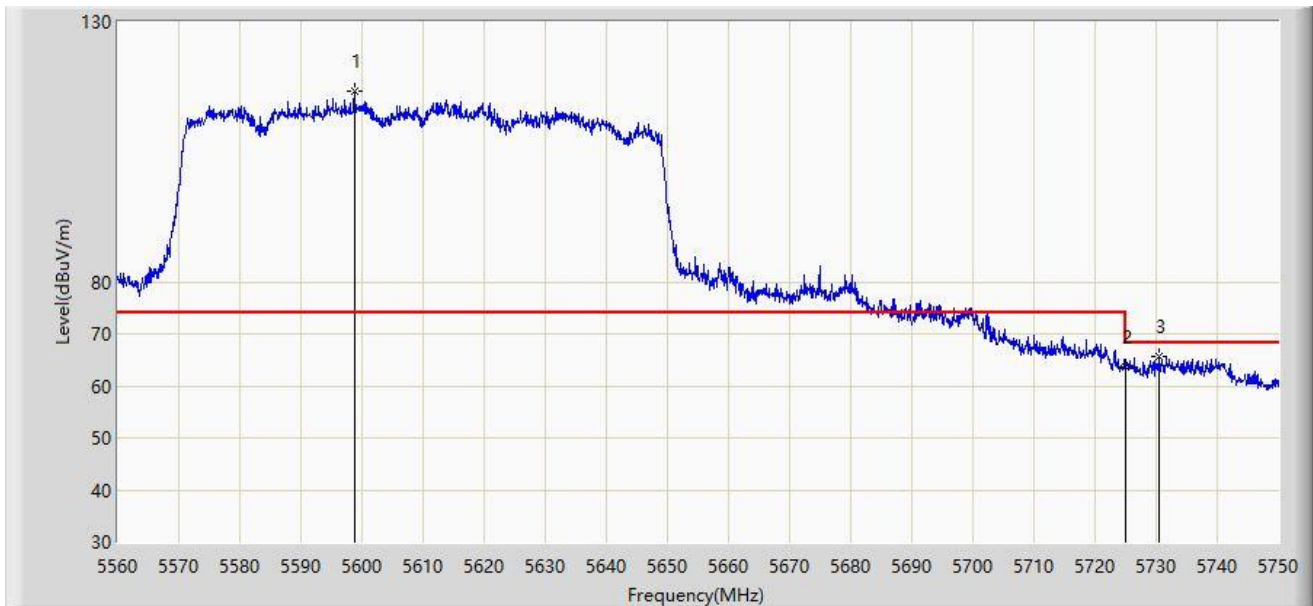


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5598.760	116.728	112.330	N/A	N/A	4.399	PK
2			5725.000	63.754	58.733	-4.446	68.200	5.021	PK
3			5730.525	65.608	60.548	-2.592	68.200	5.060	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/10/05 - 15:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz	

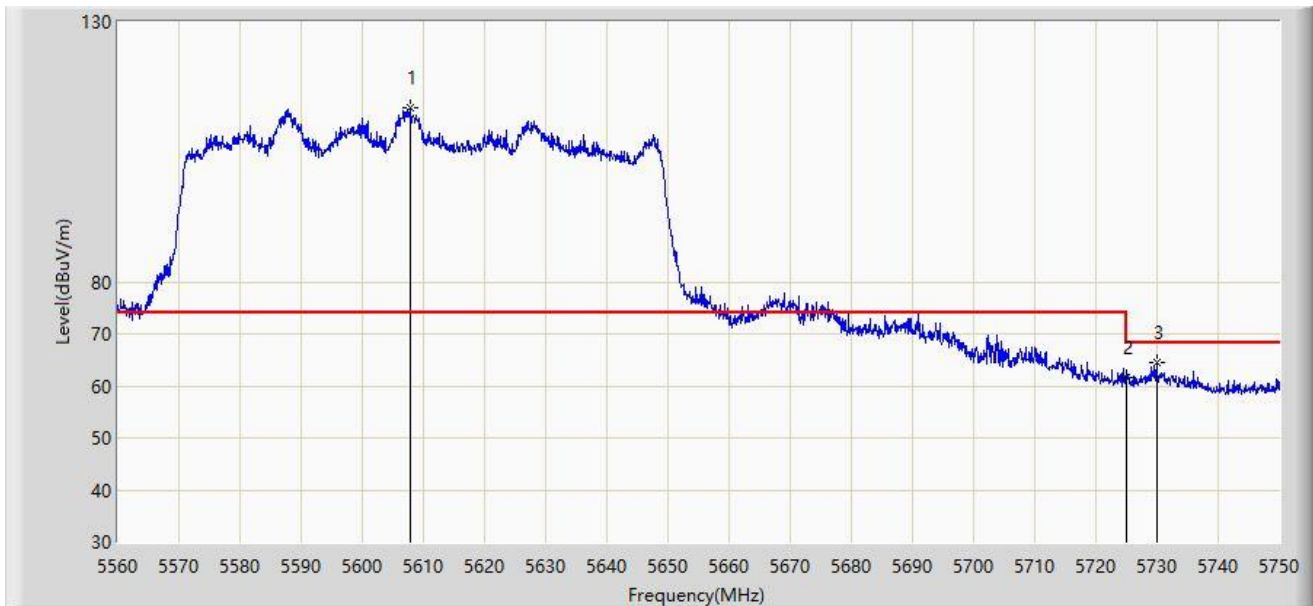


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5607.785	113.375	108.854	N/A	N/A	4.520	PK
2			5725.000	61.454	56.433	-6.746	68.200	5.021	PK
3			5729.955	64.395	59.337	-3.805	68.200	5.058	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5210MHz + 5290MHz	

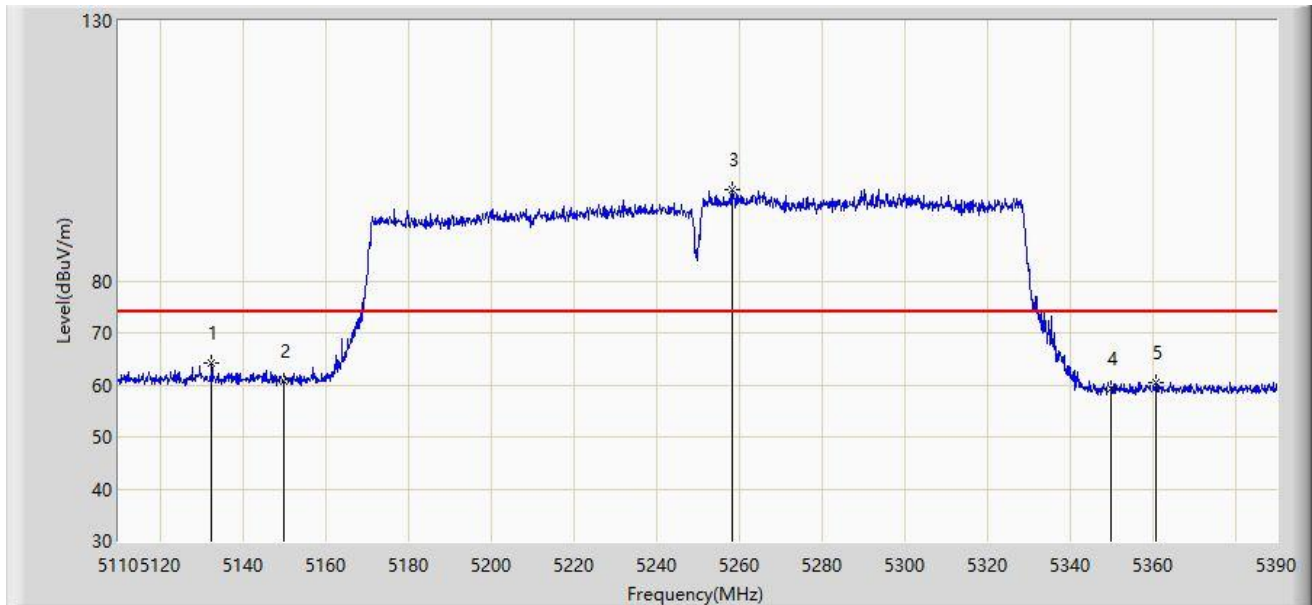


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5132.540	64.139	57.518	-9.861	74.000	6.621	PK
2		5150.000	60.709	54.312	-13.291	74.000	6.398	PK
3	*	5258.260	97.481	91.106	N/A	N/A	6.375	PK
4		5350.000	59.344	53.017	-14.656	74.000	6.327	PK
5		5361.020	60.448	54.055	-13.552	74.000	6.393	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5210MHz + 5290MHz	

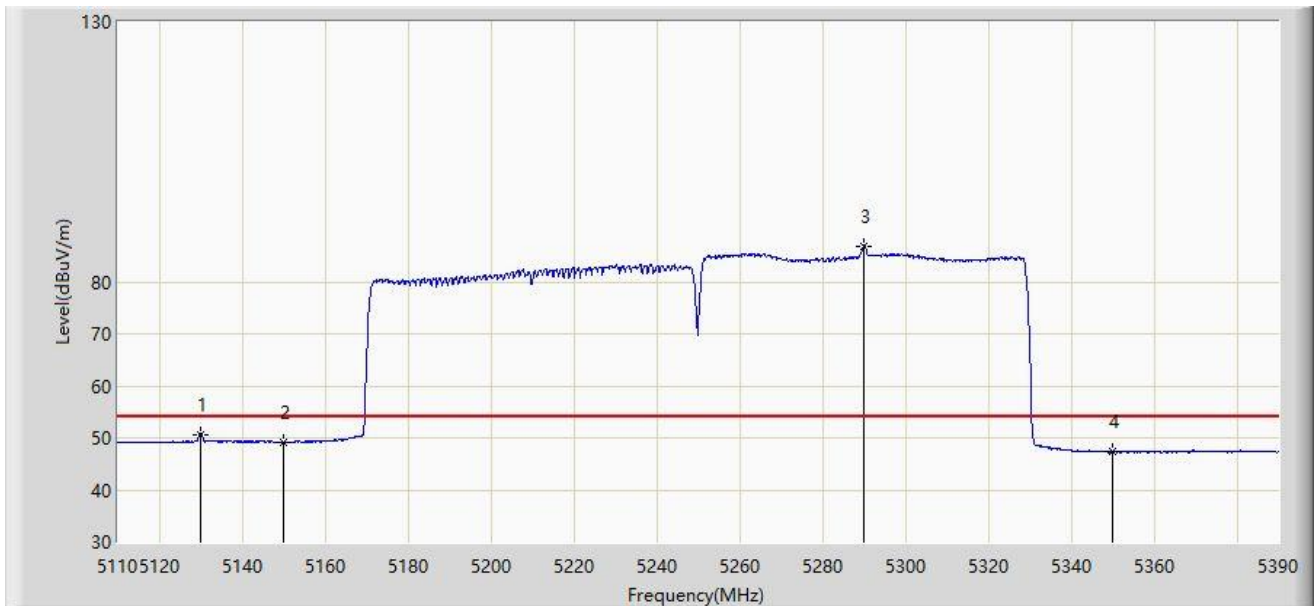


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5129.880	50.695	44.063	-3.305	54.000	6.632	AV
2		5150.000	49.252	42.855	-4.748	54.000	6.398	AV
3	*	5289.900	86.826	80.580	N/A	N/A	6.247	AV
4		5350.000	47.332	41.005	-6.668	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5210MHz + 5290MHz	

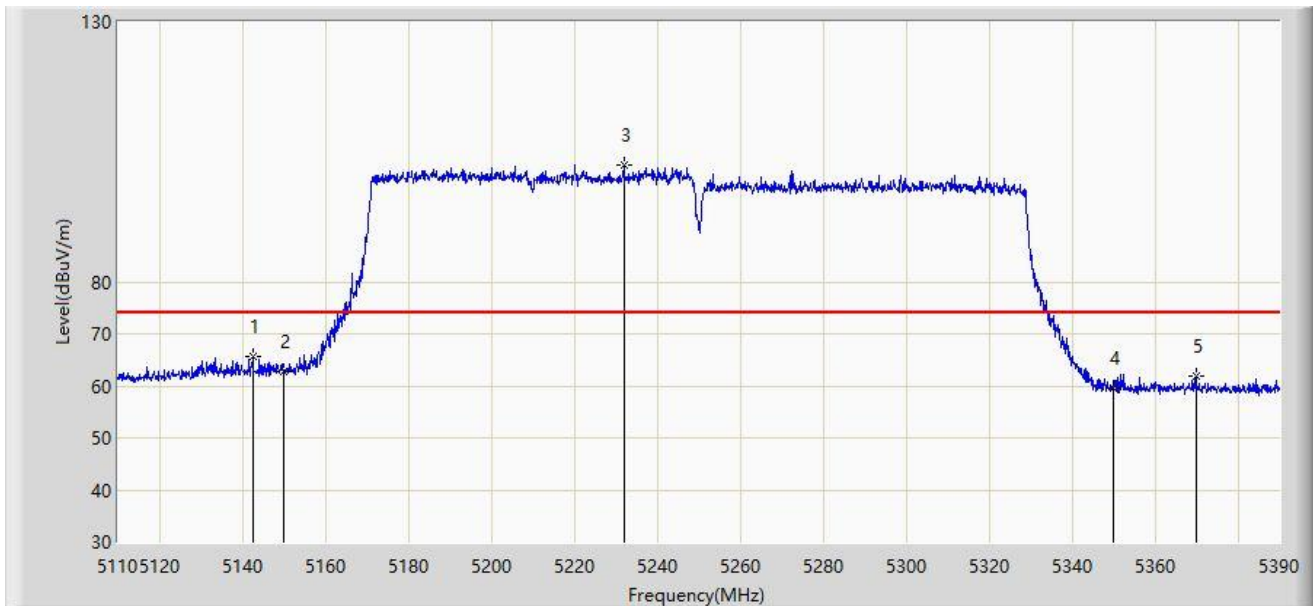


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5142.480	65.585	59.111	-8.415	74.000	6.475	PK
2		5150.000	62.758	56.361	-11.242	74.000	6.398	PK
3	*	5231.940	102.431	96.090	N/A	N/A	6.341	PK
4		5350.000	59.478	53.151	-14.522	74.000	6.327	PK
5		5369.840	61.896	55.443	-12.104	74.000	6.453	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5210MHz + 5290MHz	

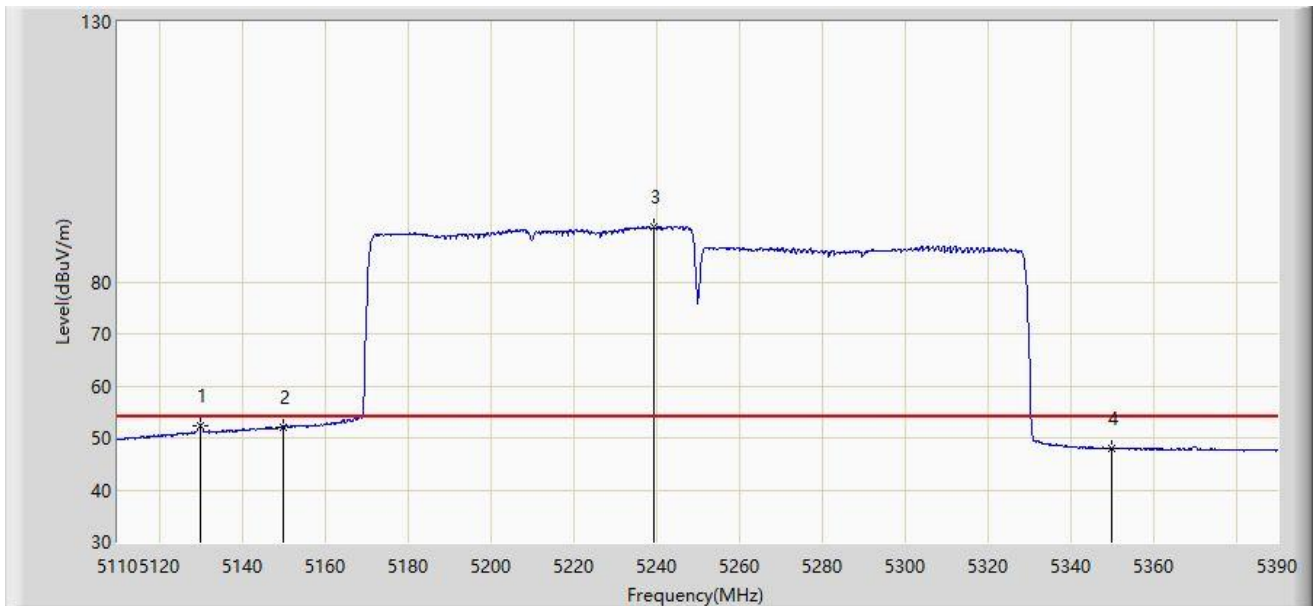


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5129.880	52.265	45.633	-1.735	54.000	6.632	AV
2		5150.000	52.057	45.660	-1.943	54.000	6.398	AV
3	*	5239.500	90.478	84.099	N/A	N/A	6.379	AV
4		5350.000	47.867	41.540	-6.133	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5530MHz + 5610MHz	

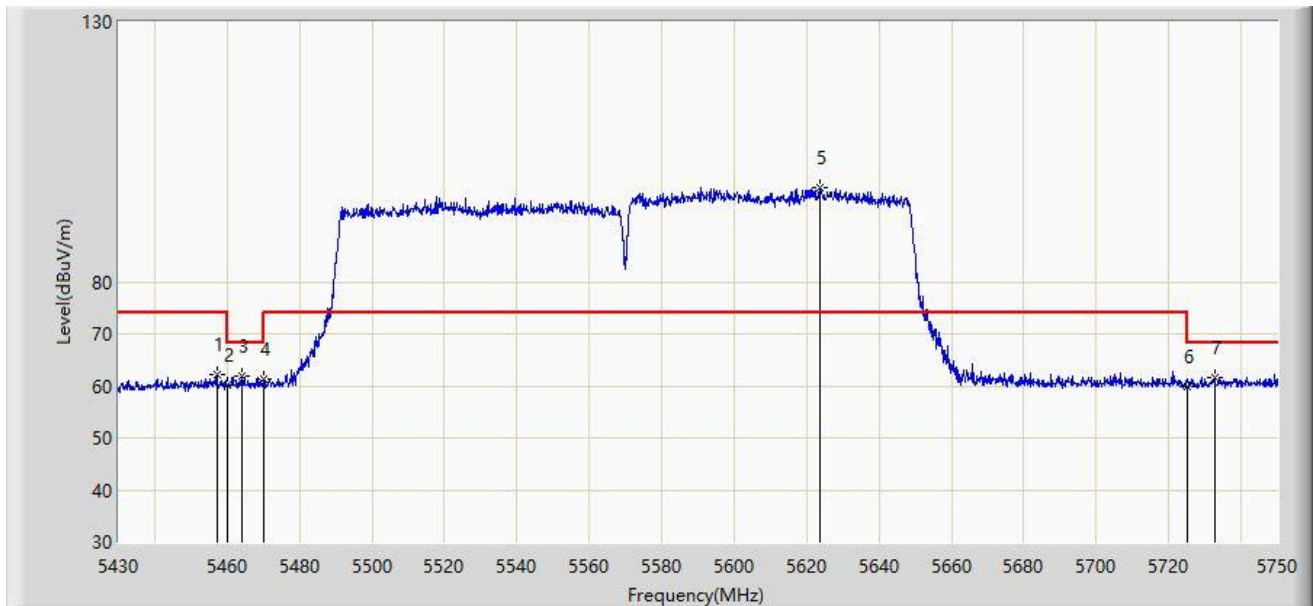


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5457.200	62.275	55.650	-11.725	74.000	6.625	PK
2		5460.000	60.042	53.430	-13.958	74.000	6.612	PK
3		5463.920	61.748	55.153	-6.452	68.200	6.594	PK
4		5470.000	61.199	54.632	-7.001	68.200	6.567	PK
5	*	5623.600	98.222	91.502	N/A	N/A	6.720	PK
6		5725.000	59.809	52.942	-8.391	68.200	6.867	PK
7		5732.560	61.525	54.620	-6.675	68.200	6.905	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5530MHz + 5610MHz	

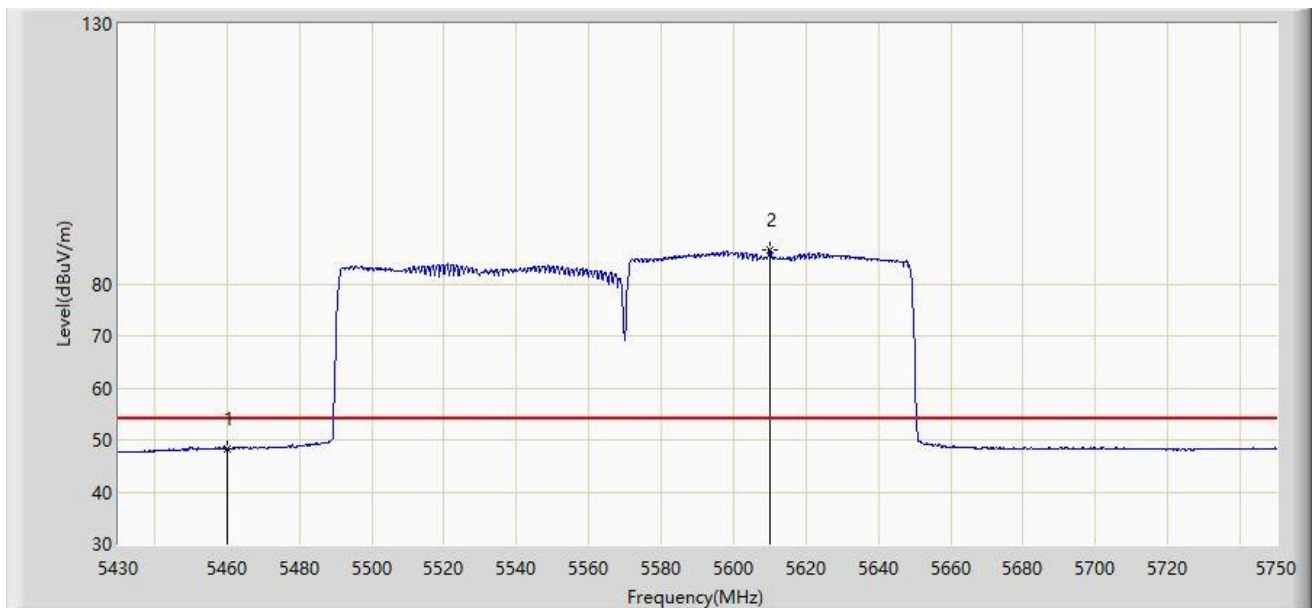


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	48.351	41.739	-5.649	54.000	6.612	AV
2	*	5610.000	86.554	79.883	N/A	N/A	6.671	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5530MHz + 5610MHz	

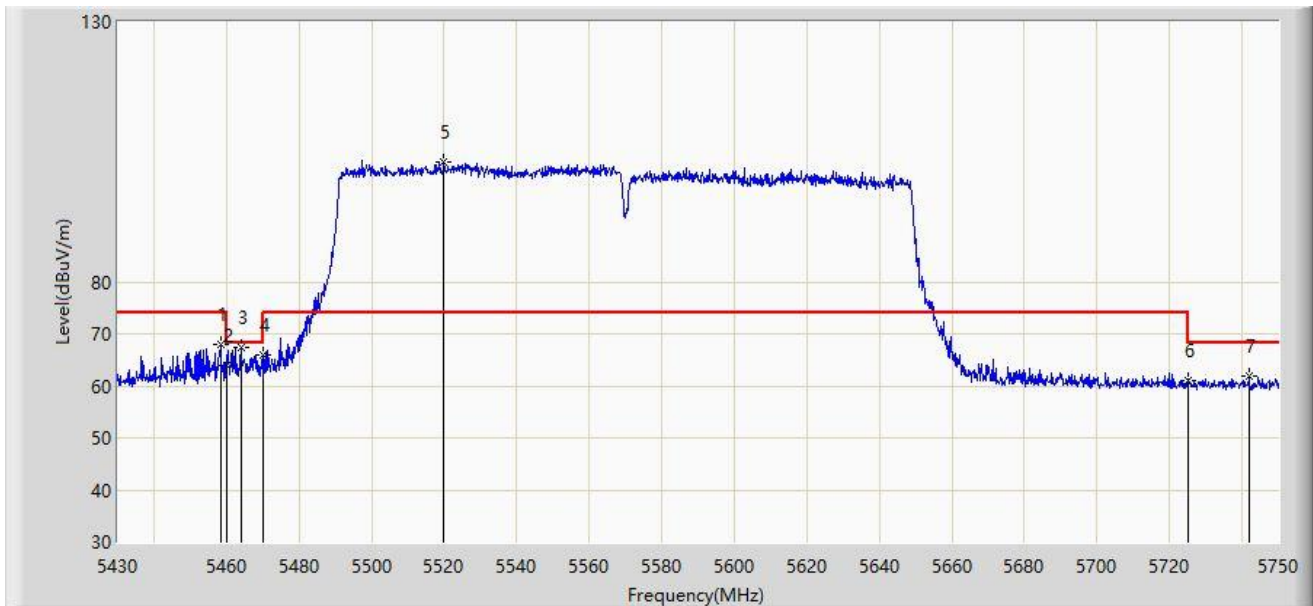


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5458.320	67.928	61.308	-6.072	74.000	6.620	PK
2		5460.000	63.911	57.299	-10.089	74.000	6.612	PK
3		5464.080	67.424	60.830	-0.776	68.200	6.594	PK
4		5470.000	66.057	59.490	-2.143	68.200	6.567	PK
5	*	5519.920	103.062	96.354	N/A	N/A	6.708	PK
6		5725.000	61.024	54.157	-7.176	68.200	6.867	PK
7		5742.000	61.994	55.025	-6.206	68.200	6.969	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5530MHz + 5610MHz	

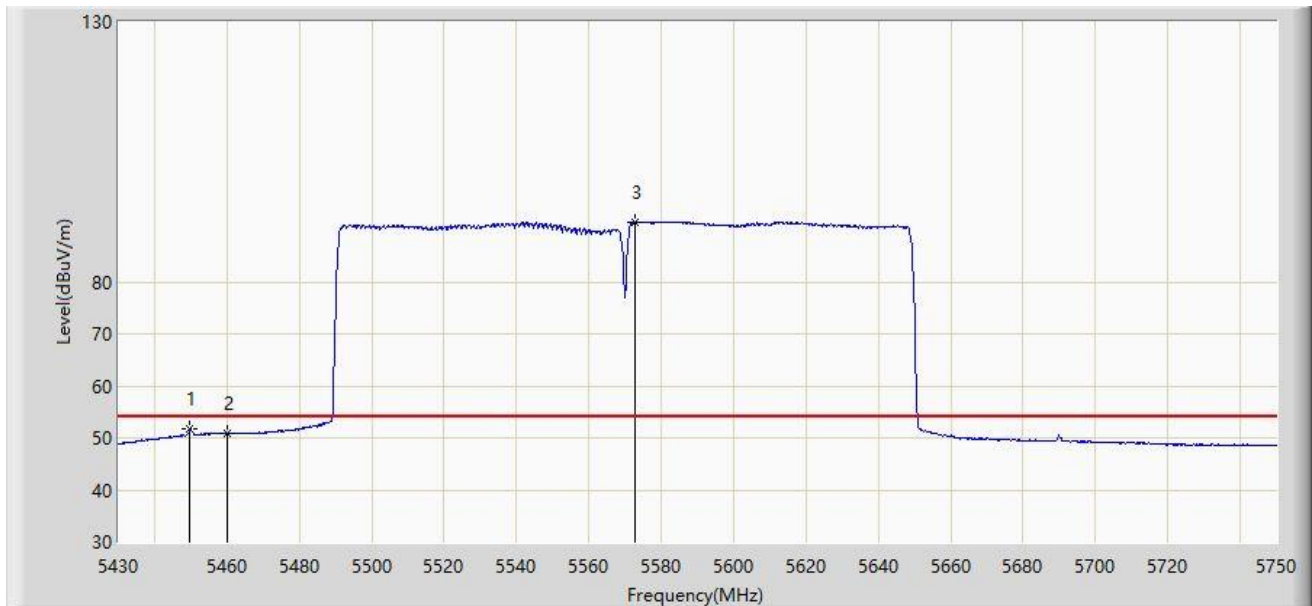


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5449.840	51.662	45.040	-2.338	54.000	6.622	AV
2		5460.000	50.918	44.306	-3.082	54.000	6.612	AV
3	*	5572.720	91.510	84.736	N/A	N/A	6.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

For OAW-AP1322 CDD Mode

Site: AC1	Time: 2020/02/21 - 16:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11a at channel 5320MHz	

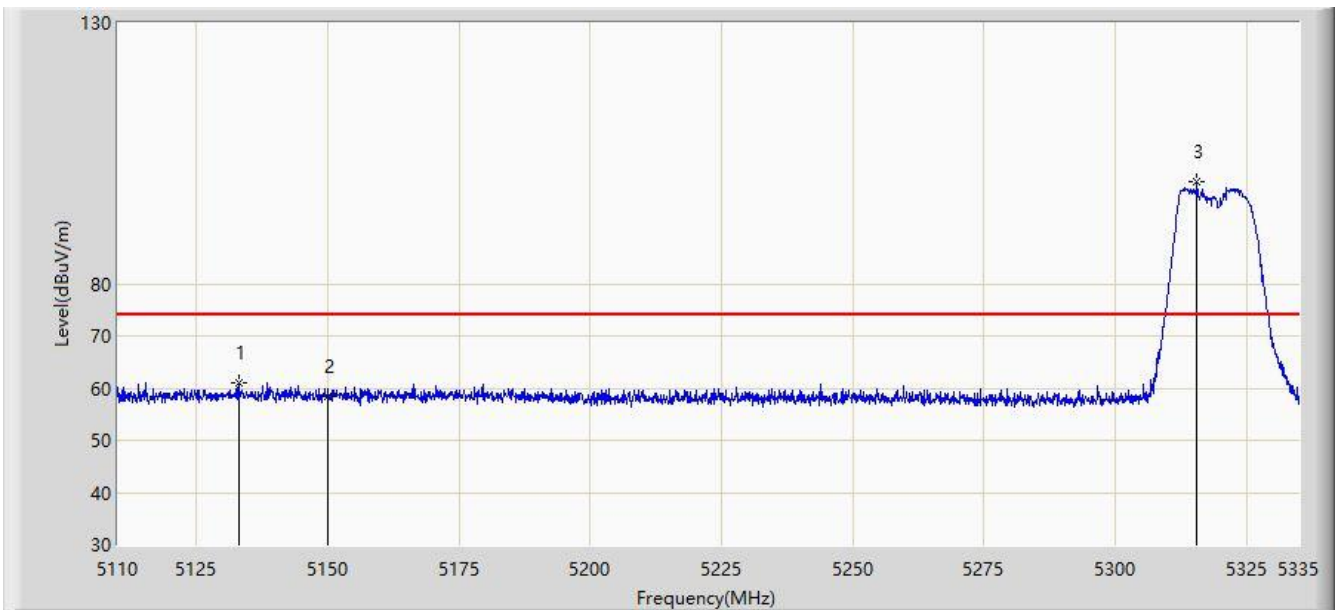


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.062	60.923	52.318	-13.077	74.000	8.604	PK
2			5150.000	58.335	49.807	-15.665	74.000	8.528	PK
3		*	5315.650	99.462	91.053	25.462	74.000	8.410	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11a at channel 5320MHz	

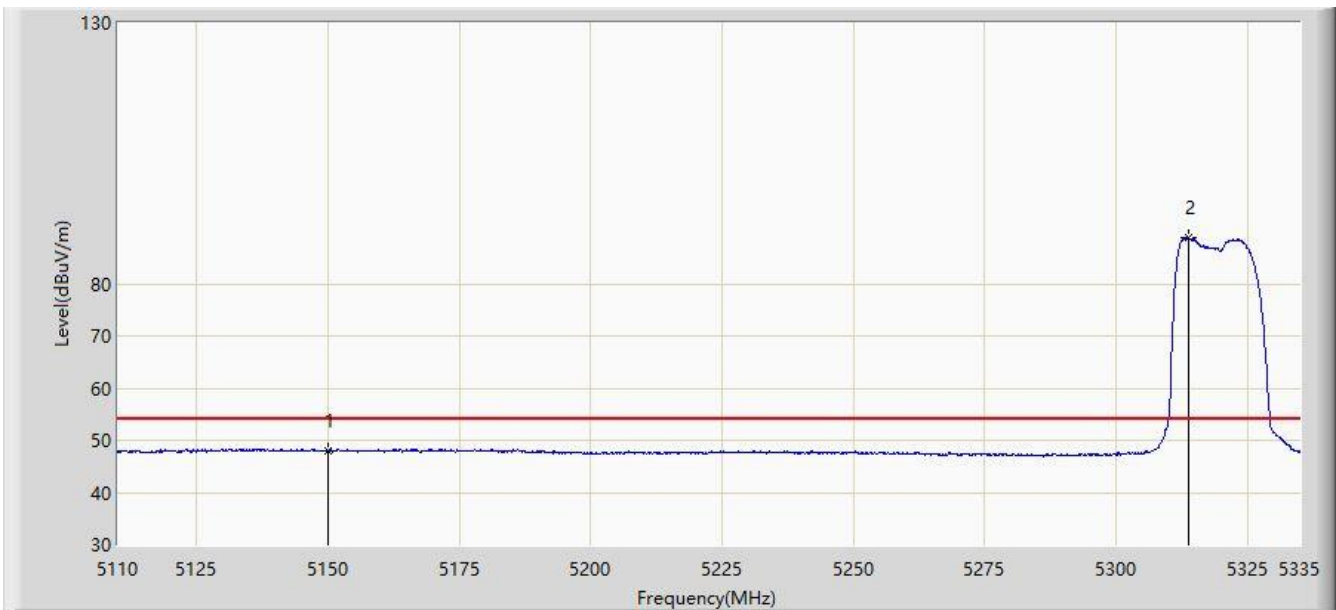


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.907	39.379	-6.093	54.000	8.528	AV
2		*	5313.737	88.863	80.471	34.863	54.000	8.393	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11a at channel 5320MHz	

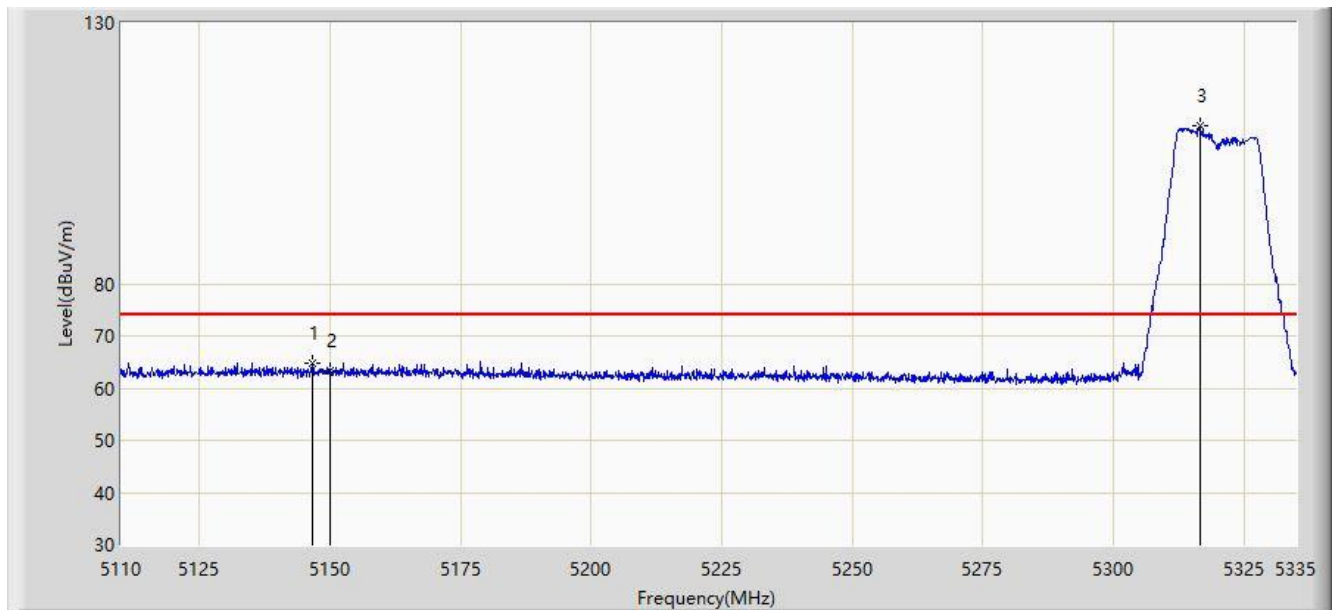


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.562	64.655	56.134	-9.345	74.000	8.522	PK
2			5150.000	63.421	54.893	-10.579	74.000	8.528	PK
3		*	5316.663	110.256	101.838	36.256	74.000	8.418	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11a at channel 5320MHz	

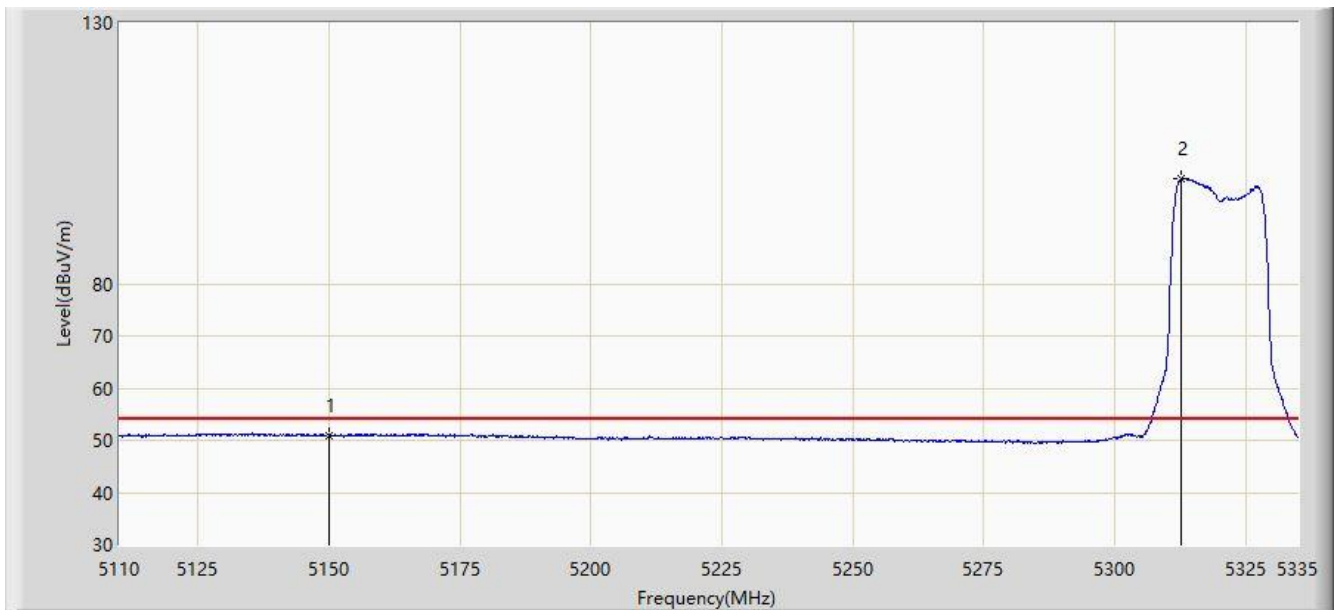


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.955	42.427	-3.045	54.000	8.528	AV
2		*	5312.725	100.225	91.842	46.225	54.000	8.383	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 07:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz	

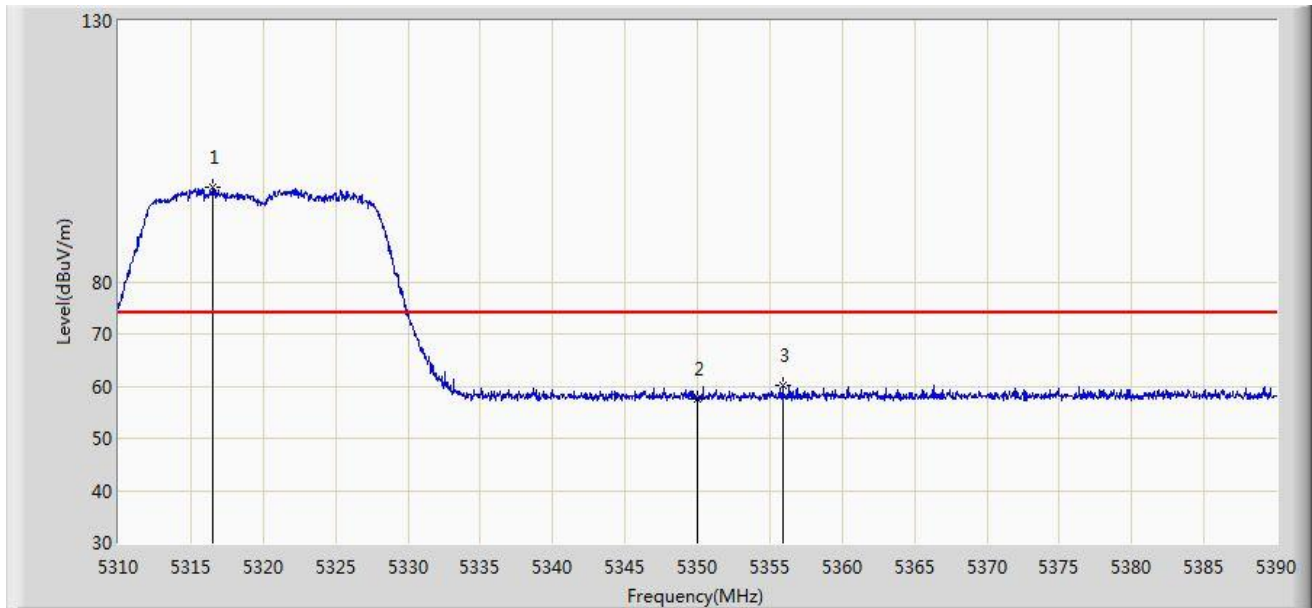


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.480	98.034	91.691	N/A	N/A	6.343	PK
2			5350.000	57.618	51.291	-16.382	74.000	6.327	PK
3			5355.880	60.169	53.814	-13.831	74.000	6.355	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 07:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz	

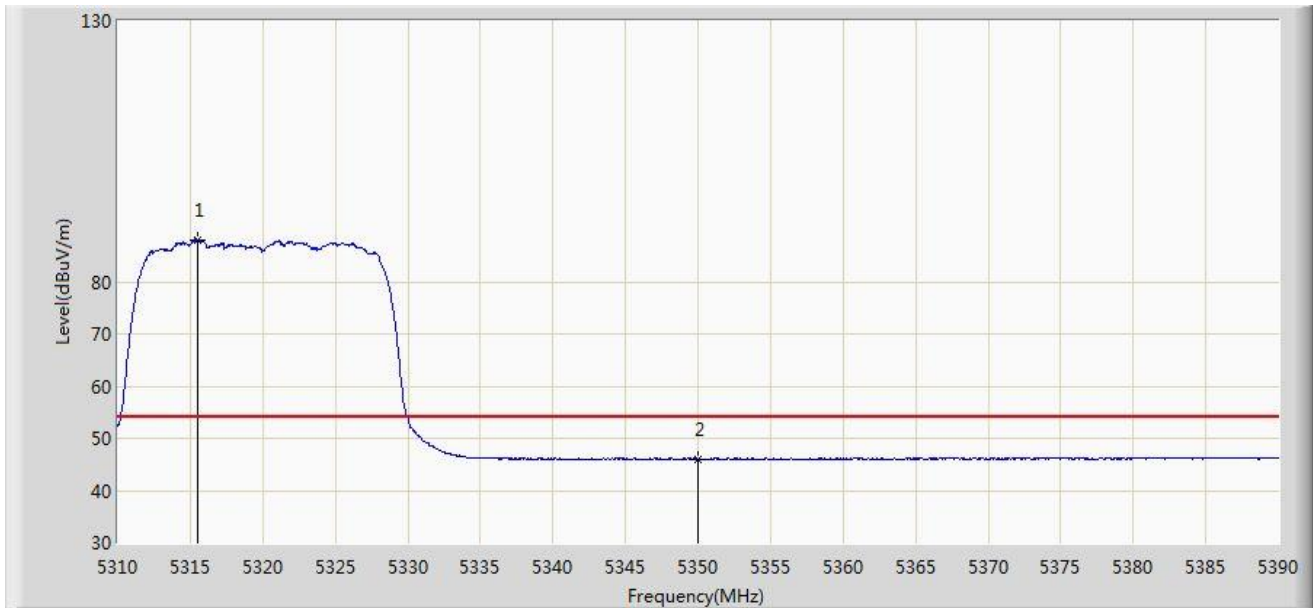


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.560	87.996	81.657	N/A	N/A	6.340	AV
2			5350.000	45.960	39.633	-8.040	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 07:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz	

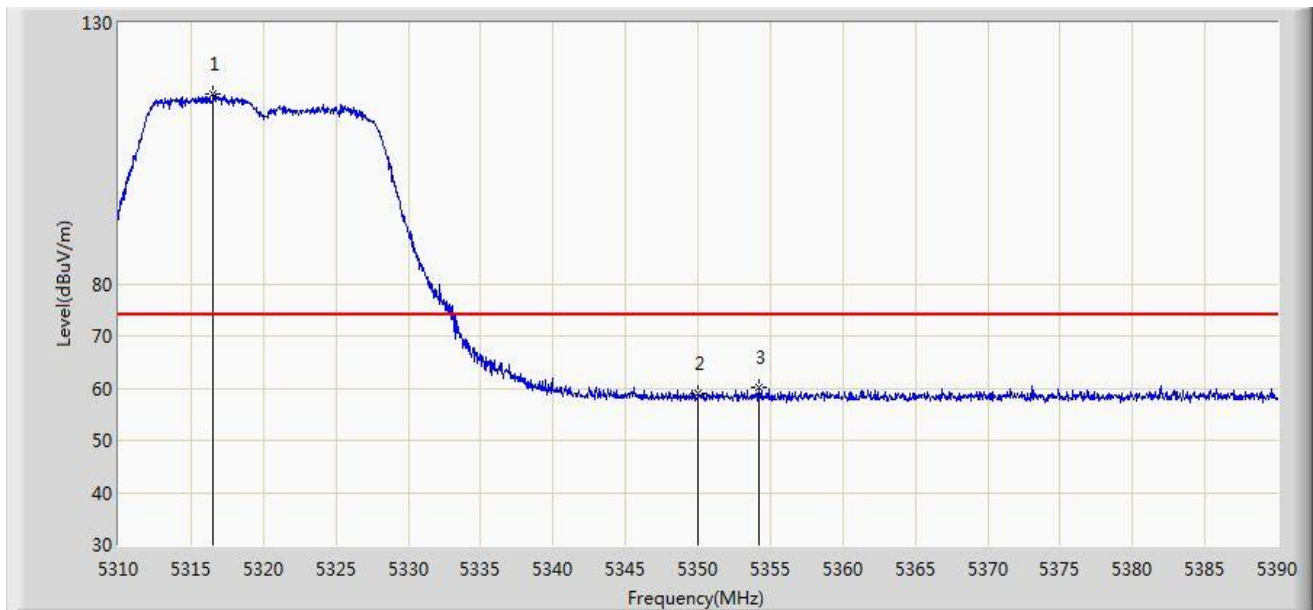


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.560	116.317	109.974	N/A	N/A	6.344	PK
2			5350.000	59.063	52.736	-14.937	74.000	6.327	PK
3			5354.240	60.181	53.838	-13.819	74.000	6.343	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 07:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz	

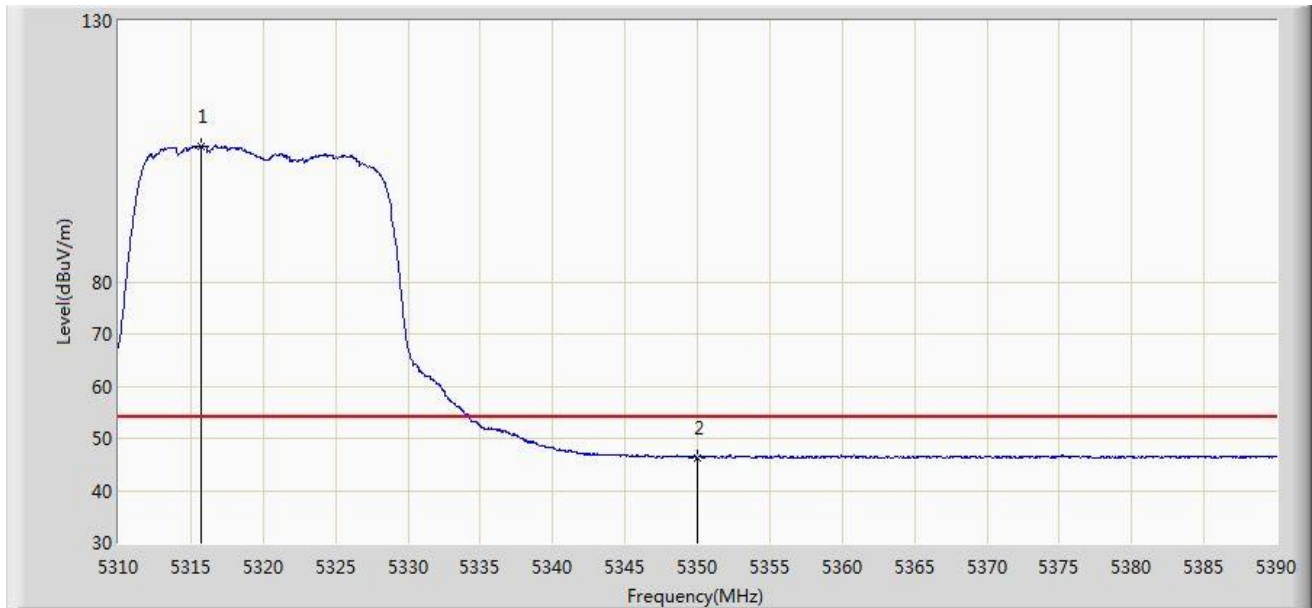


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.680	105.934	99.594	N/A	N/A	6.339	AV
2			5350.000	46.340	40.013	-7.660	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 07:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz	

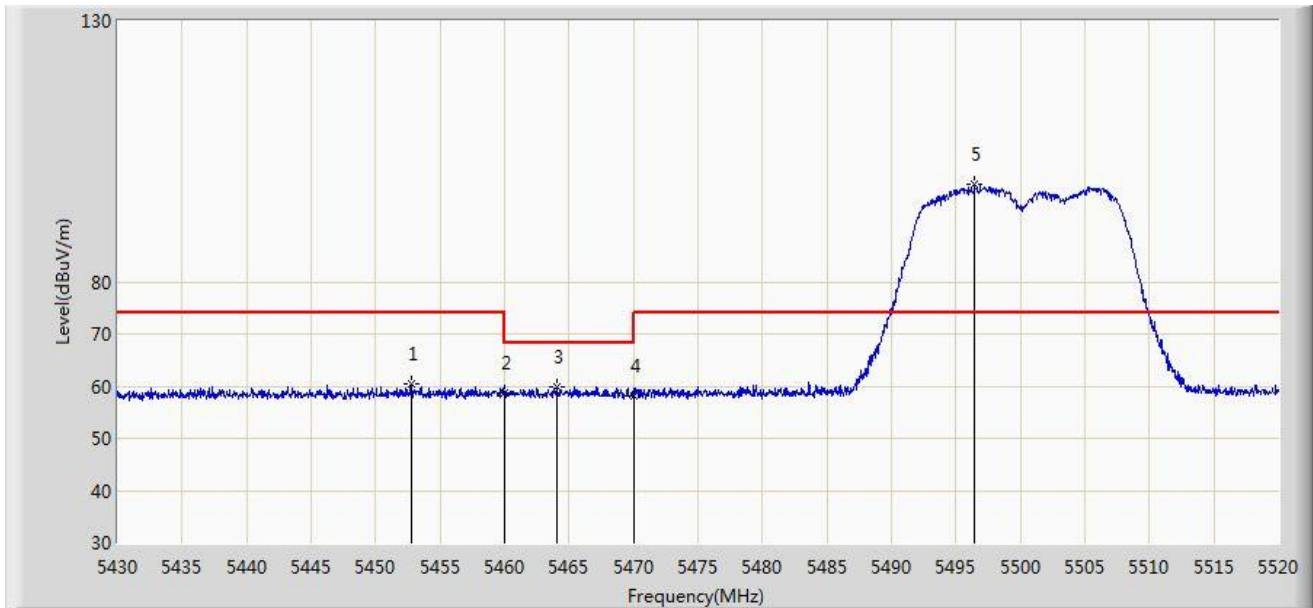


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.770	60.390	53.756	-13.610	74.000	6.633	PK
2			5460.000	58.811	52.199	-15.189	74.000	6.612	PK
3			5464.065	59.755	53.161	-8.445	68.200	6.594	PK
4			5470.000	58.162	51.595	-10.038	68.200	6.567	PK
5		*	5496.420	98.622	91.940	N/A	N/A	6.681	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz	

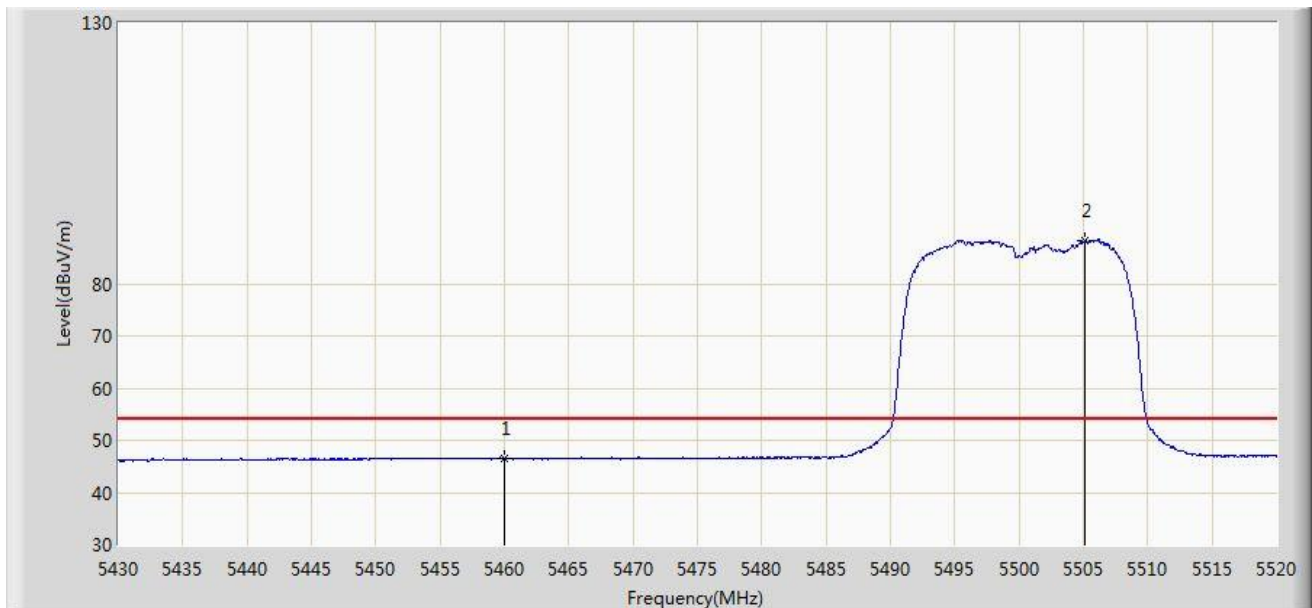


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.383	39.771	-7.617	54.000	6.612	AV
2		*	5505.105	88.235	81.492	N/A	N/A	6.744	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz	

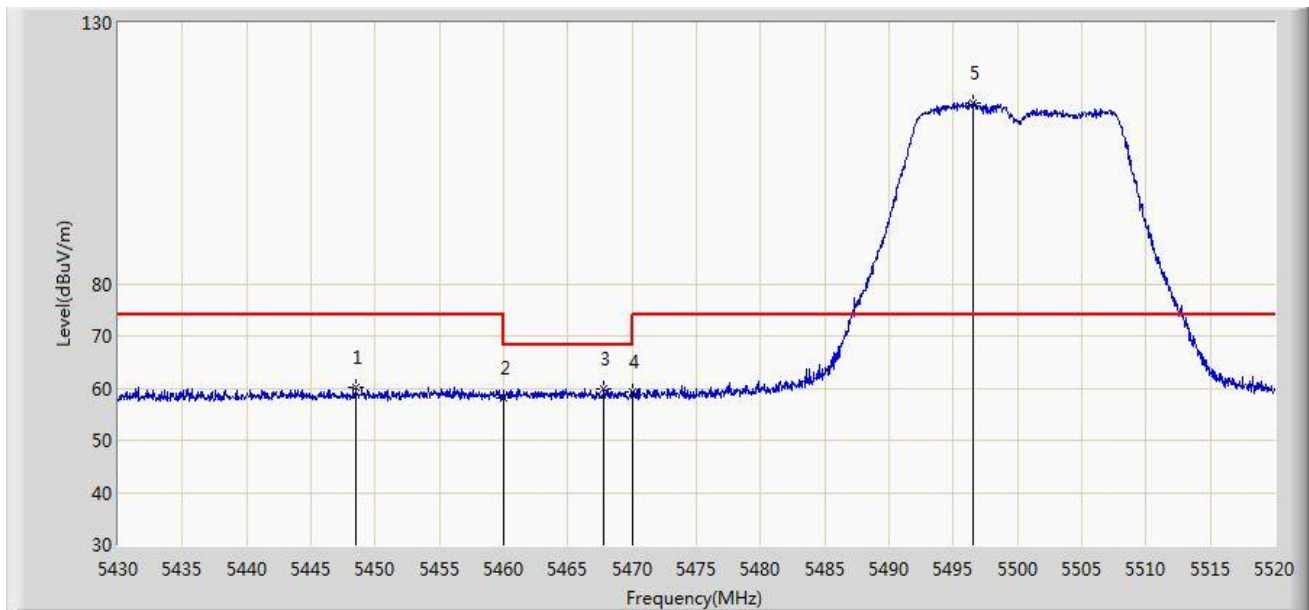


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.495	60.124	53.507	-13.876	74.000	6.617	PK
2			5460.000	58.214	51.602	-15.786	74.000	6.612	PK
3			5467.800	59.747	53.170	-8.453	68.200	6.577	PK
4			5470.000	59.262	52.695	-8.938	68.200	6.567	PK
5		*	5496.555	114.760	108.077	N/A	N/A	6.683	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz	

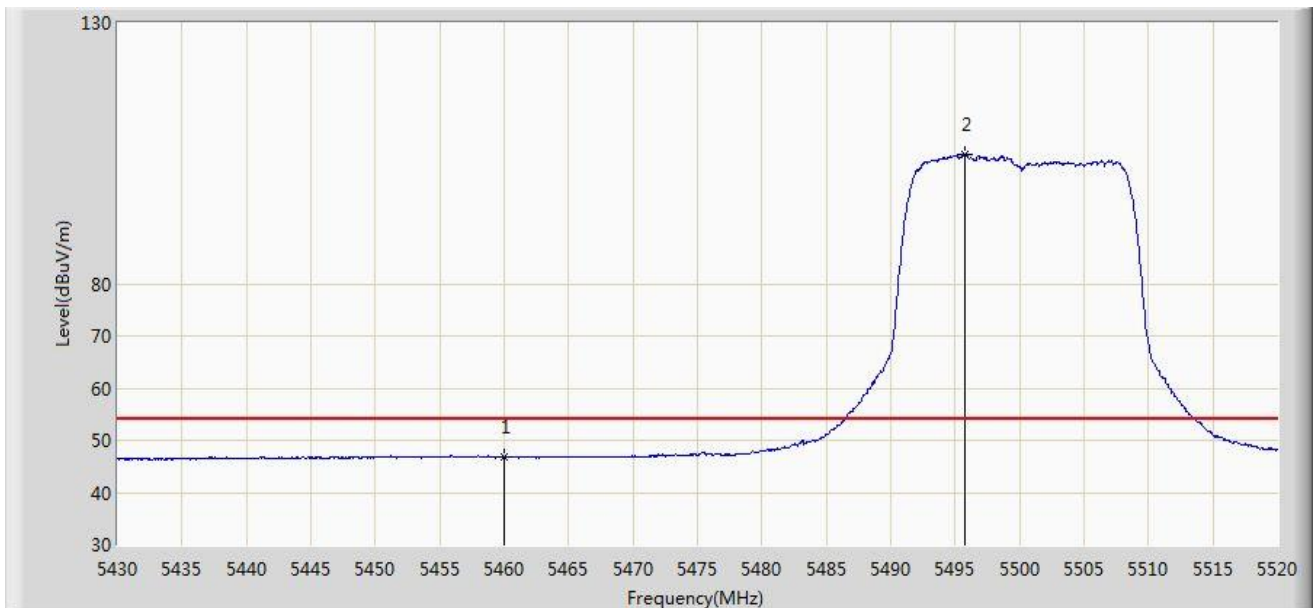


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.847	40.235	-7.153	54.000	6.612	AV
2		*	5495.745	104.792	98.115	N/A	N/A	6.677	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:04
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz	

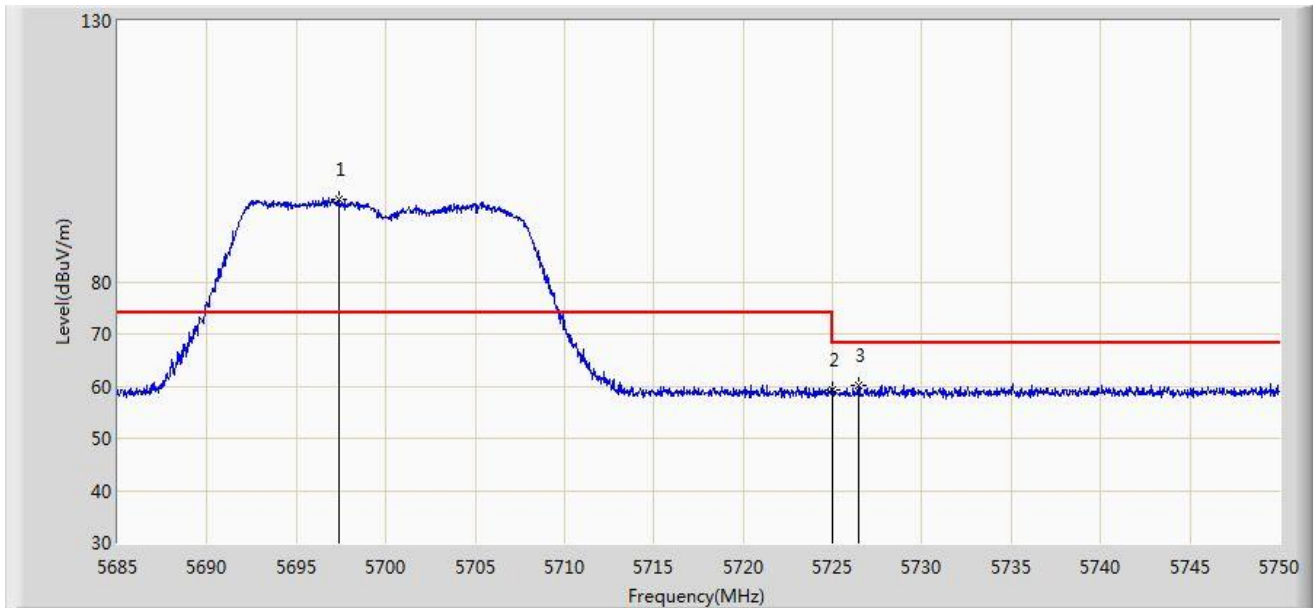


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.350	95.756	88.867	N/A	N/A	6.888	PK
2			5725.000	59.202	52.335	-8.998	68.200	6.867	PK
3			5726.470	60.004	53.141	-8.196	68.200	6.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz	

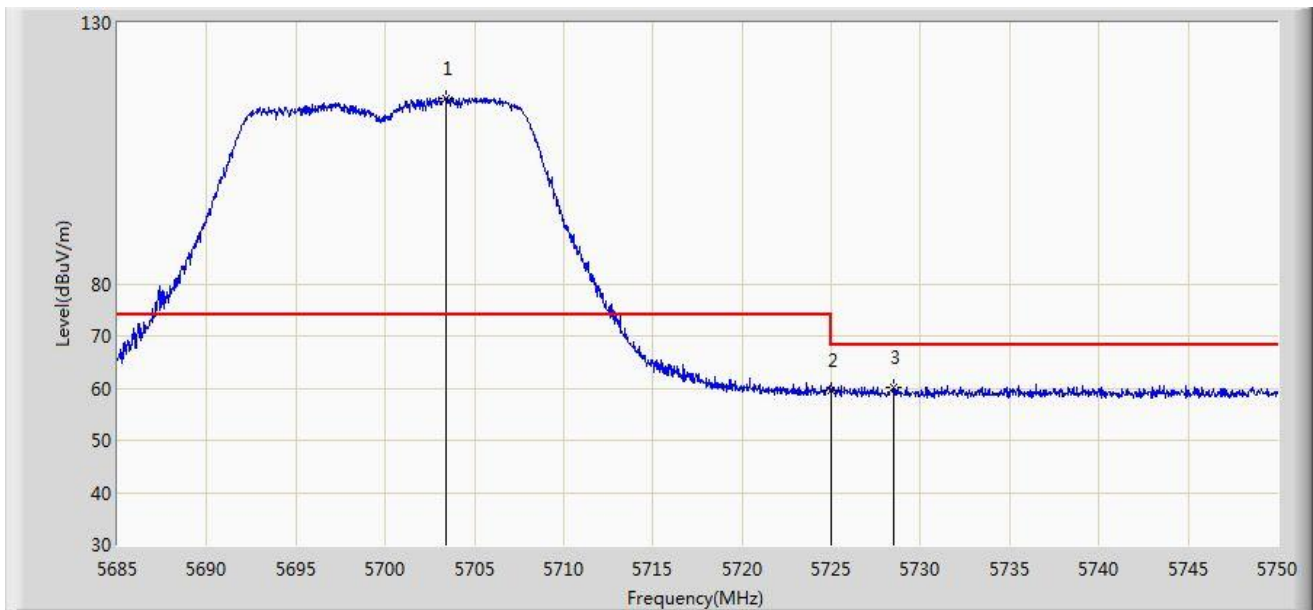


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.395	115.629	108.694	N/A	N/A	6.935	PK
2			5725.000	59.475	52.608	-8.725	68.200	6.867	PK
3			5728.485	60.283	53.406	-7.917	68.200	6.877	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:11
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 5320MHz	

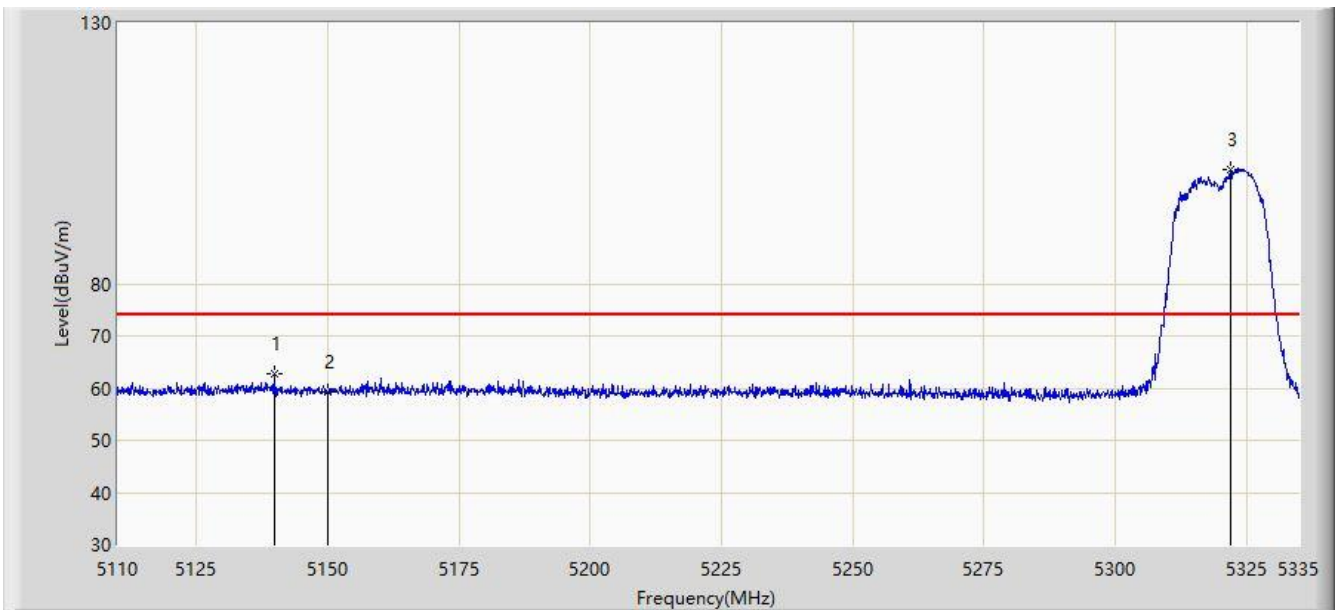


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.812	62.729	54.166	-11.271	74.000	8.563	PK
2			5150.000	59.142	50.614	-14.858	74.000	8.528	PK
3		*	5321.950	101.799	93.359	27.799	74.000	8.440	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 5320MHz	

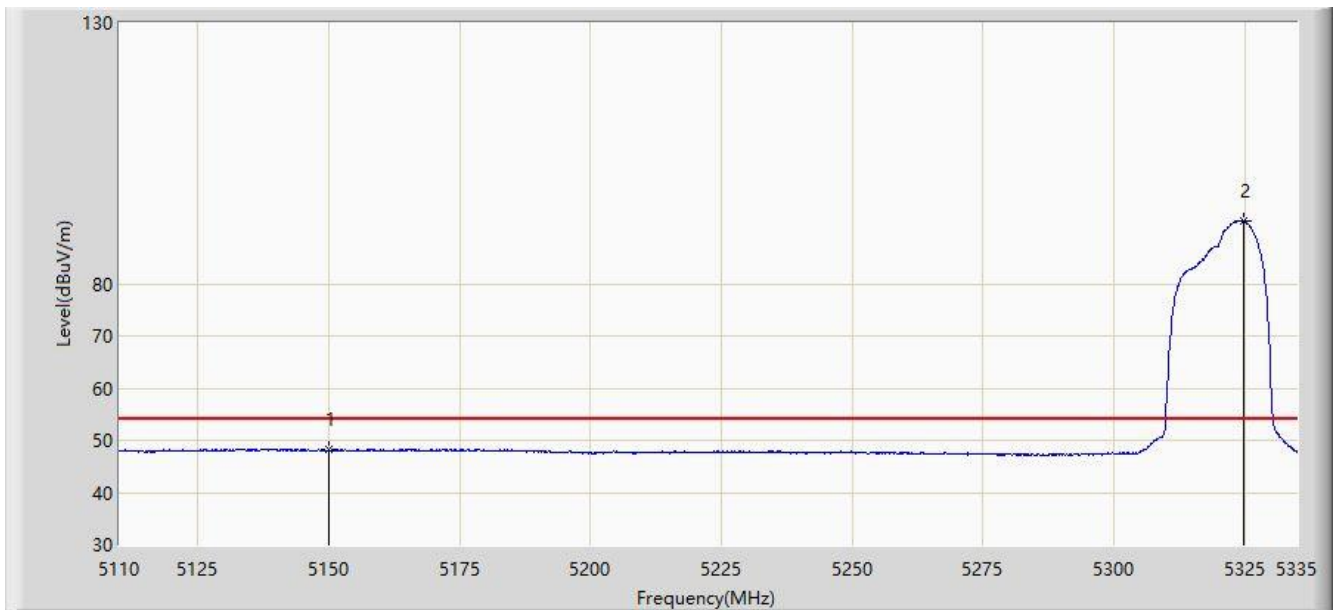


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.127	39.599	-5.873	54.000	8.528	AV
2		*	5324.875	91.967	83.519	37.967	54.000	8.449	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 5320MHz	

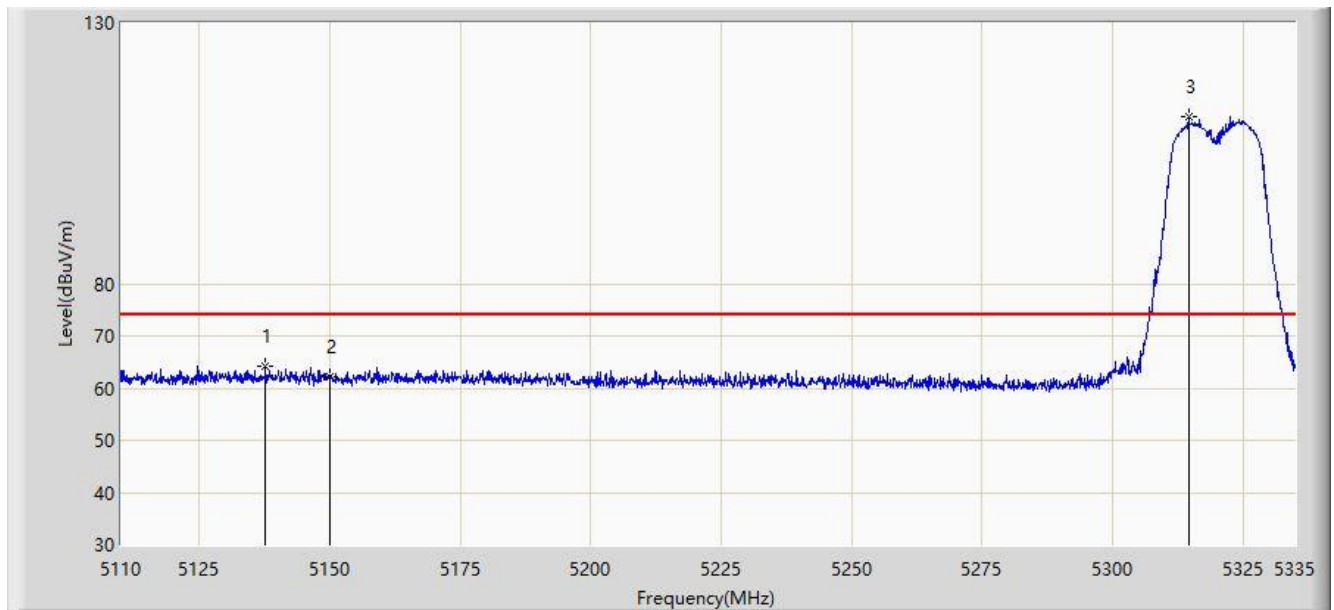


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.675	64.178	55.602	-9.822	74.000	8.577	PK
2			5150.000	62.275	53.747	-11.725	74.000	8.528	PK
3		*	5314.638	111.939	103.539	37.939	74.000	8.401	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 5320MHz	

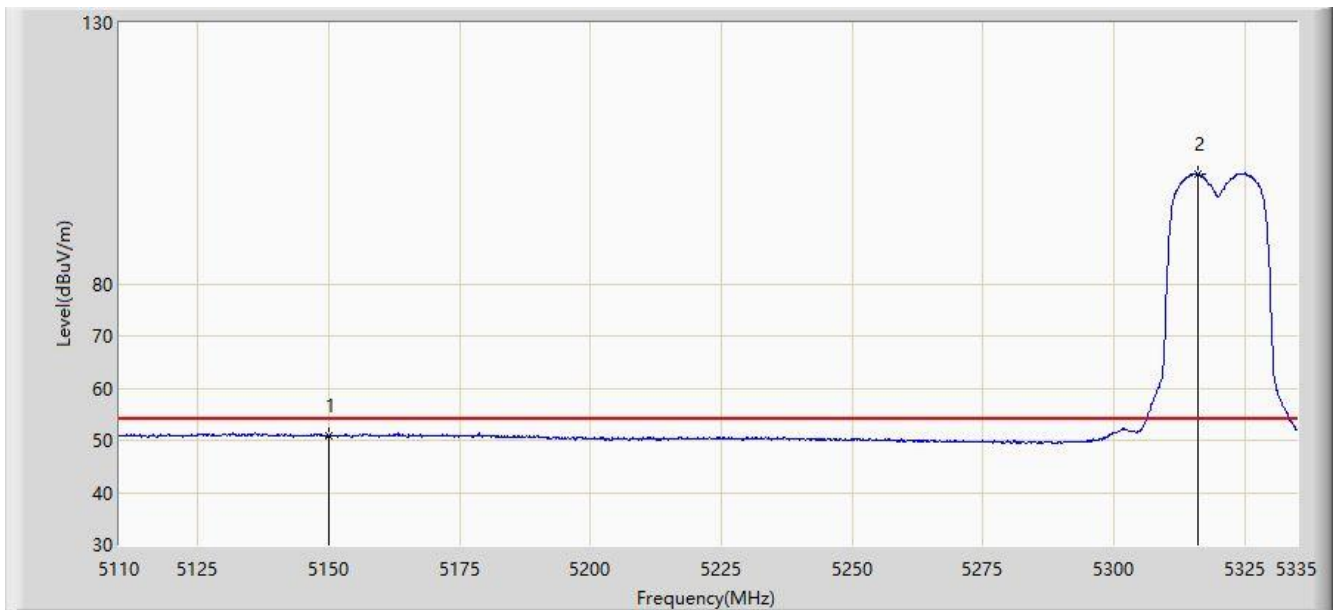


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.888	42.360	-3.112	54.000	8.528	AV
2		*	5315.987	101.015	92.603	47.015	54.000	8.411	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:50
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

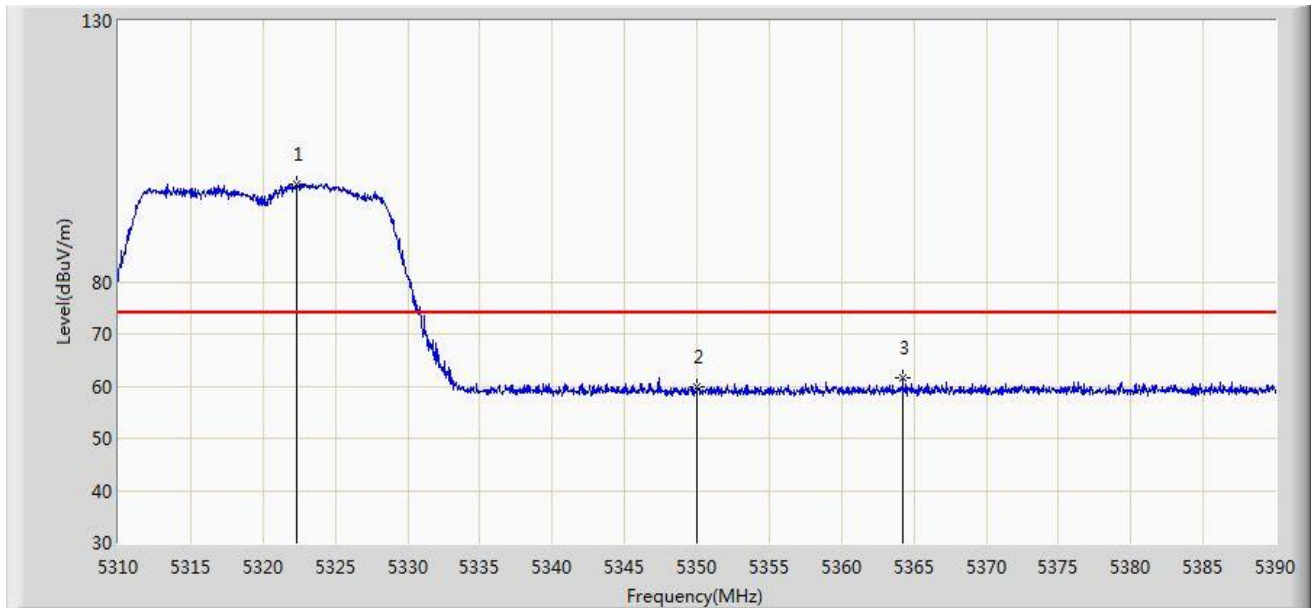


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.360	98.811	92.467	N/A	N/A	6.344	PK
2			5350.000	59.950	53.623	-14.050	74.000	6.327	PK
3			5364.240	61.491	55.075	-12.509	74.000	6.417	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

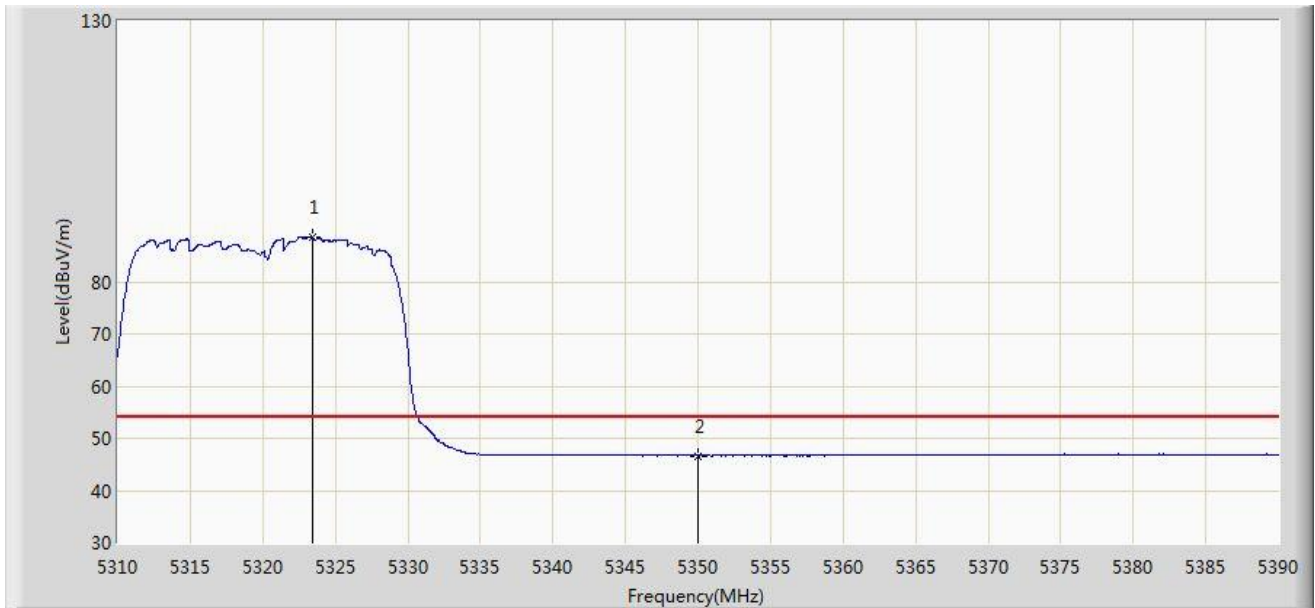


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.400	88.669	82.326	N/A	N/A	6.343	AV
2			5350.000	46.662	40.335	-7.338	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

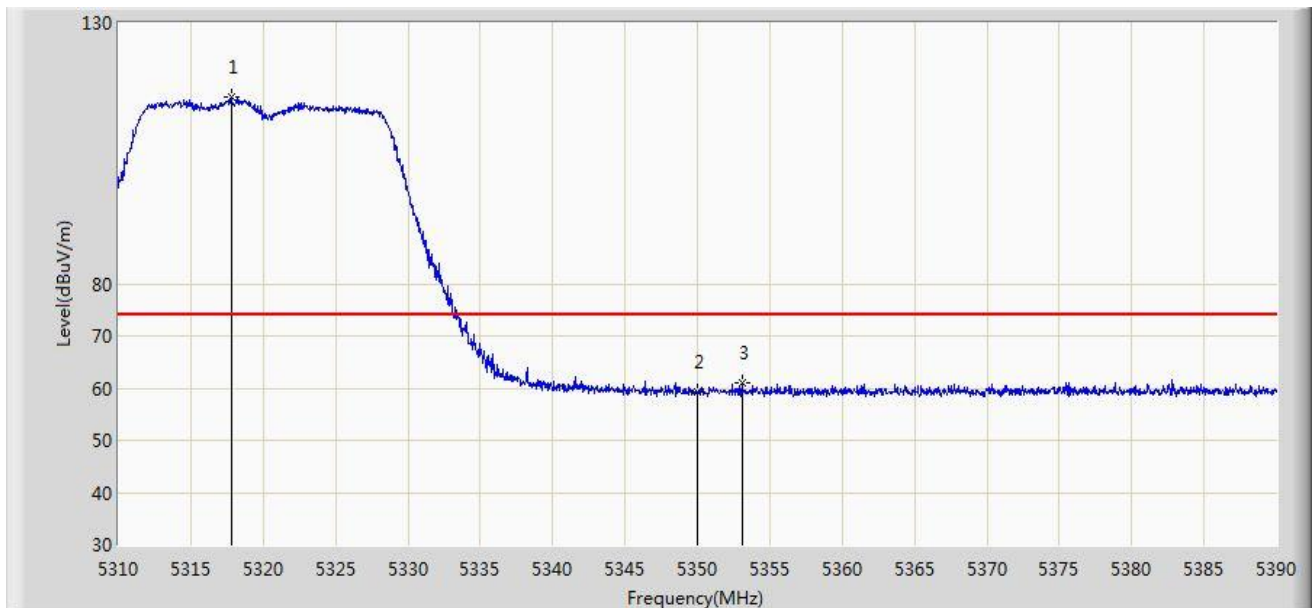


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.800	115.914	109.566	N/A	N/A	6.348	PK
2			5350.000	59.209	52.882	-14.791	74.000	6.327	PK
3			5353.080	60.915	54.580	-13.085	74.000	6.335	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

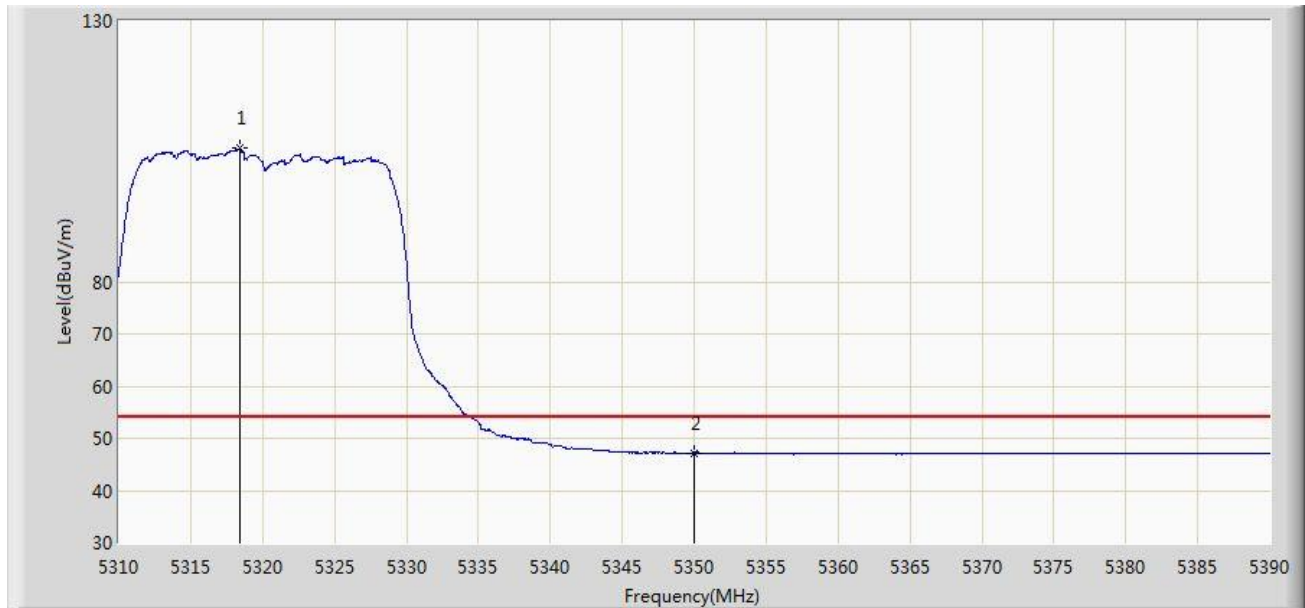


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.400	105.534	99.185	N/A	N/A	6.349	AV
2			5350.000	47.212	40.885	-6.788	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

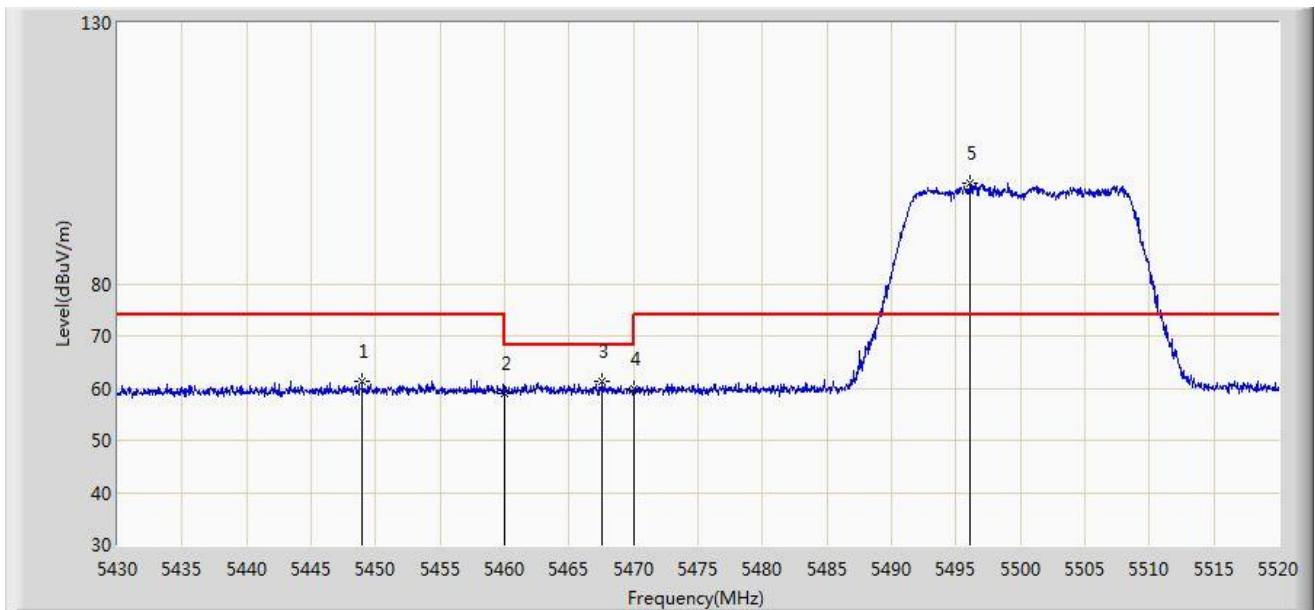


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.945	61.401	54.783	-12.599	74.000	6.619	PK
2			5460.000	58.897	52.285	-15.103	74.000	6.612	PK
3			5467.575	61.213	54.635	-6.987	68.200	6.578	PK
4			5470.000	59.782	53.215	-8.418	68.200	6.567	PK
5		*	5496.105	99.149	92.470	N/A	N/A	6.679	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

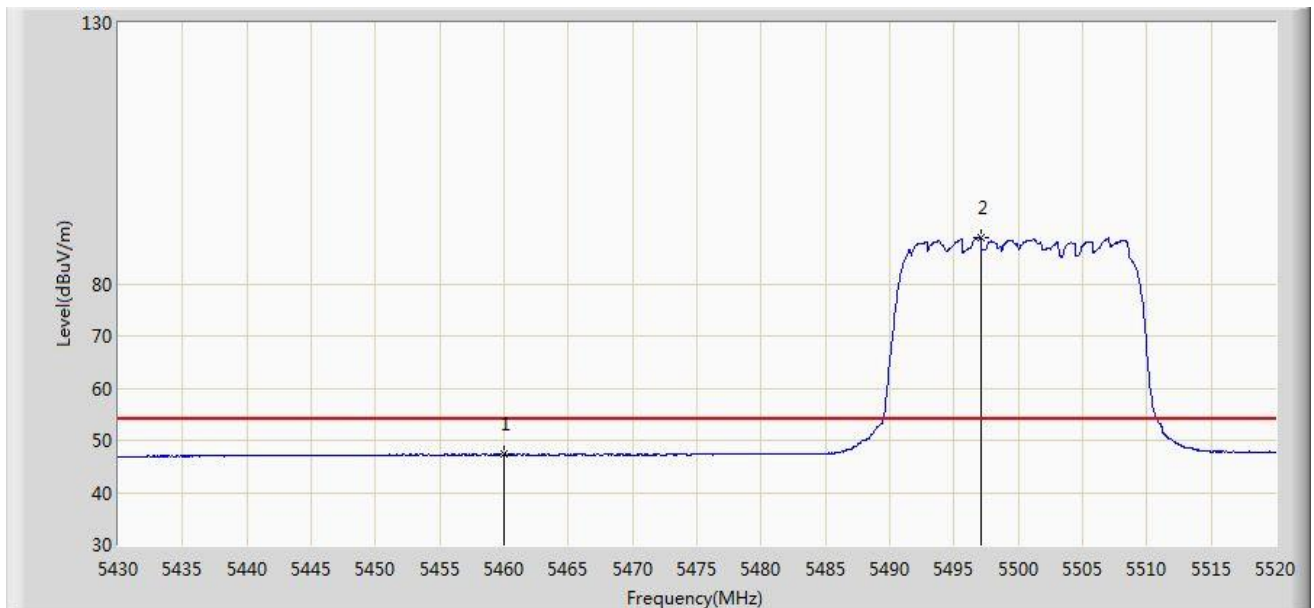


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.280	40.668	-6.720	54.000	6.612	AV
2		*	5497.050	88.854	82.168	N/A	N/A	6.686	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

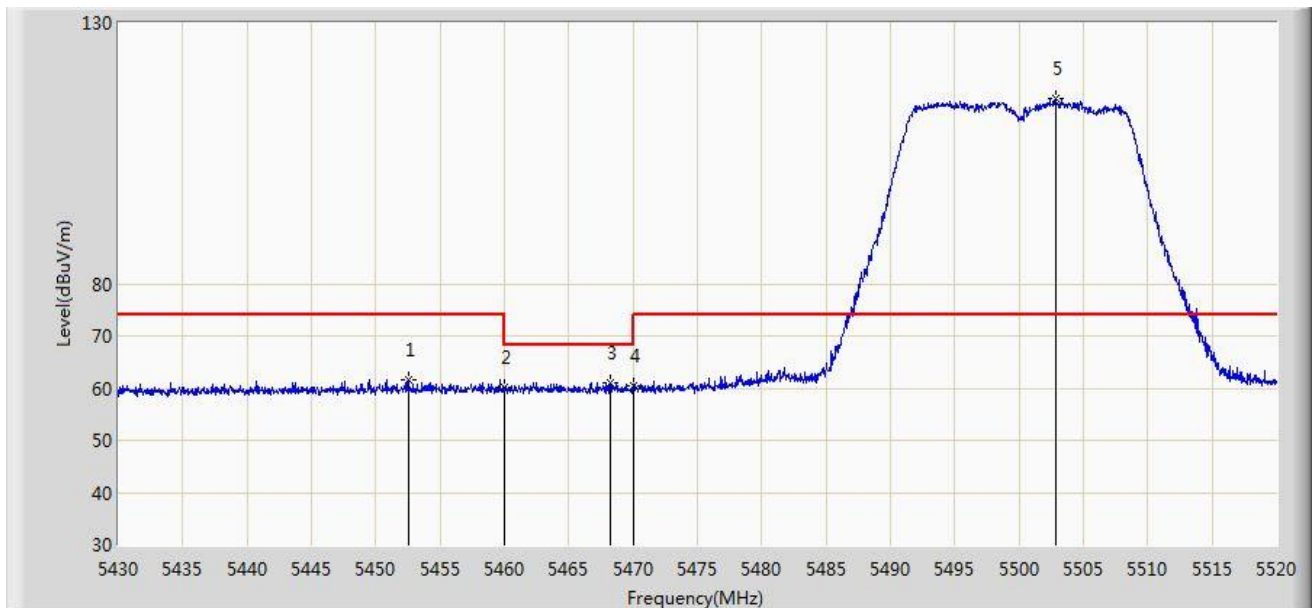


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.500	61.467	54.834	-12.533	74.000	6.633	PK
2			5460.000	60.048	53.436	-13.952	74.000	6.612	PK
3			5468.205	61.087	54.512	-7.113	68.200	6.574	PK
4			5470.000	60.560	53.993	-7.640	68.200	6.567	PK
5		*	5502.810	115.561	108.833	N/A	N/A	6.729	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

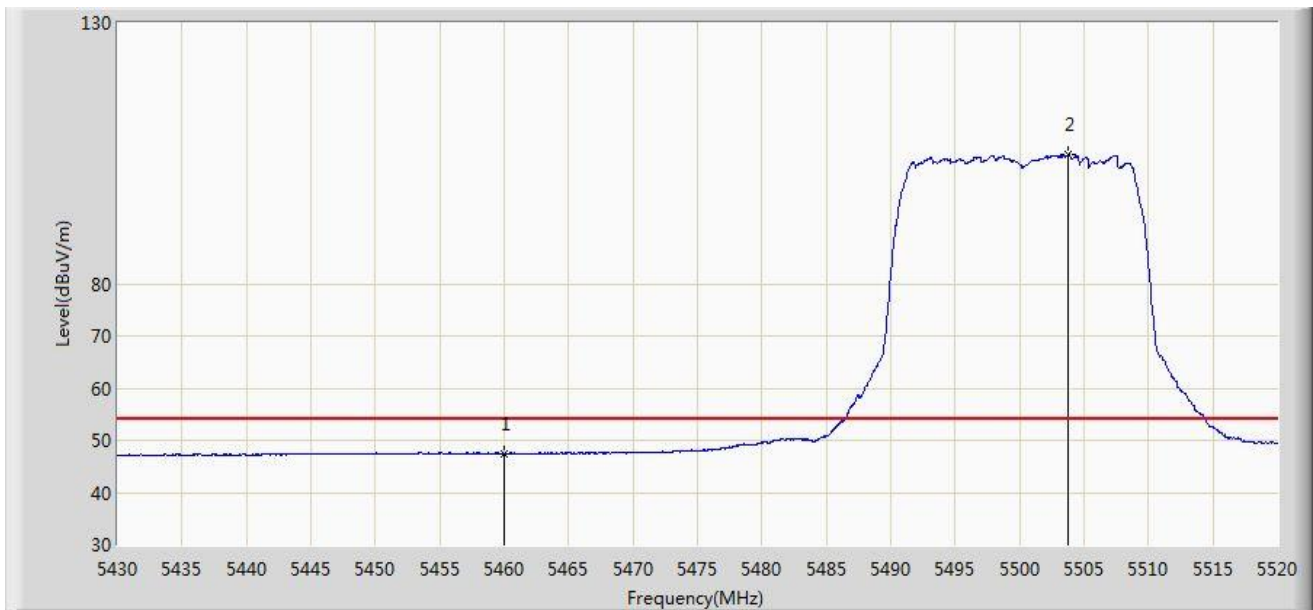


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.498	40.886	-6.502	54.000	6.612	AV
2		*	5503.710	104.726	97.992	N/A	N/A	6.734	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 08:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

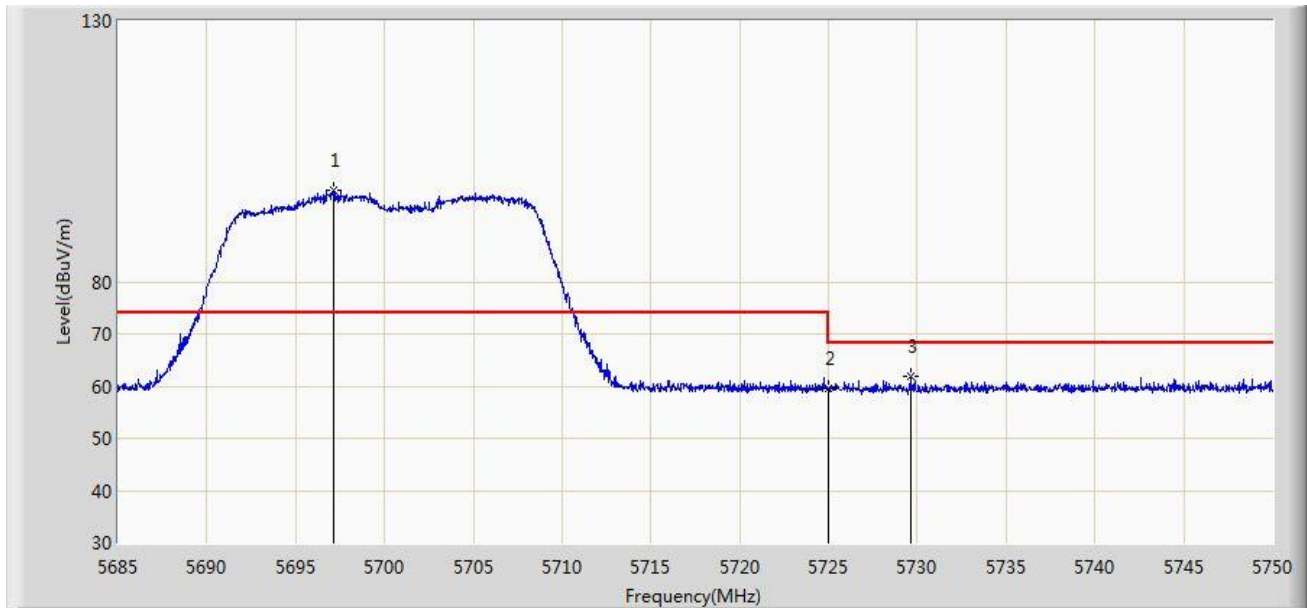


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.155	97.580	90.693	N/A	N/A	6.887	PK
2			5725.000	59.527	52.660	-8.673	68.200	6.867	PK
3			5729.623	61.899	55.014	-6.301	68.200	6.886	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 09:04
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

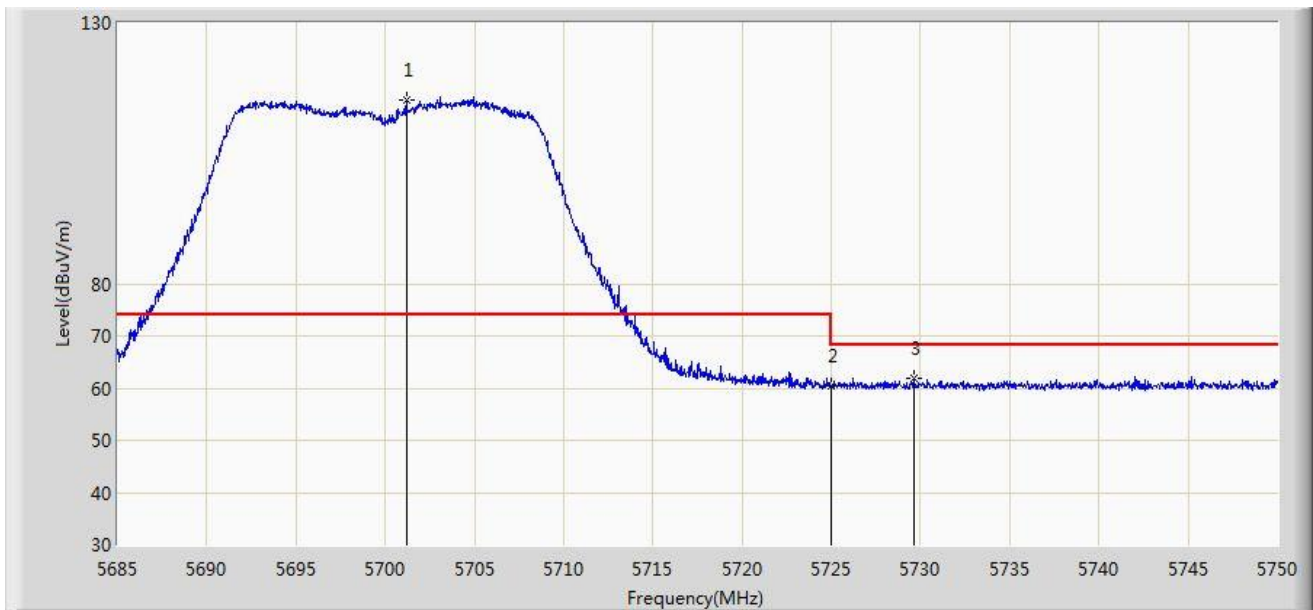


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.185	115.252	108.335	N/A	N/A	6.918	PK
2			5725.000	60.319	53.452	-7.881	68.200	6.867	PK
3			5729.623	61.899	55.014	-6.301	68.200	6.886	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 5310MHz	

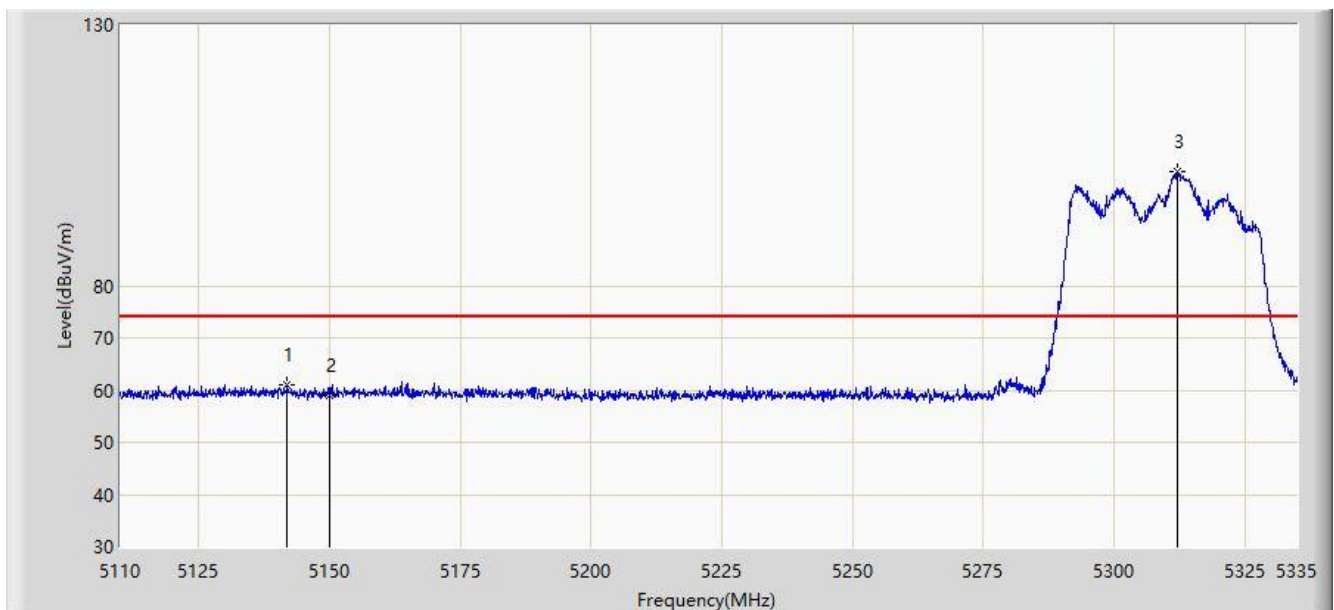


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.950	60.912	52.362	-13.088	74.000	8.549	PK
2			5150.000	58.872	50.344	-15.128	74.000	8.528	PK
3		*	5312.050	101.870	93.493	27.870	74.000	8.377	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 5310MHz	

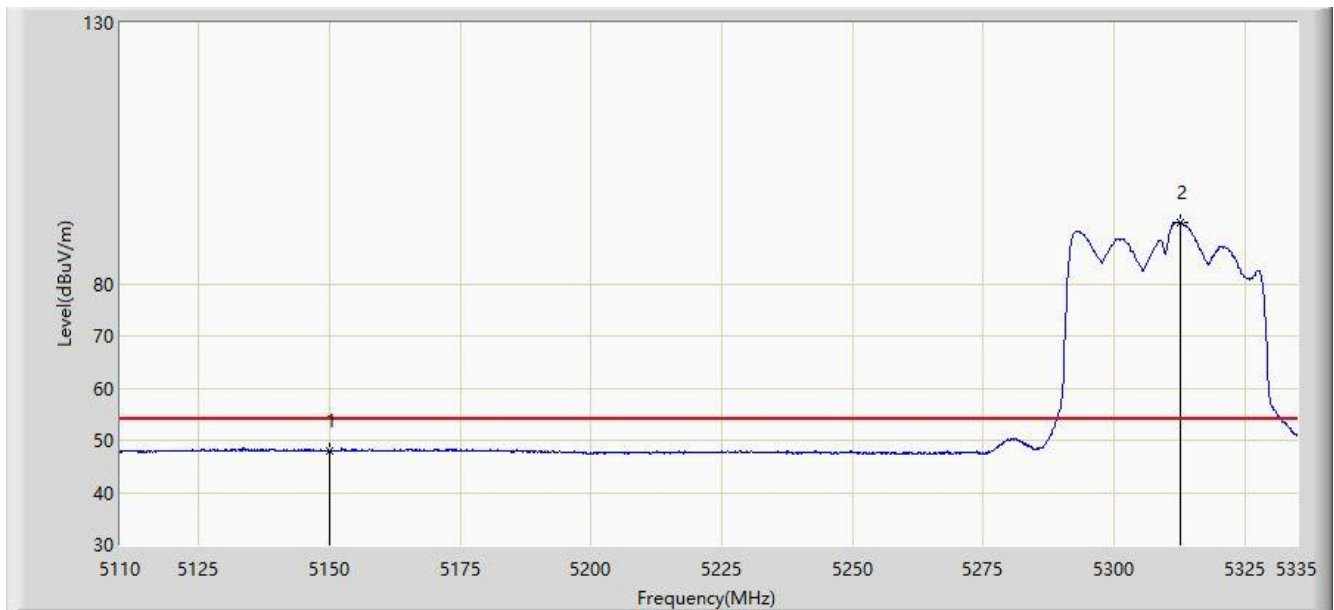


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.937	39.409	-6.063	54.000	8.528	AV
2		*	5312.837	91.741	83.357	37.741	54.000	8.384	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 5310MHz	

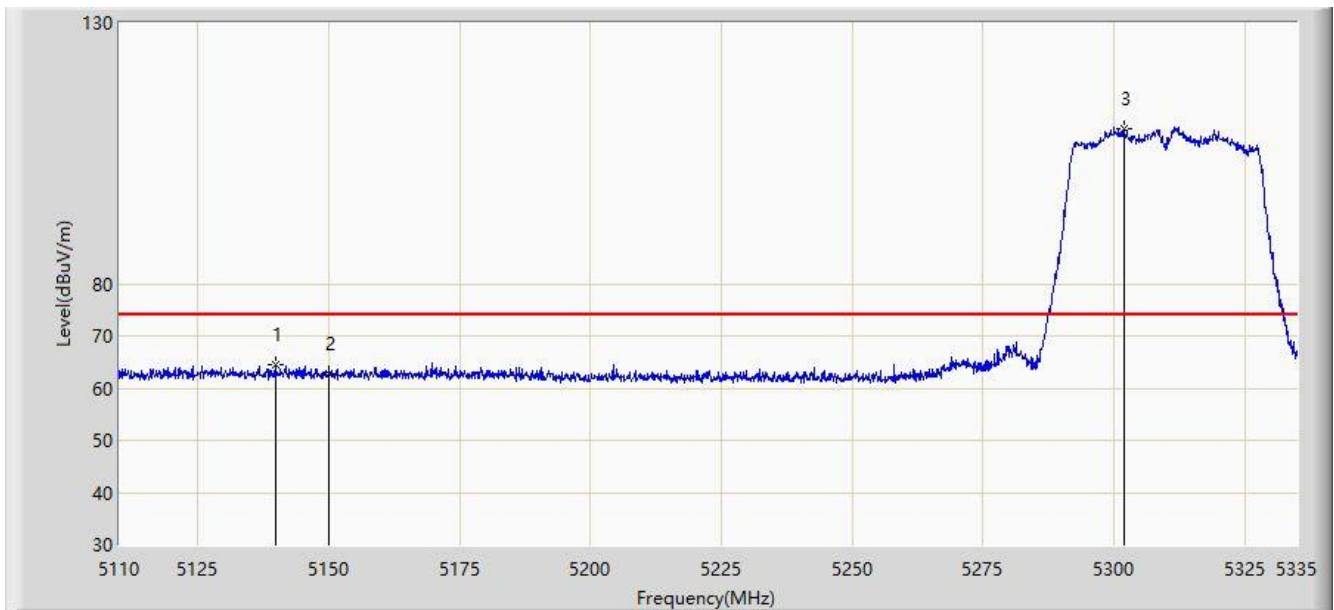


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.812	64.574	56.011	-9.426	74.000	8.563	PK
2			5150.000	62.877	54.349	-11.123	74.000	8.528	PK
3		*	5301.925	109.725	101.438	35.725	74.000	8.287	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 5310MHz	

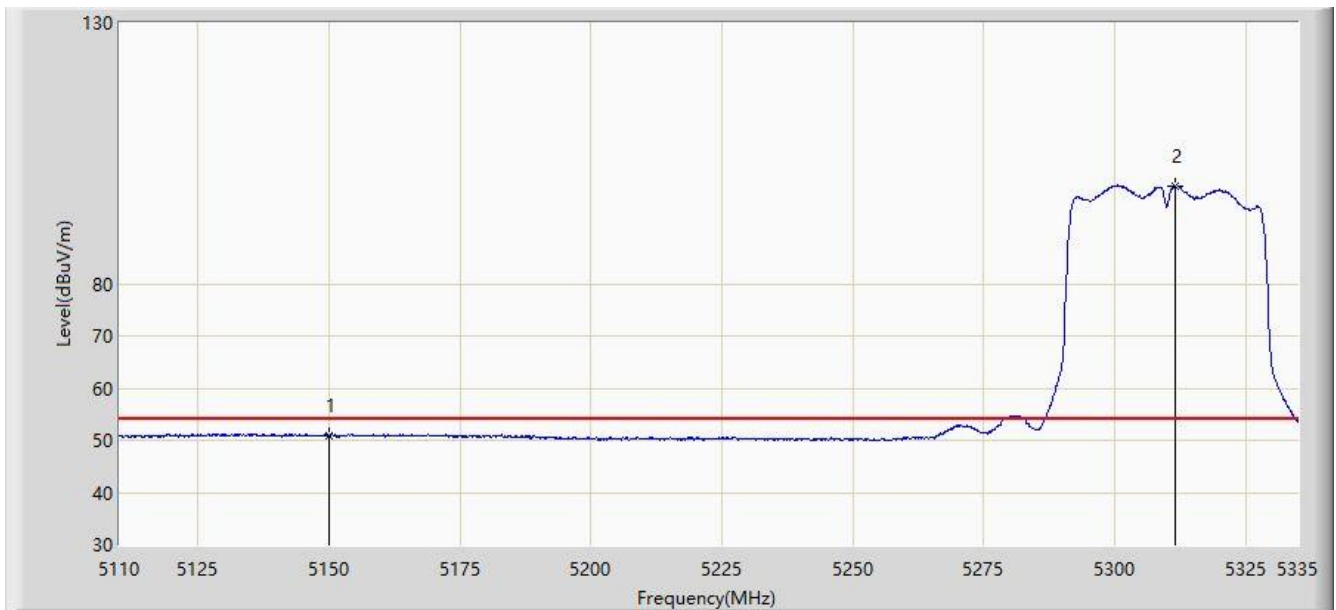


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.889	42.361	-3.111	54.000	8.528	AV
2		*	5311.600	98.823	90.450	44.823	54.000	8.374	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

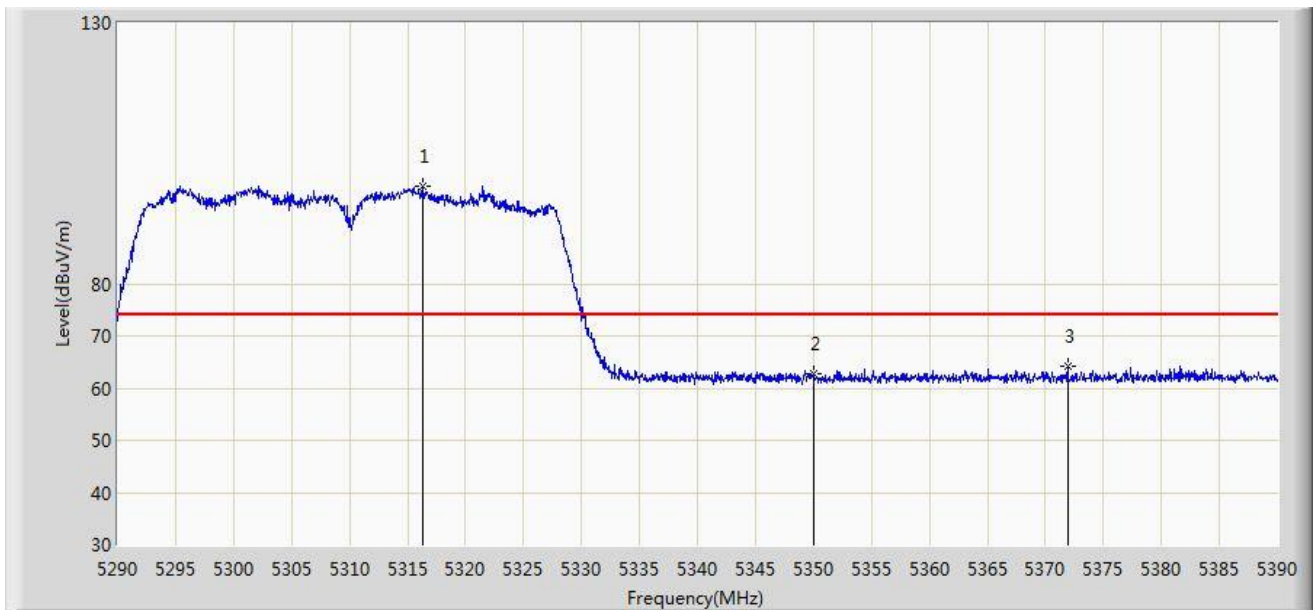


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.350	98.639	92.297	N/A	N/A	6.342	PK
2			5350.000	62.767	56.440	-11.233	74.000	6.327	PK
3			5371.900	64.269	57.811	-9.731	74.000	6.458	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

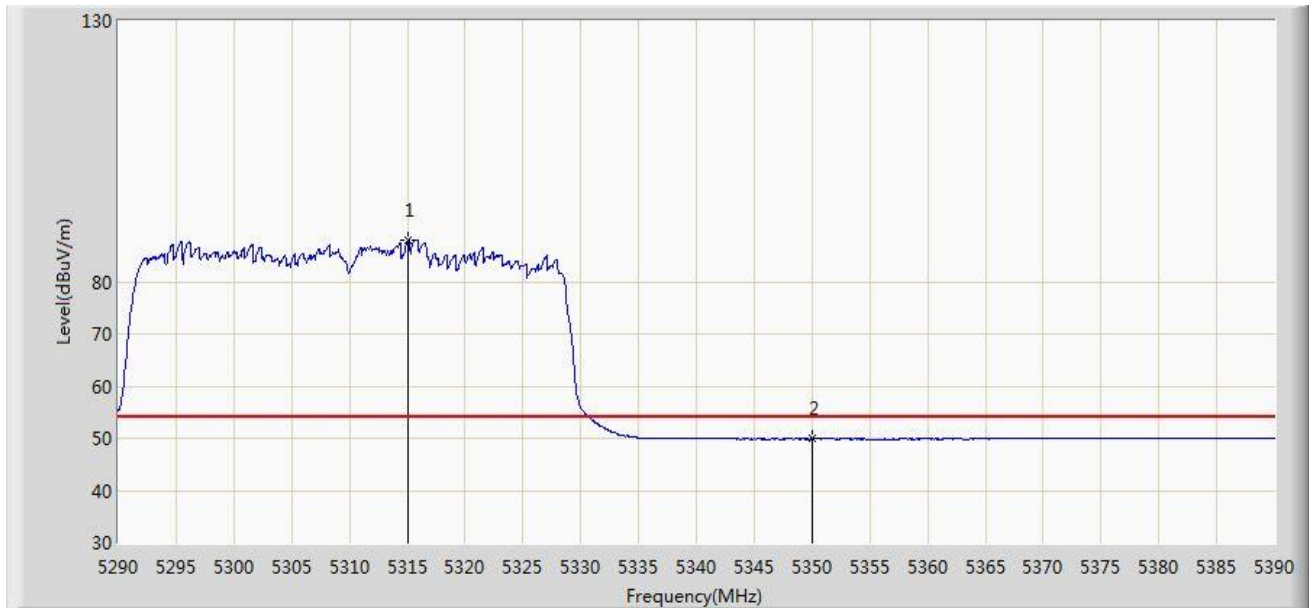


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.100	88.044	81.707	N/A	N/A	6.337	AV
2			5350.000	49.910	43.583	-4.090	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

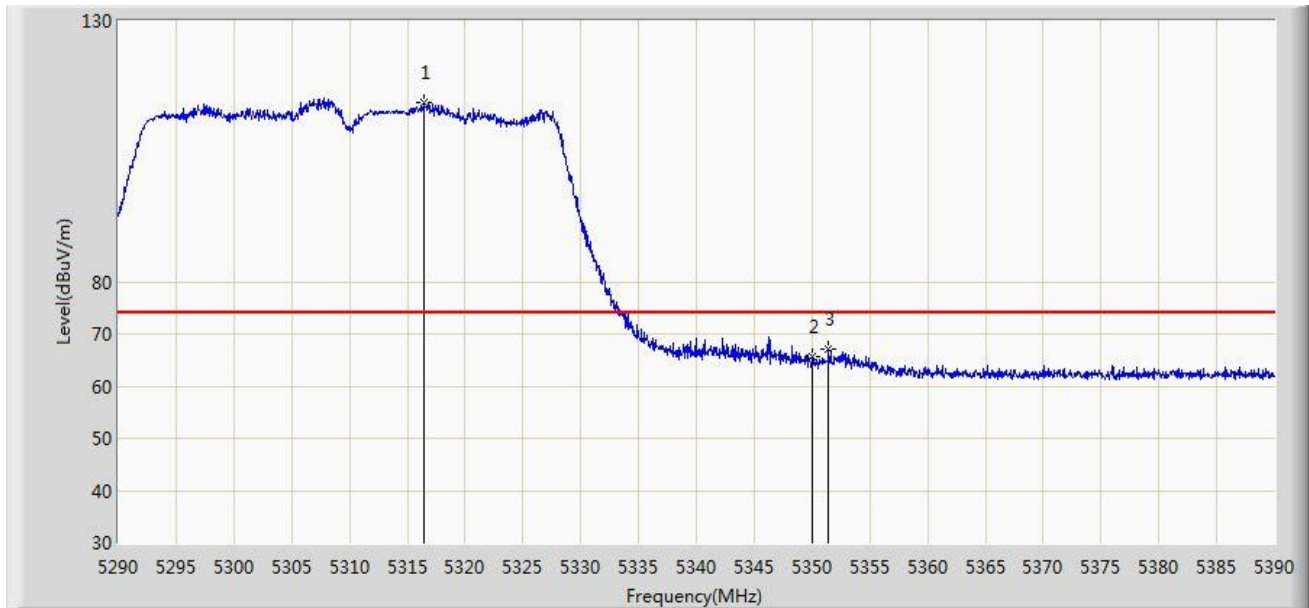


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.450	114.438	108.095	N/A	N/A	6.343	PK
2			5350.000	65.648	59.321	-8.352	74.000	6.327	PK
3			5351.450	67.216	60.889	-6.784	74.000	6.327	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

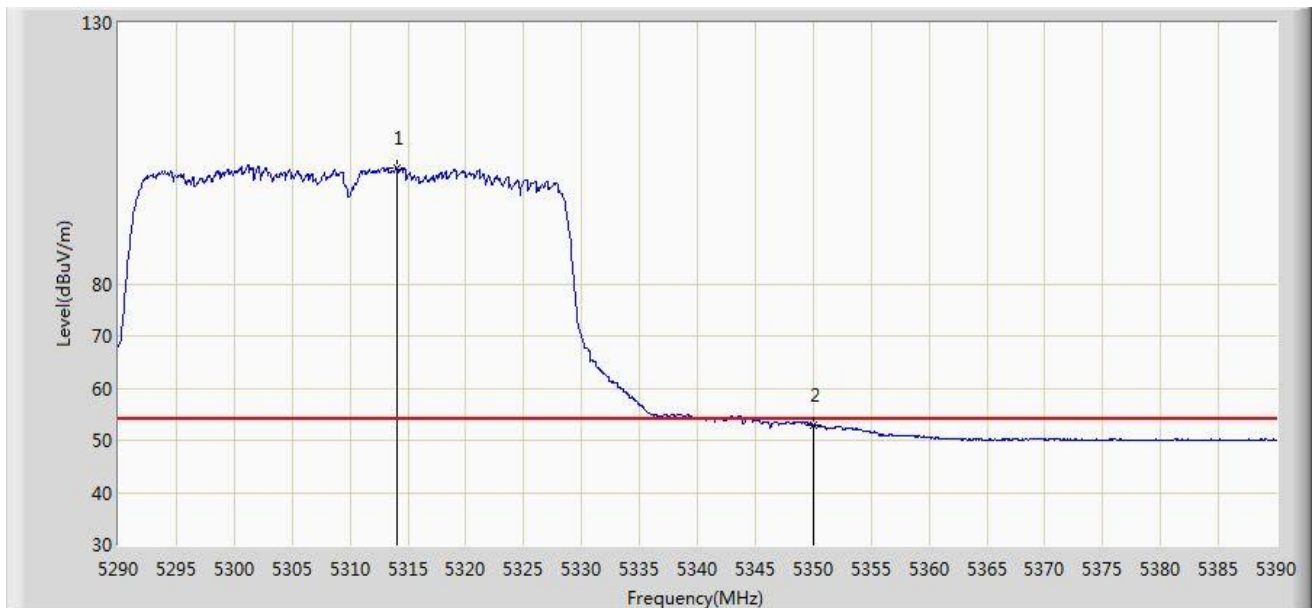


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.000	102.248	95.915	N/A	N/A	6.333	AV
2			5350.000	52.891	46.564	-1.109	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

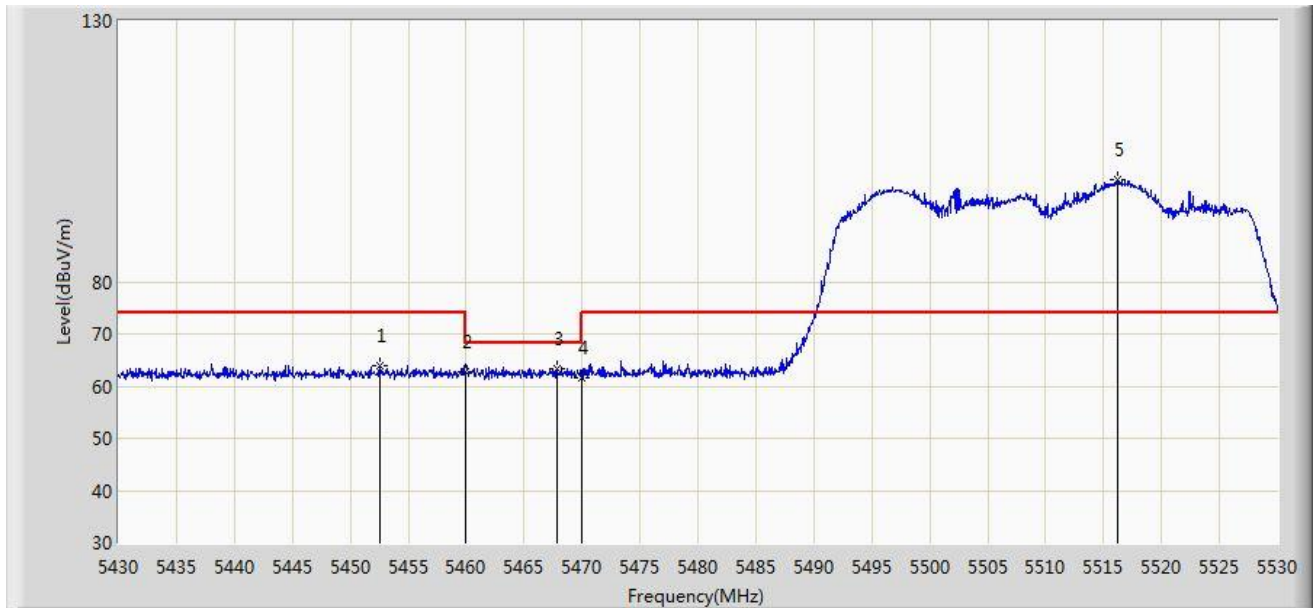


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.500	64.034	57.401	-9.966	74.000	6.633	PK
2			5460.000	62.803	56.191	-11.197	74.000	6.612	PK
3			5467.850	63.457	56.880	-4.743	68.200	6.577	PK
4			5470.000	61.570	55.003	-6.630	68.200	6.567	PK
5		*	5516.250	99.624	92.907	N/A	N/A	6.717	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

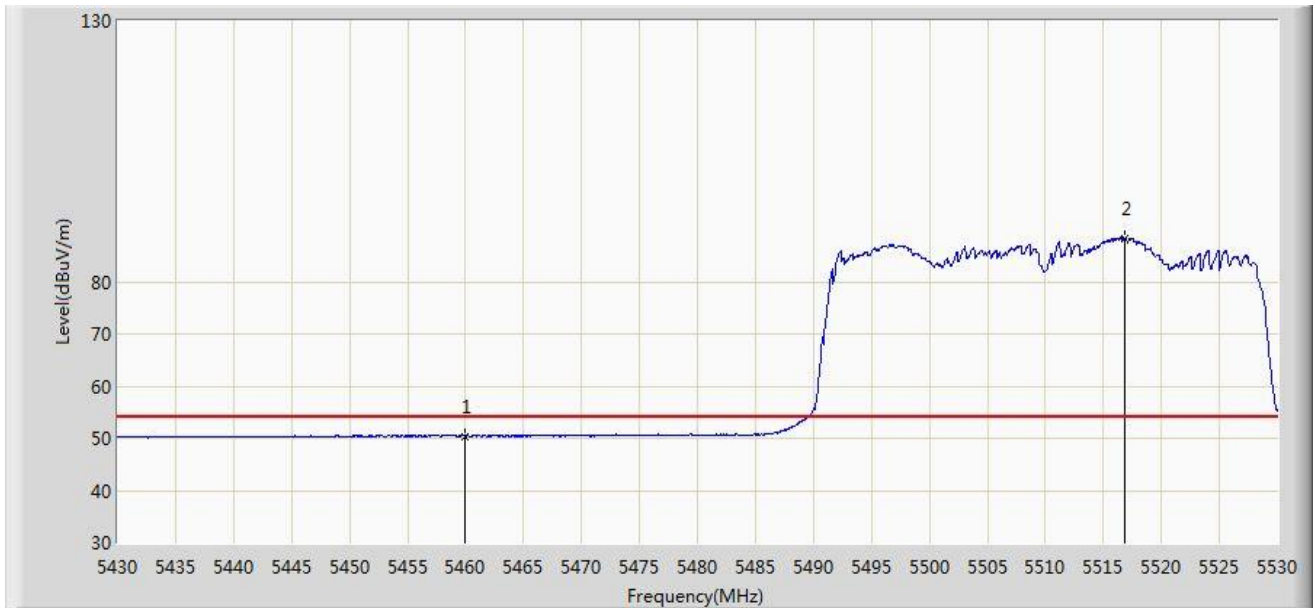


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.416	43.804	-3.584	54.000	6.612	AV
2		*	5516.900	88.384	81.669	N/A	N/A	6.715	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

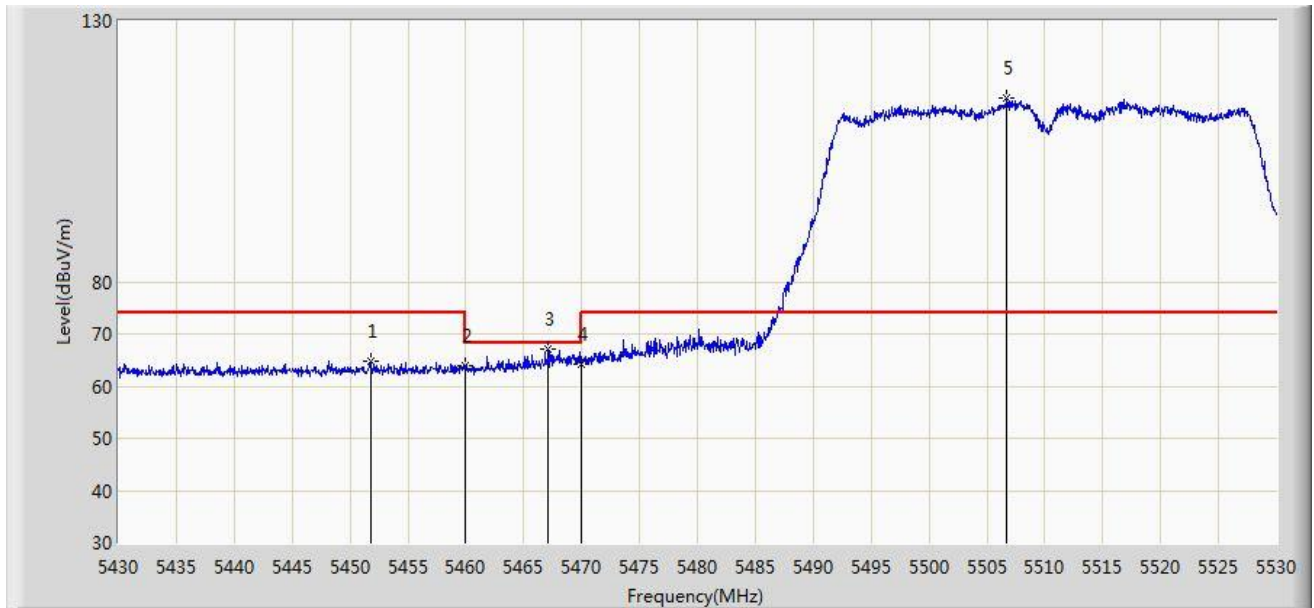


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.800	64.740	58.110	-9.260	74.000	6.629	PK
2			5460.000	63.939	57.327	-10.061	74.000	6.612	PK
3			5467.150	67.096	60.516	-1.104	68.200	6.579	PK
4			5470.000	64.314	57.747	-3.886	68.200	6.567	PK
5		*	5506.750	115.119	108.379	N/A	N/A	6.740	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

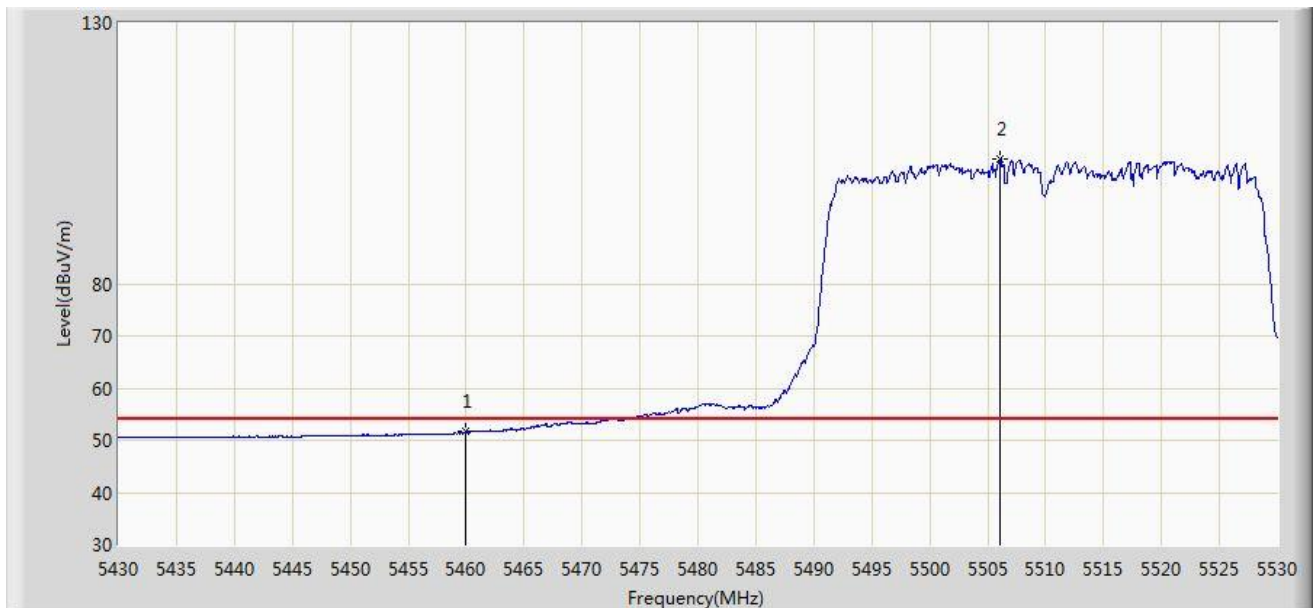


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.611	44.999	-2.389	54.000	6.612	AV
2		*	5506.100	103.823	97.082	N/A	N/A	6.741	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

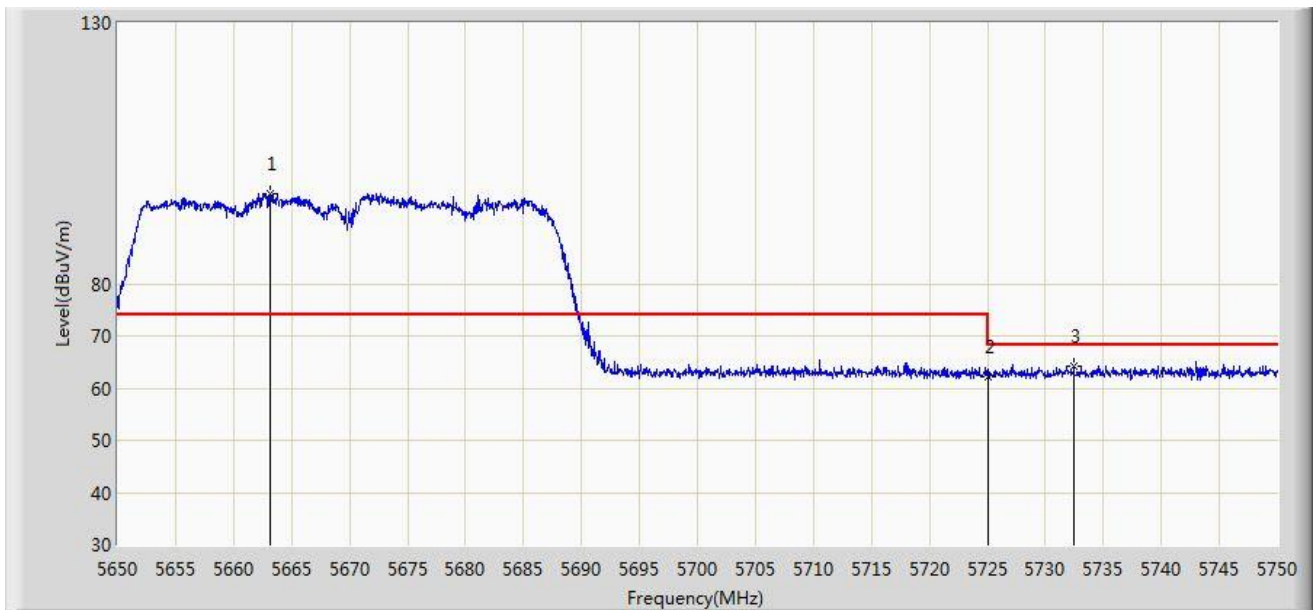


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5663.150	97.357	90.609	N/A	N/A	6.748	PK
2			5725.000	62.255	55.388	-5.945	68.200	6.867	PK
3			5732.450	64.065	57.161	-4.135	68.200	6.904	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 20:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

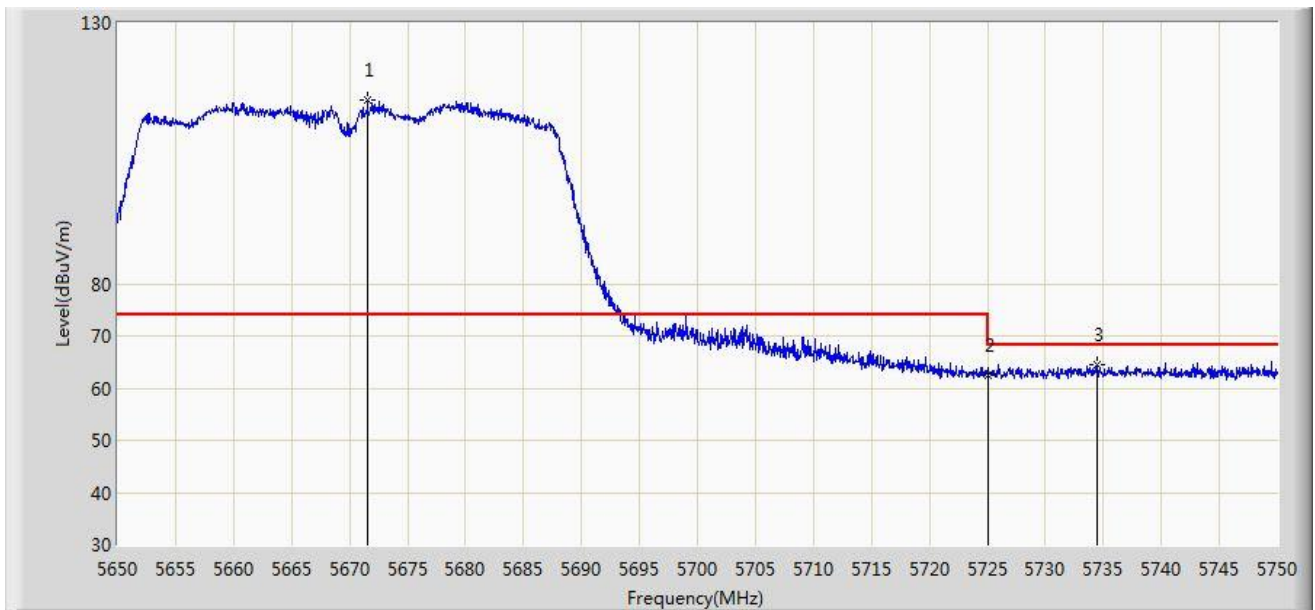


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5671.550	115.112	108.389	N/A	N/A	6.723	PK
2			5725.000	62.571	55.704	-5.629	68.200	6.867	PK
3			5734.450	64.487	57.569	-3.713	68.200	6.918	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 5320MHz	

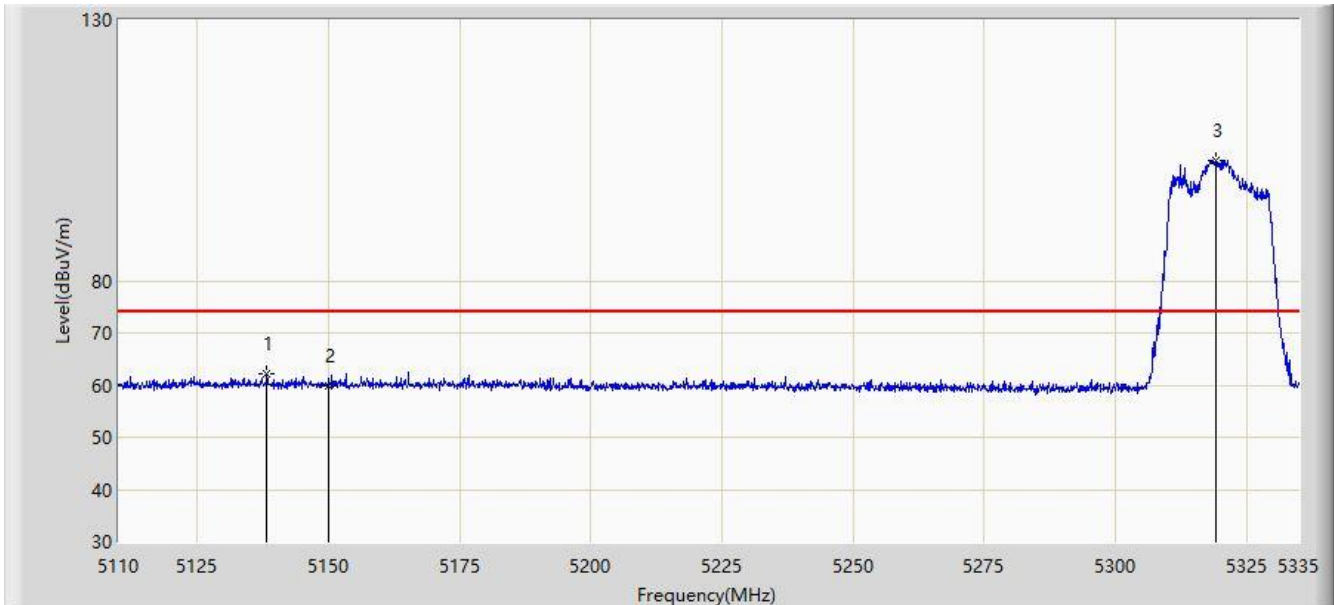


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.237	62.179	53.606	-11.821	74.000	8.573	PK
2			5150.000	59.779	51.251	-14.221	74.000	8.528	PK
3		*	5319.138	103.172	94.739	29.172	74.000	8.433	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 5320MHz	

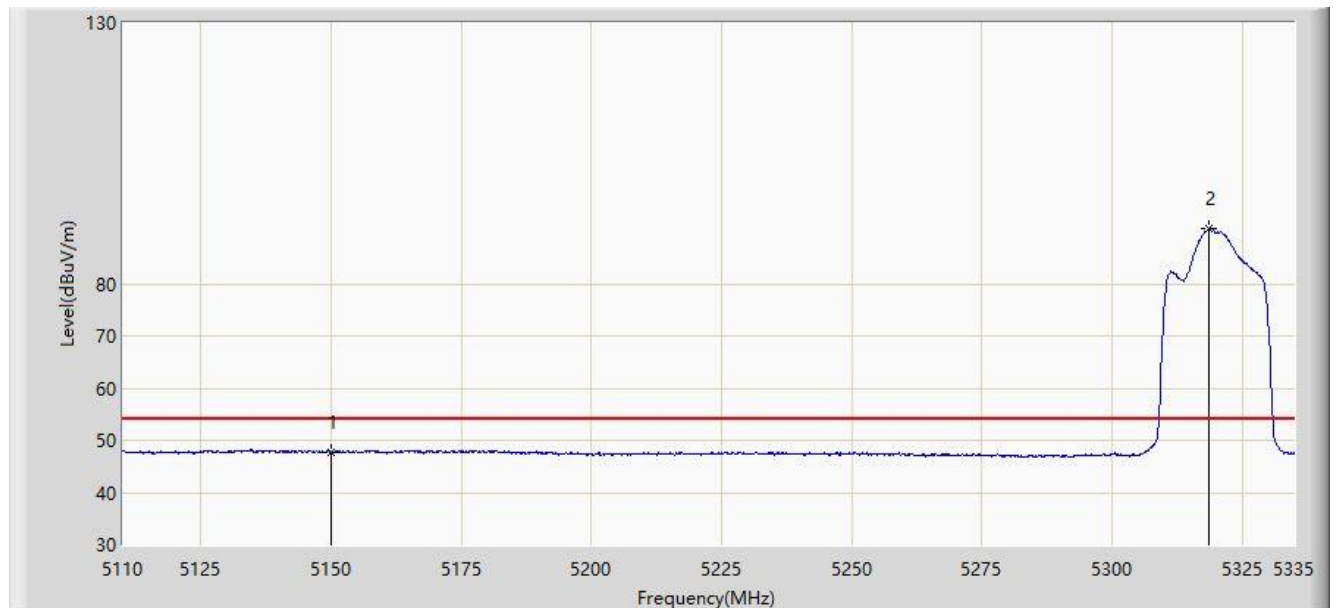


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.685	39.157	-6.315	54.000	8.528	AV
2		*	5318.575	90.585	82.153	36.585	54.000	8.432	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 5320MHz	

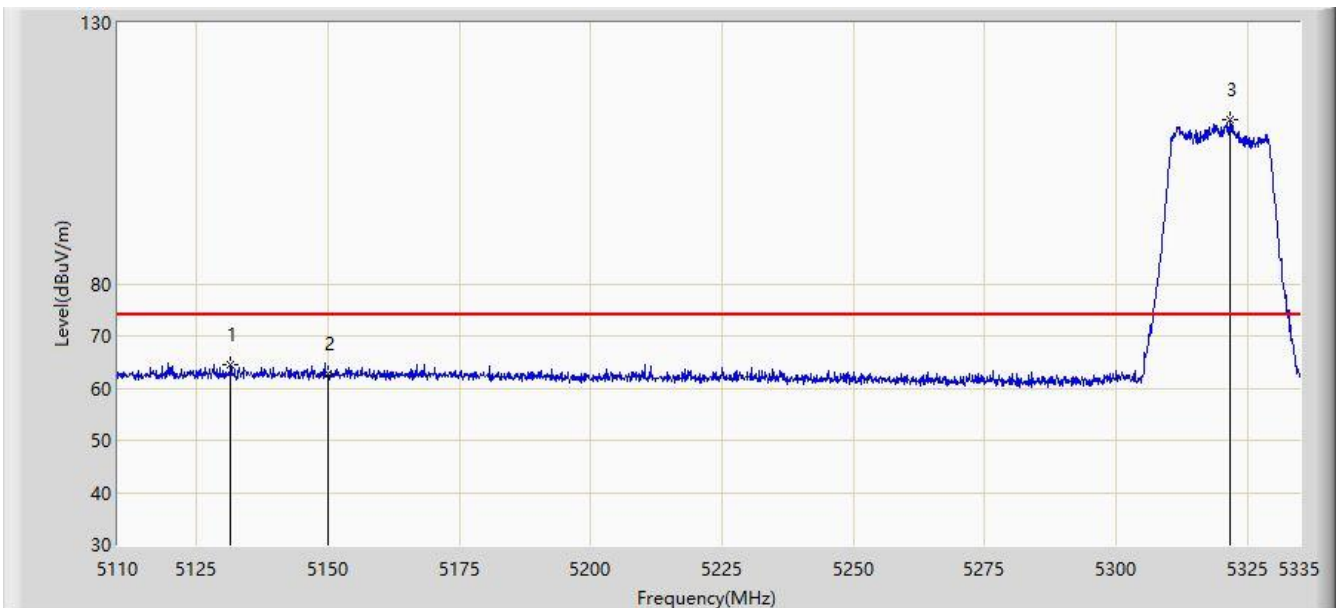


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.487	64.364	55.750	-9.636	74.000	8.614	PK
2			5150.000	62.756	54.228	-11.244	74.000	8.528	PK
3		*	5321.612	111.366	102.926	37.366	74.000	8.440	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 5320MHz	

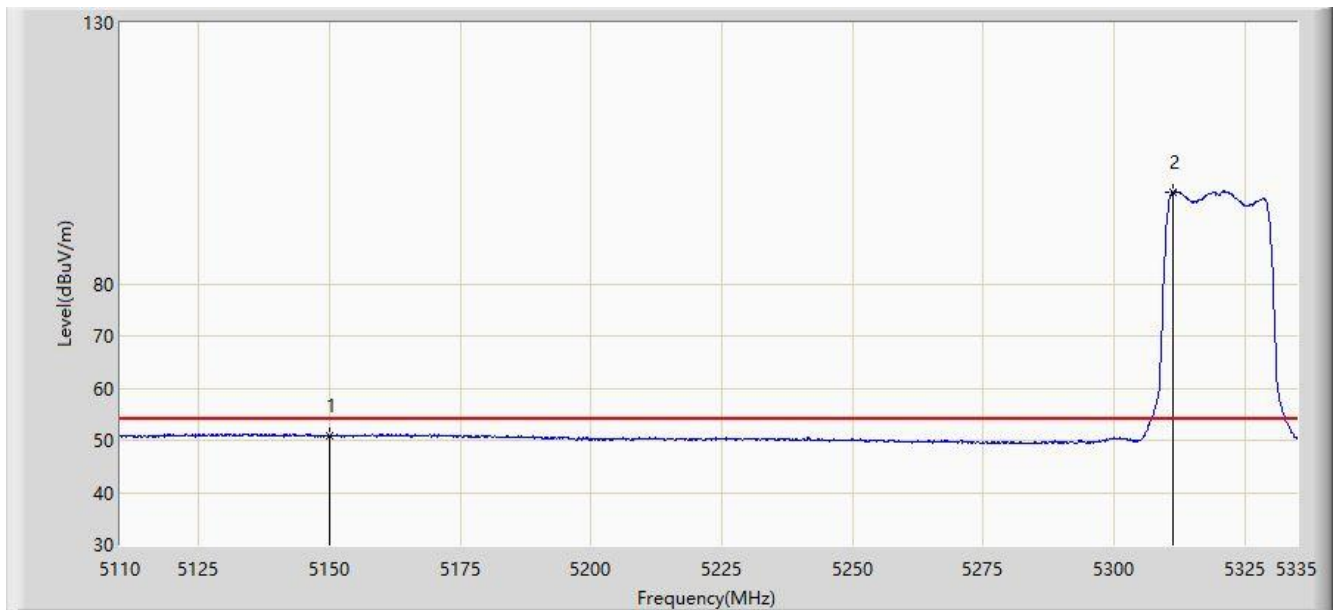


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.781	42.253	-3.219	54.000	8.528	AV
2		*	5311.375	97.567	89.196	43.567	54.000	8.372	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

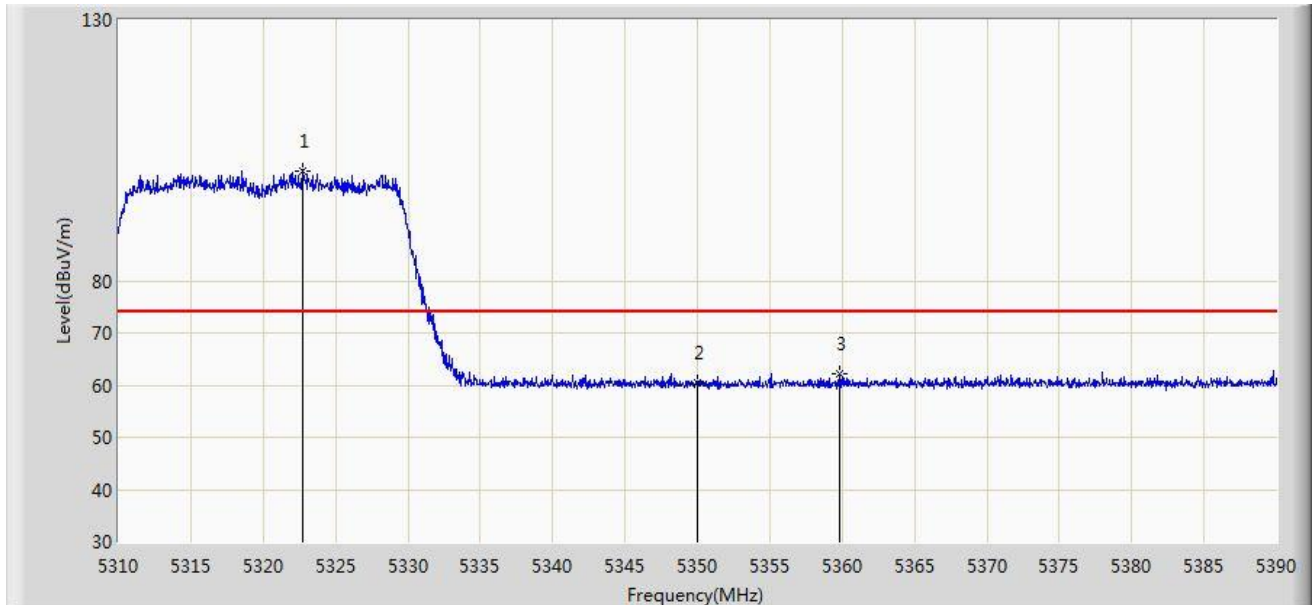


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.760	101.156	94.812	N/A	N/A	6.344	PK
2			5350.000	60.428	54.101	-13.572	74.000	6.327	PK
3			5359.840	62.042	55.658	-11.958	74.000	6.384	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

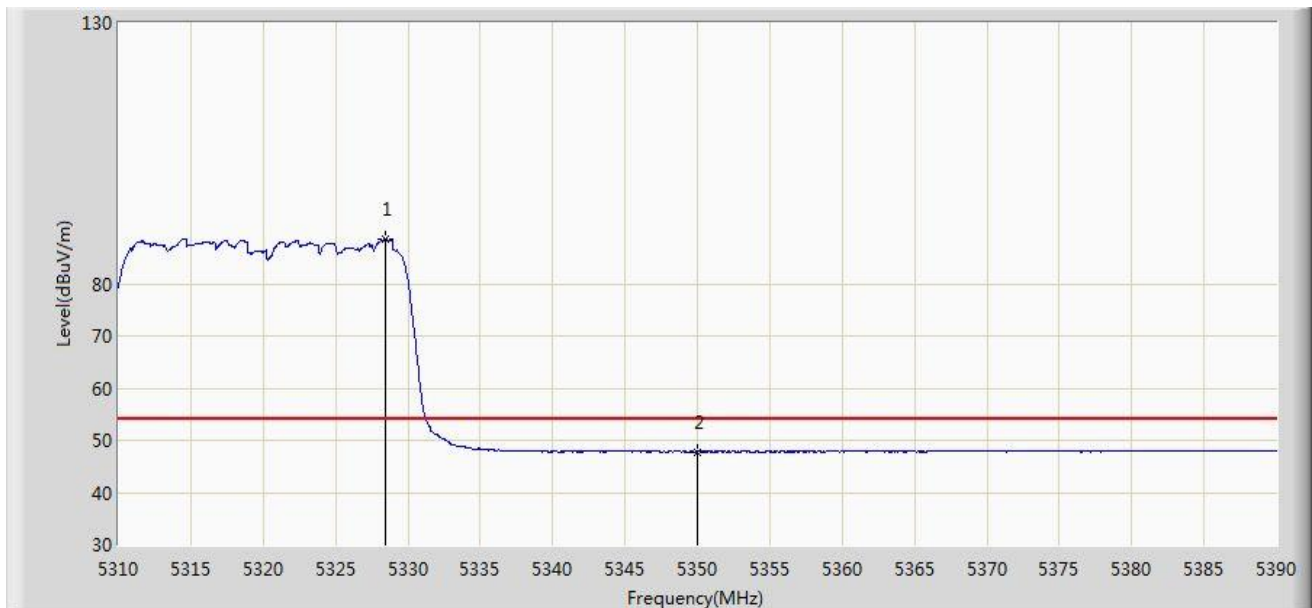


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5328.480	88.441	82.103	N/A	N/A	6.338	AV
2			5350.000	47.804	41.477	-6.196	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

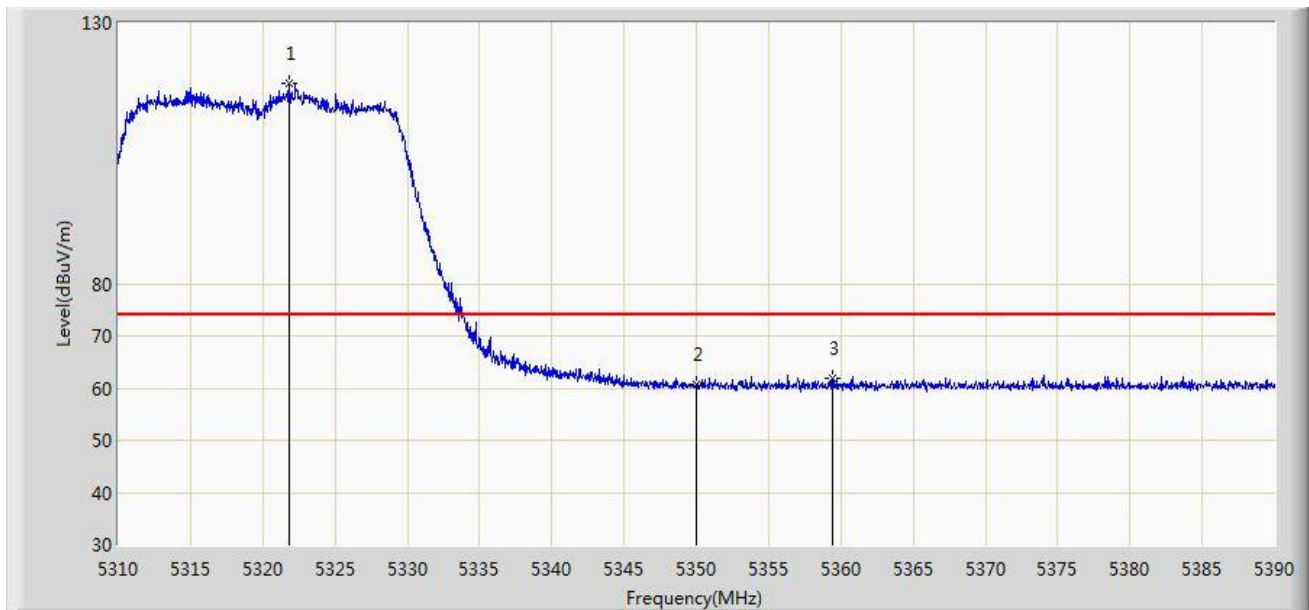


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.800	118.503	112.158	N/A	N/A	6.345	PK
2			5350.000	60.748	54.421	-13.252	74.000	6.327	PK
3			5359.400	61.855	55.474	-12.145	74.000	6.381	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:21
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

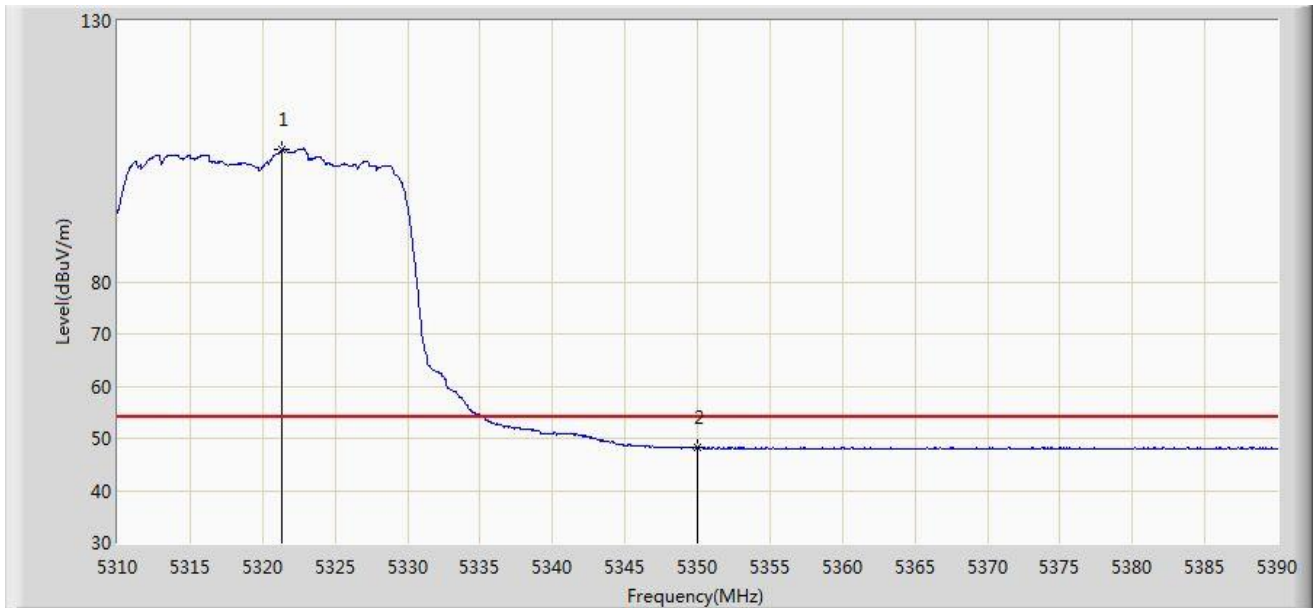


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.360	105.362	99.016	N/A	N/A	6.346	AV
2			5350.000	48.156	41.829	-5.844	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

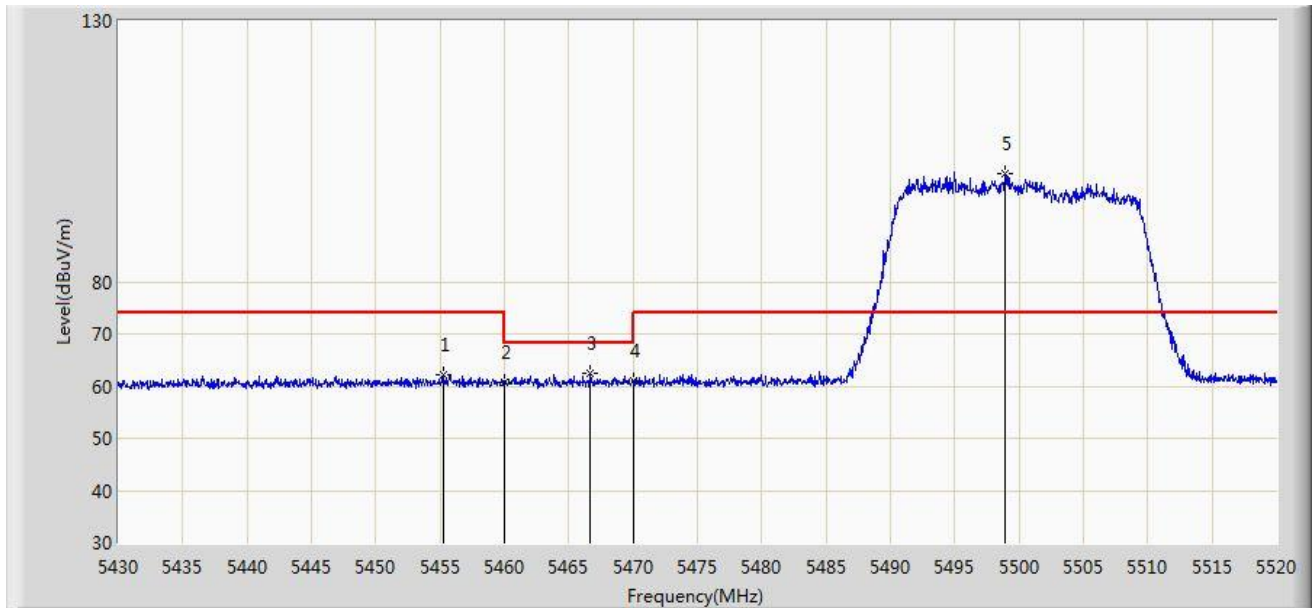


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.290	62.143	55.509	-11.857	74.000	6.634	PK
2			5460.000	60.814	54.202	-13.186	74.000	6.612	PK
3			5466.675	62.494	55.912	-5.706	68.200	6.582	PK
4			5470.000	60.966	54.399	-7.234	68.200	6.567	PK
5		*	5498.895	100.624	93.925	N/A	N/A	6.700	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

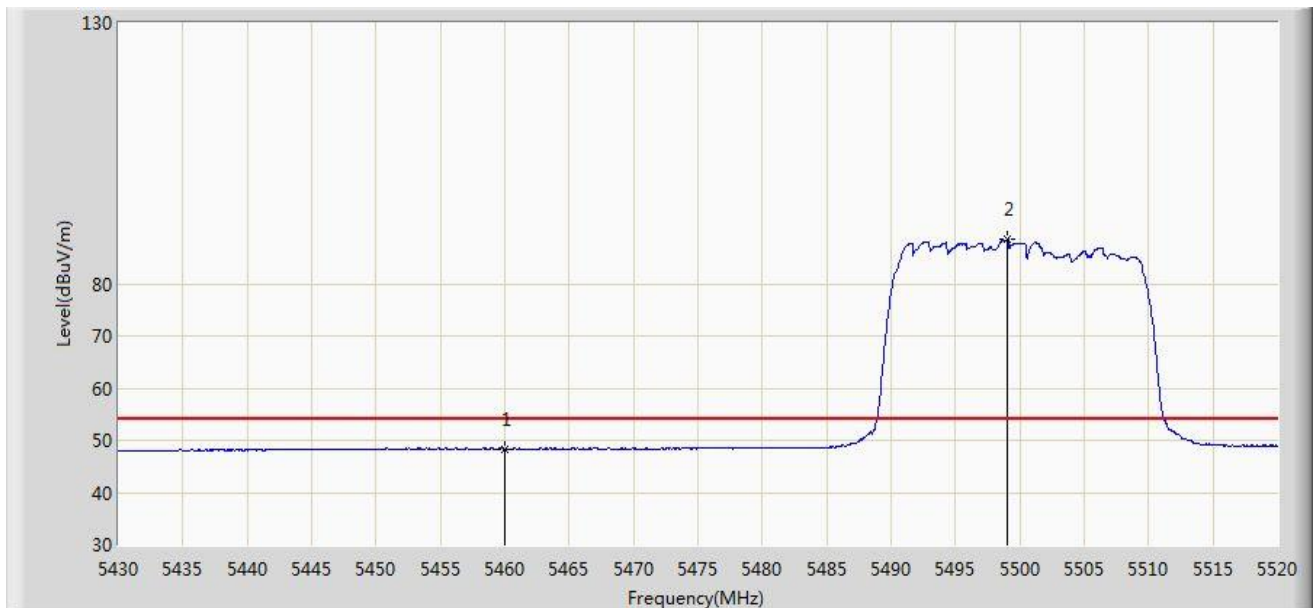


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.369	41.757	-5.631	54.000	6.612	AV
2		*	5499.075	88.478	81.777	N/A	N/A	6.701	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:24
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

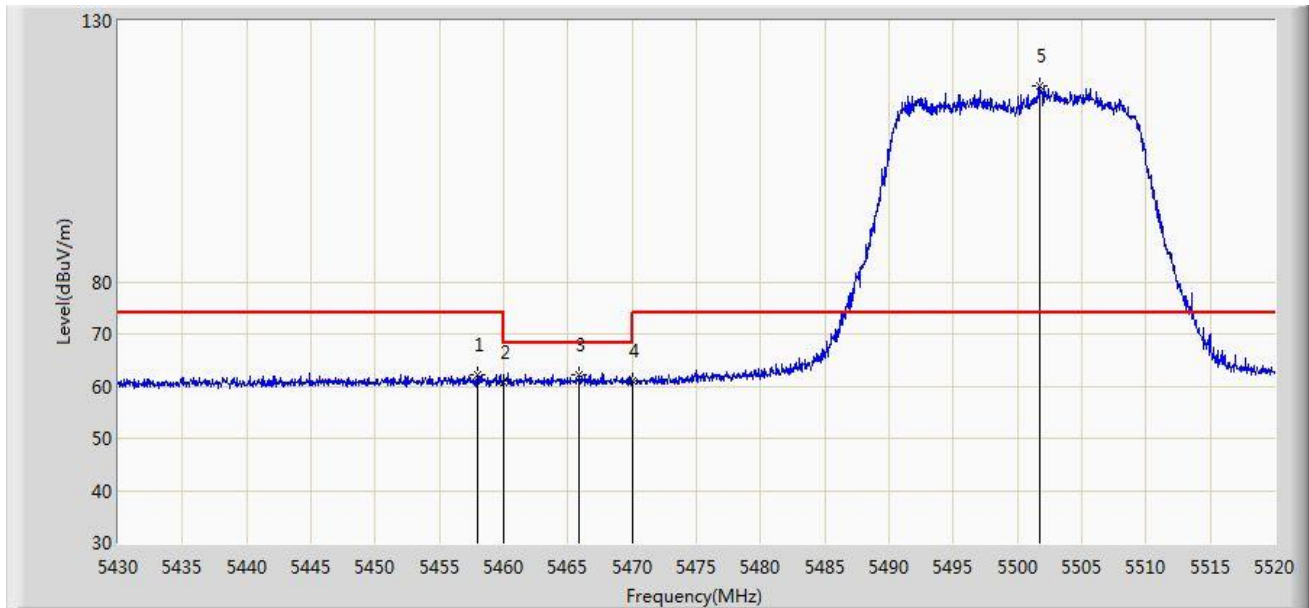


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.945	62.185	55.563	-11.815	74.000	6.622	PK
2			5460.000	60.848	54.236	-13.152	74.000	6.612	PK
3			5465.910	62.286	55.701	-5.914	68.200	6.585	PK
4			5470.000	60.992	54.425	-7.208	68.200	6.567	PK
5		*	5501.730	117.444	110.724	N/A	N/A	6.719	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

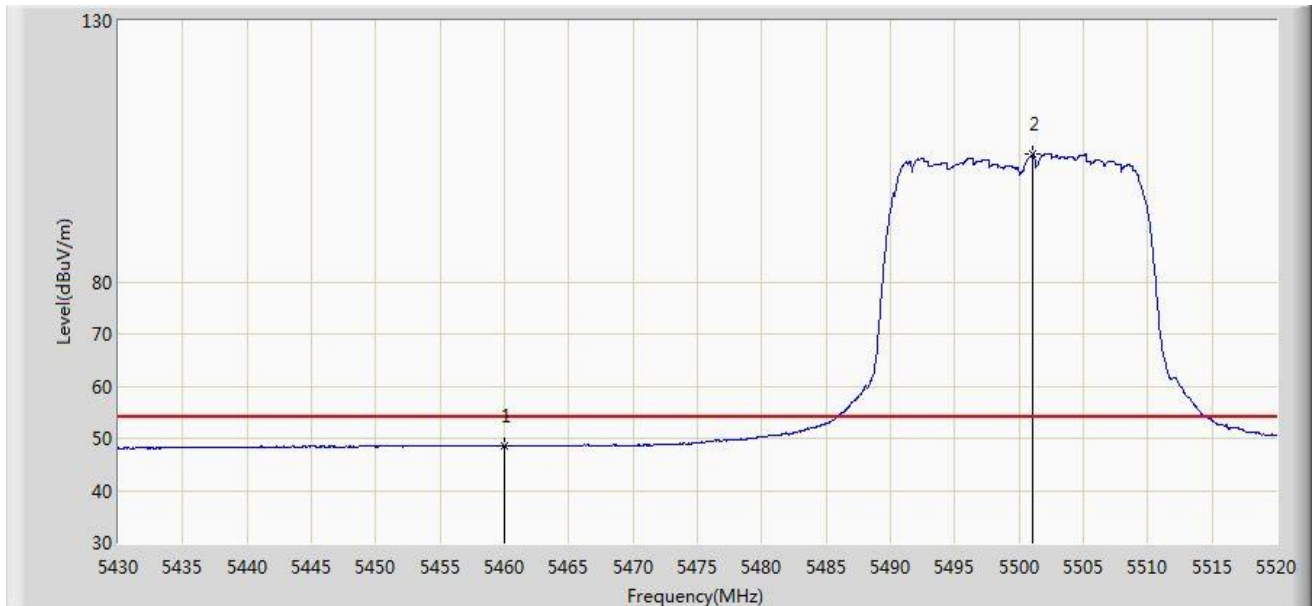


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.678	42.066	-5.322	54.000	6.612	AV
2		*	5501.055	104.413	97.698	N/A	N/A	6.716	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:29
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz	

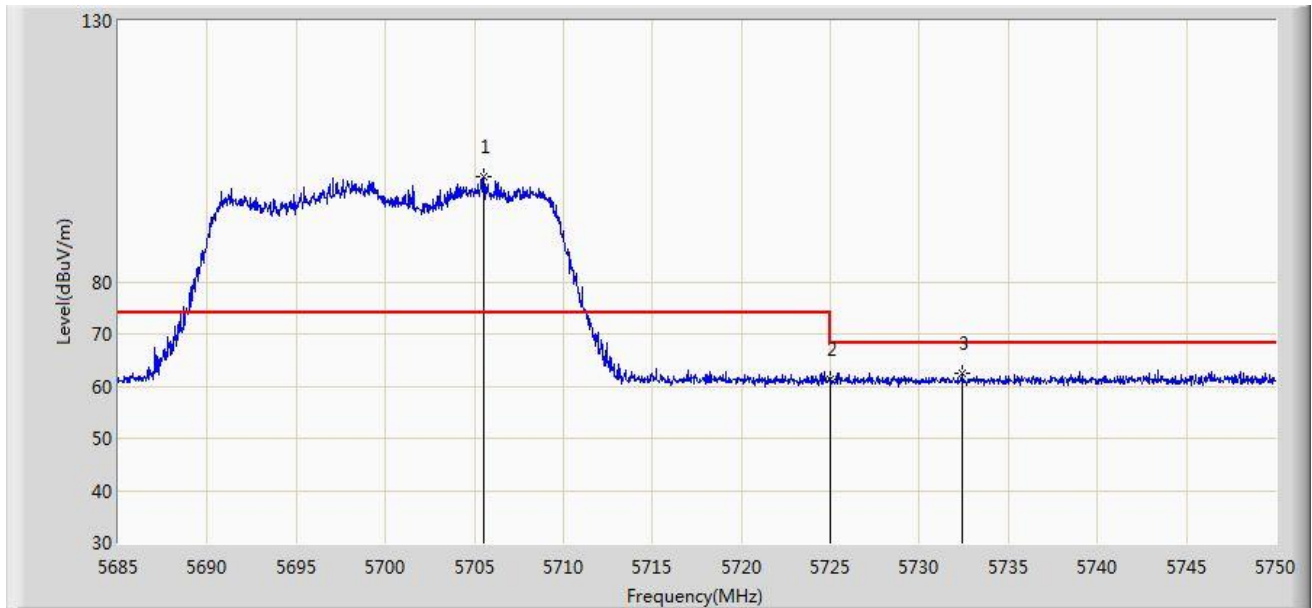


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5705.540	100.114	93.159	N/A	N/A	6.955	PK
2			5725.000	61.319	54.452	-6.881	68.200	6.867	PK
3			5732.417	62.459	55.555	-5.741	68.200	6.903	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz	

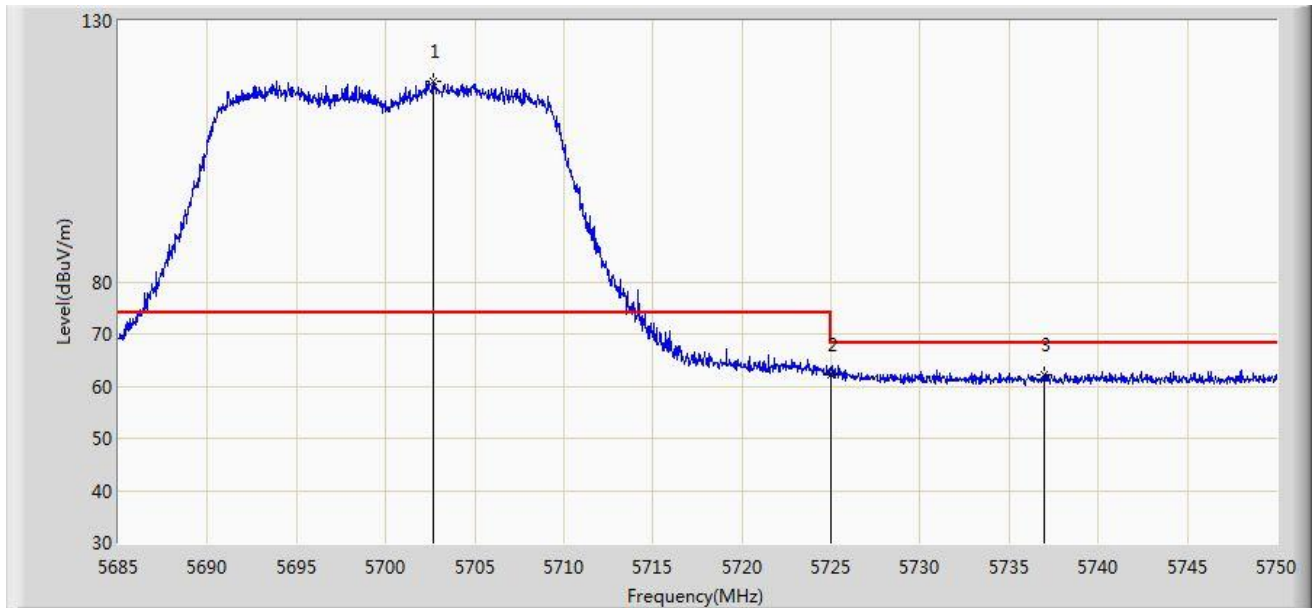


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.647	118.418	111.490	N/A	N/A	6.928	PK
2			5725.000	62.172	55.305	-6.028	68.200	6.867	PK
3			5736.967	62.211	55.276	-5.989	68.200	6.936	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 5310MHz	

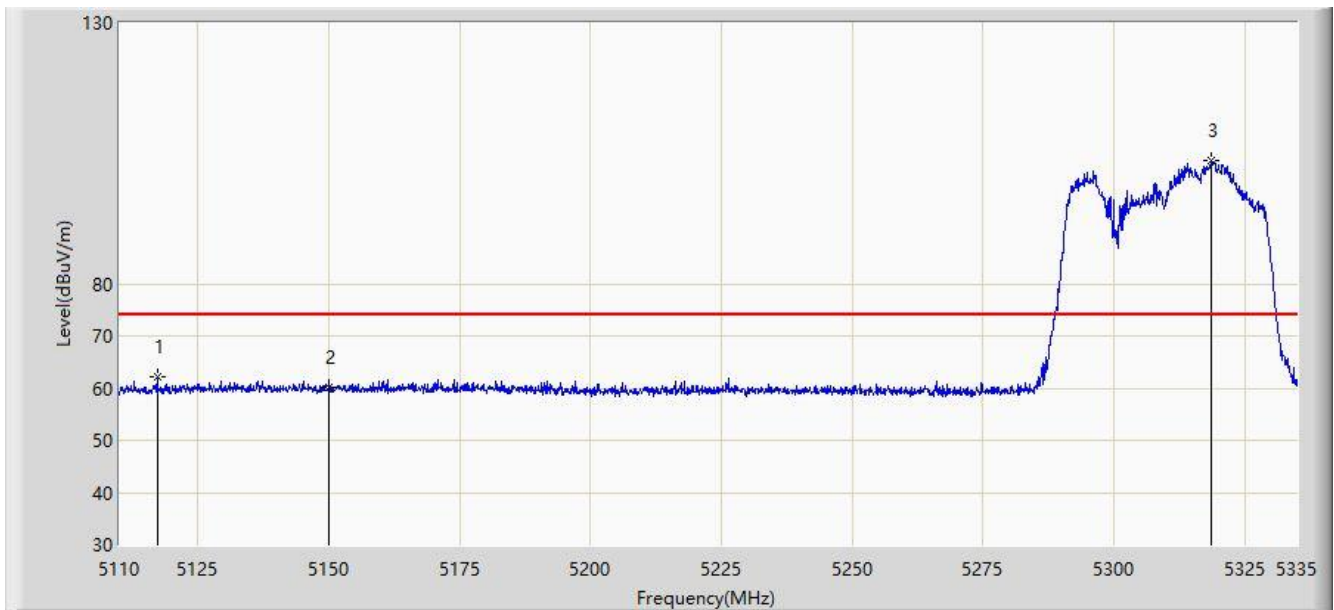


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5117.200	62.054	53.653	-11.946	74.000	8.400	PK
2			5150.000	60.263	51.735	-13.737	74.000	8.528	PK
3		*	5318.575	103.606	95.174	29.606	74.000	8.432	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 5310MHz	

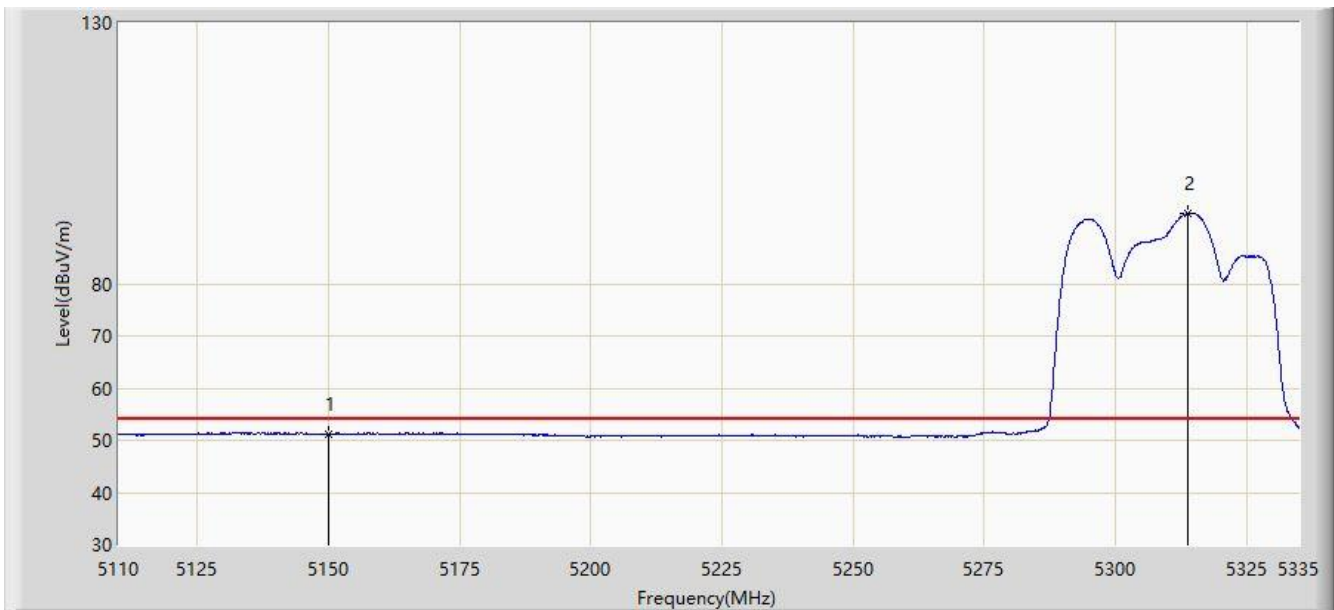


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.259	42.731	-2.741	54.000	8.528	AV
2		*	5313.850	93.522	85.129	39.522	54.000	8.393	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 5310MHz	

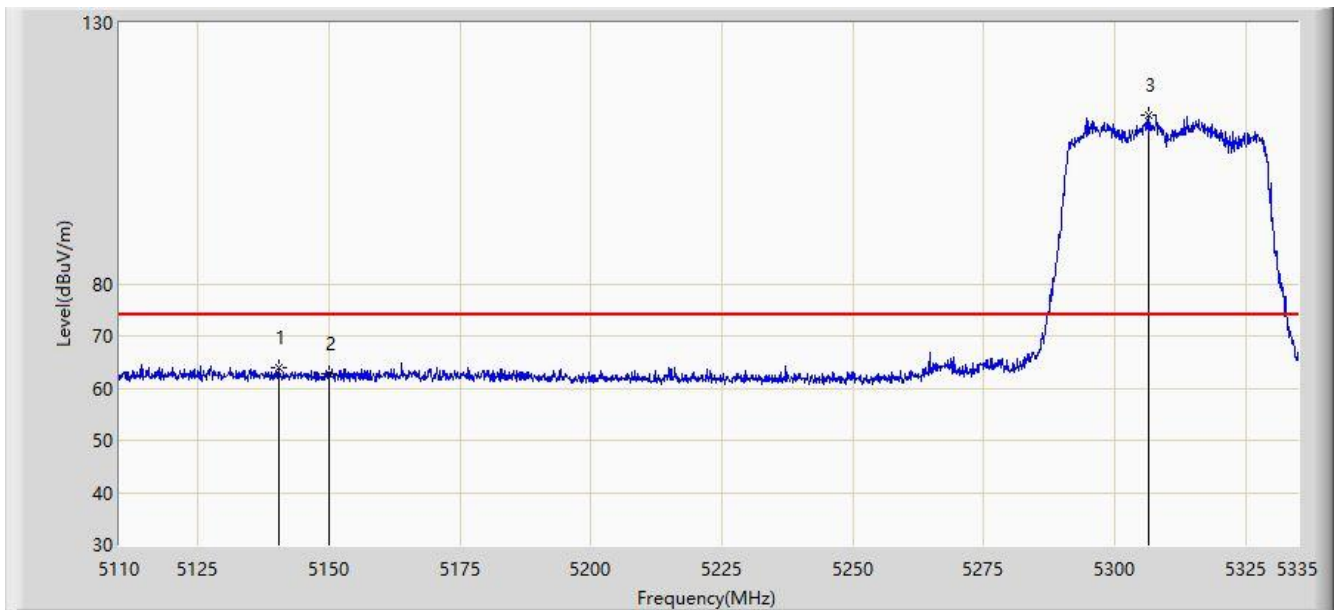


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.487	63.829	55.270	-10.171	74.000	8.559	PK
2			5150.000	62.851	54.323	-11.149	74.000	8.528	PK
3		*	5306.425	112.462	104.135	38.462	74.000	8.328	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 5310MHz	

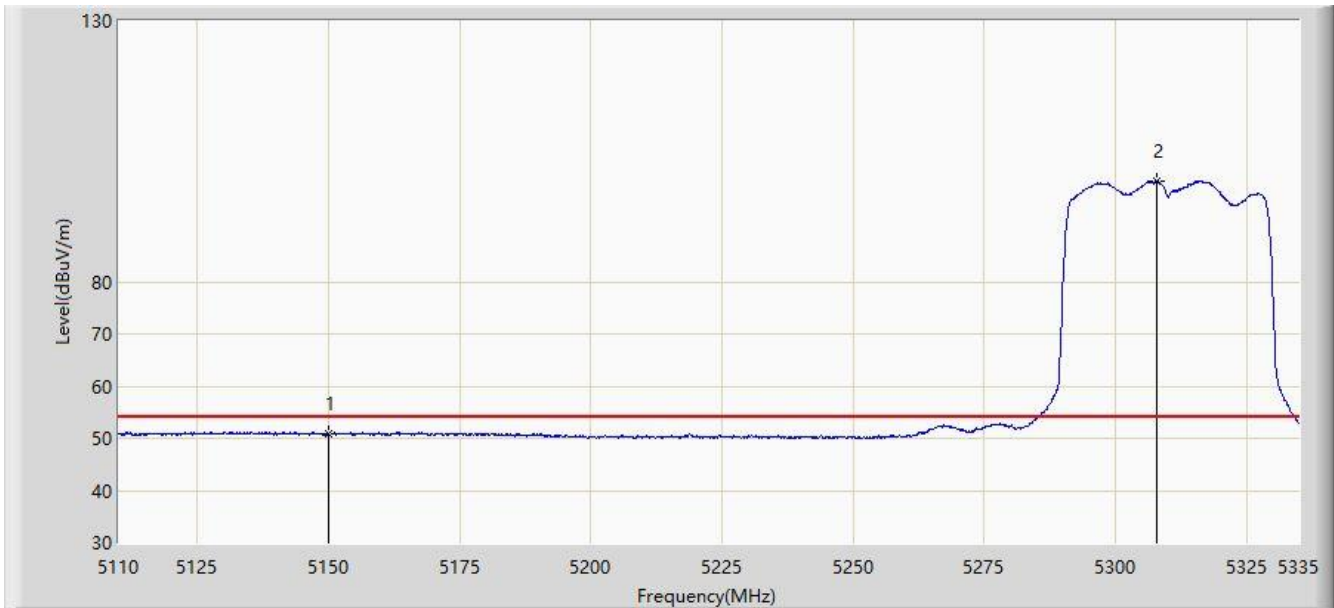


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.817	42.289	-3.183	54.000	8.528	AV
2		*	5307.888	99.208	90.868	45.208	54.000	8.339	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:49
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

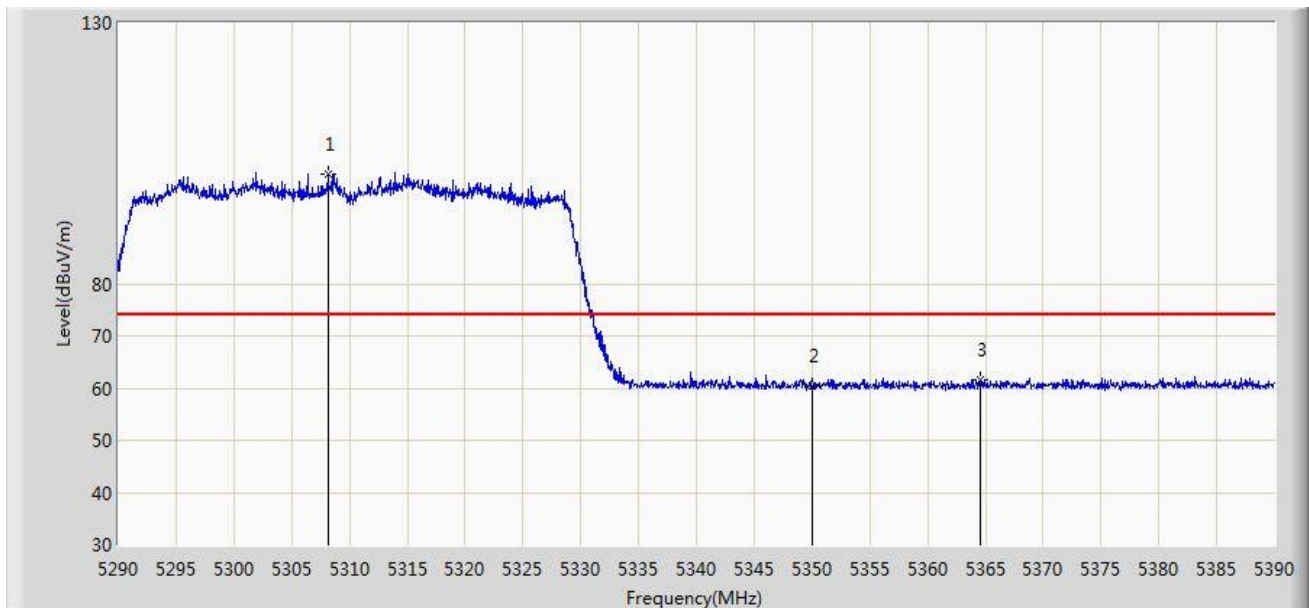


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.150	101.159	94.846	N/A	N/A	6.313	PK
2			5350.000	60.510	54.183	-13.490	74.000	6.327	PK
3			5364.600	61.718	55.299	-12.282	74.000	6.419	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

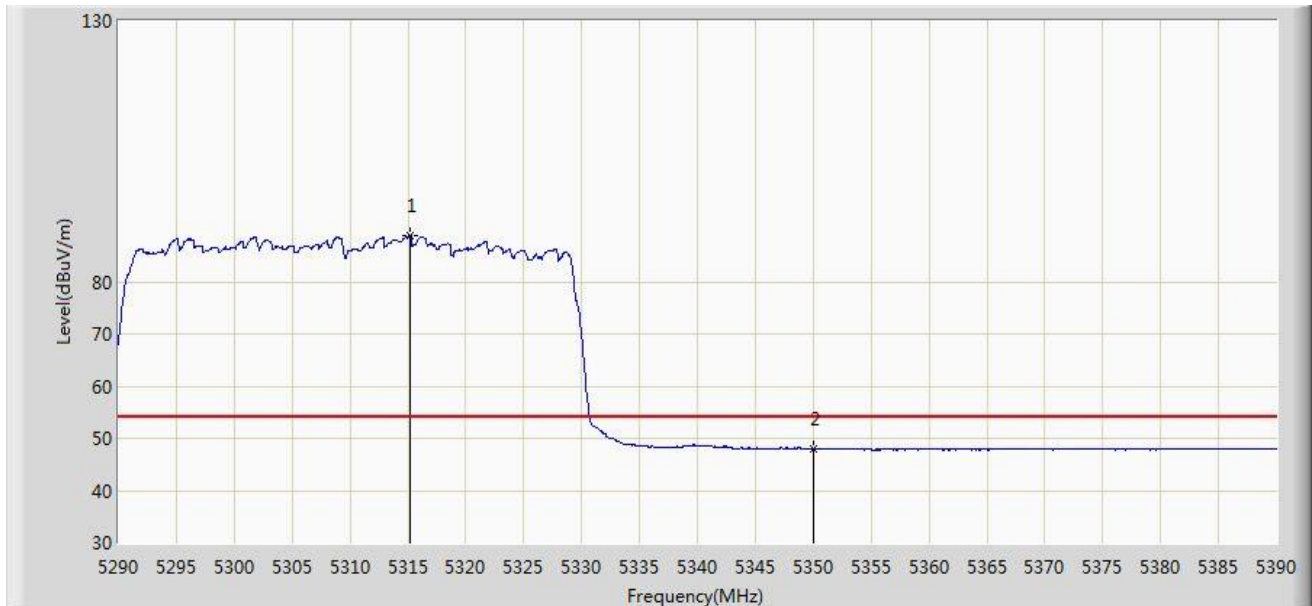


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.150	88.858	82.521	N/A	N/A	6.337	AV
2			5350.000	48.025	41.698	-5.975	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:48
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

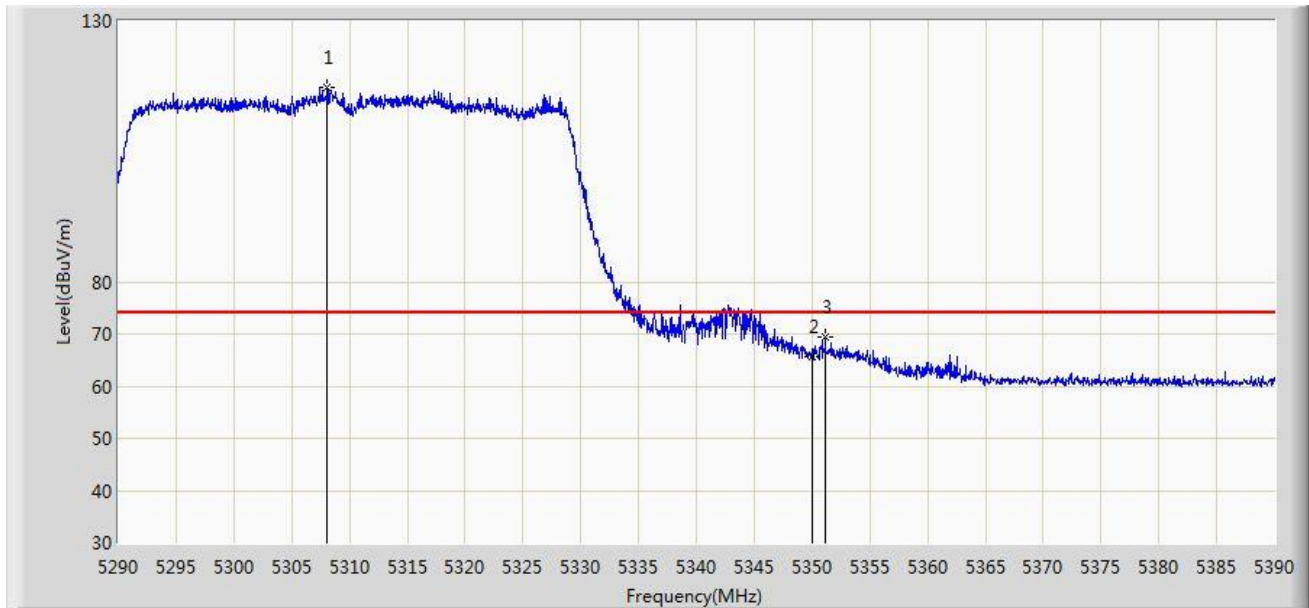


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.050	117.158	110.846	N/A	N/A	6.312	PK
2			5350.000	65.676	59.349	-8.324	74.000	6.327	PK
3			5351.150	69.280	62.953	-4.720	74.000	6.327	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz	

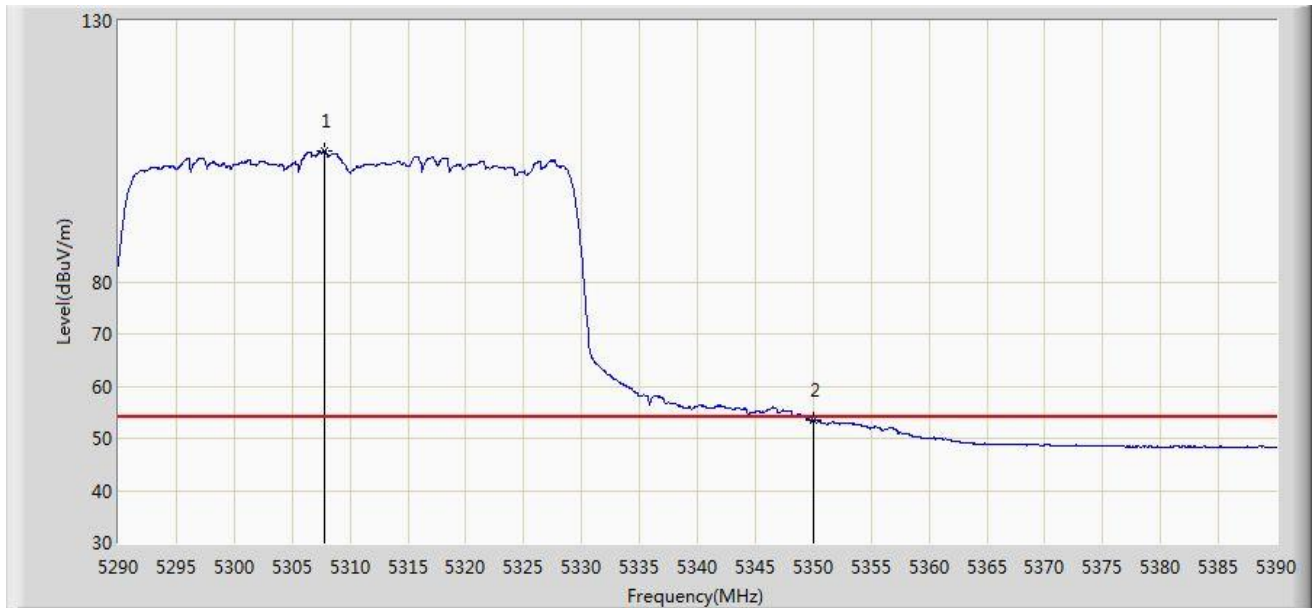


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.750	105.016	98.705	N/A	N/A	6.311	AV
2			5350.000	53.453	47.126	-0.547	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

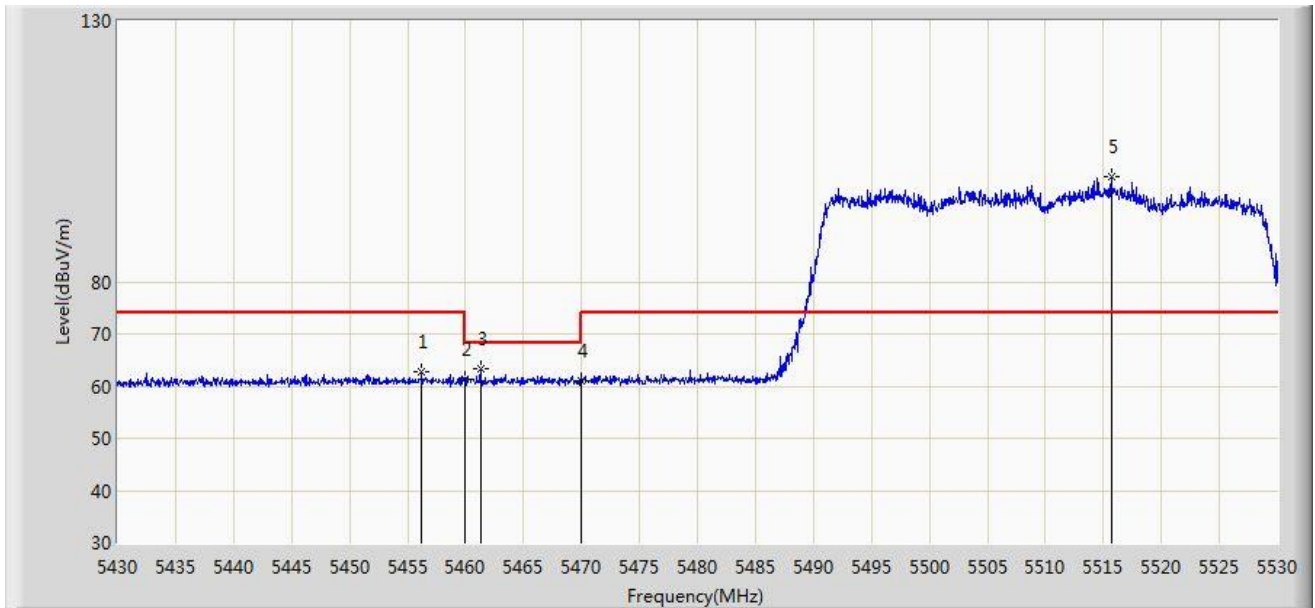


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.200	62.682	56.052	-11.318	74.000	6.630	PK
2			5460.000	61.217	54.605	-12.783	74.000	6.612	PK
3			5461.300	63.429	56.822	-4.771	68.200	6.606	PK
4			5470.000	60.937	54.370	-7.263	68.200	6.567	PK
5		*	5515.700	100.103	93.385	N/A	N/A	6.718	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

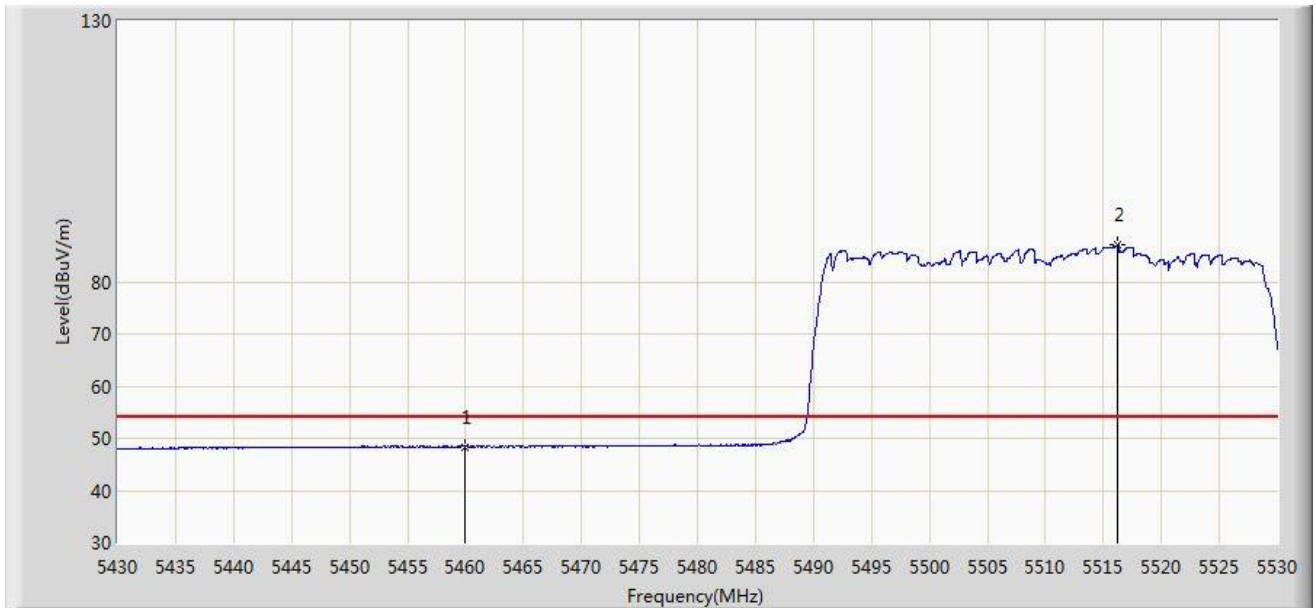


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.401	41.789	-5.599	54.000	6.612	AV
2		*	5516.250	87.039	80.322	N/A	N/A	6.717	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

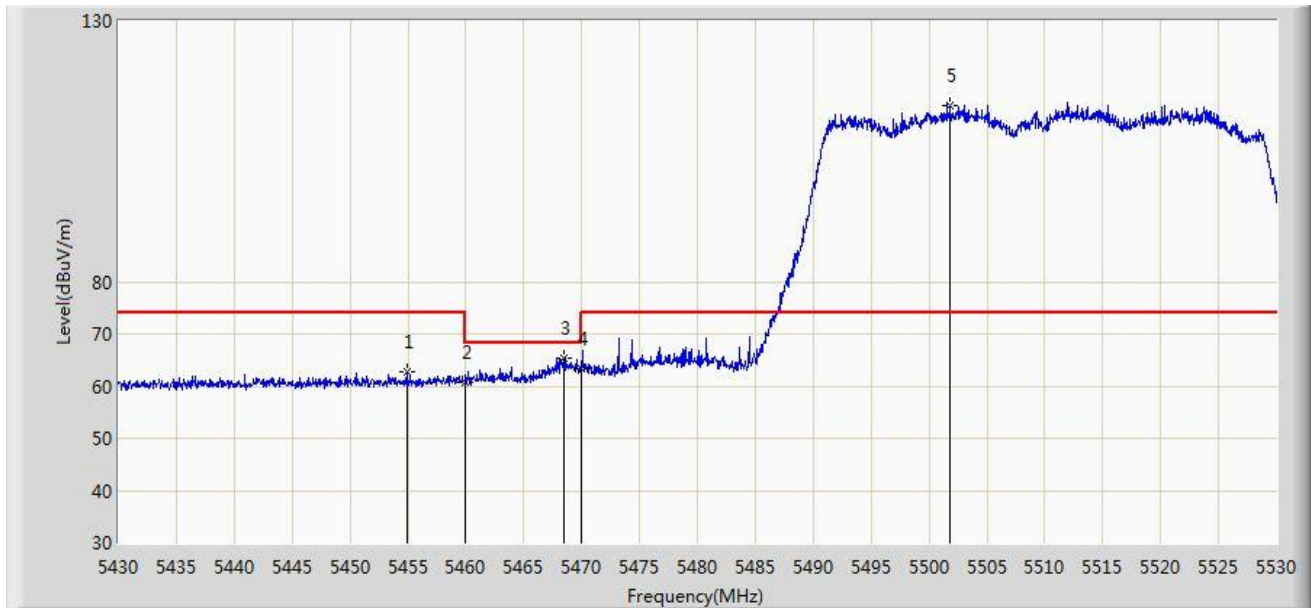


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.900	62.619	55.983	-11.381	74.000	6.636	PK
2			5460.000	60.751	54.139	-13.249	74.000	6.612	PK
3			5468.450	65.308	58.734	-2.892	68.200	6.574	PK
4			5470.000	63.261	56.694	-4.939	68.200	6.567	PK
5		*	5501.850	113.706	106.985	N/A	N/A	6.721	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/18 - 23:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz	

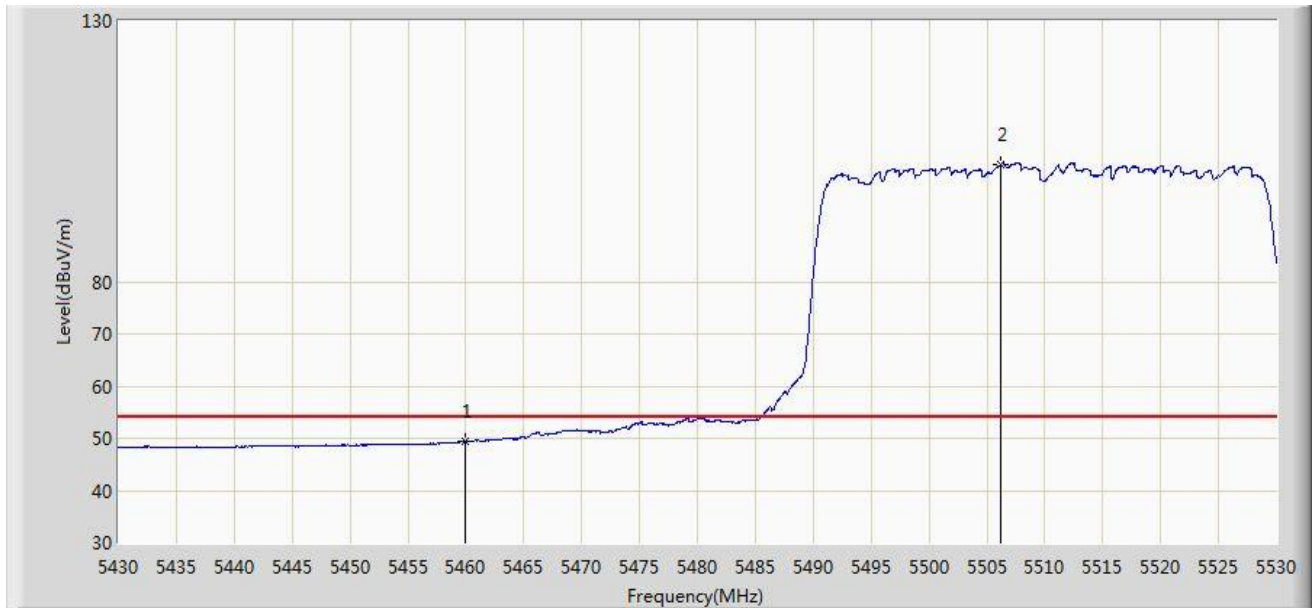


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.473	42.861	-4.527	54.000	6.612	AV
2		*	5506.250	102.518	95.777	N/A	N/A	6.741	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz	

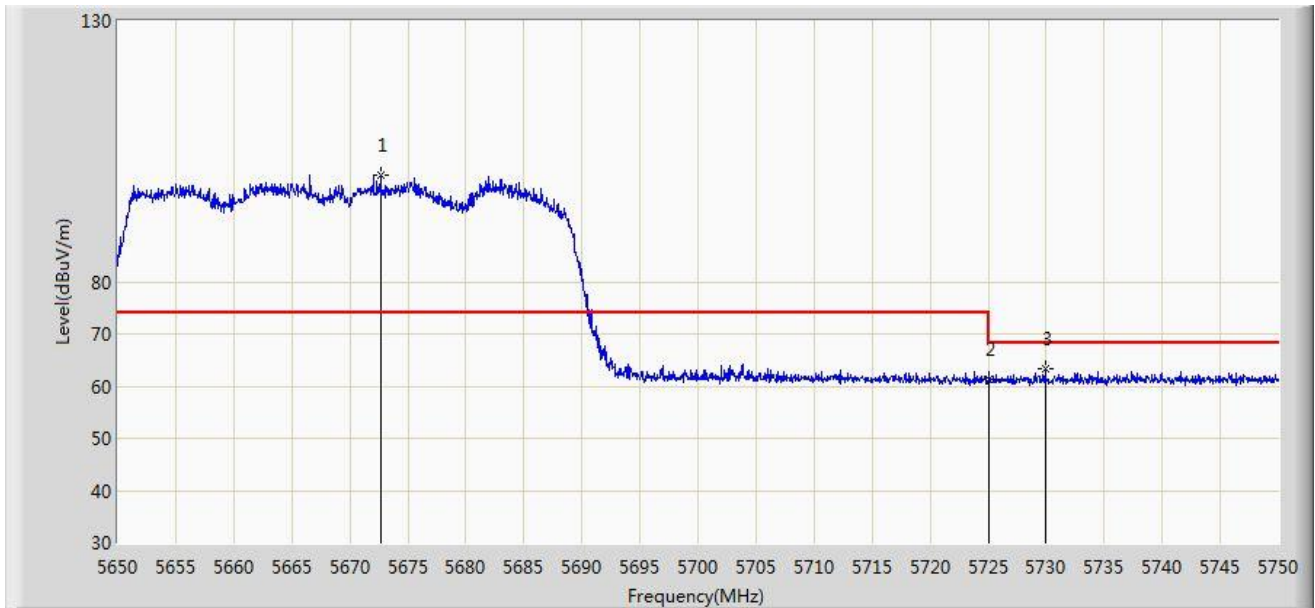


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.650	100.529	93.809	N/A	N/A	6.719	PK
2			5725.000	61.368	54.501	-6.832	68.200	6.867	PK
3			5729.900	63.420	56.533	-4.780	68.200	6.887	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:03
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz	

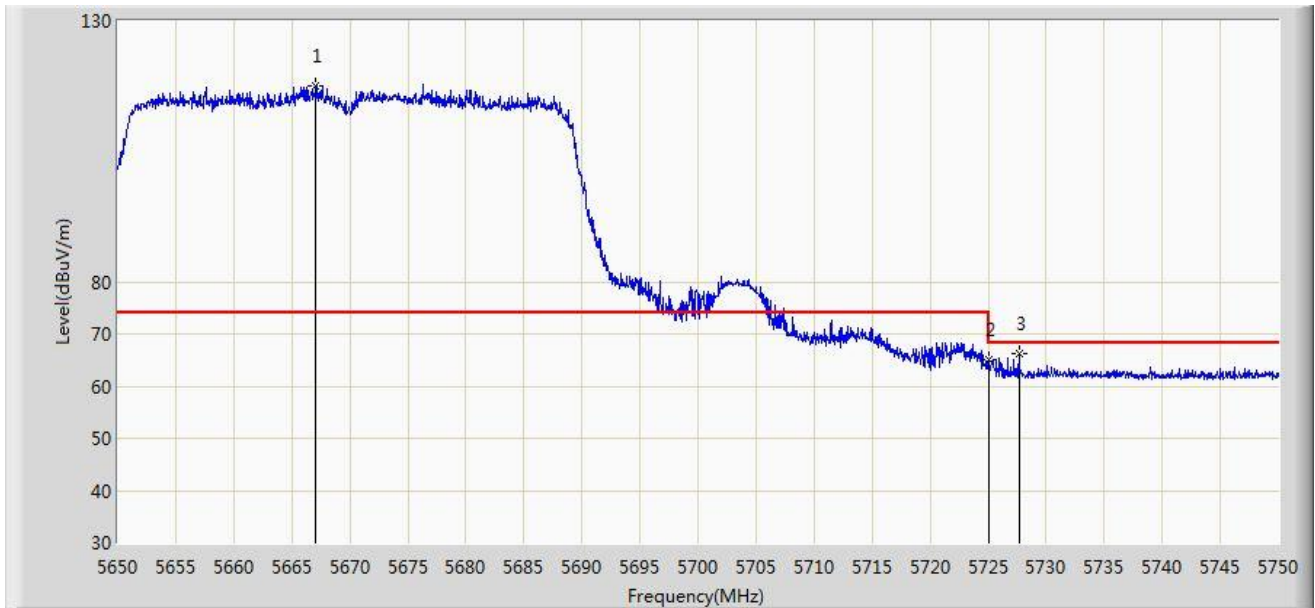


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.050	117.555	110.819	N/A	N/A	6.736	PK
2			5725.000	64.950	58.083	-3.250	68.200	6.867	PK
3			5727.650	66.271	59.400	-1.929	68.200	6.871	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at channel 5290MHz	

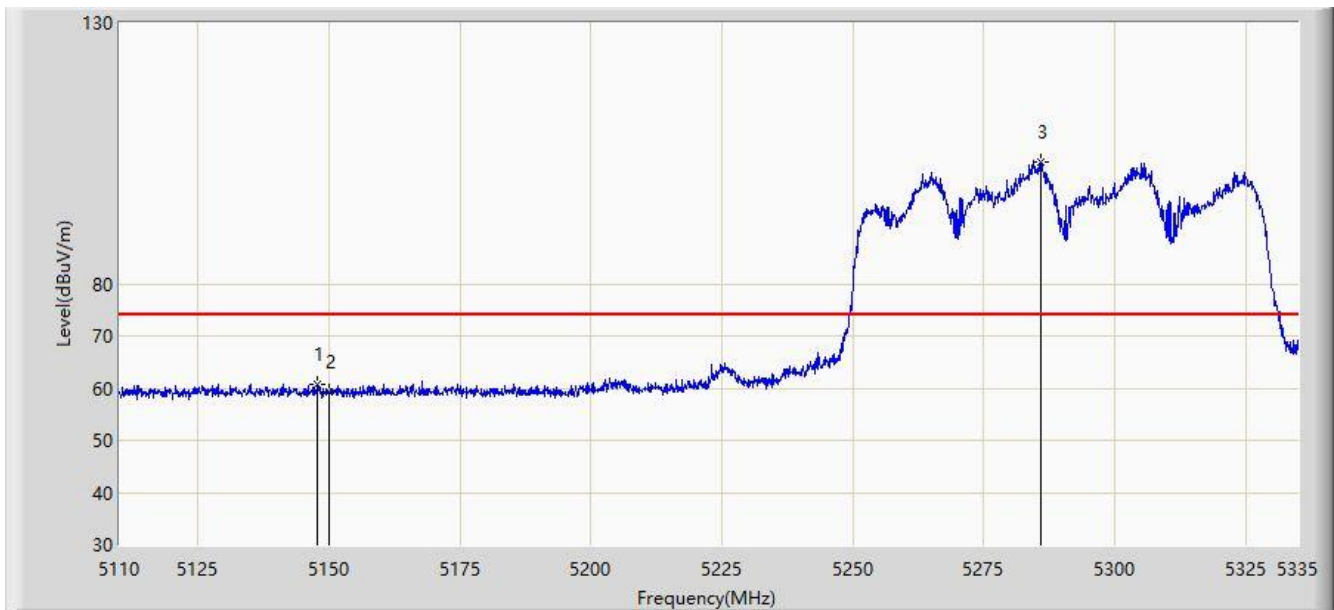


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.800	60.614	52.100	-13.386	74.000	8.515	PK
2			5150.000	59.303	50.775	-14.697	74.000	8.528	PK
3		*	5285.950	103.446	95.326	29.446	74.000	8.120	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at channel 5290MHz	

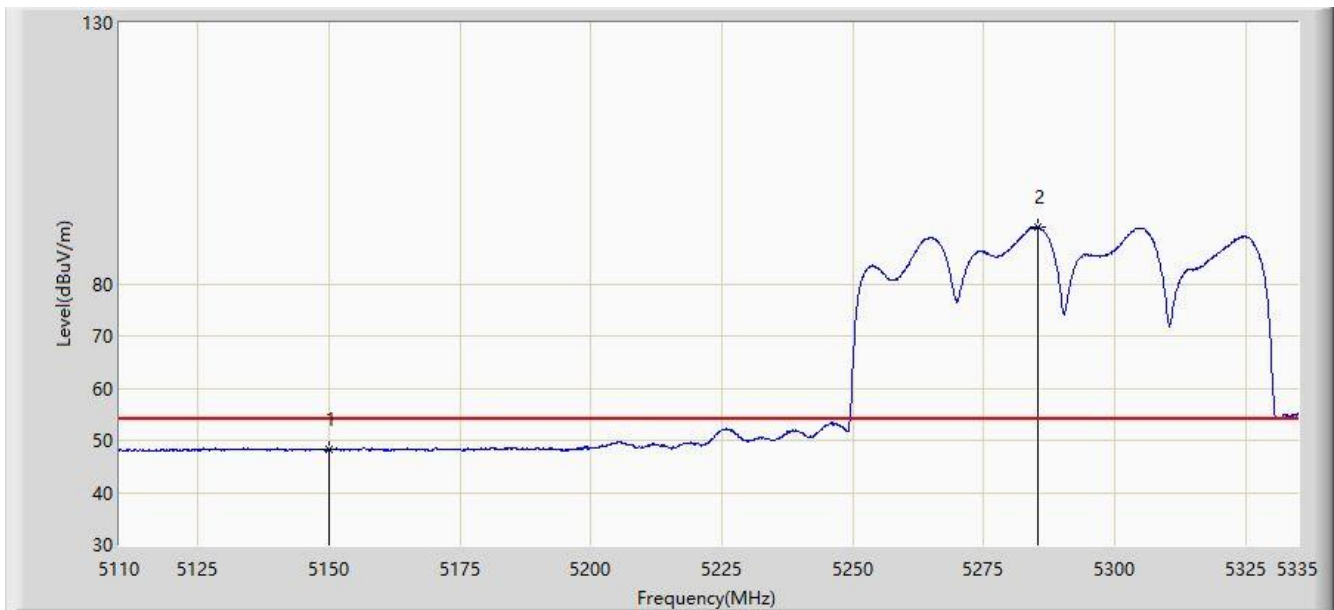


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.284	39.756	-5.716	54.000	8.528	AV
2		*	5285.500	90.835	82.719	36.835	54.000	8.115	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at channel 5290MHz	

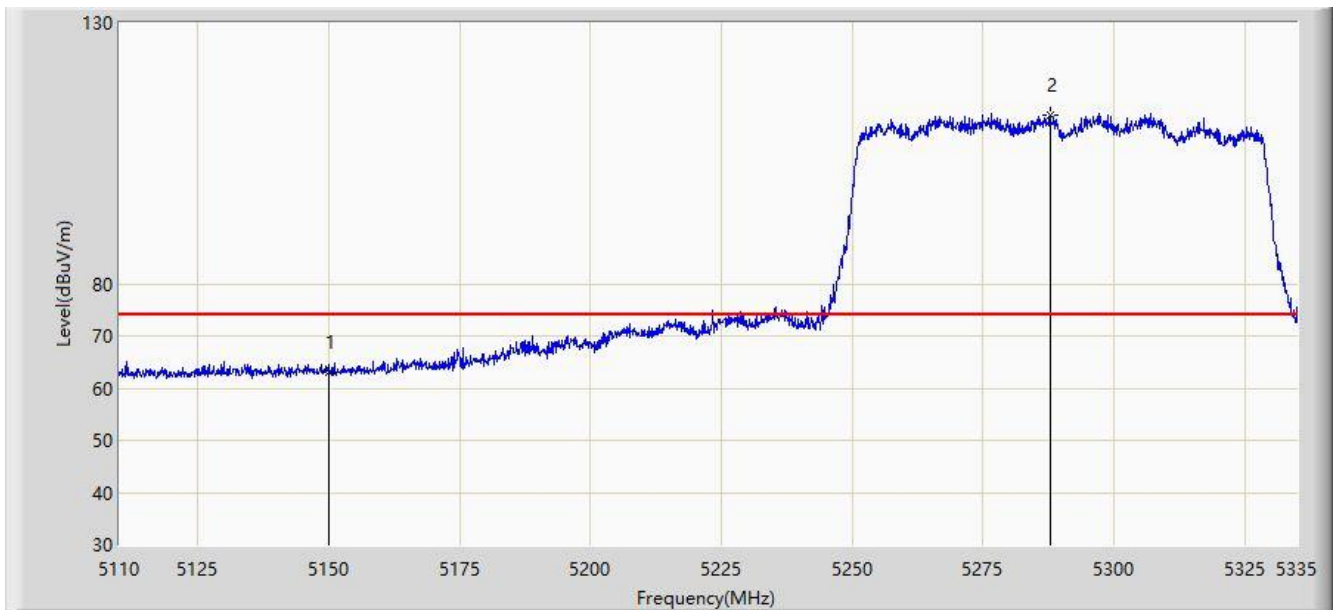


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.899	54.371	-11.101	74.000	8.528	PK
2		*	5287.862	112.332	104.191	38.332	74.000	8.140	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellare	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE80 at channel 5290MHz	

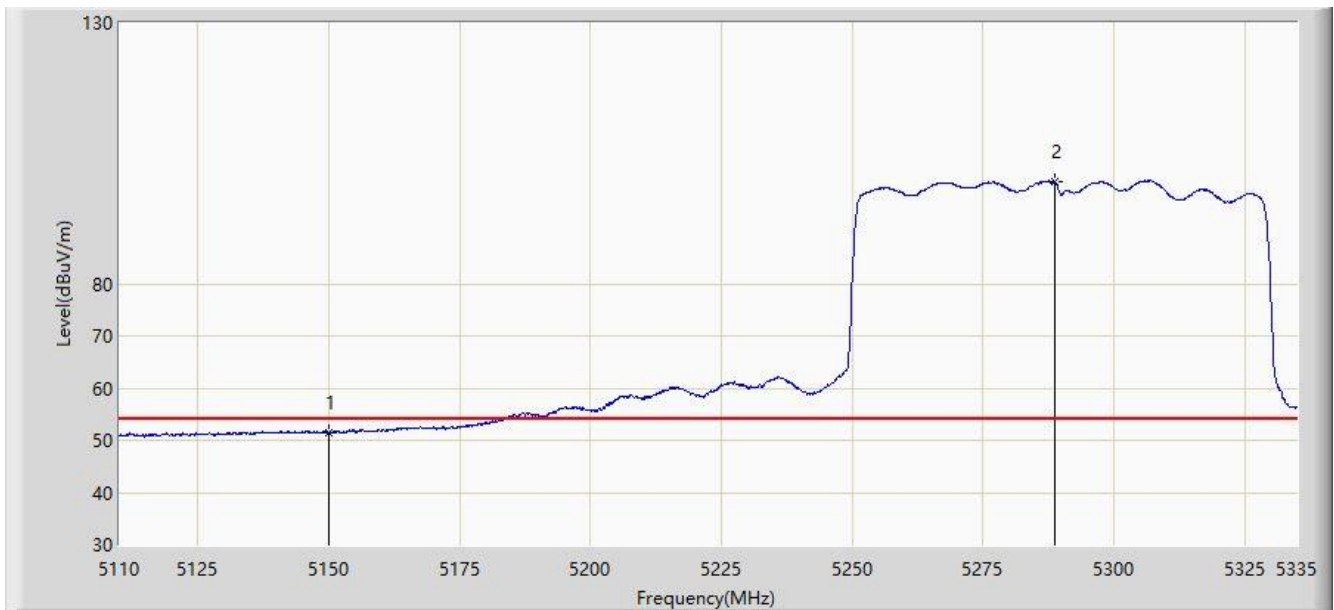


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.427	42.899	-2.573	54.000	8.528	AV
2		*	5288.650	99.433	91.284	45.433	54.000	8.149	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

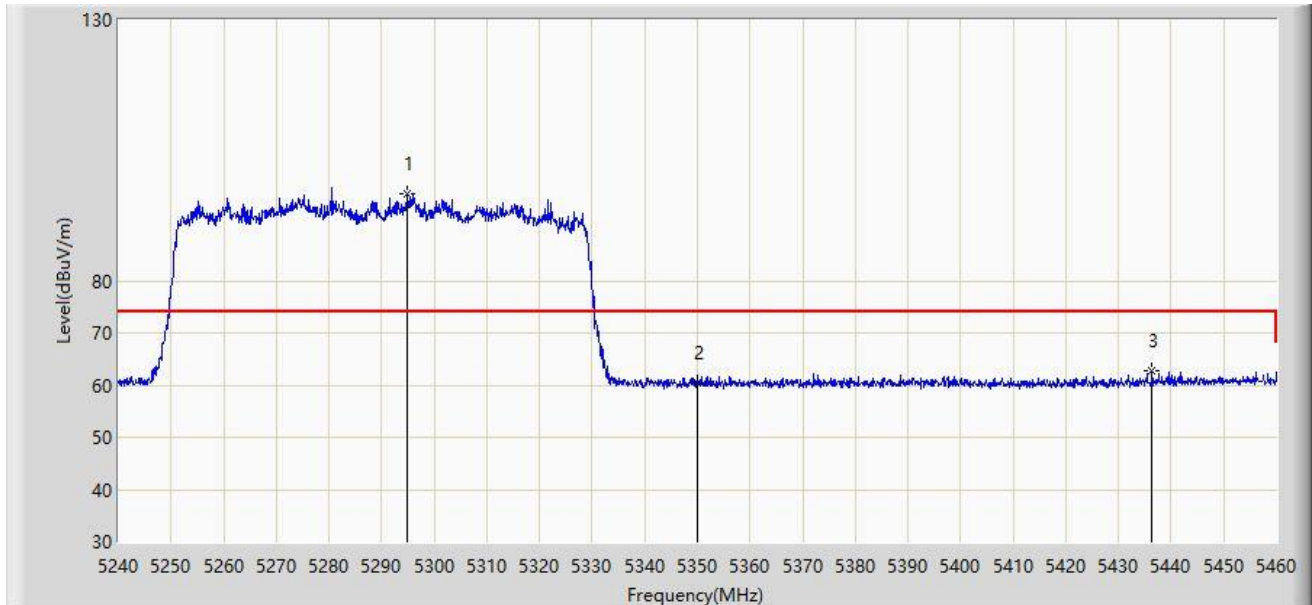


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.890	96.674	90.414	N/A	N/A	6.260	PK
2			5350.000	60.559	54.232	-13.441	74.000	6.327	PK
3			5436.350	62.708	56.144	-11.292	74.000	6.563	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/23 - 21:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

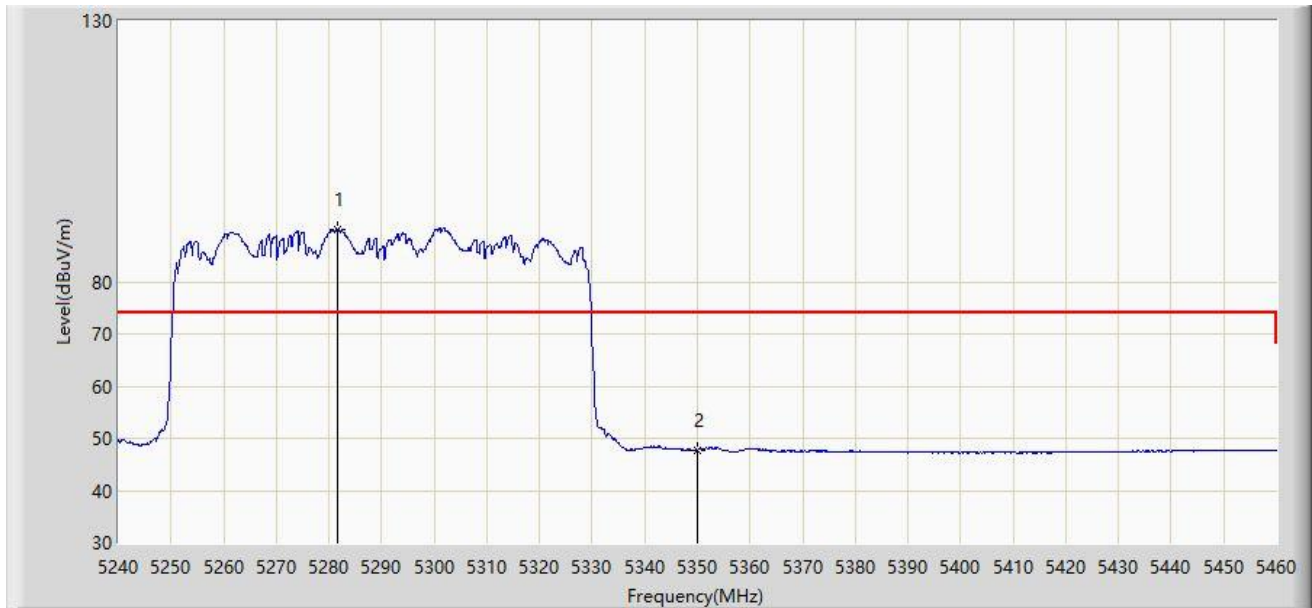


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.580	90.097	83.854	N/A	N/A	6.243	PK
2			5350.000	47.804	41.477	-26.196	74.000	6.327	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

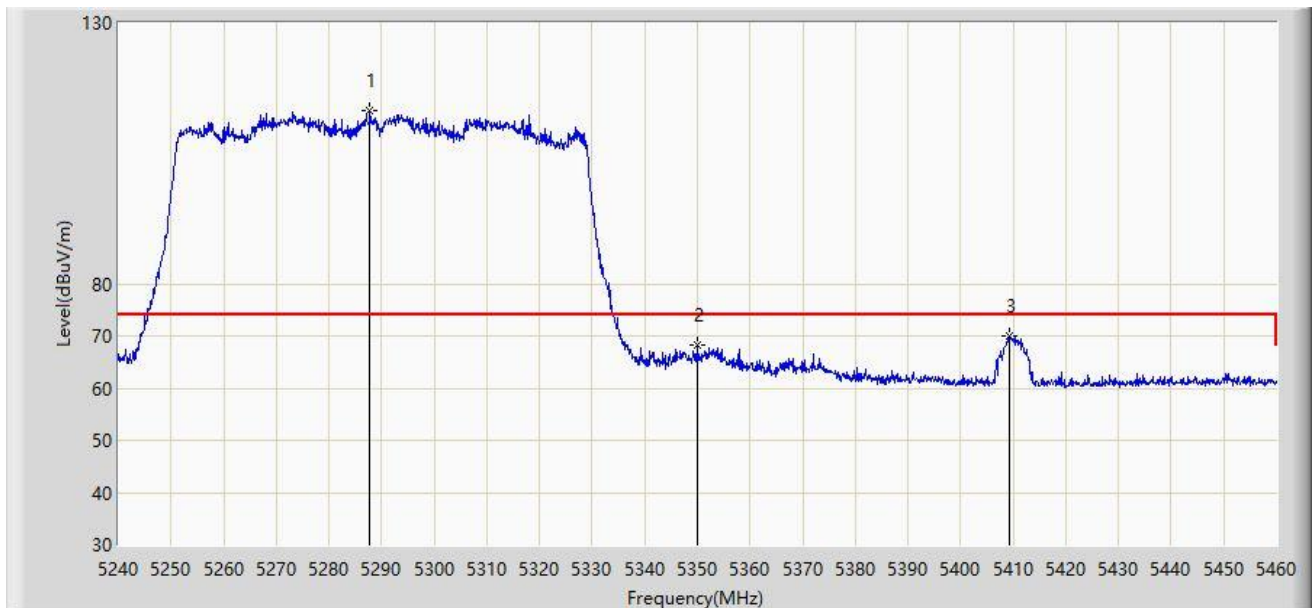


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5287.740	113.063	106.823	N/A	N/A	6.241	PK
2			5350.000	68.168	61.841	-5.832	74.000	6.327	PK
3			5409.180	70.069	63.633	-3.931	74.000	6.435	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz	

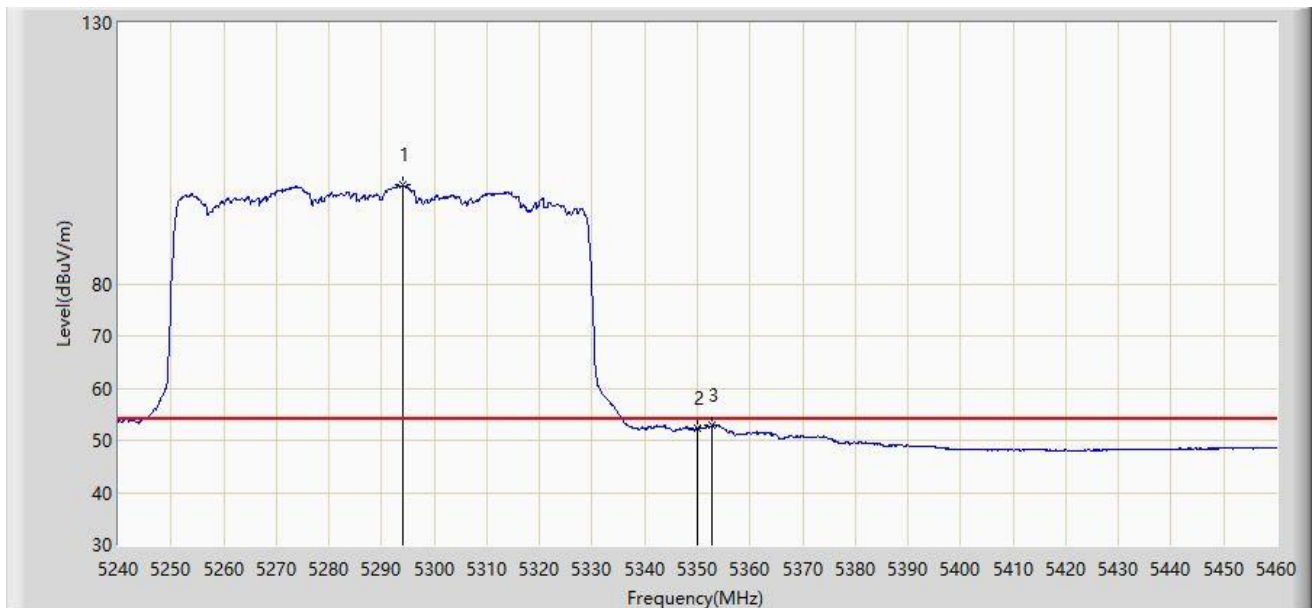


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5294.120	98.849	92.591	N/A	N/A	6.258	AV
2			5350.000	52.335	46.008	-1.665	54.000	6.327	AV
3			5352.860	52.834	46.501	-1.166	54.000	6.333	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

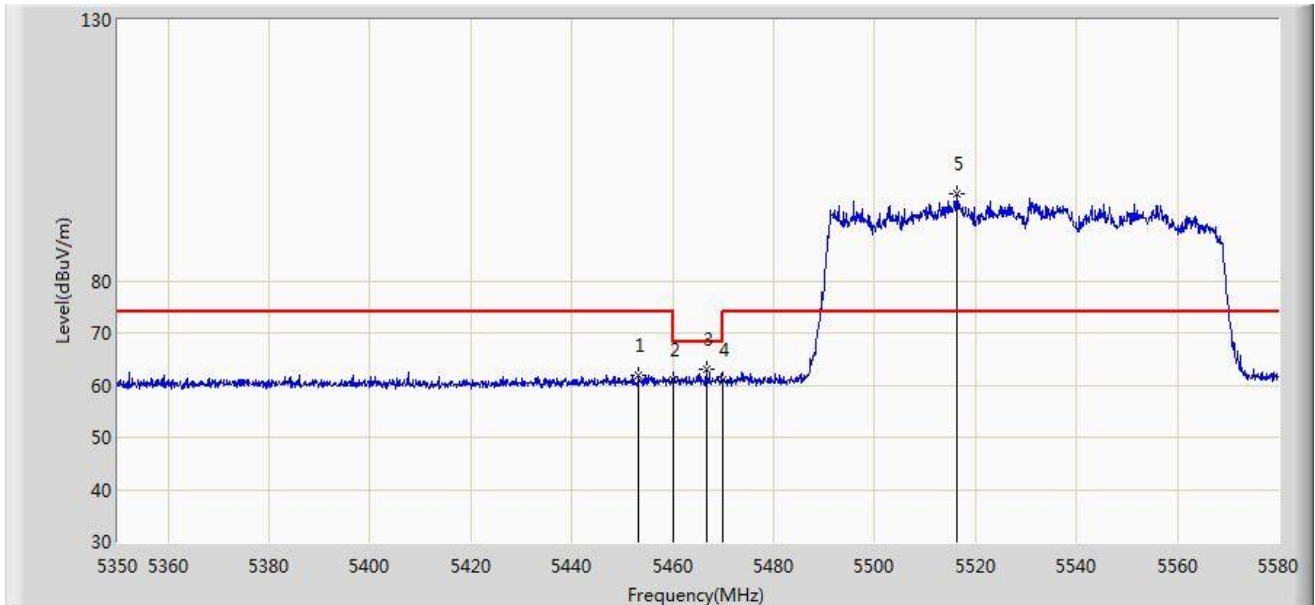


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.270	61.971	55.335	-12.029	74.000	6.635	PK
2			5460.000	60.918	54.306	-13.082	74.000	6.612	PK
3			5466.610	63.066	56.484	-5.134	68.200	6.583	PK
4			5470.000	61.016	54.449	-7.184	68.200	6.567	PK
5		*	5516.175	96.664	89.947	N/A	N/A	6.717	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

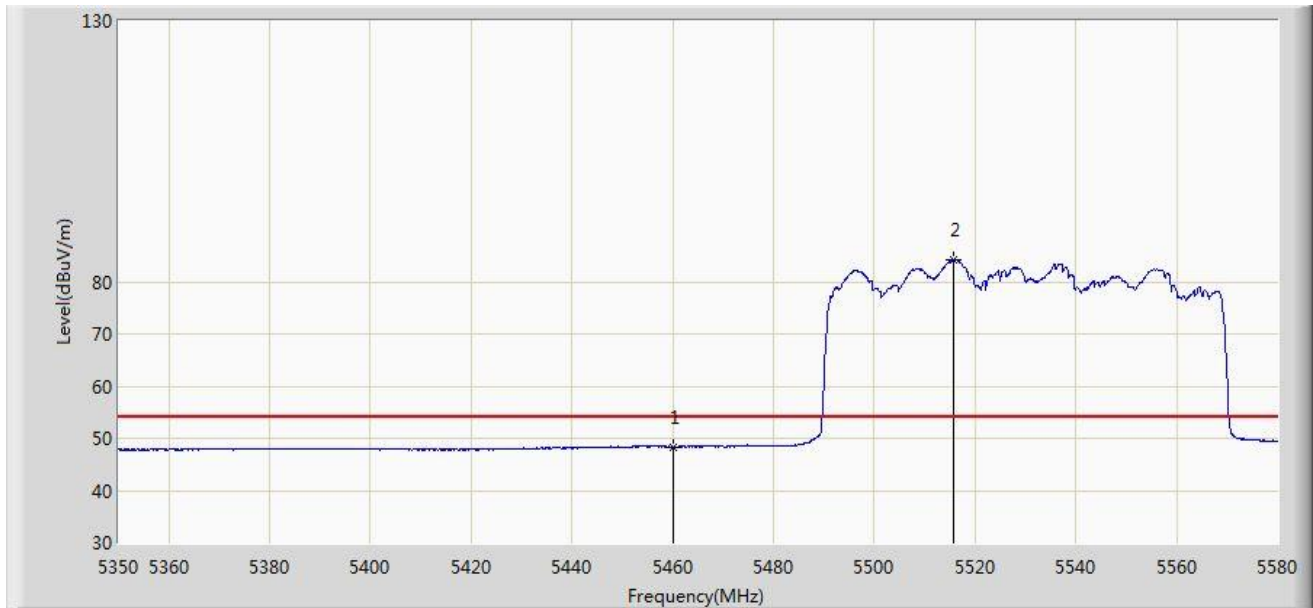


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.332	41.720	-5.668	54.000	6.612	AV
2		*	5515.715	84.221	77.503	N/A	N/A	6.718	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

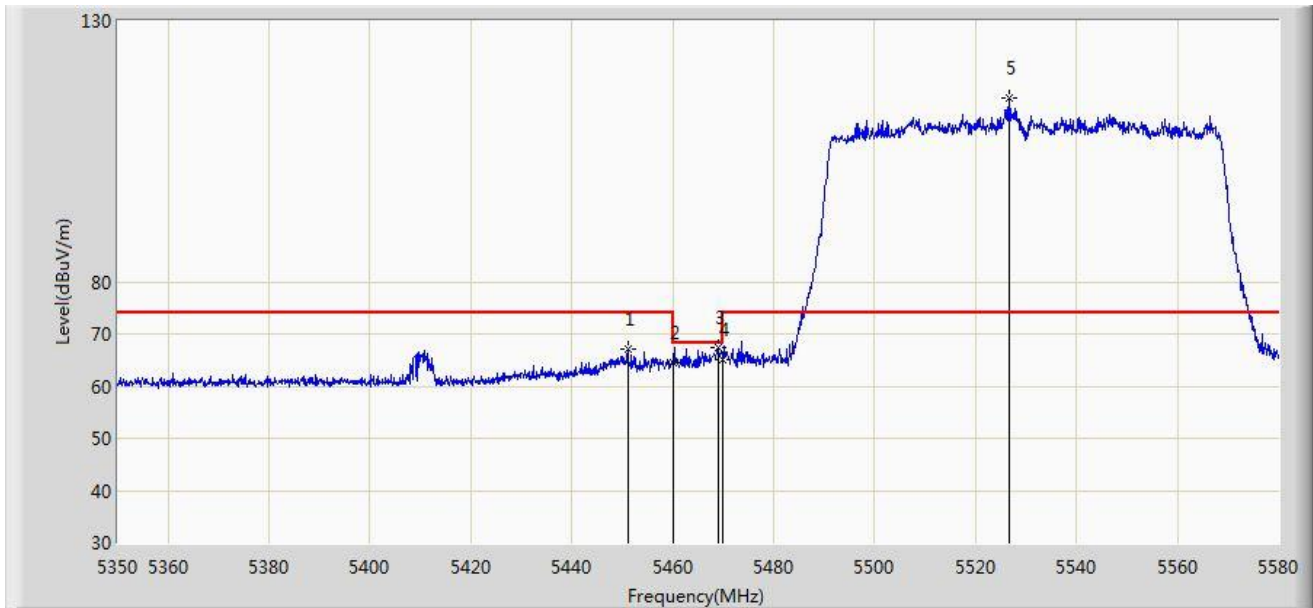


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.085	67.139	60.512	-6.861	74.000	6.627	PK
2			5460.000	64.584	57.972	-9.416	74.000	6.612	PK
3			5468.910	67.474	60.902	-0.726	68.200	6.571	PK
4			5470.000	65.133	58.566	-3.067	68.200	6.567	PK
5		*	5526.755	115.247	108.581	N/A	N/A	6.666	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz	

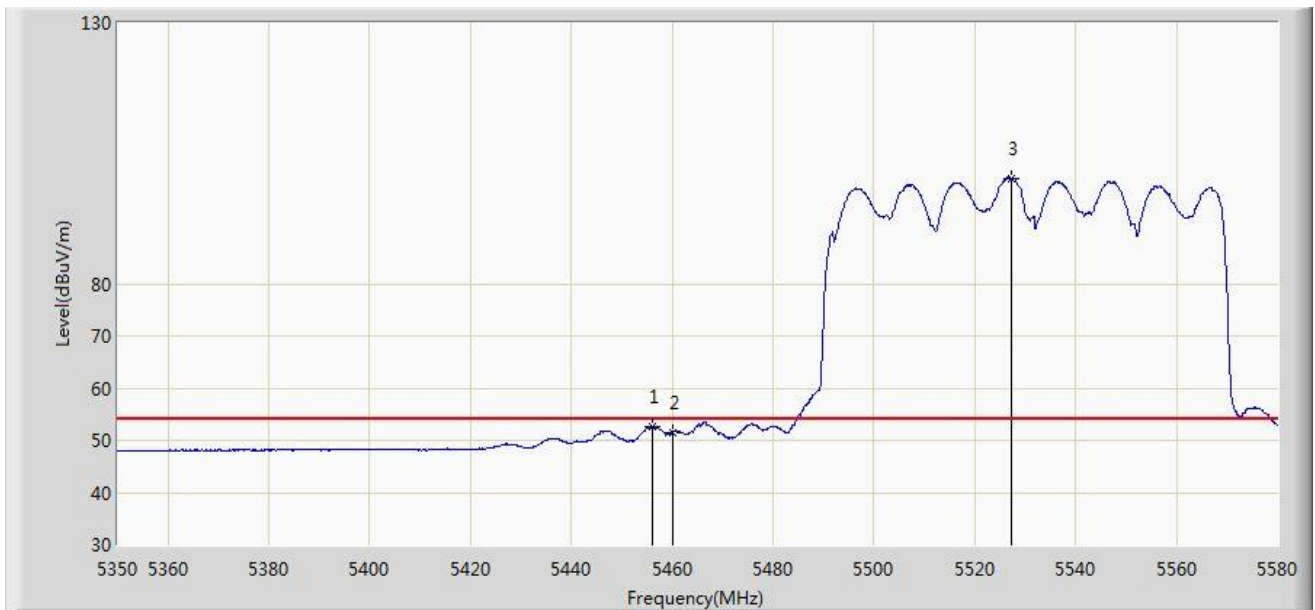


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.030	52.535	45.904	-1.465	54.000	6.631	AV
2			5460.000	51.508	44.896	-2.492	54.000	6.612	AV
3		*	5527.330	100.100	93.438	N/A	N/A	6.661	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz	

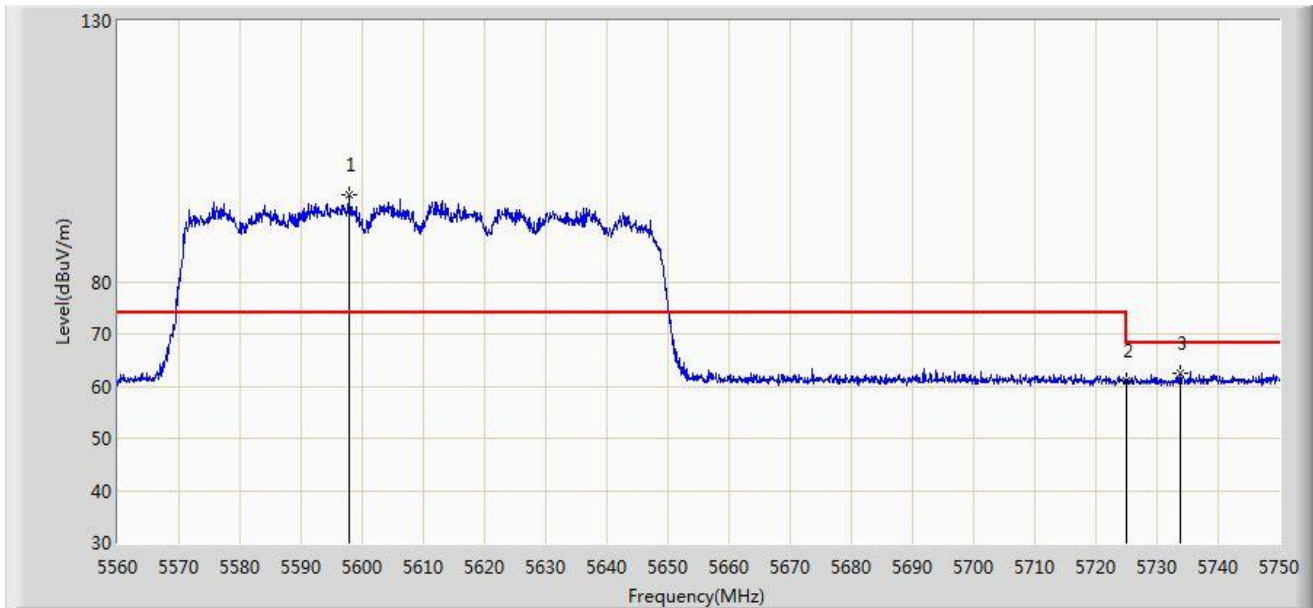


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5597.810	96.545	89.864	N/A	N/A	6.681	PK
2			5725.000	60.985	54.118	-7.215	68.200	6.867	PK
3			5733.850	62.556	55.642	-5.644	68.200	6.914	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/19 - 00:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bacon Dong
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz	

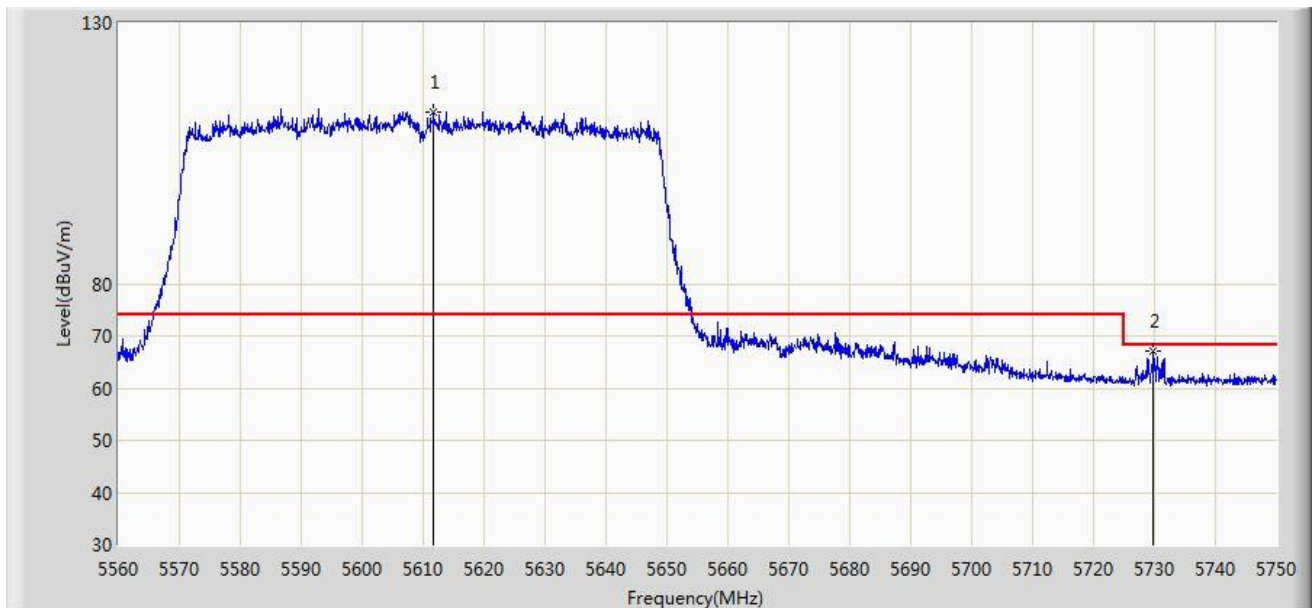


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5611.775	112.964	106.287	N/A	N/A	6.676	PK
2			5729.765	67.105	60.219	-1.095	68.200	6.886	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5210MHz + 5290MHz	

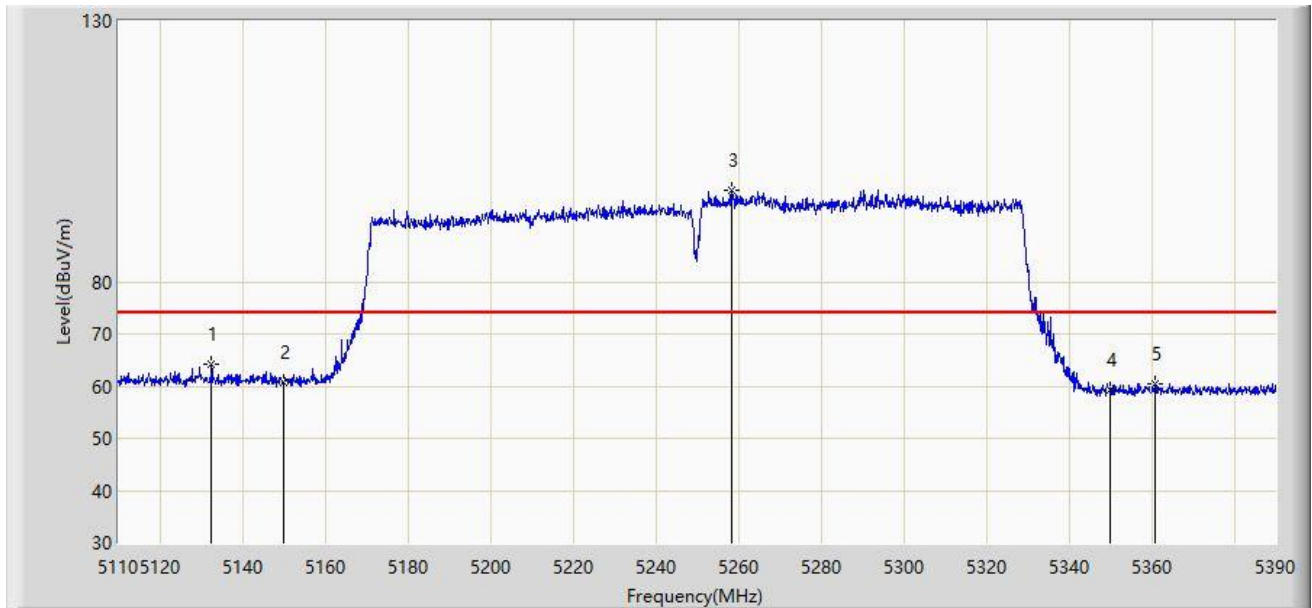


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5132.540	64.139	57.518	-9.861	74.000	6.621	PK
2		5150.000	60.709	54.312	-13.291	74.000	6.398	PK
3	*	5258.260	97.481	91.106	N/A	N/A	6.375	PK
4		5350.000	59.344	53.017	-14.656	74.000	6.327	PK
5		5361.020	60.448	54.055	-13.552	74.000	6.393	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5210MHz + 5290MHz	

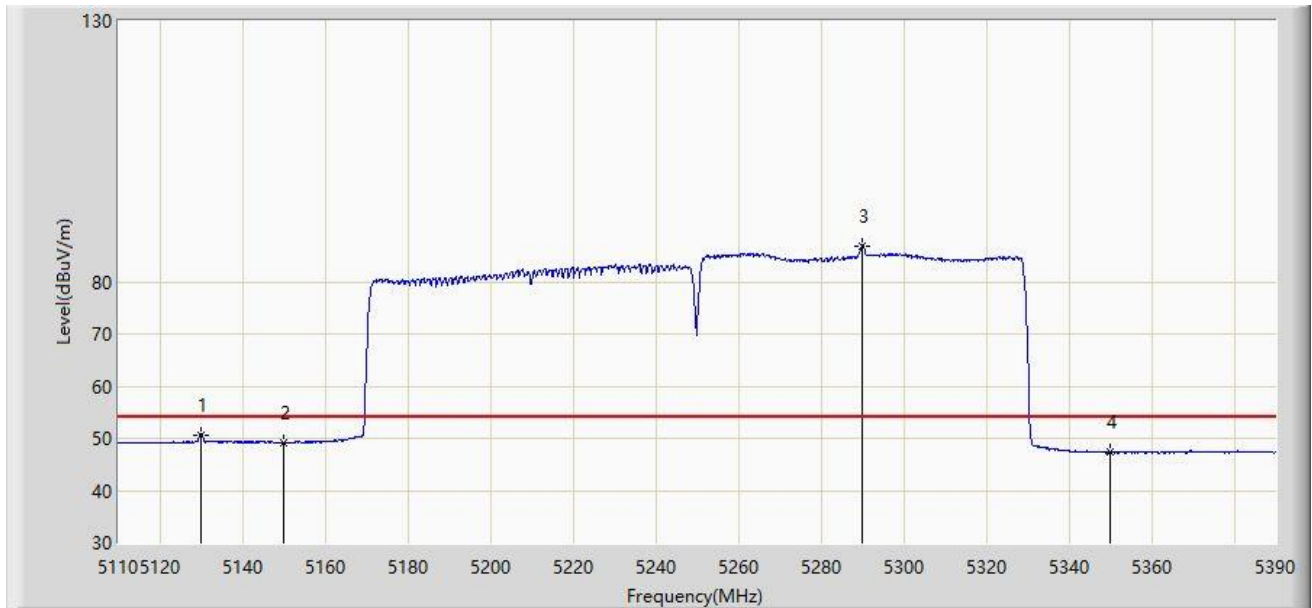


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5129.880	50.695	44.063	-3.305	54.000	6.632	AV
2		5150.000	49.252	42.855	-4.748	54.000	6.398	AV
3	*	5289.900	86.826	80.580	N/A	N/A	6.247	AV
4		5350.000	47.332	41.005	-6.668	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5210MHz + 5290MHz	

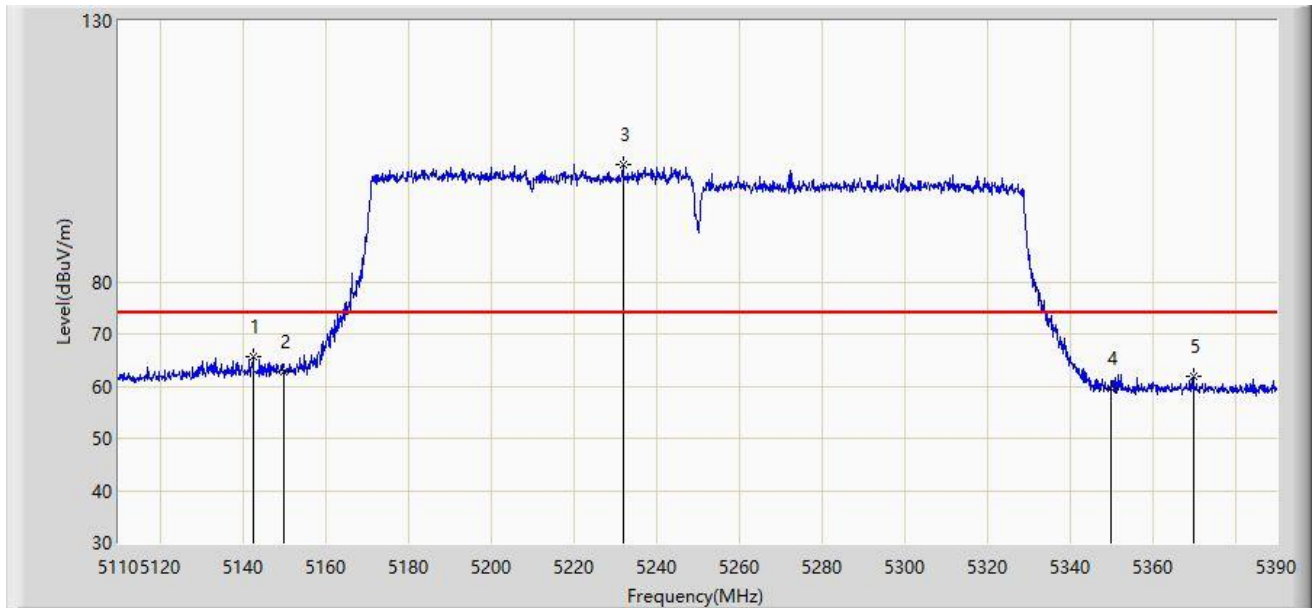


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5142.480	65.585	59.111	-8.415	74.000	6.475	PK
2		5150.000	62.758	56.361	-11.242	74.000	6.398	PK
3	*	5231.940	102.431	96.090	N/A	N/A	6.341	PK
4		5350.000	59.478	53.151	-14.522	74.000	6.327	PK
5		5369.840	61.896	55.443	-12.104	74.000	6.453	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5210MHz + 5290MHz	

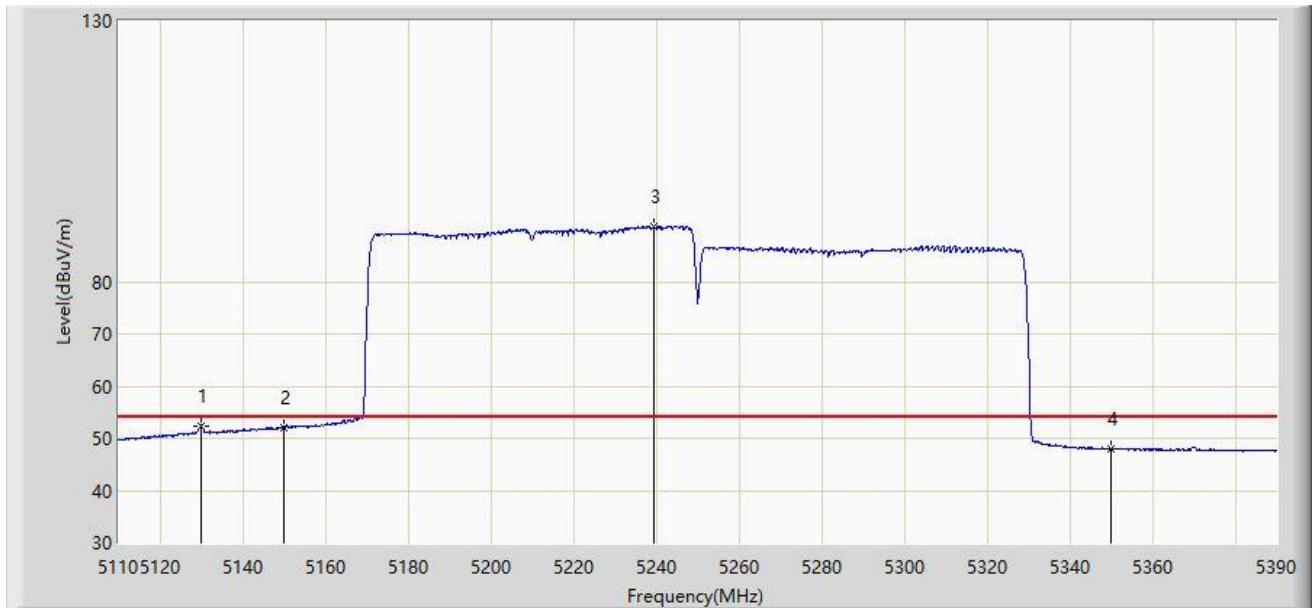


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5129.880	52.265	45.633	-1.735	54.000	6.632	AV
2		5150.000	52.057	45.660	-1.943	54.000	6.398	AV
3	*	5239.500	90.478	84.099	N/A	N/A	6.379	AV
4		5350.000	47.867	41.540	-6.133	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5530MHz + 5610MHz	

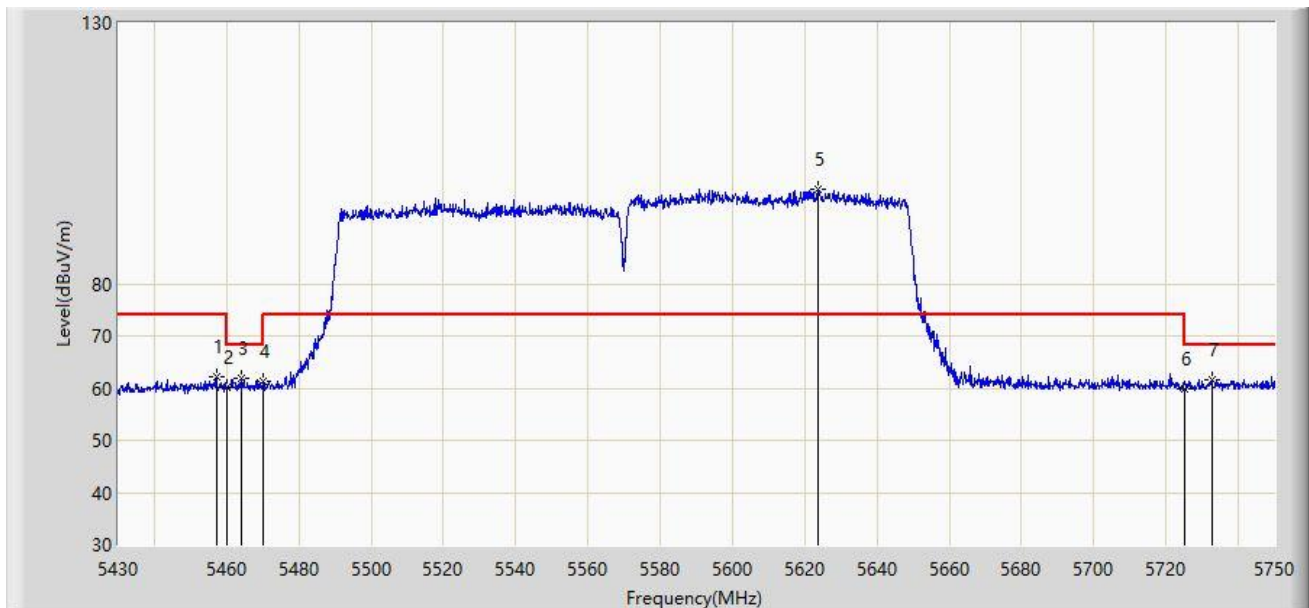


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5457.200	62.275	55.650	-11.725	74.000	6.625	PK
2		5460.000	60.042	53.430	-13.958	74.000	6.612	PK
3		5463.920	61.748	55.153	-6.452	68.200	6.594	PK
4		5470.000	61.199	54.632	-7.001	68.200	6.567	PK
5	*	5623.600	98.222	91.502	N/A	N/A	6.720	PK
6		5725.000	59.809	52.942	-8.391	68.200	6.867	PK
7		5732.560	61.525	54.620	-6.675	68.200	6.905	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5530MHz + 5610MHz	

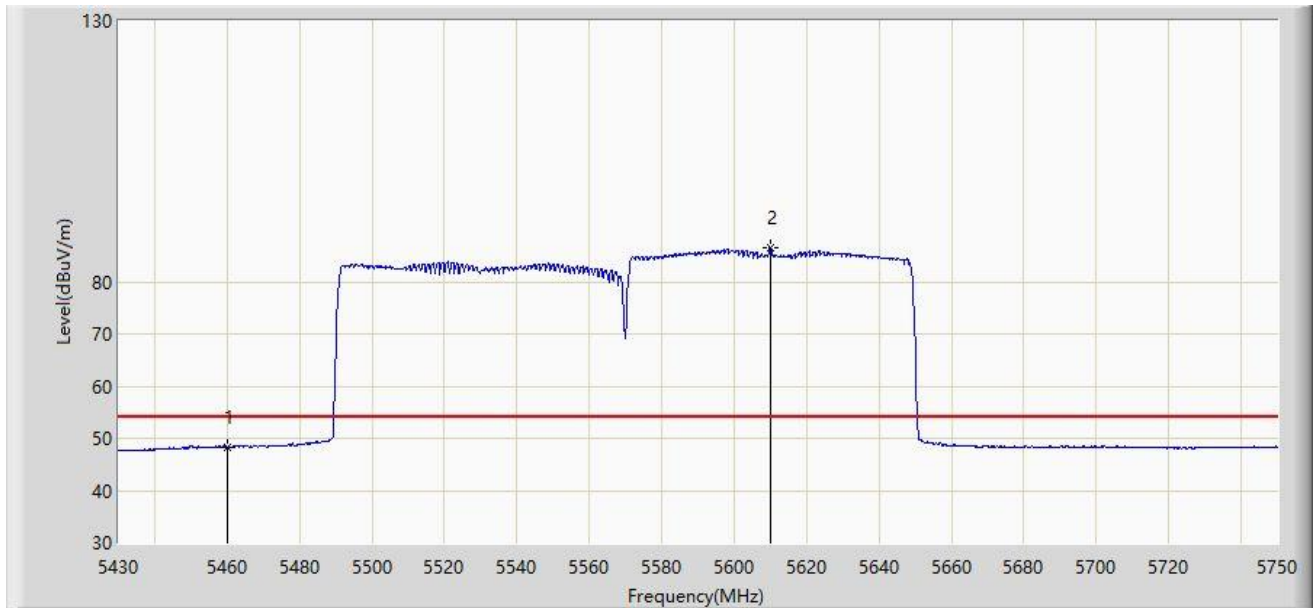


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	48.351	41.739	-5.649	54.000	6.612	AV
2	*	5610.000	86.554	79.883	N/A	N/A	6.671	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5530MHz + 5610MHz	

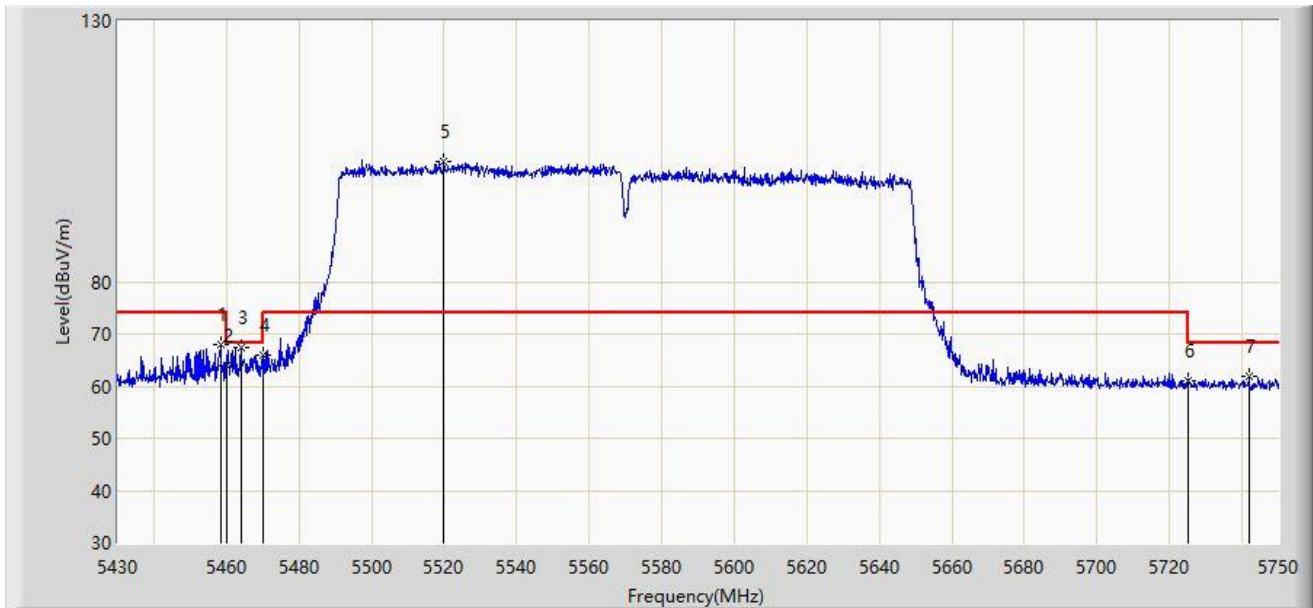


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5458.320	67.928	61.308	-6.072	74.000	6.620	PK
2		5460.000	63.911	57.299	-10.089	74.000	6.612	PK
3		5464.080	67.424	60.830	-0.776	68.200	6.594	PK
4		5470.000	66.057	59.490	-2.143	68.200	6.567	PK
5	*	5519.920	103.062	96.354	N/A	N/A	6.708	PK
6		5725.000	61.024	54.157	-7.176	68.200	6.867	PK
7		5742.000	61.994	55.025	-6.206	68.200	6.969	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/24 - 21:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 + 80 at channel 5530MHz + 5610MHz	

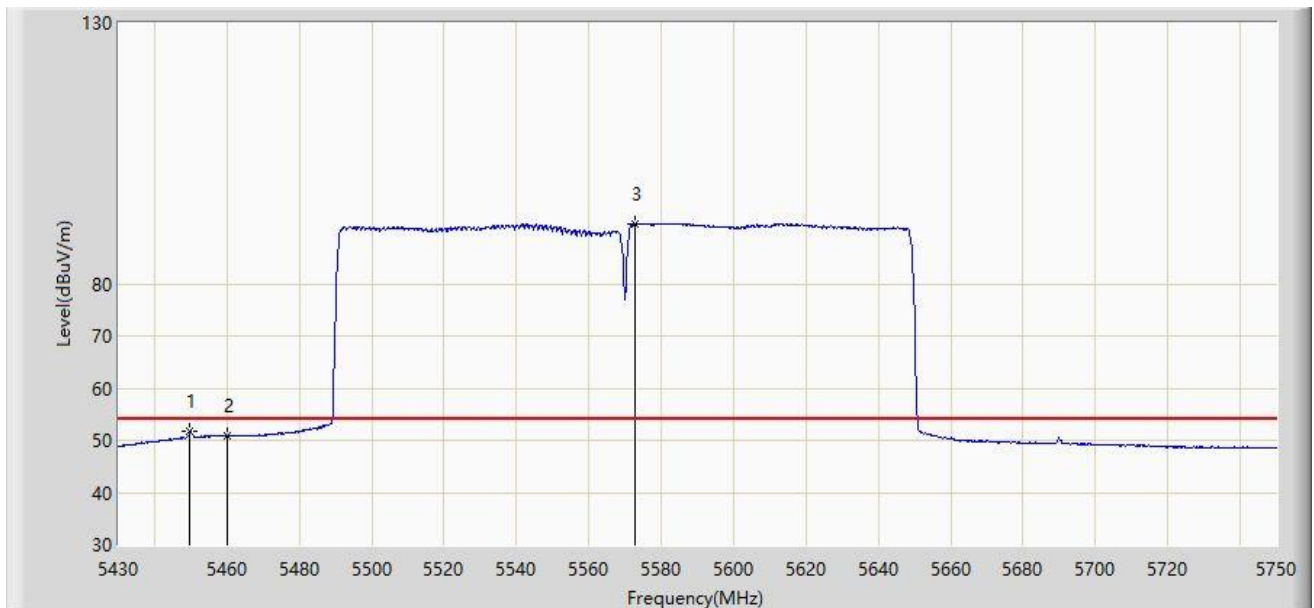


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5449.840	51.662	45.040	-2.338	54.000	6.622	AV
2		5460.000	50.918	44.306	-3.082	54.000	6.612	AV
3	*	5572.720	91.510	84.736	N/A	N/A	6.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

For OAW-AP1322 Beamforming Mode

Site: AC1	Time: 2020/02/21 - 17:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

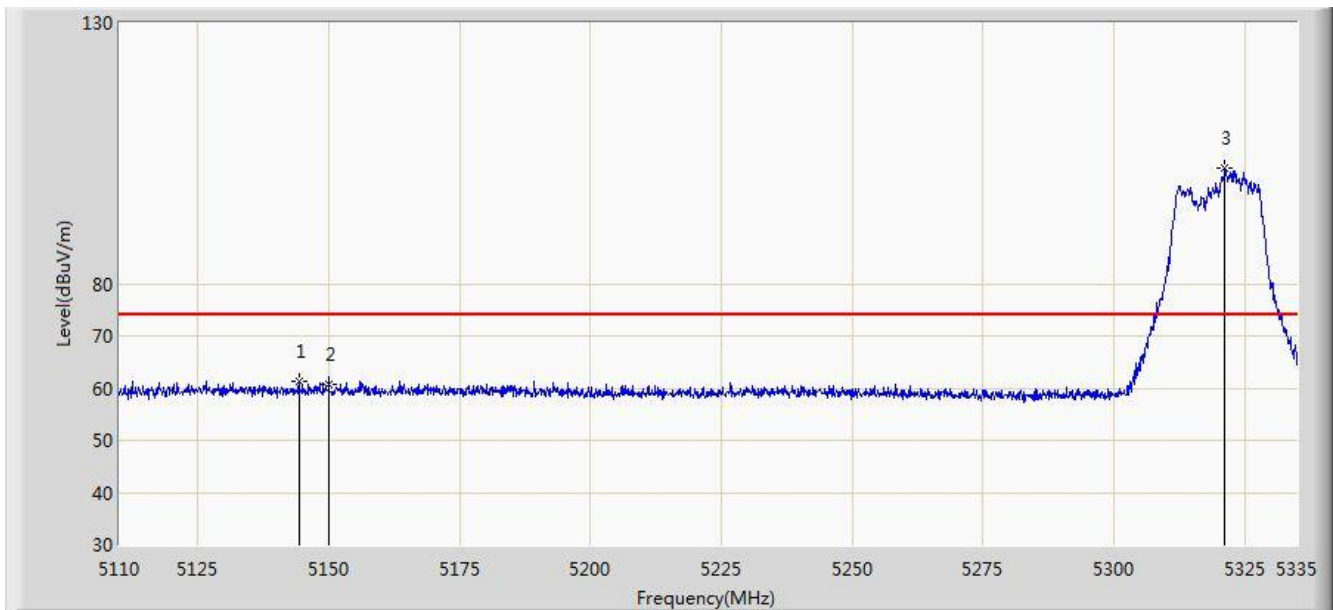


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.312	61.271	52.736	-12.729	74.000	8.535	PK
2			5150.000	60.830	52.302	-13.170	74.000	8.528	PK
3		*	5321.275	102.167	93.728	28.167	74.000	8.439	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 17:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

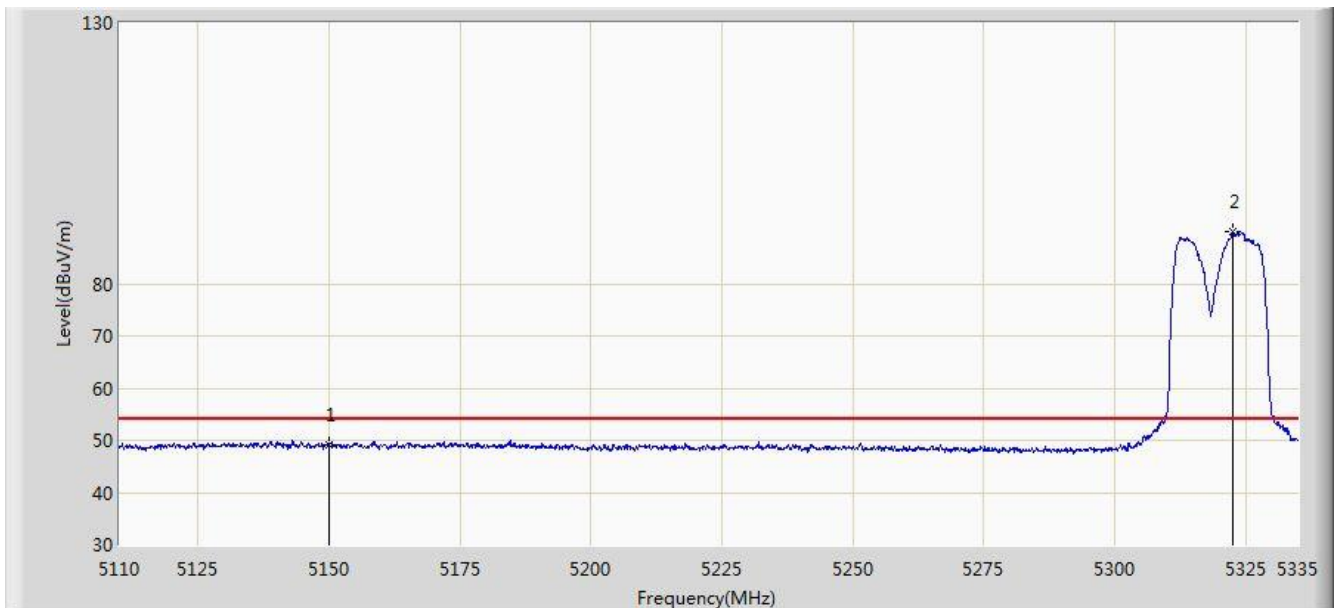


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.114	40.586	-4.886	54.000	8.528	AV
2		*	5322.625	90.111	81.669	36.111	54.000	8.441	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 18:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

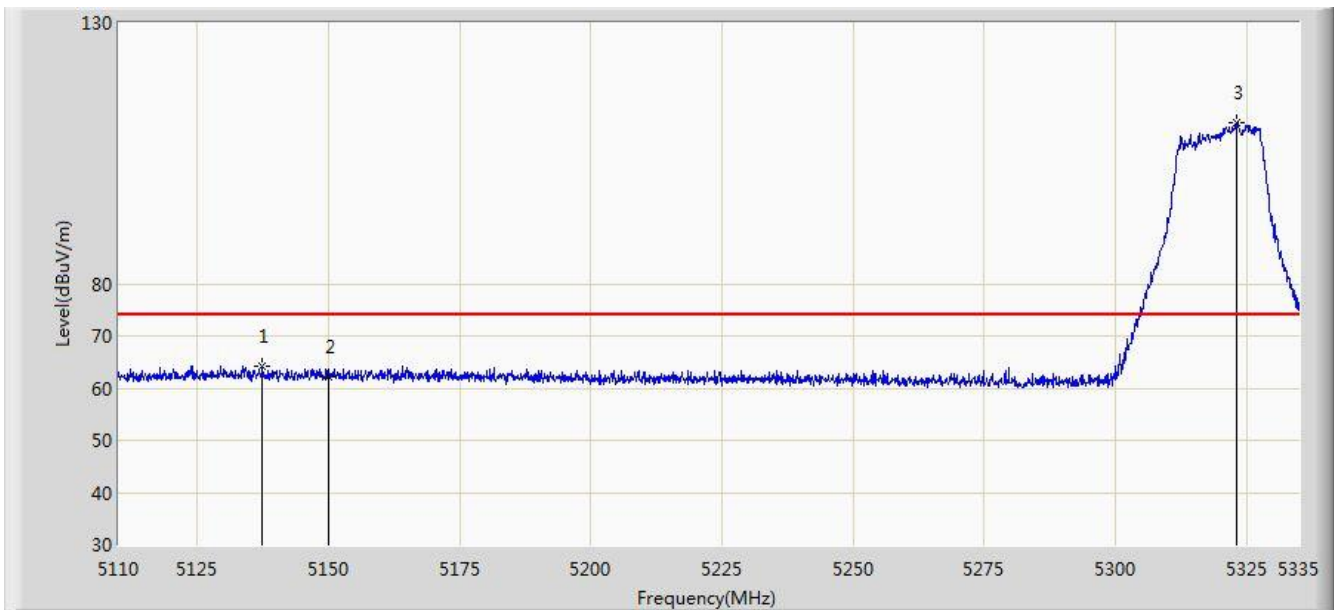


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.450	64.127	55.549	-9.873	74.000	8.578	PK
2			5150.000	62.196	53.668	-11.804	74.000	8.528	PK
3		*	5323.187	110.995	104.350	36.995	74.000	6.644	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/21 - 18:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jason Gao
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

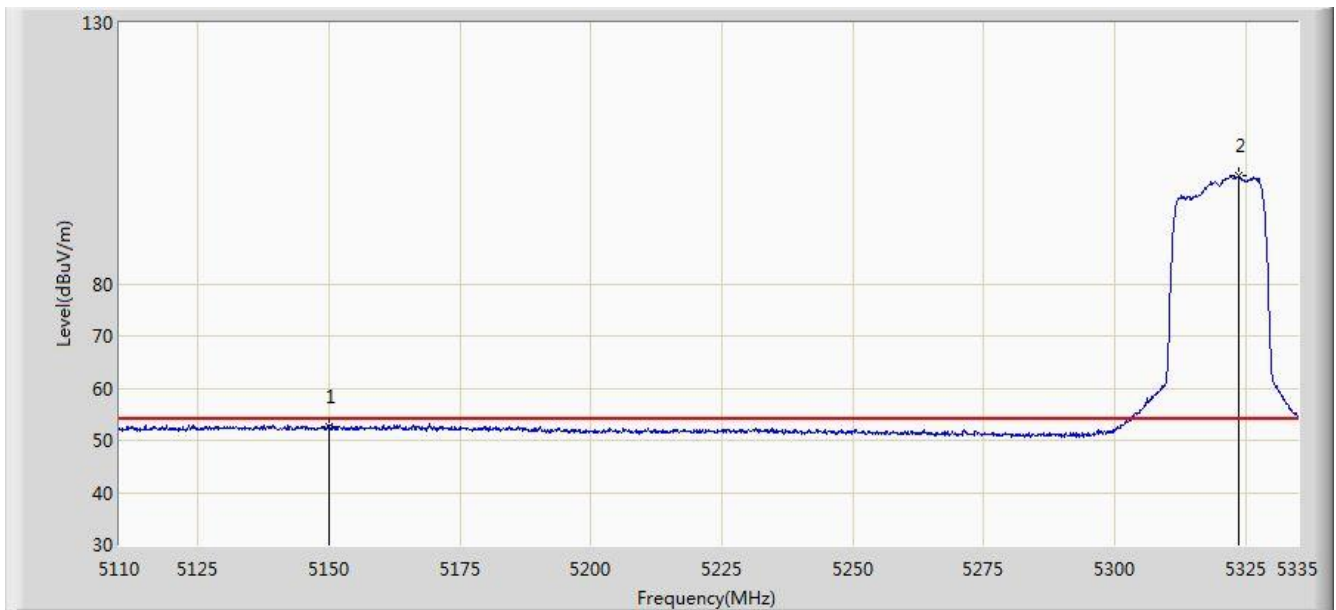


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.499	43.971	-1.501	54.000	8.528	AV
2		*	5323.750	100.696	92.251	46.696	54.000	8.444	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/27 - 12:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

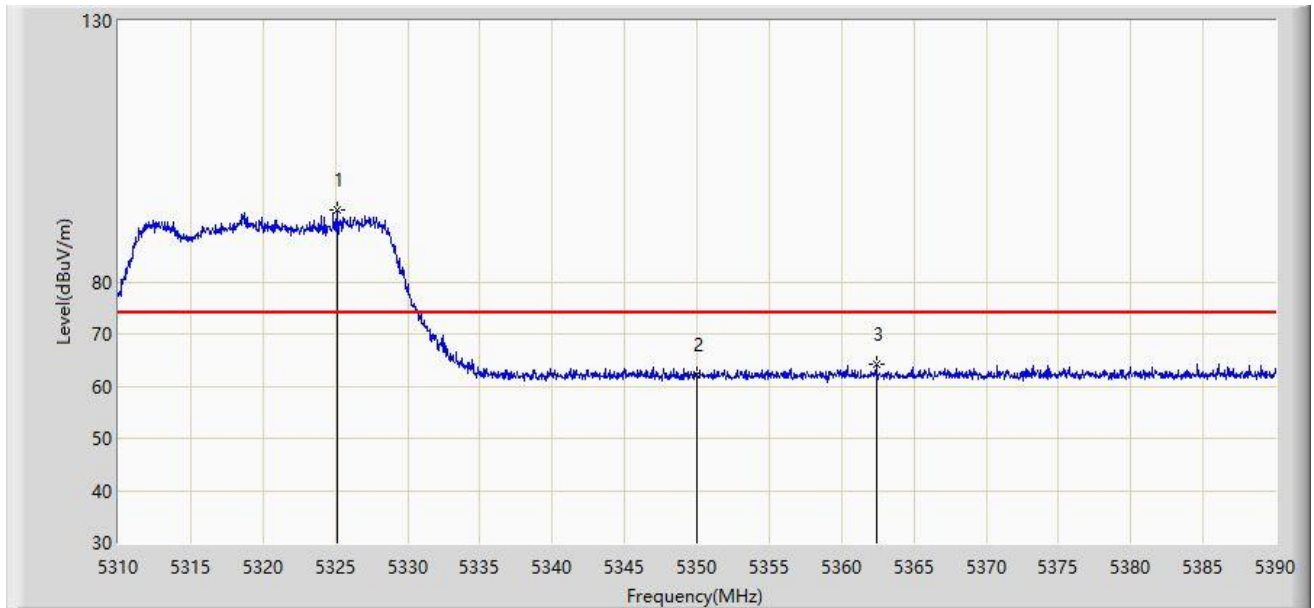


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5325.120	93.766	87.425	N/A	N/A	6.341	PK
2		5350.000	62.305	55.978	-11.695	74.000	6.327	PK
3		5362.400	64.226	57.823	-9.774	74.000	6.402	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/27 - 12:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

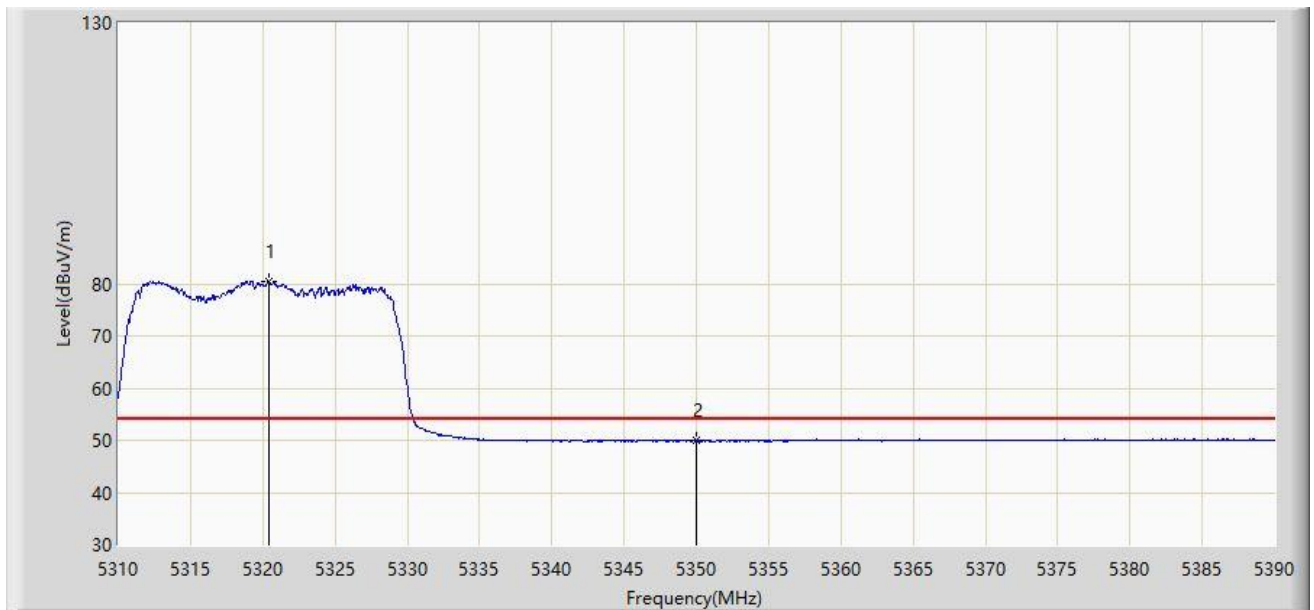


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5320.400	80.487	74.140	N/A	N/A	6.346	AV
2		5350.000	49.861	43.534	-4.139	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/27 - 12:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

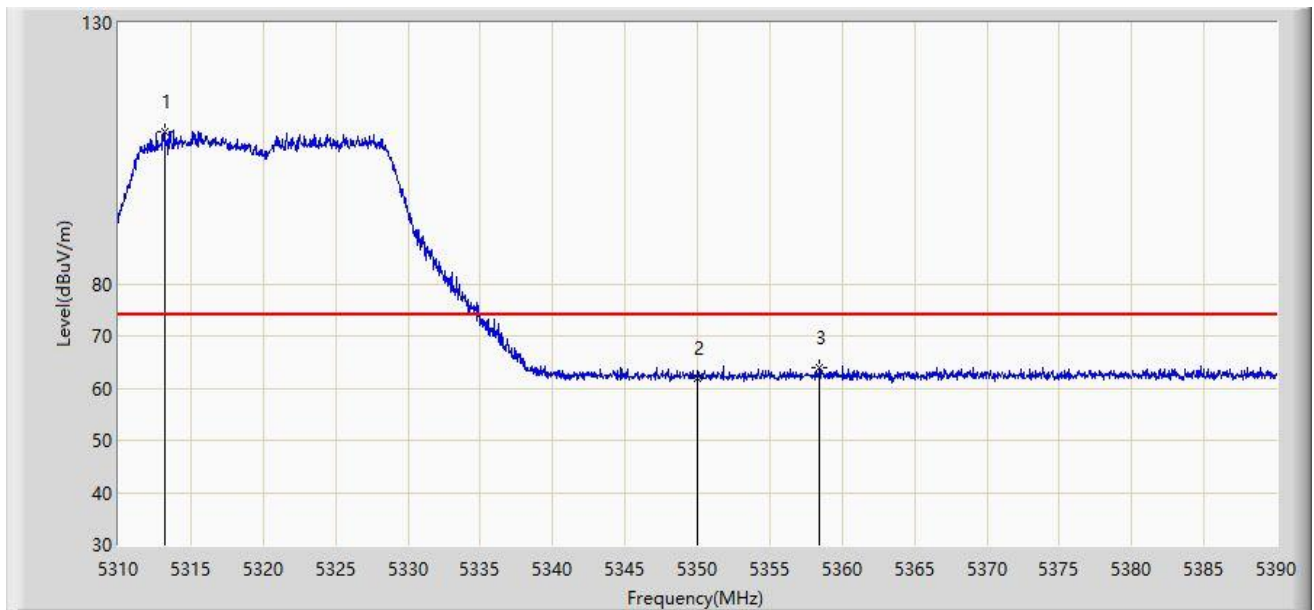


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5313.200	109.043	102.713	N/A	N/A	6.330	PK
2		5350.000	61.893	55.566	-12.107	74.000	6.327	PK
3		5358.440	63.909	57.535	-10.091	74.000	6.373	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/27 - 12:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

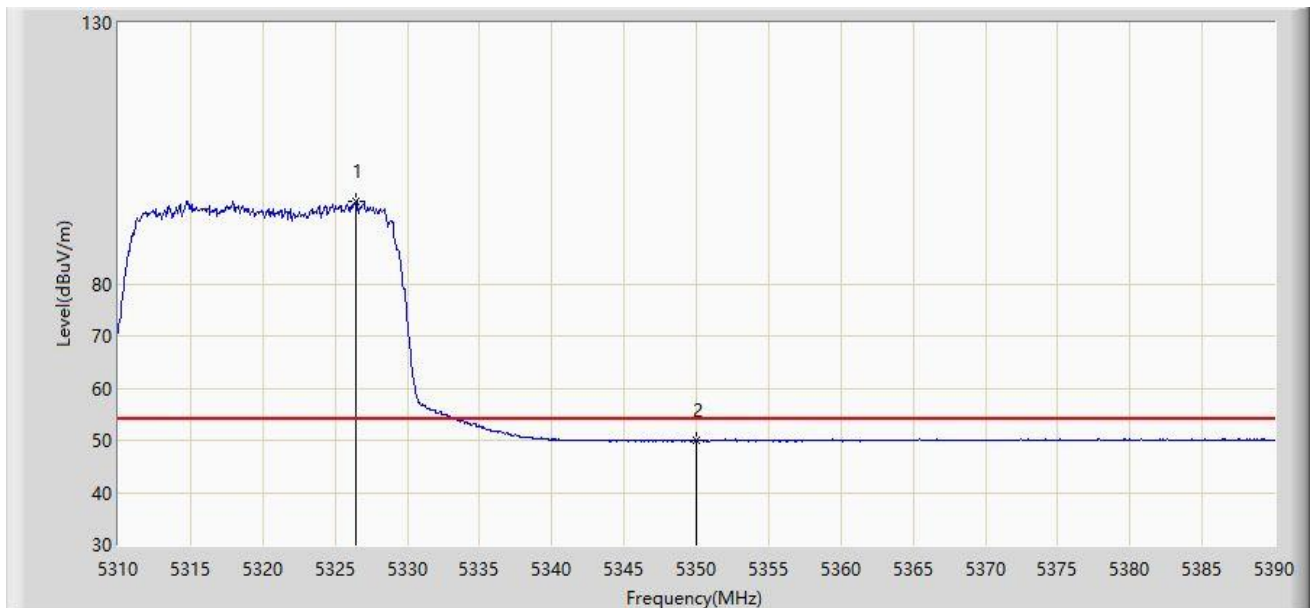


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5326.440	95.745	89.405	N/A	N/A	6.340	AV
2		5350.000	49.858	43.531	-4.142	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/10/27 - 12:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Cloud Guo
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: OmniAccess Stellar	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

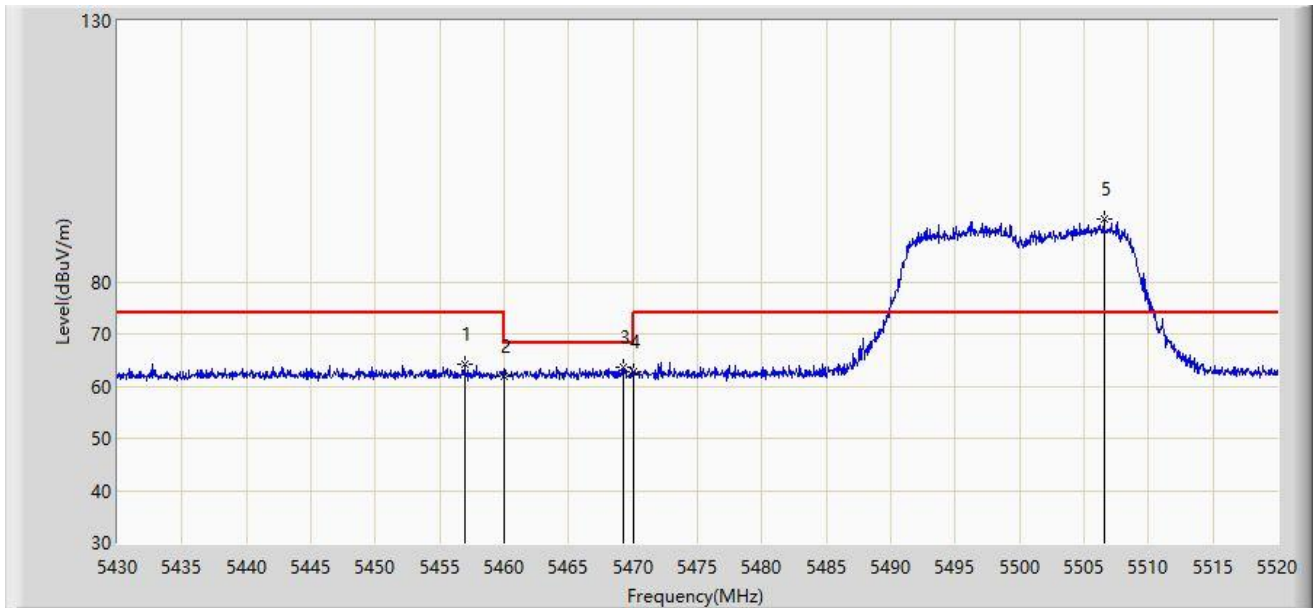

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5456.955	64.279	57.653	-9.721	74.000	6.626	PK
2		5460.000	61.833	55.221	-12.167	74.000	6.612	PK
3		5469.195	63.735	57.165	-4.465	68.200	6.570	PK
4		5470.000	62.714	56.147	-5.486	68.200	6.567	PK
5	*	5506.590	92.084	85.344	N/A	N/A	6.739	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)