

7. Maximum conducted output power

7.1 Test Method

According to KDB789033 D02


7.2 Limit

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

7.3 Test setup

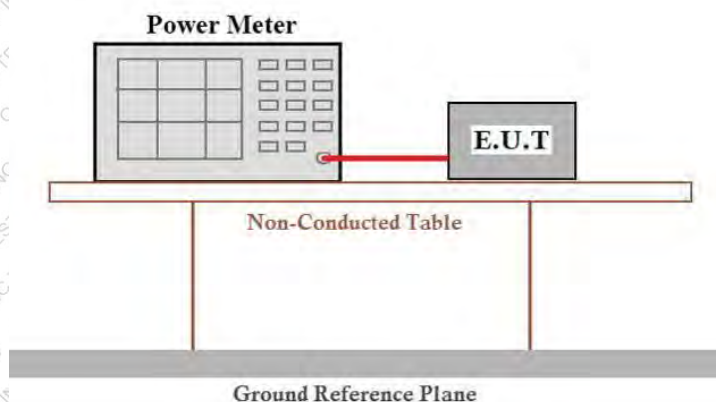

7.4 Test Procedure

Measurement using an RF average power meter

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied
 - a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B).
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

7.5 Test Data

Temperature	23 °C	Humidity	52%
ATM Pressure	101.1kPa	Antenna Gain	Ant1: 0.67dBi Ant2: 0.67dBi
Test by	LBi Li	Test result	PASS



Test result as below table

Maximum conducted power:

IEE 802.11a modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	Low	5180	16.59	15.4	/	/	/	23.98
	Middle	5200	16.41	15.83	/	/	/	23.98
	High	5240	15.85	15.46	/	/	/	23.98
UNII-2A	Low	5260	16.62	16.11	/	/	/	23.98
	Middle	5300	16.66	15.45	/	/	/	23.98
	High	5320	15.79	14.44	/	/	/	23.98
UNII-2C	Low	5500	15.46	14.4	/	/	/	23.98
	Middle	5580	15.51	14.16	/	/	/	23.98
	High	5700	15.97	13.78	/	/	/	23.98
		5720	15.94	13.82	/	/	/	23.98
UNII-3	Low	5745	16.6	16.07	/	/	/	30
	Middle	5785	16.55	16.64	/	/	/	30
	High	5825	16.84	16.71	/	/	/	30

IEE 802.11n20 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	Low	5180	15.87	15.25	13.59	12.53	16.1	23.98
	Middle	5200	16.25	15.76	13.99	13.47	16.75	23.98
	High	5240	15.83	15.22	12.9	12.42	15.68	23.98
UNII-2A	Low	5260	16.64	15.99	13.82	13.35	16.6	23.98
	Middle	5300	16.65	15.42	13.83	12.92	16.41	23.98
	High	5320	15.76	14.4	12.99	11.91	15.49	23.98
UNII-2C	Low	5500	15.51	14.37	12.77	11.33	15.12	23.98
	Middle	5580	15.55	14.11	12.83	11.52	15.23	23.98
	High	5700	15.94	13.66	13.15	11.32	15.34	23.98
		5720	15.96	13.79	13.28	11.36	15.44	23.98
UNII-3	Low	5745	16.38	16.16	13.97	12.04	16.12	30
	Middle	5785	16.56	16.24	13.72	12.41	16.12	30
	High	5825	16.78	16.08	13.94	12.62	16.34	30



IEE 802.11n40 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	Low	5190	16.72	15.81	13.15	12.15	15.69	23.98
	High	5230	16.28	15.97	12.67	12.14	15.42	23.98
UNII-2A	Low	5270	15.81	15.74	13.34	12.51	15.96	23.98
	High	5310	15.36	15.22	13.21	12.03	15.67	23.98
UNII-2C	Low	5510	15.38	14.71	12.84	11.56	15.26	23.98
	Middle	5550	15.29	14.59	12.89	11.61	15.31	23.98
		5670	15.37	14.04	13.34	11.49	15.52	23.98
	High	5710	15.47	13.95	13.03	11.23	15.23	23.98
UNII-3	Low	5755	16.28	15.56	13.24	12.01	15.68	30
	High	5795	16	15.74	13.37	12.07	15.78	30

IEE 802.11ac20 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	Low	5180	15.66	15.34	13.26	12.44	15.88	23.98
	Middle	5200	15.52	15.65	14.07	13.55	16.83	23.98
	High	5240	15.79	15.42	12.8	12.26	15.55	23.98
UNII-2A	Low	5260	15.78	15.83	13.66	13.37	16.53	23.98
	Middle	5300	15.81	15.38	13.79	12.91	16.38	23.98
	High	5320	15.74	14.4	12.85	11.94	15.43	23.98
UNII-2C	Low	5500	15.59	14.45	12.8	11.33	15.14	23.98
	Middle	5580	15.6	14.25	12.86	11.47	15.23	23.98
		5700	15.62	13.8	13.11	11.28	15.3	23.98
	High	5720	15.64	13.87	13.27	11.37	15.43	23.98
UNII-3	Low	5745	16.17	16.04	13.39	12.41	15.94	30
	Middle	5785	16.48	16.18	13.52	12.17	15.91	30
	High	5825	16.68	16.19	13.66	12.19	16	30



IEE 802.11ac40 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	Low	5190	16.68	15.74	13.04	12.06	15.59	23.98
	High	5230	16.2	15.48	12.59	11.94	15.29	23.98
UNII-2A	Low	5270	15.41	15.41	13.18	12.5	15.86	23.98
	High	5310	15.27	15.66	13.14	12.12	15.67	23.98
UNII-2C	Low	5510	15.3	14.6	12.68	11.64	15.2	23.98
	Middle	5550	15.24	14.45	12.75	11.68	15.26	23.98
	High	5670	15.48	13.94	13.06	10.78	15.08	23.98
		5710	15.51	13.89	13.1	10.82	15.12	23.98
UNII-3	Low	5755	15.79	15.46	13.22	12.01	15.67	30
	High	5795	15.88	15.62	13.29	11.9	15.66	30

IEE 802.11ac80 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	42	5210	15.88	15.51	13.24	11.79	15.59	23.98
UNII-2A	58	5290	15.62	15.55	13.1	11.43	15.36	23.98
UNII-2C	Low	5530	15.53	14.37	13.37	11.98	15.74	23.98
	Middle	5610	15.58	13.81	13.67	11.1	15.58	23.98
		5690	15.63	14	12.96	11.28	15.21	23.98
UNII-3	155	5775	15.97	15.37	13.31	12.17	15.79	30

IEE 802.11ac160 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-2A	50	5250	15.8	15.22	13.21	11.81	15.58	23.98
UNII-2C	114	5570	15.77	14.36	13.57	11.92	15.83	23.98



IEE 802.11ax20 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	Low	5180	16.4	15.55	13.22	12.52	15.89	23.98
	Middle	5200	15.59	15.78	13.79	13.1	16.47	23.98
	High	5240	15.93	15.6	12.15	12.29	15.23	23.98
UNII-2A	Low	5260	15.91	15.46	13.51	13.14	16.34	23.98
	Middle	5300	15.74	15.45	13.57	12.67	16.15	23.98
	High	5320	15.77	14.49	13.03	11.95	15.53	23.98
UNII-2C	Low	5500	15.73	14.63	12.78	11.44	15.17	23.98
	Middle	5580	15.32	14.21	12.93	11.54	15.3	23.98
	High	5700	15.47	13.98	13.32	11.32	15.44	23.98
		5720	15.48	13.79	13.38	11.39	15.51	23.98
UNII-3	Low	5745	16.16	15.97	13.26	11.81	15.61	30
	Middle	5785	16.17	16.04	13.6	12.17	15.95	30
	High	5825	16.39	15.93	13.65	12.04	15.93	30

IEE 802.11ax40 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	Low	5190	16.44	15.55	12.73	11.66	15.24	23.98
	High	5230	16.07	15.76	13.19	11.51	15.44	23.98
UNII-2A	Low	5270	15.24	15.47	12.99	12.21	15.63	23.98
	High	5310	15.16	15.54	12.89	11.87	15.42	23.98
UNII-2C	Low	5510	15.19	14.4	12.75	11.66	15.25	23.98
	Middle	5550	15.09	14.19	12.8	11.66	15.28	23.98
		5670	15.28	13.58	12.92	11.1	15.11	23.98
	High	5710	15.32	13.75	13.09	11.26	15.28	23.98
UNII-3	Low	5755	15.58	15.35	12.88	11.69	15.34	30
	High	5795	15.67	15.45	13.06	11.7	15.44	30



IEE 802.11ax80 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-1	42	5210	15.51	15.72	13.01	11.52	15.34	23.98
UNII-2A	58	5290	15.45	15.36	12.92	11.73	15.38	23.98
UNII-2C	Low	5530	15.71	14.17	12.71	11.34	15.09	23.98
	Middle	5610	15.4	13.64	13.36	10.97	15.34	23.98
		5690	15.56	13.79	13.02	11.33	15.27	23.98
UNII-3	155	5775	15.92	15.2	13.08	11.91	15.54	30

IEE 802.11ax160 modulation Test Result

Band	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (dBm)	Conducted Power (dBm)			Conducted Power Limit (dBm)
			Ant1	Ant2	Ant1	Ant2	Total	
UNII-2A	50	5250	15.75	15.05	12.79	12.16	15.5	23.98
UNII-2C	114	5570	15.82	14.05	12.77	10.96	14.97	23.98

Remark:

1. $\text{Power}_{\text{SUM}} = 10 \cdot \log(10^{(\text{Power}_{\text{ANT1}}/10)} + 10^{(\text{Power}_{\text{ANT2}}/10)})$
2. Conducted Output Power=Measured Output Power+Duty Factor
3. For MIMO devices refer to KDB Publication 662911 D01.



Duty Cycle:

IEE 802.11a modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5180	81.4	0.89	81.46	0.89	/	/
	5200	81.36	0.9	81.42	0.89	/	/
	5240	81.51	0.89	81.37	0.9	/	/
UNII-2A	5260	81.55	0.89	81.29	0.9	/	/
	5300	81.63	0.88	81.5	0.89	/	/
	5320	81.52	0.89	81.47	0.89	/	/
UNII-2C	5500	81.51	0.89	81.37	0.9	/	/
	5580	81.41	0.89	81.32	0.9	/	/
	5700	81.45	0.89	81.41	0.89	/	/
	5720	81.5	0.89	81.37	0.9	/	/
UNII-3	5745	81.38	0.89	81.4	0.89	/	/
	5785	81.46	0.89	81.35	0.9	/	/
	5825	81.33	0.9	81.49	0.89	/	/

IEE 802.11n20 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5180	83.36	0.79	83.14	0.8	89.58	0.48
	5200	83.45	0.79	83.36	0.79	89.56	0.48
	5240	83.46	0.79	83.34	0.79	89.7	0.47
UNII-2A	5260	83.51	0.78	83.39	0.79	89.66	0.47
	5300	83.51	0.78	83.6	0.78	89.68	0.47
	5320	83.68	0.77	83.23	0.8	89.73	0.47
UNII-2C	5500	83.26	0.8	83.53	0.78	89.68	0.47
	5580	83.43	0.79	83.26	0.8	89.56	0.48
	5700	83.3	0.79	83.24	0.8	89.57	0.48
	5720	83.47	0.78	83.35	0.79	89.6	0.48
UNII-3	5745	83.29	0.79	83.25	0.8	89.55	0.48
	5785	83.16	0.8	83.51	0.78	89.57	0.48
	5825	83.12	0.8	83.26	0.8	89.53	0.48



IEE 802.11n40 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5190	83.47	0.78	83.49	0.78	89.85	0.46
	5230	83.6	0.78	83.6	0.78	88.82	0.51
UNII-2A	5270	83.77	0.77	83.65	0.78	86.1	0.65
	5310	83.73	0.77	83.64	0.78	87.62	0.57
UNII-2C	5510	83.6	0.78	83.6	0.78	87.56	0.58
	5550	83.6	0.78	83.68	0.77	87.62	0.57
	5670	83.54	0.78	83.54	0.78	89.85	0.46
	5710	83.64	0.78	83.56	0.78	88.82	0.51
UNII-3	5755	83.57	0.78	83.45	0.79	88.74	0.52
	5795	83.58	0.78	83.69	0.77	89.82	0.47

IEE 802.11ac20 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5180	82.47	0.84	82.38	0.84	88.53	0.53
	5200	82.32	0.84	82.34	0.84	88.57	0.53
	5240	82.51	0.83	82.46	0.84	88.55	0.53
UNII-2A	5260	82.4	0.84	82.43	0.84	88.63	0.52
	5300	82.52	0.83	82.41	0.84	88.67	0.52
	5320	82.58	0.83	82.49	0.84	88.79	0.52
UNII-2C	5500	82.46	0.84	82.55	0.83	88.58	0.53
	5580	82.24	0.85	82.3	0.85	88.54	0.53
	5700	82.44	0.84	82.42	0.84	88.64	0.52
	5720	82.42	0.84	82.29	0.85	88.56	0.53
UNII-3	5745	82.41	0.84	82.35	0.84	82.34	0.84
	5785	82.37	0.84	82.28	0.85	82.32	0.84
	5825	82.29	0.85	82.35	0.84	82.39	0.84



IEE 802.11ac40 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5190	81.69	0.88	81.53	0.89	87.24	0.59
	5230	81.86	0.87	81.72	0.88	88.64	0.52
UNII-2A	5270	81.94	0.86	81.32	0.9	88.66	0.52
	5310	81.83	0.87	81.59	0.88	87.36	0.59
UNII-2C	5510	81.65	0.88	81.64	0.88	87.35	0.59
	5550	81.7	0.88	81.5	0.89	88.55	0.53
	5670	81.68	0.88	81.65	0.88	88.55	0.53
	5710	81.64	0.88	81.64	0.88	88.62	0.52
UNII-3	5755	81.65	0.88	81.69	0.88	87.33	0.59
	5795	81.62	0.88	81.62	0.88	88.56	0.53

IEE 802.11ac80 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5210	82.17	0.85	82.23	0.85	80.63	0.93
UNII-2A	5290	82.4	0.84	82.38	0.84	80.65	0.93
UNII-2C	5530	82.29	0.85	82.35	0.84	87.34	0.59
	5610	82.32	0.84	82.29	0.85	88.55	0.53
	5690	82.49	0.84	82.41	0.84	88.58	0.53
UNII-3	5775	82.33	0.84	82.22	0.85	80.62	0.94

IEE 802.11ac160 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5250	82.21	0.85	82.21	0.85	80.56	0.94
UNII-2A	5570	82.27	0.85	82.32	0.84	80.35	0.95



IEE 802.11ax20 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5180	83.09	0.8	83.24	0.8	88.54	0.53
	5200	83.15	0.8	83.21	0.8	87.49	0.58
	5240	83.34	0.79	83.05	0.81	88.55	0.53
UNII-2A	5260	83.28	0.79	83.15	0.8	87.54	0.58
	5300	83.27	0.8	83.33	0.79	87.53	0.58
	5320	83.47	0.78	83.26	0.8	87.63	0.57
UNII-2C	5500	83.44	0.79	83.2	0.8	87.55	0.58
	5580	82.99	0.81	83.14	0.8	87.41	0.58
	5700	83.27	0.8	83.03	0.81	87.44	0.58
	5720	83.32	0.79	83.09	0.8	87.43	0.58
UNII-3	5745	83.26	0.8	83.1	0.8	83.07	0.81
	5785	83	0.81	83.2	0.8	88.59	0.53
	5825	83.16	0.8	83.32	0.79	88.55	0.53

IEE 802.11ax40 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5190	82.65	0.83	82.68	0.83	85.9	0.66
	5230	82.86	0.82	82.85	0.82	87.62	0.57
UNII-2A	5270	82.74	0.82	82.74	0.82	87.63	0.57
	5310	82.49	0.84	82.63	0.83	86.38	0.64
UNII-2C	5510	83.43	0.79	82.47	0.84	86.53	0.63
	5550	82.86	0.82	83.02	0.81	87.72	0.57
	5670	82.92	0.81	82.77	0.82	87.59	0.58
	5710	82.97	0.81	82.77	0.82	87.67	0.57
UNII-3	5755	82.83	0.82	82.71	0.82	86.07	0.65
	5795	82.88	0.82	82.81	0.82	83.1	0.8



IEE 802.11ax80 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5210	83.17	0.8	83.23	0.8	81.53	0.89
UNII-2A	5290	83.6	0.78	83.17	0.8	81.43	0.89
UNII-2C	5530	83.26	0.8	83.22	0.8	86.18	0.65
	5610	83.15	0.8	82.77	0.82	87.71	0.57
	5690	83.31	0.79	83.39	0.79	87.7	0.57
UNII-3	5775	83.38	0.79	83.14	0.8	81.51	0.89


IEE 802.11ax160 modulation Test Result

Band	Frequency (MHz)	Ant1		Ant2		Total	
		Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)	Duty Cycle (%)	Correction Factor (dB)
UNII-1	5250	83.21	0.8	83.19	0.8	81.37	0.9
UNII-2A	5570	83.1	0.8	83.31	0.79	81.48	0.89

Remark:

Duty Factor=10log(1/duty Cycle)


Duty Cycle NVNT a 5180MHz Ant1

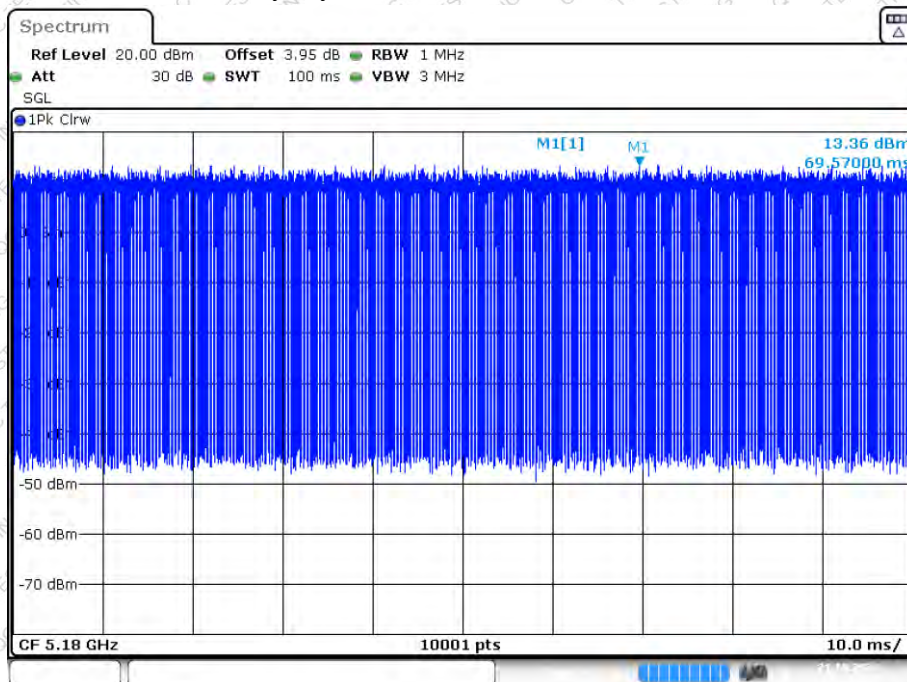

Date: 21.OCT.2024 21:04:16




Duty Cycle NVNT a 5200MHz Ant1

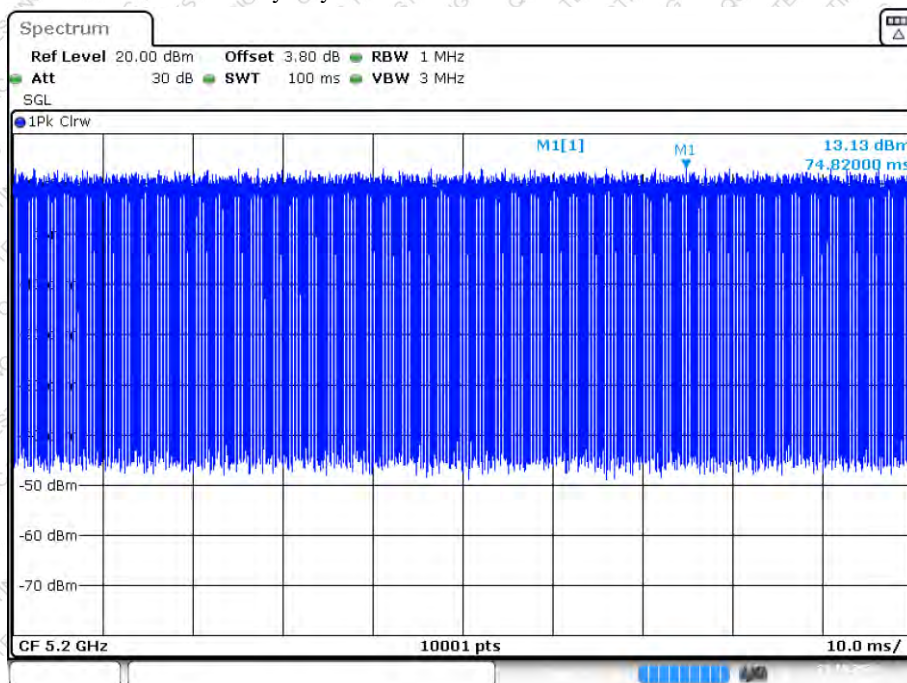

Date: 23.OCT.2024 16:16:04


Duty Cycle NVNT a 5240MHz Ant1

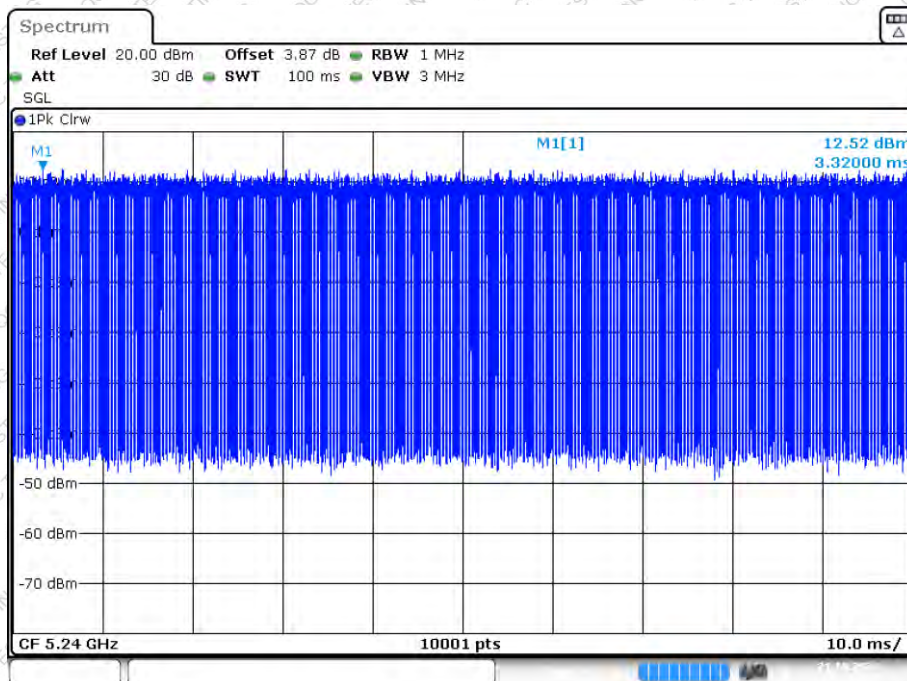

Date: 21.OCT.2024 21:30:14




Duty Cycle NVNT a 5180MHz Ant2

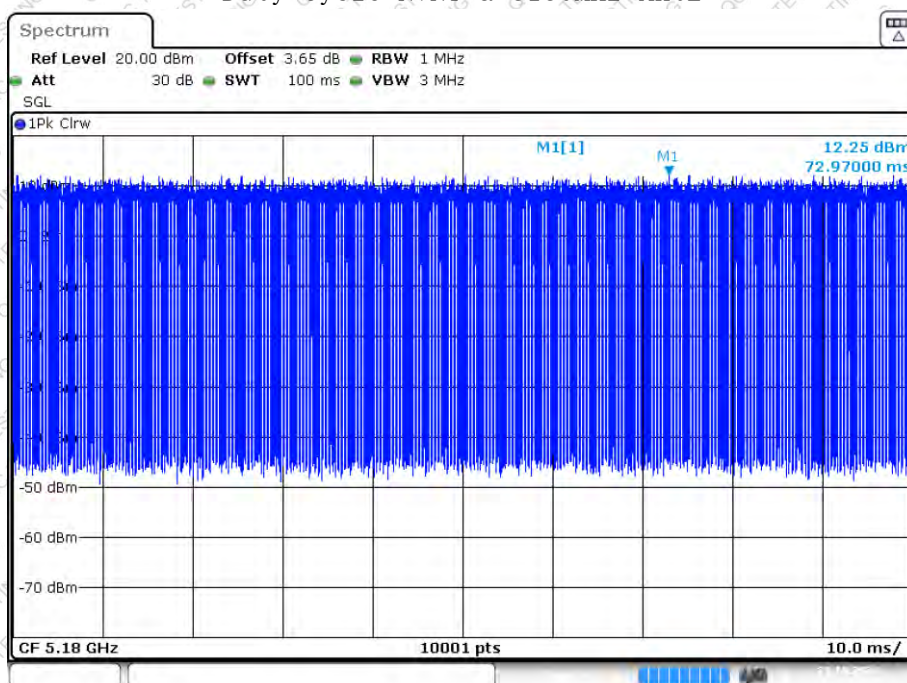

Date: 22.OCT.2024 17:49:35


Duty Cycle NVNT a 5200MHz Ant2

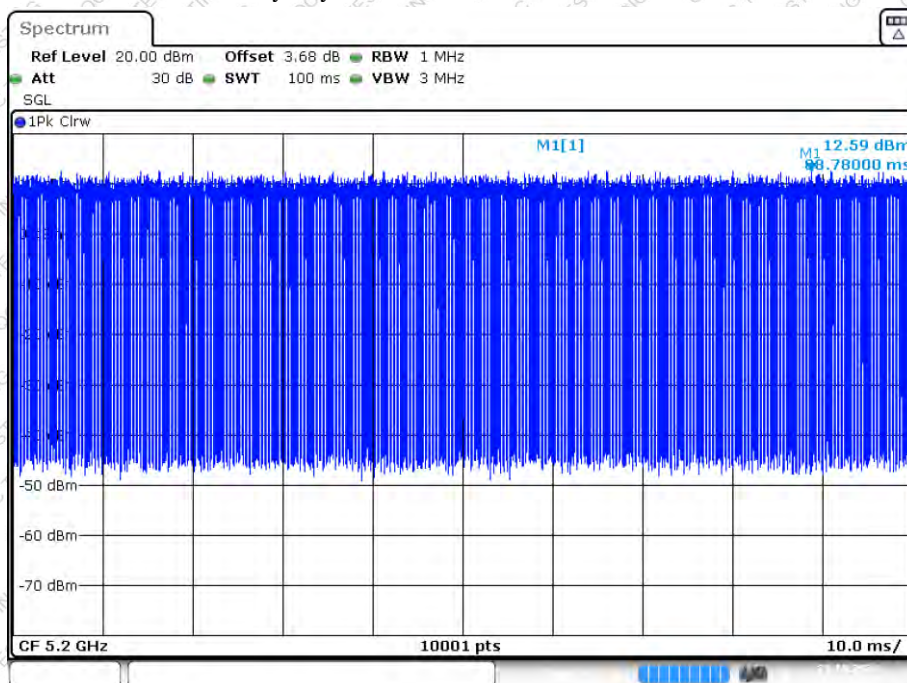

Date: 23.OCT.2024 17:35:16




Duty Cycle NVNT a 5240MHz Ant2

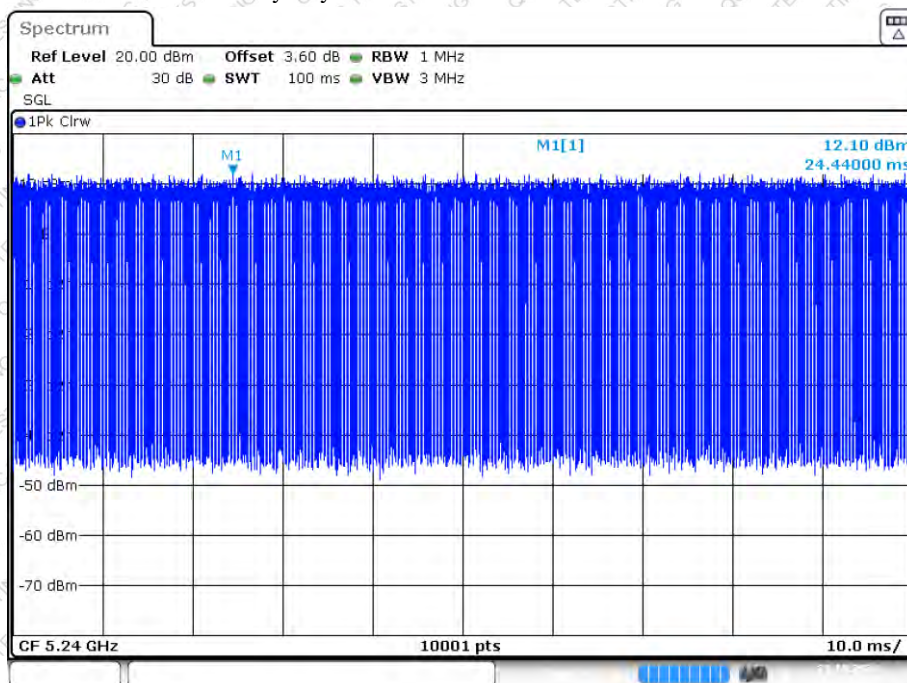

Date: 22.OCT.2024 17:51:32


Duty Cycle NVNT a 5180MHz Sum

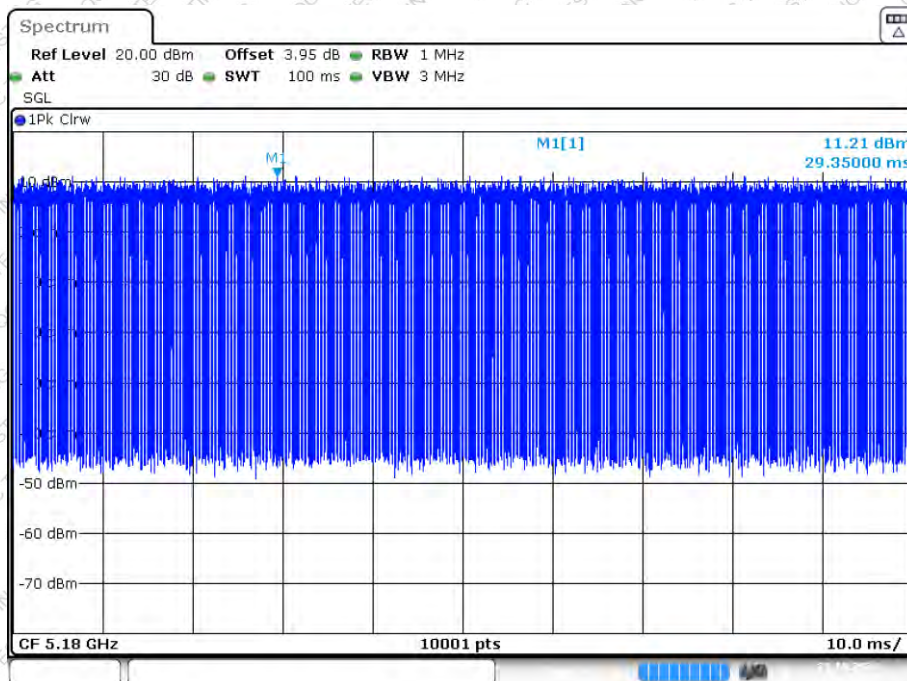

Date: 22.OCT.2024 19:17:33




Duty Cycle NVNT a 5200MHz Sum

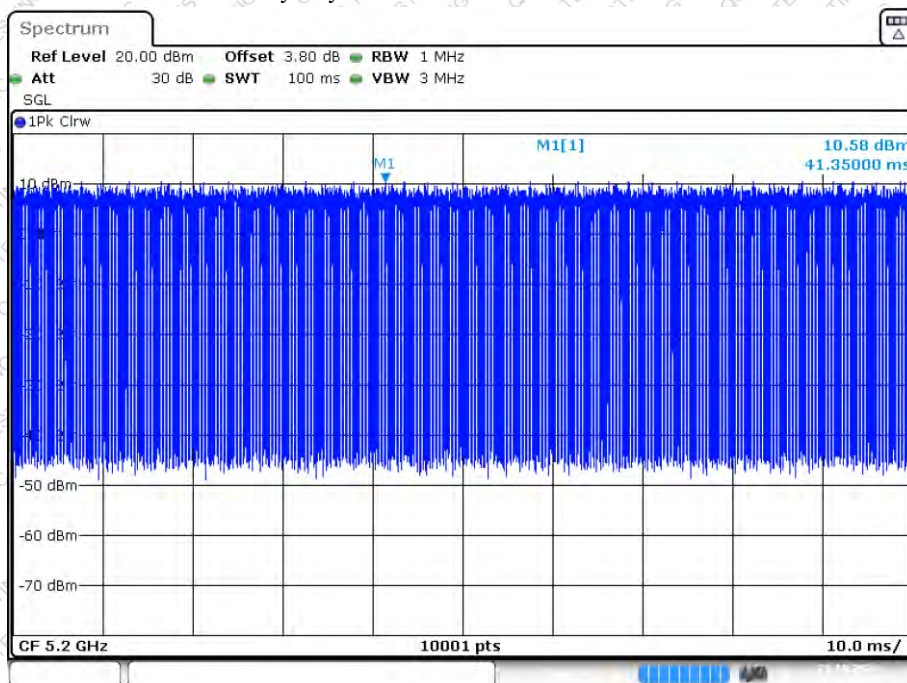

Date: 23.OCT.2024 19:27:30


Duty Cycle NVNT a 5240MHz Sum

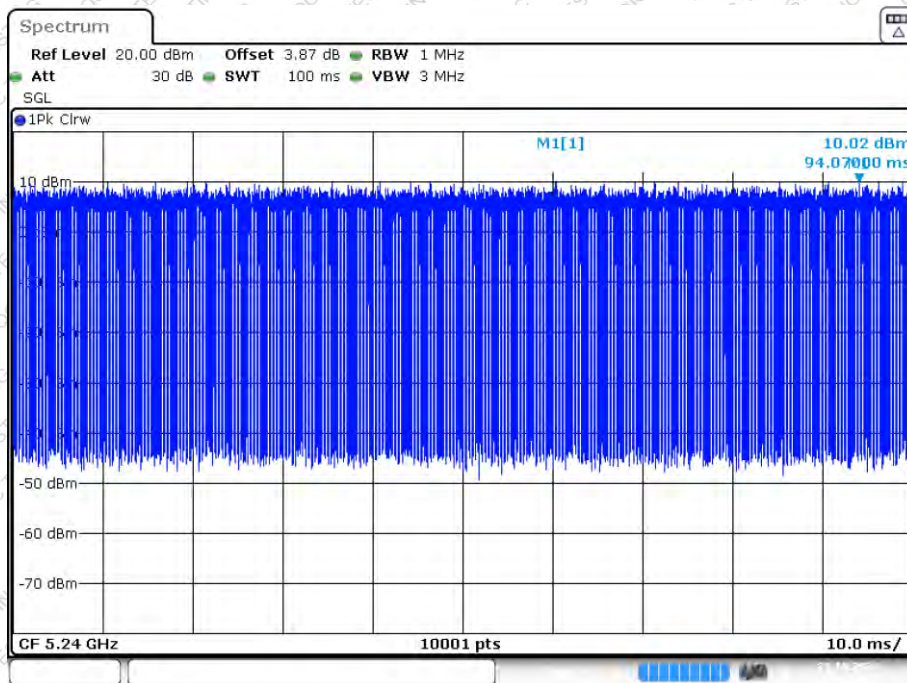

Date: 22.OCT.2024 19:19:43




Duty Cycle NVNT a 5260MHz Ant1

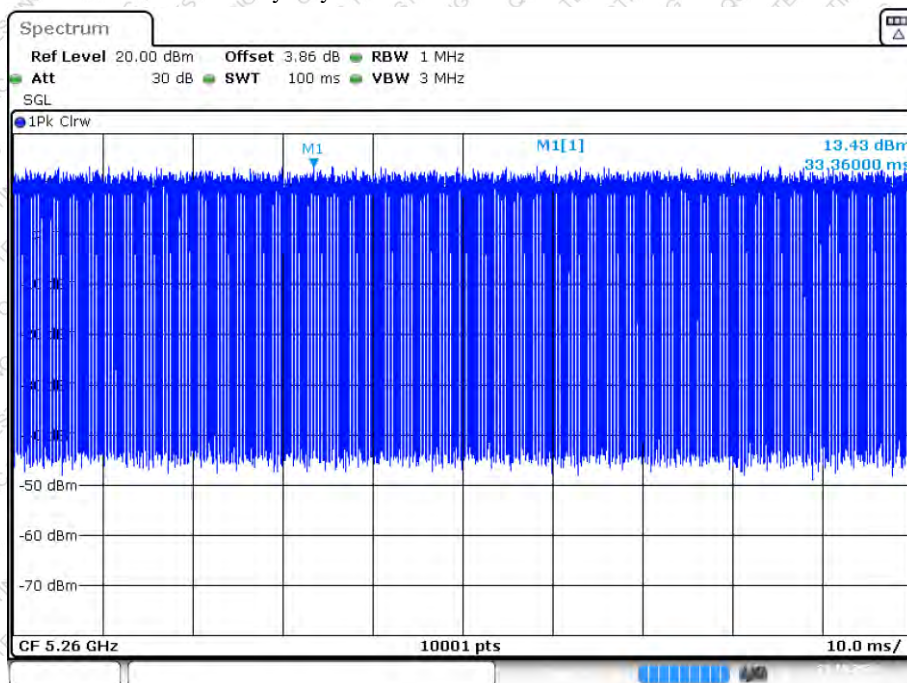

Date: 23.OCT.2024 16:17:19


Duty Cycle NVNT a 5300MHz Ant1

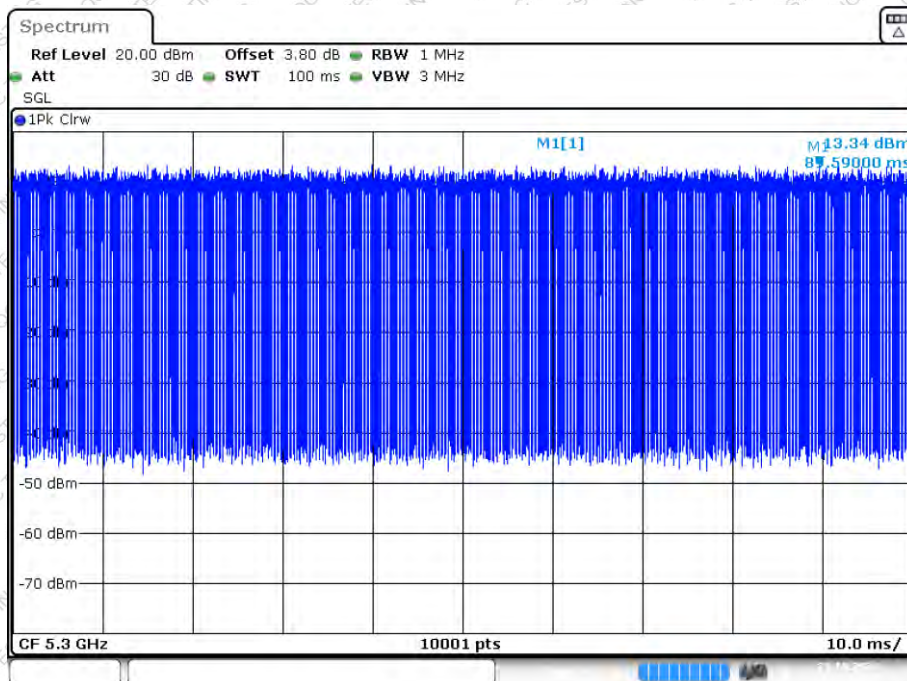

Date: 23.OCT.2024 16:20:53




Duty Cycle NVNT a 5320MHz Ant1

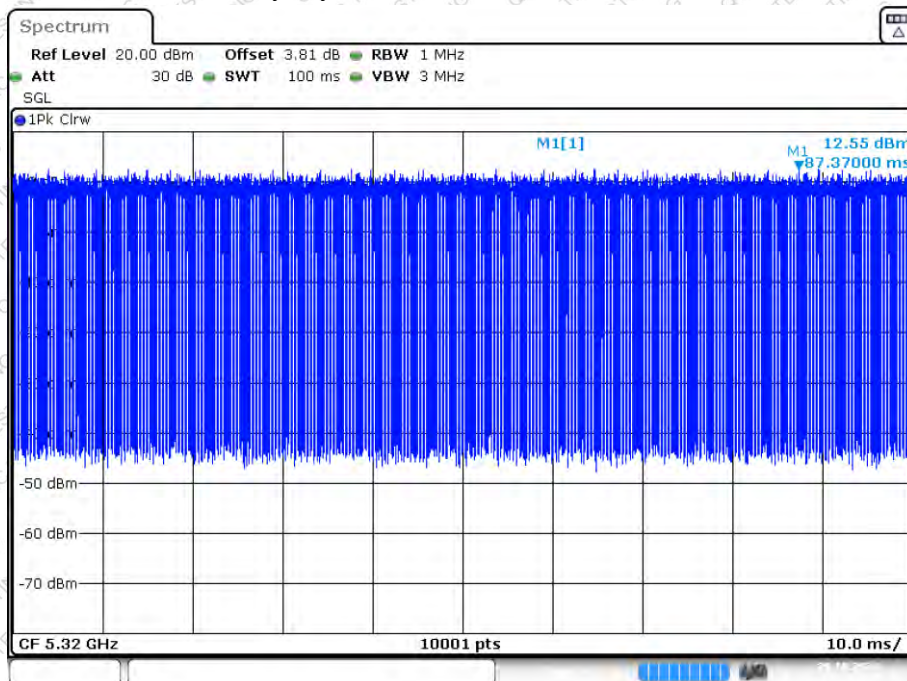

Date: 28.OCT.2024 07:54:51


Duty Cycle NVNT a 5500MHz Ant1

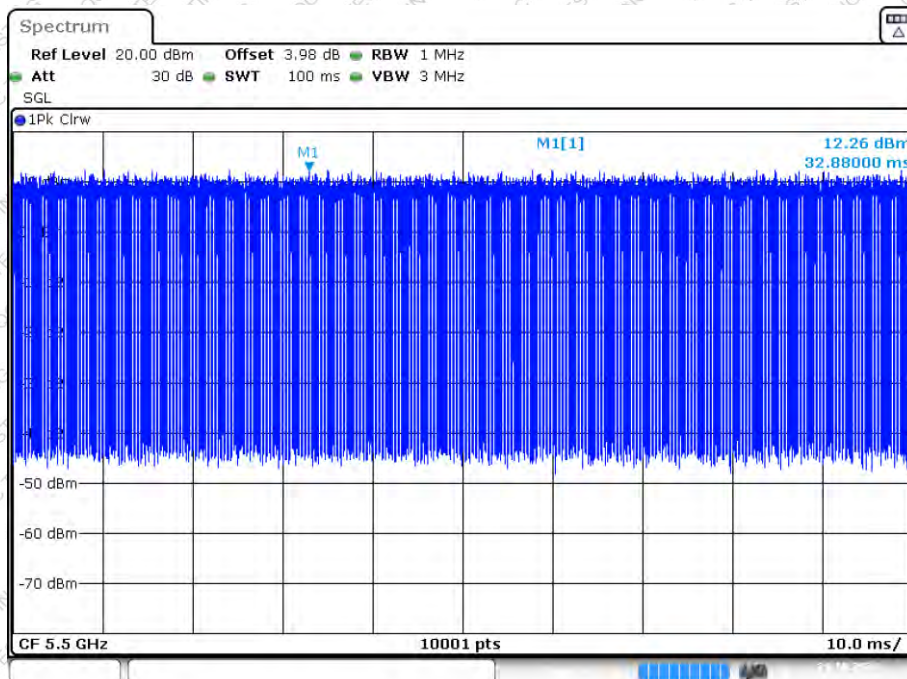

Date: 24.OCT.2024 16:44:28




Duty Cycle NVNT a 5580MHz Ant1

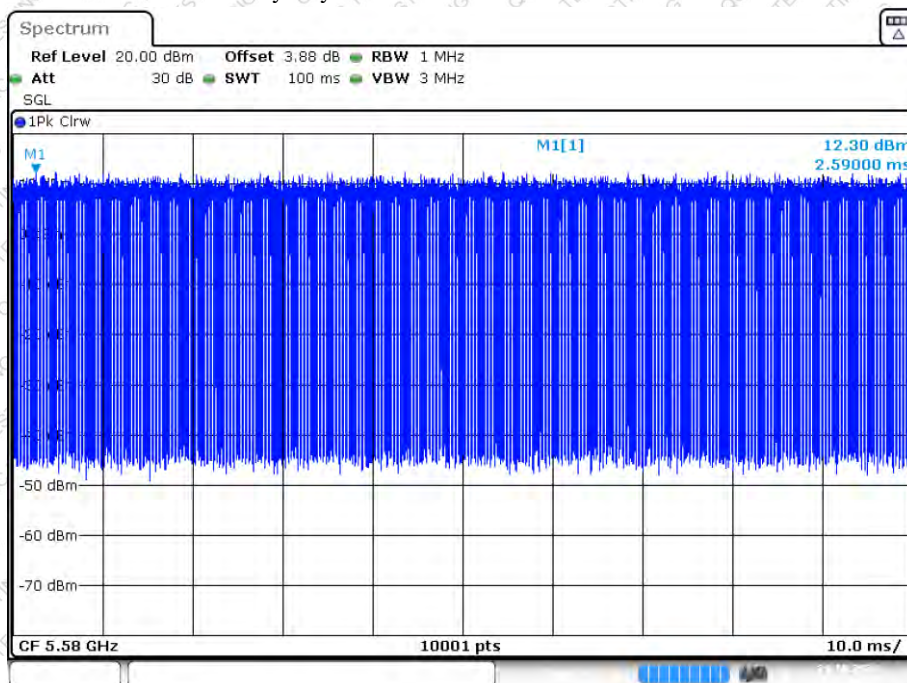

Date: 24.OCT.2024 16:46:03


Duty Cycle NVNT a 5700MHz Ant1

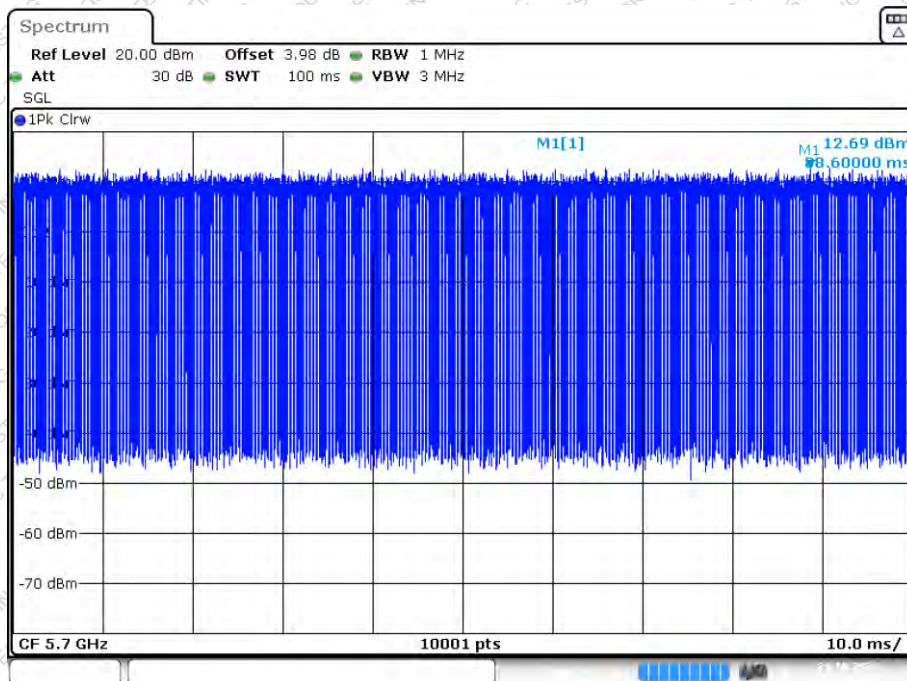

Date: 24.OCT.2024 16:47:22




Duty Cycle NVNT a 5720MHz Ant1

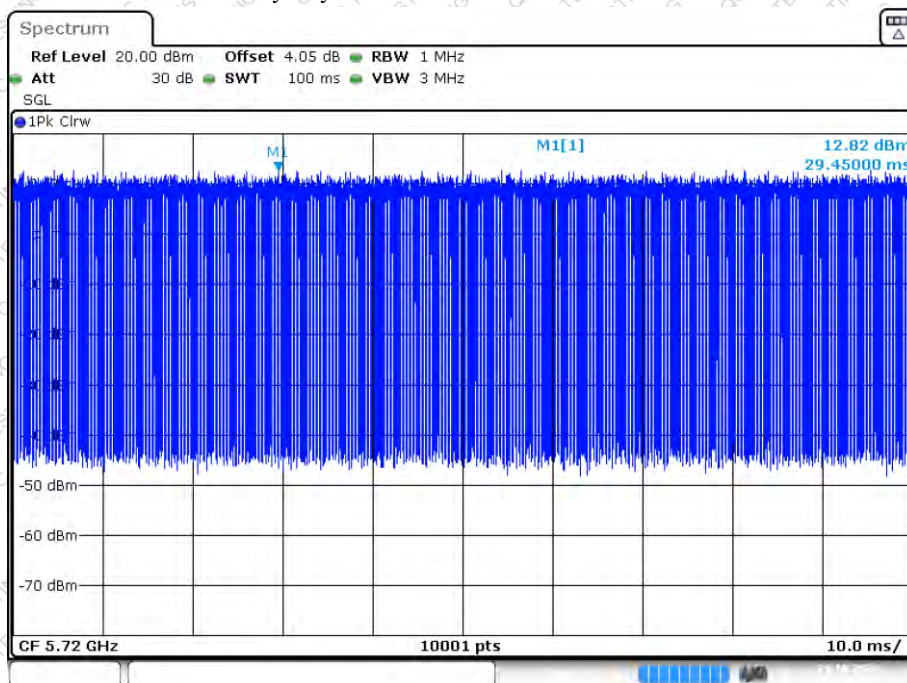

Date: 24.OCT.2024 16:49:55


Duty Cycle NVNT a 5260MHz Ant2

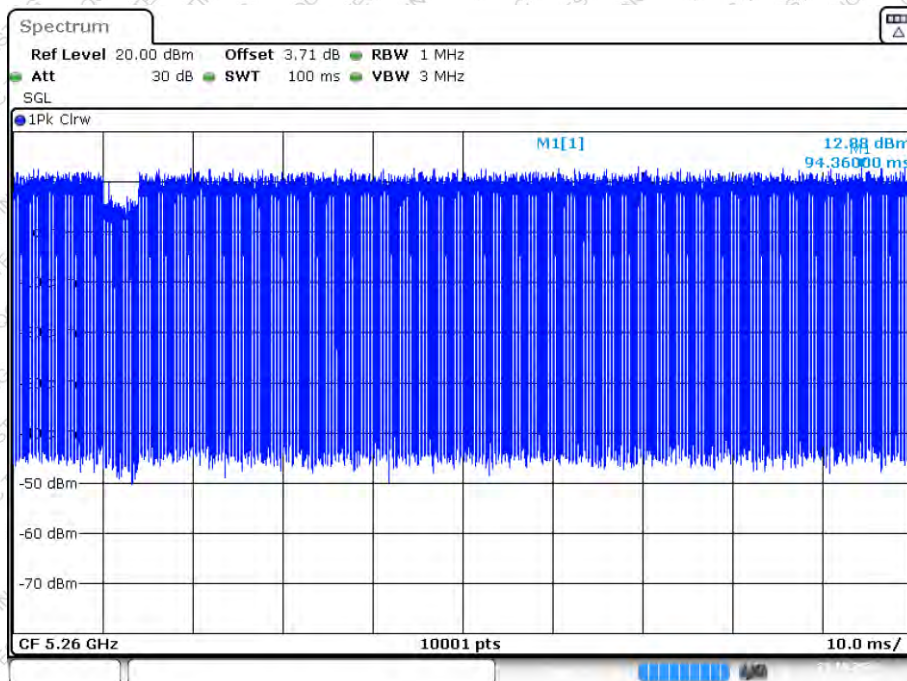

Date: 23.OCT.2024 17:36:41




Duty Cycle NVNT a 5300MHz Ant2

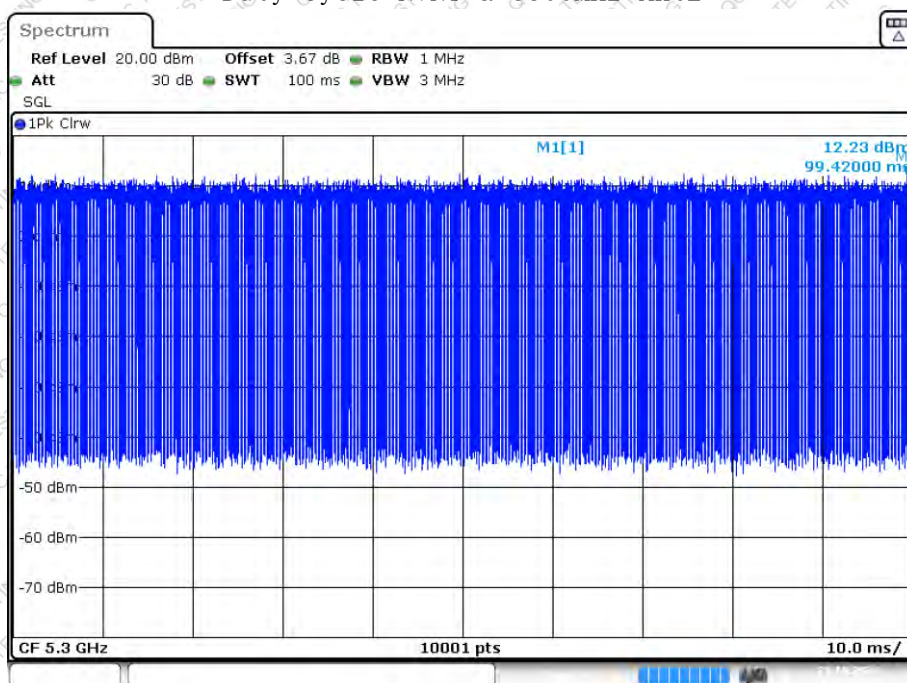

Date: 23.OCT.2024 17:38:14


Duty Cycle NVNT a 5320MHz Ant2

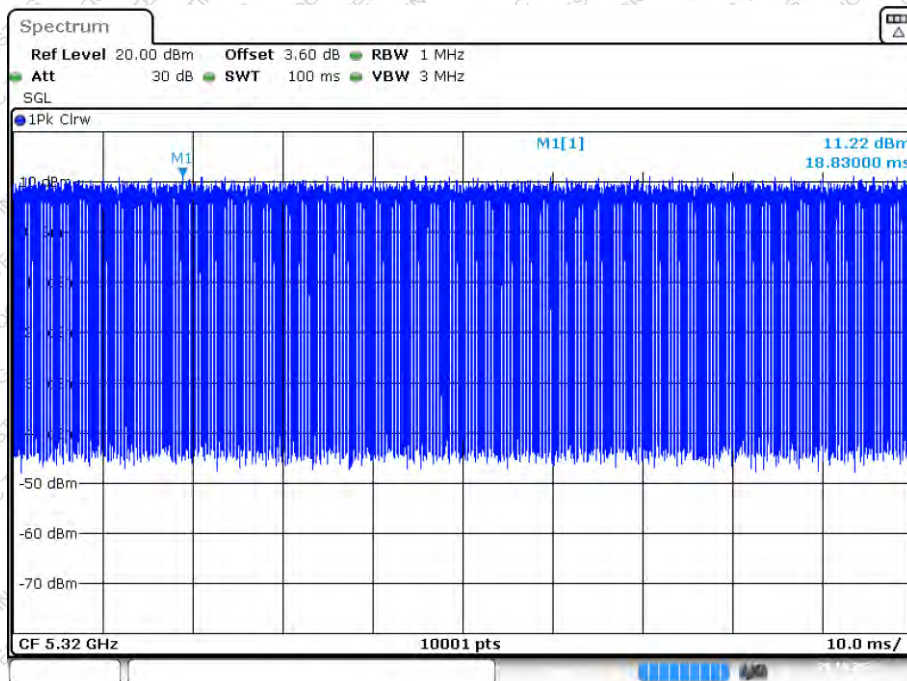

Date: 28.OCT.2024 08:03:02




Duty Cycle NVNT a 5500MHz Ant2

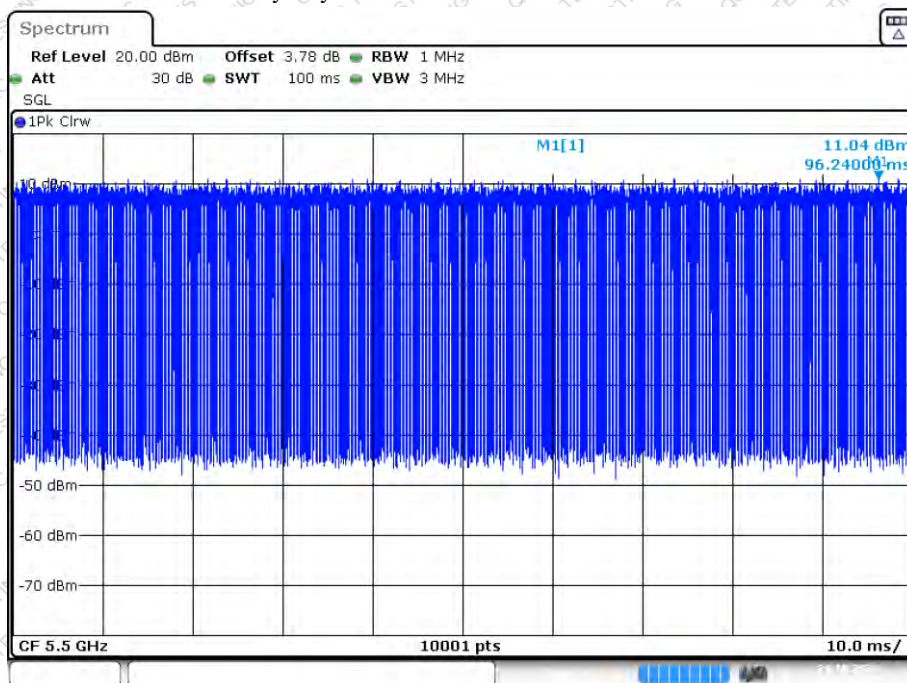

Date: 24.OCT.2024 18:51:55


Duty Cycle NVNT a 5580MHz Ant2

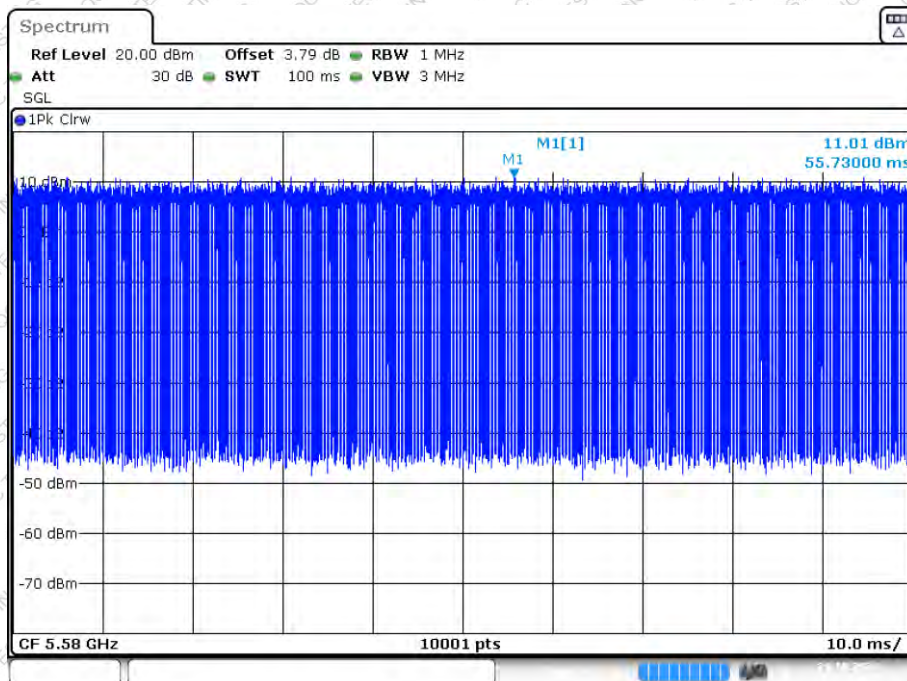

Date: 24.OCT.2024 18:54:01




Duty Cycle NVNT a 5700MHz Ant2

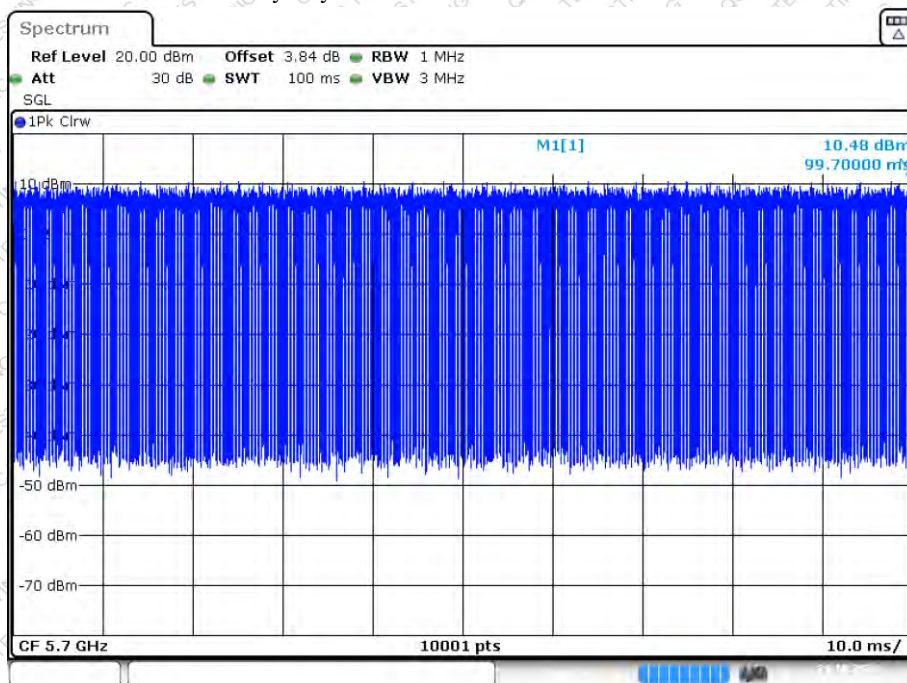

Date: 24.OCT.2024 18:54:52


Duty Cycle NVNT a 5720MHz Ant2

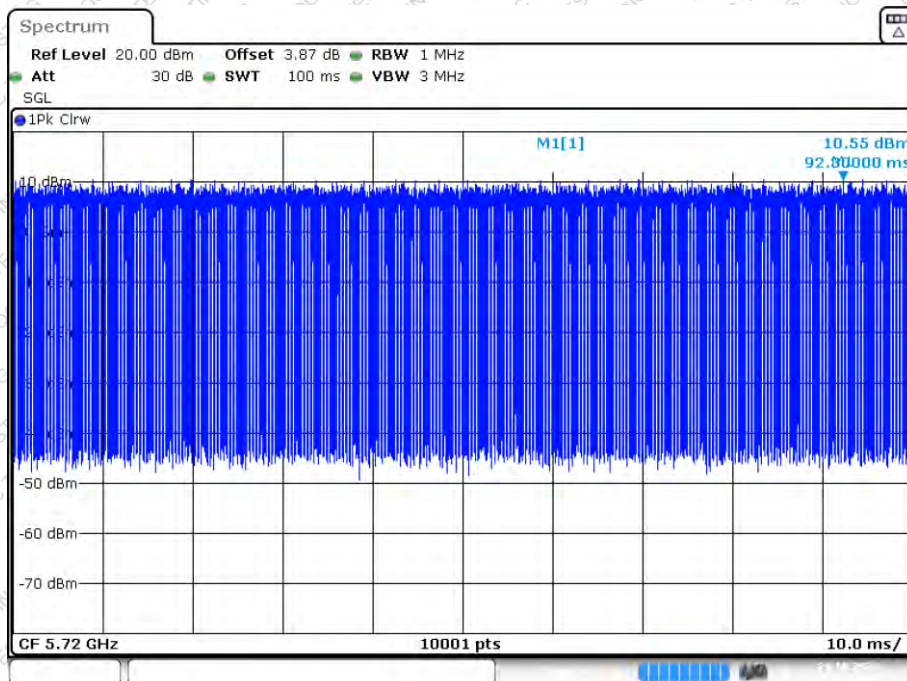

Date: 24.OCT.2024 18:55:48




Duty Cycle NVNT a 5260MHz Sum

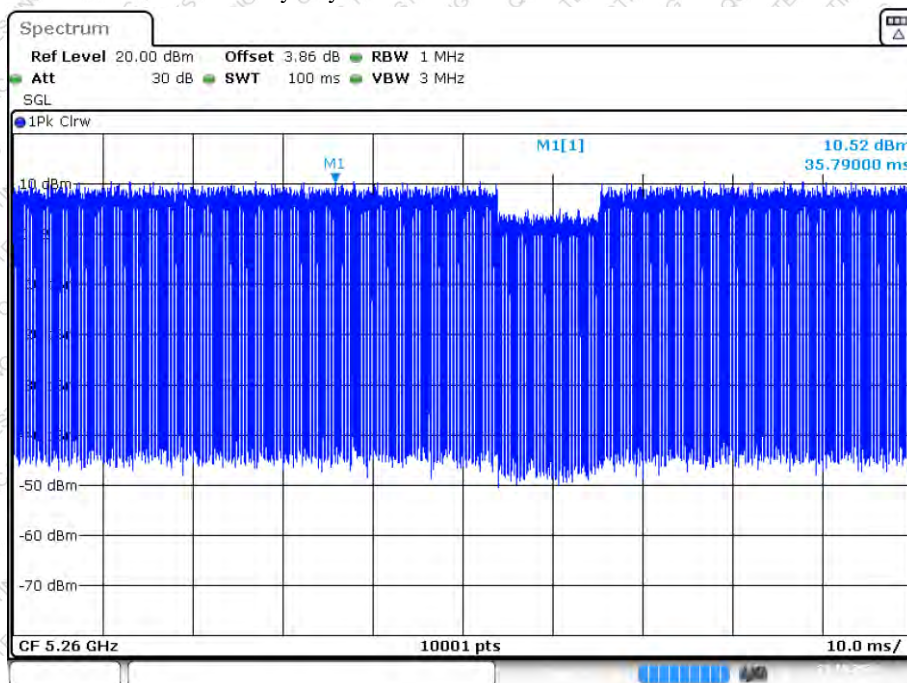

Date: 23.OCT.2024 19:28:43


Duty Cycle NVNT a 5300MHz Sum

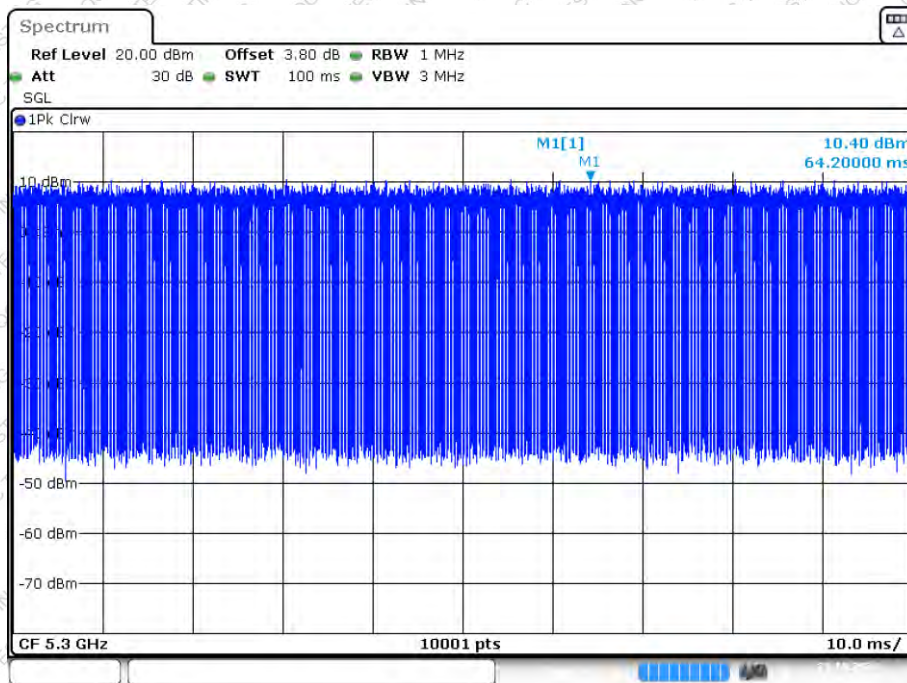

Date: 23.OCT.2024 19:30:33




Duty Cycle NVNT a 5320MHz Sum

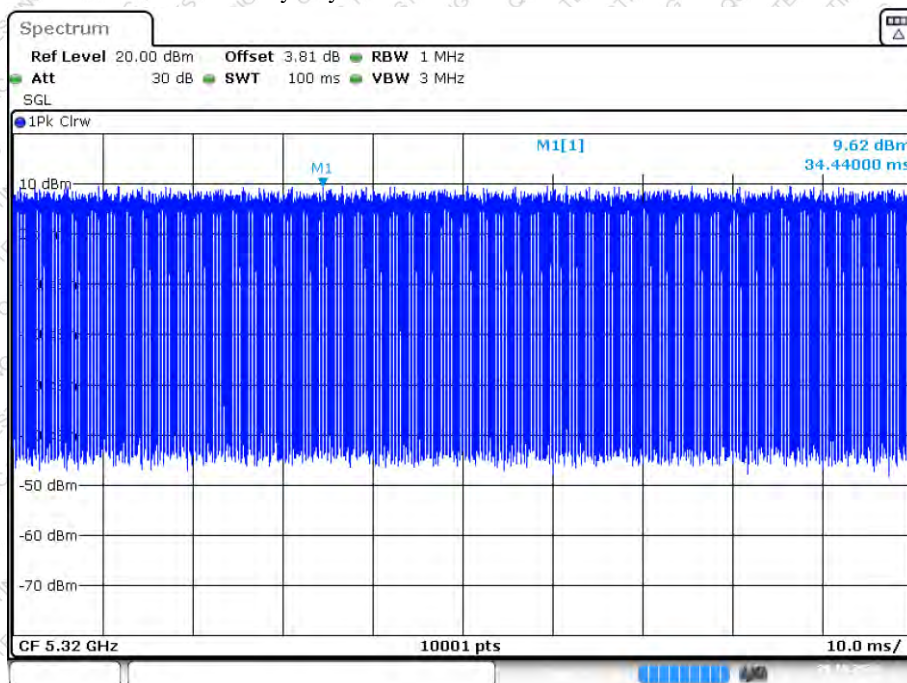

Date: 28.OCT.2024 08:22:47


Duty Cycle NVNT a 5500MHz Sum

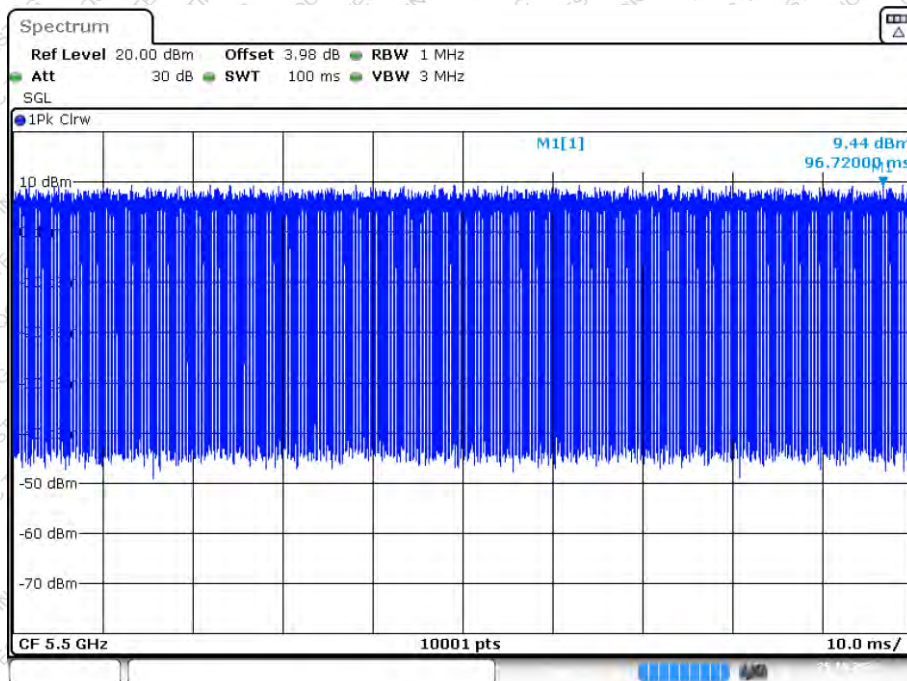

Date: 25.OCT.2024 09:17:25




Duty Cycle NVNT a 5580MHz Sum

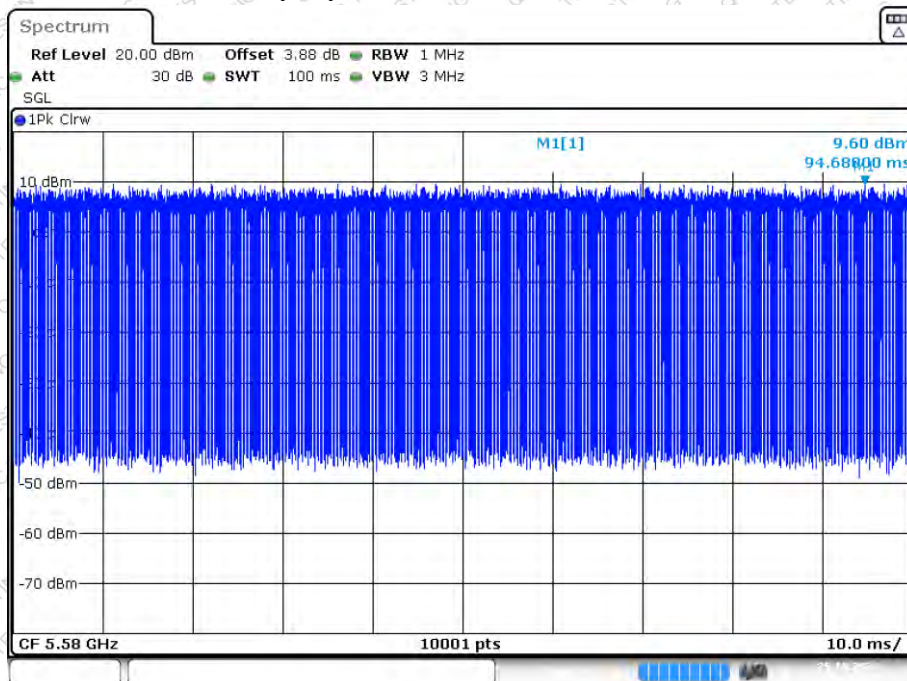

Date: 25.OCT.2024 09:18:55


Duty Cycle NVNT a 5700MHz Sum

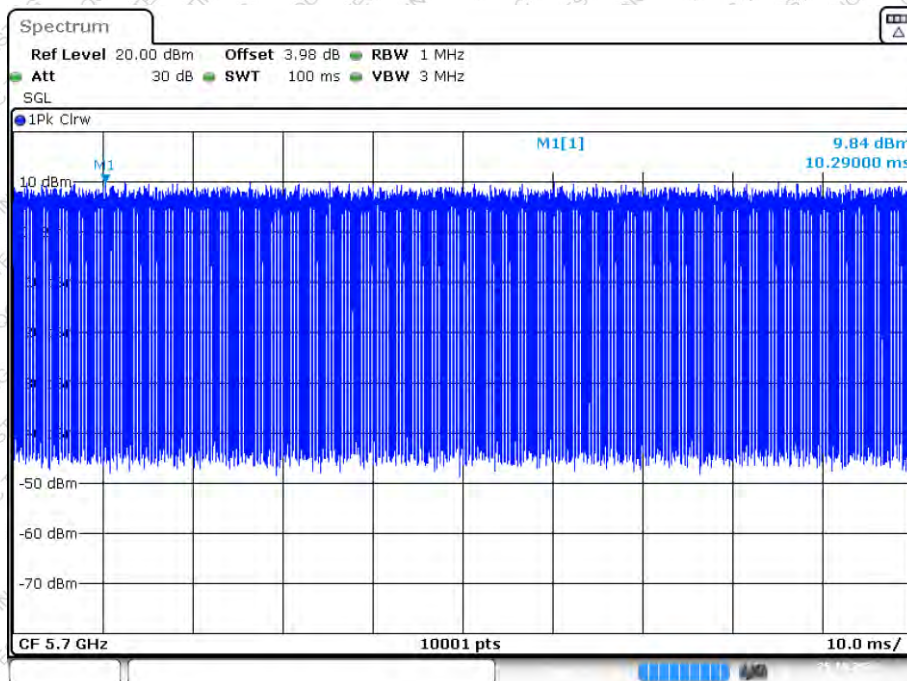

Date: 25.OCT.2024 09:20:13




Duty Cycle NVNT a 5720MHz Sum

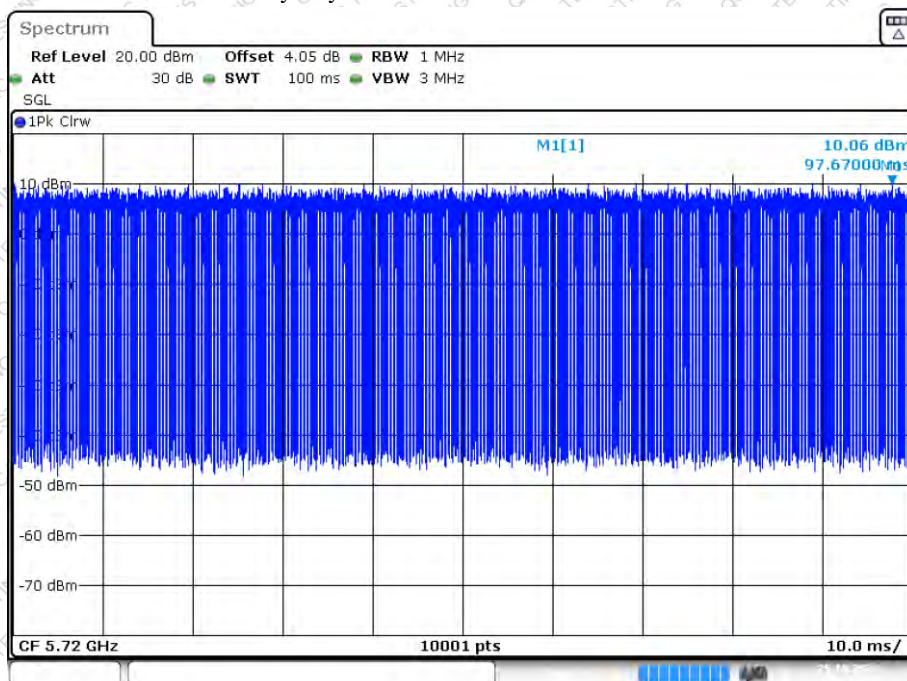

Date: 25.OCT.2024 09:21:28


Duty Cycle NVNT a 5745MHz Ant1

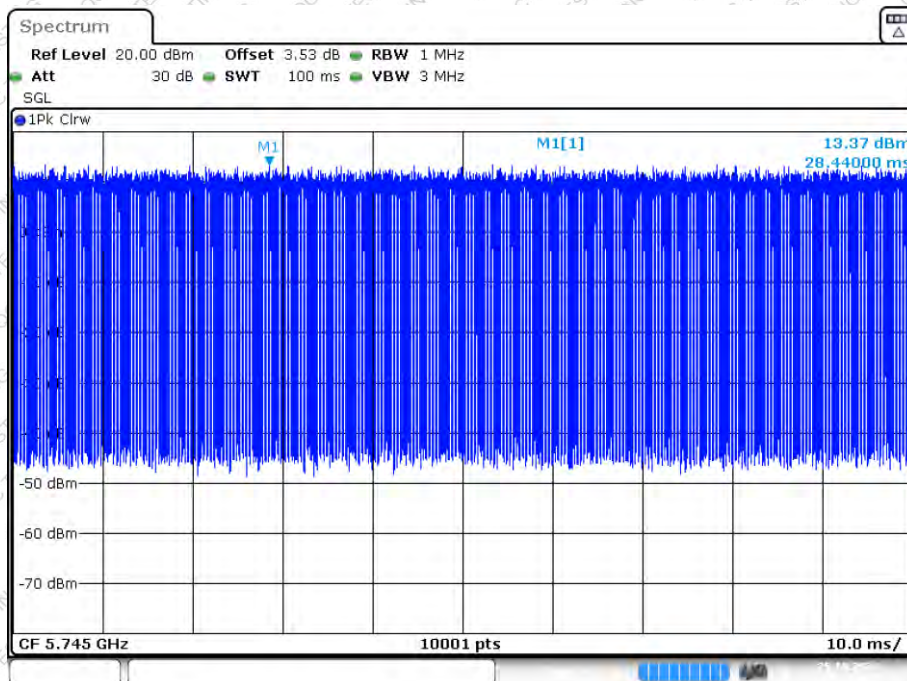

Date: 25.OCT.2024 10:34:03




Duty Cycle NVNT a 5785MHz Ant1

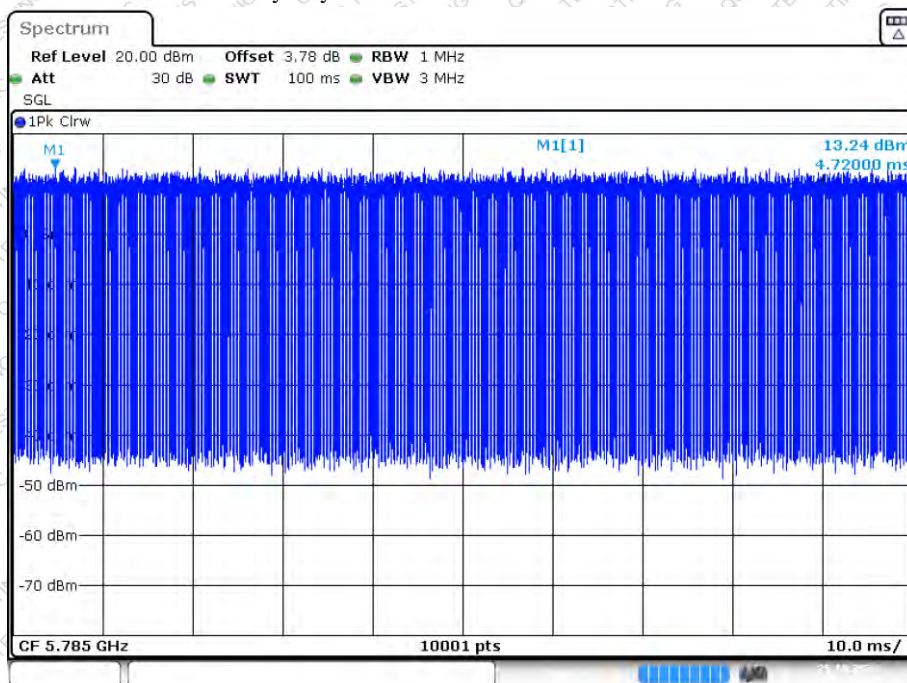

Date: 25.OCT.2024 10:38:00


Duty Cycle NVNT a 5825MHz Ant1

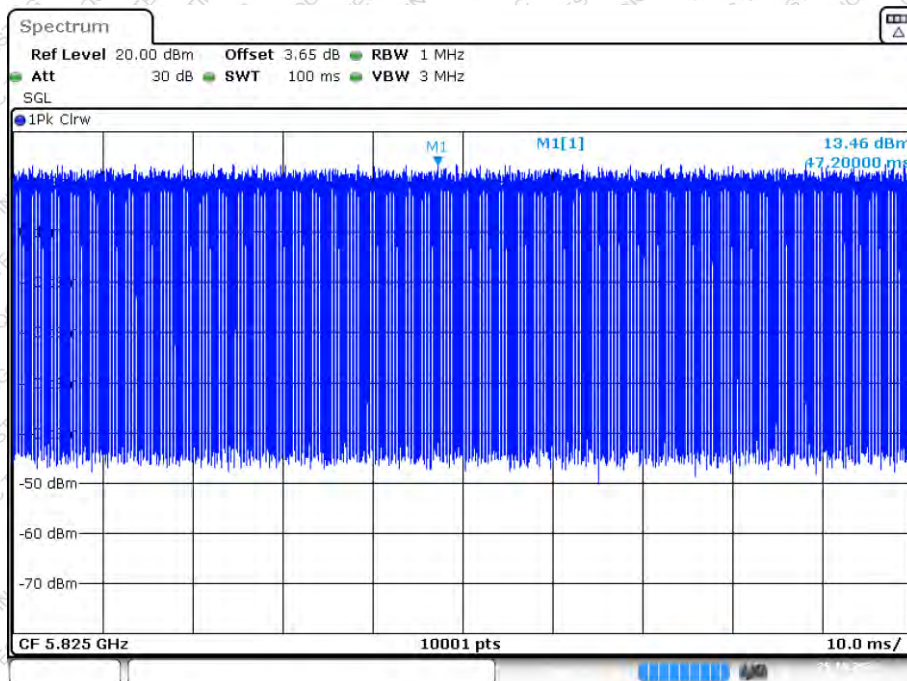

Date: 25.OCT.2024 10:40:26




Duty Cycle NVNT a 5745MHz Ant2

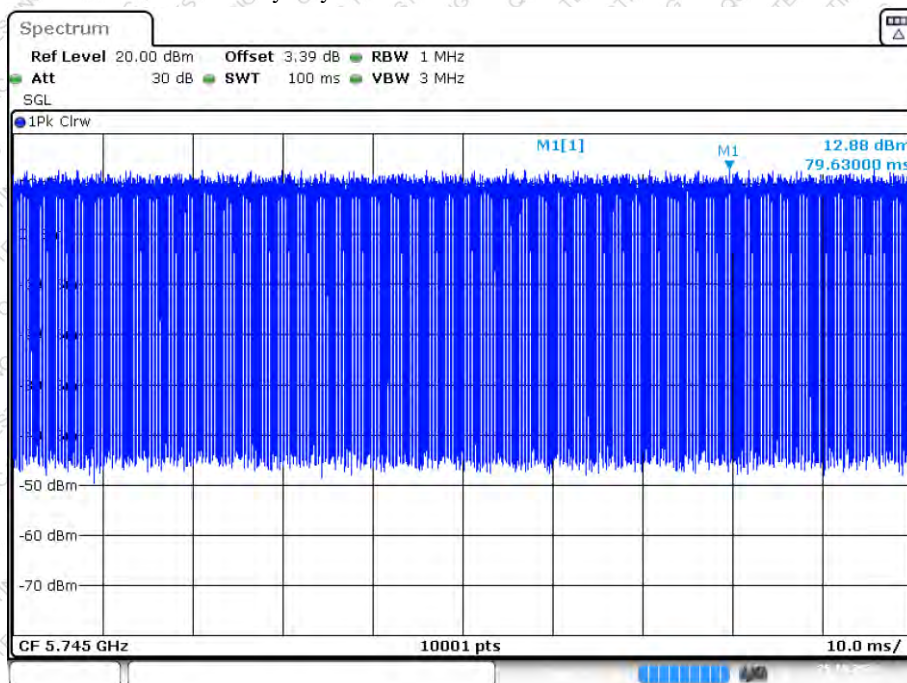

Date: 25.OCT.2024 11:30:20


Duty Cycle NVNT a 5785MHz Ant2

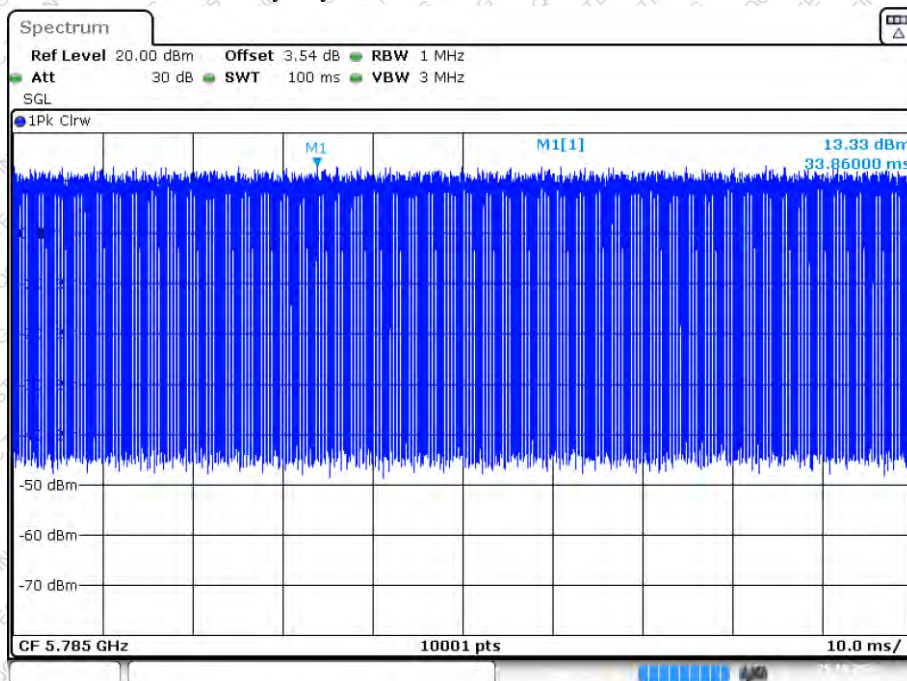

Date: 25.OCT.2024 11:36:11




Duty Cycle NVNT a 5825MHz Ant2

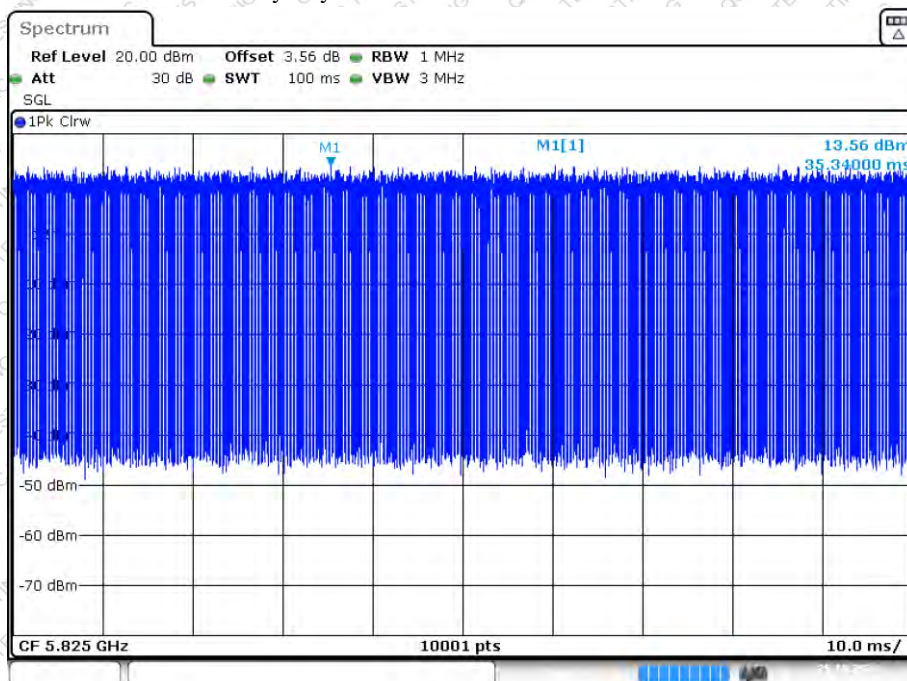

Date: 25.OCT.2024 11:38:49


Duty Cycle NVNT a 5745MHz Sum

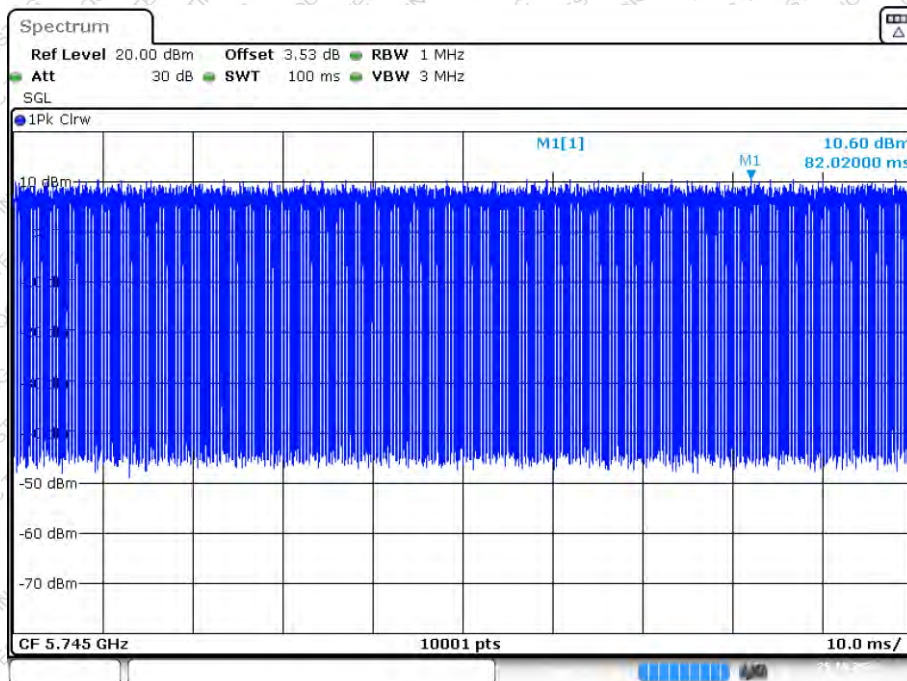

Date: 25.OCT.2024 14:15:12




Duty Cycle NVNT a 5785MHz Sum

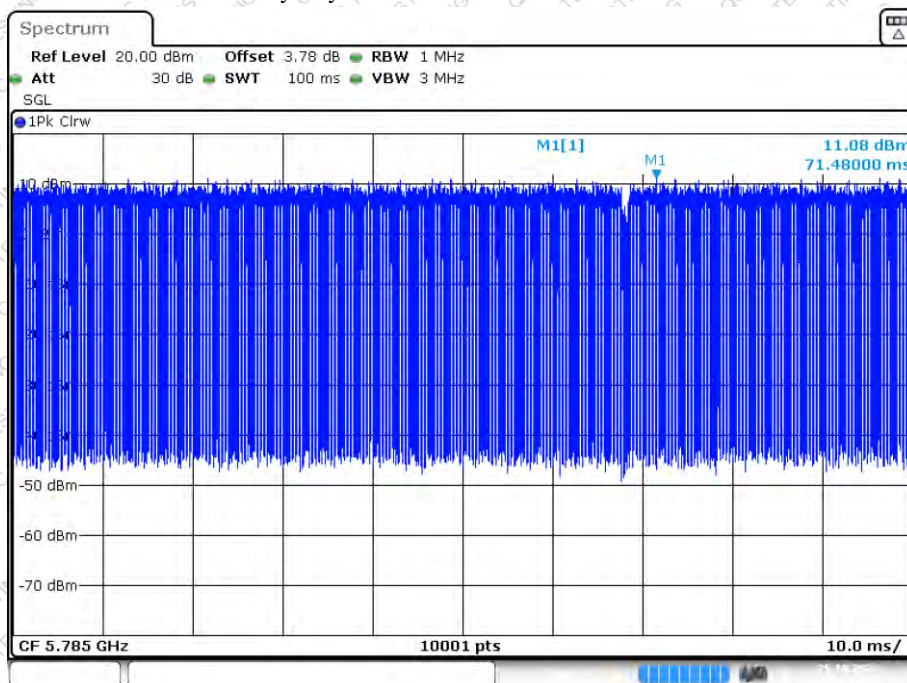

Date: 25.OCT.2024 14:17:53


Duty Cycle NVNT a 5825MHz Sum

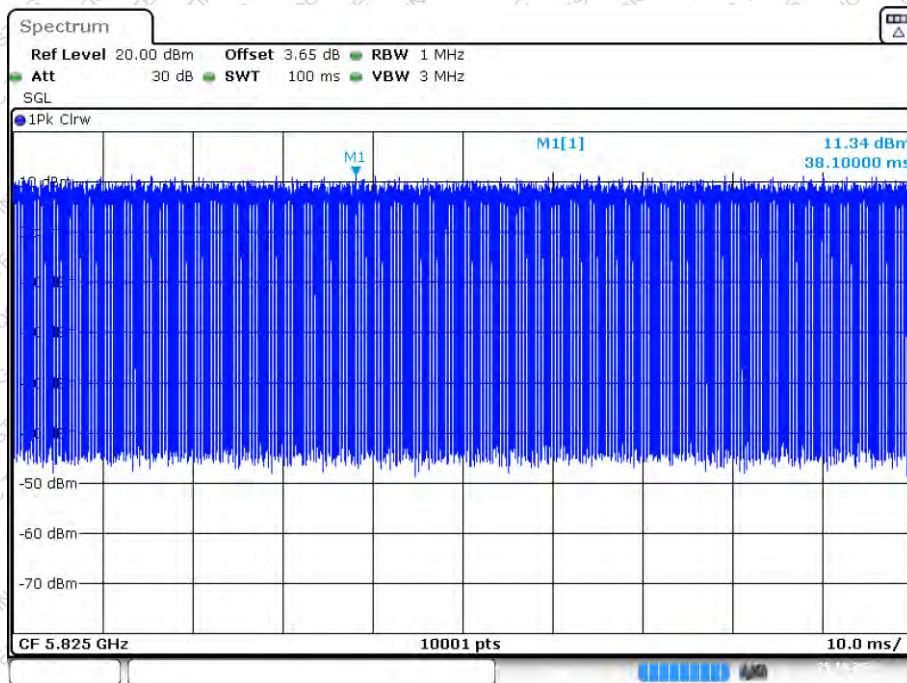

Date: 25.OCT.2024 14:21:01




Duty Cycle NVNT n20 5180MHz Ant1

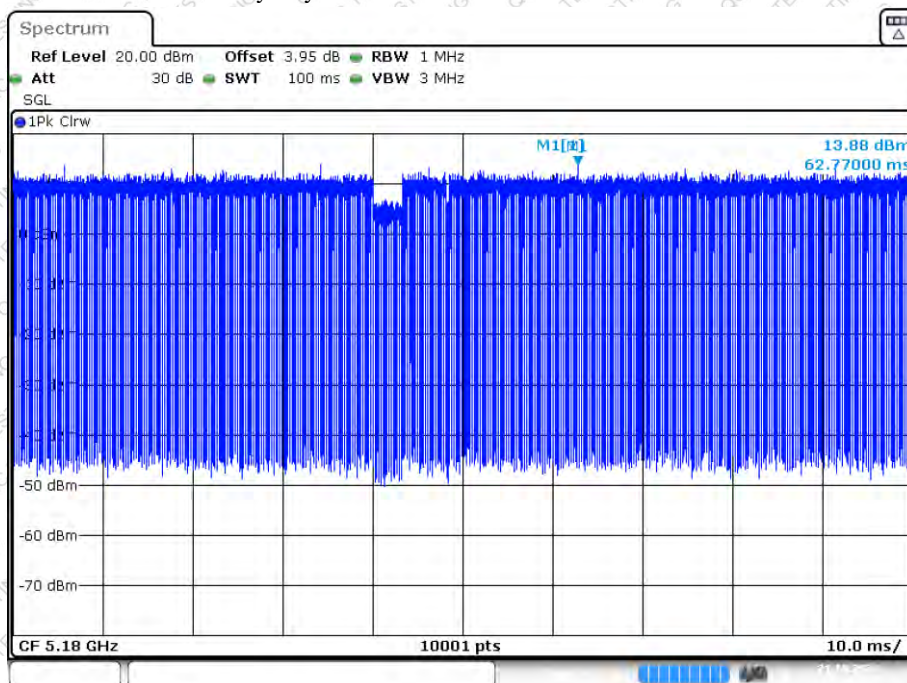

Date: 21.OCT.2024 21:41:00


Duty Cycle NVNT n20 5200MHz Ant1

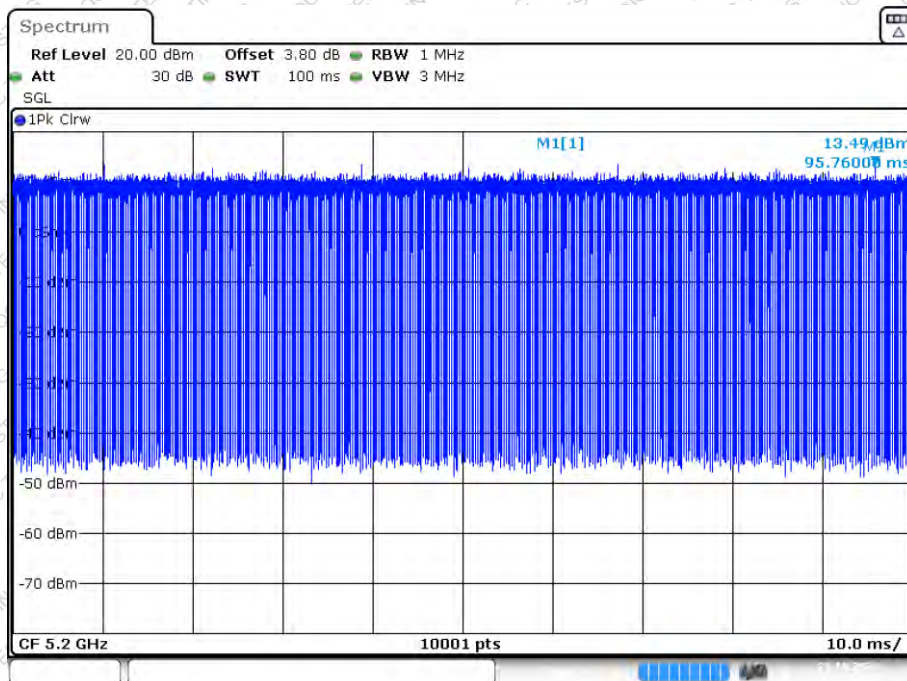

Date: 23.OCT.2024 16:22:51




Duty Cycle NVNT n20 5240MHz Ant1

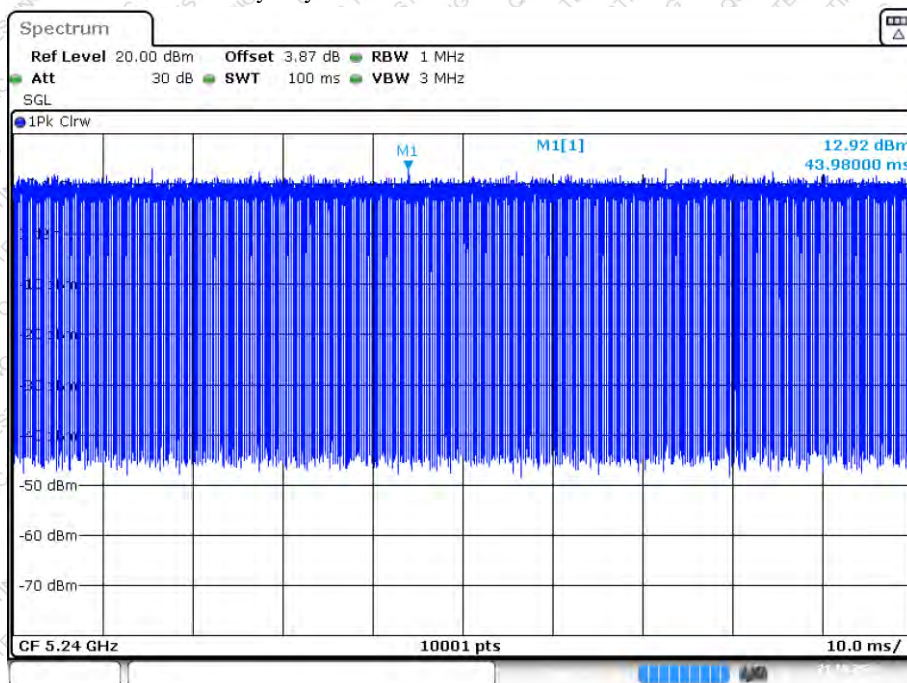

Date: 21.OCT.2024 21:43:47

Duty Cycle NVNT n20 5180MHz Ant2

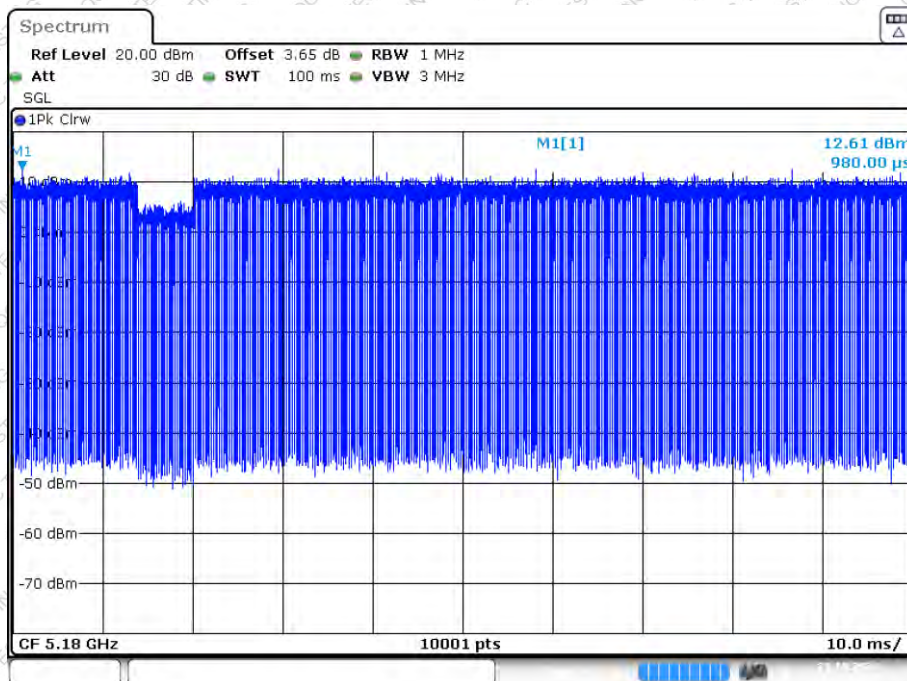

Date: 22.OCT.2024 17:58:22