


User Manual MERKURY SPB82

How to use the speaker

1. Slide on/off switch to ON position, the speaker will go into Bluetooth pairing mode automatically, and the speaker will say “Bluetooth is ready to pair”.
2. Enable the Bluetooth function on your mobile device and search for the Bluetooth speaker.
3. Select device MERKURY SPB82 that has been newly added to pairing, then it will say “Bluetooth is connected successfully”.
4. Play music via bluetooth with your mobile device or dial with you mobile phone.
5. Pause /Play: Short press this button to play/pause the music of the device.
6. Change Songs :Short press FORWARD or NEXT button to play forward or next music.
7. Volume Adjustment: Rotate the VOLUME to turn the volume up or down.
8. Mode: Press MODE button to change the audio source around Bluetooth/FM Radio /AUX.
9. Hands-free: when the speaker is connected with a phone via Bluetooth, music will temporally pause; if a phone call come in while the Bluetooth is connected with telephone, first the speaker will read the phone number, and then Short  to answer a call and hang up a call, to reject a call and call back, just long press.
10. **Charge Description :** use Micro USB cable connect to the charging port of the speaker “DC 5V”

Button Functions Display

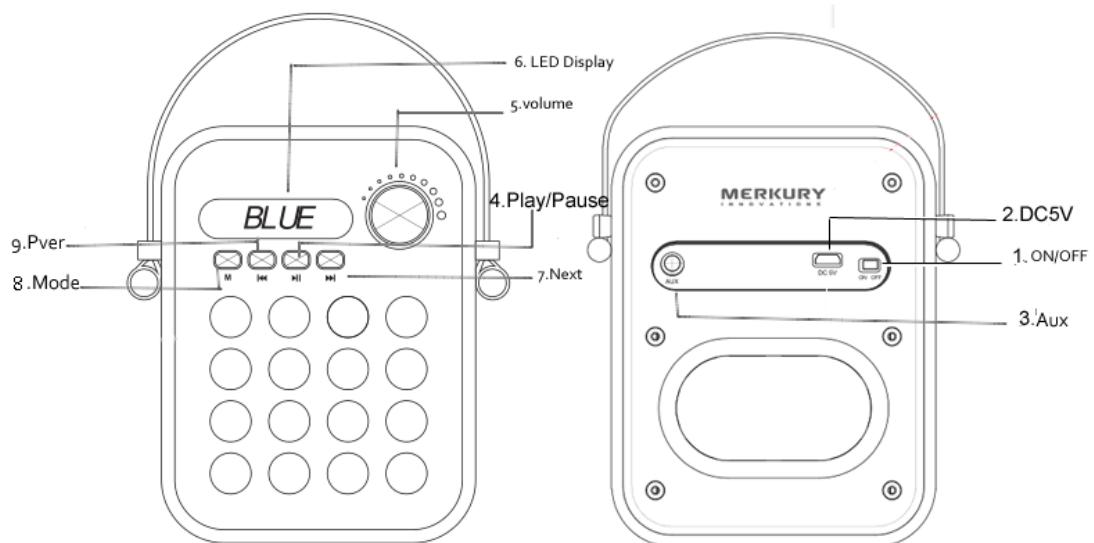

1. Power On/Off

2. DC5V: Micro USB Charging Port

3. AUX: Connection Jack

4.Play/Pause Or/ Hands-free: Hands-free: Short press to answer/ hang up a call, Long press to reject a call redialing

5.Volume : Rotate the VOLUME to turn the volume up or down.

6.LED Display

7.Next song

8.Mode: Press MODE button to change the audio source around Bluetooth/FM Radio /AUX.

9.Previous song

Specifications

1:Bluetooth Version:V2.1+EDR(3.0)

2:Support Profiles:HFP/L2CAP/A2DP/AVCTP/AVDTP/AVCRP

3: Output Power: 3W x2

4:THD:<0.5%

5:S/N:>90dB

6:Frequency Response:80Hz-20kHz

7:Frequency :2.402-2.480GHz

8:Play Time: About 3~4 hours continuously

9:Charge Time: About 1~2 hours

10:Net Weight:2lbs

11:Battery Capacitor: 1200mA/3.7v

12:Production Dimensions: 122*85*142 mm

Package Includes

1:LED Bluetooth Speaker x 1

2:3.5mm Audio Cable x 1

3:Micro USB Charging Cable x1

4: User Manual x 1

Friendly Reminder (FAQ) Troubleshooting

1. Make sure your mobile devices are Bluetooth-enabled before using product.

2. Make sure the speaker is fully charged when using for the first time.

3.In order to protect the circuit of this speaker and ensure the long-term performance of the built-in battery,please do not play music while charging your mobile device.

4.If you Repeated Unsuccessful pairing: ① . Shutdown and reboot the speaker ② If you device ask for a password. Please type in 0000

5.Staccato appears when Plying music: Check if the device exceeds the working distance ,Or if there is any obstacles between them

6. stay silently when playing: ① .Check if the Volume of speaker has been adjusted

② check if the speaker has been muted or paused

7. stay silently after AUX is connected : Check if the audio input line is correctly connected
- 8.Fail to turn on: Check if the built-in battery is dead

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation