

**FOXEEER****TM25 Transmitter****SPECIFICATION**

MODEL	TM25
Transmitter Frequency(MHz)	Wideband FM Modulate
Video Format	NTSC/PAL
Output Impedance	50 Ohm
Input Voltage	DC 7-24V
Output Voltage	DC 5V
Operating Temperature	-10~85 °C
Video Band Width	0~8.0MHz
Audio carrier Frequency	6.5MHz
Video Input Level	0.8~1.2Vp-p
Audio Input Level	0.5~2.0Vp-p
Audio Input Impedance	10K Ohm
Weight	6.7g
Antenna Connector	Reversed polarity external antenna port
Accessories	1×Transmitter; 1×cable

**FREQUENCY**

5845MHz ; 5825MHz ; 5805MHz ; 5785MHz ; 5765MHz ; 5745MHz  
5752MHz ; 5771MHz ; 5790MHz ; 5809MHz ; 5828MHz ; 5847MHz  
5740MHz ; 5760MHz ; 5780MHz ; 5800MHz ; 5820MHz ; 5840MHz ; 5860MHz;  
5769MHz ; 5806MHz ; 5843MHz

### KEY FUNCTION

1. Long press the key for 2 seconds to enter channel setting mode.
2. Short press the key once to switch the channel from 1 to 8.
3. Long press the key for 2 seconds to enter channel group setting mode.
4. Short press the key once to switch channel group from 1 to 5.
5. Long press the key for 2 seconds to quit setting mode. LED display window will show present group and channel alternately.

Line 1: DC 5V OUT


Line 2: GND

Line 3: Video IN

Line 4: Audio IN

Line 5: GND

Line 6: VDD IN(2S-6S)

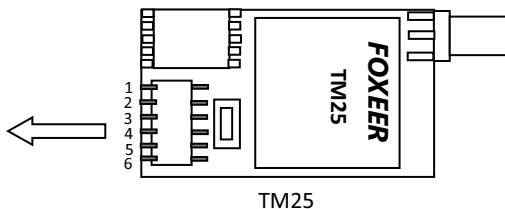

TM25

**CAUTION:** This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.