






NTNV-11AC20SISO-Ant1-5180

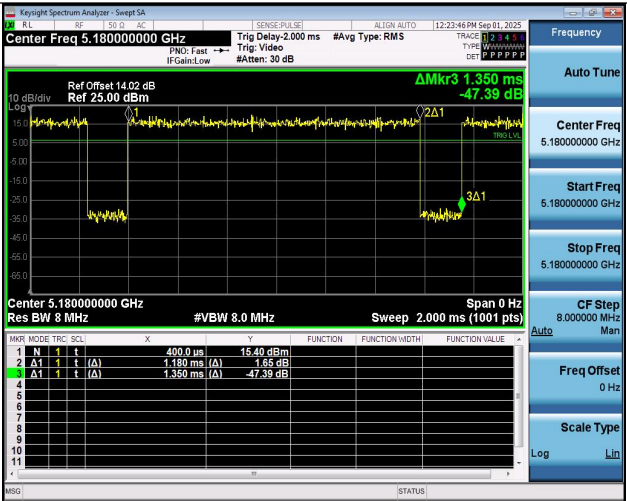


NTNV-11AC20SISO-Ant1-5200

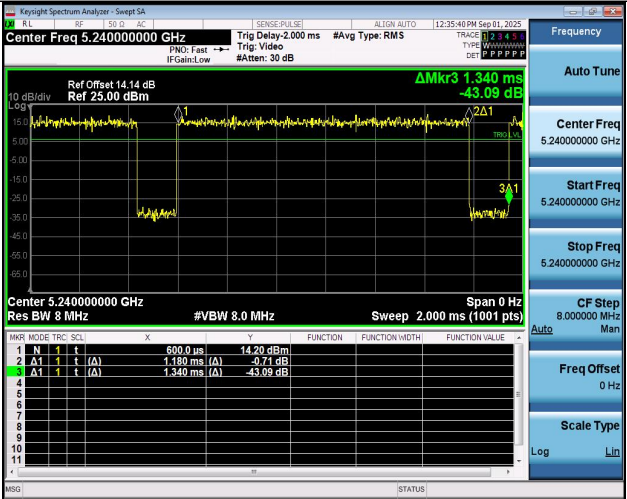


NTNV-11AC20SISO-Ant1-5240

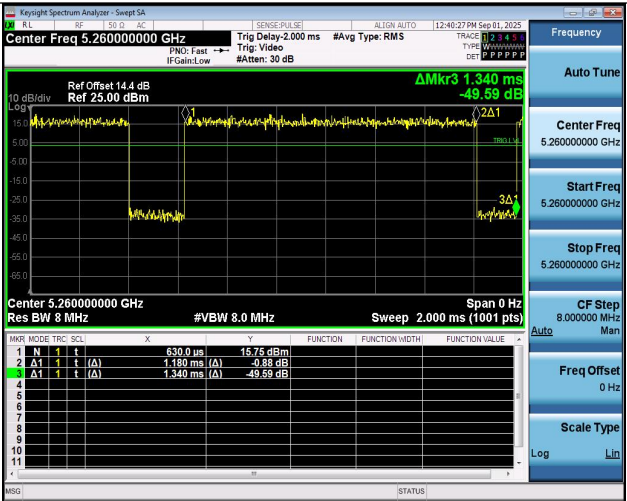


NTNV-11AC20SISO-Ant1-5260

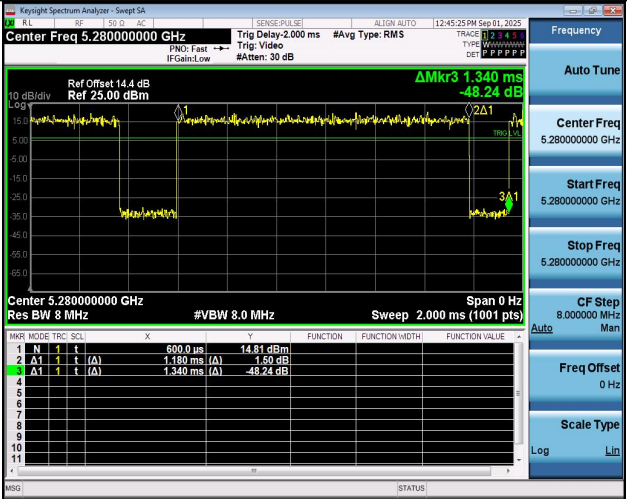


NTNV-11AC20SISO-Ant1-5280

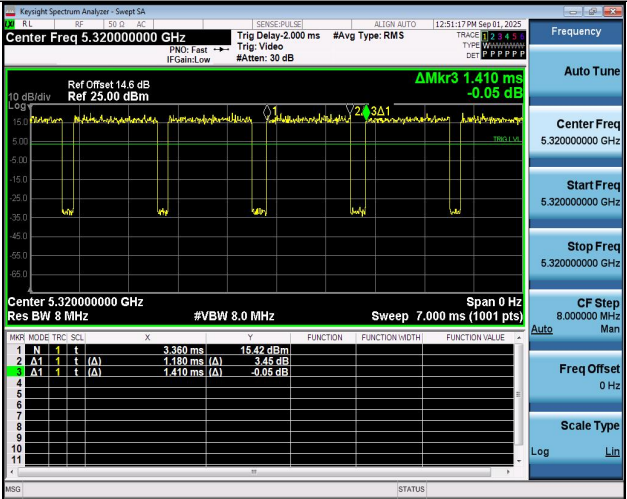


NTNV-11AC20SISO-Ant1-5320

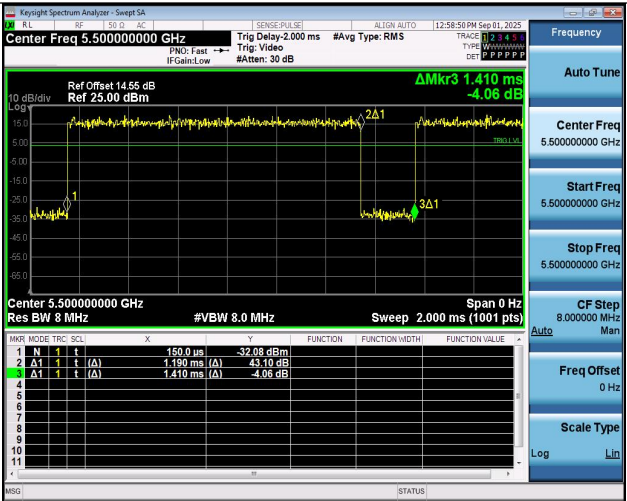


NTNV-11AC20SISO-Ant1-5500

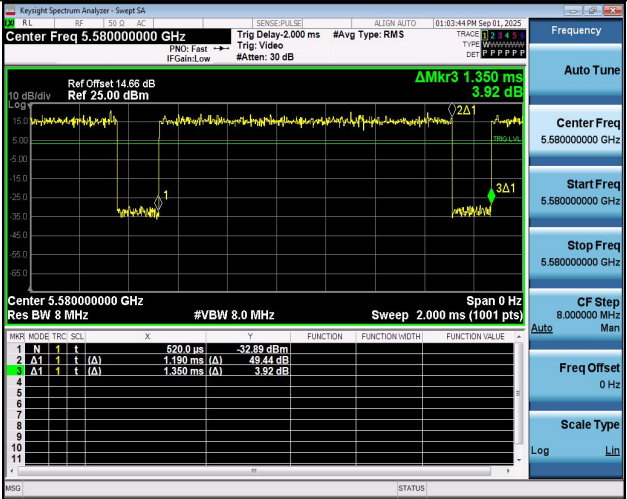


NTNV-11AC20SISO-Ant1-5580

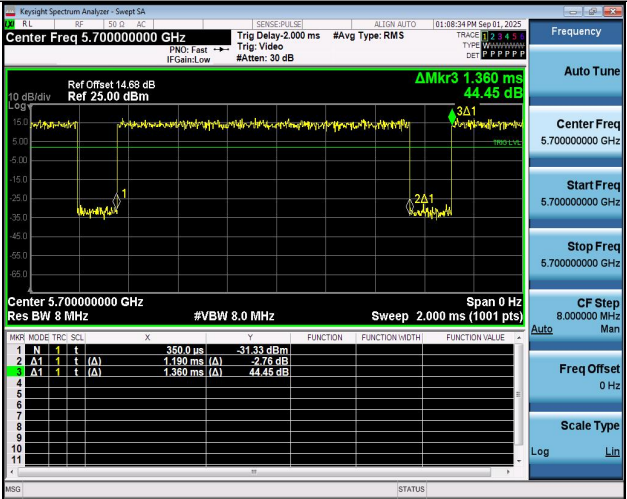

NTNV-11AC20SISO-Ant1-5700

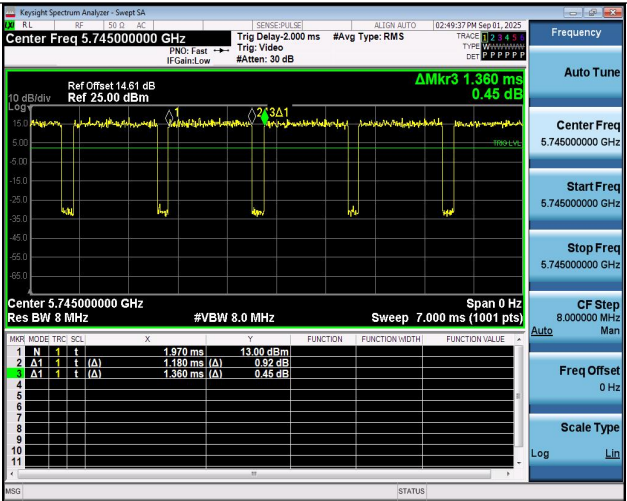


NTNV-11AC20SISO-Ant1-5745

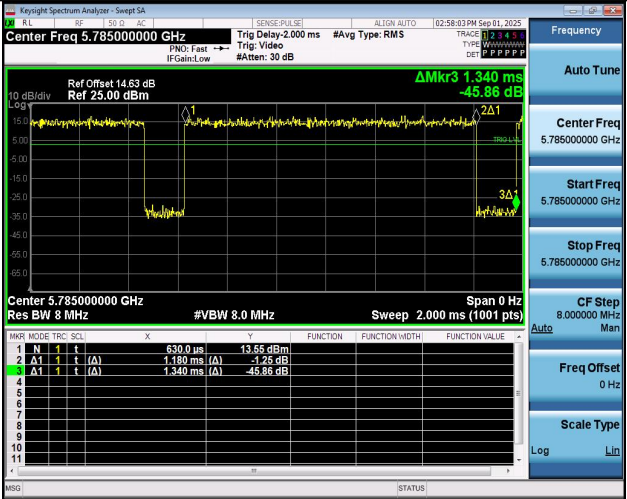


NTNV-11AC20SISO-Ant1-5785




NTNV-11AC20SISO-Ant1-5825

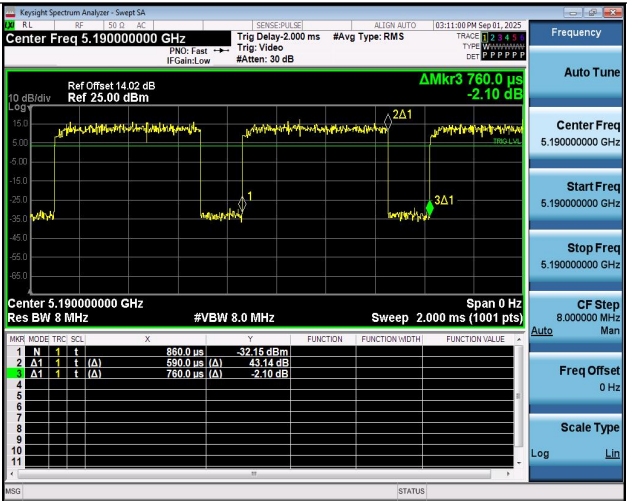


NTNV-11AC40SISO-Ant1-5190

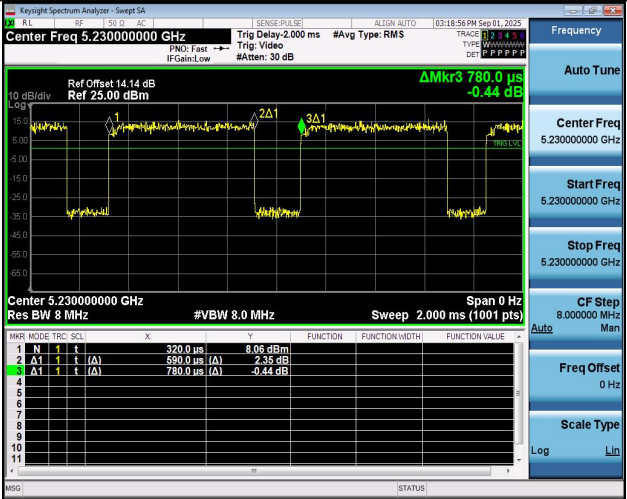


NTNV-11AC40SISO-Ant1-5230

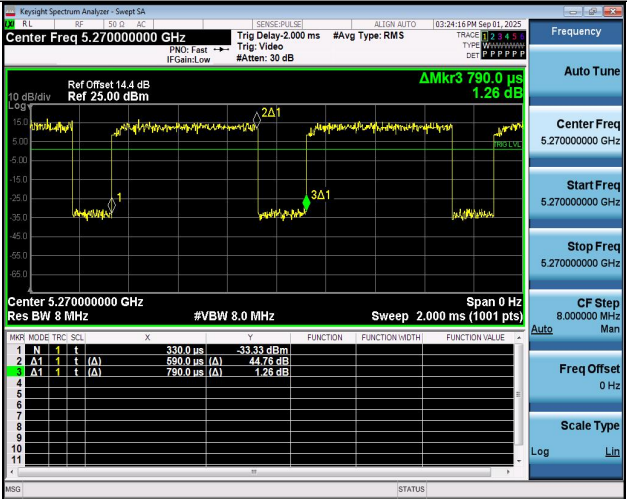


NTNV-11AC40SISO-Ant1-5270

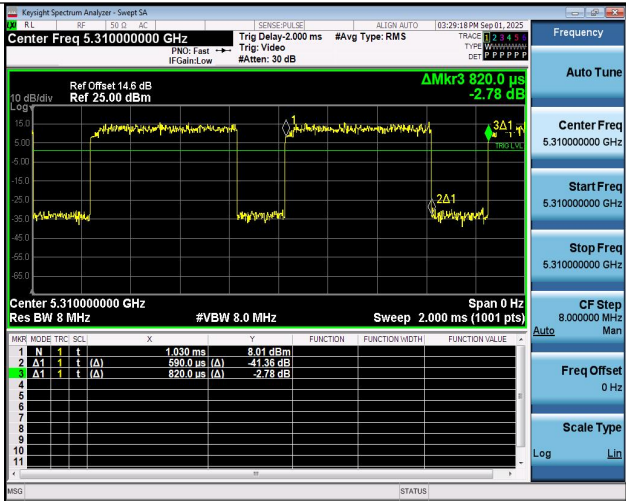


NTNV-11AC40SISO-Ant1-5310

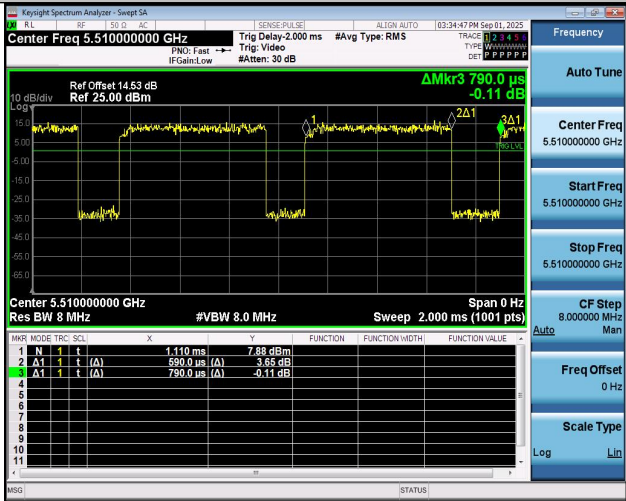


NTNV-11AC40SISO-Ant1-5510

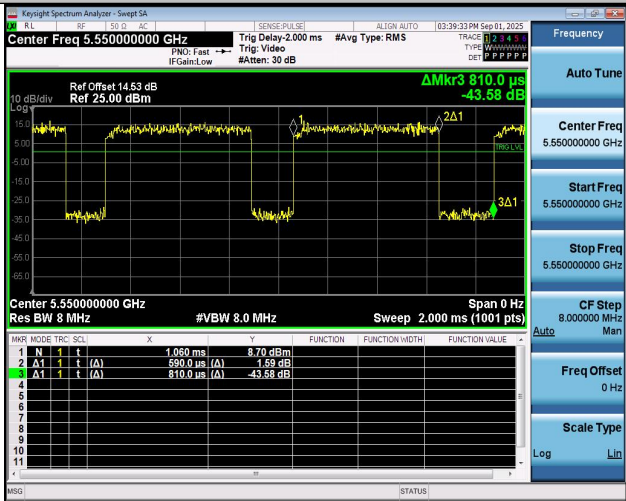


NTNV-11AC40SISO-Ant1-5550

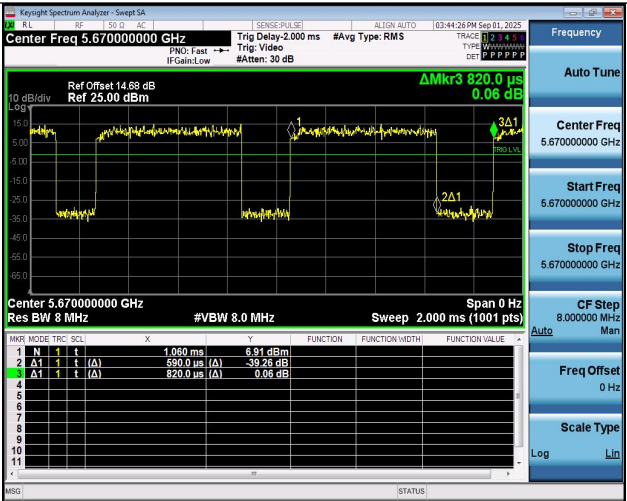


NTNV-11AC40SISO-Ant1-5670

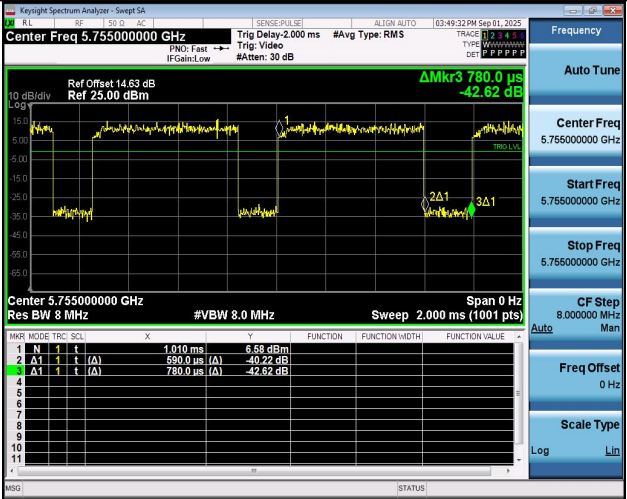


NTNV-11AC40SISO-Ant1-5755

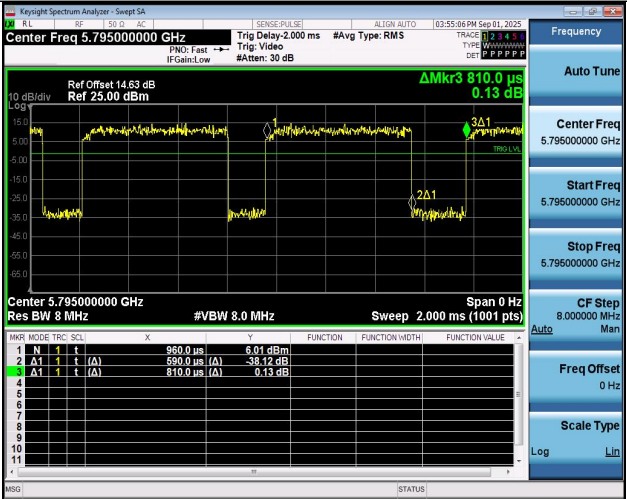


NTNV-11AC40SISO-Ant1-5795

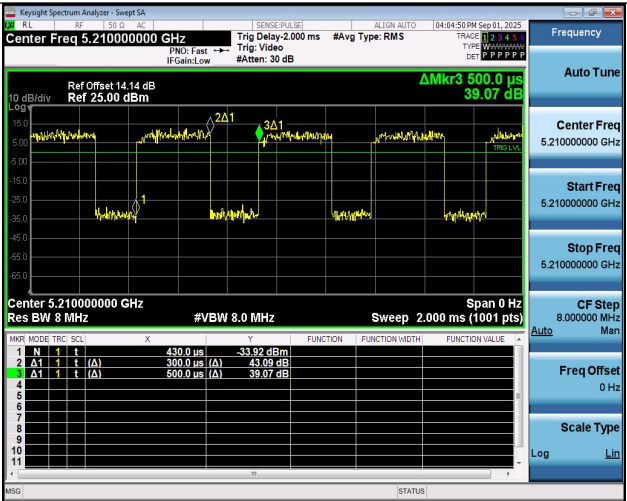


NTNV-11AC80SISO-Ant1-5210

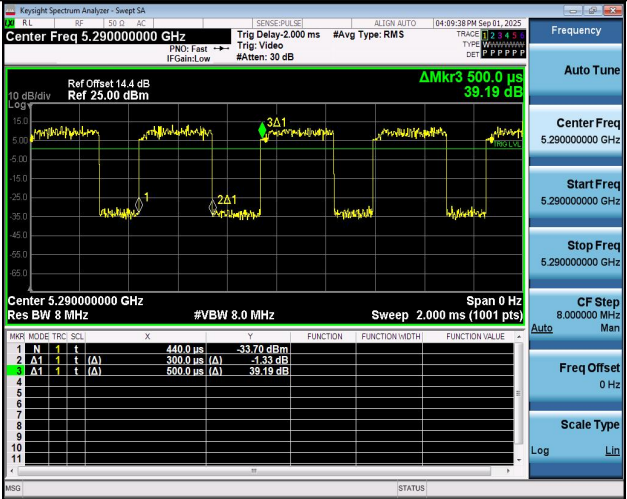


NTNV-11AC80SISO-Ant1-5290

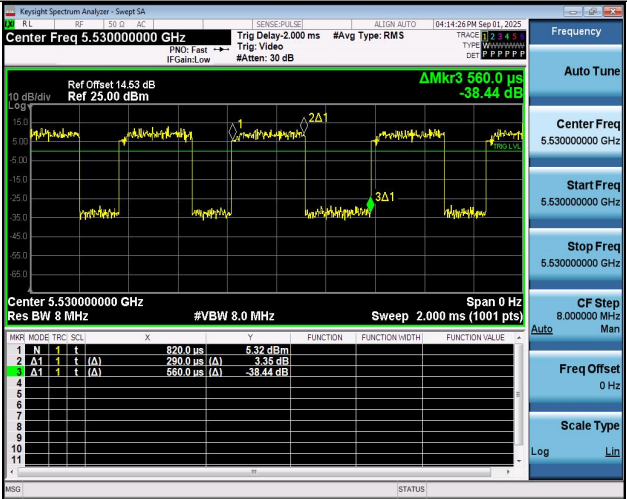

NTNV-11AC80SISO-Ant1-5530

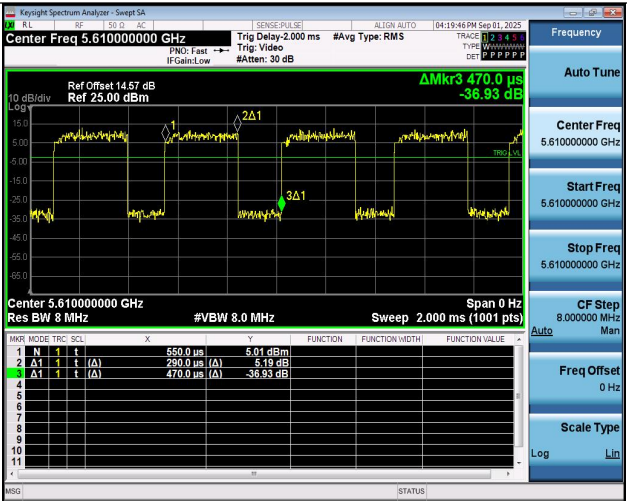

NTNV-11AC80SISO-Ant1-5610

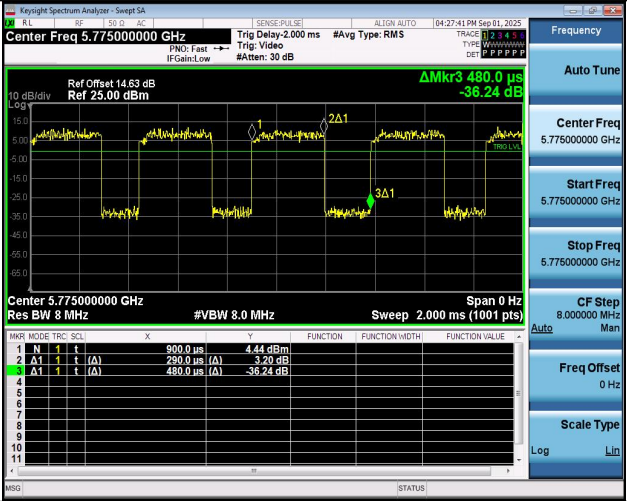

NTNV-11AC80SISO-Ant1-5775


Appendix C: Maximum conducted output power**Test Result Channel Power**

Test Mode	Antenna	Frequency [MHz]	TPC	Set Power	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	NA	---	15.02	88.54	0.53	15.55	≤23.98	PASS
11A	Ant1	5200	NA	---	14.76	86.34	0.64	15.40	≤23.98	PASS
11A	Ant1	5240	NA	---	14.39	83.73	0.77	15.16	≤23.98	PASS
11A	Ant1	5260	NA	---	15.29	87.50	0.58	15.87	≤23.98	PASS
11A	Ant1	5280	NA	---	14.92	85.28	0.69	15.61	≤23.98	PASS
11A	Ant1	5320	NA	---	14.70	89.10	0.50	15.20	≤23.98	PASS
11A	Ant1	5500	NA	---	15.01	87.42	0.58	15.59	≤23.98	PASS
11A	Ant1	5580	NA	---	14.90	89.68	0.47	15.37	≤23.98	PASS
11A	Ant1	5700	NA	---	13.26	85.28	0.69	13.95	≤23.98	PASS
11A	Ant1	5745	NA	---	13.61	88.05	0.55	14.16	≤30.00	PASS
11A	Ant1	5785	NA	---	13.80	83.13	0.80	14.60	≤30.00	PASS
11A	Ant1	5825	NA	---	14.41	96.53	0.15	14.56	≤30.00	PASS
11N20SISO	Ant1	5180	NA	---	13.91	87.97	0.56	14.47	≤23.98	PASS
11N20SISO	Ant1	5200	NA	---	13.79	83.57	0.78	14.57	≤23.98	PASS
11N20SISO	Ant1	5240	NA	---	13.50	87.97	0.56	14.06	≤23.98	PASS
11N20SISO	Ant1	5260	NA	---	14.40	87.97	0.56	14.96	≤23.98	PASS
11N20SISO	Ant1	5280	NA	---	13.98	83.69	0.77	14.75	≤23.98	PASS
11N20SISO	Ant1	5320	NA	---	13.72	80.69	0.93	14.65	≤23.98	PASS
11N20SISO	Ant1	5500	NA	---	13.97	86.67	0.62	14.59	≤23.98	PASS
11N20SISO	Ant1	5580	NA	---	13.69	86.76	0.62	14.31	≤23.98	PASS
11N20SISO	Ant1	5700	NA	---	12.40	86.67	0.62	13.02	≤23.98	PASS
11N20SISO	Ant1	5745	NA	---	12.65	86.13	0.65	13.30	≤30.00	PASS
11N20SISO	Ant1	5785	NA	---	12.71	83.57	0.78	13.49	≤30.00	PASS
11N20SISO	Ant1	5825	NA	---	13.13	87.31	0.59	13.72	≤30.00	PASS
11N40SISO	Ant1	5190	NA	---	13.70	74.68	1.27	14.97	≤23.98	PASS
11N40SISO	Ant1	5230	NA	---	13.47	75.64	1.21	14.68	≤23.98	PASS
11N40SISO	Ant1	5270	NA	---	14.03	78.38	1.06	15.09	≤23.98	PASS
11N40SISO	Ant1	5310	NA	---	13.89	77.63	1.10	14.99	≤23.98	PASS
11N40SISO	Ant1	5510	NA	---	13.82	69.41	1.59	15.41	≤23.98	PASS
11N40SISO	Ant1	5550	NA	---	13.77	70.24	1.53	15.30	≤23.98	PASS
11N40SISO	Ant1	5670	NA	---	12.30	75.64	1.21	13.51	≤23.98	PASS
11N40SISO	Ant1	5755	NA	---	12.54	77.63	1.10	13.64	≤30.00	PASS
11N40SISO	Ant1	5795	NA	---	12.78	74.68	1.27	14.05	≤30.00	PASS
11AC20SISO	Ant1	5180	NA	---	12.89	87.41	0.58	13.47	≤23.98	PASS
11AC20SISO	Ant1	5200	NA	---	12.87	83.80	0.77	13.64	≤23.98	PASS
11AC20SISO	Ant1	5240	NA	---	12.52	88.06	0.55	13.07	≤23.98	PASS

11AC20SISO	Ant1	5260	NA	---	13.34	88.06	0.55	13.89	≤23.98	PASS
11AC20SISO	Ant1	5280	NA	---	13.03	88.06	0.55	13.58	≤23.98	PASS
11AC20SISO	Ant1	5320	NA	---	12.73	83.69	0.77	13.50	≤23.98	PASS
11AC20SISO	Ant1	5500	NA	---	12.93	84.40	0.74	13.67	≤23.98	PASS
11AC20SISO	Ant1	5580	NA	---	12.67	88.15	0.55	13.22	≤23.98	PASS
11AC20SISO	Ant1	5700	NA	---	11.25	87.50	0.58	11.83	≤23.98	PASS
11AC20SISO	Ant1	5745	NA	---	11.71	86.76	0.62	12.33	≤30.00	PASS
11AC20SISO	Ant1	5785	NA	---	11.74	88.06	0.55	12.29	≤30.00	PASS
11AC20SISO	Ant1	5825	NA	---	12.11	88.15	0.55	12.66	≤30.00	PASS
11AC40SISO	Ant1	5190	NA	---	12.81	77.63	1.10	13.91	≤23.98	PASS
11AC40SISO	Ant1	5230	NA	---	12.62	75.64	1.21	13.83	≤23.98	PASS
11AC40SISO	Ant1	5270	NA	---	13.08	74.68	1.27	14.35	≤23.98	PASS
11AC40SISO	Ant1	5310	NA	---	13.22	71.95	1.43	14.65	≤23.98	PASS
11AC40SISO	Ant1	5510	NA	---	12.85	74.68	1.27	14.12	≤23.98	PASS
11AC40SISO	Ant1	5550	NA	---	12.85	72.84	1.38	14.23	≤23.98	PASS
11AC40SISO	Ant1	5670	NA	---	11.38	71.95	1.43	12.81	≤23.98	PASS
11AC40SISO	Ant1	5755	NA	---	11.56	75.64	1.21	12.77	≤30.00	PASS
11AC40SISO	Ant1	5795	NA	---	11.35	72.84	1.38	12.73	≤30.00	PASS
11AC80SISO	Ant1	5210	NA	---	11.13	60.00	2.22	13.35	≤23.98	PASS
11AC80SISO	Ant1	5290	NA	---	11.77	60.00	2.22	13.99	≤23.98	PASS
11AC80SISO	Ant1	5530	NA	---	11.23	51.79	2.86	14.09	≤23.98	PASS
11AC80SISO	Ant1	5610	NA	---	11.03	61.70	2.10	13.13	≤23.98	PASS
11AC80SISO	Ant1	5775	NA	---	10.40	60.42	2.19	12.59	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.

Test Graphs Channel Power

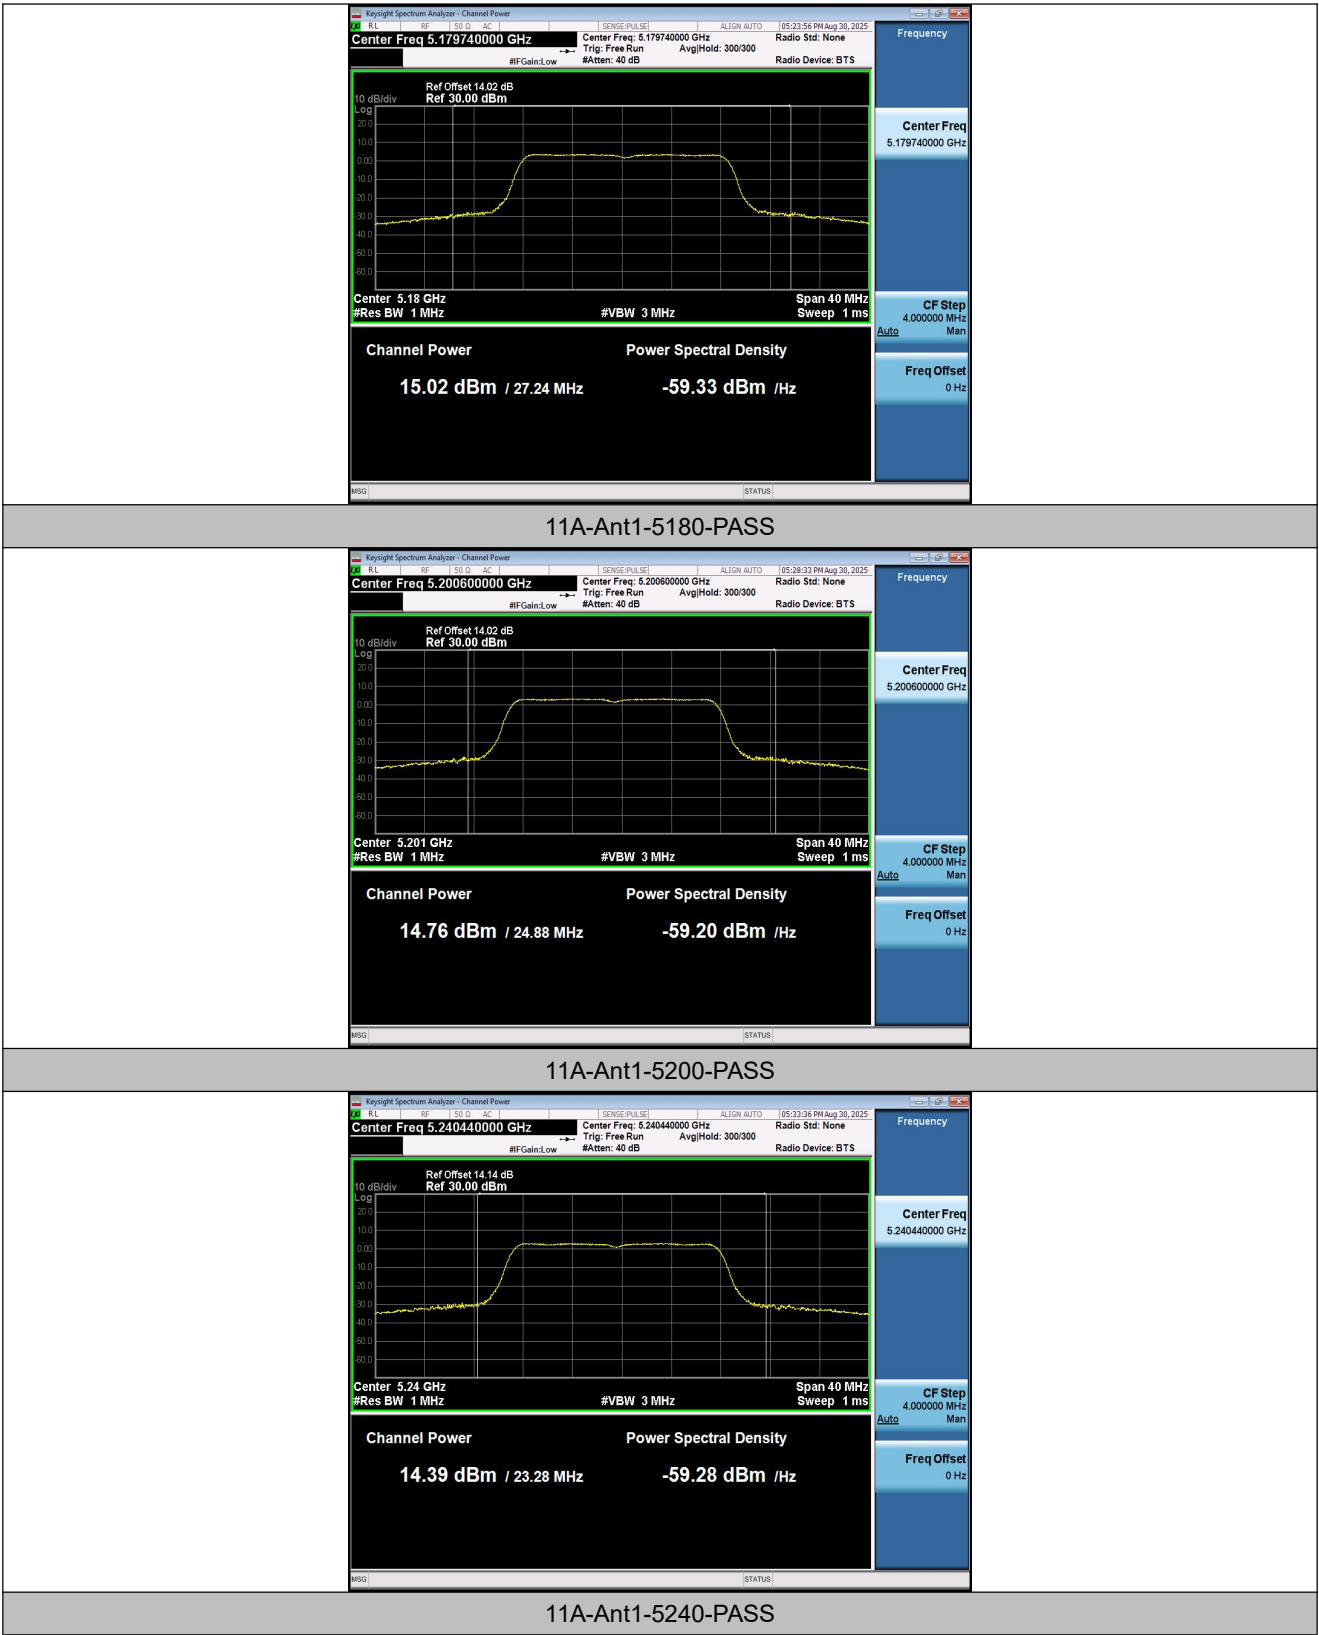



11A-Ant1-5260-PASS




11A-Ant1-5280-PASS




11A-Ant1-5320-PASS



11A-Ant1-5500-PASS

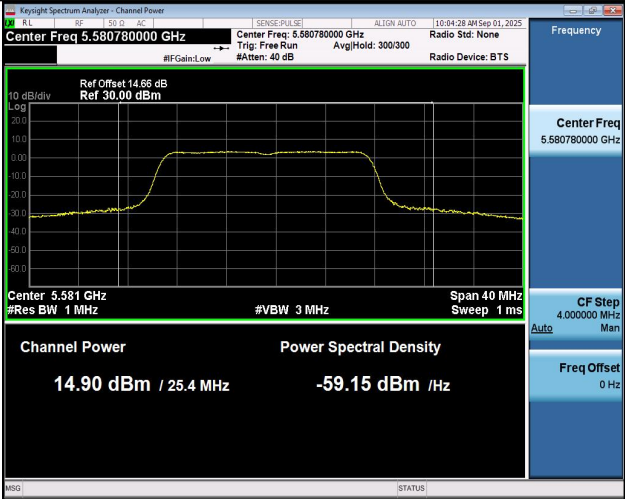

11A-Ant1-5580-PASS

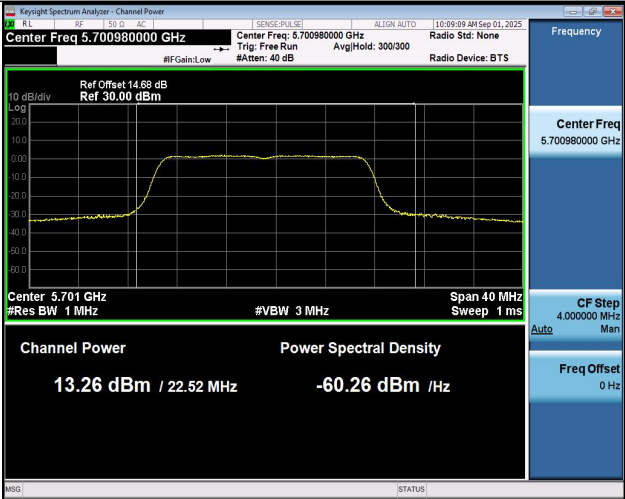

11A-Ant1-5700-PASS