



Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.649	0	-4.649	30	Pass
NVNT	BLE	2442	Ant1	-4.724	0	-4.724	30	Pass
NVNT	BLE	2480	Ant1	-6.497	0	-6.497	30	Pass

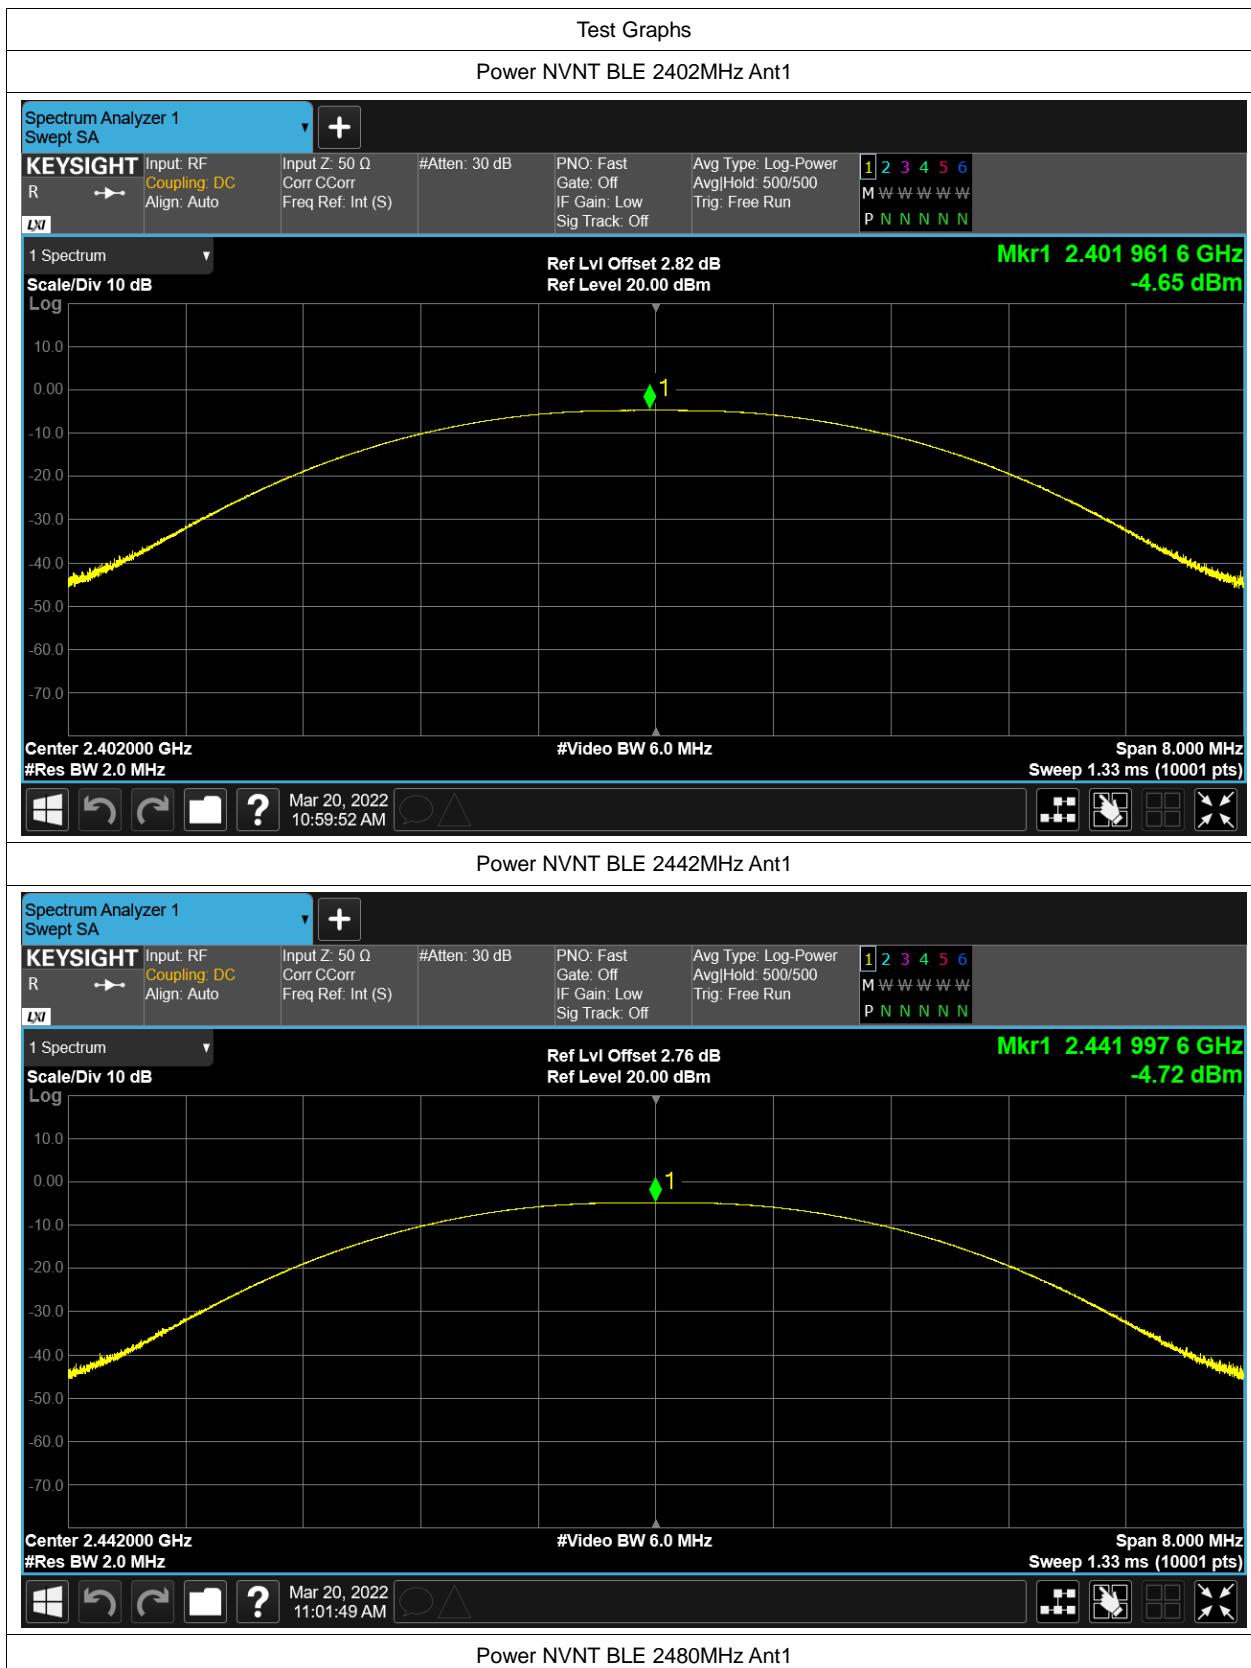


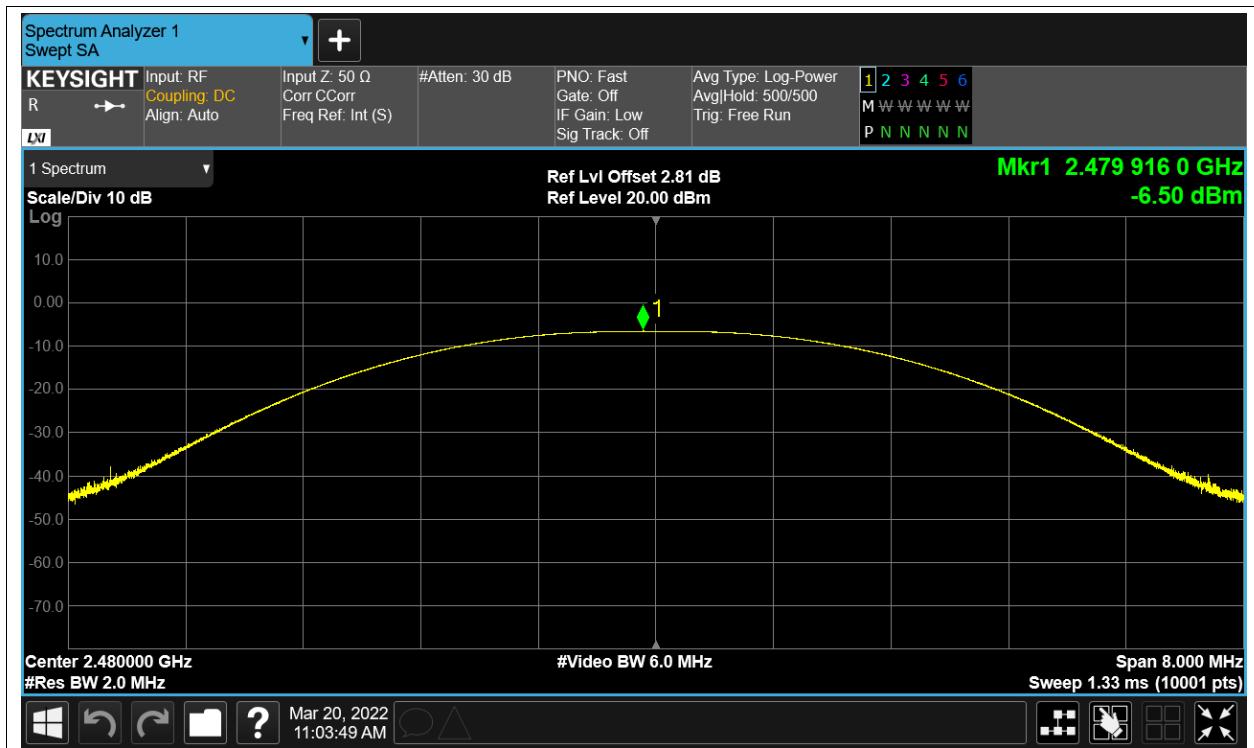

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	0.682	0.5	Pass
NVNT	BLE	2442	Ant1	0.683	0.5	Pass
NVNT	BLE	2480	Ant1	0.683	0.5	Pass




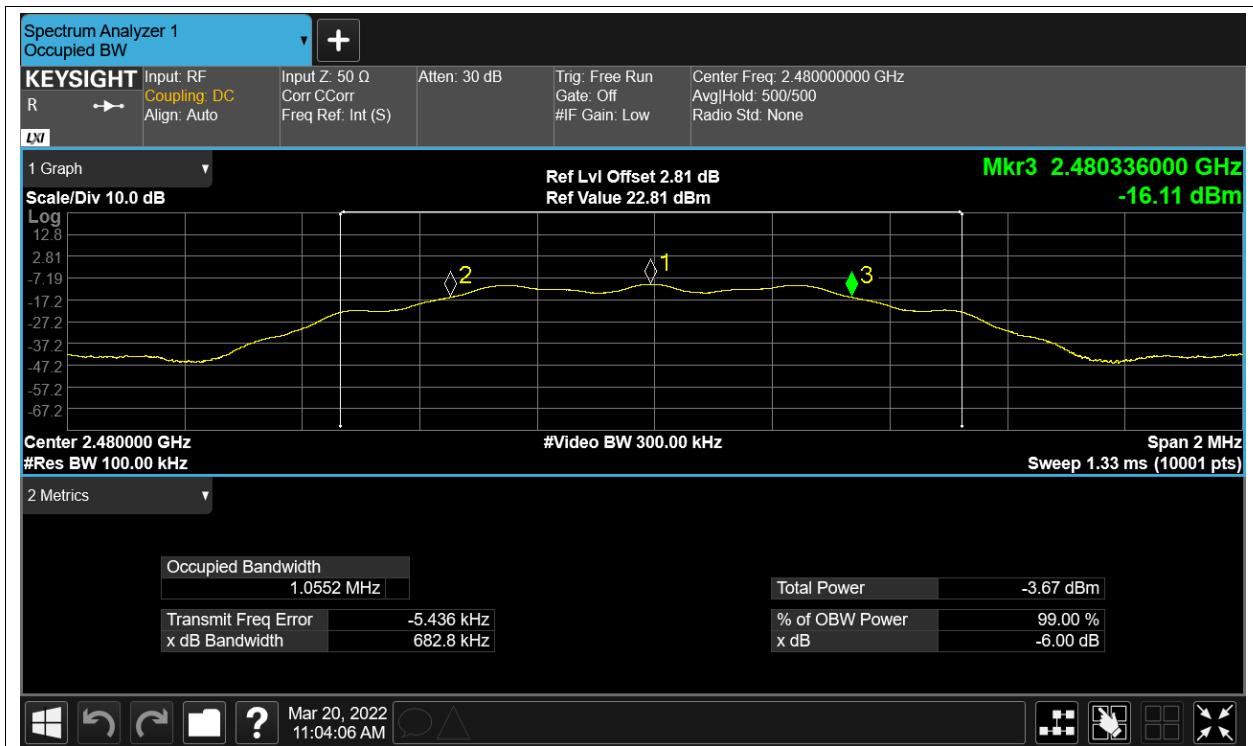

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.052332478
NVNT	BLE	2442	Ant1	1.056167196
NVNT	BLE	2480	Ant1	1.056625688




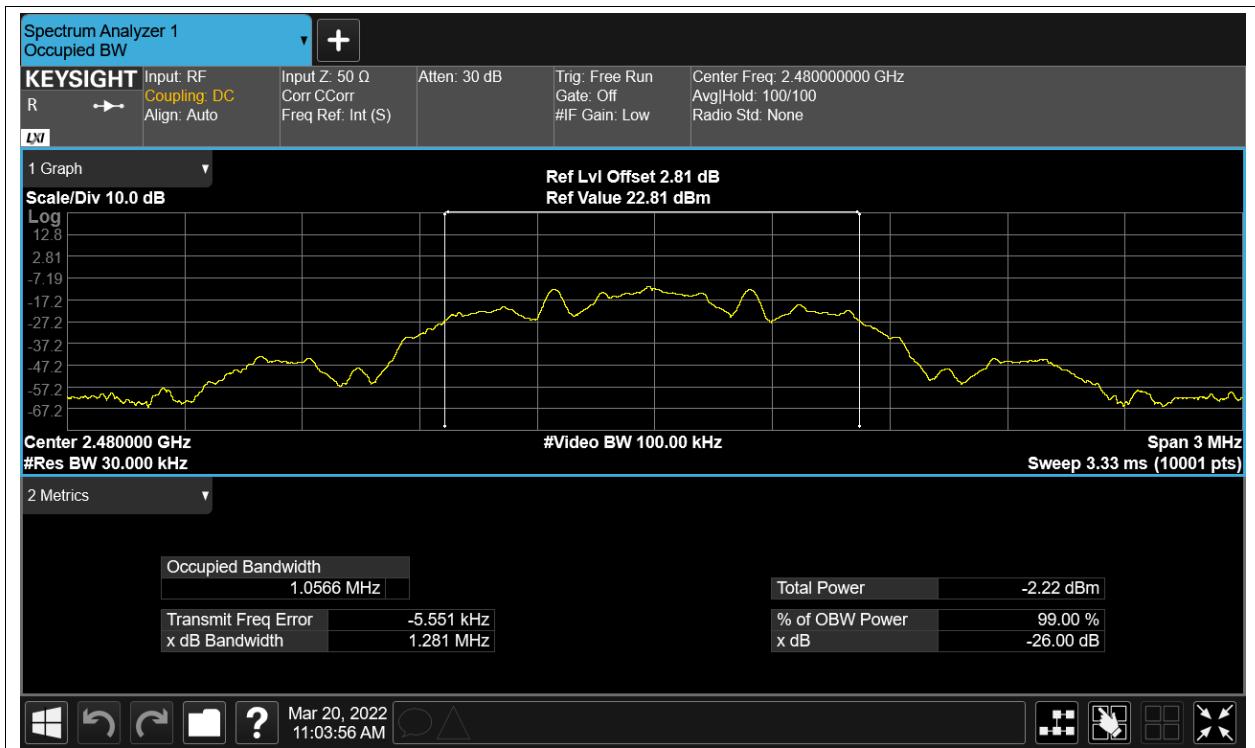

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-10.993	8	Pass
NVNT	BLE	2442	Ant1	-11.072	8	Pass
NVNT	BLE	2480	Ant1	-12.9	8	Pass




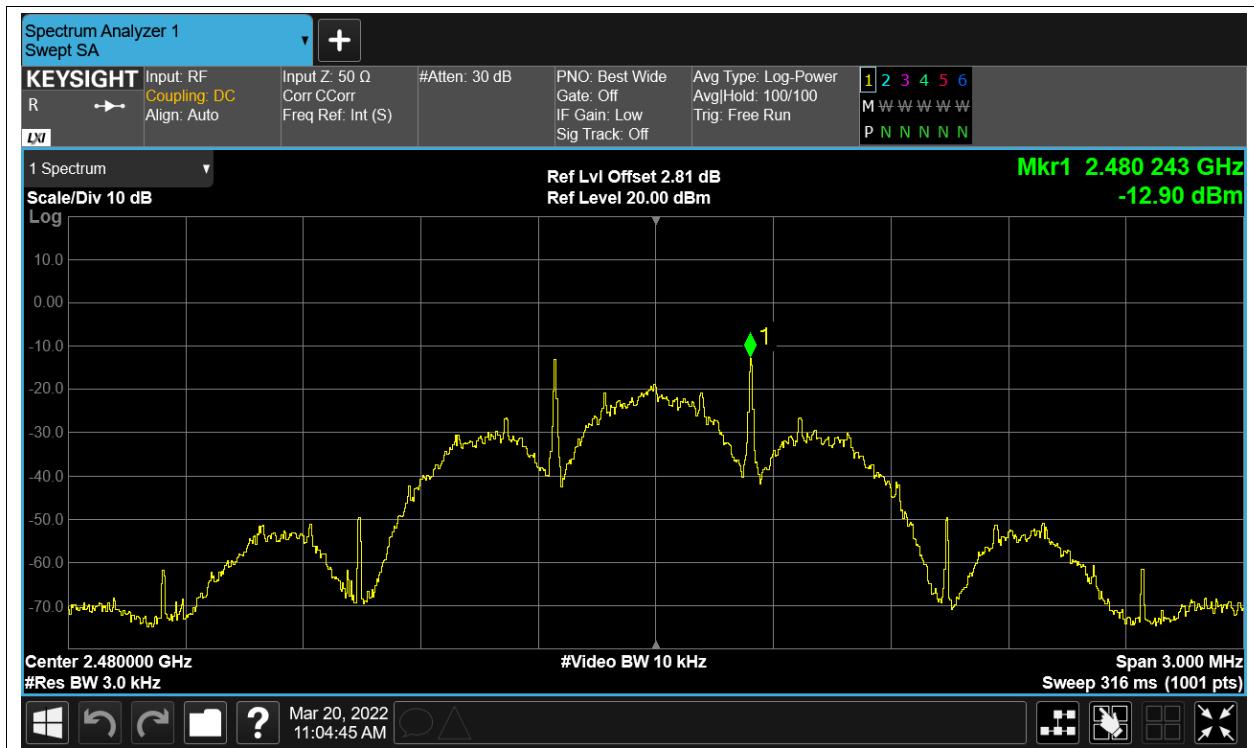


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-47.92	-20	Pass
NVNT	BLE	2480	Ant1	-45.72	-20	Pass



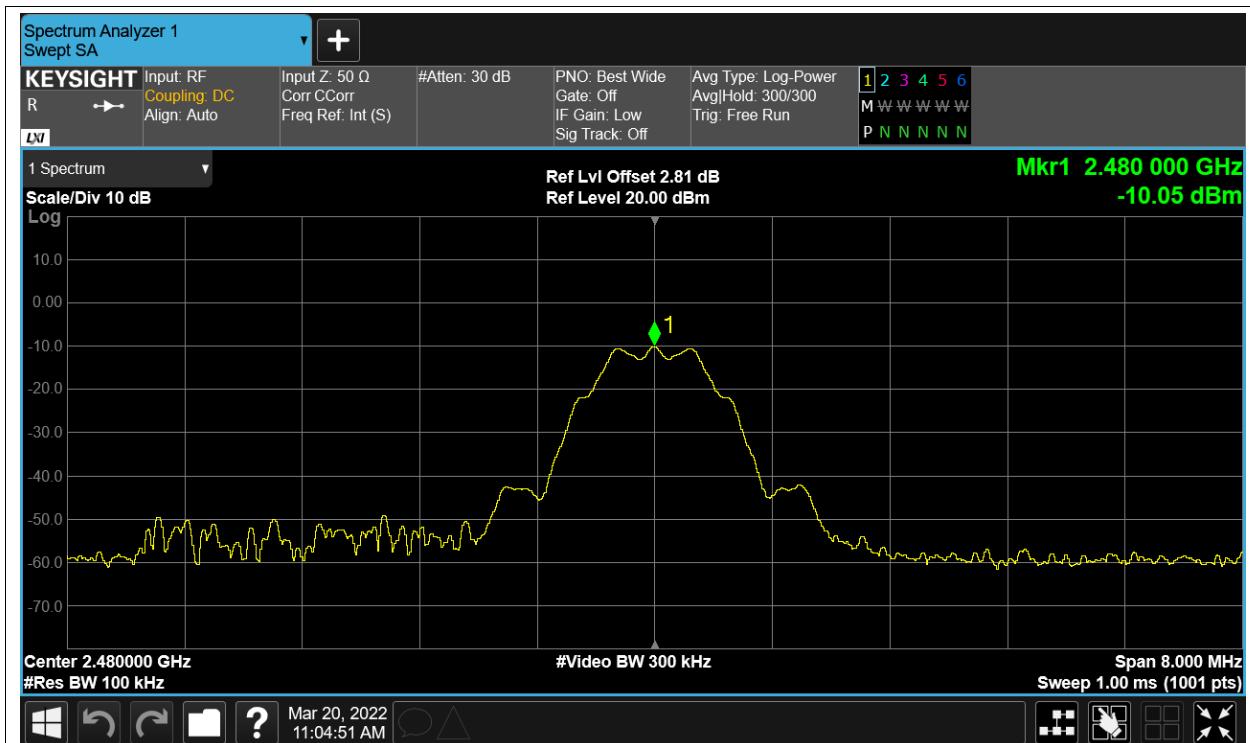

Band Edge NVNT BLE 2480MHz Ant1 Emission

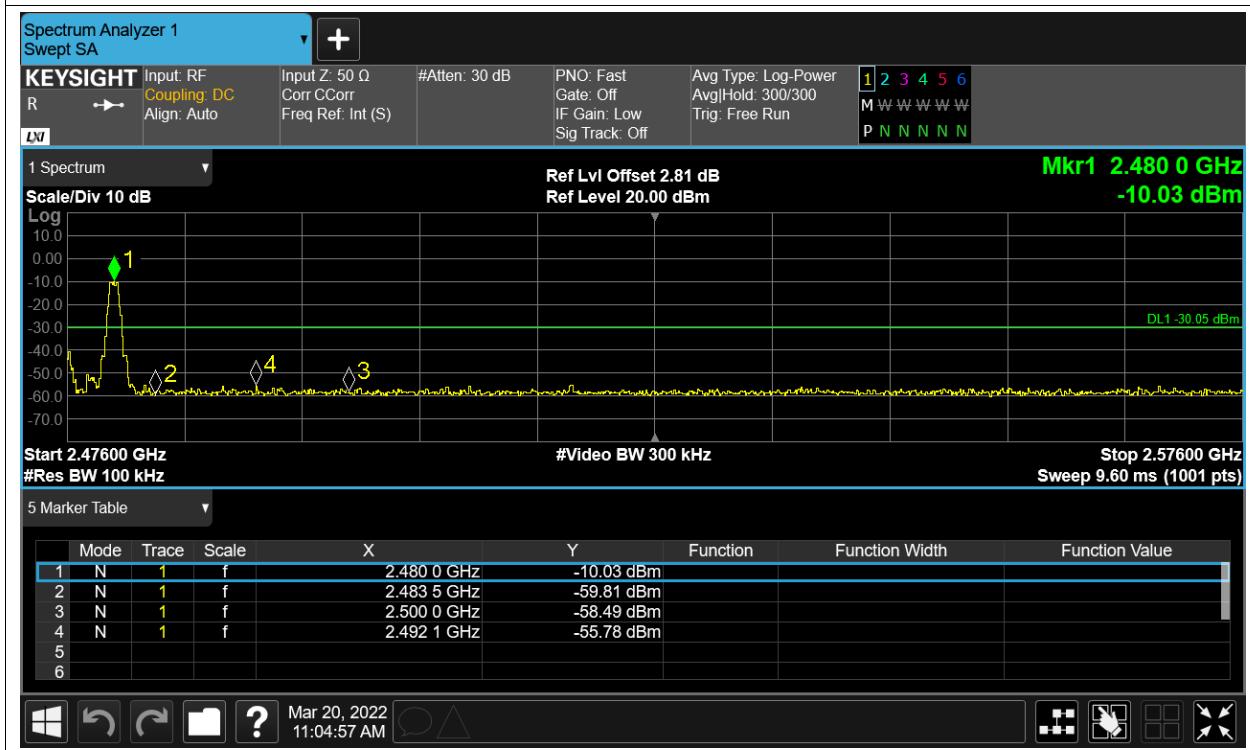


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-41.76	-20	Pass
NVNT	BLE	2442	Ant1	-38.28	-20	Pass
NVNT	BLE	2480	Ant1	-40.12	-20	Pass





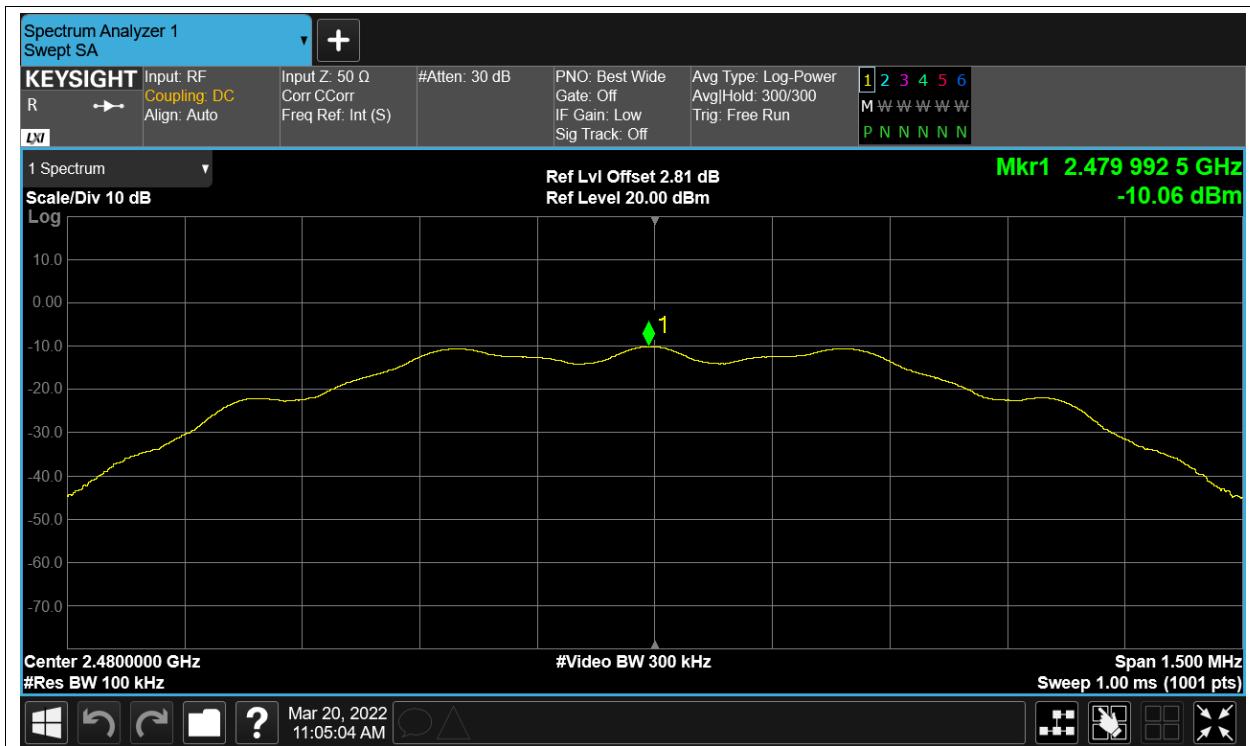

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

