

TABLE OF CONTENTS

1 Conducted output power for NR FR12

2 Frequency stability for NR FR14

3 Peak-to-Average Ratio for NR FR16

4 Occupied bandwidth for NR FR1 77

5 Band edge for NR FR1.....101

6 Out-of-band emissions for NR FR1 111

1 Conducted output power for NR FR1

<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
n77(3550-3700)	30	10	637000	1@1	DFT_BPSK	25.40	-2.92	22.48	30.00	Pass
n77(3550-3700)	30	10	637000	24@0	DFT_QPSK	25.30	-2.92	22.38	30.00	Pass
n77(3550-3700)	30	10	637000	12@6	DFT_QPSK	25.40	-2.92	22.48	30.00	Pass
n77(3550-3700)	30	10	637000	1@1	DFT_QPSK	25.43	-2.92	22.51	30.00	Pass
n77(3550-3700)	30	10	637000	1@22	DFT_QPSK	25.45	-2.92	22.53	30.00	Pass
n77(3550-3700)	30	10	637000	1@1	DFT_QAM16	25.59	-2.92	22.67	30.00	Pass
n77(3550-3700)	30	10	637000	1@1	DFT_QAM64	24.10	-2.92	21.18	30.00	Pass
n77(3550-3700)	30	10	637000	1@1	DFT_QAM256	21.92	-2.92	19.00	30.00	Pass
n77(3550-3700)	30	10	637000	1@1	CP_QPSK	24.92	-2.92	22.00	30.00	Pass
n77(3550-3700)	30	10	641666	1@1	DFT_BPSK	25.52	-2.92	22.60	30.00	Pass
n77(3550-3700)	30	10	641666	24@0	DFT_QPSK	25.12	-2.92	22.20	30.00	Pass
n77(3550-3700)	30	10	641666	12@6	DFT_QPSK	25.68	-2.92	22.76	30.00	Pass
n77(3550-3700)	30	10	641666	1@1	DFT_QPSK	25.30	-2.92	22.38	30.00	Pass
n77(3550-3700)	30	10	641666	1@22	DFT_QPSK	25.34	-2.92	22.42	30.00	Pass
n77(3550-3700)	30	10	641666	1@1	DFT_QAM16	25.29	-2.92	22.37	30.00	Pass
n77(3550-3700)	30	10	641666	1@1	DFT_QAM64	23.89	-2.92	20.97	30.00	Pass
n77(3550-3700)	30	10	641666	1@1	DFT_QAM256	21.68	-2.92	18.76	30.00	Pass
n77(3550-3700)	30	10	641666	1@1	CP_QPSK	24.63	-2.92	21.71	30.00	Pass
n77(3550-3700)	30	10	646332	1@1	DFT_BPSK	25.91	-2.92	22.99	30.00	Pass
n77(3550-3700)	30	10	646332	24@0	DFT_QPSK	25.11	-2.92	22.19	30.00	Pass
n77(3550-3700)	30	10	646332	12@6	DFT_QPSK	22.85	-2.92	19.93	30.00	Pass
n77(3550-3700)	30	10	646332	1@1	DFT_QPSK	25.83	-2.92	22.91	30.00	Pass
n77(3550-3700)	30	10	646332	1@22	DFT_QPSK	25.86	-2.92	22.94	30.00	Pass
n77(3550-3700)	30	10	646332	1@1	DFT_QAM16	22.16	-2.92	19.24	30.00	Pass
n77(3550-3700)	30	10	646332	1@1	DFT_QAM64	20.51	-2.92	17.59	30.00	Pass
n77(3550-3700)	30	10	646332	1@1	DFT_QAM256	21.62	-2.92	18.70	30.00	Pass
n77(3550-3700)	30	10	646332	1@1	CP_QPSK	24.71	-2.92	21.79	30.00	Pass
n77(3550-3700)	30	50	638334	1@1	DFT_BPSK	25.45	-2.92	22.53	30.00	Pass
n77(3550-3700)	30	50	638334	128@0	DFT_QPSK	25.33	-2.92	22.41	30.00	Pass
n77(3550-3700)	30	50	638334	64@32	DFT_QPSK	25.60	-2.92	22.68	30.00	Pass
n77(3550-3700)	30	50	638334	1@1	DFT_QPSK	25.50	-2.92	22.58	30.00	Pass
n77(3550-3700)	30	50	638334	1@131	DFT_QPSK	25.69	-2.92	22.77	30.00	Pass
n77(3550-3700)	30	50	638334	1@1	DFT_QAM16	25.21	-2.92	22.29	30.00	Pass
n77(3550-3700)	30	50	638334	1@1	DFT_QAM64	24.17	-2.92	21.25	30.00	Pass
n77(3550-3700)	30	50	638334	1@1	DFT_QAM256	21.79	-2.92	18.87	30.00	Pass
n77(3550-3700)	30	50	638334	1@1	CP_QPSK	24.92	-2.92	22.00	30.00	Pass
n77(3550-3700)	30	50	641666	1@1	DFT_BPSK	25.90	-2.92	22.98	30.00	Pass

n77(3550-3700)	30	50	641666	128@0	DFT_QPSK	25.04	-2.92	22.12	30.00	Pass
n77(3550-3700)	30	50	641666	64@32	DFT_QPSK	25.09	-2.92	22.17	30.00	Pass
n77(3550-3700)	30	50	641666	1@1	DFT_QPSK	22.73	-2.92	19.81	30.00	Pass
n77(3550-3700)	30	50	641666	1@131	DFT_QPSK	25.68	-2.92	22.76	30.00	Pass
n77(3550-3700)	30	50	641666	1@1	DFT_QAM16	25.19	-2.92	22.27	30.00	Pass
n77(3550-3700)	30	50	641666	1@1	DFT_QAM64	23.63	-2.92	20.71	30.00	Pass
n77(3550-3700)	30	50	641666	1@1	DFT_QAM256	21.92	-2.92	19.00	30.00	Pass
n77(3550-3700)	30	50	641666	1@1	CP_QPSK	24.65	-2.92	21.73	30.00	Pass
n77(3550-3700)	30	50	645000	1@1	DFT_BPSK	24.87	-2.92	21.95	30.00	Pass
n77(3550-3700)	30	50	645000	128@0	DFT_QPSK	24.94	-2.92	22.02	30.00	Pass
n77(3550-3700)	30	50	645000	64@32	DFT_QPSK	25.98	-2.92	23.06	30.00	Pass
n77(3550-3700)	30	50	645000	1@1	DFT_QPSK	22.71	-2.92	19.79	30.00	Pass
n77(3550-3700)	30	50	645000	1@131	DFT_QPSK	25.98	-2.92	23.06	30.00	Pass
n77(3550-3700)	30	50	645000	1@1	DFT_QAM16	24.81	-2.92	21.89	30.00	Pass
n77(3550-3700)	30	50	645000	1@1	DFT_QAM64	23.57	-2.92	20.65	30.00	Pass
n77(3550-3700)	30	50	645000	1@1	DFT_QAM256	21.14	-2.92	18.22	30.00	Pass
n77(3550-3700)	30	50	645000	1@1	CP_QPSK	24.15	-2.92	21.23	30.00	Pass
n77(3550-3700)	30	100	640000	1@1	DFT_BPSK	22.09	-2.92	19.17	30.00	Pass
n77(3550-3700)	30	100	640000	270@0	DFT_QPSK	22.14	-2.92	19.22	30.00	Pass
n77(3550-3700)	30	100	640000	135@67	DFT_QPSK	25.59	-2.92	22.67	30.00	Pass
n77(3550-3700)	30	100	640000	1@1	DFT_QPSK	25.08	-2.92	22.16	30.00	Pass
n77(3550-3700)	30	100	640000	1@271	DFT_QPSK	23.68	-2.92	20.76	30.00	Pass
n77(3550-3700)	30	100	640000	1@1	DFT_QAM16	25.30	-2.92	22.38	30.00	Pass
n77(3550-3700)	30	100	640000	1@1	DFT_QAM64	23.70	-2.92	20.78	30.00	Pass
n77(3550-3700)	30	100	640000	1@1	DFT_QAM256	20.15	-2.92	17.23	30.00	Pass
n77(3550-3700)	30	100	640000	1@1	CP_QPSK	21.66	-2.92	18.74	30.00	Pass
n77(3550-3700)	30	100	641666	1@1	DFT_BPSK	25.52	-2.92	22.60	30.00	Pass
n77(3550-3700)	30	100	641666	270@0	DFT_QPSK	24.98	-2.92	22.06	30.00	Pass
n77(3550-3700)	30	100	641666	135@67	DFT_QPSK	25.99	-2.92	23.07	30.00	Pass
n77(3550-3700)	30	100	641666	1@1	DFT_QPSK	23.67	-2.92	20.75	30.00	Pass
n77(3550-3700)	30	100	641666	1@271	DFT_QPSK	25.86	-2.92	22.94	30.00	Pass
n77(3550-3700)	30	100	641666	1@1	DFT_QAM16	24.92	-2.92	22.00	30.00	Pass
n77(3550-3700)	30	100	641666	1@1	DFT_QAM64	23.84	-2.92	20.92	30.00	Pass
n77(3550-3700)	30	100	641666	1@1	DFT_QAM256	19.69	-2.92	16.77	30.00	Pass
n77(3550-3700)	30	100	641666	1@1	CP_QPSK	24.36	-2.92	21.44	30.00	Pass
n77(3550-3700)	30	100	643332	1@1	DFT_BPSK	25.84	-2.92	22.92	30.00	Pass
n77(3550-3700)	30	100	643332	270@0	DFT_QPSK	24.94	-2.92	22.02	30.00	Pass
n77(3550-3700)	30	100	643332	135@67	DFT_QPSK	25.90	-2.92	22.98	30.00	Pass
n77(3550-3700)	30	100	643332	1@1	DFT_QPSK	25.66	-2.92	22.74	30.00	Pass
n77(3550-3700)	30	100	643332	1@271	DFT_QPSK	25.98	-2.92	23.06	30.00	Pass
n77(3550-3700)	30	100	643332	1@1	DFT_QAM16	25.43	-2.92	22.51	30.00	Pass
n77(3550-3700)	30	100	643332	1@1	DFT_QAM64	23.79	-2.92	20.87	30.00	Pass
n77(3550-3700)	30	100	643332	1@1	DFT_QAM256	21.81	-2.92	18.89	30.00	Pass
n77(3550-3700)	30	100	643332	1@1	CP_QPSK	24.48	-2.92	21.56	30.00	Pass

2 Frequency stability for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n77(3550-3700)	30	10	637000	12@6	DFT_BPSK	-12.73	-0.00358	-2.5	2.5	PASS
n77(3550-3700)	30	10	637000	1@1	DFT_BPSK	-12.61	-0.00355	-2.5	2.5	PASS
n77(3550-3700)	30	10	637000	1@22	DFT_BPSK	-12.67	-0.00356	-2.5	2.5	PASS
n77(3550-3700)	30	10	637000	12@6	DFT_QPSK	-9.64	-0.00271	-2.5	2.5	PASS
n77(3550-3700)	30	10	637000	1@1	DFT_QPSK	-12.29	-0.00346	-2.5	2.5	PASS
n77(3550-3700)	30	10	637000	1@22	DFT_QPSK	-11.63	-0.00327	-2.5	2.5	PASS
n77(3550-3700)	30	10	641666	12@6	DFT_BPSK	-9.66	-0.00266	-2.5	2.5	PASS
n77(3550-3700)	30	10	641666	1@1	DFT_BPSK	-10.13	-0.00279	-2.5	2.5	PASS
n77(3550-3700)	30	10	641666	1@22	DFT_BPSK	-10.65	-0.00294	-2.5	2.5	PASS
n77(3550-3700)	30	10	641666	12@6	DFT_QPSK	-11.44	-0.00316	-2.5	2.5	PASS
n77(3550-3700)	30	10	641666	1@1	DFT_QPSK	-11.90	-0.00328	-2.5	2.5	PASS
n77(3550-3700)	30	10	641666	1@22	DFT_QPSK	-12.15	-0.00335	-2.5	2.5	PASS
n77(3550-3700)	30	10	646332	12@6	DFT_BPSK	-9.73	-0.00263	-2.5	2.5	PASS
n77(3550-3700)	30	10	646332	1@1	DFT_BPSK	-9.74	-0.00264	-2.5	2.5	PASS
n77(3550-3700)	30	10	646332	1@22	DFT_BPSK	-10.56	-0.00286	-2.5	2.5	PASS
n77(3550-3700)	30	10	646332	12@6	DFT_QPSK	-11.00	-0.00298	-2.5	2.5	PASS
n77(3550-3700)	30	10	646332	1@1	DFT_QPSK	-8.27	-0.00224	-2.5	2.5	PASS
n77(3550-3700)	30	10	646332	1@22	DFT_QPSK	-9.09	-0.00246	-2.5	2.5	PASS
n77(3550-3700)	30	50	638334	64@32	DFT_BPSK	-11.83	-0.00331	-2.5	2.5	PASS
n77(3550-3700)	30	50	638334	1@1	DFT_BPSK	-11.90	-0.00333	-2.5	2.5	PASS
n77(3550-3700)	30	50	638334	1@131	DFT_BPSK	-11.77	-0.00329	-2.5	2.5	PASS
n77(3550-3700)	30	50	638334	64@32	DFT_QPSK	-9.65	-0.00270	-2.5	2.5	PASS
n77(3550-3700)	30	50	638334	1@1	DFT_QPSK	-11.33	-0.00317	-2.5	2.5	PASS
n77(3550-3700)	30	50	638334	1@131	DFT_QPSK	-12.64	-0.00354	-2.5	2.5	PASS
n77(3550-3700)	30	50	641666	64@32	DFT_BPSK	-10.63	-0.00293	-2.5	2.5	PASS
n77(3550-3700)	30	50	641666	1@1	DFT_BPSK	-9.39	-0.00259	-2.5	2.5	PASS
n77(3550-3700)	30	50	641666	1@131	DFT_BPSK	-12.60	-0.00348	-2.5	2.5	PASS
n77(3550-3700)	30	50	641666	64@32	DFT_QPSK	-10.81	-0.00298	-2.5	2.5	PASS
n77(3550-3700)	30	50	641666	1@1	DFT_QPSK	-11.69	-0.00322	-2.5	2.5	PASS
n77(3550-3700)	30	50	641666	1@131	DFT_QPSK	-11.88	-0.00328	-2.5	2.5	PASS
n77(3550-3700)	30	50	645000	64@32	DFT_BPSK	-10.03	-0.00273	-2.5	2.5	PASS
n77(3550-3700)	30	50	645000	1@1	DFT_BPSK	-10.14	-0.00276	-2.5	2.5	PASS
n77(3550-3700)	30	50	645000	1@131	DFT_BPSK	-8.07	-0.00220	-2.5	2.5	PASS
n77(3550-3700)	30	50	645000	64@32	DFT_QPSK	-9.59	-0.00261	-2.5	2.5	PASS
n77(3550-3700)	30	50	645000	1@1	DFT_QPSK	-10.62	-0.00289	-2.5	2.5	PASS
n77(3550-3700)	30	50	645000	1@131	DFT_QPSK	-7.69	-0.00209	-2.5	2.5	PASS
n77(3550-3700)	30	100	640000	135@67	DFT_BPSK	-12.49	-0.00347	-2.5	2.5	PASS
n77(3550-3700)	30	100	640000	1@1	DFT_BPSK	-10.51	-0.00292	-2.5	2.5	PASS

n77(3550-3700)	30	100	640000	1@271	DFT_BPSK	-9.75	-0.00271	-2.5	2.5	PASS
n77(3550-3700)	30	100	640000	135@67	DFT_QPSK	-10.19	-0.00283	-2.5	2.5	PASS
n77(3550-3700)	30	100	640000	1@1	DFT_QPSK	-12.92	-0.00359	-2.5	2.5	PASS
n77(3550-3700)	30	100	640000	1@271	DFT_QPSK	-9.31	-0.00259	-2.5	2.5	PASS
n77(3550-3700)	30	100	641666	135@67	DFT_BPSK	-13.22	-0.00365	-2.5	2.5	PASS
n77(3550-3700)	30	100	641666	1@1	DFT_BPSK	-12.02	-0.00332	-2.5	2.5	PASS
n77(3550-3700)	30	100	641666	1@271	DFT_BPSK	-9.35	-0.00258	-2.5	2.5	PASS
n77(3550-3700)	30	100	641666	135@67	DFT_QPSK	-11.02	-0.00304	-2.5	2.5	PASS
n77(3550-3700)	30	100	641666	1@1	DFT_QPSK	-12.13	-0.00335	-2.5	2.5	PASS
n77(3550-3700)	30	100	641666	1@271	DFT_QPSK	-8.49	-0.00234	-2.5	2.5	PASS
n77(3550-3700)	30	100	643332	135@67	DFT_BPSK	-10.64	-0.00292	-2.5	2.5	PASS
n77(3550-3700)	30	100	643332	1@1	DFT_BPSK	-12.25	-0.00336	-2.5	2.5	PASS
n77(3550-3700)	30	100	643332	1@271	DFT_BPSK	-8.58	-0.00235	-2.5	2.5	PASS
n77(3550-3700)	30	100	643332	135@67	DFT_QPSK	-9.00	-0.00247	-2.5	2.5	PASS
n77(3550-3700)	30	100	643332	1@1	DFT_QPSK	-13.39	-0.00367	-2.5	2.5	PASS
n77(3550-3700)	30	100	643332	1@271	DFT_QPSK	-10.89	-0.00298	-2.5	2.5	PASS

Note: (Voltage: 3.78V, Temperature: 25°C) only reflect the worst mode.

3 Peak-to-Average Ratio for NR FR1


<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
n77(3550-3700)	30	10	637000	24@0	DFT_BPSK	4.17	13	PASS
n77(3550-3700)	30	10	637000	24@0	DFT_QPSK	5.21	13	PASS
n77(3550-3700)	30	10	637000	24@0	DFT_QAM16	6.11	13	PASS
n77(3550-3700)	30	10	637000	24@0	DFT_QAM64	6.62	13	PASS
n77(3550-3700)	30	10	637000	24@0	DFT_QAM256	6.95	13	PASS
n77(3550-3700)	30	10	641666	24@0	DFT_BPSK	4.10	13	PASS
n77(3550-3700)	30	10	641666	24@0	DFT_QPSK	5.13	13	PASS
n77(3550-3700)	30	10	641666	24@0	DFT_QAM16	6.06	13	PASS
n77(3550-3700)	30	10	641666	24@0	DFT_QAM64	6.38	13	PASS
n77(3550-3700)	30	10	641666	24@0	DFT_QAM256	6.73	13	PASS
n77(3550-3700)	30	10	646332	24@0	DFT_BPSK	3.96	13	PASS
n77(3550-3700)	30	10	646332	24@0	DFT_QPSK	5.49	13	PASS
n77(3550-3700)	30	10	646332	24@0	DFT_QAM16	5.79	13	PASS
n77(3550-3700)	30	10	646332	24@0	DFT_QAM64	6.09	13	PASS
n77(3550-3700)	30	10	646332	24@0	DFT_QAM256	6.71	13	PASS
n77(3550-3700)	30	15	637168	36@0	DFT_BPSK	4.51	13	PASS
n77(3550-3700)	30	15	637168	36@0	DFT_QPSK	5.20	13	PASS
n77(3550-3700)	30	15	637168	36@0	DFT_QAM16	5.93	13	PASS
n77(3550-3700)	30	15	637168	36@0	DFT_QAM64	6.47	13	PASS
n77(3550-3700)	30	15	637168	36@0	DFT_QAM256	6.80	13	PASS
n77(3550-3700)	30	15	641666	36@0	DFT_BPSK	4.32	13	PASS
n77(3550-3700)	30	15	641666	36@0	DFT_QPSK	5.66	13	PASS
n77(3550-3700)	30	15	641666	36@0	DFT_QAM16	6.07	13	PASS
n77(3550-3700)	30	15	641666	36@0	DFT_QAM64	6.55	13	PASS
n77(3550-3700)	30	15	641666	36@0	DFT_QAM256	6.78	13	PASS
n77(3550-3700)	30	15	646166	36@0	DFT_BPSK	4.48	13	PASS
n77(3550-3700)	30	15	646166	36@0	DFT_QPSK	5.22	13	PASS
n77(3550-3700)	30	15	646166	36@0	DFT_QAM16	6.31	13	PASS
n77(3550-3700)	30	15	646166	36@0	DFT_QAM64	6.15	13	PASS
n77(3550-3700)	30	15	646166	36@0	DFT_QAM256	6.68	13	PASS
n77(3550-3700)	30	20	637334	50@0	DFT_BPSK	4.46	13	PASS
n77(3550-3700)	30	20	637334	50@0	DFT_QPSK	5.32	13	PASS
n77(3550-3700)	30	20	637334	50@0	DFT_QAM16	6.29	13	PASS
n77(3550-3700)	30	20	637334	50@0	DFT_QAM64	6.32	13	PASS
n77(3550-3700)	30	20	637334	50@0	DFT_QAM256	6.68	13	PASS
n77(3550-3700)	30	20	641666	50@0	DFT_BPSK	4.20	13	PASS
n77(3550-3700)	30	20	641666	50@0	DFT_QPSK	5.48	13	PASS
n77(3550-3700)	30	20	641666	50@0	DFT_QAM16	6.16	13	PASS
n77(3550-3700)	30	20	641666	50@0	DFT_QAM64	6.50	13	PASS
n77(3550-3700)	30	20	641666	50@0	DFT_QAM256	7.08	13	PASS

n77(3550-3700)	30	20	646000	50@0	DFT_BPSK	4.86	13	PASS
n77(3550-3700)	30	20	646000	50@0	DFT_QPSK	5.41	13	PASS
n77(3550-3700)	30	20	646000	50@0	DFT_QAM16	5.99	13	PASS
n77(3550-3700)	30	20	646000	50@0	DFT_QAM64	6.42	13	PASS
n77(3550-3700)	30	20	646000	50@0	DFT_QAM256	6.90	13	PASS
n77(3550-3700)	30	40	638000	100@0	DFT_BPSK	5.06	13	PASS
n77(3550-3700)	30	40	638000	100@0	DFT_QPSK	5.99	13	PASS
n77(3550-3700)	30	40	638000	100@0	DFT_QAM16	6.57	13	PASS
n77(3550-3700)	30	40	638000	100@0	DFT_QAM64	6.93	13	PASS
n77(3550-3700)	30	40	638000	100@0	DFT_QAM256	6.97	13	PASS
n77(3550-3700)	30	40	641666	100@0	DFT_BPSK	4.50	13	PASS
n77(3550-3700)	30	40	641666	100@0	DFT_QPSK	5.75	13	PASS
n77(3550-3700)	30	40	641666	100@0	DFT_QAM16	6.66	13	PASS
n77(3550-3700)	30	40	641666	100@0	DFT_QAM64	6.90	13	PASS
n77(3550-3700)	30	40	641666	100@0	DFT_QAM256	6.90	13	PASS
n77(3550-3700)	30	40	645332	100@0	DFT_BPSK	5.00	13	PASS
n77(3550-3700)	30	40	645332	100@0	DFT_QPSK	5.81	13	PASS
n77(3550-3700)	30	40	645332	100@0	DFT_QAM16	6.45	13	PASS
n77(3550-3700)	30	40	645332	100@0	DFT_QAM64	6.91	13	PASS
n77(3550-3700)	30	40	645332	100@0	DFT_QAM256	7.00	13	PASS
n77(3550-3700)	30	50	638334	128@0	DFT_BPSK	5.06	13	PASS
n77(3550-3700)	30	50	638334	128@0	DFT_QPSK	6.35	13	PASS
n77(3550-3700)	30	50	638334	128@0	DFT_QAM16	7.21	13	PASS
n77(3550-3700)	30	50	638334	128@0	DFT_QAM64	7.32	13	PASS
n77(3550-3700)	30	50	638334	128@0	DFT_QAM256	7.30	13	PASS
n77(3550-3700)	30	50	641666	128@0	DFT_BPSK	6.09	13	PASS
n77(3550-3700)	30	50	641666	128@0	DFT_QPSK	6.45	13	PASS
n77(3550-3700)	30	50	641666	128@0	DFT_QAM16	7.28	13	PASS
n77(3550-3700)	30	50	641666	128@0	DFT_QAM64	7.32	13	PASS
n77(3550-3700)	30	50	641666	128@0	DFT_QAM256	7.03	13	PASS
n77(3550-3700)	30	50	645000	128@0	DFT_BPSK	5.89	13	PASS
n77(3550-3700)	30	50	645000	128@0	DFT_QPSK	6.59	13	PASS
n77(3550-3700)	30	50	645000	128@0	DFT_QAM16	6.92	13	PASS
n77(3550-3700)	30	50	645000	128@0	DFT_QAM64	7.19	13	PASS
n77(3550-3700)	30	50	645000	128@0	DFT_QAM256	7.41	13	PASS
n77(3550-3700)	30	60	638668	162@0	DFT_BPSK	5.83	13	PASS
n77(3550-3700)	30	60	638668	162@0	DFT_QPSK	6.87	13	PASS
n77(3550-3700)	30	60	638668	162@0	DFT_QAM16	7.48	13	PASS
n77(3550-3700)	30	60	638668	162@0	DFT_QAM64	7.67	13	PASS
n77(3550-3700)	30	60	638668	162@0	DFT_QAM256	7.66	13	PASS
n77(3550-3700)	30	60	641666	162@0	DFT_BPSK	5.79	13	PASS
n77(3550-3700)	30	60	641666	162@0	DFT_QPSK	6.83	13	PASS
n77(3550-3700)	30	60	641666	162@0	DFT_QAM16	7.69	13	PASS
n77(3550-3700)	30	60	641666	162@0	DFT_QAM64	7.57	13	PASS


n77(3550-3700)	30	60	641666	162@0	DFT_QAM256	7.80	13	PASS
n77(3550-3700)	30	60	644666	162@0	DFT_BPSK	6.24	13	PASS
n77(3550-3700)	30	60	644666	162@0	DFT_QPSK	6.73	13	PASS
n77(3550-3700)	30	60	644666	162@0	DFT_QAM16	7.50	13	PASS
n77(3550-3700)	30	60	644666	162@0	DFT_QAM64	7.42	13	PASS
n77(3550-3700)	30	60	644666	162@0	DFT_QAM256	7.61	13	PASS
n77(3550-3700)	30	80	639334	216@0	DFT_BPSK	5.90	13	PASS
n77(3550-3700)	30	80	639334	216@0	DFT_QPSK	7.13	13	PASS
n77(3550-3700)	30	80	639334	216@0	DFT_QAM16	7.64	13	PASS
n77(3550-3700)	30	80	639334	216@0	DFT_QAM64	7.74	13	PASS
n77(3550-3700)	30	80	639334	216@0	DFT_QAM256	7.85	13	PASS
n77(3550-3700)	30	80	641666	216@0	DFT_BPSK	6.04	13	PASS
n77(3550-3700)	30	80	641666	216@0	DFT_QPSK	7.37	13	PASS
n77(3550-3700)	30	80	641666	216@0	DFT_QAM16	7.73	13	PASS
n77(3550-3700)	30	80	641666	216@0	DFT_QAM64	7.64	13	PASS
n77(3550-3700)	30	80	641666	216@0	DFT_QAM256	7.66	13	PASS
n77(3550-3700)	30	80	644000	216@0	DFT_BPSK	5.79	13	PASS
n77(3550-3700)	30	80	644000	216@0	DFT_QPSK	7.32	13	PASS
n77(3550-3700)	30	80	644000	216@0	DFT_QAM16	7.75	13	PASS
n77(3550-3700)	30	80	644000	216@0	DFT_QAM64	7.83	13	PASS
n77(3550-3700)	30	80	644000	216@0	DFT_QAM256	7.88	13	PASS
n77(3550-3700)	30	90	639668	240@0	DFT_BPSK	6.28	13	PASS
n77(3550-3700)	30	90	639668	240@0	DFT_QPSK	7.47	13	PASS
n77(3550-3700)	30	90	639668	240@0	DFT_QAM16	7.65	13	PASS
n77(3550-3700)	30	90	639668	240@0	DFT_QAM64	7.99	13	PASS
n77(3550-3700)	30	90	639668	240@0	DFT_QAM256	7.78	13	PASS
n77(3550-3700)	30	90	641666	240@0	DFT_BPSK	6.38	13	PASS
n77(3550-3700)	30	90	641666	240@0	DFT_QPSK	7.49	13	PASS
n77(3550-3700)	30	90	641666	240@0	DFT_QAM16	7.85	13	PASS
n77(3550-3700)	30	90	641666	240@0	DFT_QAM64	7.63	13	PASS
n77(3550-3700)	30	90	641666	240@0	DFT_QAM256	8.20	13	PASS
n77(3550-3700)	30	90	643666	240@0	DFT_BPSK	6.96	13	PASS
n77(3550-3700)	30	90	643666	240@0	DFT_QPSK	7.29	13	PASS
n77(3550-3700)	30	90	643666	240@0	DFT_QAM16	7.74	13	PASS
n77(3550-3700)	30	90	643666	240@0	DFT_QAM64	7.76	13	PASS
n77(3550-3700)	30	90	643666	240@0	DFT_QAM256	8.10	13	PASS
n77(3550-3700)	30	100	640000	270@0	DFT_BPSK	6.47	13	PASS
n77(3550-3700)	30	100	640000	270@0	DFT_QPSK	7.53	13	PASS
n77(3550-3700)	30	100	640000	270@0	DFT_QAM16	8.15	13	PASS
n77(3550-3700)	30	100	640000	270@0	DFT_QAM64	7.91	13	PASS
n77(3550-3700)	30	100	640000	270@0	DFT_QAM256	8.03	13	PASS
n77(3550-3700)	30	100	641666	270@0	DFT_BPSK	6.36	13	PASS
n77(3550-3700)	30	100	641666	270@0	DFT_QPSK	7.57	13	PASS
n77(3550-3700)	30	100	641666	270@0	DFT_QAM16	7.83	13	PASS

n77(3550-3700)	30	100	641666	270@0	DFT_QAM64	8.02	13	PASS
n77(3550-3700)	30	100	641666	270@0	DFT_QAM256	8.18	13	PASS
n77(3550-3700)	30	100	643332	270@0	DFT_BPSK	6.63	13	PASS
n77(3550-3700)	30	100	643332	270@0	DFT_QPSK	7.57	13	PASS
n77(3550-3700)	30	100	643332	270@0	DFT_QAM16	7.96	13	PASS
n77(3550-3700)	30	100	643332	270@0	DFT_QAM64	7.90	13	PASS
n77(3550-3700)	30	100	643332	270@0	DFT_QAM256	7.89	13	PASS


n77(3550-3700) SCS=30kHz DFT_BPSK BW=100MHz Channel=640000 RB=270@0

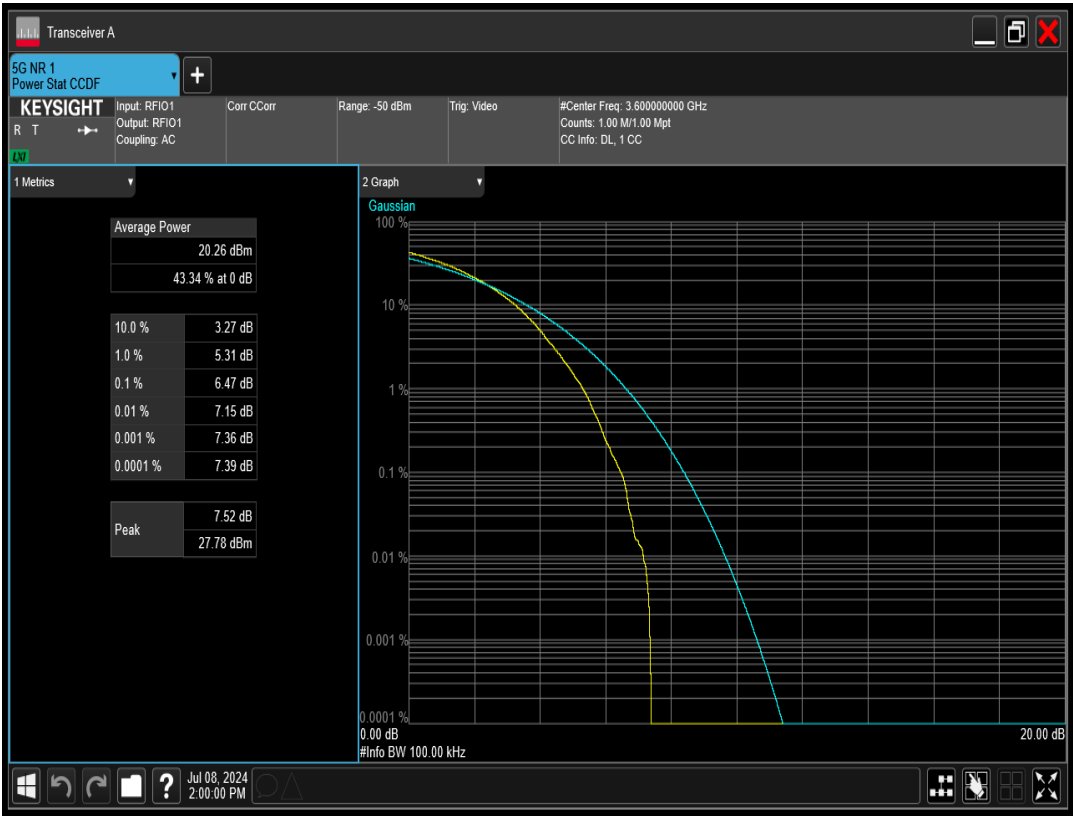


n77(3550-3700) SCS=30kHz DFT_BPSK BW=100MHz Channel=641666 RB=270@0

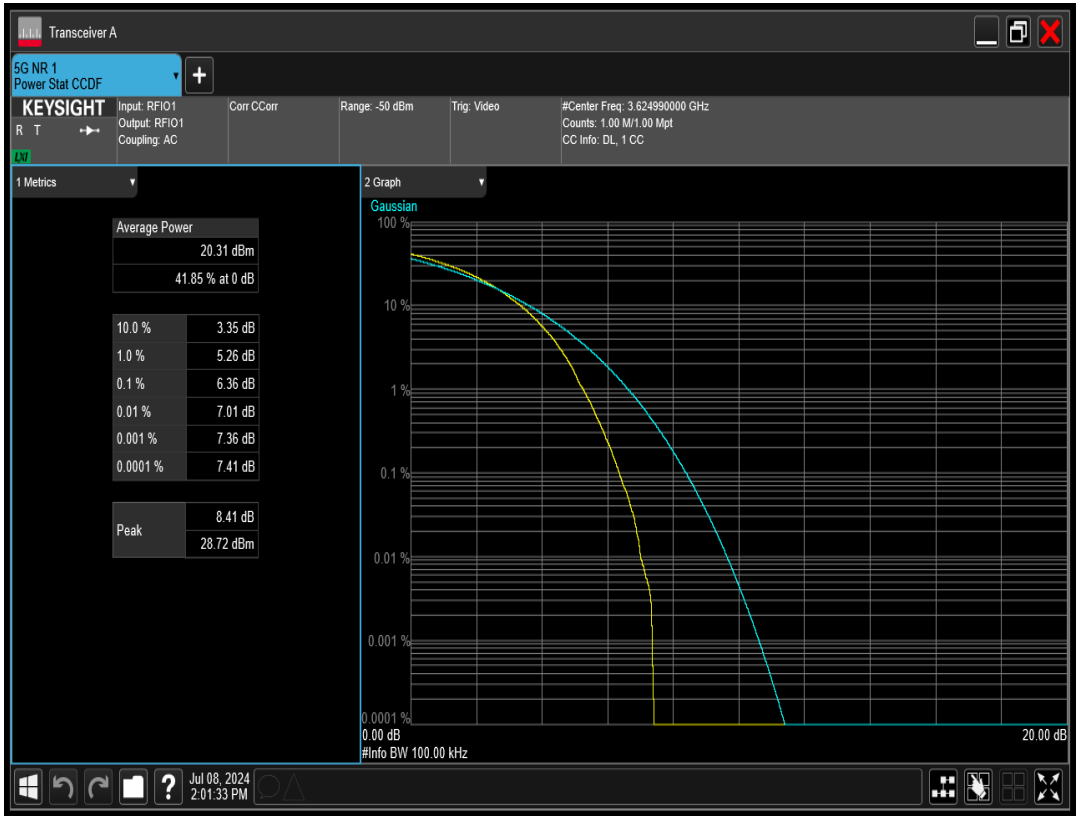


n77(3550-3700) SCS=30kHz DFT_BPSK BW=100MHz Channel=643332 RB=270@0

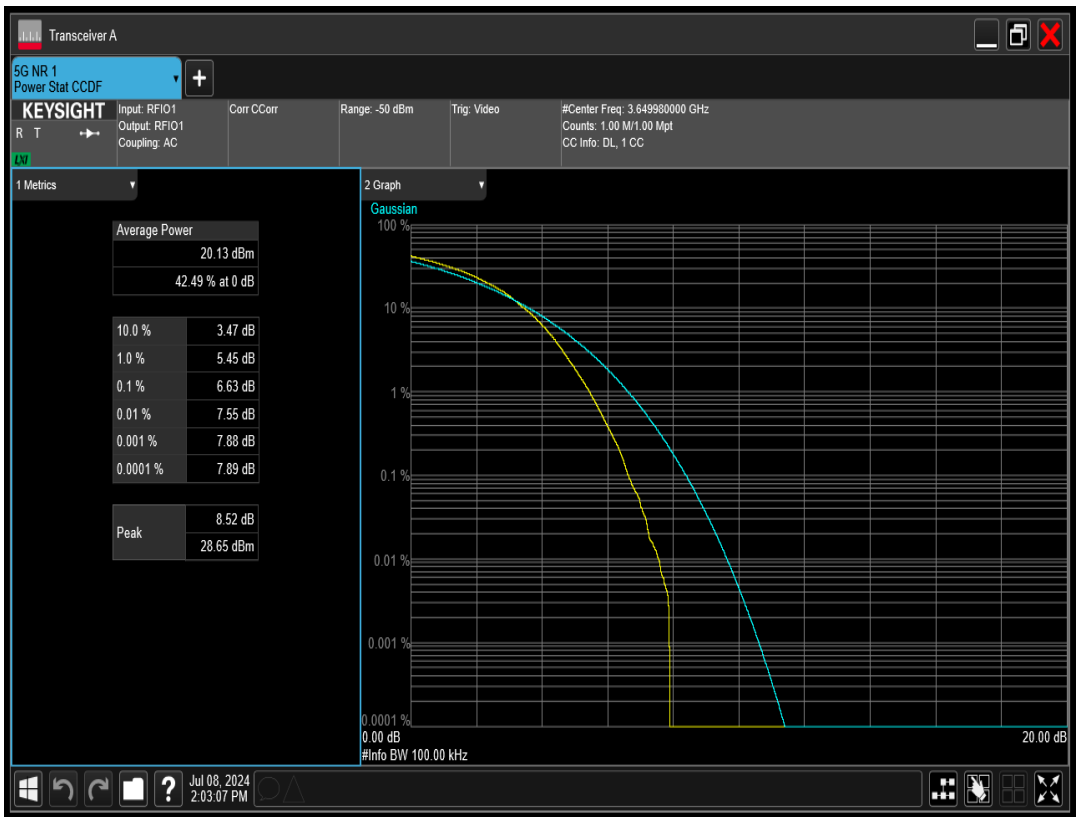


n77(3550-3700) SCS=30kHz DFT_BPSK BW=10MHz Channel=637000 RB=24@0

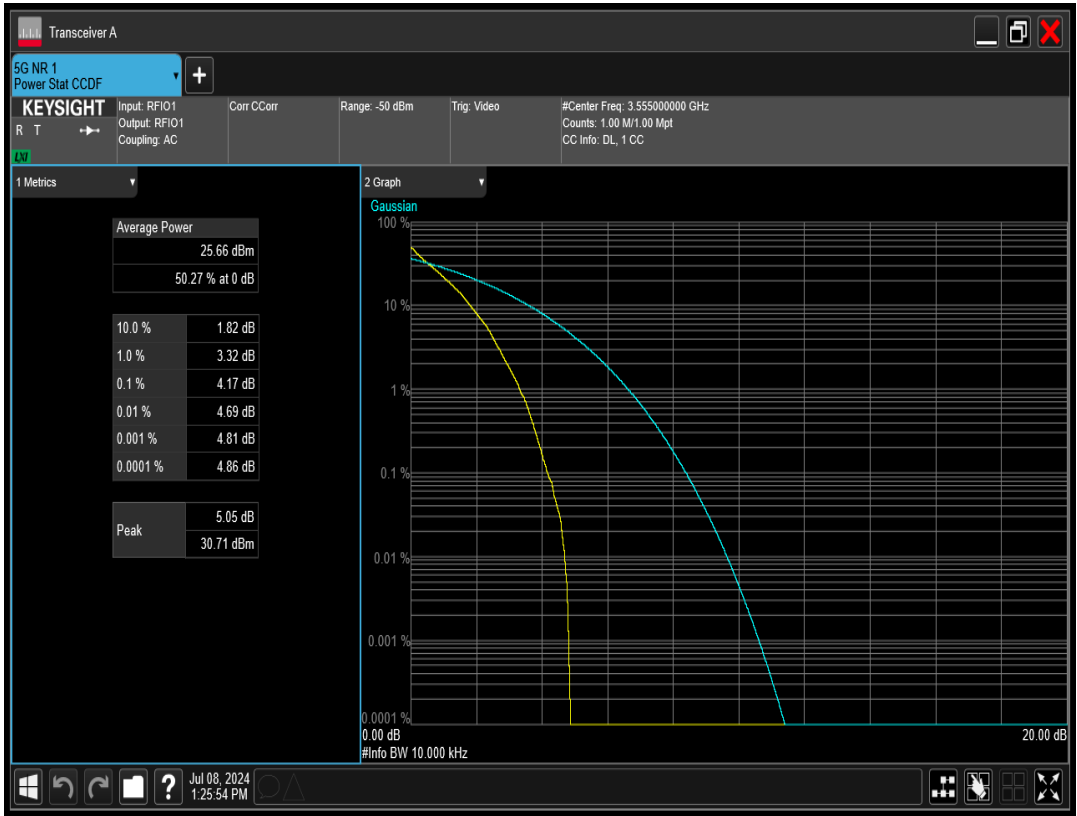


n77(3550-3700) SCS=30kHz DFT_BPSK BW=10MHz Channel=641666 RB=24@0

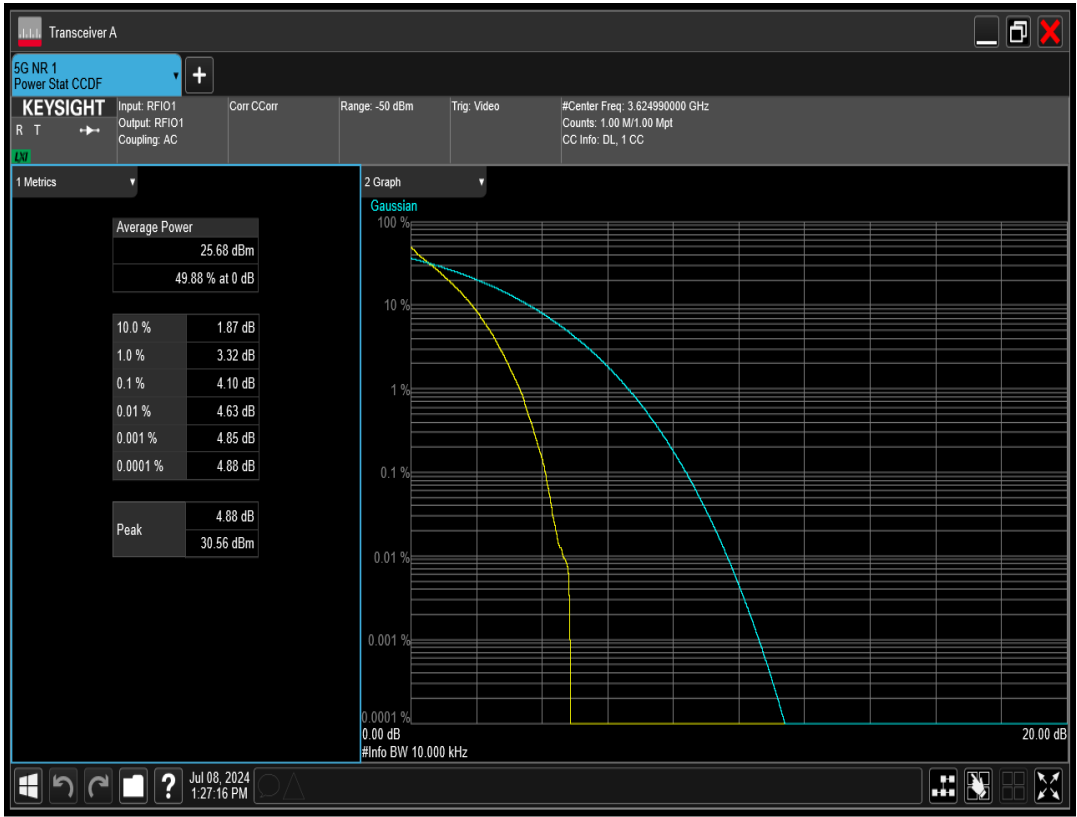


n77(3550-3700) SCS=30kHz DFT_BPSK BW=10MHz Channel=646332 RB=24@0

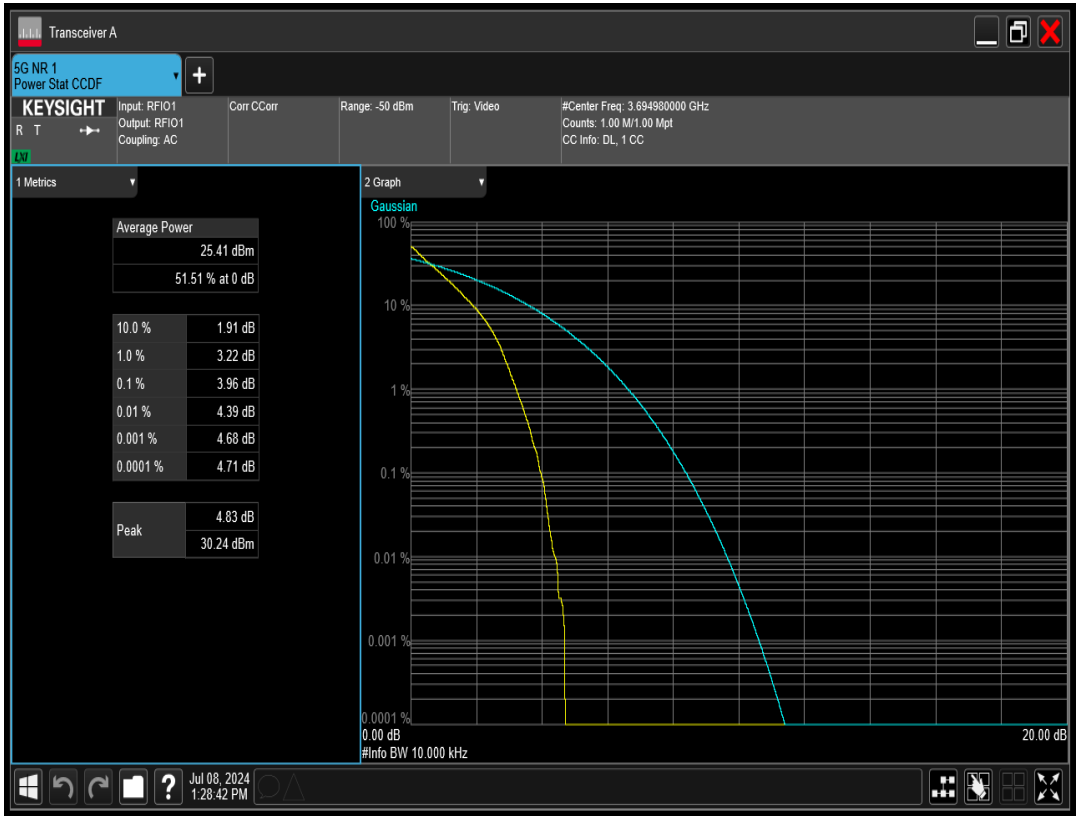


n77(3550-3700) SCS=30kHz DFT_BPSK BW=15MHz Channel=637168 RB=36@0

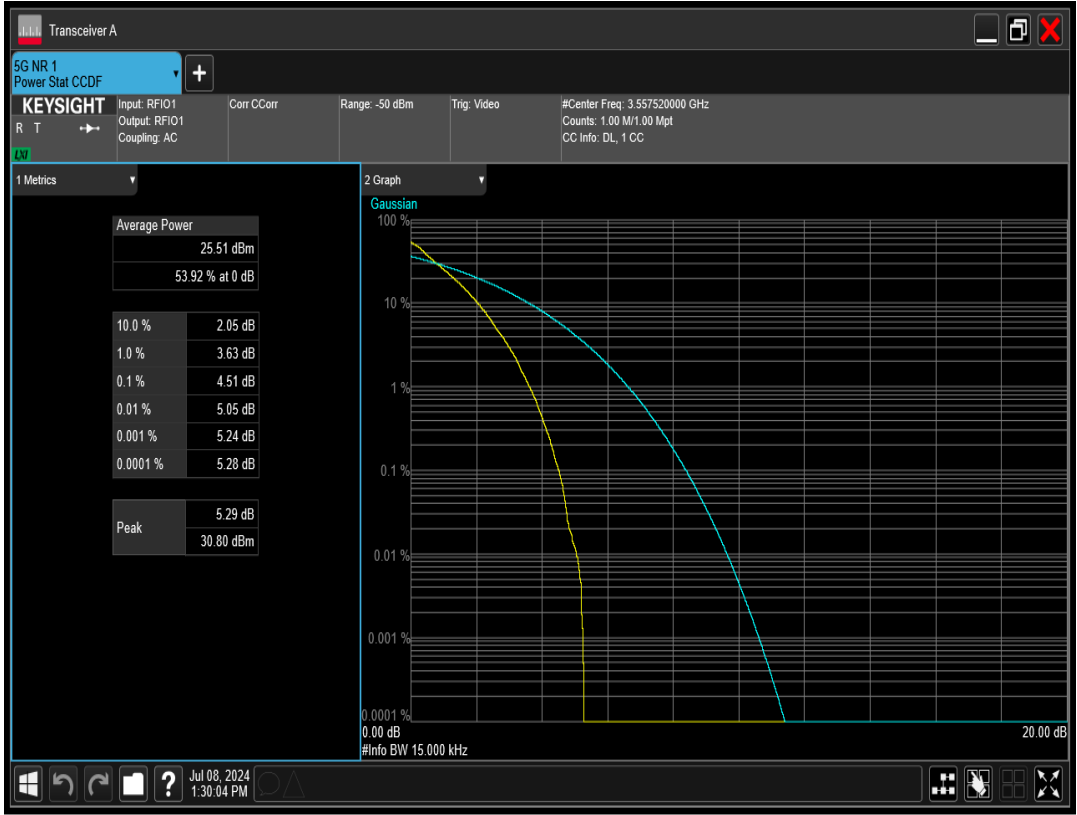


n77(3550-3700) SCS=30kHz DFT_BPSK BW=15MHz Channel=641666 RB=36@0

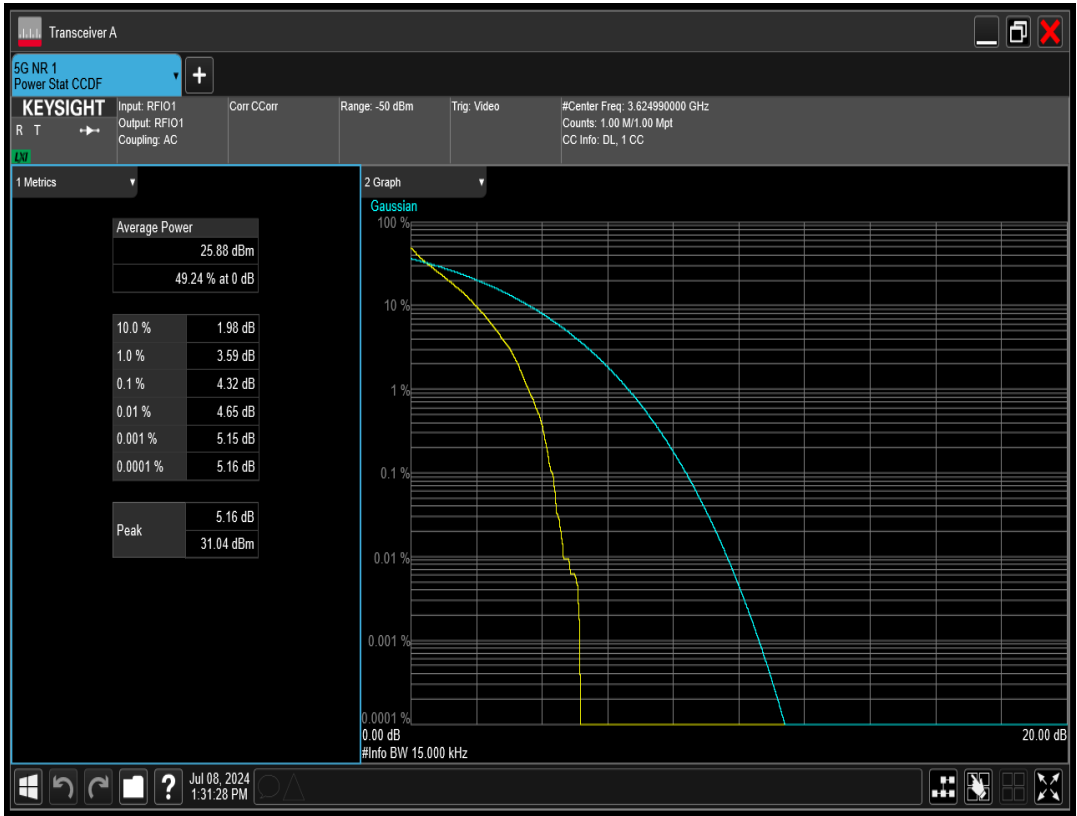


n77(3550-3700) SCS=30kHz DFT_BPSK BW=15MHz Channel=646166 RB=36@0

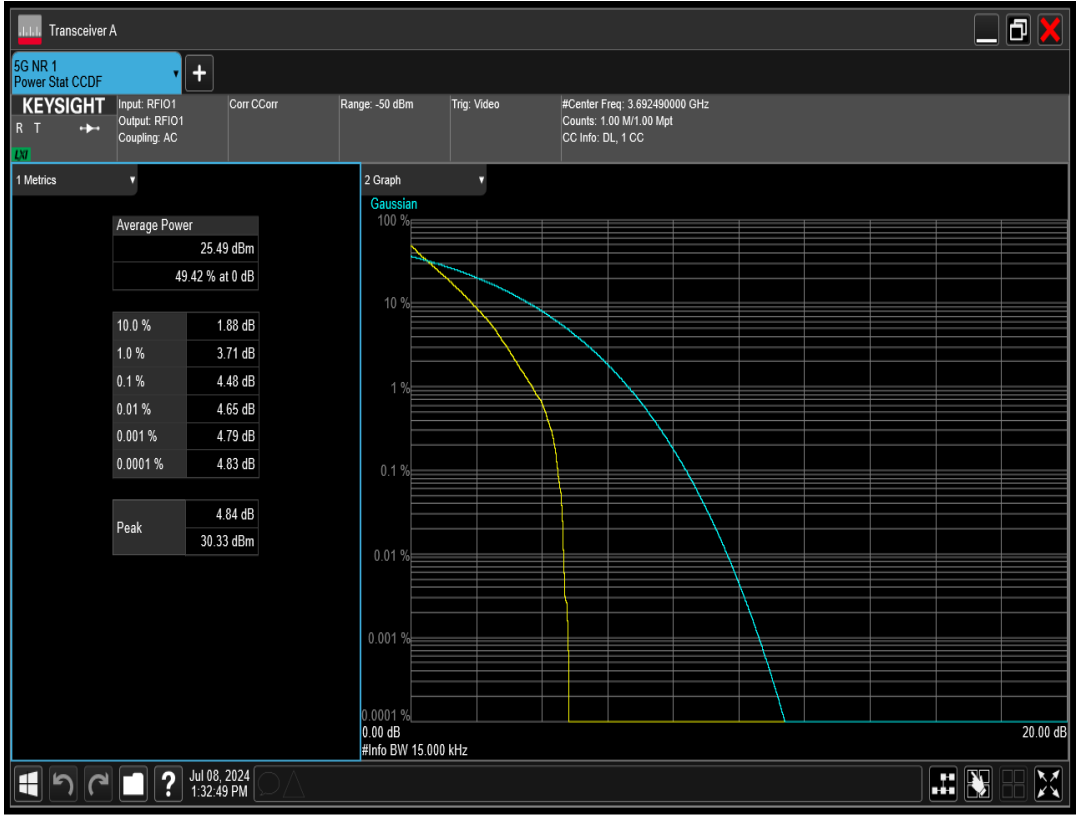


n77(3550-3700) SCS=30kHz DFT_BPSK BW=20MHz Channel=637334 RB=50@0

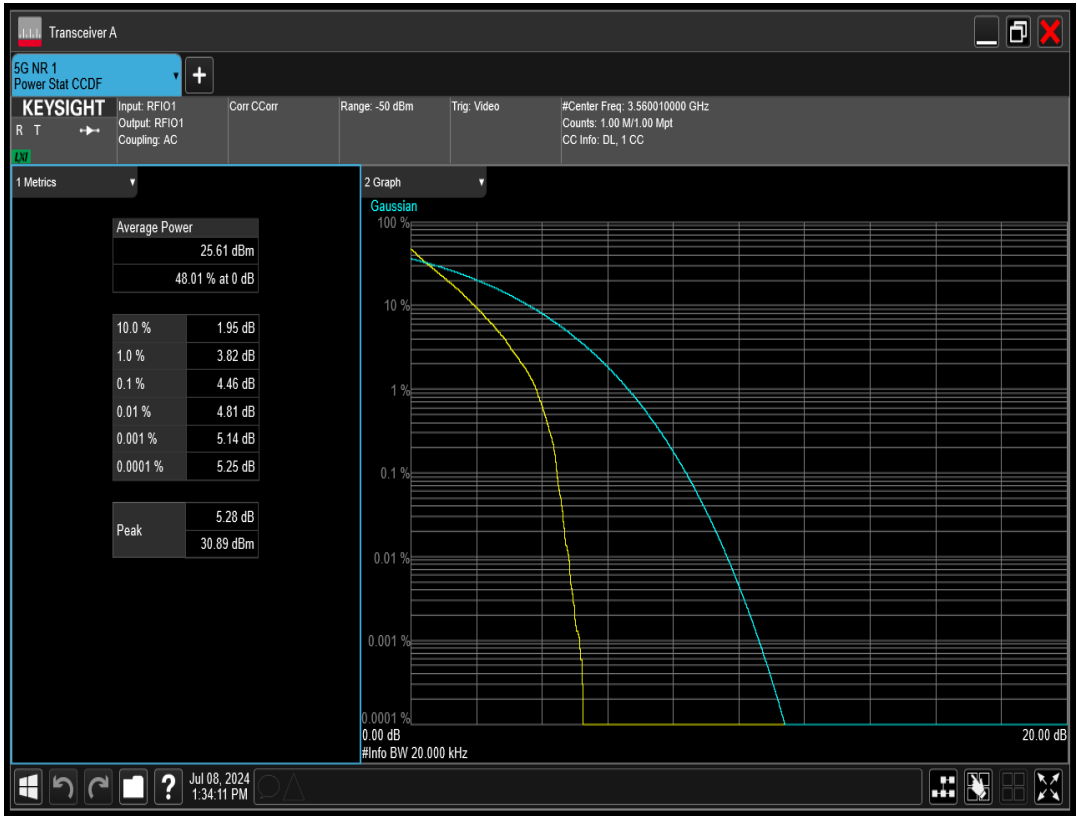


n77(3550-3700) SCS=30kHz DFT_BPSK BW=20MHz Channel=641666 RB=50@0

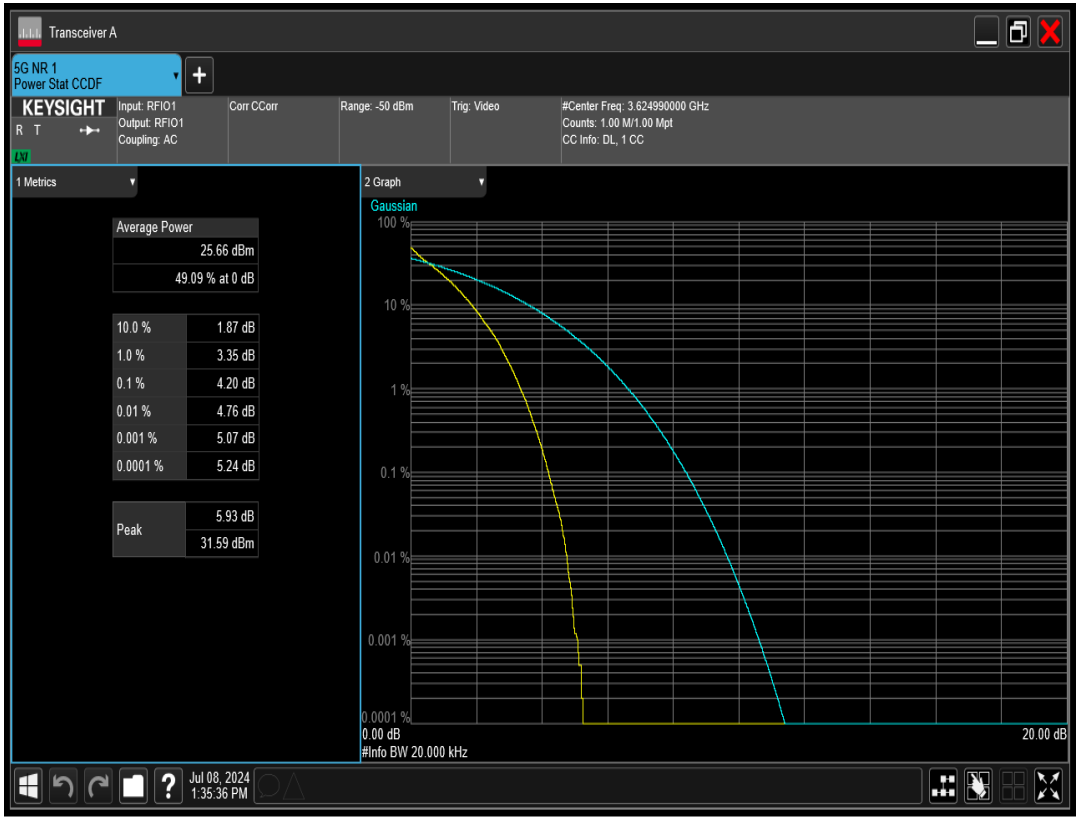


n77(3550-3700) SCS=30kHz DFT_BPSK BW=20MHz Channel=646000 RB=50@0

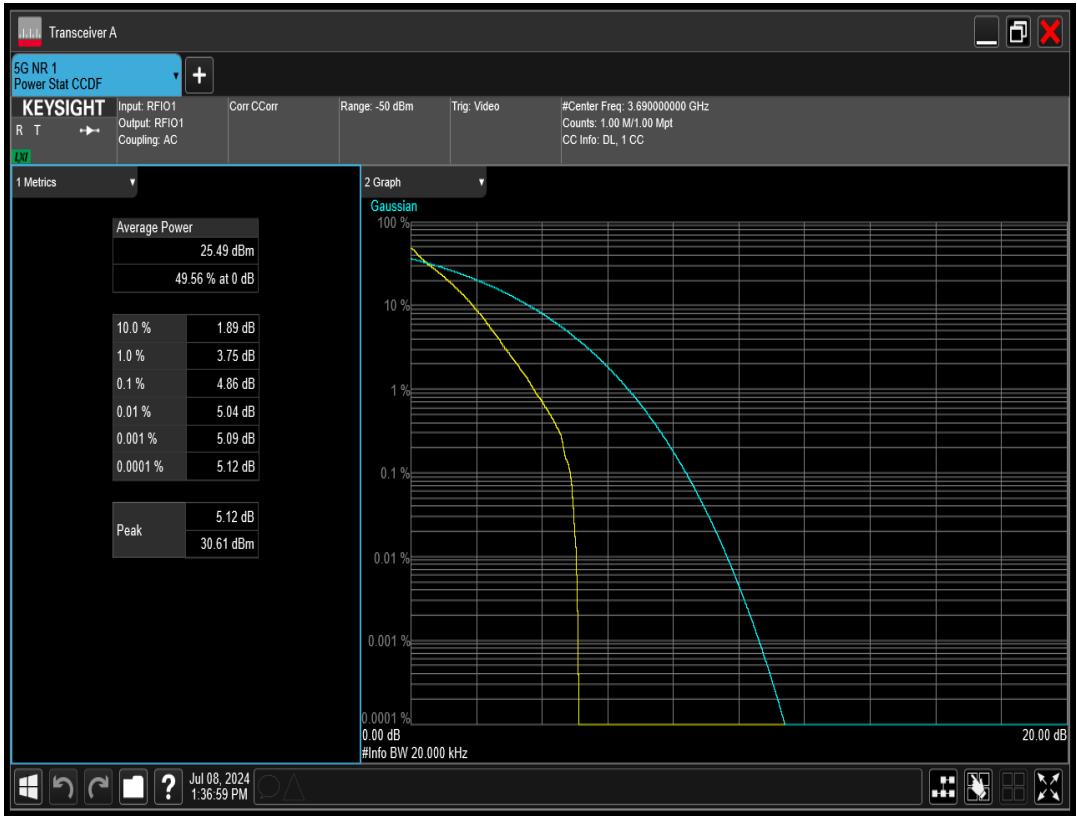


n77(3550-3700) SCS=30kHz DFT_BPSK BW=40MHz Channel=638000 RB=100@0

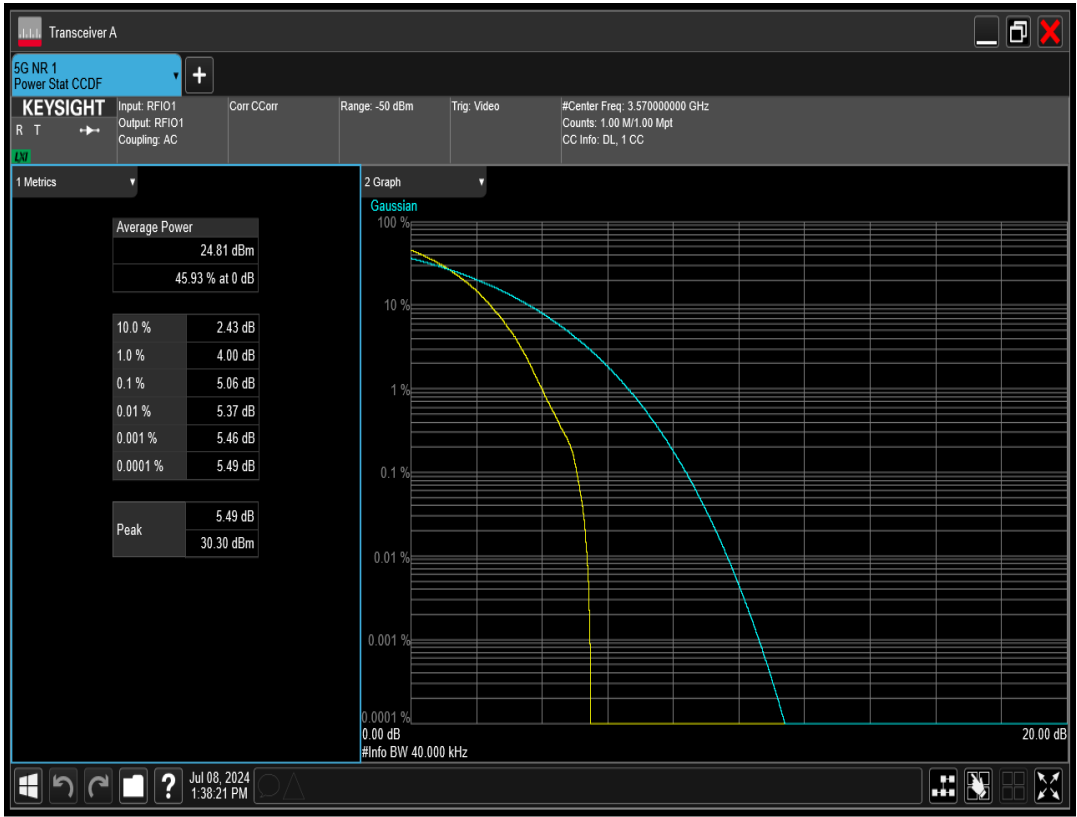


n77(3550-3700) SCS=30kHz DFT_BPSK BW=40MHz Channel=641666 RB=100@0

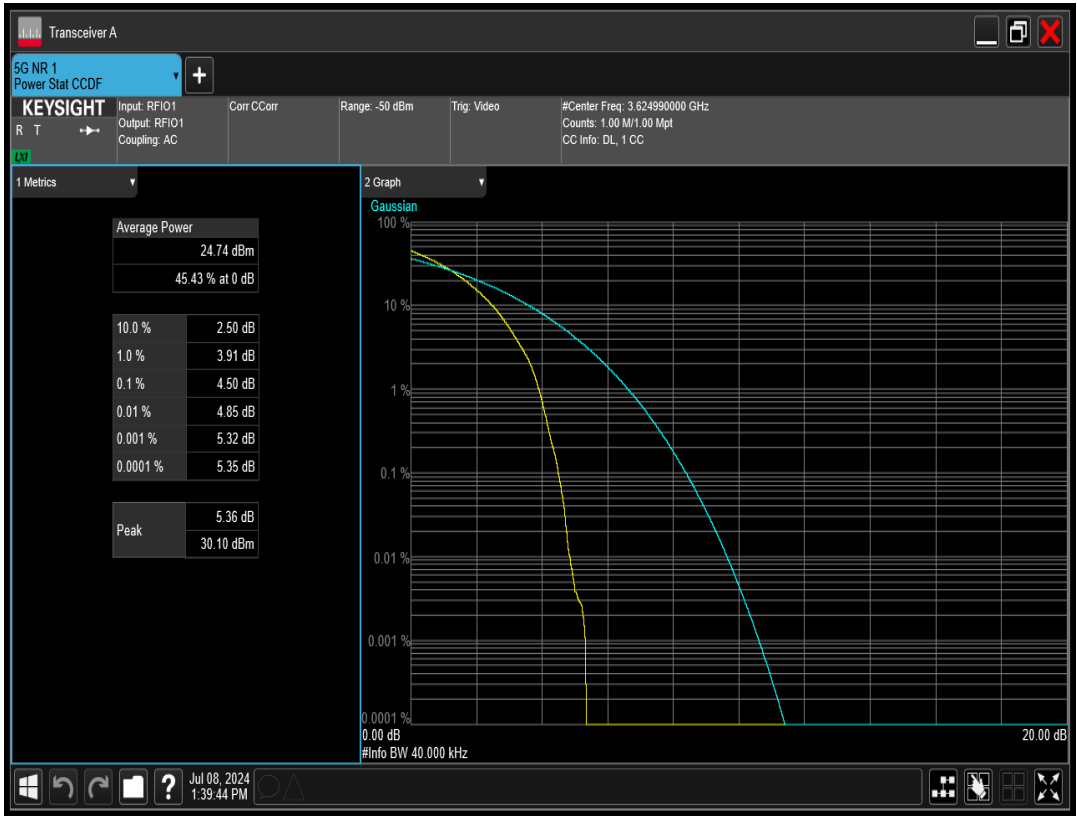


n77(3550-3700) SCS=30kHz DFT_BPSK BW=40MHz Channel=645332 RB=100@0

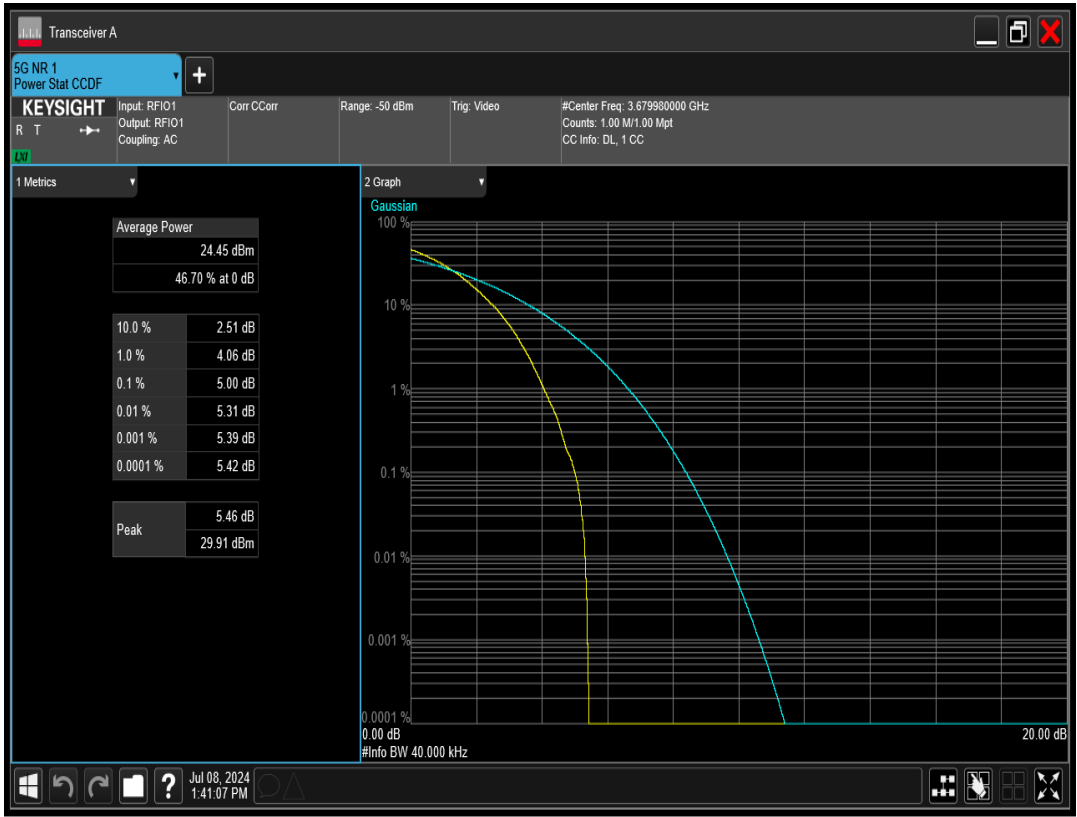


n77(3550-3700) SCS=30kHz DFT_BPSK BW=50MHz Channel=638334 RB=128@0

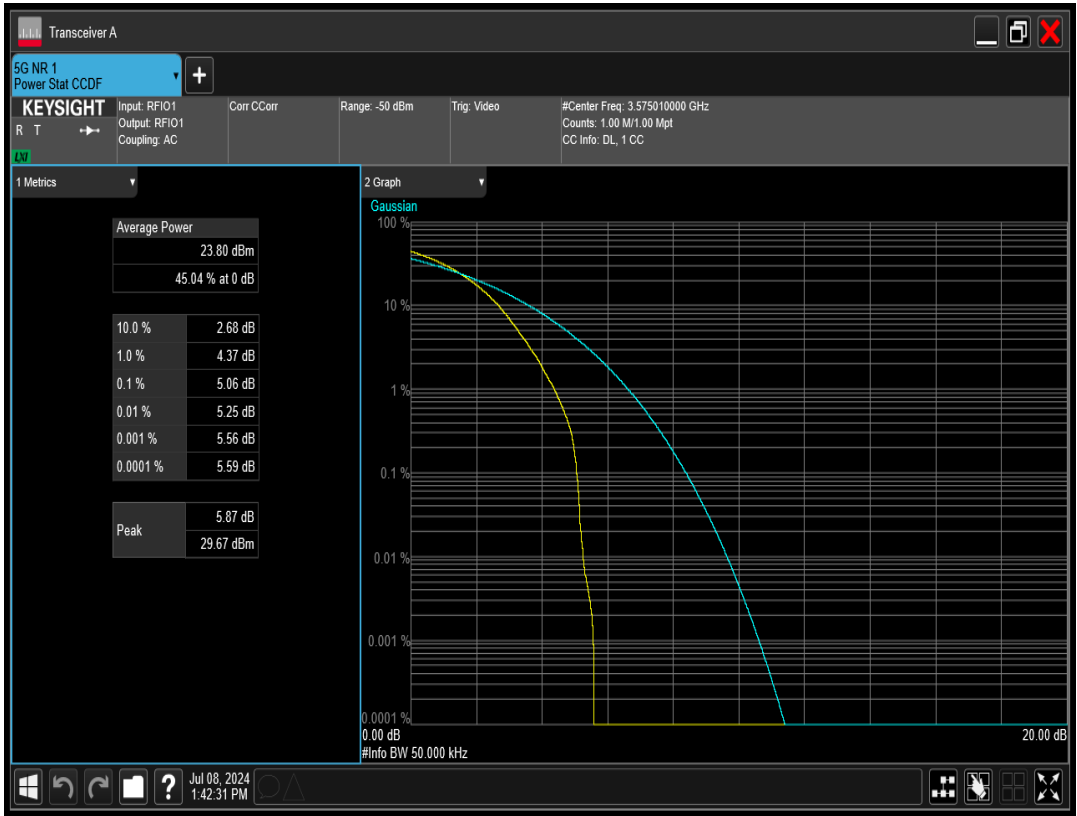


n77(3550-3700) SCS=30kHz DFT_BPSK BW=50MHz Channel=641666 RB=128@0

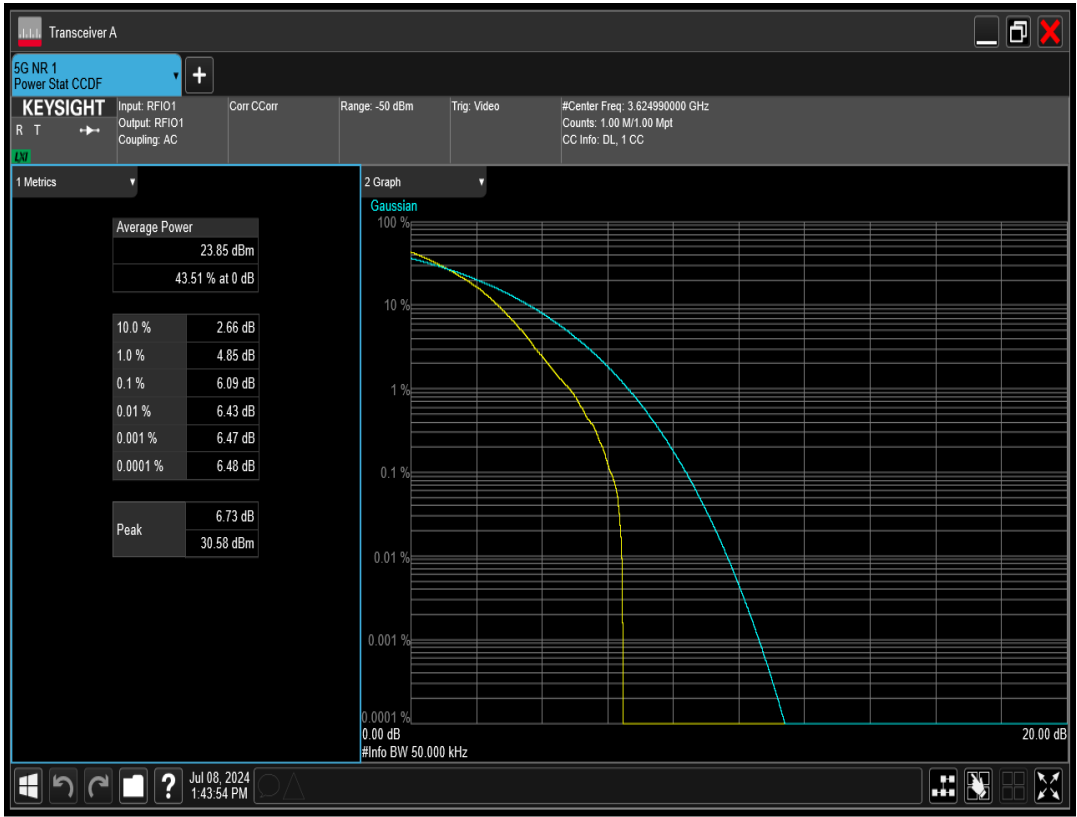


n77(3550-3700) SCS=30kHz DFT_BPSK BW=50MHz Channel=645000 RB=128@0

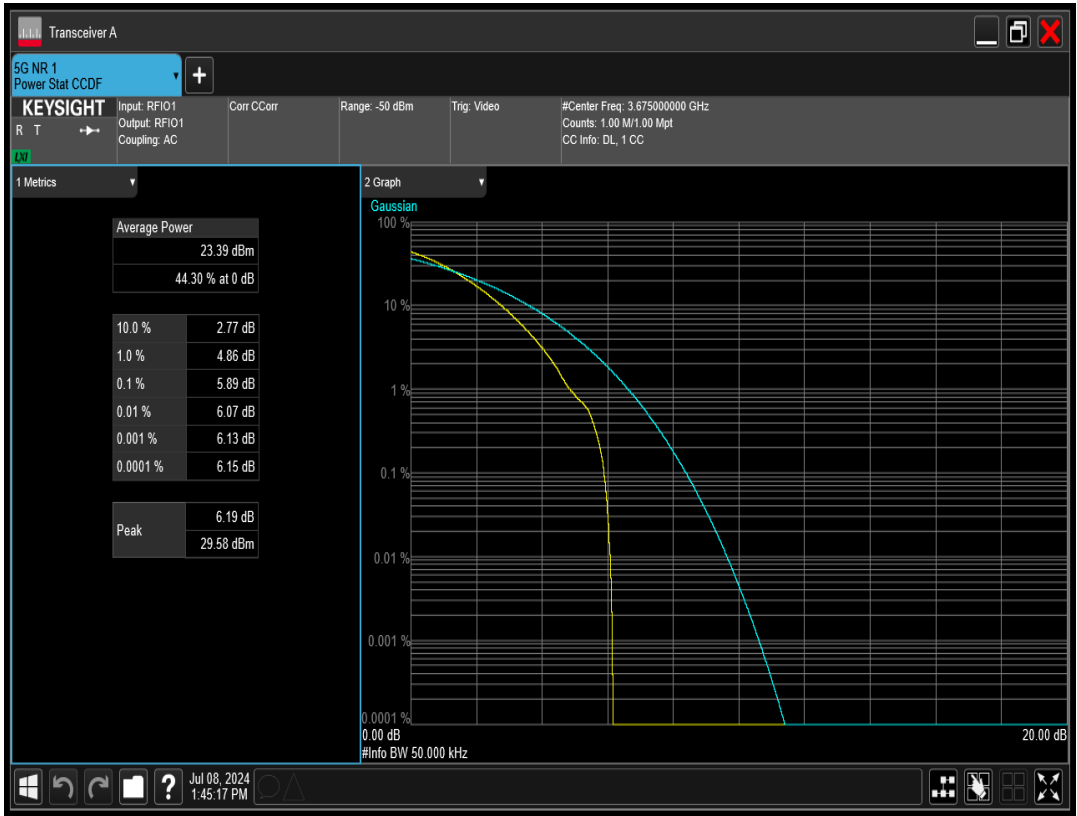


n77(3550-3700) SCS=30kHz DFT_BPSK BW=60MHz Channel=638668 RB=162@0

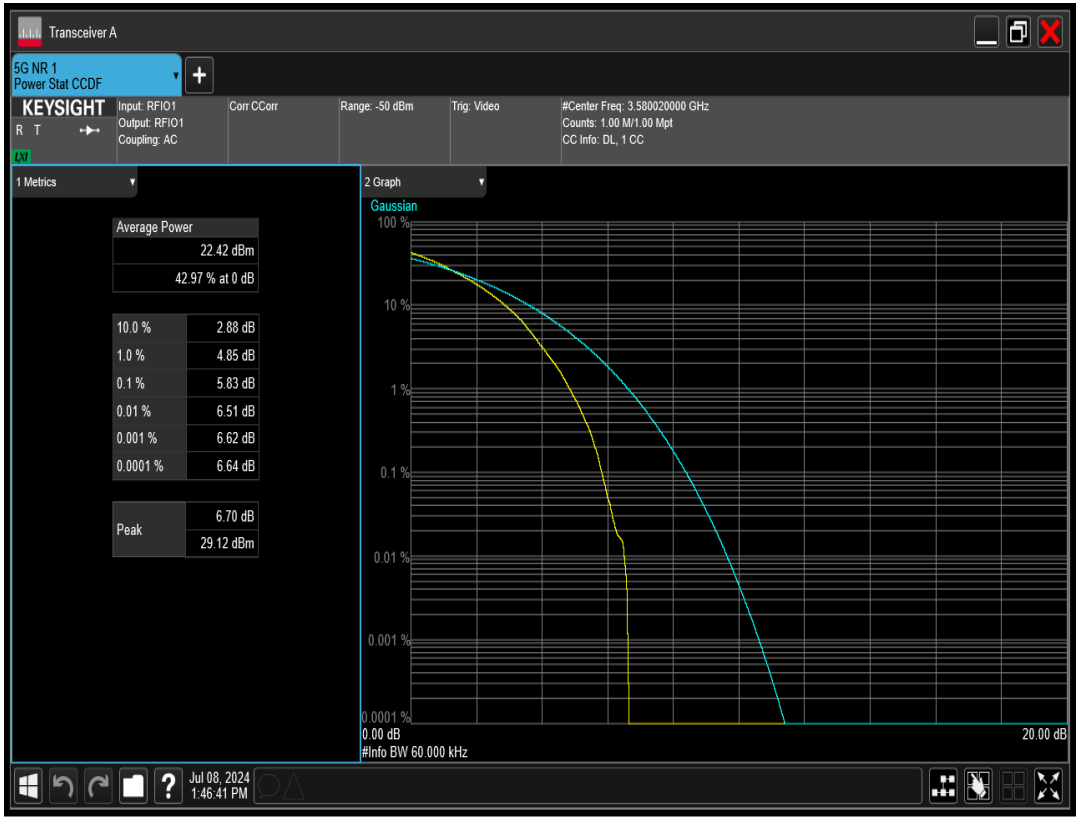


n77(3550-3700) SCS=30kHz DFT_BPSK BW=60MHz Channel=641666 RB=162@0

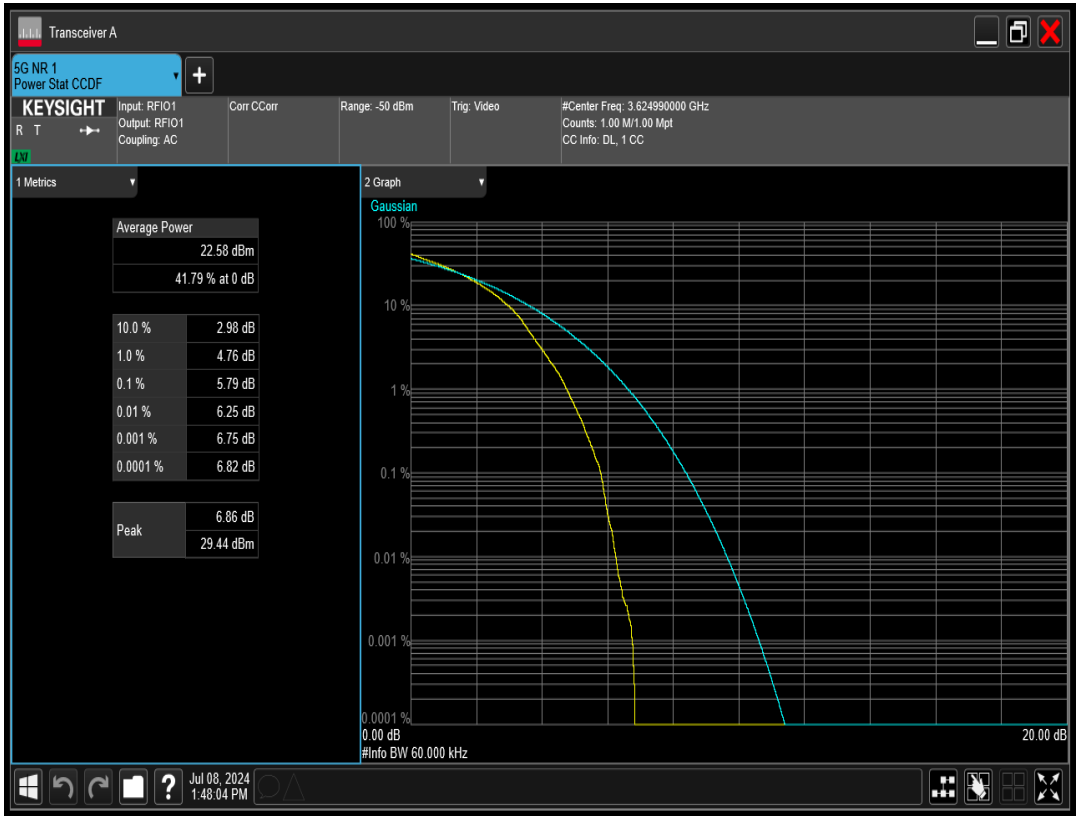


n77(3550-3700) SCS=30kHz DFT_BPSK BW=60MHz Channel=644666 RB=162@0

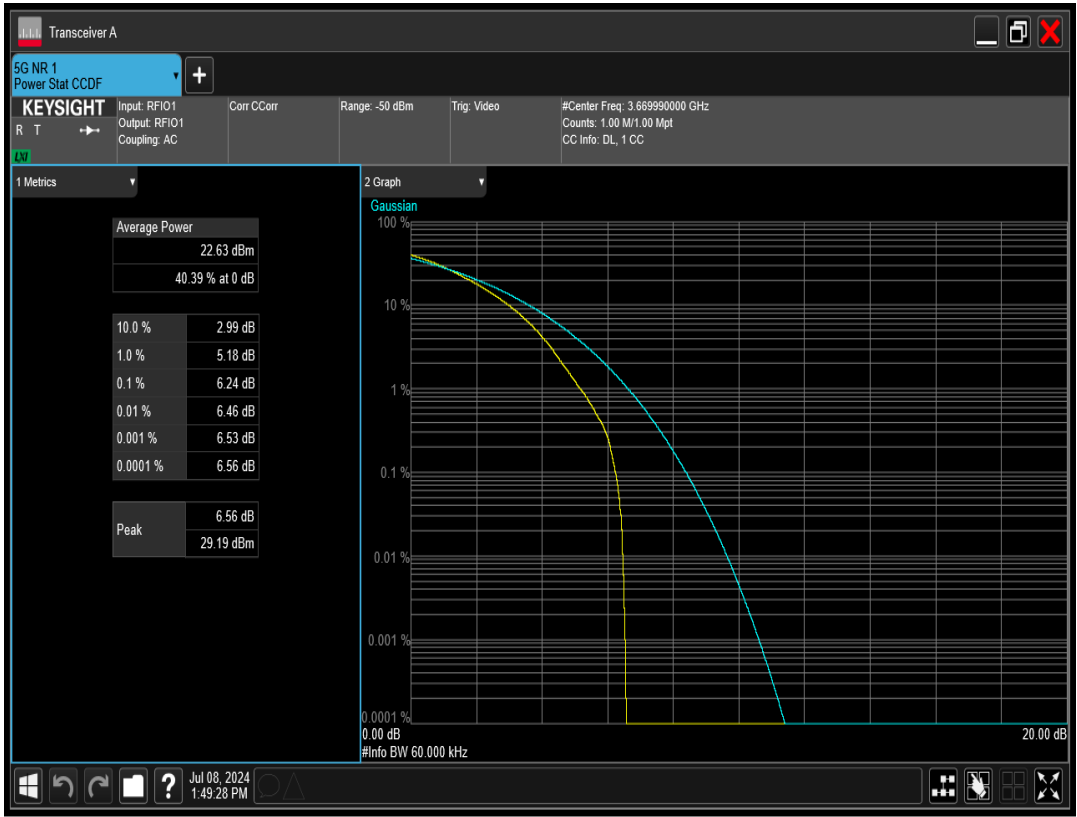


n77(3550-3700) SCS=30kHz DFT_BPSK BW=80MHz Channel=639334 RB=216@0

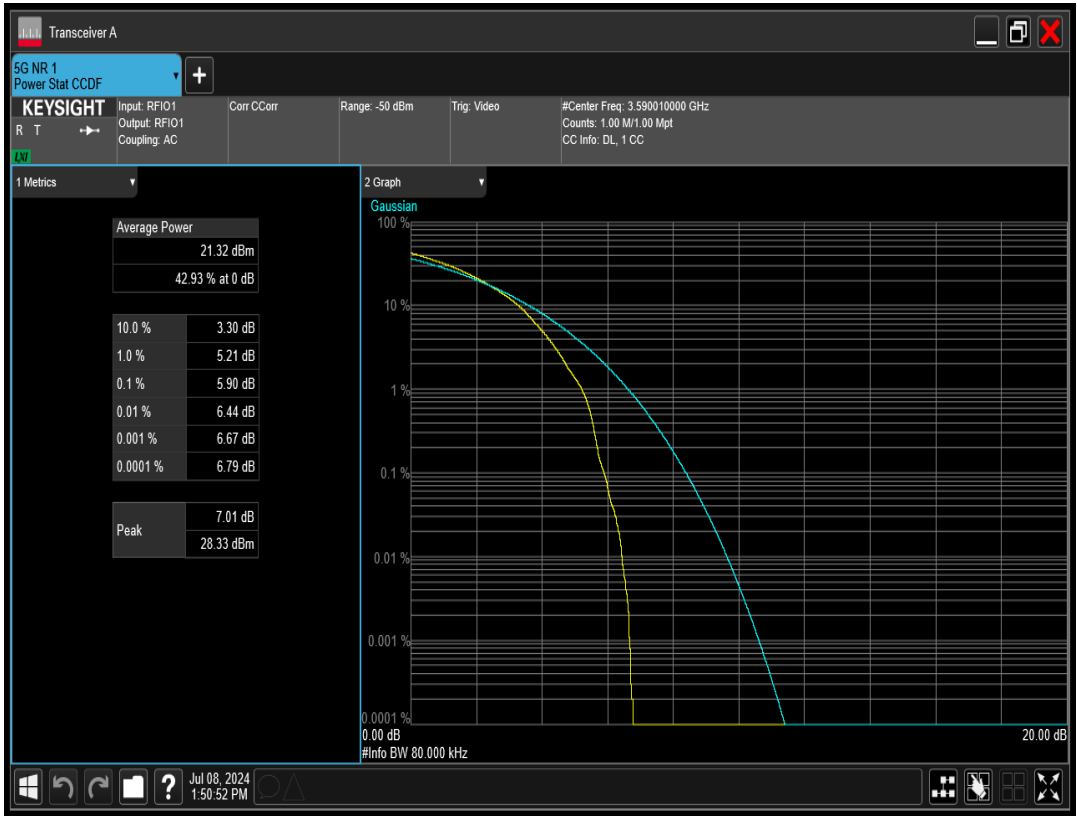


n77(3550-3700) SCS=30kHz DFT_BPSK BW=80MHz Channel=641666 RB=216@0

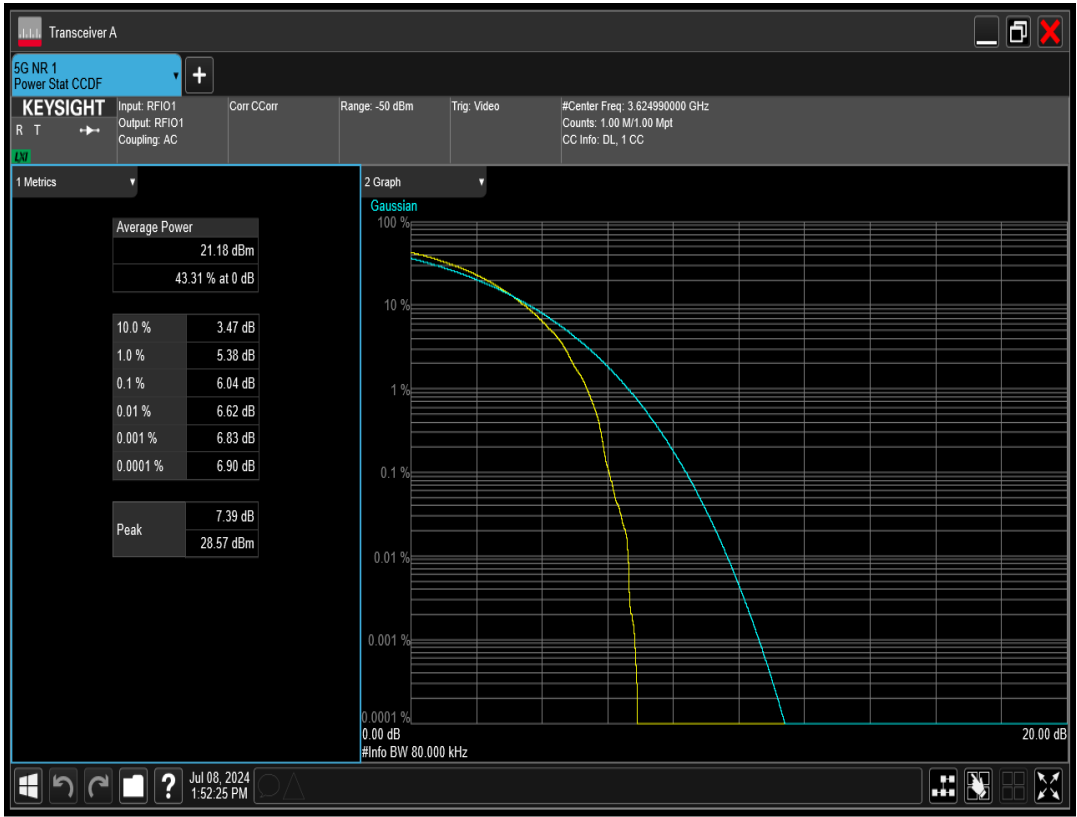


n77(3550-3700) SCS=30kHz DFT_BPSK BW=80MHz Channel=644000 RB=216@0

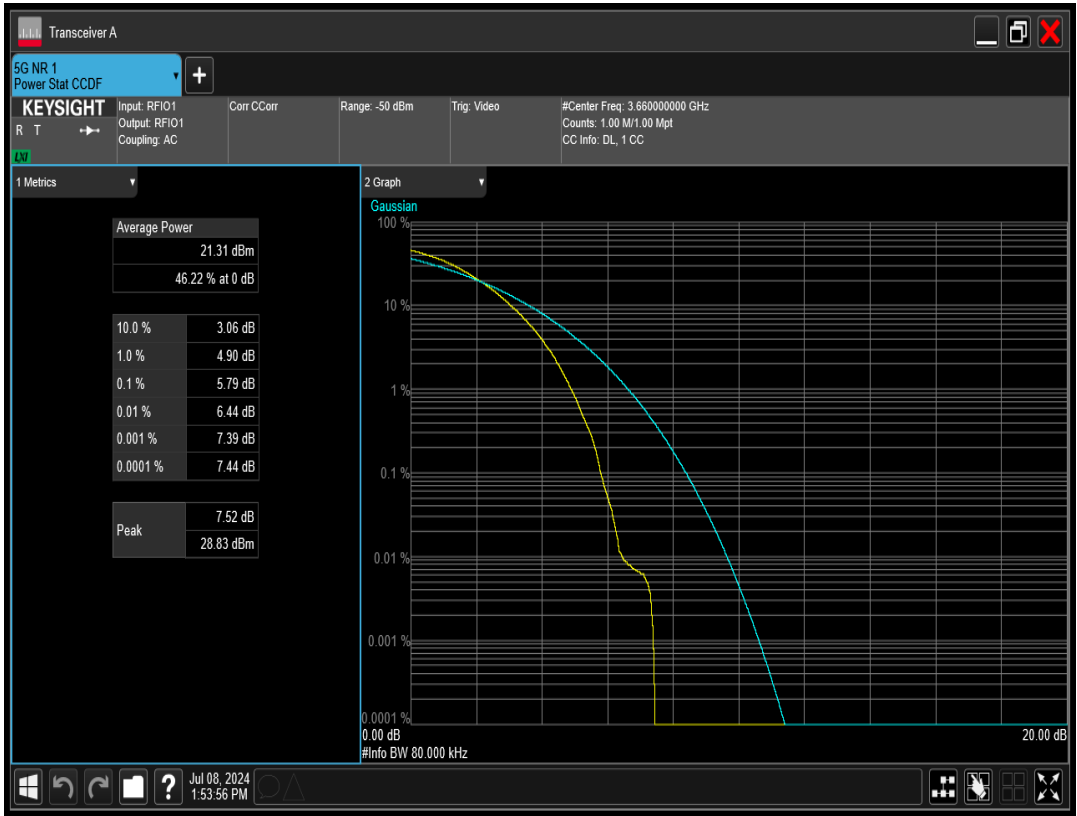


n77(3550-3700) SCS=30kHz DFT_BPSK BW=90MHz Channel=639668 RB=240@0

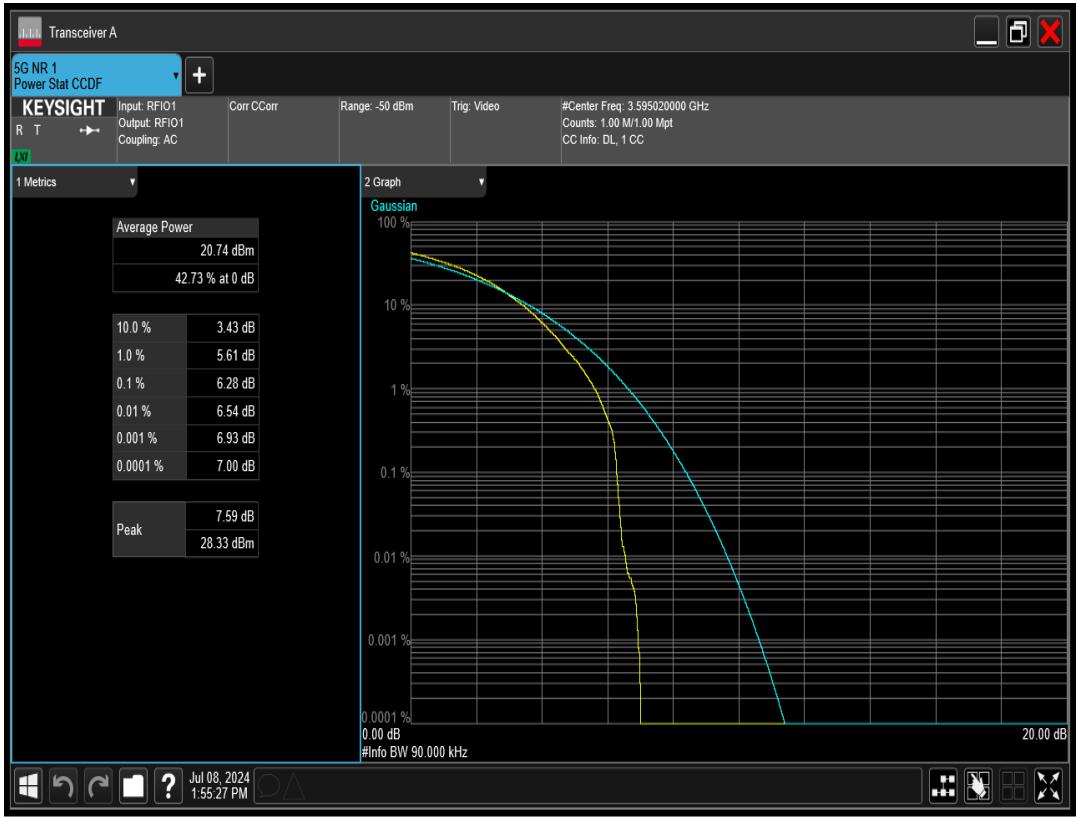


n77(3550-3700) SCS=30kHz DFT_BPSK BW=90MHz Channel=641666 RB=240@0

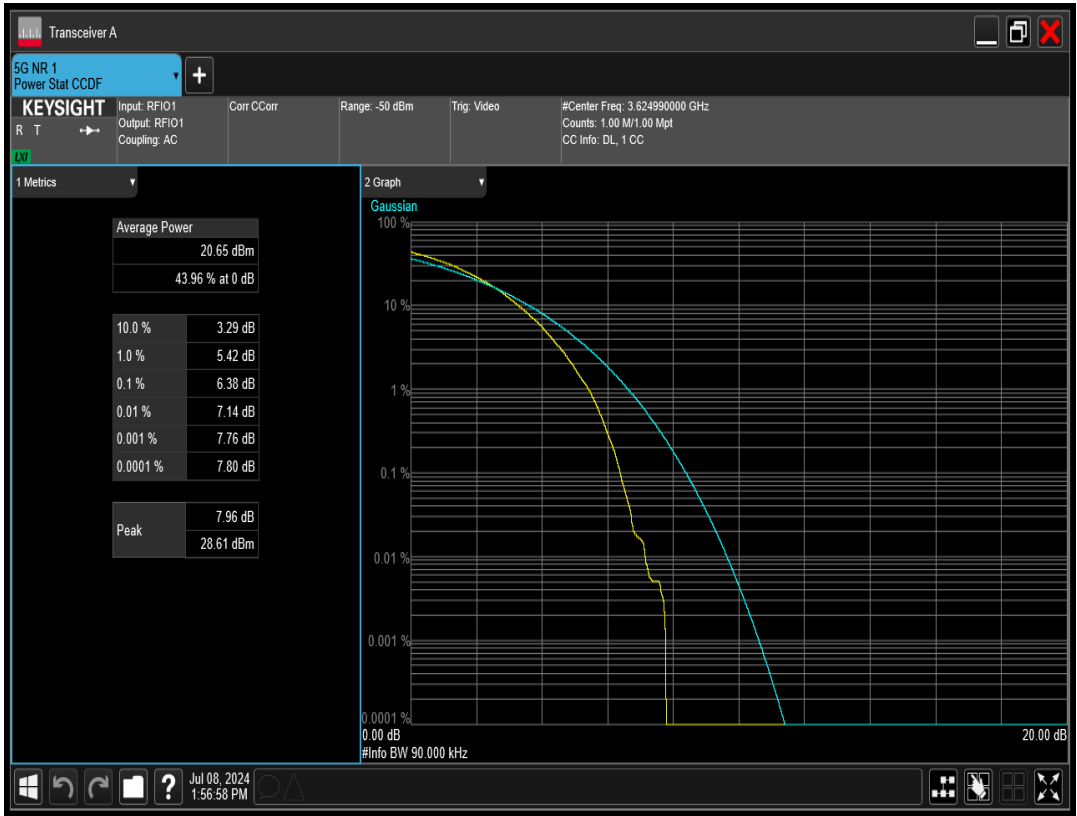


n77(3550-3700) SCS=30kHz DFT_BPSK BW=90MHz Channel=643666 RB=240@0

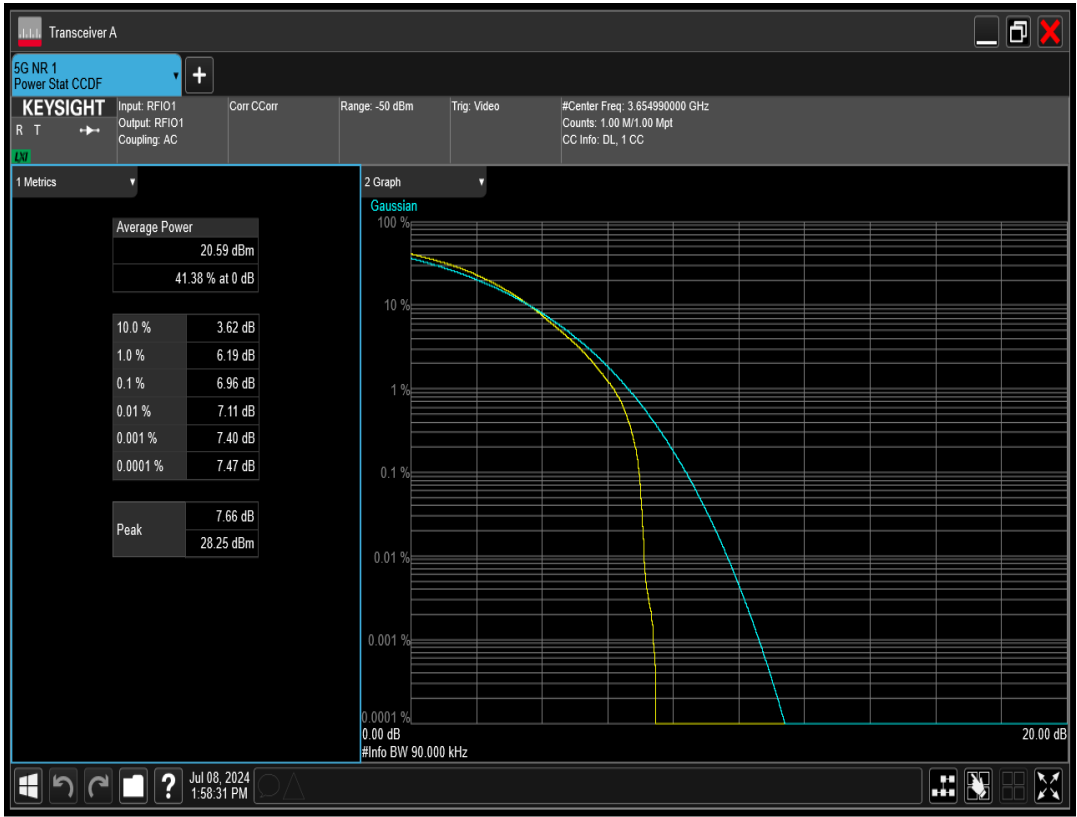


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=100MHz Channel=640000 RB=270@0

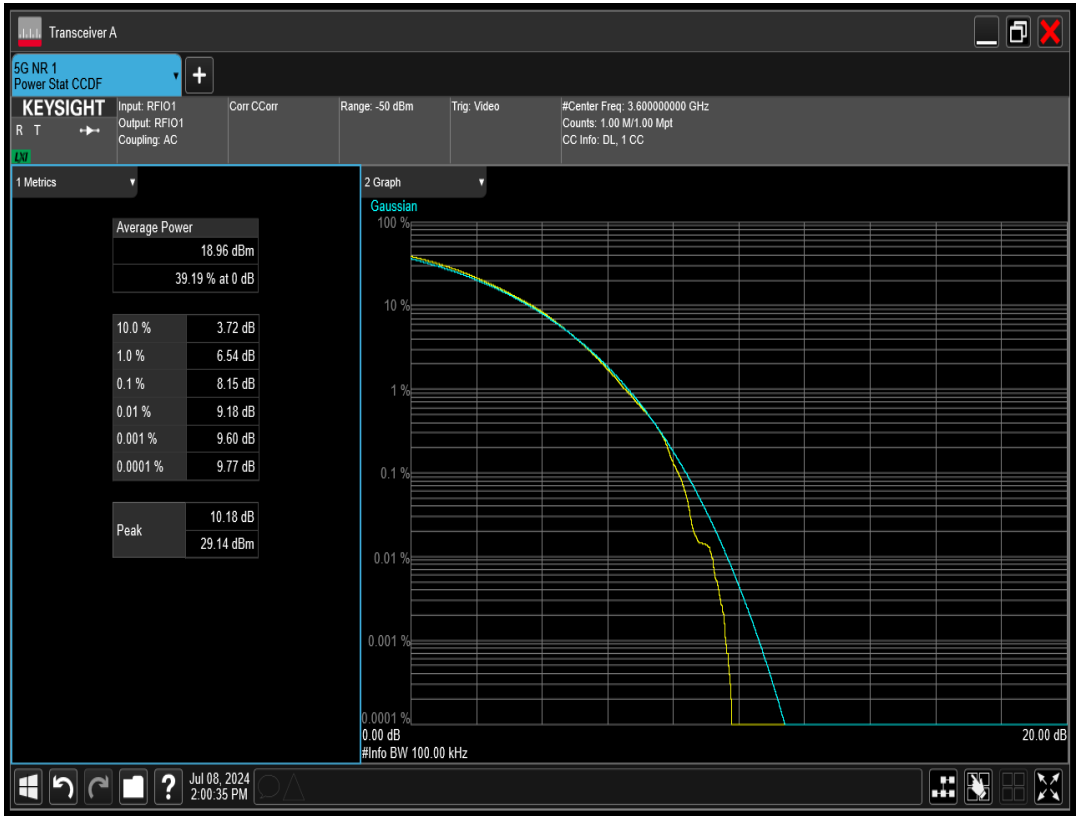


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=100MHz Channel=641666 RB=270@0

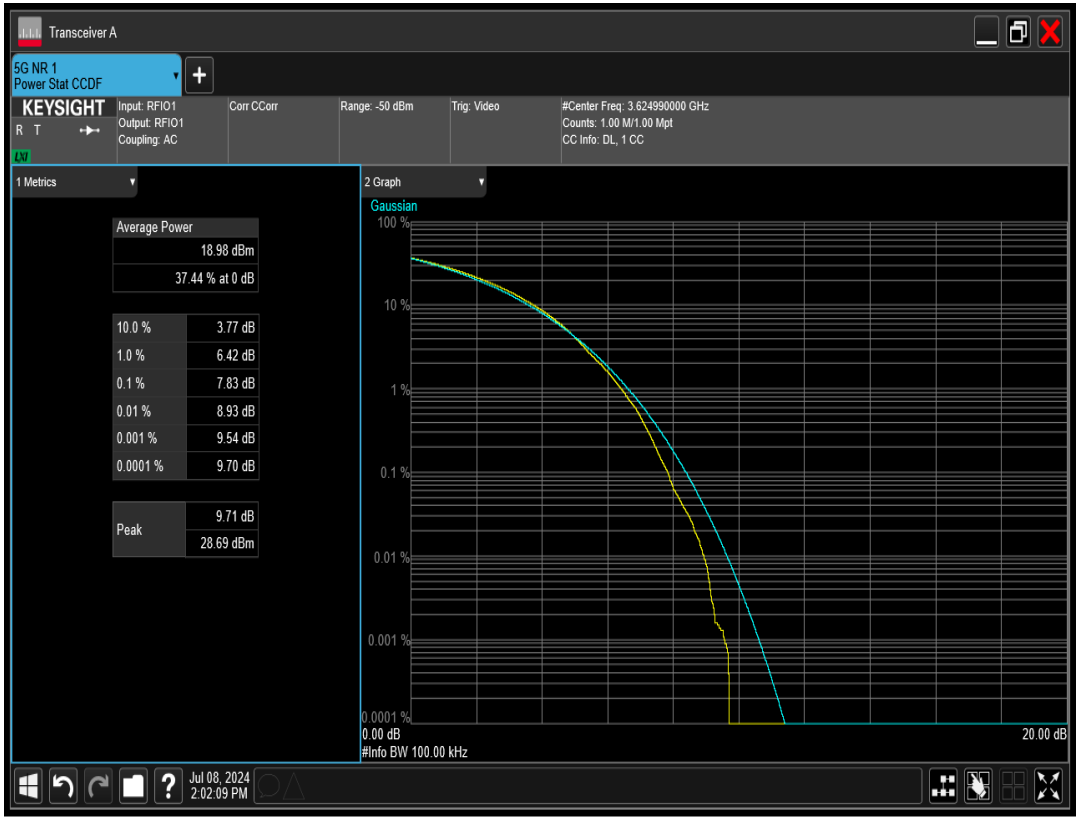


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=100MHz Channel=643332 RB=270@0

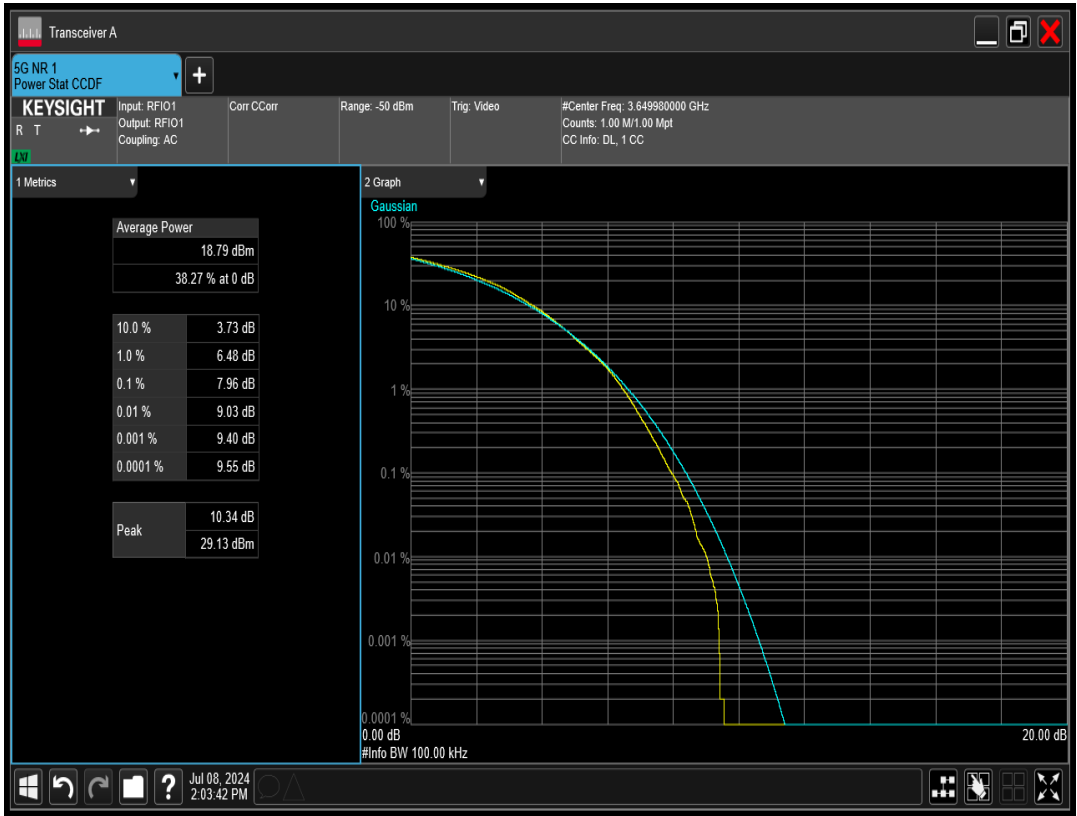


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=10MHz Channel=637000 RB=24@0

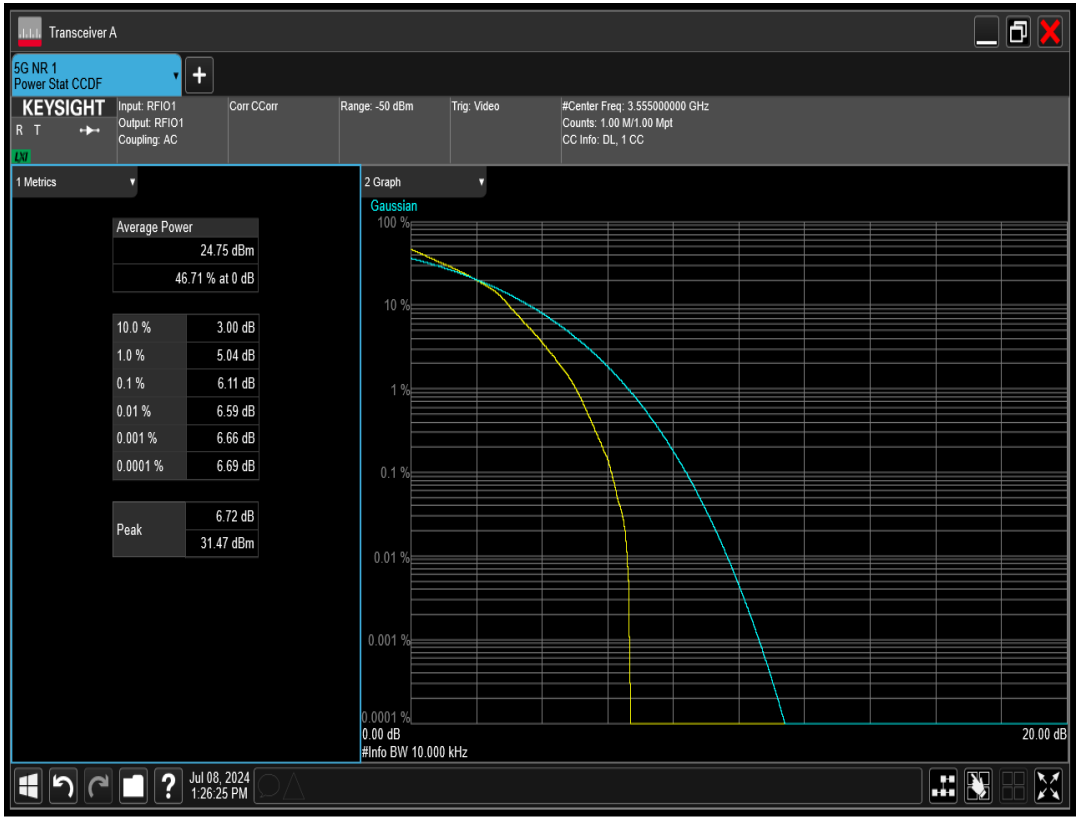


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=10MHz Channel=641666 RB=24@0

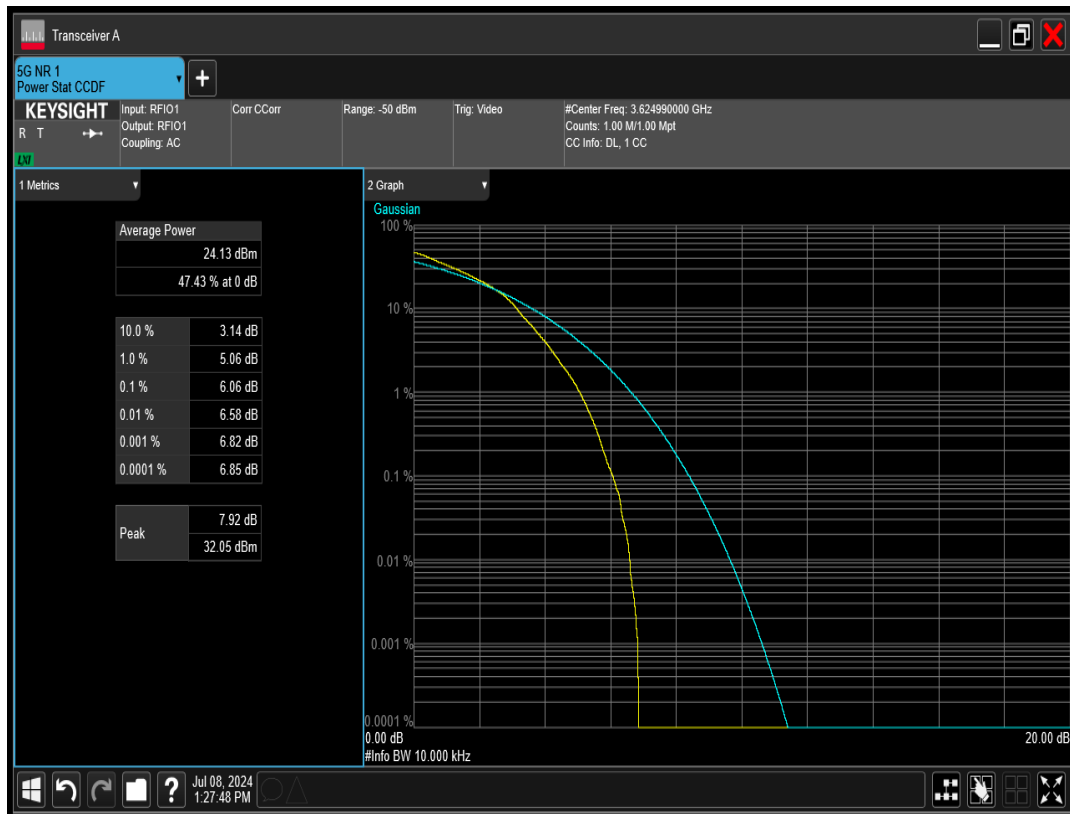


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=10MHz Channel=646332 RB=24@0

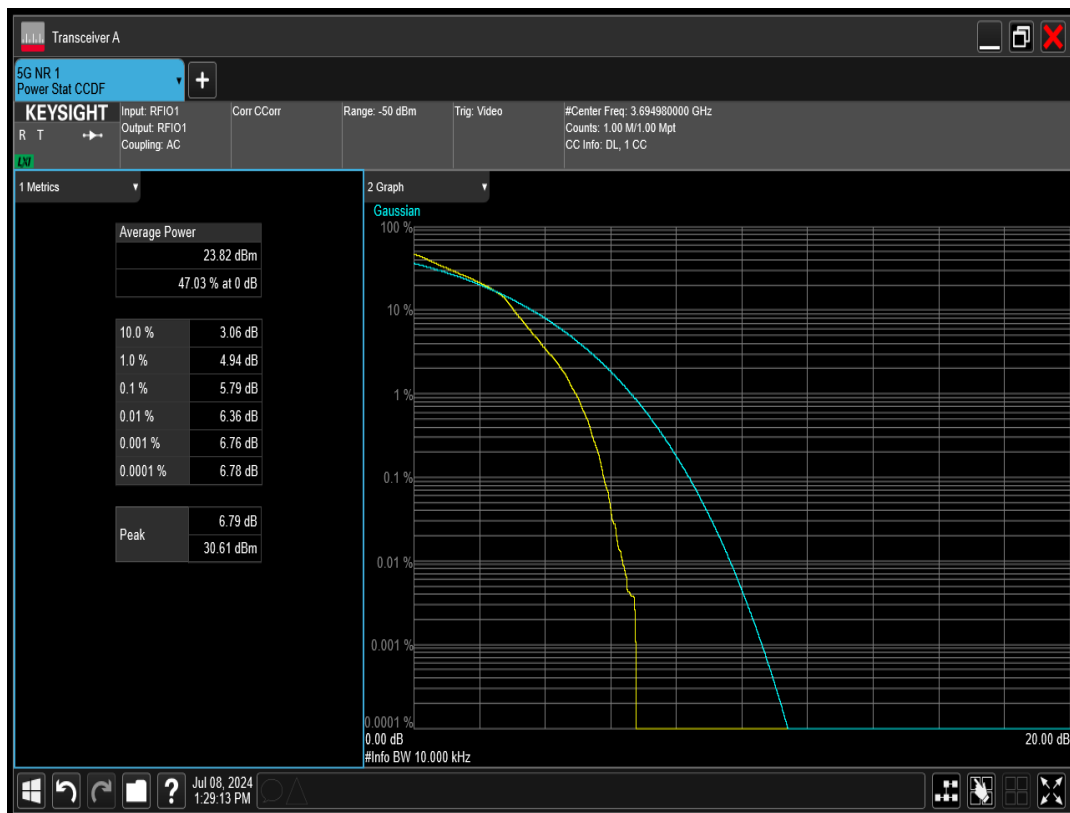


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=15MHz Channel=637168 RB=36@0

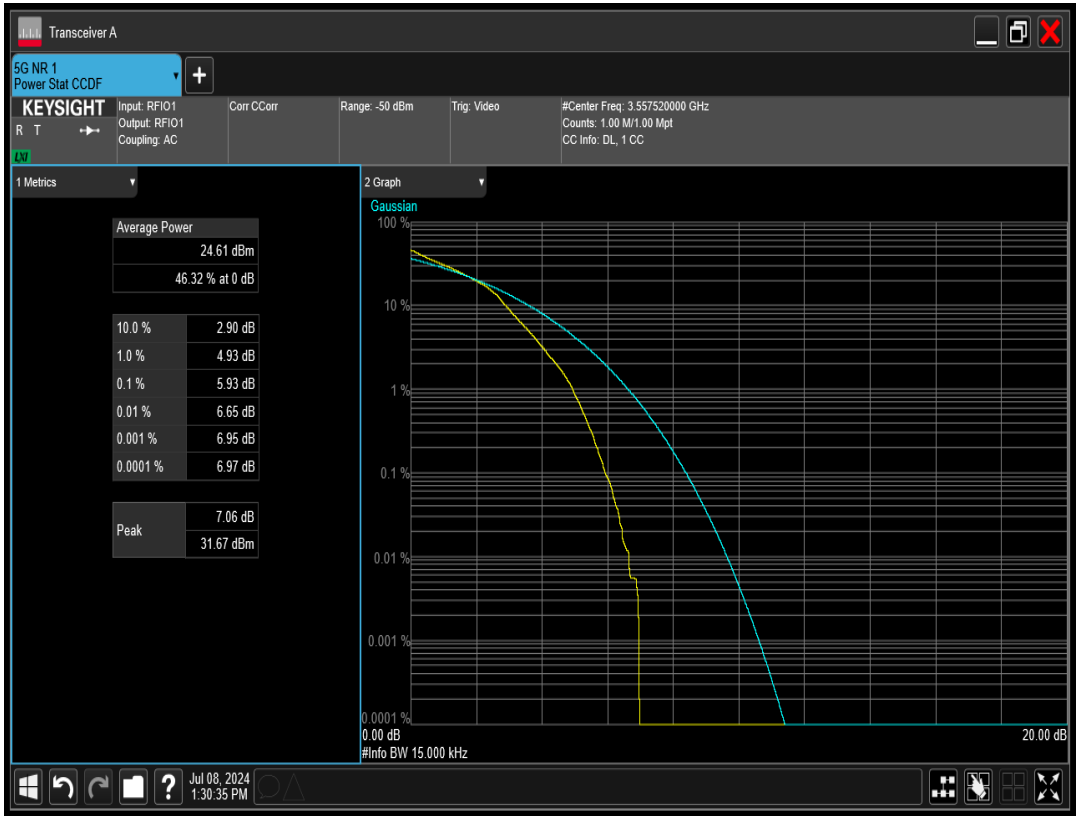


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=15MHz Channel=641666 RB=36@0

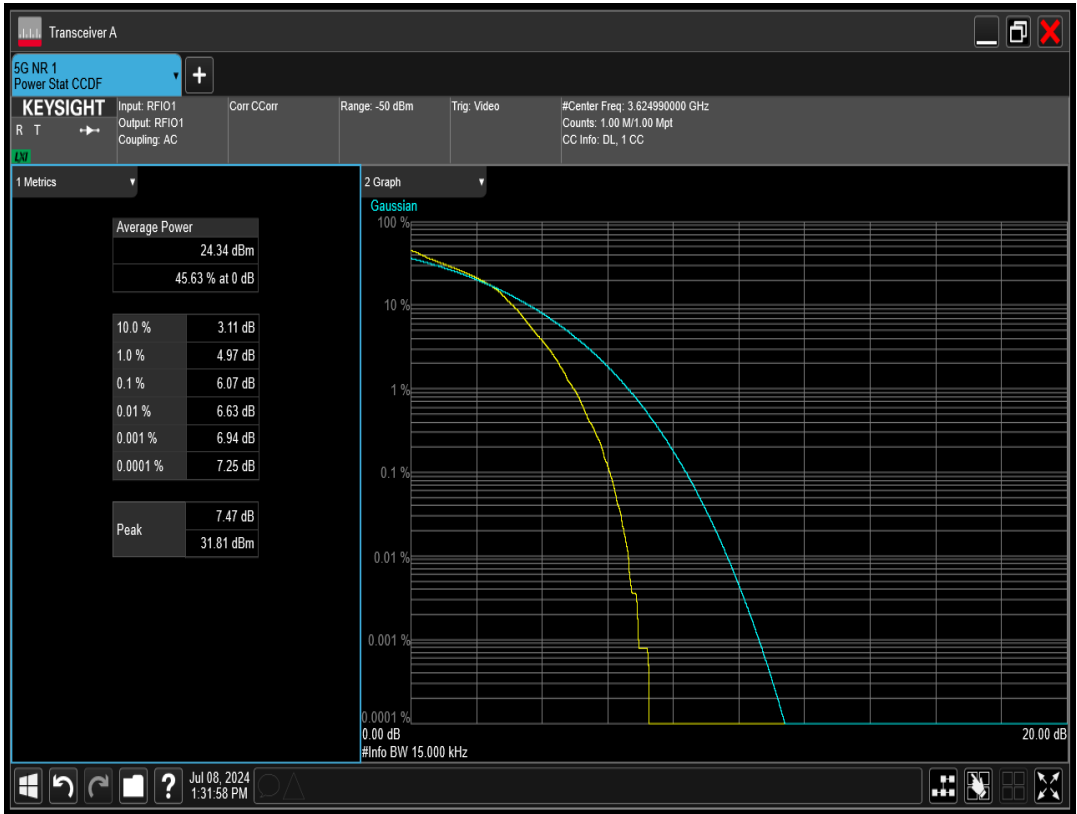


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=15MHz Channel=646166 RB=36@0

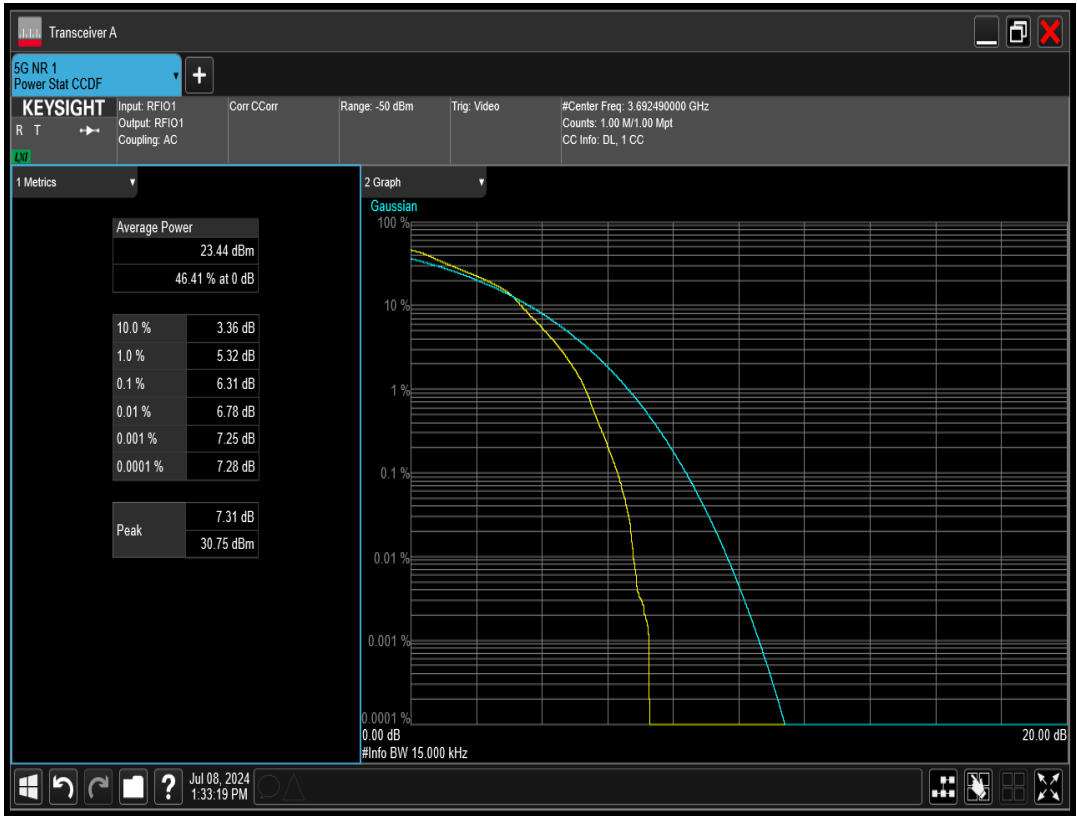


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=20MHz Channel=637334 RB=50@0

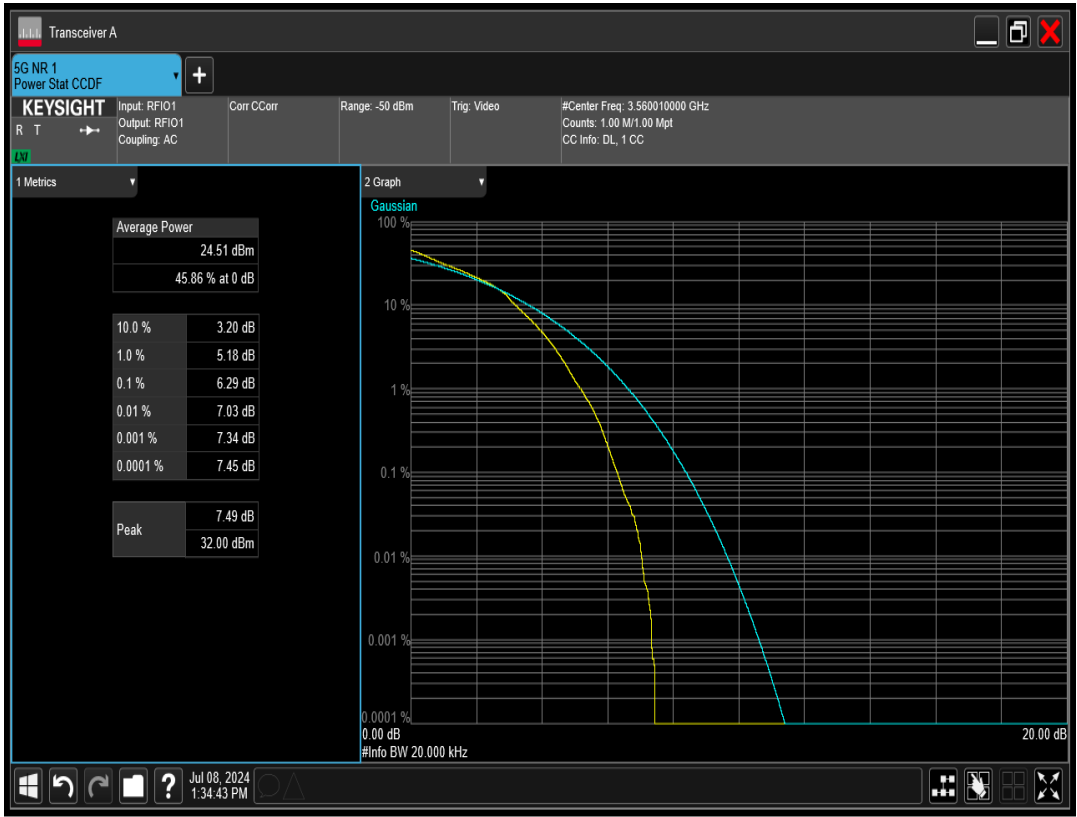


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=20MHz Channel=641666 RB=50@0

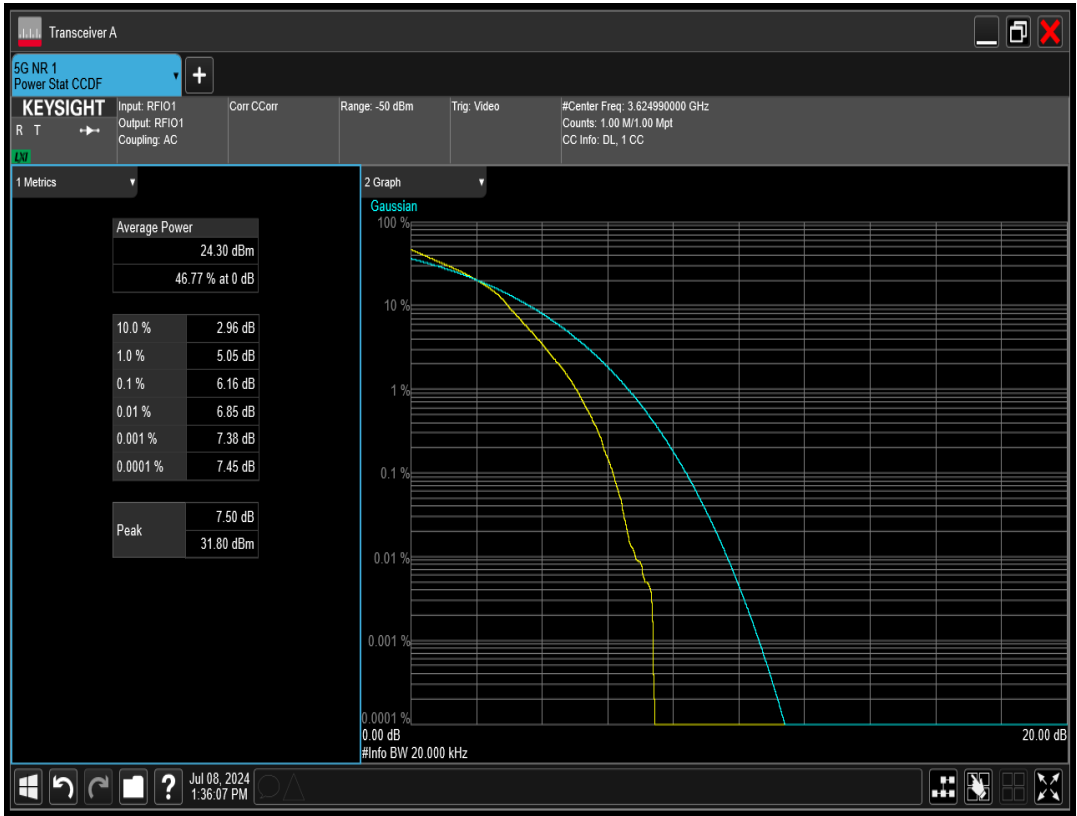


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=20MHz Channel=646000 RB=50@0

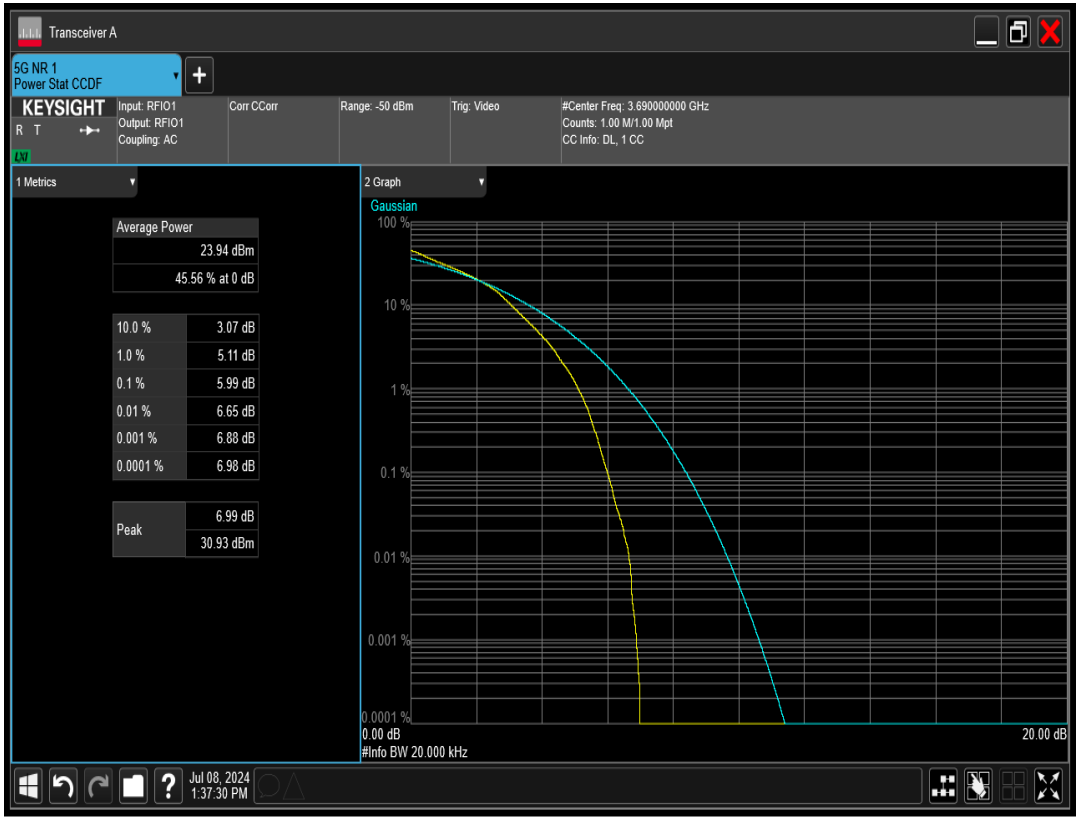


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=40MHz Channel=638000 RB=100@0

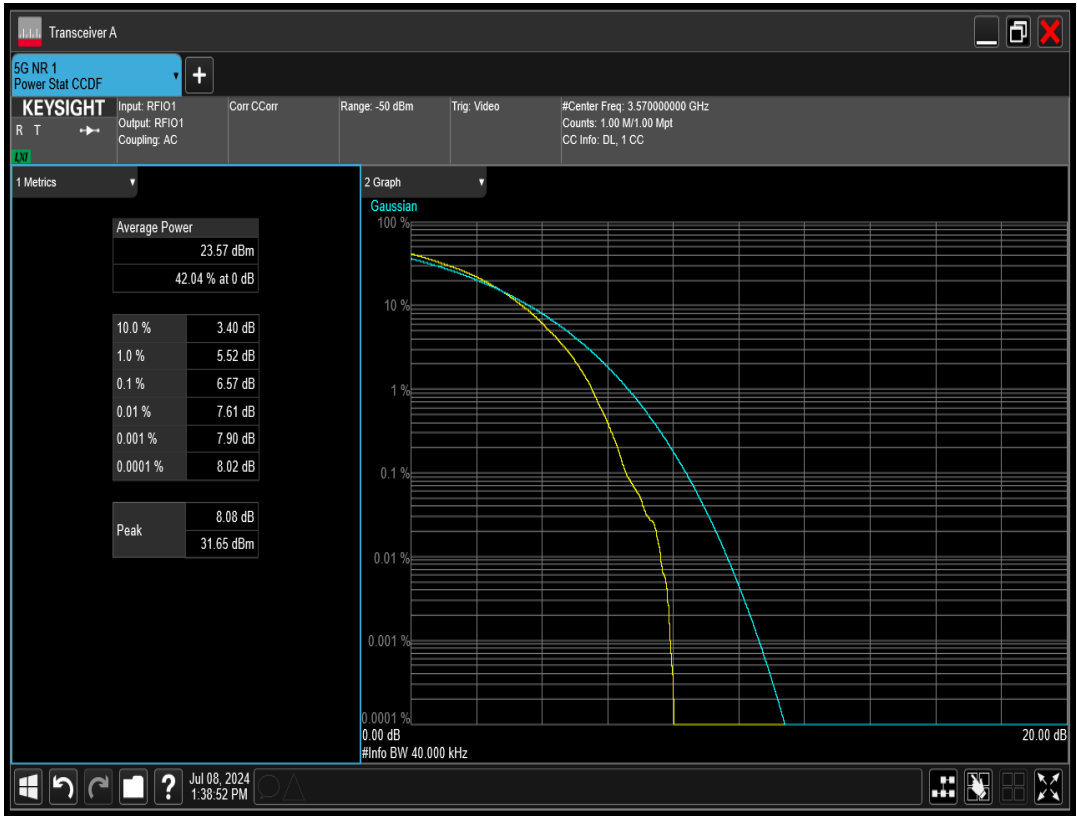


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=40MHz Channel=641666 RB=100@0

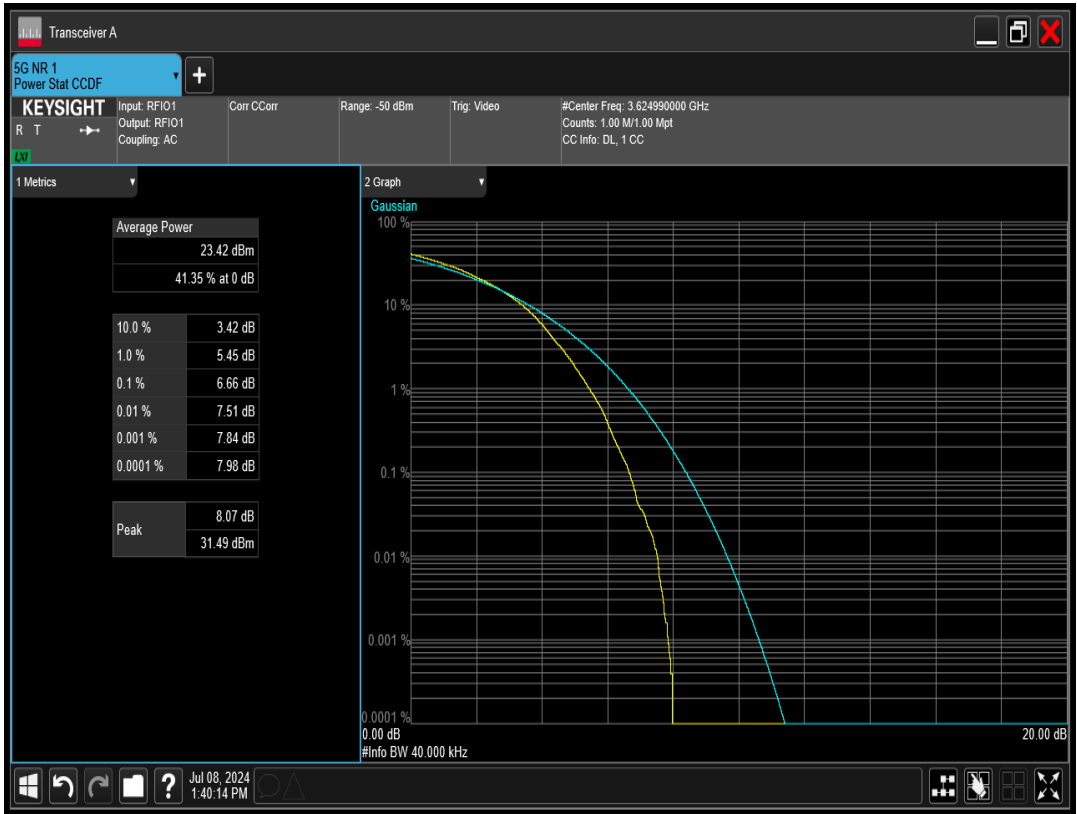


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=40MHz Channel=645332 RB=100@0

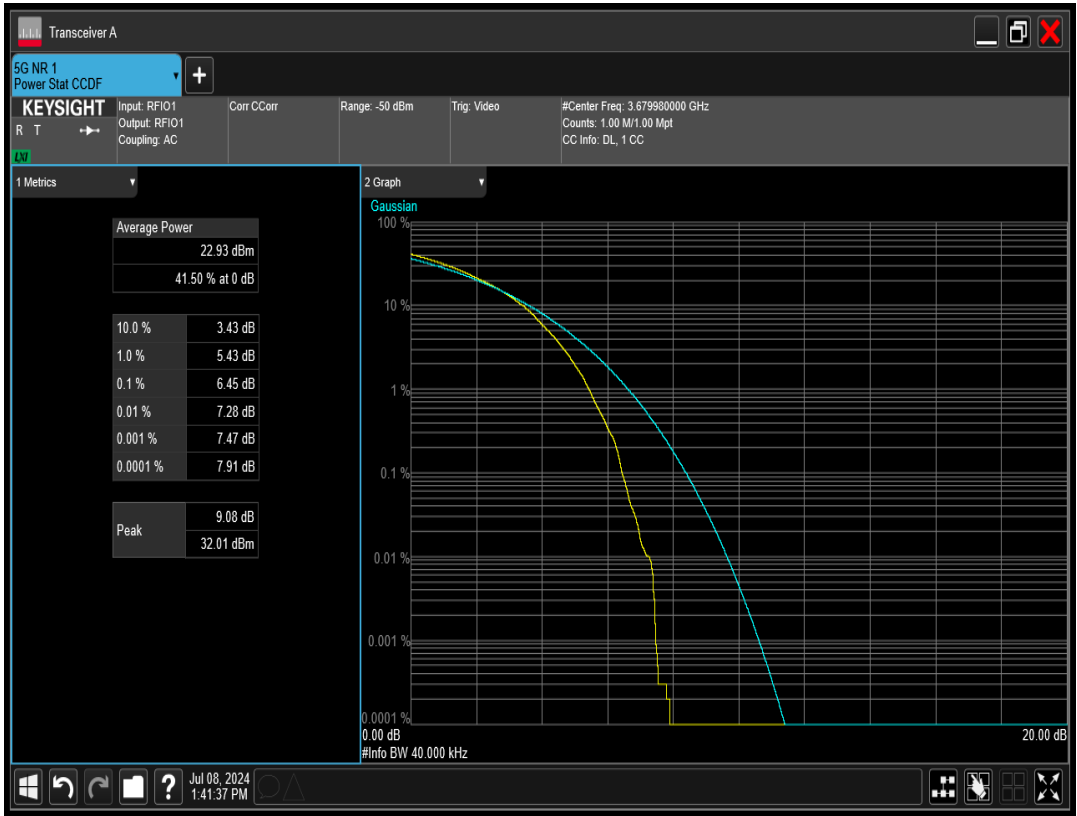


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=50MHz Channel=638334 RB=128@0

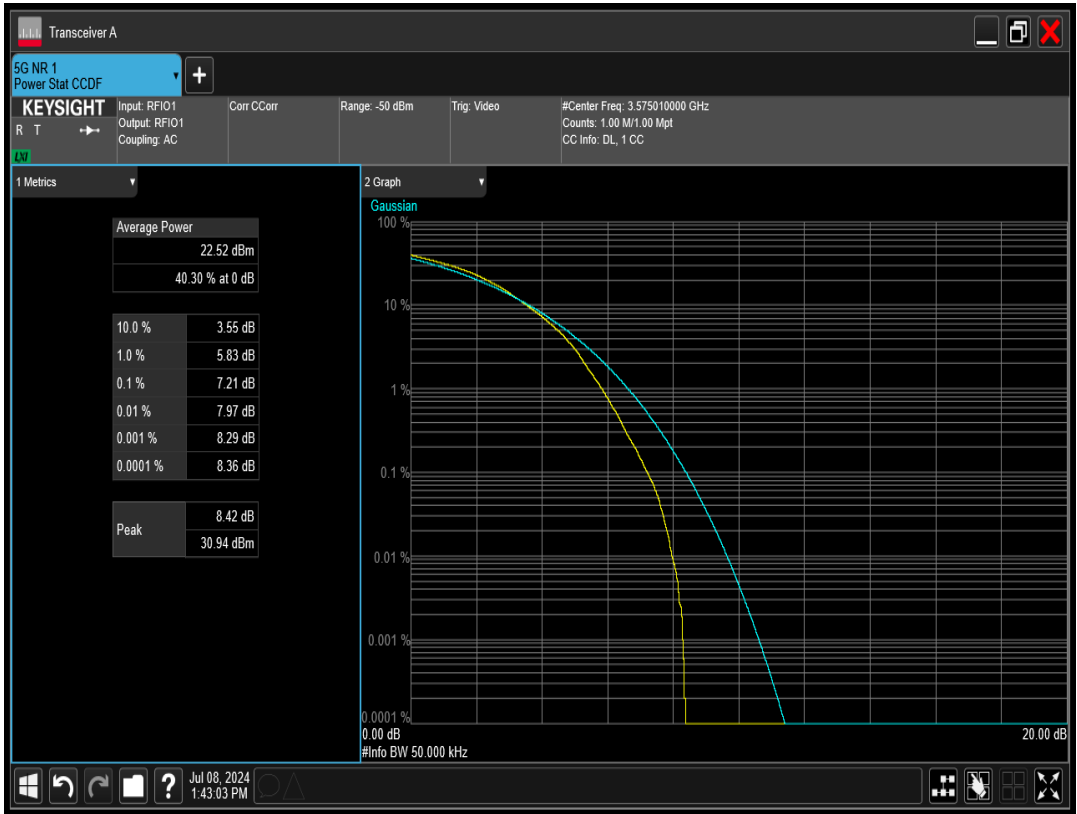


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=50MHz Channel=641666 RB=128@0

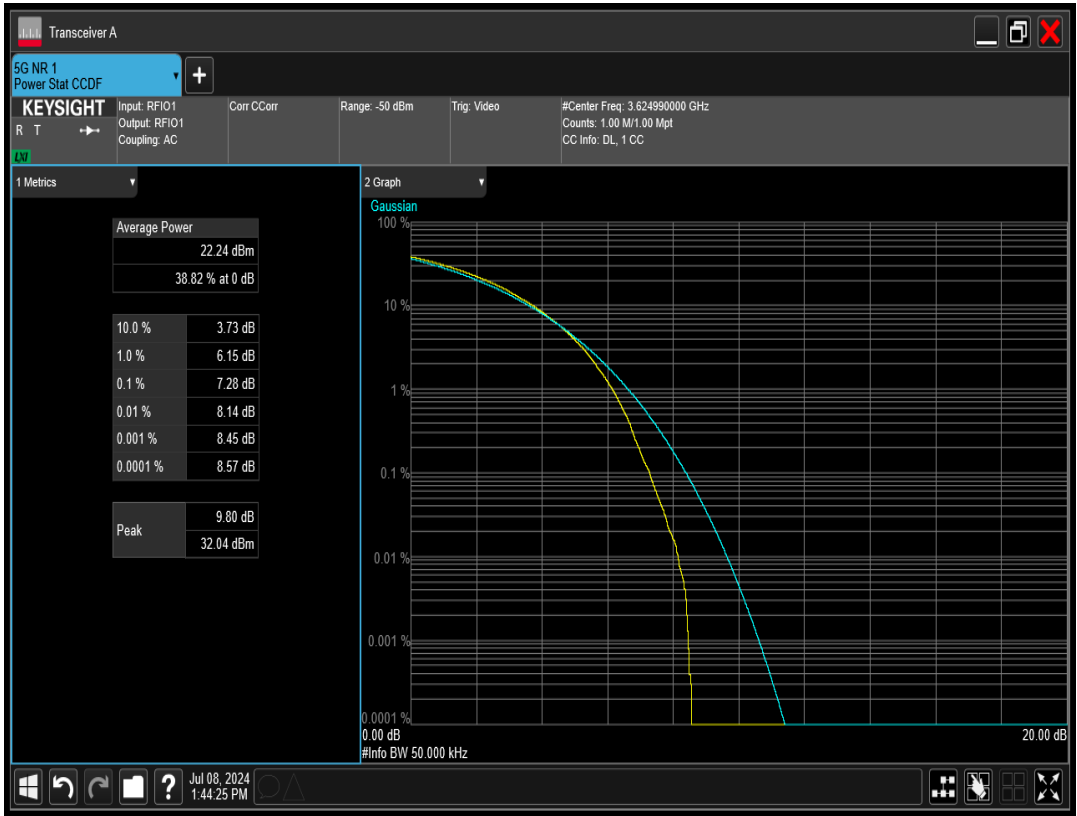


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=50MHz Channel=645000 RB=128@0

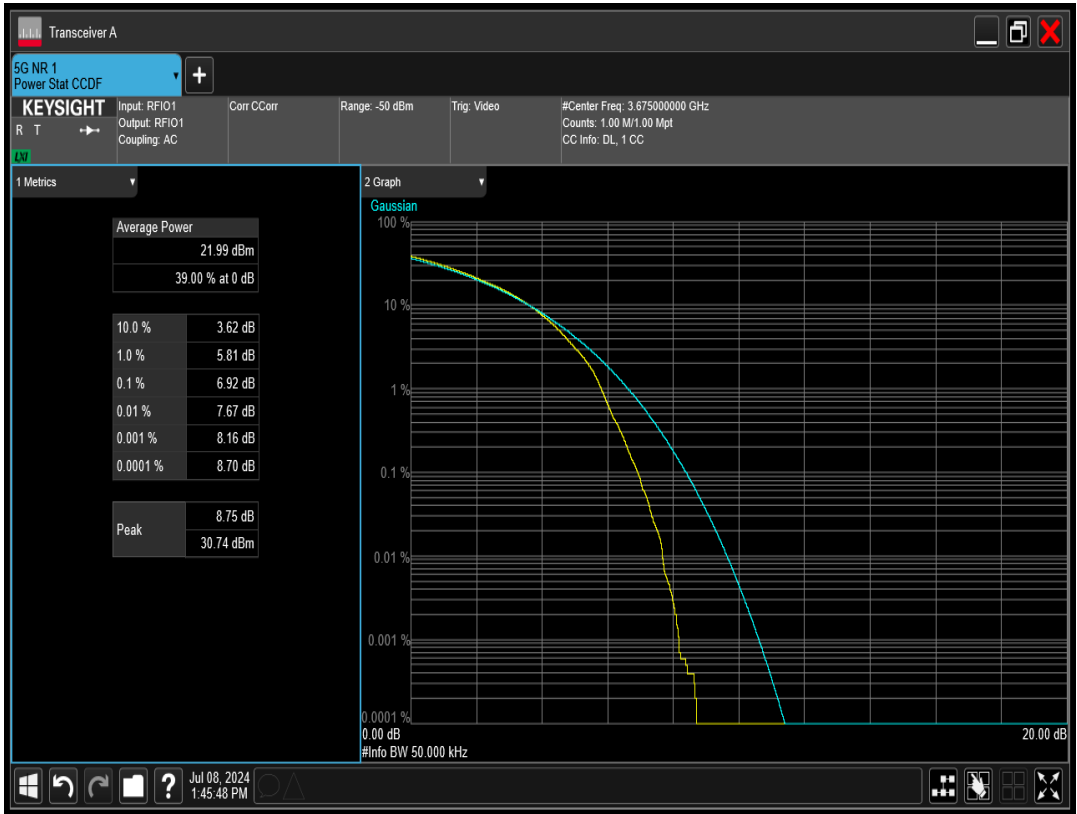


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=60MHz Channel=638668 RB=162@0

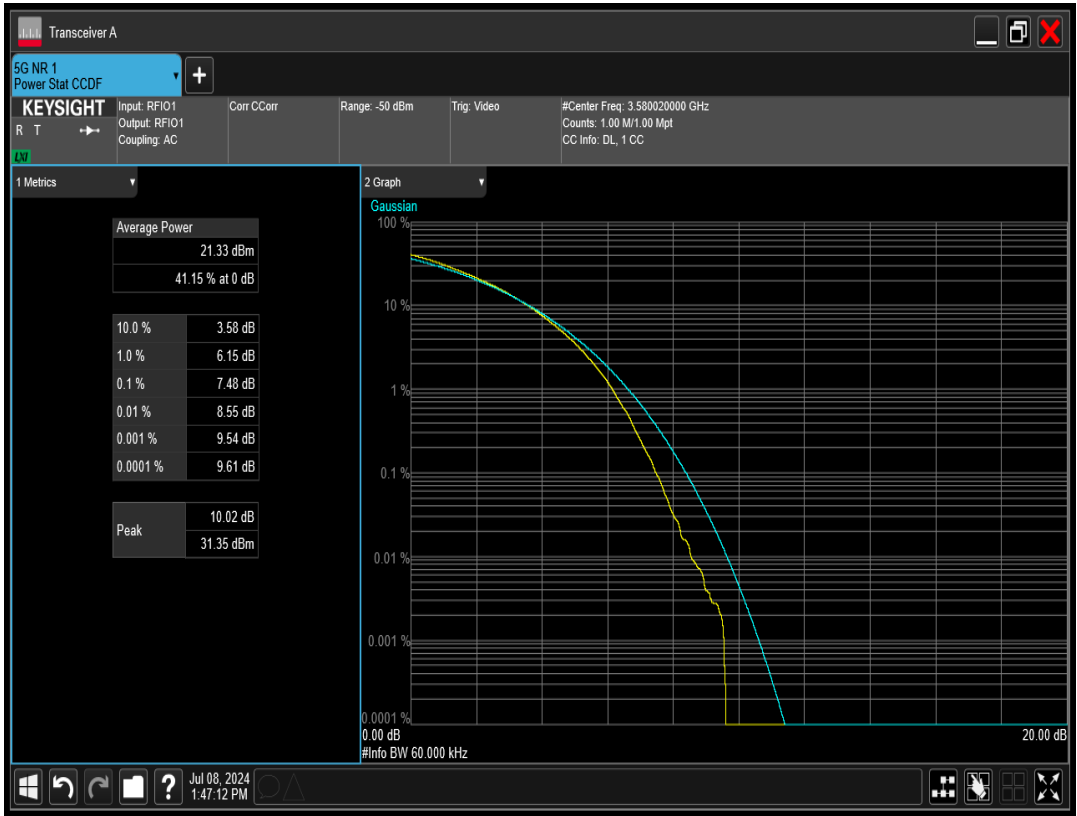


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=60MHz Channel=641666 RB=162@0

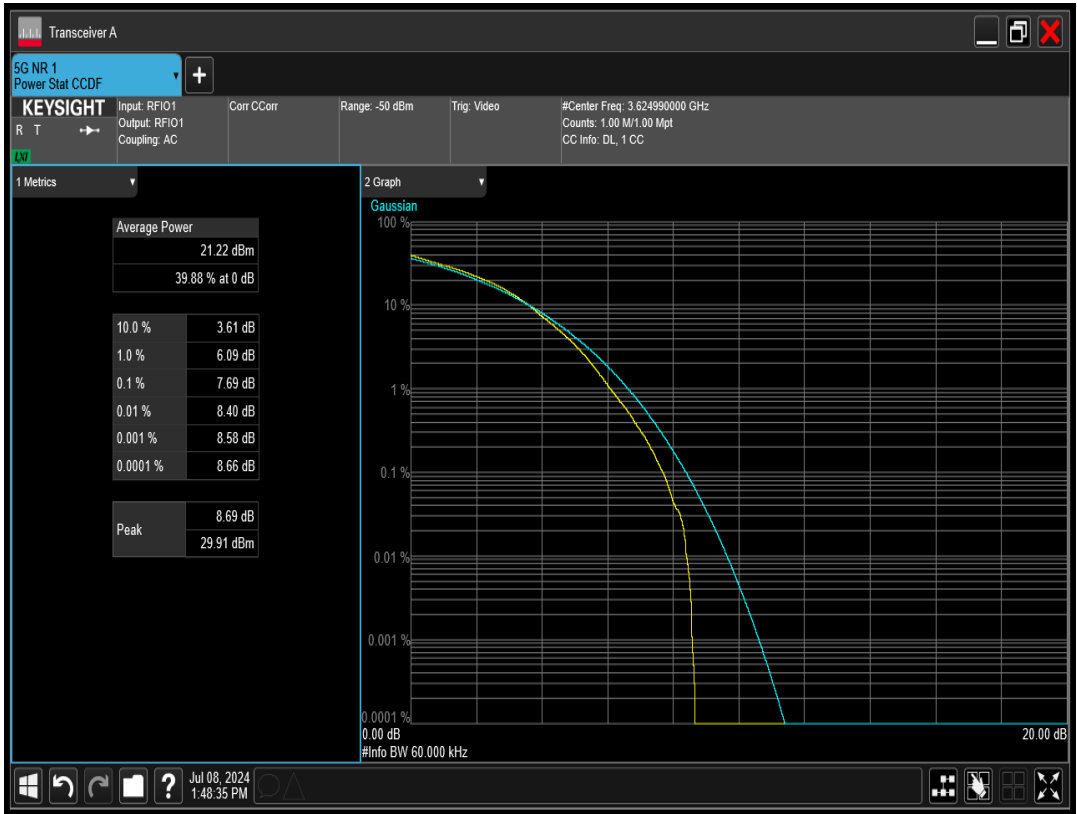


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=60MHz Channel=644666 RB=162@0

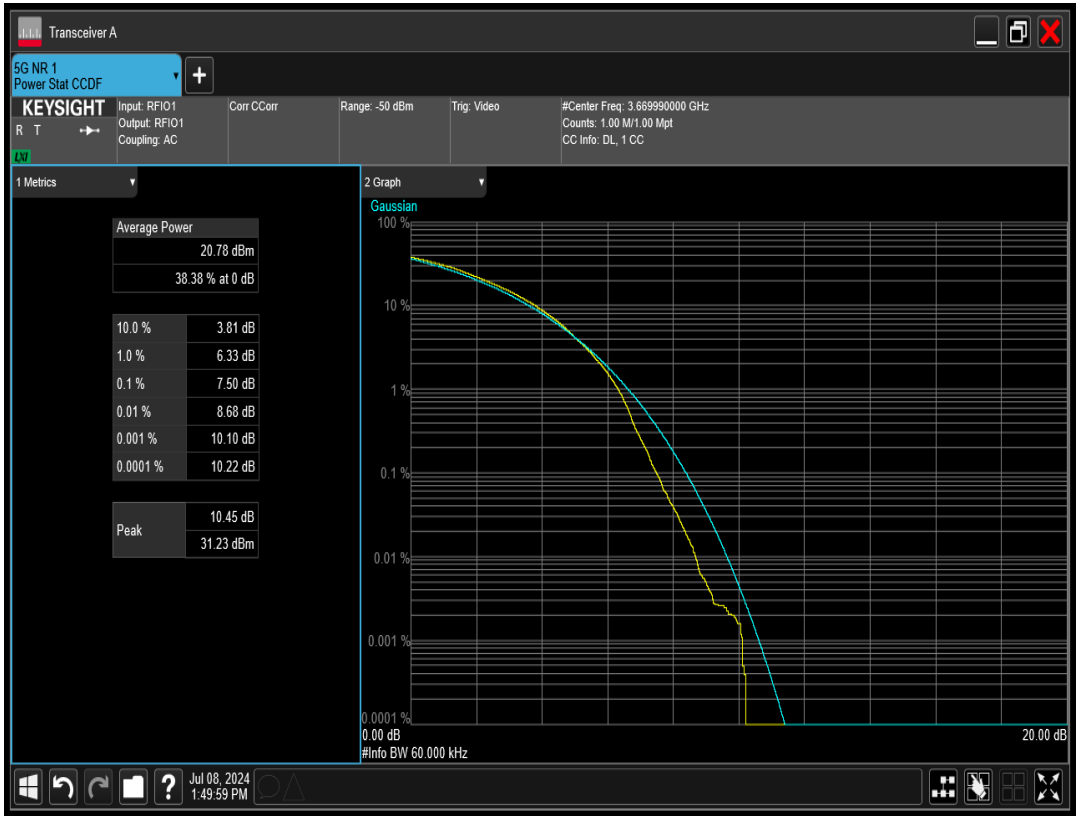


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=80MHz Channel=639334 RB=216@0

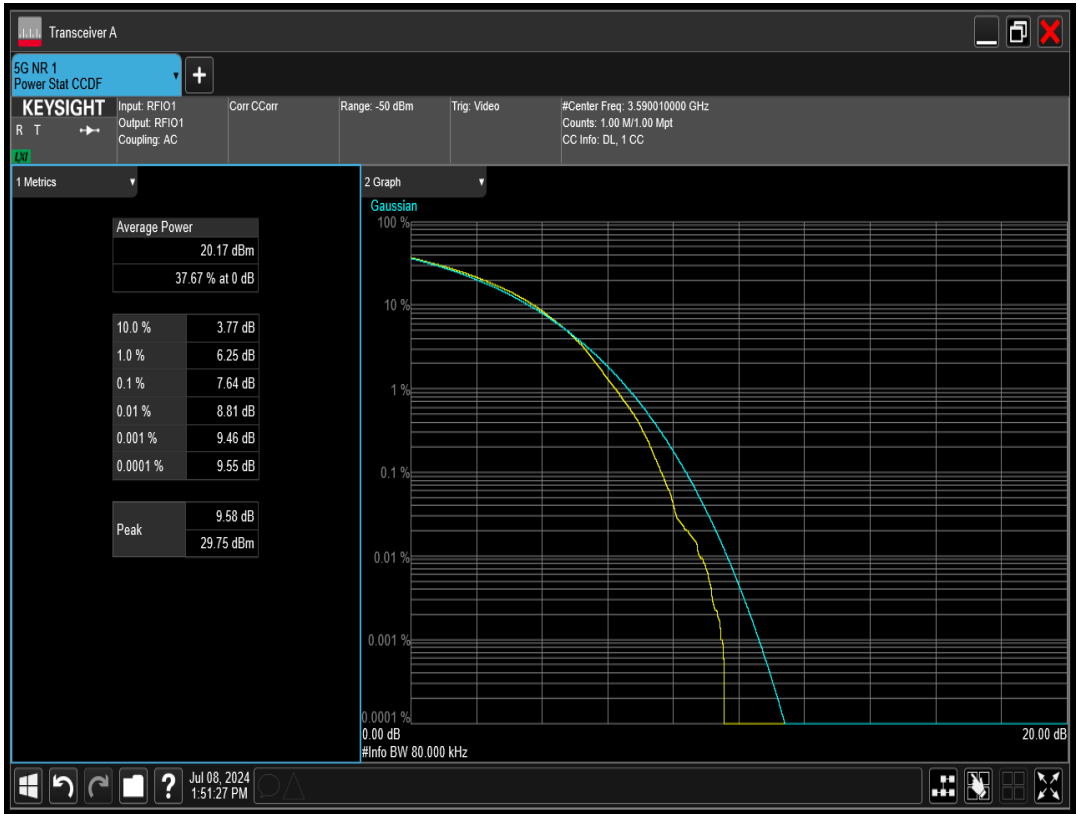


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=80MHz Channel=641666 RB=216@0

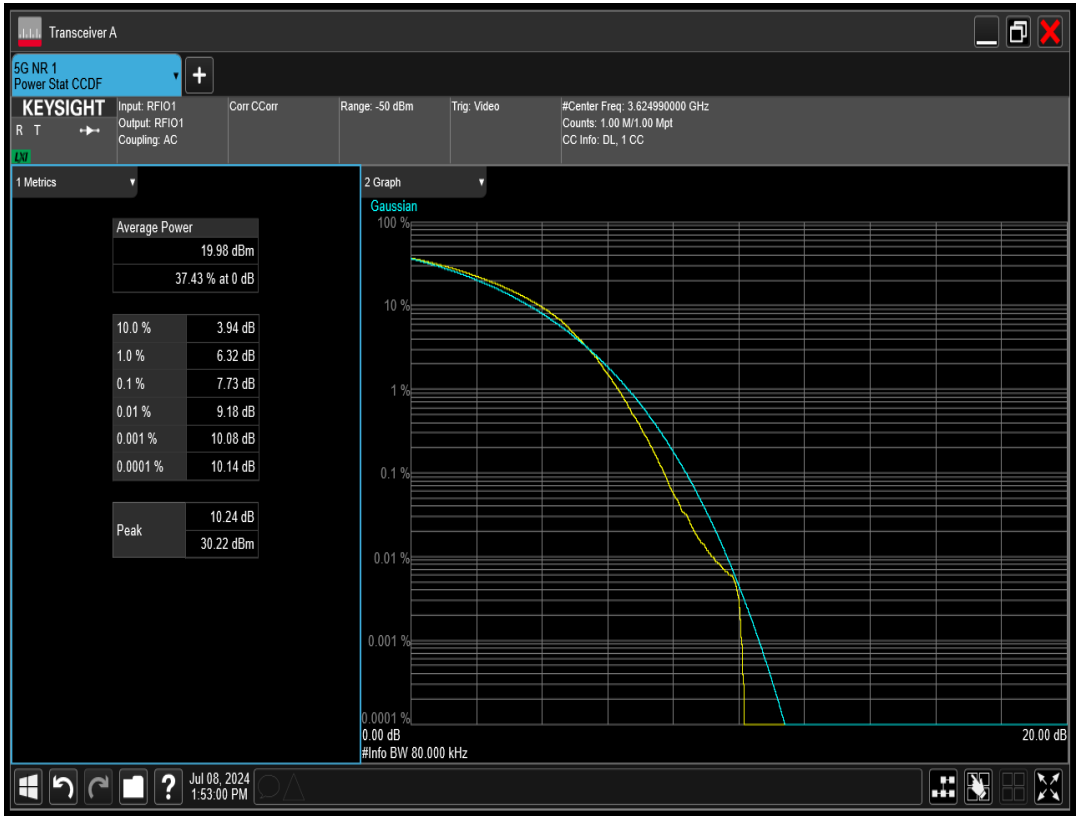


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=80MHz Channel=644000 RB=216@0

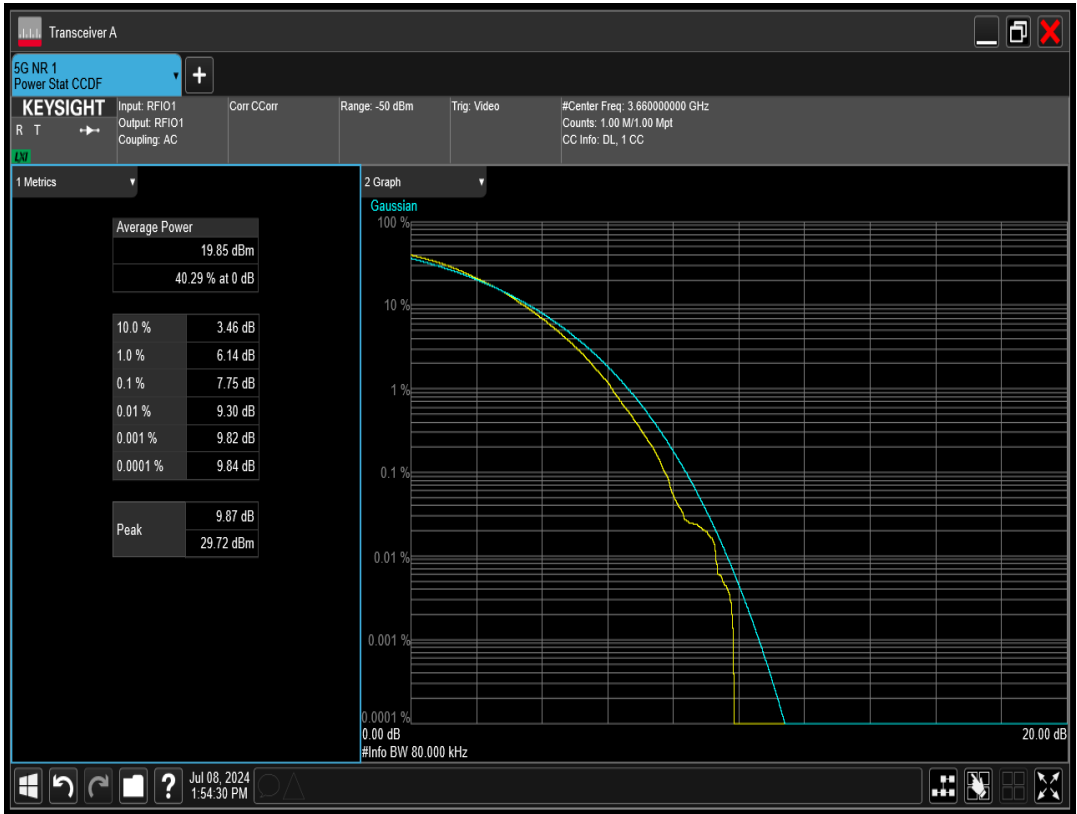


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=90MHz Channel=639668 RB=240@0

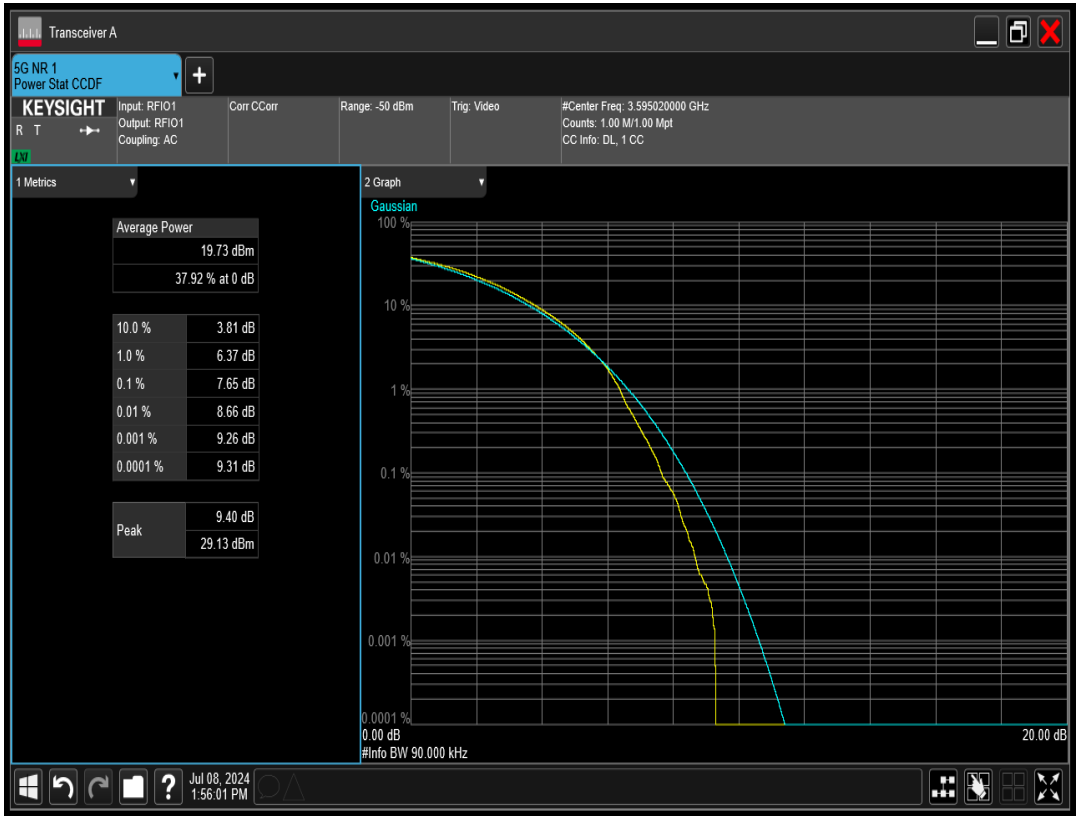


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=90MHz Channel=641666 RB=240@0

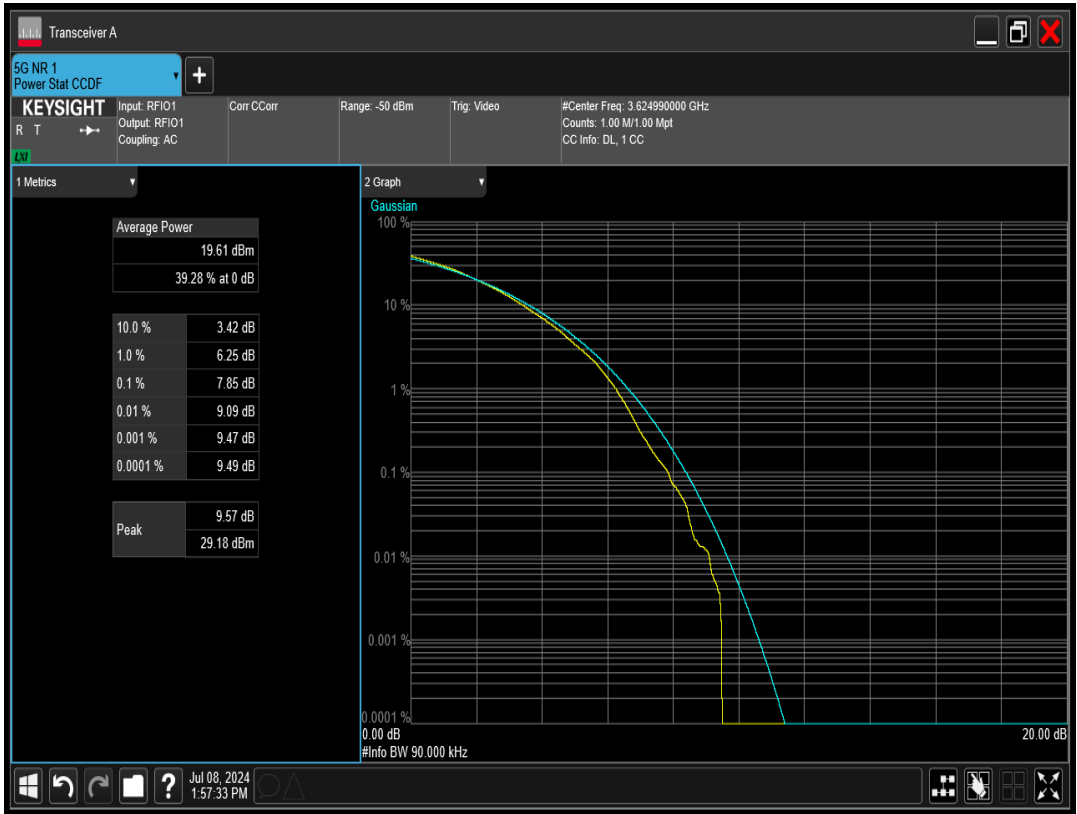


n77(3550-3700) SCS=30kHz DFT_QAM16 BW=90MHz Channel=643666 RB=240@0

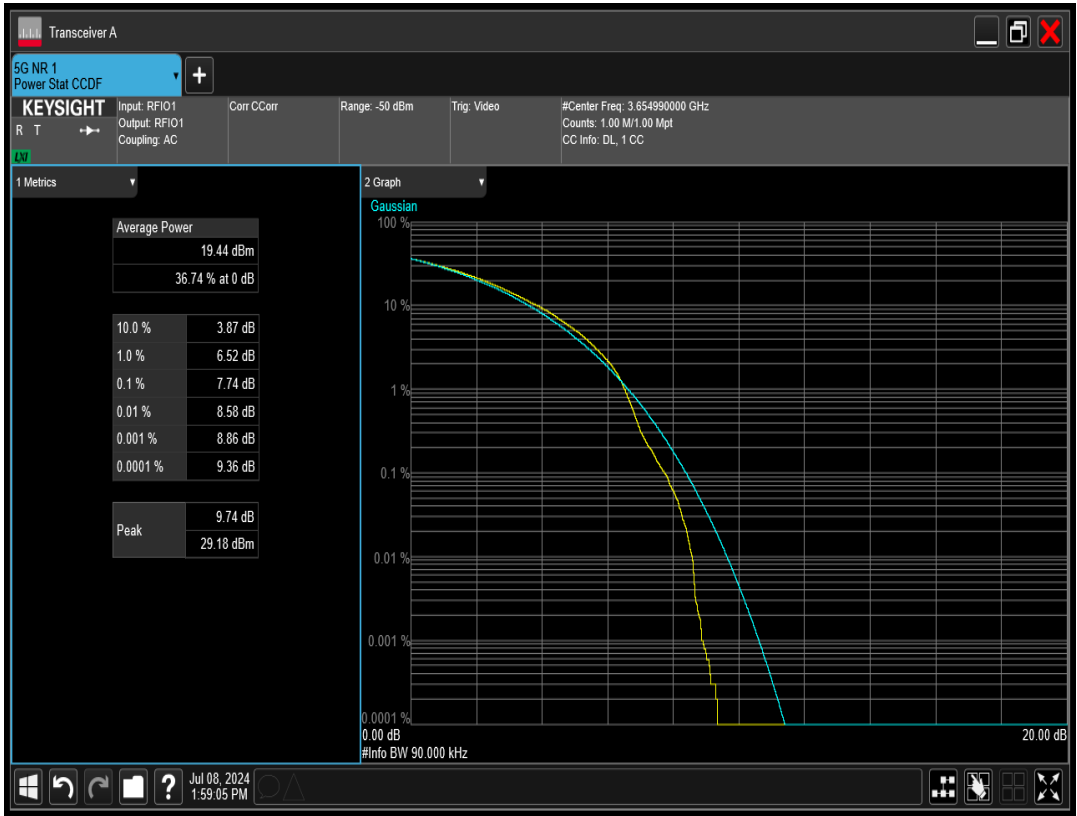


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=100MHz Channel=640000 RB=270@0

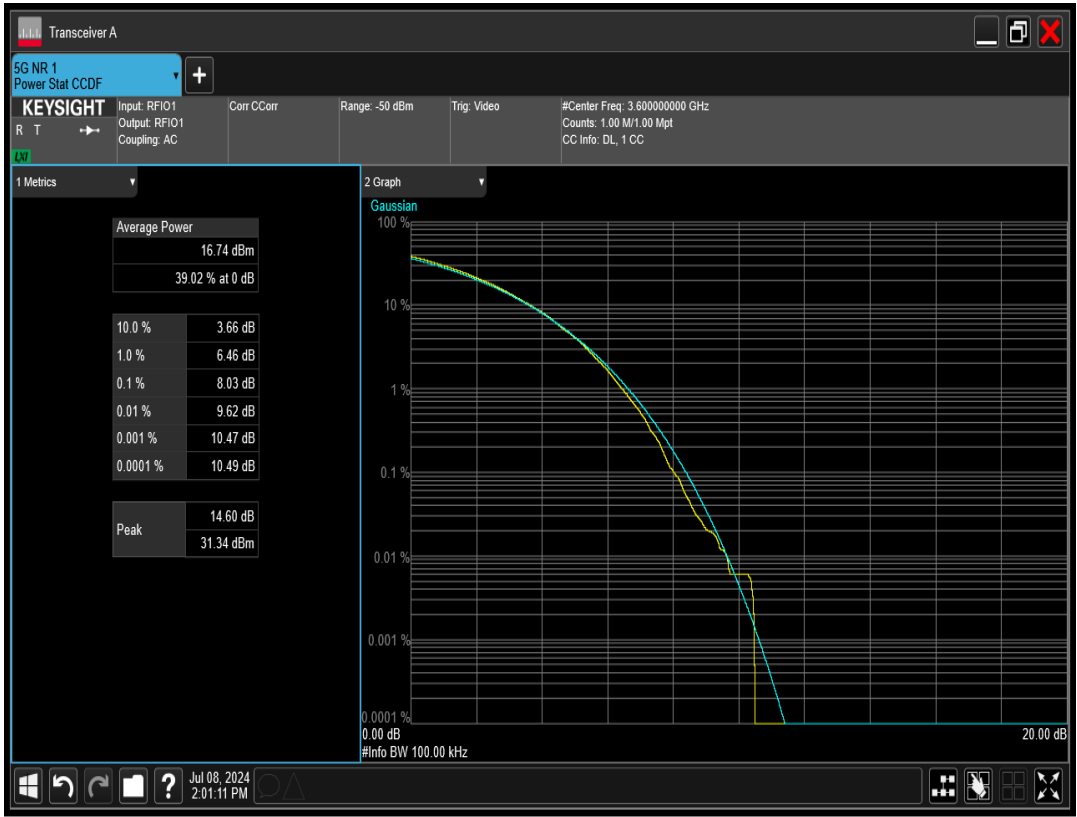


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=100MHz Channel=641666 RB=270@0

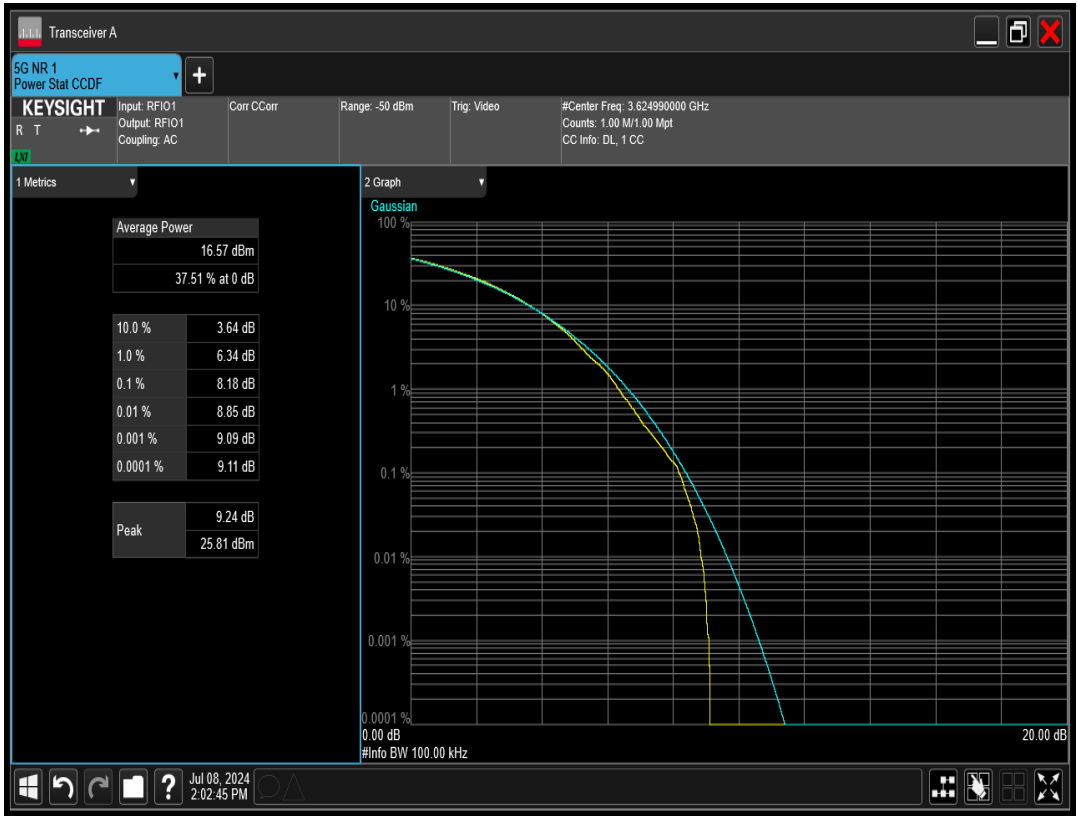


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=100MHz Channel=643332 RB=270@0

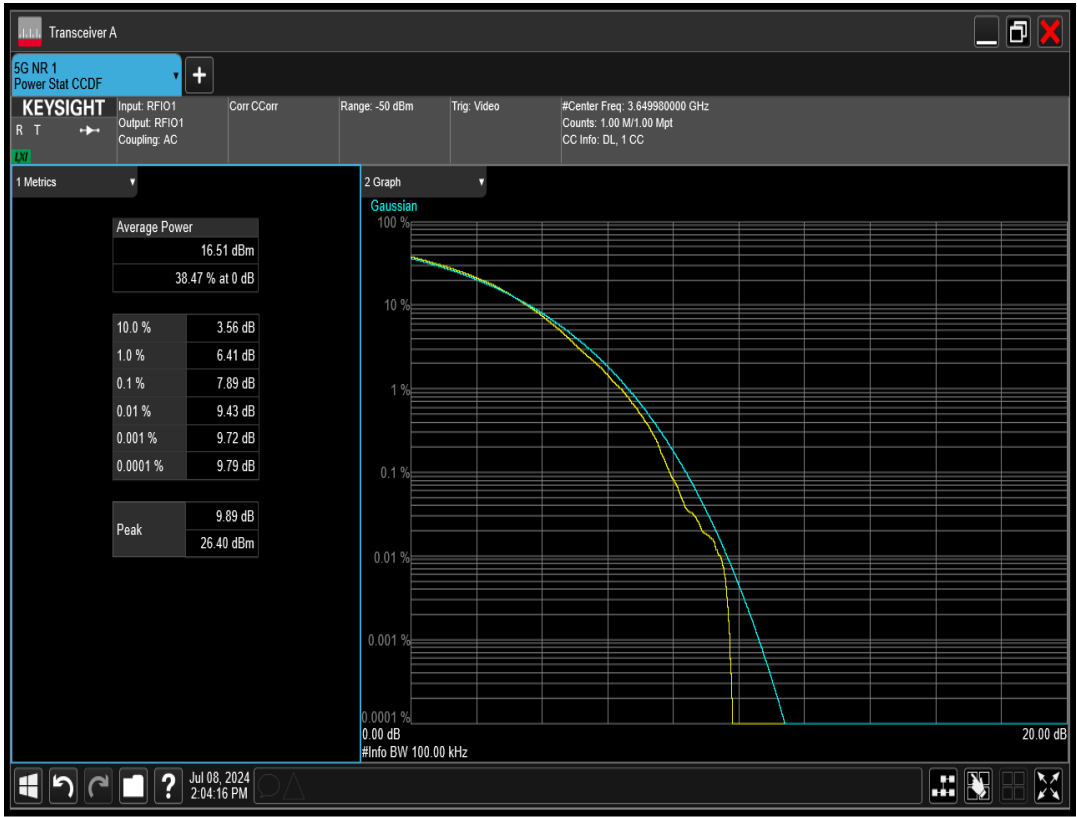


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=10MHz Channel=637000 RB=24@0

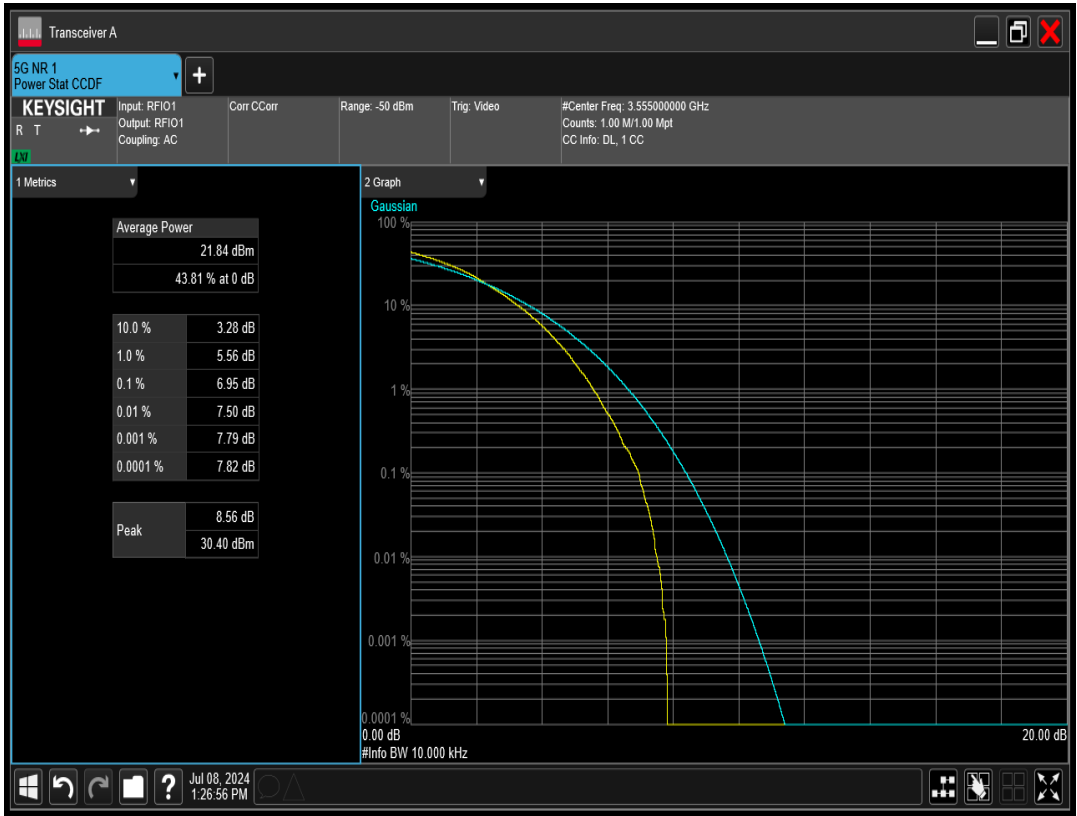


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=10MHz Channel=641666 RB=24@0

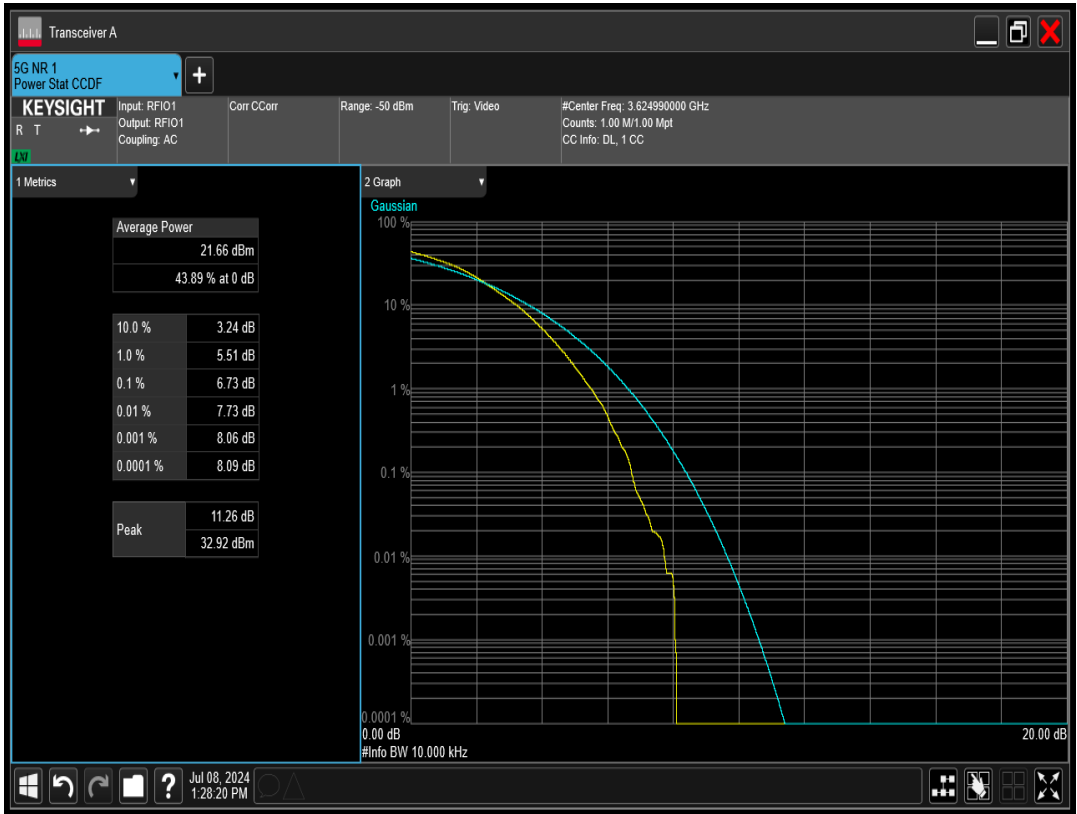


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=10MHz Channel=646332 RB=24@0

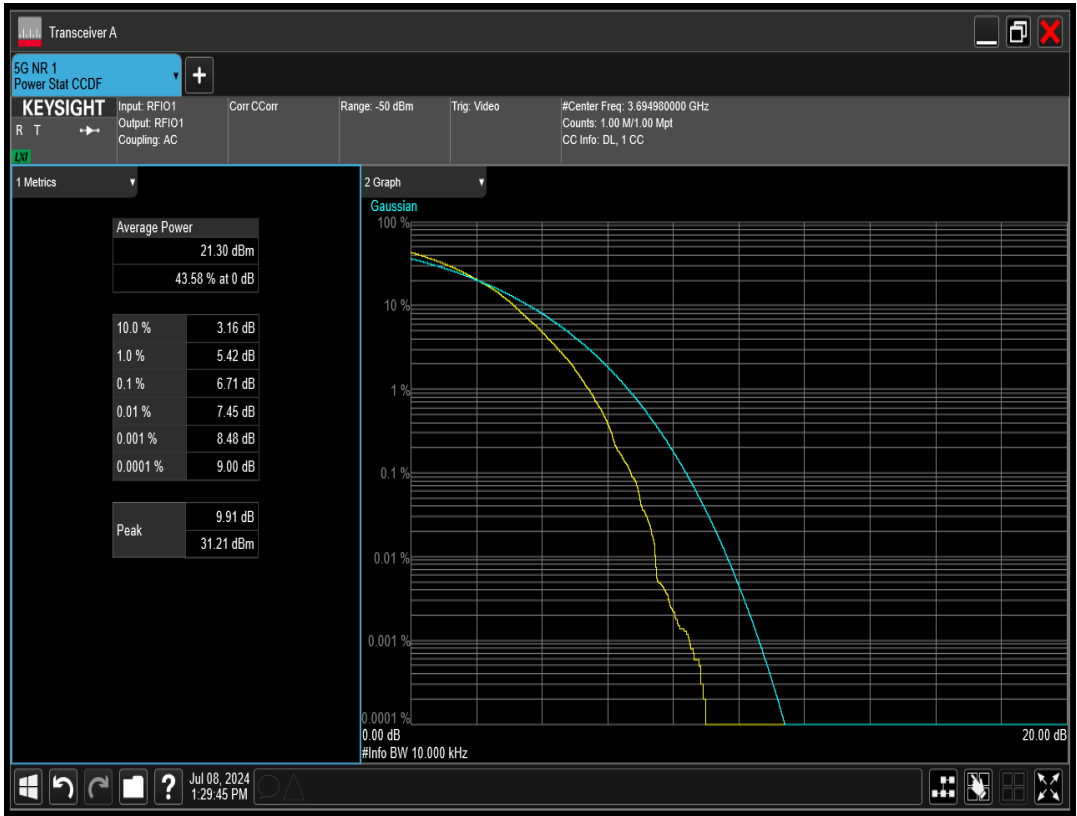


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=15MHz Channel=637168 RB=36@0

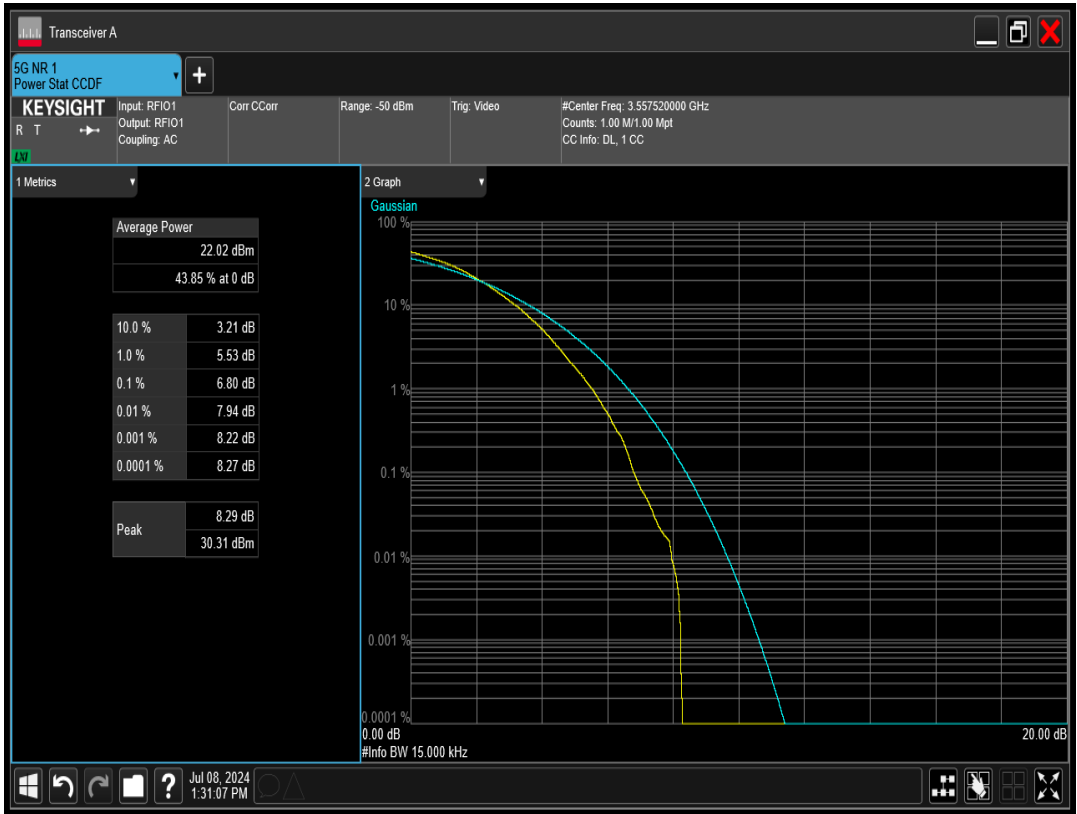


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=15MHz Channel=641666 RB=36@0

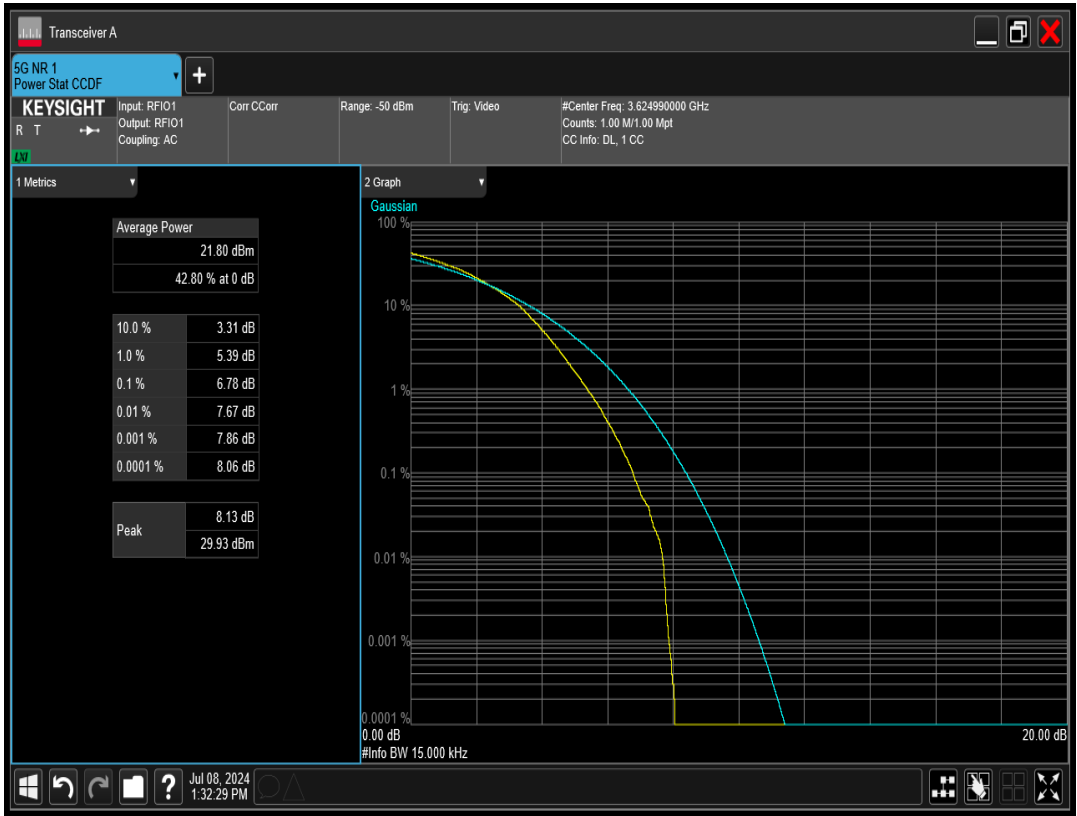


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=15MHz Channel=646166 RB=36@0

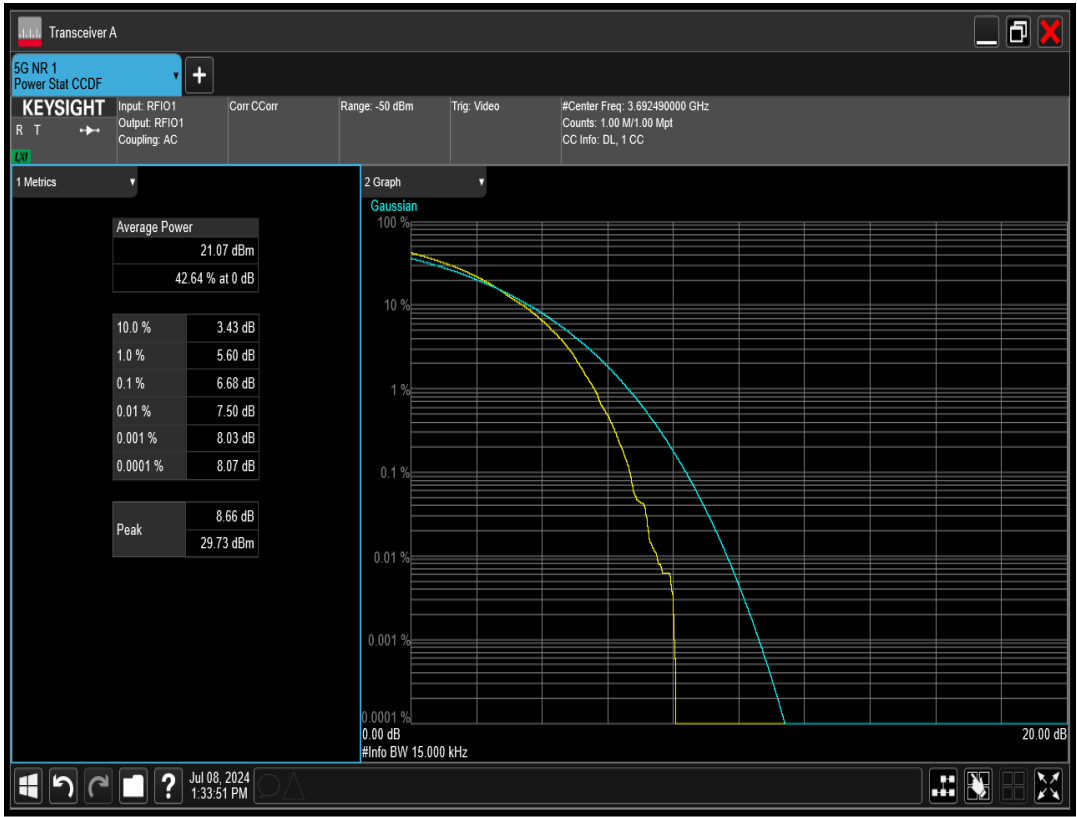


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=20MHz Channel=637334 RB=50@0

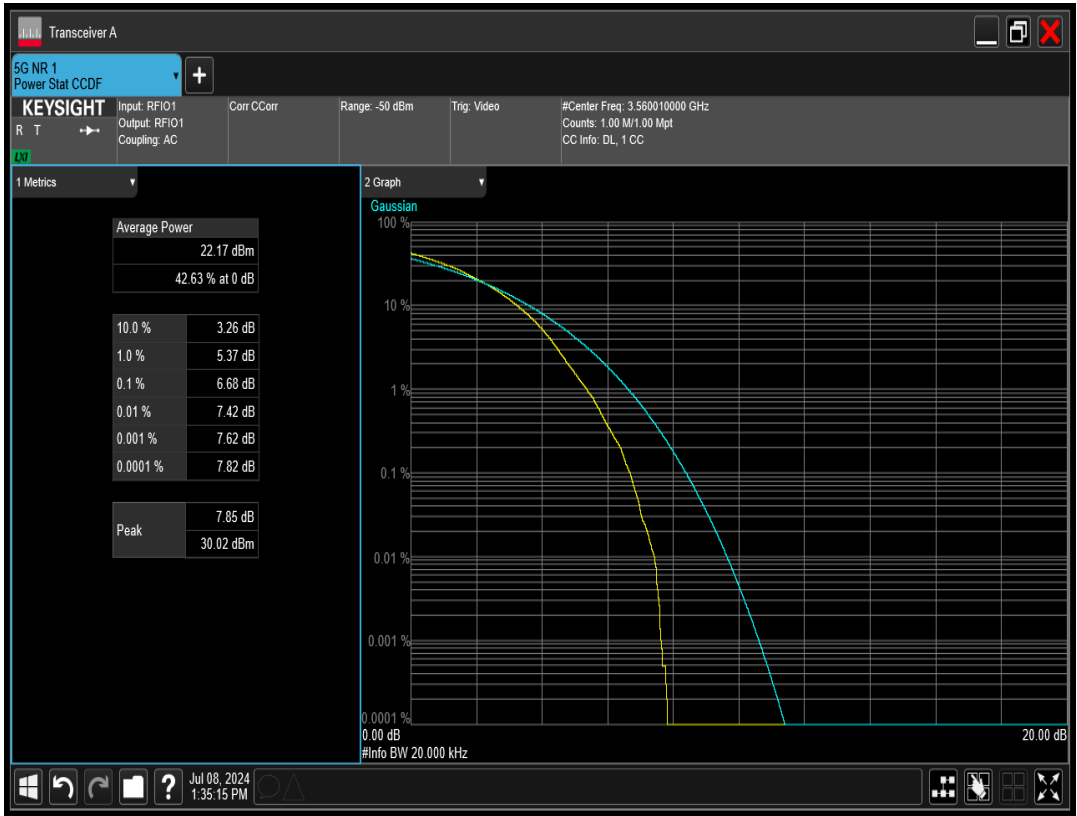


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=20MHz Channel=641666 RB=50@0

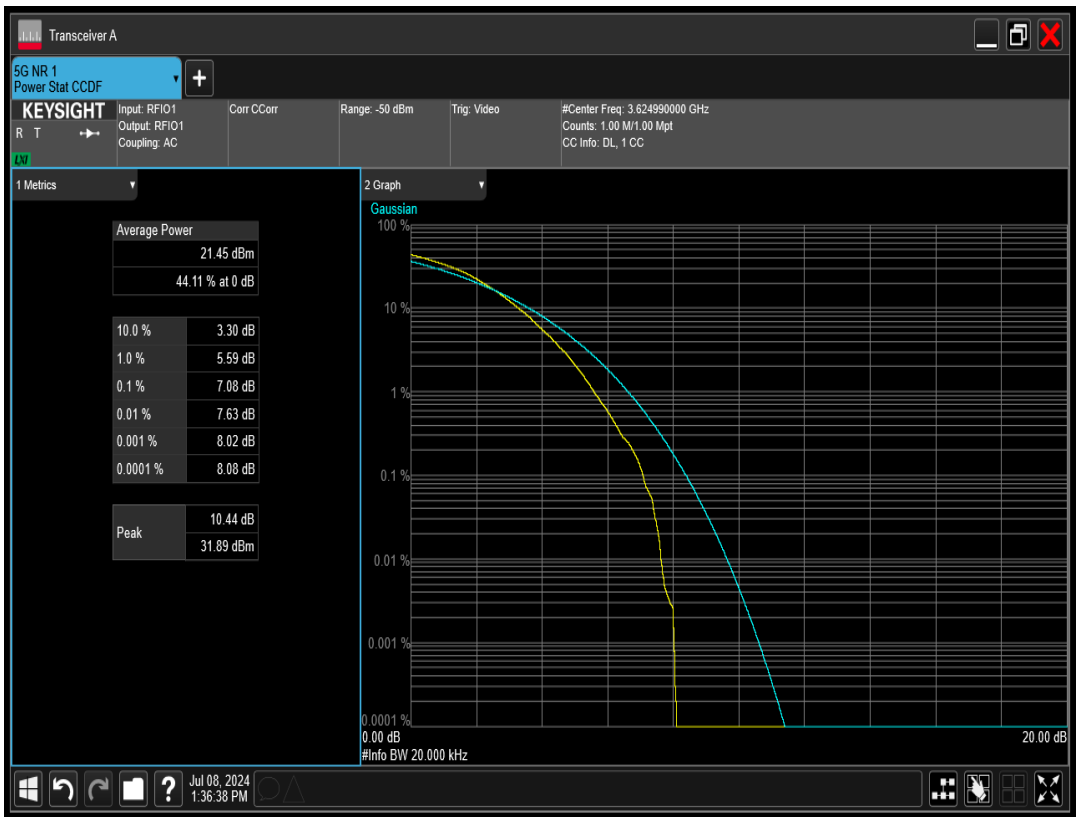


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=20MHz Channel=646000 RB=50@0

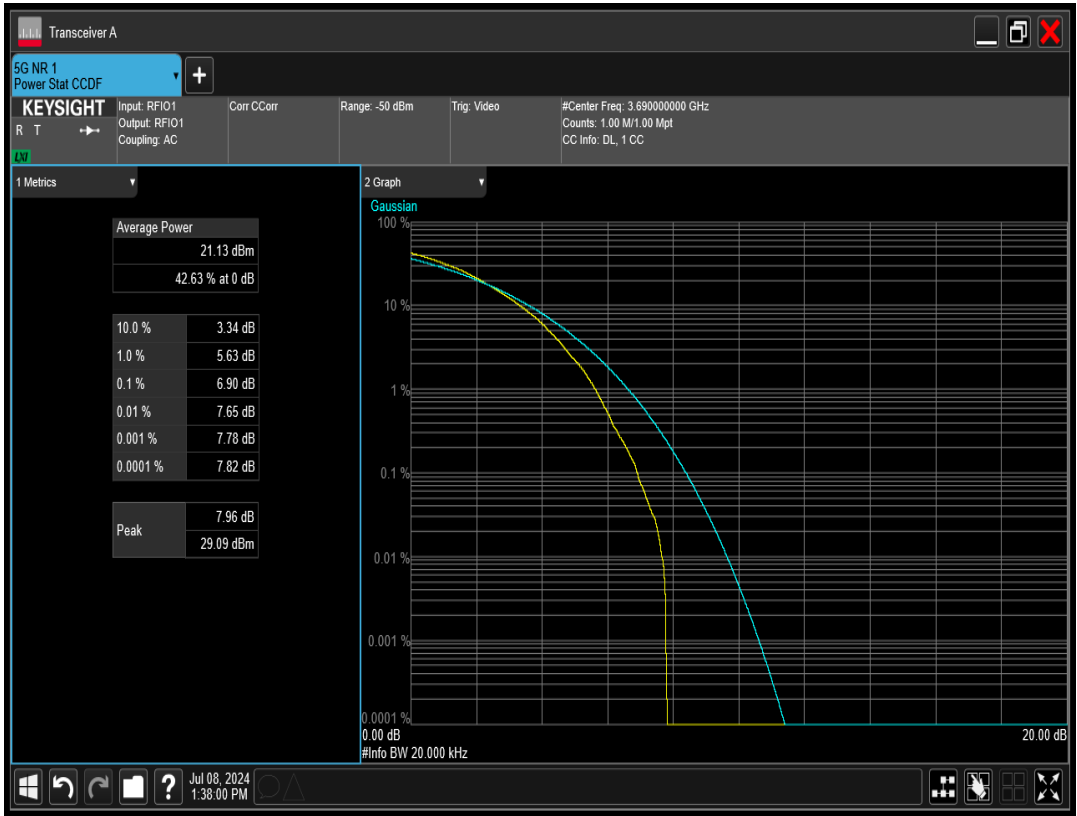


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=40MHz Channel=638000 RB=100@0

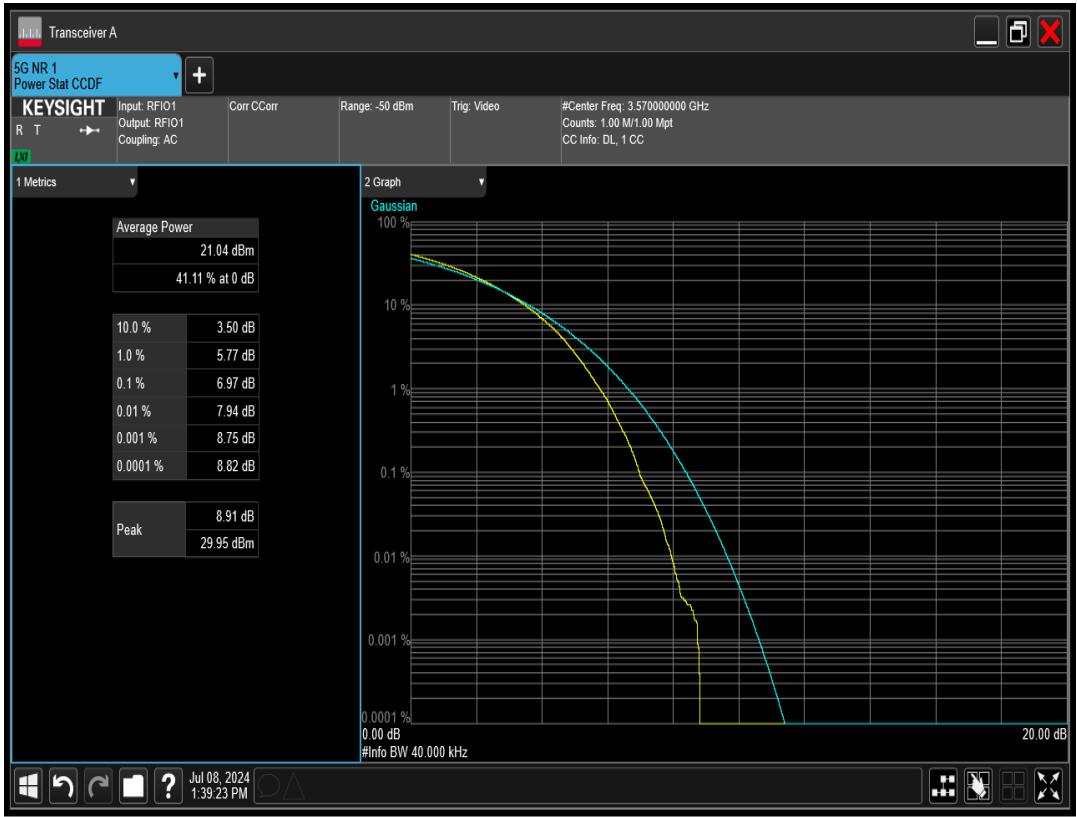


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=40MHz Channel=641666 RB=100@0

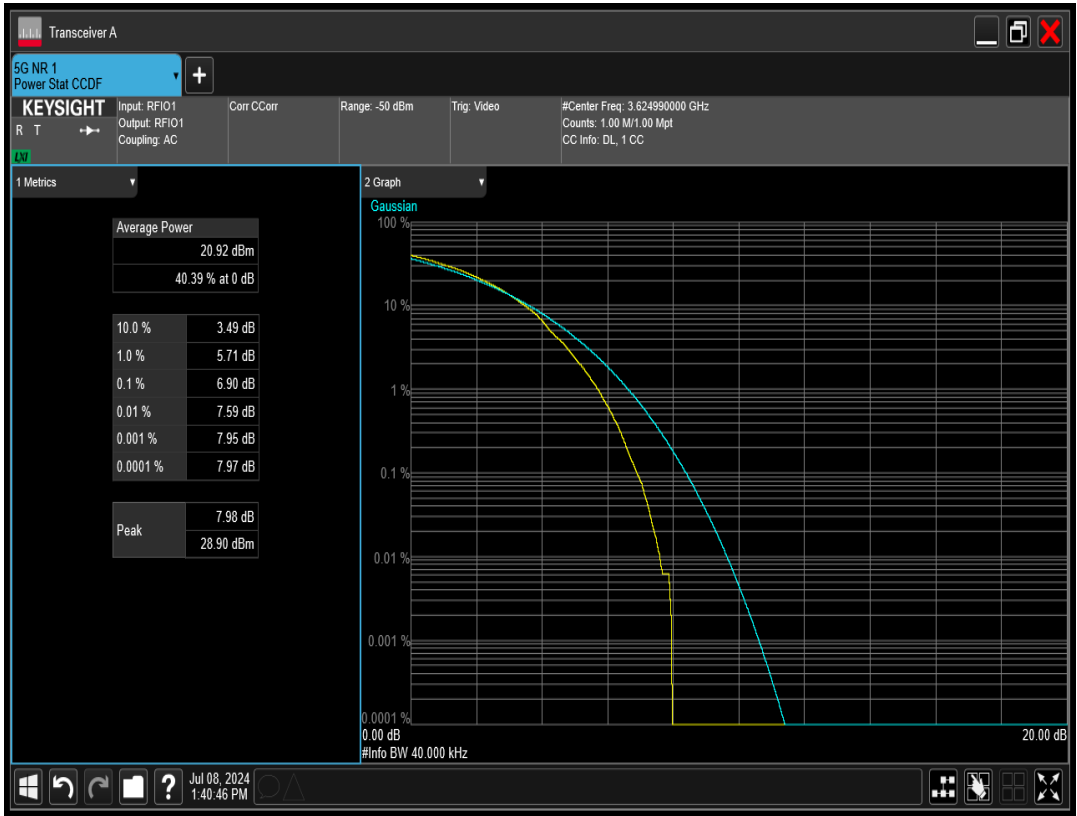


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=40MHz Channel=645332 RB=100@0

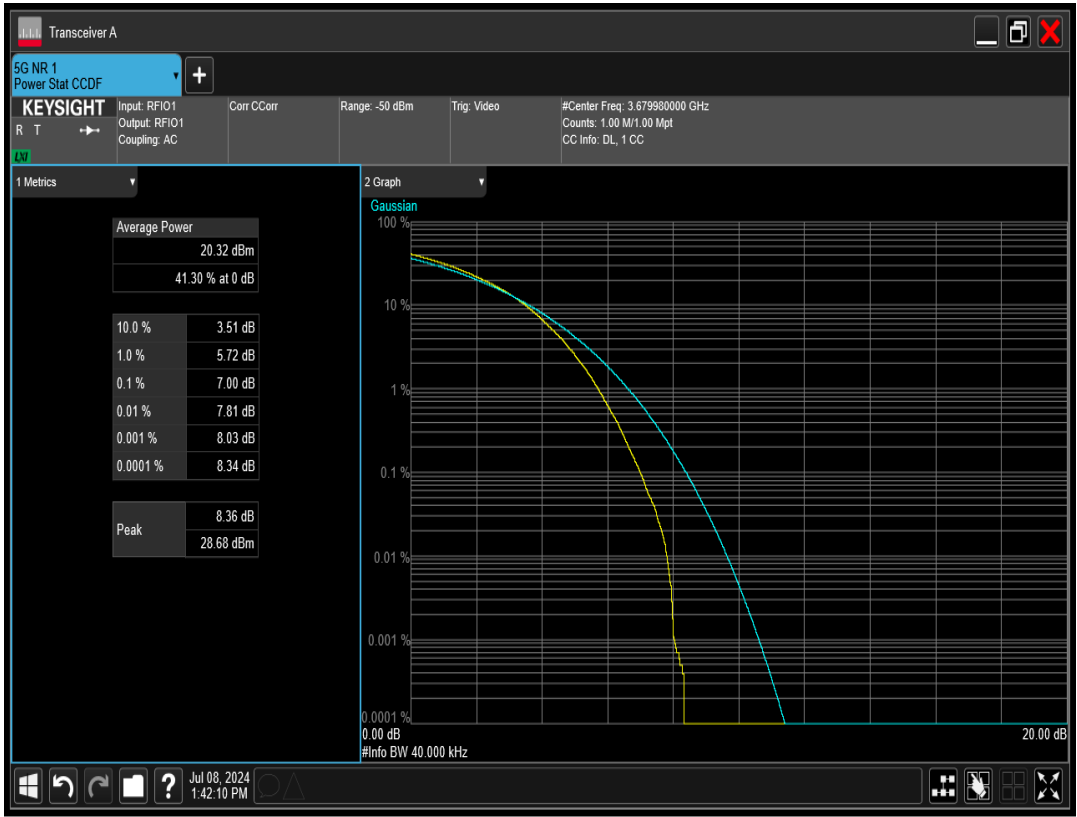


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=50MHz Channel=638334 RB=128@0

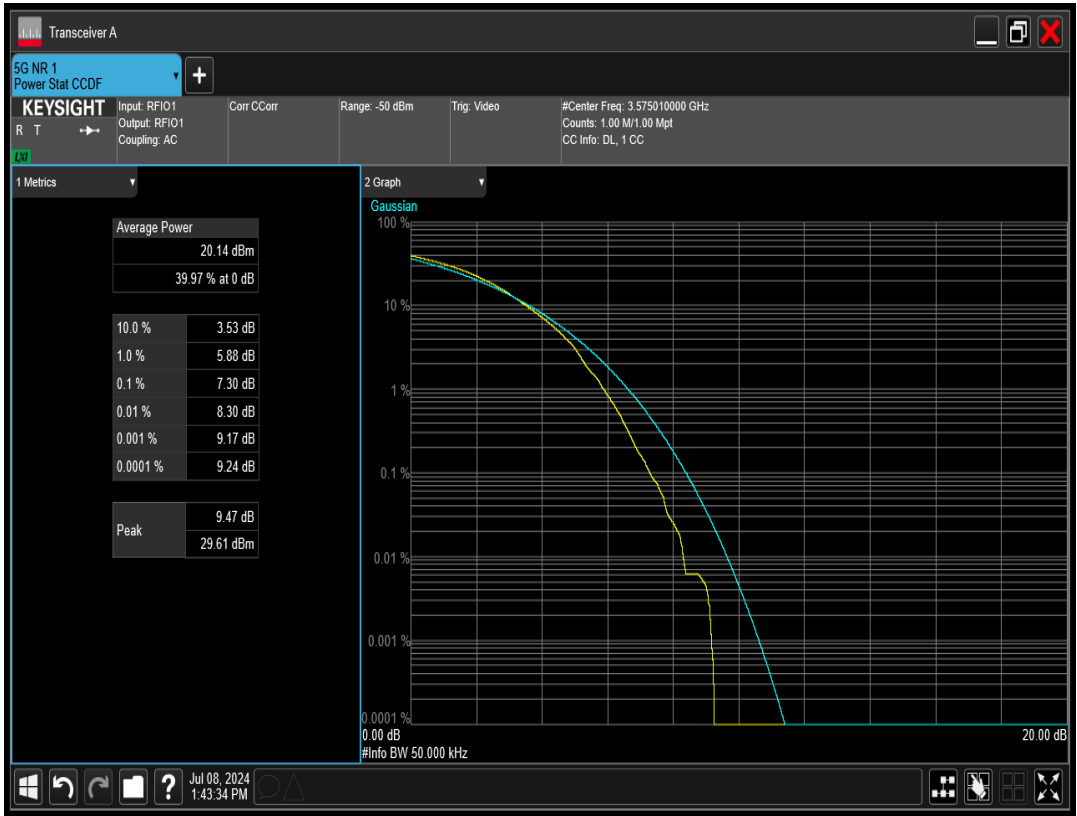


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=50MHz Channel=641666 RB=128@0

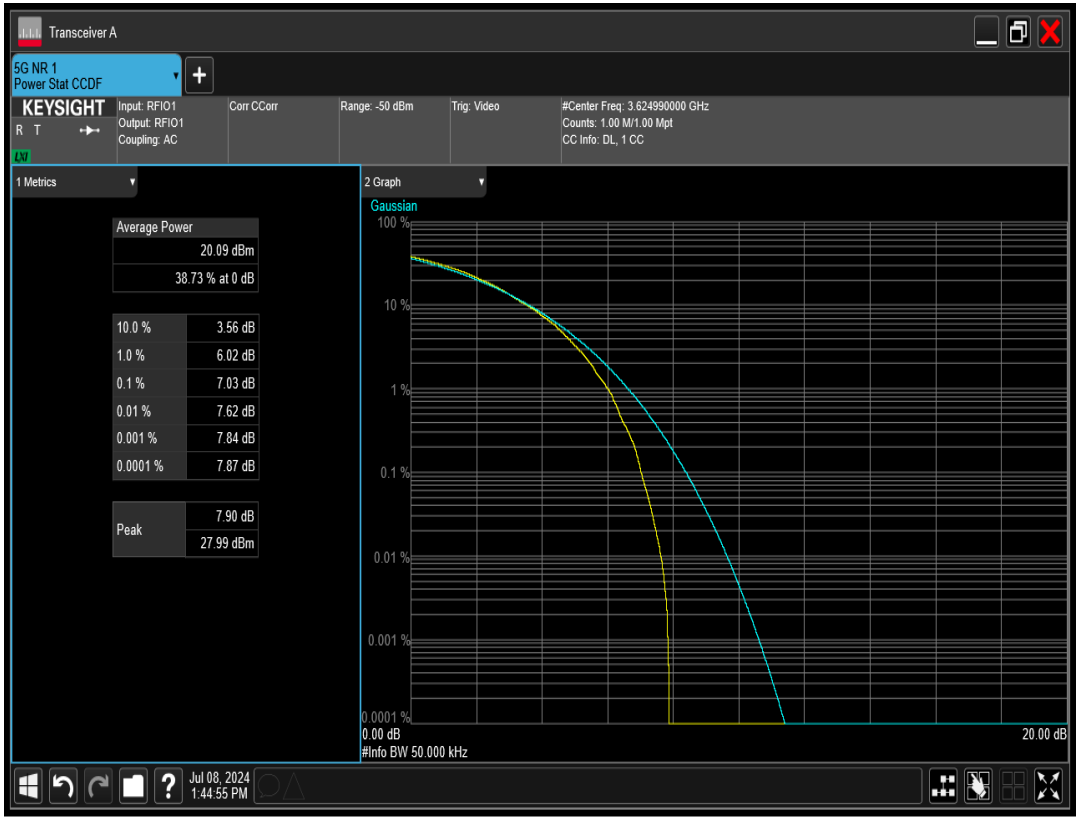


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=50MHz Channel=645000 RB=128@0

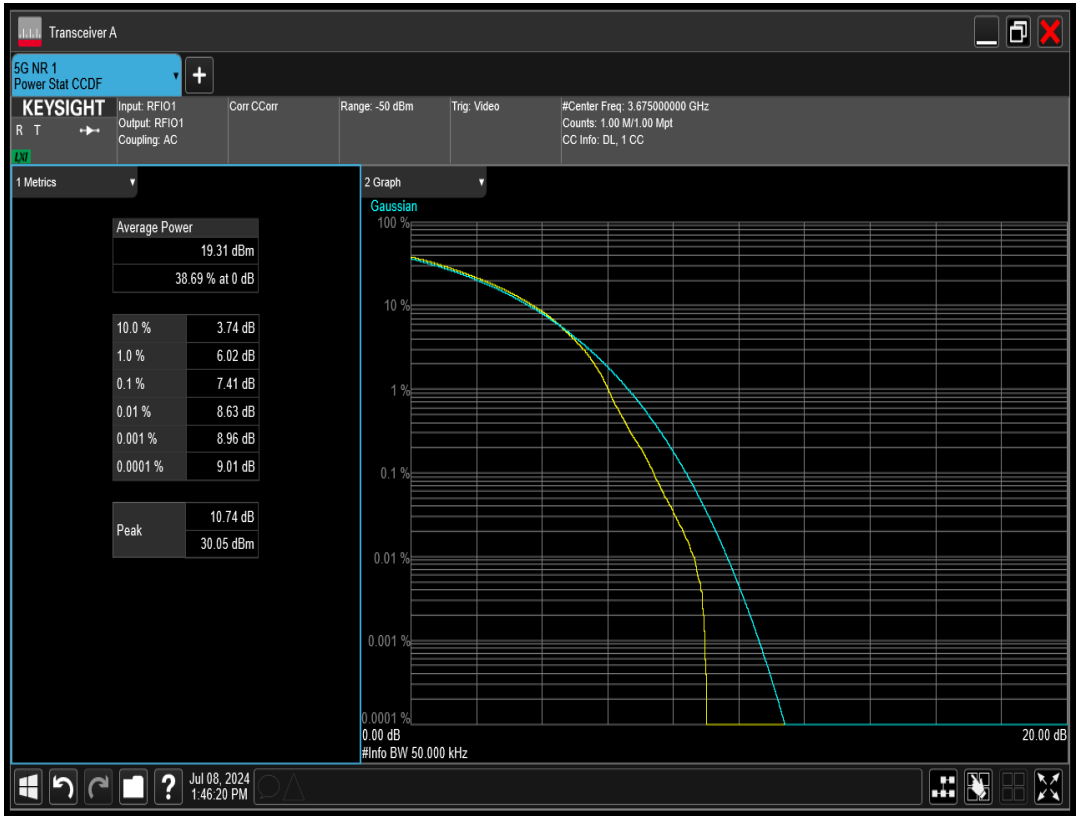


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=60MHz Channel=638668 RB=162@0

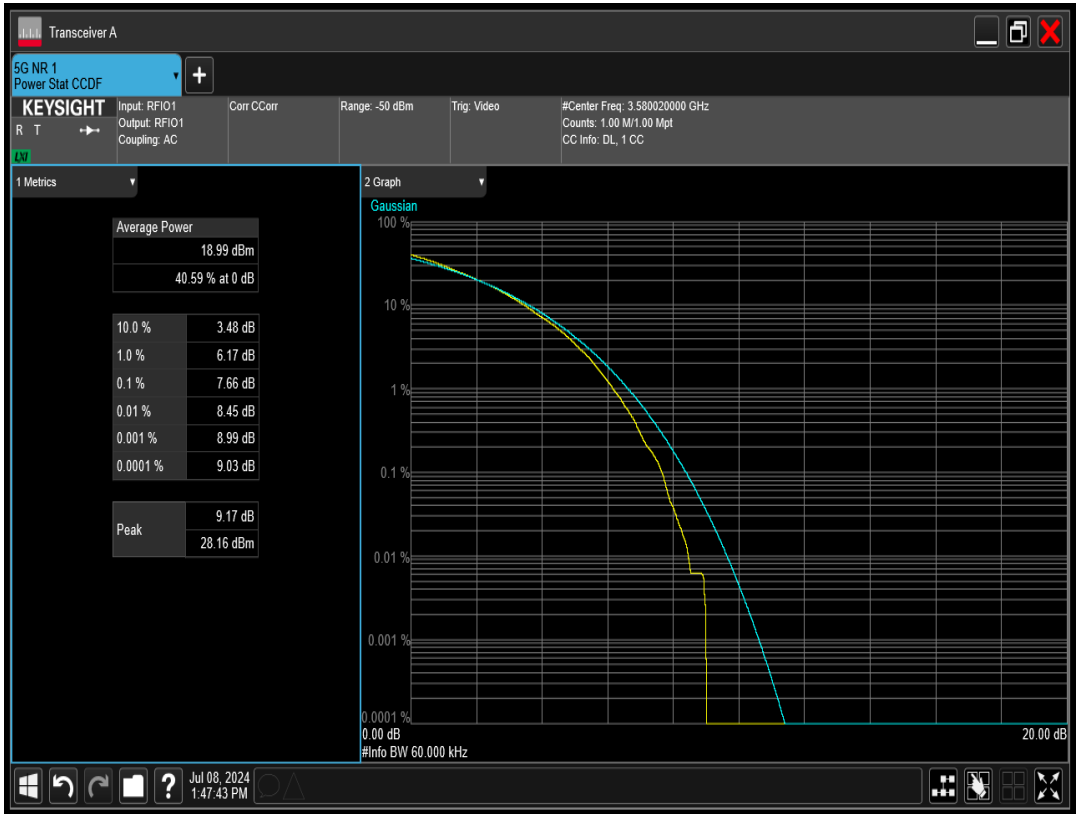


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=60MHz Channel=641666 RB=162@0

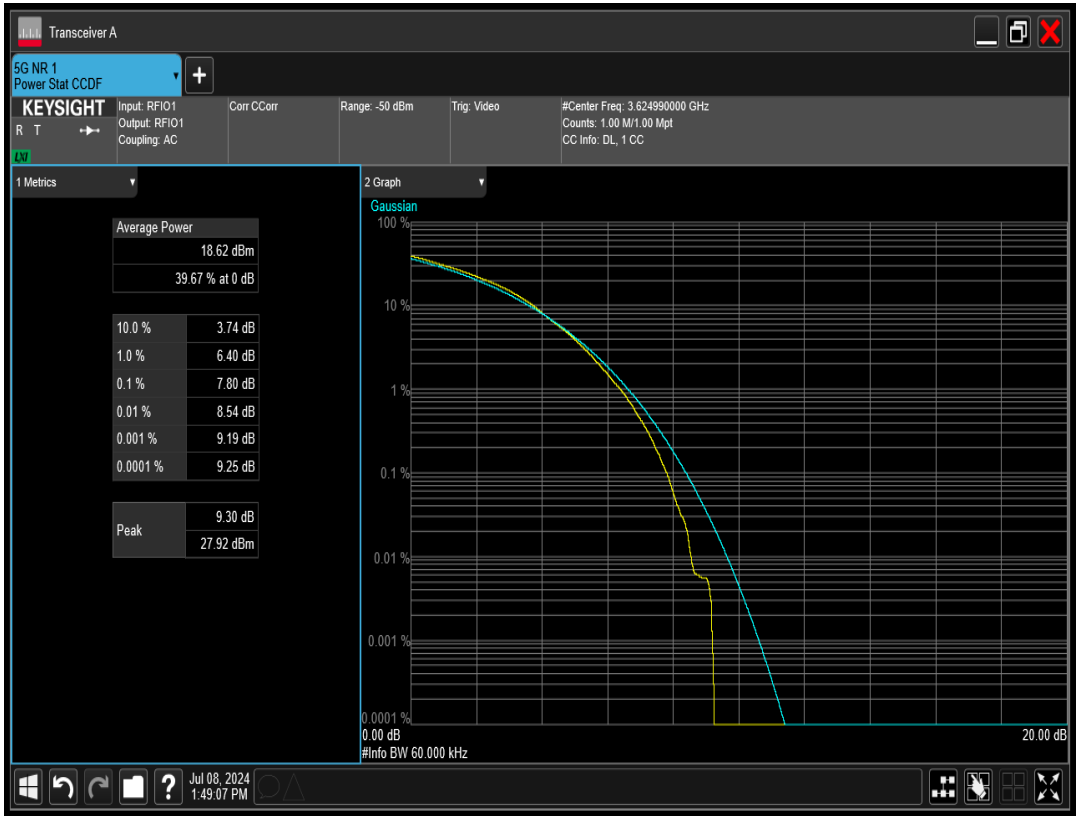


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=60MHz Channel=644666 RB=162@0

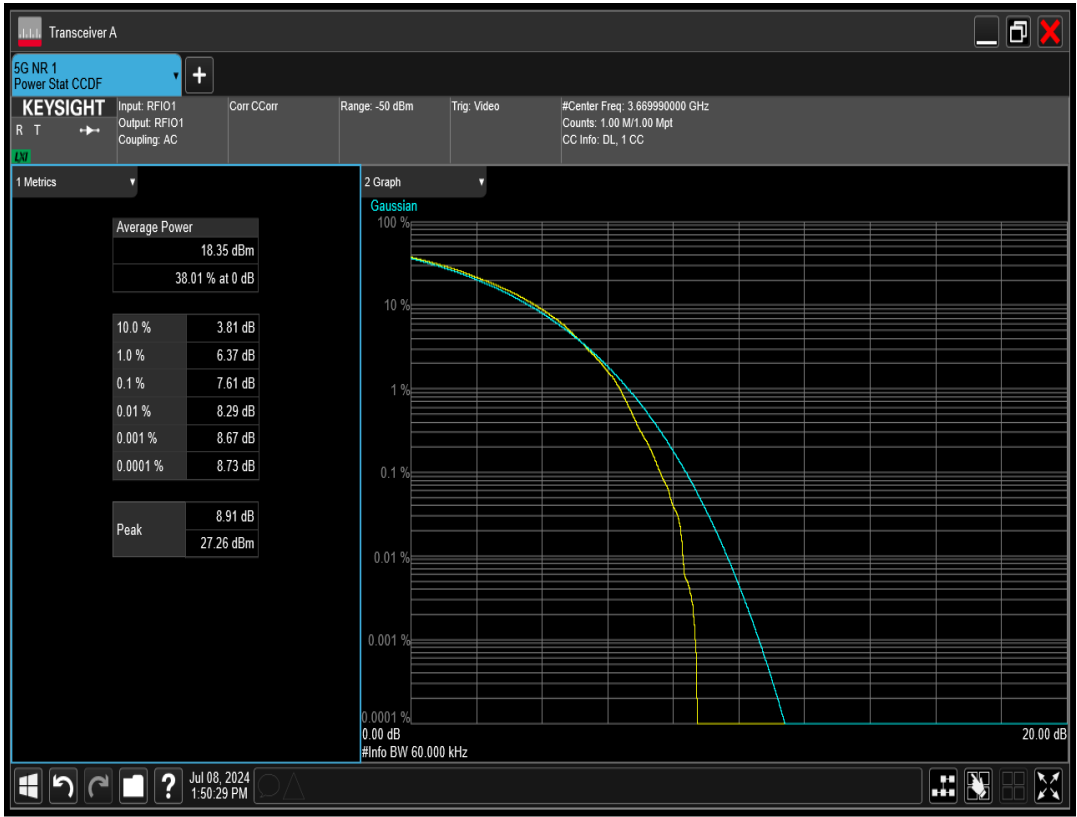


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=80MHz Channel=639334 RB=216@0

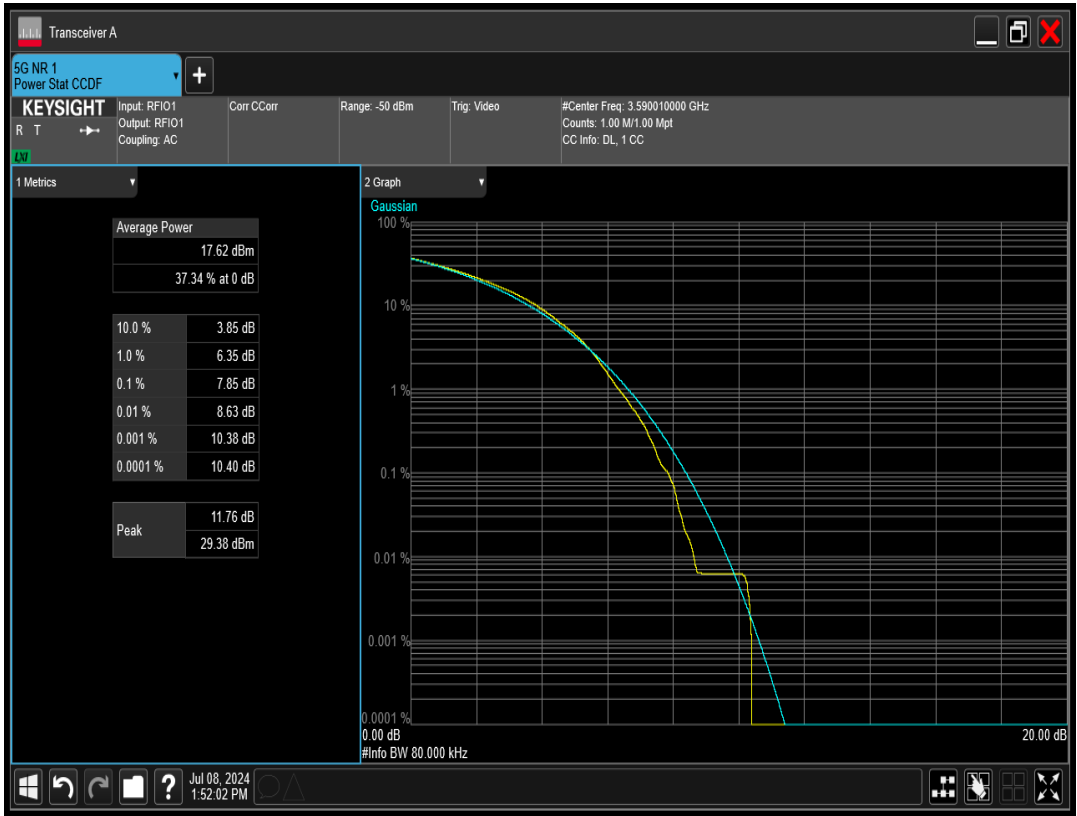


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=80MHz Channel=641666 RB=216@0

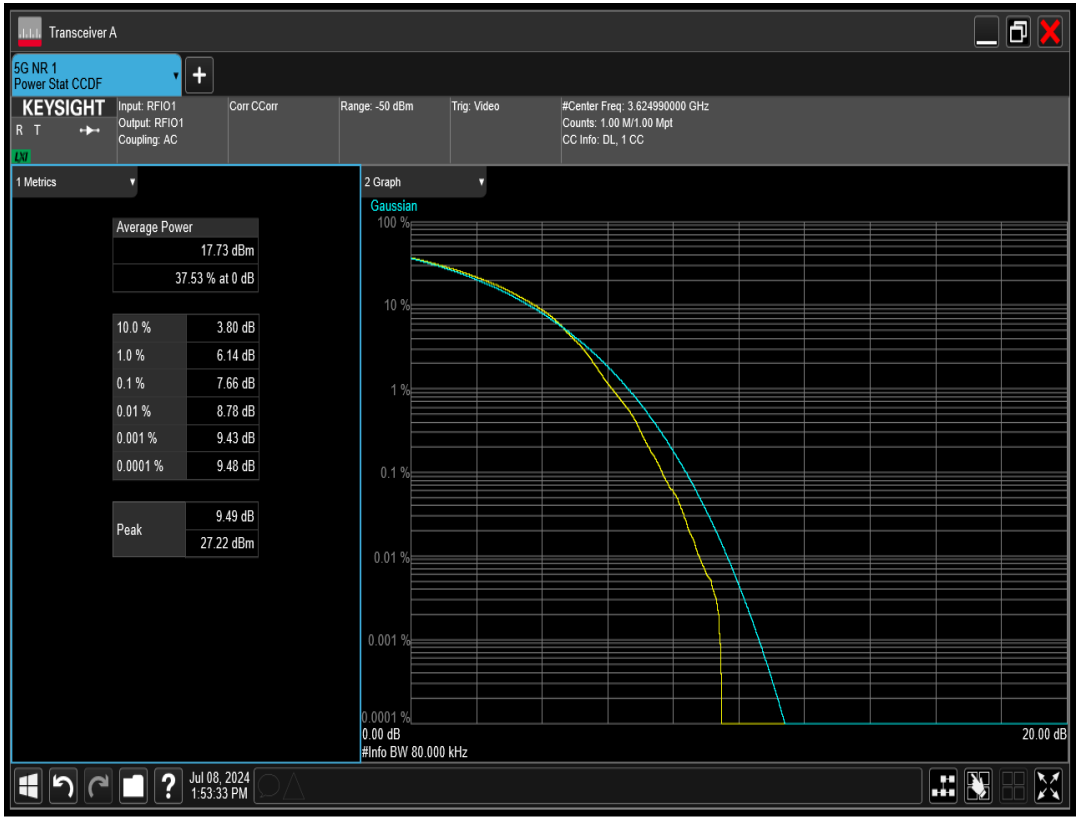


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=80MHz Channel=644000 RB=216@0

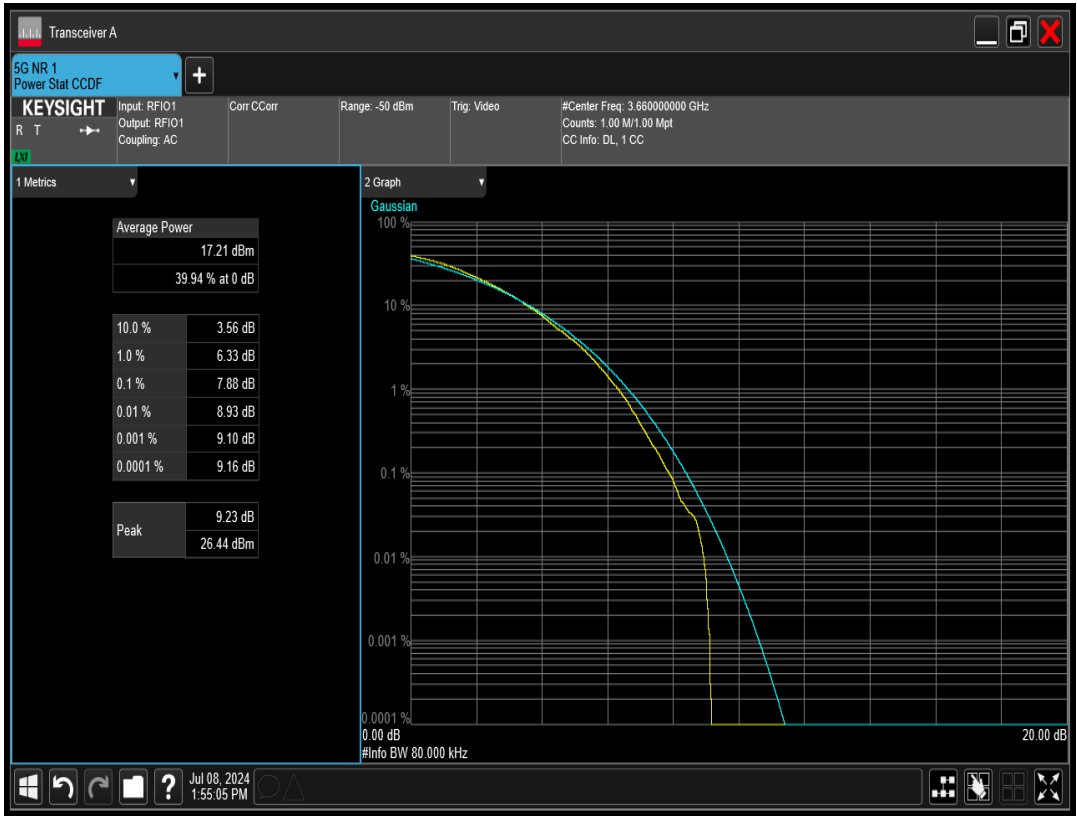


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=90MHz Channel=639668 RB=240@0

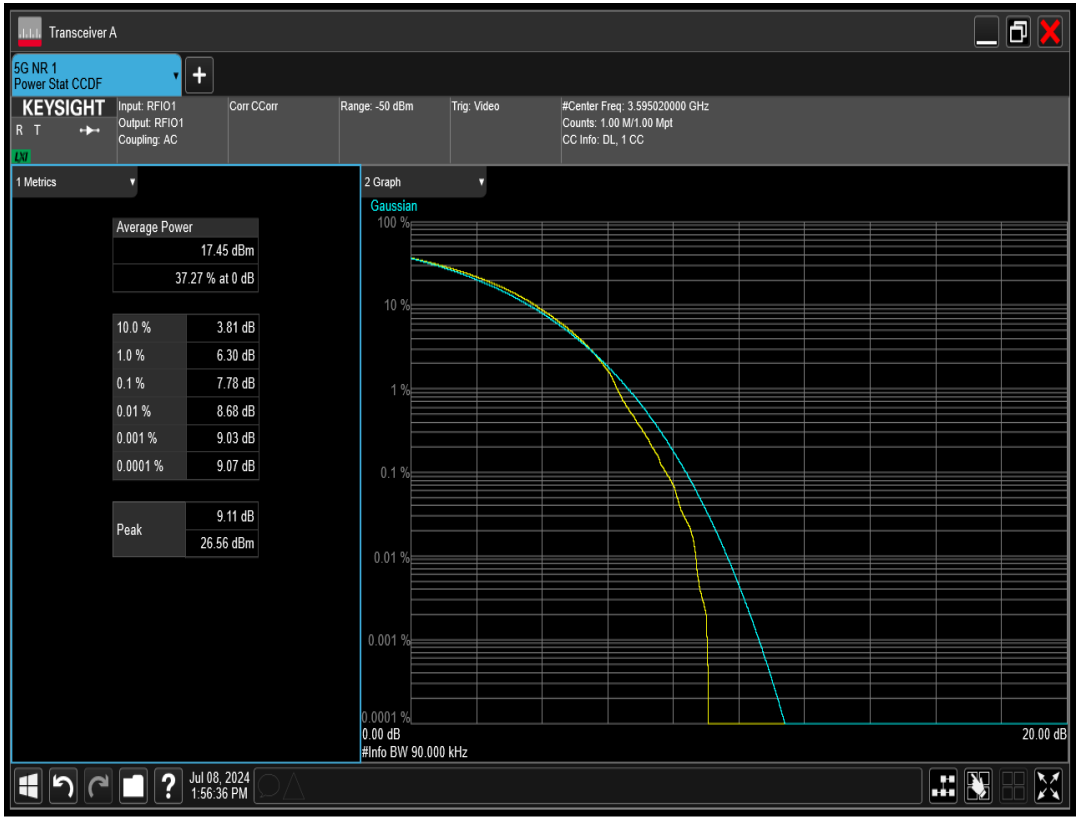


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=90MHz Channel=641666 RB=240@0

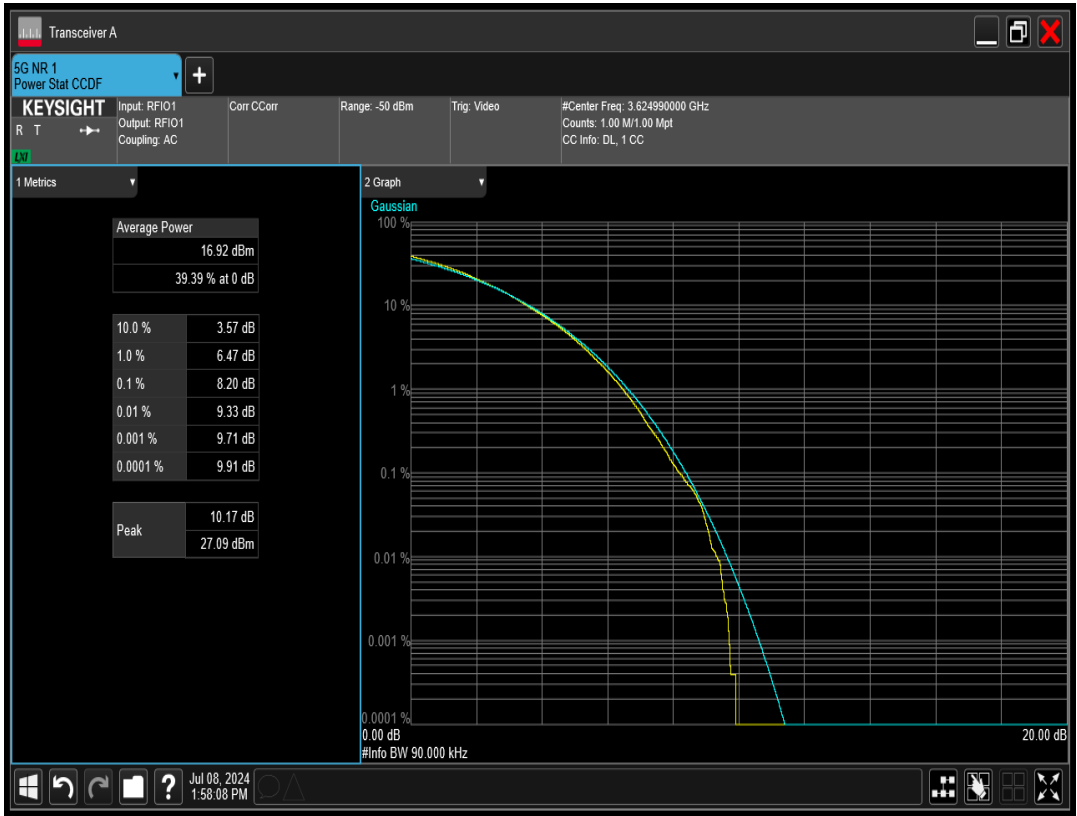


n77(3550-3700) SCS=30kHz DFT_QAM256 BW=90MHz Channel=643666 RB=240@0

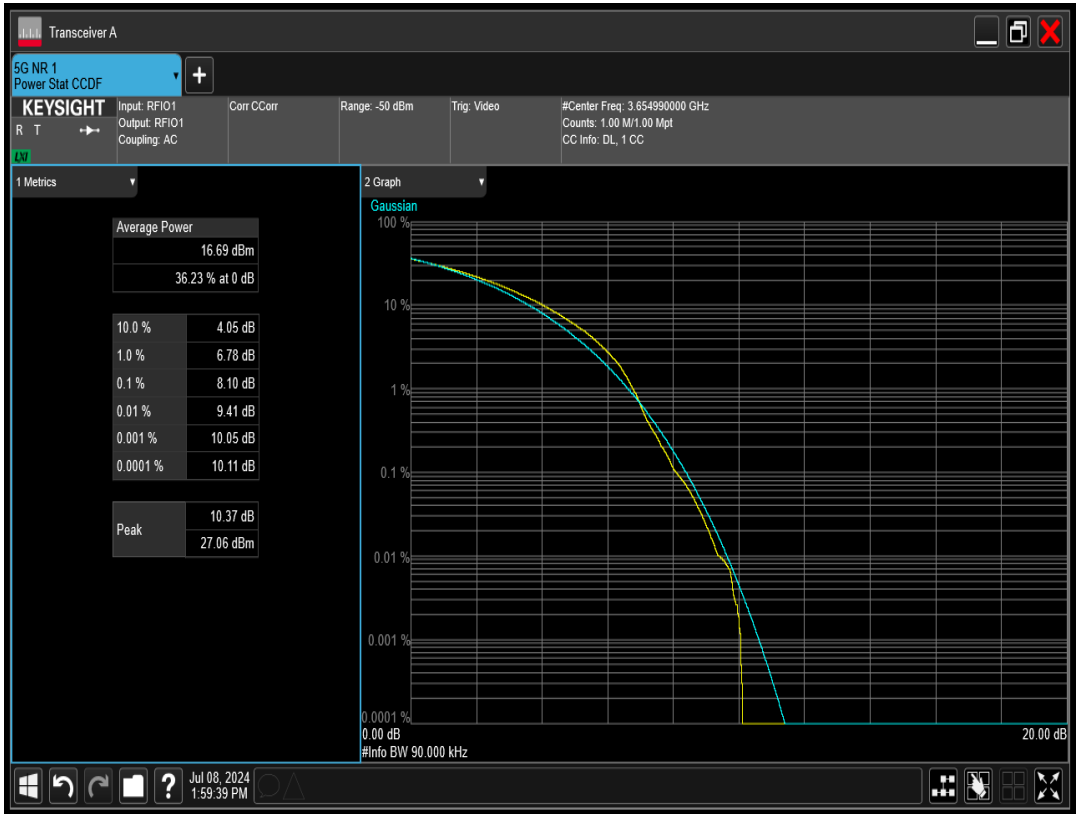


n77(3550-3700) SCS=30kHz DFT_QAM64 BW=100MHz Channel=640000 RB=270@0

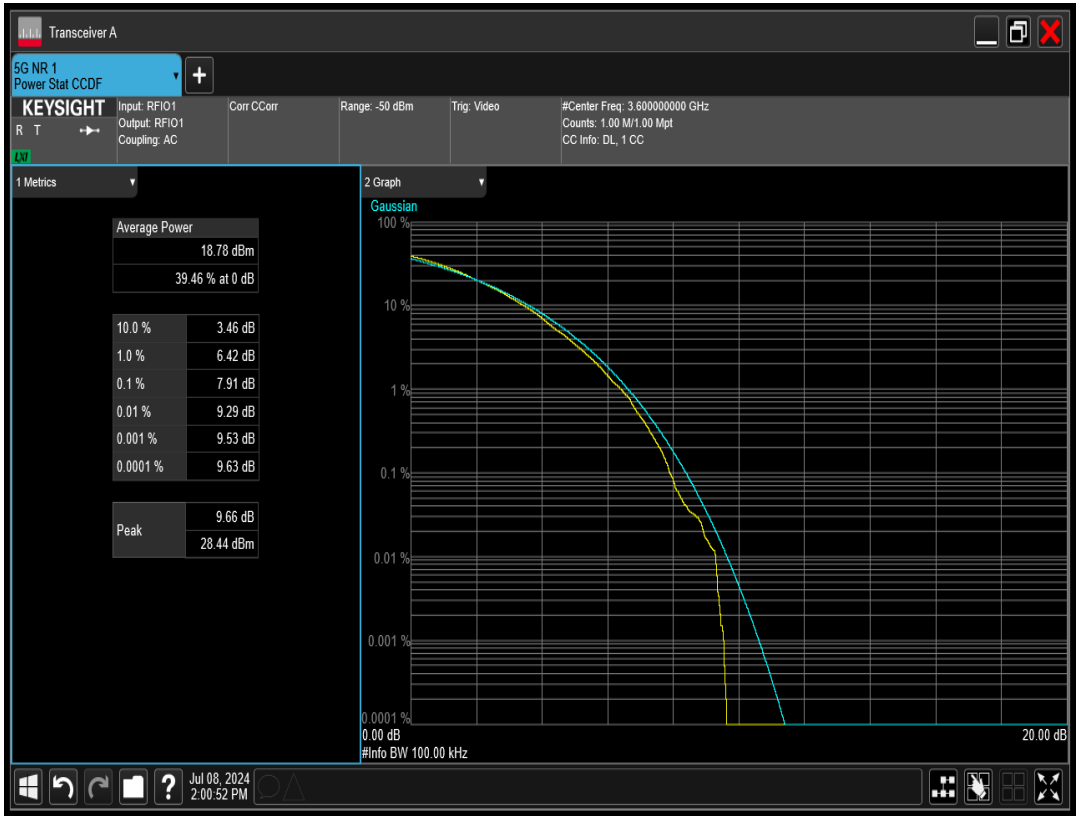


n77(3550-3700) SCS=30kHz DFT_QAM64 BW=100MHz Channel=641666 RB=270@0

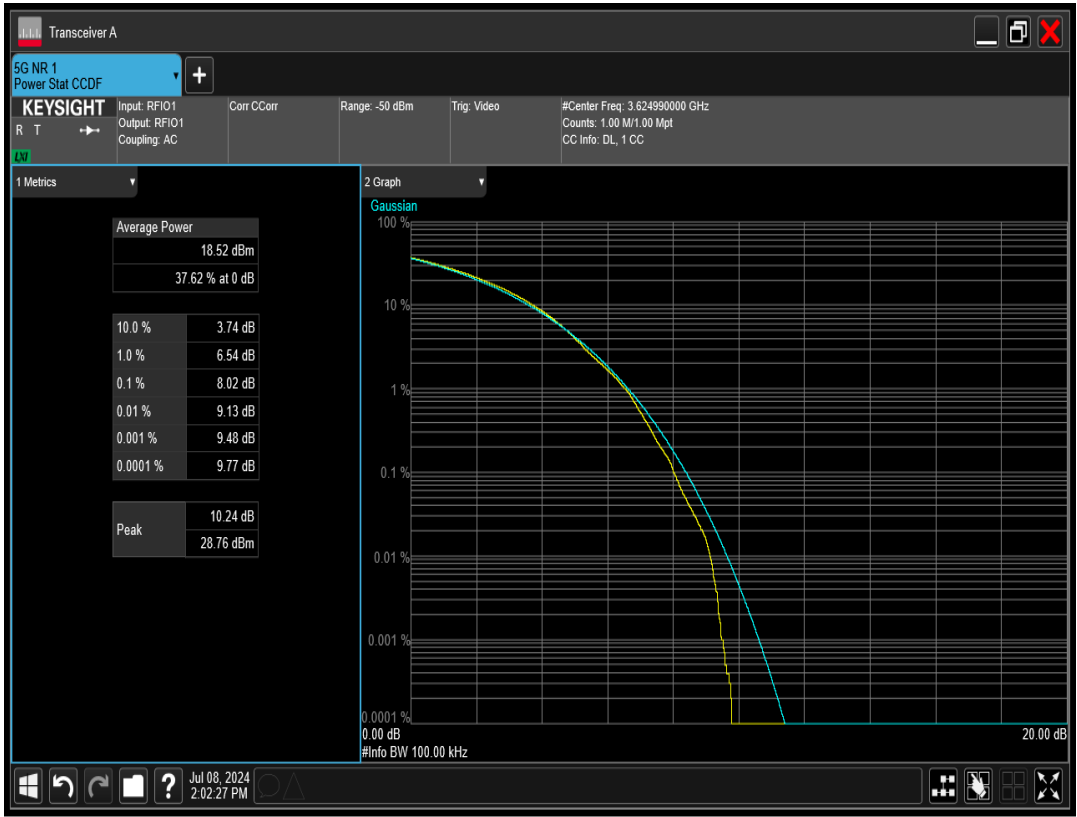


n77(3550-3700) SCS=30kHz DFT_QAM64 BW=100MHz Channel=643332 RB=270@0

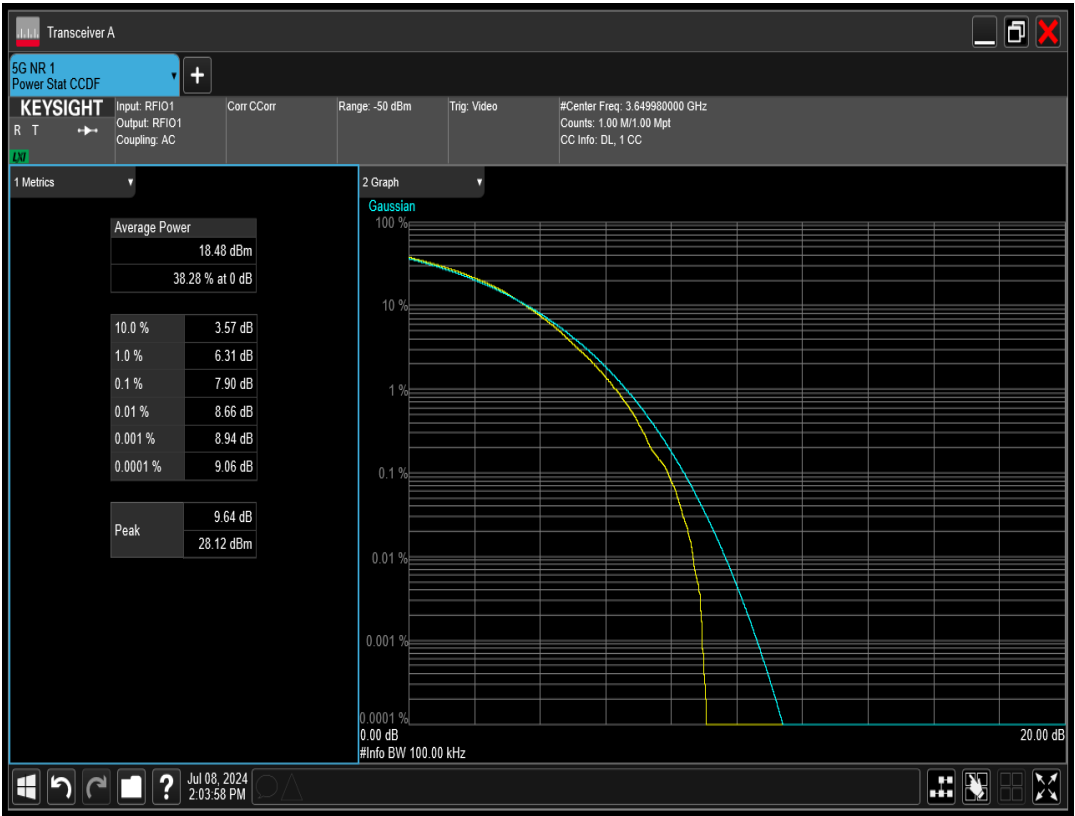


n77(3550-3700) SCS=30kHz DFT_QAM64 BW=10MHz Channel=637000 RB=24@0

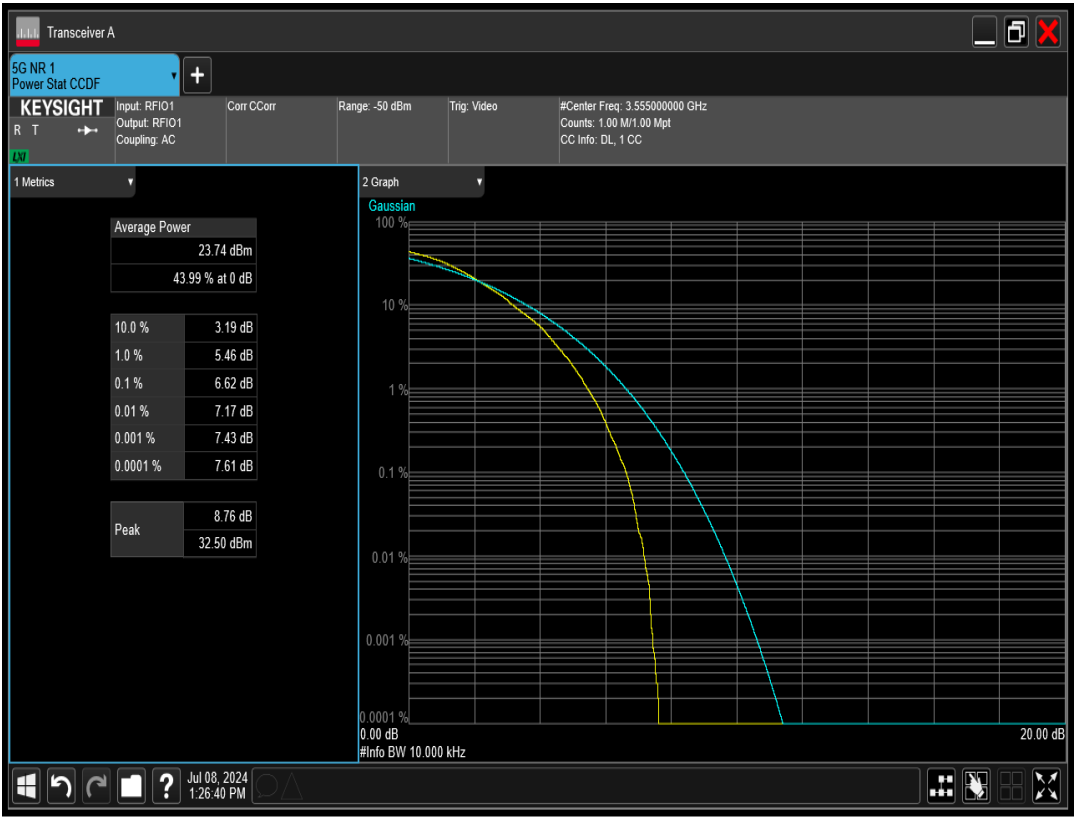


n77(3550-3700) SCS=30kHz DFT_QAM64 BW=10MHz Channel=641666 RB=24@0

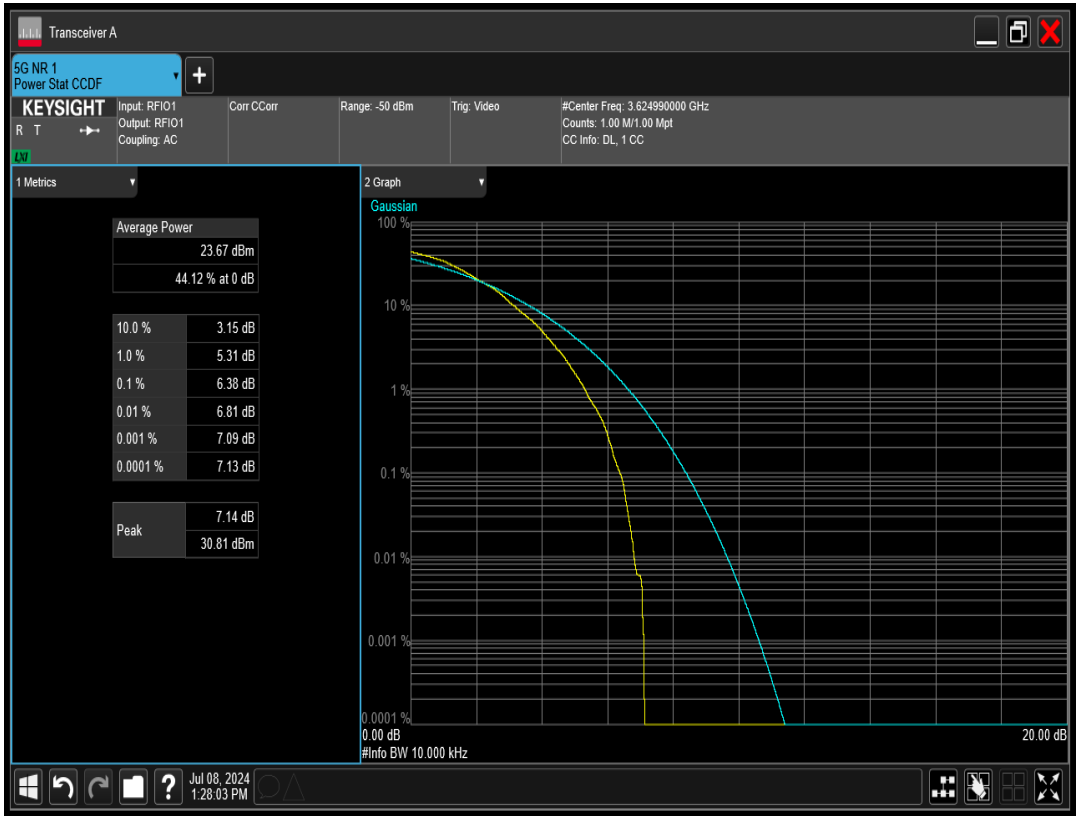


n77(3550-3700) SCS=30kHz DFT_QAM64 BW=10MHz Channel=646332 RB=24@0

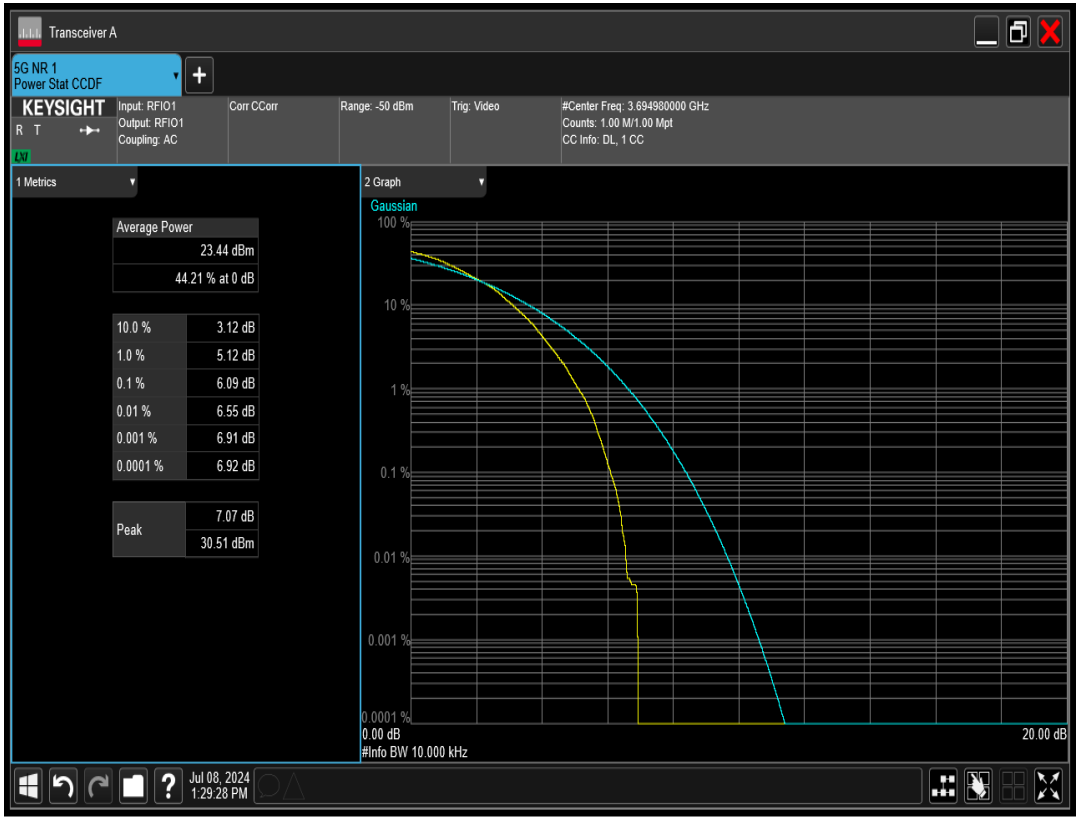

n77(3550-3700) SCS=30kHz DFT_QAM64 BW=15MHz Channel=637168 RB=36@0

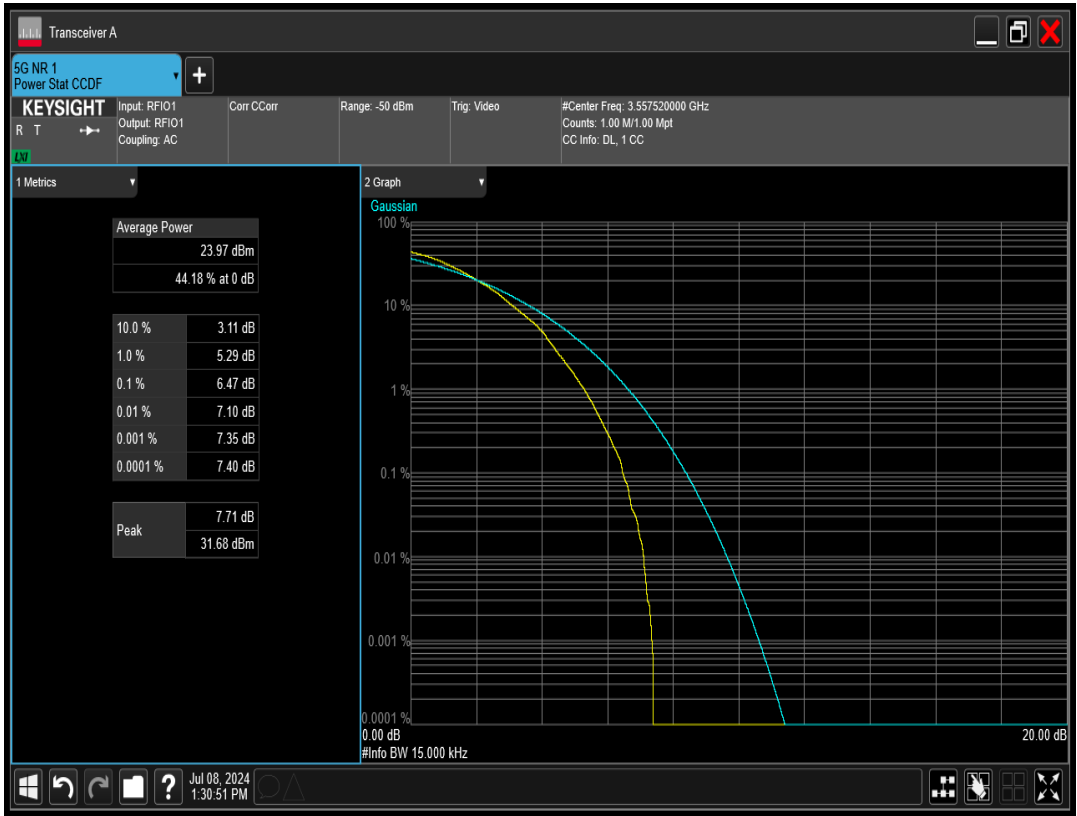

n77(3550-3700) SCS=30kHz DFT_QAM64 BW=15MHz Channel=641666 RB=36@0

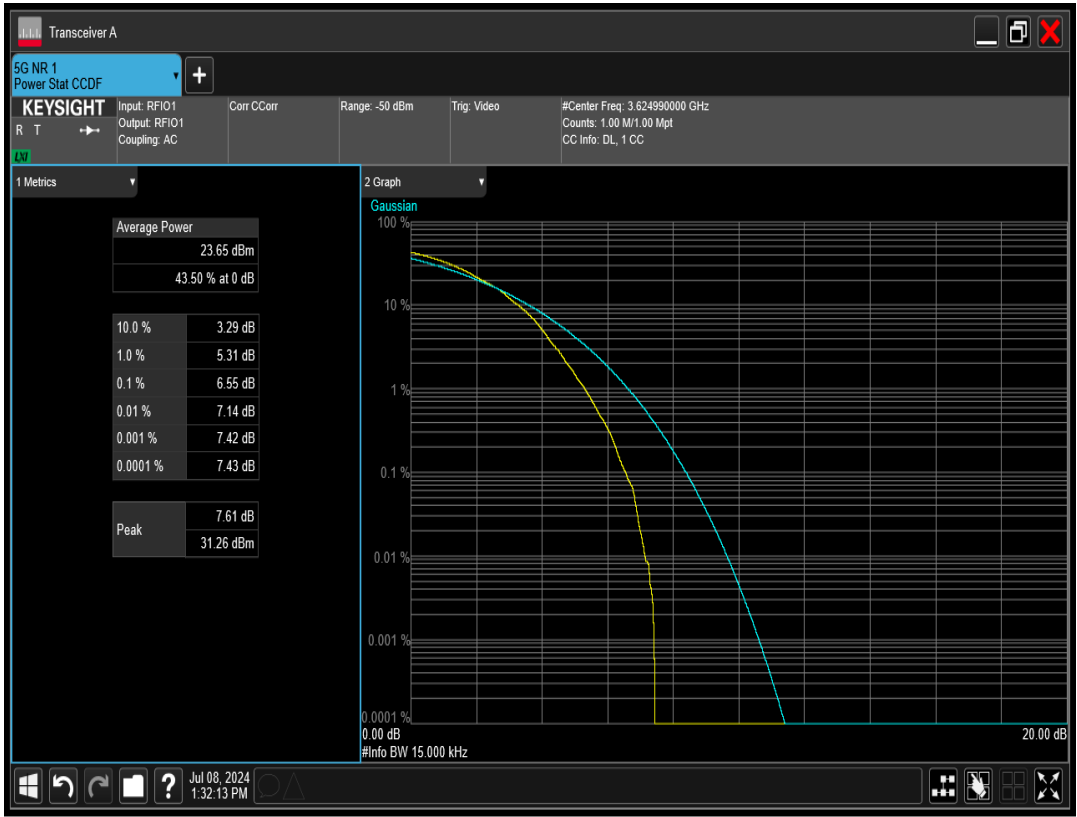

n77(3550-3700) SCS=30kHz DFT_QAM64 BW=15MHz Channel=646166 RB=36@0