

TABLE OF CONTENTS

1 Conducted output power for EN-DC2

2 Frequency stability for EN-DC4

3 Peak-to-Average Ratio for EN-DC.....6

4 Occupied bandwidth for EN-DC..... 77

5 Band edge for EN-DC101

6 Out-of-band emissions for EN-DC 111

1 Conducted output power for EN-DC

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Power (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
Band66	30	5	131997	1@0	QPSK	19.78			
n78	30	10	620334	1@0	DFT_BPSK	21.65			
Sum	30					23.82	19	26	PASS
Band66	30	5	132322	8@0	QPSK	19.62			
n78	30	10	636666	12@6	DFT_BPSK	21.02			
Sum	30					23.38	19	26	PASS
Band66	30	5	132322	8@0	QPSK	19.63			
n78	30	10	636666	12@6	DFT_QPSK	21.12			
Sum	30					23.44	19	26	PASS
Band66	30	5	132647	1@17	QPSK	19.89			
n78	30	10	653000	1@23	DFT_BPSK	20.98			
Sum	30					23.47	19	26	PASS
Band66	30	5	132647	8@17	QPSK	19.59			
n78	30	10	653000	12@6	DFT_BPSK	20.98			
Sum	30					23.35	19	26	PASS
Band66	30	5	132647	1@17	QPSK	19.88			
n78	30	10	653000	1@23	DFT_QPSK	20.86			
Sum	30					23.40	19	26	PASS
Band66	30	5	132647	8@17	QPSK	19.62			
n78	30	10	653000	12@6	DFT_QPSK	20.98			
Sum	30					23.36	19	26	PASS
Band66	30	20	132072	1@0	QPSK	19.78			
n78	30	100	623334	1@0	DFT_BPSK	21.27			
Sum	30					23.59	19	26	PASS
Band66	30	20	132322	18@0	QPSK	19.58			
n78	30	100	636666	135@67	DFT_BPSK	21.28			
Sum	30					23.52	19	26	PASS
Band66	30	20	132322	18@0	QPSK	19.57			
n78	30	100	636666	135@67	DFT_QPSK	21.26			
Sum	30					23.50	19	26	PASS
Band66	30	20	132572	1@72	QPSK	19.89			
n78	30	100	650000	1@272	DFT_BPSK	20.73			
Sum	30					23.34	19	26	PASS
Band66	30	20	132572	18@72	QPSK	19.56			
n78	30	100	650000	135@67	DFT_BPSK	21.18			
Sum	30					23.45	19	26	PASS
Band66	30	20	132572	1@72	QPSK	19.93			
n78	30	100	650000	1@272	DFT_QPSK	20.65			

Sum	30					23.31	19	26	PASS
Band66	30	20	132572	18@72	QPSK	19.57			
n78	30	100	650000	135@67	DFT_QPSK	21.17			
Sum	30					23.45	19	26	PASS

2 Frequency stability for EN-DC

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n78	30	10	620334	12@6	DFT_BPSK	-12.05	-0.00365	-2.5	2.5	PASS
n78	30	10	620334	1@1	DFT_BPSK	-12.20	-0.00369	-2.5	2.5	PASS
n78	30	10	620334	1@22	DFT_BPSK	-9.09	-0.00275	-2.5	2.5	PASS
n78	30	10	620334	12@6	DFT_QPSK	-7.00	-0.00212	-2.5	2.5	PASS
n78	30	10	620334	1@1	DFT_QPSK	-11.23	-0.00340	-2.5	2.5	PASS
n78	30	10	620334	1@22	DFT_QPSK	-11.58	-0.00350	-2.5	2.5	PASS
n78	30	10	636666	12@6	DFT_BPSK	-6.58	-0.00185	-2.5	2.5	PASS
n78	30	10	636666	1@1	DFT_BPSK	-8.04	-0.00226	-2.5	2.5	PASS
n78	30	10	636666	1@22	DFT_BPSK	-9.23	-0.00260	-2.5	2.5	PASS
n78	30	10	636666	12@6	DFT_QPSK	-10.28	-0.00290	-2.5	2.5	PASS
n78	30	10	636666	1@1	DFT_QPSK	-9.79	-0.00276	-2.5	2.5	PASS
n78	30	10	636666	1@22	DFT_QPSK	-10.75	-0.00303	-2.5	2.5	PASS
n78	30	10	653000	12@6	DFT_BPSK	-5.22	-0.00138	-2.5	2.5	PASS
n78	30	10	653000	1@1	DFT_BPSK	-6.99	-0.00184	-2.5	2.5	PASS
n78	30	10	653000	1@22	DFT_BPSK	-7.94	-0.00209	-2.5	2.5	PASS
n78	30	10	653000	12@6	DFT_QPSK	-10.89	-0.00287	-2.5	2.5	PASS
n78	30	10	653000	1@1	DFT_QPSK	-14.04	-0.00370	-2.5	2.5	PASS
n78	30	10	653000	1@22	DFT_QPSK	-9.91	-0.00261	-2.5	2.5	PASS
n78	30	50	621668	64@32	DFT_BPSK	-11.69	-0.00352	-2.5	2.5	PASS
n78	30	50	621668	1@1	DFT_BPSK	-11.65	-0.00350	-2.5	2.5	PASS
n78	30	50	621668	1@131	DFT_BPSK	-11.28	-0.00339	-2.5	2.5	PASS
n78	30	50	621668	64@32	DFT_QPSK	-8.93	-0.00269	-2.5	2.5	PASS
n78	30	50	621668	1@1	DFT_QPSK	-9.18	-0.00276	-2.5	2.5	PASS
n78	30	50	621668	1@131	DFT_QPSK	-10.31	-0.00310	-2.5	2.5	PASS
n78	30	50	636666	64@32	DFT_BPSK	-6.93	-0.00195	-2.5	2.5	PASS
n78	30	50	636666	1@1	DFT_BPSK	-11.08	-0.00312	-2.5	2.5	PASS
n78	30	50	636666	1@131	DFT_BPSK	-8.95	-0.00252	-2.5	2.5	PASS
n78	30	50	636666	64@32	DFT_QPSK	-8.03	-0.00226	-2.5	2.5	PASS
n78	30	50	636666	1@1	DFT_QPSK	-12.45	-0.00351	-2.5	2.5	PASS
n78	30	50	636666	1@131	DFT_QPSK	-10.22	-0.00288	-2.5	2.5	PASS
n78	30	50	651666	64@32	DFT_BPSK	-8.62	-0.00228	-2.5	2.5	PASS
n78	30	50	651666	1@1	DFT_BPSK	-7.18	-0.00190	-2.5	2.5	PASS
n78	30	50	651666	1@131	DFT_BPSK	-9.32	-0.00247	-2.5	2.5	PASS
n78	30	50	651666	64@32	DFT_QPSK	-10.41	-0.00276	-2.5	2.5	PASS
n78	30	50	651666	1@1	DFT_QPSK	-11.68	-0.00309	-2.5	2.5	PASS
n78	30	50	651666	1@131	DFT_QPSK	-9.19	-0.00243	-2.5	2.5	PASS
n78	30	100	623334	135@67	DFT_BPSK	-7.84	-0.00234	-2.5	2.5	PASS
n78	30	100	623334	1@1	DFT_BPSK	-13.38	-0.00399	-2.5	2.5	PASS
n78	30	100	623334	1@271	DFT_BPSK	-12.34	-0.00368	-2.5	2.5	PASS

n78	30	100	623334	135@67	DFT_QPSK	-11.67	-0.00348	-2.5	2.5	PASS
n78	30	100	623334	1@1	DFT_QPSK	-9.73	-0.00290	-2.5	2.5	PASS
n78	30	100	623334	1@271	DFT_QPSK	-10.29	-0.00307	-2.5	2.5	PASS
n78	30	100	636666	135@67	DFT_BPSK	-9.05	-0.00255	-2.5	2.5	PASS
n78	30	100	636666	1@1	DFT_BPSK	-8.92	-0.00251	-2.5	2.5	PASS
n78	30	100	636666	1@271	DFT_BPSK	-4.71	-0.00133	-2.5	2.5	PASS
n78	30	100	636666	135@67	DFT_QPSK	-4.56	-0.00128	-2.5	2.5	PASS
n78	30	100	636666	1@1	DFT_QPSK	-10.82	-0.00305	-2.5	2.5	PASS
n78	30	100	636666	1@271	DFT_QPSK	-5.89	-0.00166	-2.5	2.5	PASS
n78	30	100	650000	135@67	DFT_BPSK	-5.47	-0.00146	-2.5	2.5	PASS
n78	30	100	650000	1@1	DFT_BPSK	-11.27	-0.00301	-2.5	2.5	PASS
n78	30	100	650000	1@271	DFT_BPSK	-7.65	-0.00204	-2.5	2.5	PASS
n78	30	100	650000	135@67	DFT_QPSK	-12.01	-0.00320	-2.5	2.5	PASS
n78	30	100	650000	1@1	DFT_QPSK	-8.50	-0.00227	-2.5	2.5	PASS
n78	30	100	650000	1@271	DFT_QPSK	-12.88	-0.00343	-2.5	2.5	PASS

3 Peak-to-Average Ratio for EN-DC


<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
n78	30	10	620334	24@0	DFT_BPSK	3.80	13	PASS
n78	30	10	620334	24@0	DFT_QPSK	5.12	13	PASS
n78	30	10	620334	24@0	DFT_QAM16	5.97	13	PASS
n78	30	10	620334	24@0	DFT_QAM64	6.27	13	PASS
n78	30	10	620334	24@0	DFT_QAM256	6.33	13	PASS
n78	30	10	636666	24@0	DFT_BPSK	4.33	13	PASS
n78	30	10	636666	24@0	DFT_QPSK	5.57	13	PASS
n78	30	10	636666	24@0	DFT_QAM16	6.28	13	PASS
n78	30	10	636666	24@0	DFT_QAM64	6.34	13	PASS
n78	30	10	636666	24@0	DFT_QAM256	6.59	13	PASS
n78	30	10	653000	24@0	DFT_BPSK	5.19	13	PASS
n78	30	10	653000	24@0	DFT_QPSK	5.81	13	PASS
n78	30	10	653000	24@0	DFT_QAM16	6.56	13	PASS
n78	30	10	653000	24@0	DFT_QAM64	6.31	13	PASS
n78	30	10	653000	24@0	DFT_QAM256	6.49	13	PASS
n78	30	15	620500	36@0	DFT_BPSK	4.00	13	PASS
n78	30	15	620500	36@0	DFT_QPSK	4.94	13	PASS
n78	30	15	620500	36@0	DFT_QAM16	5.92	13	PASS
n78	30	15	620500	36@0	DFT_QAM64	6.00	13	PASS
n78	30	15	620500	36@0	DFT_QAM256	6.36	13	PASS
n78	30	15	636666	36@0	DFT_BPSK	4.31	13	PASS
n78	30	15	636666	36@0	DFT_QPSK	5.77	13	PASS
n78	30	15	636666	36@0	DFT_QAM16	6.16	13	PASS
n78	30	15	636666	36@0	DFT_QAM64	6.73	13	PASS
n78	30	15	636666	36@0	DFT_QAM256	6.59	13	PASS
n78	30	15	652832	36@0	DFT_BPSK	4.36	13	PASS
n78	30	15	652832	36@0	DFT_QPSK	5.66	13	PASS
n78	30	15	652832	36@0	DFT_QAM16	6.64	13	PASS
n78	30	15	652832	36@0	DFT_QAM64	6.75	13	PASS
n78	30	15	652832	36@0	DFT_QAM256	6.64	13	PASS
n78	30	20	620668	50@0	DFT_BPSK	3.91	13	PASS
n78	30	20	620668	50@0	DFT_QPSK	5.40	13	PASS
n78	30	20	620668	50@0	DFT_QAM16	6.25	13	PASS
n78	30	20	620668	50@0	DFT_QAM64	5.98	13	PASS
n78	30	20	620668	50@0	DFT_QAM256	6.48	13	PASS
n78	30	20	636666	50@0	DFT_BPSK	4.59	13	PASS
n78	30	20	636666	50@0	DFT_QPSK	5.98	13	PASS
n78	30	20	636666	50@0	DFT_QAM16	6.43	13	PASS
n78	30	20	636666	50@0	DFT_QAM64	6.57	13	PASS

n78	30	20	636666	50@0	DFT_QAM256	6.52	13	PASS
n78	30	20	652666	50@0	DFT_BPSK	5.29	13	PASS
n78	30	20	652666	50@0	DFT_QPSK	5.93	13	PASS
n78	30	20	652666	50@0	DFT_QAM16	6.11	13	PASS
n78	30	20	652666	50@0	DFT_QAM64	6.61	13	PASS
n78	30	20	652666	50@0	DFT_QAM256	6.57	13	PASS
n78	30	40	621334	100@0	DFT_BPSK	3.96	13	PASS
n78	30	40	621334	100@0	DFT_QPSK	5.07	13	PASS
n78	30	40	621334	100@0	DFT_QAM16	5.94	13	PASS
n78	30	40	621334	100@0	DFT_QAM64	6.19	13	PASS
n78	30	40	621334	100@0	DFT_QAM256	6.35	13	PASS
n78	30	40	636666	100@0	DFT_BPSK	4.51	13	PASS
n78	30	40	636666	100@0	DFT_QPSK	5.66	13	PASS
n78	30	40	636666	100@0	DFT_QAM16	6.17	13	PASS
n78	30	40	636666	100@0	DFT_QAM64	6.57	13	PASS
n78	30	40	636666	100@0	DFT_QAM256	6.98	13	PASS
n78	30	40	652000	100@0	DFT_BPSK	6.02	13	PASS
n78	30	40	652000	100@0	DFT_QPSK	6.23	13	PASS
n78	30	40	652000	100@0	DFT_QAM16	6.49	13	PASS
n78	30	40	652000	100@0	DFT_QAM64	6.72	13	PASS
n78	30	40	652000	100@0	DFT_QAM256	6.83	13	PASS
n78	30	50	621668	128@0	DFT_BPSK	4.02	13	PASS
n78	30	50	621668	128@0	DFT_QPSK	5.21	13	PASS
n78	30	50	621668	128@0	DFT_QAM16	5.84	13	PASS
n78	30	50	621668	128@0	DFT_QAM64	6.22	13	PASS
n78	30	50	621668	128@0	DFT_QAM256	6.39	13	PASS
n78	30	50	636666	128@0	DFT_BPSK	4.40	13	PASS
n78	30	50	636666	128@0	DFT_QPSK	5.64	13	PASS
n78	30	50	636666	128@0	DFT_QAM16	6.27	13	PASS
n78	30	50	636666	128@0	DFT_QAM64	6.81	13	PASS
n78	30	50	636666	128@0	DFT_QAM256	6.55	13	PASS
n78	30	50	651666	128@0	DFT_BPSK	4.40	13	PASS
n78	30	50	651666	128@0	DFT_QPSK	5.75	13	PASS
n78	30	50	651666	128@0	DFT_QAM16	6.49	13	PASS
n78	30	50	651666	128@0	DFT_QAM64	6.44	13	PASS
n78	30	50	651666	128@0	DFT_QAM256	6.52	13	PASS
n78	30	60	622000	162@0	DFT_BPSK	4.15	13	PASS
n78	30	60	622000	162@0	DFT_QPSK	5.25	13	PASS
n78	30	60	622000	162@0	DFT_QAM16	5.74	13	PASS
n78	30	60	622000	162@0	DFT_QAM64	6.15	13	PASS
n78	30	60	622000	162@0	DFT_QAM256	6.34	13	PASS
n78	30	60	636666	162@0	DFT_BPSK	4.86	13	PASS
n78	30	60	636666	162@0	DFT_QPSK	5.69	13	PASS
n78	30	60	636666	162@0	DFT_QAM16	6.20	13	PASS


n78	30	60	636666	162@0	DFT_QAM64	6.26	13	PASS
n78	30	60	636666	162@0	DFT_QAM256	6.74	13	PASS
n78	30	60	651332	162@0	DFT_BPSK	4.96	13	PASS
n78	30	60	651332	162@0	DFT_QPSK	5.62	13	PASS
n78	30	60	651332	162@0	DFT_QAM16	6.25	13	PASS
n78	30	60	651332	162@0	DFT_QAM64	6.53	13	PASS
n78	30	60	651332	162@0	DFT_QAM256	7.11	13	PASS
n78	30	80	622668	216@0	DFT_BPSK	4.23	13	PASS
n78	30	80	622668	216@0	DFT_QPSK	5.11	13	PASS
n78	30	80	622668	216@0	DFT_QAM16	5.78	13	PASS
n78	30	80	622668	216@0	DFT_QAM64	6.17	13	PASS
n78	30	80	622668	216@0	DFT_QAM256	6.47	13	PASS
n78	30	80	636666	216@0	DFT_BPSK	5.50	13	PASS
n78	30	80	636666	216@0	DFT_QPSK	5.49	13	PASS
n78	30	80	636666	216@0	DFT_QAM16	6.47	13	PASS
n78	30	80	636666	216@0	DFT_QAM64	6.82	13	PASS
n78	30	80	636666	216@0	DFT_QAM256	6.71	13	PASS
n78	30	80	650666	216@0	DFT_BPSK	4.35	13	PASS
n78	30	80	650666	216@0	DFT_QPSK	5.84	13	PASS
n78	30	80	650666	216@0	DFT_QAM16	6.16	13	PASS
n78	30	80	650666	216@0	DFT_QAM64	6.46	13	PASS
n78	30	80	650666	216@0	DFT_QAM256	6.57	13	PASS
n78	30	90	623000	240@0	DFT_BPSK	4.55	13	PASS
n78	30	90	623000	240@0	DFT_QPSK	5.31	13	PASS
n78	30	90	623000	240@0	DFT_QAM16	5.89	13	PASS
n78	30	90	623000	240@0	DFT_QAM64	6.27	13	PASS
n78	30	90	623000	240@0	DFT_QAM256	6.42	13	PASS
n78	30	90	636666	240@0	DFT_BPSK	4.68	13	PASS
n78	30	90	636666	240@0	DFT_QPSK	5.64	13	PASS
n78	30	90	636666	240@0	DFT_QAM16	6.76	13	PASS
n78	30	90	636666	240@0	DFT_QAM64	6.68	13	PASS
n78	30	90	636666	240@0	DFT_QAM256	6.47	13	PASS
n78	30	90	650332	240@0	DFT_BPSK	5.08	13	PASS
n78	30	90	650332	240@0	DFT_QPSK	5.67	13	PASS
n78	30	90	650332	240@0	DFT_QAM16	6.26	13	PASS
n78	30	90	650332	240@0	DFT_QAM64	6.81	13	PASS
n78	30	90	650332	240@0	DFT_QAM256	6.71	13	PASS
n78	30	100	623334	270@0	DFT_BPSK	5.23	13	PASS
n78	30	100	623334	270@0	DFT_QPSK	5.58	13	PASS
n78	30	100	623334	270@0	DFT_QAM16	6.06	13	PASS
n78	30	100	623334	270@0	DFT_QAM64	6.49	13	PASS
n78	30	100	623334	270@0	DFT_QAM256	6.74	13	PASS
n78	30	100	636666	270@0	DFT_BPSK	4.75	13	PASS
n78	30	100	636666	270@0	DFT_QPSK	5.56	13	PASS

n78	30	100	636666	270@0	DFT_QAM16	6.22	13	PASS
n78	30	100	636666	270@0	DFT_QAM64	6.45	13	PASS
n78	30	100	636666	270@0	DFT_QAM256	6.57	13	PASS
n78	30	100	650000	270@0	DFT_BPSK	5.06	13	PASS
n78	30	100	650000	270@0	DFT_QPSK	5.97	13	PASS
n78	30	100	650000	270@0	DFT_QAM16	6.25	13	PASS
n78	30	100	650000	270@0	DFT_QAM64	6.49	13	PASS
n78	30	100	650000	270@0	DFT_QAM256	6.53	13	PASS


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=650000 RB=270@0

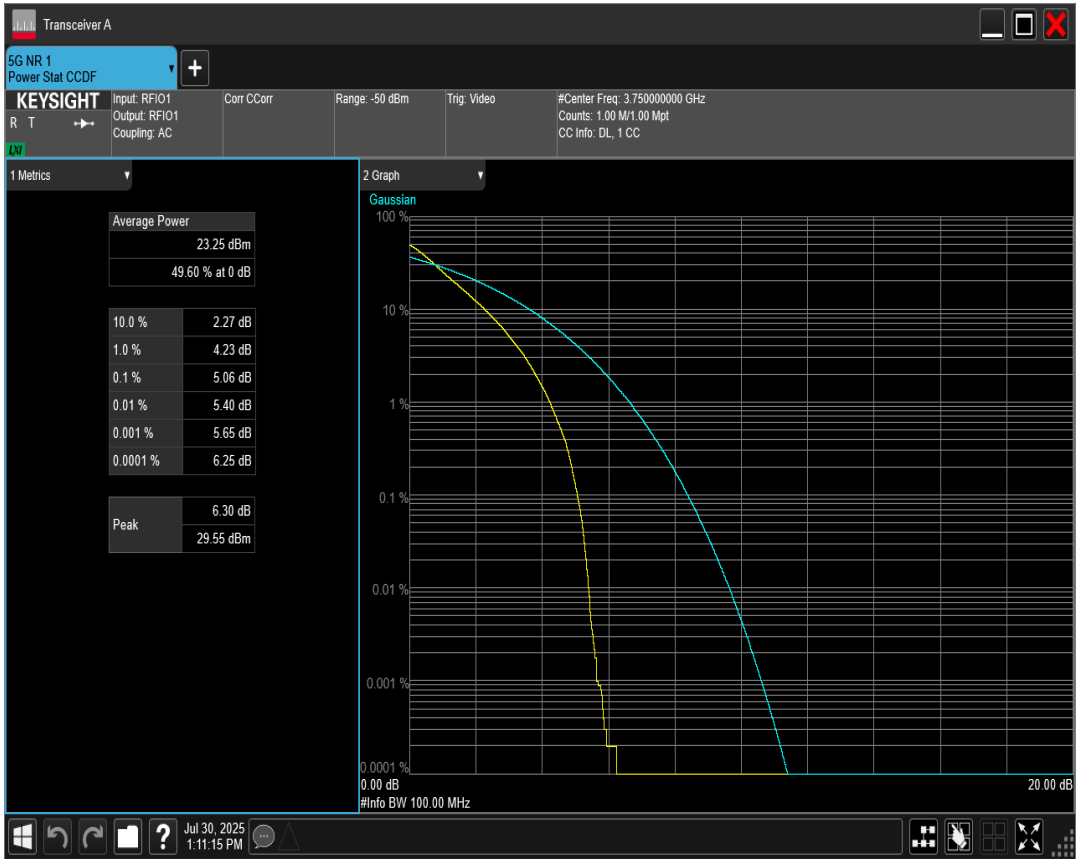


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=636666 RB=270@0

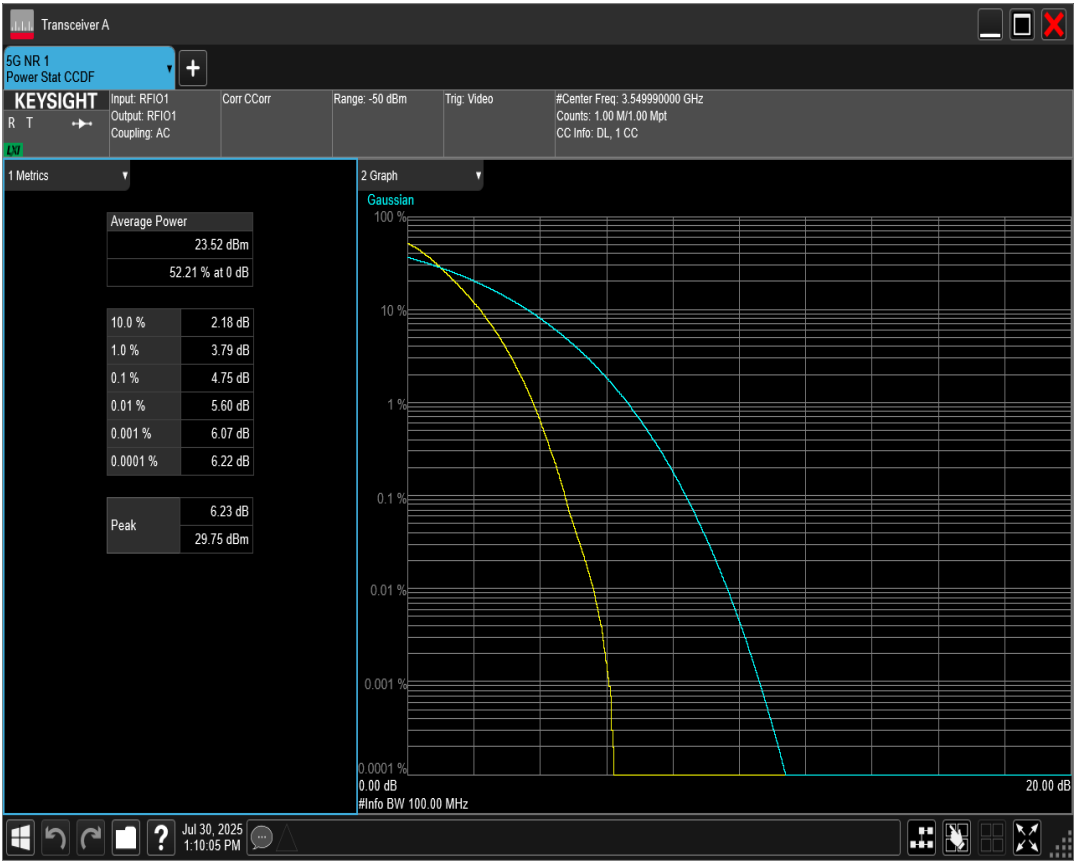


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=623334 RB=270@0

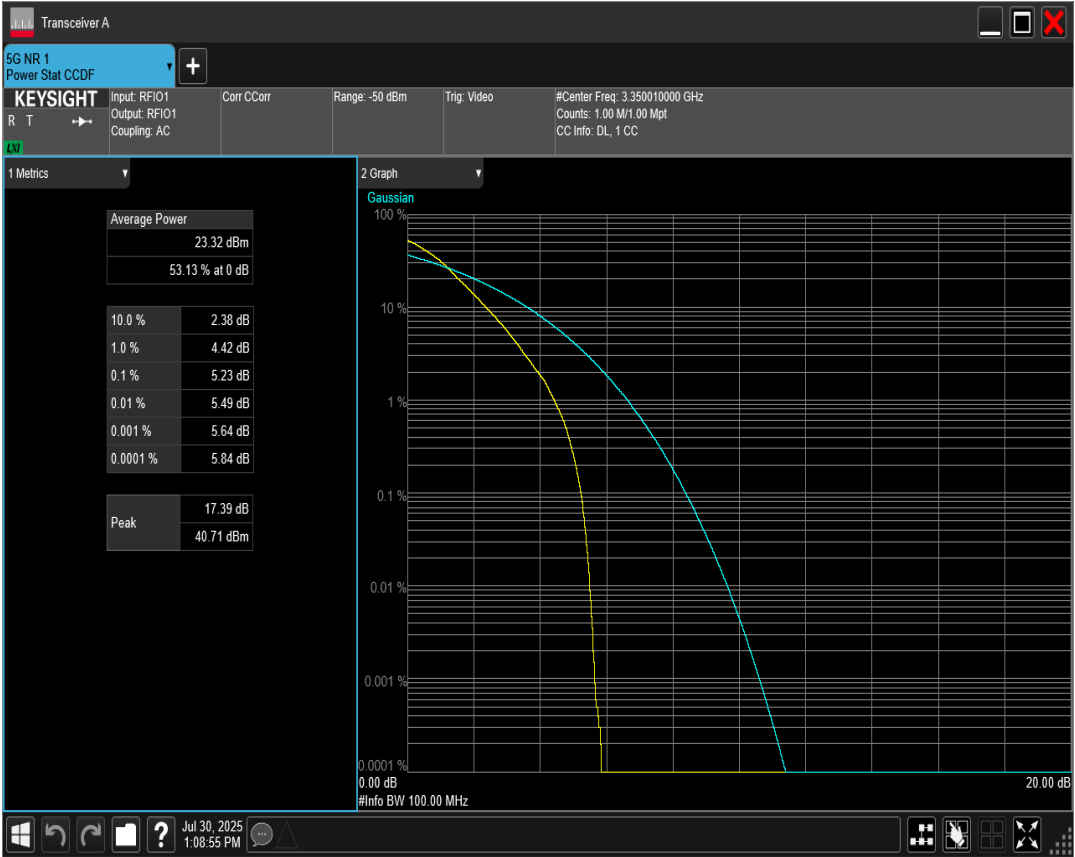


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=652832 RB=36@0

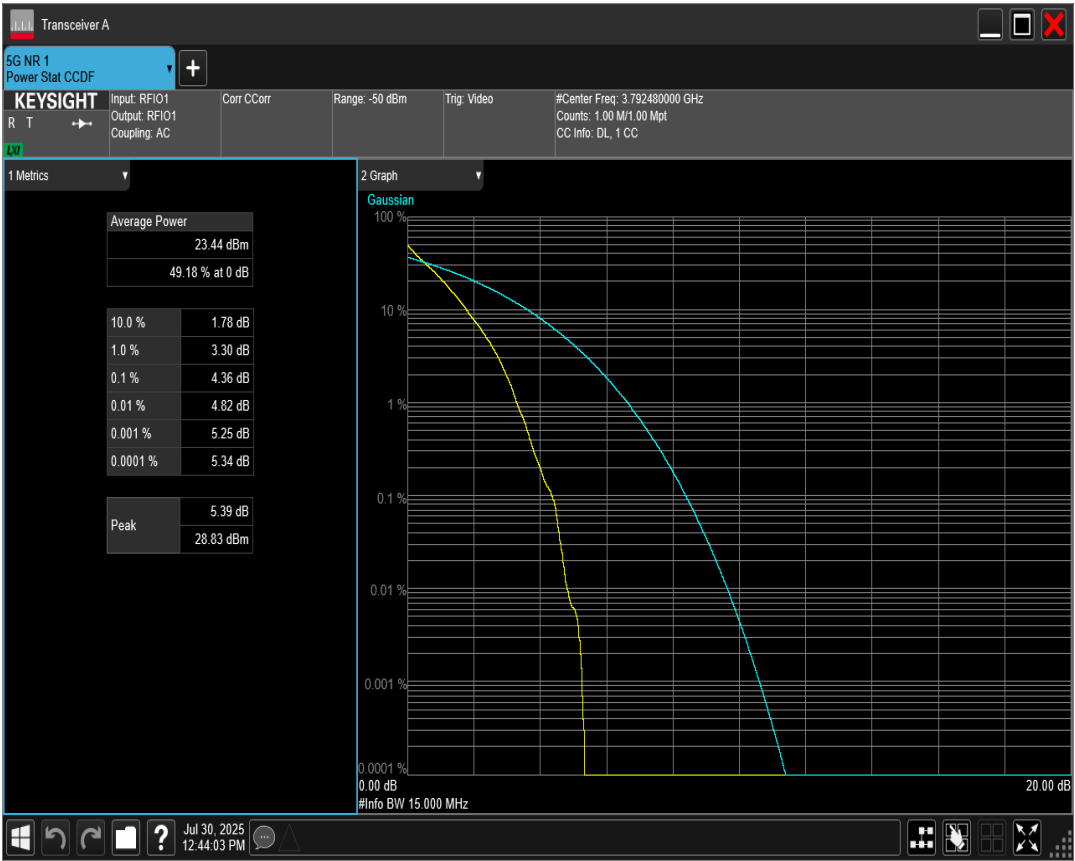


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=636666 RB=36@0

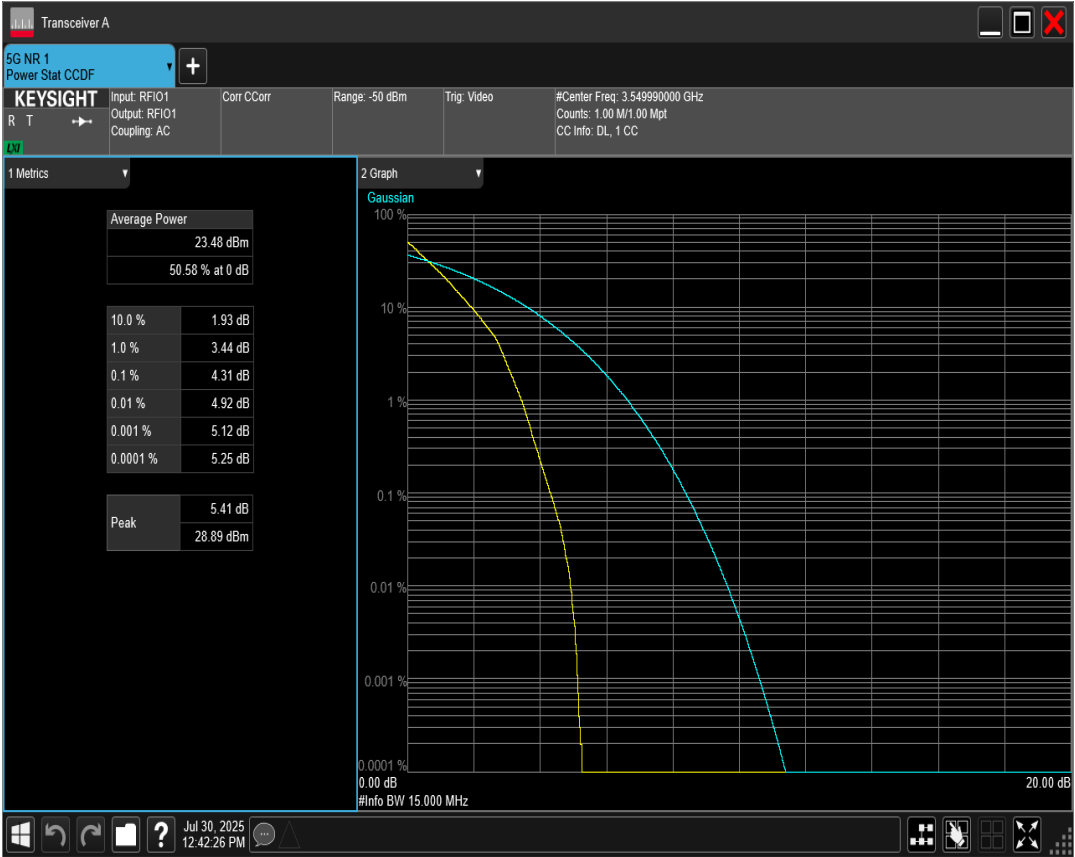


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=636666 RB=50@0

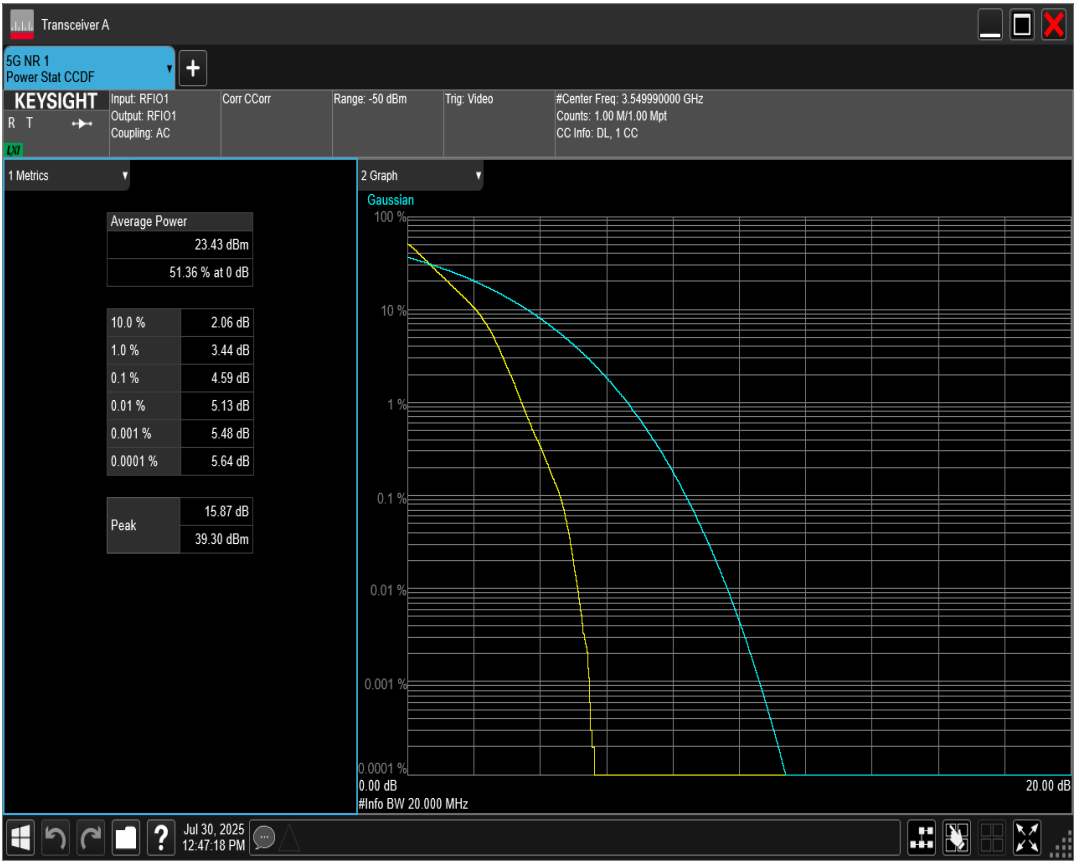


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=620668 RB=50@0

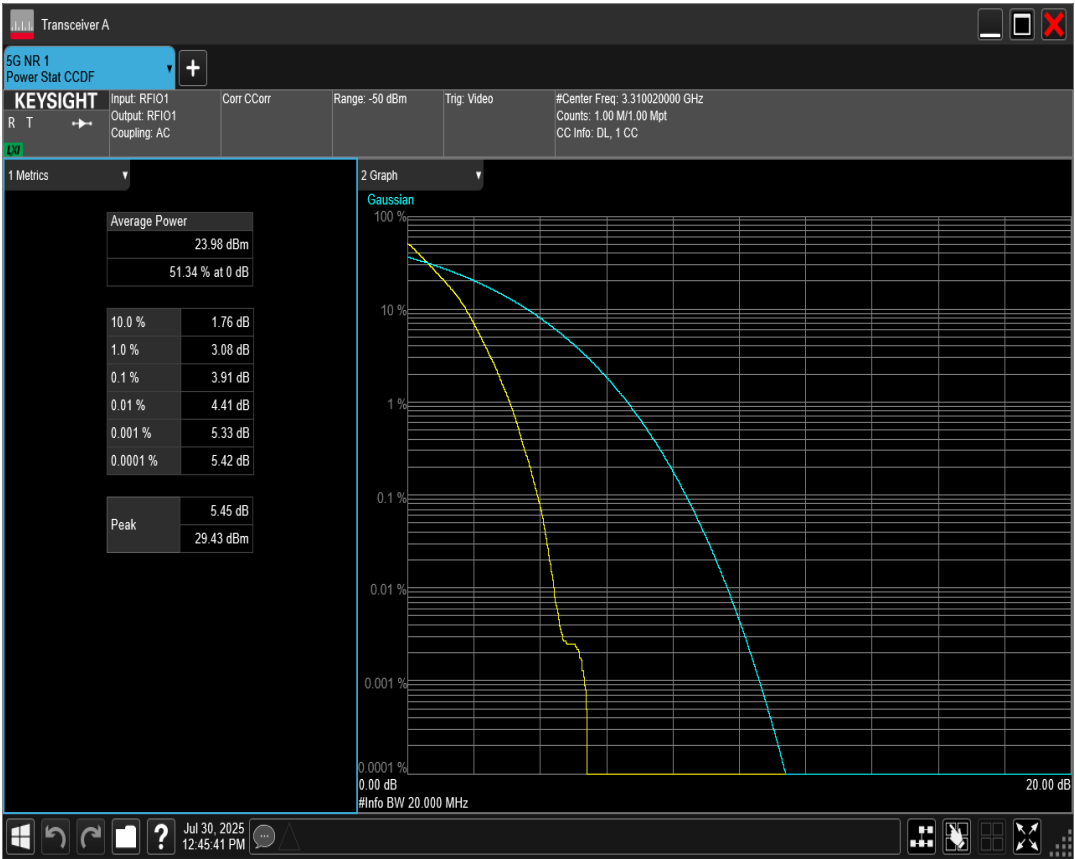


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=636666 RB=24@0

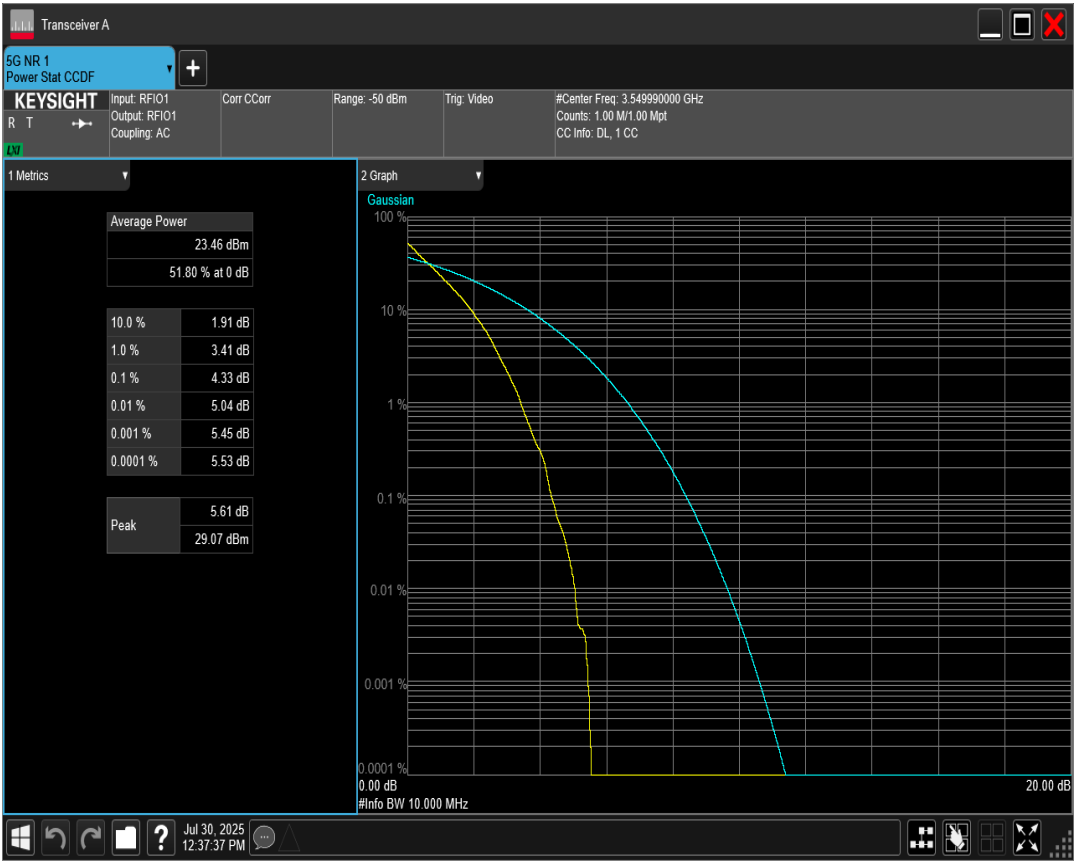


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=620334 RB=24@0

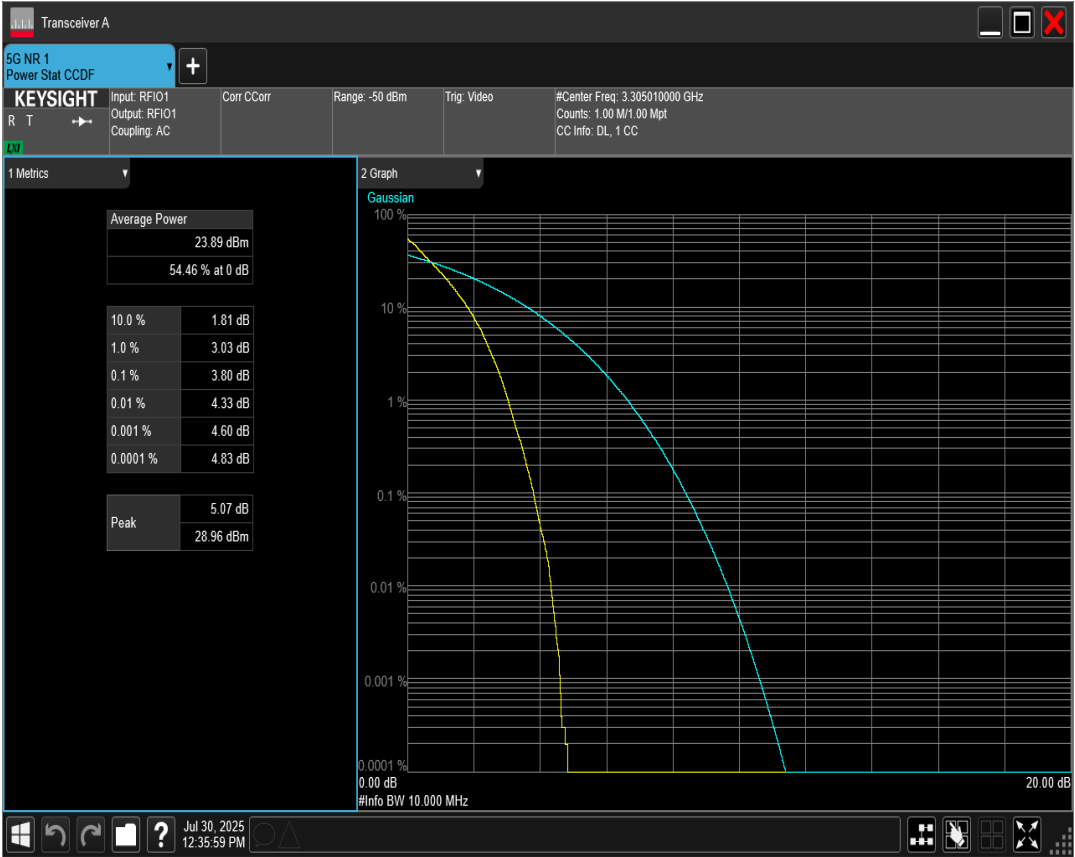


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=620500 RB=36@0

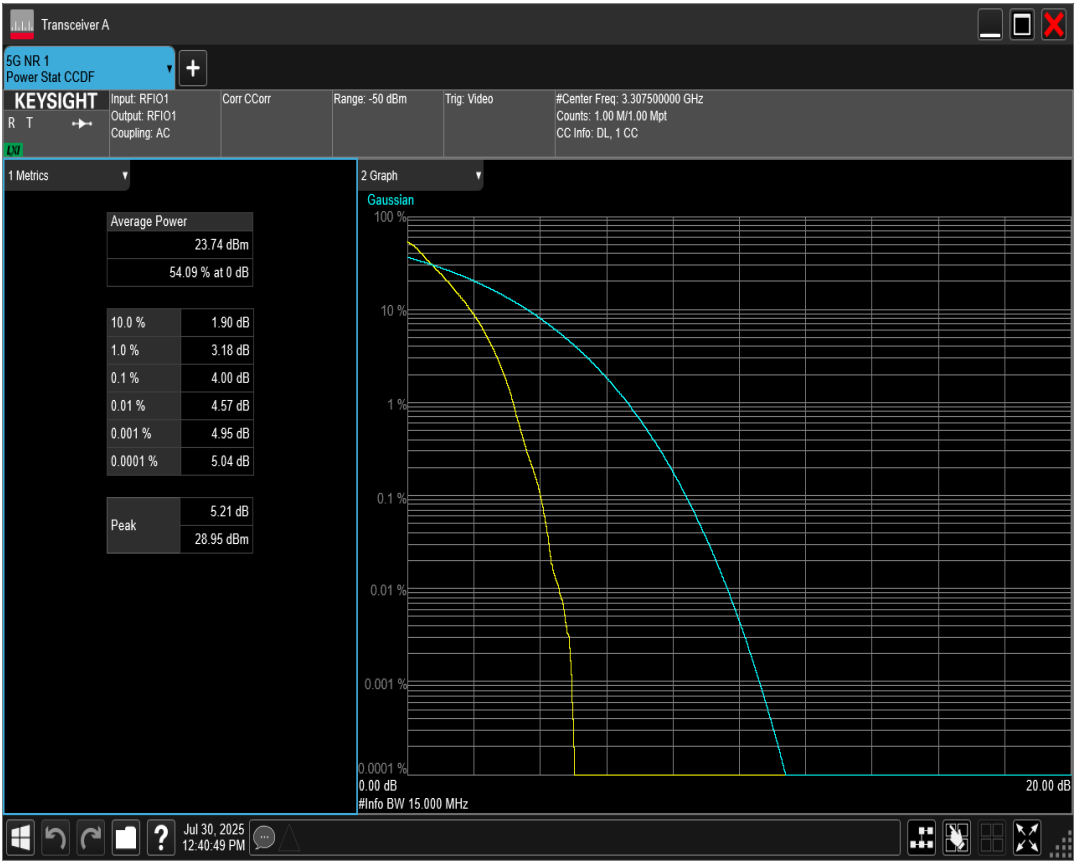


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=653000 RB=24@0

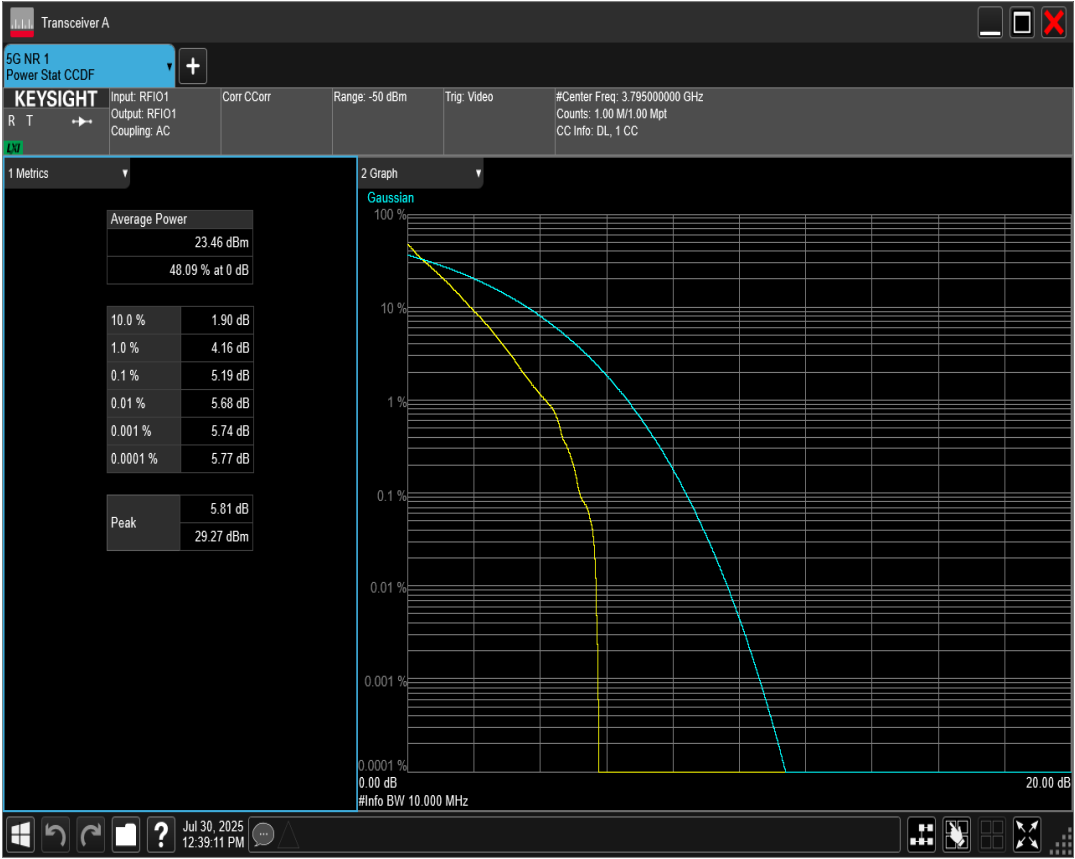


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=652666 RB=50@0

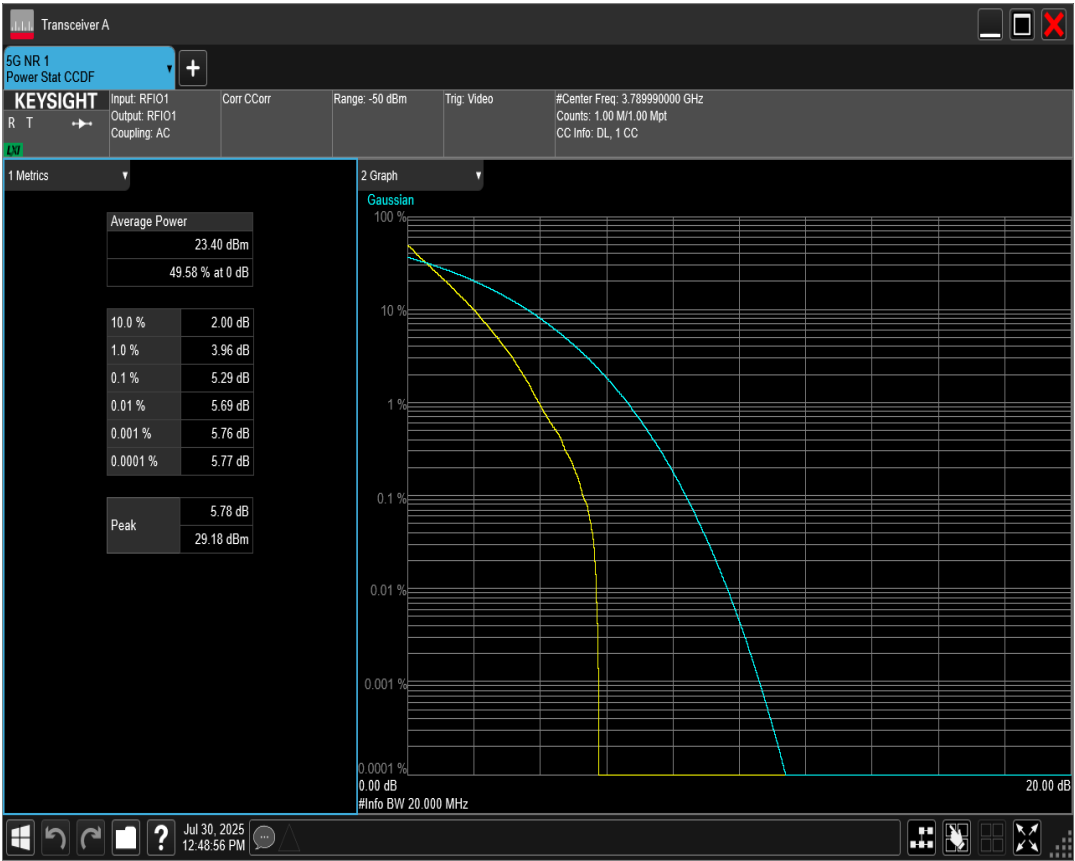


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=636666 RB=128@0

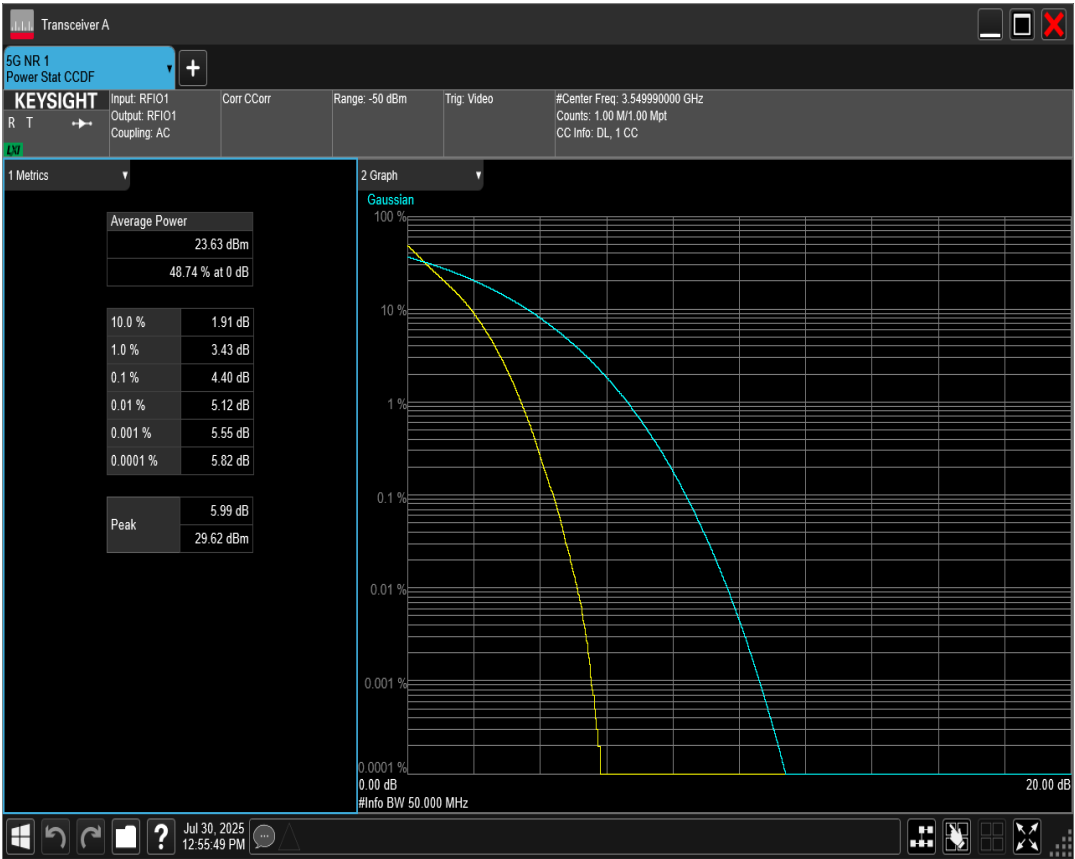


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=651666 RB=128@0

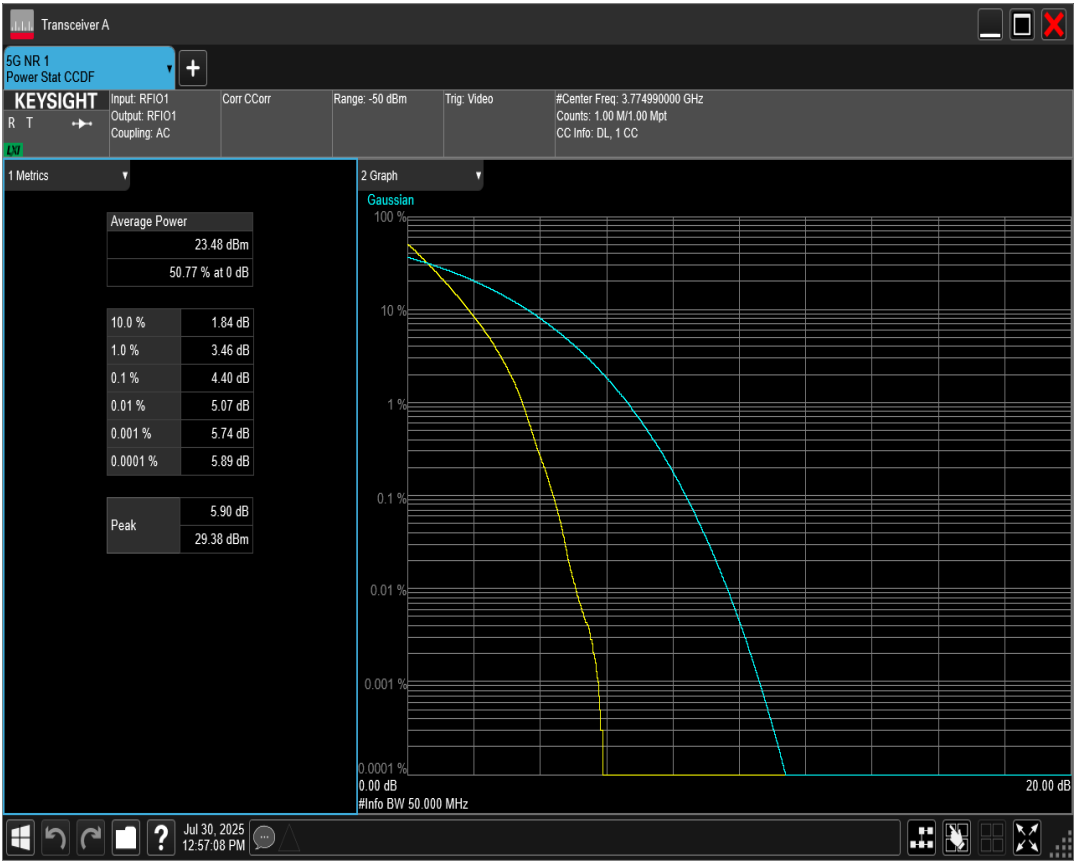


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=622000 RB=162@0

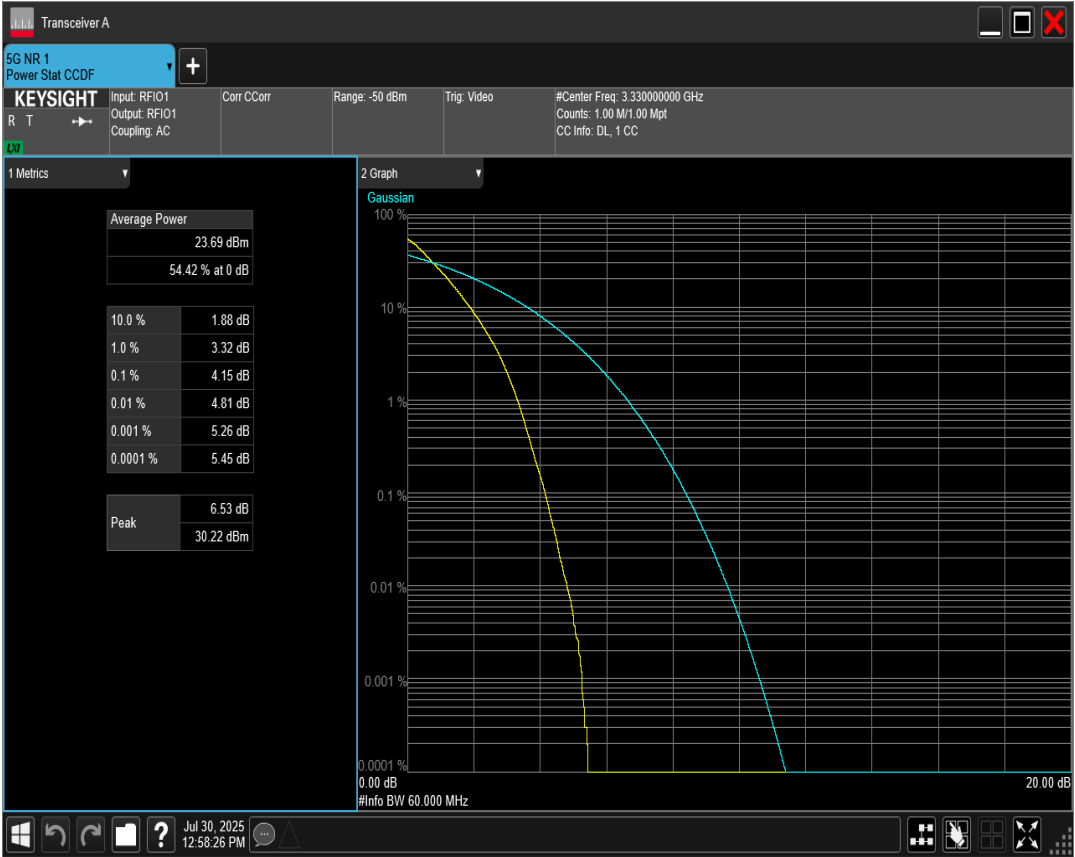


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=621668 RB=128@0

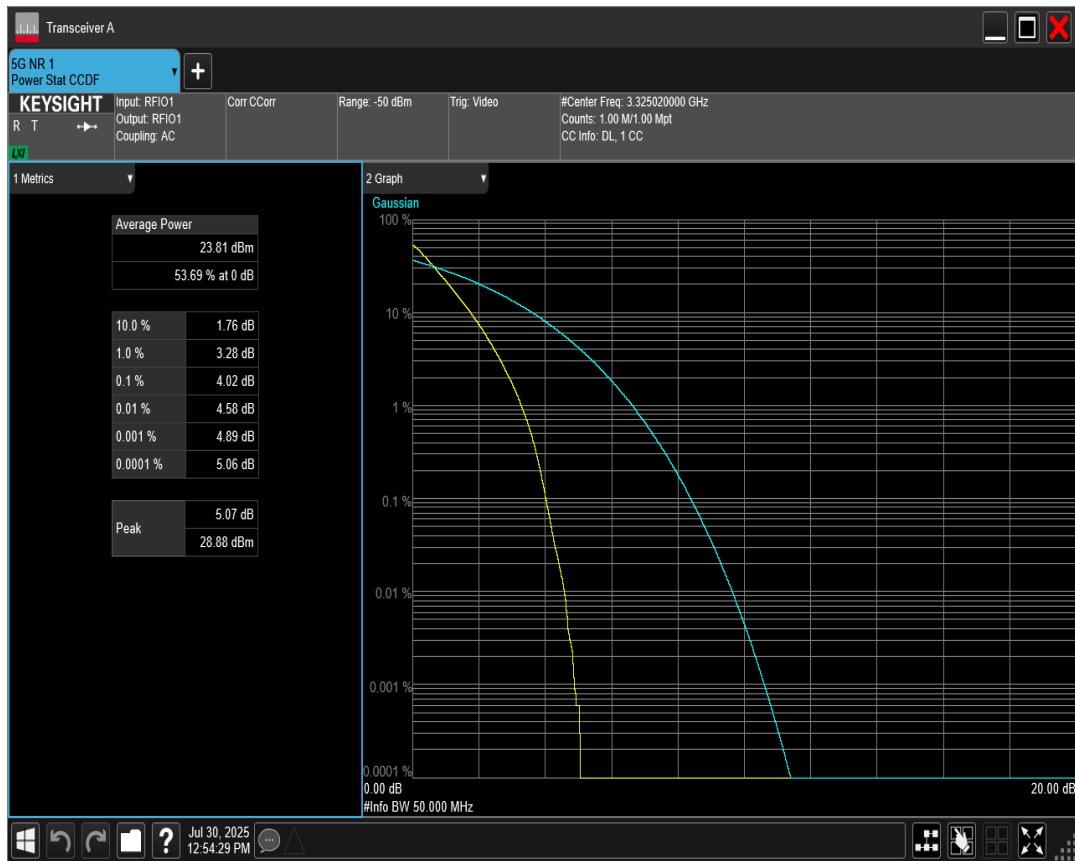


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=621334 RB=100@0

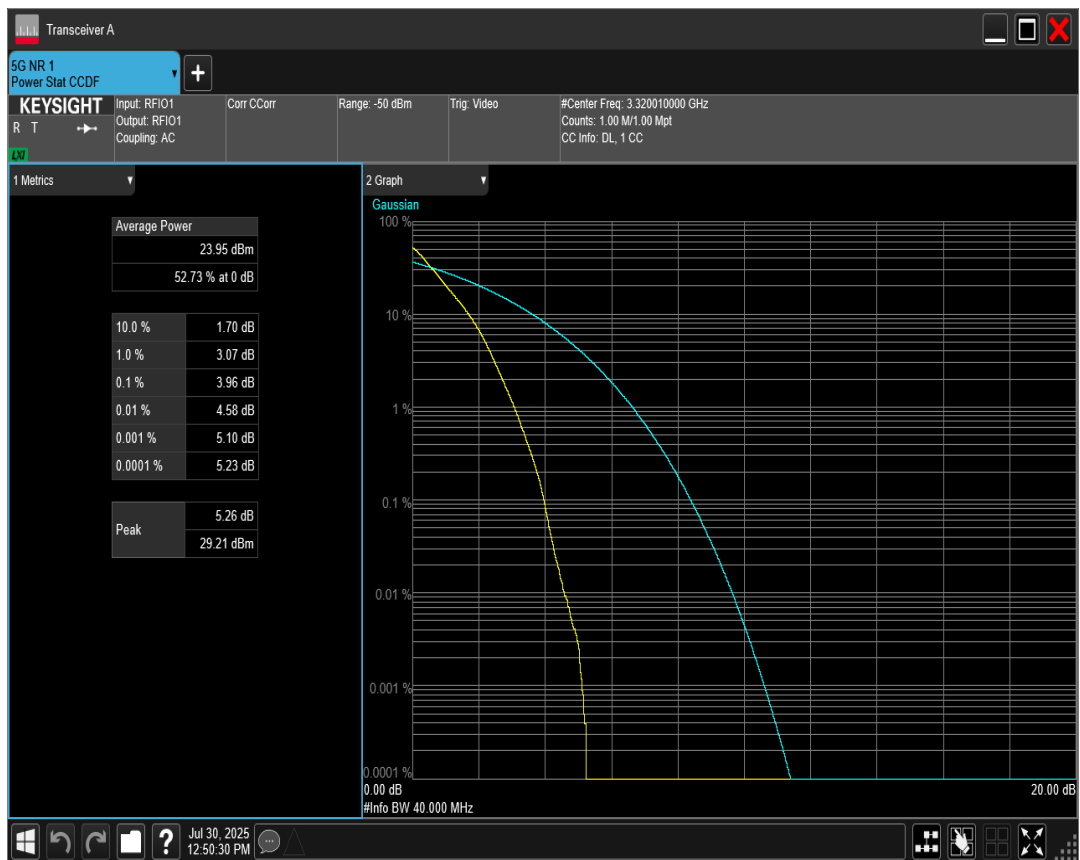


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=636666 RB=100@0

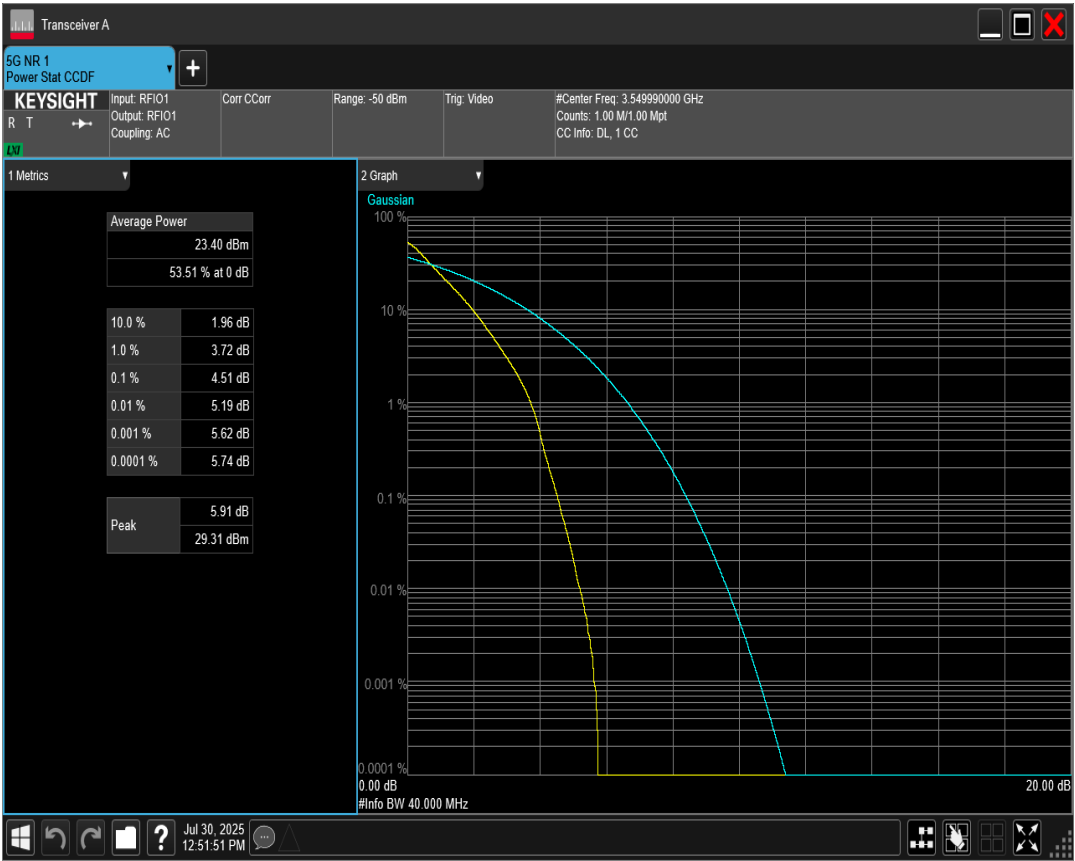


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=652000 RB=100@0

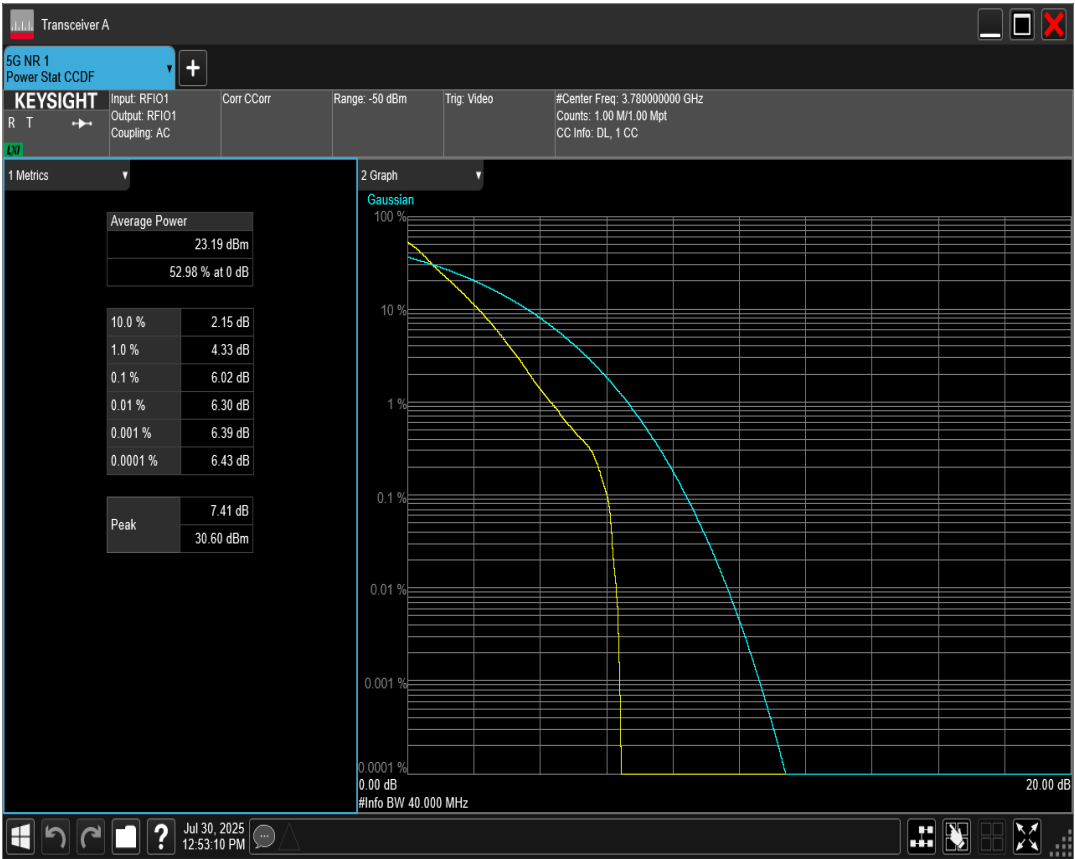


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=650666 RB=216@0

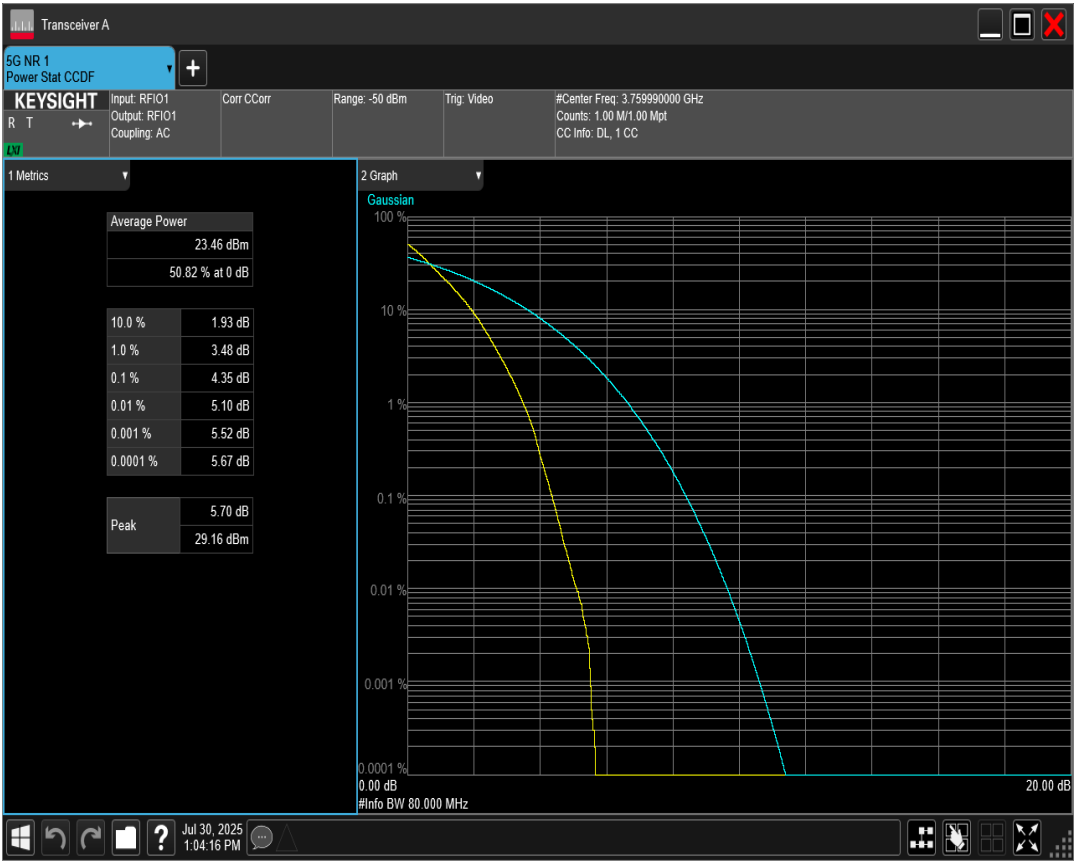


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=623000 RB=240@0

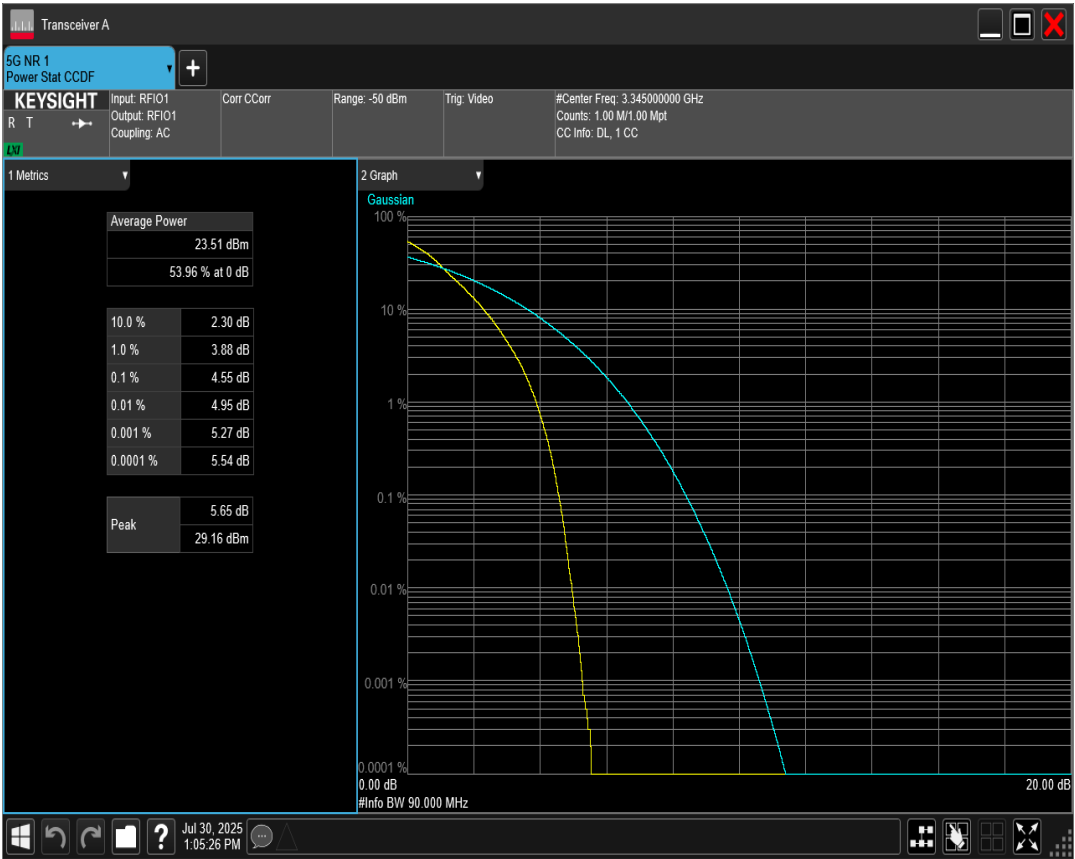


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=636666 RB=240@0

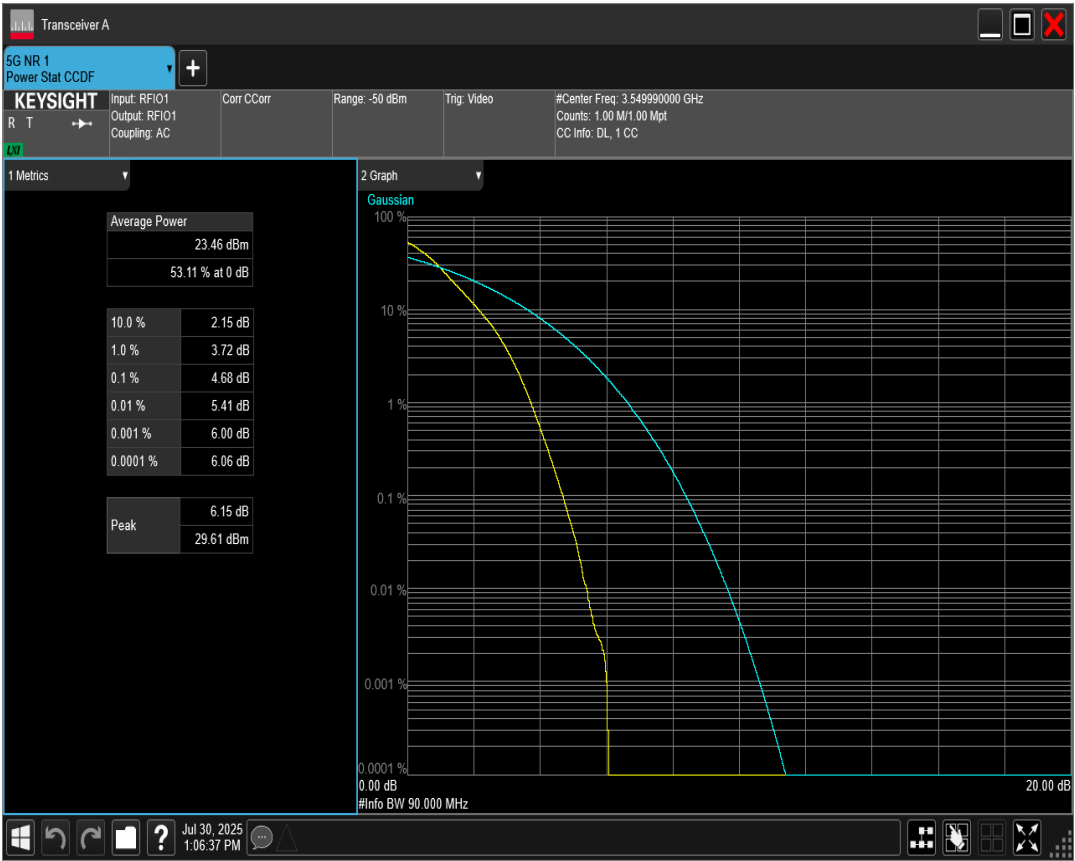


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=636666 RB=216@0

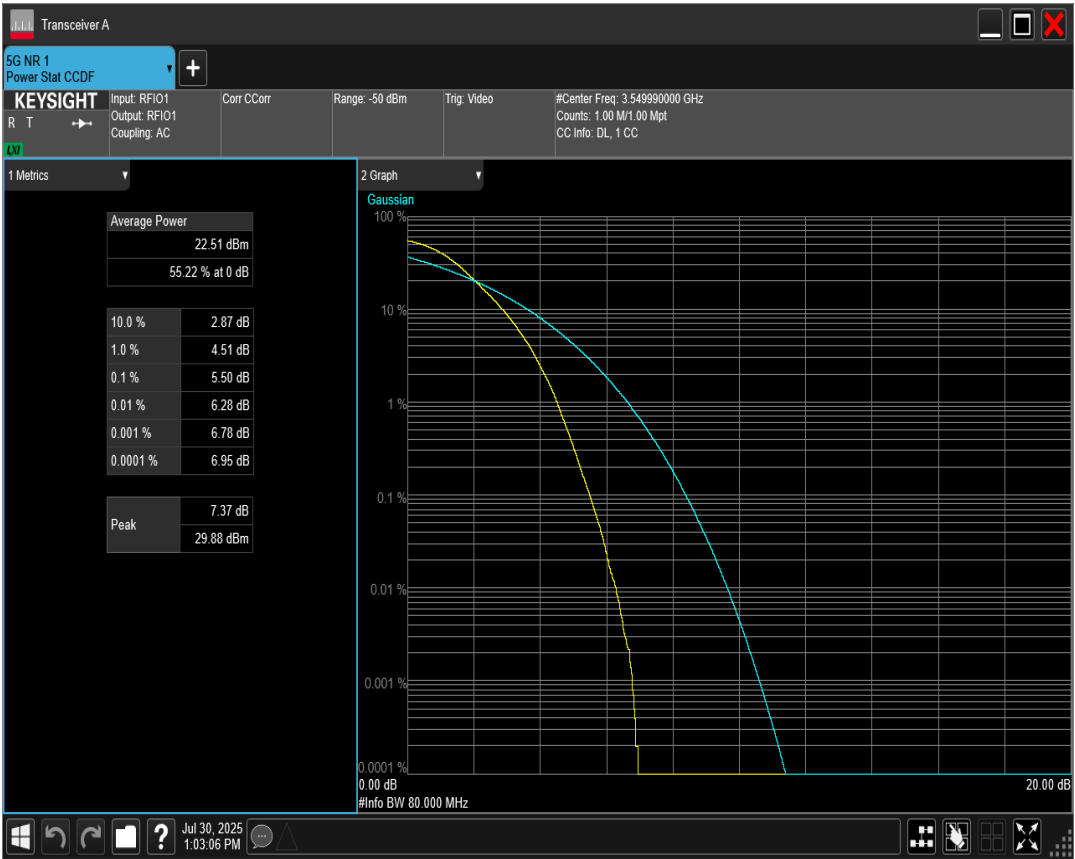


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=636666 RB=162@0

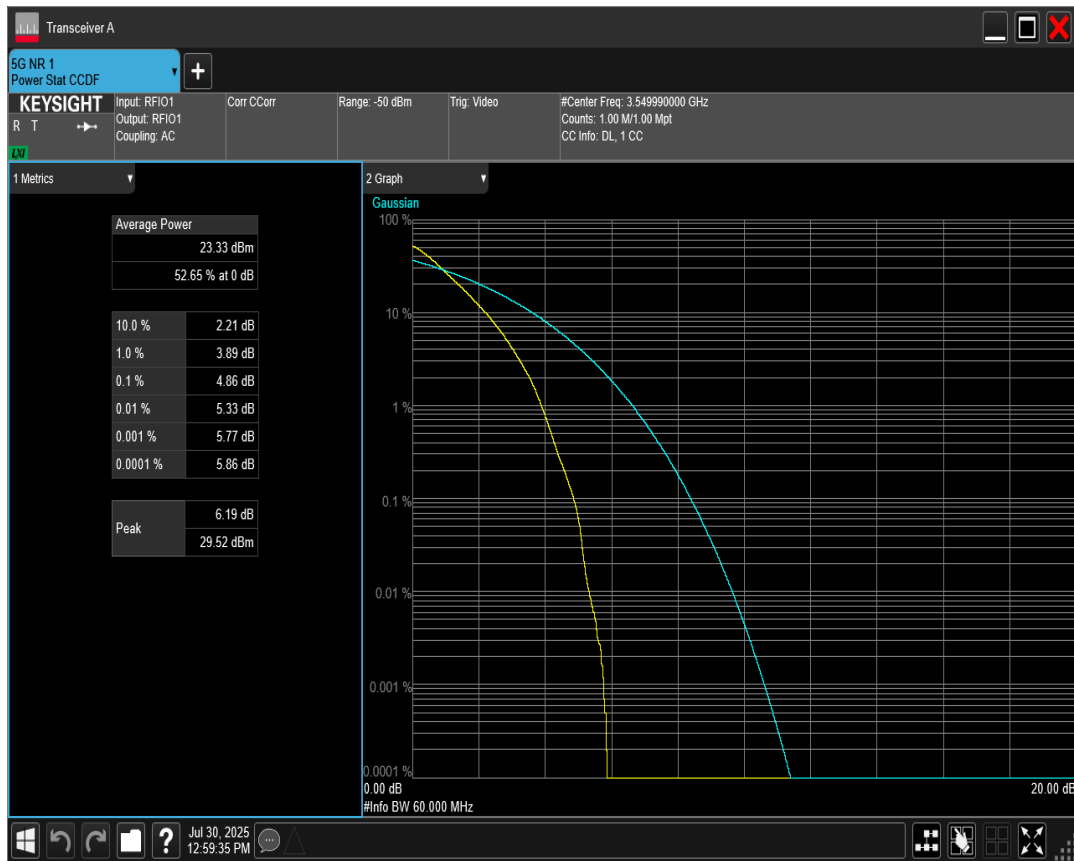


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=651332 RB=162@0

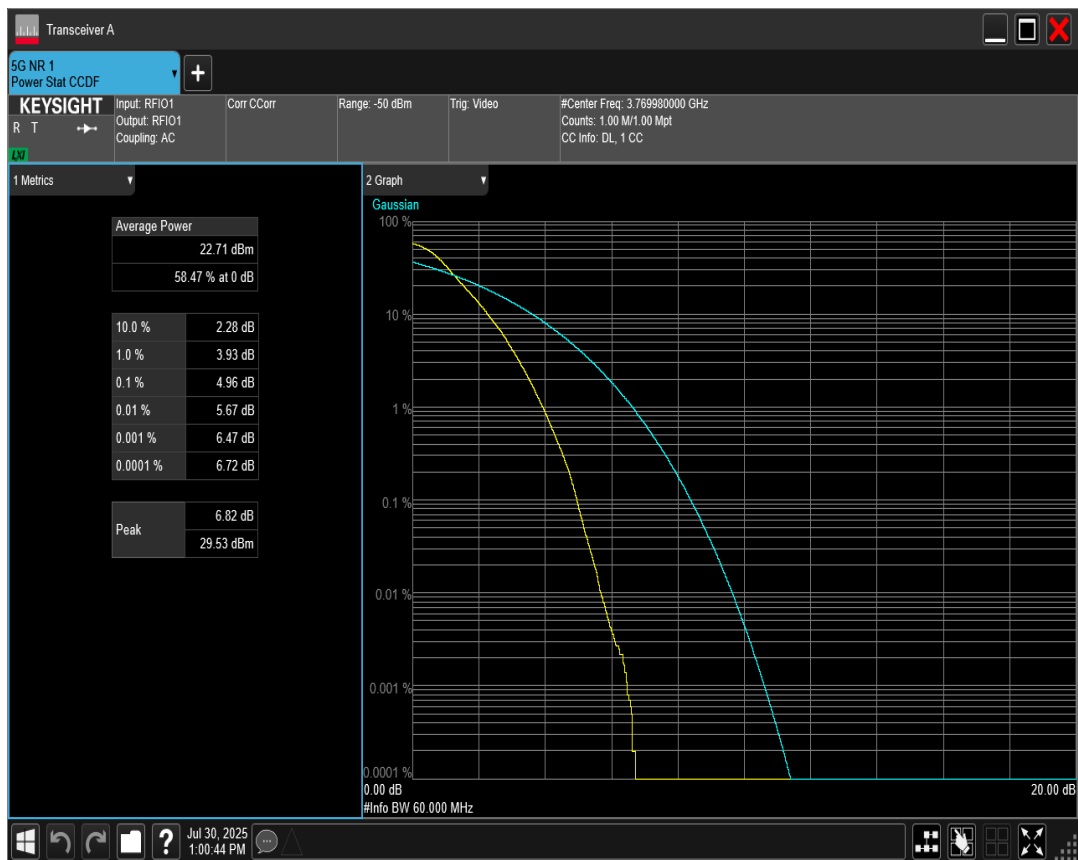


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=622668 RB=216@0

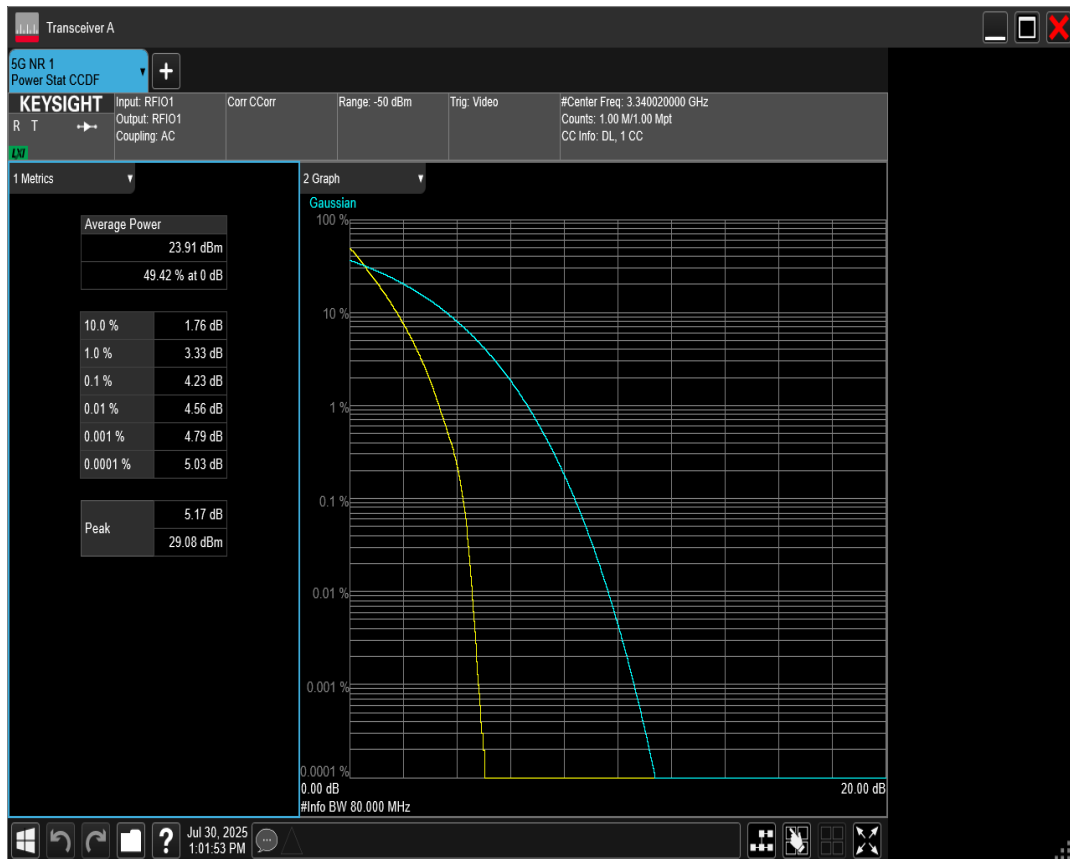


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=636666 RB=24@0

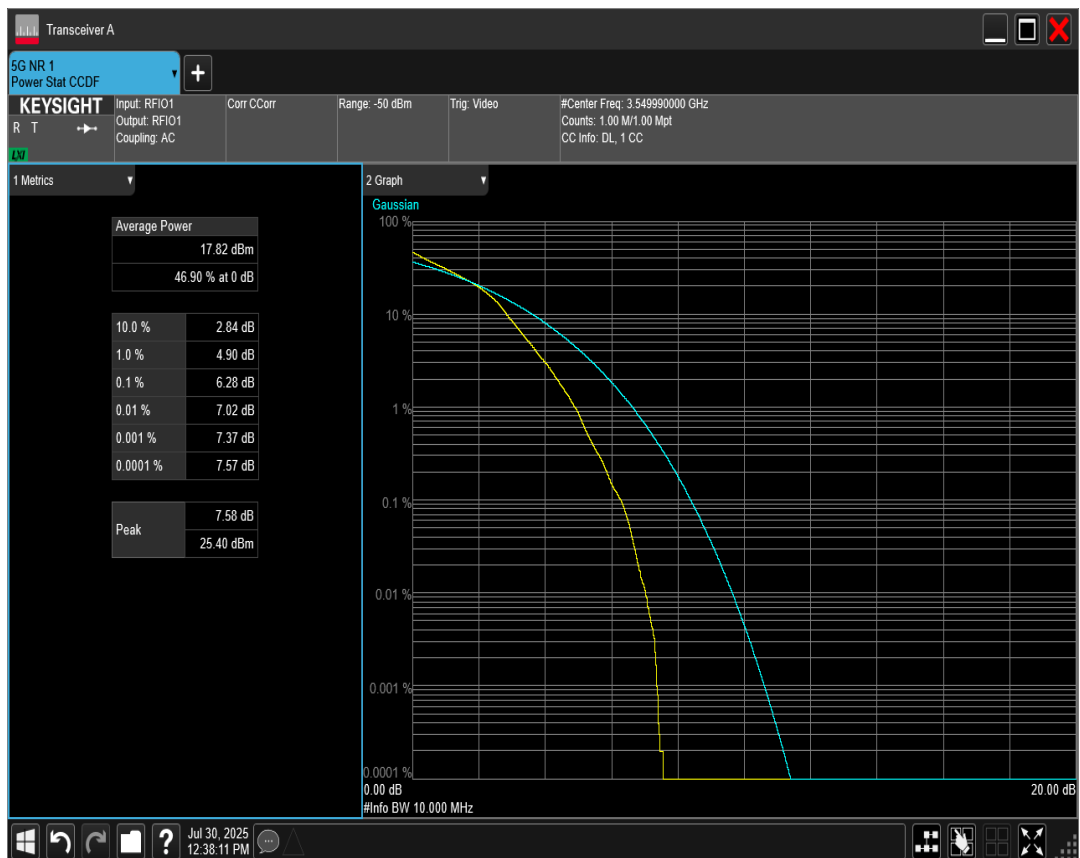


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=620334 RB=24@0

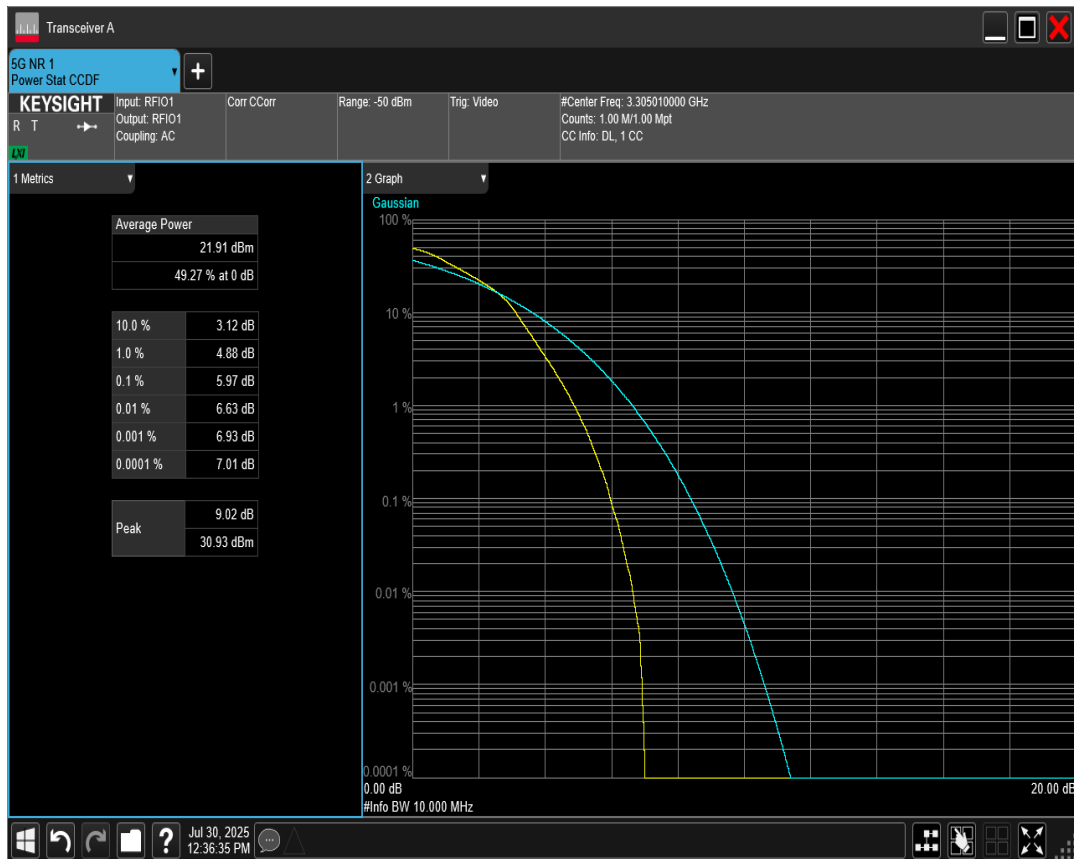


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=620500 RB=36@0

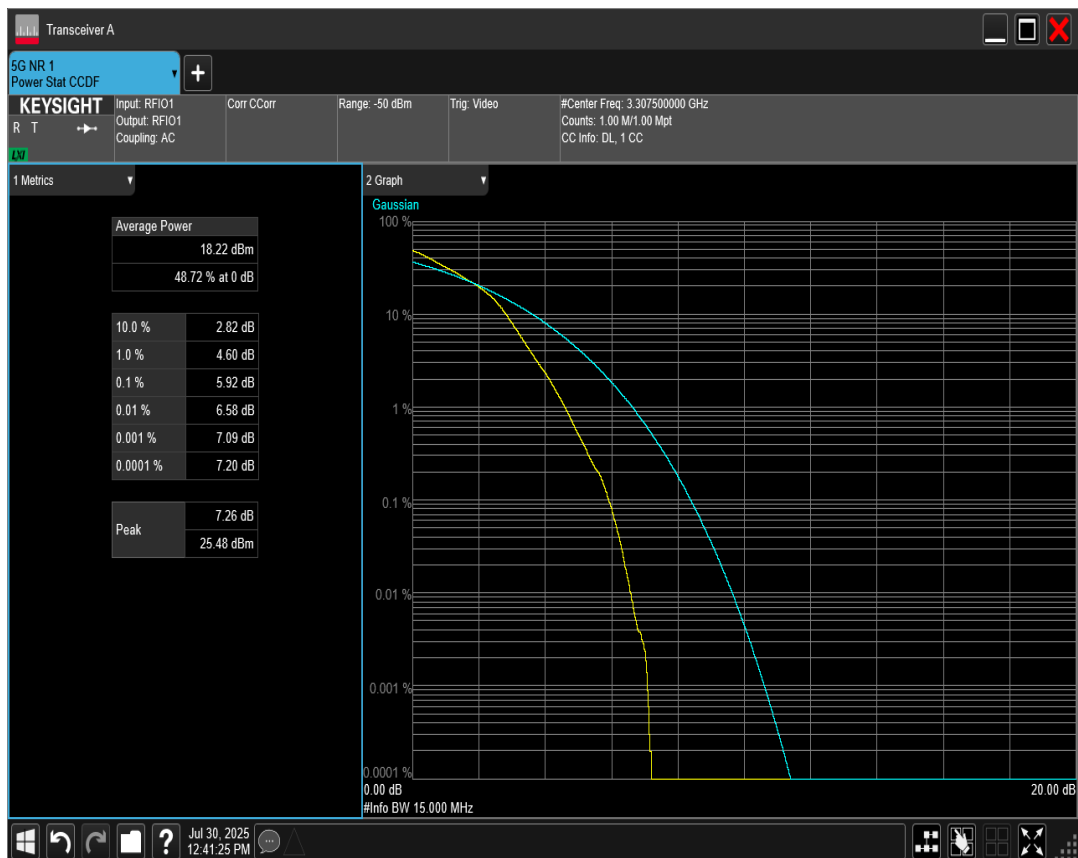


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=653000 RB=24@0

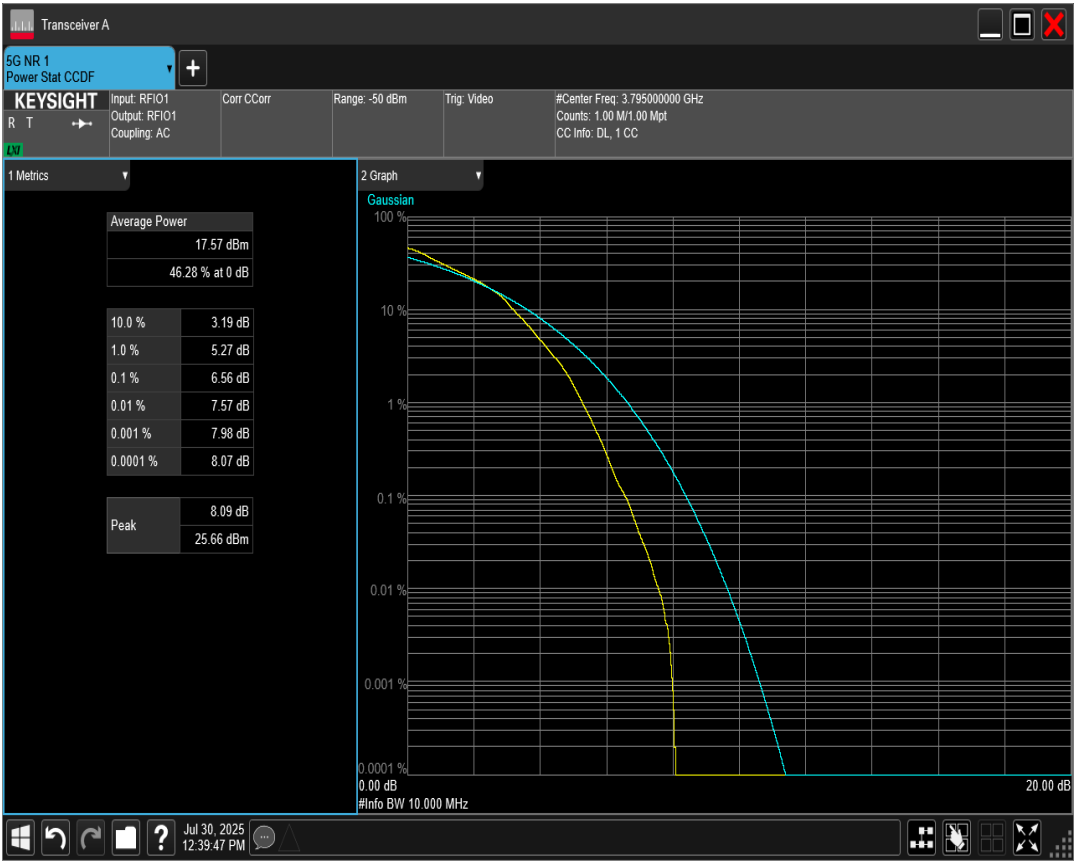


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=623334 RB=270@0

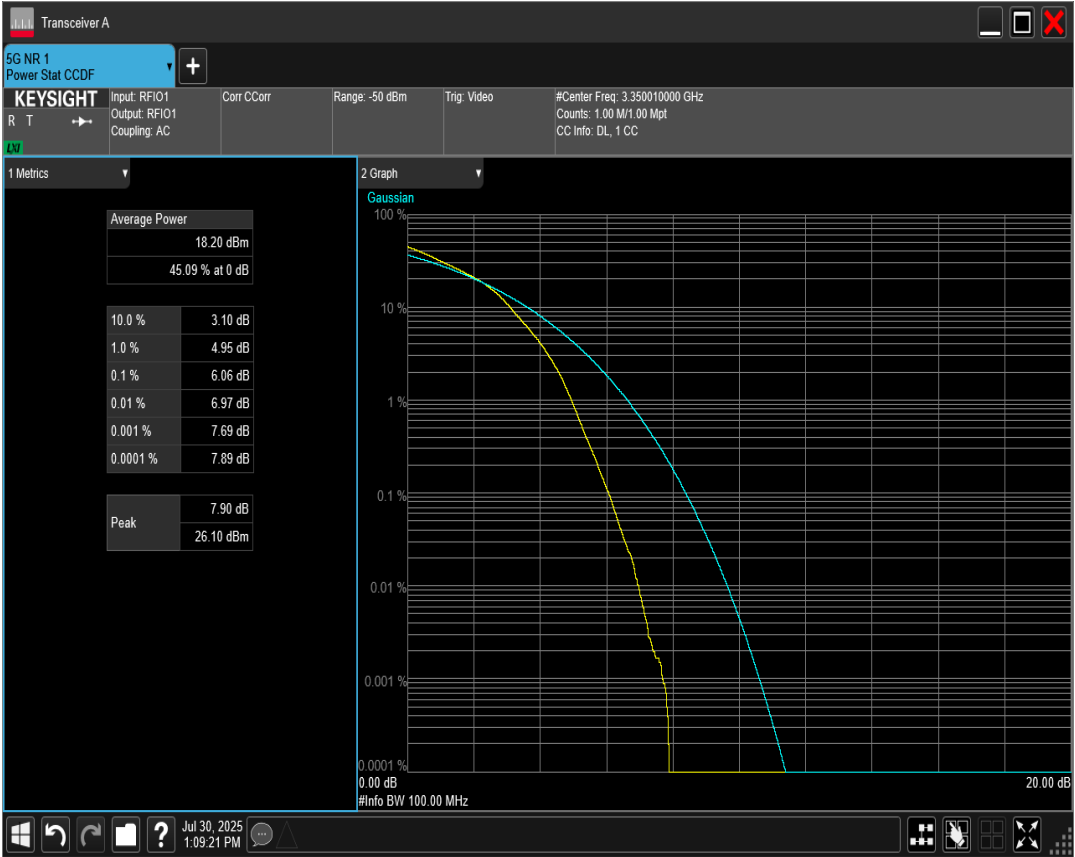


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=650332 RB=240@0

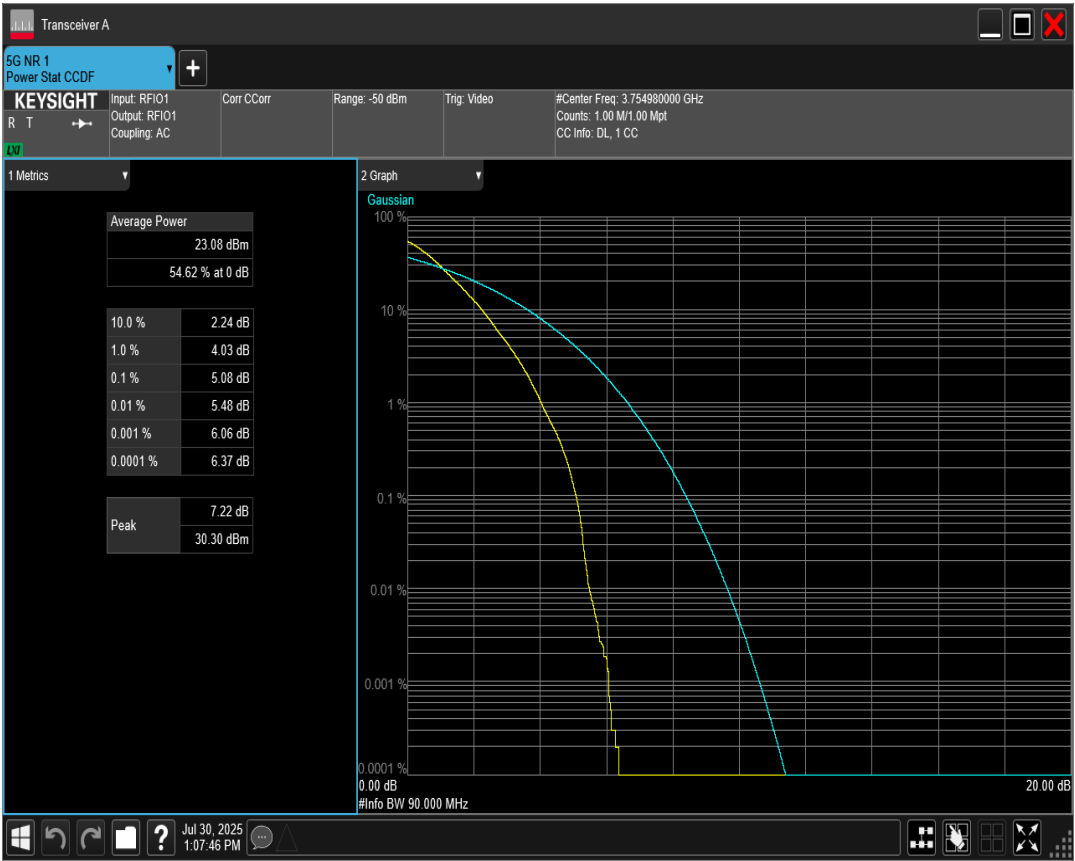


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=650000 RB=270@0

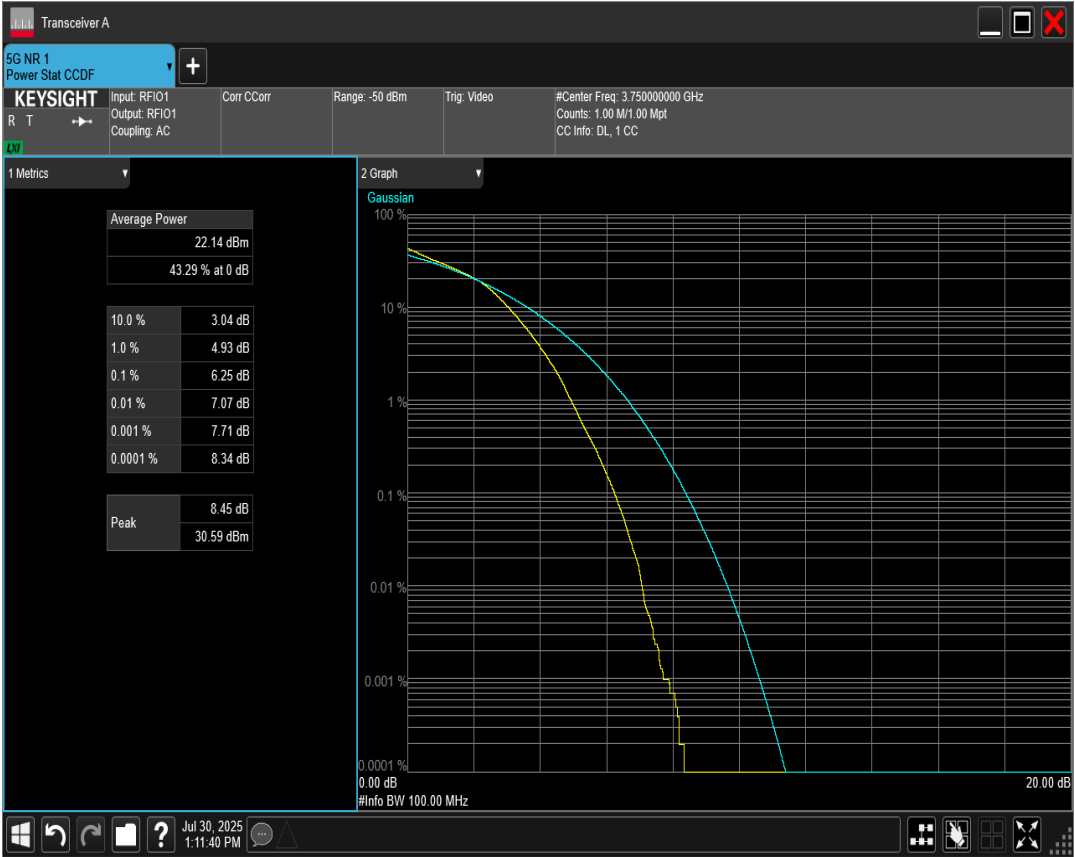


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=636666 RB=270@0

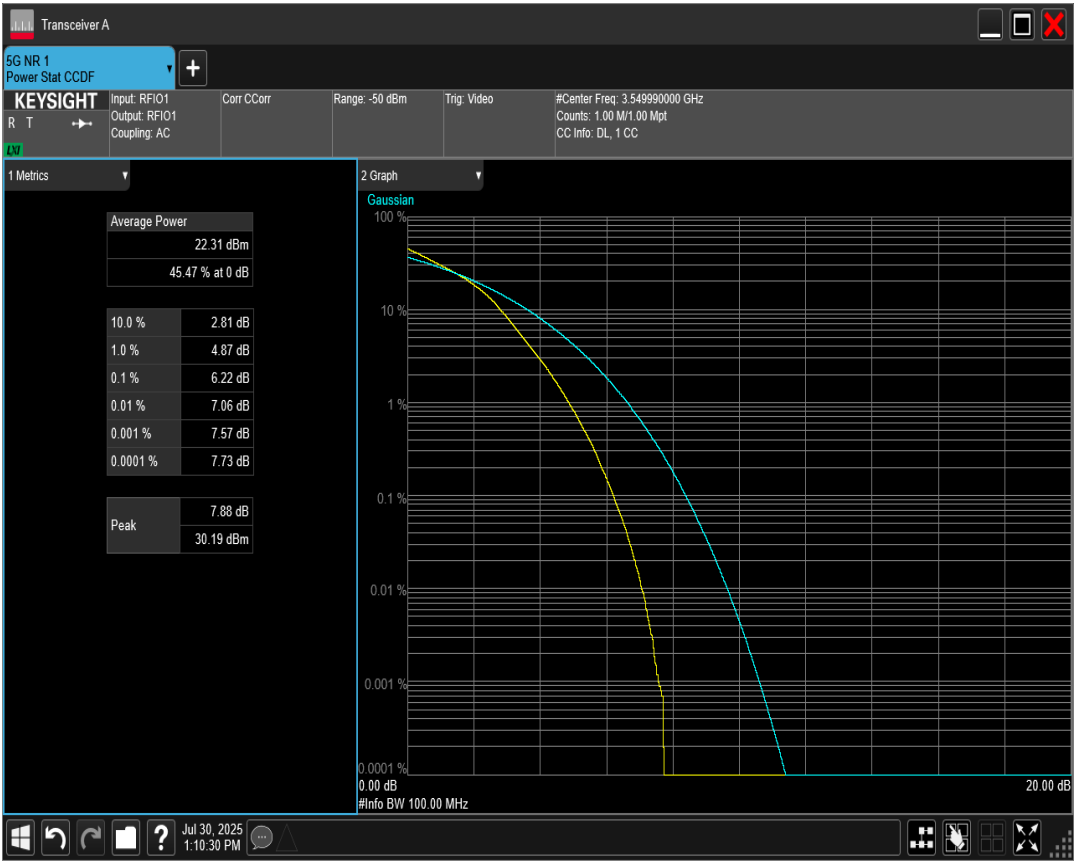


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=620668 RB=50@0

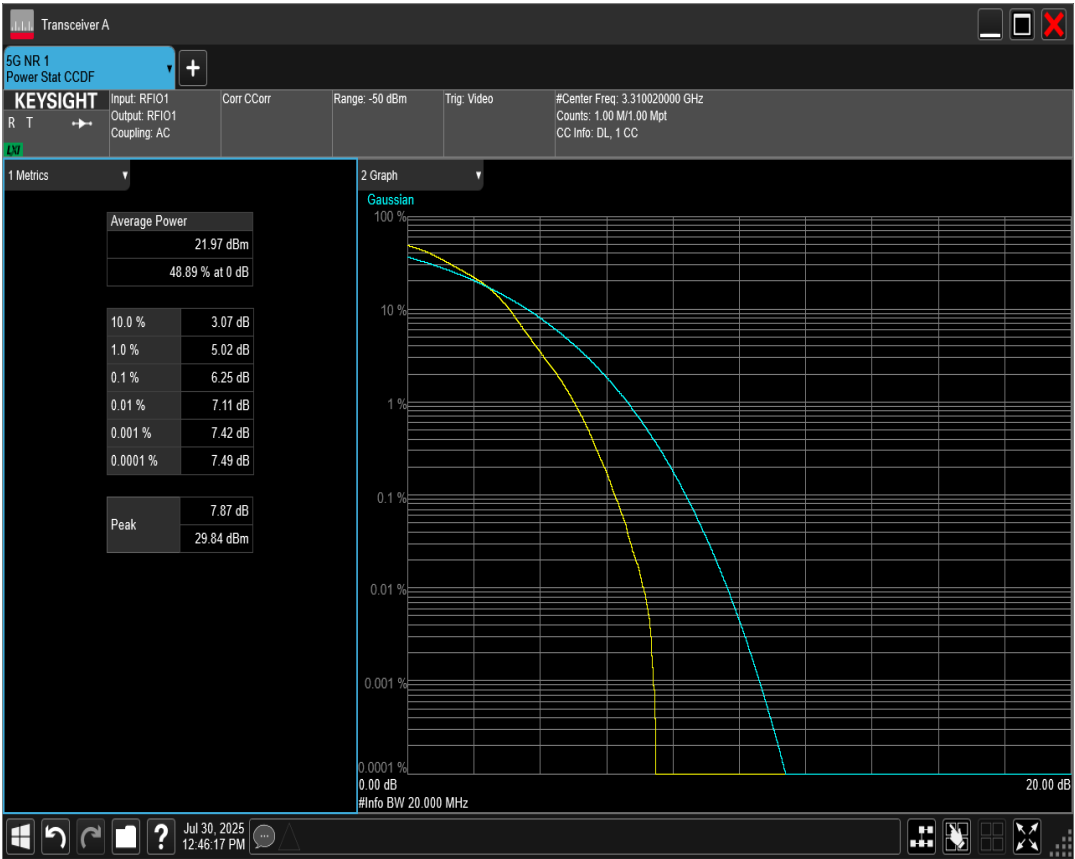


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=636666 RB=50@0

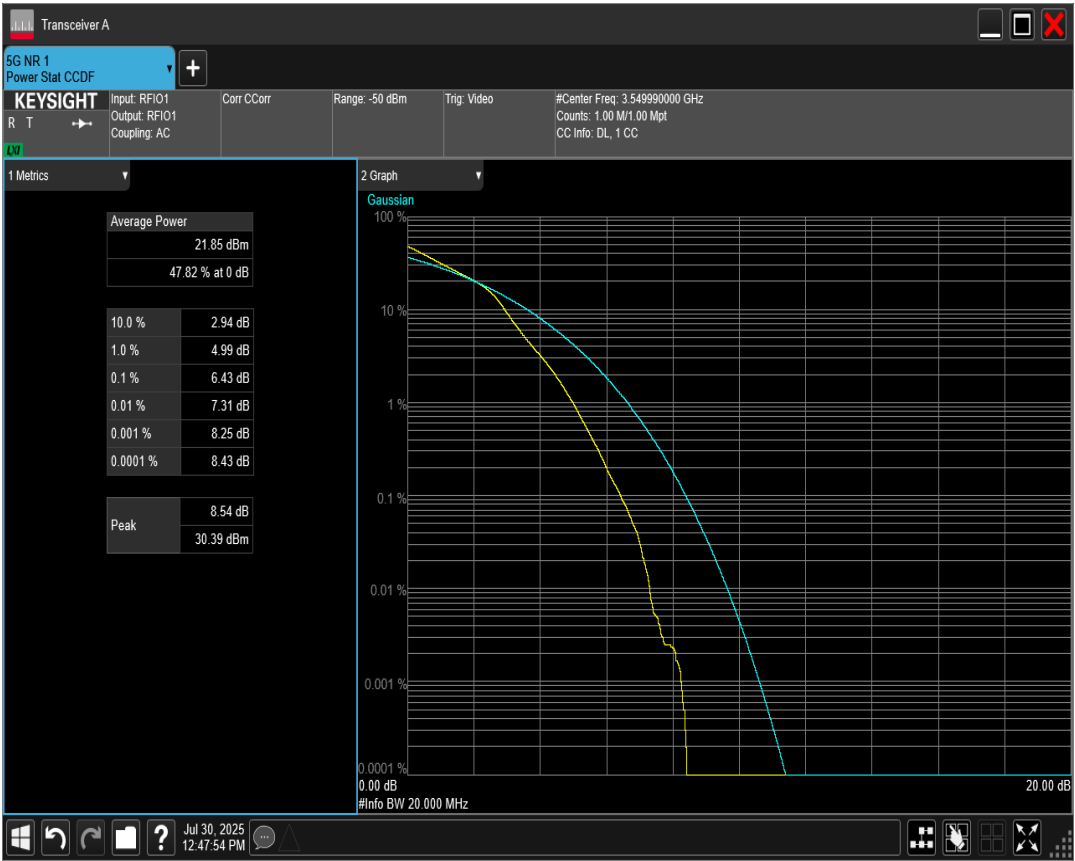


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=636666 RB=36@0

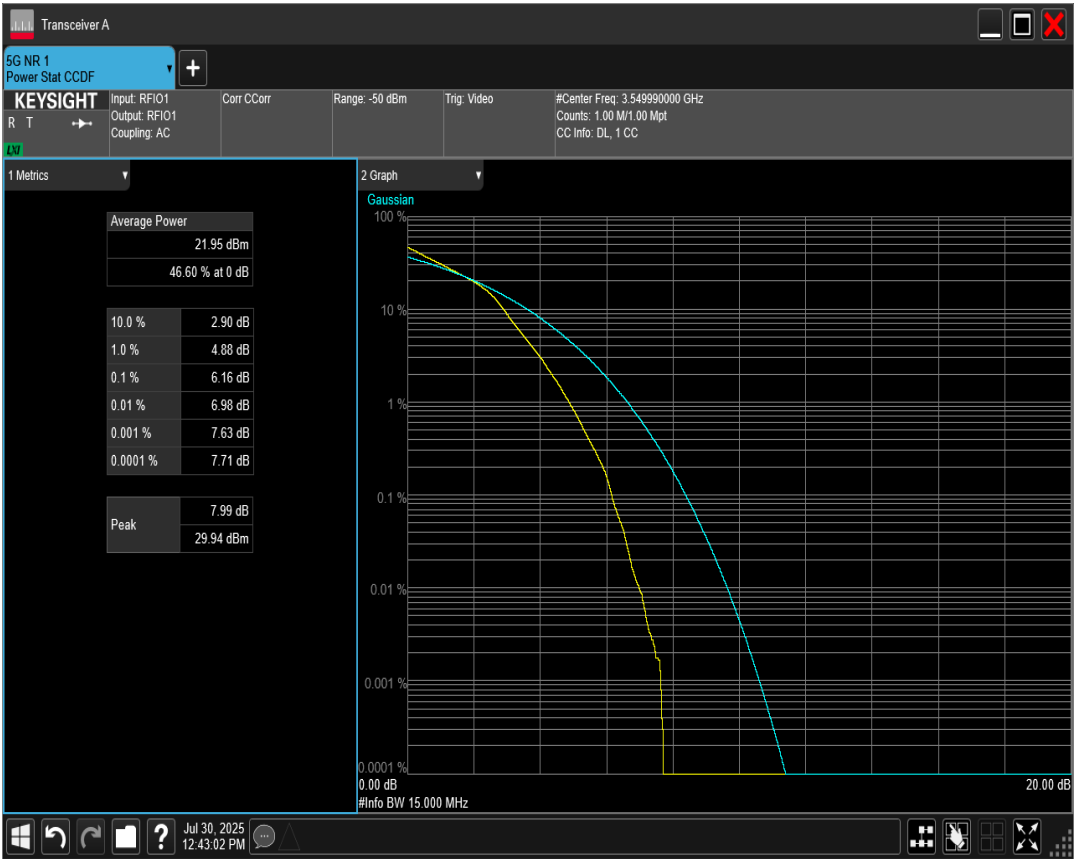


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=652832 RB=36@0

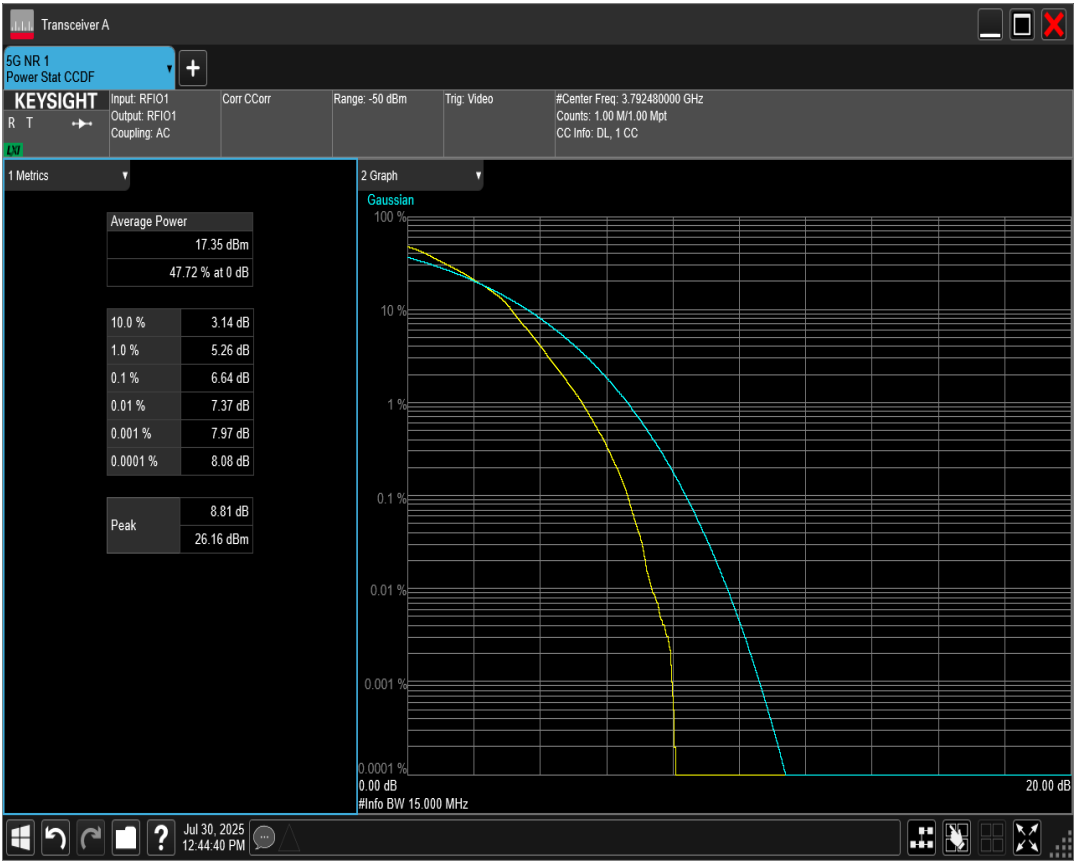


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=636666 RB=100@0

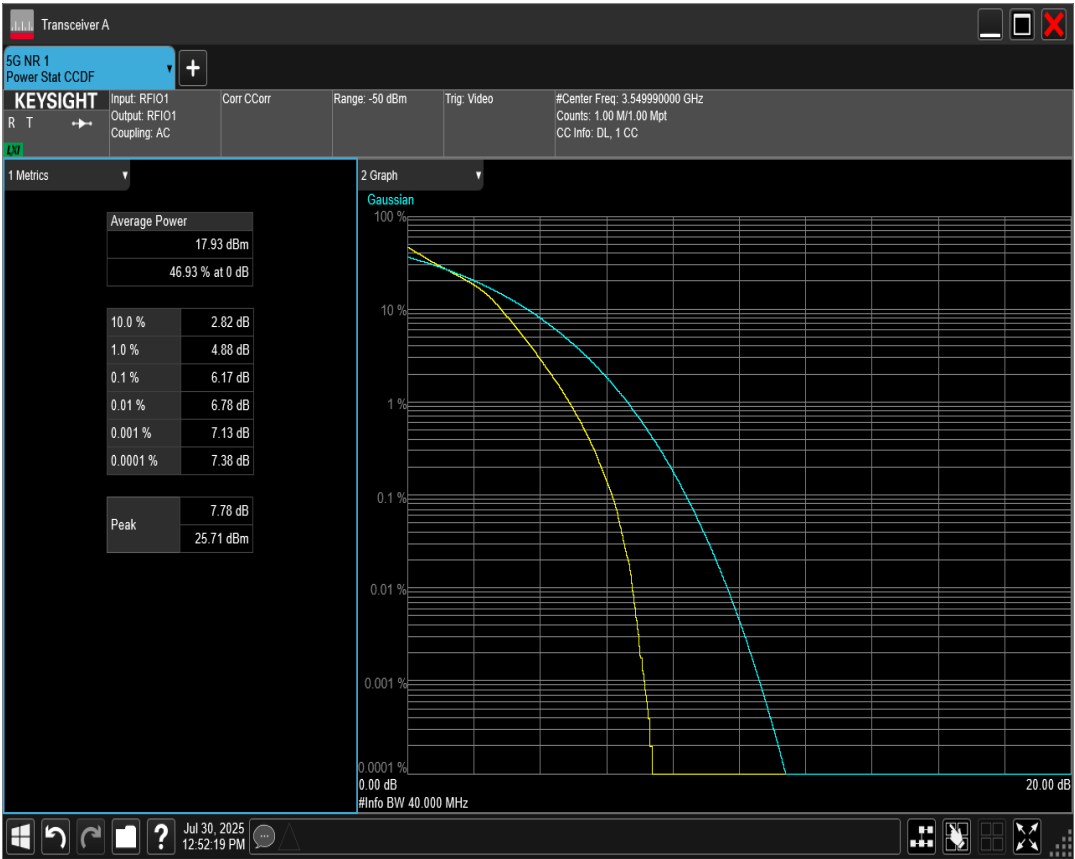


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=621334 RB=100@0

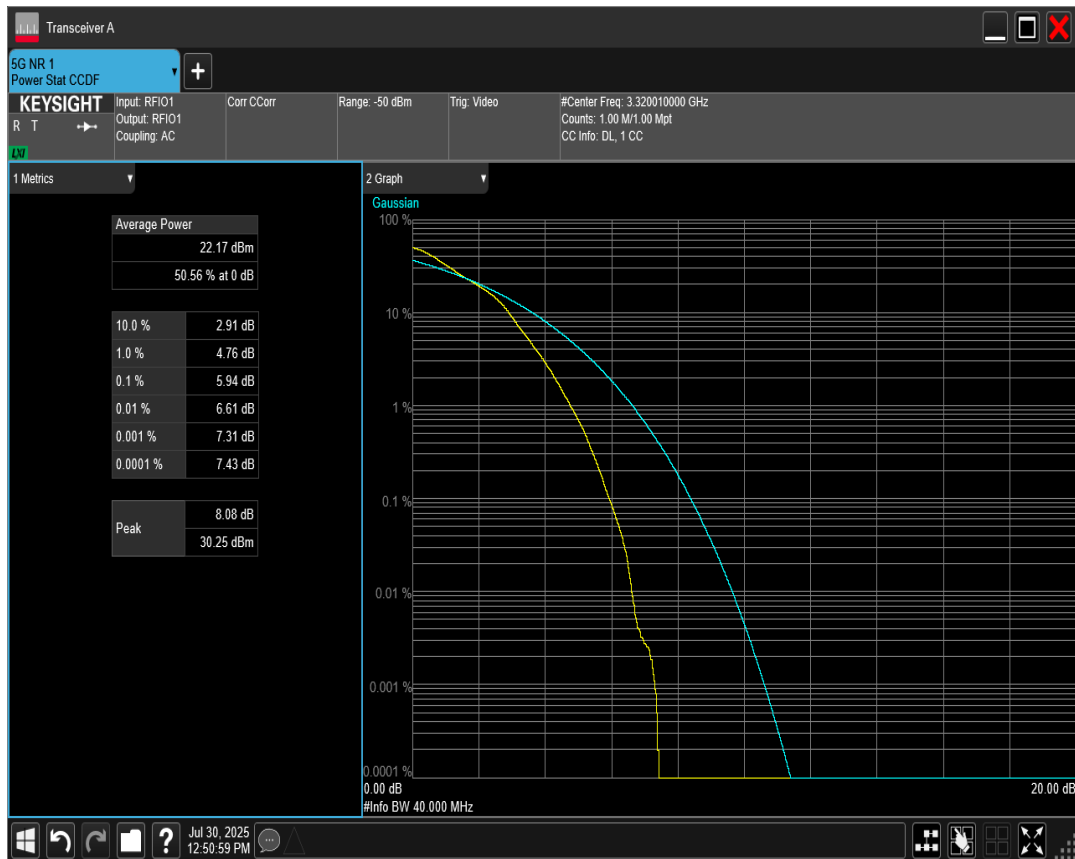


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=652666 RB=50@0

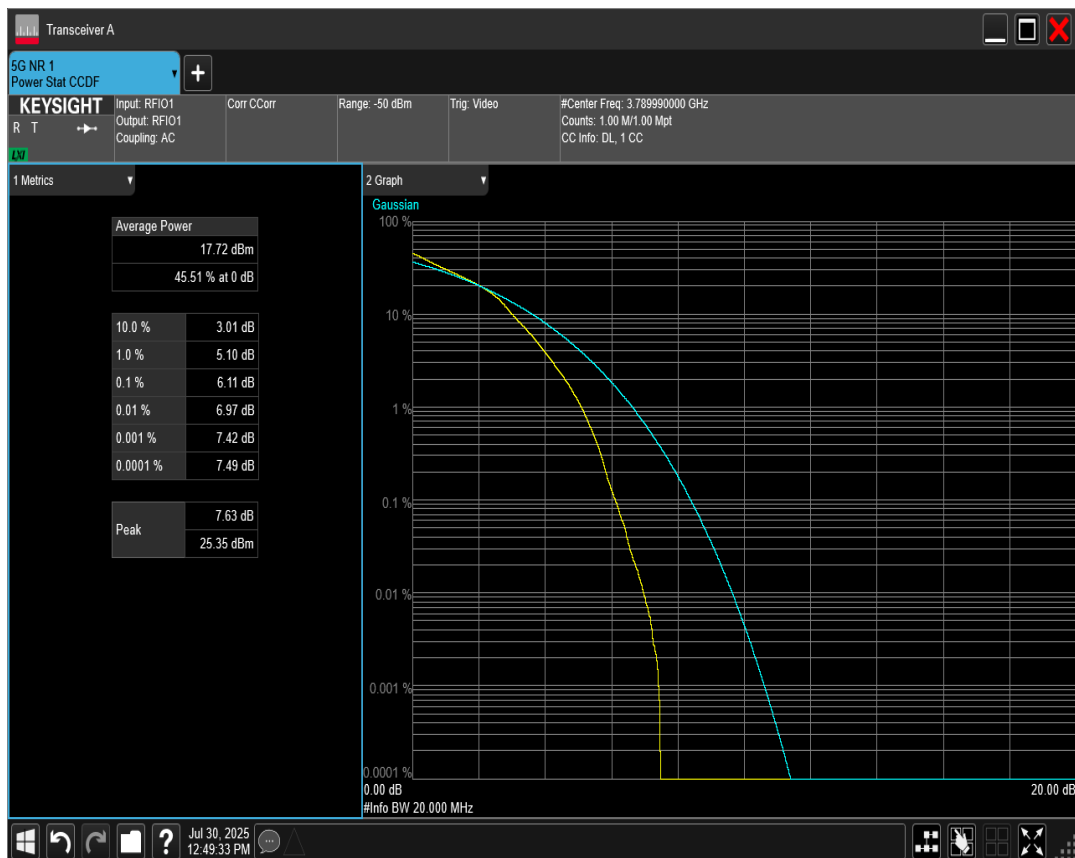


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=651332 RB=162@0

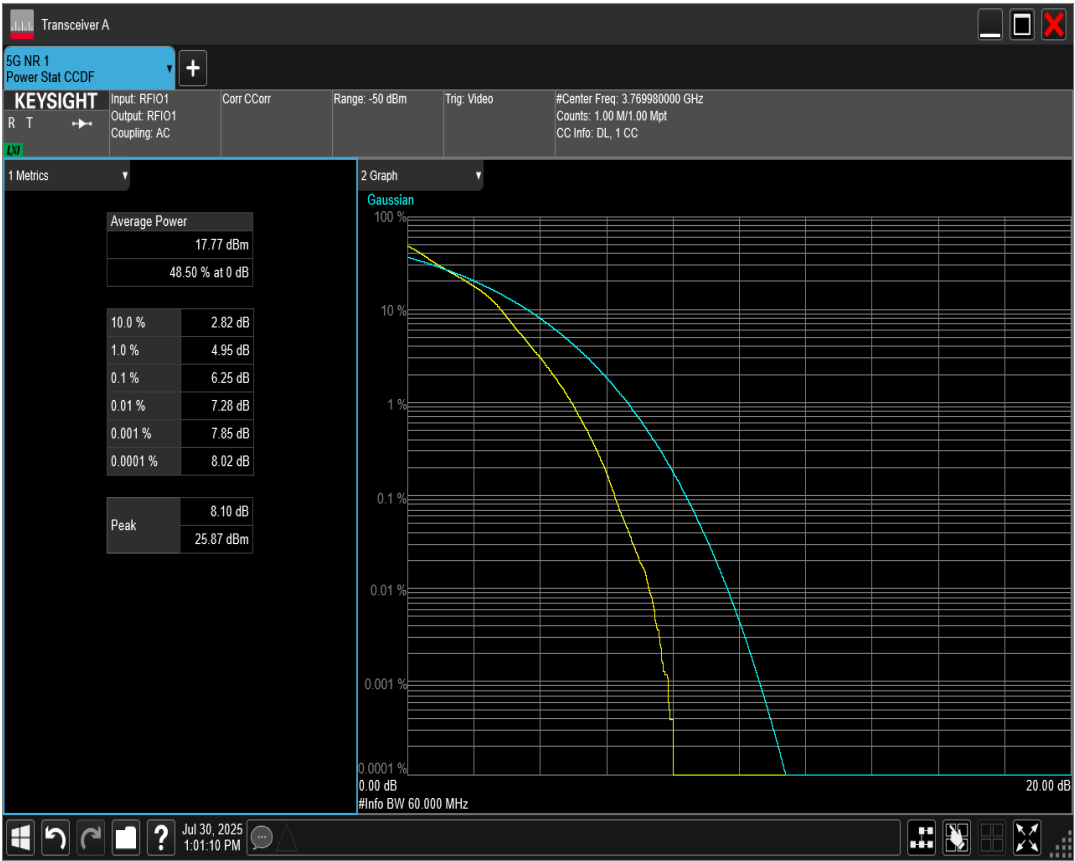


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=636666 RB=162@0

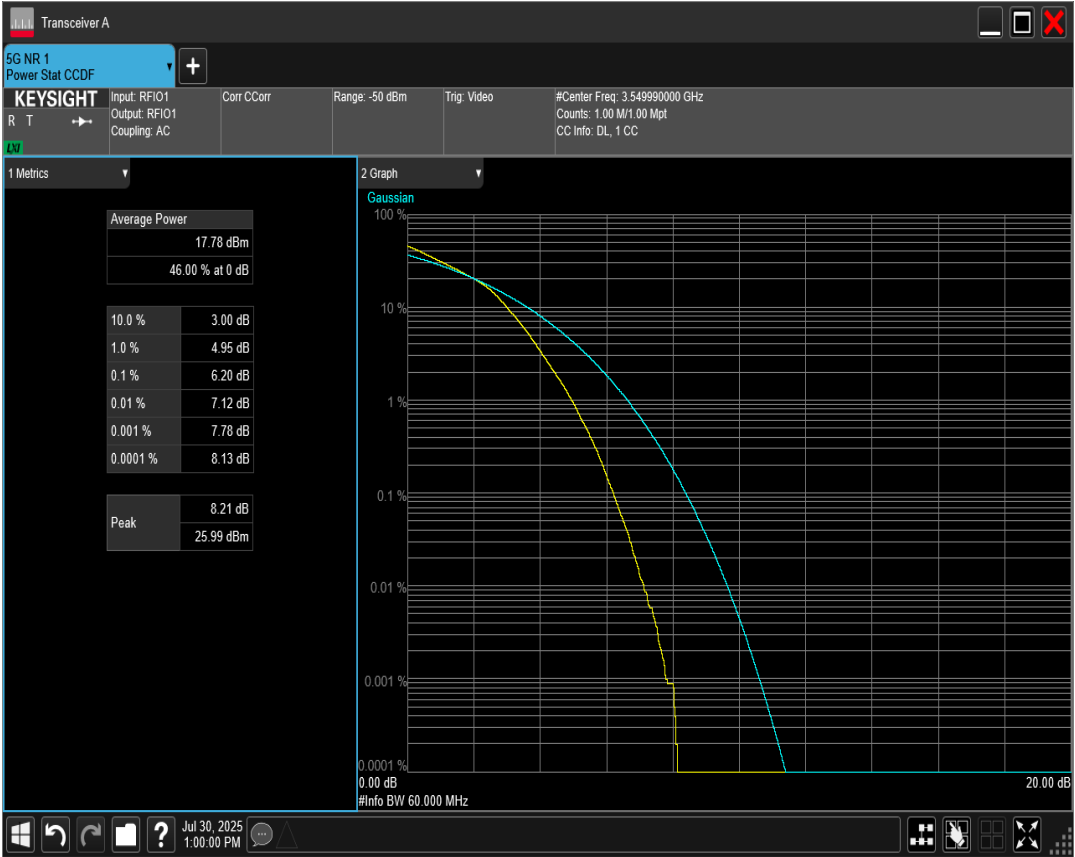


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=636666 RB=216@0

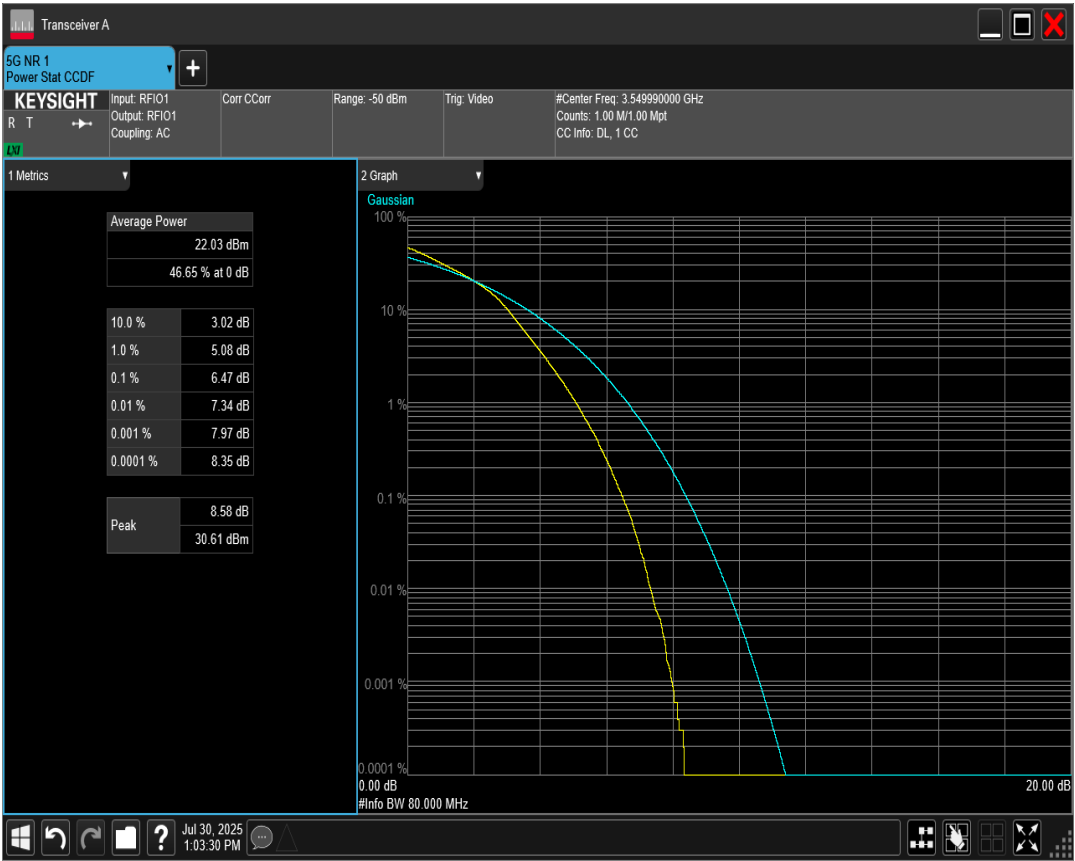


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=622668 RB=216@0

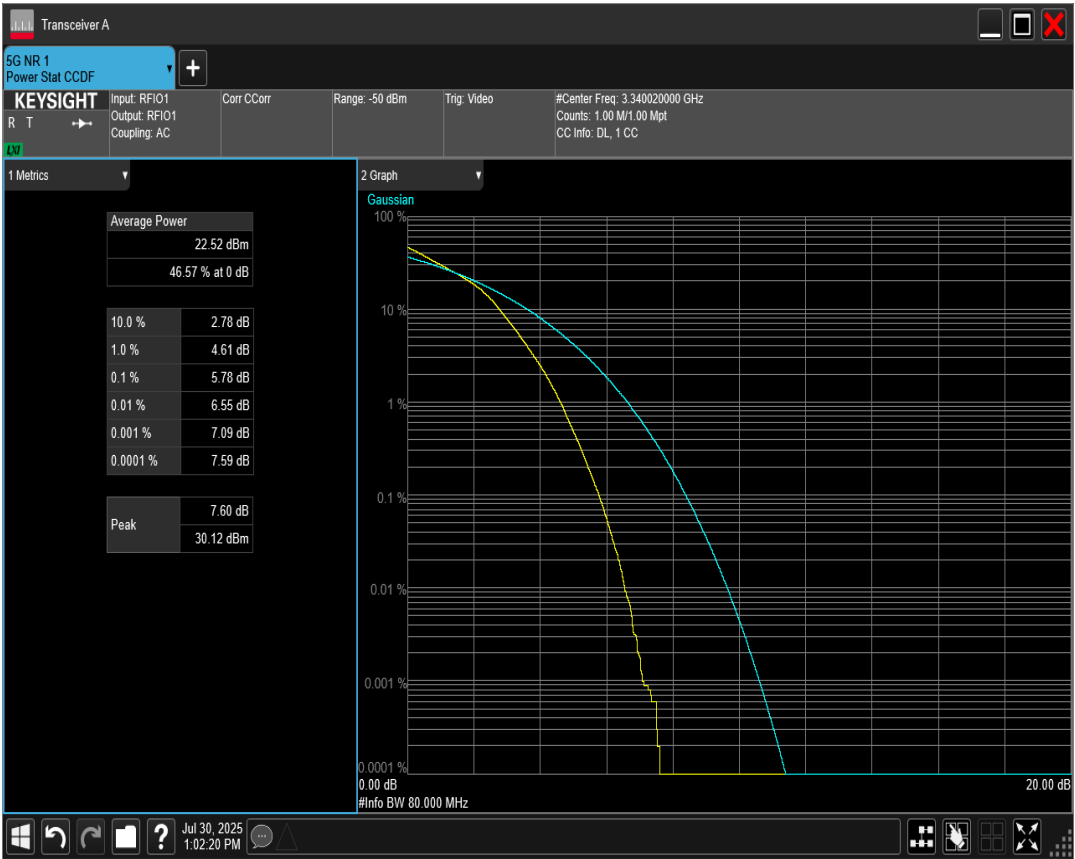


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=622000 RB=162@0

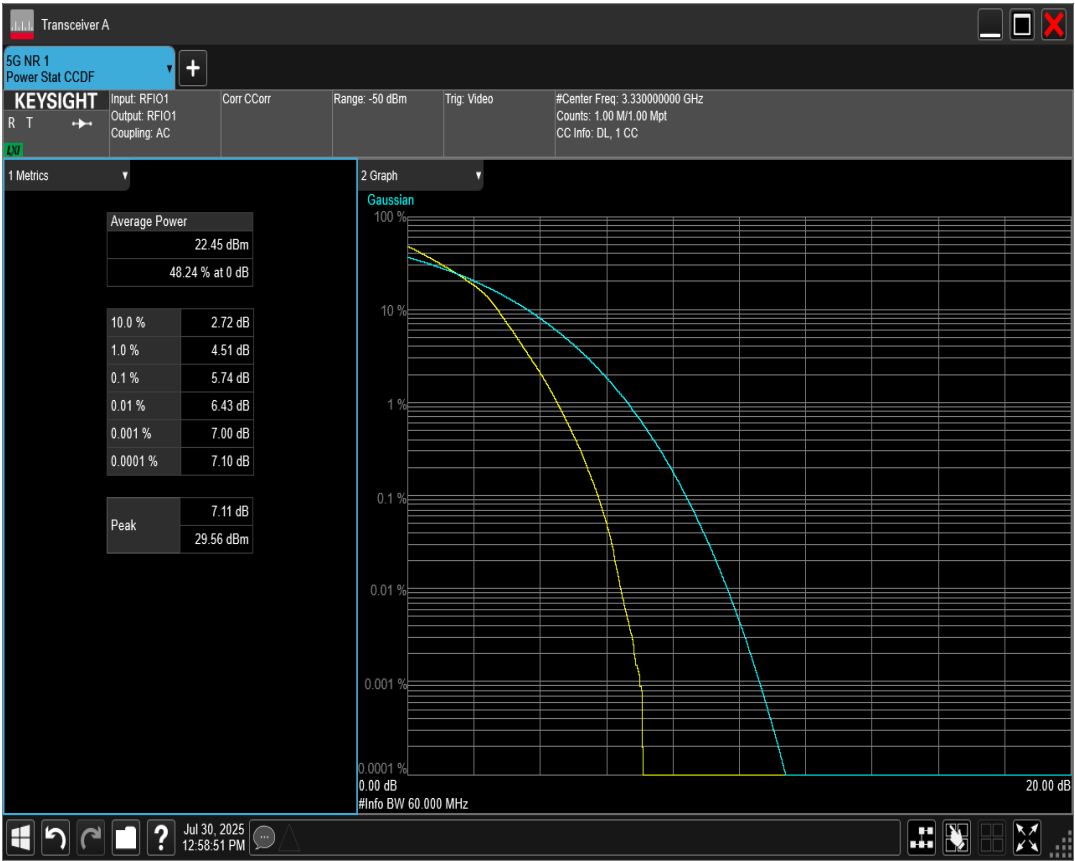


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=621668 RB=128@0

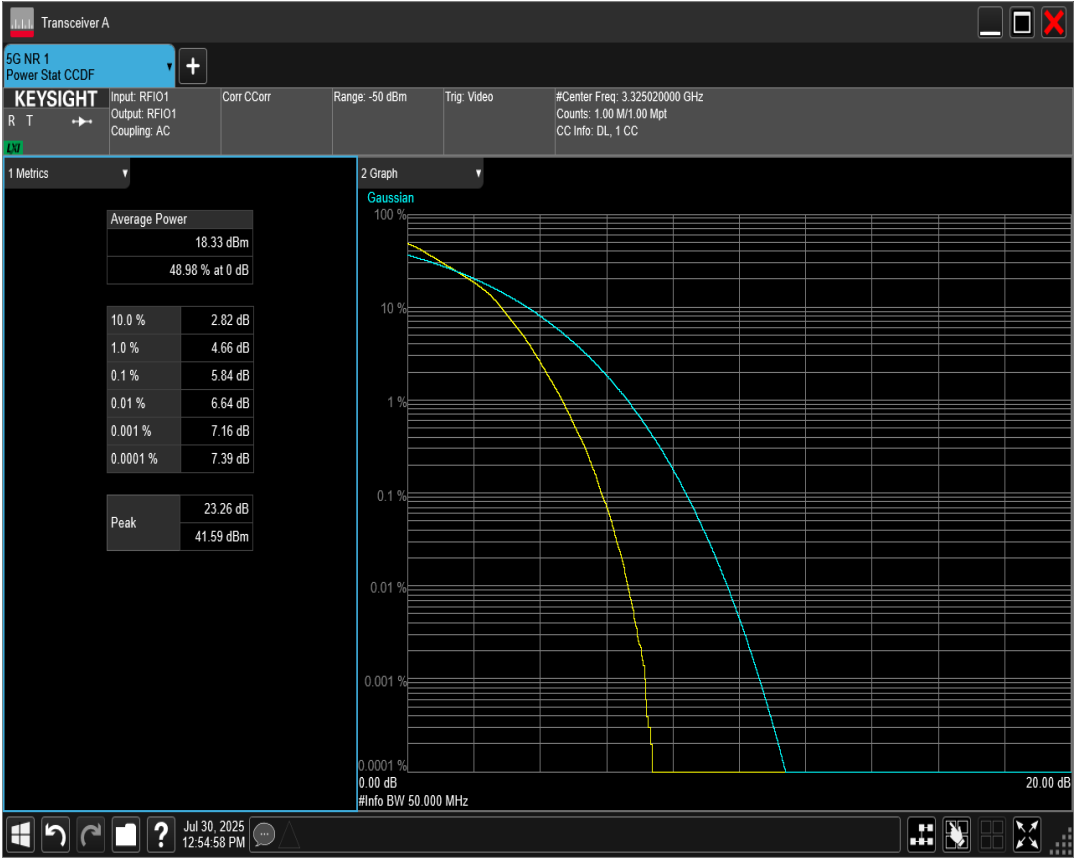


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=652000 RB=100@0

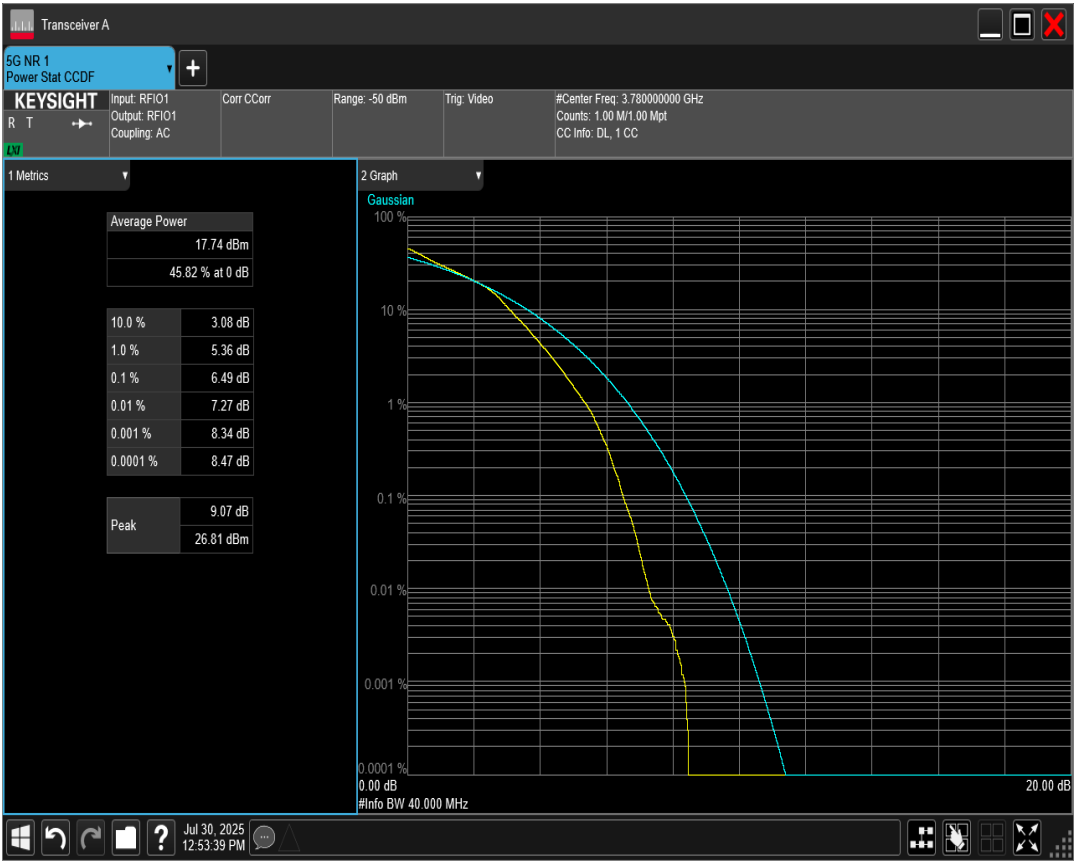


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=651666 RB=128@0

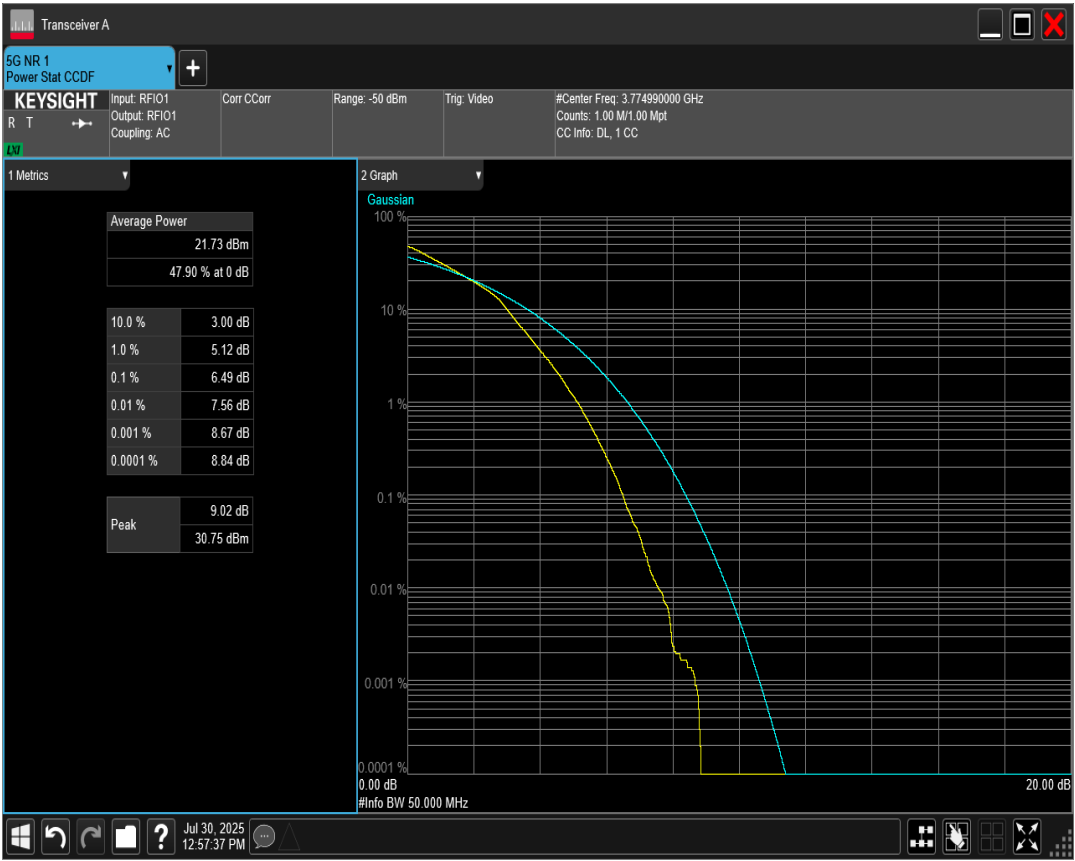


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=636666 RB=128@0

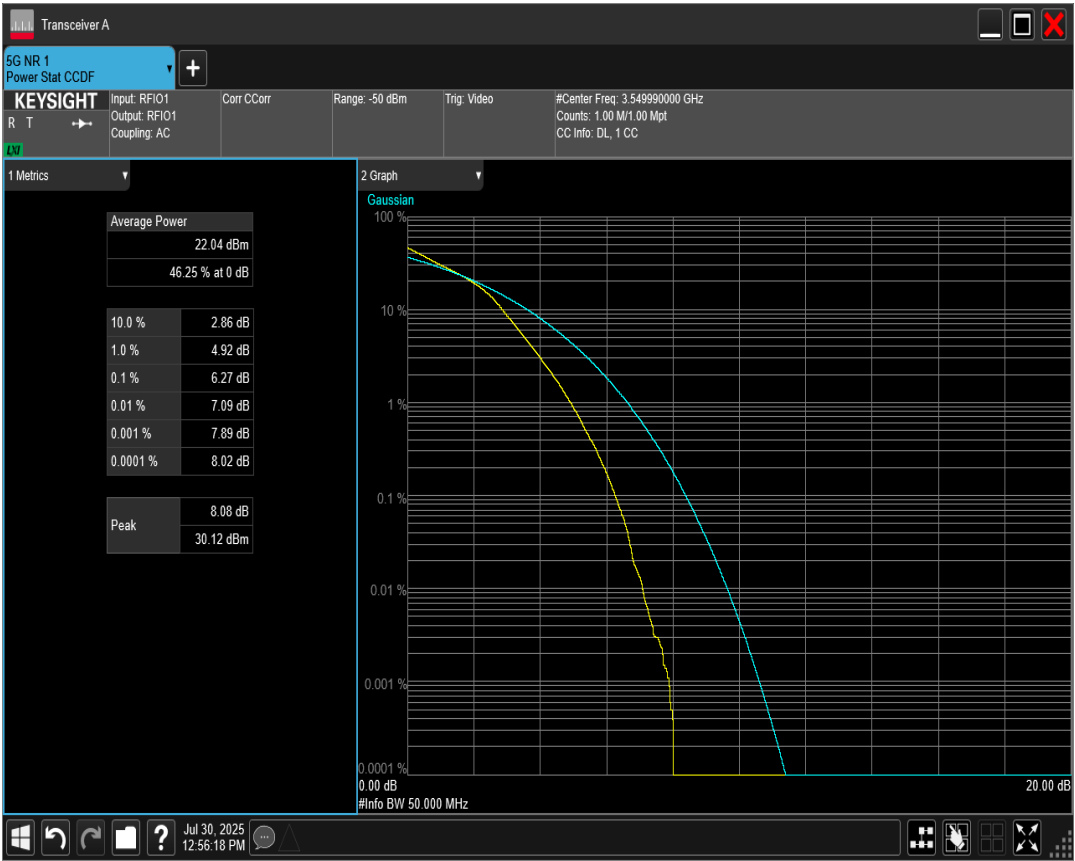


n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=623334 RB=270@0

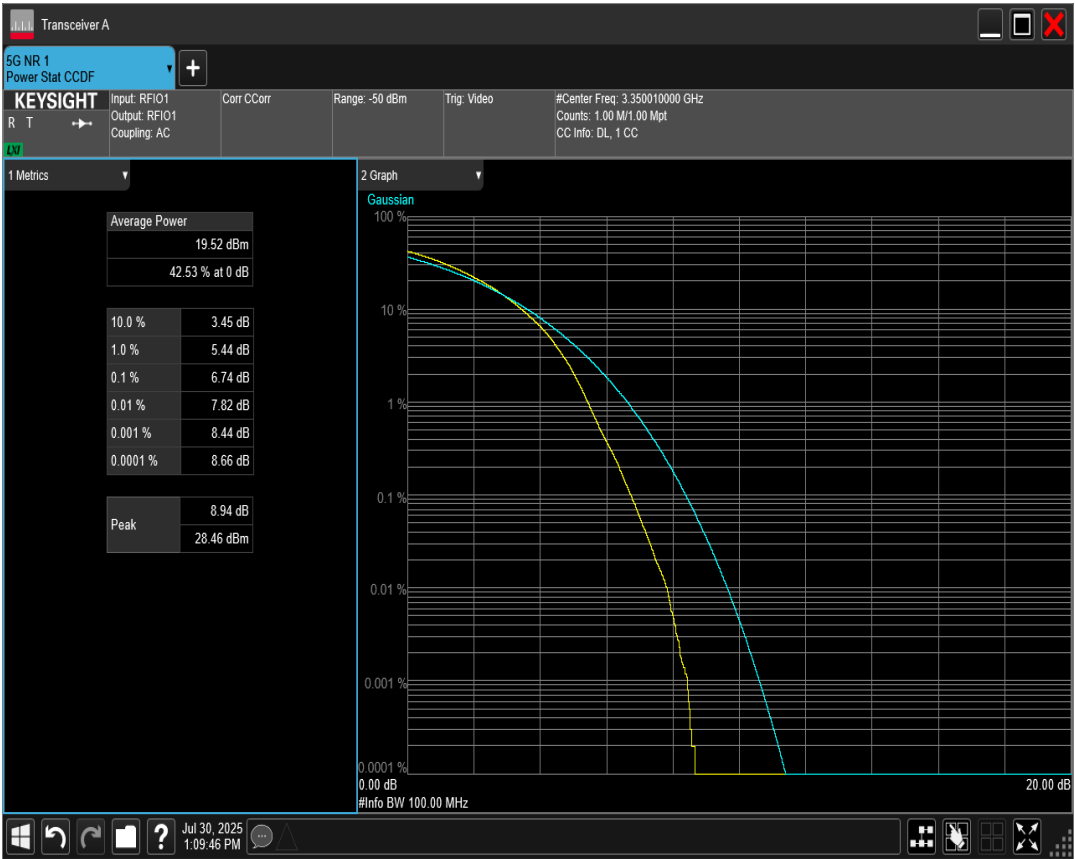


n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=636666 RB=270@0

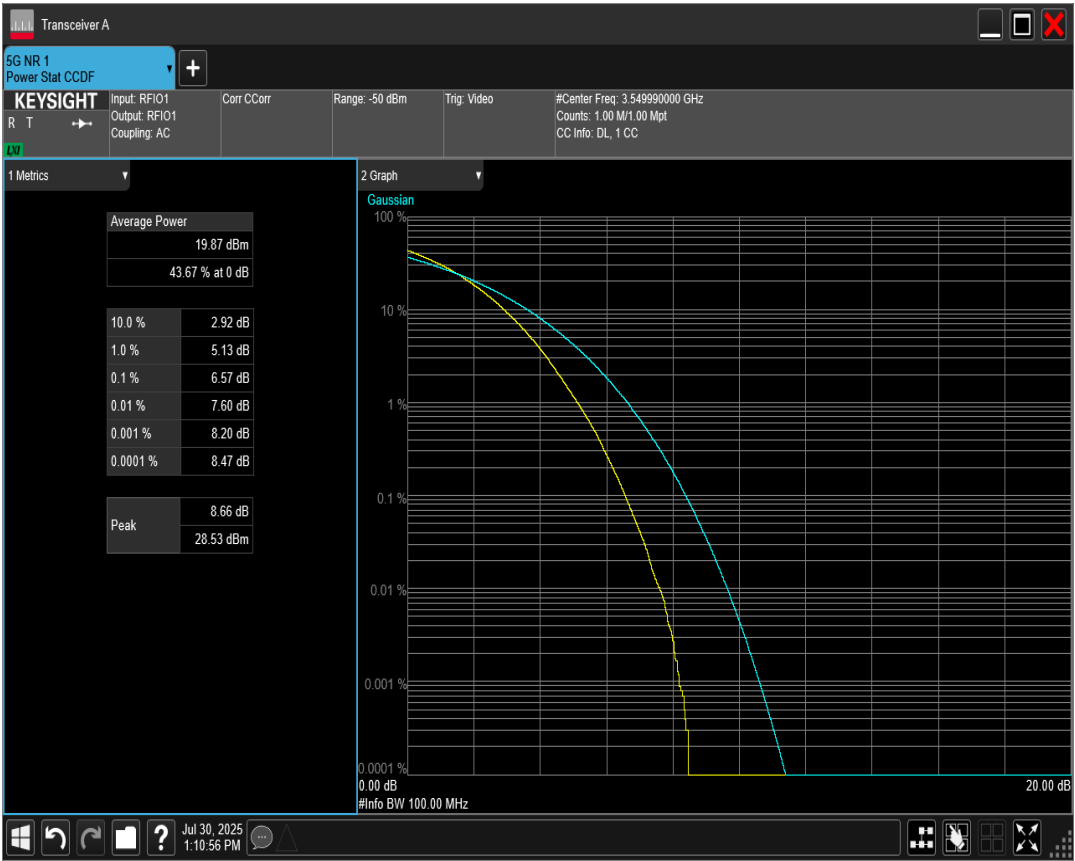


n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=650000 RB=270@0

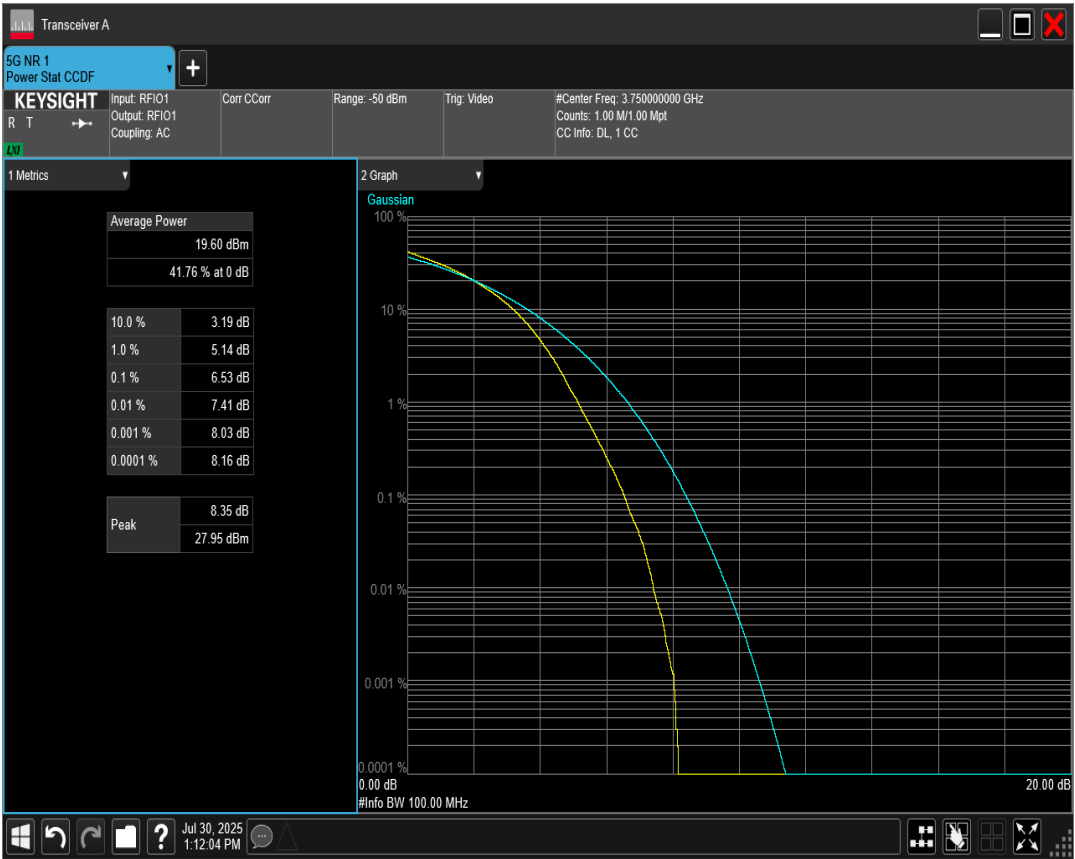


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=650332 RB=240@0

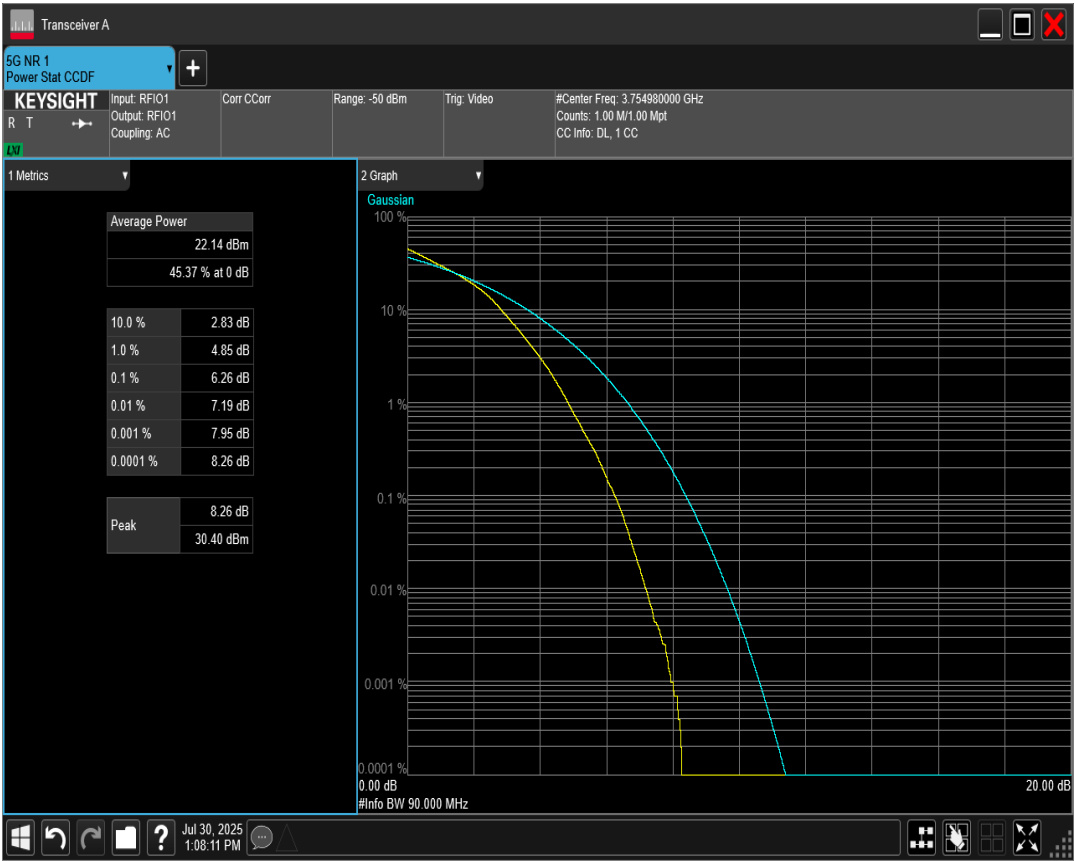


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=650666 RB=216@0

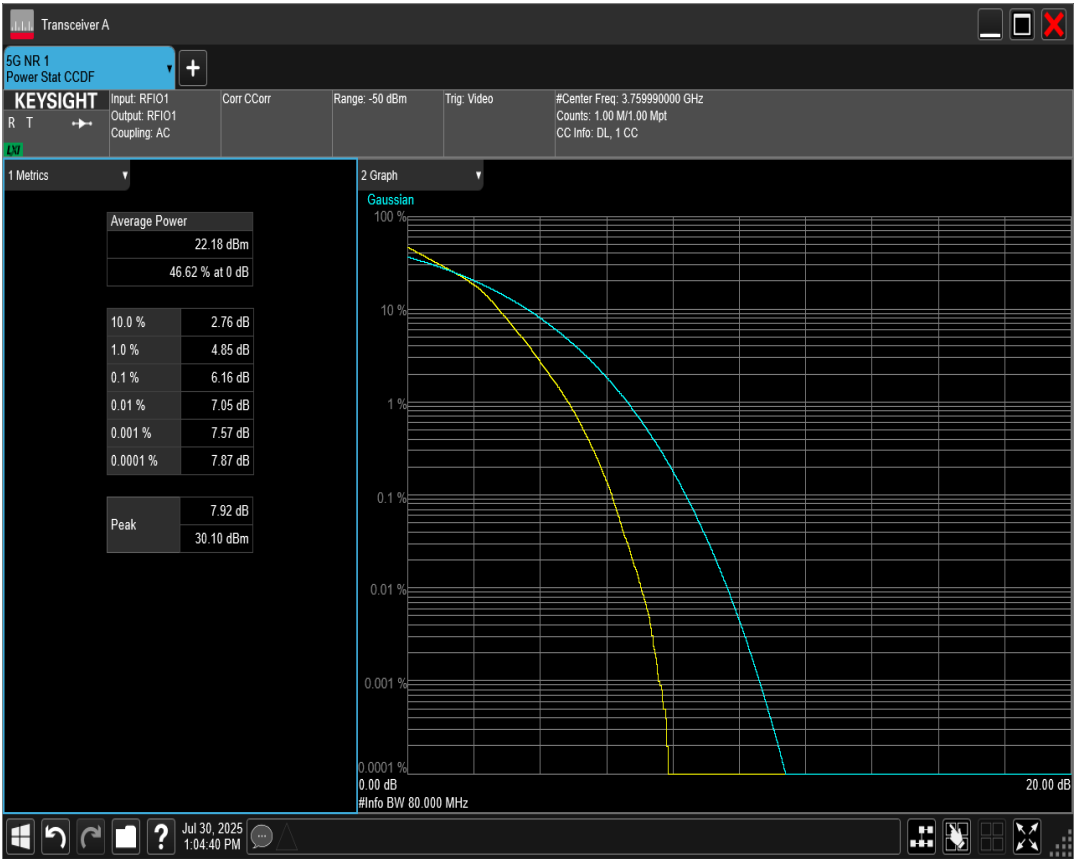


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=623000 RB=240@0

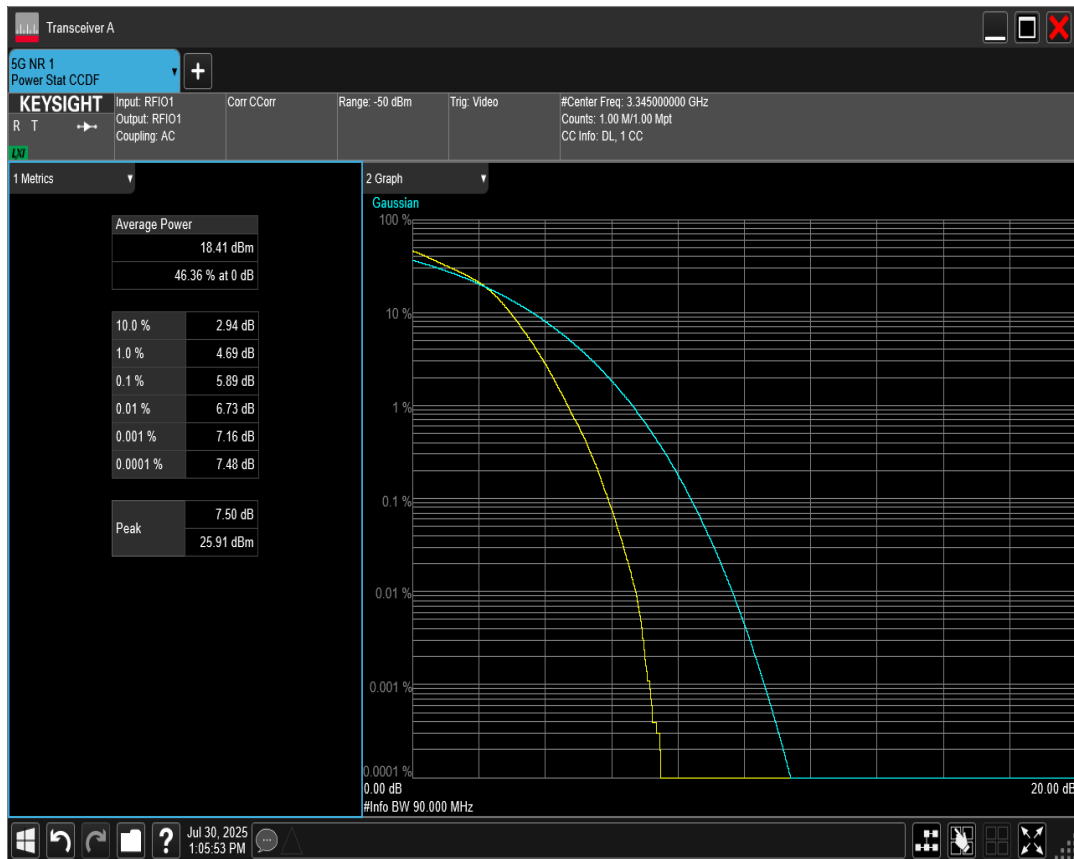


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=636666 RB=240@0

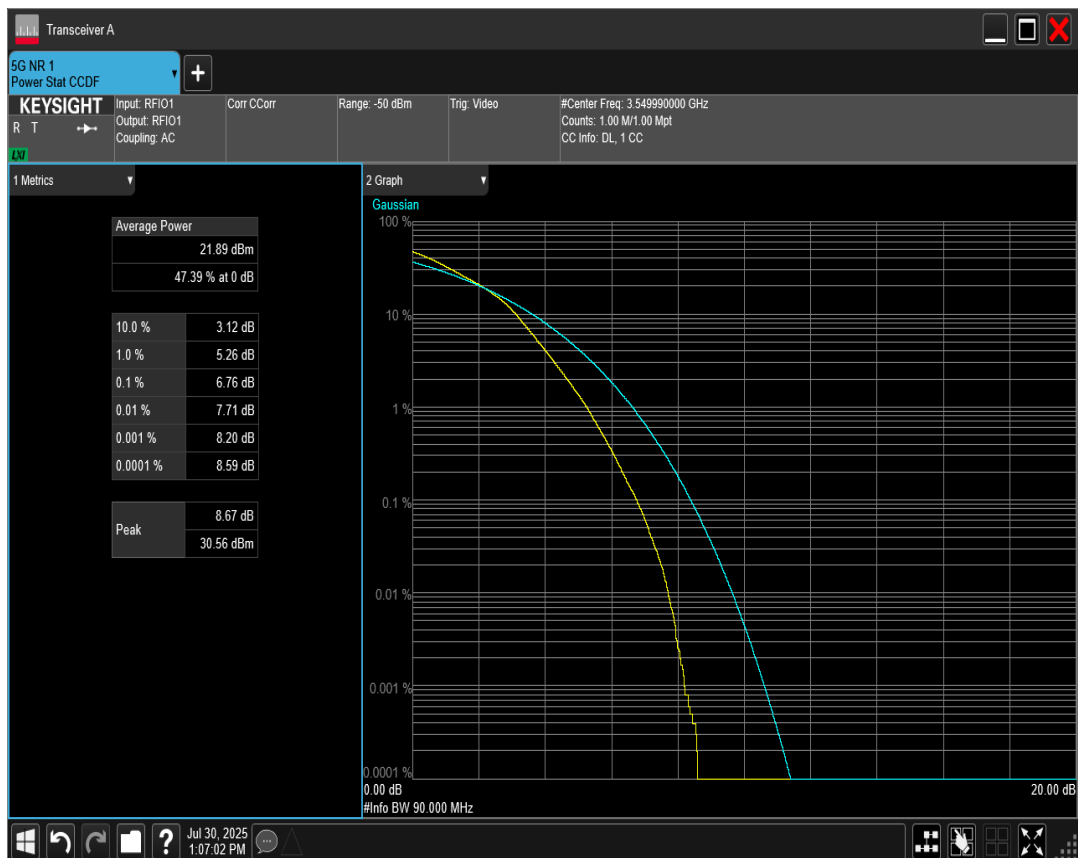


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=652832 RB=36@0

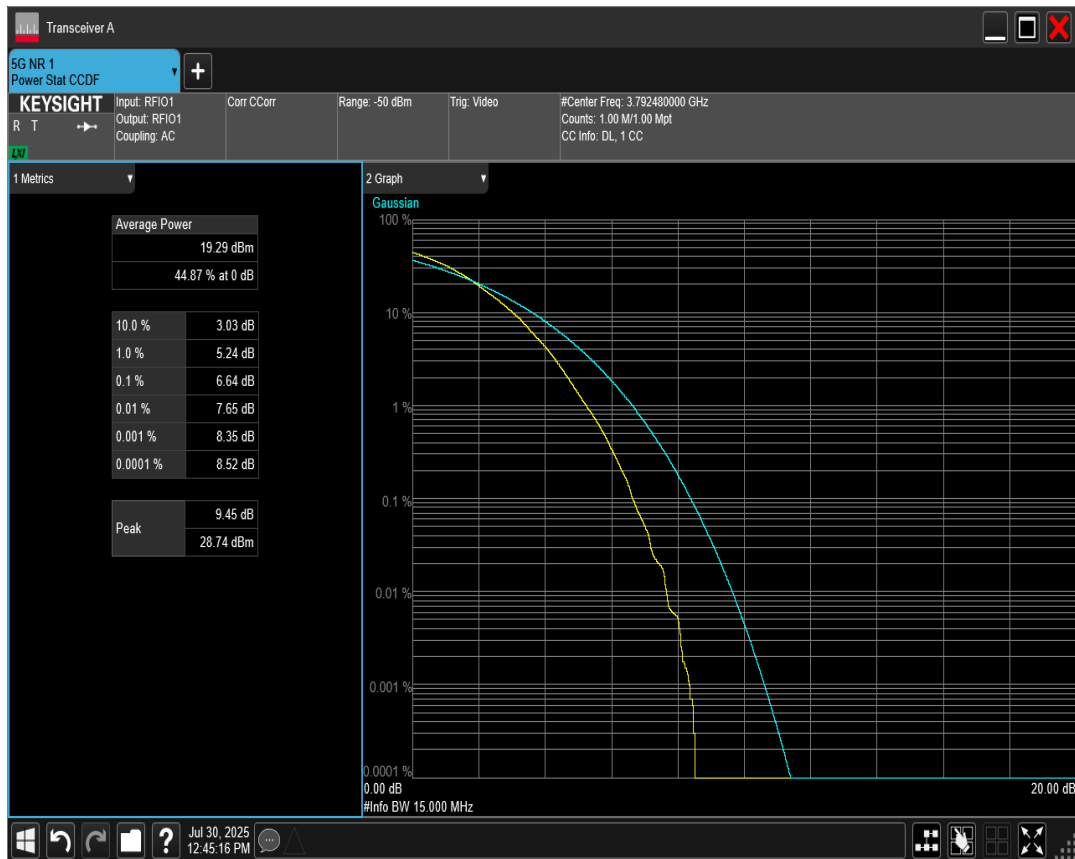


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=636666 RB=36@0

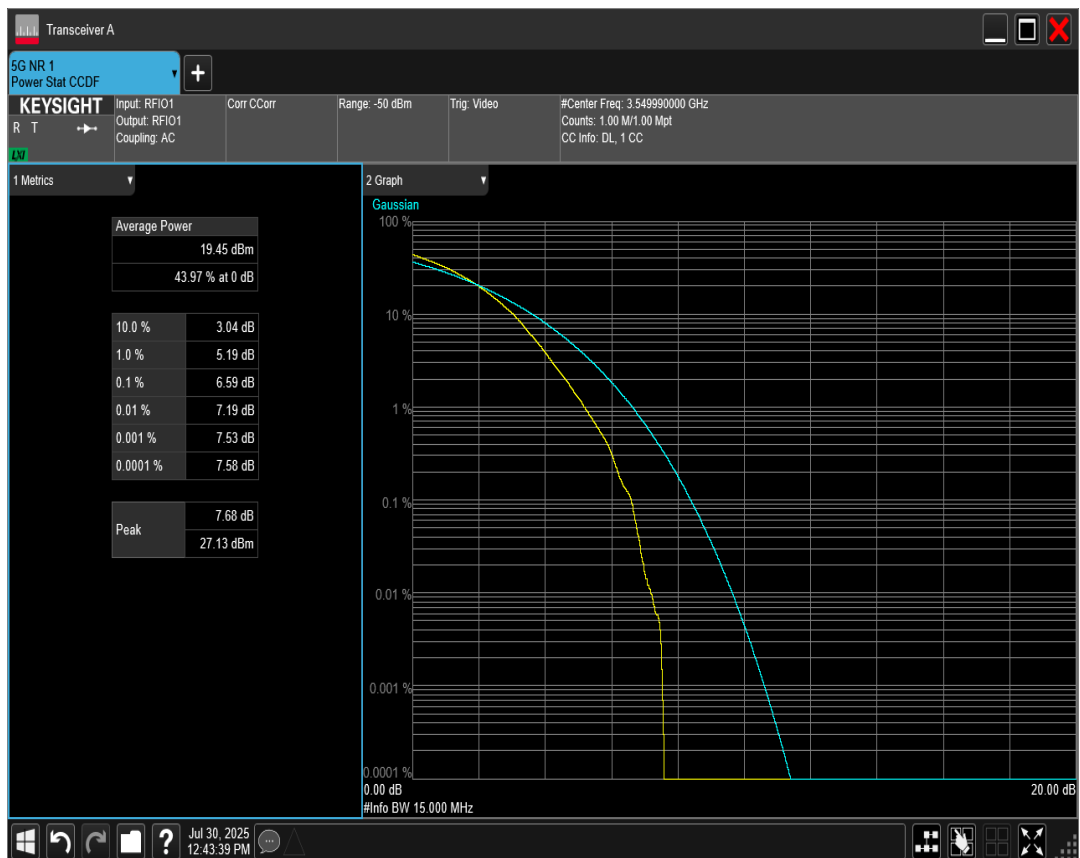


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=636666 RB=50@0

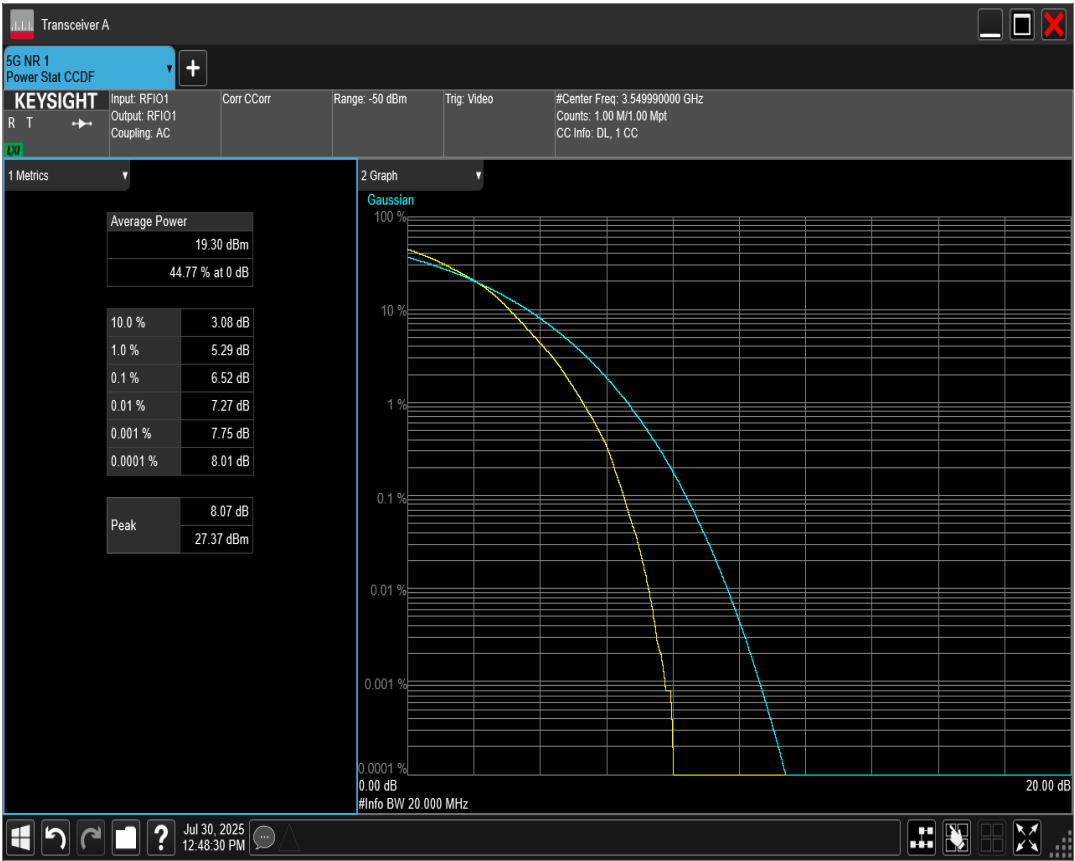


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=620668 RB=50@0

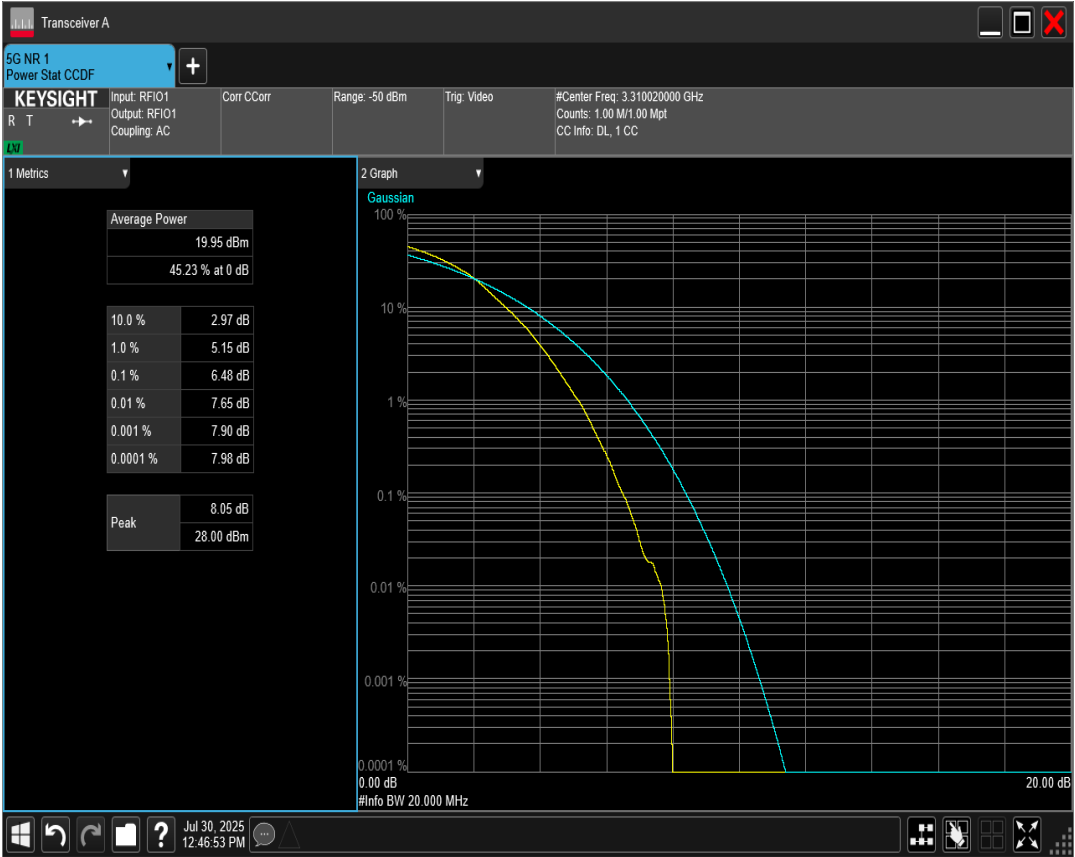


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=636666 RB=24@0

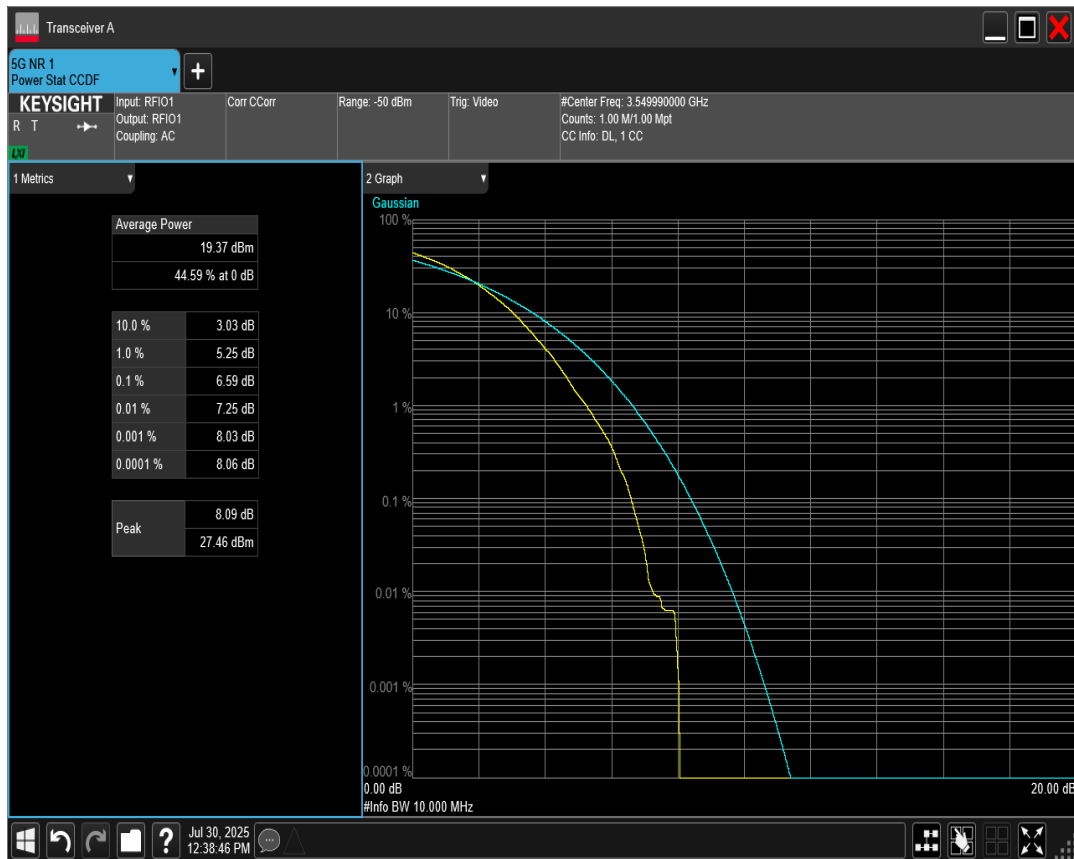


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=620334 RB=24@0

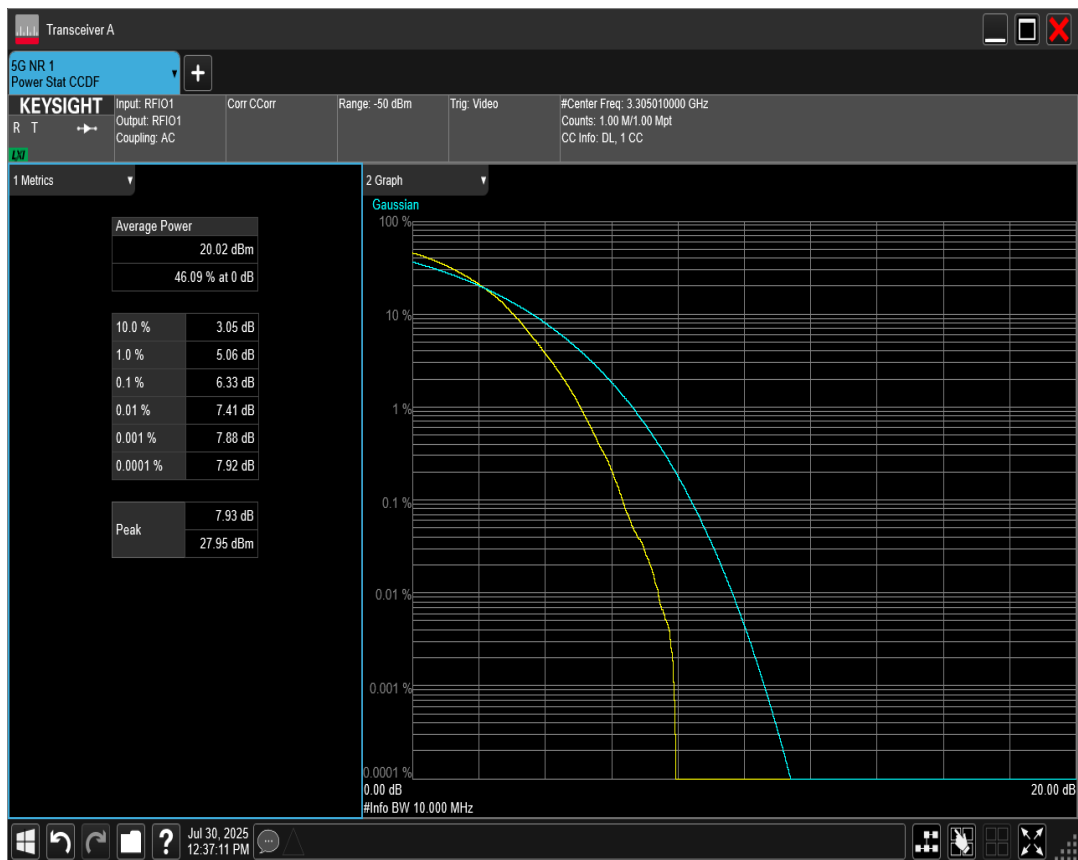


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=620500 RB=36@0

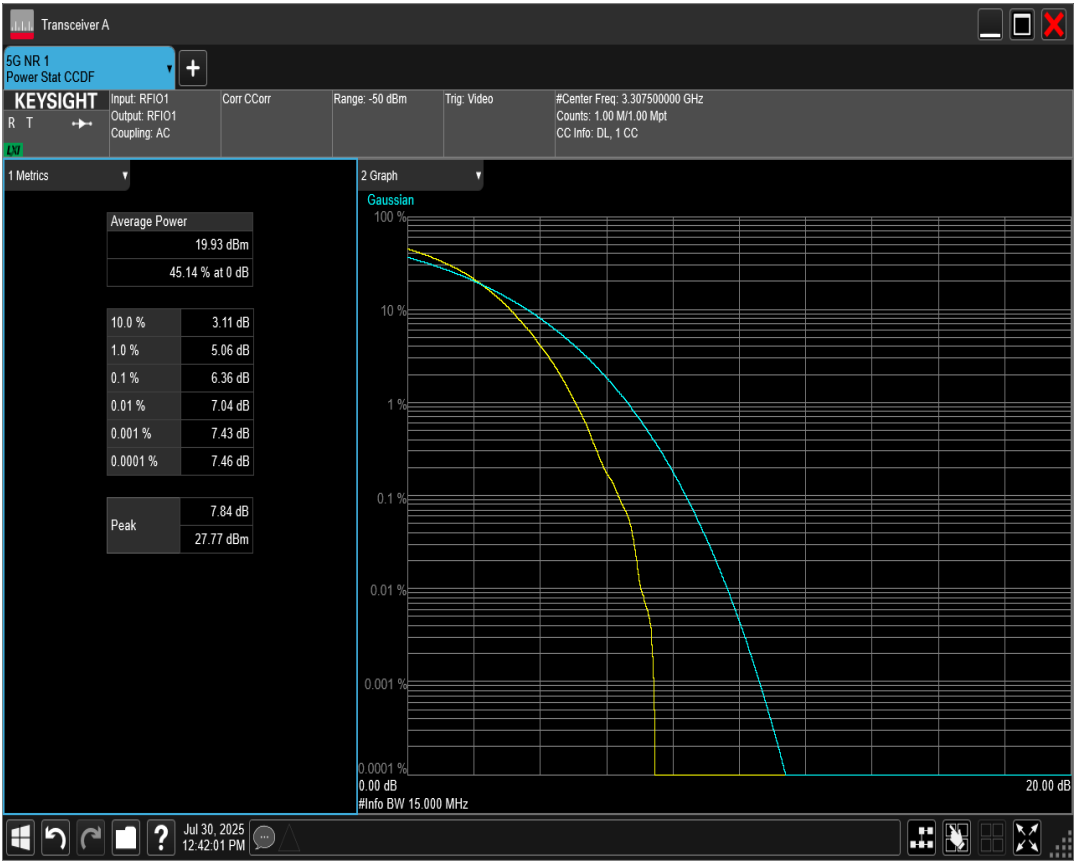


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=653000 RB=24@0

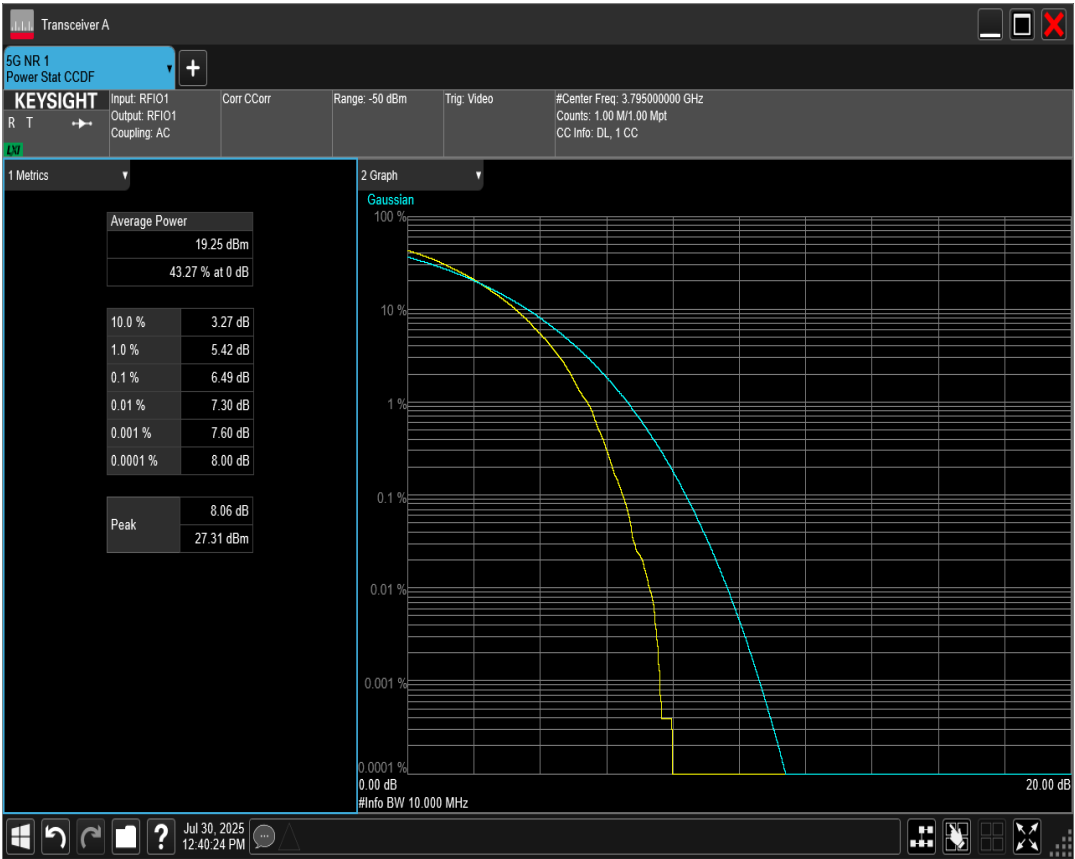


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=636666 RB=128@0

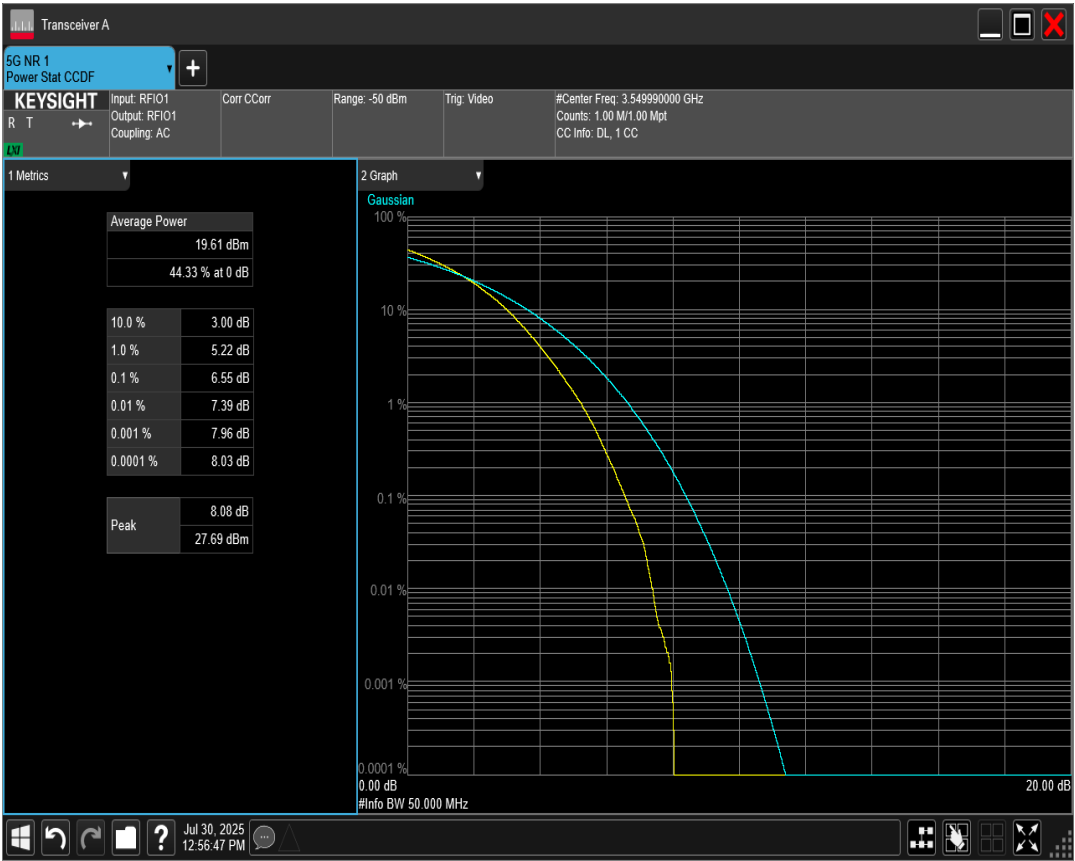


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=621668 RB=128@0

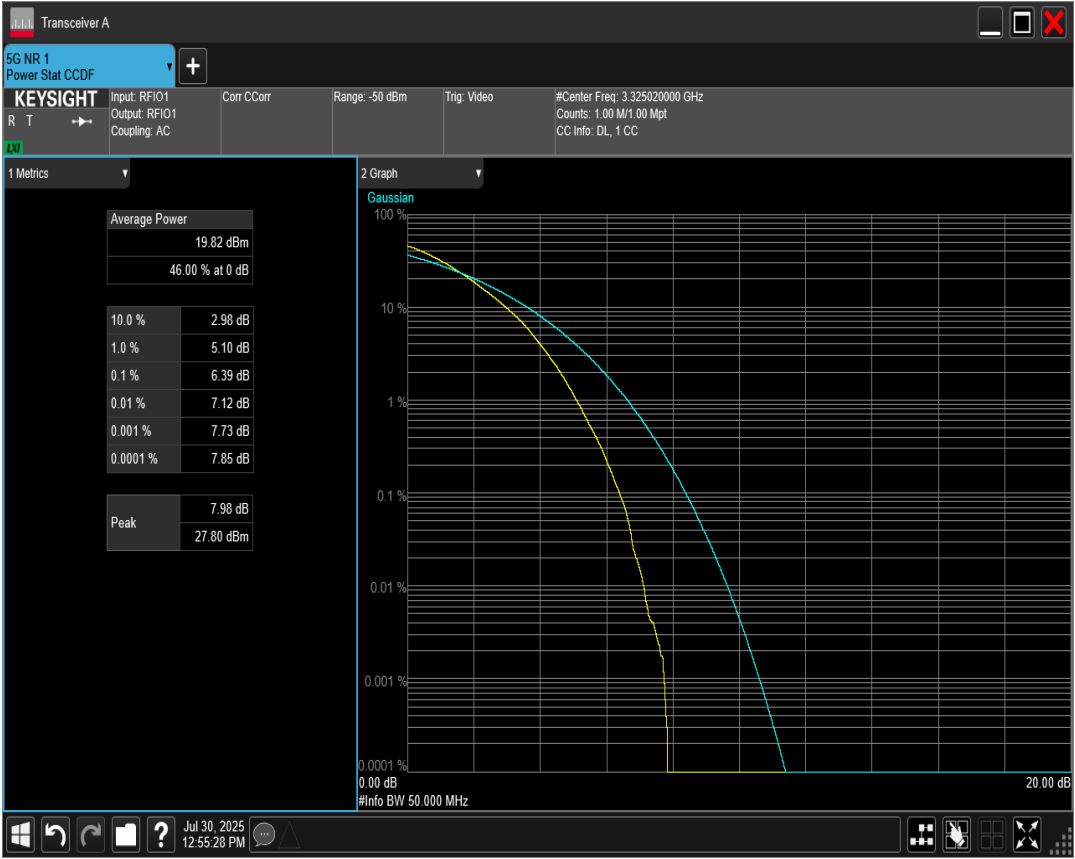


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=622000 RB=162@0

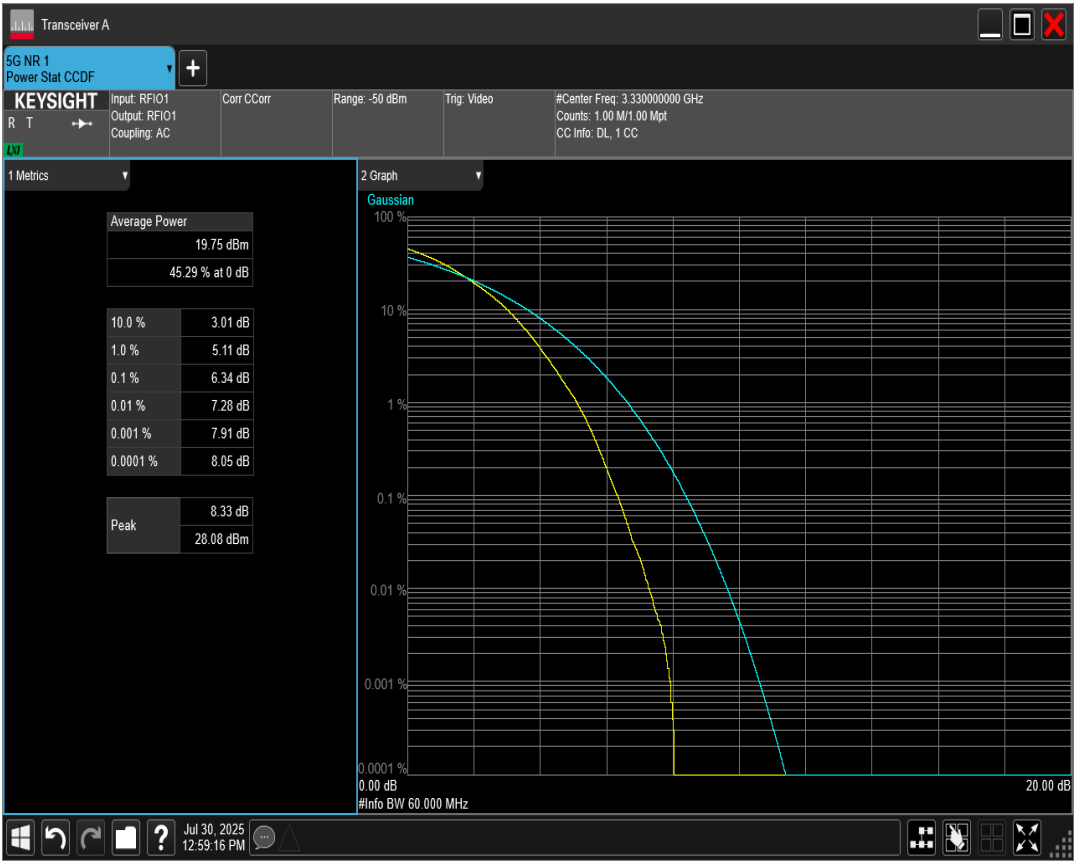


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=651666 RB=128@0

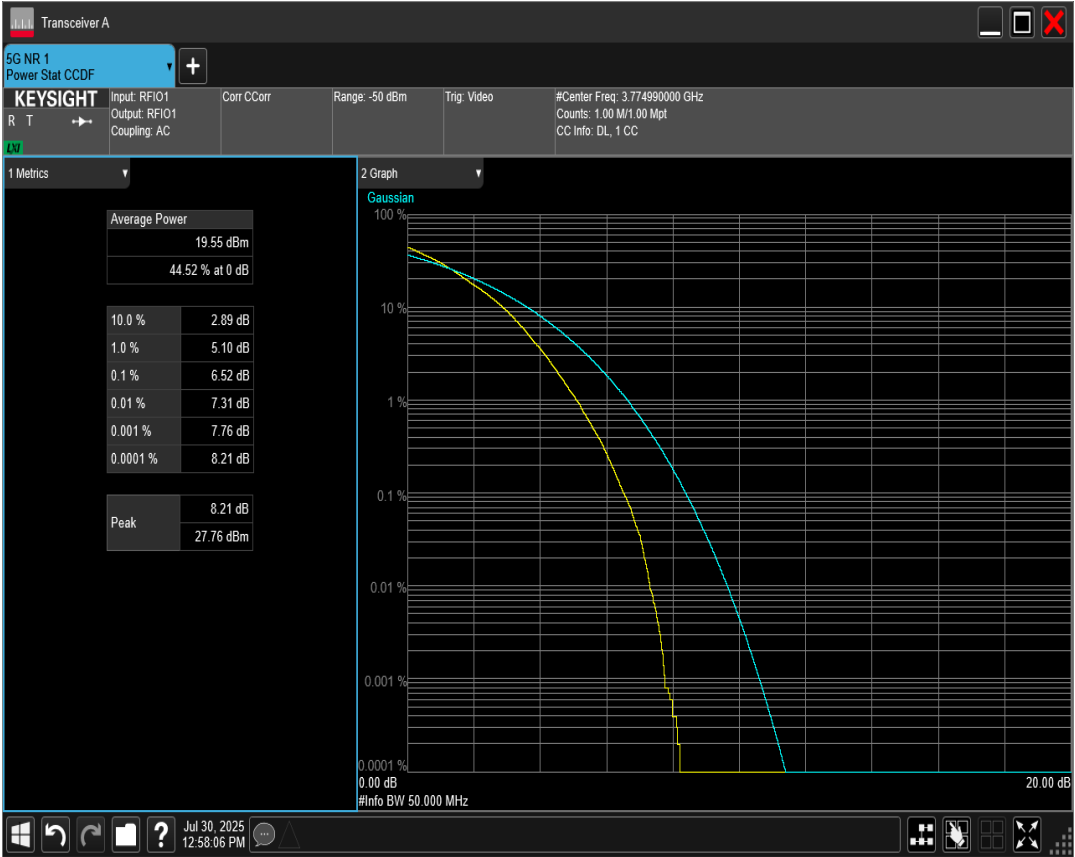


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=621334 RB=100@0

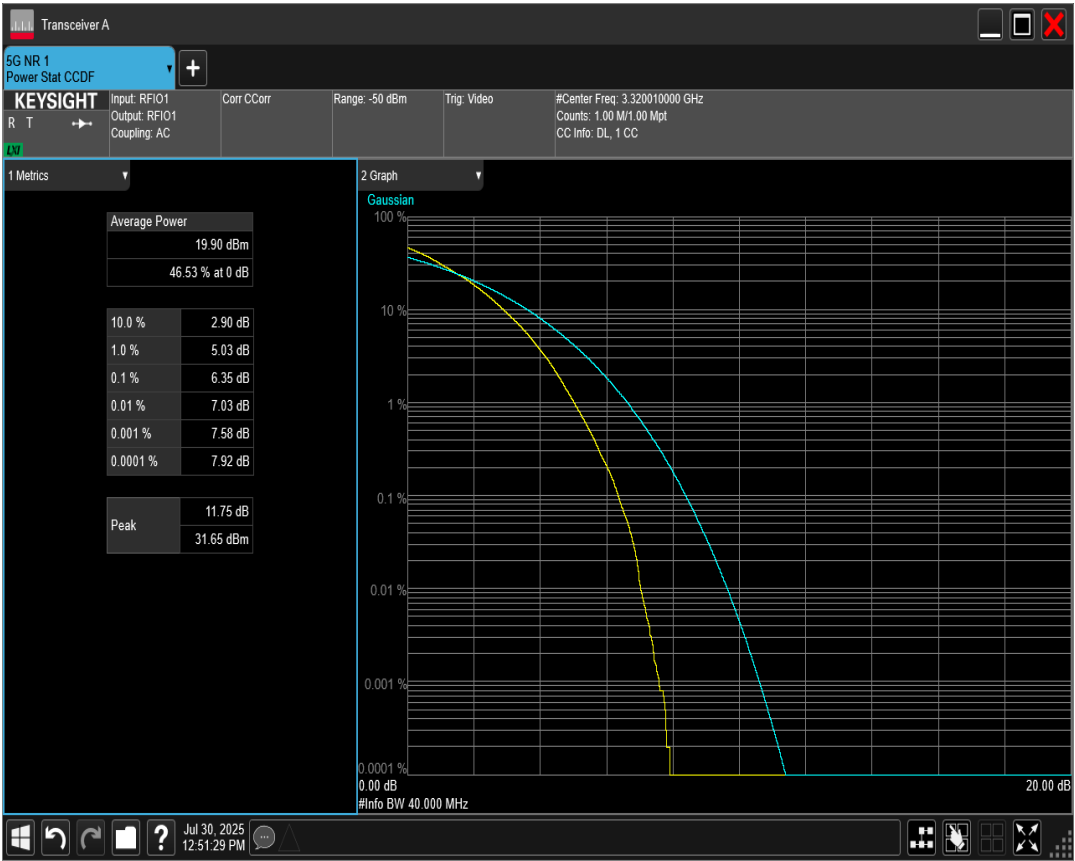


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=652666 RB=50@0

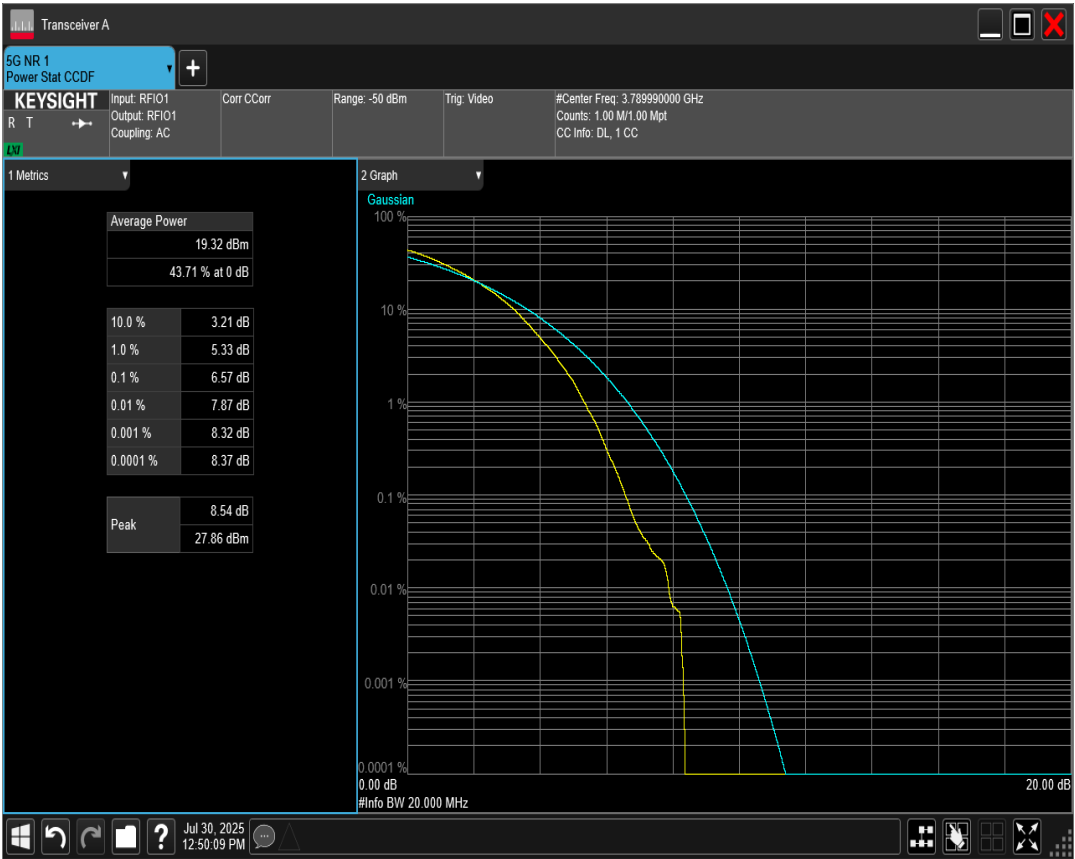


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=652000 RB=100@0

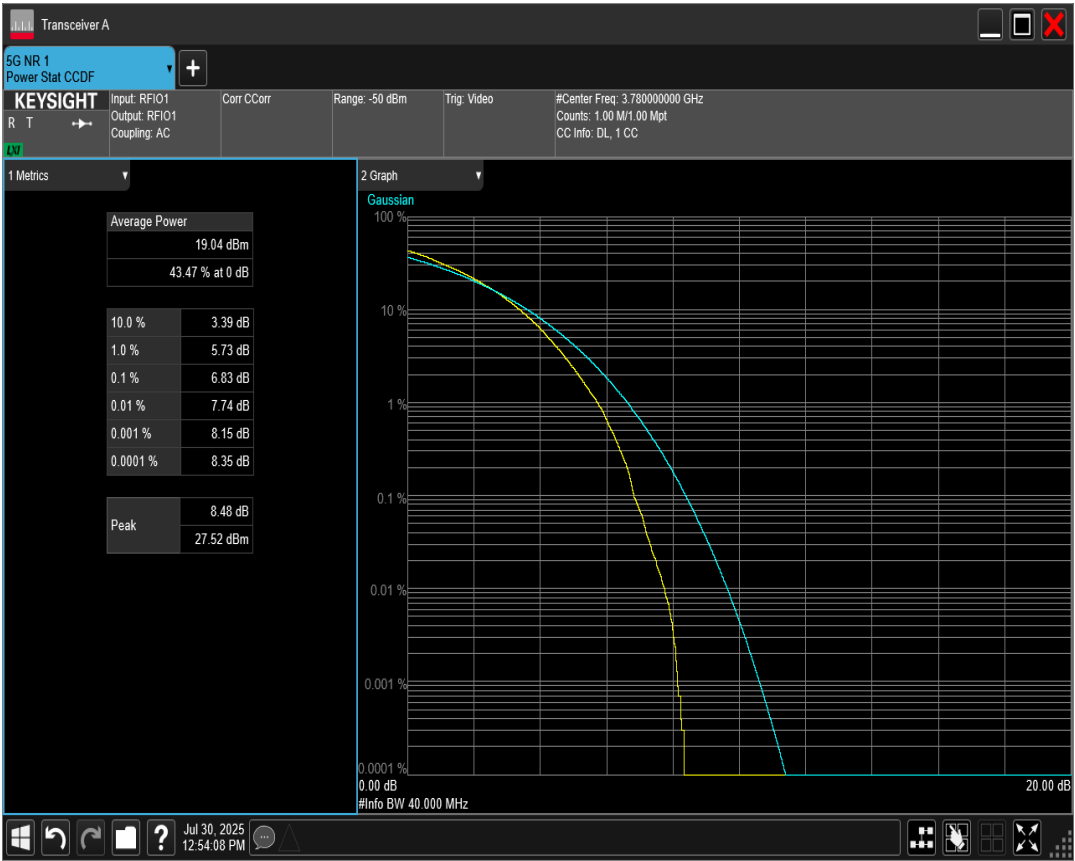


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=636666 RB=100@0

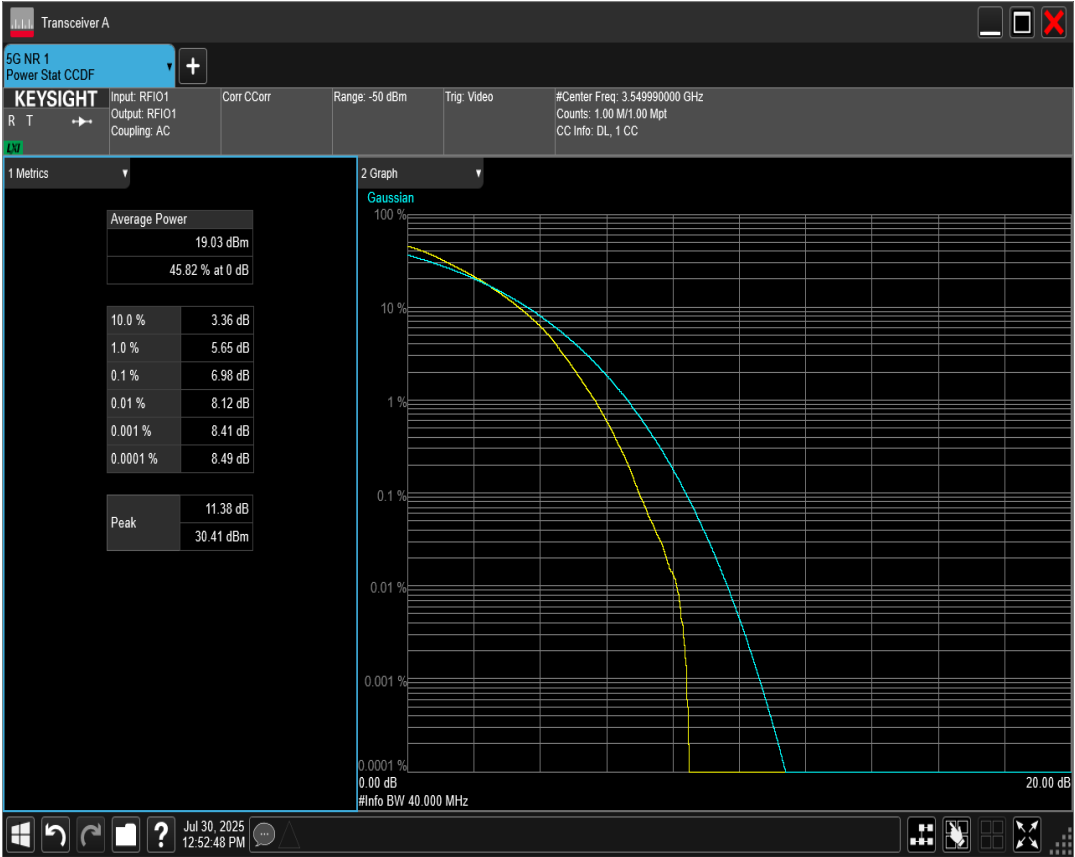


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=623000 RB=240@0

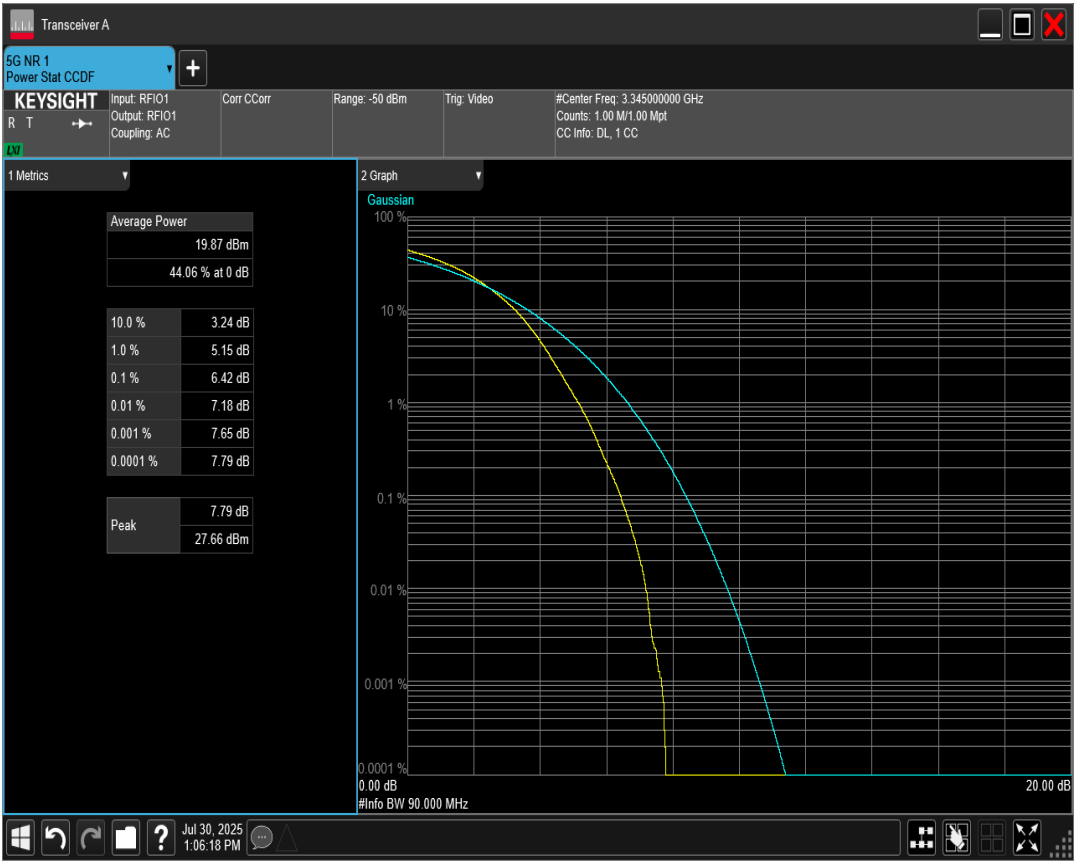


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=650666 RB=216@0

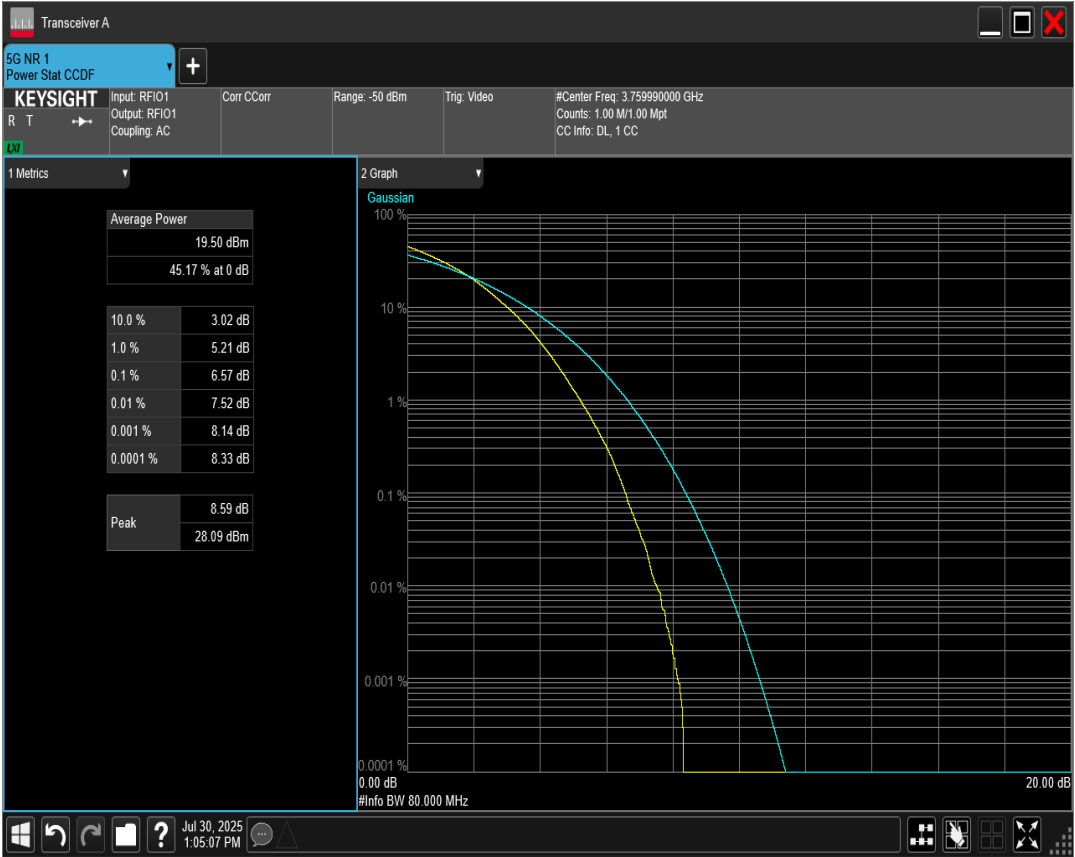


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=650332 RB=240@0

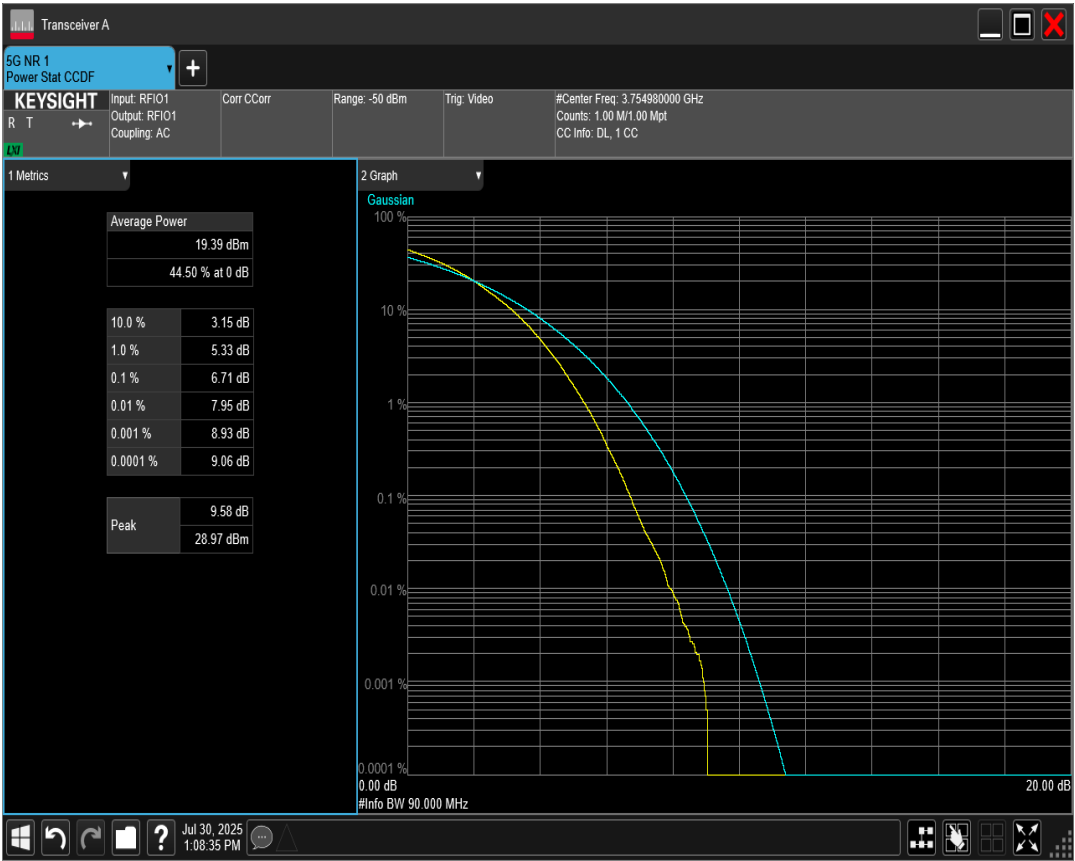


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=636666 RB=240@0

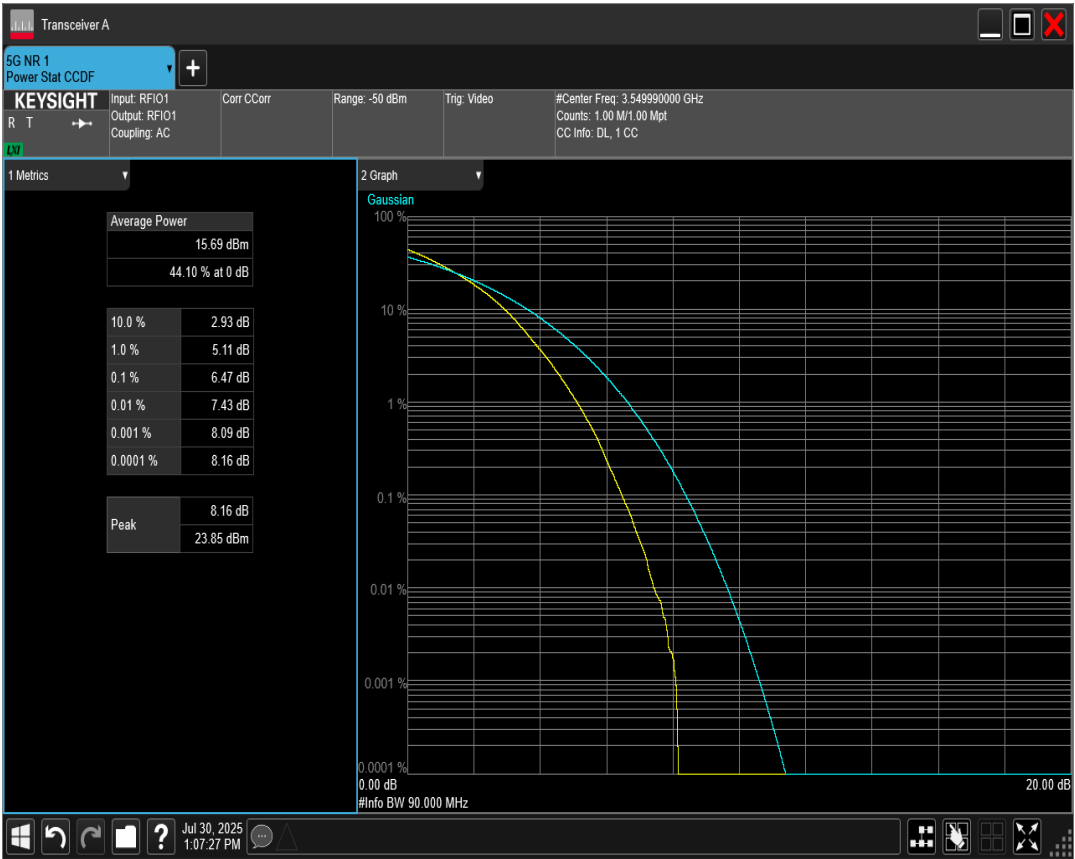


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=651332 RB=162@0

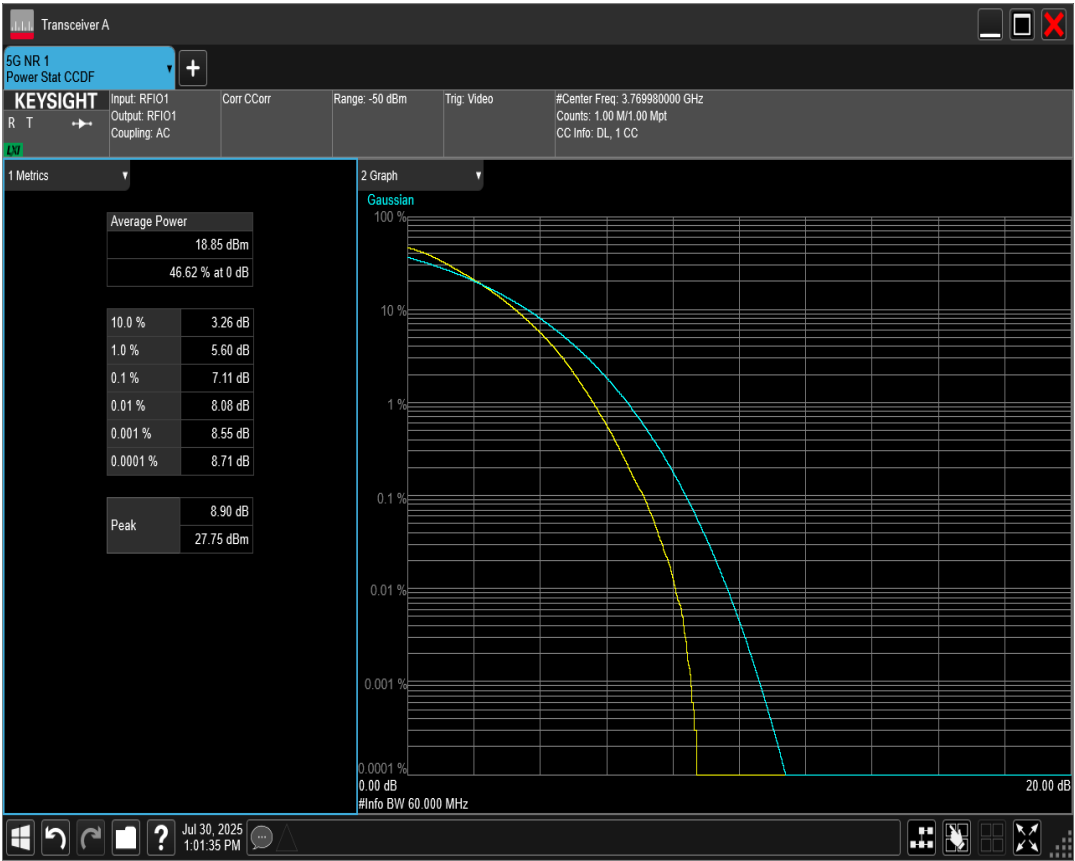


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=636666 RB=162@0

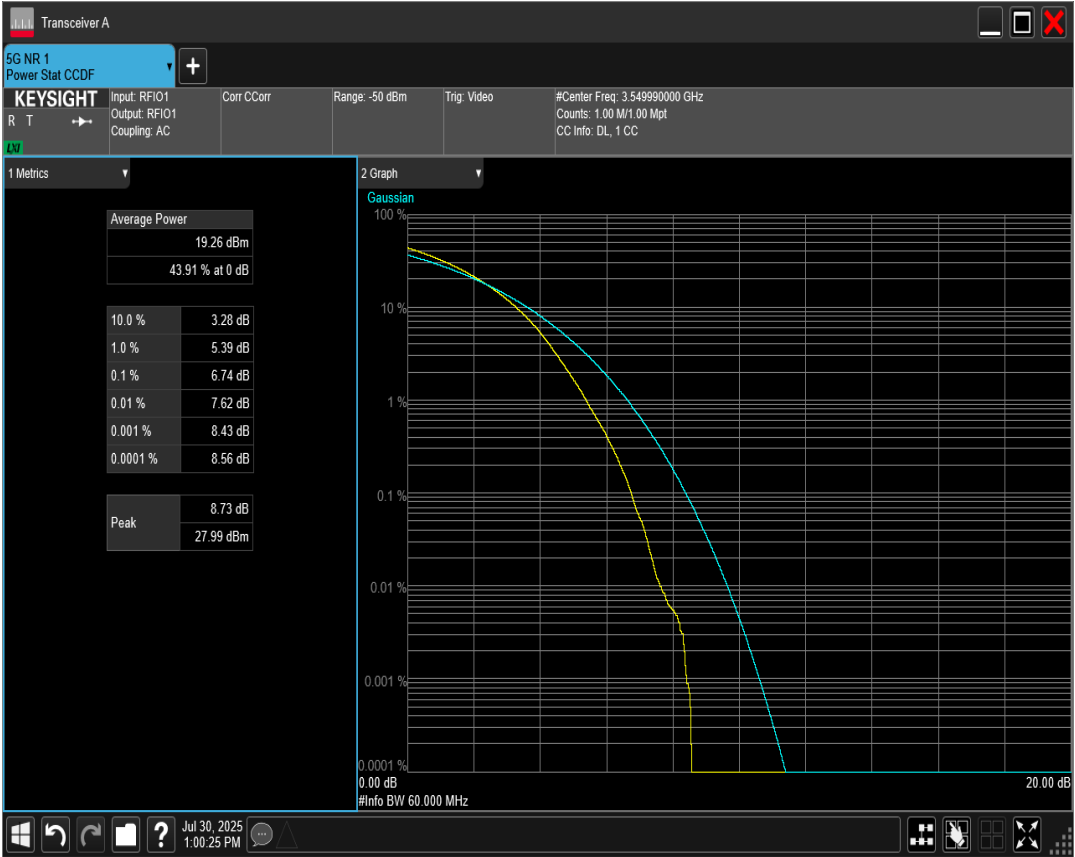


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=636666 RB=216@0

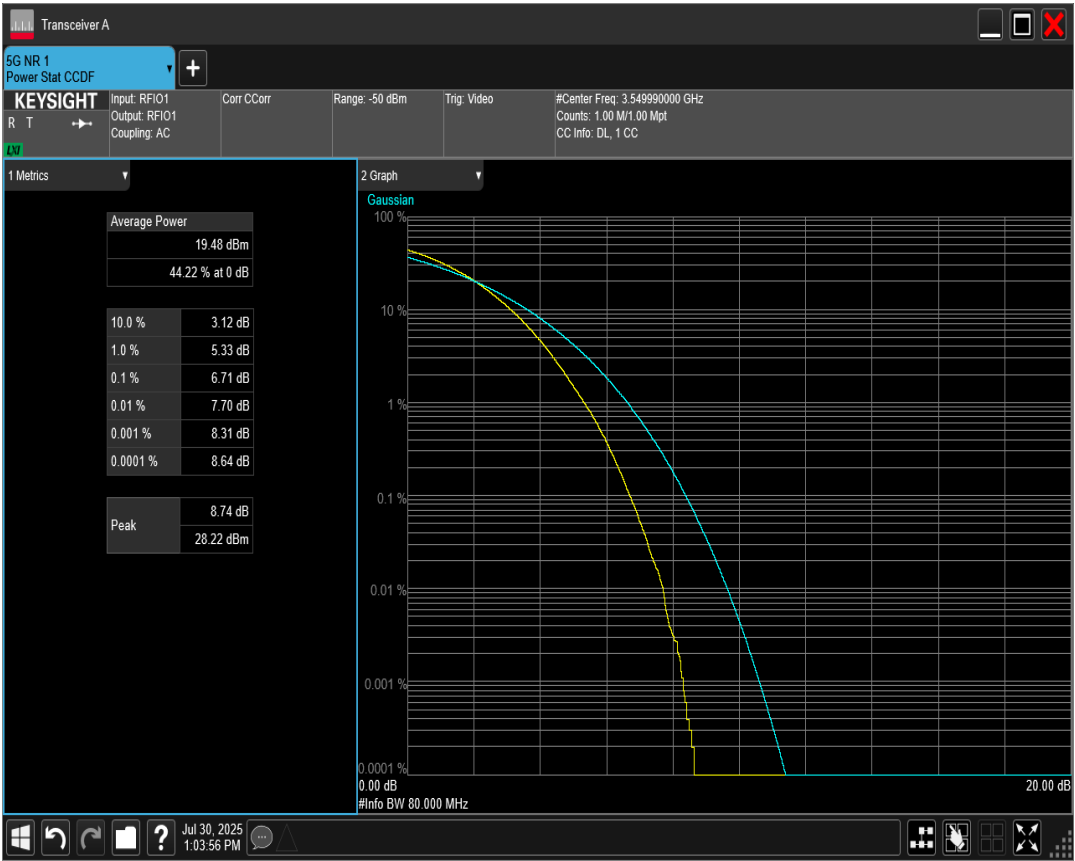


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=622668 RB=216@0

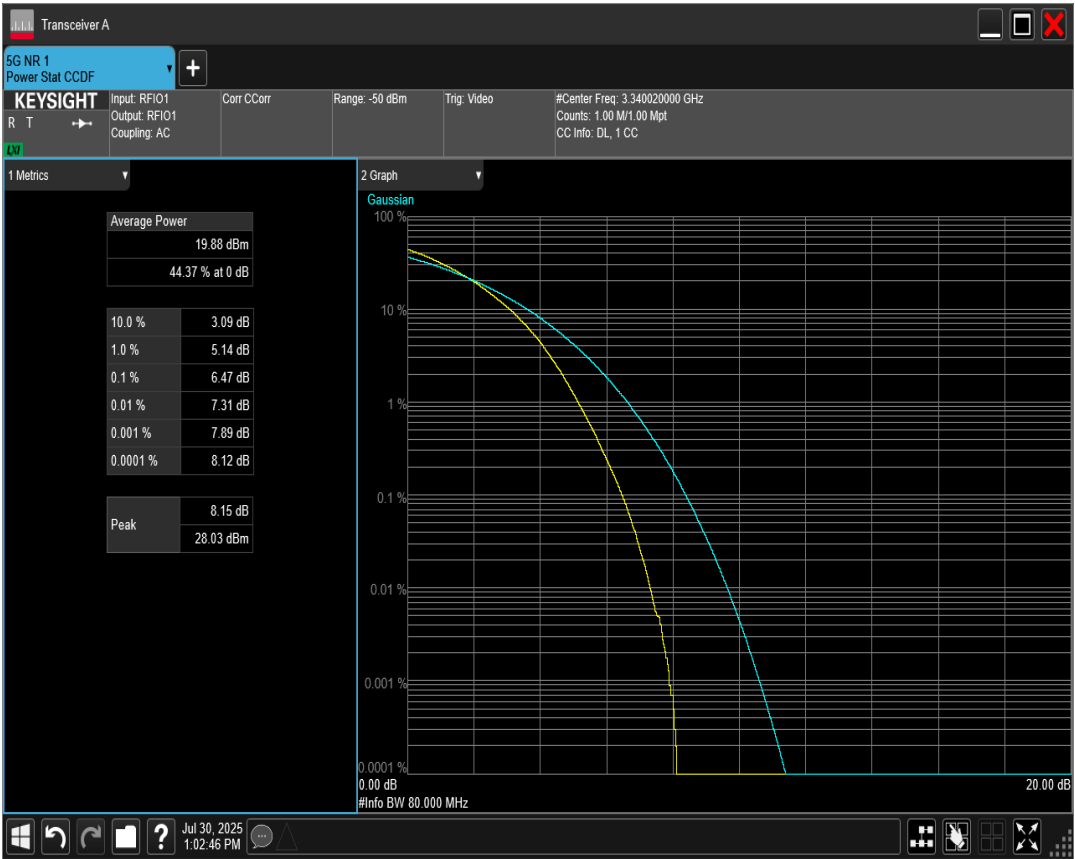


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=636666 RB=24@0

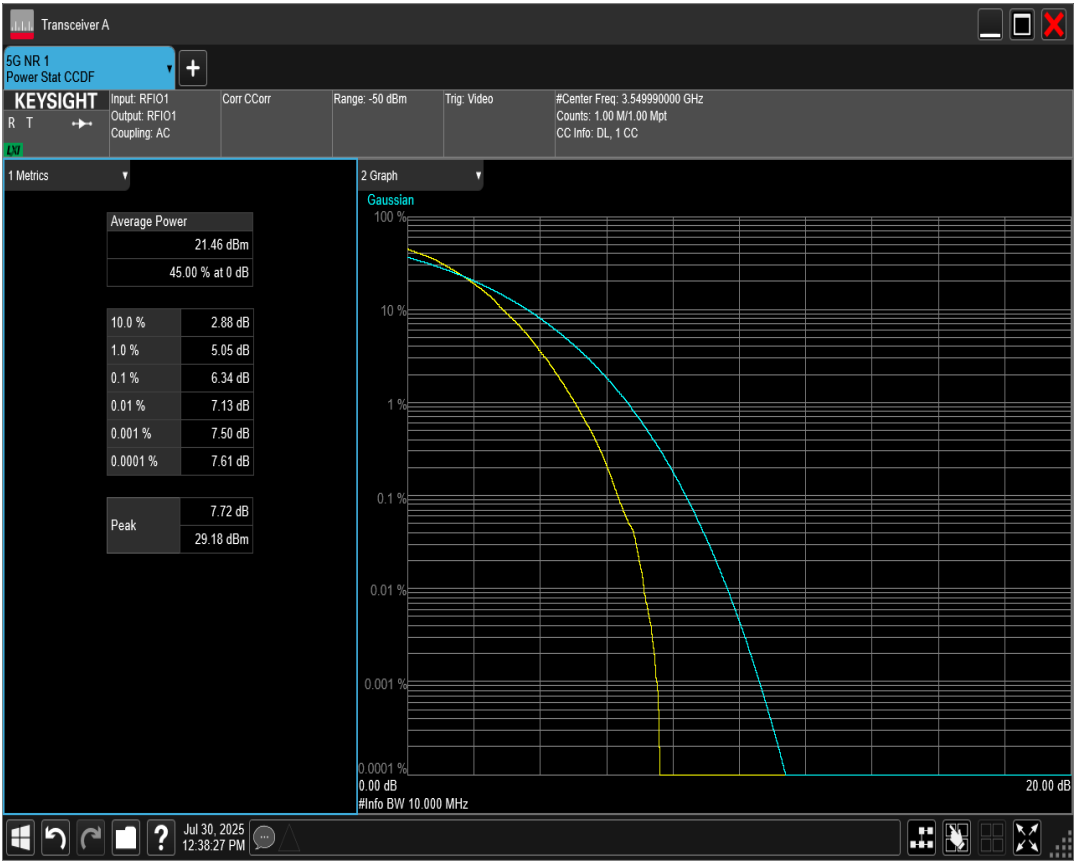


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=653000 RB=24@0

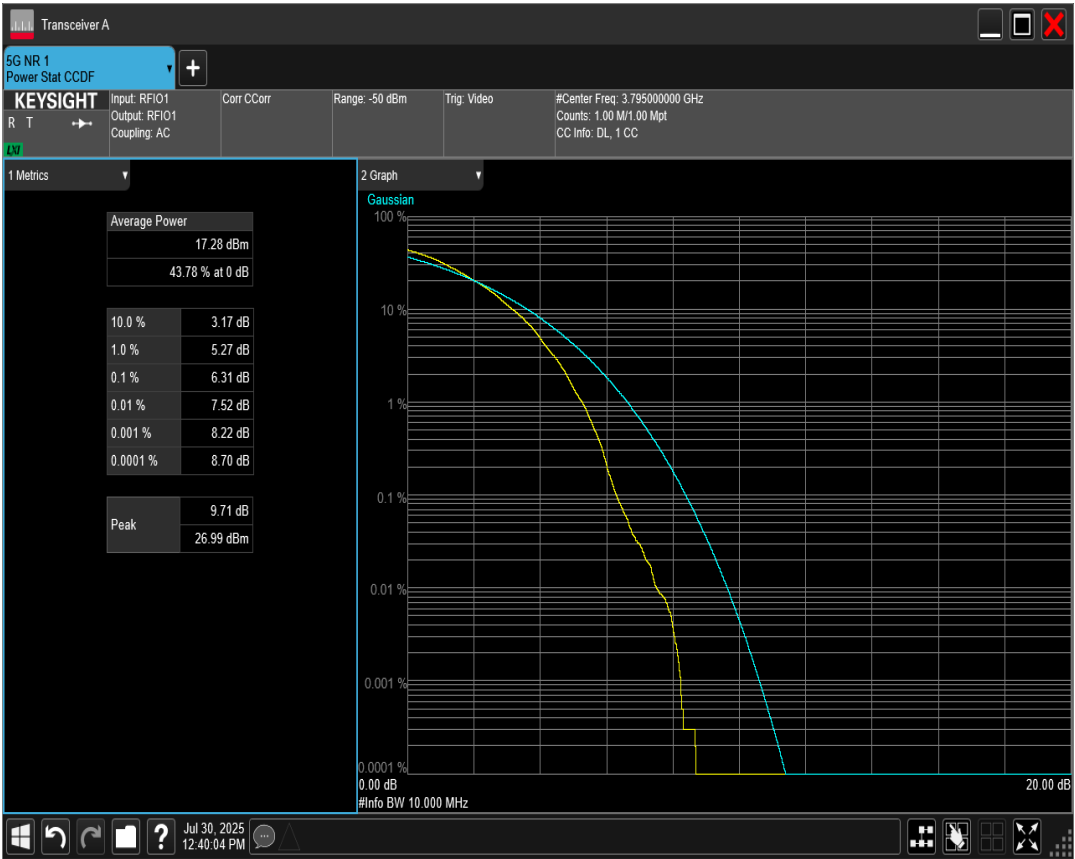


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=620500 RB=36@0

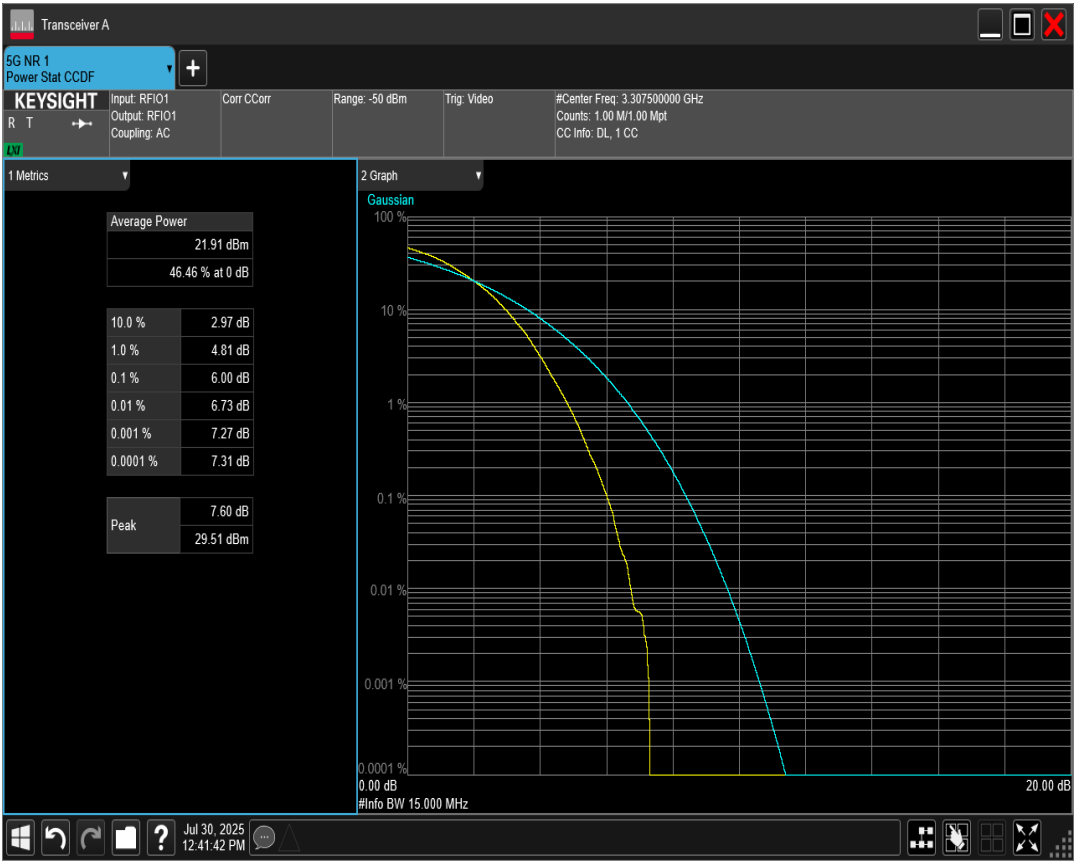


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=620334 RB=24@0

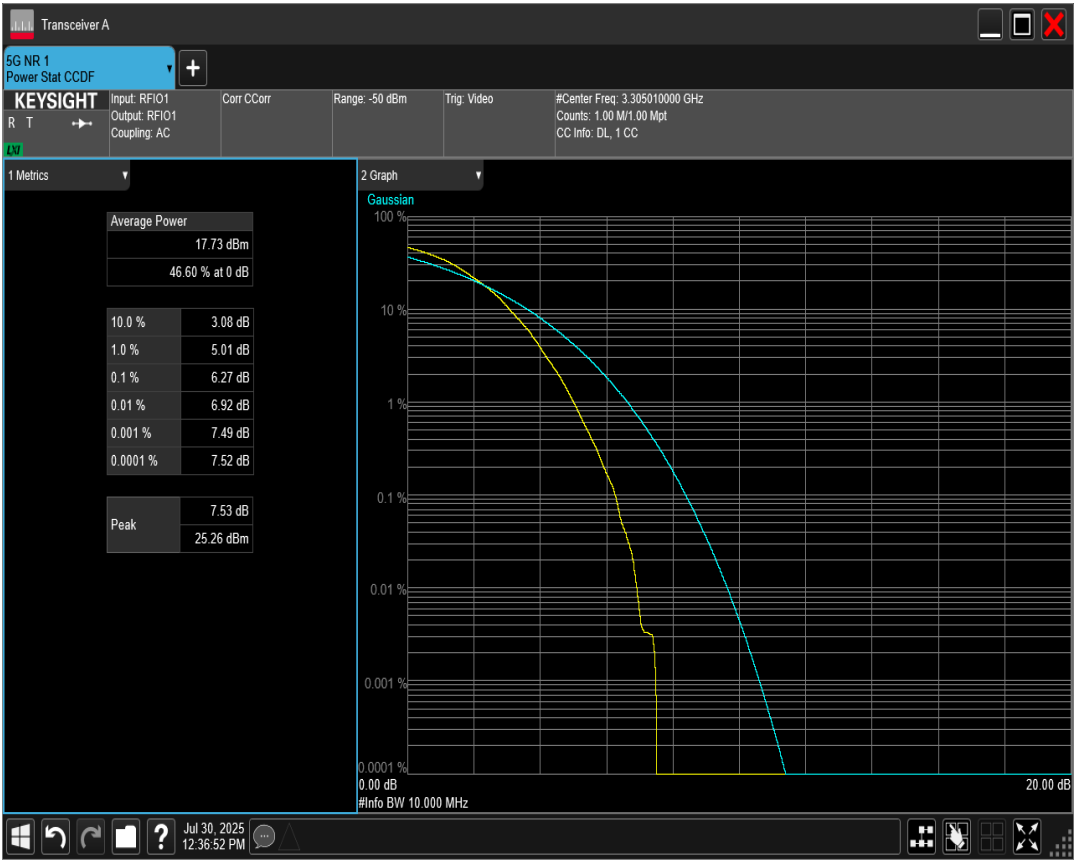


n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=623334 RB=270@0

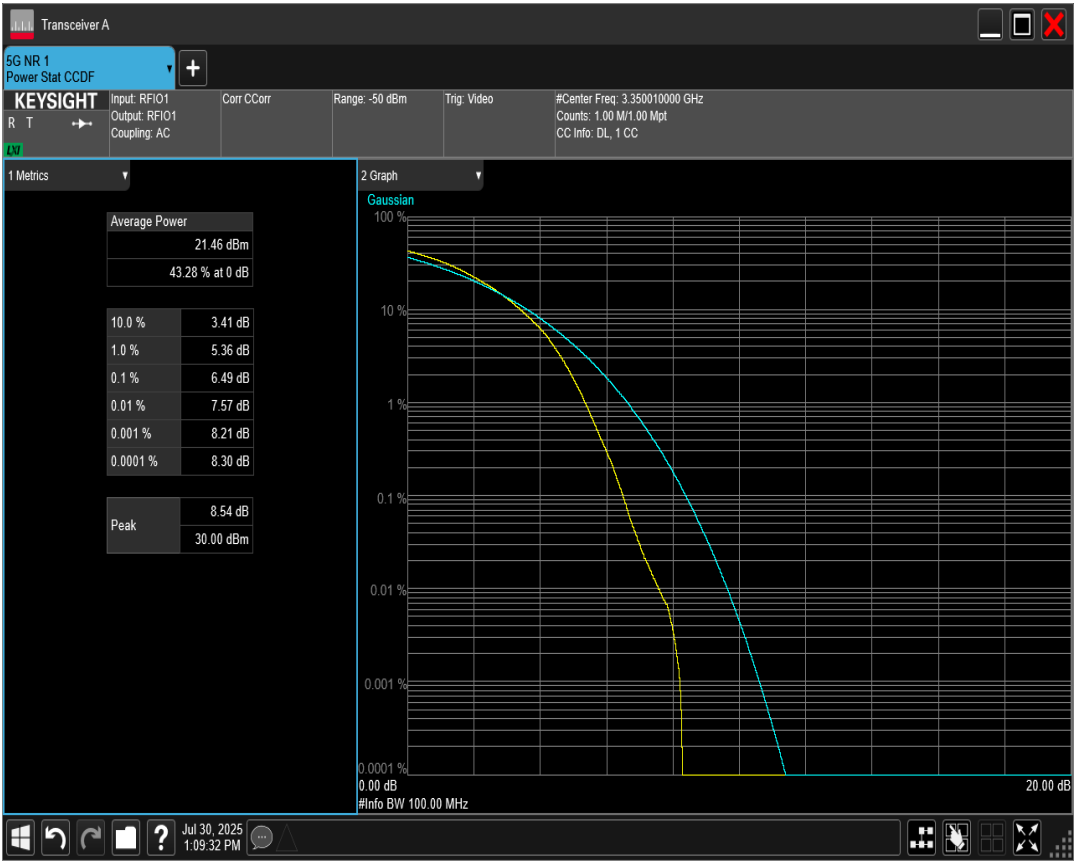


n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=636666 RB=270@0

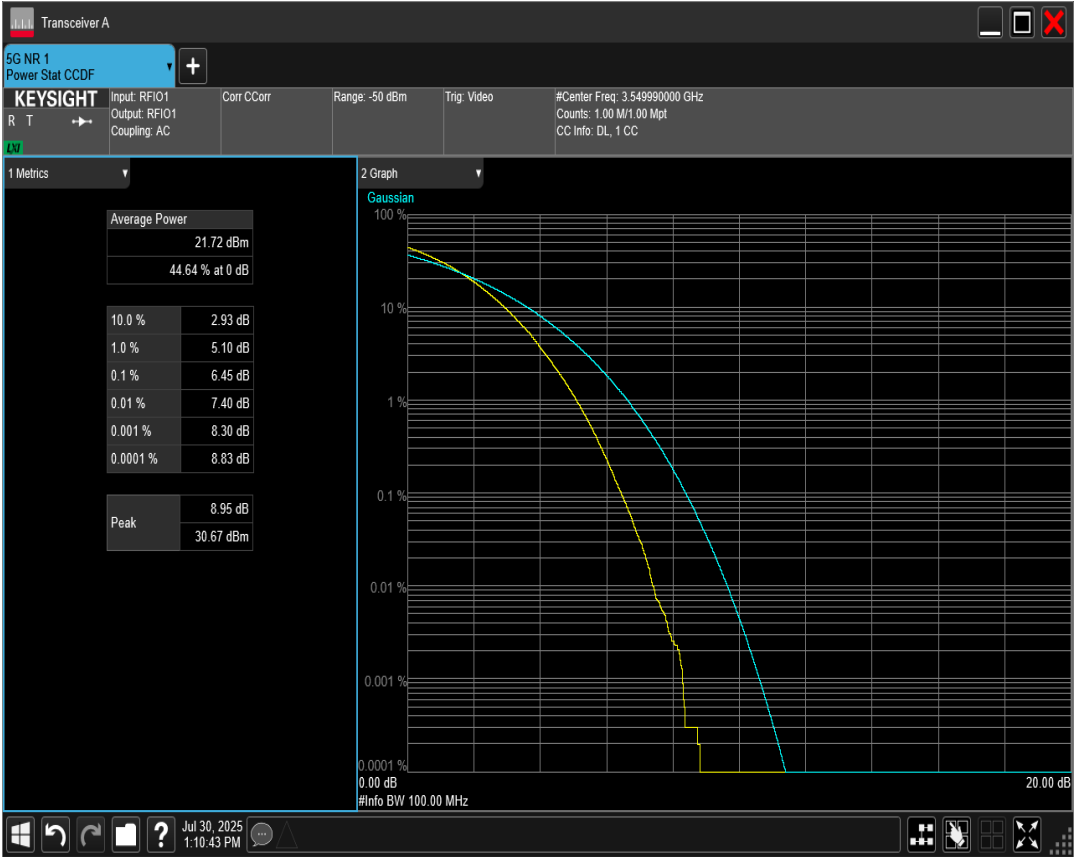


n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=650000 RB=270@0

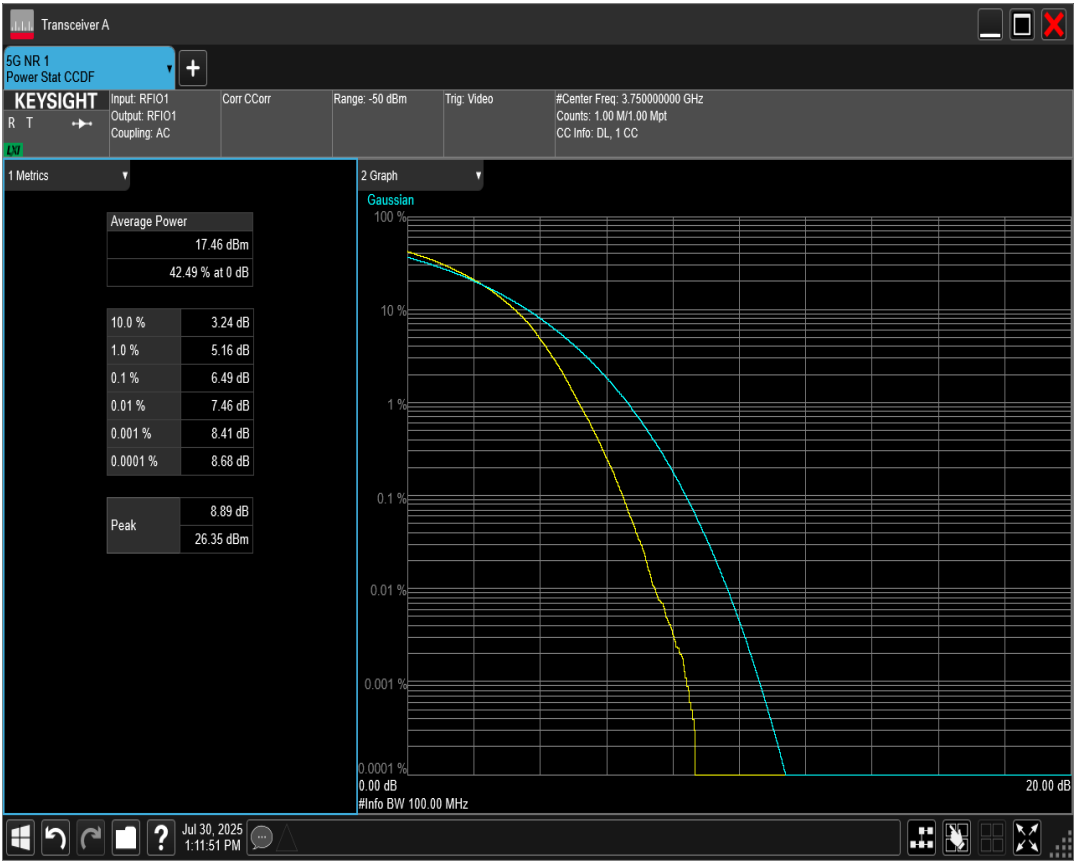


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=636666 RB=100@0

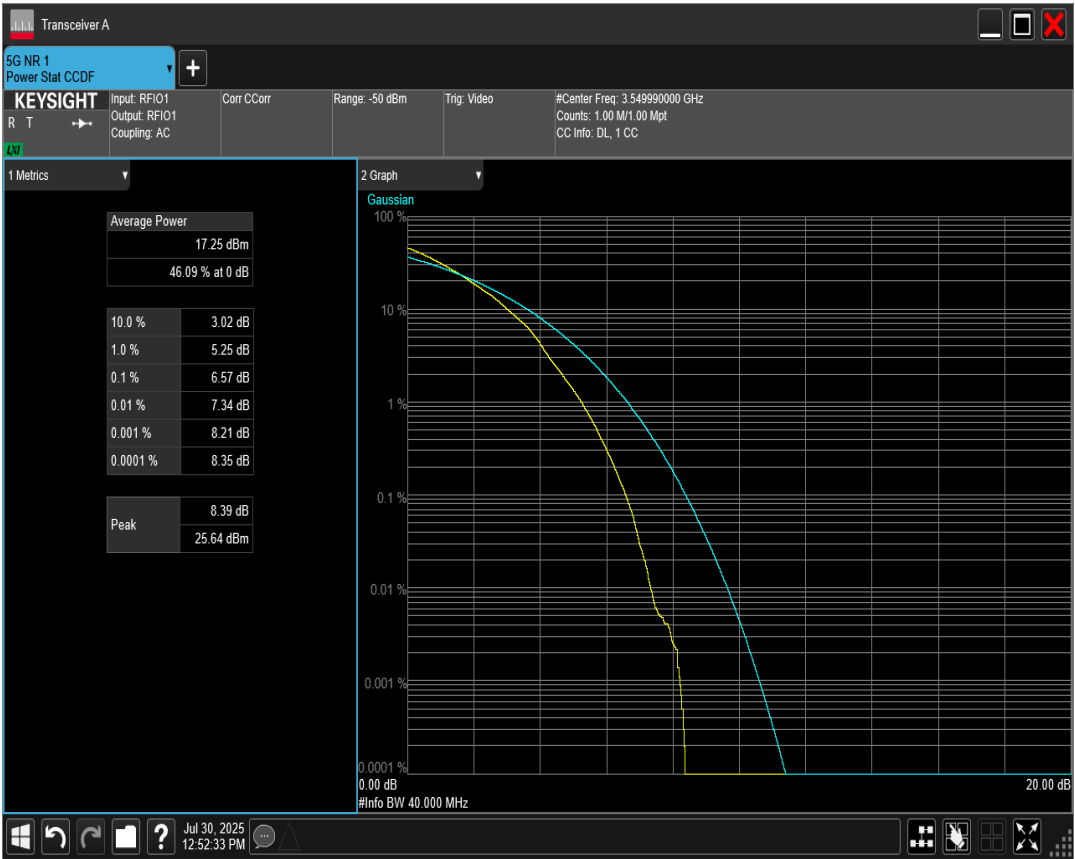


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=621334 RB=100@0

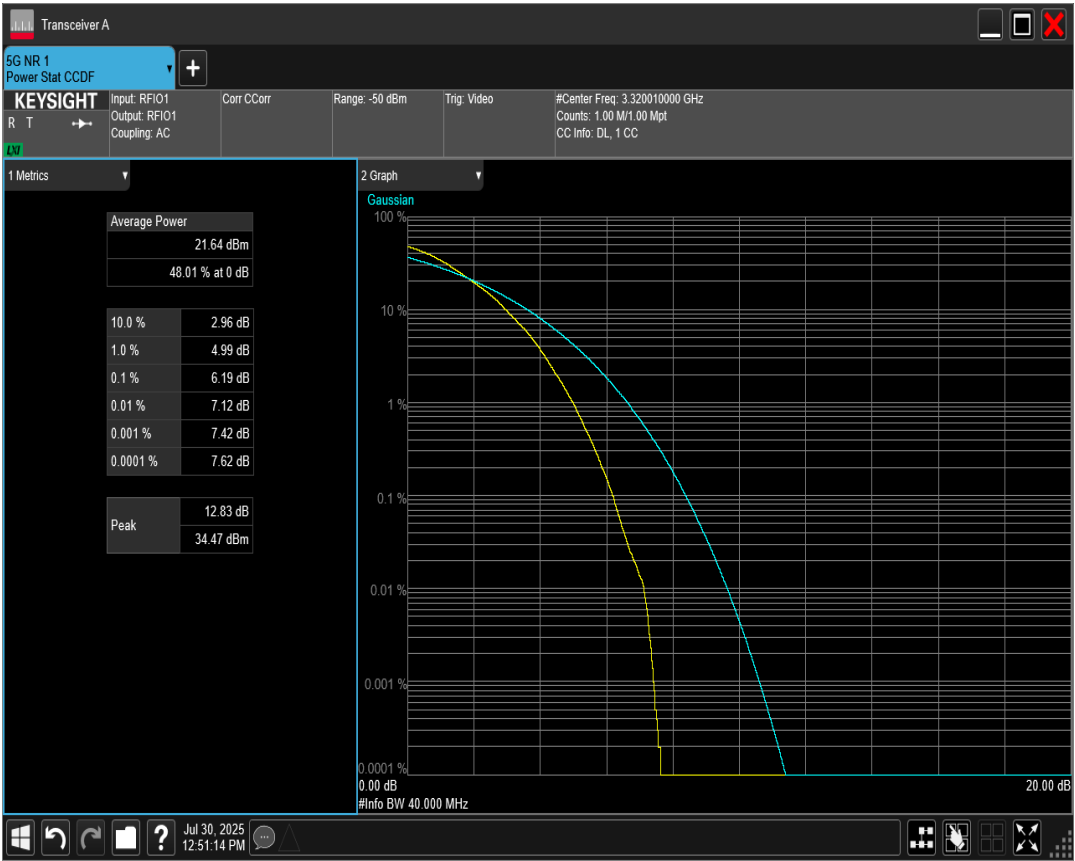


n78 SCS=30kHz DFT_QAM64 BW=50MHz Channel=621668 RB=128@0

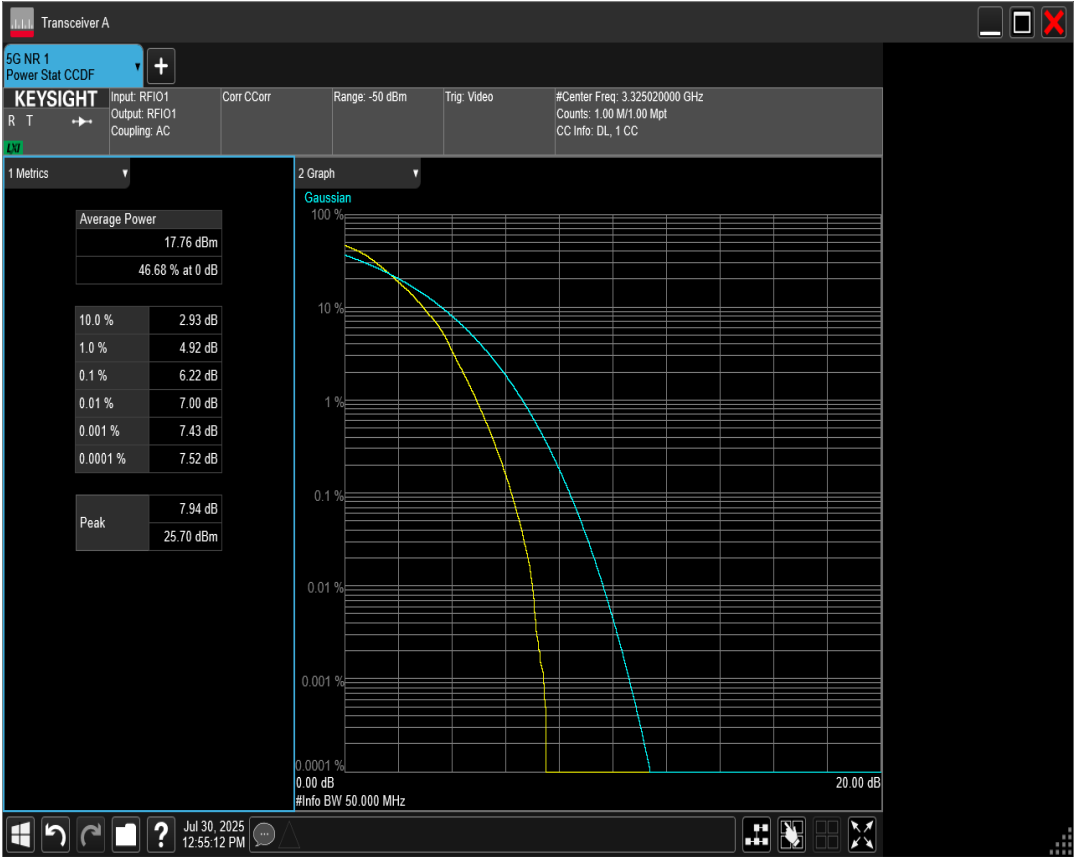


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=652000 RB=100@0

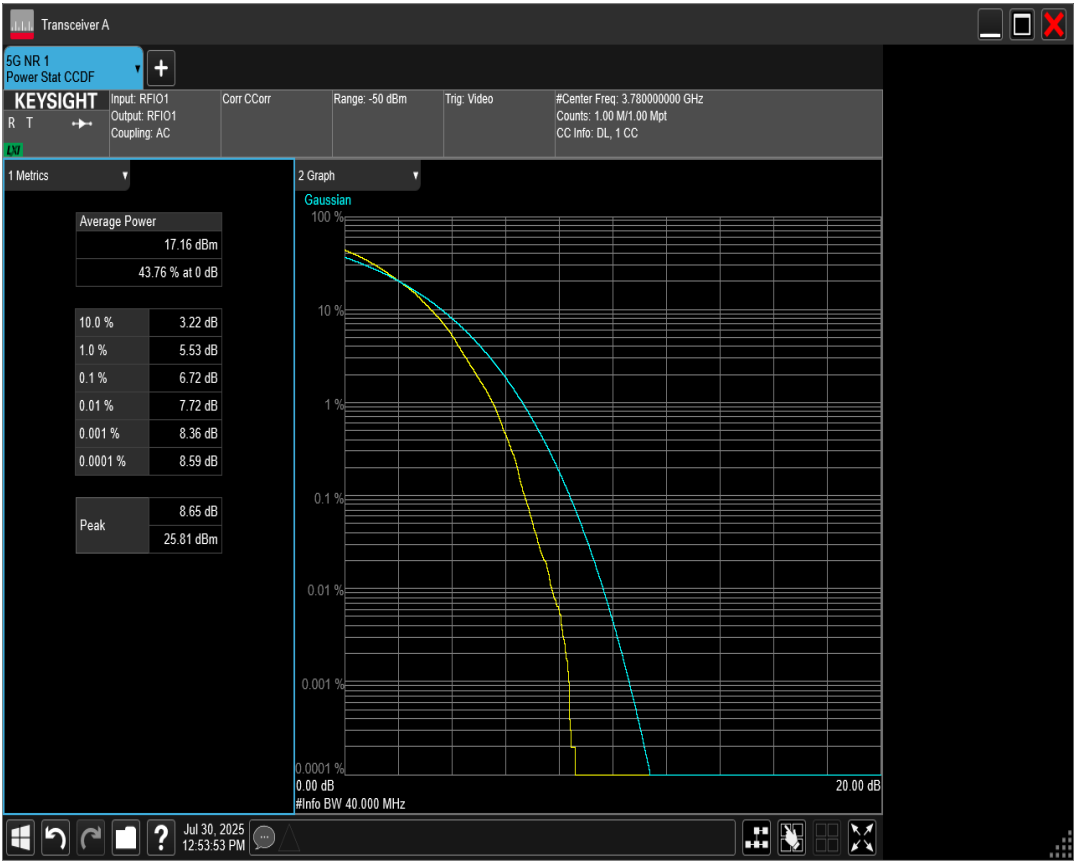


n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=652666 RB=50@0

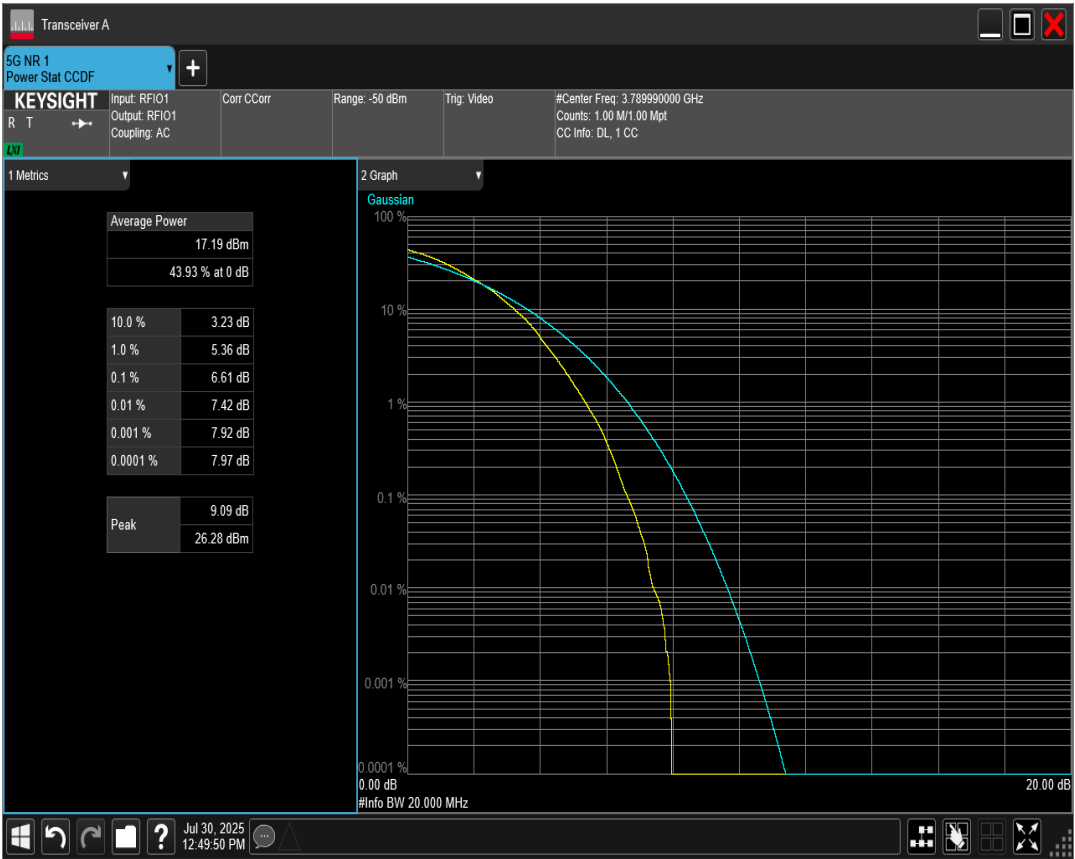


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=652832 RB=36@0

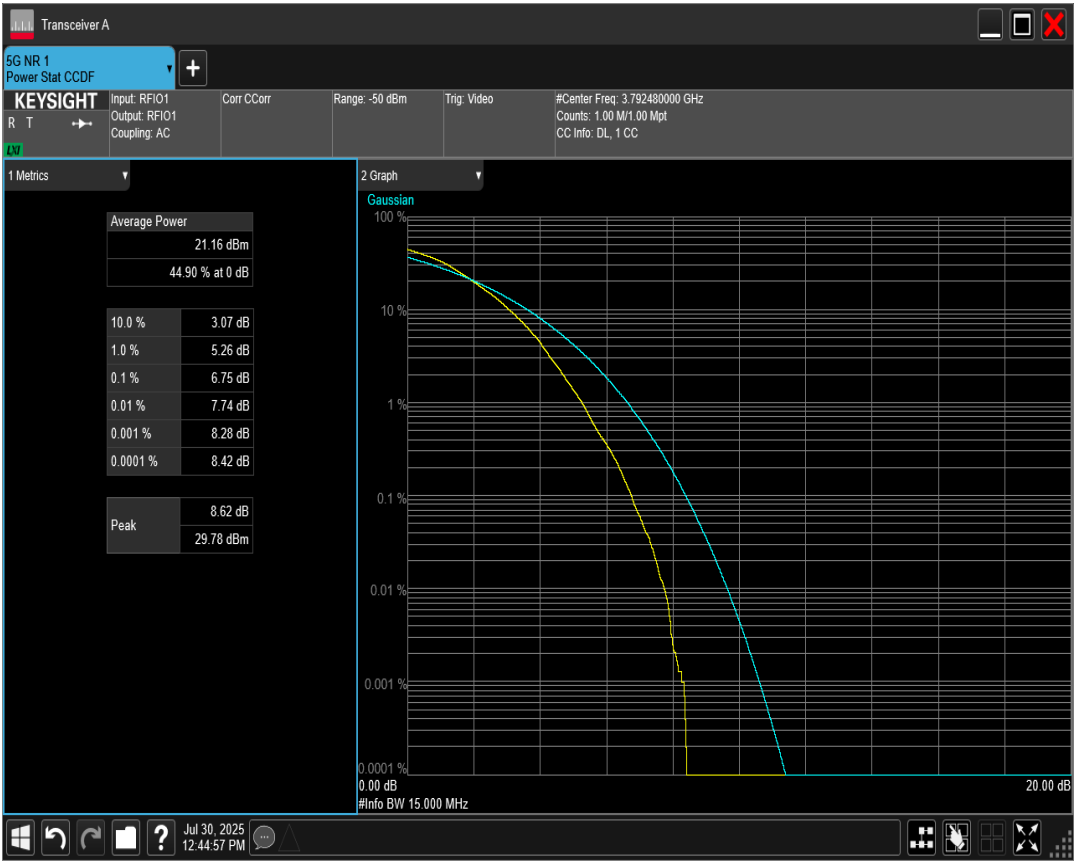


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=636666 RB=36@0

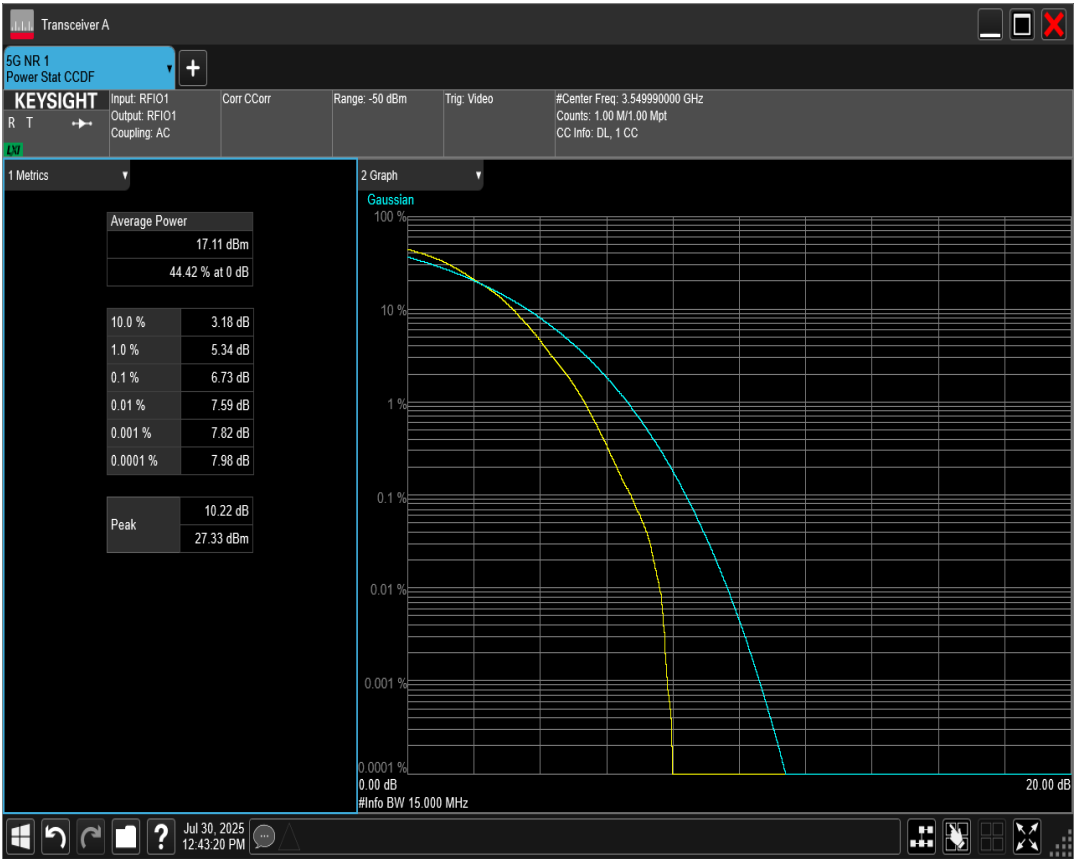

n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=636666 RB=50@0

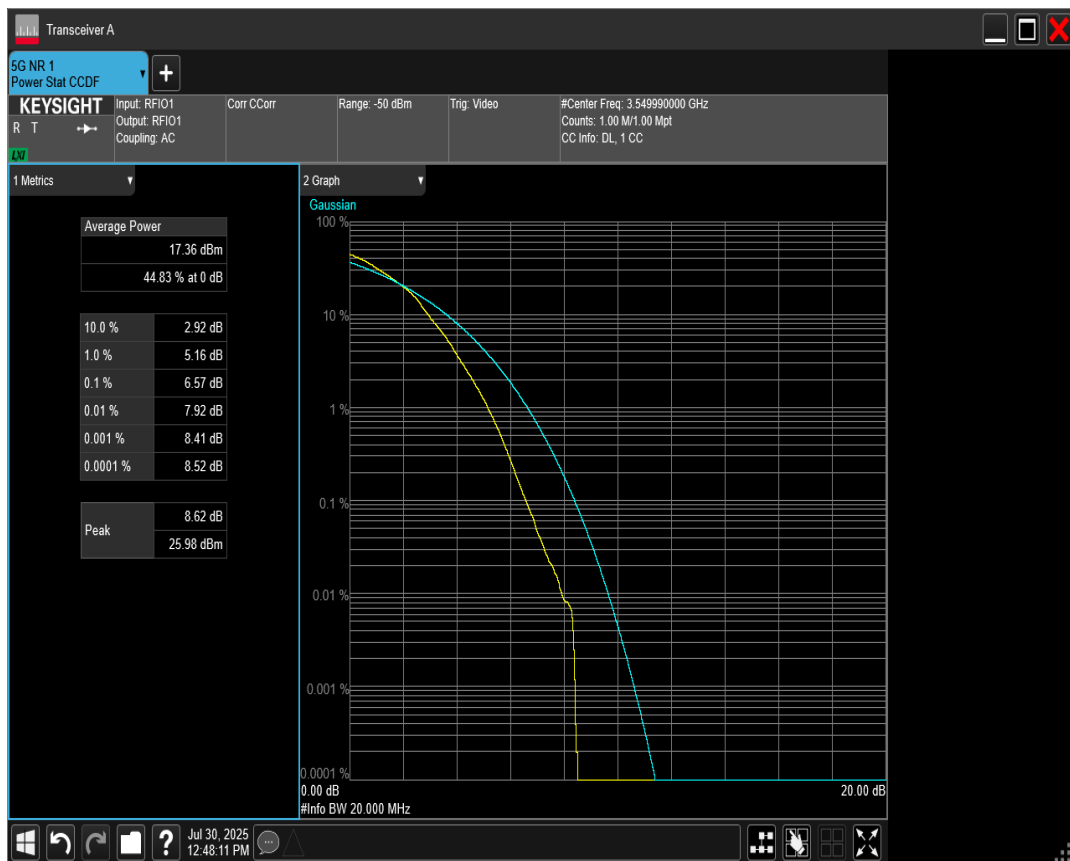

n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=620668 RB=50@0

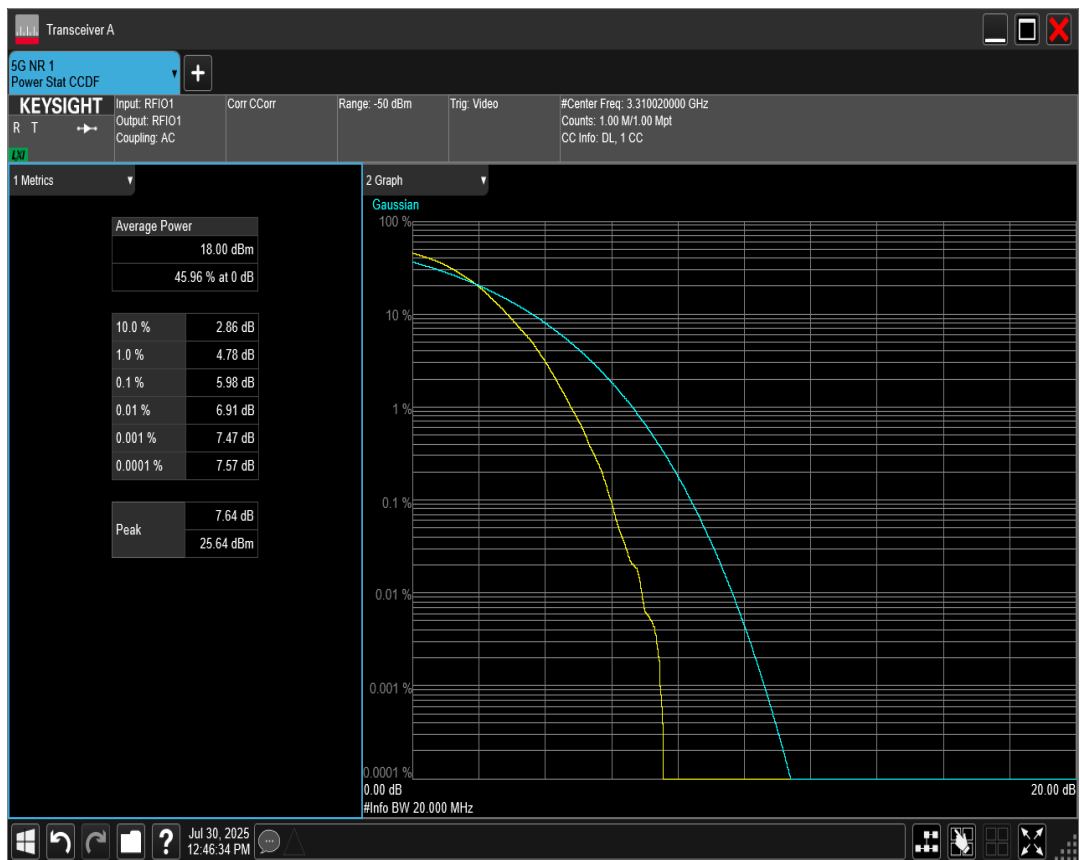

n78 SCS=30kHz DFT_QAM64 BW=80MHz Channel=622668 RB=216@0