



Low Band Edge WCDMA Band 5 CH 4132

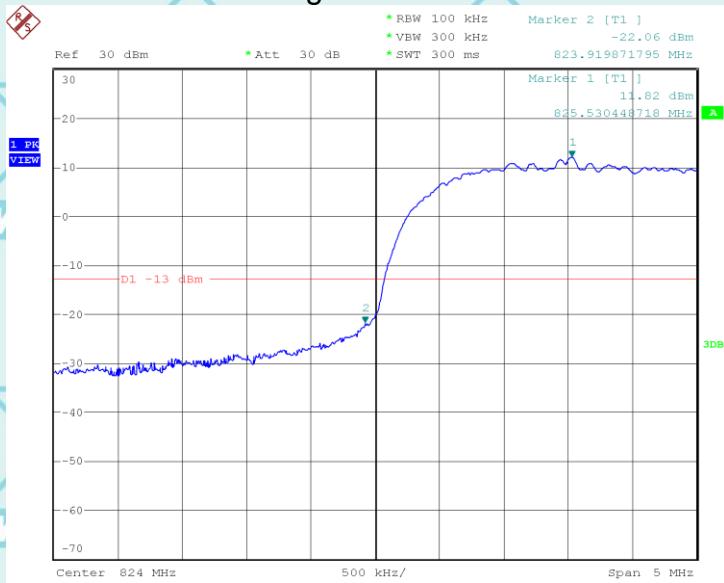

High Band Edge WCDMA Band 5 CH 4233

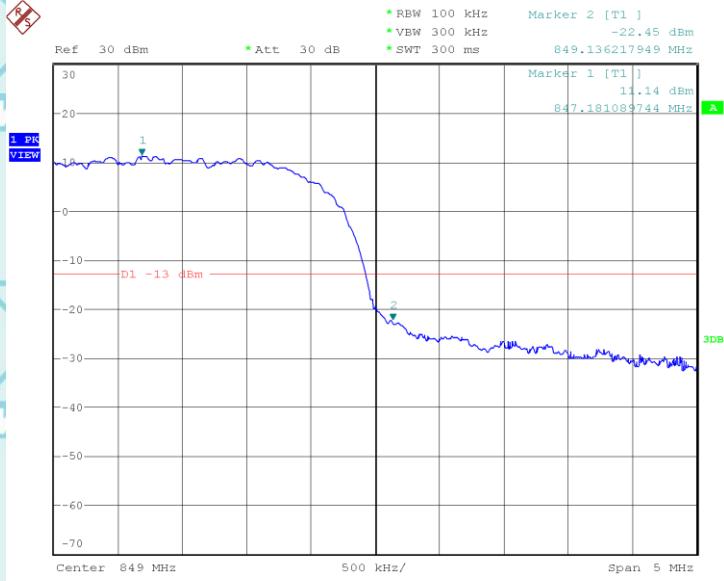

Note: Please refer to Annex (LTE&NR Band Edge) for more test data

11. SPURIOUS EMISSION (Conducted and Radiated)

11.1. Measurement Result (Pre-measurement)

GSM850:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	0.2	128	824.2	Pass
Middle Range	0.2	190	836.6	Pass
High Range	0.2	251	848.8	Pass

PCS 1900 :

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	0.2	512	1850.2	Pass
Middle Range	0.2	661	1880.0	Pass
High Range	0.2	810	1909.8	Pass

UTRA BANDS

Band 2:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	9262	1852.4	Pass
Middle Range	5	9400	1880.0	Pass
High Range	5	9538	1907.6	Pass

Band 4:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	1312	1712.4	Pass
Middle Range	5	1413	1732.6	Pass
High Range	5	1513	1752.6	Pass

Band 5:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	4132	826.4	Pass
Middle Range	5	4182	836.4	Pass
High Range	5	4233	846.6	Pass



Test Plot(s)

Conducted method

Test limit:


The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.


Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least $X + 10\log(P)$ dB, where P represents the transmitter power expressed in watts and X is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation $X + 10\log(P)$ being expressed in dBc (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e., $10\log(P) - \{X + 10\log(P)\}$], resulting in an absolute level of $-X$ dBW [or $(-X + 30)$ dBm]. See section 4.

Test procedure:


The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

Conducted Emission Test-Up:

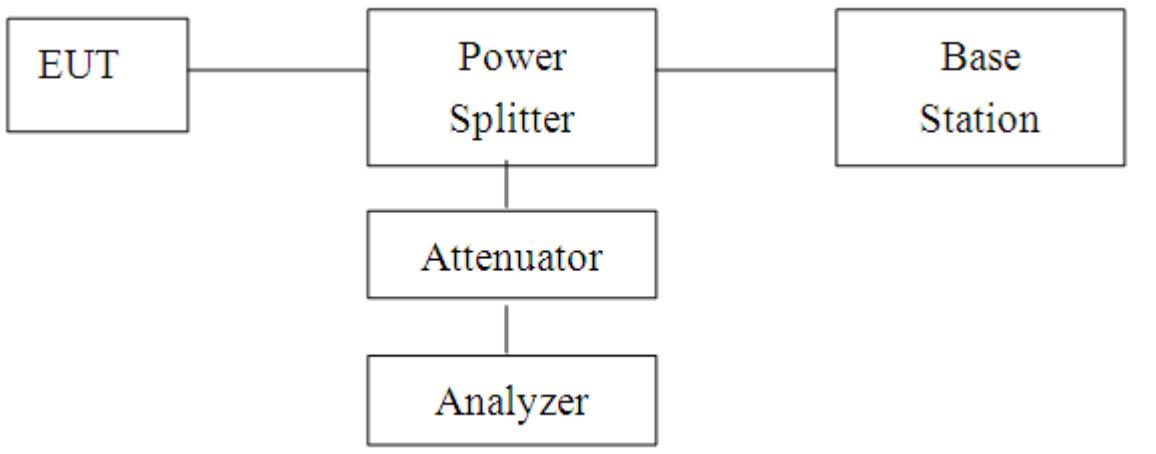


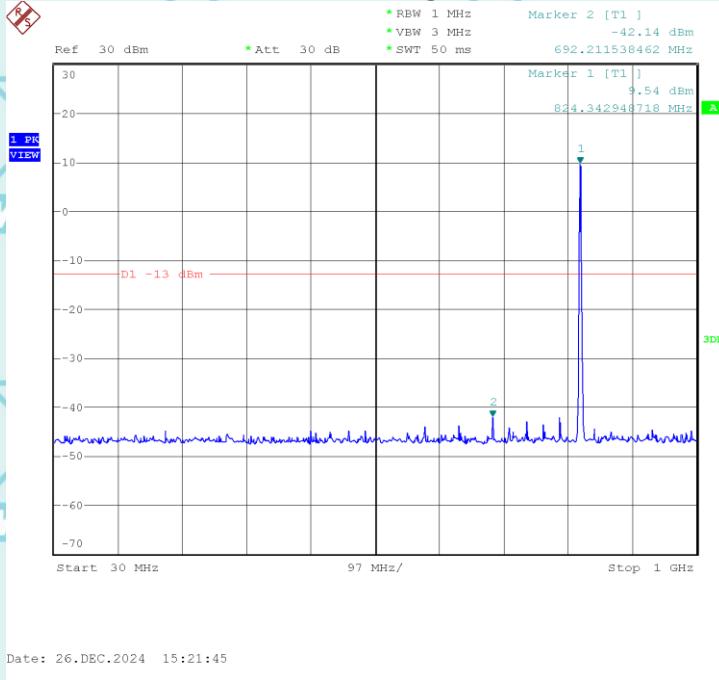CONDUCTED EMISSION IN GSM850 Band
Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 128 1GHz – 9GHz

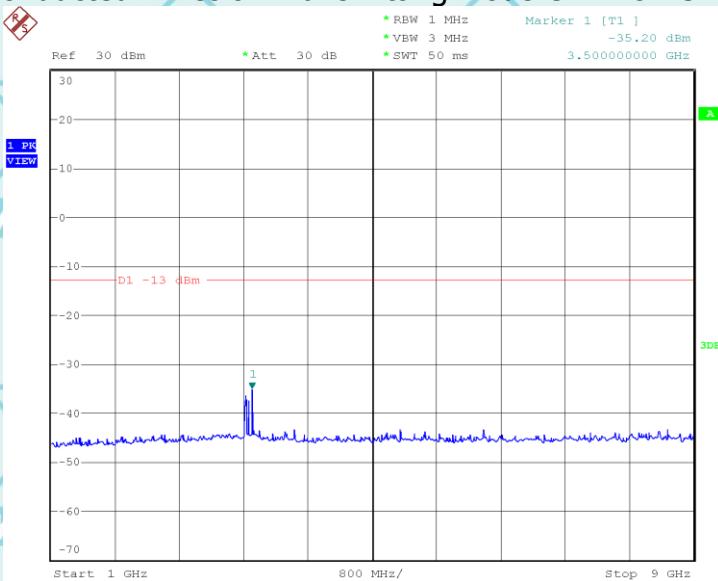


Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

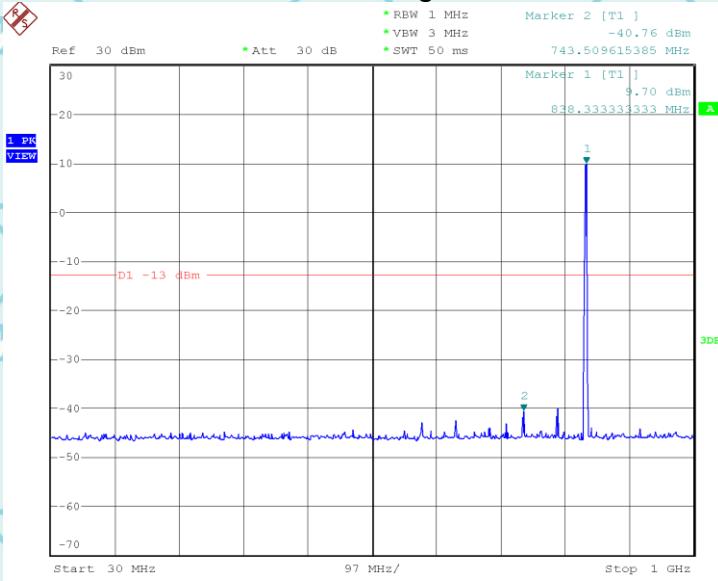


Conducted Emission Transmitting Mode CH 190 1GHz – 9GHz

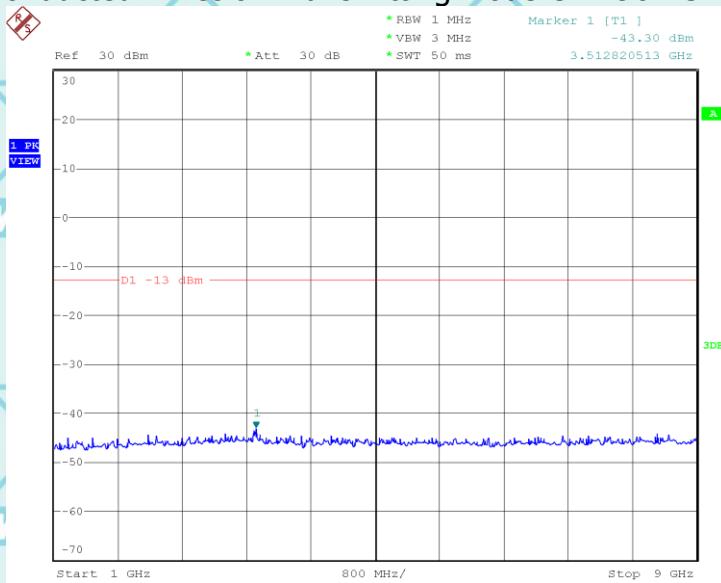

Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

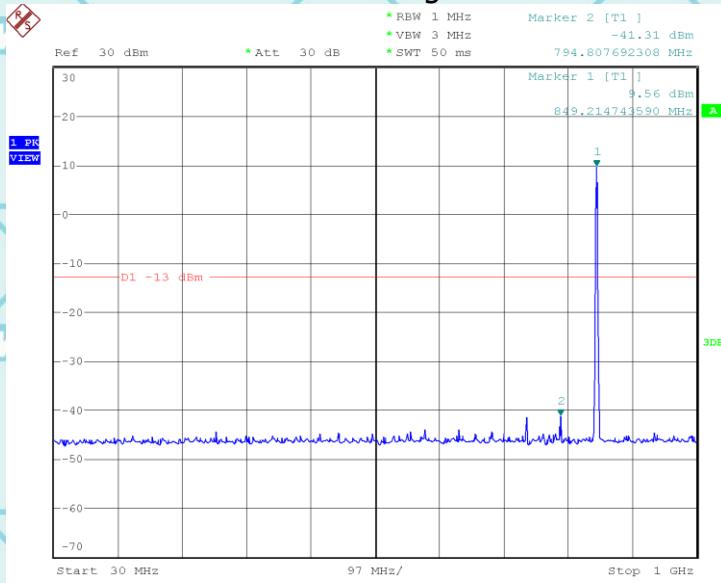


Conducted Emission Transmitting Mode CH 251 1GHz – 9GHz

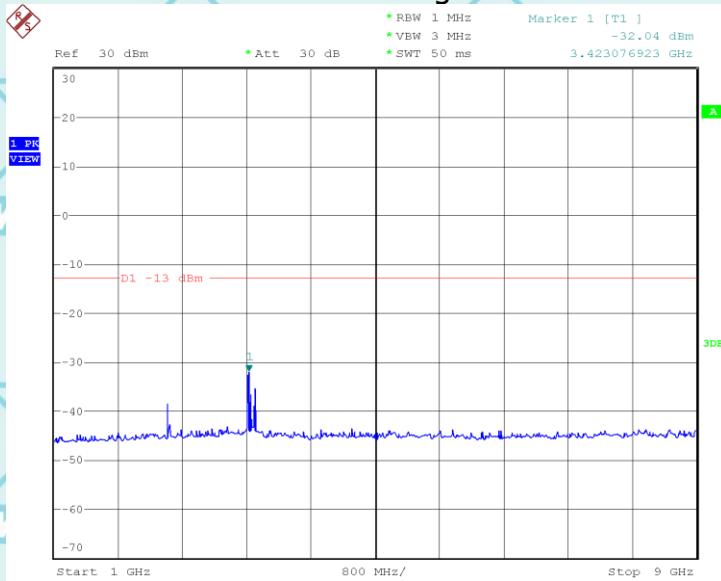


Date: 26.DEC.2024 15:13:56

CONDUCTED EMISSION IN PCS1900 BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz

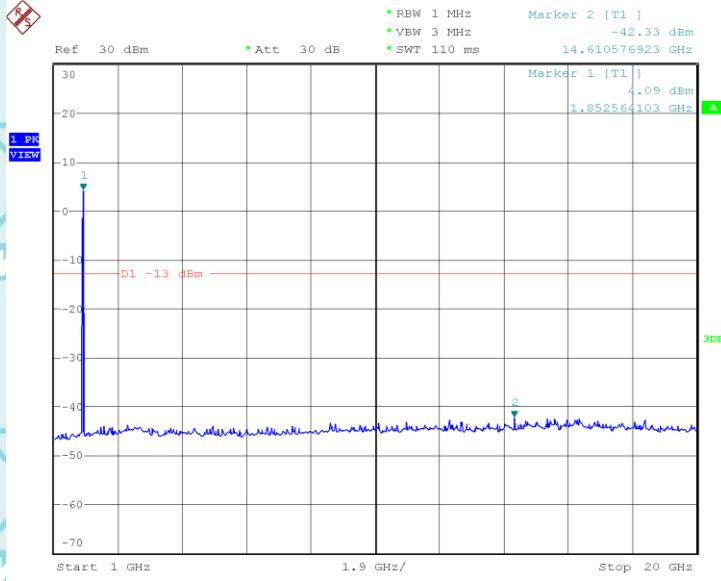


Date: 30.DEC.2024 22:57:46


Conducted Emission Transmitting Mode CH 512 1GHz – 20GHz

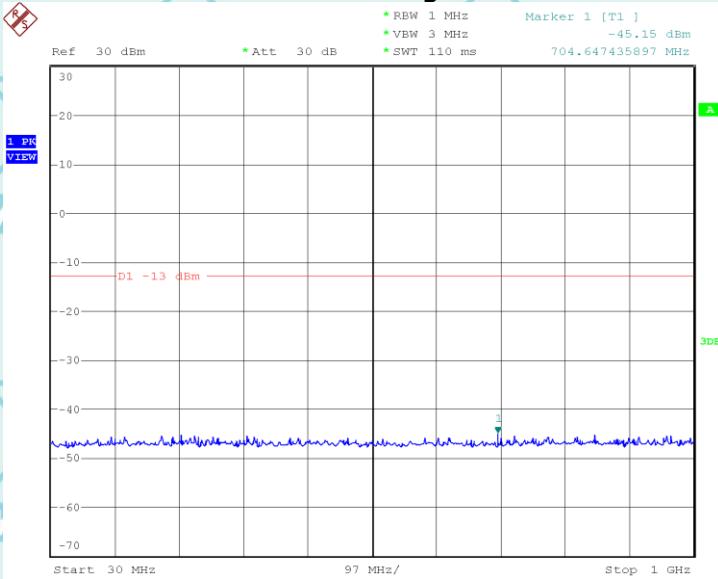


Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

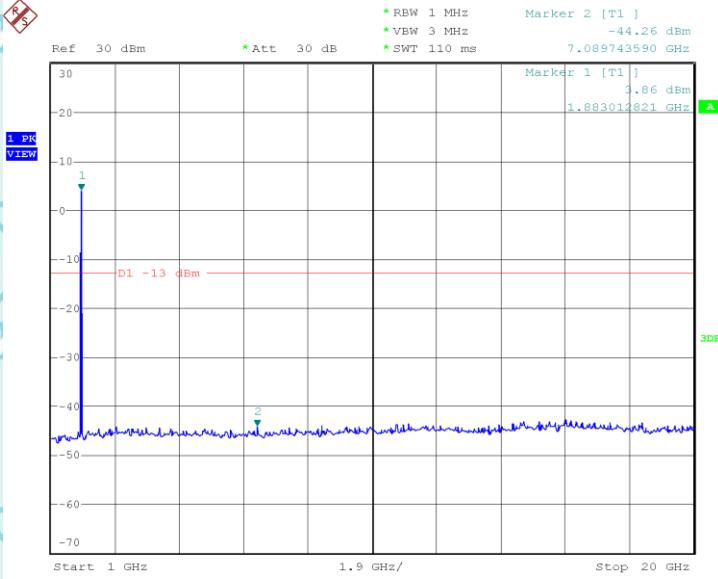



Conducted Emission Transmitting Mode CH 661 1GHz – 20GHz

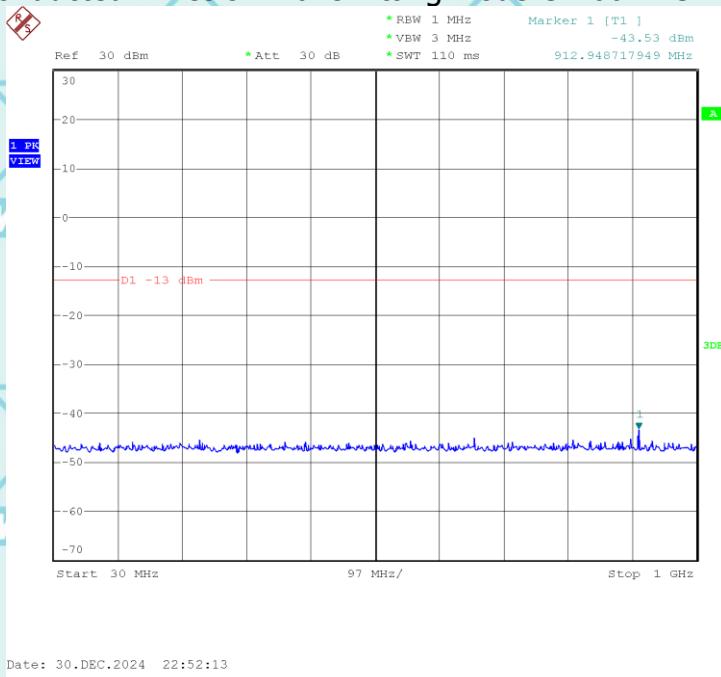


Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

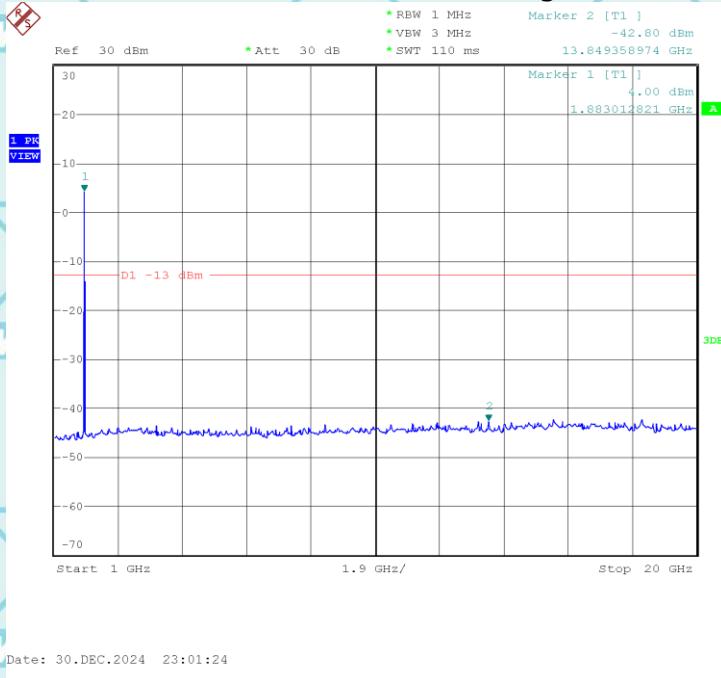


Conducted Emission Transmitting Mode CH 810 1GHz – 20GHz

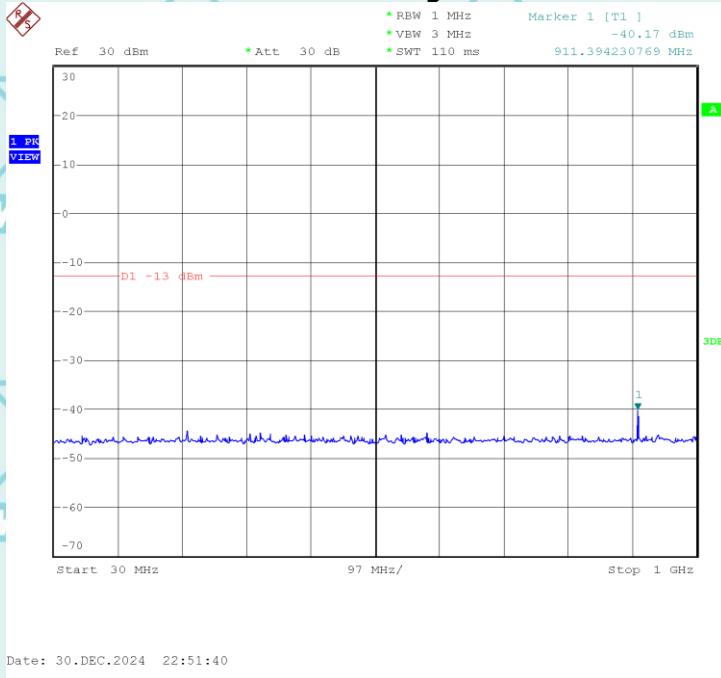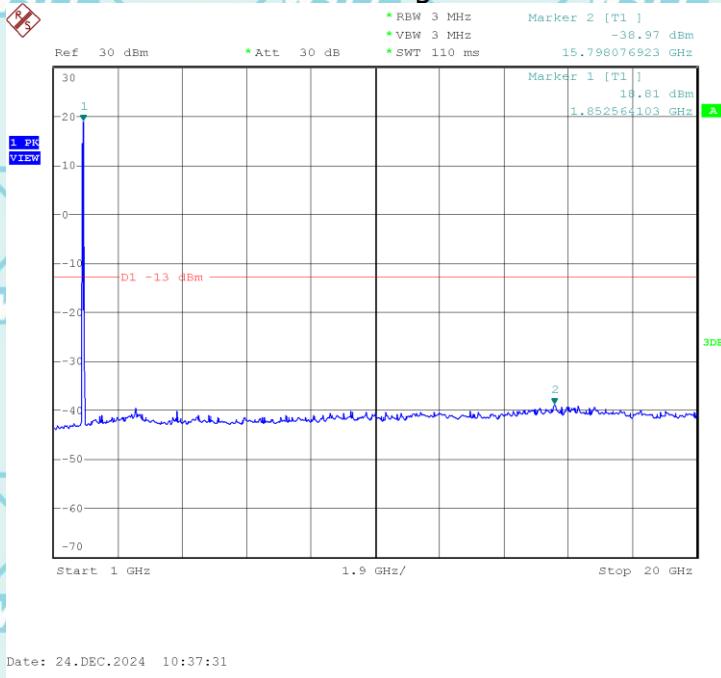CONDUCTED EMISSION IN WCDMA Band 2
Conducted Emission Transmitting Mode CH 9262 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 9262 1GHz – 20GHz

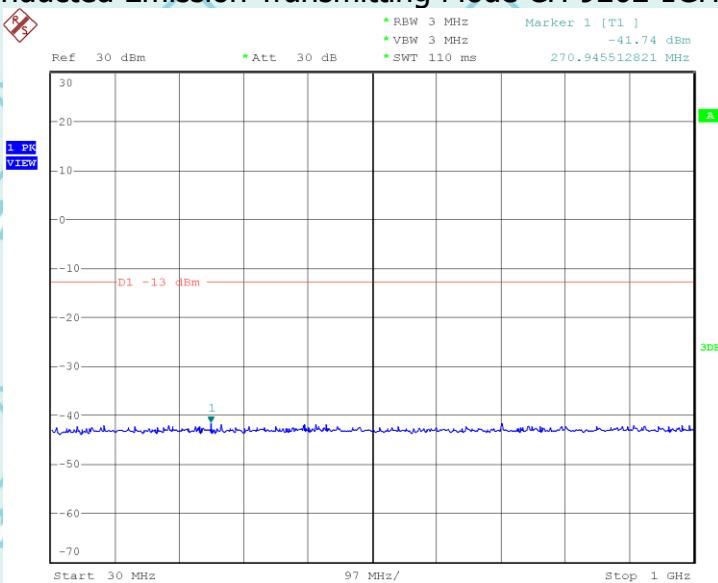


Conducted Emission Transmitting Mode CH 9400 30MHz – 1GHz

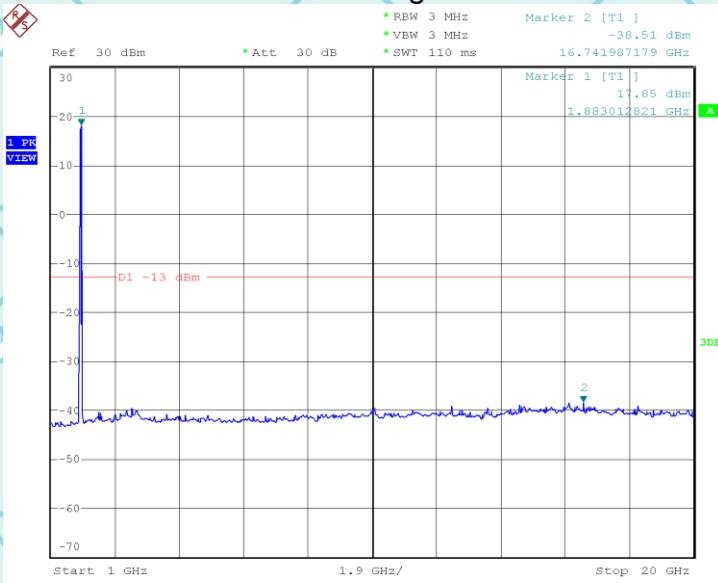



Conducted Emission Transmitting Mode CH 9400 1GHz – 20GHz

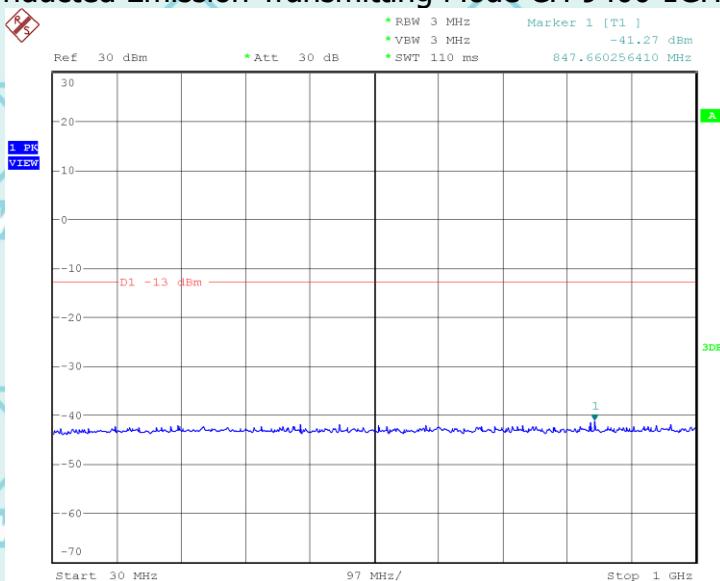


Conducted Emission Transmitting Mode CH 9538 30MHz – 1GHz

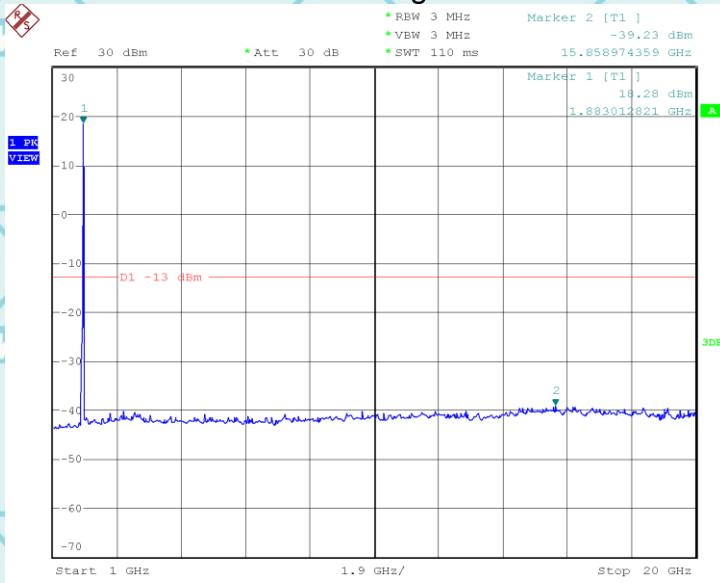


Conducted Emission Transmitting Mode CH 9538 1GHz – 20GHz

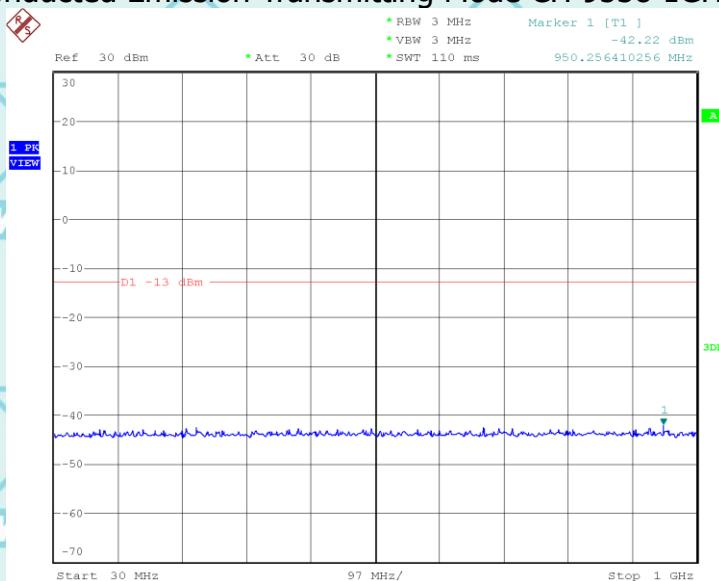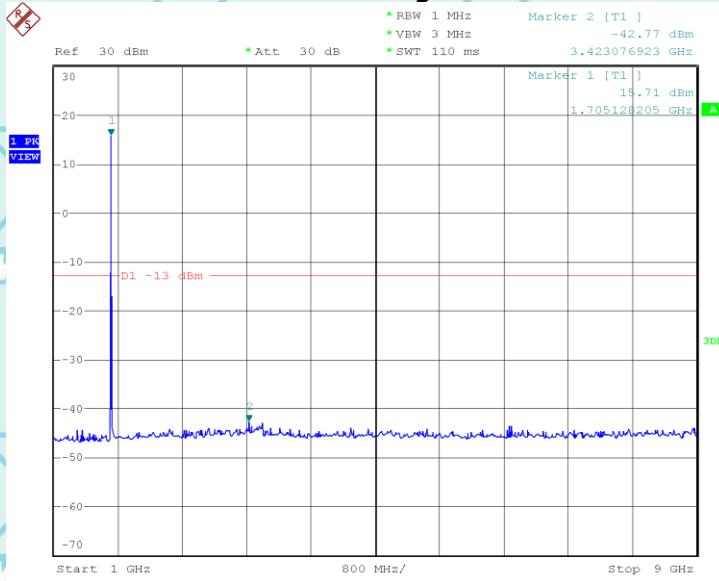CONDUCTED EMISSION IN WCDMA Band 4
Conducted Emission Transmitting Mode CH 1312 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 1312 1GHz – 20GHz

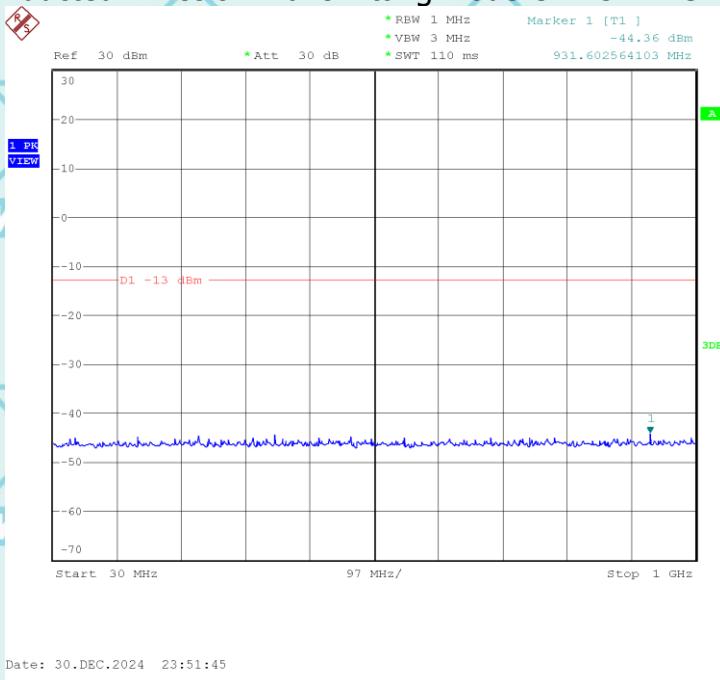


Conducted Emission Transmitting Mode CH 1413 30MHz – 1GHz

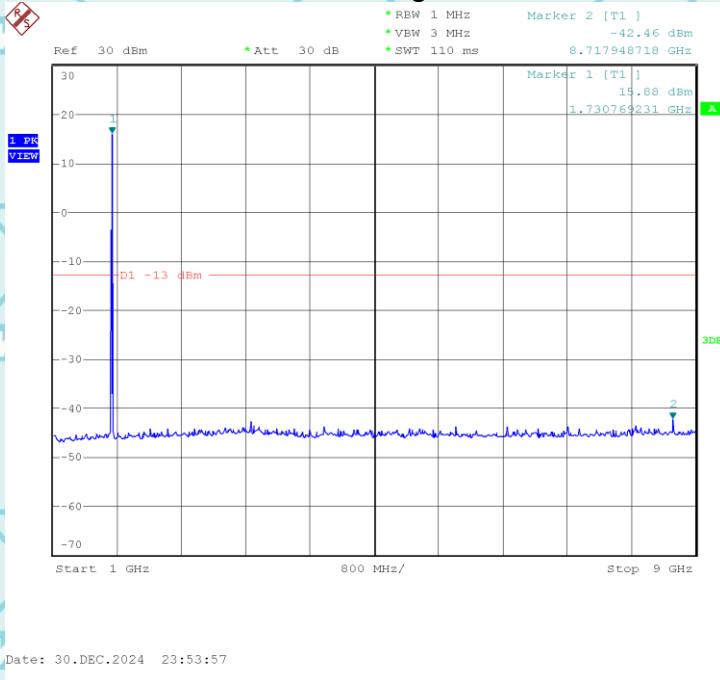



Conducted Emission Transmitting Mode CH 1413 1GHz – 20GHz

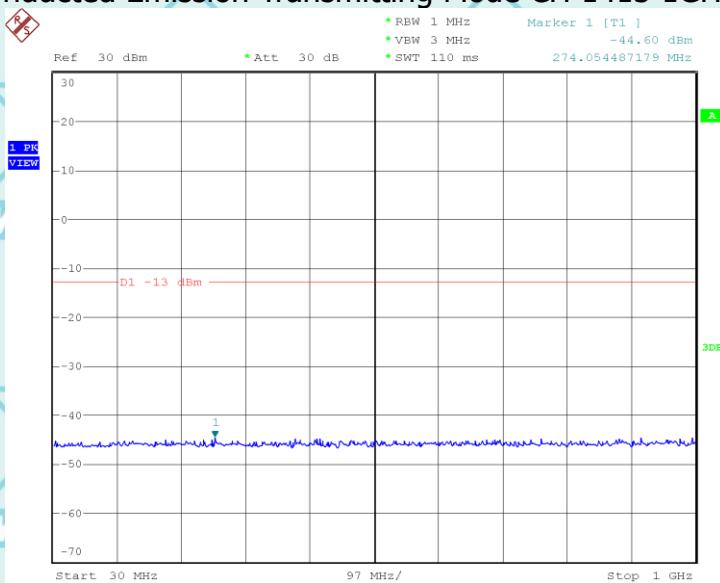


Conducted Emission Transmitting Mode CH 1513 30MHz – 1GHz

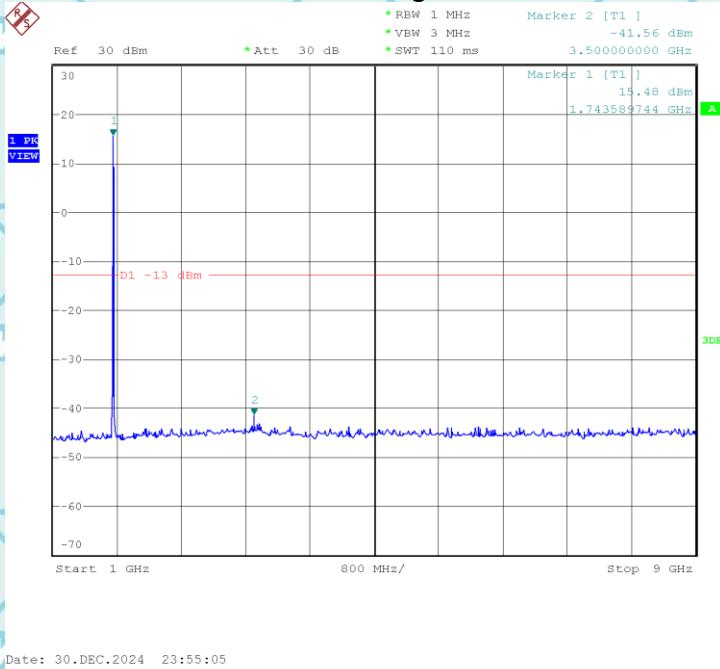


Conducted Emission Transmitting Mode CH 1513 1GHz – 20GHz

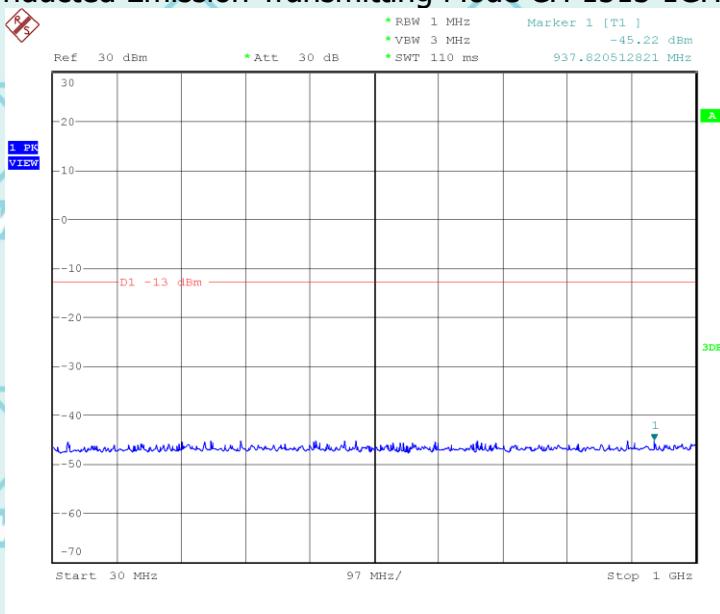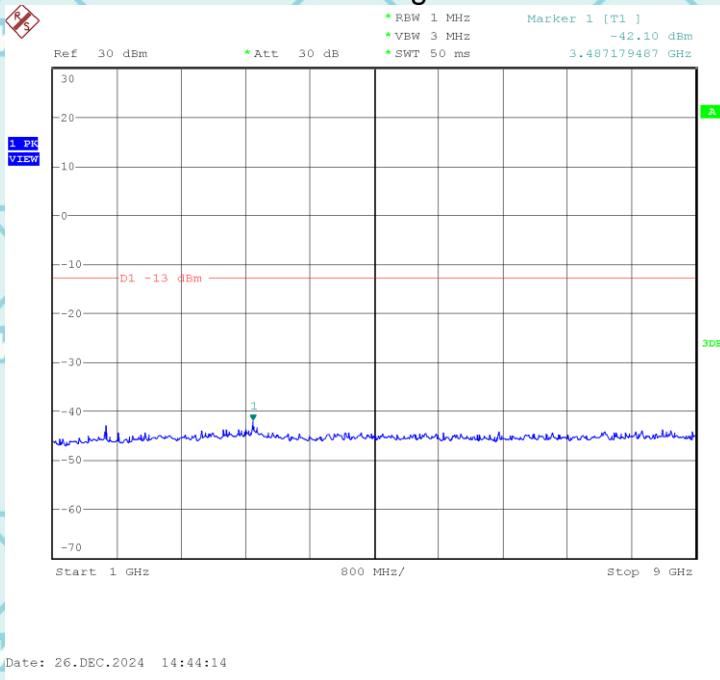CONDUCTED EMISSION IN WCDMA Band 5
Conducted Emission Transmitting Mode CH 4132 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 4132 1GHz – 9GHz

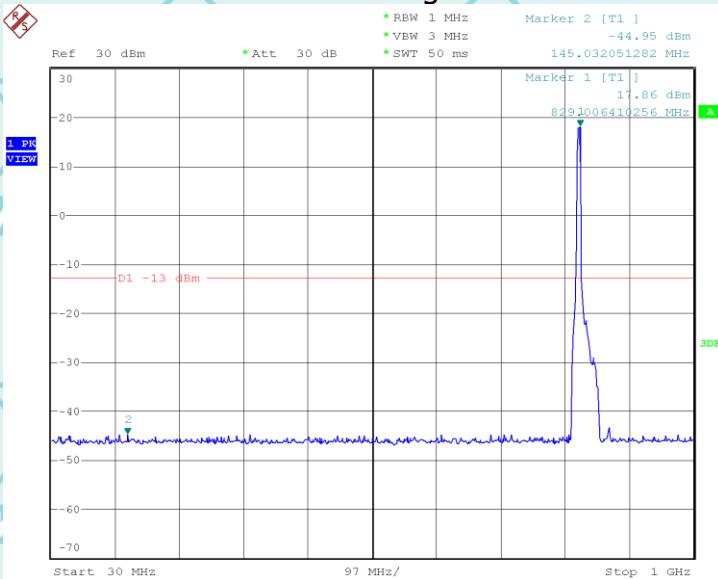


Conducted Emission Transmitting Mode CH 4182 30MHz – 1GHz

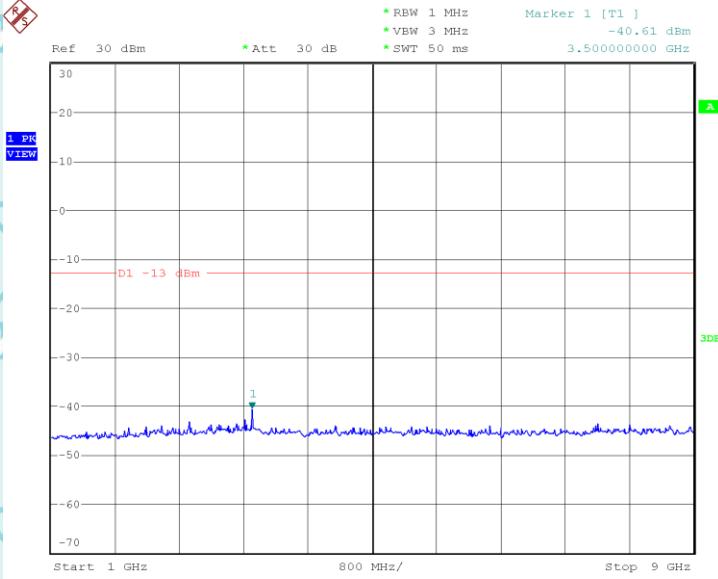


Conducted Emission Transmitting Mode CH 4182 1GHz – 9GHz

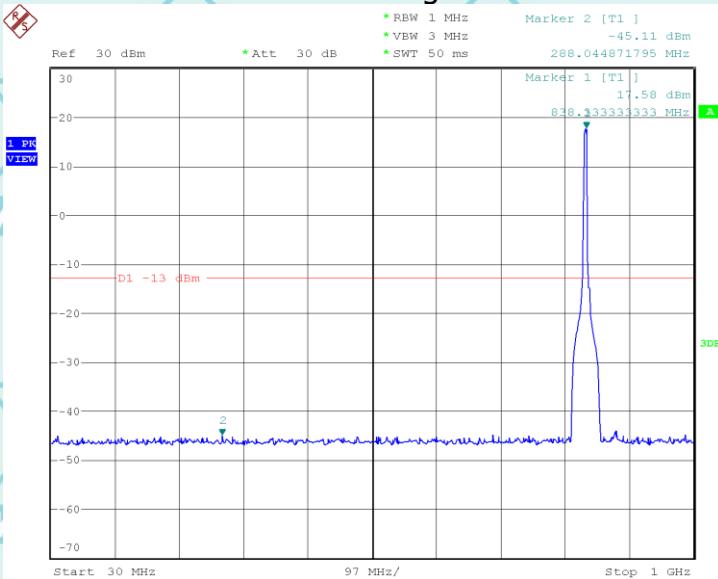

Conducted Emission Transmitting Mode CH 4233 30MHz – 1GHz

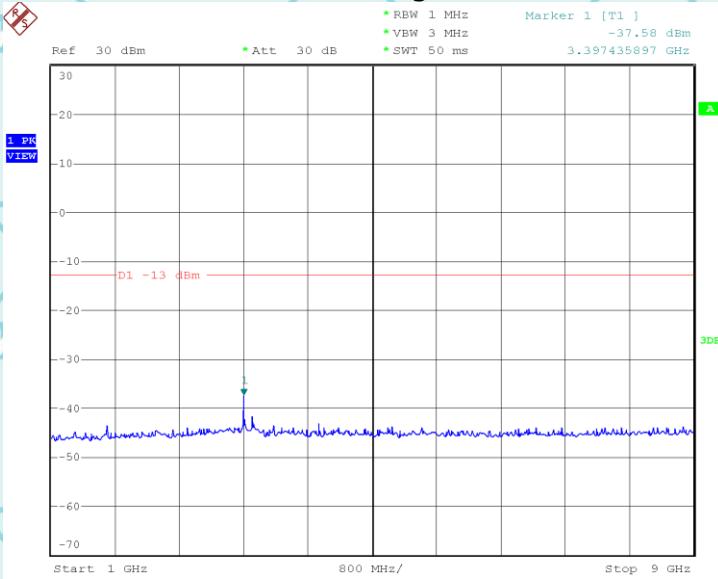

Conducted Emission Transmitting Mode CH 4233 1GHz – 9GHz

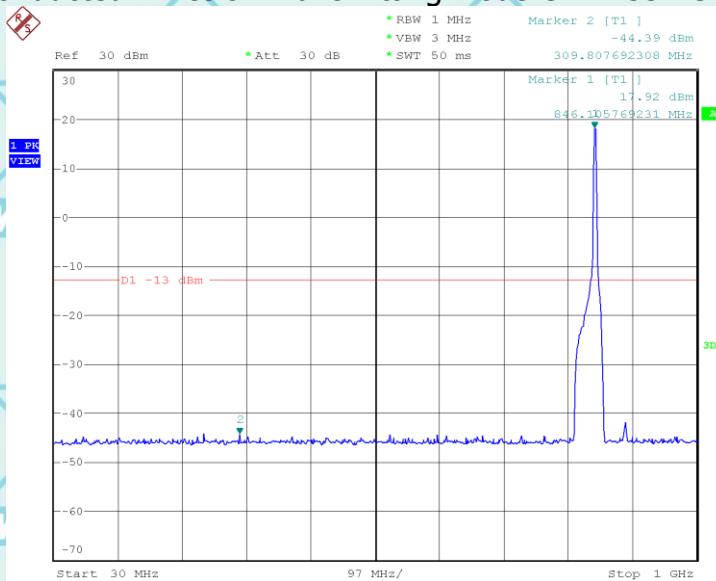

Note: Please refer to Annex (LTE&NR Out-of-band emissions) for more test data

12. FREQUENCY STABILITY


Test limit:

The frequency stability of the transmitter shall be measured while varying the ambient temperatures and supply voltages over the ranges specified in §2.1055. The specific frequency stability limits are provided in the relevant rules section(s). see section 4.

Test procedure:

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

Test setup:

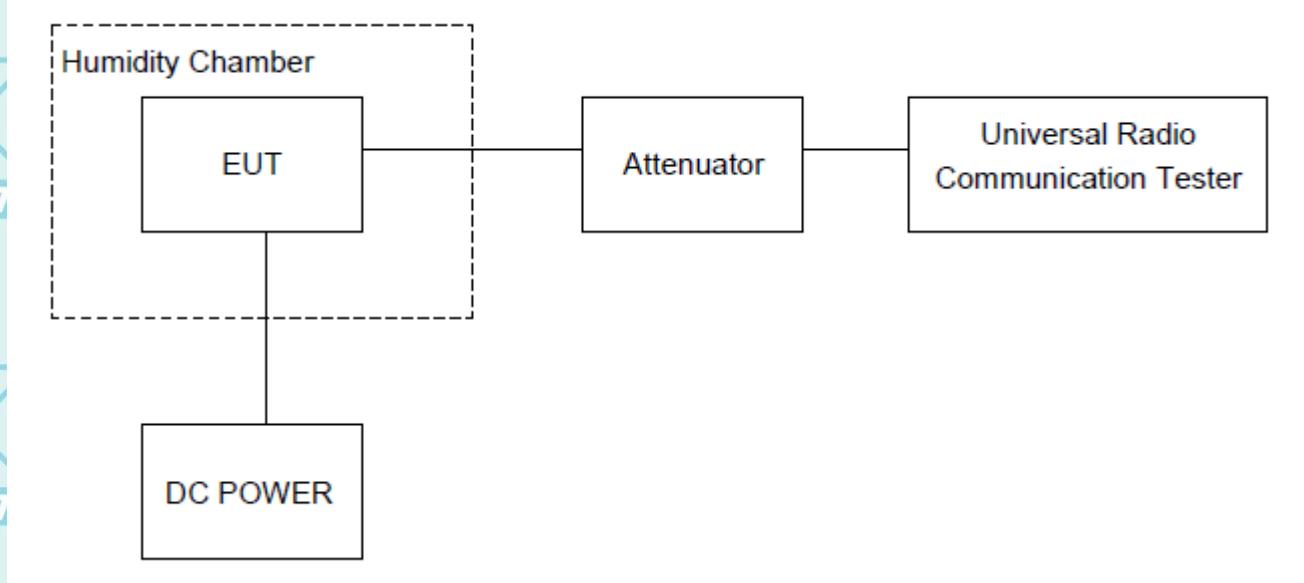

12.1. Measurement Result (Worst)

Frequency Error against Voltage for GSM 850 band (836.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	36	0.019
3.91	35	0.018
4.50	33	0.018

Frequency Error against Temperature for GSM 850 band (836.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	36	0.019
0	37	0.020
10	38	0.020
20	30	0.016
30	40	0.021
40	31	0.017
55	37	0.020

Frequency Error against Voltage for PCS 1900 band (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	29	0.035
3.91	40	0.048
4.50	32	0.039

Frequency Error against Temperature for PCS 1900 band (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	37	0.044
0	35	0.042
10	32	0.038
20	39	0.047
30	34	0.041
40	31	0.037
55	36	0.043

Frequency Error against Voltage for GPRS 850 band (836.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	37	0.020
3.91	37	0.020
4.50	33	0.018

Frequency Error against Temperature for GPRS 850 band (836.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	40	0.021
0	28	0.015
10	30	0.016
20	40	0.021
30	32	0.017
40	38	0.020
55	28	0.015

Frequency Error against Voltage for GPRS 1900 band (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	28	0.034
3.91	34	0.041
4.50	29	0.034

Frequency Error against Temperature for GPRS 1900 band (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	40	0.048
0	39	0.046
10	39	0.046
20	29	0.035
30	40	0.048
40	38	0.045
55	32	0.039



Frequency Error against Voltage for EGPRS 850 band (836.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	31	0.016
3.91	36	0.019
4.50	31	0.017

Frequency Error against Temperature for EGPRS 850 band (836.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	38	0.020
0	38	0.020
10	31	0.016
20	34	0.018
30	32	0.017
40	30	0.016
55	36	0.019

Frequency Error against Voltage for EGPRS 1900 band (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	39	0.047
3.91	37	0.045
4.50	39	0.046

Frequency Error against Temperature for EGPRS 1900 band (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	34	0.040
0	39	0.046
10	35	0.042
20	36	0.044
30	34	0.040
40	39	0.047
55	31	0.036



Frequency Error against Voltage for WCDMA Band 2 (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	34	0.018
3.91	37	0.020
4.50	33	0.017

Frequency Error against Temperature for WCDMA Band 2 (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	33	0.017
0	39	0.021
10	35	0.019
20	36	0.019
30	37	0.020
40	29	0.015
55	30	0.016

Frequency Error against Voltage for WCDMA Band 4 (1732.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	29	0.035
3.91	39	0.046
4.50	38	0.046

Frequency Error against Temperature for WCDMA Band 4 (1732.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	31	0.037
0	35	0.042
10	29	0.035
20	31	0.037
30	40	0.048
40	33	0.039
55	37	0.044



Frequency Error against Voltage for WCDMA Band 5 (836.4MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	29	0.015
3.91	36	0.019
4.50	29	0.015

Frequency Error against Temperature for WCDMA Band 5 (836.4MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	32	0.017
0	39	0.021
10	34	0.018
20	32	0.017
30	40	0.021
40	39	0.021
55	34	0.018

Note: Please refer to Annex (LTE&NR Frequency Error against) for more test data



13. Test Setup Photographs

Please refer to Annex "Set Up Photos-RF" for test setup photos

---END OF REPORT---

