


Vertical:




Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2681.8750	-61.22	7.07	-68.29	-13	-48.22	360	Vertical	PK	Pass
1	2681.8750		7.07		54		360	Vertical	AV	Pass
2	5206.8750	-46.15	19.17	-65.32	-13	-33.15	349.1	Vertical	PK	Pass
2	5206.8750		19.17		54		349.1	Vertical	AV	Pass
3	5981.2500	-48.79	22.45	-71.24	-13	-35.79	197.7	Vertical	PK	Pass
3	5981.2500		22.45		54		197.7	Vertical	AV	Pass
4	11844.0000	-59.07	38.74	-97.81	-13	-46.07	1.8	Vertical	PK	Pass
4	11844.0000		38.74		54		1.8	Vertical	AV	Pass
5	13966.5000	-56.93	41.41	-98.34	-13	-43.93	348.2	Vertical	PK	Pass
5	13966.5000		41.41		54		348.2	Vertical	AV	Pass
6	17761.5000	-52.82	44.9	-97.72	-13	-39.82	300.6	Vertical	PK	Pass
6	17761.5000		44.9		54		300.6	Vertical	AV	Pass

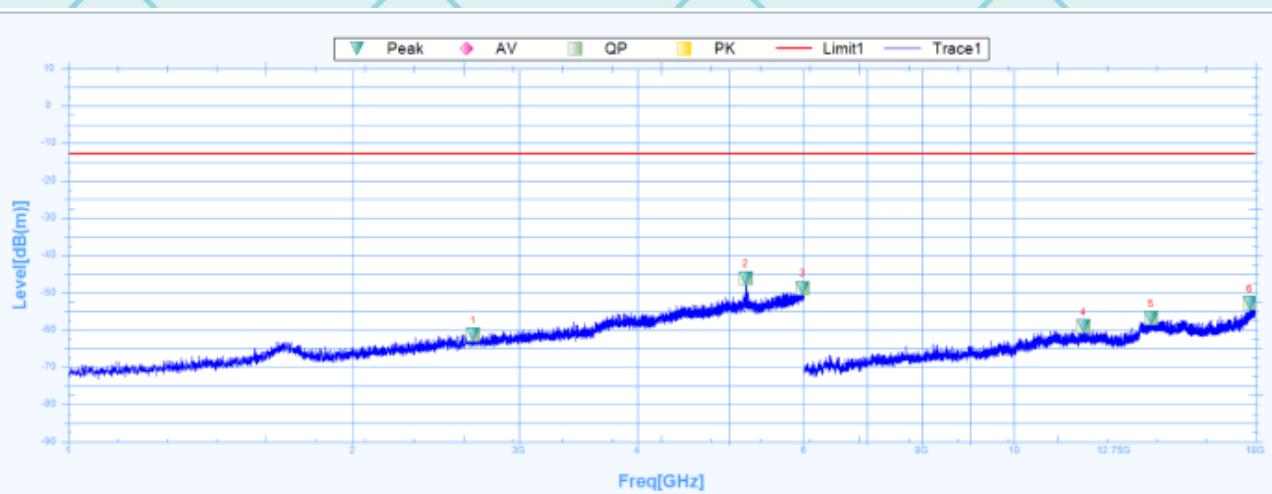

n41:

Horizontal:

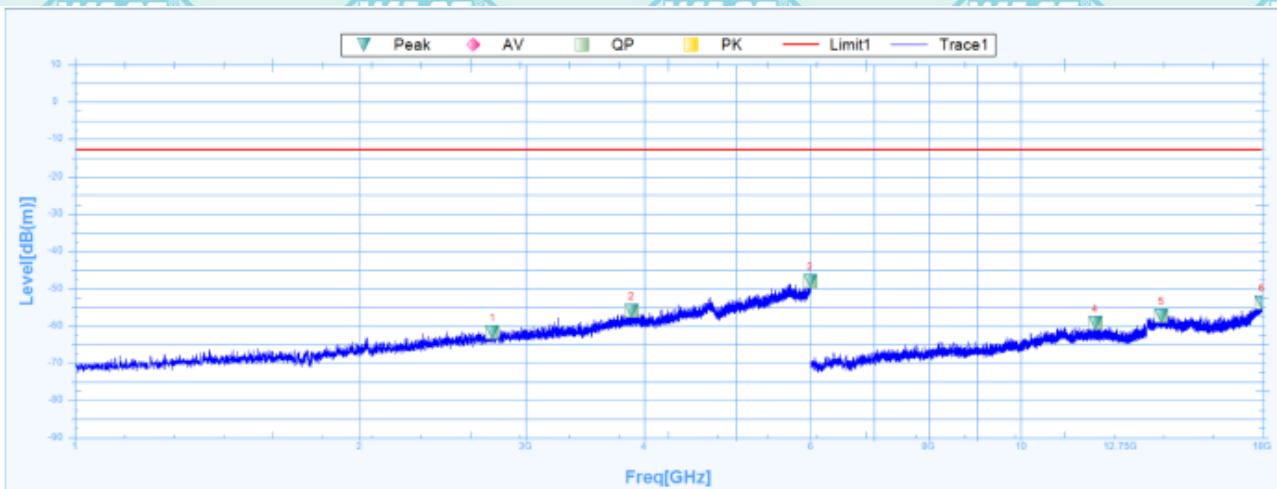


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2764.3750	-61.69	27.92	-89.61	-13	-48.69	355.7	Horizontal	PK	Pass
1	2764.3750		27.92		54		355.7	Horizontal	AV	Pass
2	3879.3750	-56.04	29.41	-85.45	-13	-43.04	138.3	Horizontal	PK	Pass
2	3879.3750		29.41		54		138.3	Horizontal	AV	Pass
3	5989.3750	-47.95	32.78	-80.73	-13	-34.95	-0.1	Horizontal	PK	Pass
3	5989.3750		32.78		54		-0.1	Horizontal	AV	Pass
4	11988.0000	-59.29	16.79	-76.08	-13	-46.29	38.8	Horizontal	PK	Pass
4	11988.0000		16.79		54		38.8	Horizontal	AV	Pass
5	14091.0000	-57.39	19.03	-76.42	-13	-44.39	193	Horizontal	PK	Pass
5	14091.0000		19.03		54		193	Horizontal	AV	Pass
6	17988.0000	-53.72	23.84	-77.56	-13	-40.72	219.3	Horizontal	PK	Pass
6	17988.0000		23.84		54		219.3	Horizontal	AV	Pass



Vertical:

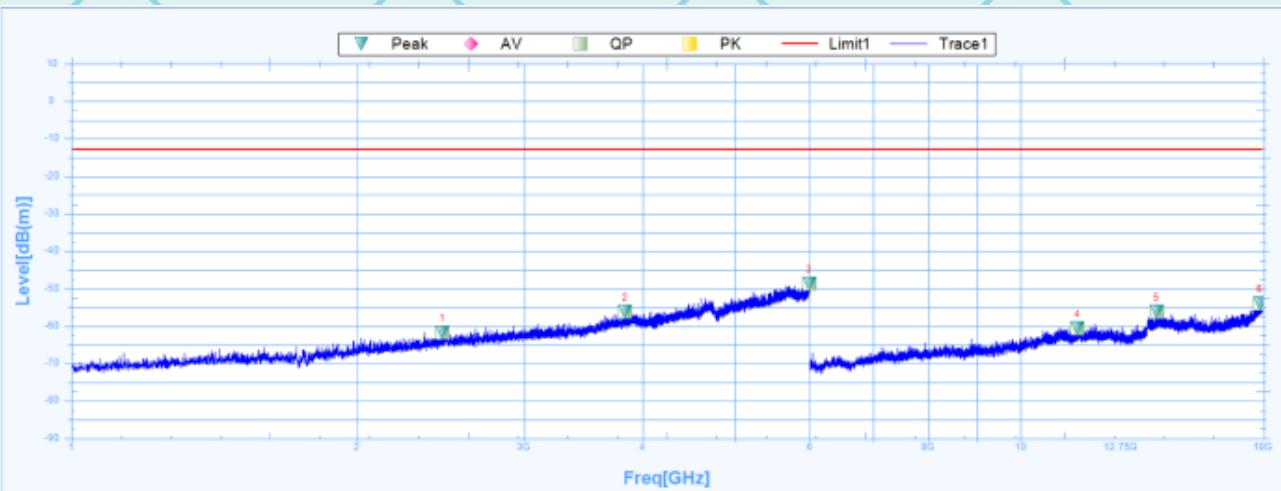


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2458.7500	-61.7	27.46	-89.16	-13	-48.7	251.9	Vertical	PK	Pass
1	2458.7500		27.46		54		251.9	Vertical	AV	Pass
2	3834.3750	-56.22	29.3	-85.52	-13	-43.22	155.1	Vertical	PK	Pass
2	3834.3750		29.3		54		155.1	Vertical	AV	Pass
3	5989.3750	-48.59	32.78	-81.37	-13	-35.59	359.1	Vertical	PK	Pass
3	5989.3750		32.78		54		359.1	Vertical	AV	Pass
4	11481.0000	-60.68	16.08	-76.76	-13	-47.68	230.1	Vertical	PK	Pass
4	11481.0000		16.08		54		230.1	Vertical	AV	Pass
5	13906.5000	-56.14	18.85	-74.99	-13	-43.14	134.4	Vertical	PK	Pass
5	13906.5000		18.85		54		134.4	Vertical	AV	Pass
6	17866.5000	-54.09	23.05	-77.14	-13	-41.09	360.2	Vertical	PK	Pass
6	17866.5000		23.05		54		360.2	Vertical	AV	Pass



n66:

Horizontal:

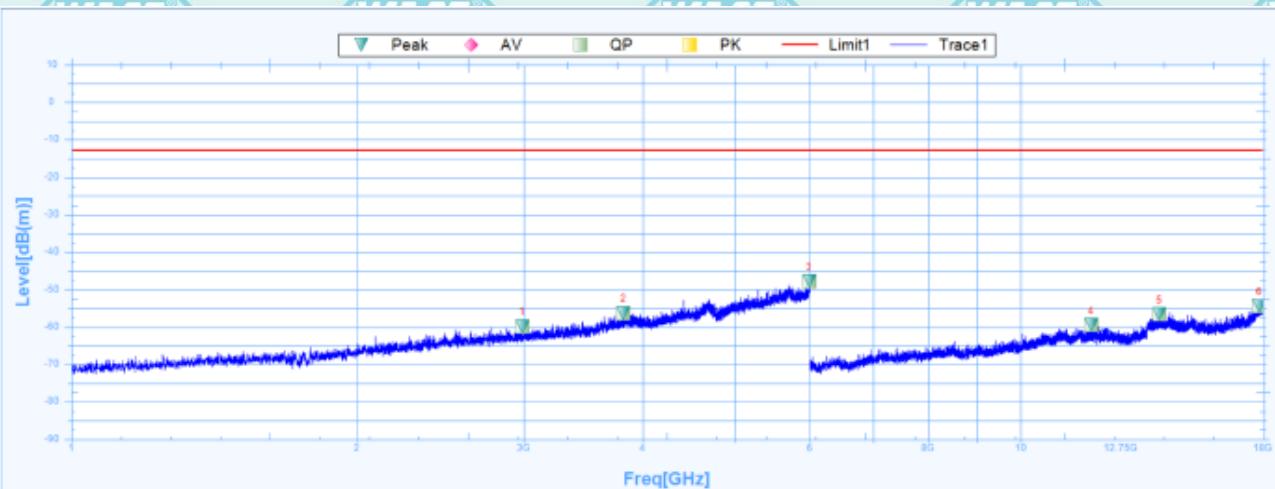


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2986.2500	-59.85	28.18	-88.03	-13	-46.85	16.5	Horizontal	PK	Pass
1	2986.2500		28.18		54		16.5	Horizontal	AV	Pass
2	3820.0000	-56.3	29.27	-85.57	-13	-43.3	317.8	Horizontal	PK	Pass
2	3820.0000		29.27		54		317.8	Horizontal	AV	Pass
3	5992.5000	-47.86	32.79	-80.65	-13	-34.86	20.1	Horizontal	PK	Pass
3	5992.5000		32.79		54		20.1	Horizontal	AV	Pass
4	11868.0000	-59.51	16.43	-75.94	-13	-46.51	304.2	Horizontal	PK	Pass
4	11868.0000		16.43		54		304.2	Horizontal	AV	Pass
5	14008.5000	-56.61	19.12	-75.73	-13	-43.61	25.7	Horizontal	PK	Pass
5	14008.5000		19.12		54		25.7	Horizontal	AV	Pass
6	17842.5000	-54.4	22.89	-77.29	-13	-41.4	199	Horizontal	PK	Pass
6	17842.5000		22.89		54		199	Horizontal	AV	Pass



Vertical:

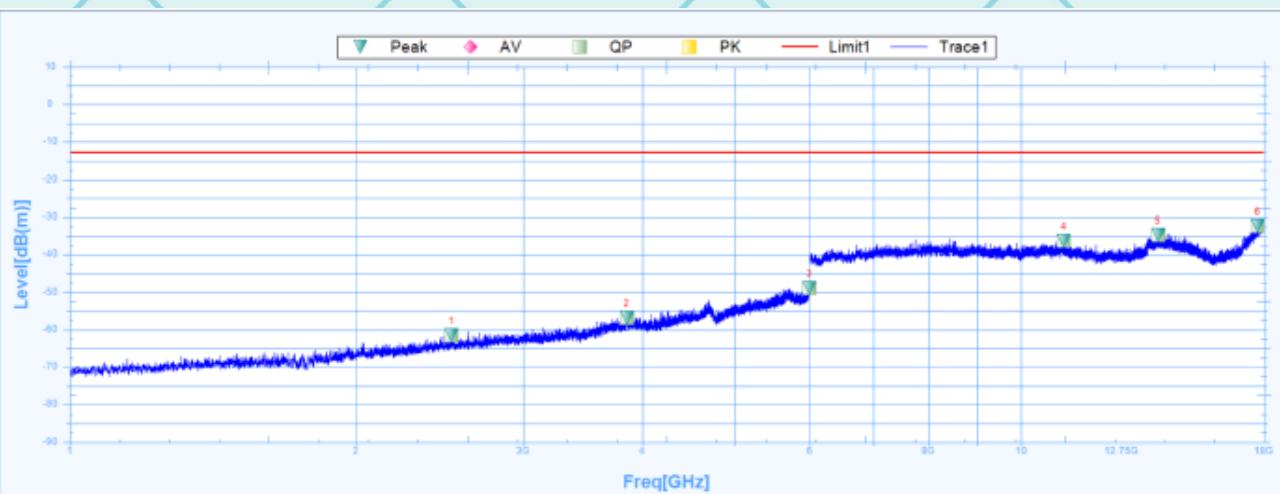


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2521.2500	-61.47	27.63	-89.1	-13	-48.47	355.1	Vertical	PK	Pass
1	2521.2500		27.63		54		355.1	Vertical	AV	Pass
2	3852.5000	-56.83	29.35	-86.18	-13	-43.83	254.3	Vertical	PK	Pass
2	3852.5000		29.35		54		254.3	Vertical	AV	Pass
3	5998.7500	-48.97	32.8	-81.77	-13	-35.97	135.9	Vertical	PK	Pass
3	5998.7500		32.8		54		135.9	Vertical	AV	Pass
4	11100.0000	-36.31	15.87	-52.18	-13	-23.31	293.4	Vertical	PK	Pass
4	11100.0000		15.87		54		293.4	Vertical	AV	Pass
5	13932.0000	-34.79	18.92	-53.71	-13	-21.79	0.5	Vertical	PK	Pass
5	13932.0000		18.92		54		0.5	Vertical	AV	Pass
6	17740.5000	-32.35	22.24	-54.59	-13	-19.35	196.6	Vertical	PK	Pass
6	17740.5000		22.24		54		196.6	Vertical	AV	Pass



n71:

Horizontal:

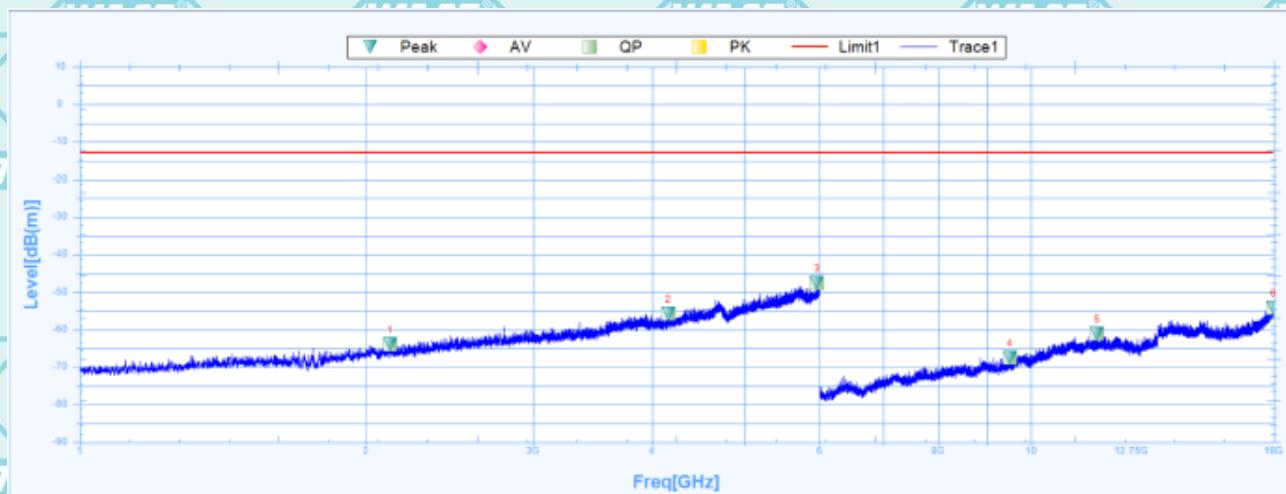


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2120.6250	-64.01	3.61	-67.62	-13	-51.01	0.9	Horizontal	PK	Pass
1	2120.6250		3.61		54		0.9	Horizontal	AV	Pass
2	4158.7500	-55.66	12.93	-68.59	-13	-42.66	215.7	Horizontal	PK	Pass
2	4158.7500		12.93		54		215.7	Horizontal	AV	Pass
3	5963.7500	-47.49	22.58	-70.07	-13	-34.49	17.3	Horizontal	PK	Pass
3	5963.7500		22.58		54		17.3	Horizontal	AV	Pass
4	9510.0000	-67.5	37.76	-105.26	-13	-54.5	206.1	Horizontal	PK	Pass
4	9510.0000		37.76		54		206.1	Horizontal	AV	Pass
5	11745.0000	-61.01	38.83	-99.84	-13	-48.01	267.1	Horizontal	PK	Pass
5	11745.0000		38.83		54		267.1	Horizontal	AV	Pass
6	17998.5000	-54.19	46.49	-100.68	-13	-41.19	181	Horizontal	PK	Pass
6	17998.5000		46.49		54		181	Horizontal	AV	Pass



Vertical:

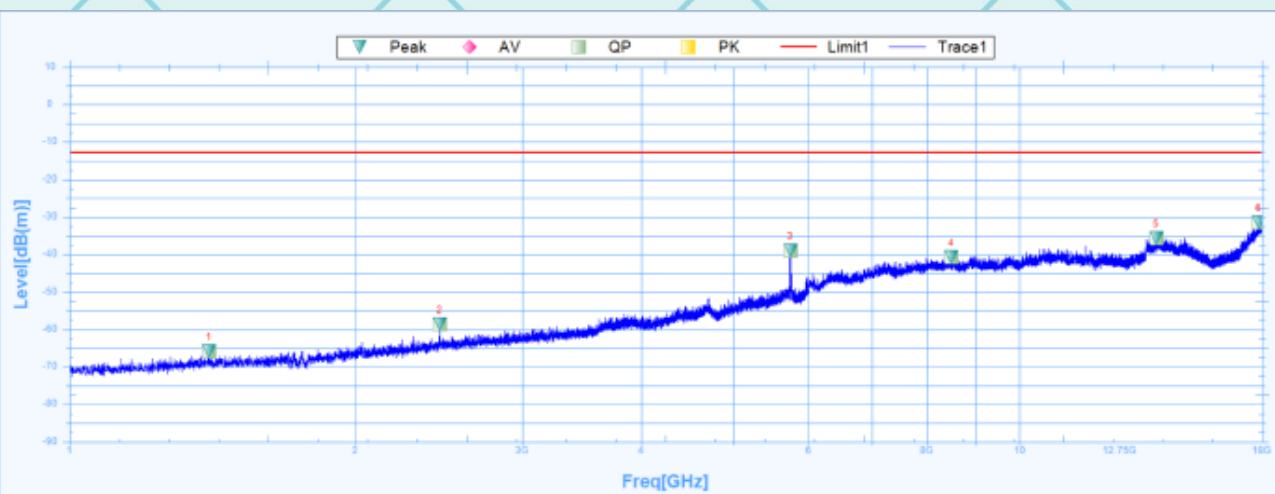


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1402.5000	-65.91	-0.33	-65.58	-13	-52.91	24.3	Vertical	PK	Pass
1	1402.5000		-0.33		54		24.3	Vertical	AV	Pass
2	2453.7500	-58.53	5.64	-64.17	-13	-45.53	221.5	Vertical	PK	Pass
2	2453.7500		5.64		54		221.5	Vertical	AV	Pass
3	5743.1250	-38.98	21.66	-60.64	-13	-25.98	349	Vertical	PK	Pass
3	5743.1250		21.66		54		349	Vertical	AV	Pass
4	8484.0000	-40.67	37.19	-77.86	-13	-27.67	91.8	Vertical	PK	Pass
4	8484.0000		37.19		54		91.8	Vertical	AV	Pass
5	13938.0000	-35.67	41.34	-77.01	-13	-22.67	-0.1	Vertical	PK	Pass
5	13938.0000		41.34		54		-0.1	Vertical	AV	Pass
6	17866.5000	-31.42	45.61	-77.03	-13	-18.42	327.3	Vertical	PK	Pass
6	17866.5000		45.61		54		327.3	Vertical	AV	Pass



n77(3450-3550Mhz):

Horizontal:

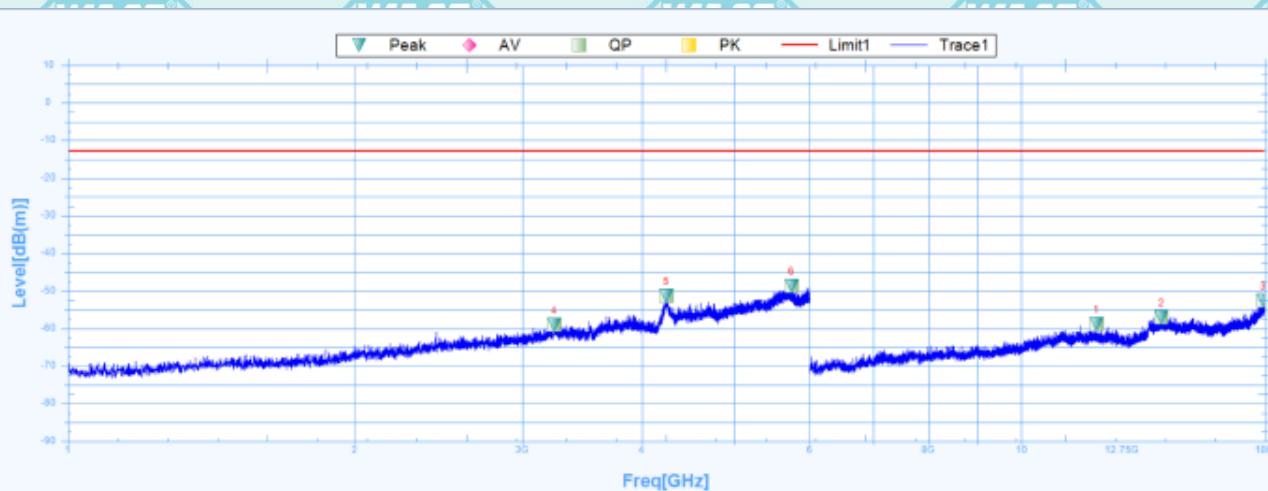


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	3239.3750	-59.13	9.68	-68.81	-13	-46.13	226.8	Vertical	PK	Pass
1	3239.3750		9.68		54		226.8	Vertical	AV	Pass
2	4246.8750	-51.41	13.01	-64.42	-13	-38.41	73.8	Vertical	PK	Pass
2	4246.8750		13.01		54		73.8	Vertical	AV	Pass
3	5743.1250	-48.69	21.27	-69.96	-13	-35.69	29.6	Vertical	PK	Pass
3	5743.1250		21.27		54		29.6	Vertical	AV	Pass
4	11988.0000	-58.87	38.61	-97.48	-13	-45.87	285	Horizontal	PK	Pass
4	11988.0000		38.61		54		285	Horizontal	AV	Pass
5	14040.0000	-57.13	41.45	-98.58	-13	-44.13	303	Horizontal	PK	Pass
5	14040.0000		41.45		54		303	Horizontal	AV	Pass
6	17950.5000	-52.76	46.17	-98.93	-13	-39.76	228.9	Horizontal	PK	Pass
6	17950.5000		46.17		54		228.9	Horizontal	AV	Pass



Vertical:

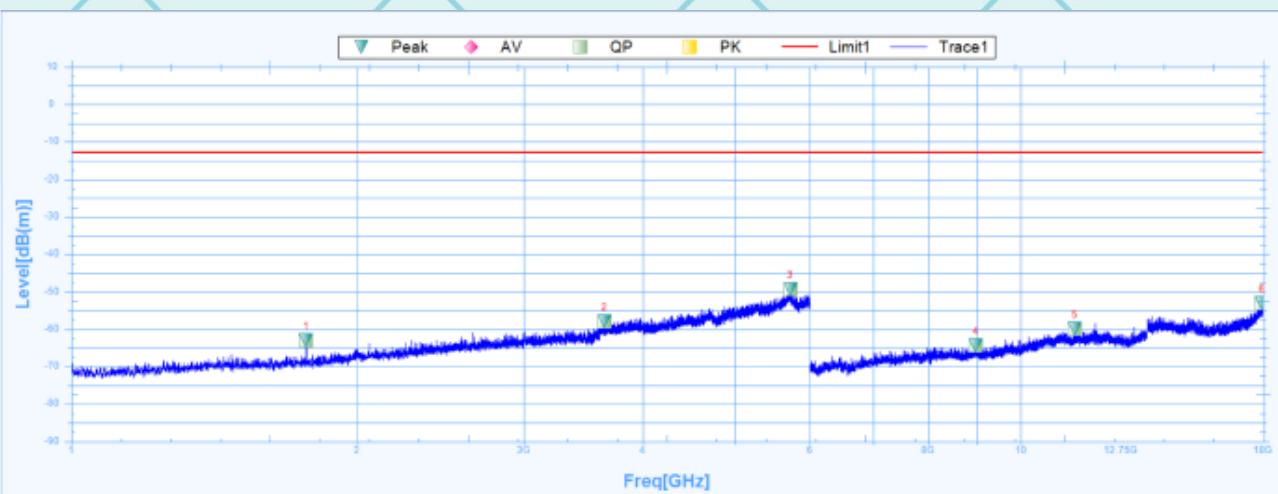


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1768.1250	-63.11	24.98	-88.09	-13	-50.11	358.2	Horizontal	PK	Pass
1	1768.1250		24.98		54		358.2	Horizontal	AV	Pass
2	3647.5000	-57.97	28.85	-86.82	-13	-44.97	95.4	Horizontal	PK	Pass
2	3647.5000		28.85		54		95.4	Horizontal	AV	Pass
3	5723.1250	-49.3	32.36	-81.66	-13	-36.3	235.2	Horizontal	PK	Pass
3	5723.1250		32.36		54		235.2	Horizontal	AV	Pass
4	8971.5000	-64.37	9.83	-74.2	-13	-51.37	337.6	Horizontal	PK	Pass
4	8971.5000		9.83		54		337.6	Horizontal	AV	Pass
5	11410.5000	-59.95	15.88	-75.83	-13	-46.95	197.8	Horizontal	PK	Pass
5	11410.5000		15.88		54		197.8	Horizontal	AV	Pass
6	17959.5000	-53.19	23.64	-76.83	-13	-40.19	309	Horizontal	PK	Pass
6	17959.5000		23.64		54		309	Horizontal	AV	Pass



n77(3700-3980Mhz):

Horizontal:

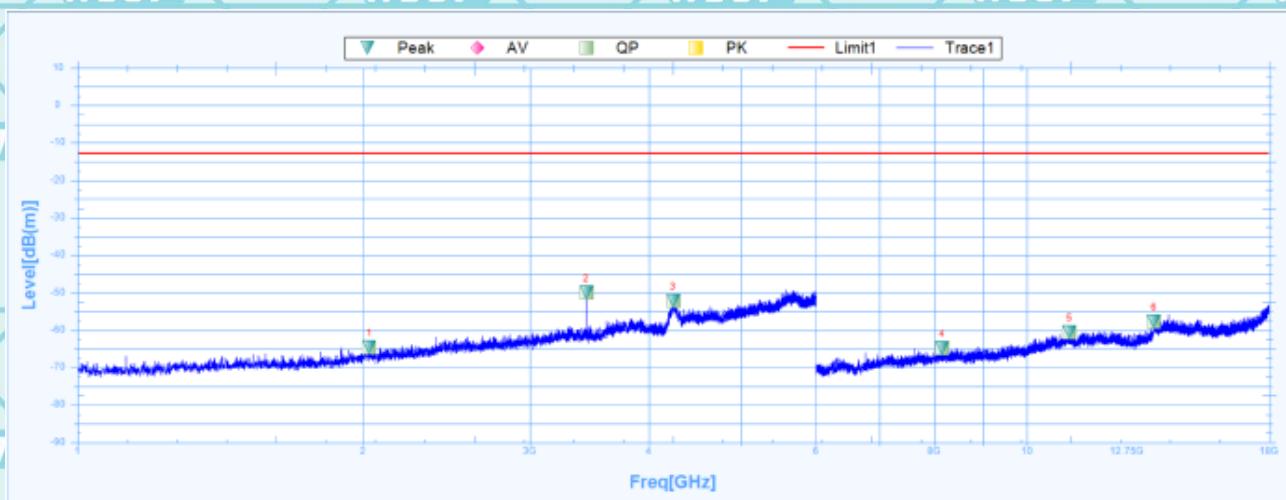


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2029.3750	-64.67	2.56	-67.23	-13	-51.67	170.7	Horizontal	PK	Pass
1	2029.3750		2.56		54		170.7	Horizontal	AV	Pass
2	3437.5000	-49.95	9.18	-59.13	-13	-36.95	161.1	Horizontal	PK	Pass
2	3437.5000		9.18		54		161.1	Horizontal	AV	Pass
3	4243.7500	-52.19	12.87	-65.06	-13	-39.19	322.5	Horizontal	PK	Pass
3	4243.7500		12.87		54		322.5	Horizontal	AV	Pass
4	8149.5000	-64.88	37.06	-101.94	-13	-51.88	208.4	Horizontal	PK	Pass
4	8149.5000		37.06		54		208.4	Horizontal	AV	Pass
5	11094.0000	-60.59	39.42	-100.01	-13	-47.59	0.5	Horizontal	PK	Pass
5	11094.0000		39.42		54		0.5	Horizontal	AV	Pass
6	13621.5000	-57.77	40.52	-98.29	-13	-44.77	5	Horizontal	PK	Pass
6	13621.5000		40.52		54		5	Horizontal	AV	Pass



Vertical:

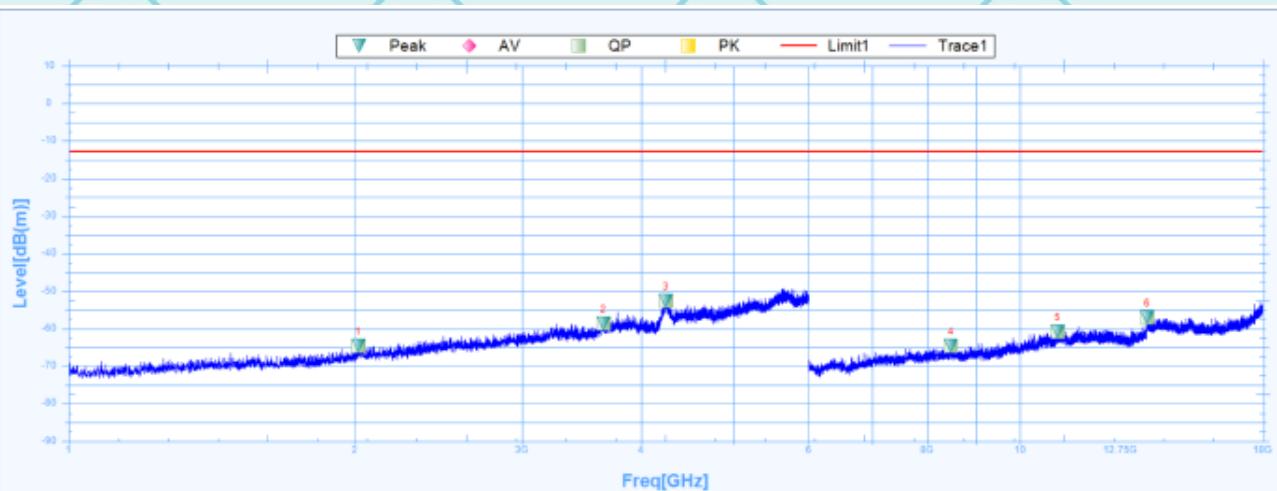


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2016.2500	-64.63	25.96	-90.59	-13	-51.63	55.9	Vertical	PK	Pass
1	2016.2500		25.96		54		55.9	Vertical	AV	Pass
2	3651.8750	-58.55	28.86	-87.41	-13	-45.55	343.4	Vertical	PK	Pass
2	3651.8750		28.86		54		343.4	Vertical	AV	Pass
3	4247.5000	-52.62	30.15	-82.77	-13	-39.62	0	Vertical	PK	Pass
3	4247.5000		30.15		54		0	Vertical	AV	Pass
4	8467.5000	-64.64	9.18	-73.82	-13	-51.64	286.1	Vertical	PK	Pass
4	8467.5000		9.18		54		286.1	Vertical	AV	Pass
5	10966.5000	-60.89	15.43	-76.32	-13	-47.89	349.1	Vertical	PK	Pass
5	10966.5000		15.43		54		349.1	Vertical	AV	Pass
6	13612.5000	-57.13	18	-75.13	-13	-44.13	302.9	Vertical	PK	Pass
6	13612.5000		18		54		302.9	Vertical	AV	Pass



n78(3450-3550Mhz):

Horizontal:

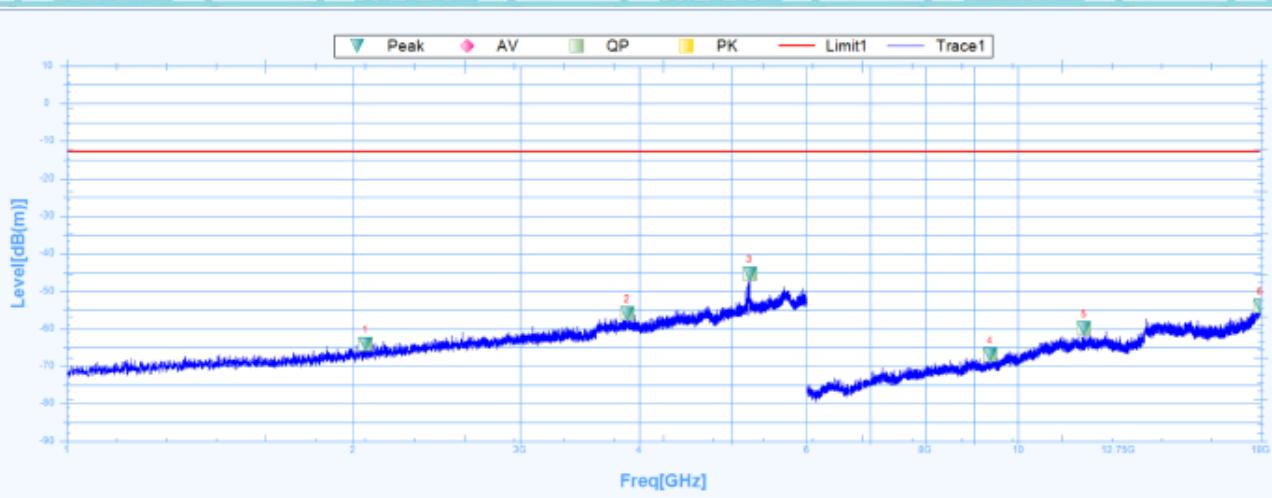


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2061.2500	-64.17	26.11	-90.28	-13	-51.17	61.4	Horizontal	PK	Pass
1	2061.2500		26.11		54		61.4	Horizontal	AV	Pass
2	3885.0000	-56	29.42	-85.42	-13	-43	264.6	Horizontal	PK	Pass
2	3885.0000		29.42		54		264.6	Horizontal	AV	Pass
3	5226.8750	-45.44	31.78	-77.22	-13	-32.44	190.6	Horizontal	PK	Pass
3	5226.8750		31.78		54		190.6	Horizontal	AV	Pass
4	9351.0000	-67.05	10.61	-77.66	-13	-54.05	9.8	Horizontal	PK	Pass
4	9351.0000		10.61		54		9.8	Horizontal	AV	Pass
5	11745.0000	-59.87	16.11	-75.98	-13	-46.87	-0.1	Horizontal	PK	Pass
5	11745.0000		16.11		54		-0.1	Horizontal	AV	Pass
6	17977.5000	-54.02	23.77	-77.79	-13	-41.02	359.6	Horizontal	PK	Pass
6	17977.5000		23.77		54		359.6	Horizontal	AV	Pass



Vertical:

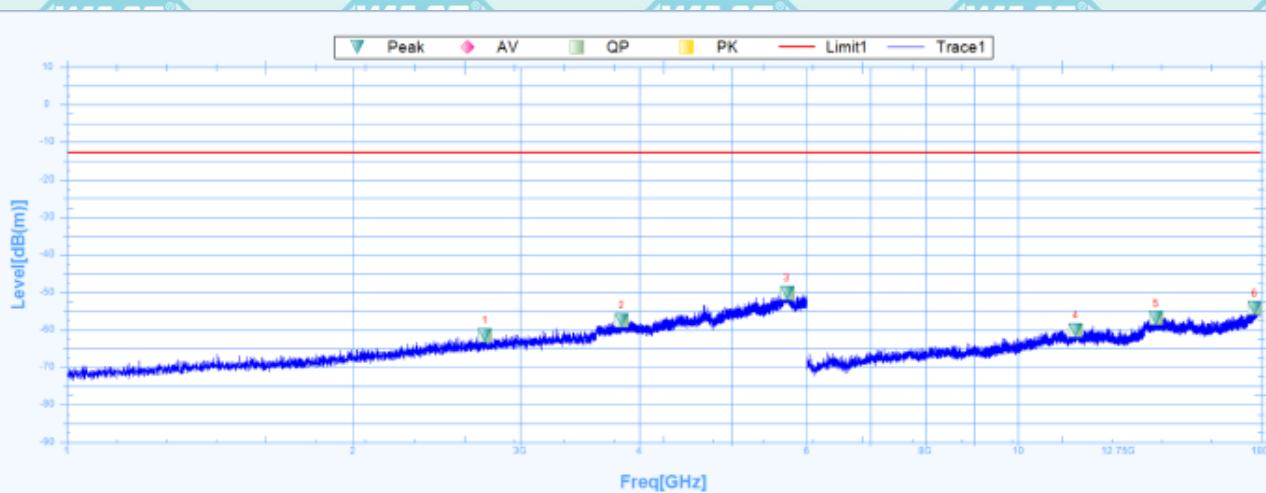


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2751.8750	-61.39	27.9	-89.29	-13	-48.39	-0.1	Vertical	PK	Pass
1	2751.8750		27.9		54		-0.1	Vertical	AV	Pass
2	3833.7500	-57.42	29.3	-86.72	-13	-44.42	232.8	Vertical	PK	Pass
2	3833.7500		29.3		54		232.8	Vertical	AV	Pass
3	5720.6250	-50.13	32.35	-82.48	-13	-37.13	304.6	Vertical	PK	Pass
3	5720.6250		32.35		54		304.6	Vertical	AV	Pass
4	11497.5000	-60.06	16.12	-76.18	-13	-47.06	14.2	Vertical	PK	Pass
4	11497.5000		16.12		54		14.2	Vertical	AV	Pass
5	13972.5000	-56.8	19.04	-75.84	-13	-43.8	90	Vertical	PK	Pass
5	13972.5000		19.04		54		90	Vertical	AV	Pass
6	17734.5000	-54.16	22.2	-76.36	-13	-41.16	141.4	Vertical	PK	Pass
6	17734.5000		22.2		54		141.4	Vertical	AV	Pass



n78(3700-3800Mhz):

Horizontal:

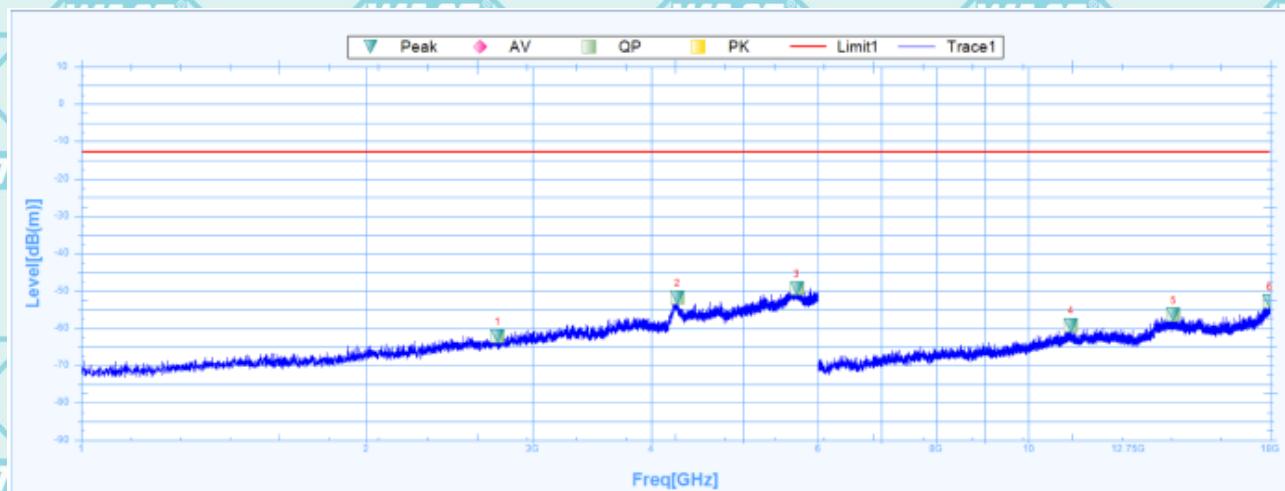


Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2753.7500	-62.09	27.9	-89.99	-13	-49.09	252.1	Horizontal	PK	Pass
1	2753.7500		27.9		54		252.1	Horizontal	AV	Pass
2	4264.3750	-51.82	30.18	-82	-13	-38.82	112.2	Horizontal	PK	Pass
2	4264.3750		30.18		54		112.2	Horizontal	AV	Pass
3	5698.1250	-49.3	32.32	-81.62	-13	-36.3	0.1	Horizontal	PK	Pass
3	5698.1250		32.32		54		0.1	Horizontal	AV	Pass
4	11094.0000	-59.18	15.89	-75.07	-13	-46.18	360.1	Horizontal	PK	Pass
4	11094.0000		15.89		54		360.1	Horizontal	AV	Pass
5	14239.5000	-56.36	18.88	-75.24	-13	-43.36	0.8	Horizontal	PK	Pass
5	14239.5000		18.88		54		0.8	Horizontal	AV	Pass
6	17982.0000	-52.87	23.8	-76.67	-13	-39.87	313.8	Horizontal	PK	Pass
6	17982.0000		23.8		54		313.8	Horizontal	AV	Pass



Vertical:

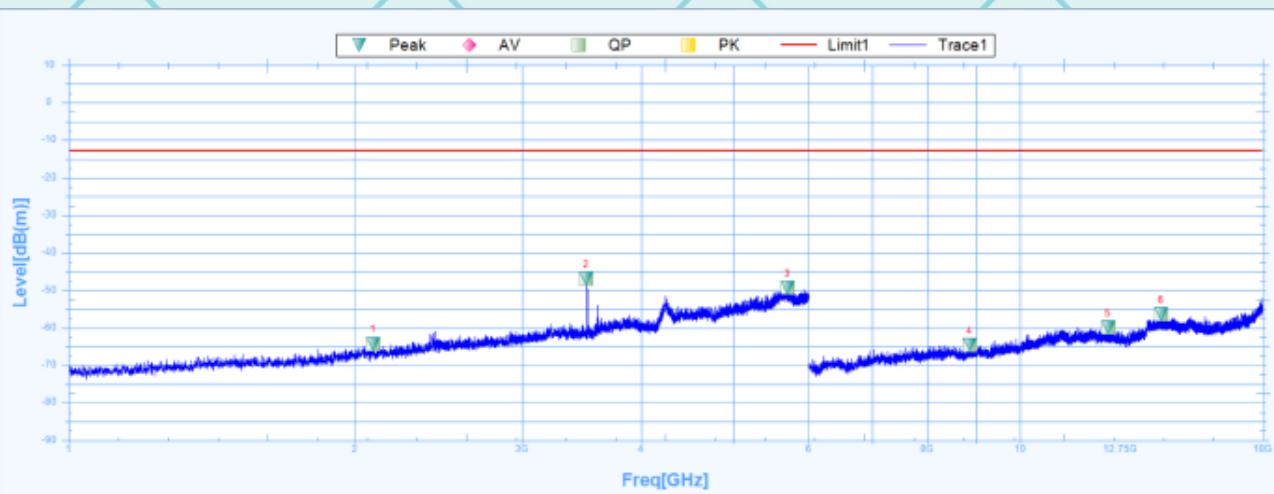

Suspected Data List

NO.	Freq. [MHz]	Reading [dB(m)]	Factor [dB]	Level [dB(m)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2090.6250	-64.26	3.23	-67.49	-13	-51.26	6.2	Vertical	PK	Pass
1	2090.6250		3.23		54		6.2	Vertical	AV	Pass
2	3501.8750	-46.91	10.46	-57.37	-13	-33.91	360	Vertical	PK	Pass
2	3501.8750		10.46		54		360	Vertical	AV	Pass
3	5701.8750	-49.45	21.69	-71.14	-13	-36.45	291	Vertical	PK	Pass
3	5701.8750		21.69		54		291	Vertical	AV	Pass
4	8854.5000	-64.6	37.34	-101.94	-13	-51.6	156.2	Vertical	PK	Pass
4	8854.5000		37.34		54		156.2	Vertical	AV	Pass
5	12379.5000	-59.9	38.71	-98.61	-13	-46.9	-0.1	Vertical	PK	Pass
5	12379.5000		38.71		54		-0.1	Vertical	AV	Pass
6	14077.5000	-56.33	41.4	-97.73	-13	-43.33	352.6	Vertical	PK	Pass
6	14077.5000		41.4		54		352.6	Vertical	AV	Pass



9. OCCUPIED BANDWIDTH& EMISSION BANDWIDTH

Test limit:

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission, shall be measured when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user. [i2.1049(h)]

Many of the individual rule parts specify a relative OBW in lieu of the 99% OBW. In such cases, the OBW is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

The relative OBW must be measured and reported when it is specified in the applicable rule part; otherwise, the 99% OBW shall be measured and reported. The test report shall specify which OBW is reported.

A spectrum/signal analyzer or other instrument providing a spectral display is recommended for these measurements and the video bandwidth shall be set to a value at least three times greater than the IF/resolution bandwidth to avoid any amplitude smoothing. Video filtering shall not be used during occupied bandwidth tests.

The OBW shall be measured for all operating conditions that will affect the bandwidth results (e.g. variable modulations, coding, or channel bandwidth settings). See section 4.

Test procedure:

Occupied bandwidth – relative measurement procedure

The reference value is the highest level of the spectral envelope of the modulated signal.

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

b) The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

c) Set the reference level of the instrument as required to prevent the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.

d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.

e) The dynamic range of the spectrum analyzer at the selected RBW shall be at least 10 dB below the target “-X dB down” requirement (i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference value).

f) Set the detection mode to peak, and the trace mode to max hold.

g) Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).

h) Determine the “-X dB down amplitude” as equal to (Reference Value – X). Alternatively, this calculation can be performed by the analyzer by using the marker-delta function.

i) Place two markers, one at the lowest and the other at the highest frequency of the

envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step g). If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers. WSCT® WSCT®

j) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Occupied bandwidth – power bandwidth (99%) measurement procedure

The following procedure shall be used for measuring (99 %) power bandwidth

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).

b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least 10log (OBW / RBW) below the reference level.

d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.


e) Set the detection mode to peak, and the trace mode to max hold..

f) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.

g) If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.

h) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Test setup:

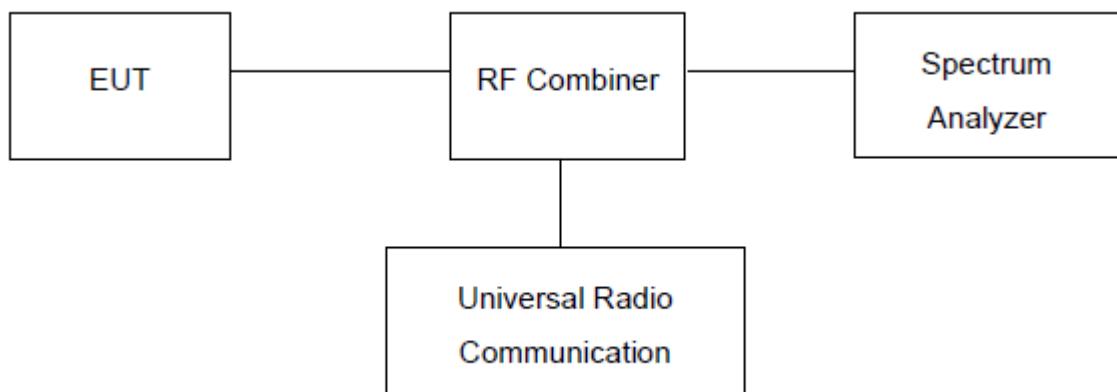

9.1. Measurement Result

GSM850:

Frequency	OBW(99%)	26dB BW
824.2	241.99KHz	306.09KHz
836.6	245.19KHz	301.28KHz
848.8	243.59KHz	296.47KHz

PCS1900:

Frequency	OBW(99%)	26dB BW
1850.2	241.99KHz	309.29KHz
1880	241.99KHz	306.09KHz
1909.8	243.59KHz	306.09KHz

GPRS850:

Frequency	OBW(99%)	26dB BW
824.2	243.59KHz	312.50KHz
836.6	246.79KHz	310.90KHz
848.8	245.19KHz	315.71KHz

GPRS 1900:

Frequency	OBW(99%)	26dB BW
1850.2	241.99KHz	310.90KHz
1880	243.59KHz	317.31KHz
1909.8	245.19KHz	322.12KHz



EGPRS 850:

Frequency	OBW(99%)	26dB BW
824.2	240.38KHz	298.08KHz
836.6	240.38KHz	294.87KHz
848.8	237.18KHz	296.47KHz

EGPRS 1900:

Frequency	OBW(99%)	26dB BW
1850.2	240.38KHz	299.68KHz
1880	240.38KHz	294.87KHz
1909.8	238.78KHz	304.49KHz



UTRA BANDS
Band 2:

Frequency	OBW(99%)	26dB BW
1852.4	4.151MHz	4.663MHz
1880	4.151MHz	4.647MHz
1907.6	4.167MHz	4.631MHz

Band 4:

Frequency	OBW(99%)	26dB BW
1712.4	4.151MHz	4.663MHz
1732.6	4.167MHz	4.679MHz
1752.6	4.167MHz	4.679MHz


Band 5:

Frequency	OBW(99%)	26dB BW
826.4	4.151MHz	4.679MHz
836.4	4.151MHz	4.663MHz
846.6	4.151MHz	4.667MHz




Report No.: WSCT-ANAB-R&E25010001A-RF5CT®
Test Plot(s)


Occupied Bandwidth (99% and -26dBc) GSM 850 Band CH 128

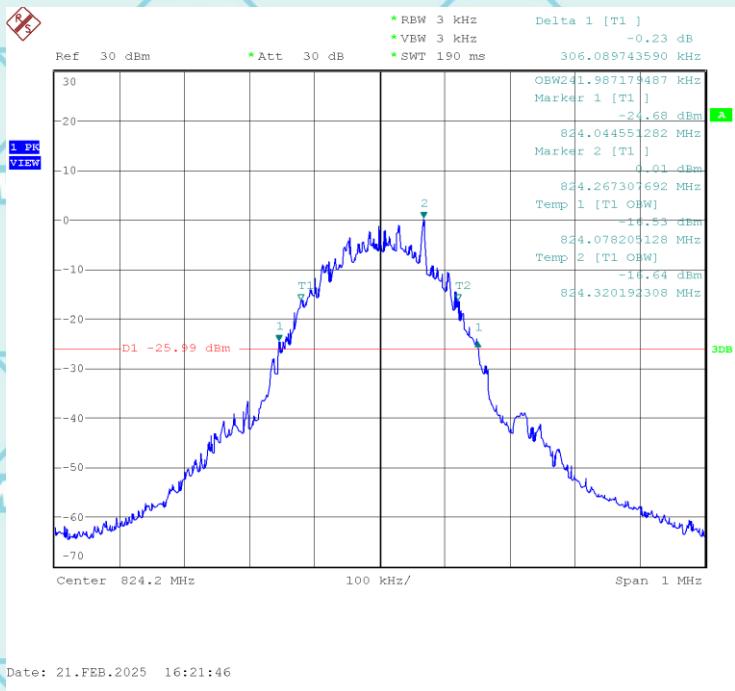


Occupied Bandwidth (99% and -26dBc) GSM 850 Band CH 190

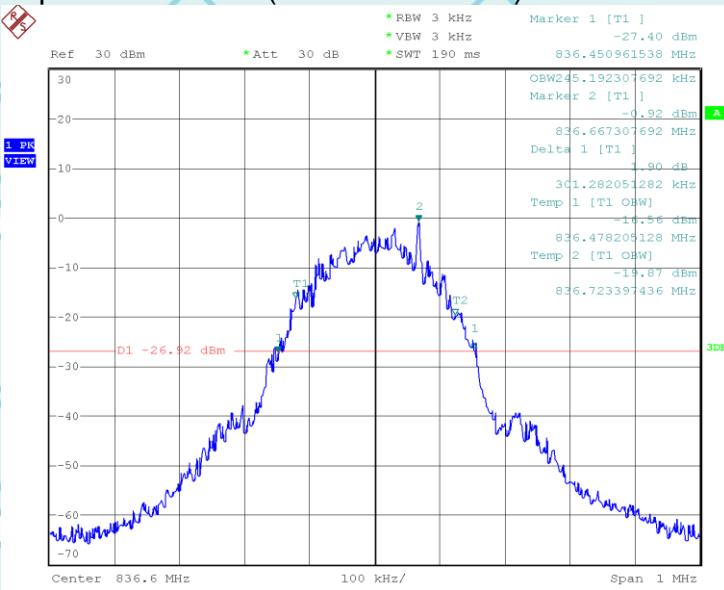


Occupied Bandwidth (99% and -26dBc) GSM 850 Band CH 251

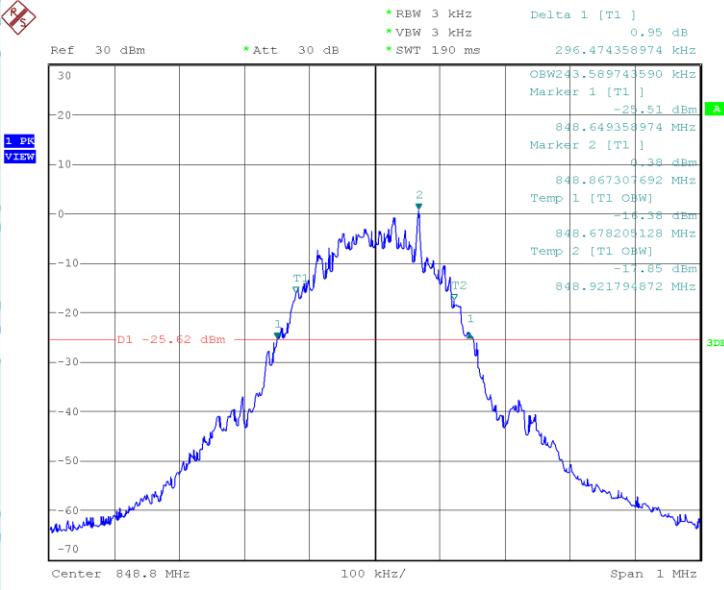


Occupied Bandwidth (99% and -26dBc) PCS 1900 Band CH 512

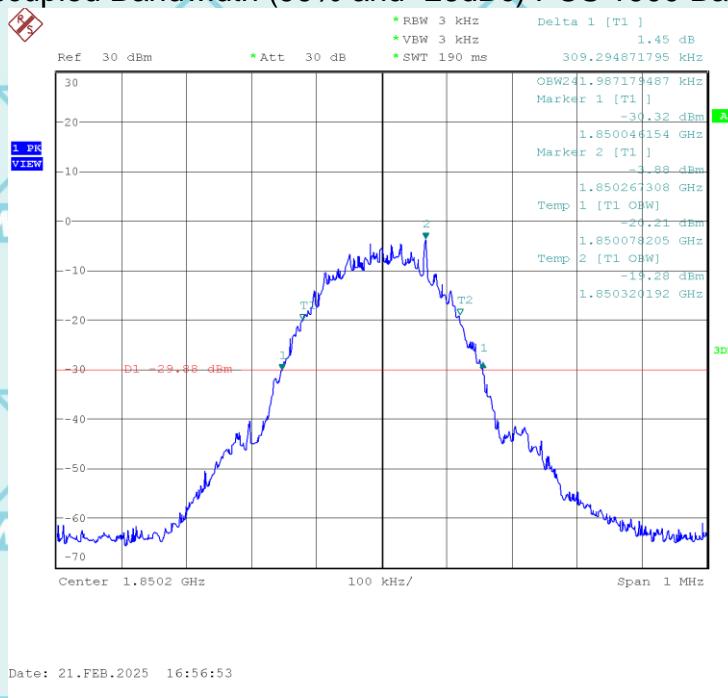


Occupied Bandwidth (99% and -26dBc) PCS 1900 Band CH 661

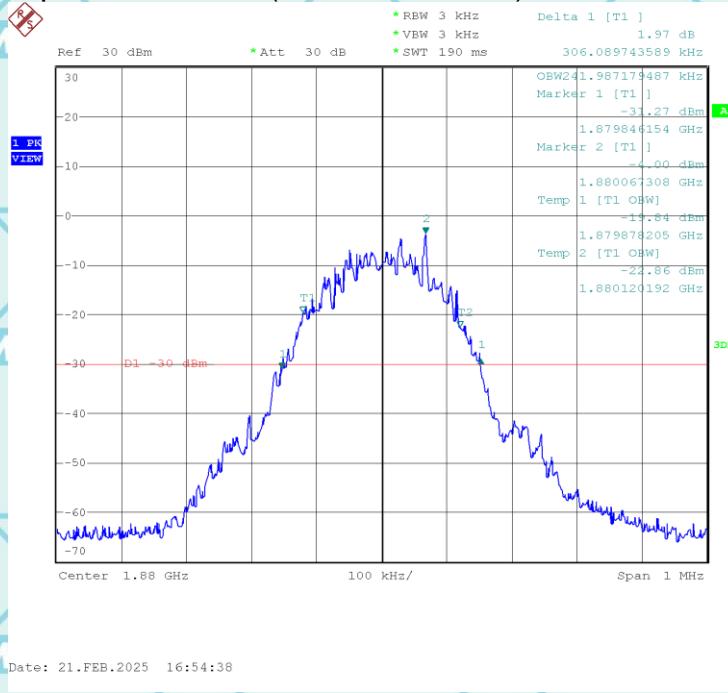


Occupied Bandwidth (99% and -26dBc) PCS 1900 Band CH 810

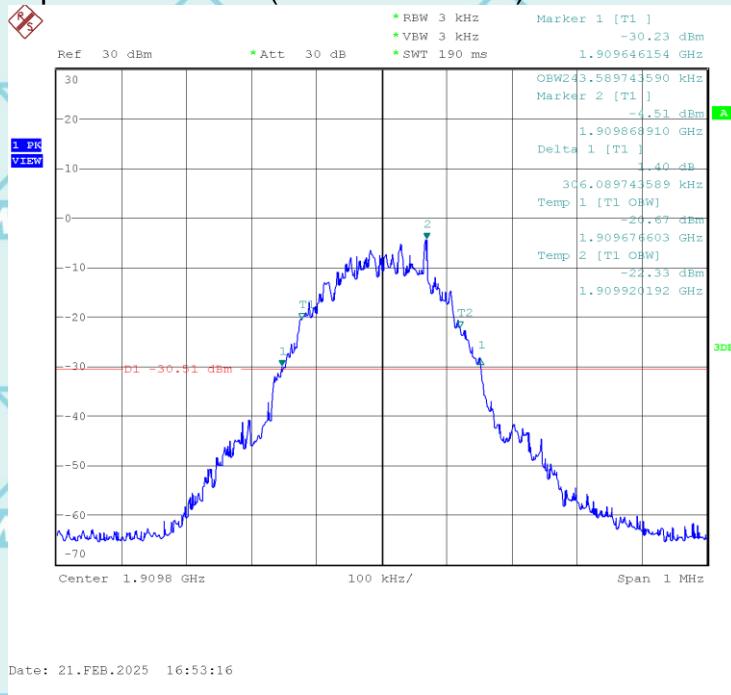


Occupied Bandwidth (99% and -26dBc) GPRS 850 Band CH 128

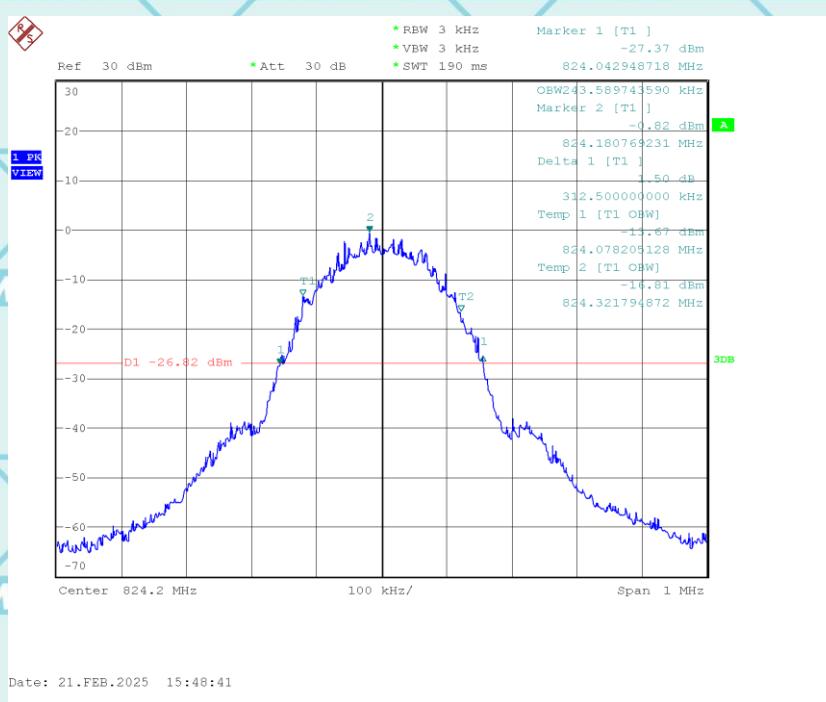


Occupied Bandwidth (99% and -26dBc) GPRS 850 Band CH 190

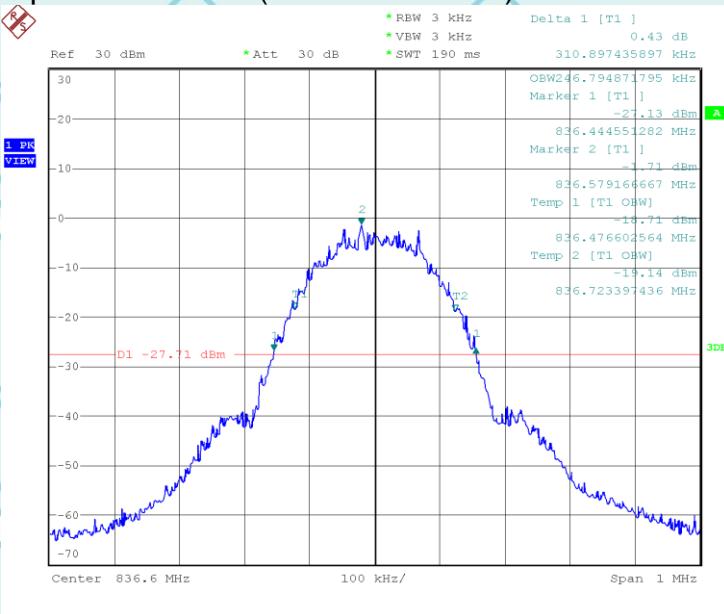

Occupied Bandwidth (99% and -26dBc) GPRS 850 Band CH 251

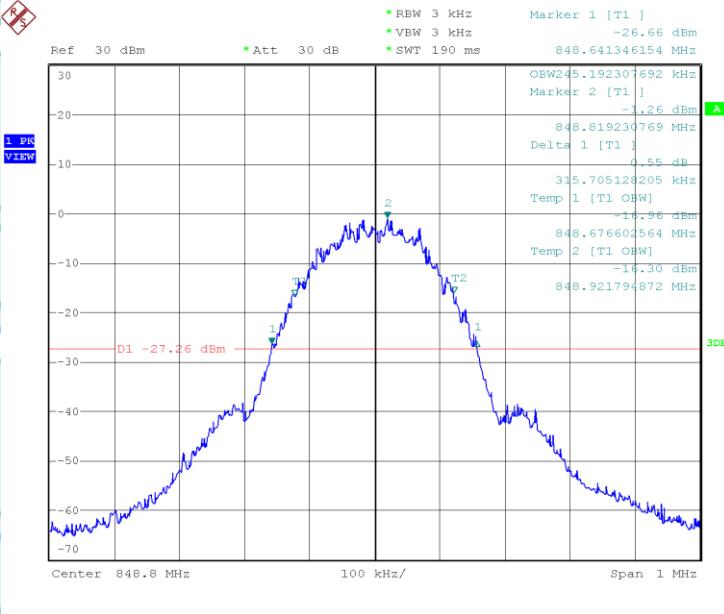


Occupied Bandwidth (99% and -26dBc) GPRS 1900 Band CH 512

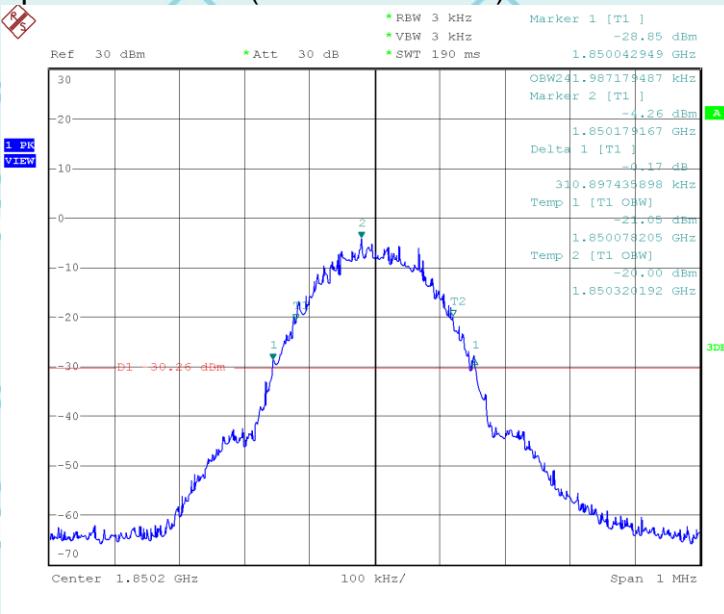


Date: 21.FEB.2025 16:45:11

Occupied Bandwidth (99% and -26dBc) GPRS 1900 Band CH 661

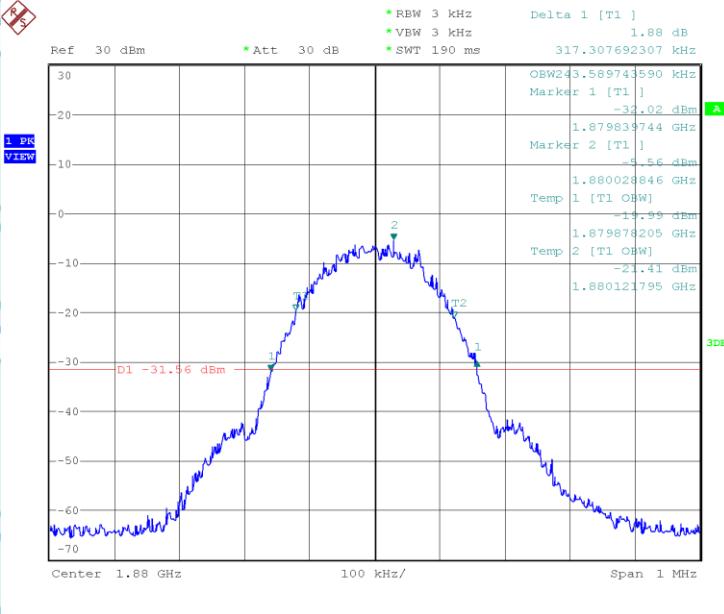


Date: 21.FEB.2025 16:43:42


Occupied Bandwidth (99% and -26dBc) GPRS 1900 Band CH 810

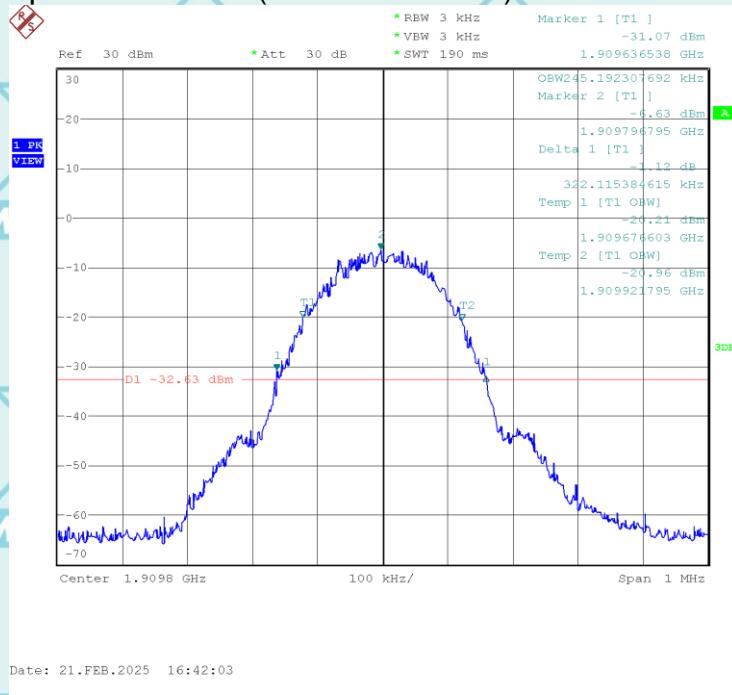


Occupied Bandwidth (99% and -26dBc) EGPRS 850 Band CH 128

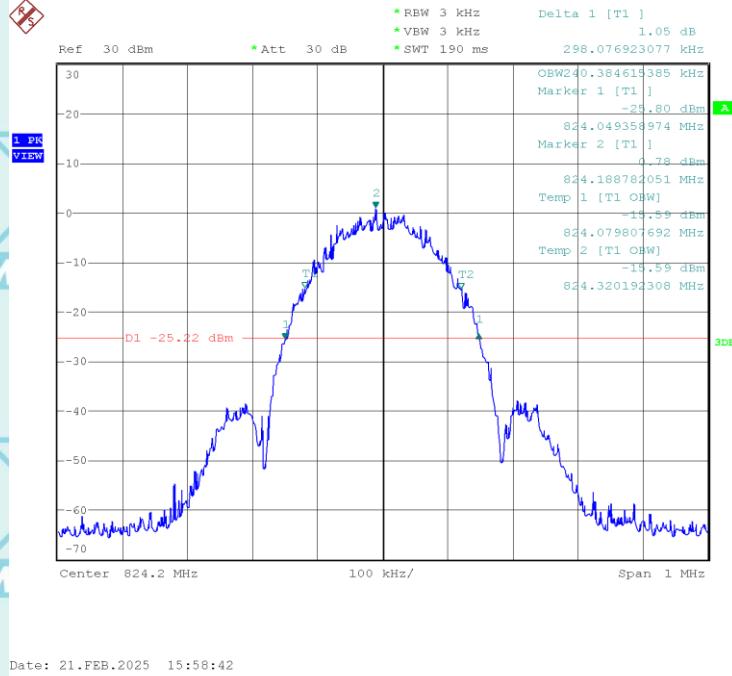


Occupied Bandwidth (99% and -26dBc) EGPRS 850 Band CH 190

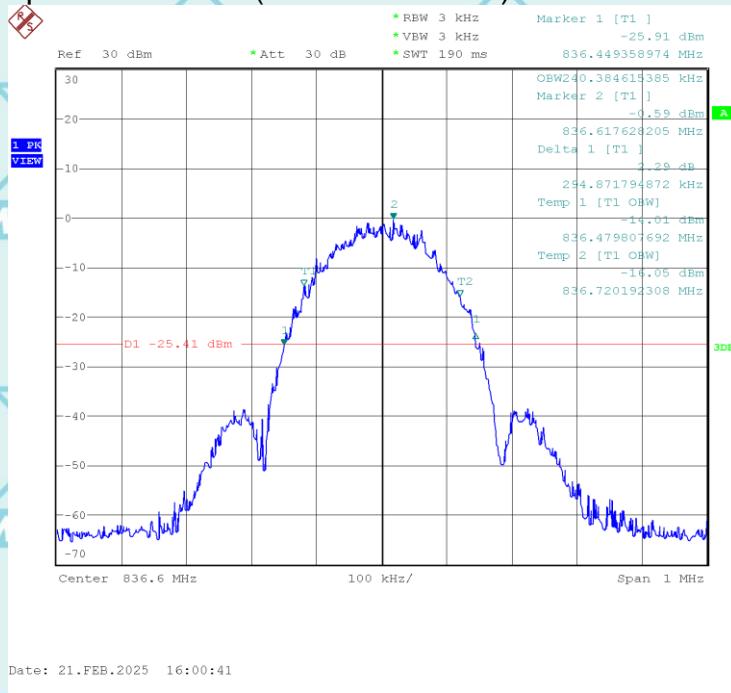


Occupied Bandwidth (99% and -26dBc) EGPRS 850 Band CH 251

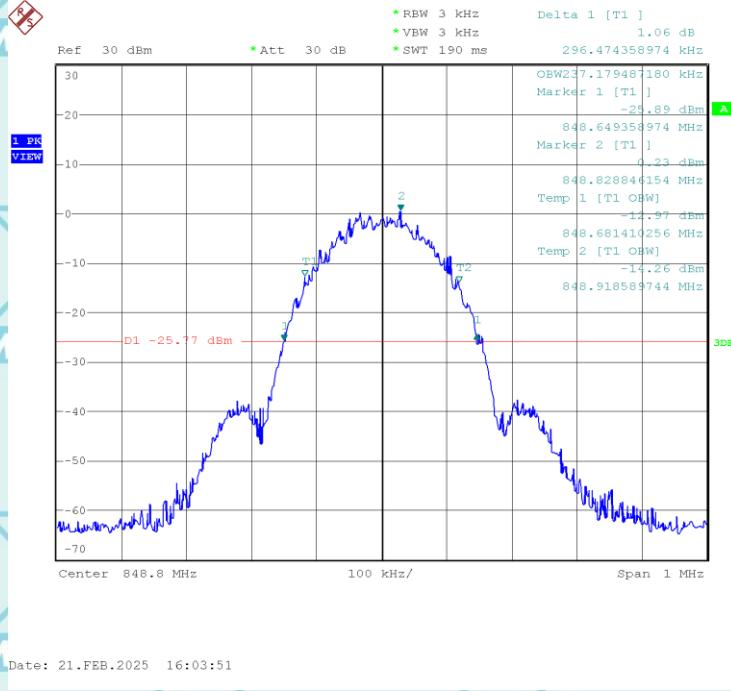



Occupied Bandwidth (99% and -26dBc) EGPRS 1900 Band CH 512

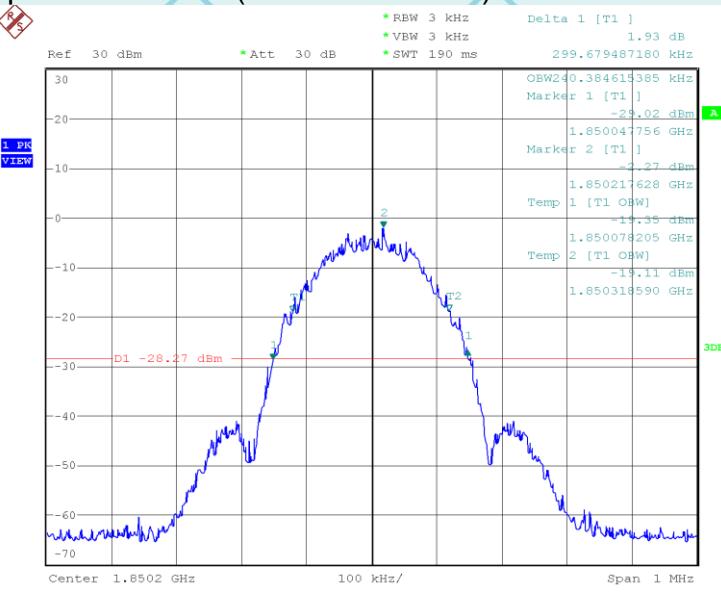


Occupied Bandwidth (99% and -26dBc) EGPRS 1900 Band CH 661

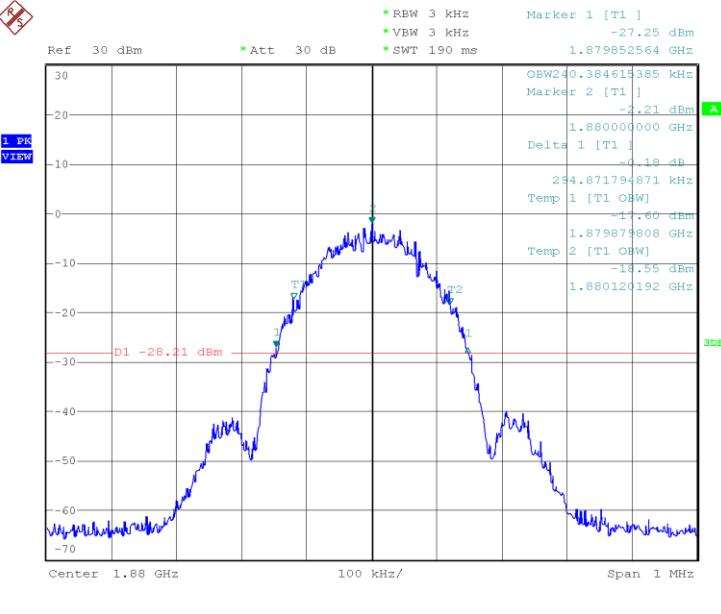

Occupied Bandwidth (99% and -26dBc) EGPRS 1900 Band CH 810

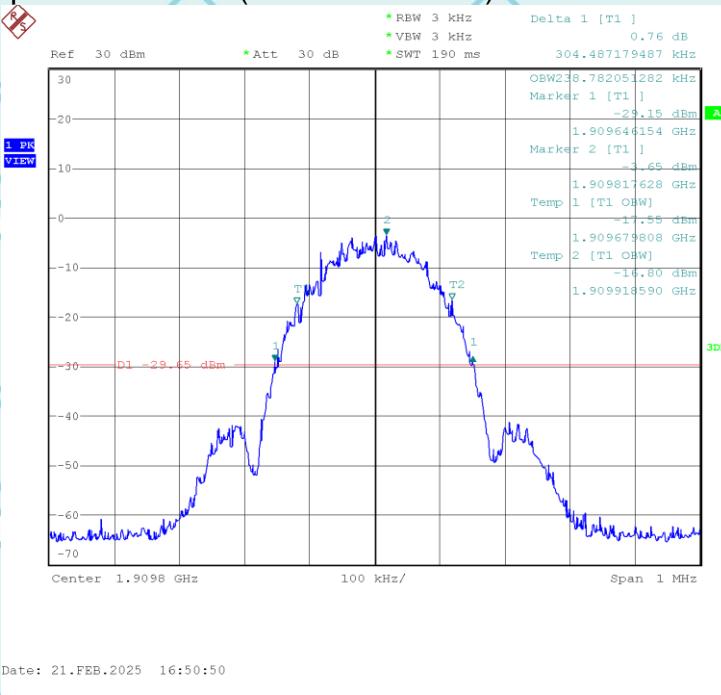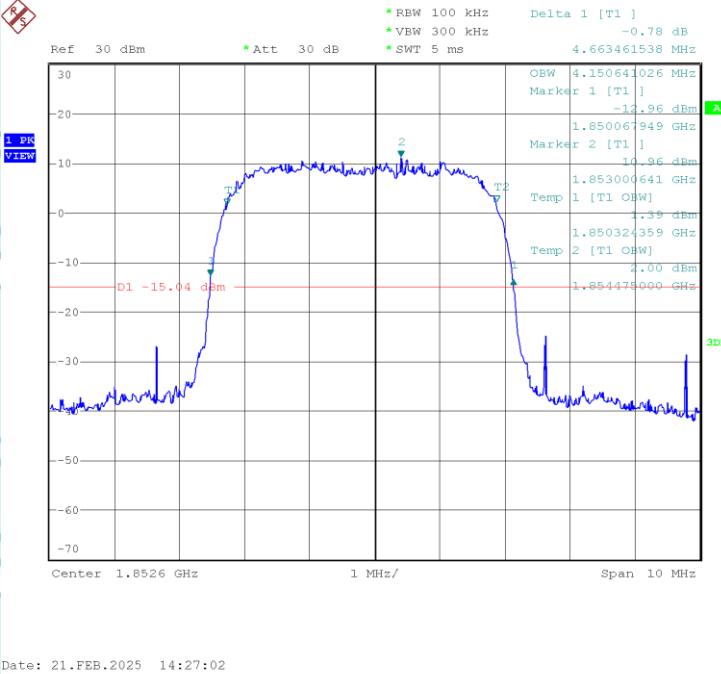
UTRA BANDS
Occupied Bandwidth (99% and -26dBc) WCDMA Band 2 CH 9262

Occupied Bandwidth (99%and-26dBc) WCDMA Band 2 CH 9400

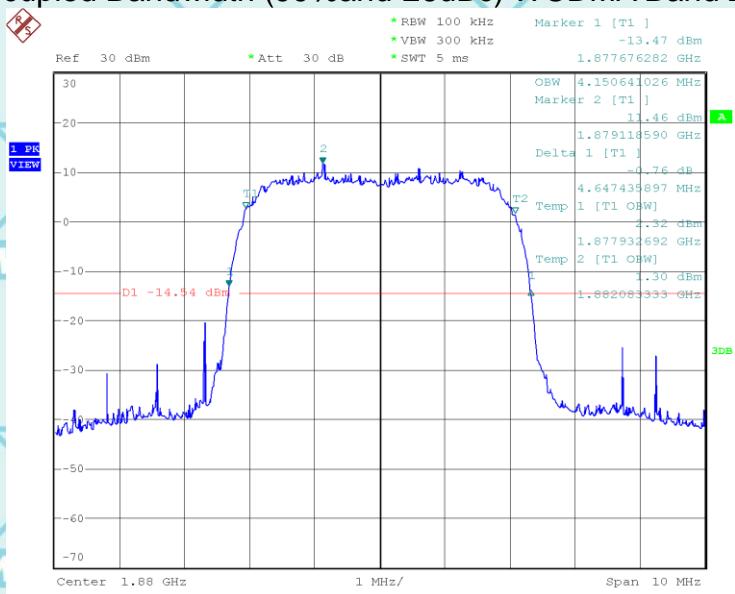

Date: 21.FEB.2025 14:26:01


Occupied Bandwidth (99%and-26dBc) WCDMA Band 2 CH 9538

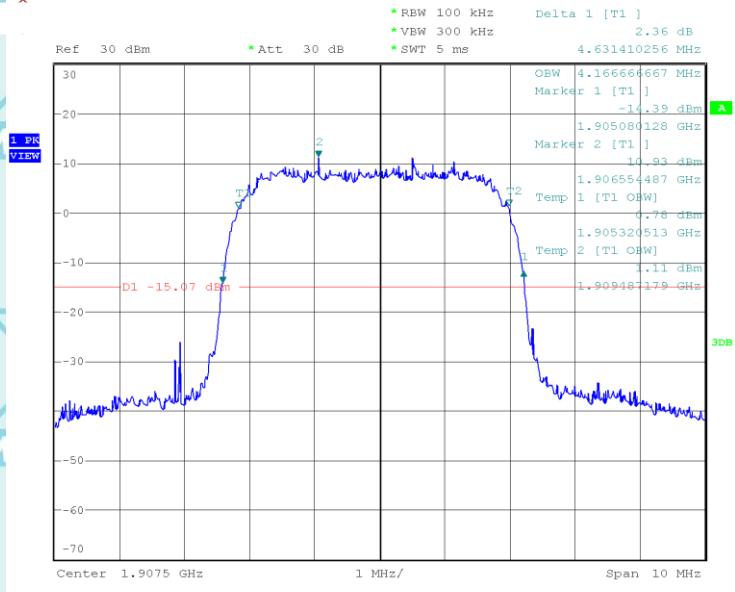

Date: 21.FEB.2025 14:24:58




Occupied Bandwidth (99% and -26dBc) WCDMA Band 4 CH 1312

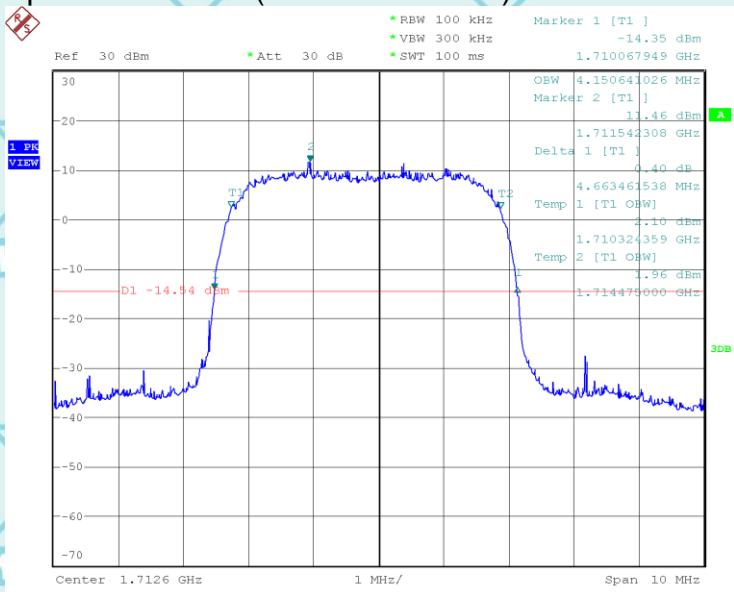

Date: 21.FEB.2025 14:46:29


Occupied Bandwidth (99% and -26dBc) WCDMA Band 4 CH 1413

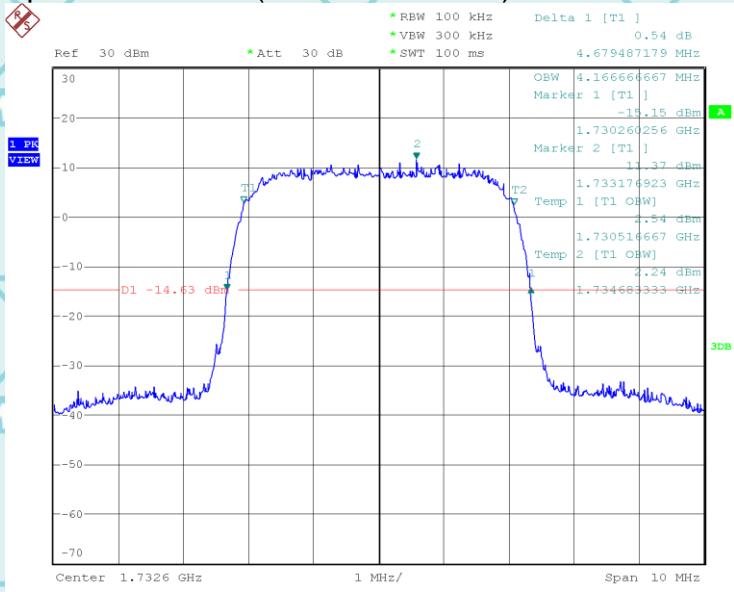


Date: 21.FEB.2025 14:45:39




Occupied Bandwidth (99% and -26dBc) WCDMA Band 4 CH 1513

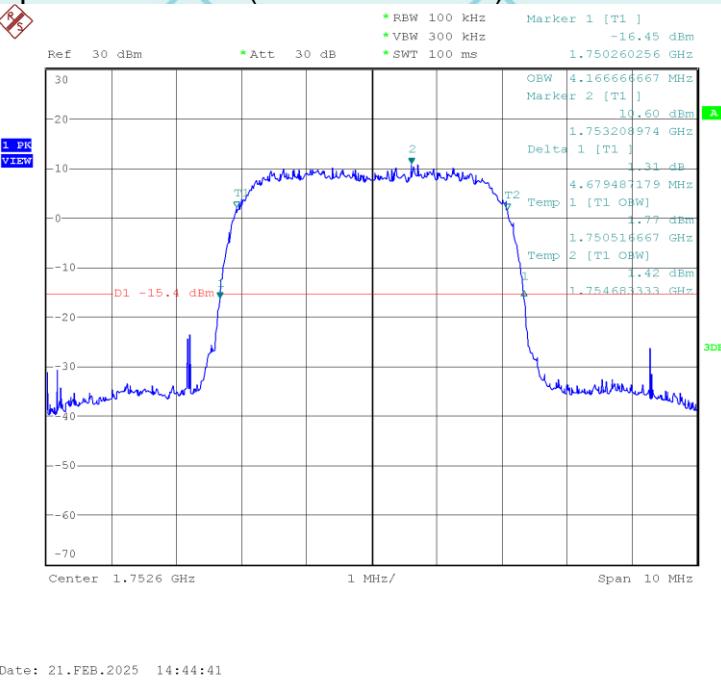


Occupied Bandwidth (99% and -26dBc) WCDMA Band 5 CH 4132

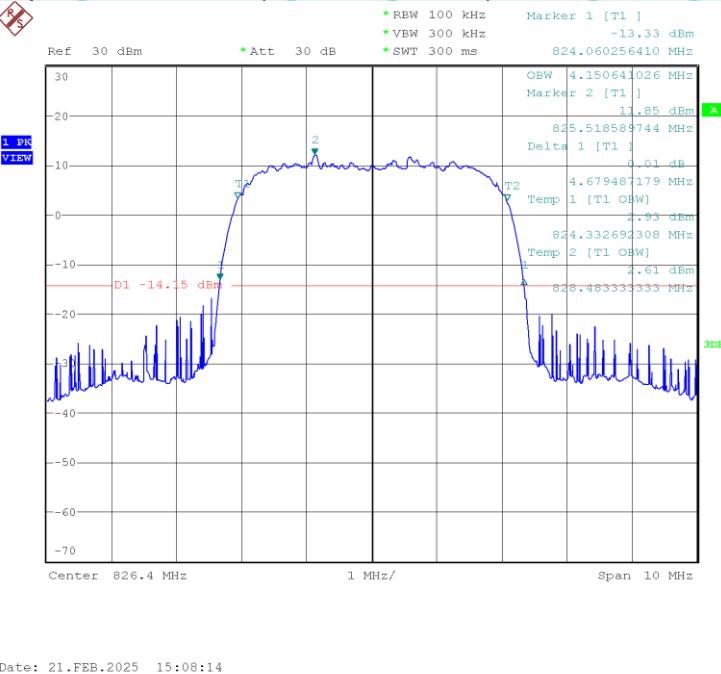

Occupied Bandwidth (99%and-26dBc) WCDMA Band 5 CH 4182

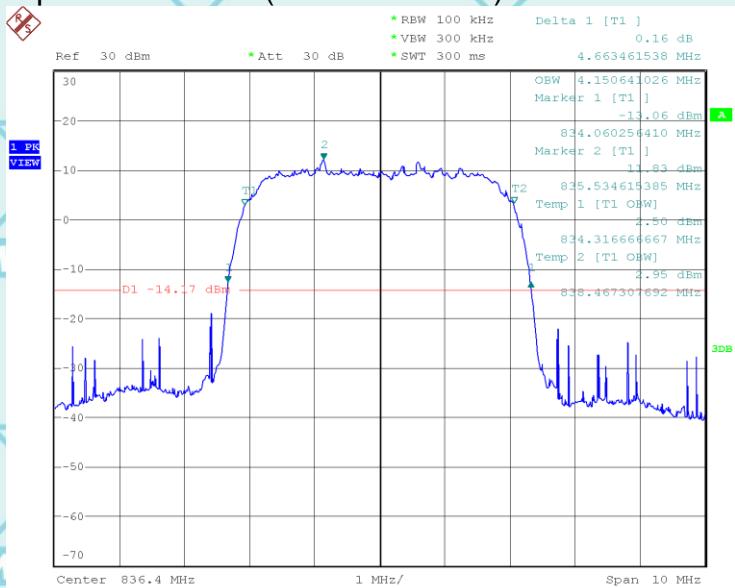

Occupied Bandwidth (99%and-26dBc) WCDMA Band 5 CH 4233

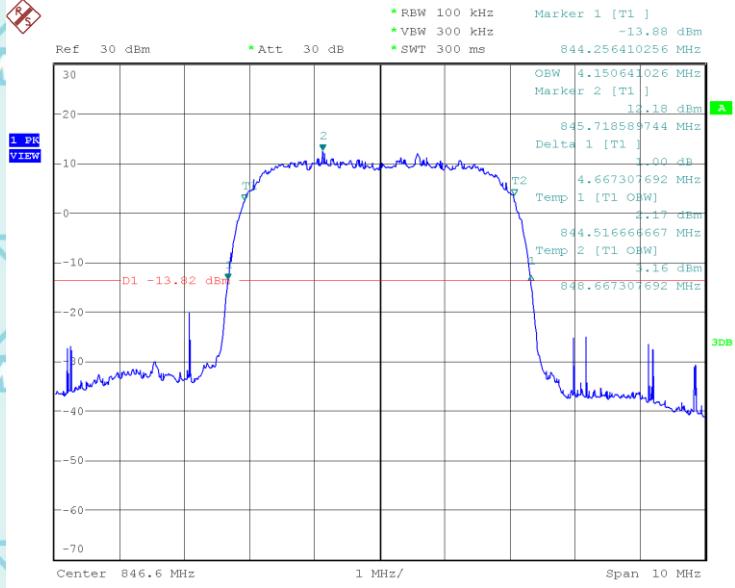

Note: Please refer to Annex (LTE&NR Occupied Bandwidth) for more test data

10. BAND EDGE


Test Limit:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified. See section 4.

Test procedure:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test setup:

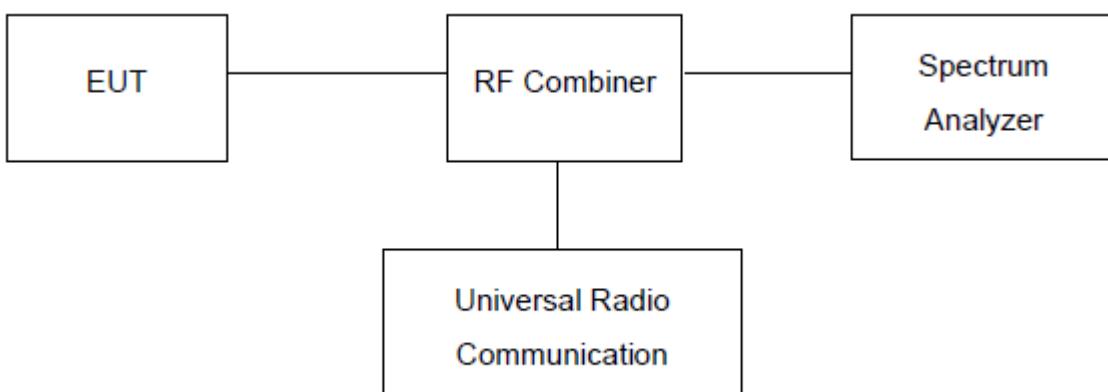


10.1. Measurement Result


Test Plot(s)




Low Band Edge PCS 1900 Band CH 512

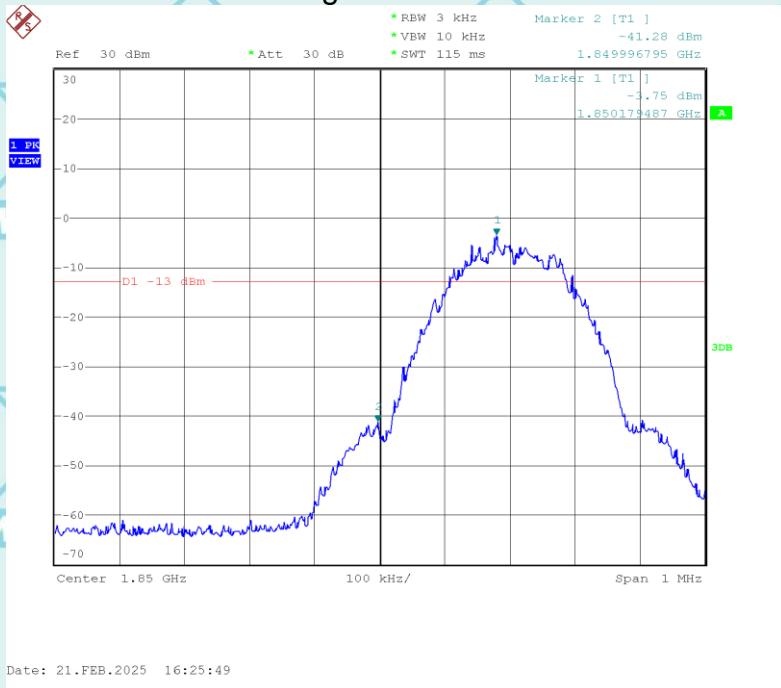

High Band Edge PCS 1900 Band CH 810

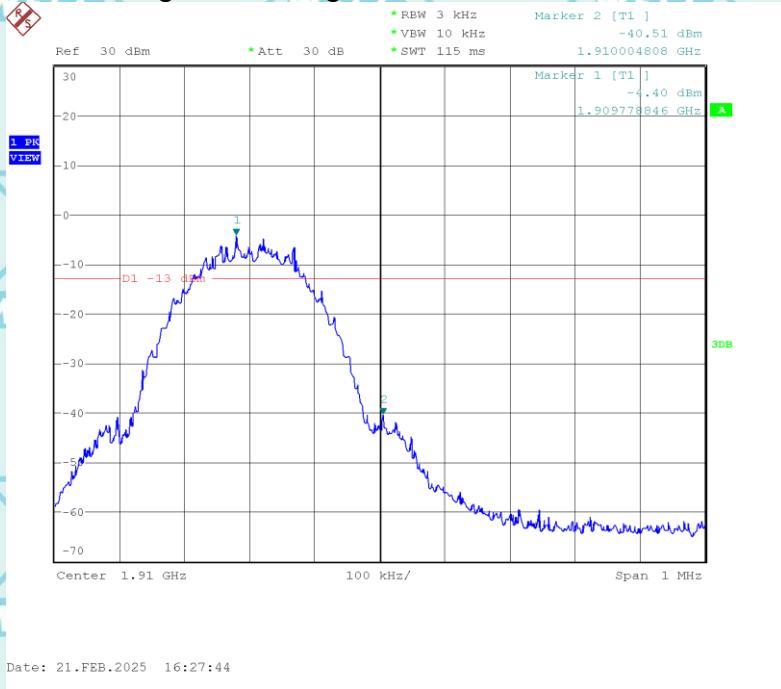


Low Band Edge WCDMA Band 2 CH 9263

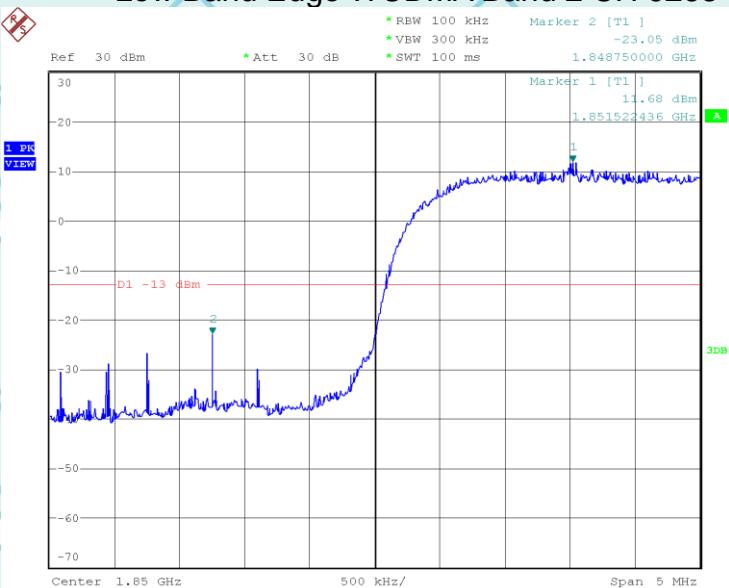


Date: 21.FEB.2025 14:20:55

High Band Edge WCDMA Band 2 CH 9537

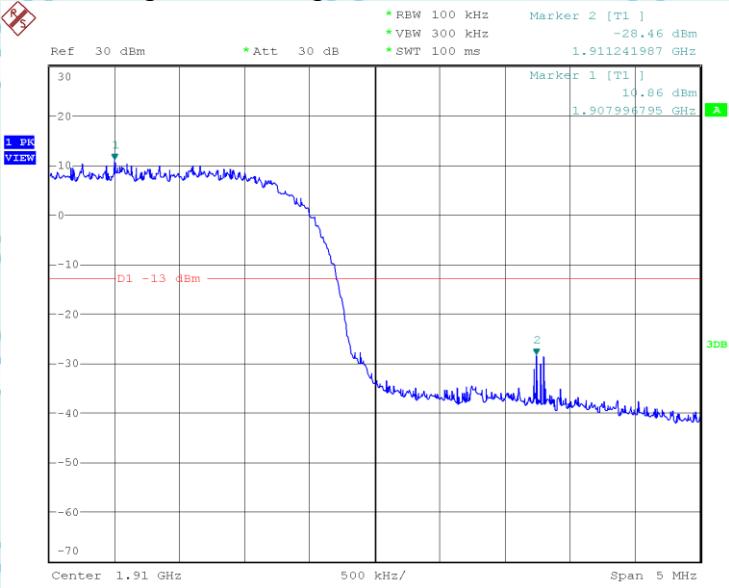


Date: 21.FEB.2025 14:21:51


Low Band Edge WCDMA Band 4 CH 1312

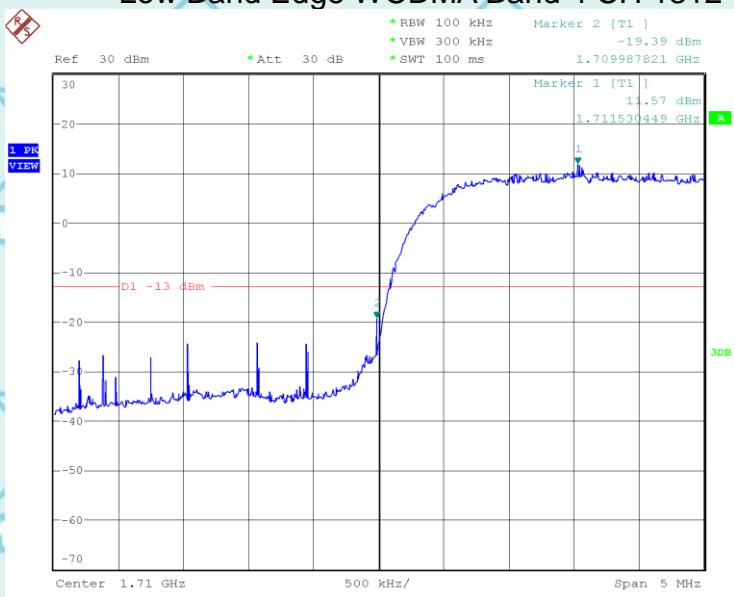

Low Band Edge WCDMA Band 4 CH 1513

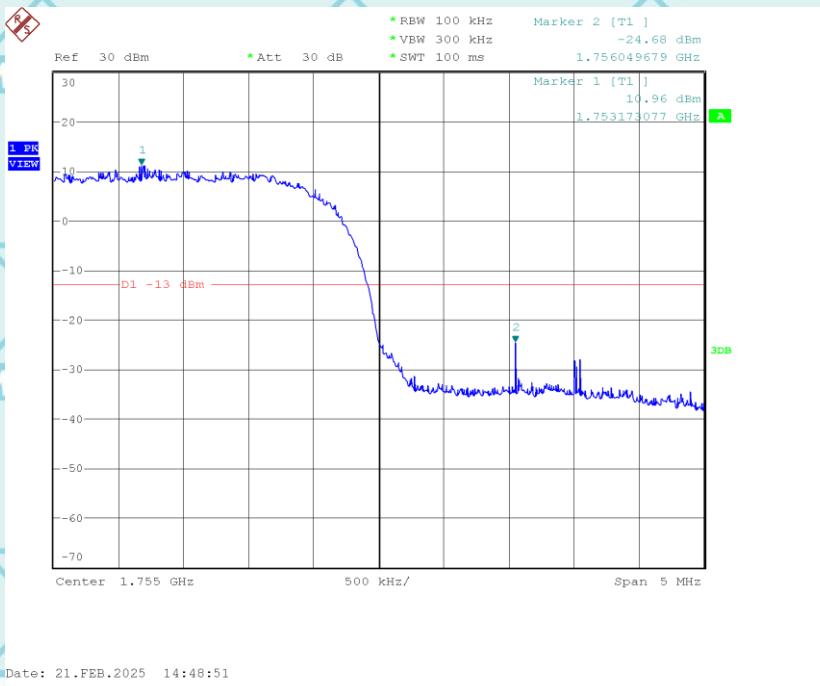


Low Band Edge WCDMA Band 5 CH 4132

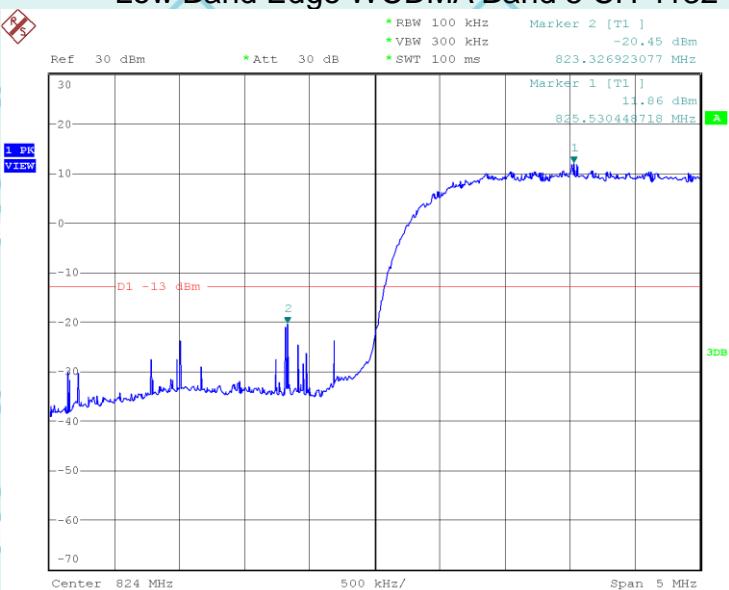

Date: 21.FEB.2025 14:58:55

High Band Edge WCDMA Band 5 CH 4233

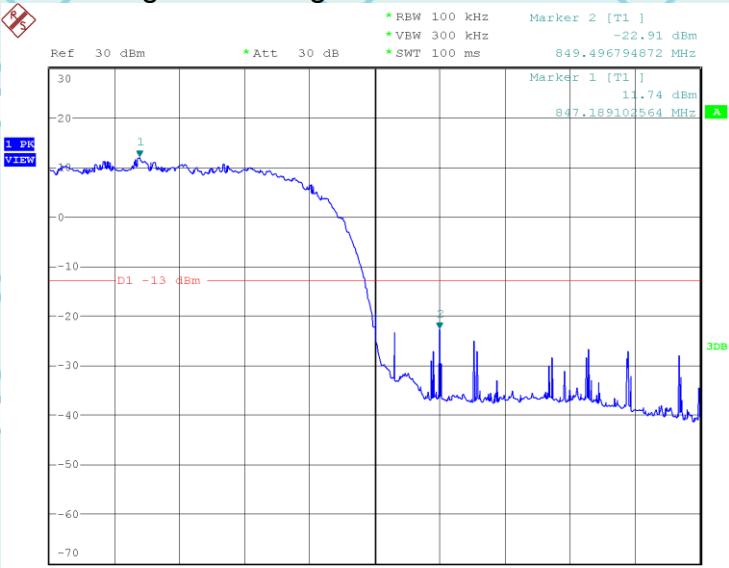

Date: 21.FEB.2025 14:59:34

Note: Please refer to Annex (LTE&NR Band Edge) for more test data

11. SPURIOUS EMISSION (Conducted and Radiated)

11.1. Measurement Result (Pre-measurement)

GSM850:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	0.2	128	824.2	Pass
Middle Range	0.2	190	836.6	Pass
High Range	0.2	251	848.8	Pass

PCS 1900 :

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	0.2	512	1850.2	Pass
Middle Range	0.2	661	1880.0	Pass
High Range	0.2	810	1909.8	Pass

UTRA BANDS

Band 2:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	9262	1852.4	Pass
Middle Range	5	9400	1880.0	Pass
High Range	5	9538	1907.6	Pass

Band 4:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	1312	1712.4	Pass
Middle Range	5	1413	1732.6	Pass
High Range	5	1513	1752.6	Pass

Band 5:

Test Channel	BW(MHz)	UL Channel	Frequency(MHz)	Judgment
Low Range	5	4132	826.4	Pass
Middle Range	5	4182	836.4	Pass
High Range	5	4233	846.6	Pass



Test Plot(s)

Conducted method

Test limit:


The spurious (unwanted) emission limits specified in the individual FCC rule parts applicable to licensed digital transmitters (typically referred to under the heading 'emission limits') normally apply to any and all emissions that are present outside of the authorized frequency band/block and apply to emissions in both the out-of-band and spurious domains. In some rule parts, the unwanted emission limits are specified by an emission mask that defines the applicable limit as a function of the frequency range relative to the authorized frequency block.


Typically, unwanted emissions are required by the licensed rule parts to be attenuated below the transmitter power by a factor of at least $X + 10\log(P)$ dB, where P represents the transmitter power expressed in watts and X is a specified scalar value (e.g., 43). This specification can be interpreted in one of two equivalent ways. First, the required attenuation can be construed to be relative to the mean carrier power, with the resultant of the equation $X + 10\log(P)$ being expressed in dBc (dB relative to the maximum carrier power). Alternatively, the specification can be interpreted as an absolute limit when the specified attenuation is actually subtracted from the maximum permissible transmitter power [i.e., $10\log(P) - \{X + 10\log(P)\}$], resulting in an absolute level of $-X$ dBW [or $(-X + 30)$ dBm]. See section 4.

Test procedure:


The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz below 1 GHz and 1 MHz above 1 GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonics.

Conducted Emission Test-Up:

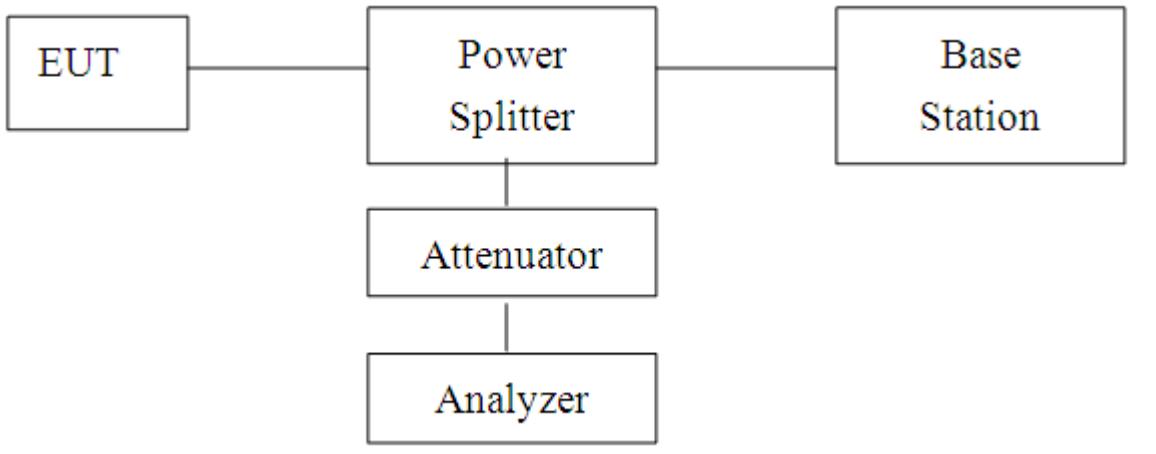


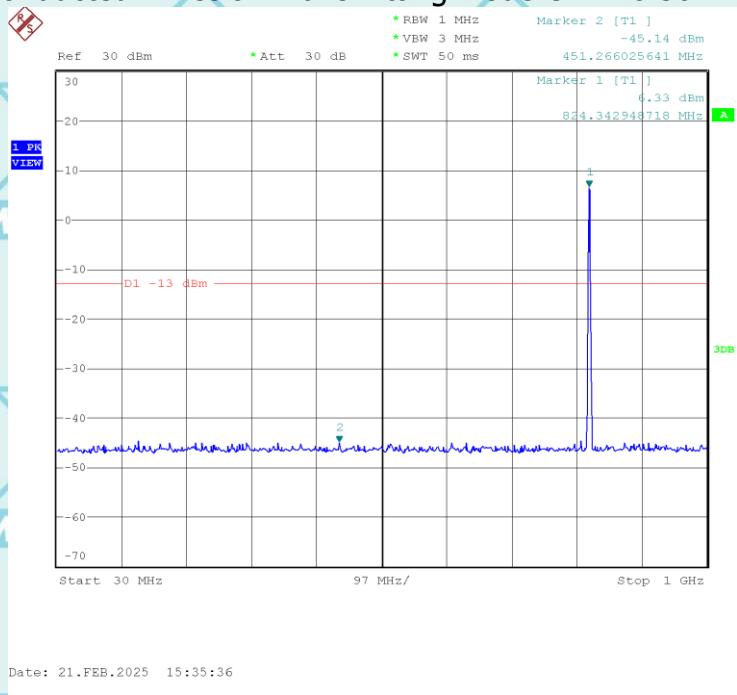CONDUCTED EMISSION IN GSM850 Band
Conducted Emission Transmitting Mode CH 128 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 128 1GHz – 9GHz

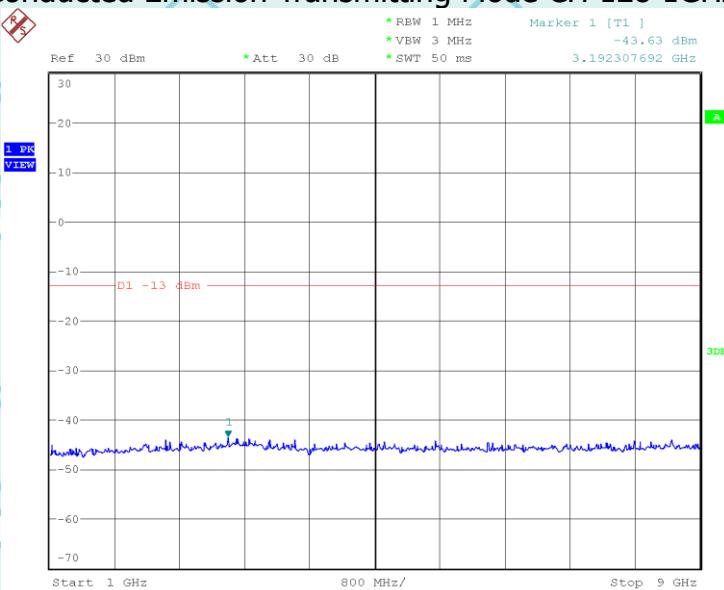


Conducted Emission Transmitting Mode CH 190 30MHz – 1GHz

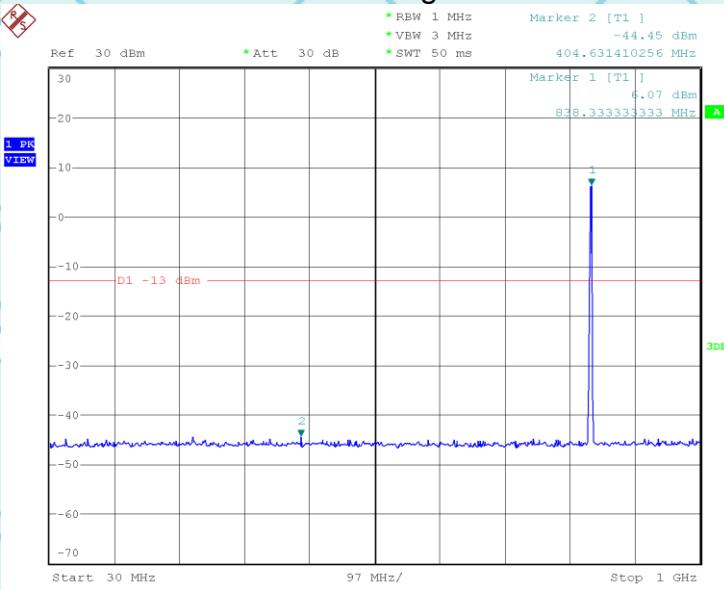



Conducted Emission Transmitting Mode CH 190 1GHz – 9GHz

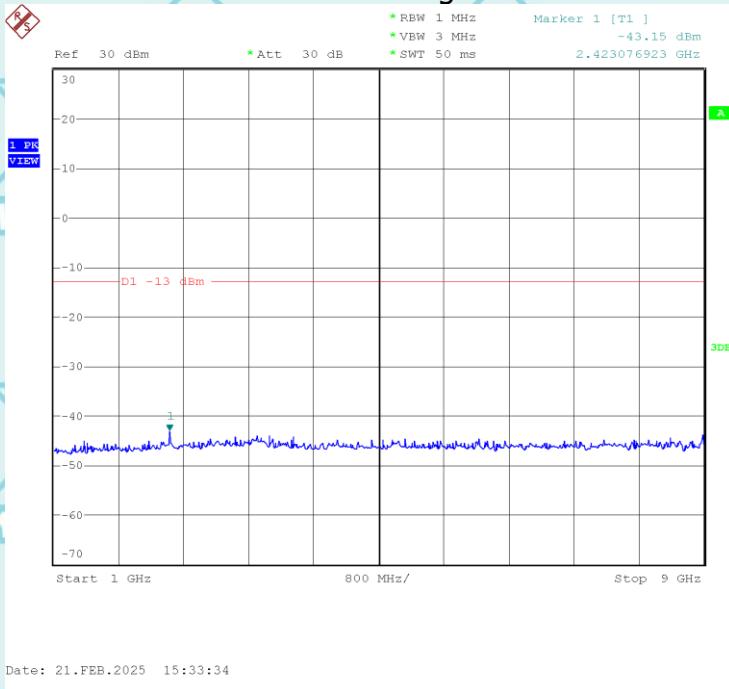


Conducted Emission Transmitting Mode CH 251 30MHz – 1GHz

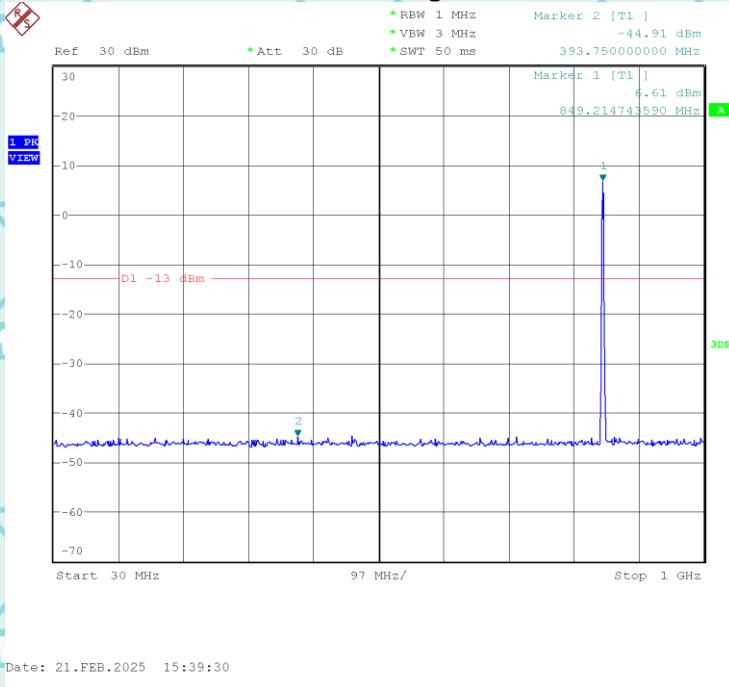


Conducted Emission Transmitting Mode CH 251 1GHz – 9GHz

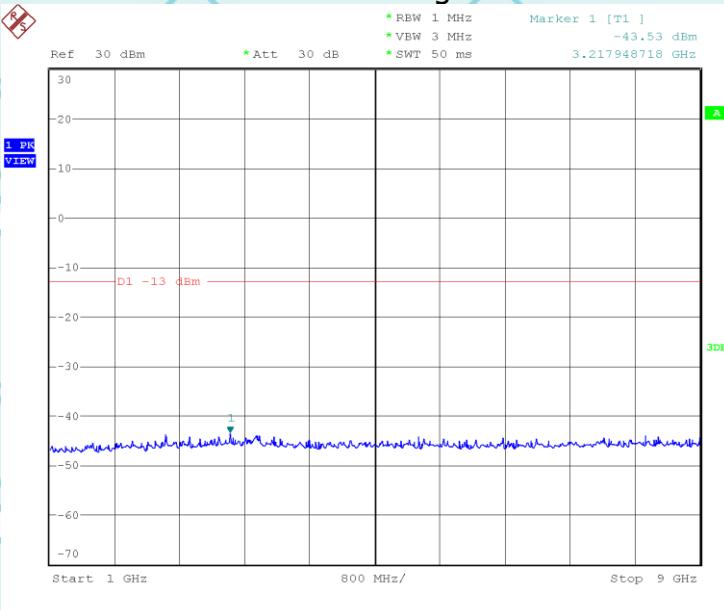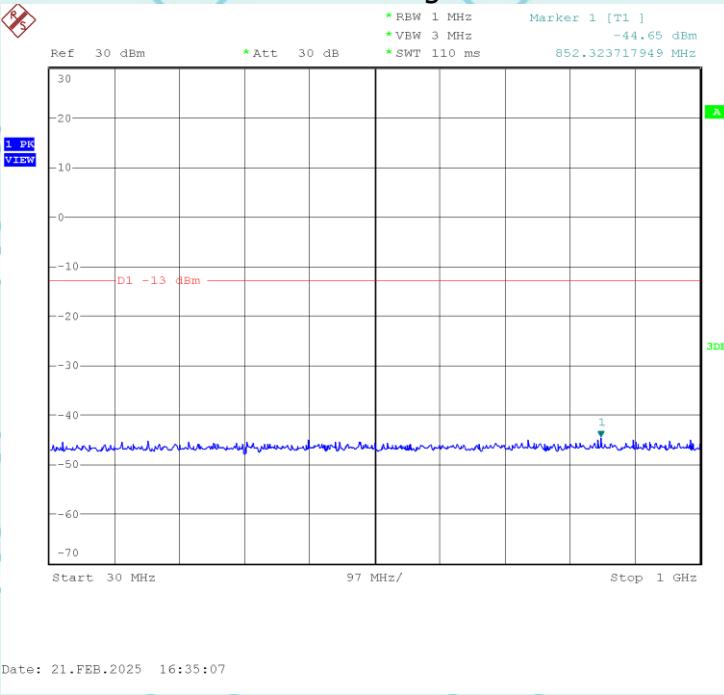CONDUCTED EMISSION IN PCS1900 BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 512 1GHz – 20GHz

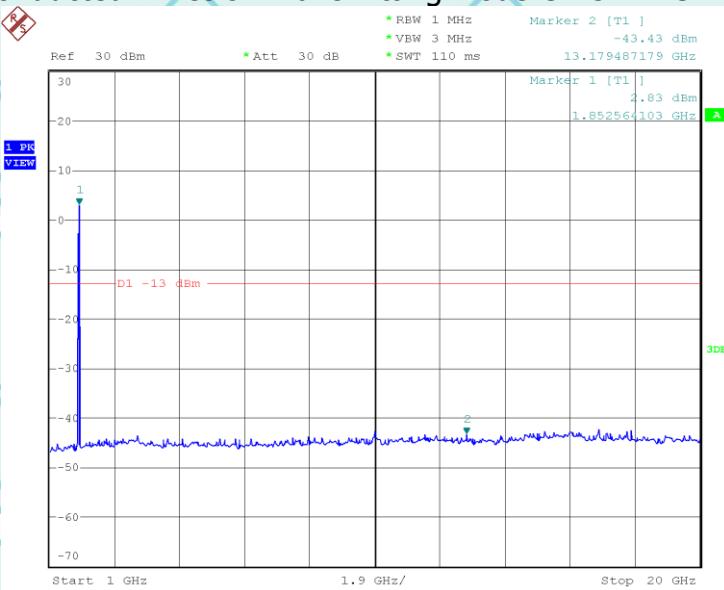


Conducted Emission Transmitting Mode CH 661 30MHz – 1GHz

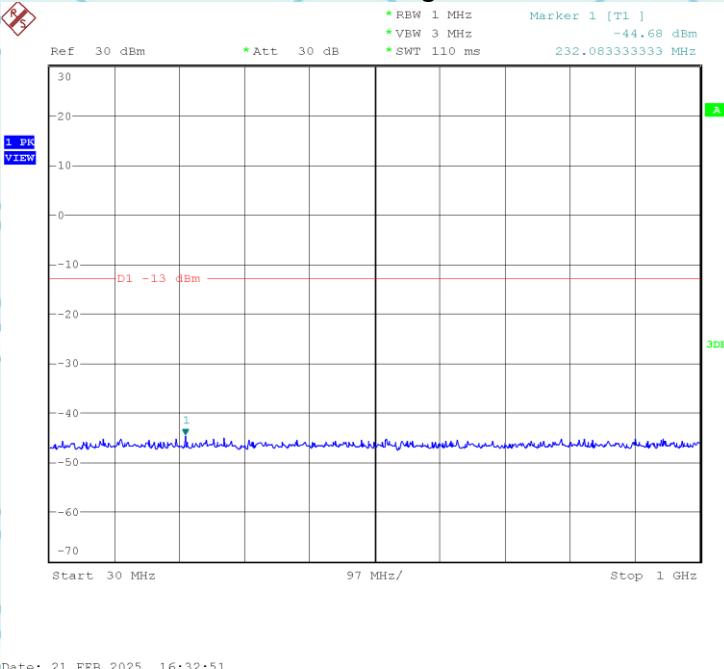



Conducted Emission Transmitting Mode CH 661 1GHz – 20GHz

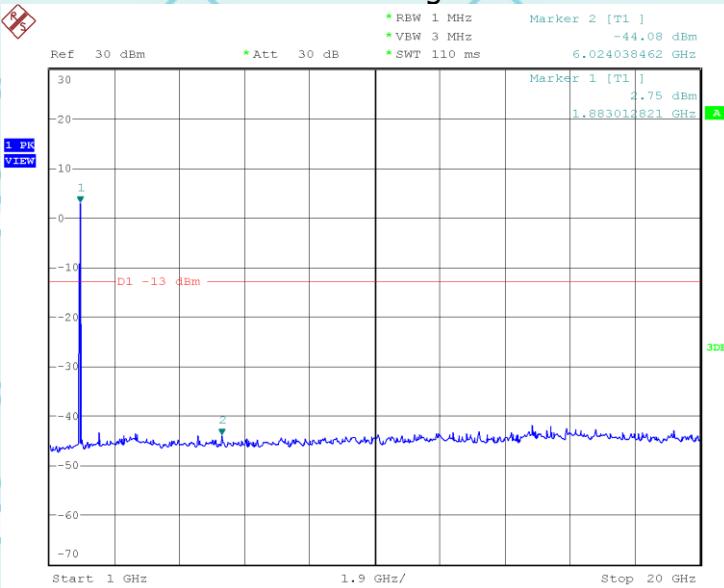


Conducted Emission Transmitting Mode CH 810 30MHz – 1GHz

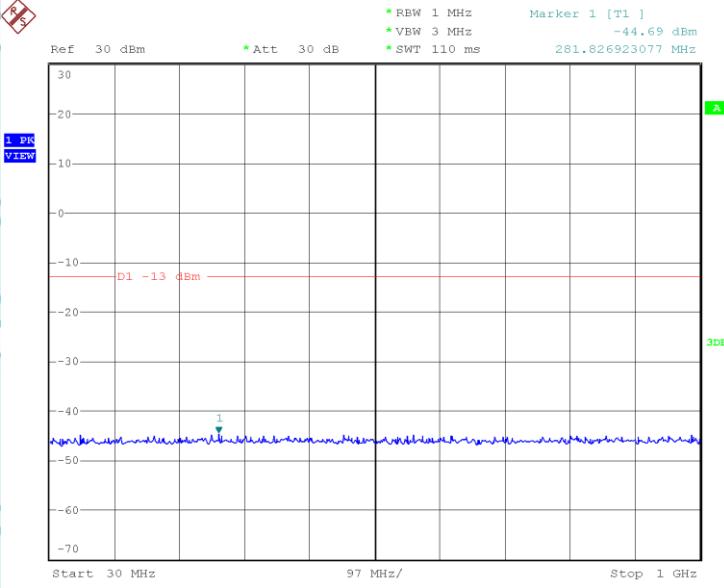


Conducted Emission Transmitting Mode CH 810 1GHz – 20GHz

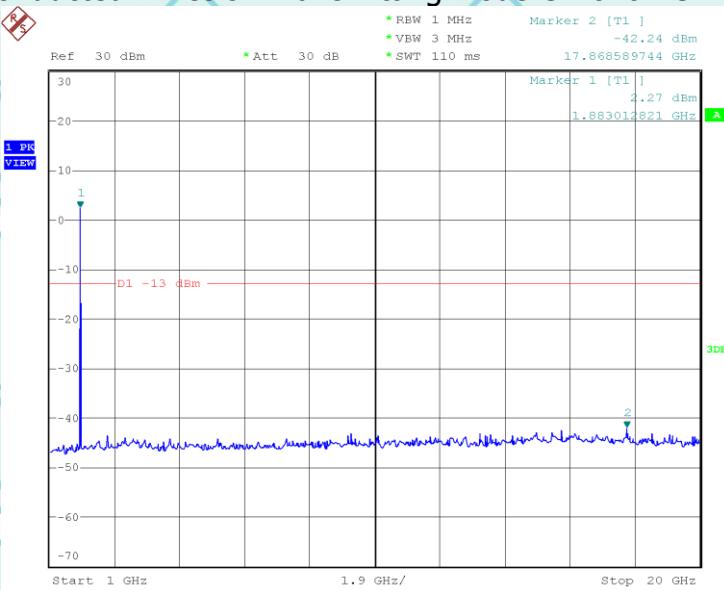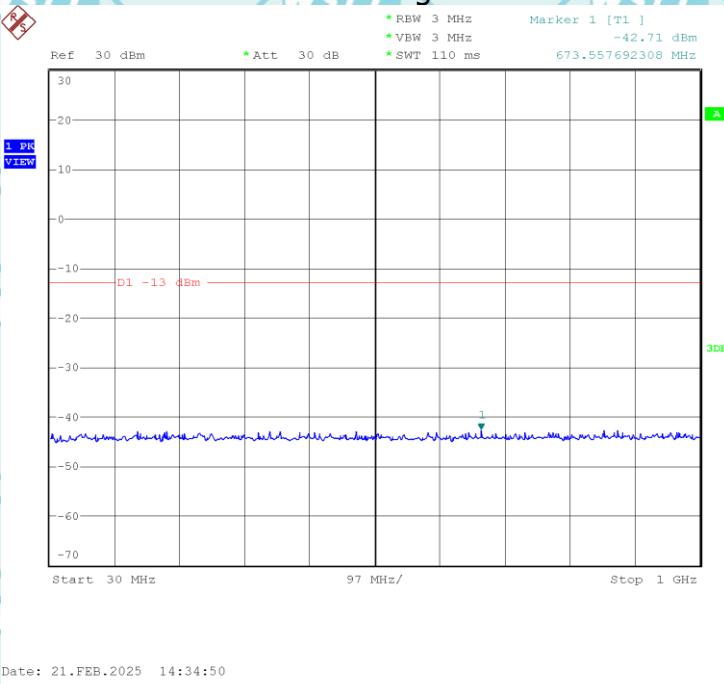CONDUCTED EMISSION IN WCDMA Band 2
Conducted Emission Transmitting Mode CH 9262 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 9262 1GHz – 20GHz

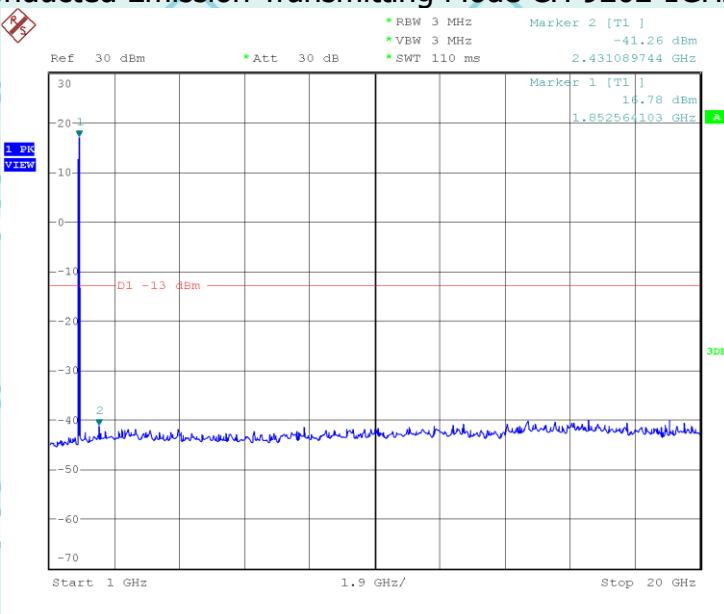


Conducted Emission Transmitting Mode CH 9400 30MHz – 1GHz

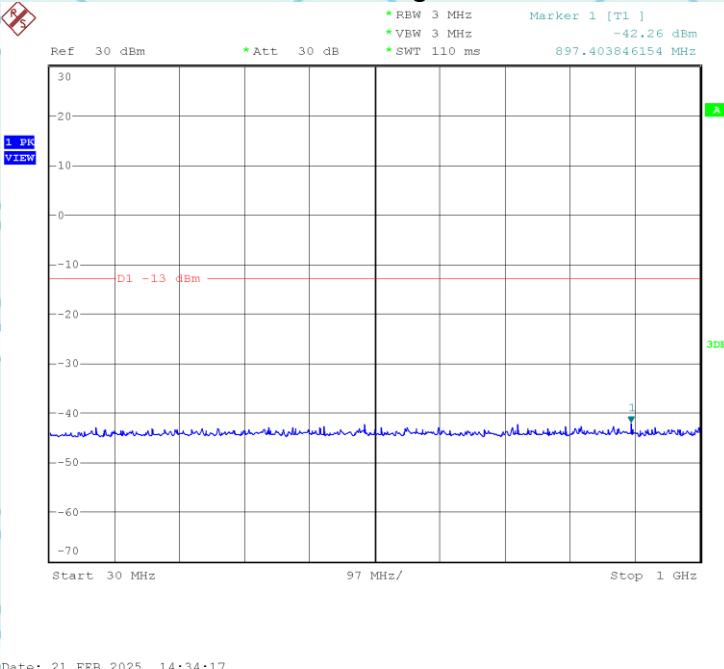



Conducted Emission Transmitting Mode CH 9400 1GHz – 20GHz

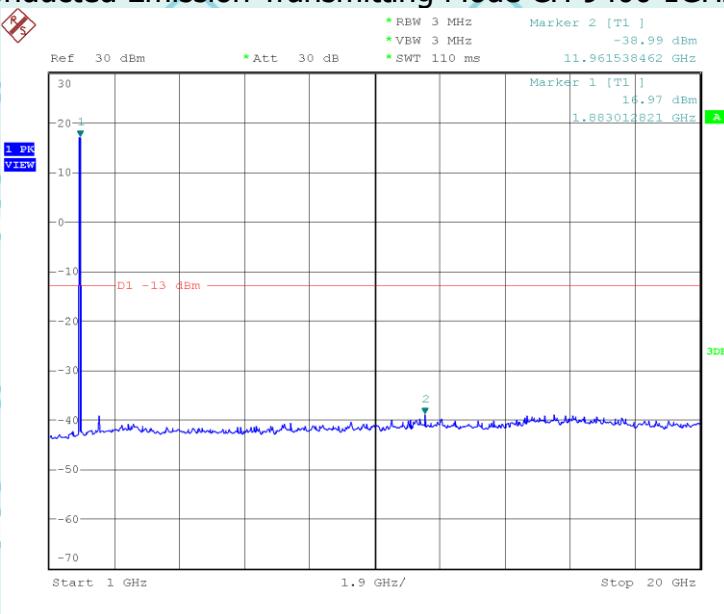


Conducted Emission Transmitting Mode CH 9538 30MHz – 1GHz

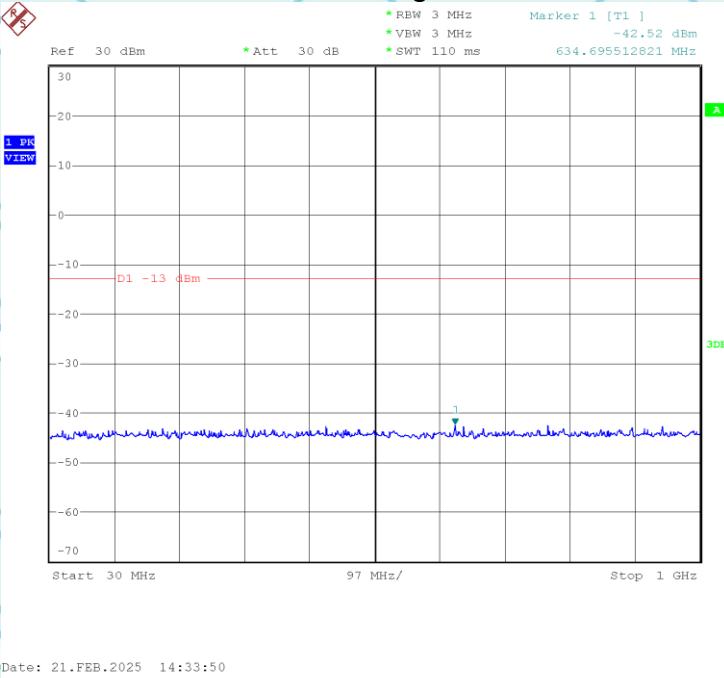


Conducted Emission Transmitting Mode CH 9538 1GHz – 20GHz

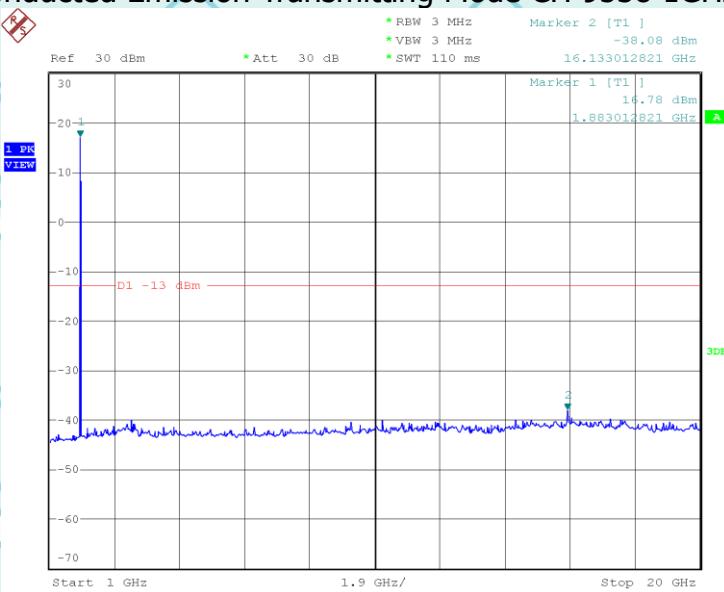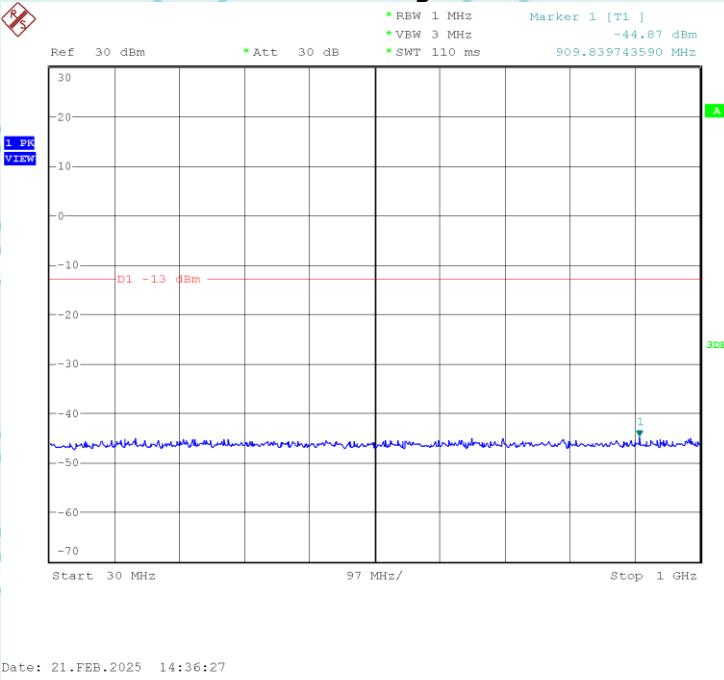CONDUCTED EMISSION IN WCDMA Band 4
Conducted Emission Transmitting Mode CH 1312 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 1312 1GHz – 20GHz

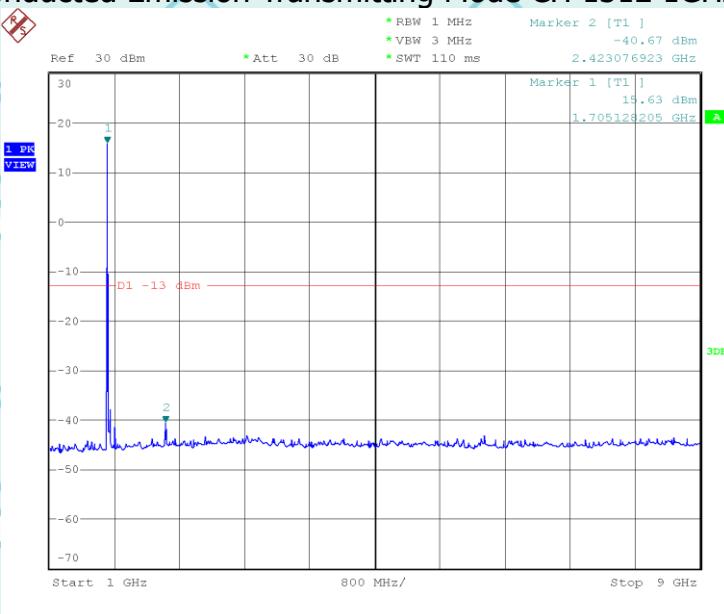


Conducted Emission Transmitting Mode CH 1413 30MHz – 1GHz

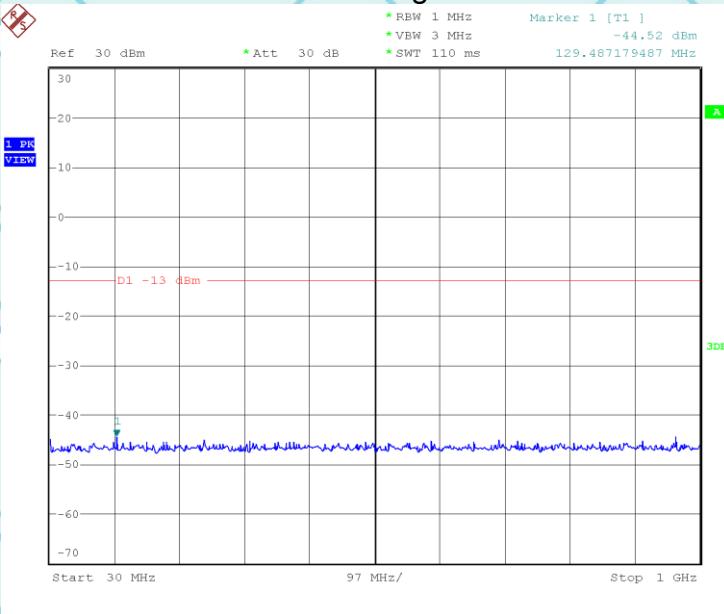



Conducted Emission Transmitting Mode CH 1413 1GHz – 20GHz

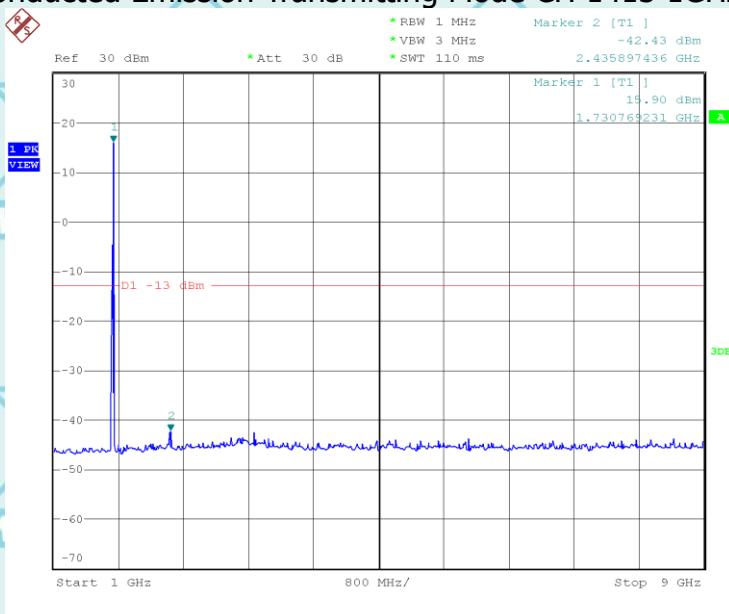


Conducted Emission Transmitting Mode CH 1513 30MHz – 1GHz

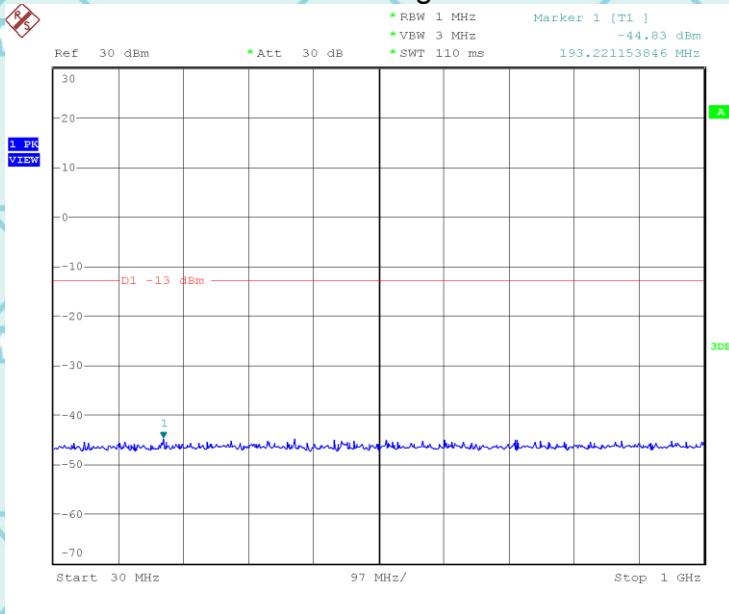


Conducted Emission Transmitting Mode CH 1513 1GHz – 20GHz

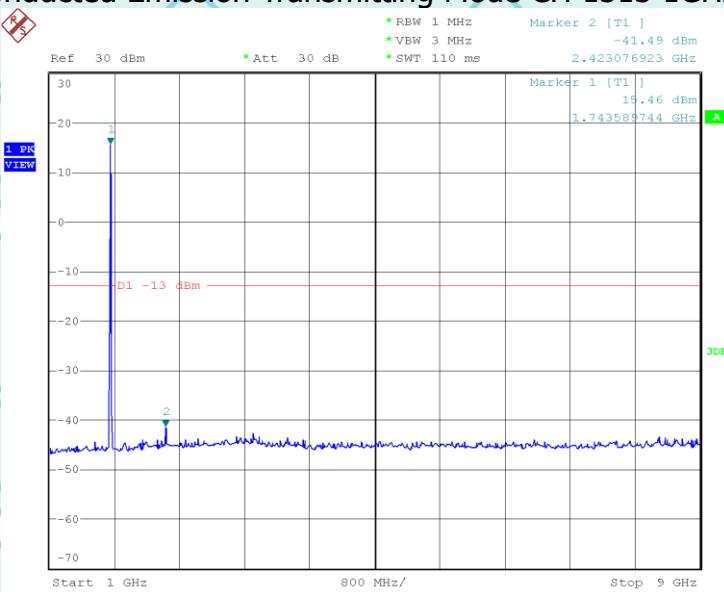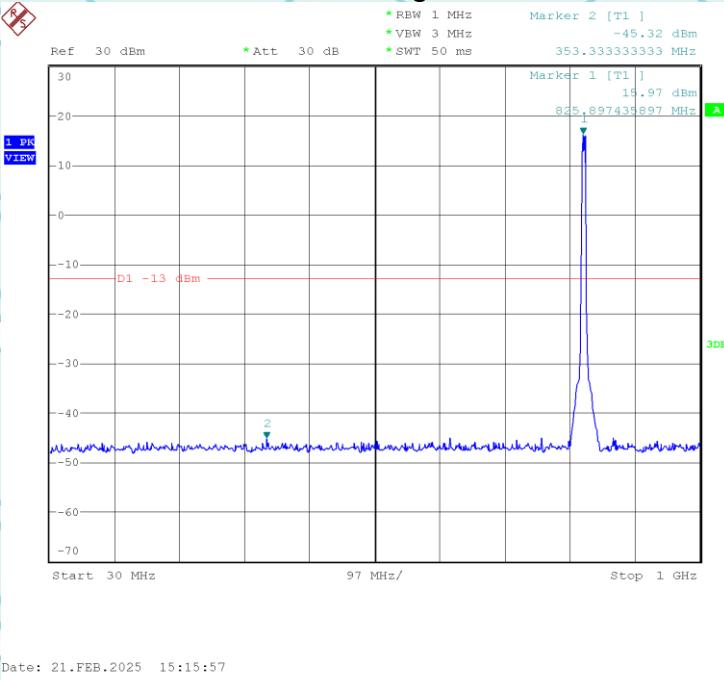CONDUCTED EMISSION IN WCDMA Band 5
Conducted Emission Transmitting Mode CH 4132 30MHz – 1GHz


Conducted Emission Transmitting Mode CH 4132 1GHz – 9GHz

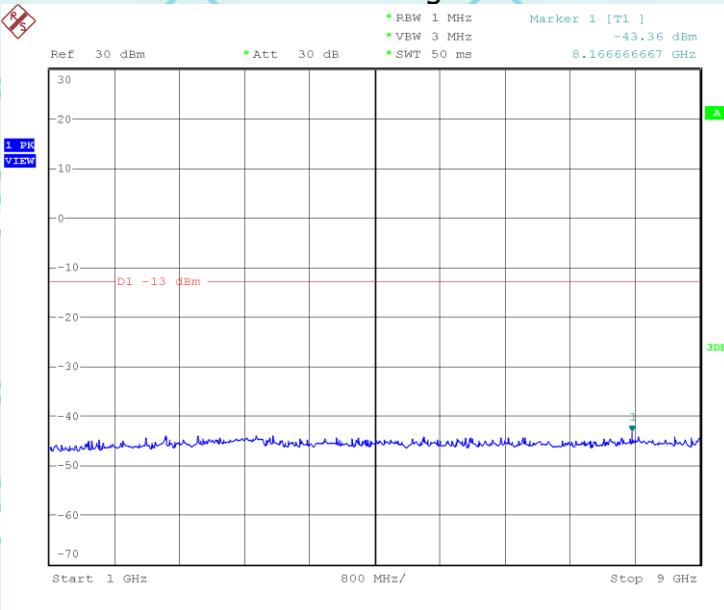


Conducted Emission Transmitting Mode CH 4182 30MHz – 1GHz

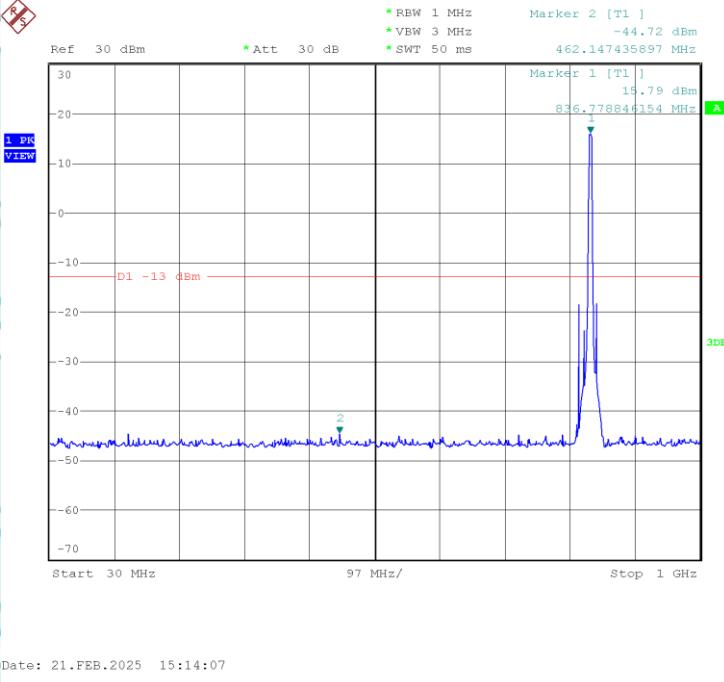


Conducted Emission Transmitting Mode CH 4182 1GHz – 9GHz

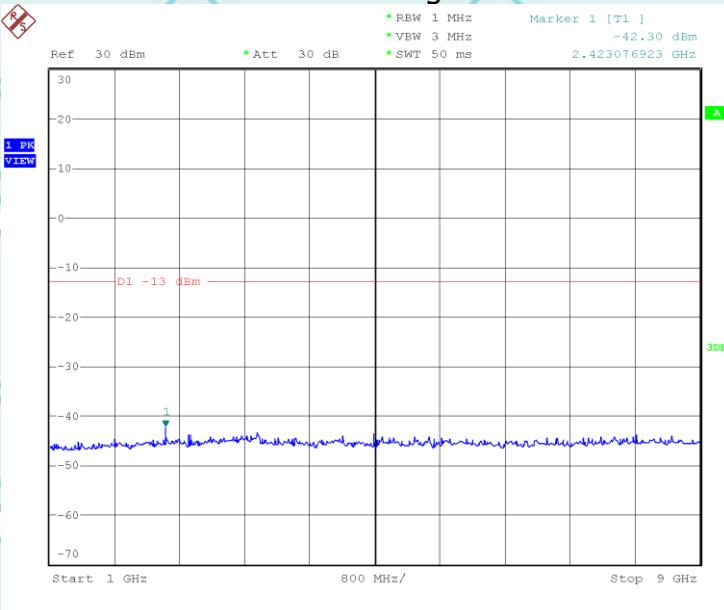

Conducted Emission Transmitting Mode CH 4233 30MHz – 1GHz

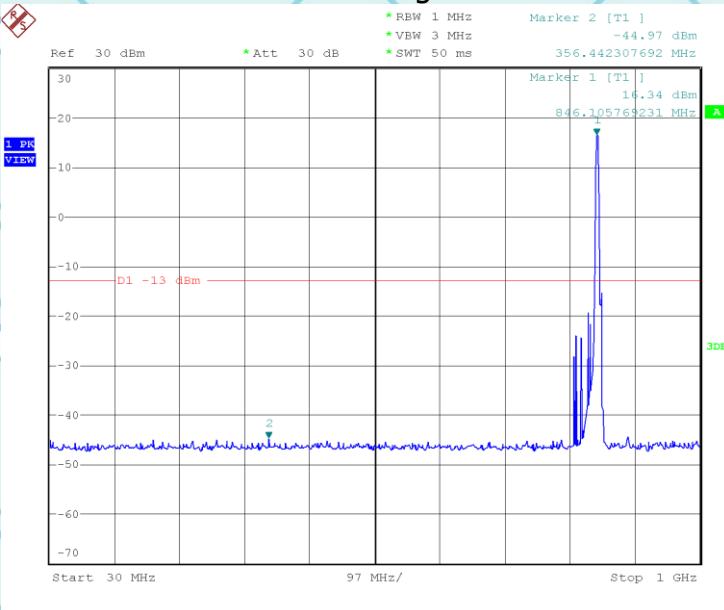

Conducted Emission Transmitting Mode CH 4233 1GHz – 9GHz

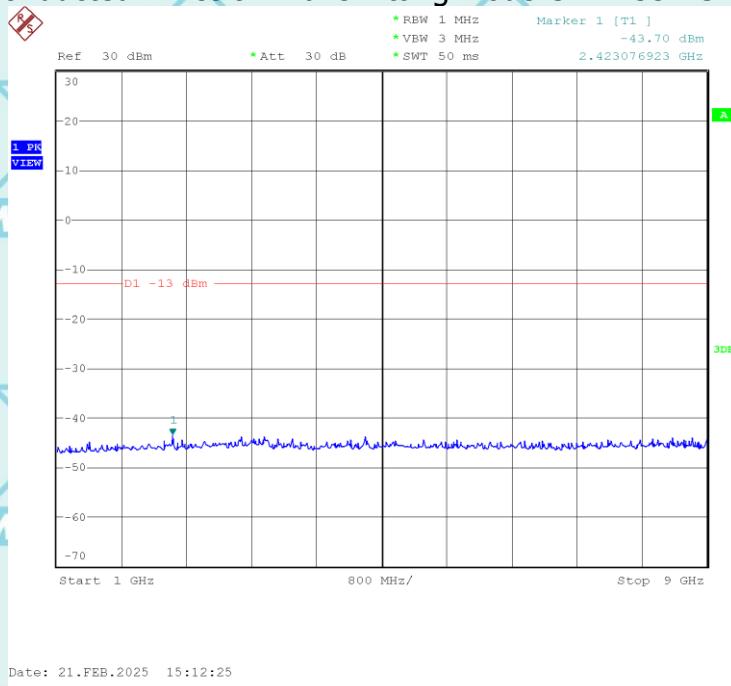

Note: Please refer to Annex (LTE&NR Out-of-band emissions) for more test data

12. FREQUENCY STABILITY


Test limit:

The frequency stability of the transmitter shall be measured while varying the ambient temperatures and supply voltages over the ranges specified in §2.1055. The specific frequency stability limits are provided in the relevant rules section(s). see section 4.

Test procedure:

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

Test setup:

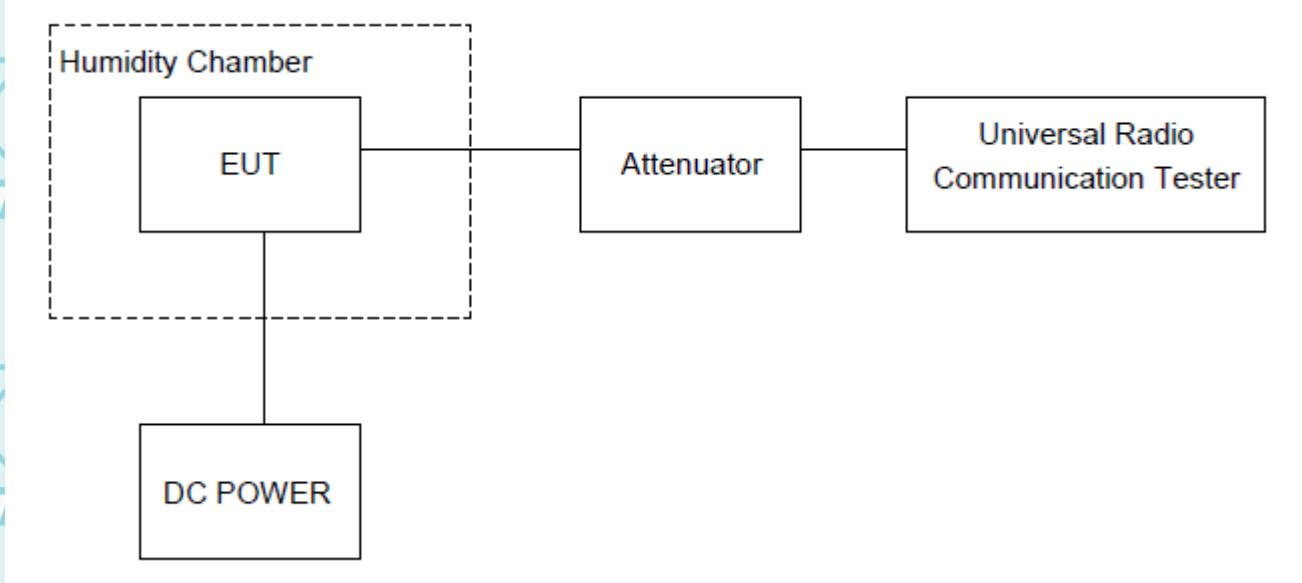

12.1. Measurement Result (Worst)

WSCT

Frequency Error against Voltage for GSM 850 band (836.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	37	0.044
3.91	42	0.050
4.50	40	0.048

Frequency Error against Temperature for GSM 850 band (836.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	35	0.041
0	40	0.048
10	39	0.047
20	40	0.048
30	39	0.047
40	40	0.048
55	35	0.042

Frequency Error against Voltage for PCS 1900 band (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	40	0.021
3.91	42	0.022
4.50	36	0.019

Frequency Error against Temperature for PCS 1900 band (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	40	0.021
0	45	0.024
10	36	0.019
20	38	0.020
30	42	0.022
40	43	0.023
55	34	0.018



Frequency Error against Voltage for GPRS 850 band (836.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	42	0.050
3.91	43	0.052
4.50	34	0.041

Frequency Error against Temperature for GPRS 850 band (836.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	40	0.048
0	35	0.042
10	36	0.043
20	41	0.049
30	35	0.042
40	38	0.045
55	37	0.044

Frequency Error against Voltage for GPRS 1900 band (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	38	0.020
3.91	41	0.022
4.50	45	0.024

Frequency Error against Temperature for GPRS 1900 band (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	35	0.018
0	36	0.019
10	38	0.020
20	36	0.019
30	35	0.018
40	40	0.021
55	38	0.020



Frequency Error against Voltage for EGPRS 850 band (836.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	40	0.048
3.91	38	0.046
4.50	42	0.051

Frequency Error against Temperature for EGPRS 850 band (836.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	37	0.044
0	38	0.046
10	35	0.042
20	38	0.046
30	38	0.046
40	42	0.051
55	40	0.048

Frequency Error against Voltage for EGPRS 1900 band (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	41	0.022
3.91	39	0.021
4.50	39	0.021

Frequency Error against Temperature for EGPRS 1900 band (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	37	0.020
0	37	0.020
10	35	0.019
20	41	0.022
30	37	0.020
40	35	0.018
55	41	0.022



Frequency Error against Voltage for WCDMA Band 2 (1880MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	39	0.021
3.91	44	0.023
4.50	44	0.023

Frequency Error against Temperature for WCDMA Band 2 (1880MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	37	0.020
0	39	0.021
10	39	0.021
20	44	0.023
30	39	0.021
40	44	0.023
55	41	0.022

Frequency Error against Voltage for WCDMA Band 4 (1732.6MHz)

Voltage(V)	Frequency error(Hz)	Frequency error (ppm)
3.45	37	0.022
3.91	41	0.024
4.50	39	0.023

Frequency Error against Temperature for WCDMA Band 4 (1732.6MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	37	0.022
0	41	0.024
10	43	0.025
20	39	0.023
30	37	0.022
40	41	0.024
55	43	0.025



Frequency Error against Voltage for WCDMA Band 5 (836.4MHz)

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.45	33	0.040
3.91	42	0.050
4.50	34	0.041

Frequency Error against Temperature for WCDMA Band 5 (836.4MHz)

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	33	0.040
0	44	0.052
10	40	0.048
20	40	0.048
30	38	0.045
40	41	0.049
55	39	0.047

Note: Please refer to Annex (LTE&NR Frequency Error against) for more test data

13. Test Setup Photographs

Please refer to Annex "Set Up Photos-RF" for test setup photos

---END OF REPORT---