

TABLE OF CONTENTS

1 Conducted output power for EN-DC	2
2 Frequency stability for EN-DC	4
3 Peak-to-Average Ratio for EN-DC.....	6
4 Occupied bandwidth for EN-DC.....	30
5 Band edge for EN-DC	38
6 Out-of-band emissions for EN-DC	48

1 Conducted output power for EN-DC

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Power (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
Band5	30	5	20425	1@0	QPSK	19.73			
n38	30	10	515000	1@0	DFT_BPSK	18.89			
Sum	30					22.34	19	26	PASS
Band5	30	5	20525	8@0	QPSK	19.97			
n38	30	10	519000	12@6	DFT_BPSK	18.78			
Sum	30					22.42	19	26	PASS
Band5	30	5	20525	8@0	QPSK	19.97			
n38	30	10	519000	12@6	DFT_QPSK	18.71			
Sum	30					22.39	19	26	PASS
Band5	30	5	20625	1@17	QPSK	19.87			
n38	30	10	523000	1@23	DFT_BPSK	18.76			
Sum	30					22.36	19	26	PASS
Band5	30	5	20625	8@17	QPSK	19.91			
n38	30	10	523000	12@6	DFT_BPSK	18.78			
Sum	30					22.39	19	26	PASS
Band5	30	5	20625	1@17	QPSK	19.83			
n38	30	10	523000	1@23	DFT_QPSK	18.83			
Sum	30					22.36	19	26	PASS
Band5	30	5	20625	8@17	QPSK	19.92			
n38	30	10	523000	12@6	DFT_QPSK	18.74			
Sum	30					22.38	19	26	PASS
Band5	30	10	20450	1@0	QPSK	20.38			
n38	30	20	516000	1@0	DFT_BPSK	18.82			
Sum	30					22.67	19	26	PASS
Band5	30	10	20525	12@0	QPSK	19.95			
n38	30	20	519000	25@12	DFT_BPSK	18.81			
Sum	30					22.42	19	26	PASS
Band5	30	10	20525	12@0	QPSK	19.97			
n38	30	20	519000	25@12	DFT_QPSK	18.68			
Sum	30					22.38	19	26	PASS
Band5	30	10	20600	1@38	QPSK	19.91			
n38	30	20	522000	1@50	DFT_BPSK	18.69			
Sum	30					22.35	19	26	PASS
Band5	30	10	20600	12@38	QPSK	19.83			
n38	30	20	522000	25@12	DFT_BPSK	18.78			
Sum	30					22.34	19	26	PASS
Band5	30	10	20600	1@38	QPSK	19.89			
n38	30	20	522000	1@50	DFT_QPSK	18.56			

Sum	30					22.28	19	26	PASS
Band5	30	10	20600	12@38	QPSK	19.85			
n38	30	20	522000	25@12	DFT_QPSK	18.70			
Sum	30					22.32	19	26	PASS

2 Frequency stability for EN-DC

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n38	30	10	515000	12@6	DFT_BPSK	-3.70	-0.00144	-2.5	2.5	PASS
n38	30	10	515000	1@1	DFT_BPSK	-1.26	-0.00049	-2.5	2.5	PASS
n38	30	10	515000	1@22	DFT_BPSK	-4.51	-0.00175	-2.5	2.5	PASS
n38	30	10	515000	12@6	DFT_QPSK	-2.58	-0.00100	-2.5	2.5	PASS
n38	30	10	515000	1@1	DFT_QPSK	-2.19	-0.00085	-2.5	2.5	PASS
n38	30	10	515000	1@22	DFT_QPSK	1.72	0.00067	-2.5	2.5	PASS
n38	30	10	519000	12@6	DFT_BPSK	-1.47	-0.00057	-2.5	2.5	PASS
n38	30	10	519000	1@1	DFT_BPSK	-1.38	-0.00053	-2.5	2.5	PASS
n38	30	10	519000	1@22	DFT_BPSK	0.16	0.00006	-2.5	2.5	PASS
n38	30	10	519000	12@6	DFT_QPSK	0.39	0.00015	-2.5	2.5	PASS
n38	30	10	519000	1@1	DFT_QPSK	-3.70	-0.00143	-2.5	2.5	PASS
n38	30	10	519000	1@22	DFT_QPSK	-2.98	-0.00115	-2.5	2.5	PASS
n38	30	10	523000	12@6	DFT_BPSK	-0.94	-0.00036	-2.5	2.5	PASS
n38	30	10	523000	1@1	DFT_BPSK	-0.77	-0.00029	-2.5	2.5	PASS
n38	30	10	523000	1@22	DFT_BPSK	-0.66	-0.00025	-2.5	2.5	PASS
n38	30	10	523000	12@6	DFT_QPSK	-4.07	-0.00156	-2.5	2.5	PASS
n38	30	10	523000	1@1	DFT_QPSK	-5.44	-0.00208	-2.5	2.5	PASS
n38	30	10	523000	1@22	DFT_QPSK	-7.74	-0.00296	-2.5	2.5	PASS
n38	30	15	515500	18@9	DFT_BPSK	-2.74	-0.00106	-2.5	2.5	PASS
n38	30	15	515500	1@1	DFT_BPSK	-1.97	-0.00076	-2.5	2.5	PASS
n38	30	15	515500	1@36	DFT_BPSK	-2.25	-0.00087	-2.5	2.5	PASS
n38	30	15	515500	18@9	DFT_QPSK	-1.56	-0.00061	-2.5	2.5	PASS
n38	30	15	515500	1@1	DFT_QPSK	-1.87	-0.00073	-2.5	2.5	PASS
n38	30	15	515500	1@36	DFT_QPSK	-0.18	-0.00007	-2.5	2.5	PASS
n38	30	15	519000	18@9	DFT_BPSK	-4.09	-0.00158	-2.5	2.5	PASS
n38	30	15	519000	1@1	DFT_BPSK	-4.59	-0.00177	-2.5	2.5	PASS
n38	30	15	519000	1@36	DFT_BPSK	-3.16	-0.00122	-2.5	2.5	PASS
n38	30	15	519000	18@9	DFT_QPSK	-4.04	-0.00156	-2.5	2.5	PASS
n38	30	15	519000	1@1	DFT_QPSK	-2.93	-0.00113	-2.5	2.5	PASS
n38	30	15	519000	1@36	DFT_QPSK	-4.50	-0.00173	-2.5	2.5	PASS
n38	30	15	522500	18@9	DFT_BPSK	-2.01	-0.00077	-2.5	2.5	PASS
n38	30	15	522500	1@1	DFT_BPSK	-4.72	-0.00181	-2.5	2.5	PASS
n38	30	15	522500	1@36	DFT_BPSK	-0.72	-0.00028	-2.5	2.5	PASS
n38	30	15	522500	18@9	DFT_QPSK	-0.76	-0.00029	-2.5	2.5	PASS
n38	30	15	522500	1@1	DFT_QPSK	-4.73	-0.00181	-2.5	2.5	PASS
n38	30	15	522500	1@36	DFT_QPSK	-2.24	-0.00086	-2.5	2.5	PASS
n38	30	20	516000	25@12	DFT_BPSK	0.62	0.00024	-2.5	2.5	PASS
n38	30	20	516000	1@1	DFT_BPSK	-0.23	-0.00009	-2.5	2.5	PASS
n38	30	20	516000	1@49	DFT_BPSK	-2.15	-0.00083	-2.5	2.5	PASS


n38	30	20	516000	25@12	DFT_QPSK	-1.17	-0.00045	-2.5	2.5	PASS
n38	30	20	516000	1@1	DFT_QPSK	-4.92	-0.00191	-2.5	2.5	PASS
n38	30	20	516000	1@49	DFT_QPSK	-5.91	-0.00229	-2.5	2.5	PASS
n38	30	20	519000	25@12	DFT_BPSK	-2.83	-0.00109	-2.5	2.5	PASS
n38	30	20	519000	1@1	DFT_BPSK	-1.70	-0.00066	-2.5	2.5	PASS
n38	30	20	519000	1@49	DFT_BPSK	-1.93	-0.00074	-2.5	2.5	PASS
n38	30	20	519000	25@12	DFT_QPSK	-0.44	-0.00017	-2.5	2.5	PASS
n38	30	20	519000	1@1	DFT_QPSK	-5.18	-0.00200	-2.5	2.5	PASS
n38	30	20	519000	1@49	DFT_QPSK	-4.83	-0.00186	-2.5	2.5	PASS
n38	30	20	522000	25@12	DFT_BPSK	-4.00	-0.00153	-2.5	2.5	PASS
n38	30	20	522000	1@1	DFT_BPSK	-1.07	-0.00041	-2.5	2.5	PASS
n38	30	20	522000	1@49	DFT_BPSK	-1.85	-0.00071	-2.5	2.5	PASS
n38	30	20	522000	25@12	DFT_QPSK	-5.29	-0.00203	-2.5	2.5	PASS
n38	30	20	522000	1@1	DFT_QPSK	-3.70	-0.00142	-2.5	2.5	PASS
n38	30	20	522000	1@49	DFT_QPSK	-3.22	-0.00123	-2.5	2.5	PASS

3 Peak-to-Average Ratio for EN-DC


<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
n38	30	10	515000	24@0	DFT_BPSK	4.58	13	PASS
n38	30	10	515000	24@0	DFT_QPSK	5.76	13	PASS
n38	30	10	515000	24@0	DFT_QAM16	7.19	13	PASS
n38	30	10	515000	24@0	DFT_QAM64	7.08	13	PASS
n38	30	10	515000	24@0	DFT_QAM256	7.05	13	PASS
n38	30	10	519000	24@0	DFT_BPSK	4.91	13	PASS
n38	30	10	519000	24@0	DFT_QPSK	5.99	13	PASS
n38	30	10	519000	24@0	DFT_QAM16	6.89	13	PASS
n38	30	10	519000	24@0	DFT_QAM64	7.17	13	PASS
n38	30	10	519000	24@0	DFT_QAM256	7.02	13	PASS
n38	30	10	523000	24@0	DFT_BPSK	5.88	13	PASS
n38	30	10	523000	24@0	DFT_QPSK	6.58	13	PASS
n38	30	10	523000	24@0	DFT_QAM16	7.05	13	PASS
n38	30	10	523000	24@0	DFT_QAM64	7.07	13	PASS
n38	30	10	523000	24@0	DFT_QAM256	6.98	13	PASS
n38	30	15	515500	36@0	DFT_BPSK	4.81	13	PASS
n38	30	15	515500	36@0	DFT_QPSK	5.93	13	PASS
n38	30	15	515500	36@0	DFT_QAM16	7.29	13	PASS
n38	30	15	515500	36@0	DFT_QAM64	7.02	13	PASS
n38	30	15	515500	36@0	DFT_QAM256	6.99	13	PASS
n38	30	15	519000	36@0	DFT_BPSK	4.74	13	PASS
n38	30	15	519000	36@0	DFT_QPSK	6.06	13	PASS
n38	30	15	519000	36@0	DFT_QAM16	6.81	13	PASS
n38	30	15	519000	36@0	DFT_QAM64	6.94	13	PASS
n38	30	15	519000	36@0	DFT_QAM256	7.19	13	PASS
n38	30	15	522500	36@0	DFT_BPSK	5.11	13	PASS
n38	30	15	522500	36@0	DFT_QPSK	6.50	13	PASS
n38	30	15	522500	36@0	DFT_QAM16	7.15	13	PASS
n38	30	15	522500	36@0	DFT_QAM64	7.02	13	PASS
n38	30	15	522500	36@0	DFT_QAM256	7.13	13	PASS
n38	30	20	516000	50@0	DFT_BPSK	4.79	13	PASS
n38	30	20	516000	50@0	DFT_QPSK	5.97	13	PASS
n38	30	20	516000	50@0	DFT_QAM16	6.96	13	PASS
n38	30	20	516000	50@0	DFT_QAM64	7.08	13	PASS
n38	30	20	516000	50@0	DFT_QAM256	7.01	13	PASS
n38	30	20	519000	50@0	DFT_BPSK	4.90	13	PASS
n38	30	20	519000	50@0	DFT_QPSK	6.08	13	PASS
n38	30	20	519000	50@0	DFT_QAM16	6.67	13	PASS
n38	30	20	519000	50@0	DFT_QAM64	7.29	13	PASS

n38	30	20	519000	50@0	DFT_QAM256	6.75	13	PASS
n38	30	20	522000	50@0	DFT_BPSK	5.87	13	PASS
n38	30	20	522000	50@0	DFT_QPSK	6.13	13	PASS
n38	30	20	522000	50@0	DFT_QAM16	7.04	13	PASS
n38	30	20	522000	50@0	DFT_QAM64	7.05	13	PASS
n38	30	20	522000	50@0	DFT_QAM256	7.15	13	PASS


n38 SCS=30kHz DFT_BPSK BW=10MHz Channel=519000 RB=24@0

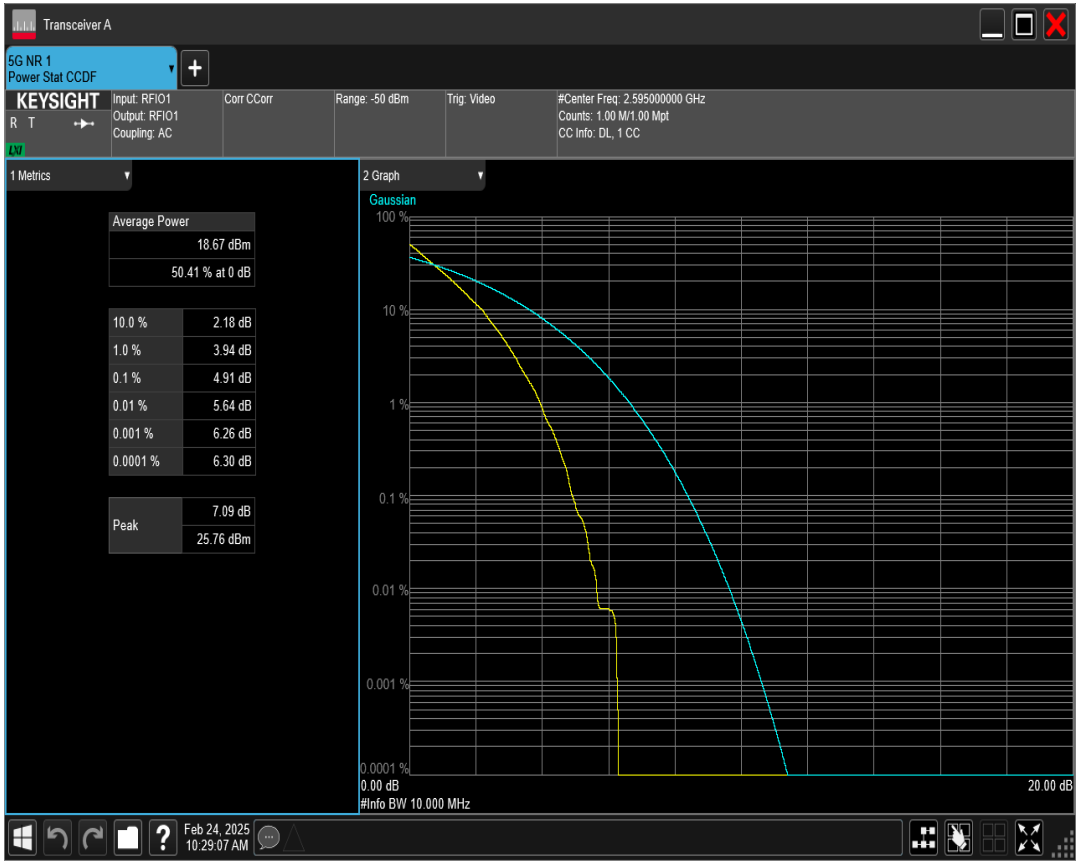


n38 SCS=30kHz DFT_BPSK BW=10MHz Channel=515000 RB=24@0

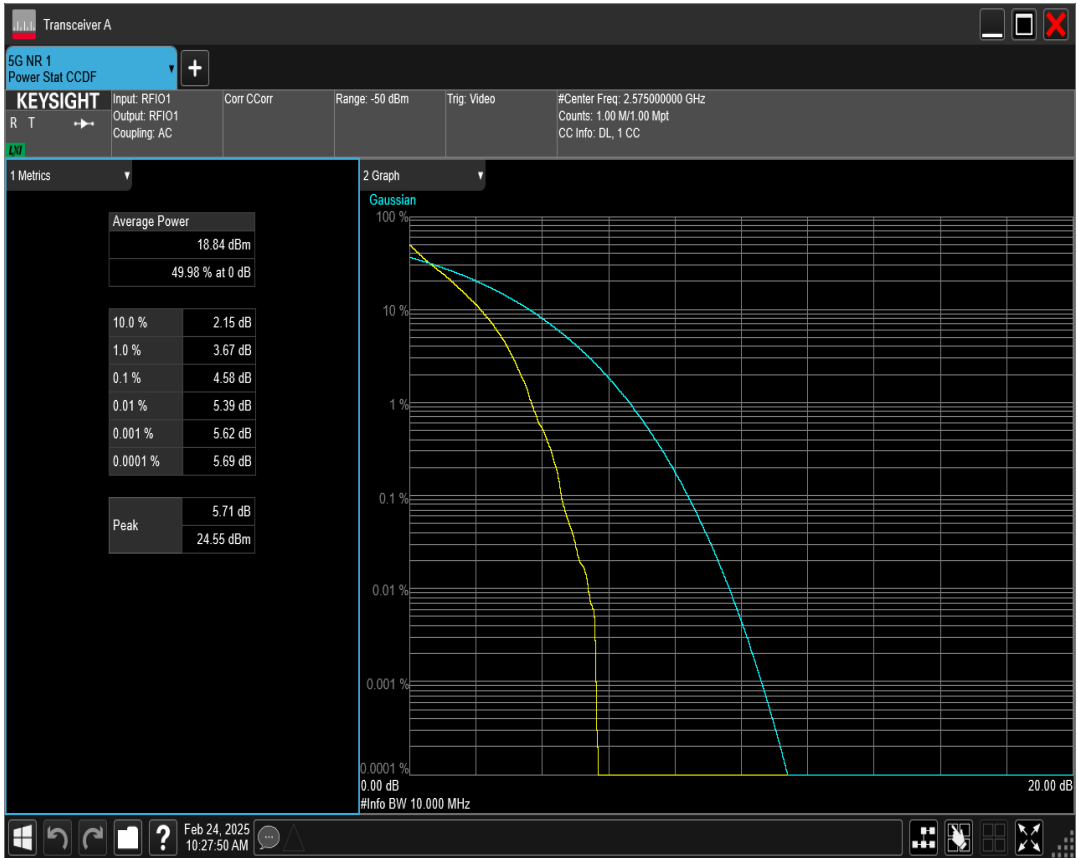


n38 SCS=30kHz DFT_BPSK BW=15MHz Channel=515500 RB=36@0

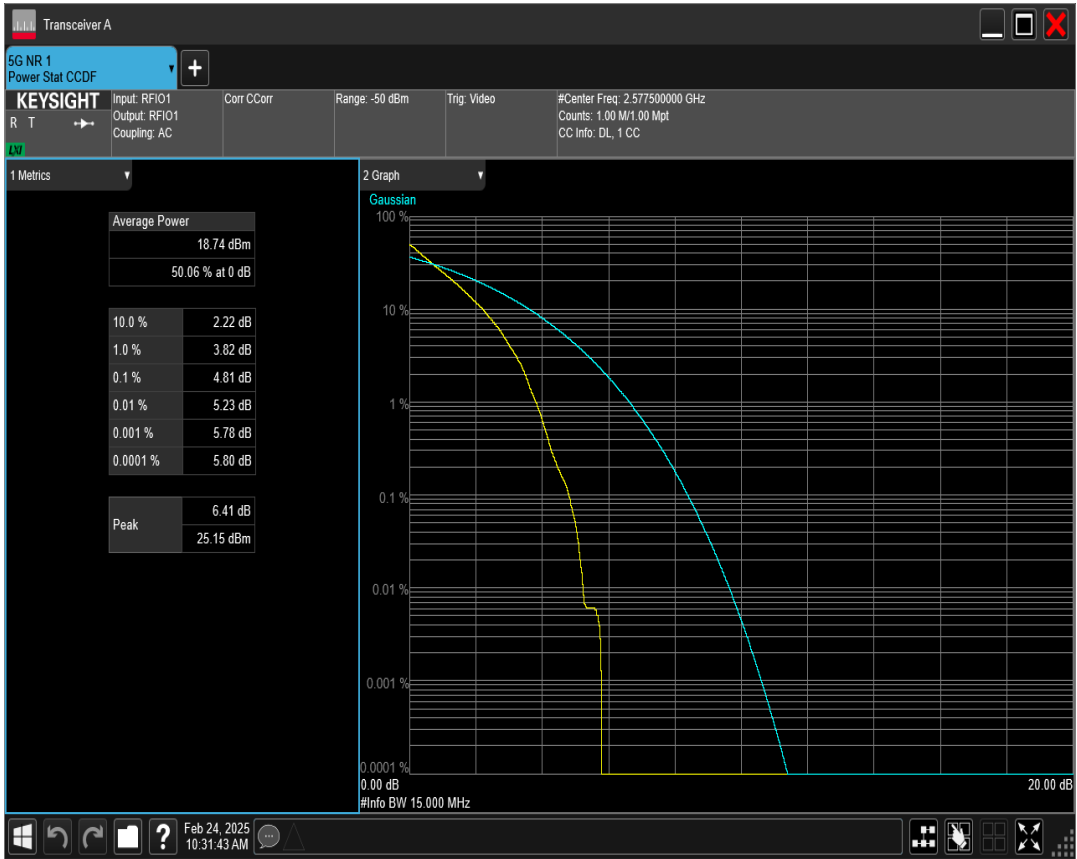


n38 SCS=30kHz DFT_BPSK BW=10MHz Channel=523000 RB=24@0

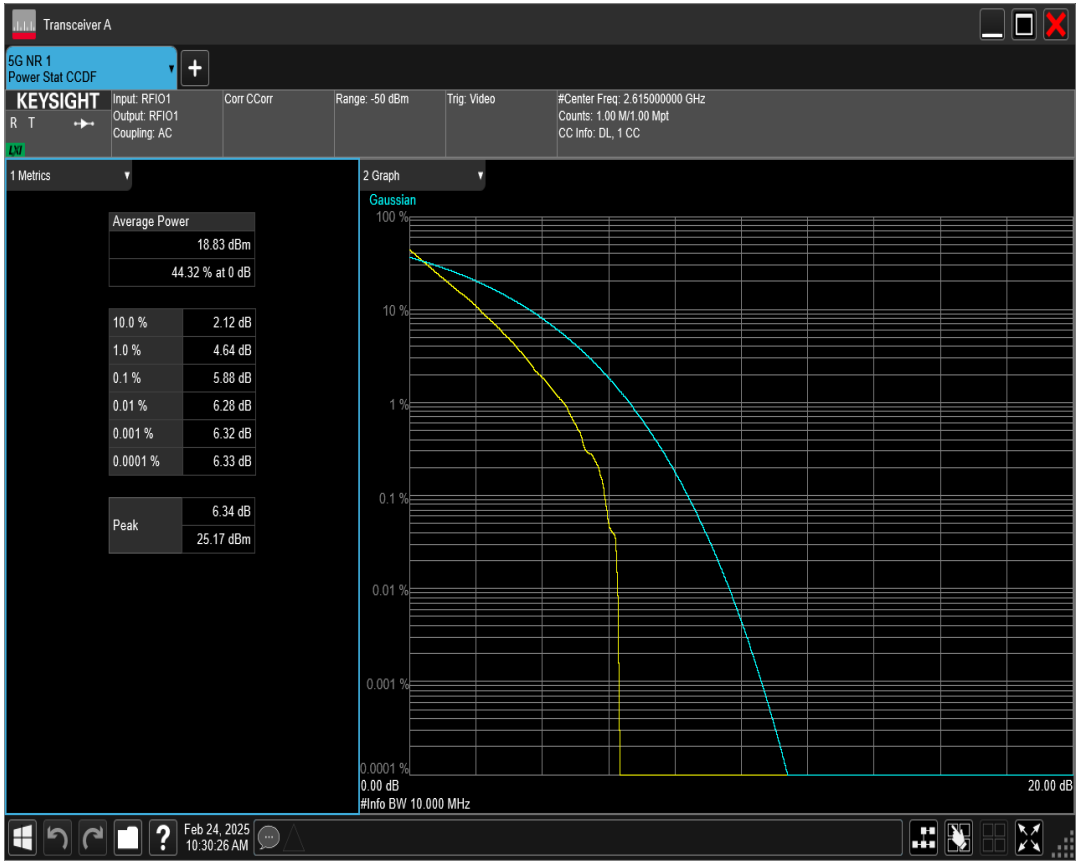


n38 SCS=30kHz DFT_BPSK BW=15MHz Channel=519000 RB=36@0

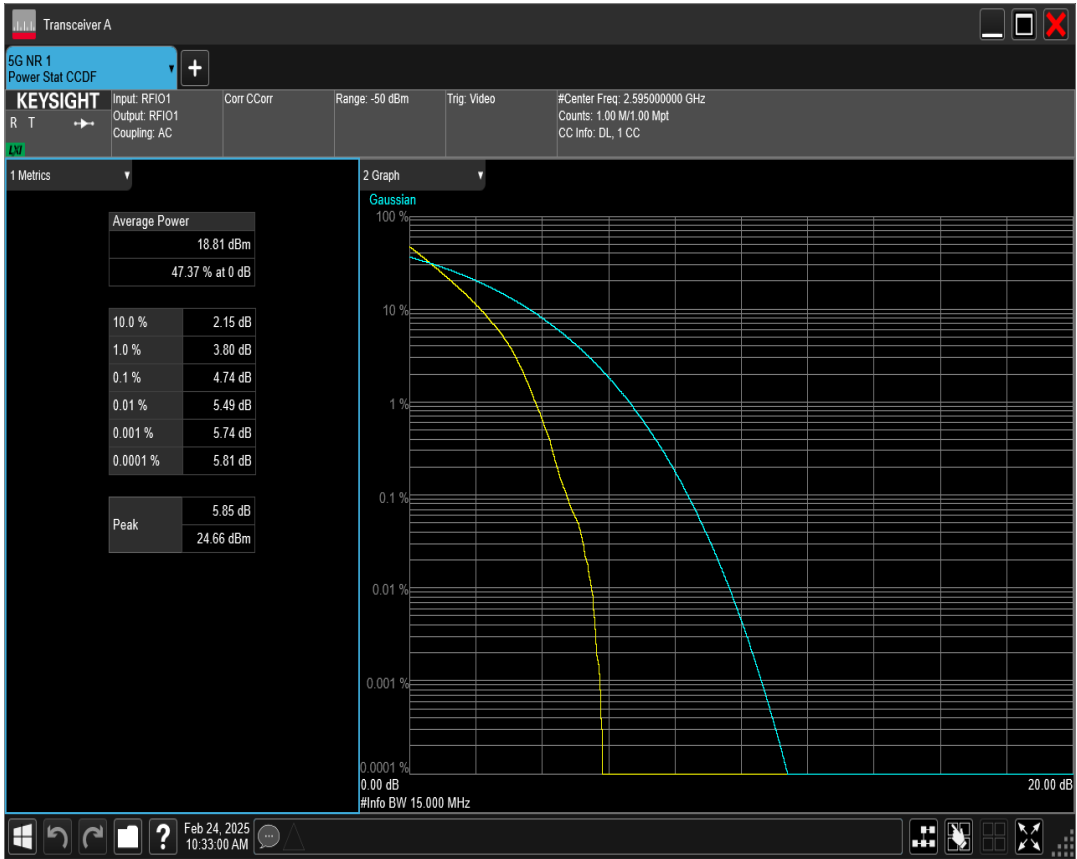


n38 SCS=30kHz DFT_BPSK BW=15MHz Channel=522500 RB=36@0

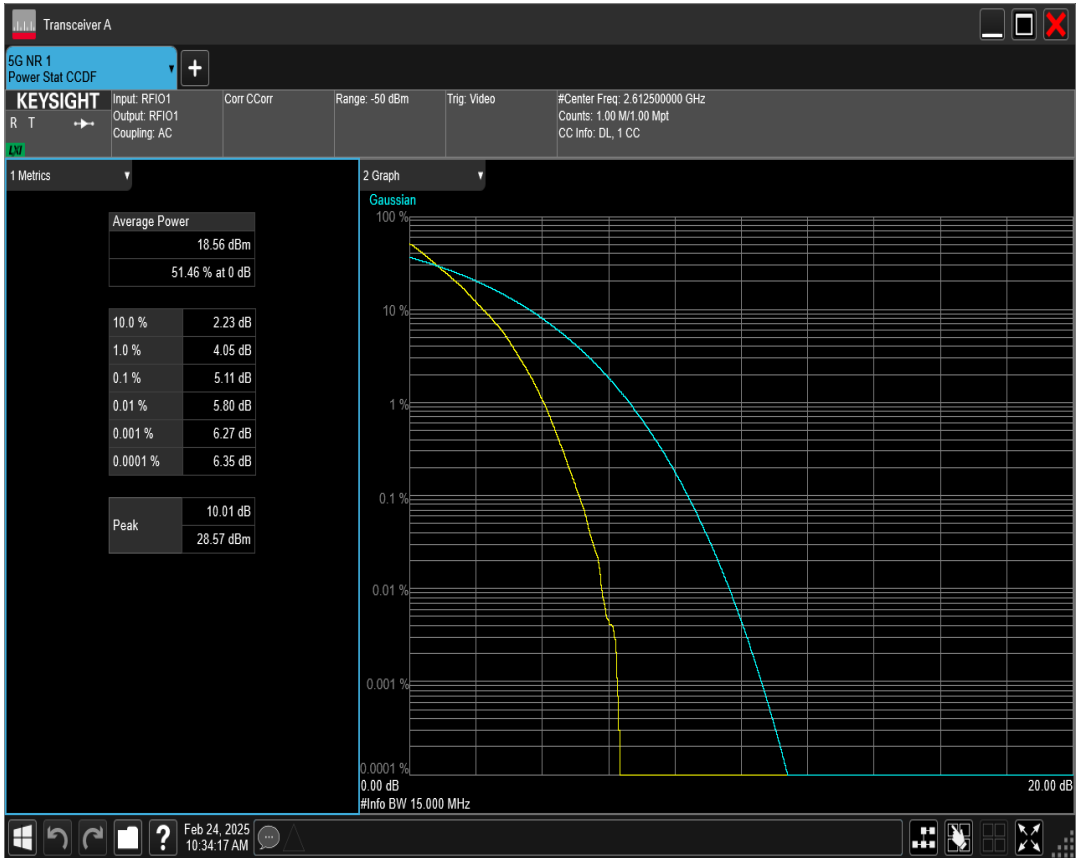


n38 SCS=30kHz DFT_BPSK BW=20MHz Channel=522000 RB=50@0

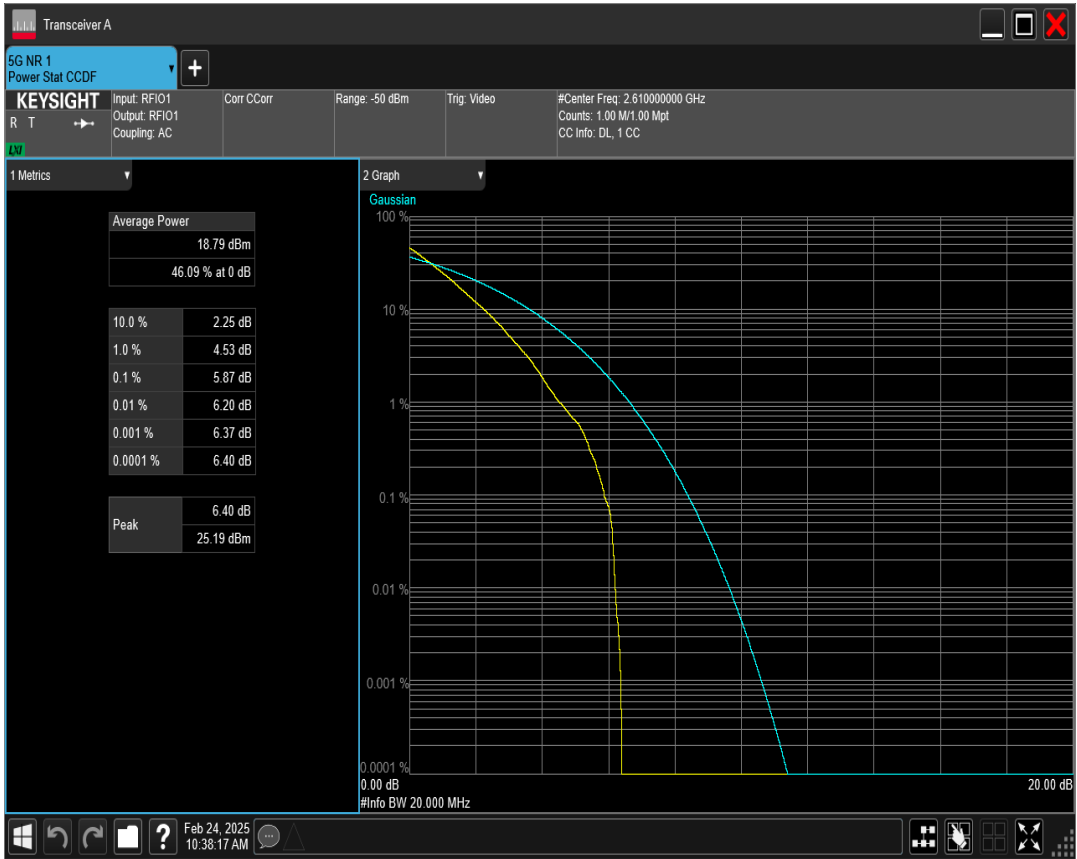


n38 SCS=30kHz DFT_BPSK BW=20MHz Channel=519000 RB=50@0

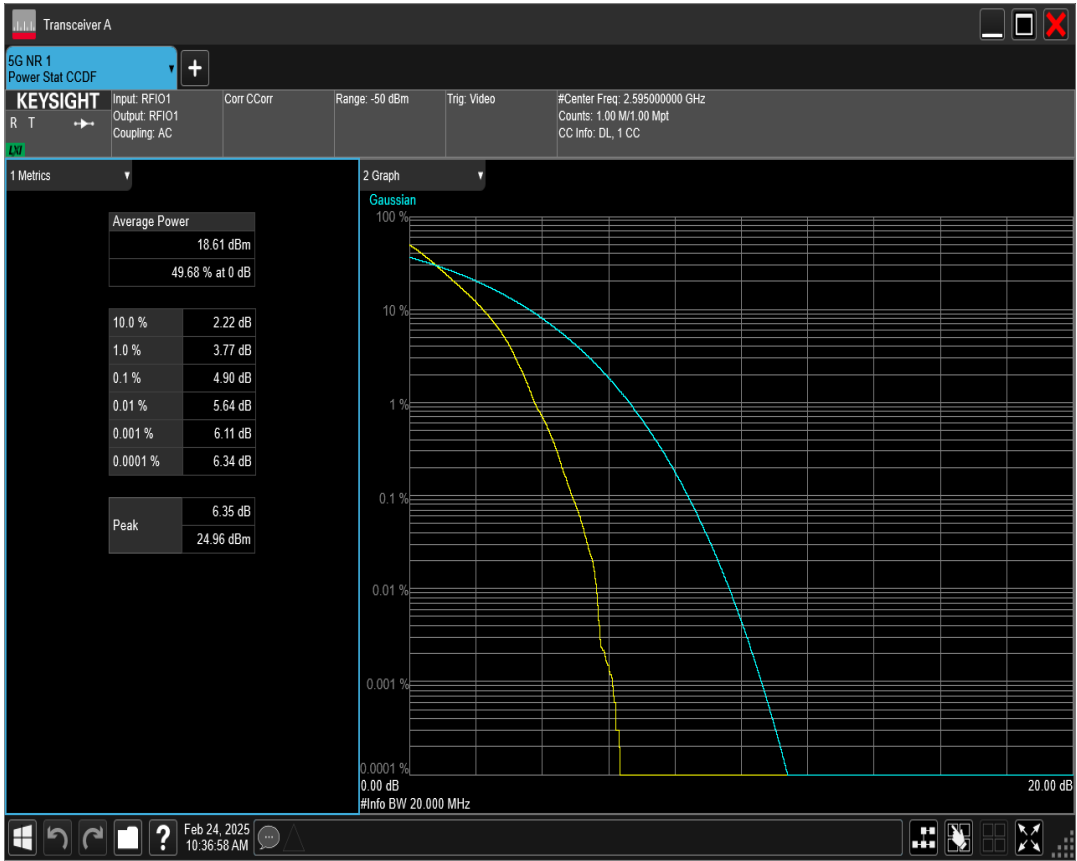


n38 SCS=30kHz DFT_BPSK BW=20MHz Channel=516000 RB=50@0

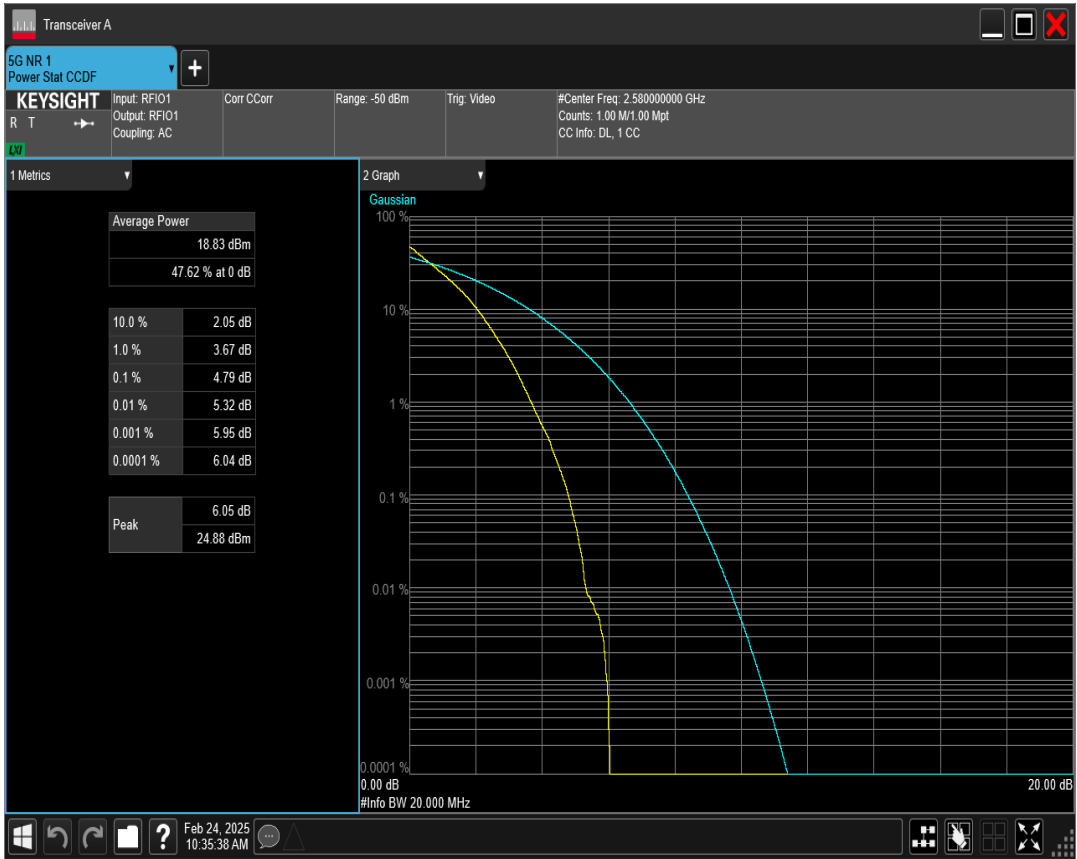


n38 SCS=30kHz DFT_QAM16 BW=10MHz Channel=519000 RB=24@0

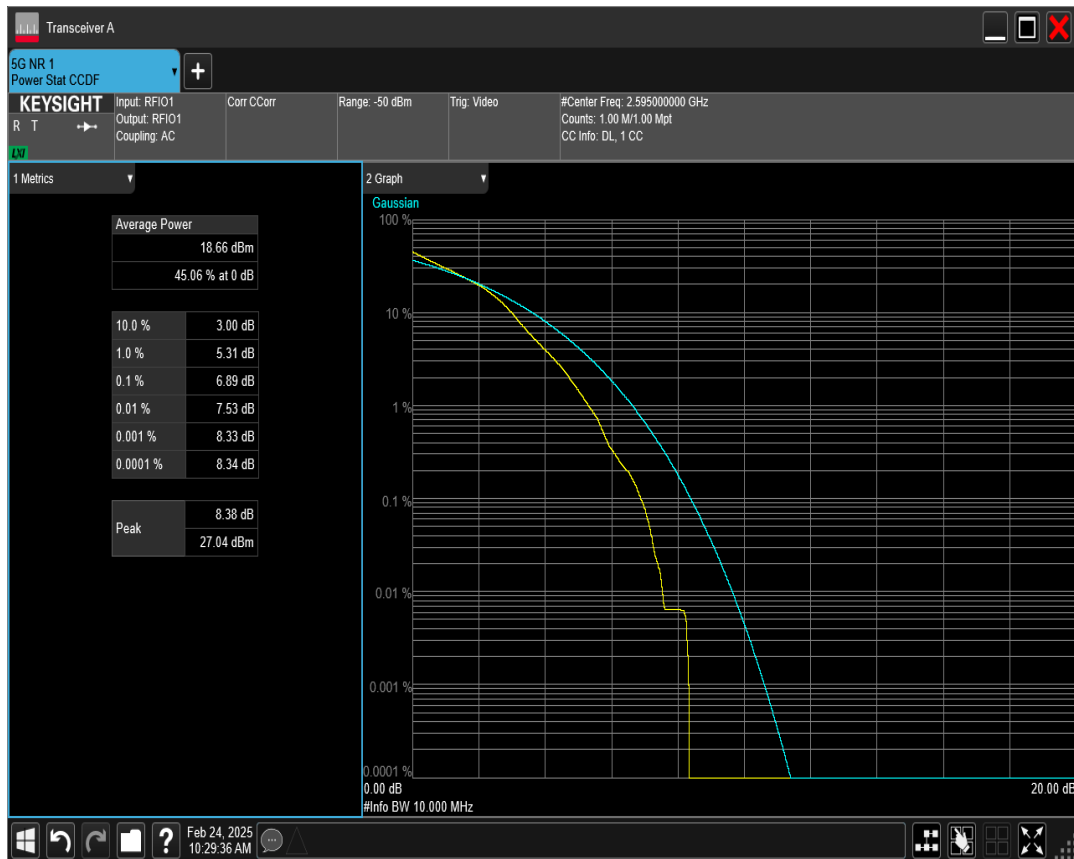


n38 SCS=30kHz DFT_QAM16 BW=10MHz Channel=515000 RB=24@0

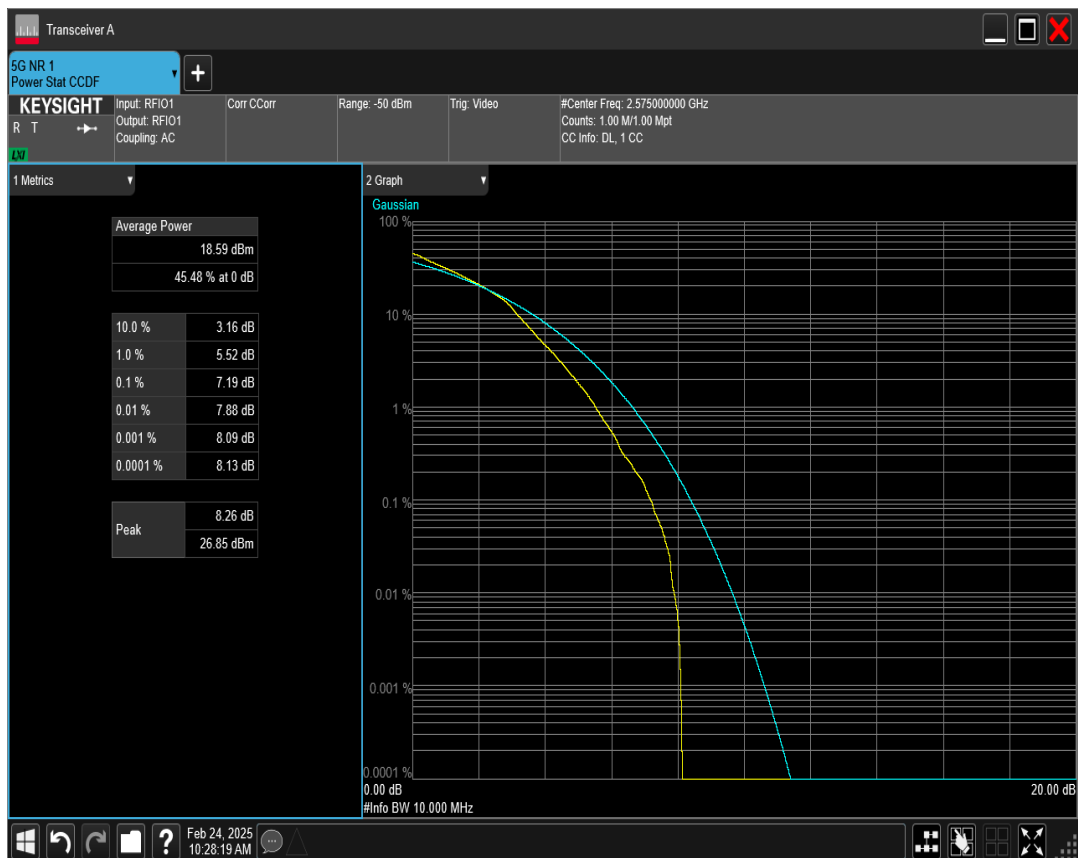


n38 SCS=30kHz DFT_QAM16 BW=15MHz Channel=515500 RB=36@0

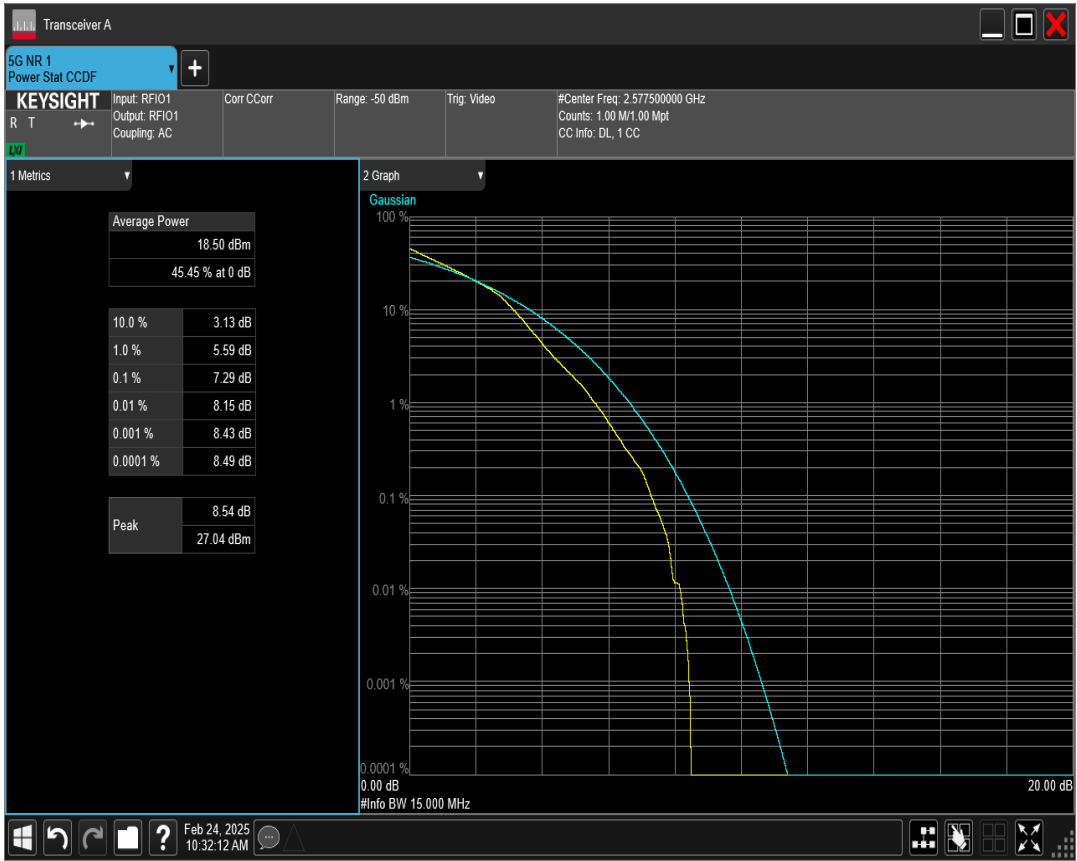


n38 SCS=30kHz DFT_QAM16 BW=10MHz Channel=523000 RB=24@0

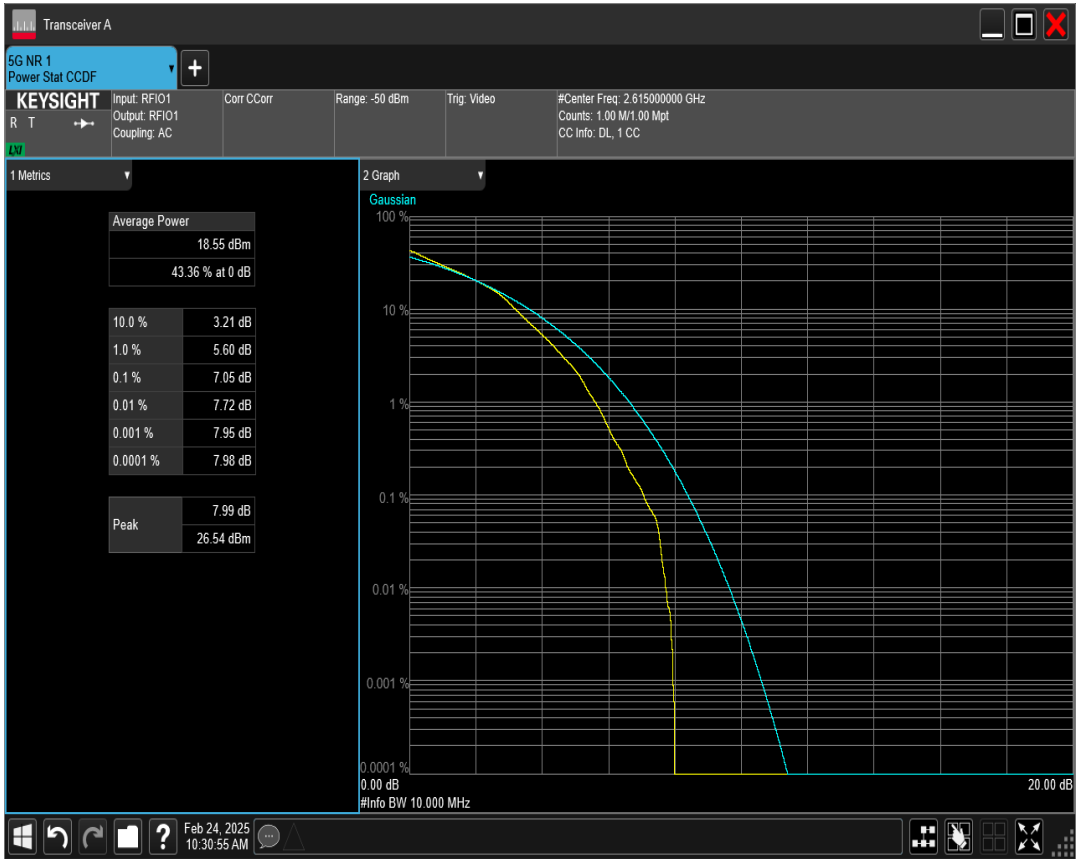


n38 SCS=30kHz DFT_QAM16 BW=15MHz Channel=519000 RB=36@0

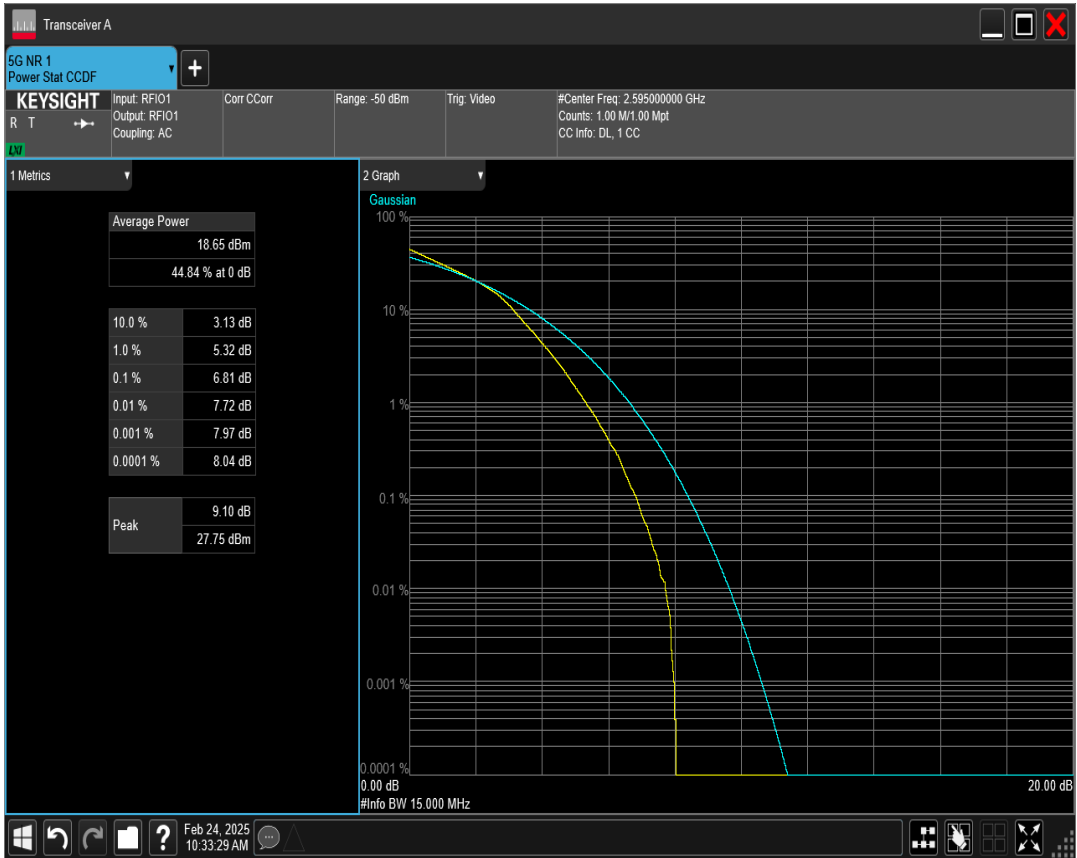


n38 SCS=30kHz DFT_QAM16 BW=20MHz Channel=519000 RB=50@0

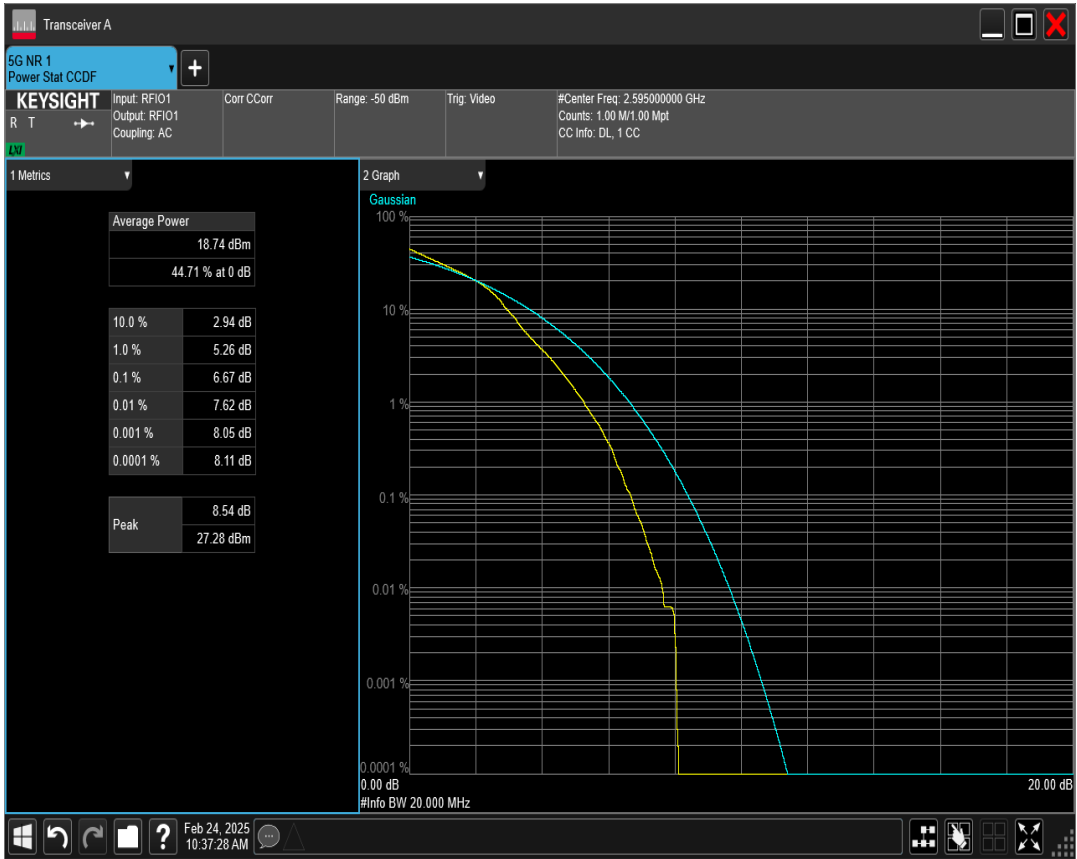


n38 SCS=30kHz DFT_QAM16 BW=20MHz Channel=516000 RB=50@0

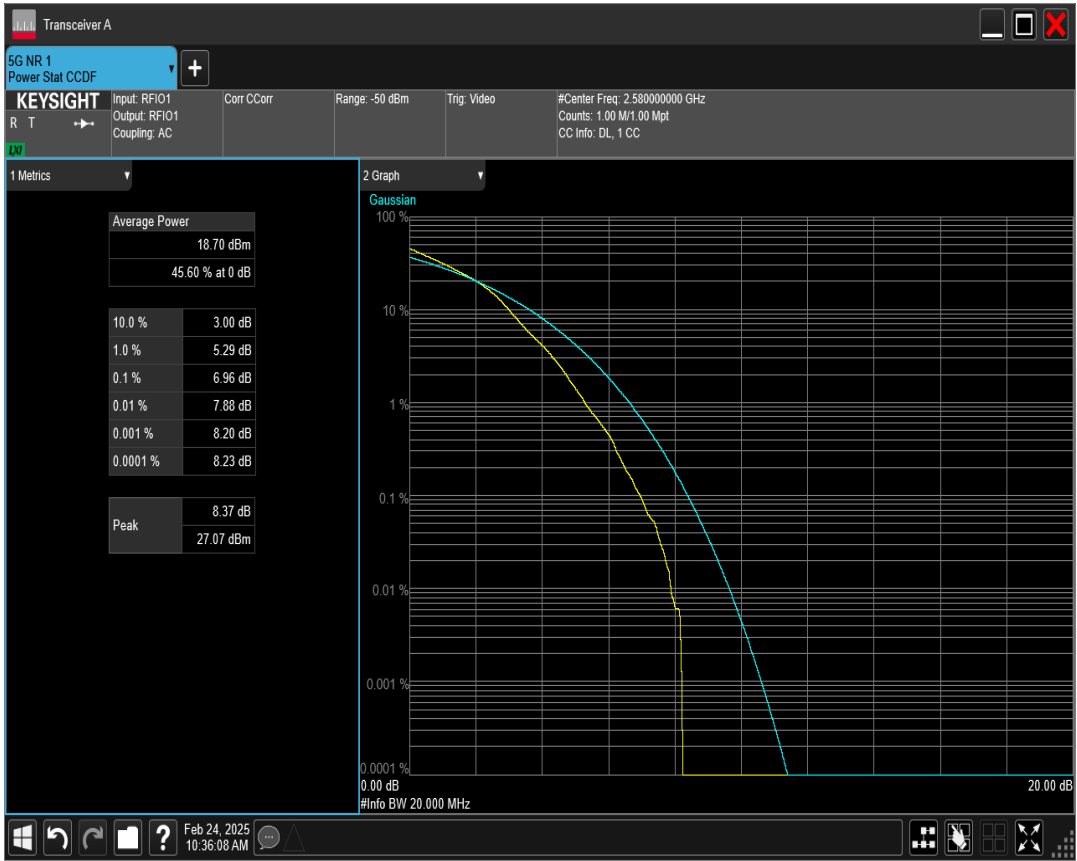


n38 SCS=30kHz DFT_QAM16 BW=15MHz Channel=522500 RB=36@0

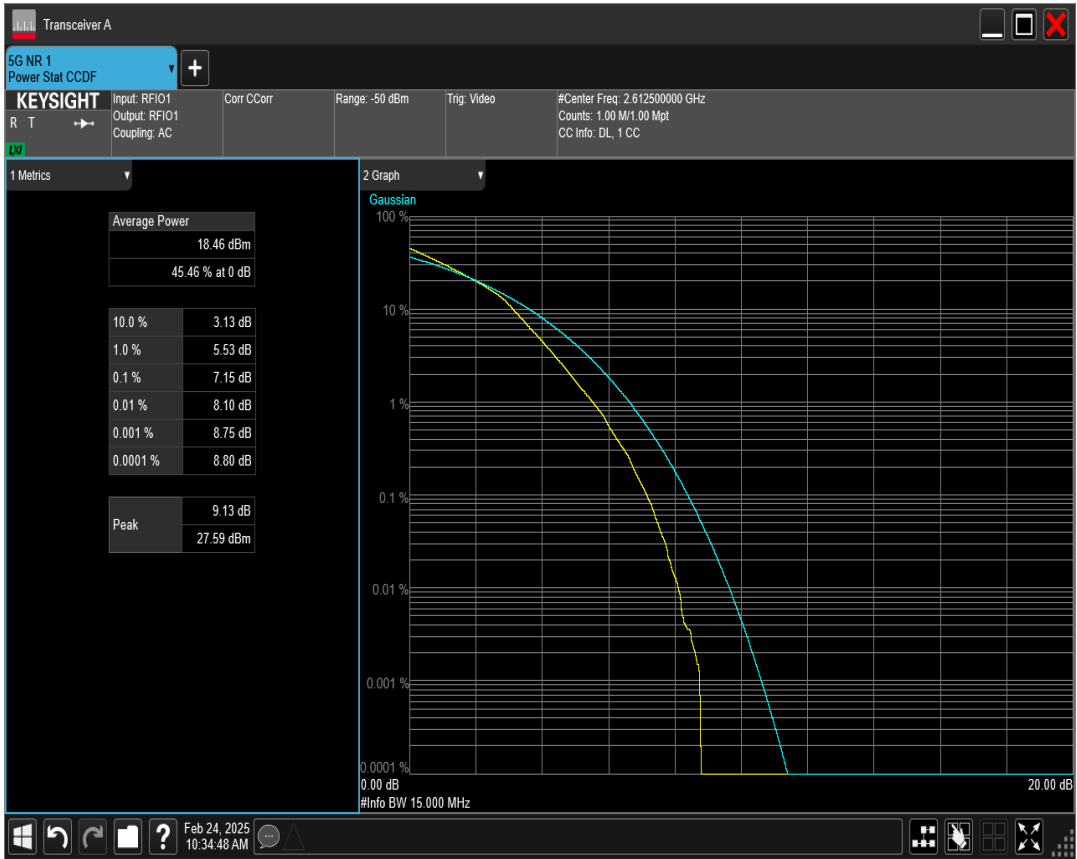


n38 SCS=30kHz DFT_QAM256 BW=10MHz Channel=515000 RB=24@0

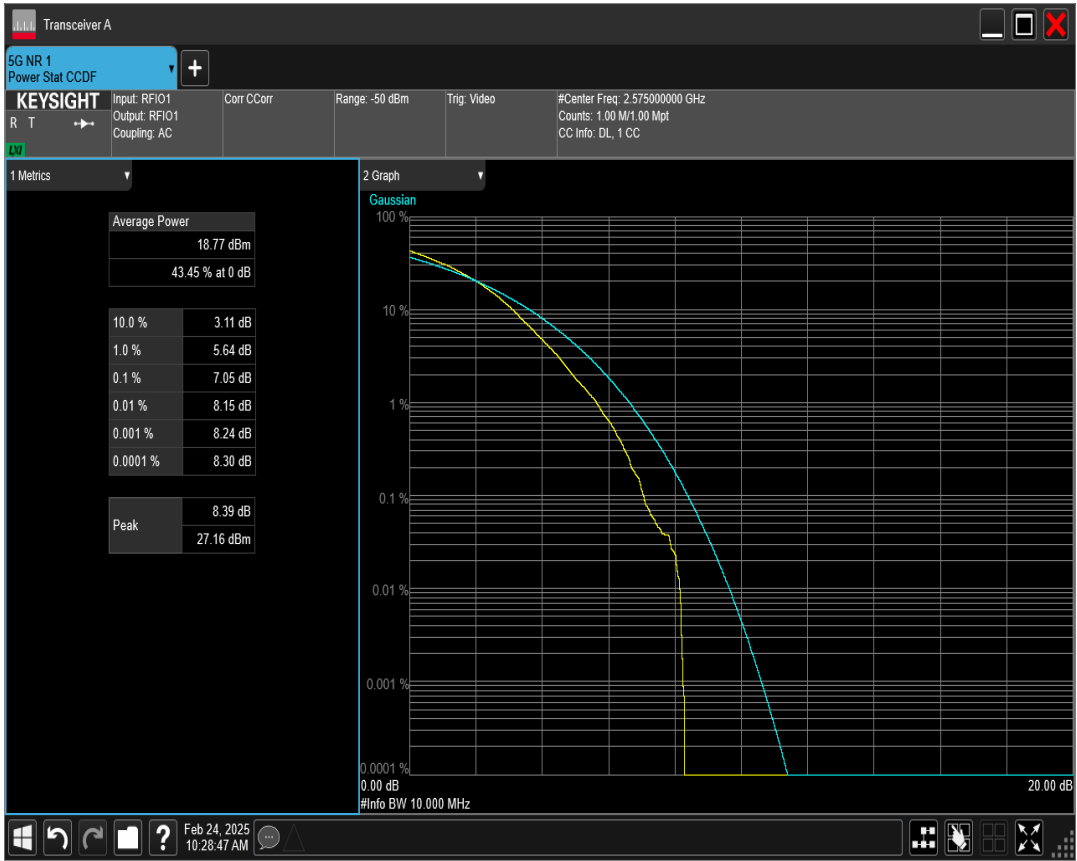


n38 SCS=30kHz DFT_QAM16 BW=20MHz Channel=522000 RB=50@0

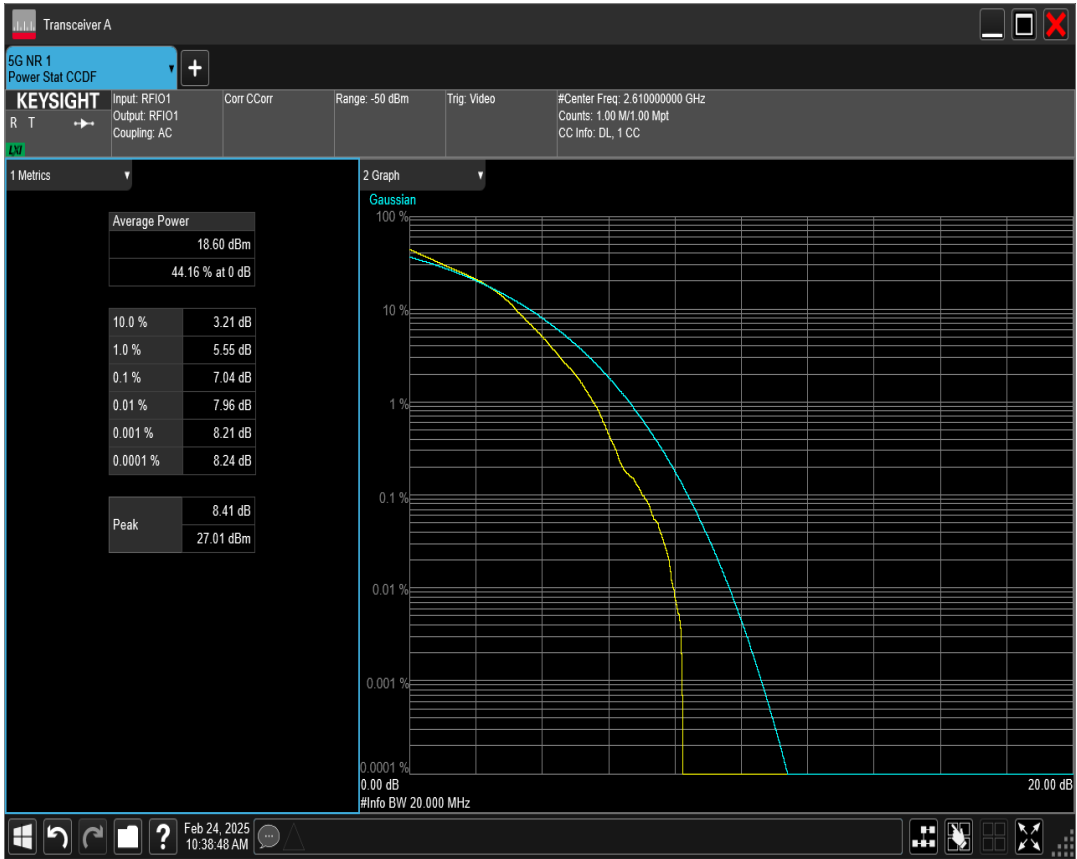


n38 SCS=30kHz DFT_QAM256 BW=15MHz Channel=515500 RB=36@0

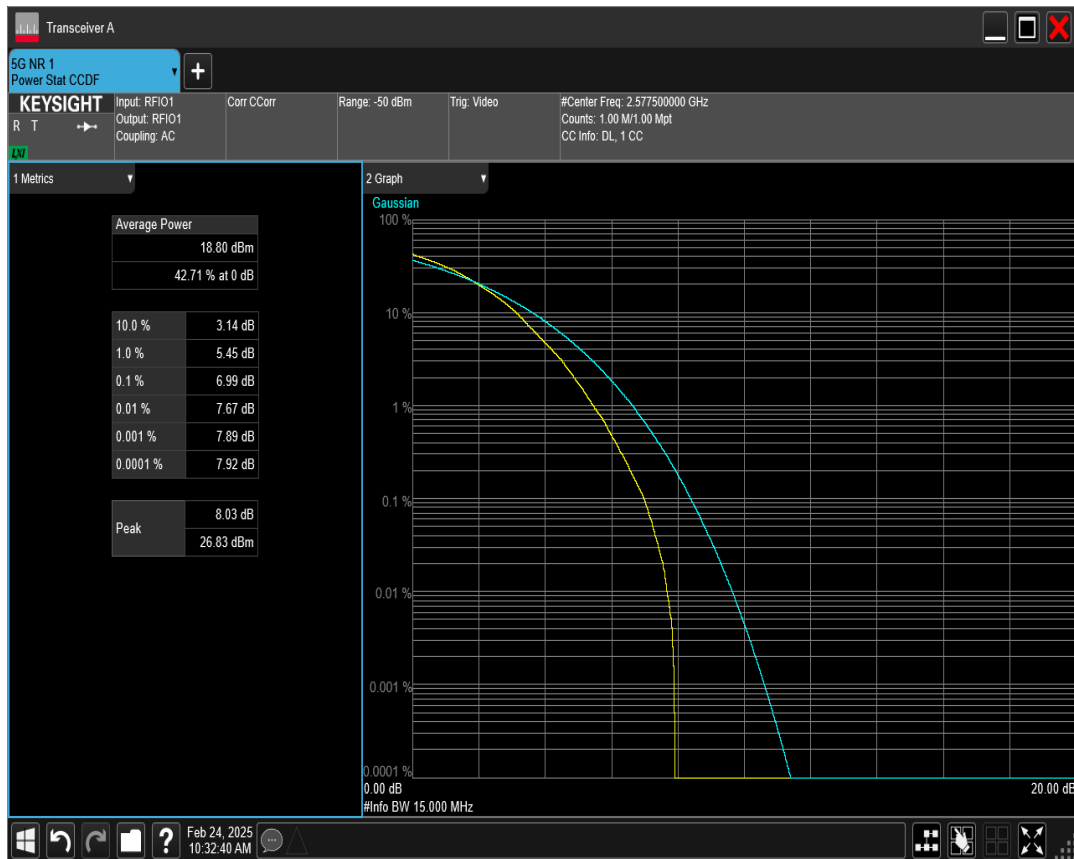


n38 SCS=30kHz DFT_QAM256 BW=10MHz Channel=523000 RB=24@0

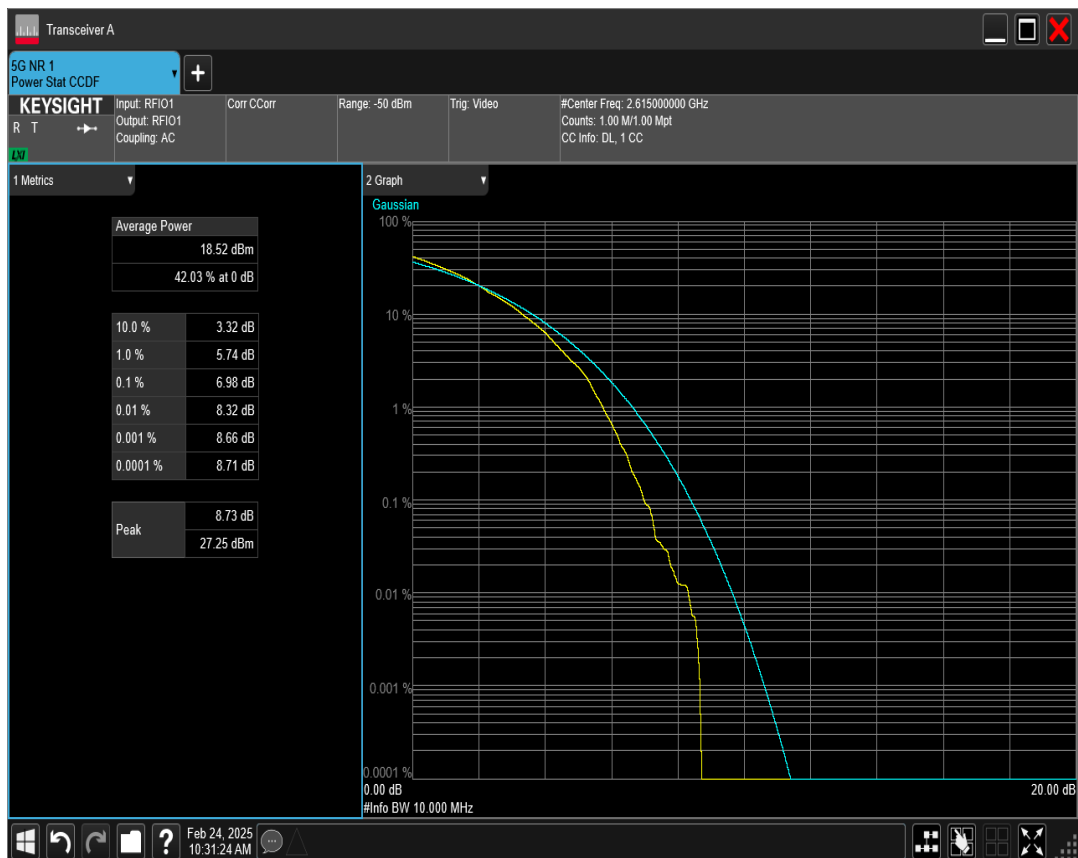


n38 SCS=30kHz DFT_QAM256 BW=10MHz Channel=519000 RB=24@0

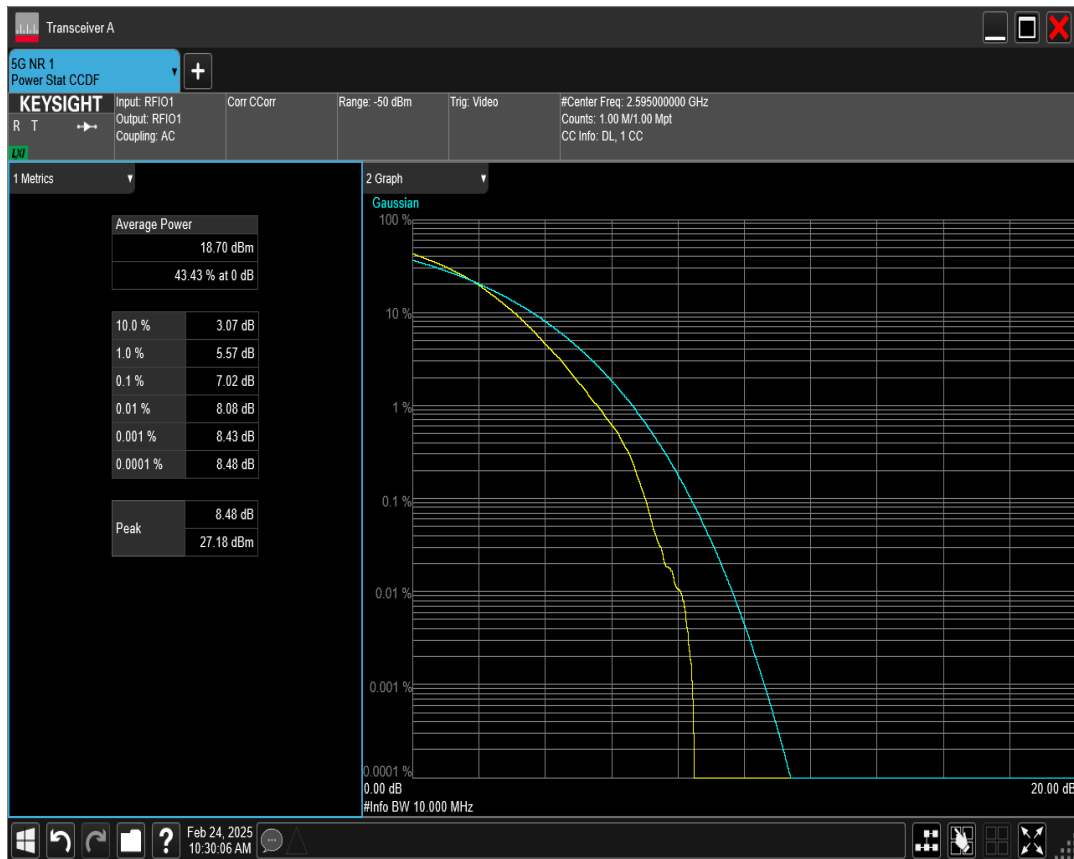


n38 SCS=30kHz DFT_QAM256 BW=20MHz Channel=516000 RB=50@0

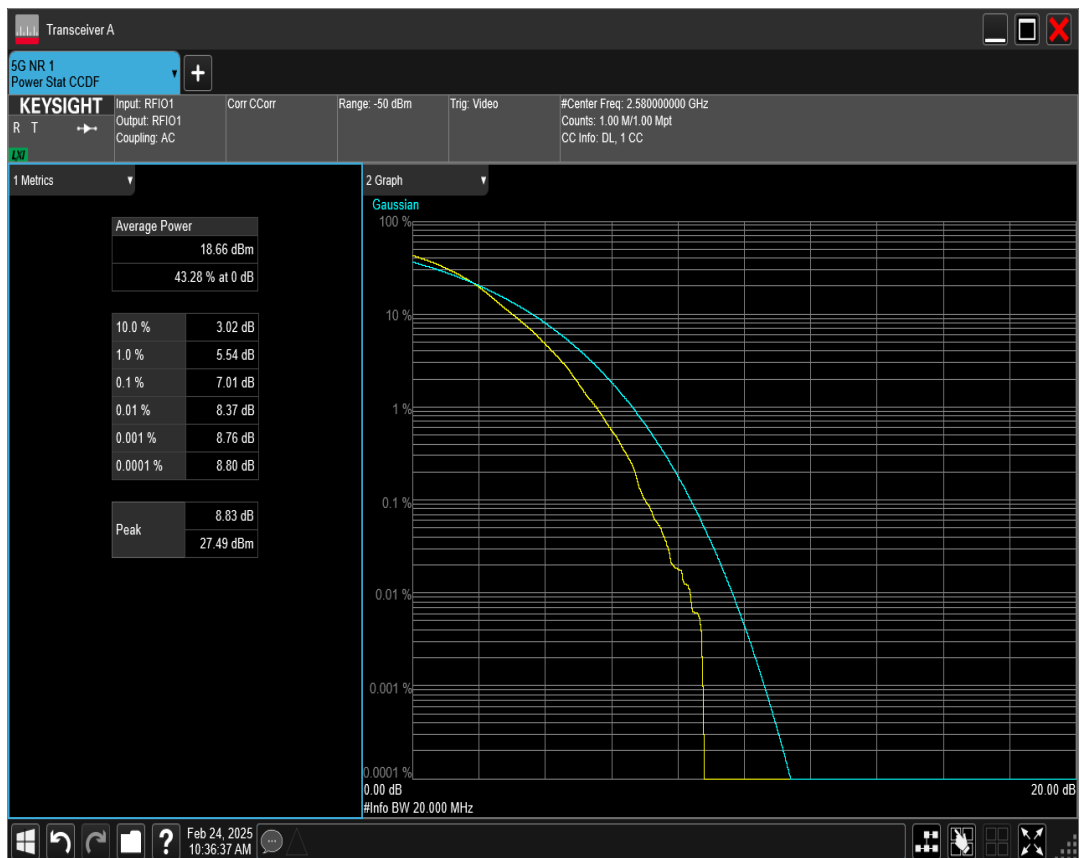


n38 SCS=30kHz DFT_QAM256 BW=15MHz Channel=522500 RB=36@0

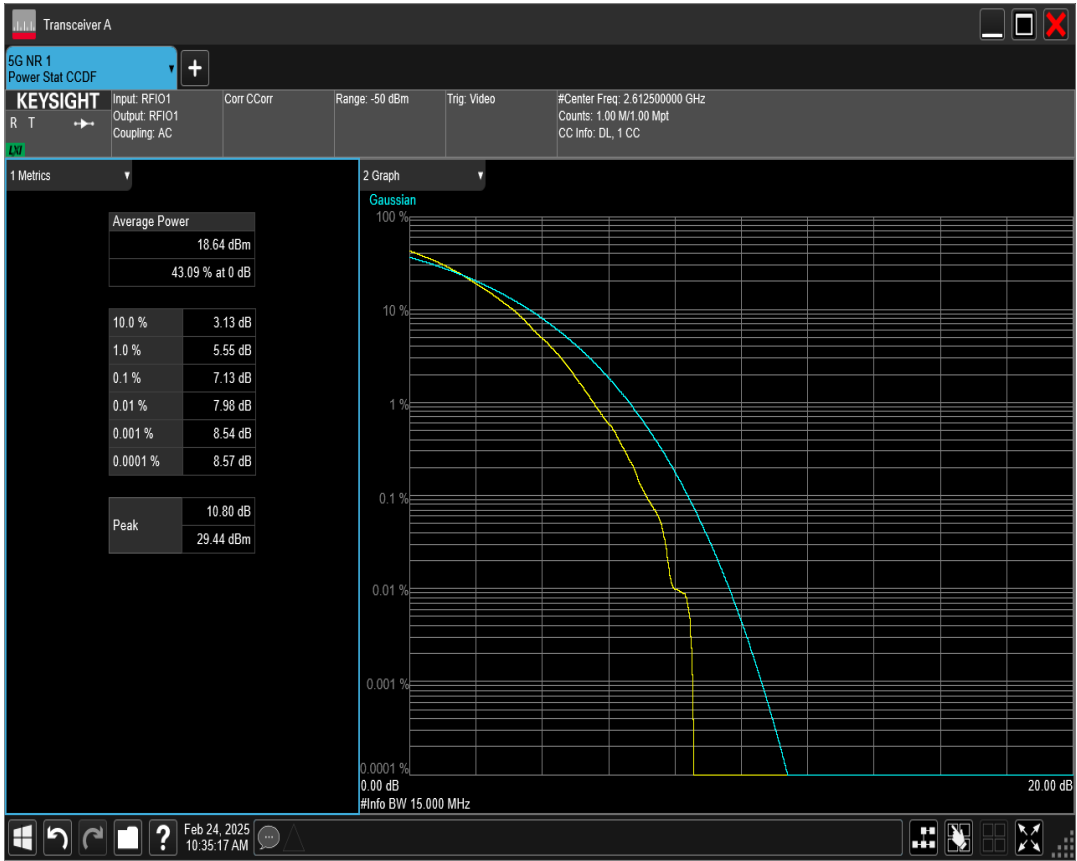


n38 SCS=30kHz DFT_QAM256 BW=15MHz Channel=519000 RB=36@0

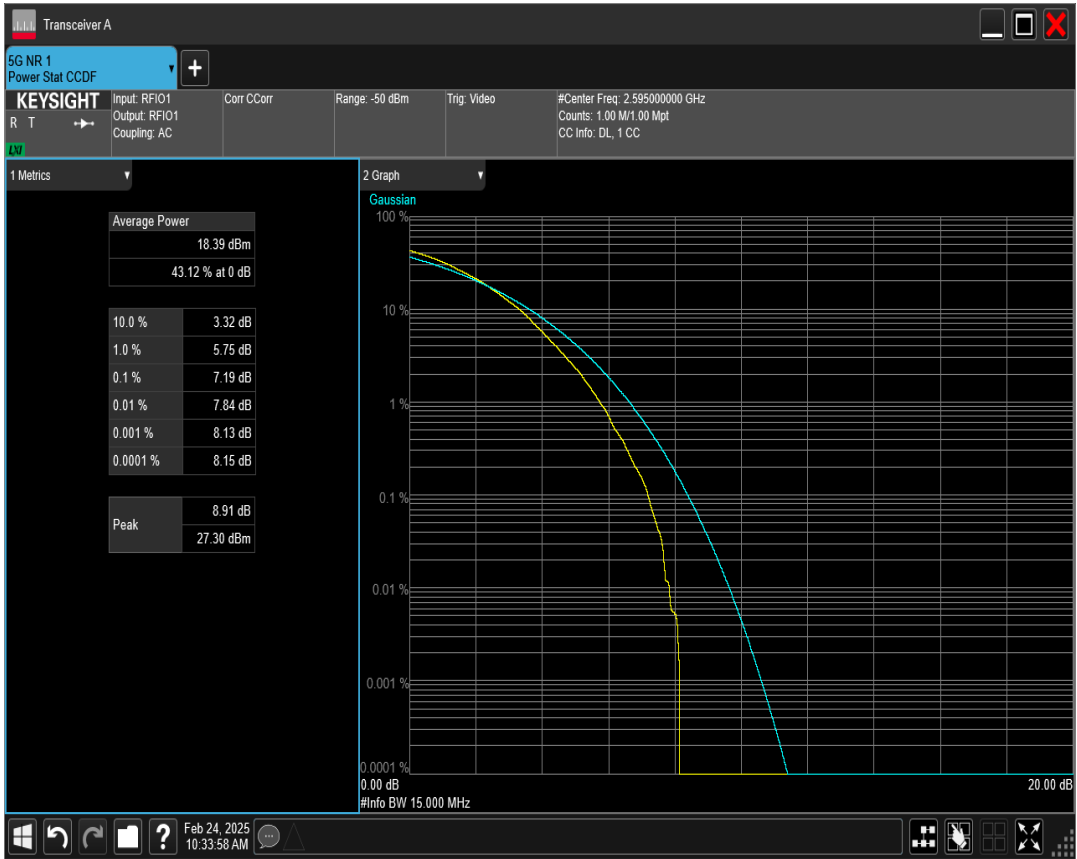


n38 SCS=30kHz DFT_QAM256 BW=20MHz Channel=519000 RB=50@0

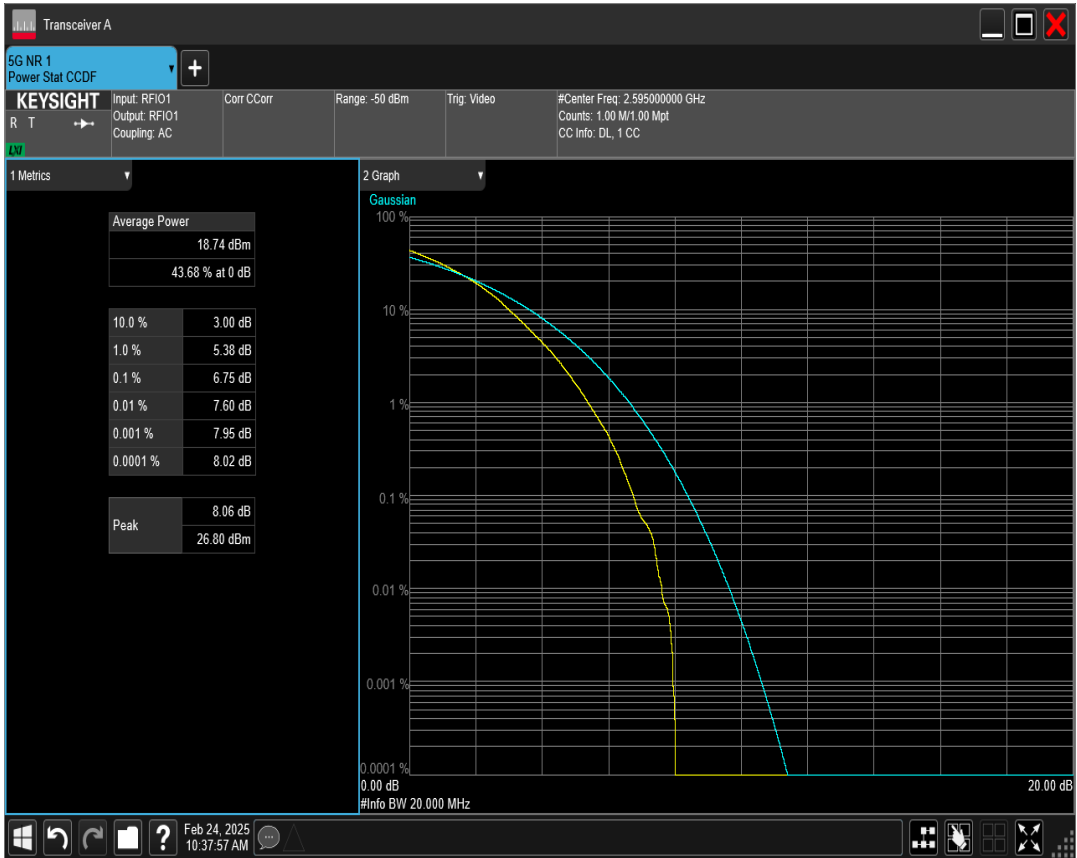


n38 SCS=30kHz DFT_QAM64 BW=10MHz Channel=515000 RB=24@0

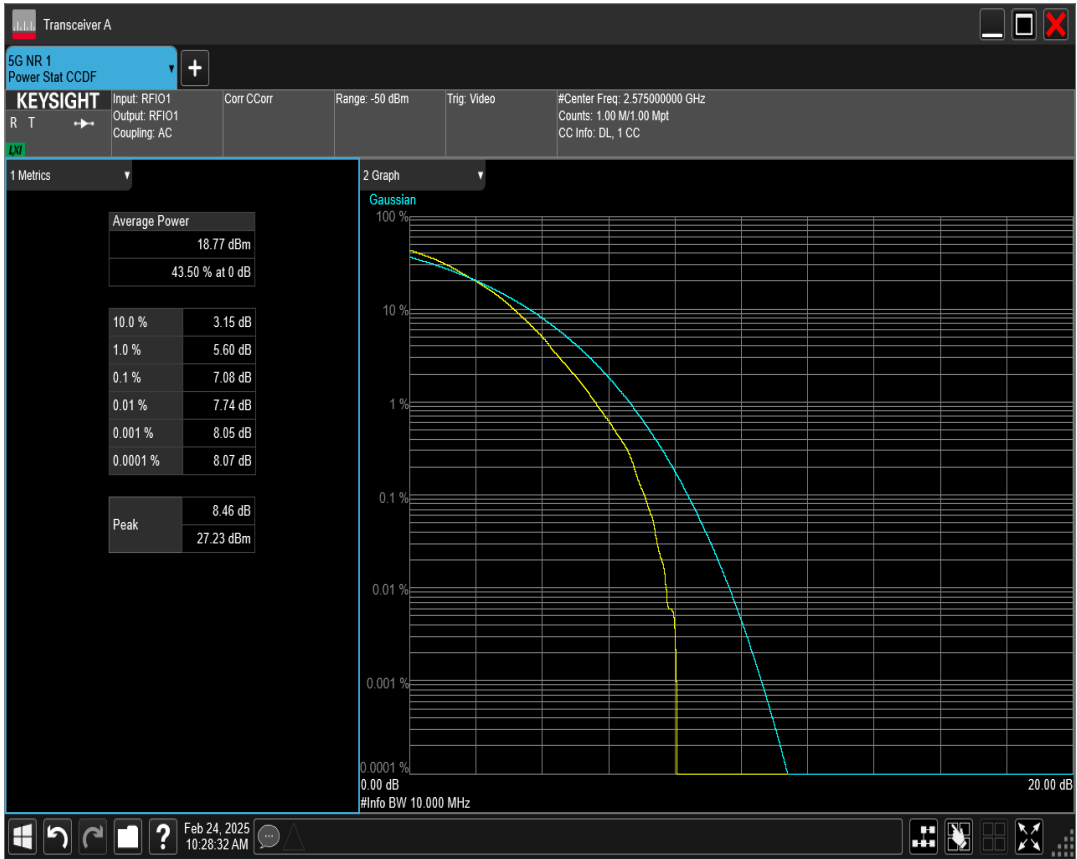


n38 SCS=30kHz DFT_QAM256 BW=20MHz Channel=522000 RB=50@0

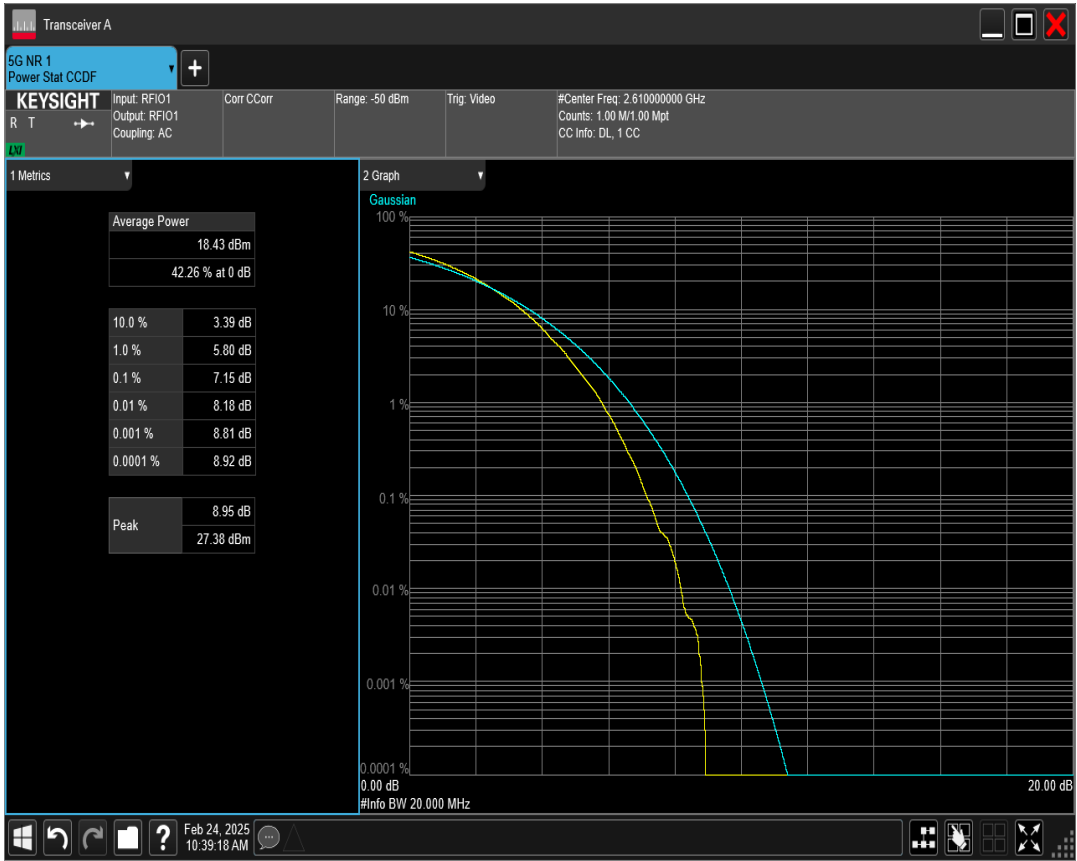


n38 SCS=30kHz DFT_QAM64 BW=10MHz Channel=519000 RB=24@0

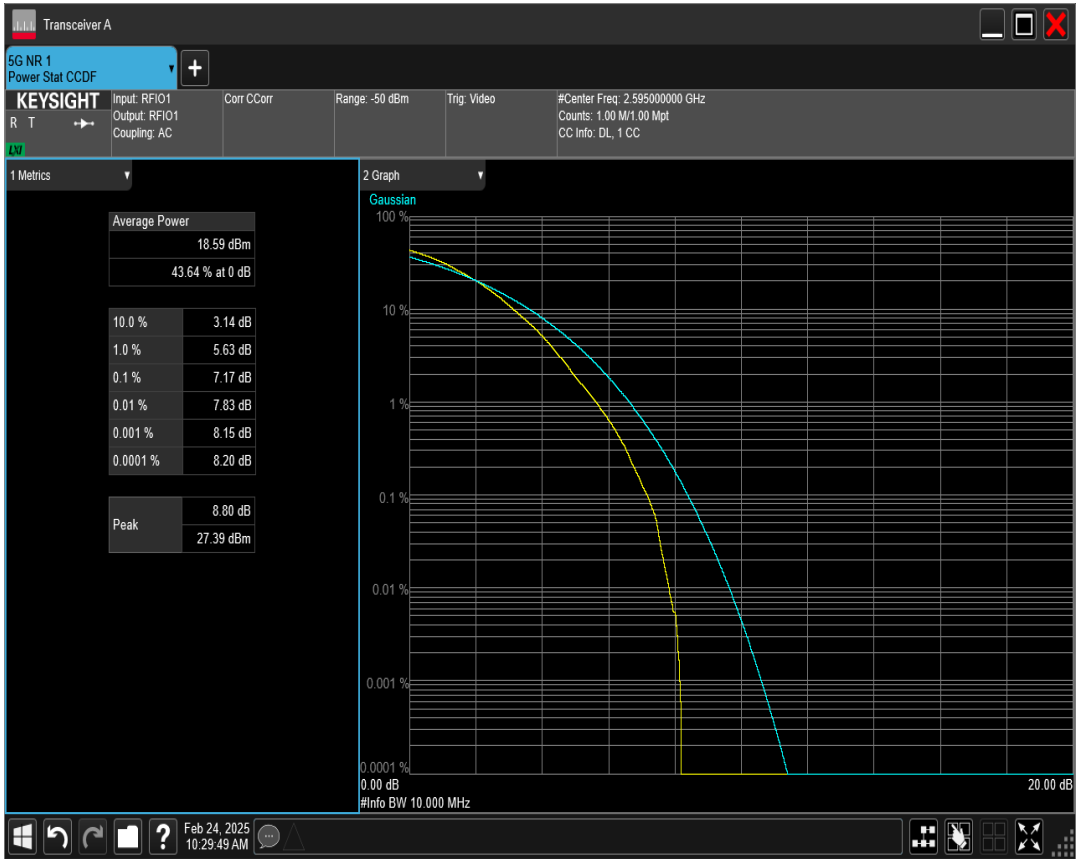


n38 SCS=30kHz DFT_QAM64 BW=15MHz Channel=515500 RB=36@0

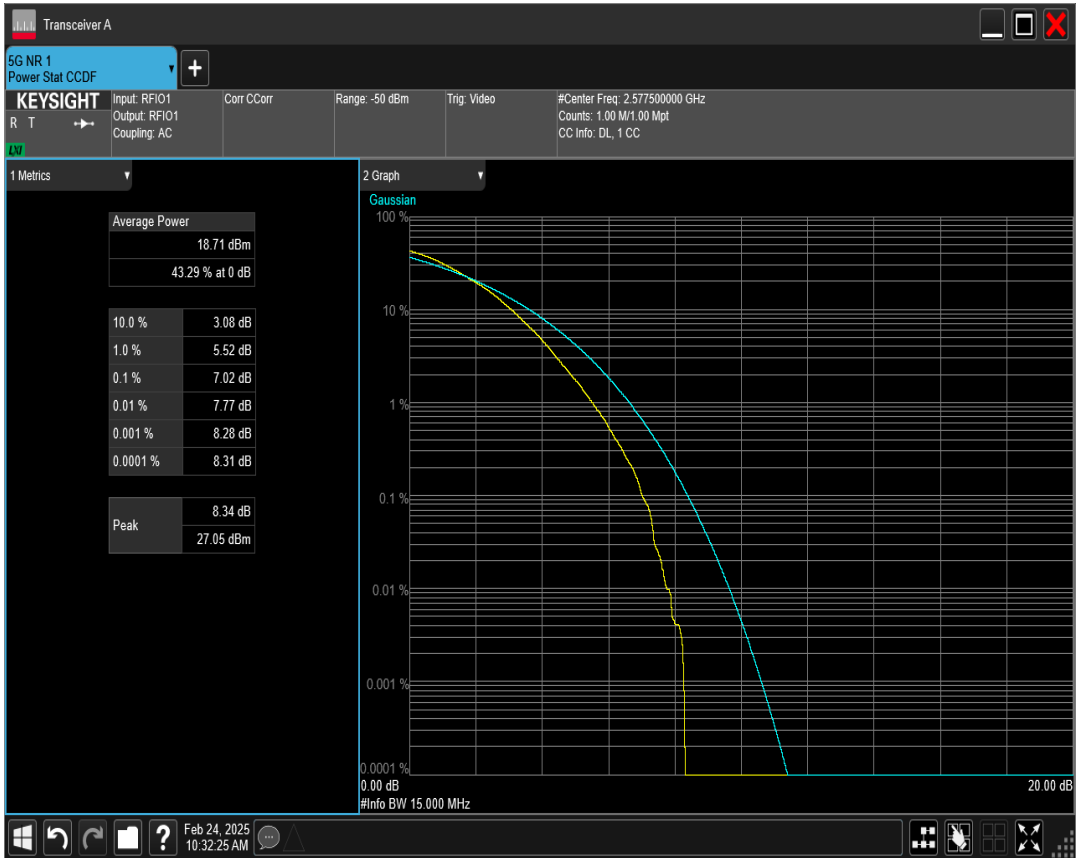


n38 SCS=30kHz DFT_QAM64 BW=10MHz Channel=523000 RB=24@0

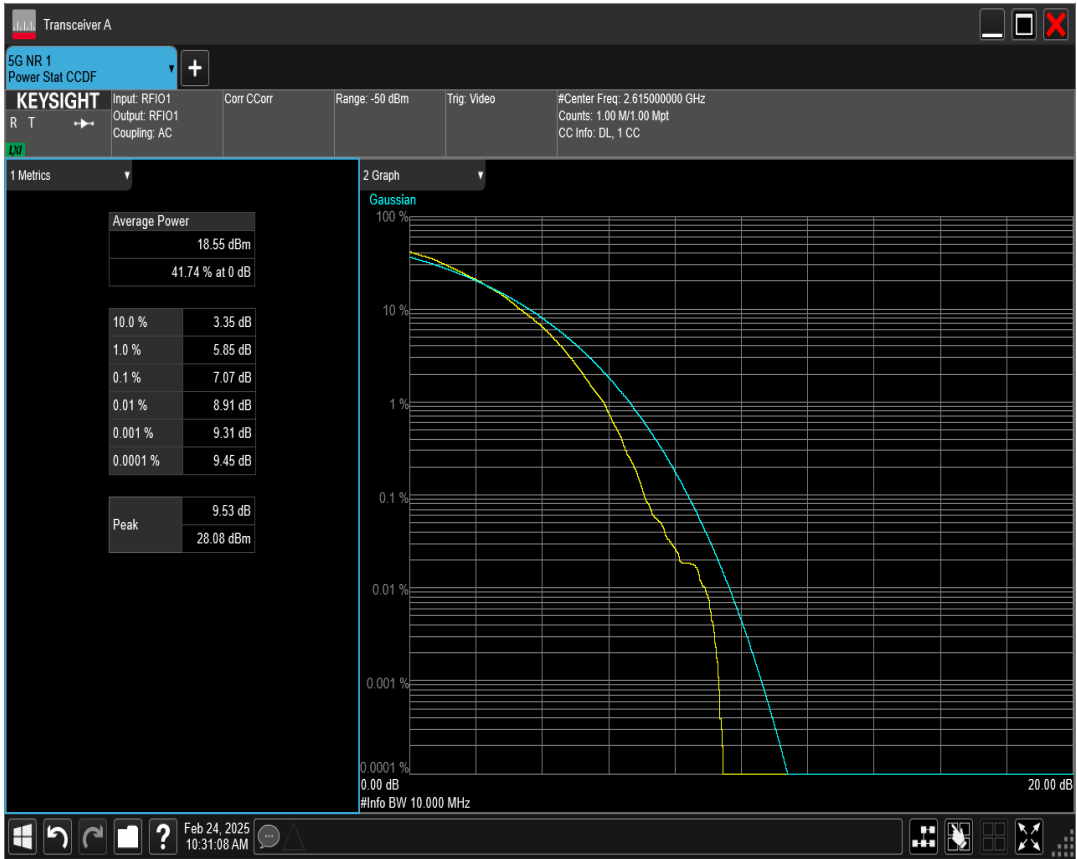


n38 SCS=30kHz DFT_QAM64 BW=15MHz Channel=519000 RB=36@0

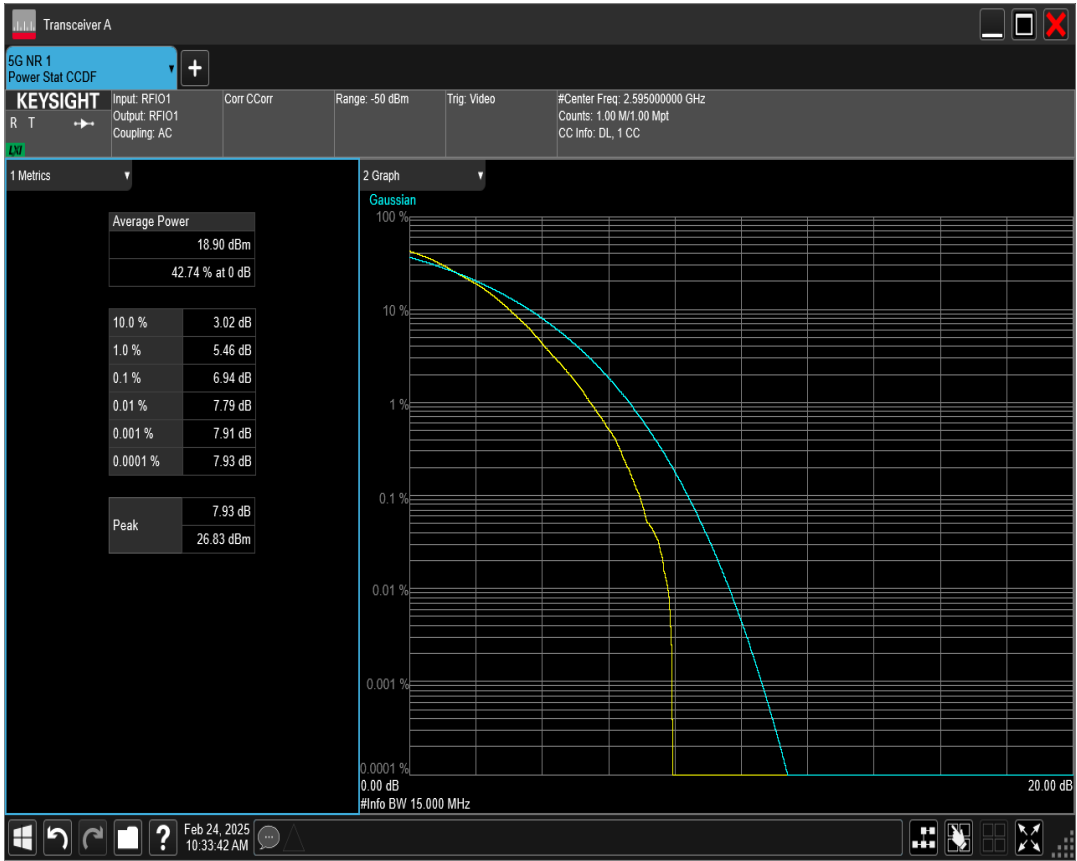


n38 SCS=30kHz DFT_QAM64 BW=20MHz Channel=519000 RB=50@0

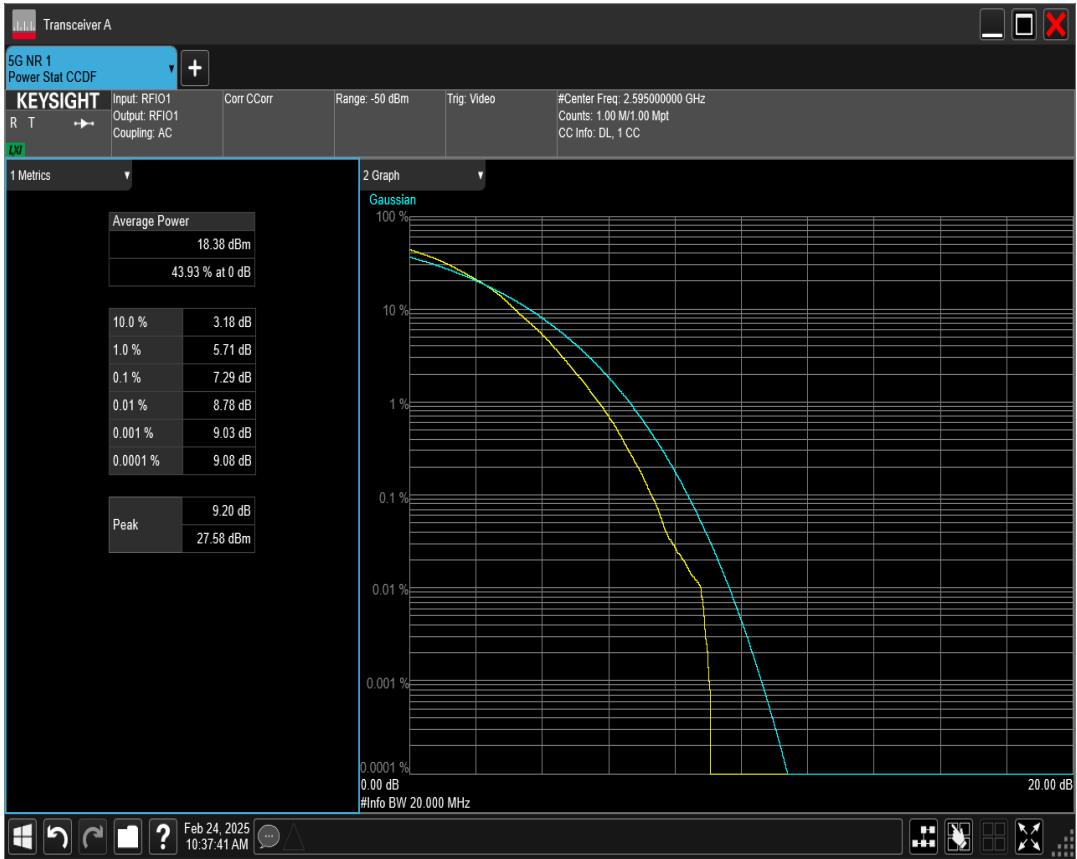


n38 SCS=30kHz DFT_QAM64 BW=20MHz Channel=522000 RB=50@0

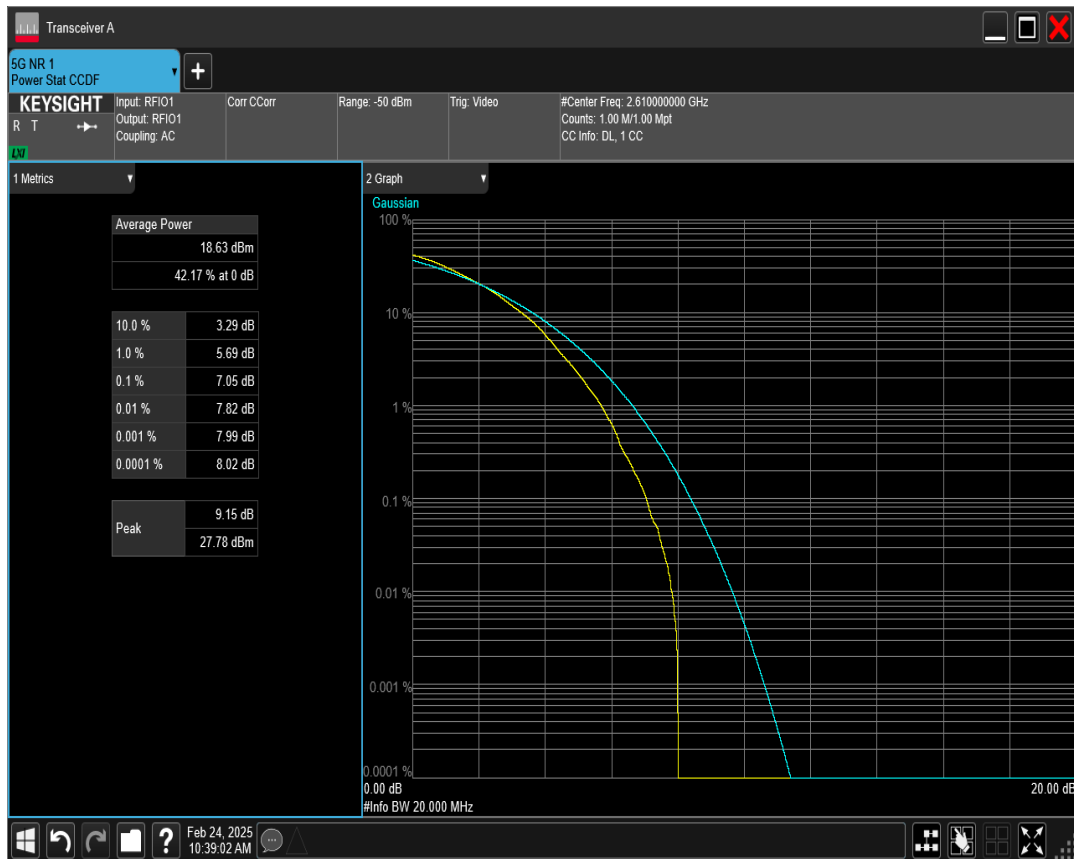


n38 SCS=30kHz DFT_QAM64 BW=15MHz Channel=522500 RB=36@0

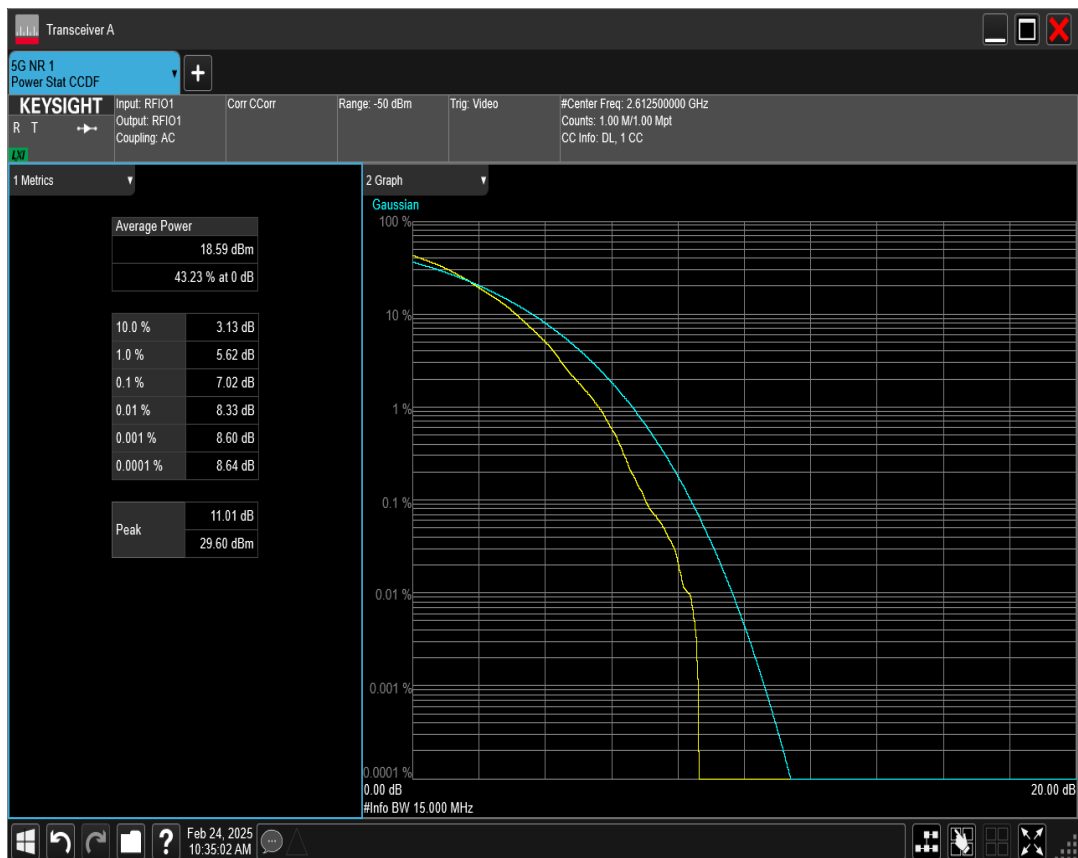


n38 SCS=30kHz DFT_QAM64 BW=20MHz Channel=516000 RB=50@0

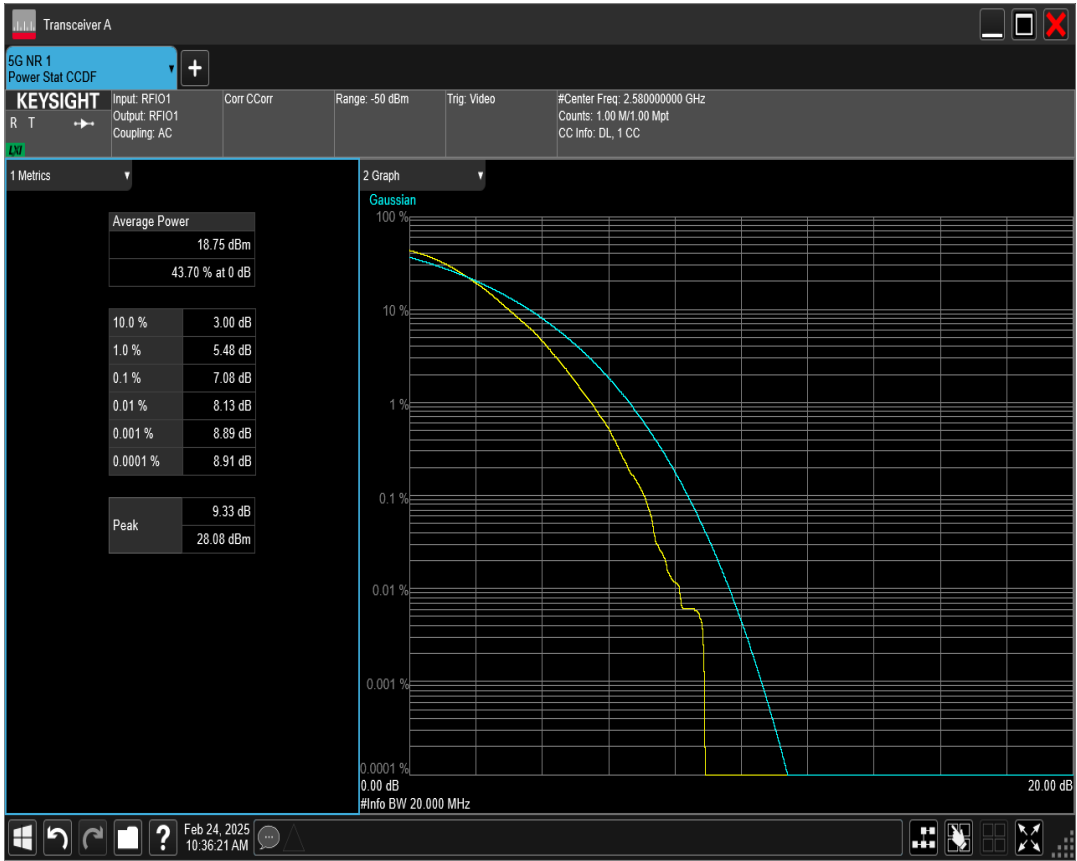


n38 SCS=30kHz DFT_QPSK BW=10MHz Channel=515000 RB=24@0

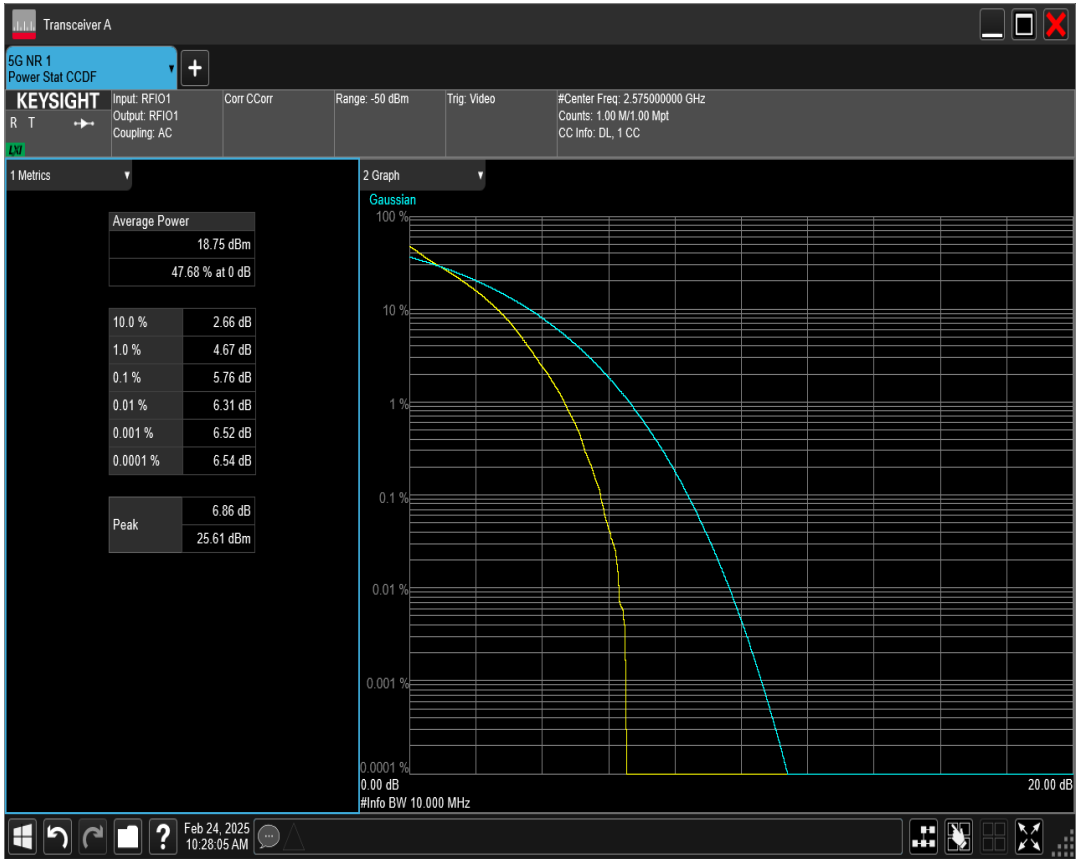


n38 SCS=30kHz DFT_QPSK BW=15MHz Channel=515500 RB=36@0

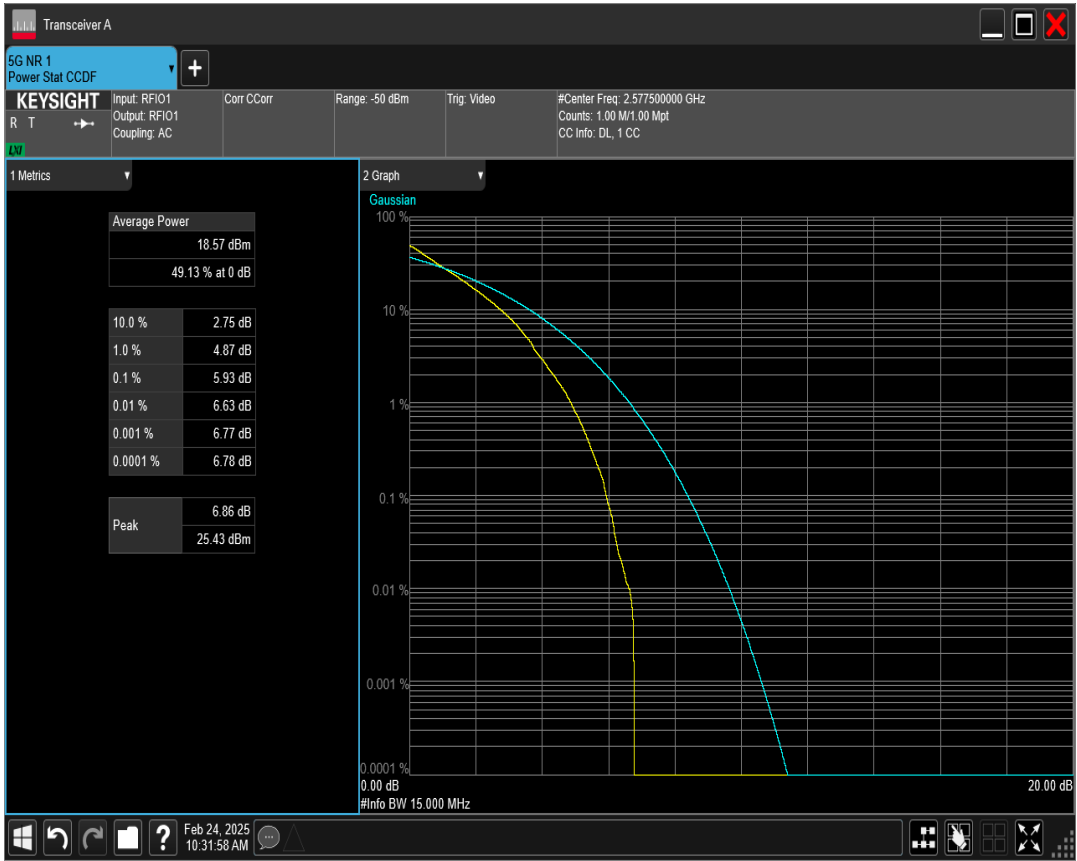


n38 SCS=30kHz DFT_QPSK BW=10MHz Channel=523000 RB=24@0

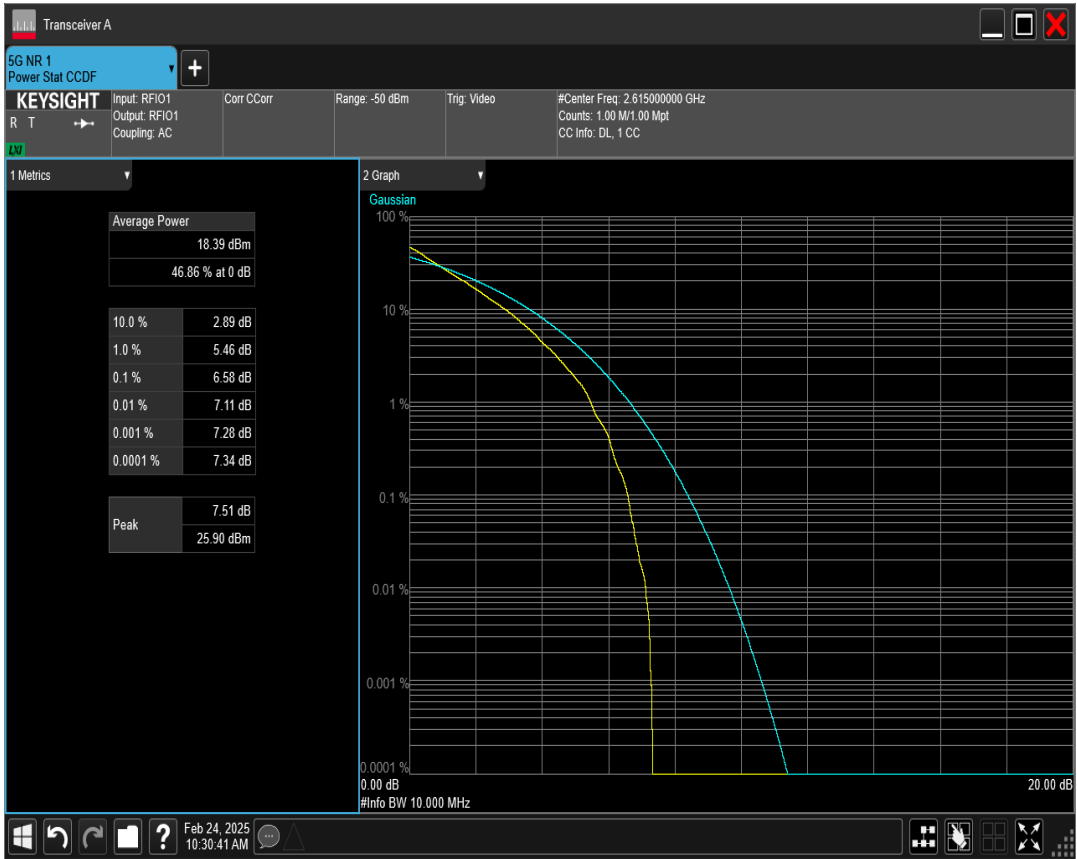


n38 SCS=30kHz DFT_QPSK BW=10MHz Channel=519000 RB=24@0

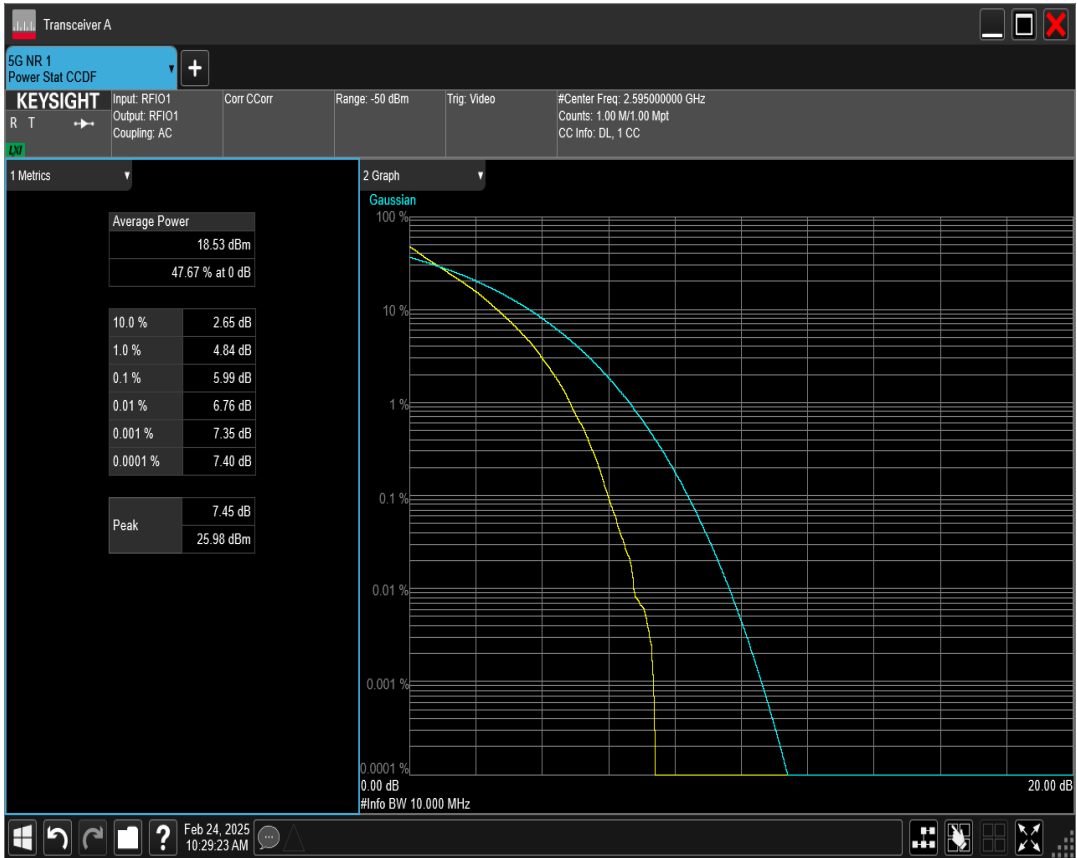


n38 SCS=30kHz DFT_QPSK BW=15MHz Channel=519000 RB=36@0

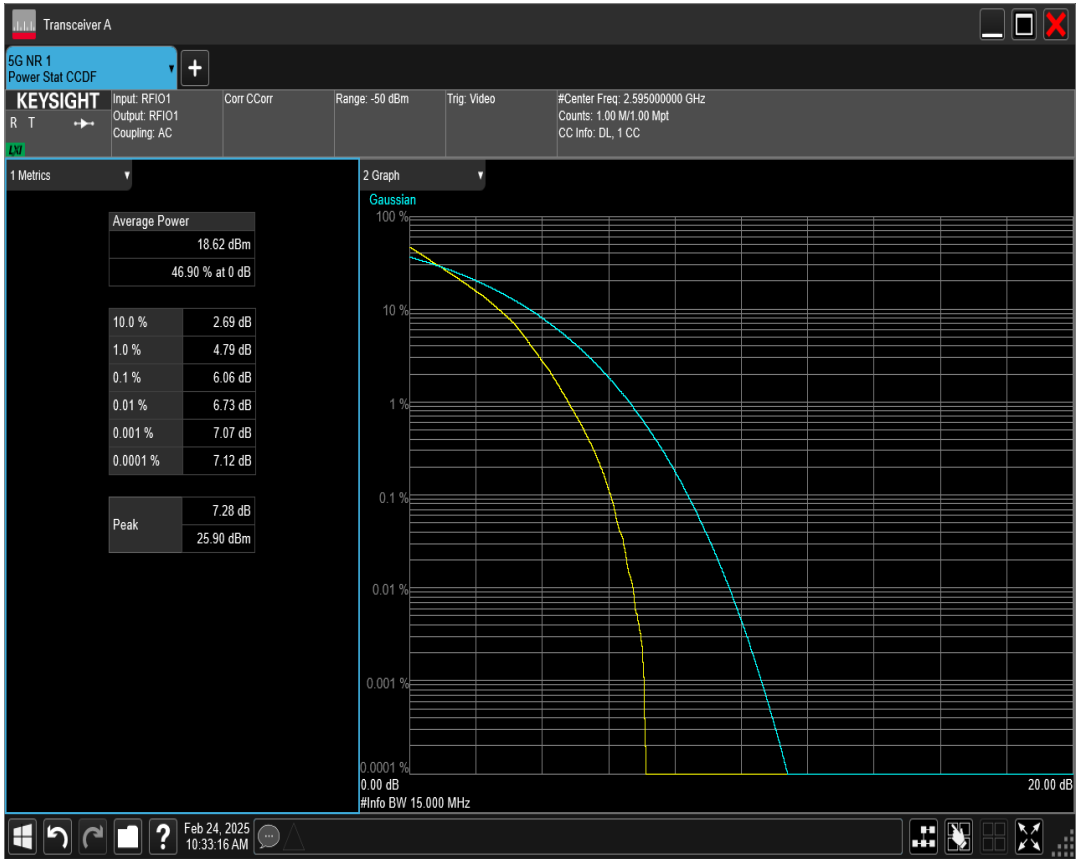


n38 SCS=30kHz DFT_QPSK BW=20MHz Channel=519000 RB=50@0

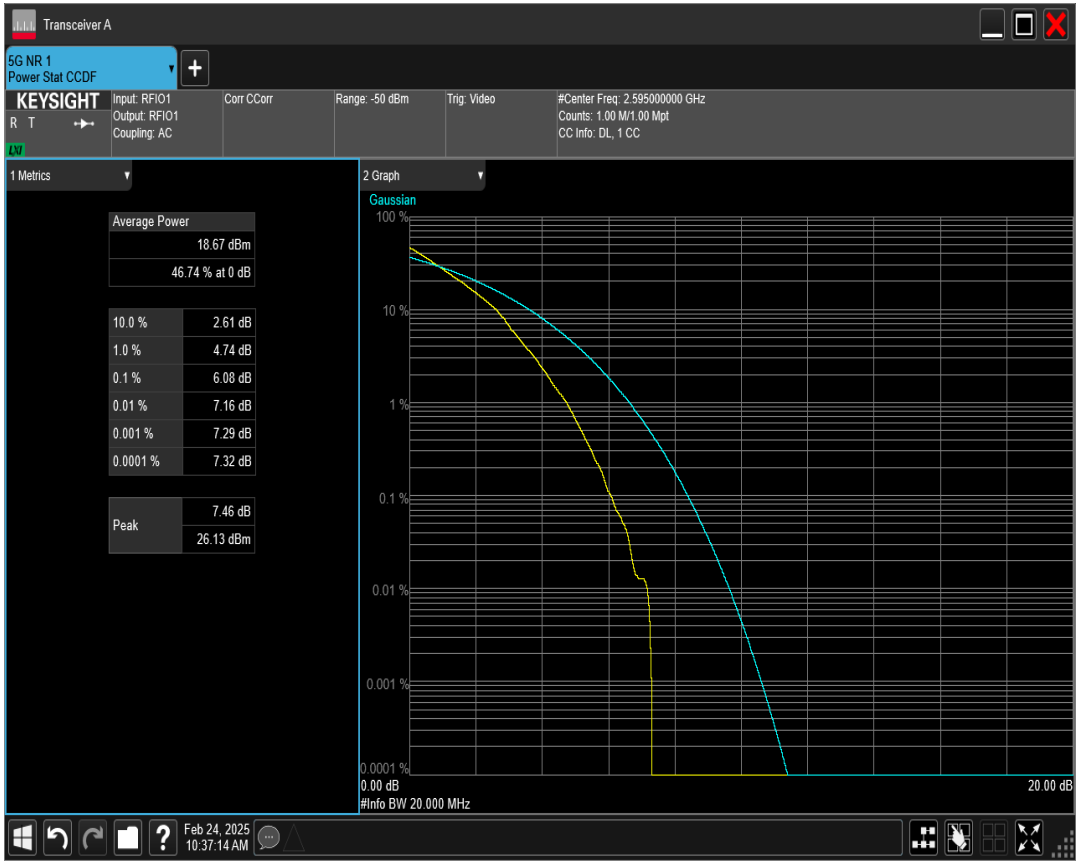


n38 SCS=30kHz DFT_QPSK BW=20MHz Channel=516000 RB=50@0

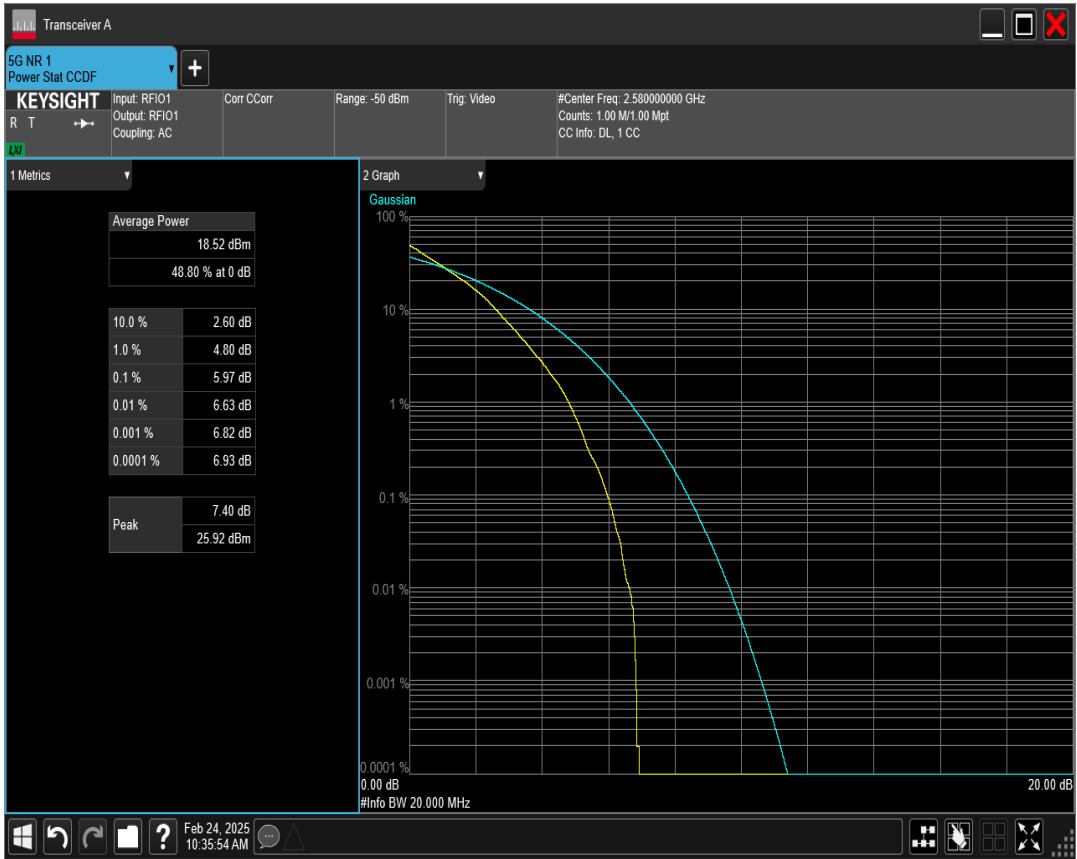

n38 SCS=30kHz DFT_QPSK BW=15MHz Channel=522500 RB=36@0

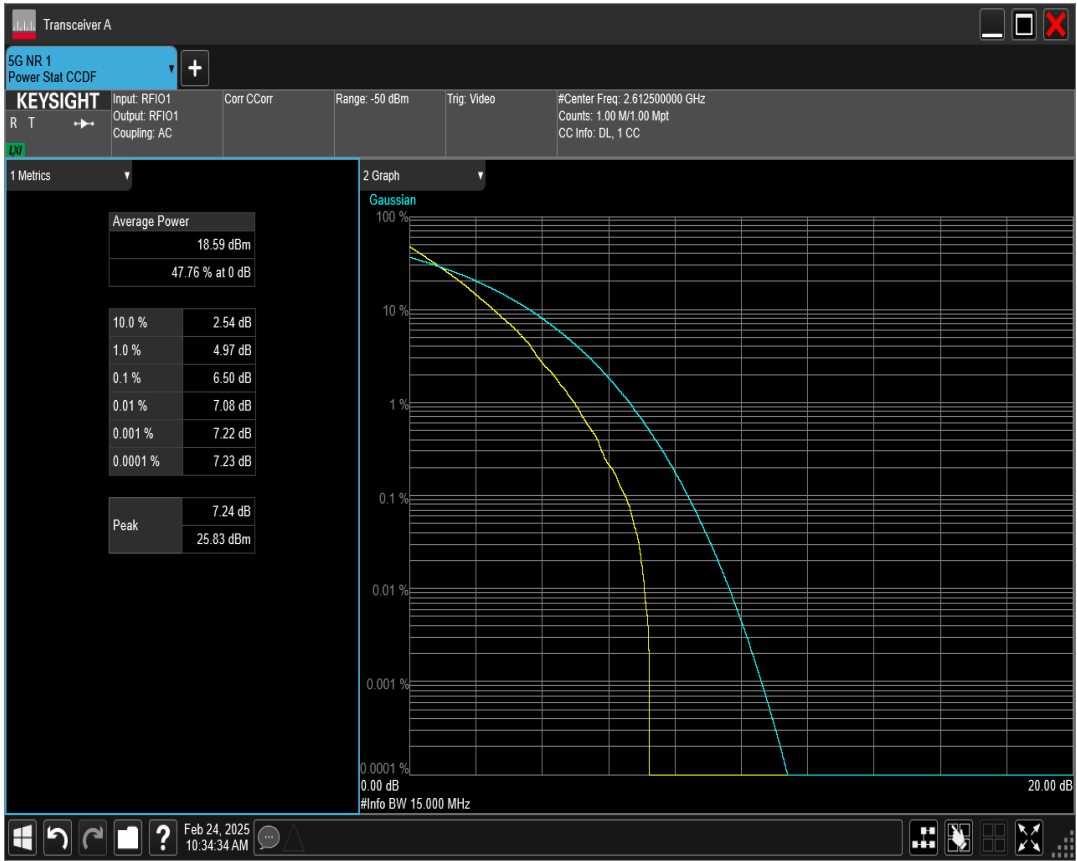

n38 SCS=30kHz DFT_QPSK BW=20MHz Channel=522000 RB=50@0

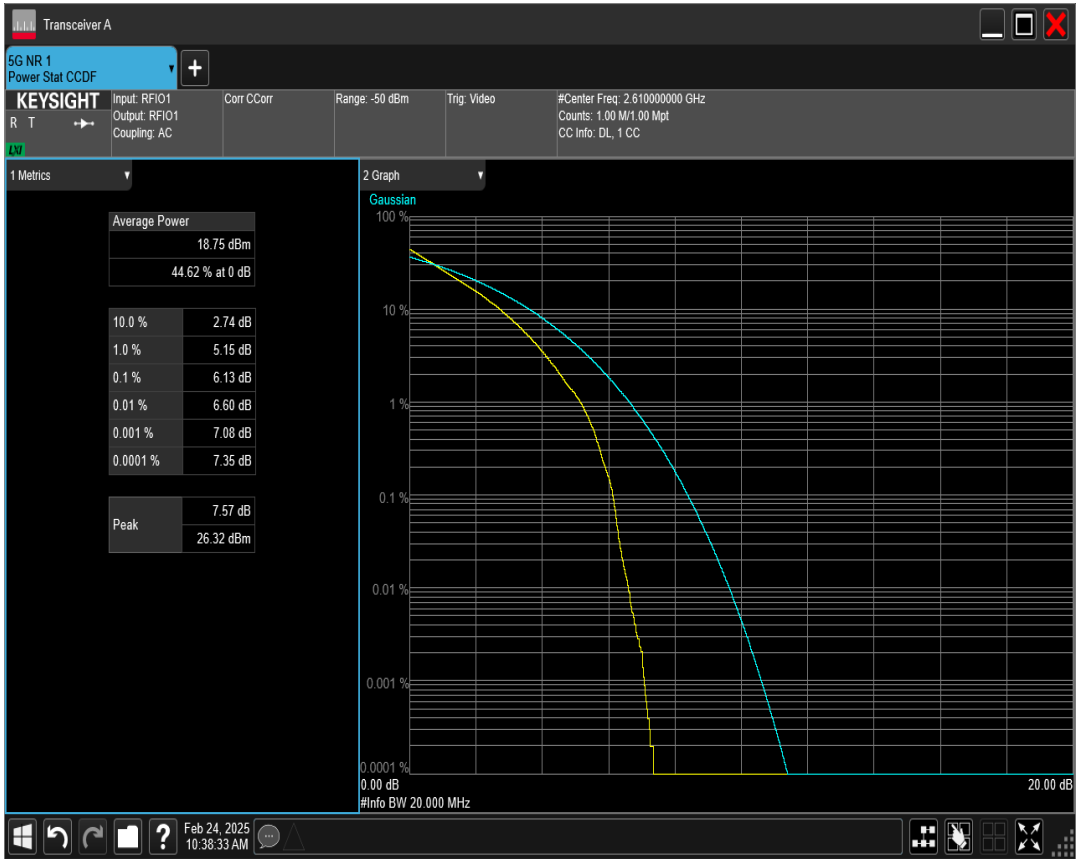

4 Occupied bandwidth for EN-DC

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
n38	30	10	519000	24@0	DFT_BPSK	8.550	8.880	PASS
n38	30	10	519000	24@0	DFT_QPSK	8.580	9.050	PASS
n38	30	10	519000	24@0	DFT_QAM16	8.550	8.900	PASS
n38	30	10	519000	24@0	DFT_QAM64	8.580	8.940	PASS
n38	30	10	519000	24@0	DFT_QAM256	8.570	8.850	PASS
n38	30	15	519000	36@0	DFT_BPSK	13.440	13.290	PASS
n38	30	15	519000	36@0	DFT_QPSK	13.490	13.310	PASS
n38	30	15	519000	36@0	DFT_QAM16	13.520	13.300	PASS
n38	30	15	519000	36@0	DFT_QAM64	13.470	13.270	PASS
n38	30	15	519000	36@0	DFT_QAM256	13.420	13.240	PASS
n38	30	20	519000	50@0	DFT_BPSK	18.090	18.330	PASS
n38	30	20	519000	50@0	DFT_QPSK	18.110	18.240	PASS
n38	30	20	519000	50@0	DFT_QAM16	18.150	18.270	PASS
n38	30	20	519000	50@0	DFT_QAM64	18.080	18.270	PASS
n38	30	20	519000	50@0	DFT_QAM256	18.090	18.270	PASS

n38 SCS=30kHz DFT_BPSK BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_BPSK BW=15MHz Channel=519000 RB=36@0



n38 SCS=30kHz DFT_BPSK BW=20MHz Channel=519000 RB=50@0



n38 SCS=30kHz DFT_QAM16 BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_QAM16 BW=15MHz Channel=519000 RB=36@0



n38 SCS=30kHz DFT_QAM256 BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_QAM16 BW=20MHz Channel=519000 RB=50@0



n38 SCS=30kHz DFT_QAM64 BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_QAM256 BW=20MHz Channel=519000 RB=50@0



n38 SCS=30kHz DFT_QAM256 BW=15MHz Channel=519000 RB=36@0



n38 SCS=30kHz DFT_QAM64 BW=15MHz Channel=519000 RB=36@0



n38 SCS=30kHz DFT_QAM64 BW=20MHz Channel=519000 RB=50@0



n38 SCS=30kHz DFT_QPSK BW=10MHz Channel=519000 RB=24@0



n38 SCS=30kHz DFT_QPSK BW=15MHz Channel=519000 RB=36@0




n38 SCS=30kHz DFT_QPSK BW=20MHz Channel=519000 RB=50@0




5 Band edge for EN-DC

<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
n38	30	10	515000	24@0	CP_QPSK	2559.42	-38.91	-25	PASS
n38	30	10	515000	1@0	CP_QPSK	2558.00	-39.92	-25	PASS
n38	30	10	515000	1@23	CP_QPSK	2559.24	-40.00	-25	PASS
n38	30	10	523000	24@0	CP_QPSK	2630.52	-38.96	-25	PASS
n38	30	10	523000	1@0	CP_QPSK	2630.31	-39.46	-25	PASS
n38	30	10	523000	1@23	CP_QPSK	2632.14	-39.48	-25	PASS
n38	30	15	515500	38@0	CP_QPSK	2553.61	-39.65	-25	PASS
n38	30	15	515500	1@0	CP_QPSK	2554.67	-39.60	-25	PASS
n38	30	15	515500	1@37	CP_QPSK	2551.73	-39.86	-25	PASS
n38	30	15	522500	38@0	CP_QPSK	2635.24	-39.41	-25	PASS
n38	30	15	522500	1@0	CP_QPSK	2635.97	-39.64	-25	PASS
n38	30	15	522500	1@37	CP_QPSK	2638.22	-39.59	-25	PASS
n38	30	20	516000	51@0	CP_QPSK	2549.85	-39.61	-25	PASS
n38	30	20	516000	1@0	CP_QPSK	2547.01	-39.86	-25	PASS
n38	30	20	516000	1@50	CP_QPSK	2547.21	-40.04	-25	PASS
n38	30	20	522000	51@0	CP_QPSK	2640.06	-39.55	-25	PASS
n38	30	20	522000	1@0	CP_QPSK	2643.72	-39.55	-25	PASS
n38	30	20	522000	1@50	CP_QPSK	2641.25	-39.69	-25	PASS


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=1@0

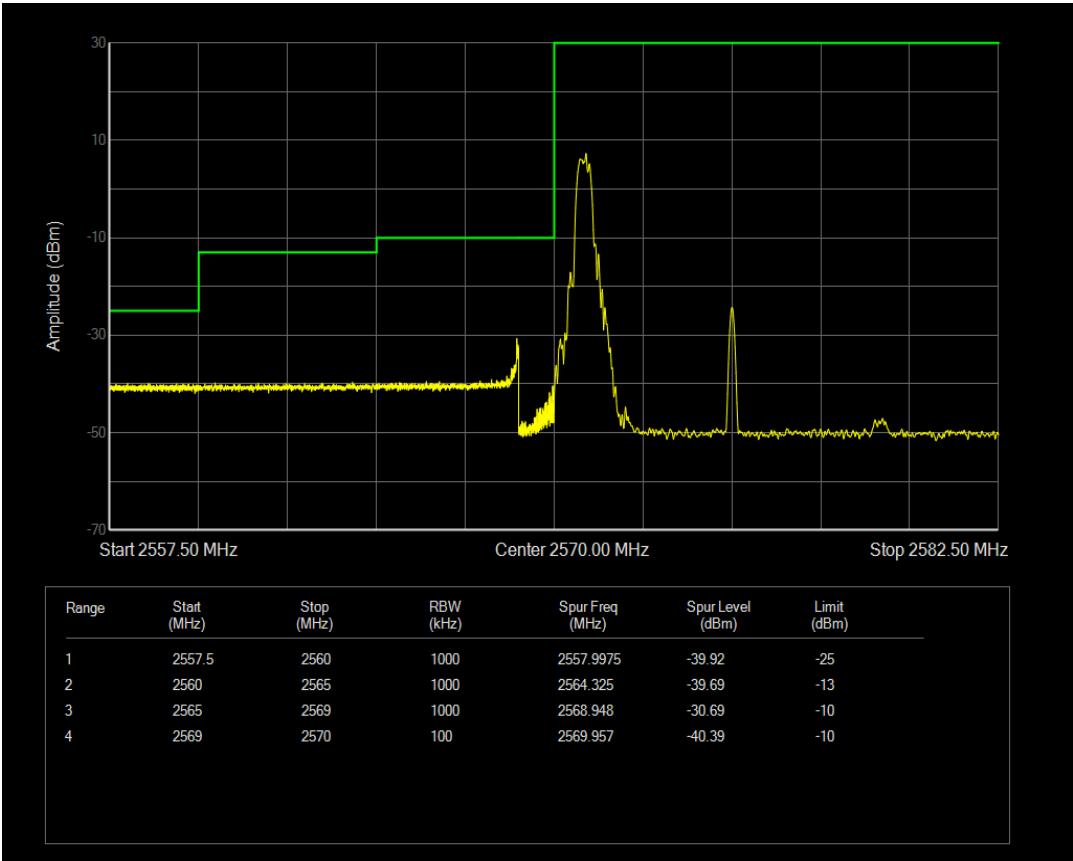


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=24@0

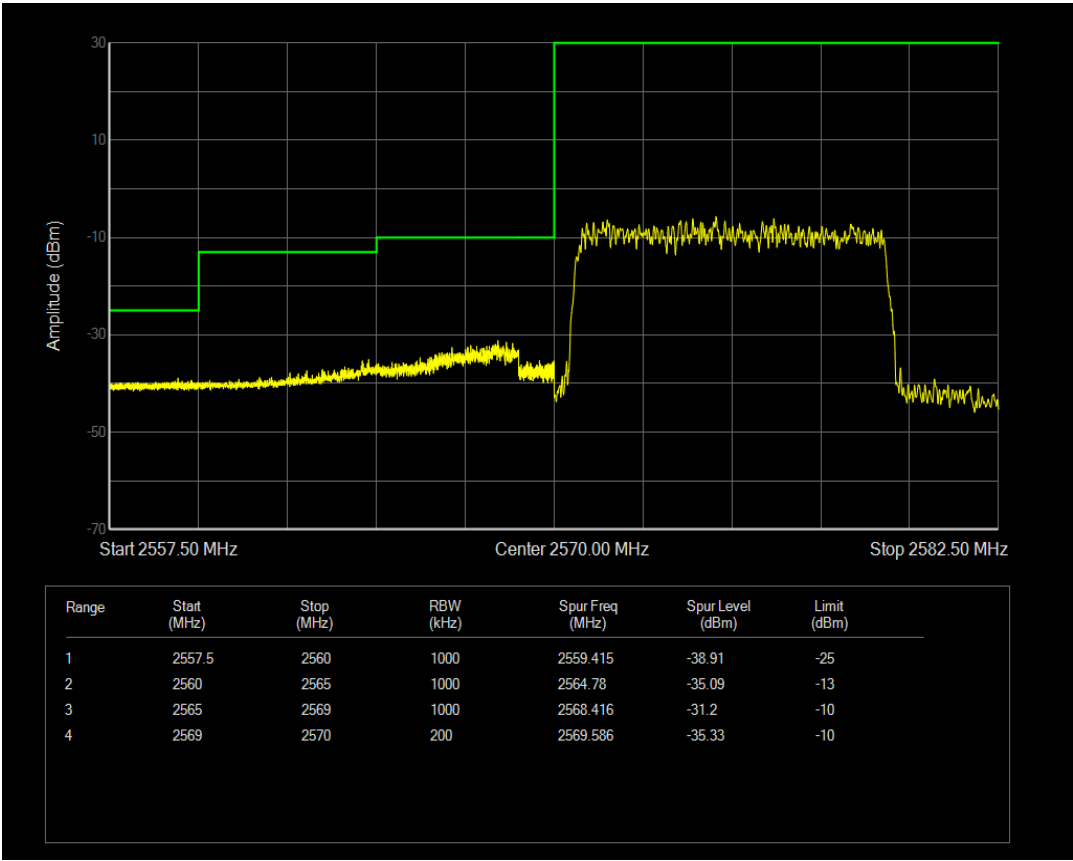


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=1@23

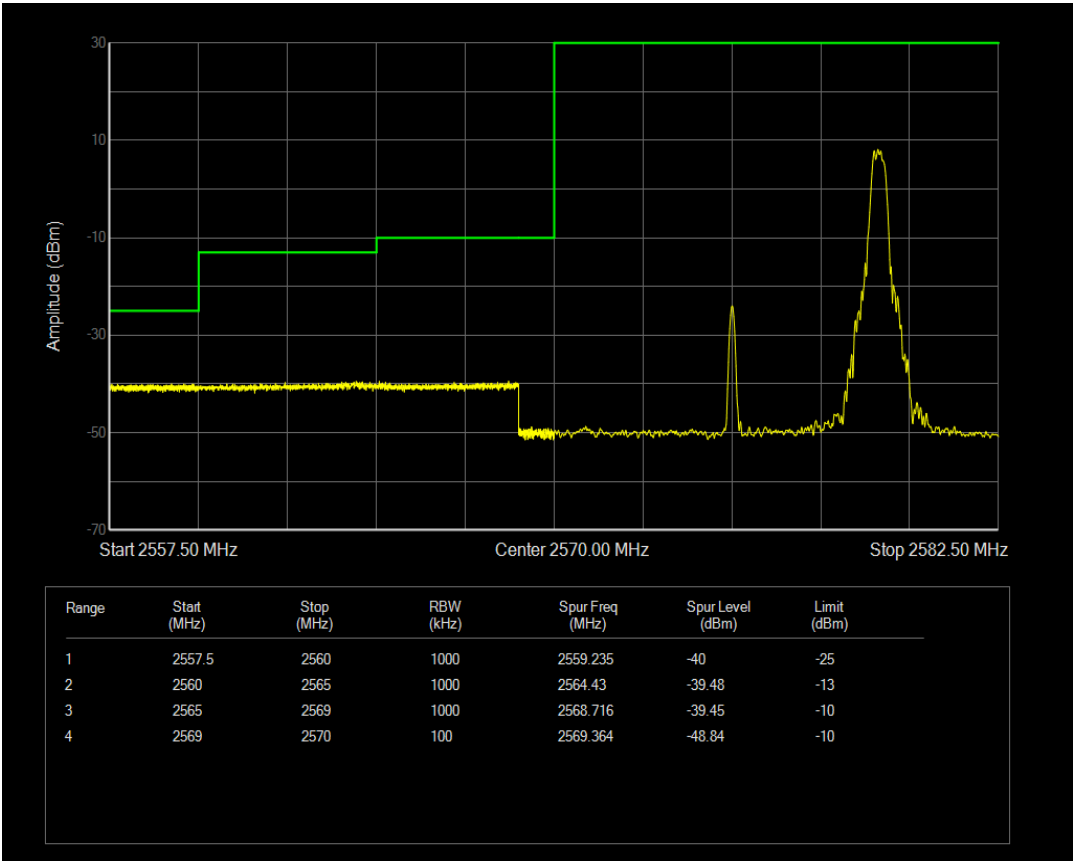


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=1@23

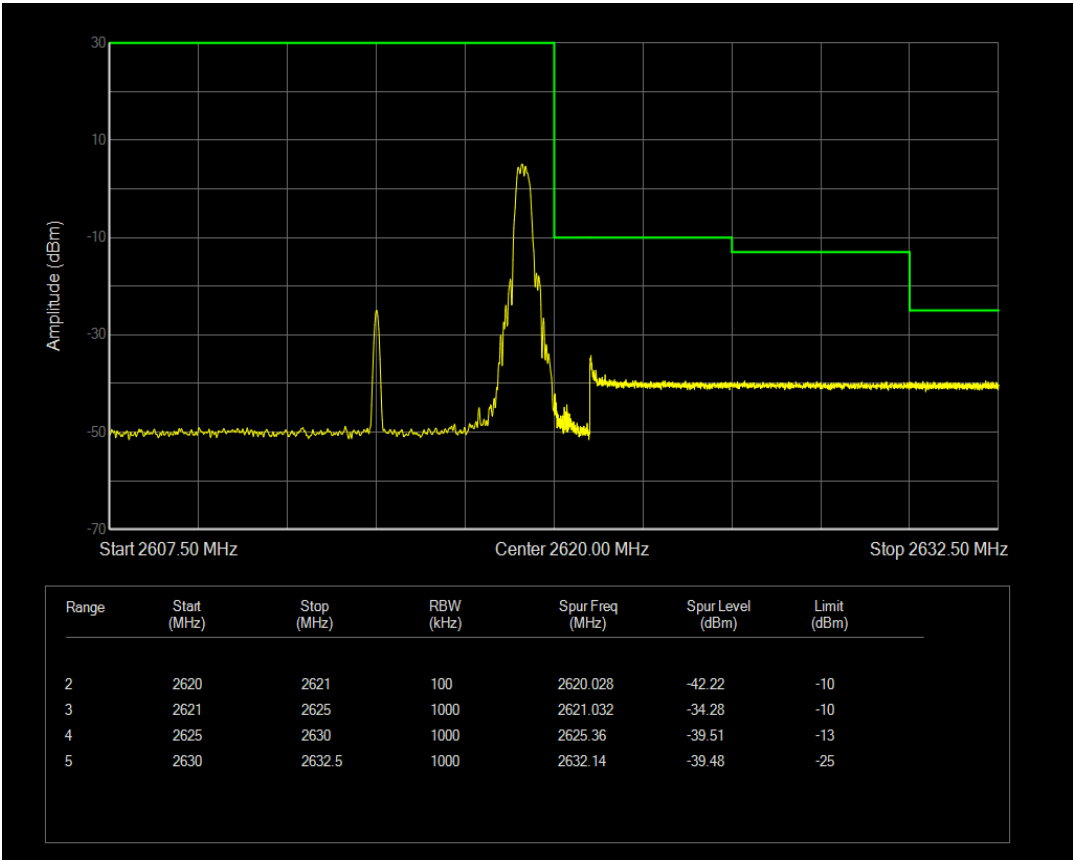


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=1@0

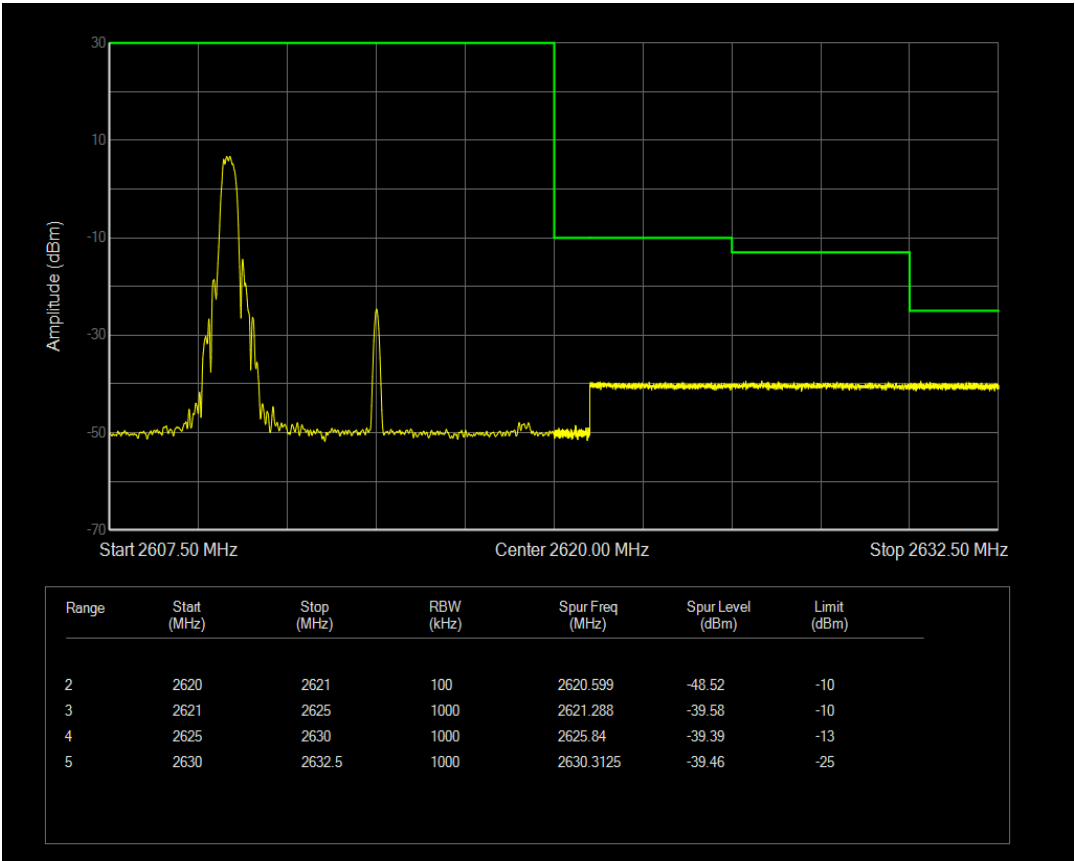


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=38@0

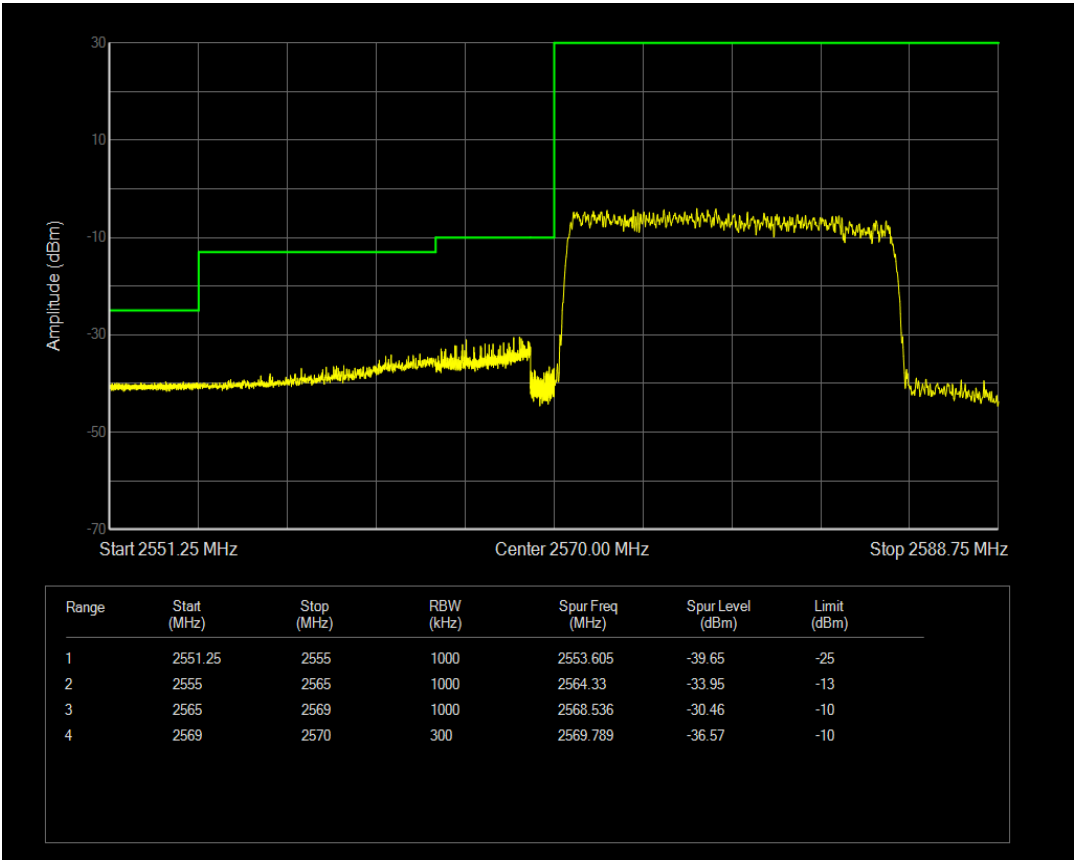


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=1@0

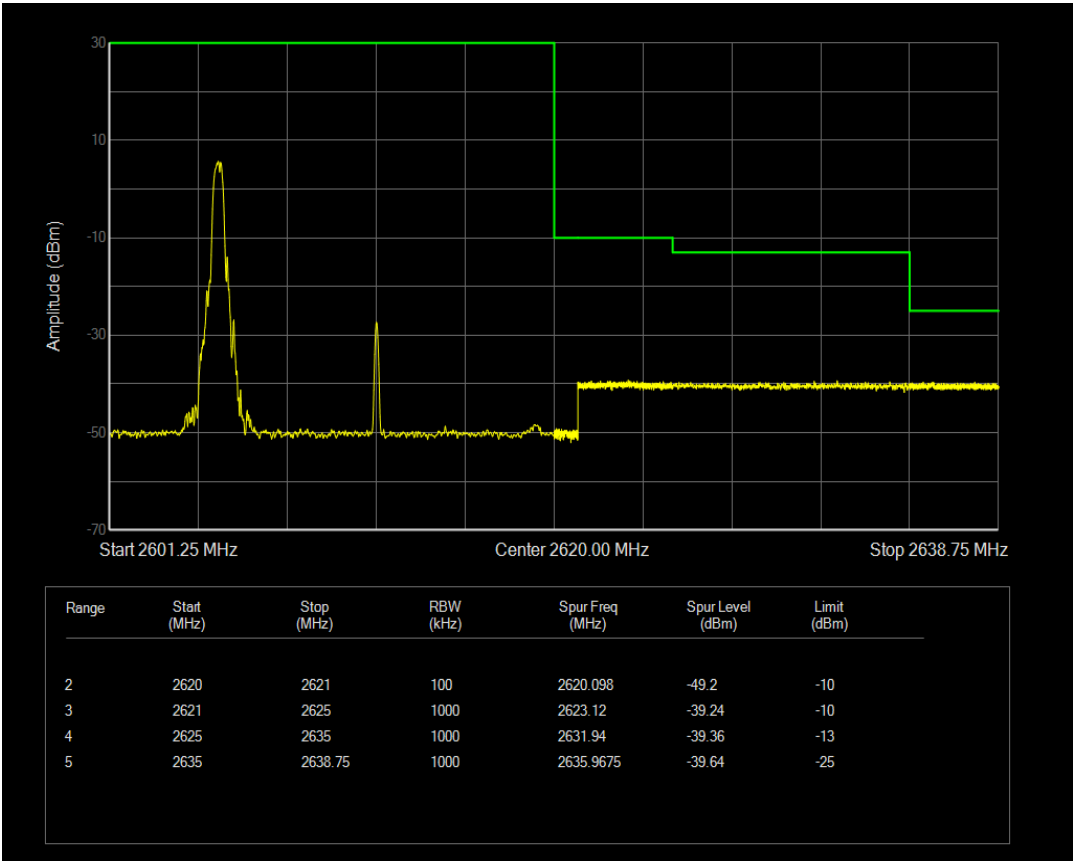


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=1@37

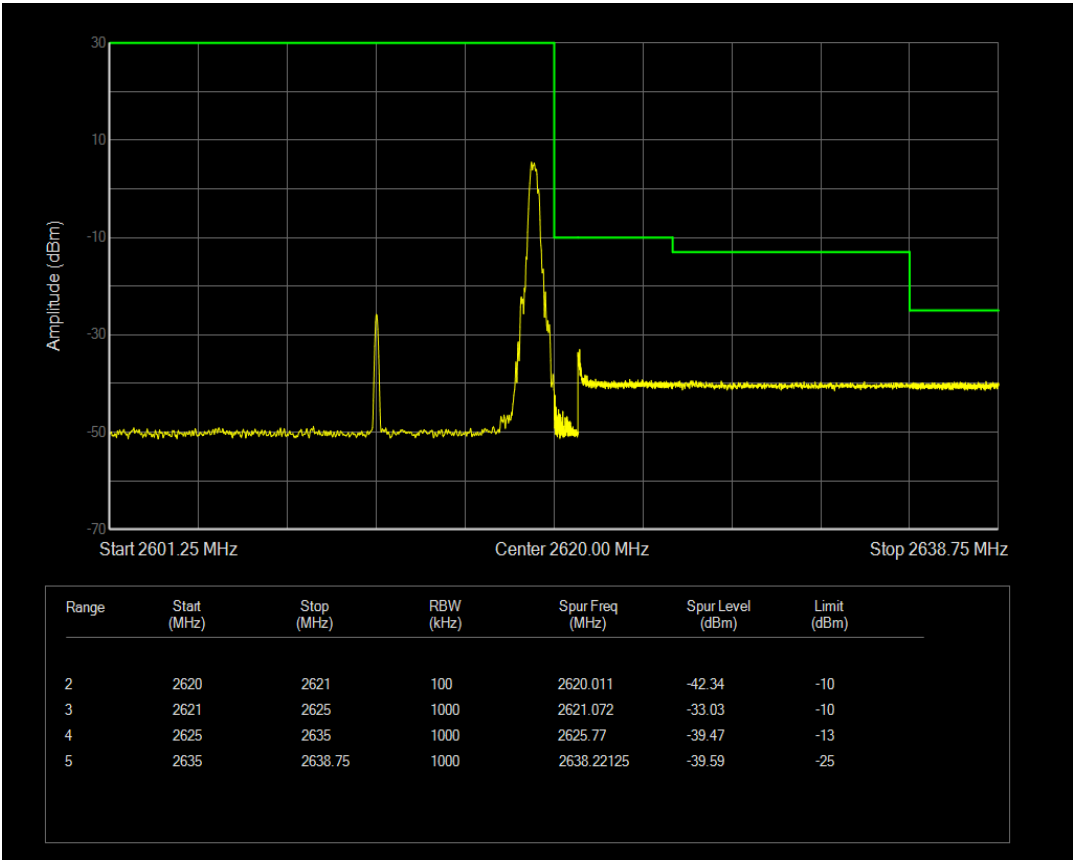


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=24@0

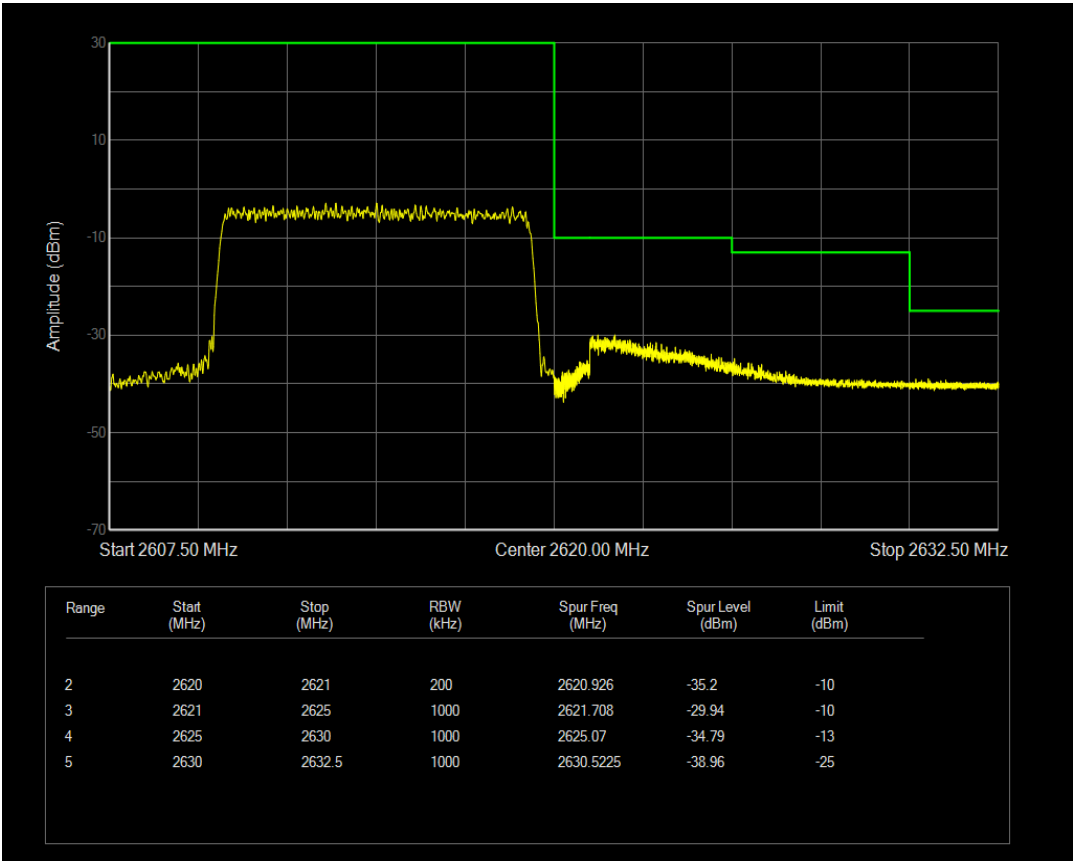


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=1@0

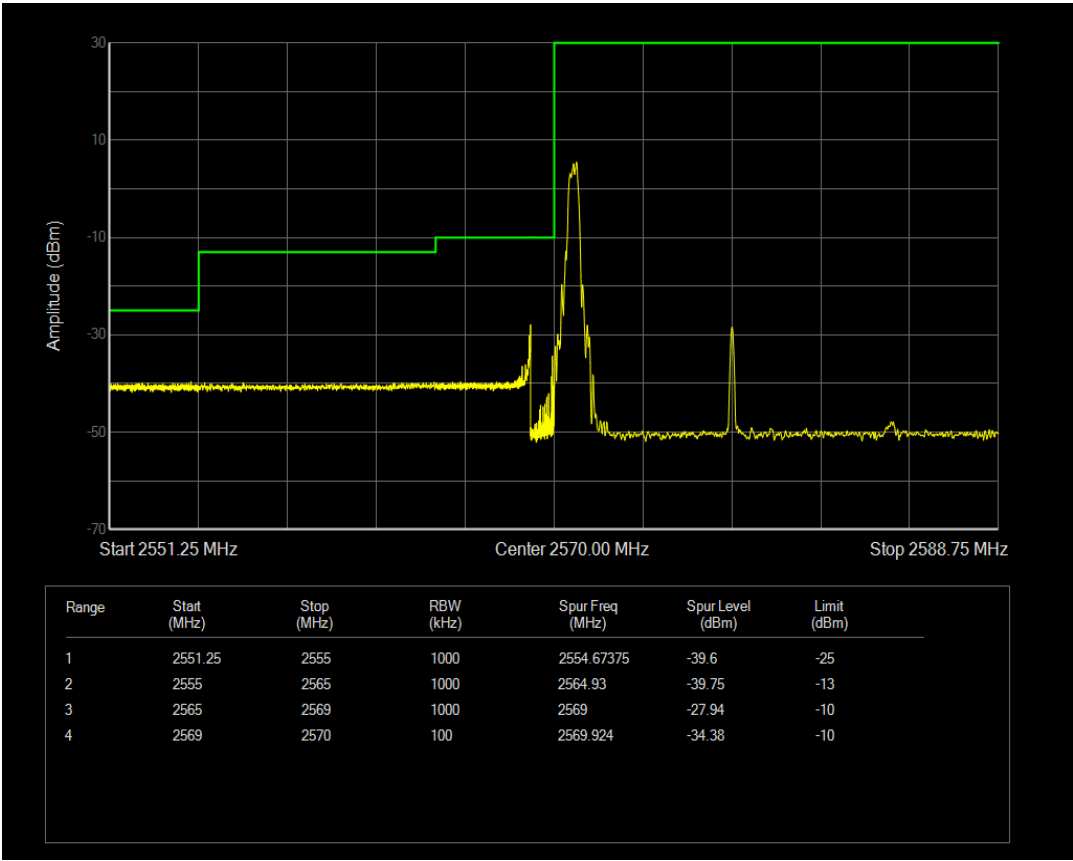


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=1@37

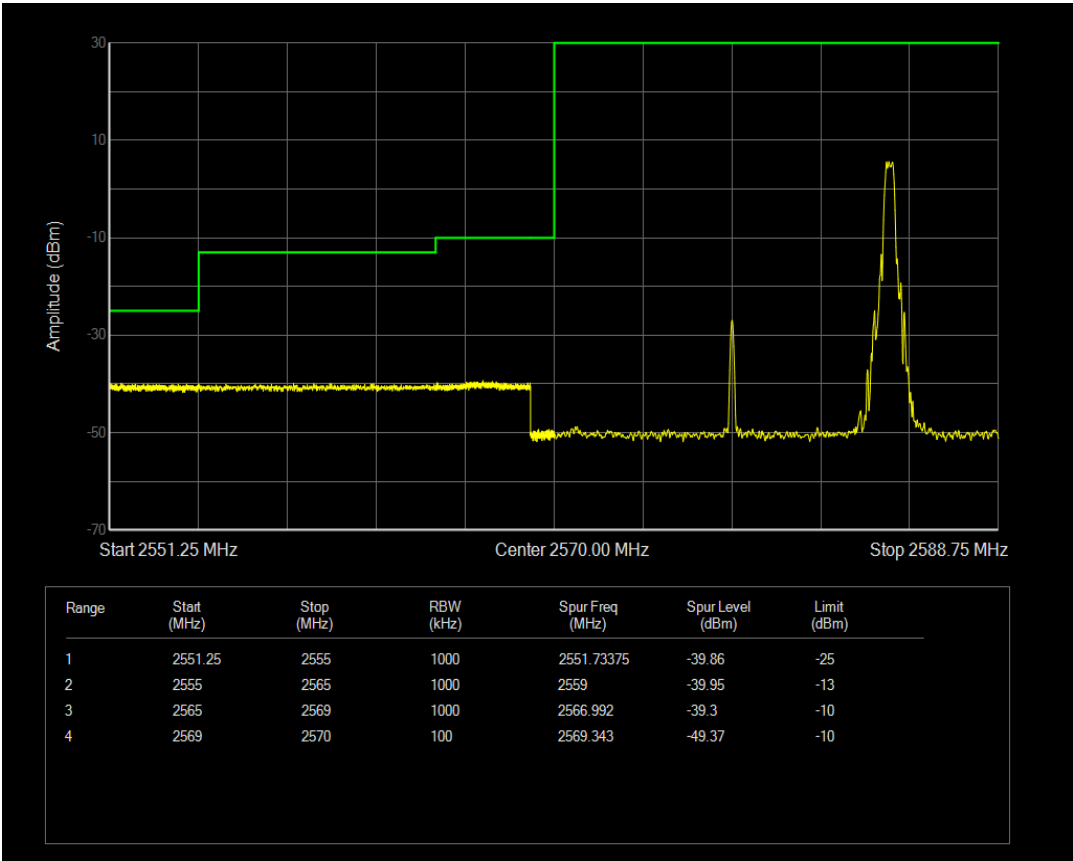


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=38@0

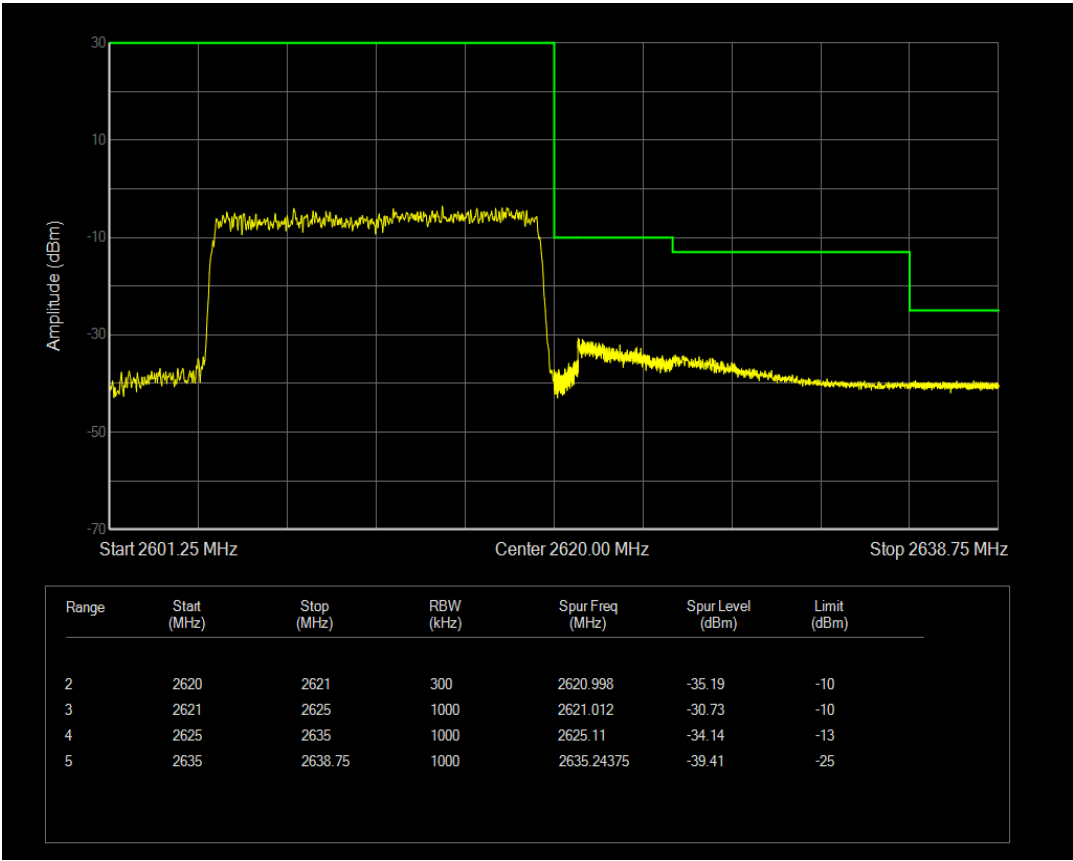


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=51@0

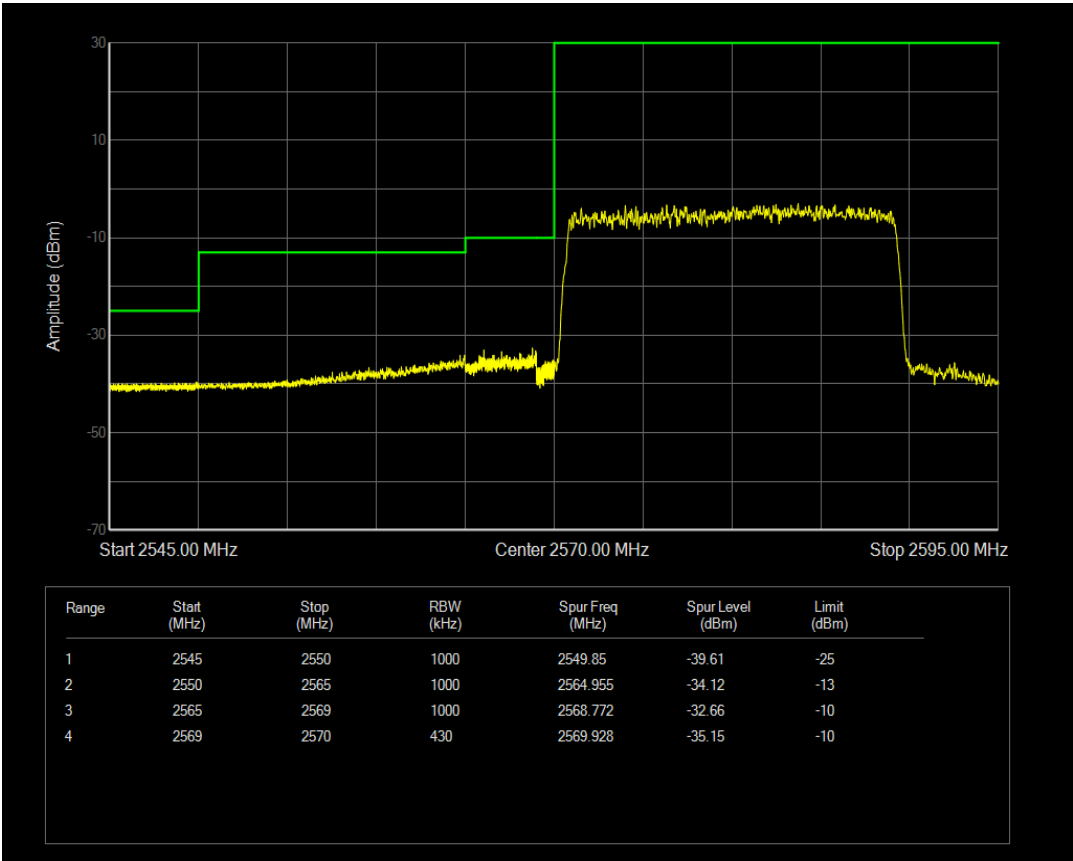


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=1@50

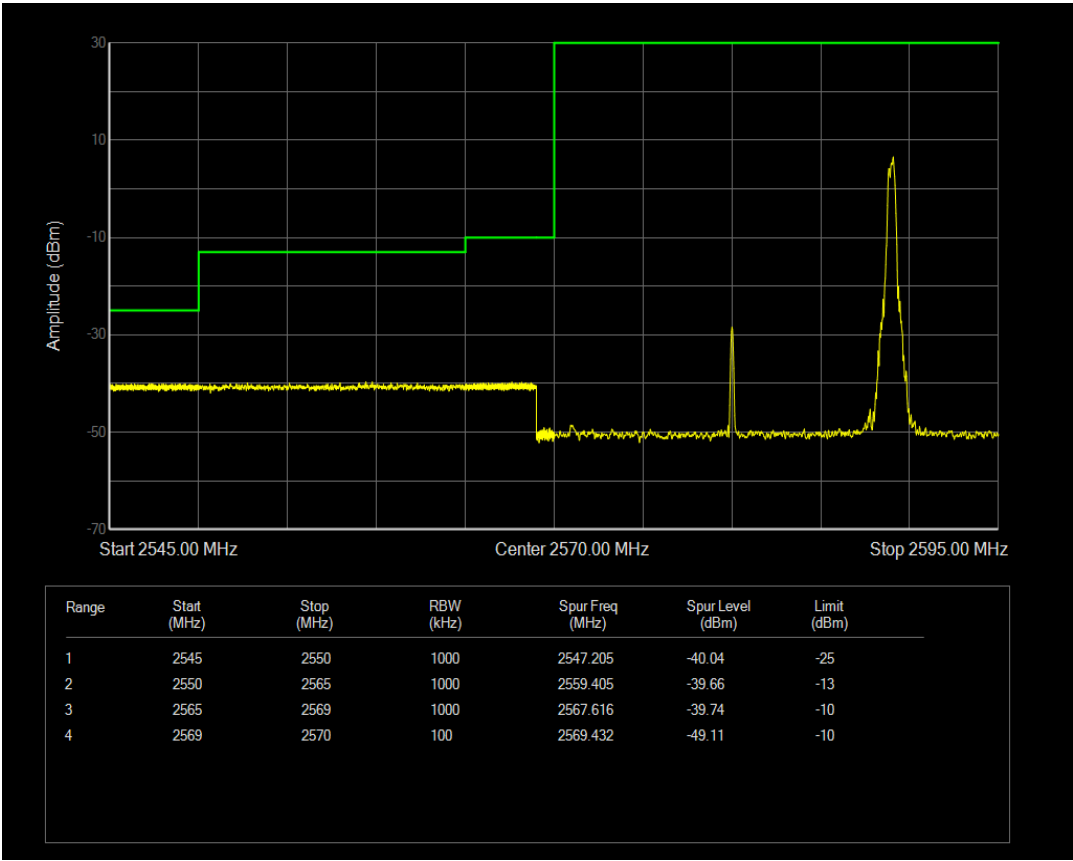


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=1@0

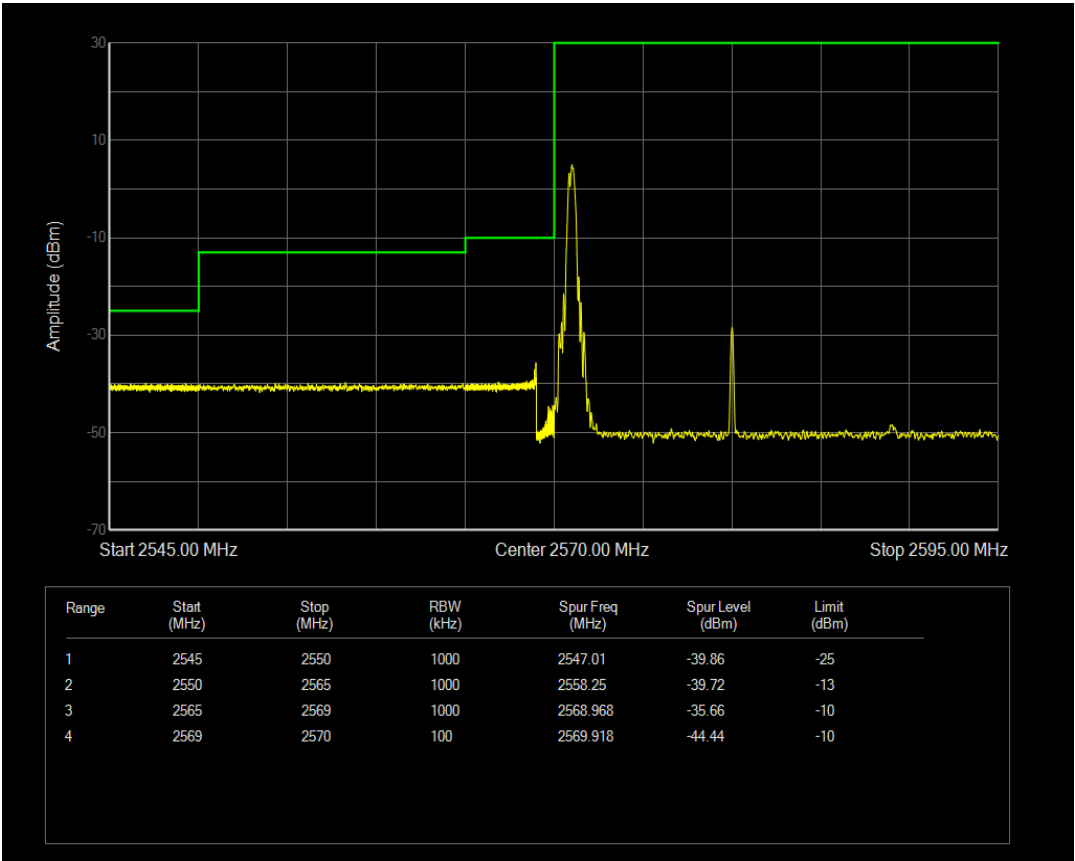


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=1@50

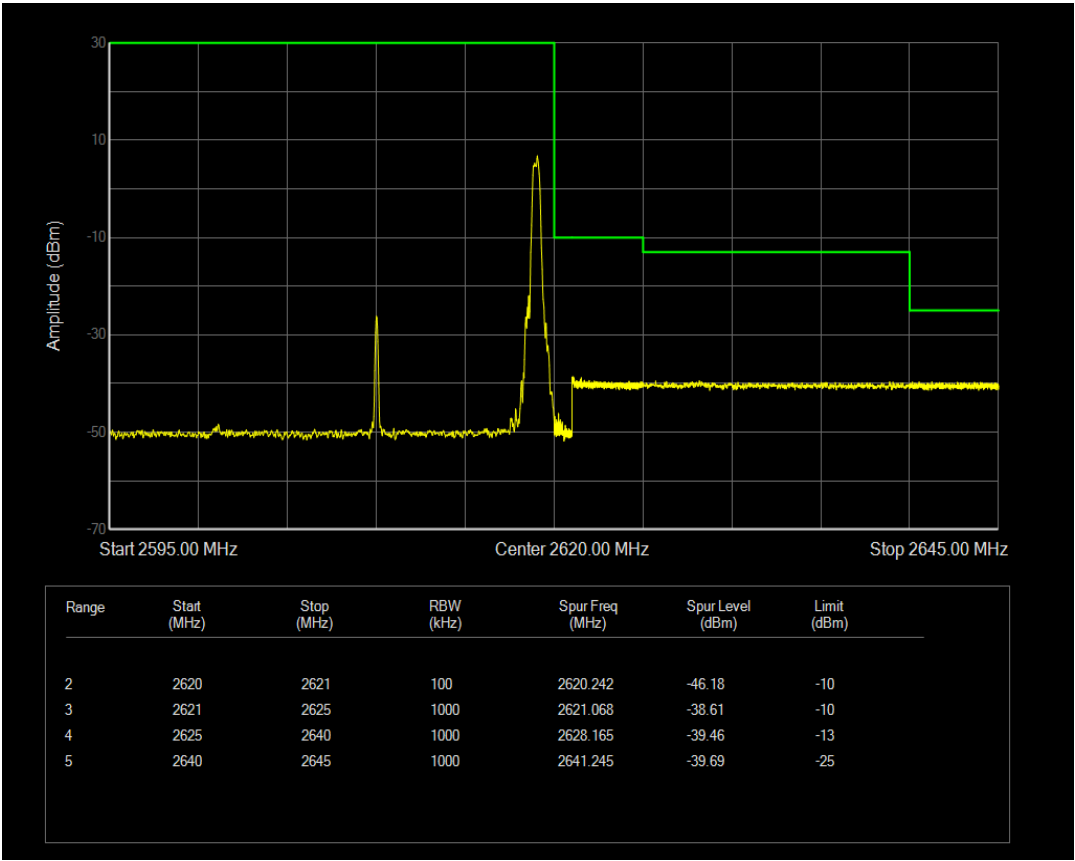

n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=1@0

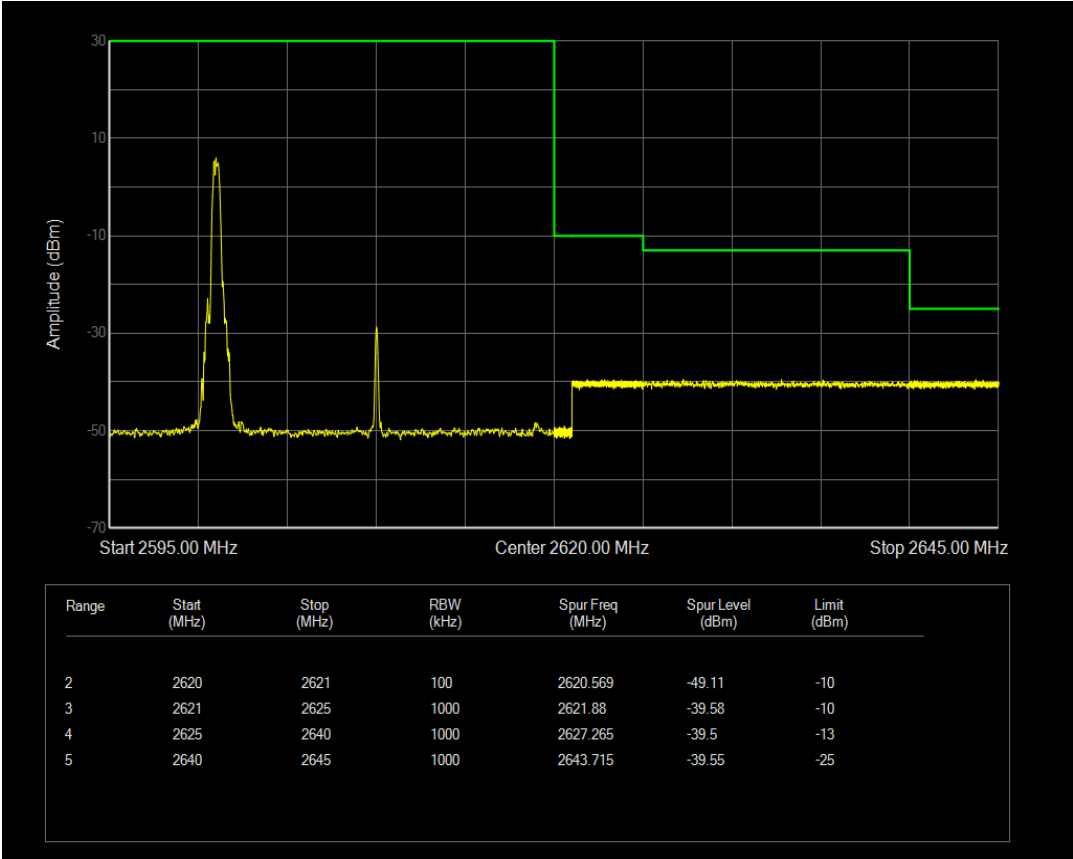


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=51@0

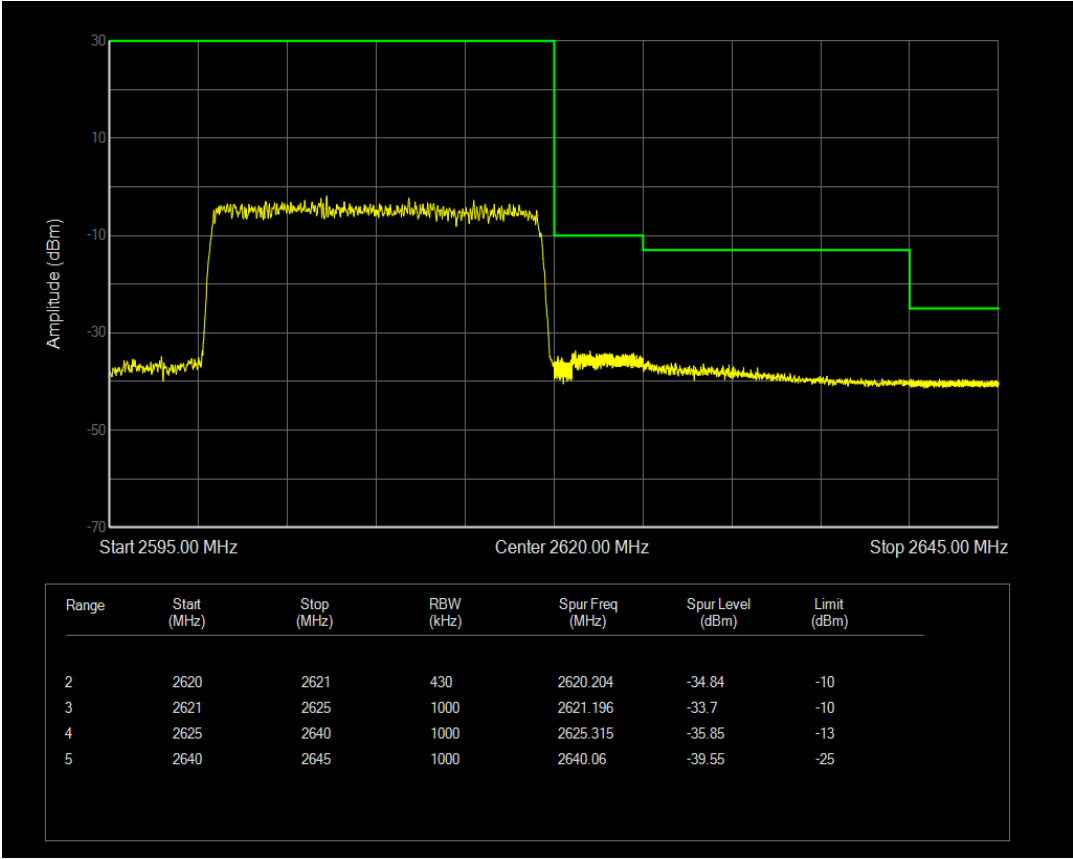


6 Out-of-band emissions for EN-DC

<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
n38	30	10	515000	24@0	CP_QPSK	2430.00	-27.31	-25	PASS
n38	30	10	515000	1@0	CP_QPSK	2430.65	-27.50	-25	PASS
n38	30	10	515000	1@23	CP_QPSK	2430.65	-25.50	-25	PASS
n38	30	10	523000	24@0	CP_QPSK	2431.30	-26.48	-25	PASS
n38	30	10	523000	1@0	CP_QPSK	2430.00	-27.38	-25	PASS
n38	30	10	523000	1@23	CP_QPSK	2430.65	-26.47	-25	PASS
n38	30	15	515500	38@0	CP_QPSK	2430.65	-28.61	-25	PASS
n38	30	15	515500	1@0	CP_QPSK	7712.55	-26.48	-25	PASS
n38	30	15	515500	1@37	CP_QPSK	7752.85	-26.27	-25	PASS
n38	30	15	522500	38@0	CP_QPSK	25685.70	-30.69	-25	PASS
n38	30	15	522500	1@0	CP_QPSK	2428.70	-27.76	-25	PASS
n38	30	15	522500	1@37	CP_QPSK	2432.60	-29.51	-25	PASS
n38	30	20	516000	51@0	CP_QPSK	26315.55	-31.62	-25	PASS
n38	30	20	516000	1@0	CP_QPSK	2428.70	-26.24	-25	PASS
n38	30	20	516000	1@50	CP_QPSK	2431.30	-26.52	-25	PASS
n38	30	20	522000	51@0	CP_QPSK	2430.65	-26.38	-25	PASS
n38	30	20	522000	1@0	CP_QPSK	2432.60	-28.74	-25	PASS
n38	30	20	522000	1@50	CP_QPSK	2433.25	-27.45	-25	PASS


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=1@0

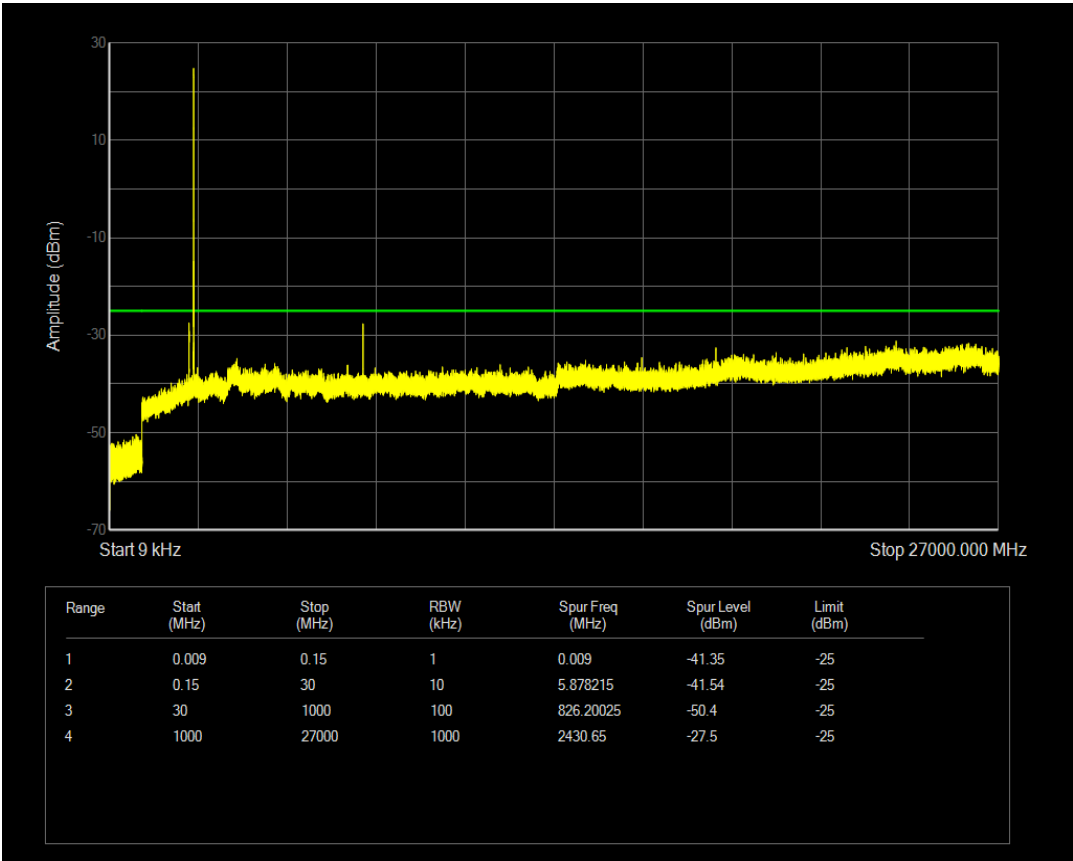


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=1@23

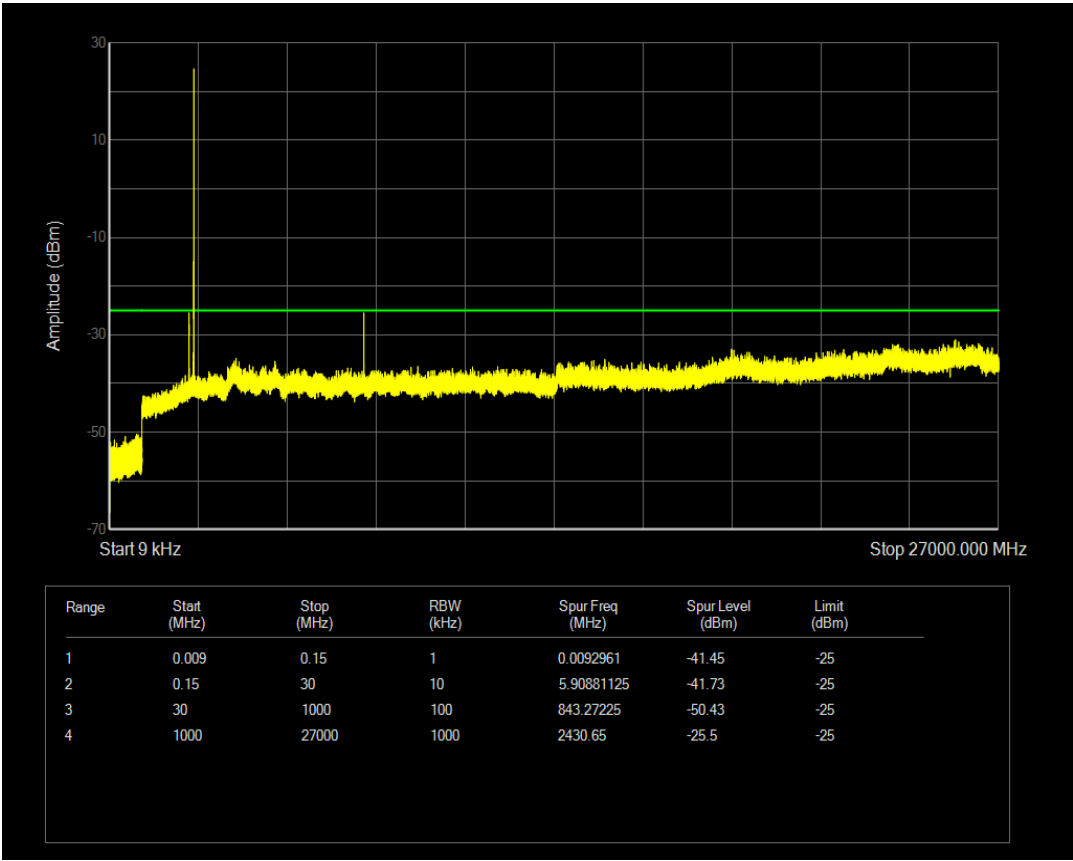


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=1@0

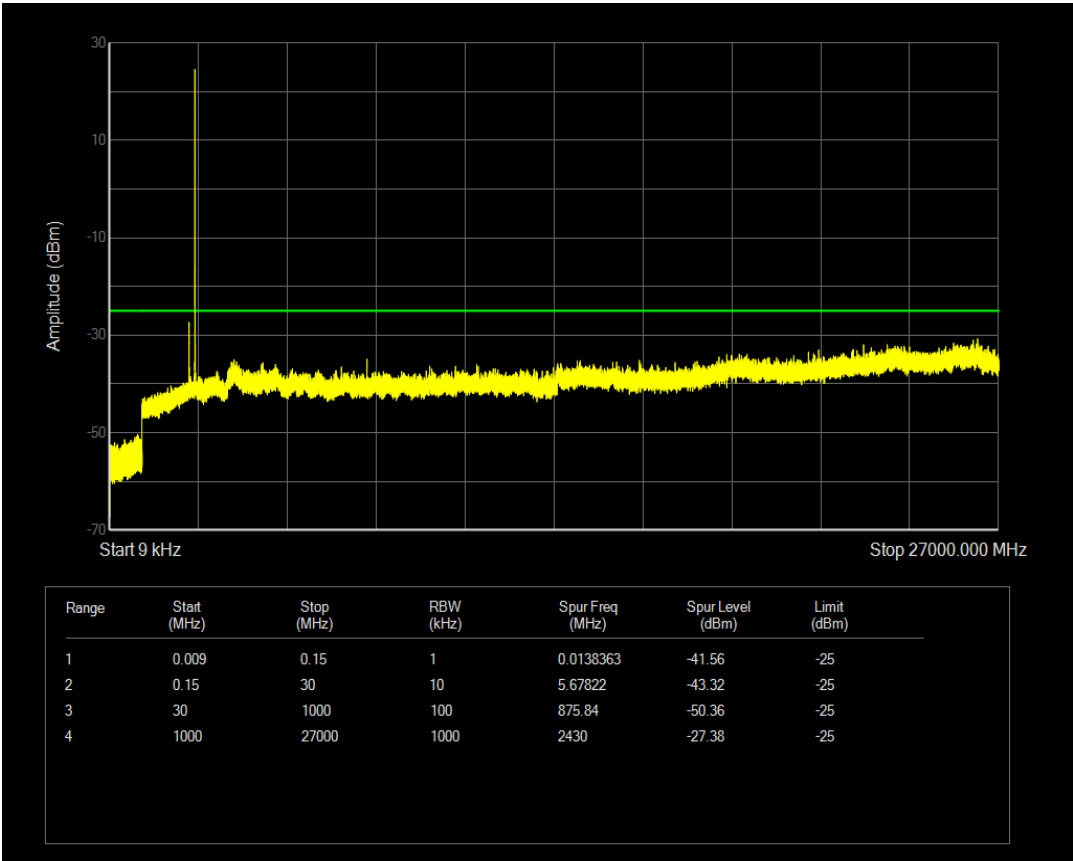


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=515000 RB=24@0

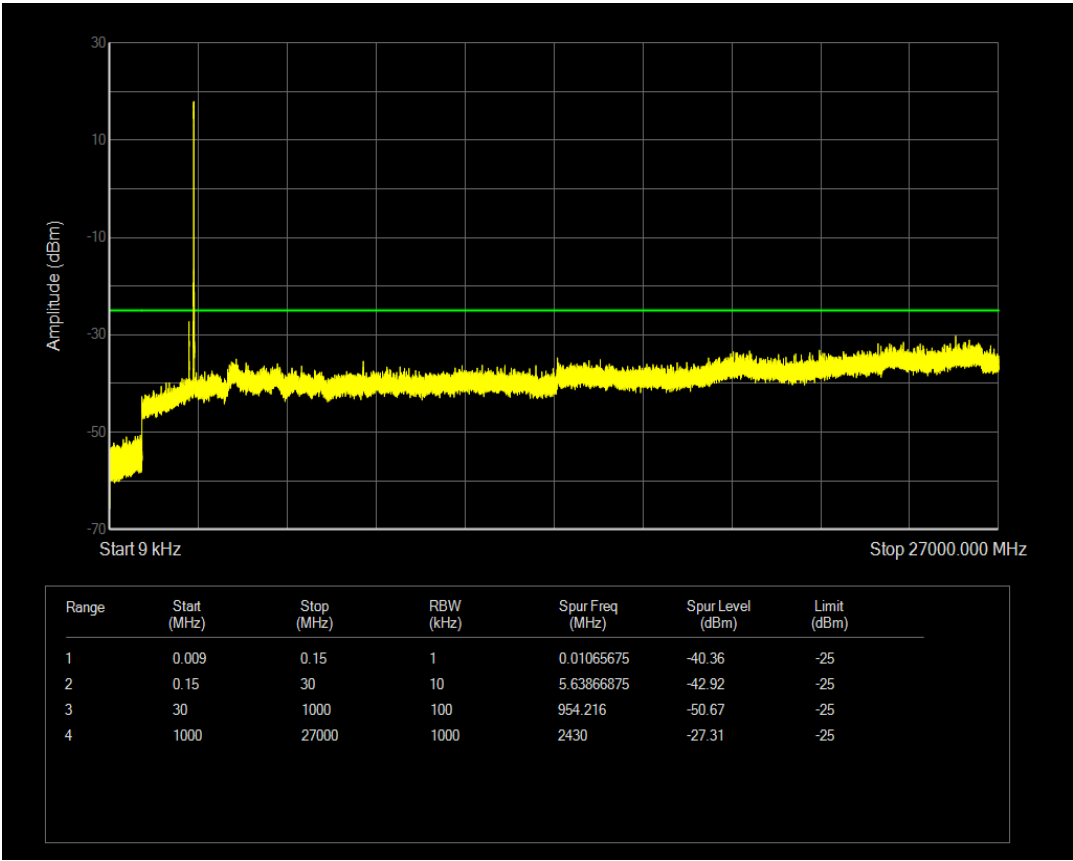


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=24@0

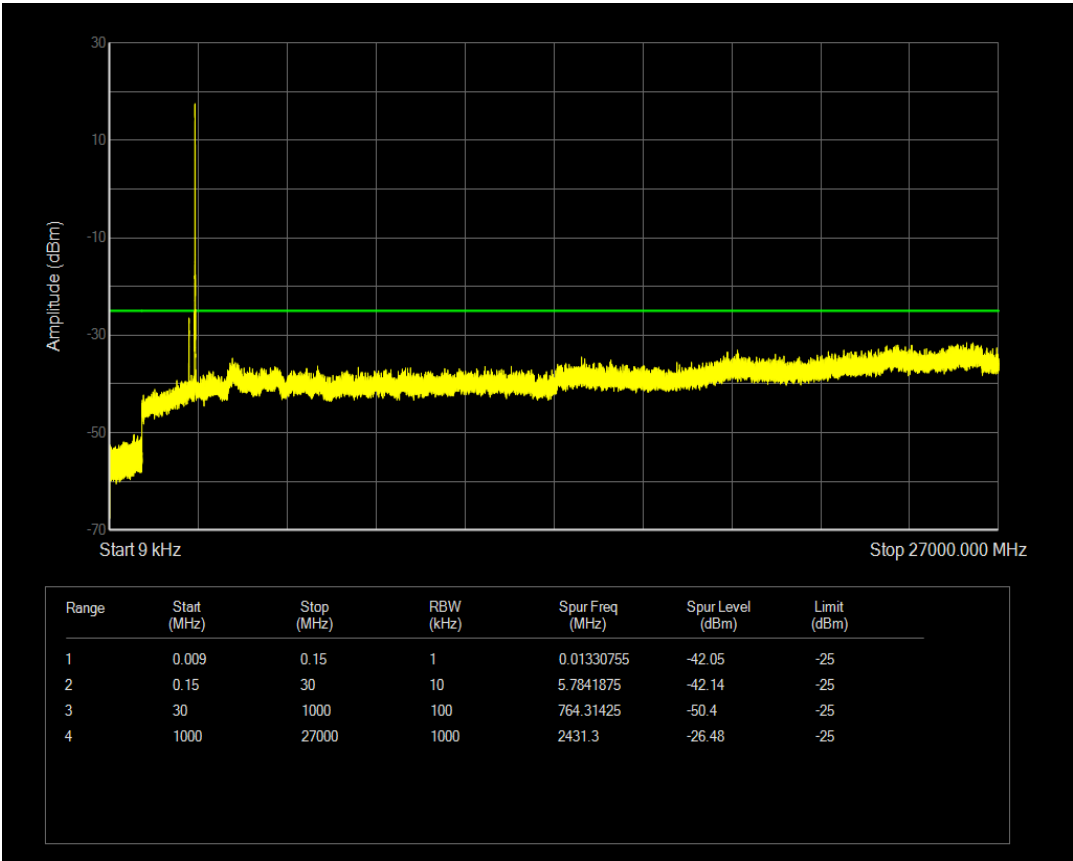


n38 SCS=30kHz CP_QPSK BW=10MHz Channel=523000 RB=1@23

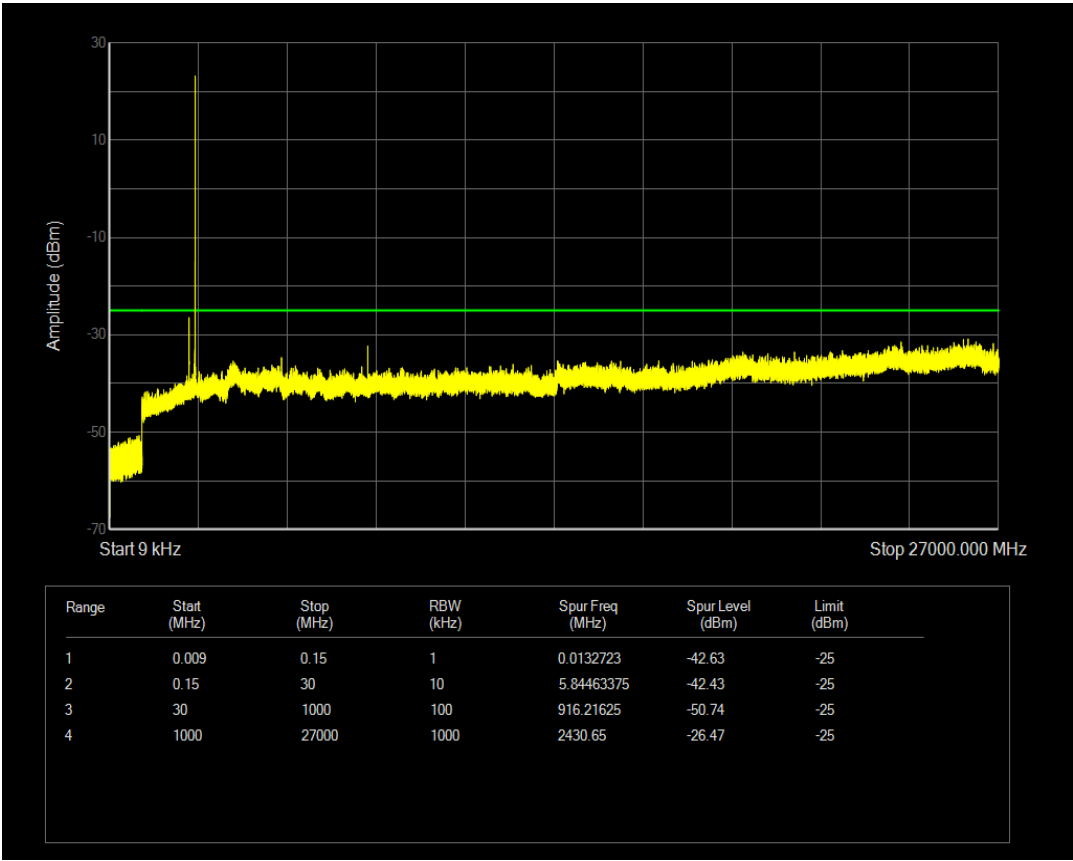


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=1@37

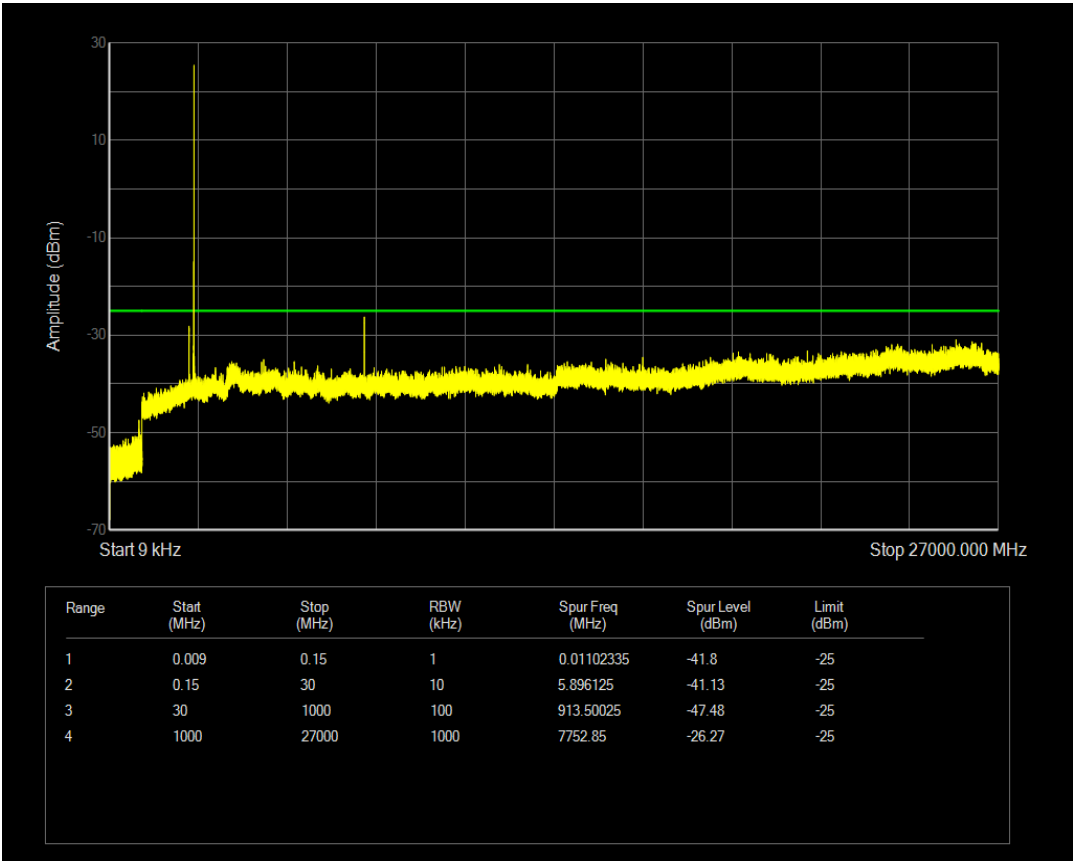


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=1@0

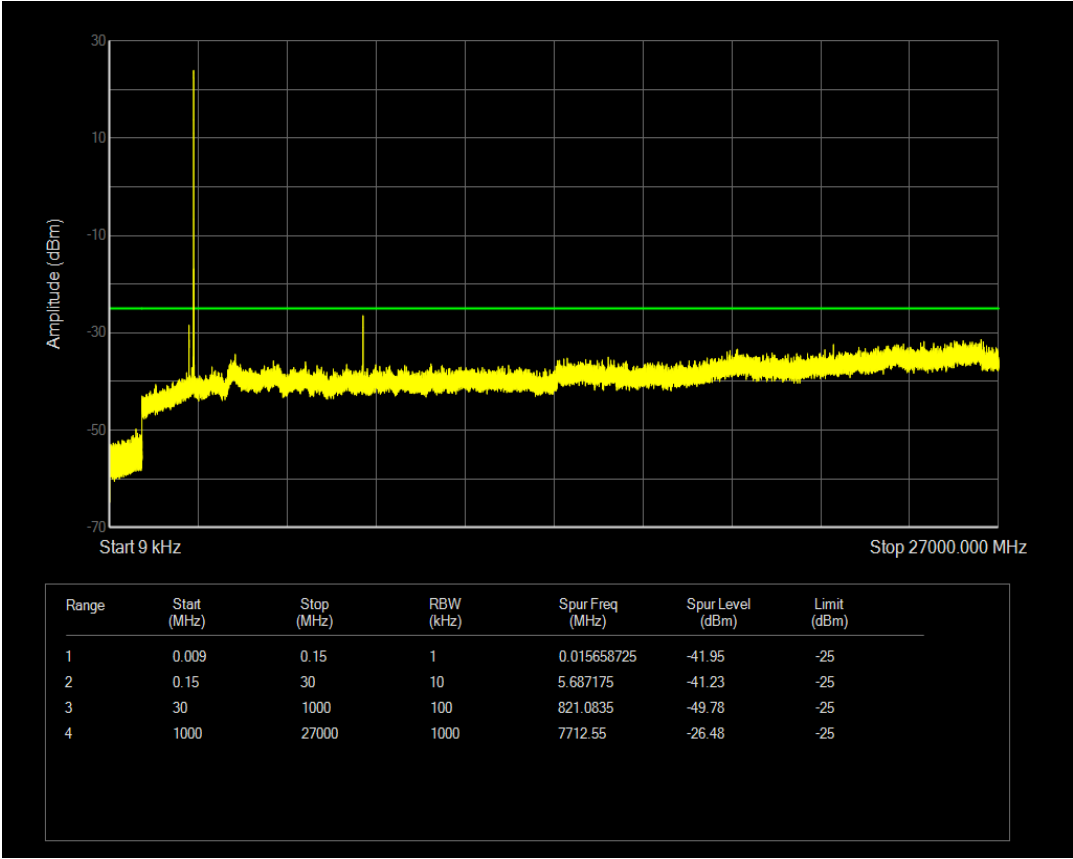


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=1@0

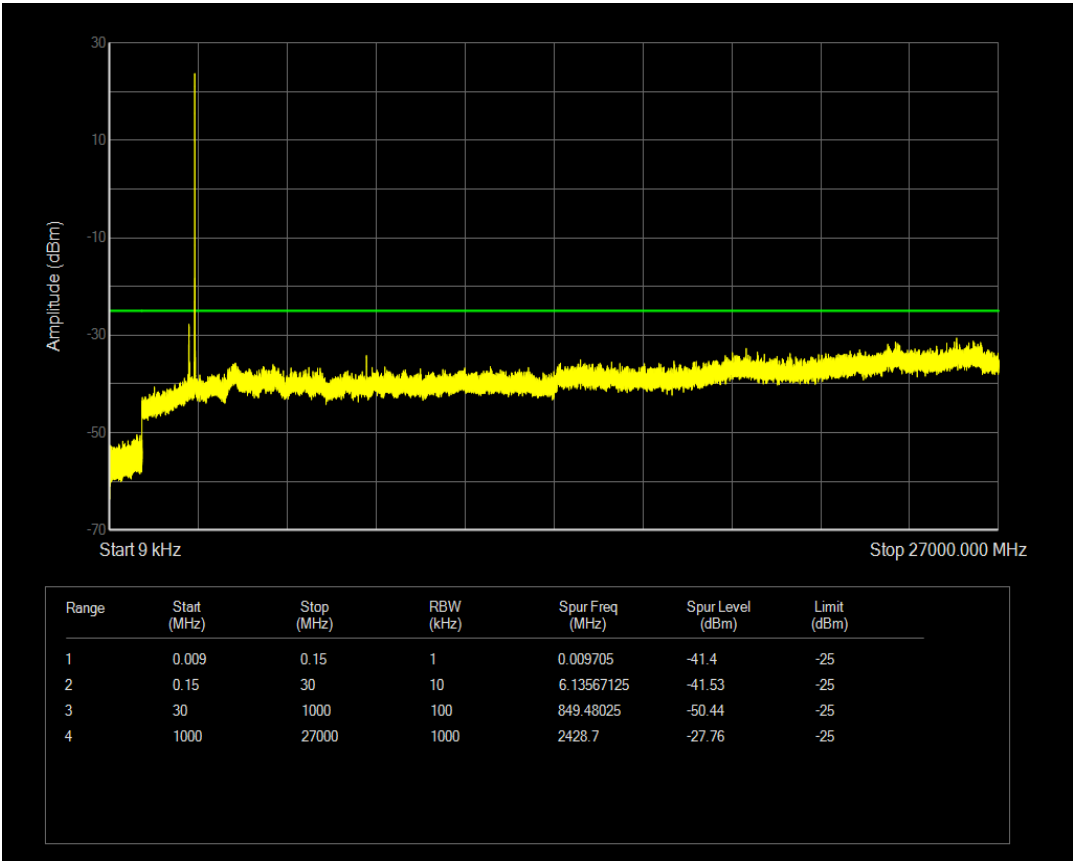


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=515500 RB=38@0

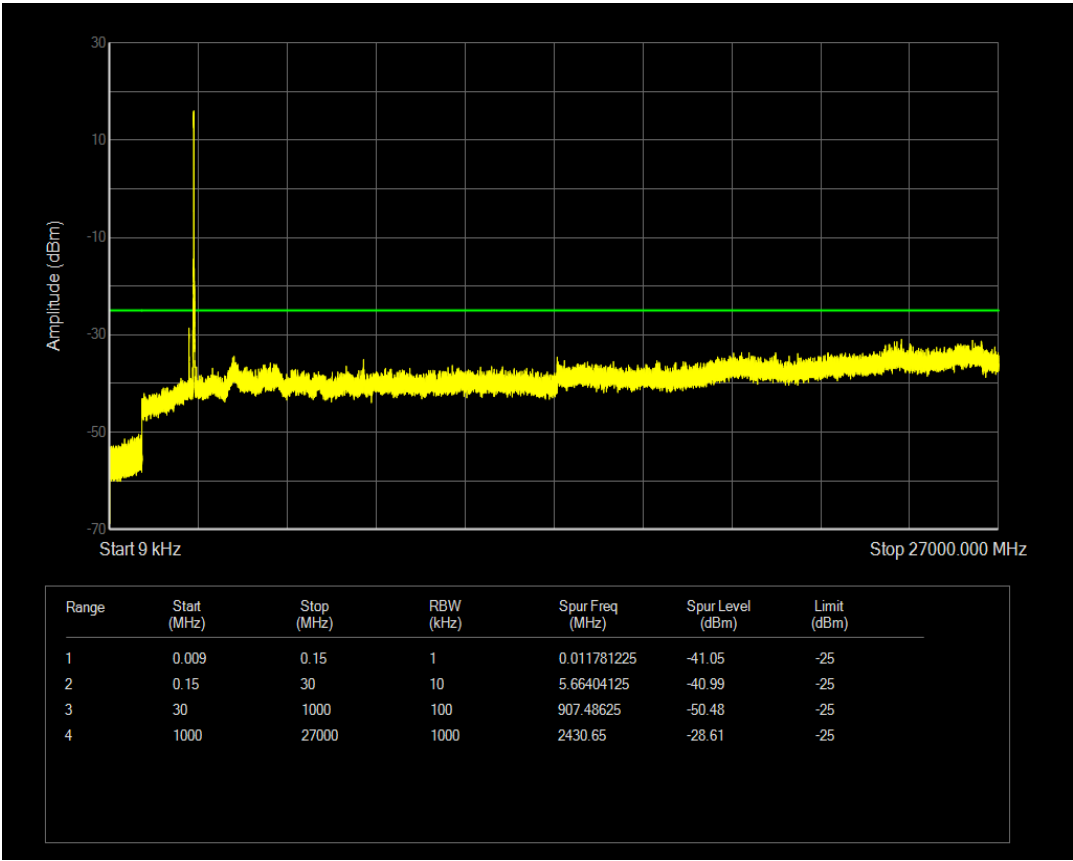


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=1@37

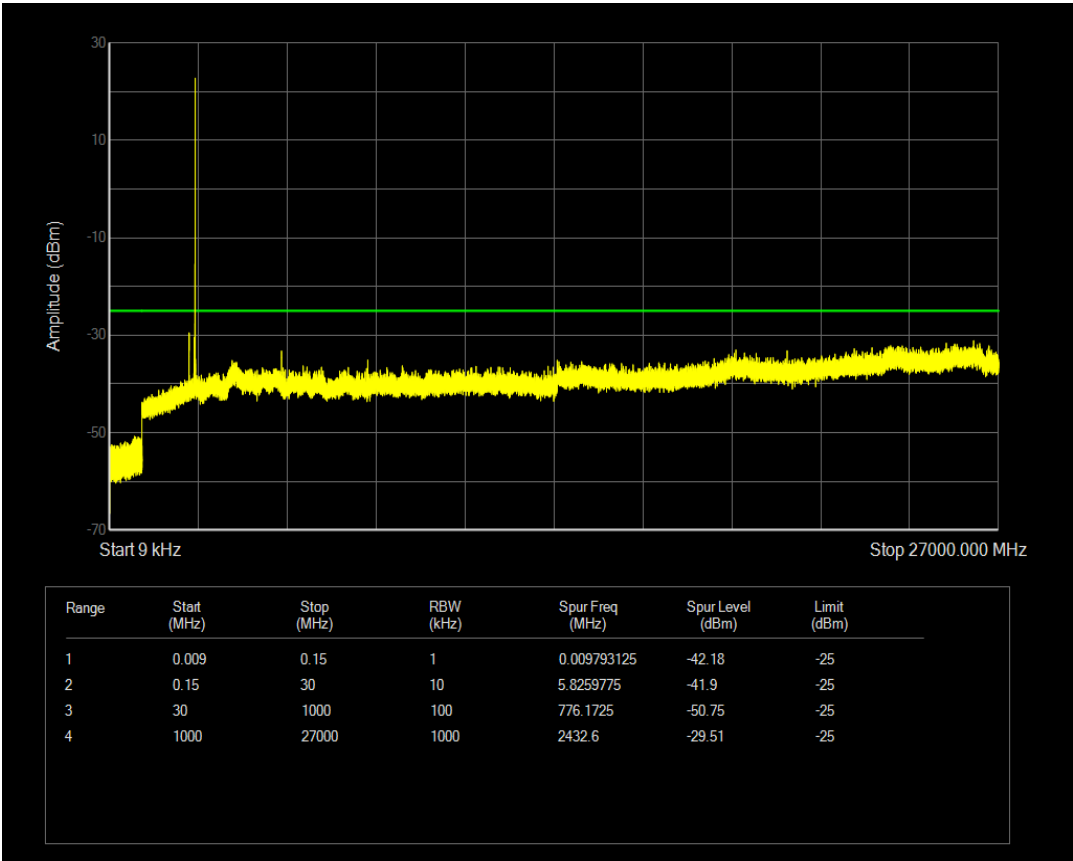


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=1@0

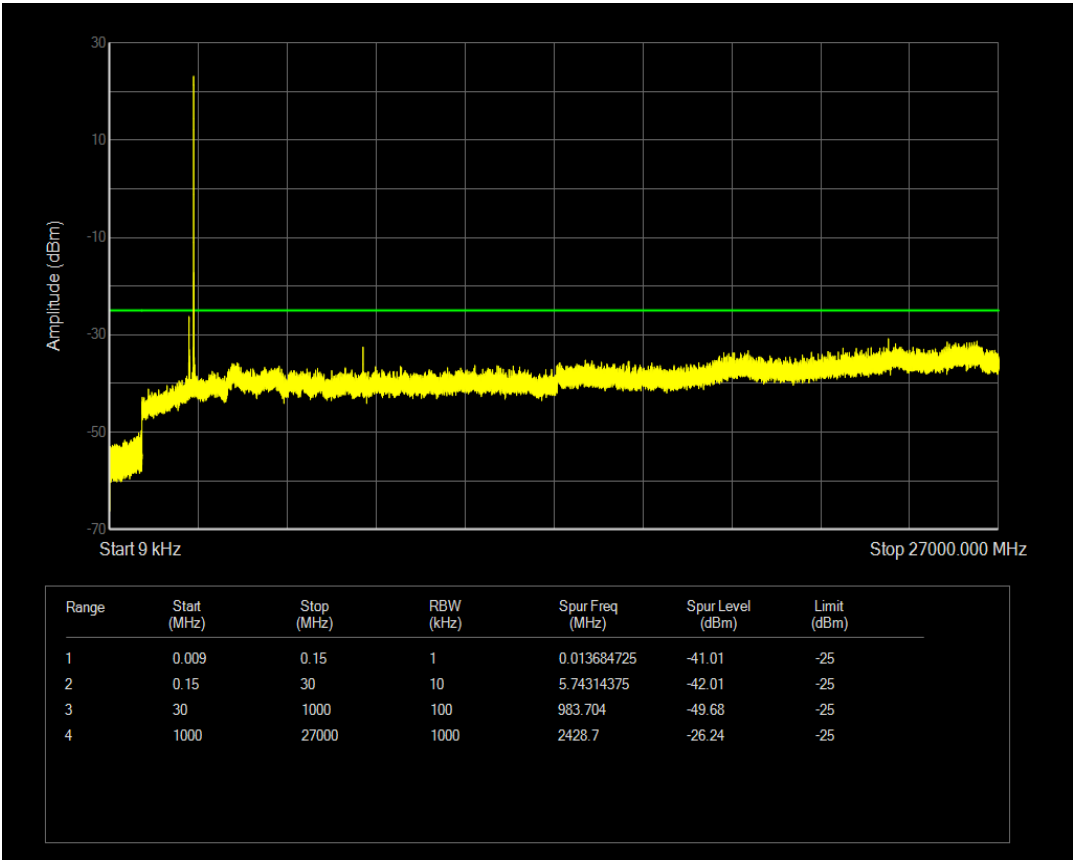


n38 SCS=30kHz CP_QPSK BW=15MHz Channel=522500 RB=38@0

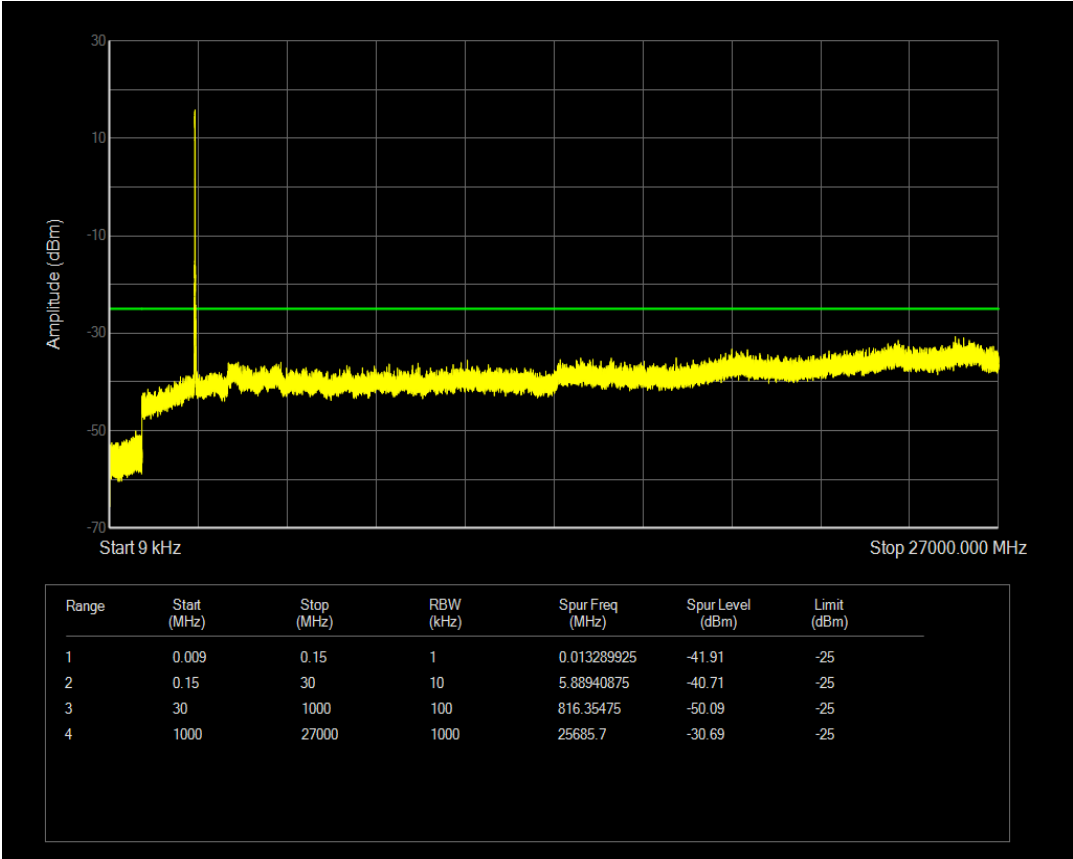


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=1@0

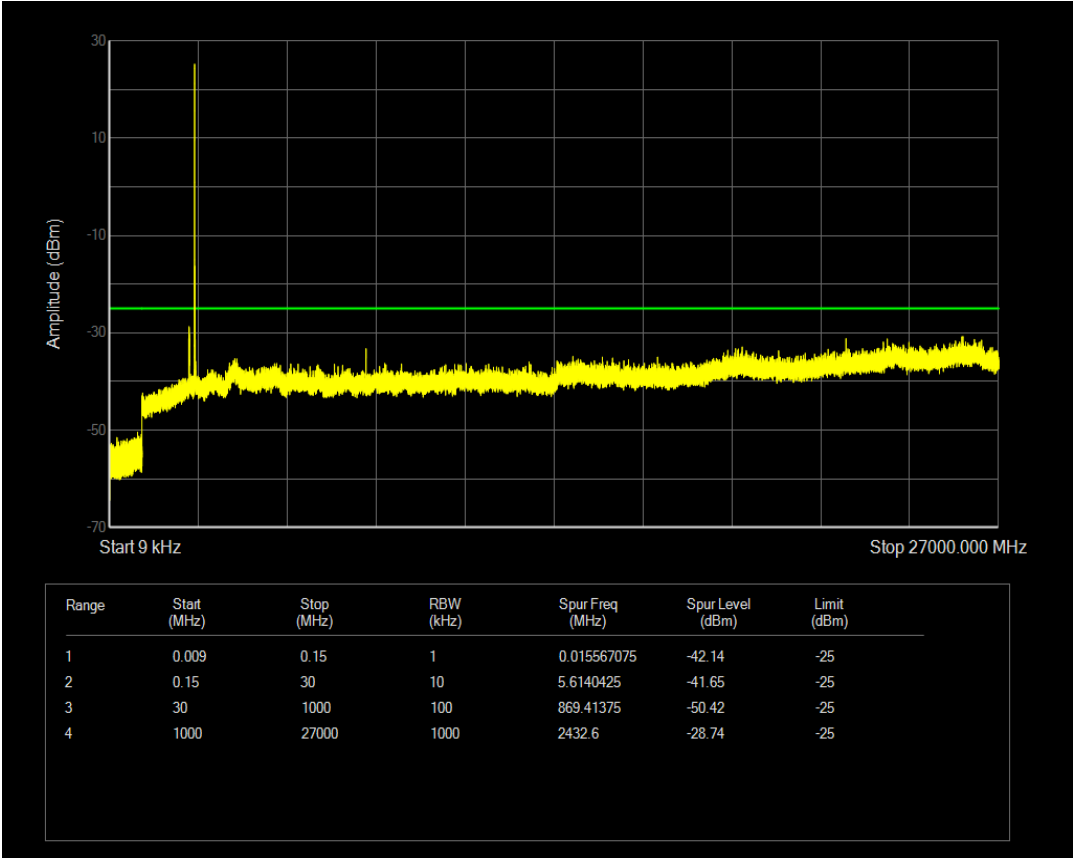


n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=51@0

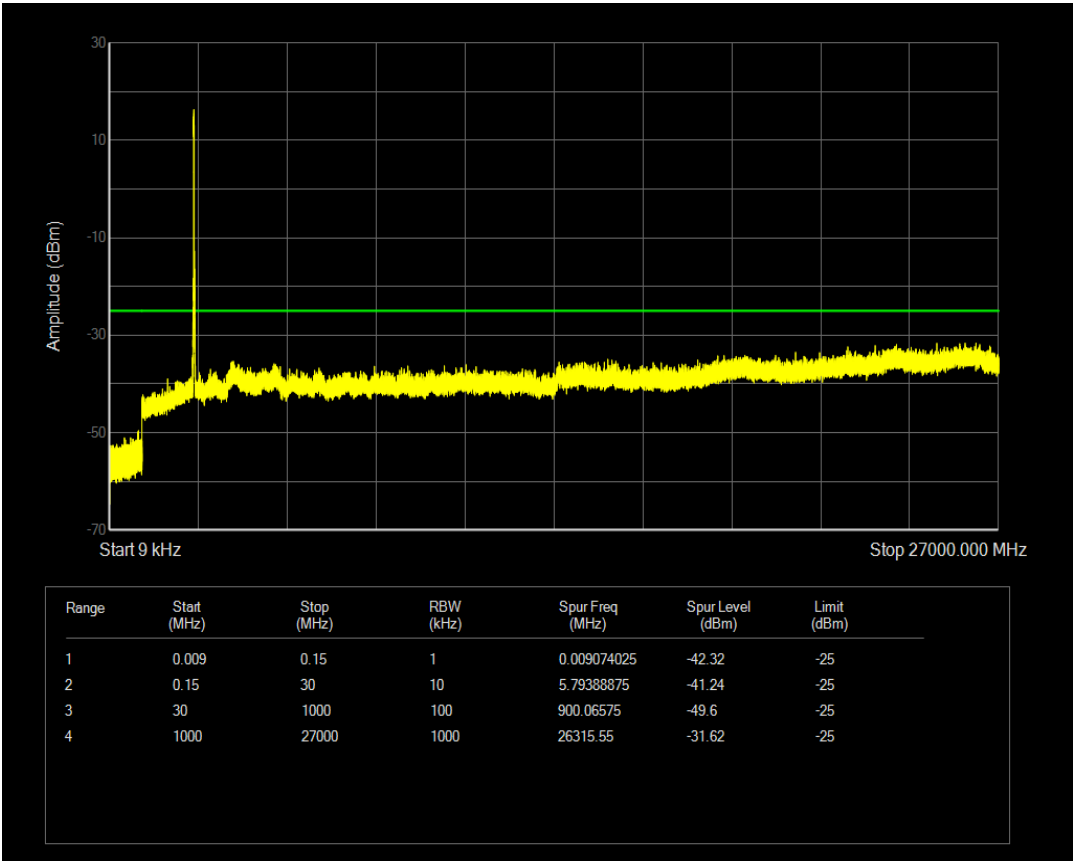

n38 SCS=30kHz CP_QPSK BW=20MHz Channel=516000 RB=1@50

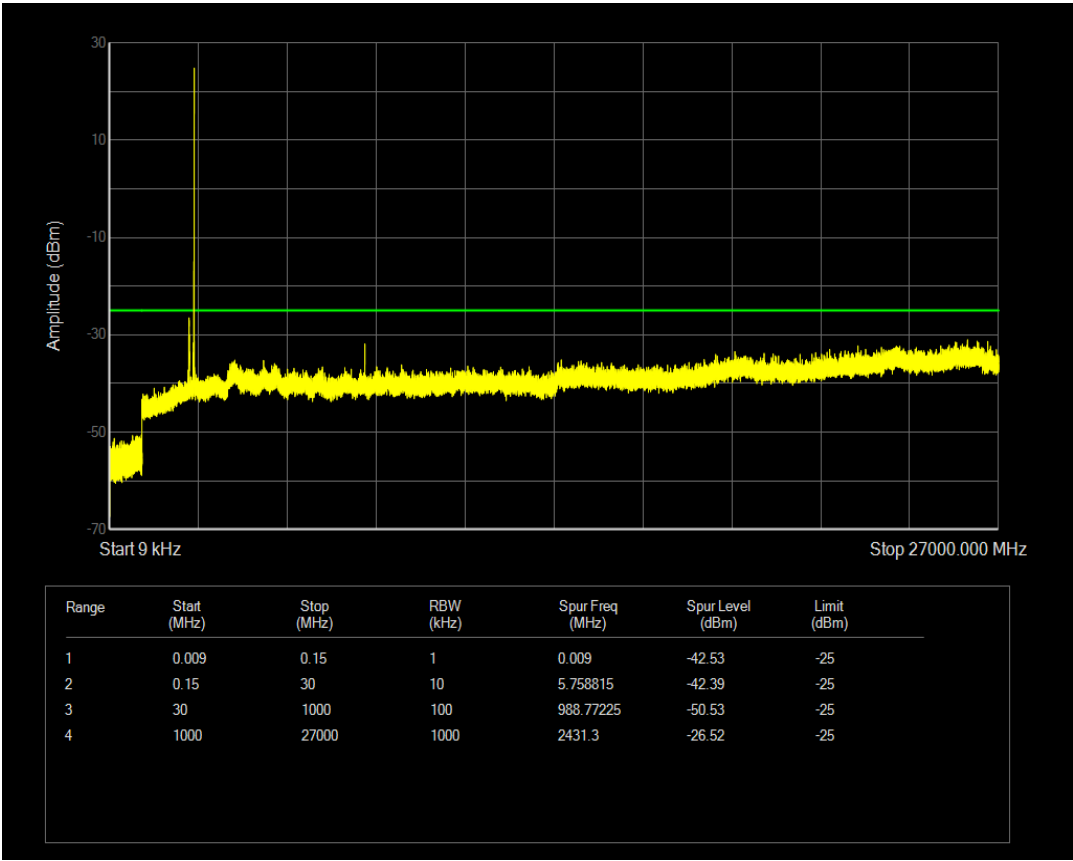

n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=1@50

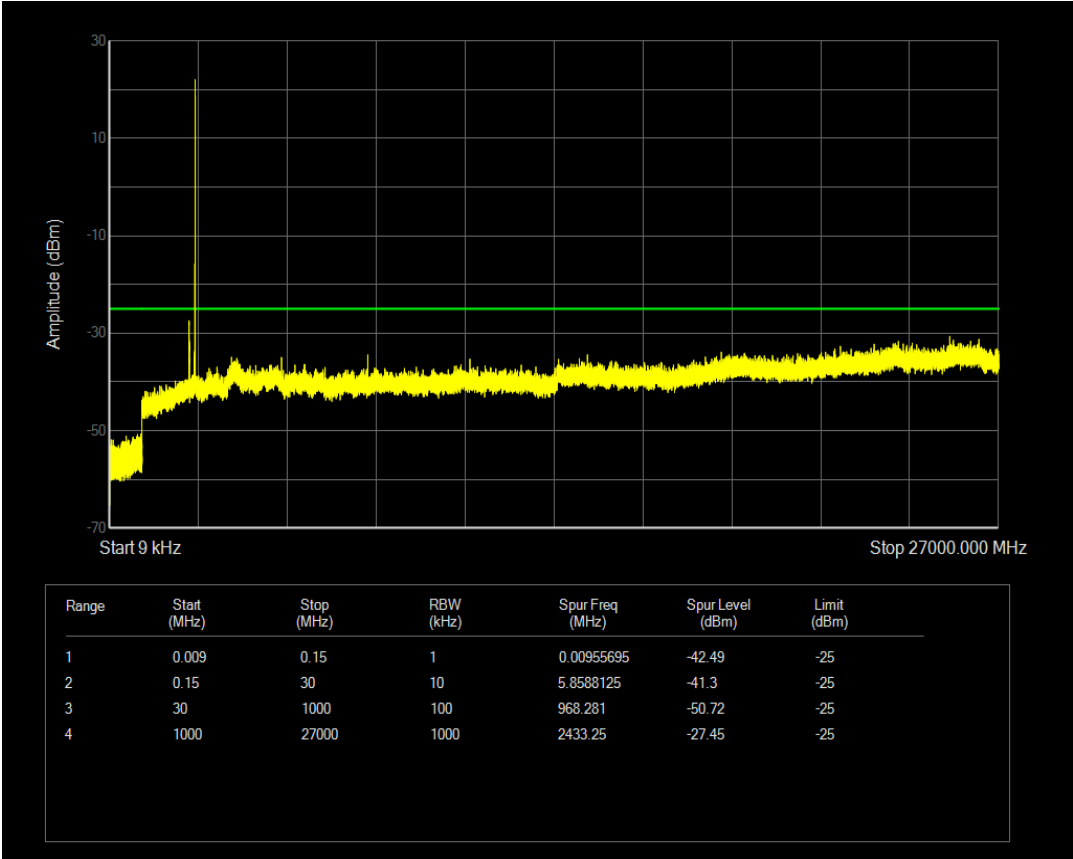

n38 SCS=30kHz CP_QPSK BW=20MHz Channel=522000 RB=51@0

