

TABLE OF CONTENTS

1 Conducted output power for NR FR12

2 Frequency stability for NR FR14

3 Peak-to-Average Ratio for NR FR16

4 Occupied bandwidth for NR FR146

5 Band edge for NR FR160

6 Out-of-band emissions for NR FR170

1 Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Conducted output power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
n66	15	5	342500	1@1	DFT_BPSK	22.78	1.7	24.48	30	PASS
n66	15	5	342500	25@0	DFT_QPSK	21.82	1.7	23.52	30	PASS
n66	15	5	342500	12@6	DFT_QPSK	22.79	1.7	24.49	30	PASS
n66	15	5	342500	1@1	DFT_QPSK	22.97	1.7	24.67	30	PASS
n66	15	5	342500	1@23	DFT_QPSK	22.54	1.7	24.24	30	PASS
n66	15	5	342500	1@1	DFT_QAM16	22.06	1.7	23.76	30	PASS
n66	15	5	342500	1@1	DFT_QAM64	20.35	1.7	22.05	30	PASS
n66	15	5	342500	1@1	DFT_QAM256	18.39	1.7	20.09	30	PASS
n66	15	5	342500	1@1	CP_QPSK	21.4	1.7	23.1	30	PASS
n66	15	5	349000	1@1	DFT_BPSK	22.91	1.7	24.61	30	PASS
n66	15	5	349000	25@0	DFT_QPSK	21.94	1.7	23.64	30	PASS
n66	15	5	349000	12@6	DFT_QPSK	22.98	1.7	24.68	30	PASS
n66	15	5	349000	1@1	DFT_QPSK	23.07	1.7	24.77	30	PASS
n66	15	5	349000	1@23	DFT_QPSK	23.07	1.7	24.77	30	PASS
n66	15	5	349000	1@1	DFT_QAM16	22.18	1.7	23.88	30	PASS
n66	15	5	349000	1@1	DFT_QAM64	20.07	1.7	21.77	30	PASS
n66	15	5	349000	1@1	DFT_QAM256	18.95	1.7	20.65	30	PASS
n66	15	5	349000	1@1	CP_QPSK	21.65	1.7	23.35	30	PASS
n66	15	5	355500	1@1	DFT_BPSK	22.97	1.7	24.67	30	PASS
n66	15	5	355500	25@0	DFT_QPSK	21.77	1.7	23.47	30	PASS
n66	15	5	355500	12@6	DFT_QPSK	22.81	1.7	24.51	30	PASS
n66	15	5	355500	1@1	DFT_QPSK	22.82	1.7	24.52	30	PASS
n66	15	5	355500	1@23	DFT_QPSK	22.77	1.7	24.47	30	PASS
n66	15	5	355500	1@1	DFT_QAM16	21.84	1.7	23.54	30	PASS
n66	15	5	355500	1@1	DFT_QAM64	20.22	1.7	21.92	30	PASS
n66	15	5	355500	1@1	DFT_QAM256	18.37	1.7	20.07	30	PASS
n66	15	5	355500	1@1	CP_QPSK	21.13	1.7	22.83	30	PASS
n66	15	20	344000	1@1	DFT_BPSK	22.64	1.7	24.34	30	PASS
n66	15	20	344000	100@0	DFT_QPSK	21.91	1.7	23.61	30	PASS
n66	15	20	344000	50@25	DFT_QPSK	22.94	1.7	24.64	30	PASS
n66	15	20	344000	1@1	DFT_QPSK	22.79	1.7	24.49	30	PASS
n66	15	20	344000	1@104	DFT_QPSK	22.88	1.7	24.58	30	PASS
n66	15	20	344000	1@1	DFT_QAM16	22.12	1.7	23.82	30	PASS
n66	15	20	344000	1@1	DFT_QAM64	20.55	1.7	22.25	30	PASS
n66	15	20	344000	1@1	DFT_QAM256	18.7	1.7	20.4	30	PASS
n66	15	20	344000	1@1	CP_QPSK	21.55	1.7	23.25	30	PASS
n66	15	20	349000	1@1	DFT_BPSK	22.89	1.7	24.59	30	PASS

n66	15	20	349000	100@0	DFT_QPSK	21.99	1.7	23.69	30	PASS
n66	15	20	349000	50@25	DFT_QPSK	23.01	1.7	24.71	30	PASS
n66	15	20	349000	1@1	DFT_QPSK	22.92	1.7	24.62	30	PASS
n66	15	20	349000	1@104	DFT_QPSK	22.85	1.7	24.55	30	PASS
n66	15	20	349000	1@1	DFT_QAM16	22.12	1.7	23.82	30	PASS
n66	15	20	349000	1@1	DFT_QAM64	20.64	1.7	22.34	30	PASS
n66	15	20	349000	1@1	DFT_QAM256	18.4	1.7	20.1	30	PASS
n66	15	20	349000	1@1	CP_QPSK	21.39	1.7	23.09	30	PASS
n66	15	20	354000	1@1	DFT_BPSK	22.96	1.7	24.66	30	PASS
n66	15	20	354000	100@0	DFT_QPSK	21.89	1.7	23.59	30	PASS
n66	15	20	354000	50@25	DFT_QPSK	22.93	1.7	24.63	30	PASS
n66	15	20	354000	1@1	DFT_QPSK	23	1.7	24.7	30	PASS
n66	15	20	354000	1@104	DFT_QPSK	22.73	1.7	24.43	30	PASS
n66	15	20	354000	1@1	DFT_QAM16	22.31	1.7	24.01	30	PASS
n66	15	20	354000	1@1	DFT_QAM64	20.65	1.7	22.35	30	PASS
n66	15	20	354000	1@1	DFT_QAM256	18.42	1.7	20.12	30	PASS
n66	15	20	354000	1@1	CP_QPSK	21.73	1.7	23.43	30	PASS
n66	15	40	346000	1@1	DFT_BPSK	22.81	1.7	24.51	30	PASS
n66	15	40	346000	216@0	DFT_QPSK	21.97	1.7	23.67	30	PASS
n66	15	40	346000	108@54	DFT_QPSK	22.99	1.7	24.69	30	PASS
n66	15	40	346000	1@1	DFT_QPSK	22.89	1.7	24.59	30	PASS
n66	15	40	346000	1@214	DFT_QPSK	22.84	1.7	24.54	30	PASS
n66	15	40	346000	1@1	DFT_QAM16	21.73	1.7	23.43	30	PASS
n66	15	40	346000	1@1	DFT_QAM64	20.22	1.7	21.92	30	PASS
n66	15	40	346000	1@1	DFT_QAM256	18.37	1.7	20.07	30	PASS
n66	15	40	346000	1@1	CP_QPSK	21.56	1.7	23.26	30	PASS
n66	15	40	349000	1@1	DFT_BPSK	23.01	1.7	24.71	30	PASS
n66	15	40	349000	216@0	DFT_QPSK	22.02	1.7	23.72	30	PASS
n66	15	40	349000	108@54	DFT_QPSK	23.05	1.7	24.75	30	PASS
n66	15	40	349000	1@1	DFT_QPSK	22.95	1.7	24.65	30	PASS
n66	15	40	349000	1@214	DFT_QPSK	22.97	1.7	24.67	30	PASS
n66	15	40	349000	1@1	DFT_QAM16	22.06	1.7	23.76	30	PASS
n66	15	40	349000	1@1	DFT_QAM64	20.55	1.7	22.25	30	PASS
n66	15	40	349000	1@1	DFT_QAM256	18.79	1.7	20.49	30	PASS
n66	15	40	349000	1@1	CP_QPSK	21.45	1.7	23.15	30	PASS
n66	15	40	352000	1@1	DFT_BPSK	22.87	1.7	24.57	30	PASS
n66	15	40	352000	216@0	DFT_QPSK	22.05	1.7	23.75	30	PASS
n66	15	40	352000	108@54	DFT_QPSK	23.06	1.7	24.76	30	PASS
n66	15	40	352000	1@1	DFT_QPSK	23	1.7	24.7	30	PASS
n66	15	40	352000	1@214	DFT_QPSK	22.85	1.7	24.55	30	PASS
n66	15	40	352000	1@1	DFT_QAM16	22.02	1.7	23.72	30	PASS
n66	15	40	352000	1@1	DFT_QAM64	20.71	1.7	22.41	30	PASS
n66	15	40	352000	1@1	DFT_QAM256	18.65	1.7	20.35	30	PASS
n66	15	40	352000	1@1	CP_QPSK	21.56	1.7	23.26	30	PASS

2 Frequency stability for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n66	15	5	342500	12@6	DFT_BPSK	-1.80	-0.00105	-2.5	2.5	PASS
n66	15	5	342500	1@1	DFT_BPSK	-0.95	-0.00055	-2.5	2.5	PASS
n66	15	5	342500	1@23	DFT_BPSK	-0.19	-0.00011	-2.5	2.5	PASS
n66	15	5	342500	12@6	DFT_QPSK	-3.19	-0.00186	-2.5	2.5	PASS
n66	15	5	342500	1@1	DFT_QPSK	-1.81	-0.00106	-2.5	2.5	PASS
n66	15	5	342500	1@23	DFT_QPSK	-3.75	-0.00219	-2.5	2.5	PASS
n66	15	5	349000	12@6	DFT_BPSK	-0.82	-0.00047	-2.5	2.5	PASS
n66	15	5	349000	1@1	DFT_BPSK	-0.08	-0.00005	-2.5	2.5	PASS
n66	15	5	349000	1@23	DFT_BPSK	-0.73	-0.00042	-2.5	2.5	PASS
n66	15	5	349000	12@6	DFT_QPSK	1.35	0.00077	-2.5	2.5	PASS
n66	15	5	349000	1@1	DFT_QPSK	2.19	0.00126	-2.5	2.5	PASS
n66	15	5	349000	1@23	DFT_QPSK	-0.20	-0.00011	-2.5	2.5	PASS
n66	15	5	355500	12@6	DFT_BPSK	1.05	0.00059	-2.5	2.5	PASS
n66	15	5	355500	1@1	DFT_BPSK	0.67	0.00038	-2.5	2.5	PASS
n66	15	5	355500	1@23	DFT_BPSK	0.66	0.00037	-2.5	2.5	PASS
n66	15	5	355500	12@6	DFT_QPSK	-2.78	-0.00156	-2.5	2.5	PASS
n66	15	5	355500	1@1	DFT_QPSK	-3.63	-0.00204	-2.5	2.5	PASS
n66	15	5	355500	1@23	DFT_QPSK	-1.90	-0.00107	-2.5	2.5	PASS
n66	15	20	344000	50@25	DFT_BPSK	-3.58	-0.00208	-2.5	2.5	PASS
n66	15	20	344000	1@1	DFT_BPSK	-4.81	-0.00280	-2.5	2.5	PASS
n66	15	20	344000	1@104	DFT_BPSK	-3.49	-0.00203	-2.5	2.5	PASS
n66	15	20	344000	50@25	DFT_QPSK	-2.42	-0.00141	-2.5	2.5	PASS
n66	15	20	344000	1@1	DFT_QPSK	-1.79	-0.00104	-2.5	2.5	PASS
n66	15	20	344000	1@104	DFT_QPSK	-1.37	-0.00080	-2.5	2.5	PASS
n66	15	20	349000	50@25	DFT_BPSK	-1.49	-0.00085	-2.5	2.5	PASS
n66	15	20	349000	1@1	DFT_BPSK	-1.47	-0.00084	-2.5	2.5	PASS
n66	15	20	349000	1@104	DFT_BPSK	-0.54	-0.00031	-2.5	2.5	PASS
n66	15	20	349000	50@25	DFT_QPSK	1.36	0.00078	-2.5	2.5	PASS
n66	15	20	349000	1@1	DFT_QPSK	0.43	0.00025	-2.5	2.5	PASS
n66	15	20	349000	1@104	DFT_QPSK	0.10	0.00006	-2.5	2.5	PASS
n66	15	20	354000	50@25	DFT_BPSK	-1.94	-0.00110	-2.5	2.5	PASS
n66	15	20	354000	1@1	DFT_BPSK	-0.45	-0.00025	-2.5	2.5	PASS
n66	15	20	354000	1@104	DFT_BPSK	-0.27	-0.00015	-2.5	2.5	PASS
n66	15	20	354000	50@25	DFT_QPSK	-5.17	-0.00292	-2.5	2.5	PASS
n66	15	20	354000	1@1	DFT_QPSK	-6.12	-0.00346	-2.5	2.5	PASS
n66	15	20	354000	1@104	DFT_QPSK	-3.21	-0.00181	-2.5	2.5	PASS
n66	15	40	346000	108@54	DFT_BPSK	0.07	0.00004	-2.5	2.5	PASS
n66	15	40	346000	1@1	DFT_BPSK	-1.80	-0.00104	-2.5	2.5	PASS
n66	15	40	346000	1@214	DFT_BPSK	-0.78	-0.00045	-2.5	2.5	PASS


n66	15	40	346000	108@54	DFT_QPSK	0.43	0.00025	-2.5	2.5	PASS
n66	15	40	346000	1@1	DFT_QPSK	1.02	0.00059	-2.5	2.5	PASS
n66	15	40	346000	1@214	DFT_QPSK	0.10	0.00006	-2.5	2.5	PASS
n66	15	40	349000	108@54	DFT_BPSK	-0.81	-0.00046	-2.5	2.5	PASS
n66	15	40	349000	1@1	DFT_BPSK	-1.07	-0.00061	-2.5	2.5	PASS
n66	15	40	349000	1@214	DFT_BPSK	-0.76	-0.00044	-2.5	2.5	PASS
n66	15	40	349000	108@54	DFT_QPSK	0.08	0.00005	-2.5	2.5	PASS
n66	15	40	349000	1@1	DFT_QPSK	0.34	0.00019	-2.5	2.5	PASS
n66	15	40	349000	1@214	DFT_QPSK	-1.75	-0.00100	-2.5	2.5	PASS
n66	15	40	352000	108@54	DFT_BPSK	1.00	0.00057	-2.5	2.5	PASS
n66	15	40	352000	1@1	DFT_BPSK	1.09	0.00062	-2.5	2.5	PASS
n66	15	40	352000	1@214	DFT_BPSK	0.41	0.00023	-2.5	2.5	PASS
n66	15	40	352000	108@54	DFT_QPSK	-1.48	-0.00084	-2.5	2.5	PASS
n66	15	40	352000	1@1	DFT_QPSK	-3.35	-0.00190	-2.5	2.5	PASS
n66	15	40	352000	1@214	DFT_QPSK	-1.93	-0.00110	-2.5	2.5	PASS

3 Peak-to-Average Ratio for NR FR1


<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
n66	15	5	342500	25@0	DFT_BPSK	4.35	13	PASS
n66	15	5	342500	25@0	DFT_QPSK	5.61	13	PASS
n66	15	5	342500	25@0	DFT_QAM16	6.16	13	PASS
n66	15	5	342500	25@0	DFT_QAM64	6.62	13	PASS
n66	15	5	342500	25@0	DFT_QAM256	6.99	13	PASS
n66	15	5	349000	25@0	DFT_BPSK	3.98	13	PASS
n66	15	5	349000	25@0	DFT_QPSK	4.91	13	PASS
n66	15	5	349000	25@0	DFT_QAM16	5.82	13	PASS
n66	15	5	349000	25@0	DFT_QAM64	5.92	13	PASS
n66	15	5	349000	25@0	DFT_QAM256	6.47	13	PASS
n66	15	5	355500	25@0	DFT_BPSK	3.90	13	PASS
n66	15	5	355500	25@0	DFT_QPSK	4.87	13	PASS
n66	15	5	355500	25@0	DFT_QAM16	5.65	13	PASS
n66	15	5	355500	25@0	DFT_QAM64	6.16	13	PASS
n66	15	5	355500	25@0	DFT_QAM256	6.71	13	PASS
n66	15	10	343000	50@0	DFT_BPSK	4.37	13	PASS
n66	15	10	343000	50@0	DFT_QPSK	5.50	13	PASS
n66	15	10	343000	50@0	DFT_QAM16	6.29	13	PASS
n66	15	10	343000	50@0	DFT_QAM64	6.42	13	PASS
n66	15	10	343000	50@0	DFT_QAM256	6.62	13	PASS
n66	15	10	349000	50@0	DFT_BPSK	4.24	13	PASS
n66	15	10	349000	50@0	DFT_QPSK	4.93	13	PASS
n66	15	10	349000	50@0	DFT_QAM16	5.81	13	PASS
n66	15	10	349000	50@0	DFT_QAM64	6.10	13	PASS
n66	15	10	349000	50@0	DFT_QAM256	6.54	13	PASS
n66	15	10	355000	50@0	DFT_BPSK	3.90	13	PASS
n66	15	10	355000	50@0	DFT_QPSK	4.88	13	PASS
n66	15	10	355000	50@0	DFT_QAM16	5.66	13	PASS
n66	15	10	355000	50@0	DFT_QAM64	5.99	13	PASS
n66	15	10	355000	50@0	DFT_QAM256	6.48	13	PASS
n66	15	15	343500	75@0	DFT_BPSK	4.37	13	PASS
n66	15	15	343500	75@0	DFT_QPSK	5.52	13	PASS
n66	15	15	343500	75@0	DFT_QAM16	6.35	13	PASS
n66	15	15	343500	75@0	DFT_QAM64	6.69	13	PASS
n66	15	15	343500	75@0	DFT_QAM256	6.76	13	PASS
n66	15	15	349000	75@0	DFT_BPSK	4.16	13	PASS
n66	15	15	349000	75@0	DFT_QPSK	5.14	13	PASS
n66	15	15	349000	75@0	DFT_QAM16	5.80	13	PASS
n66	15	15	349000	75@0	DFT_QAM64	6.14	13	PASS

n66	15	15	349000	75@0	DFT_QAM256	6.61	13	PASS
n66	15	15	354500	75@0	DFT_BPSK	4.14	13	PASS
n66	15	15	354500	75@0	DFT_QPSK	5.07	13	PASS
n66	15	15	354500	75@0	DFT_QAM16	5.93	13	PASS
n66	15	15	354500	75@0	DFT_QAM64	6.27	13	PASS
n66	15	15	354500	75@0	DFT_QAM256	6.67	13	PASS
n66	15	20	344000	100@0	DFT_BPSK	4.92	13	PASS
n66	15	20	344000	100@0	DFT_QPSK	5.57	13	PASS
n66	15	20	344000	100@0	DFT_QAM16	6.24	13	PASS
n66	15	20	344000	100@0	DFT_QAM64	6.45	13	PASS
n66	15	20	344000	100@0	DFT_QAM256	6.65	13	PASS
n66	15	20	349000	100@0	DFT_BPSK	4.08	13	PASS
n66	15	20	349000	100@0	DFT_QPSK	5.19	13	PASS
n66	15	20	349000	100@0	DFT_QAM16	5.98	13	PASS
n66	15	20	349000	100@0	DFT_QAM64	6.21	13	PASS
n66	15	20	349000	100@0	DFT_QAM256	6.70	13	PASS
n66	15	20	354000	100@0	DFT_BPSK	4.19	13	PASS
n66	15	20	354000	100@0	DFT_QPSK	5.23	13	PASS
n66	15	20	354000	100@0	DFT_QAM16	6.00	13	PASS
n66	15	20	354000	100@0	DFT_QAM64	6.23	13	PASS
n66	15	20	354000	100@0	DFT_QAM256	6.55	13	PASS
n66	15	40	346000	216@0	DFT_BPSK	4.24	13	PASS
n66	15	40	346000	216@0	DFT_QPSK	5.33	13	PASS
n66	15	40	346000	216@0	DFT_QAM16	6.13	13	PASS
n66	15	40	346000	216@0	DFT_QAM64	6.38	13	PASS
n66	15	40	346000	216@0	DFT_QAM256	6.61	13	PASS
n66	15	40	349000	216@0	DFT_BPSK	4.28	13	PASS
n66	15	40	349000	216@0	DFT_QPSK	5.39	13	PASS
n66	15	40	349000	216@0	DFT_QAM16	6.02	13	PASS
n66	15	40	349000	216@0	DFT_QAM64	6.27	13	PASS
n66	15	40	349000	216@0	DFT_QAM256	6.61	13	PASS
n66	15	40	352000	216@0	DFT_BPSK	4.18	13	PASS
n66	15	40	352000	216@0	DFT_QPSK	5.25	13	PASS
n66	15	40	352000	216@0	DFT_QAM16	6.04	13	PASS
n66	15	40	352000	216@0	DFT_QAM64	6.32	13	PASS
n66	15	40	352000	216@0	DFT_QAM256	6.59	13	PASS


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=349000 RB=50@0

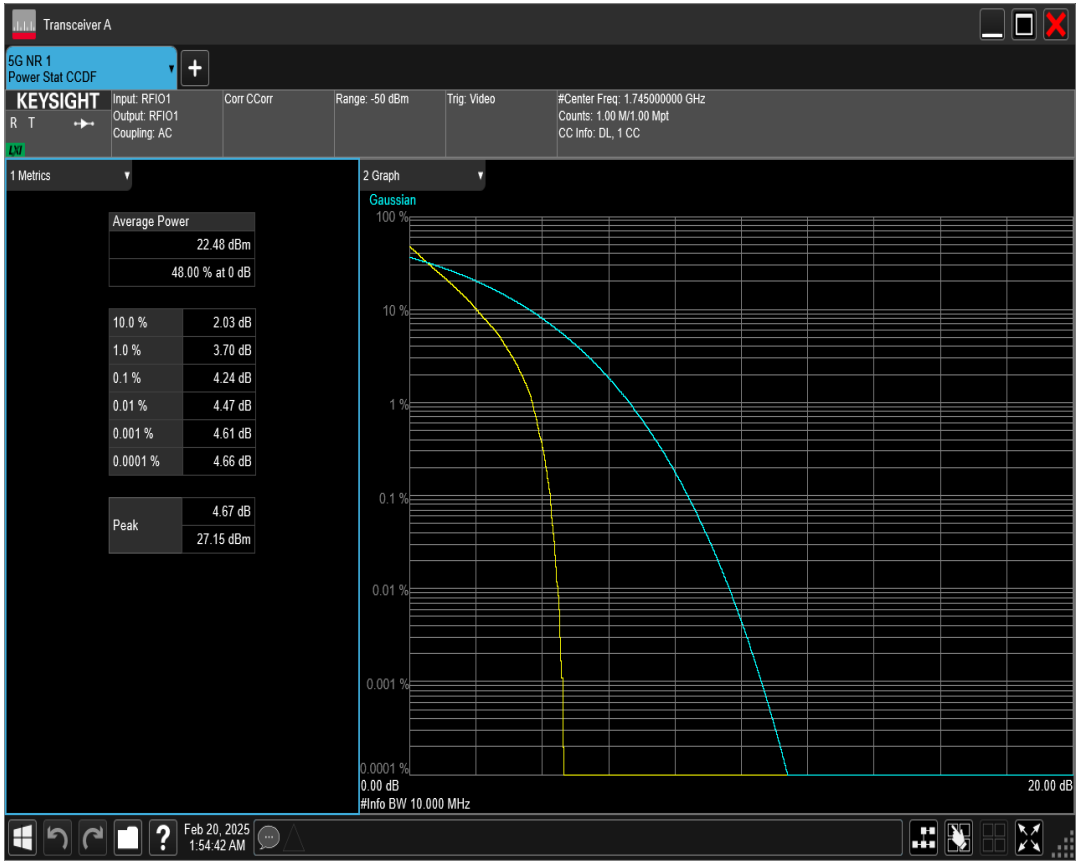


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=343000 RB=50@0

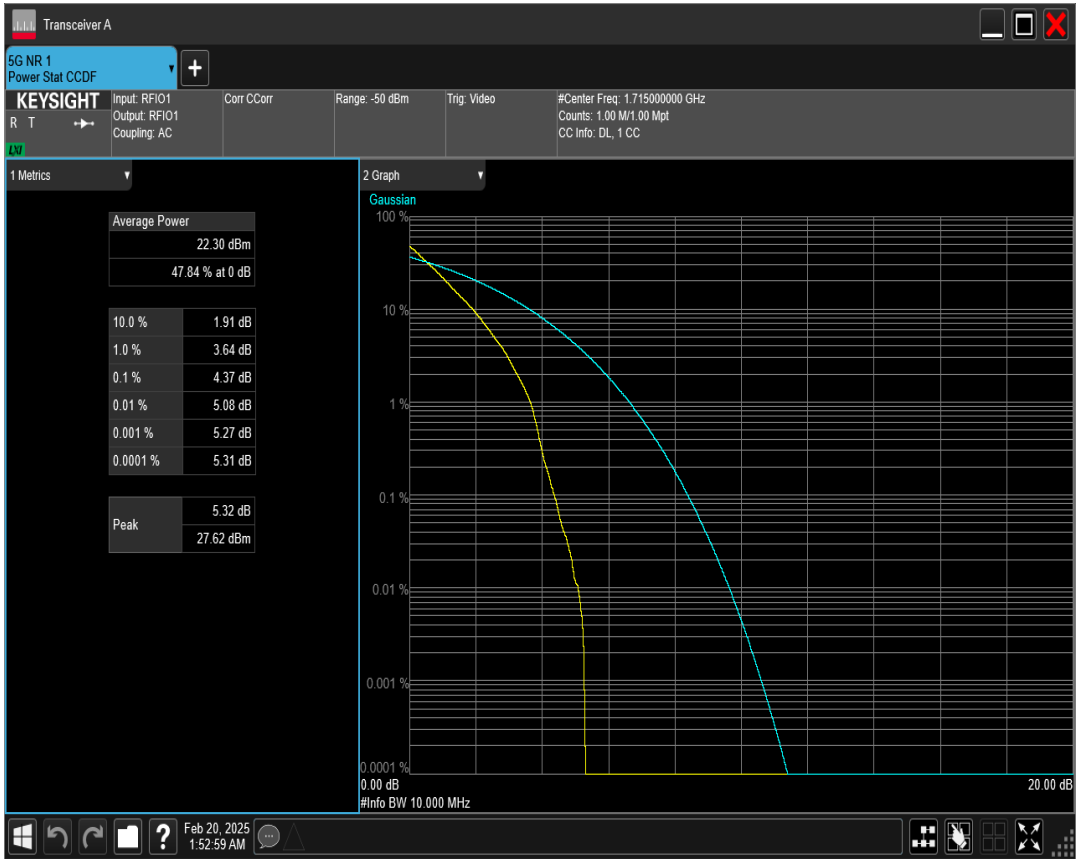


n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=343500 RB=75@0

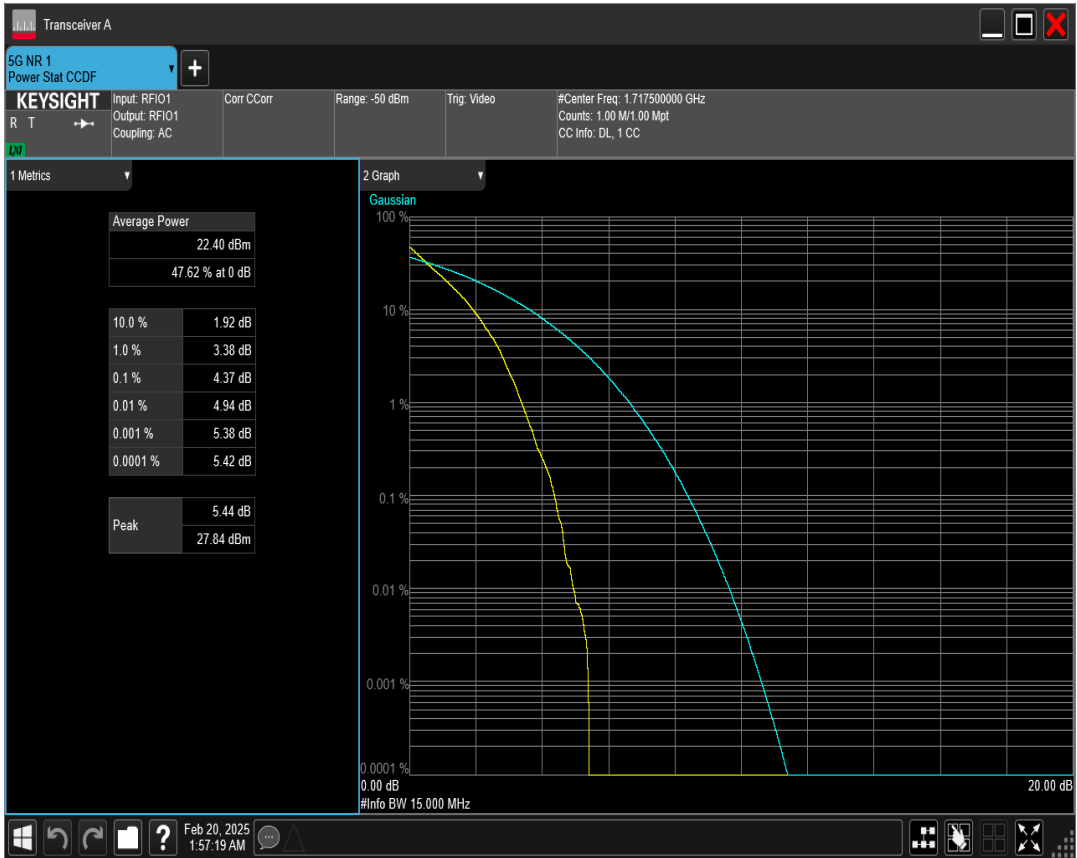


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=355000 RB=50@0

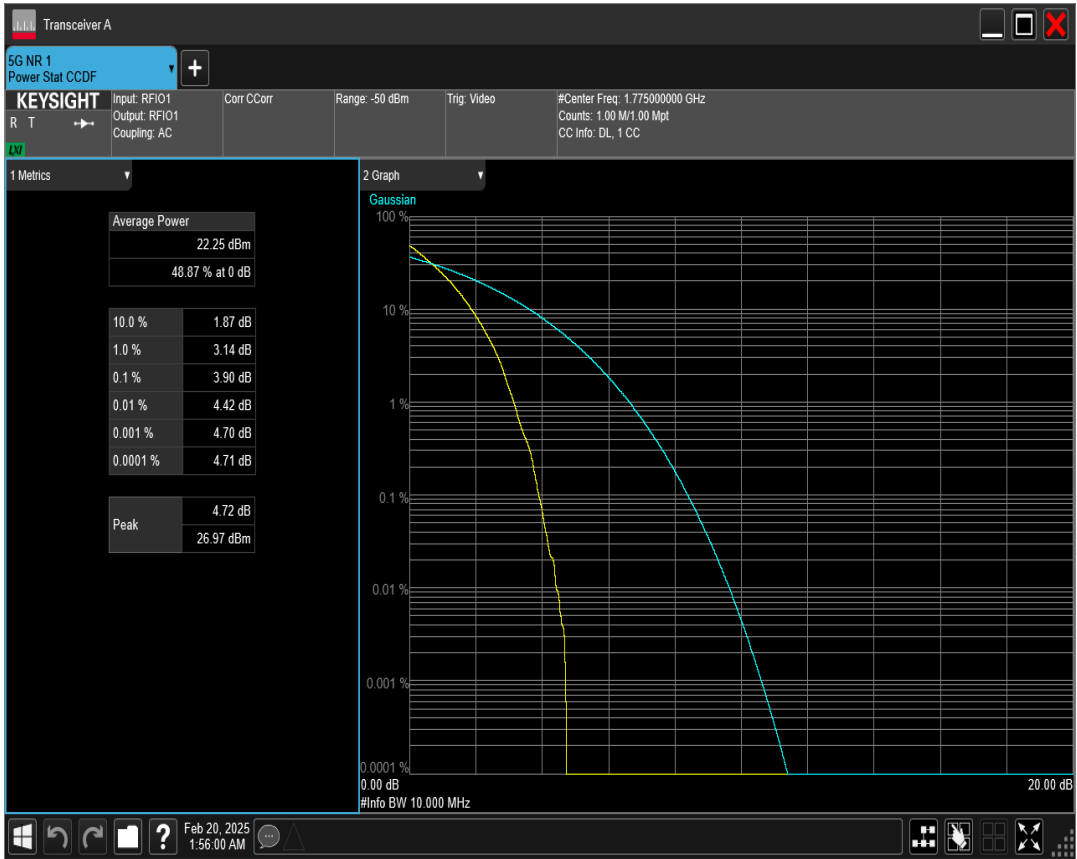


n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=349000 RB=75@0

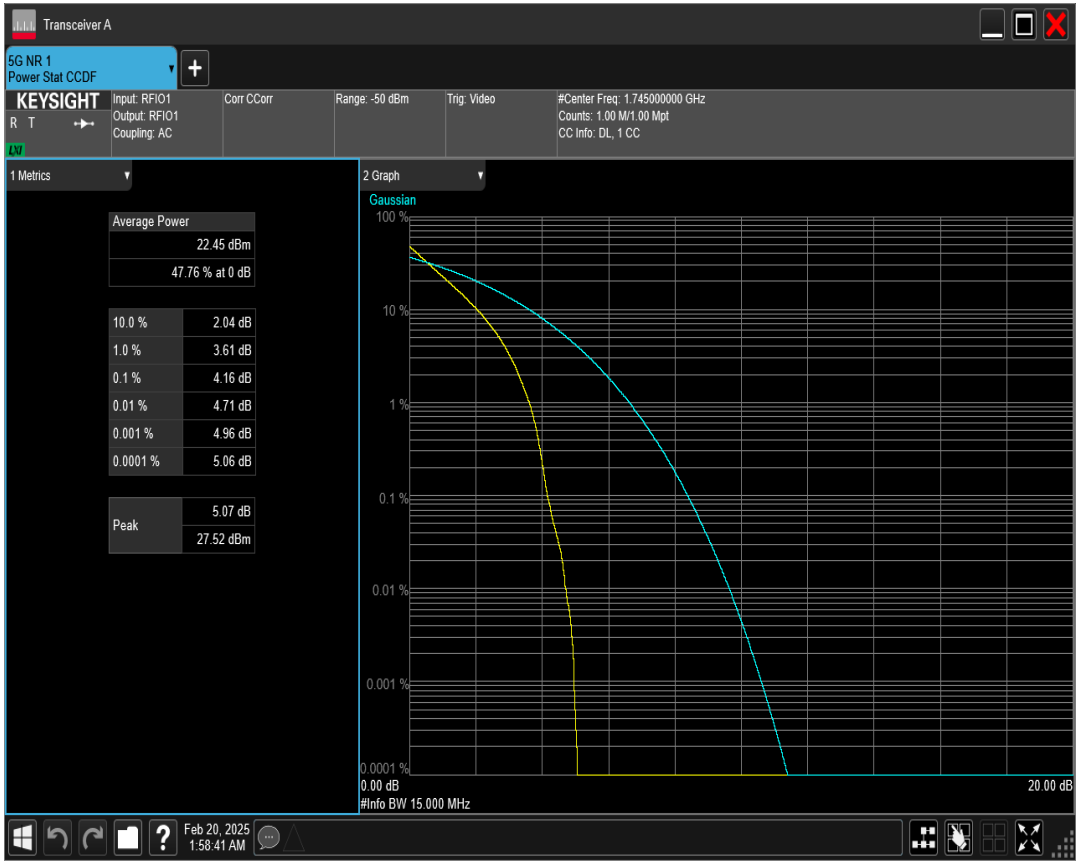


n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=344000 RB=100@0

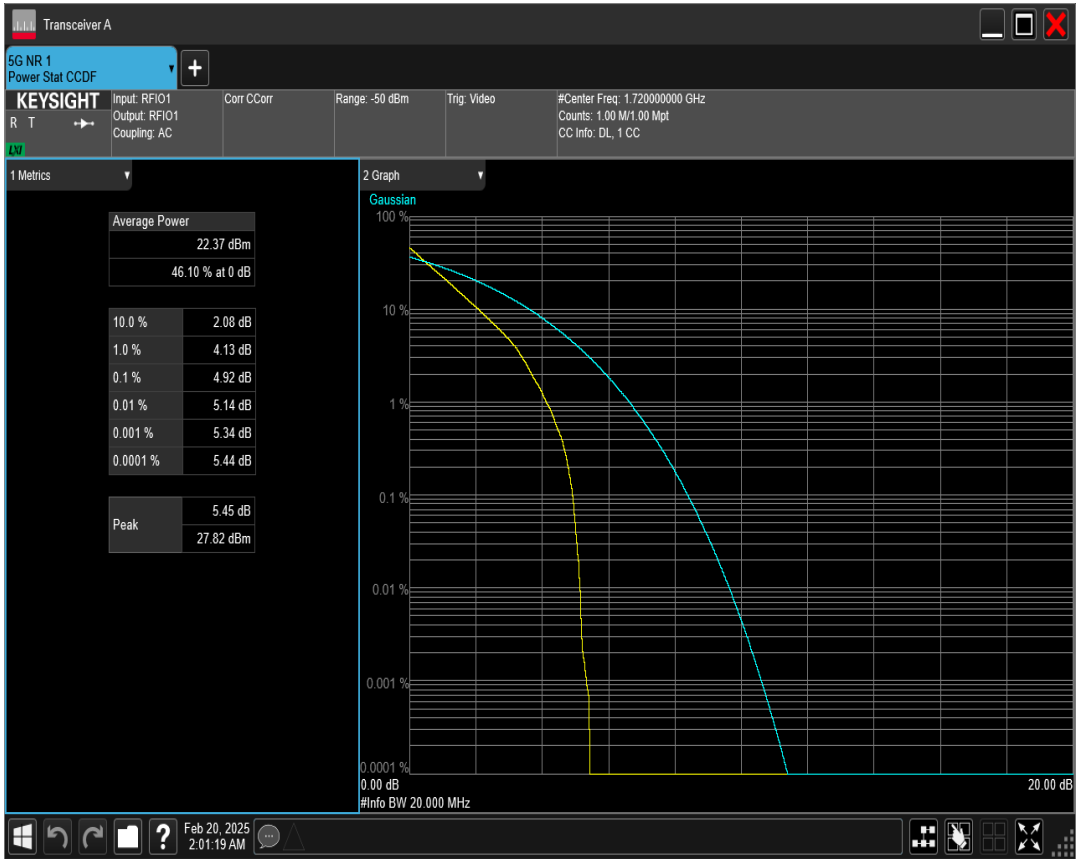

n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=354500 RB=75@0

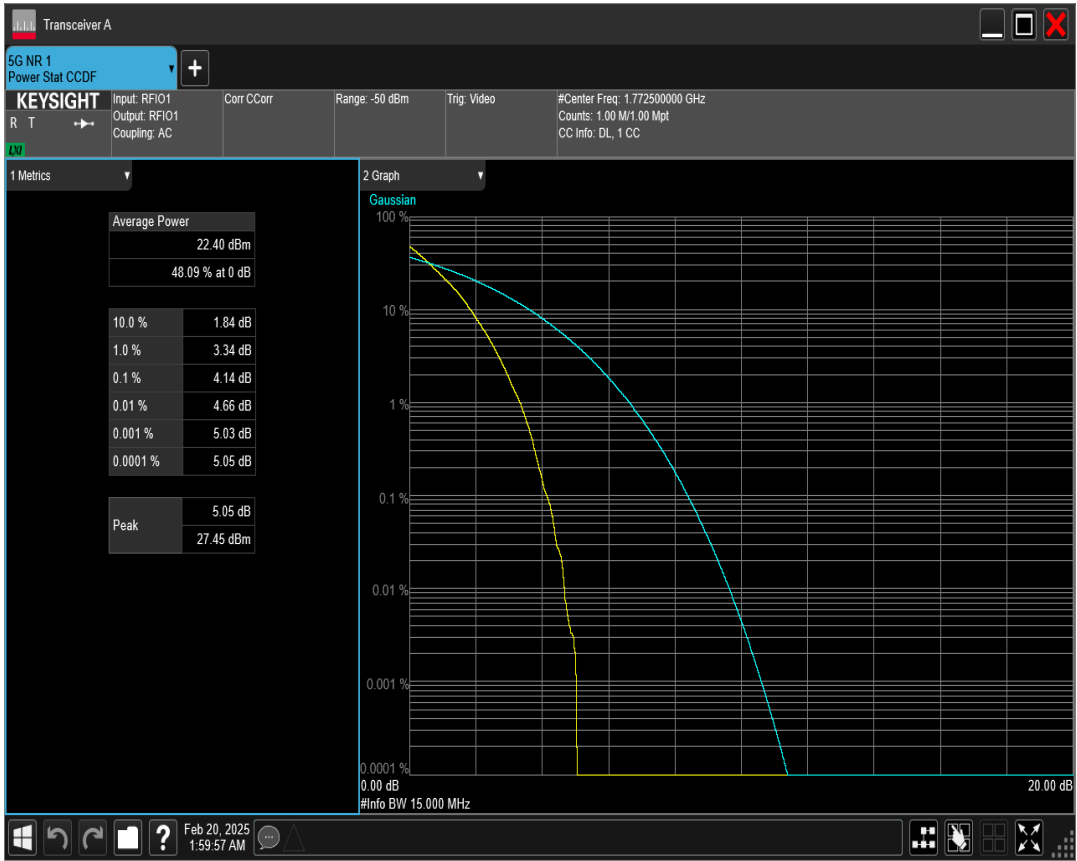


n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=349000 RB=100@0

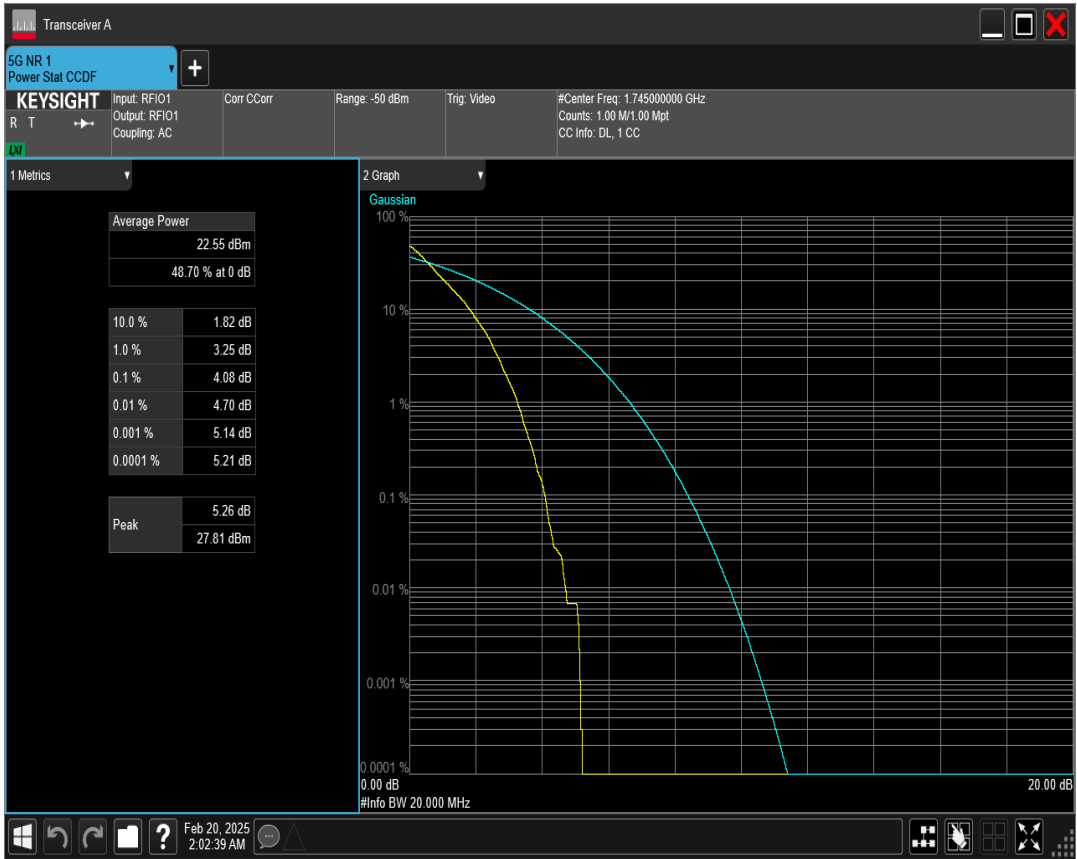


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=346000 RB=216@0




n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=354000 RB=100@0

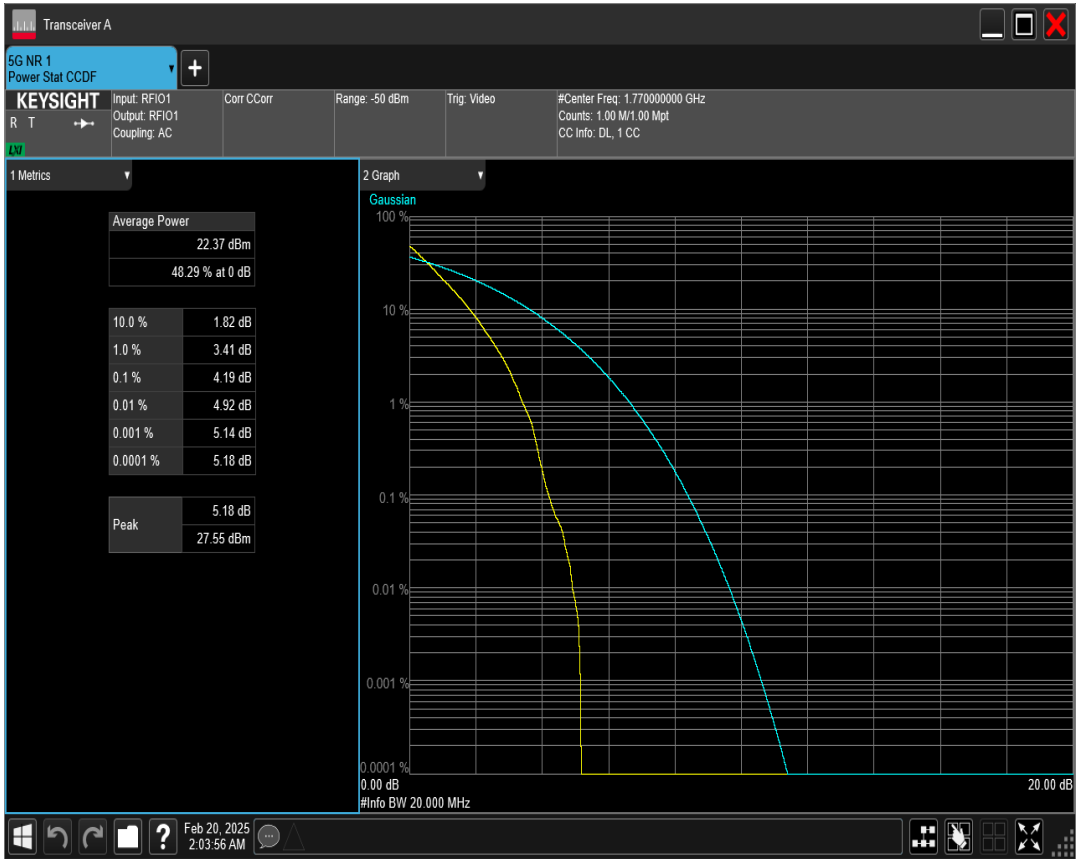


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=352000 RB=216@0

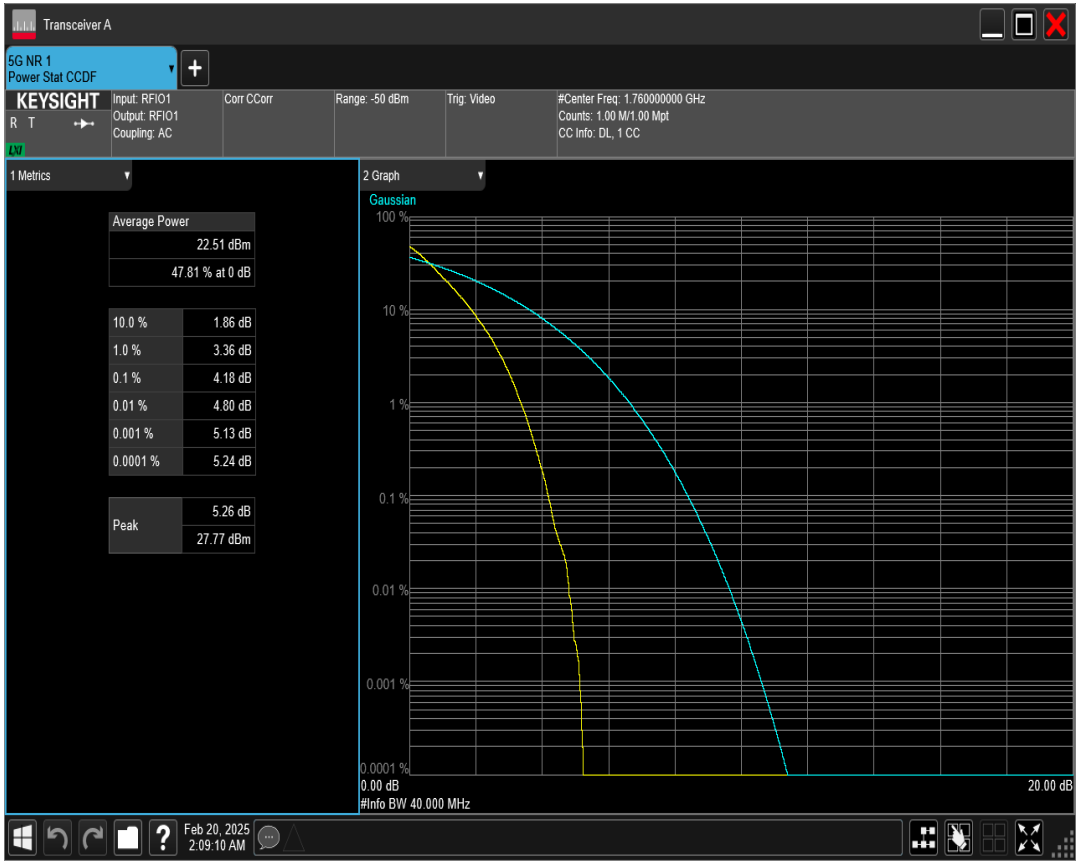


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=349000 RB=216@0

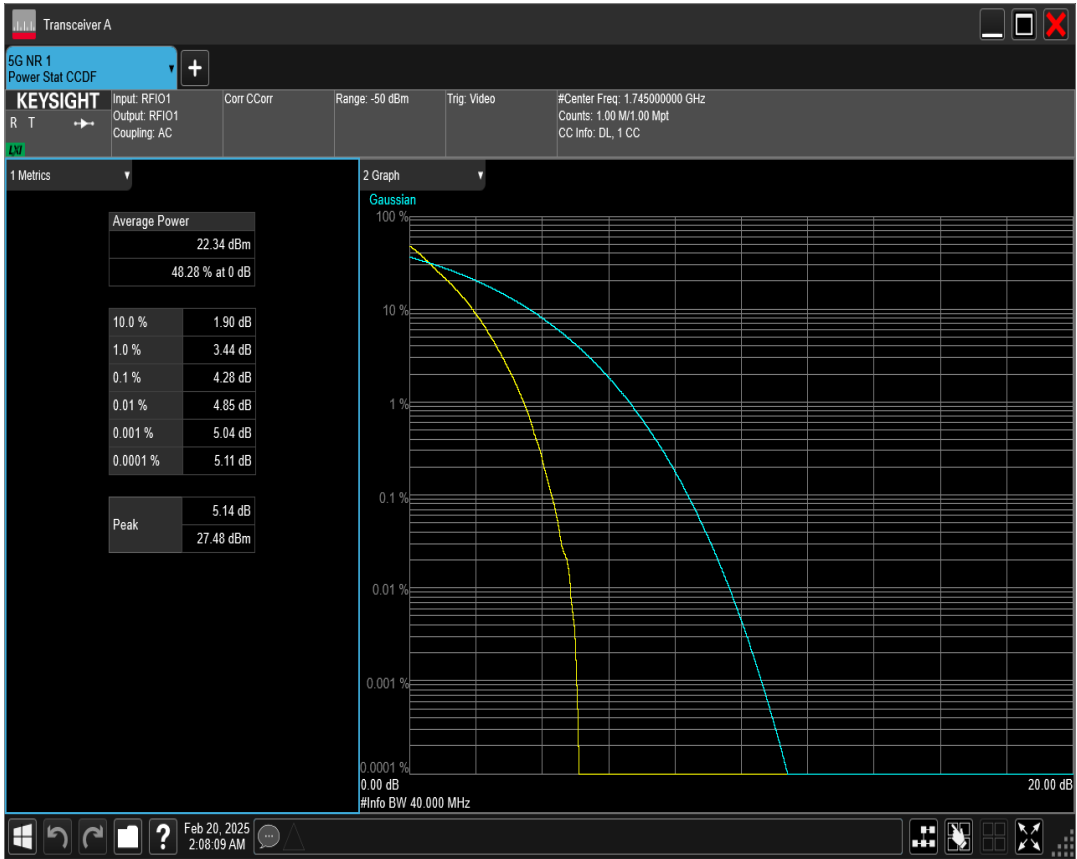


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=342500 RB=25@0

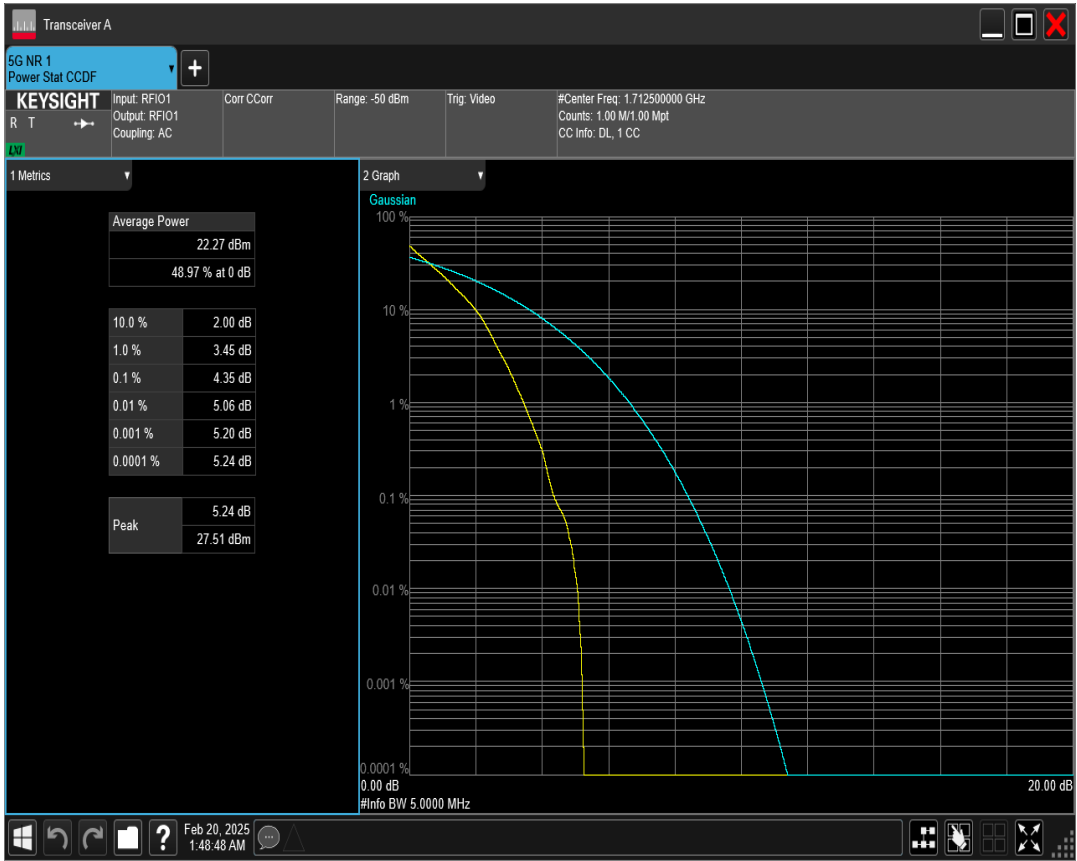


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=355500 RB=25@0

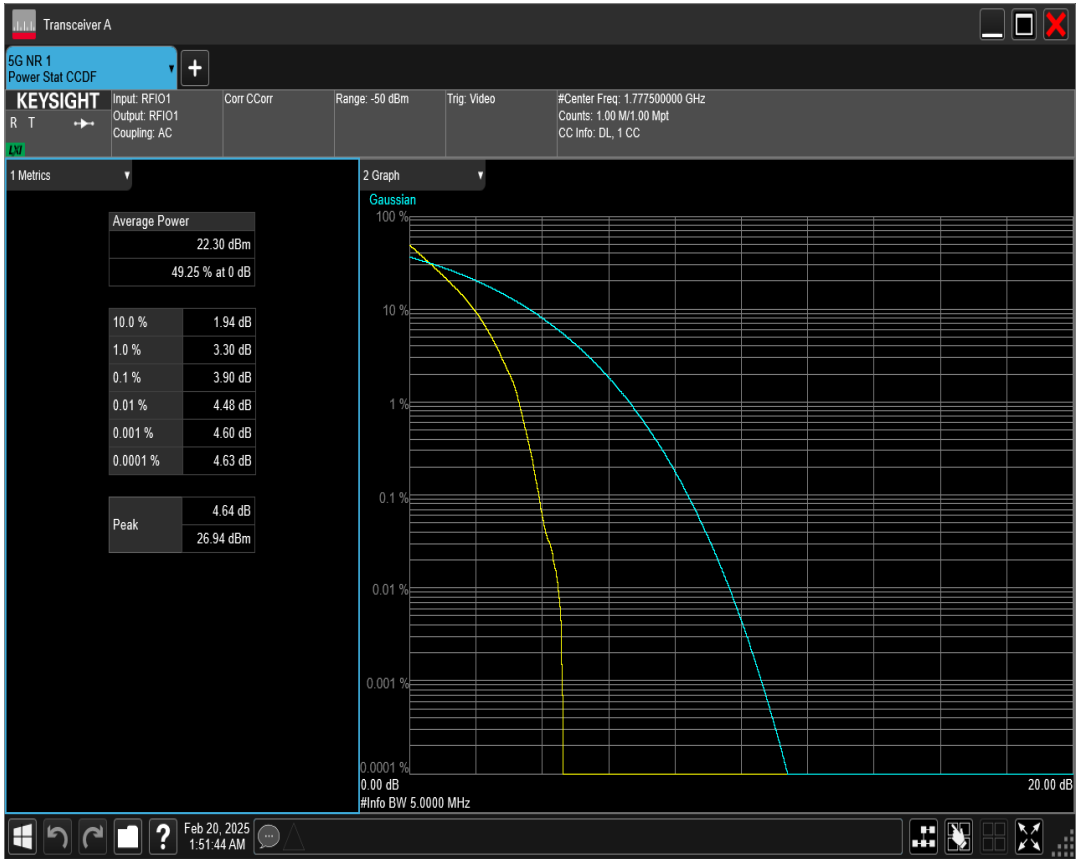


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=349000 RB=25@0

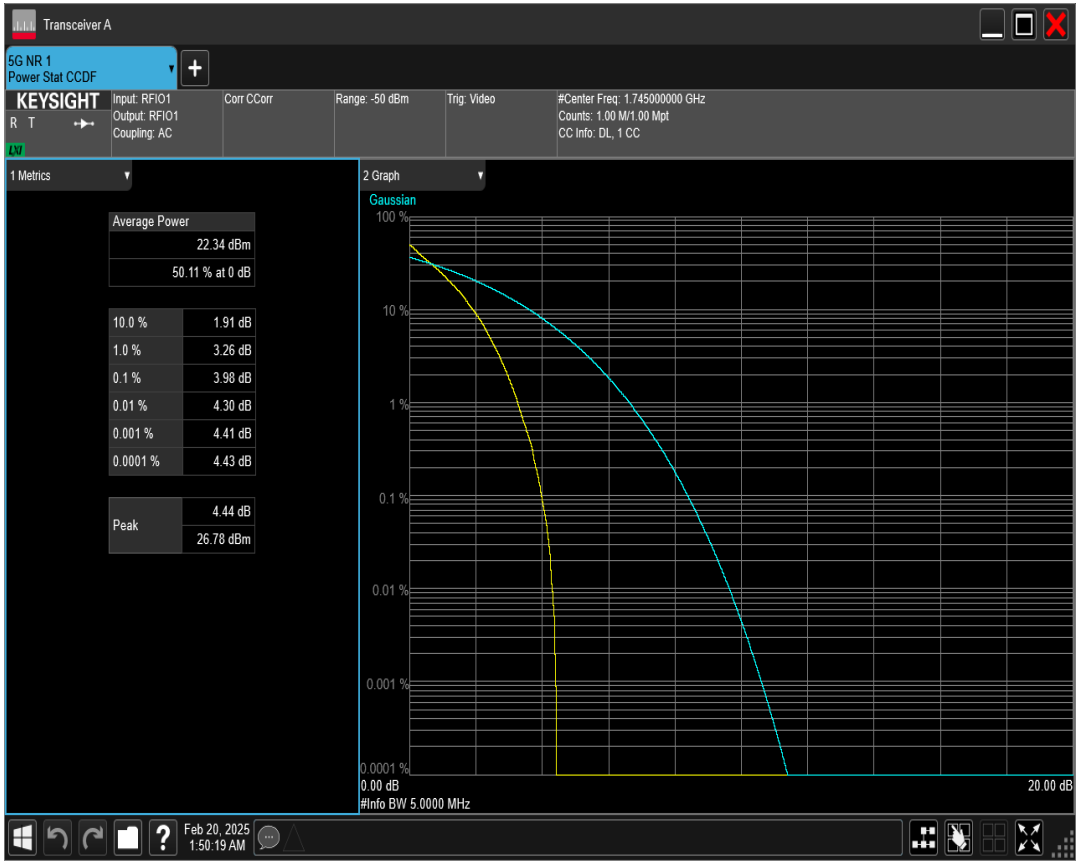


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=355000 RB=50@0

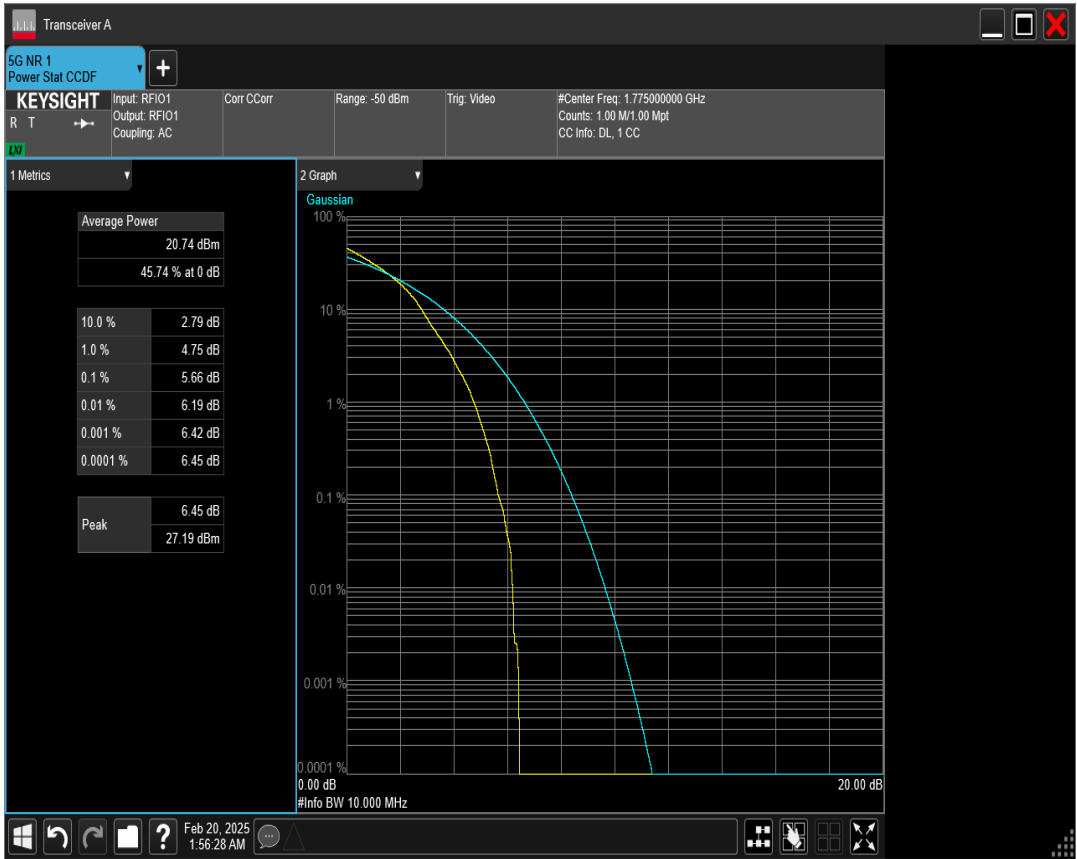


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=349000 RB=50@0

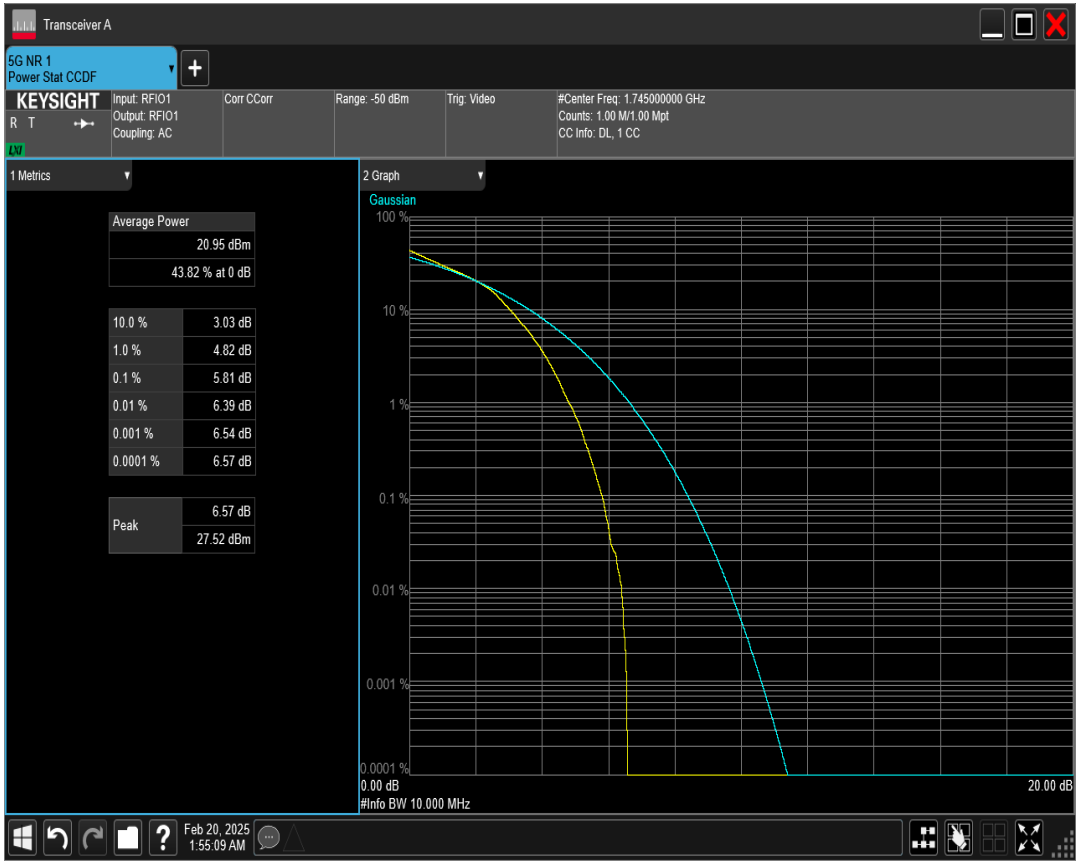


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=343000 RB=50@0

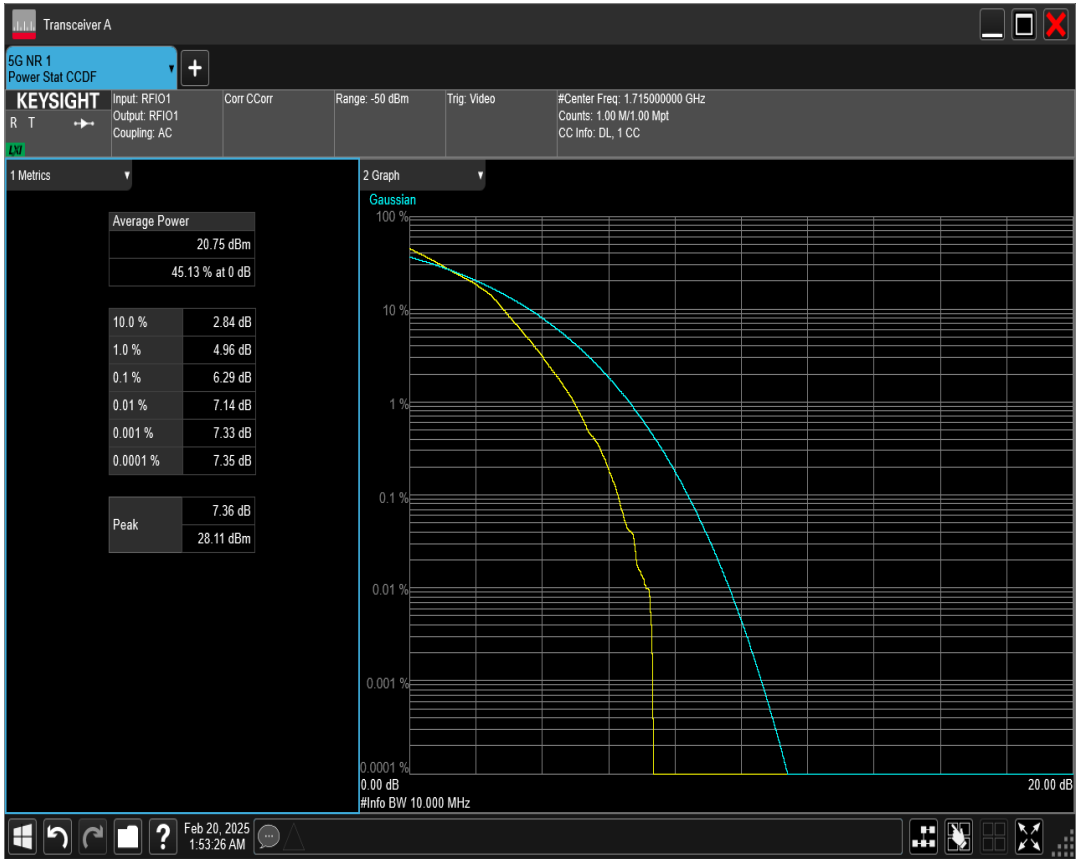


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=354500 RB=75@0

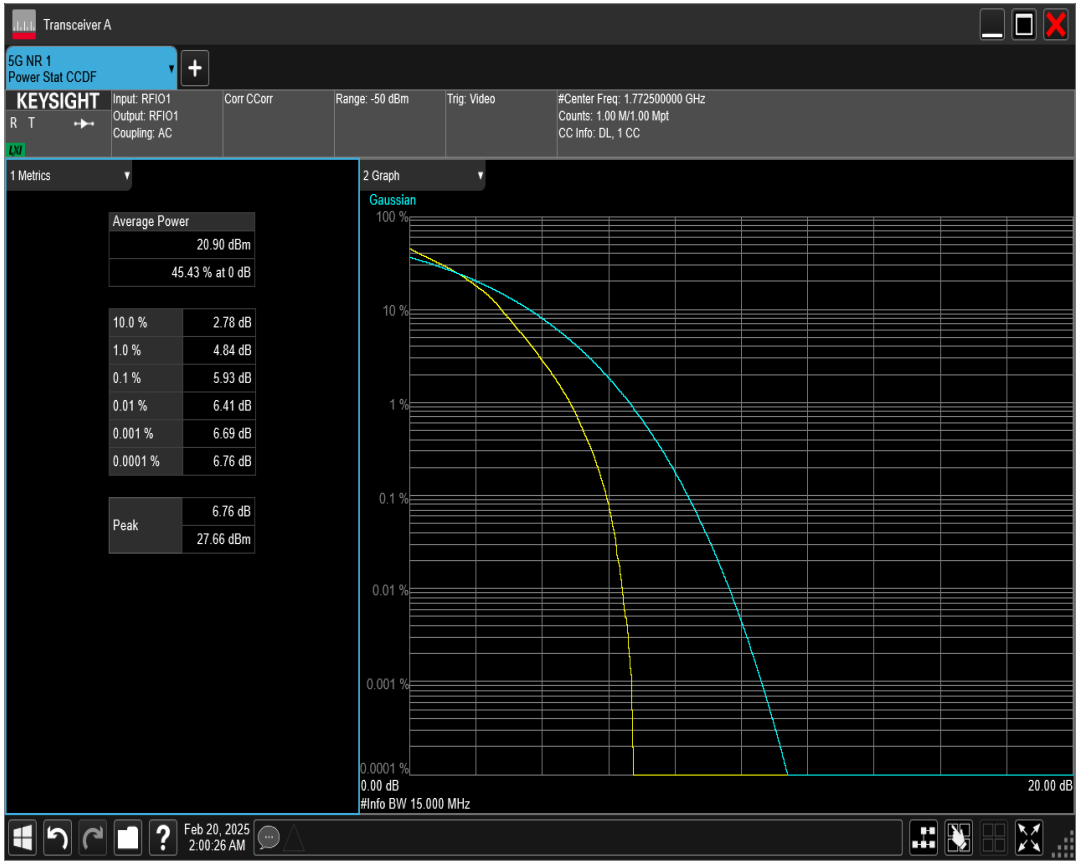


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=344000 RB=100@0

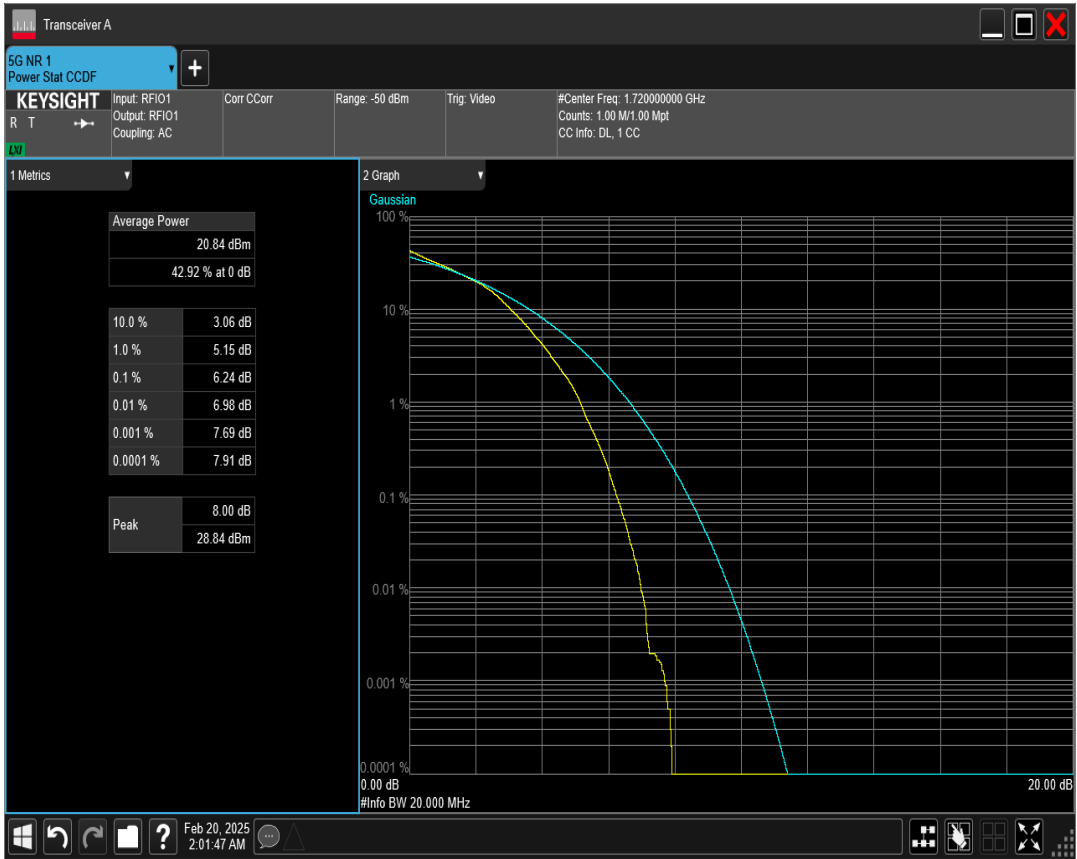


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=343500 RB=75@0

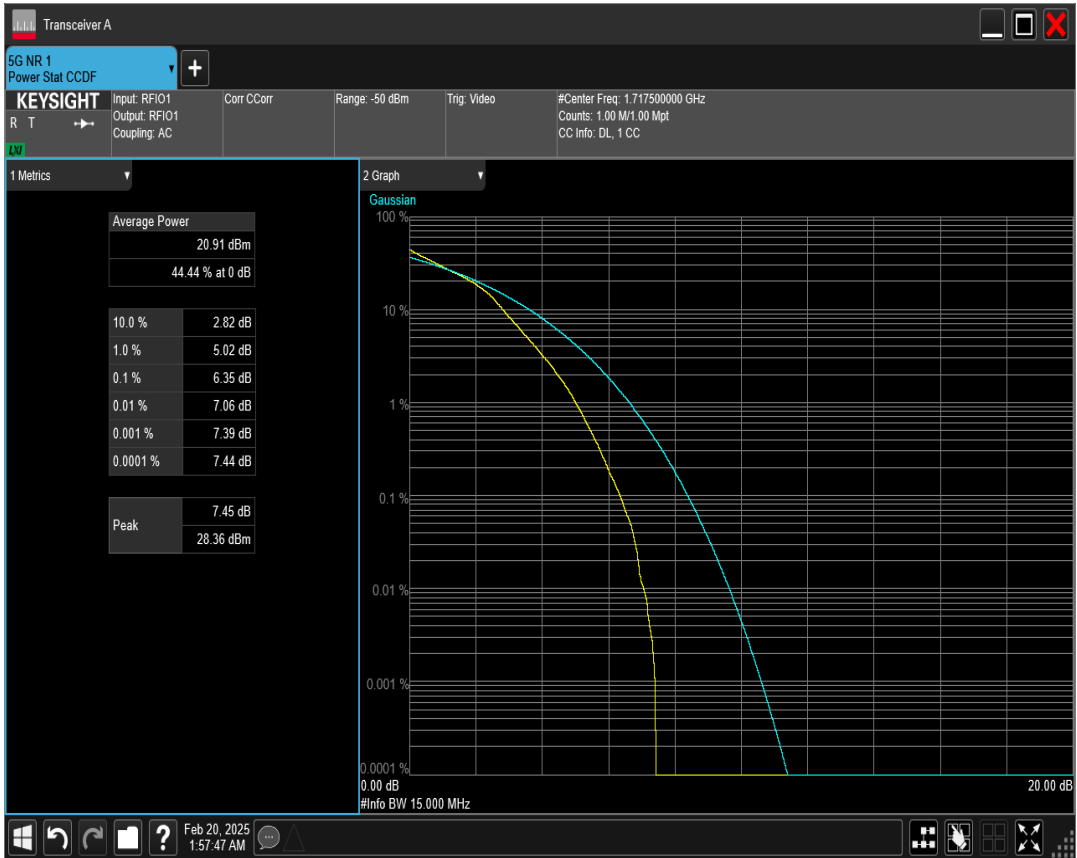


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=349000 RB=75@0

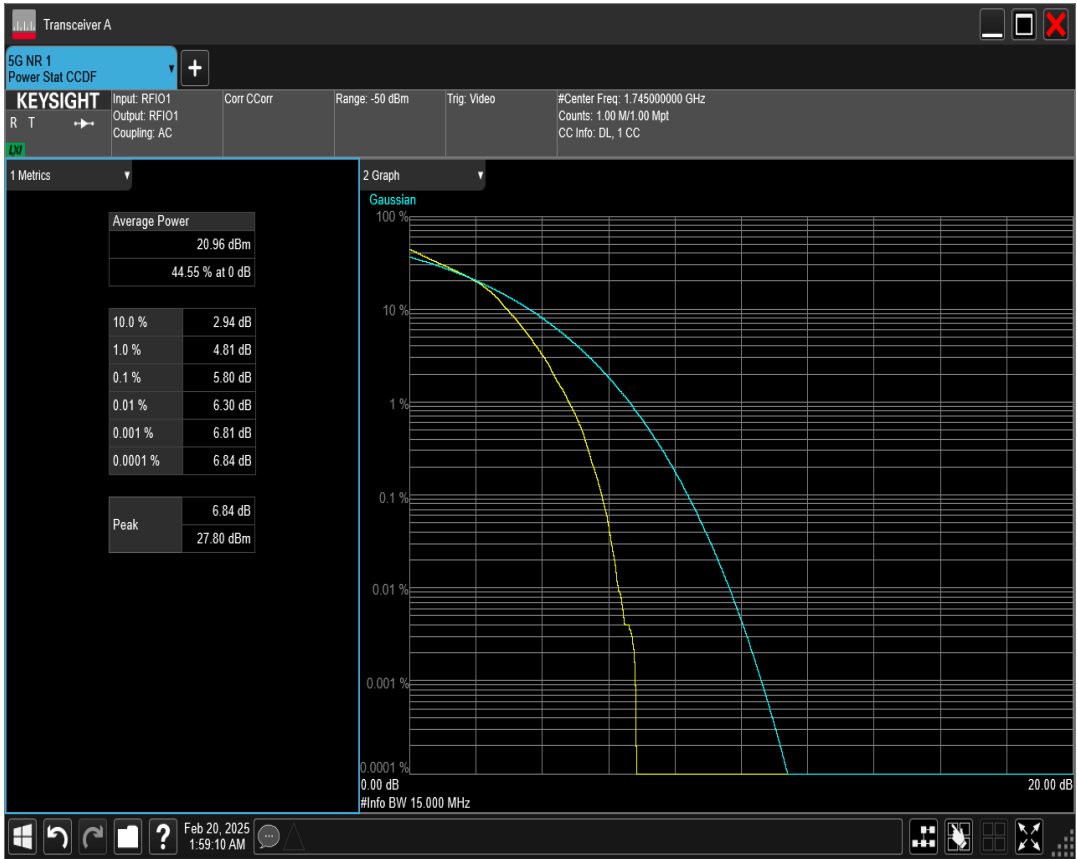


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=346000 RB=216@0

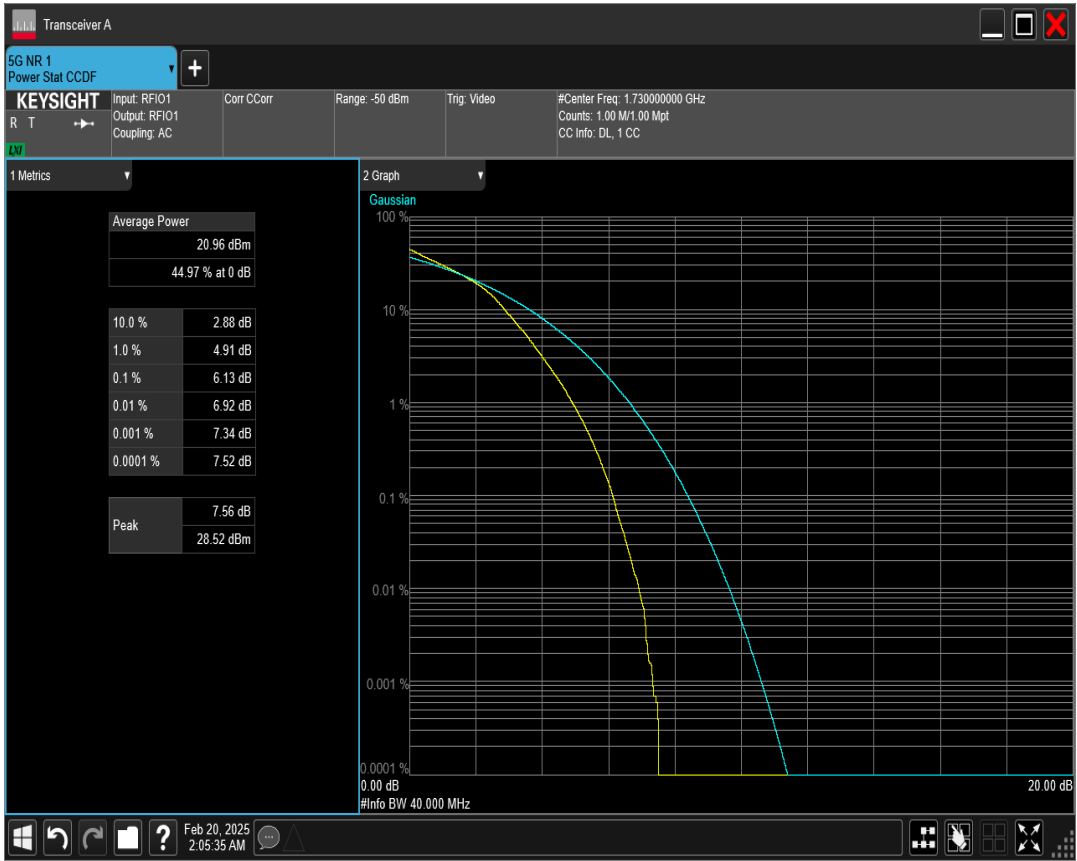


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=349000 RB=216@0

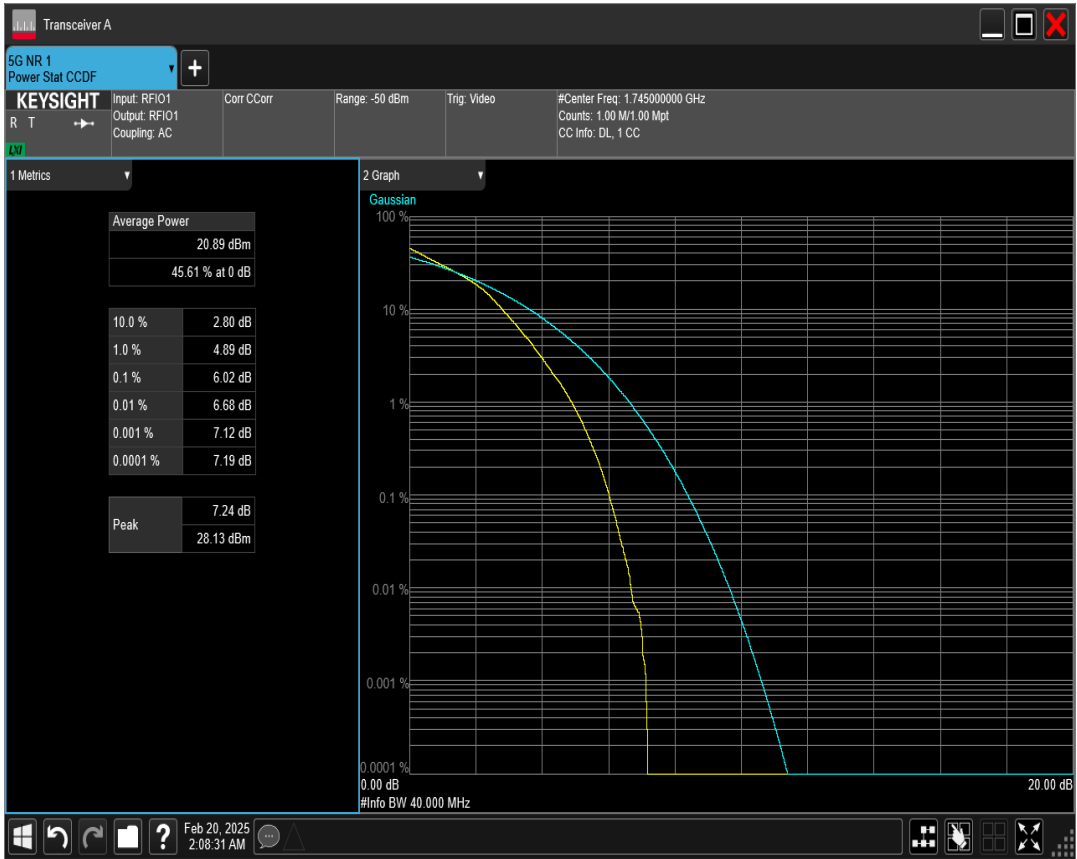


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=349000 RB=100@0

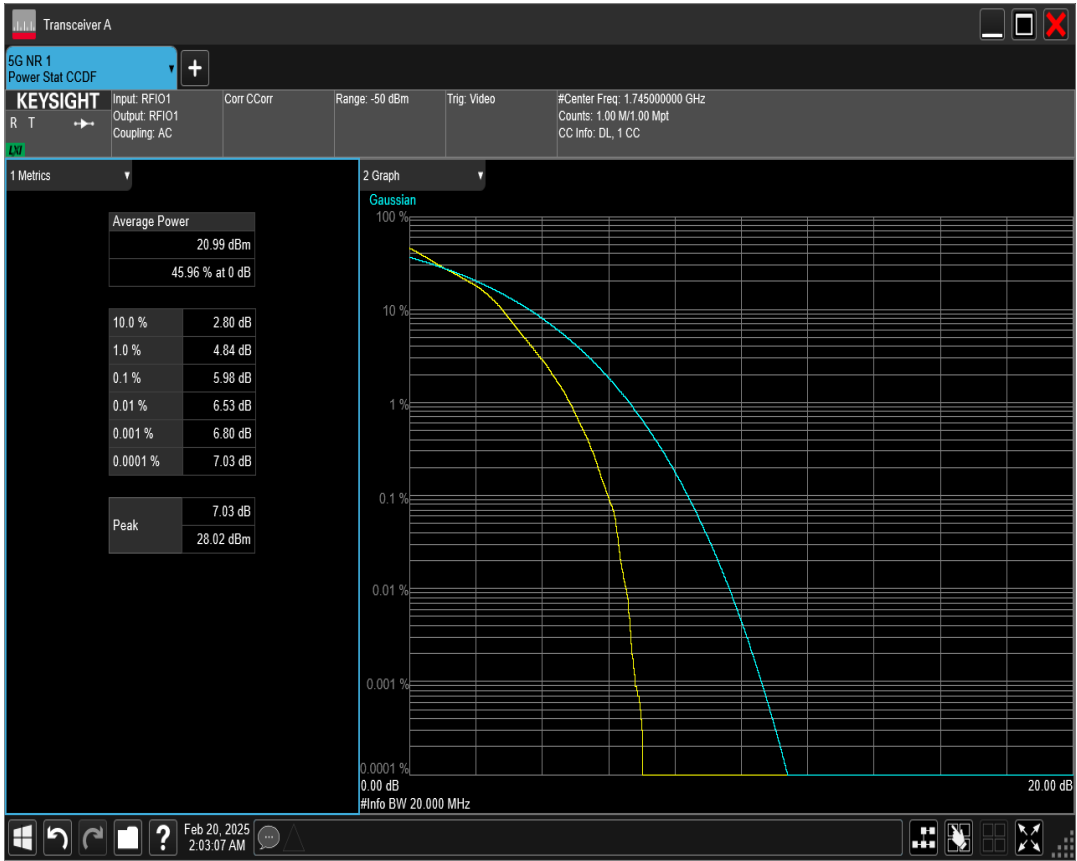


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=354000 RB=100@0

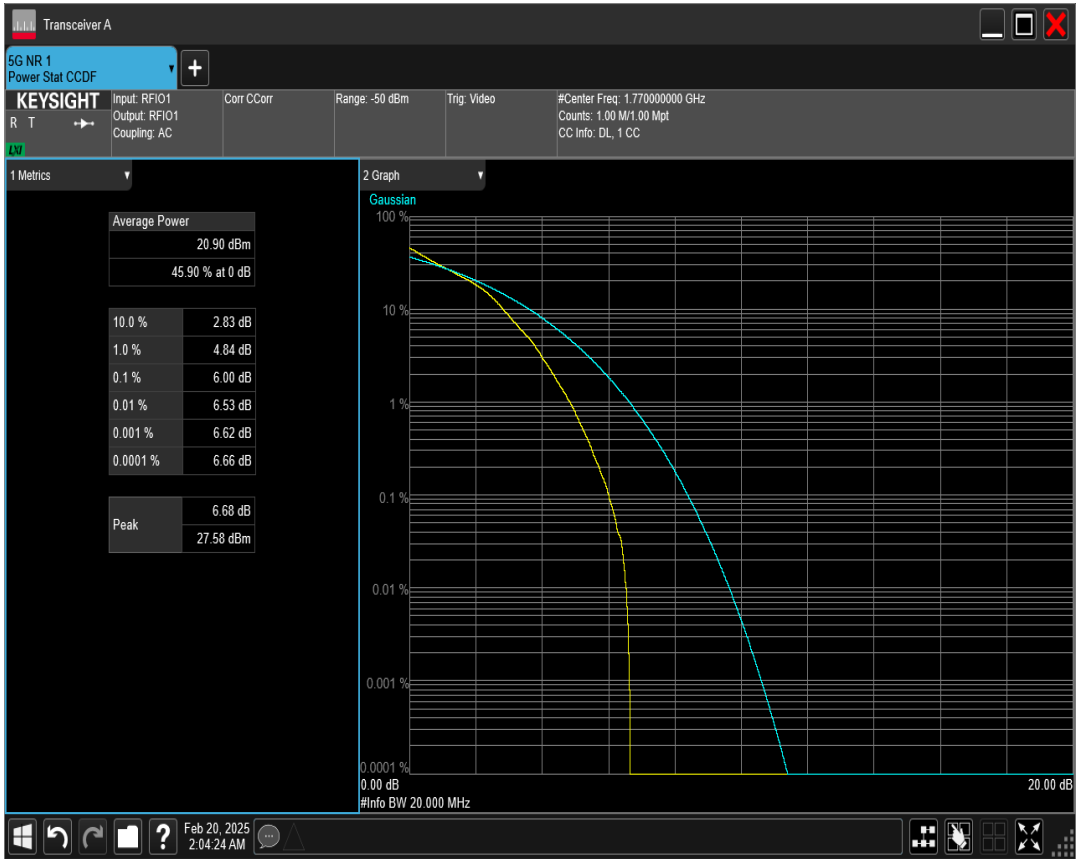


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=349000 RB=25@0

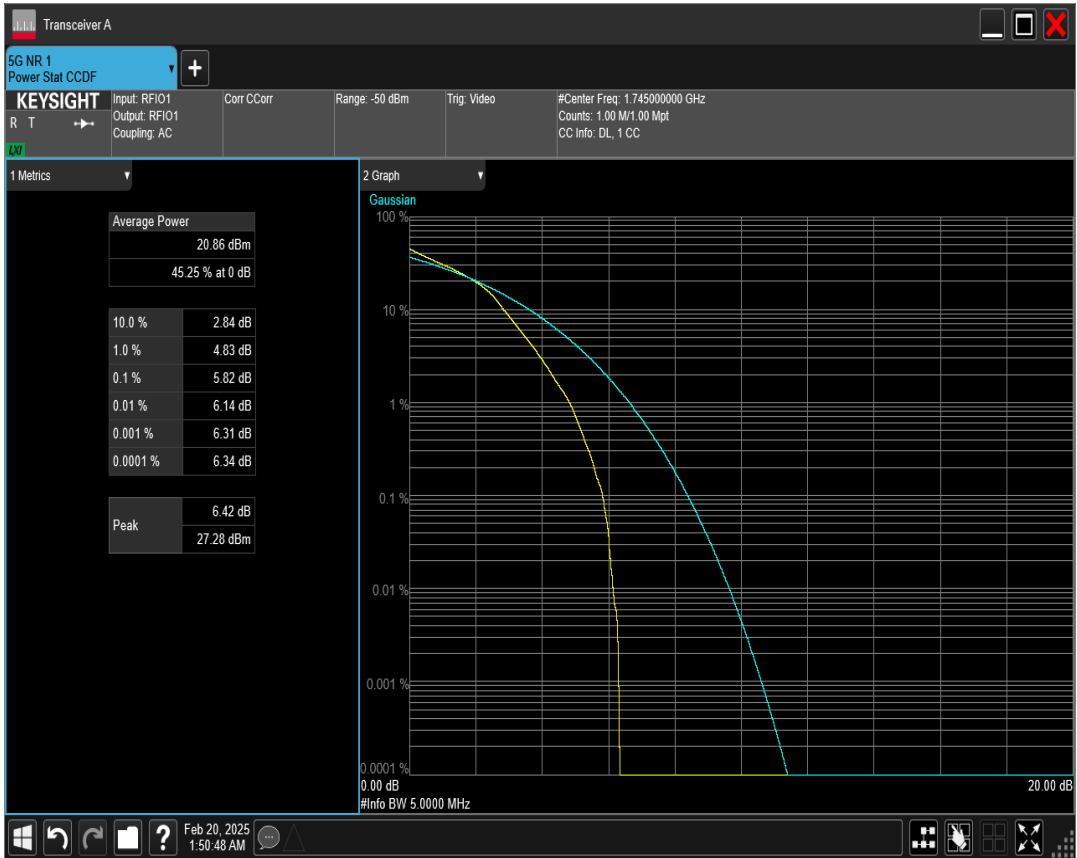


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=342500 RB=25@0

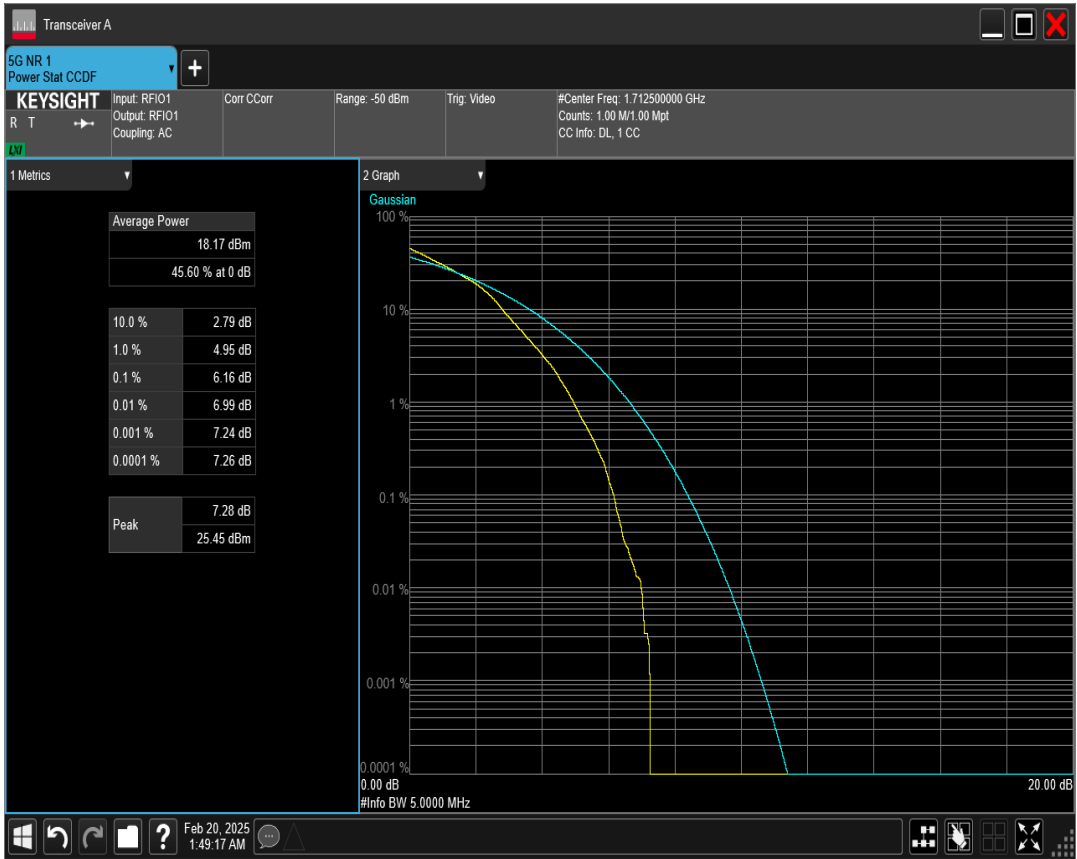


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=352000 RB=216@0

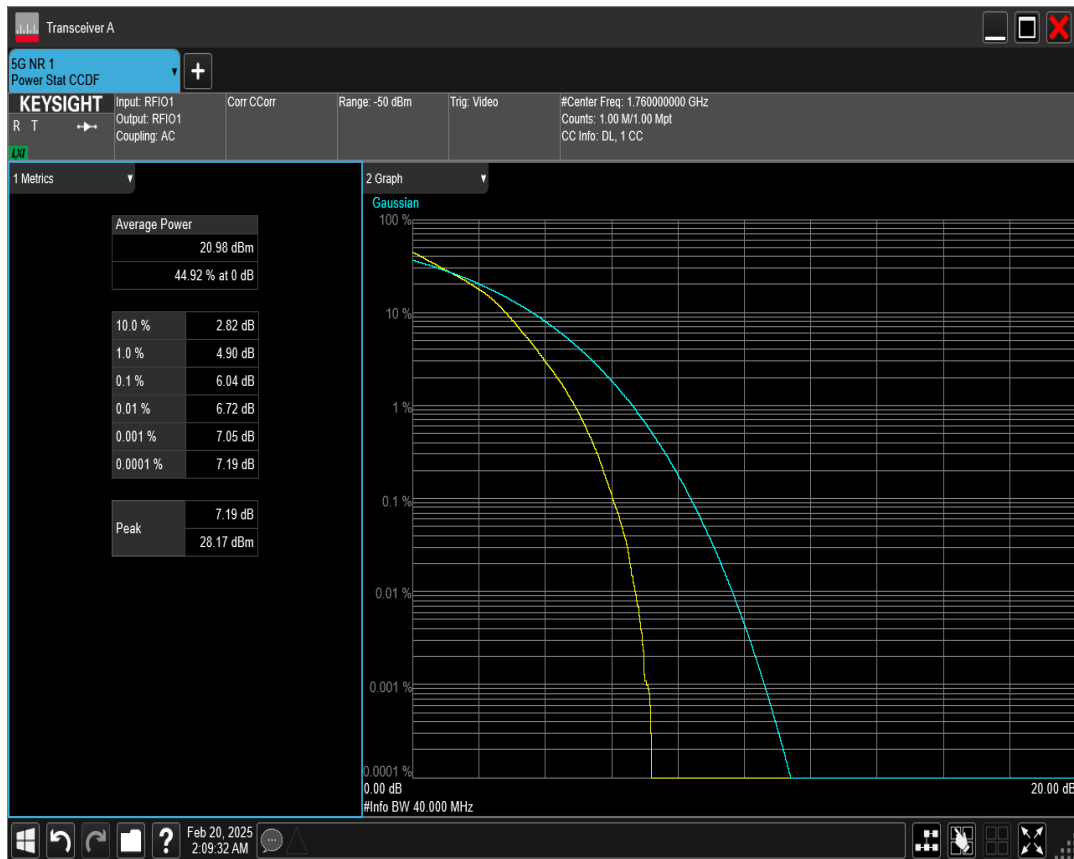


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=343000 RB=50@0

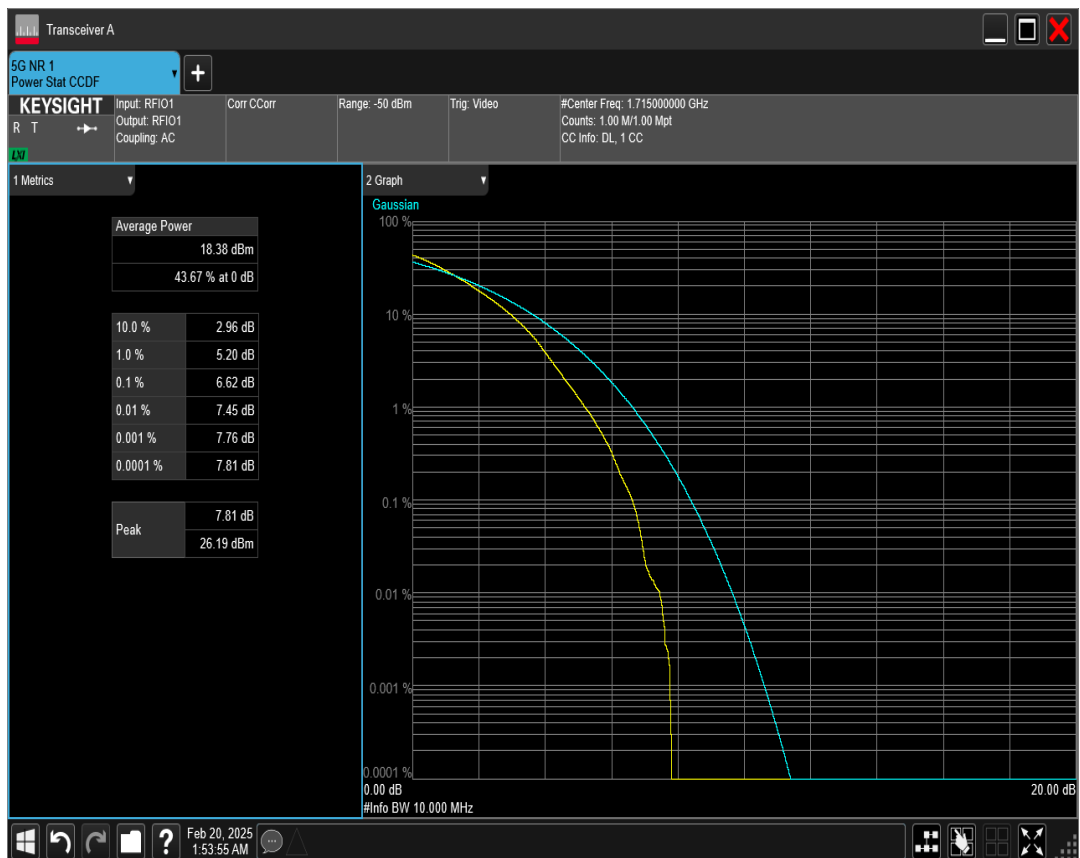


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=355500 RB=25@0

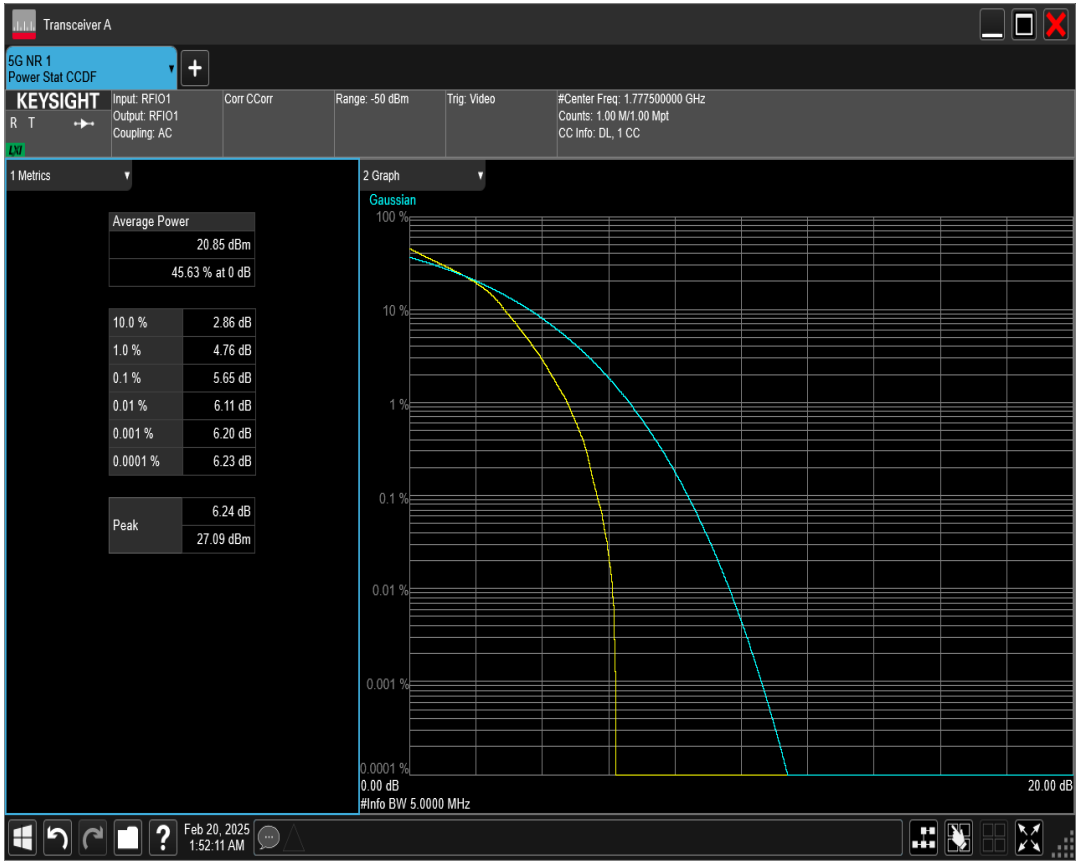


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=355000 RB=50@0

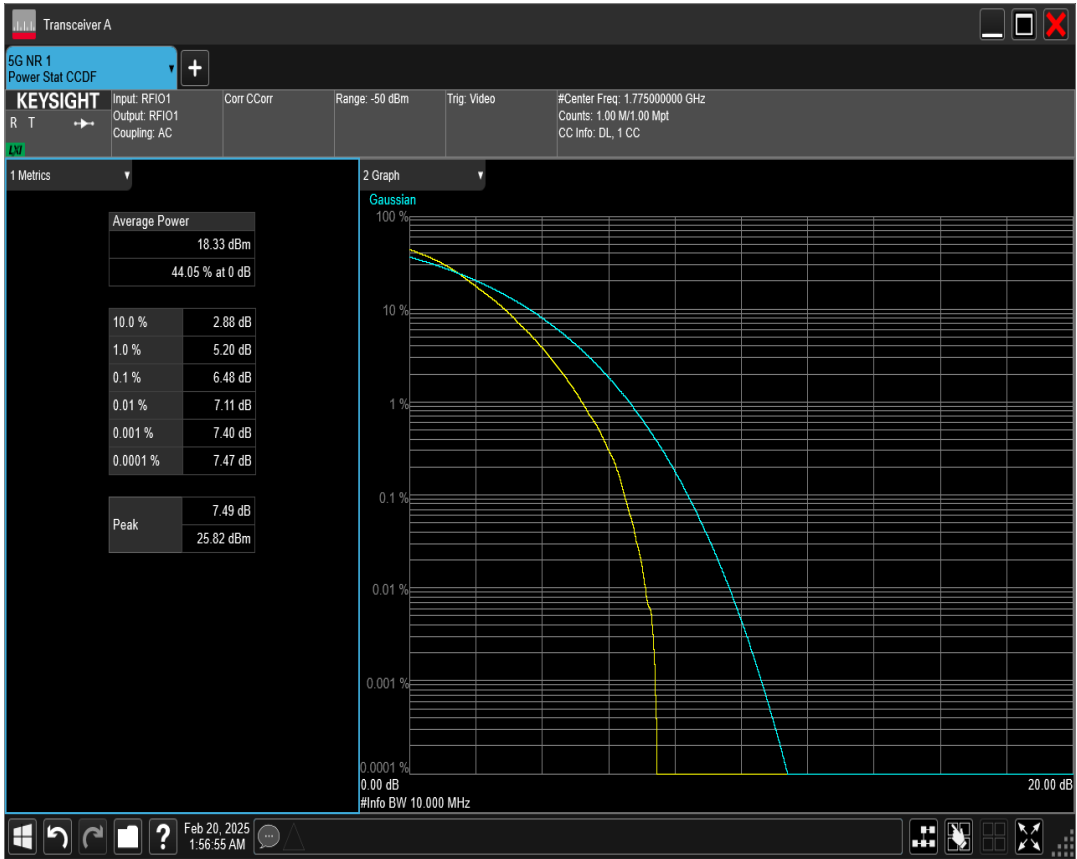


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=349000 RB=50@0

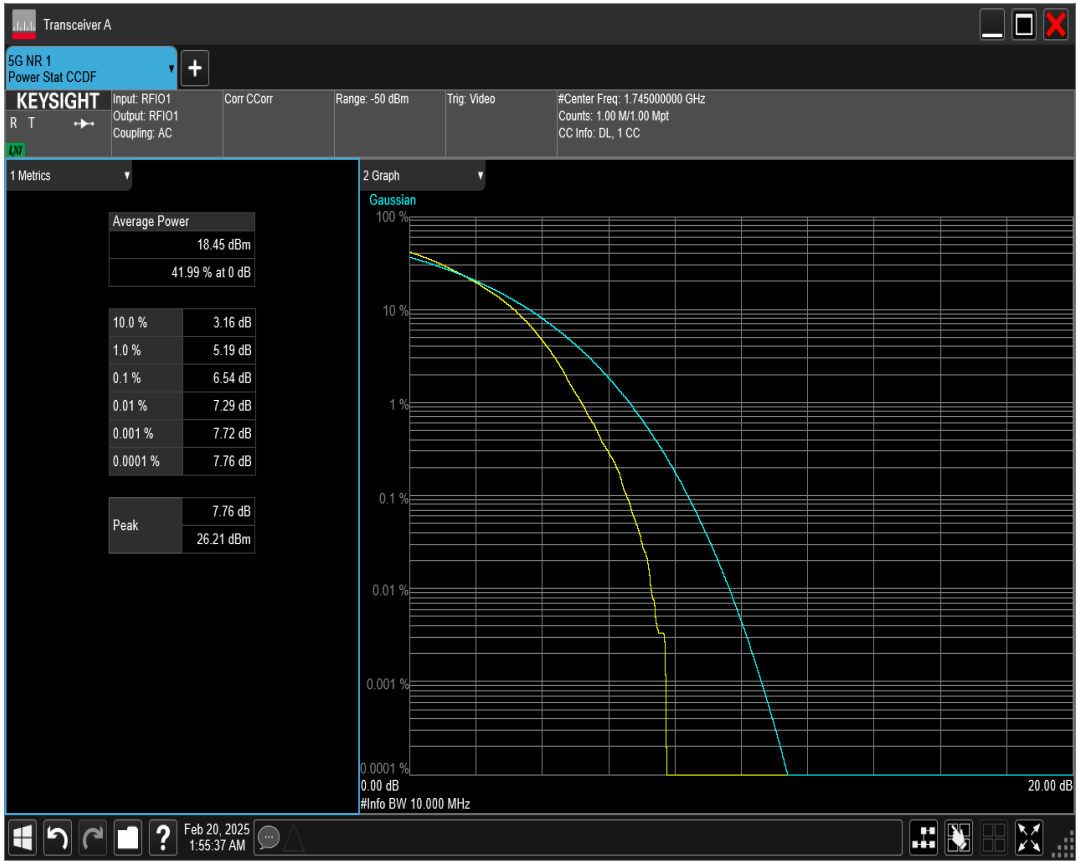


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=354500 RB=75@0

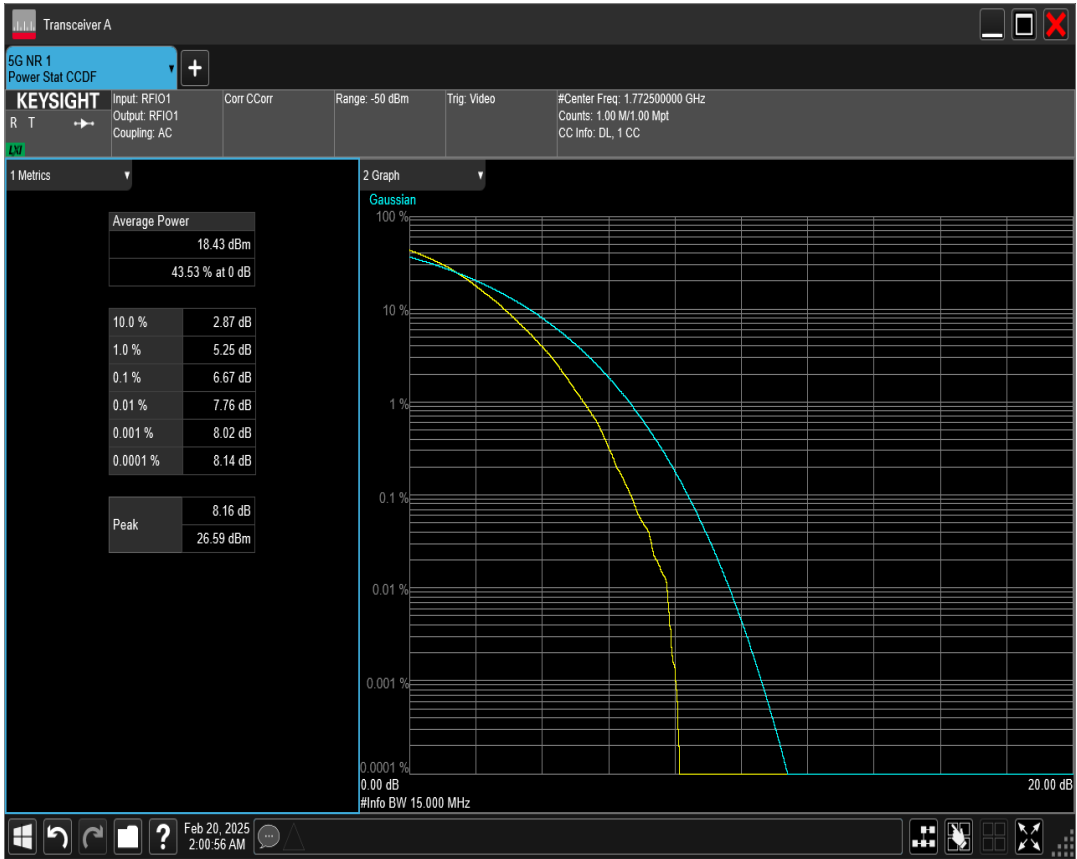


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=349000 RB=75@0

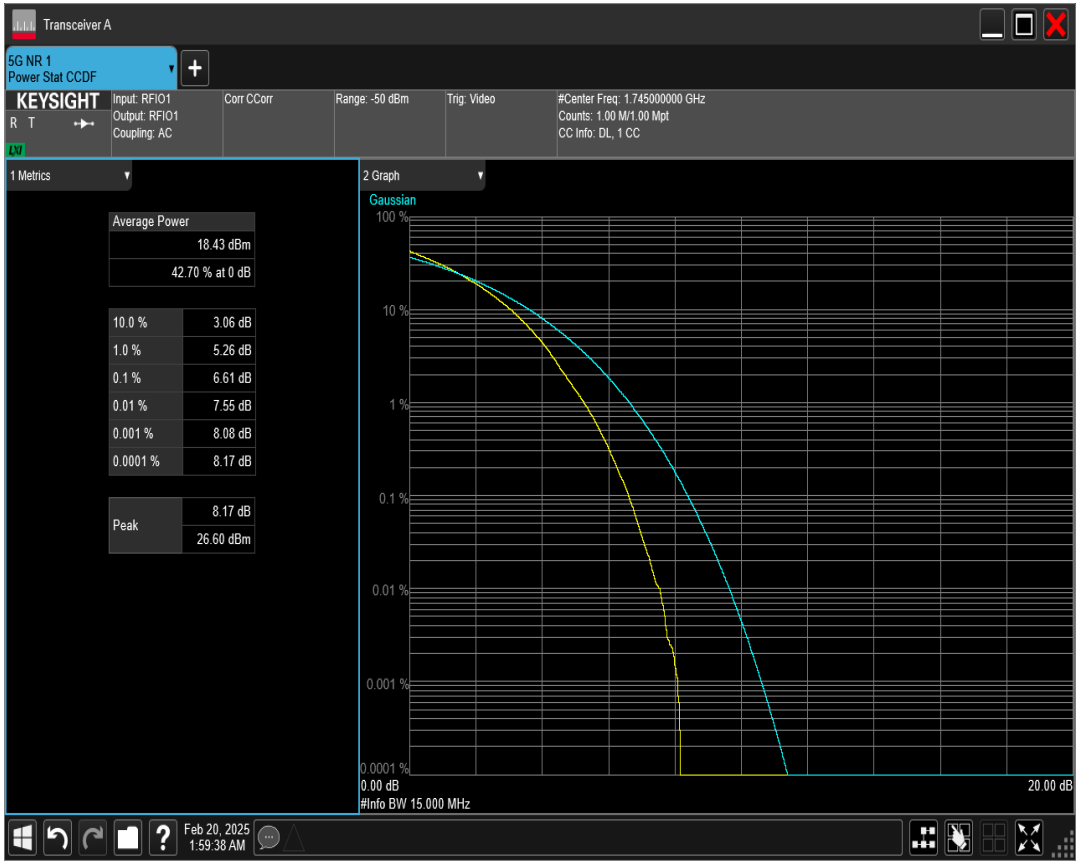


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=343500 RB=75@0

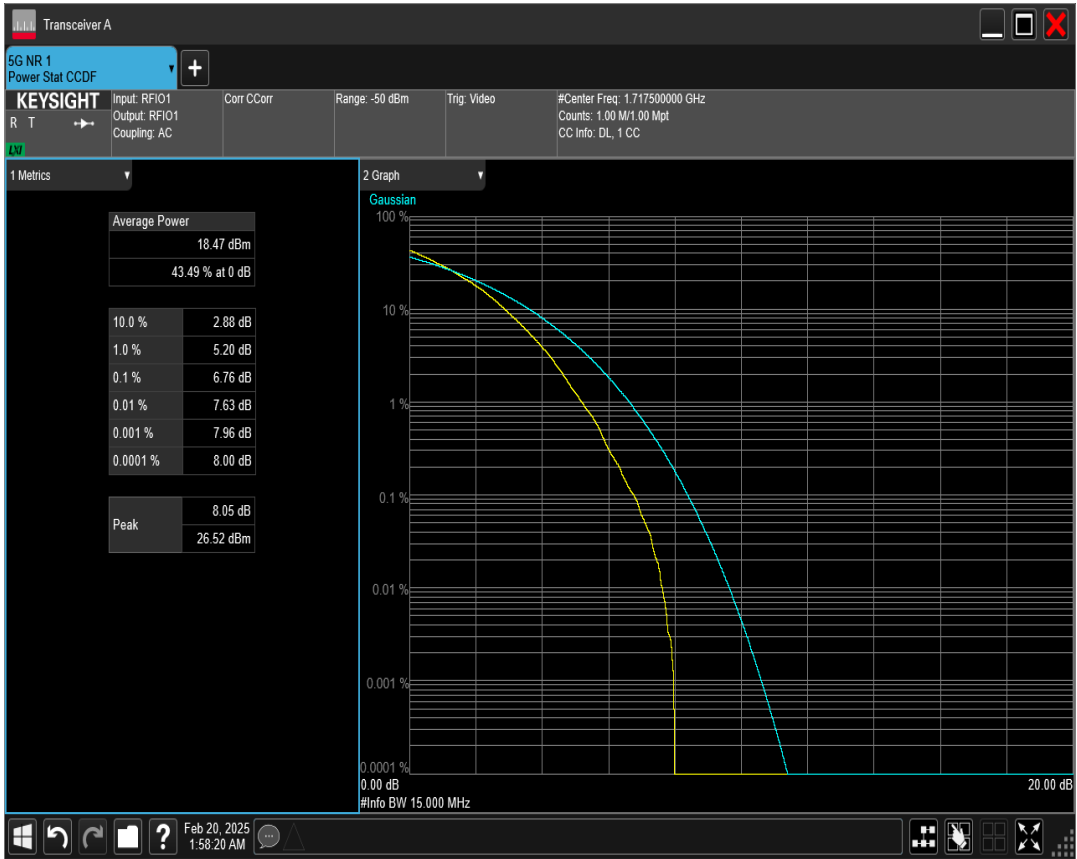


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=354000 RB=100@0

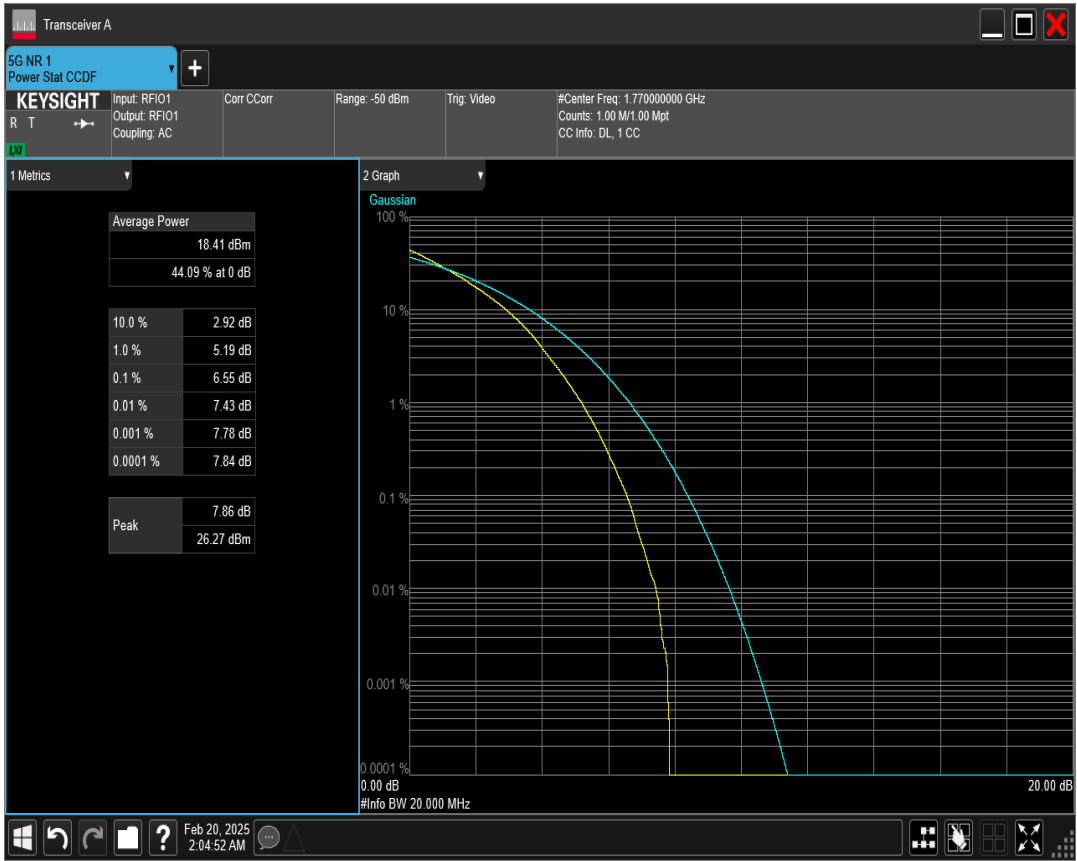


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=349000 RB=100@0

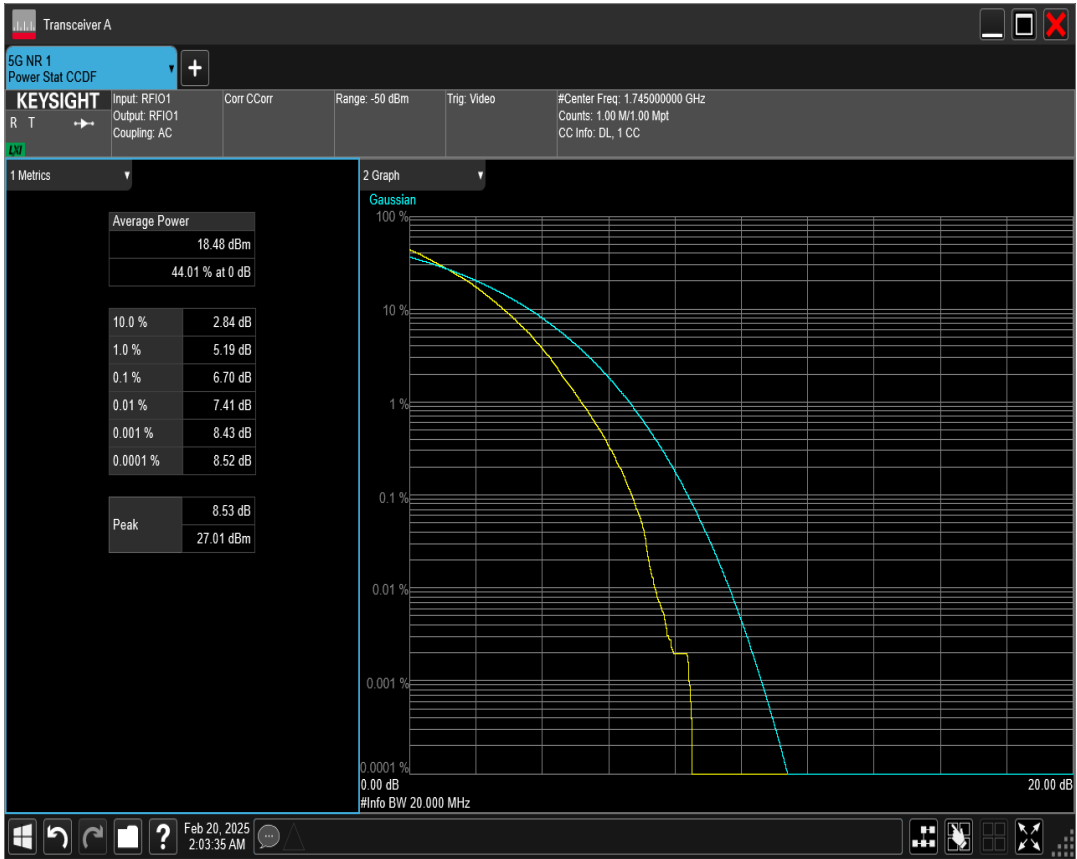


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=344000 RB=100@0

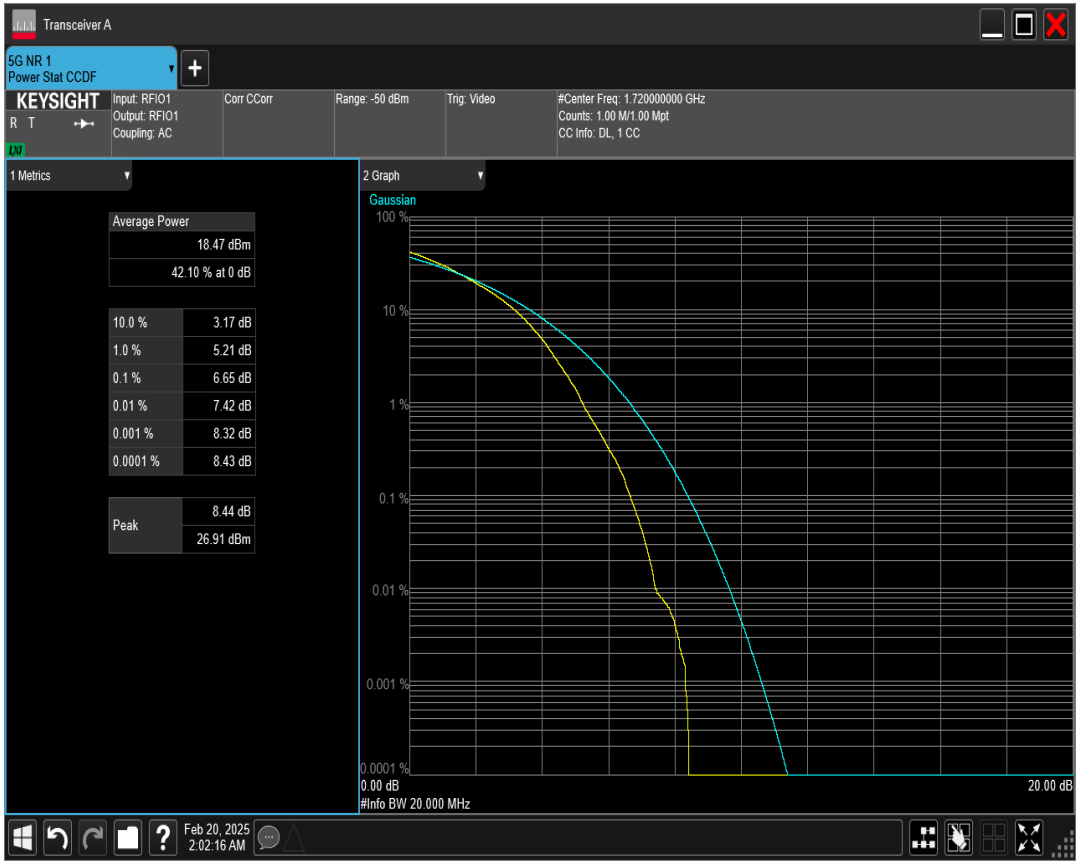


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=349000 RB=216@0

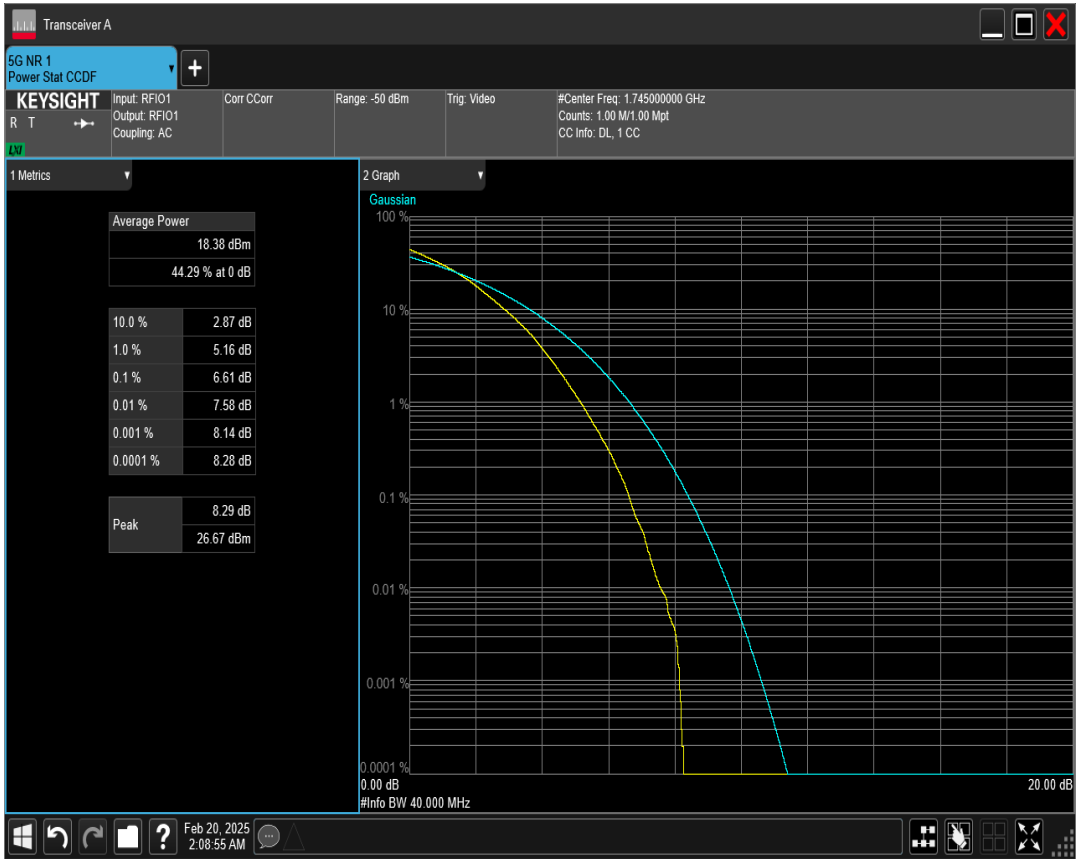


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=346000 RB=216@0

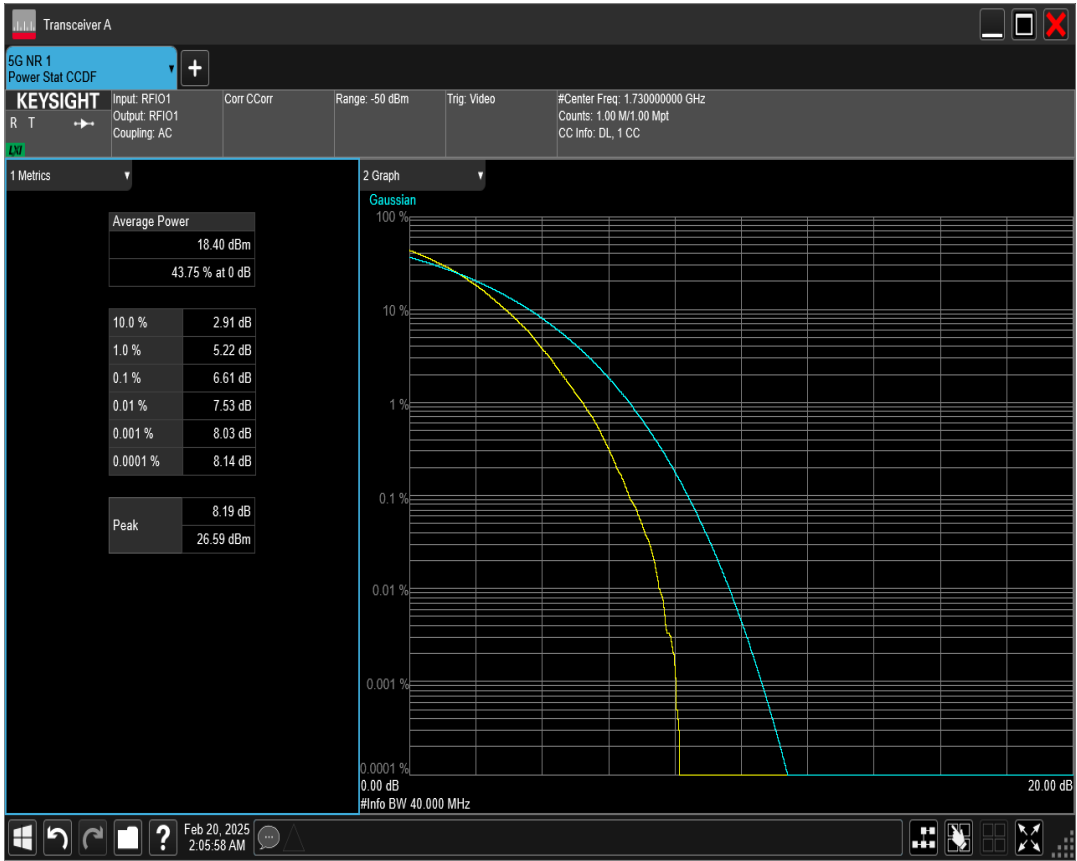


n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=342500 RB=25@0

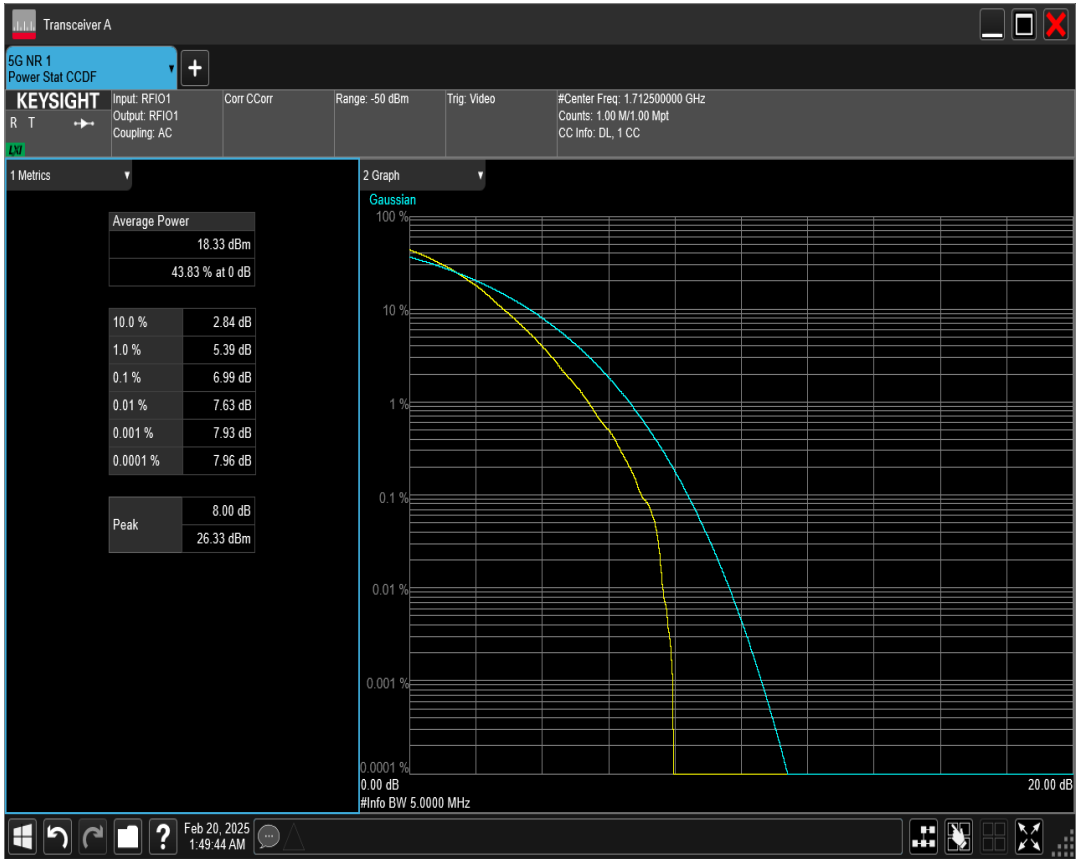


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=352000 RB=216@0

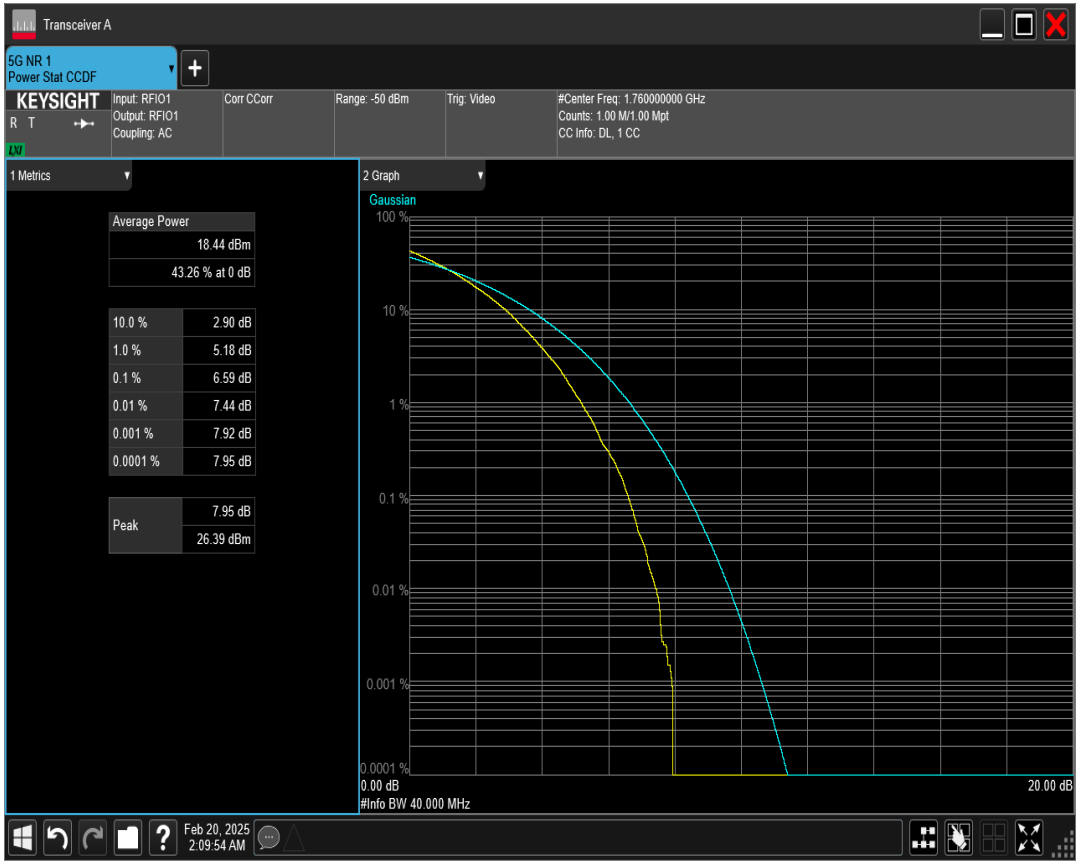


n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=349000 RB=25@0

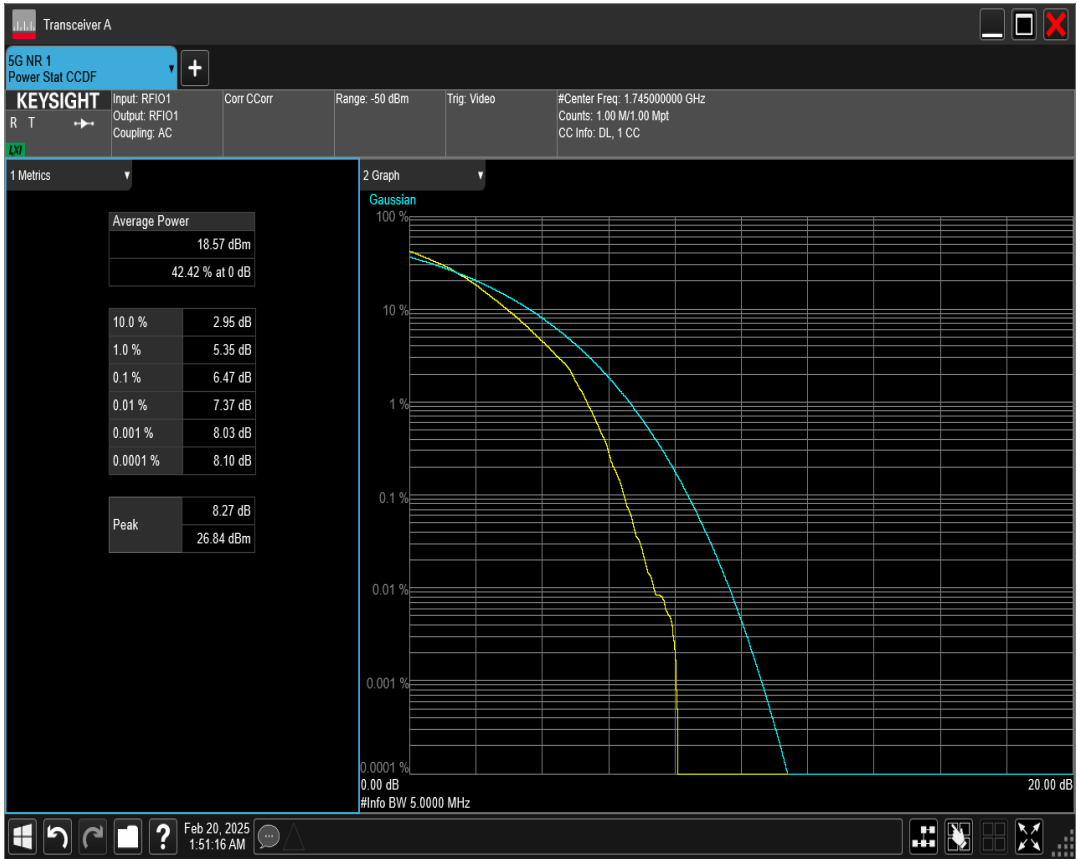


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=349000 RB=50@0

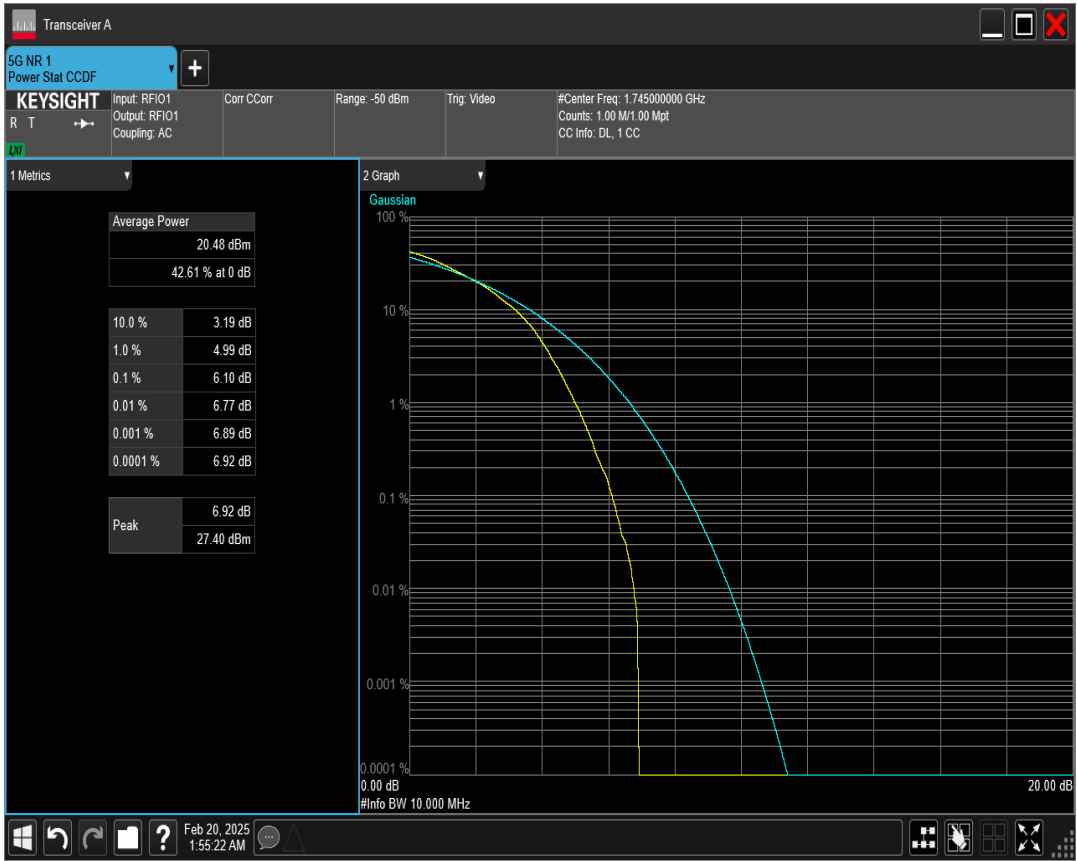


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=343000 RB=50@0

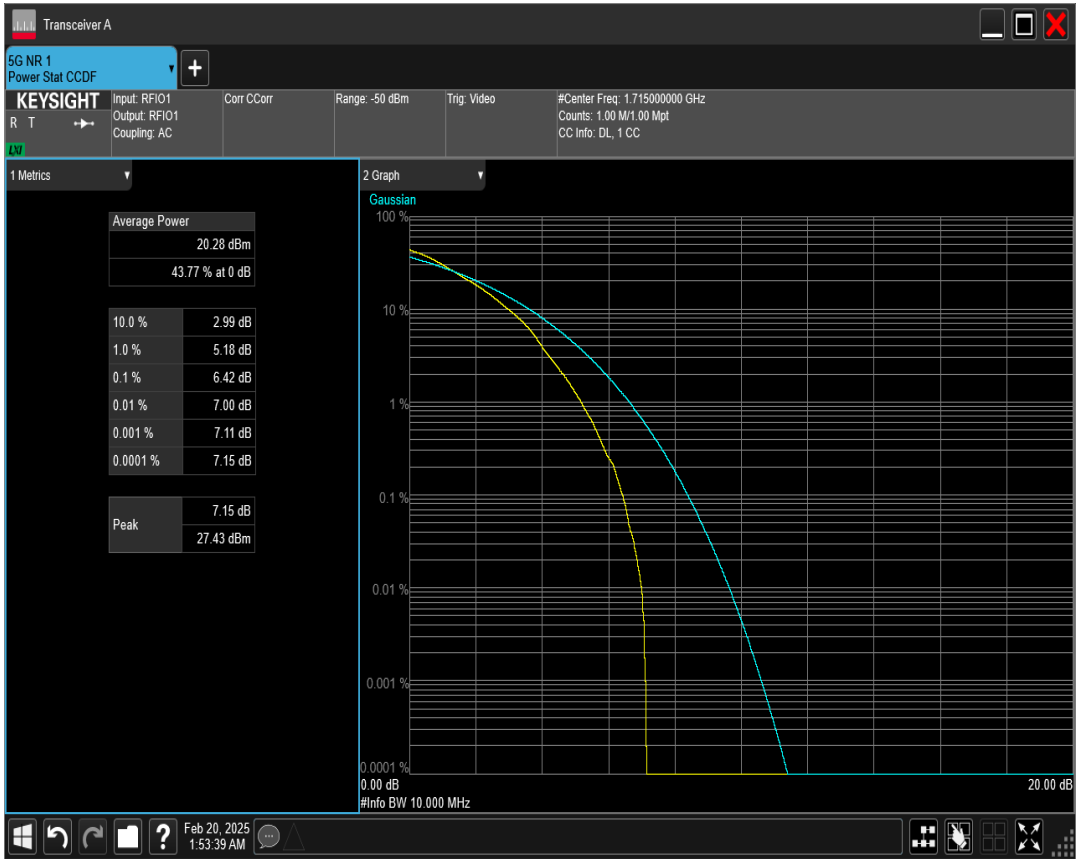


n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=355500 RB=25@0

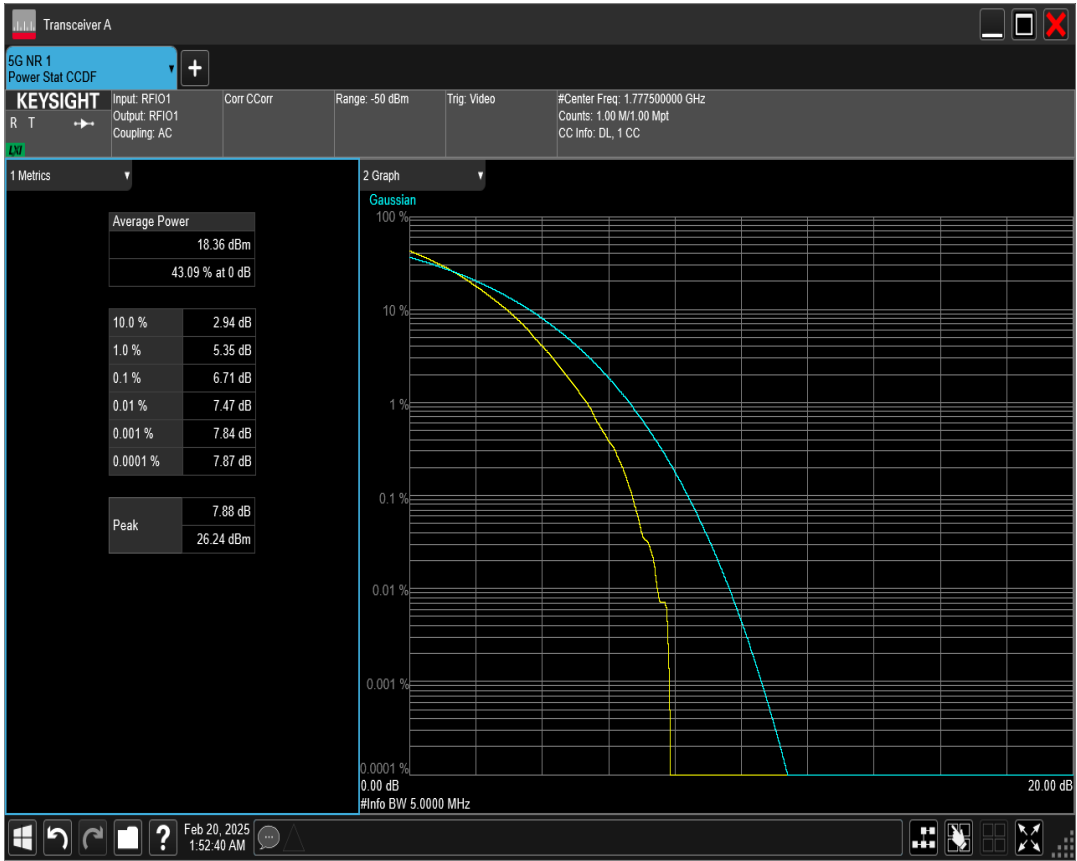


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=343500 RB=75@0

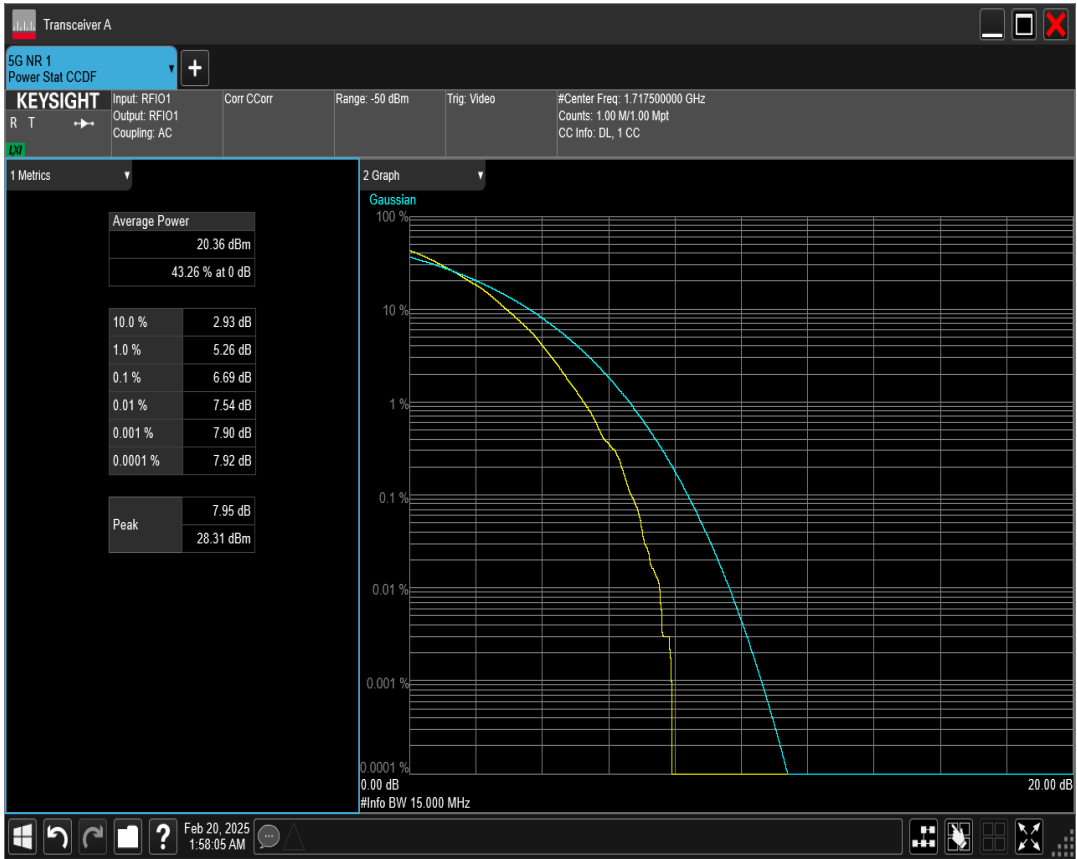


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=355000 RB=50@0

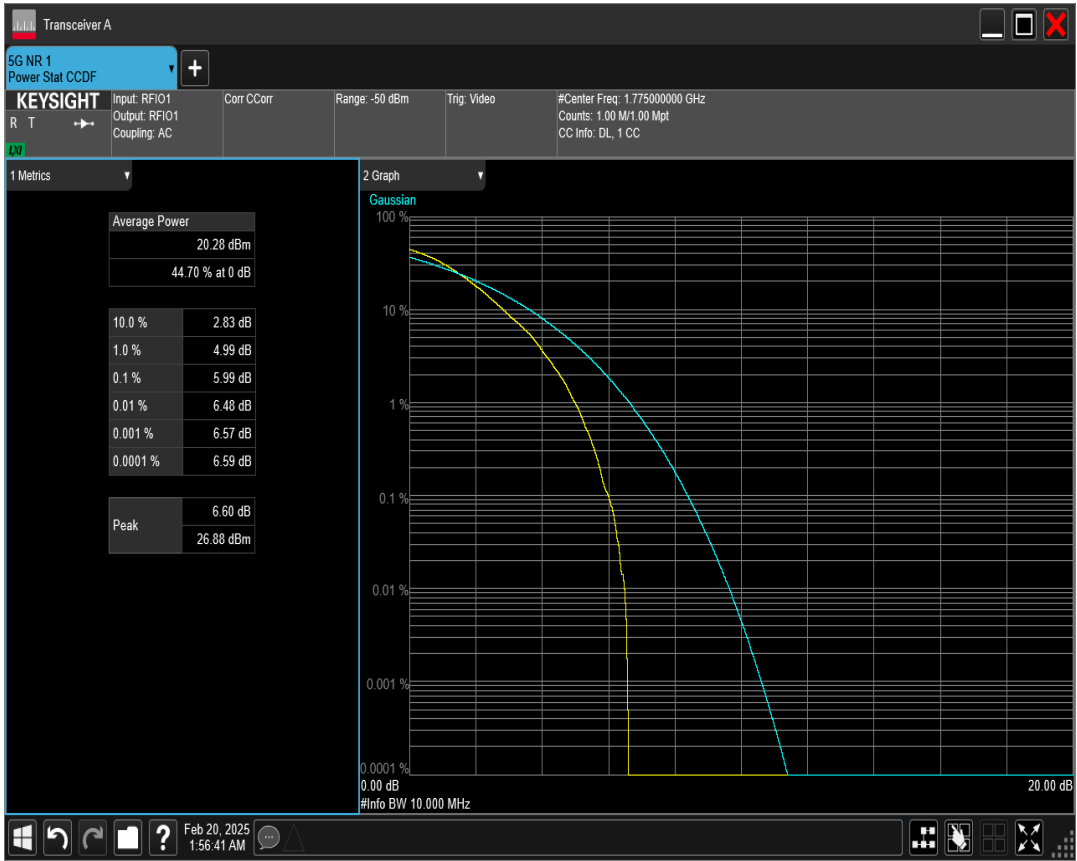


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=349000 RB=75@0

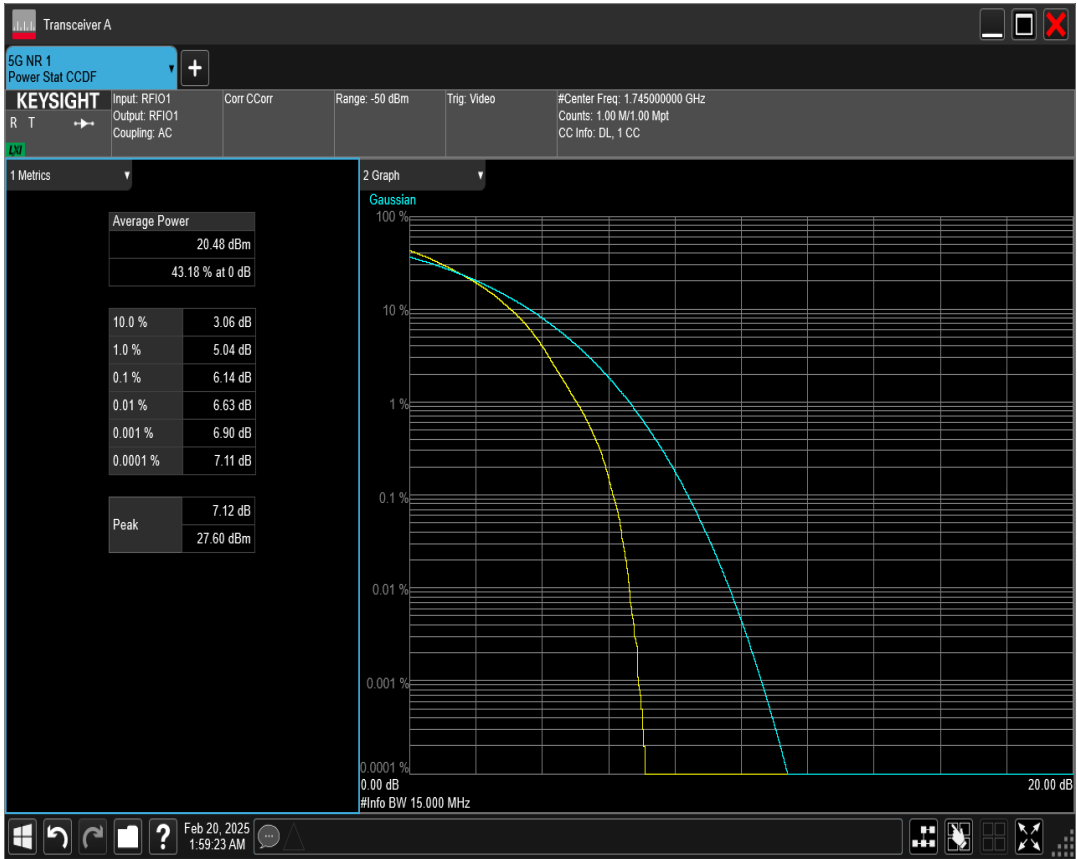


n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=354000 RB=100@0

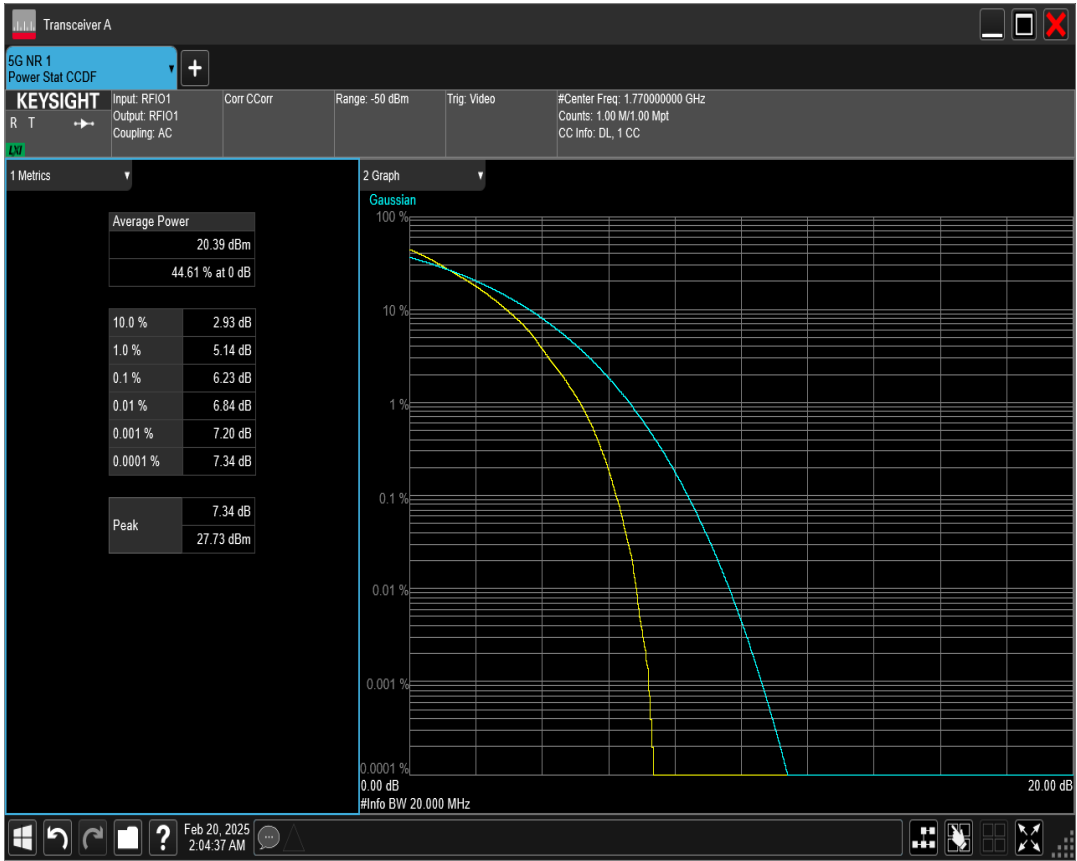


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=346000 RB=216@0

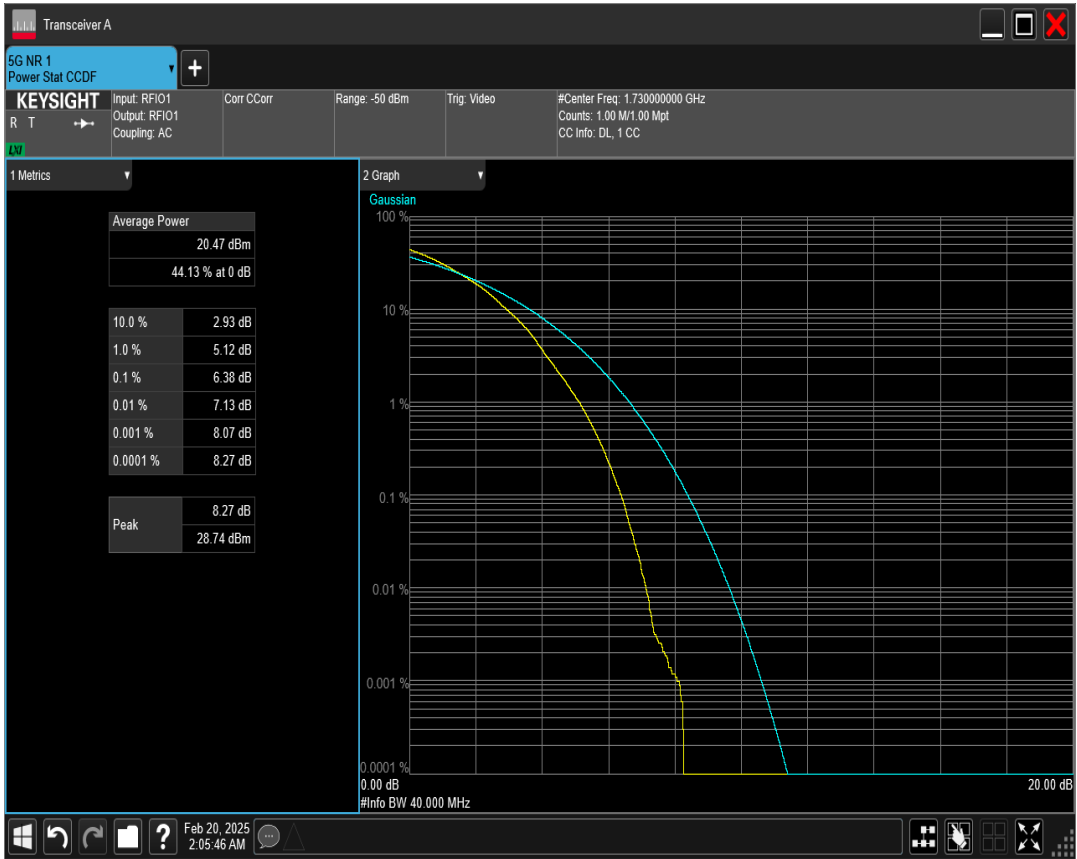


n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=349000 RB=100@0

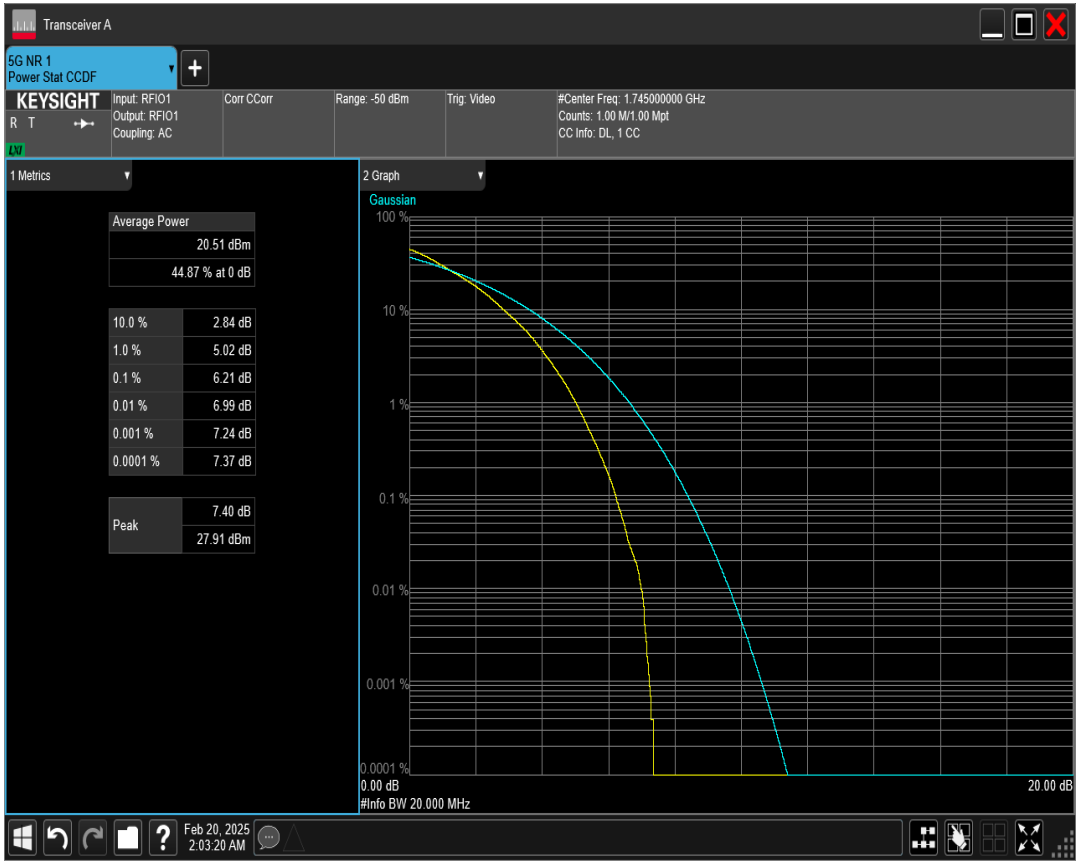


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=354500 RB=75@0

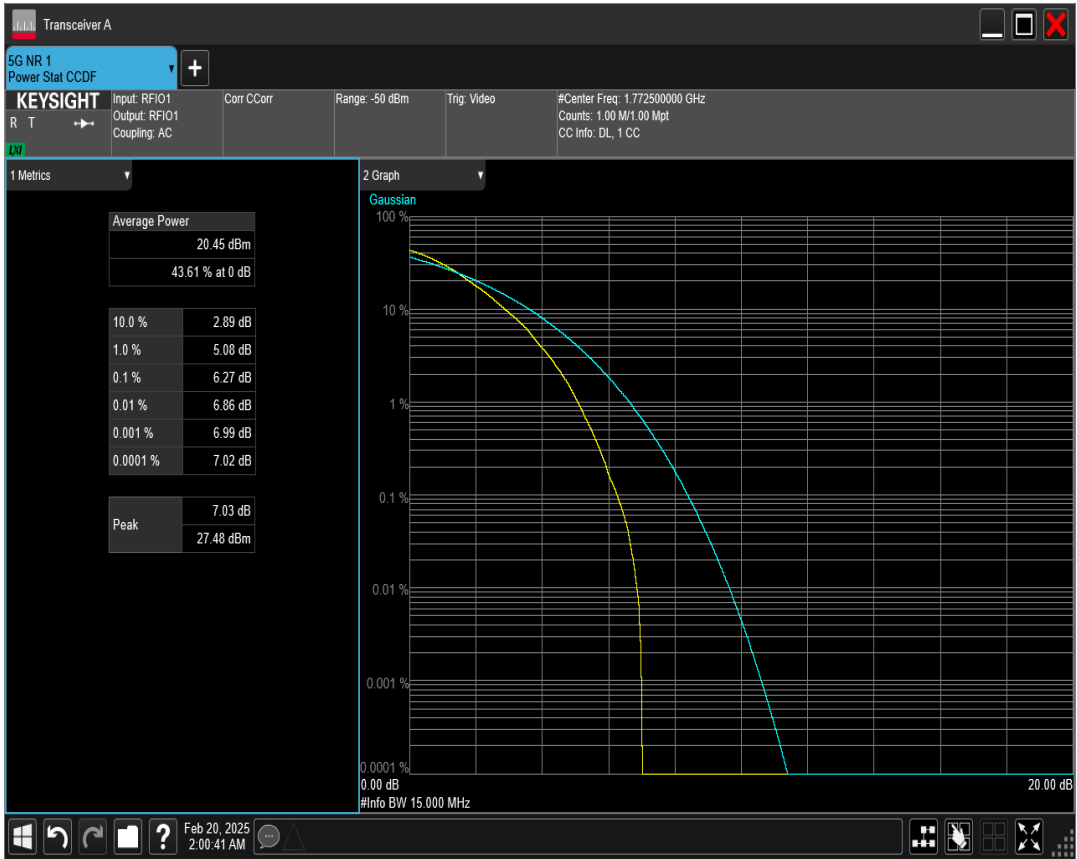


n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=344000 RB=100@0

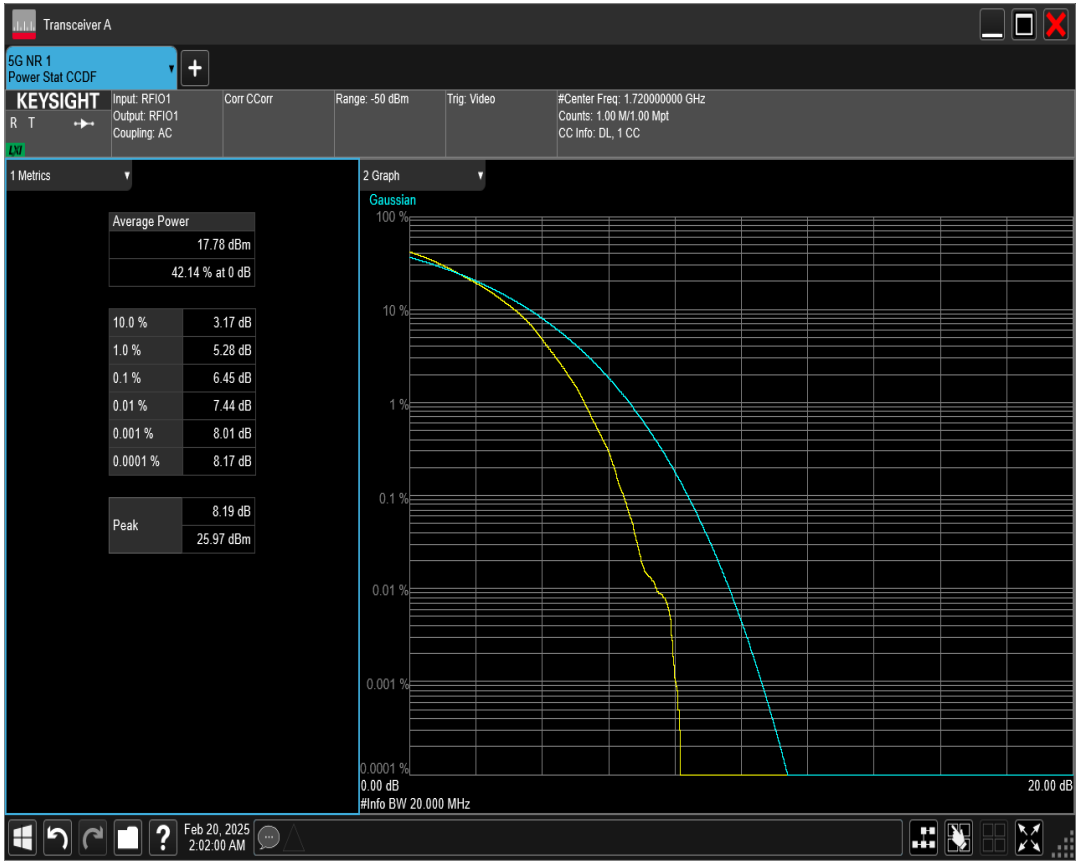


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=349000 RB=216@0

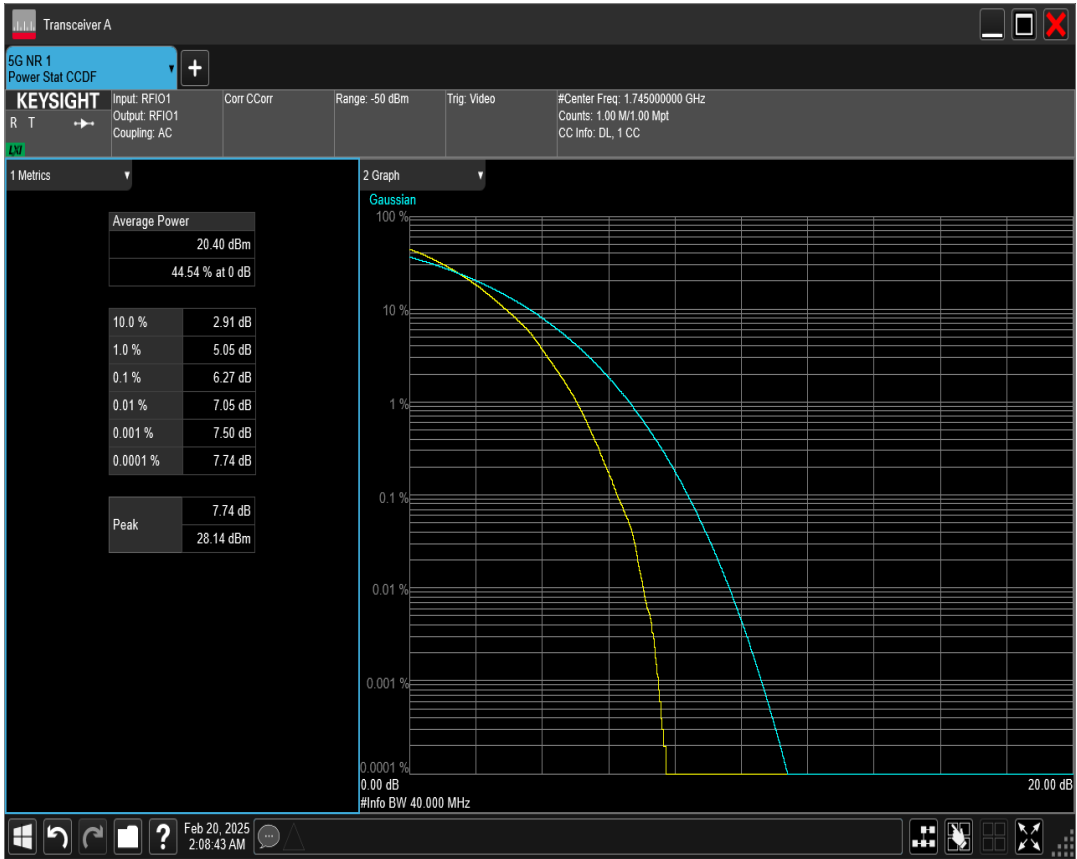


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=349000 RB=25@0

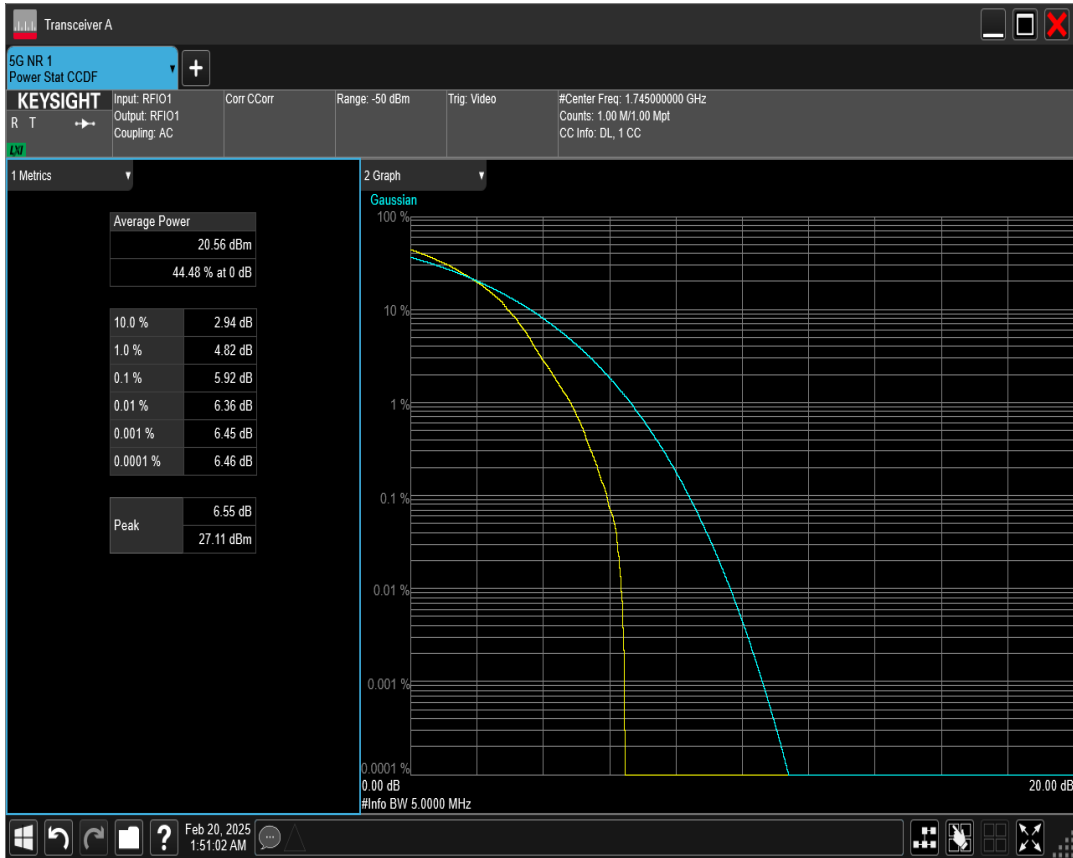


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=342500 RB=25@0

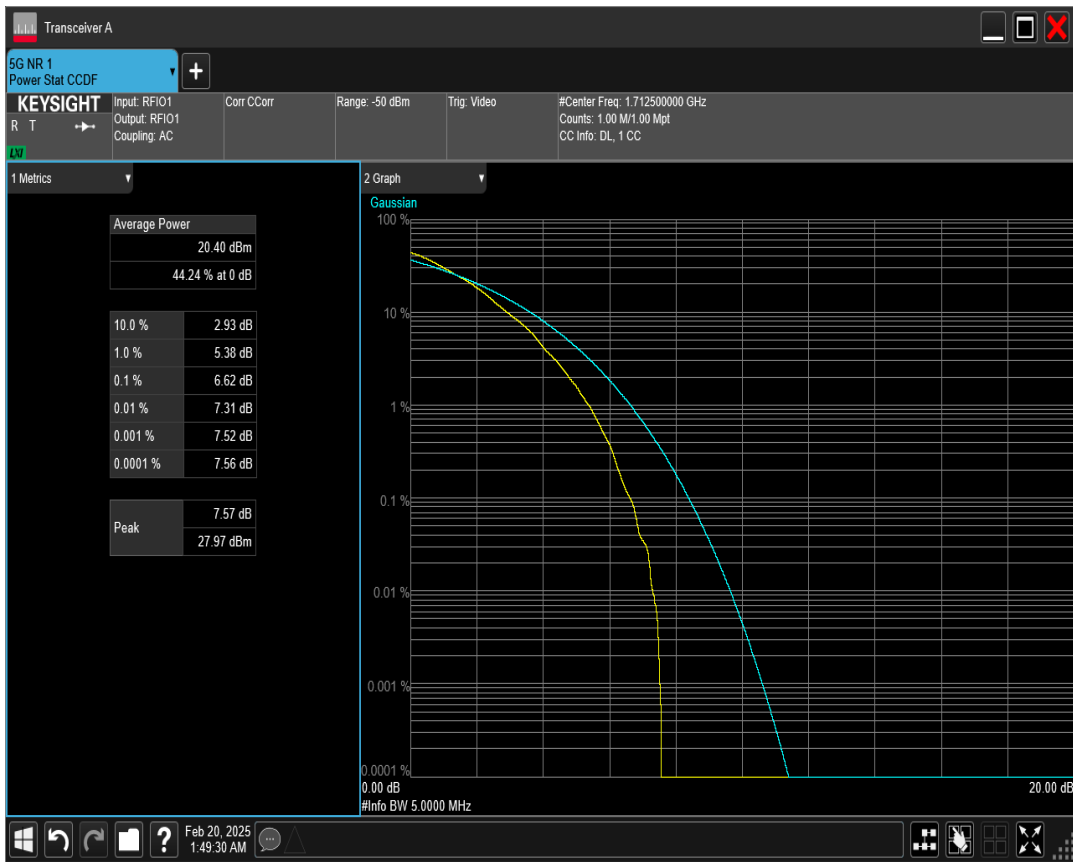


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=352000 RB=216@0

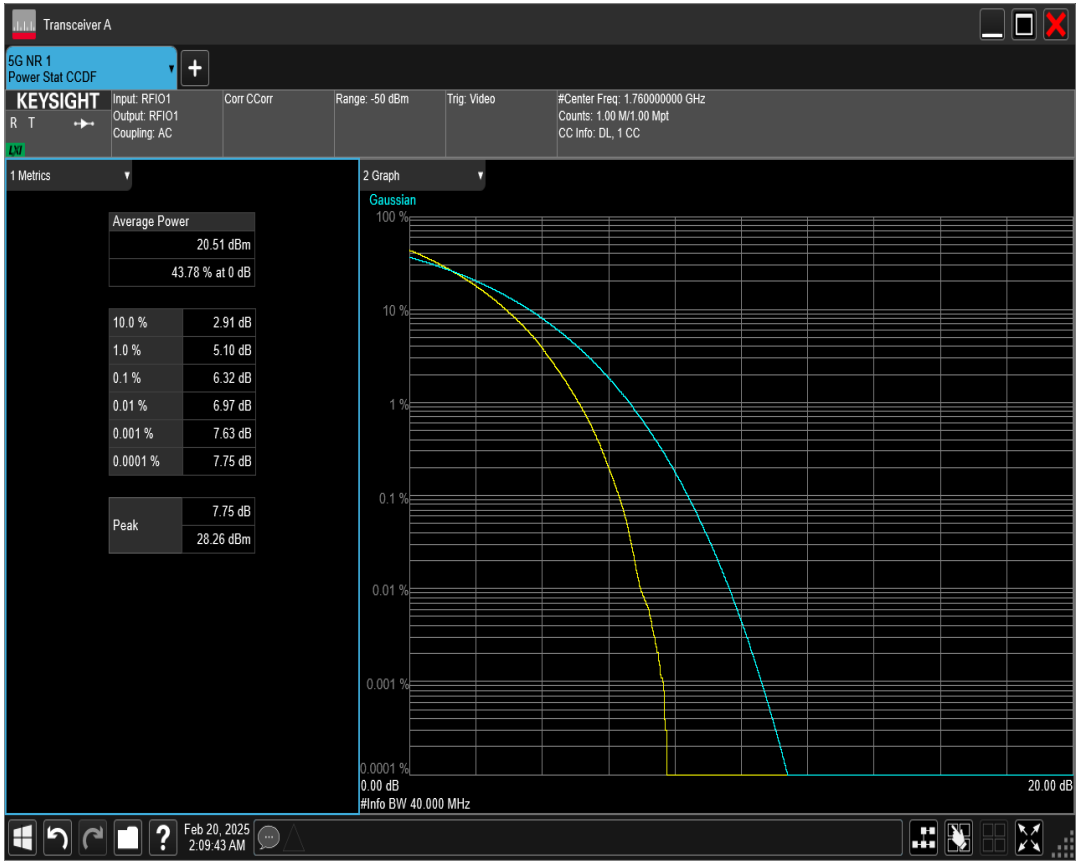


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=355000 RB=50@0

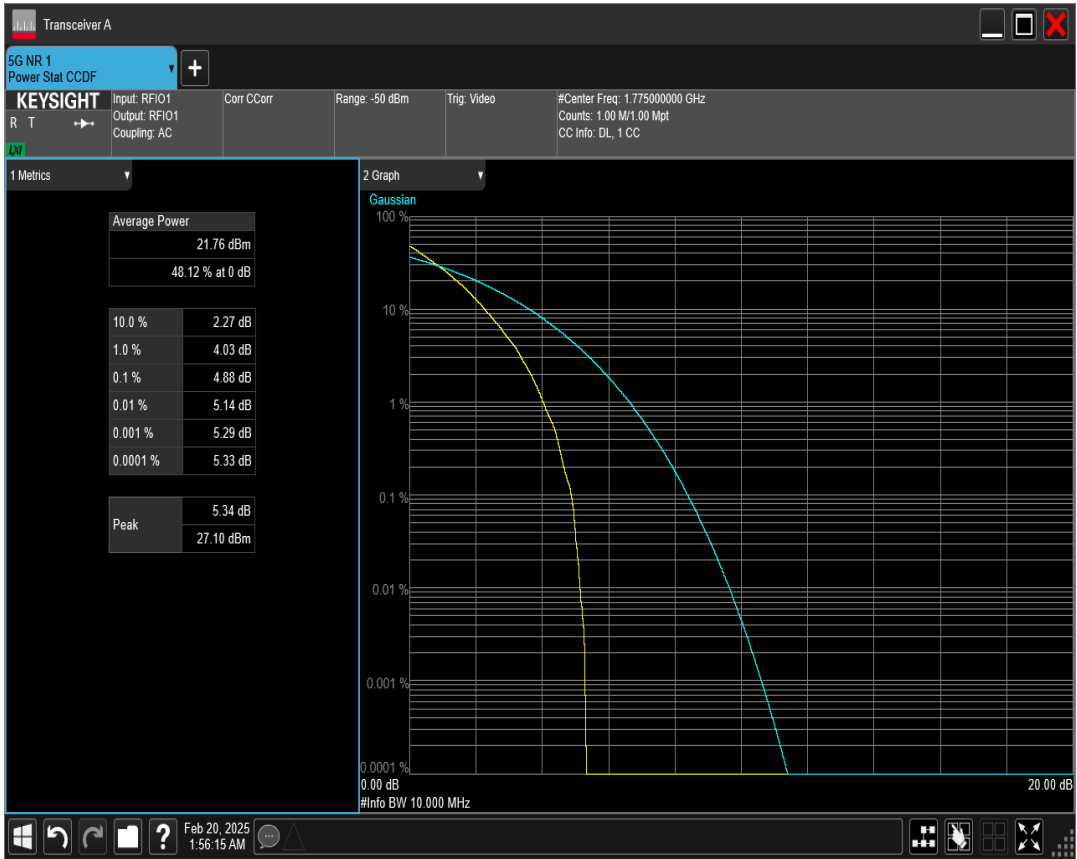


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=343500 RB=75@0

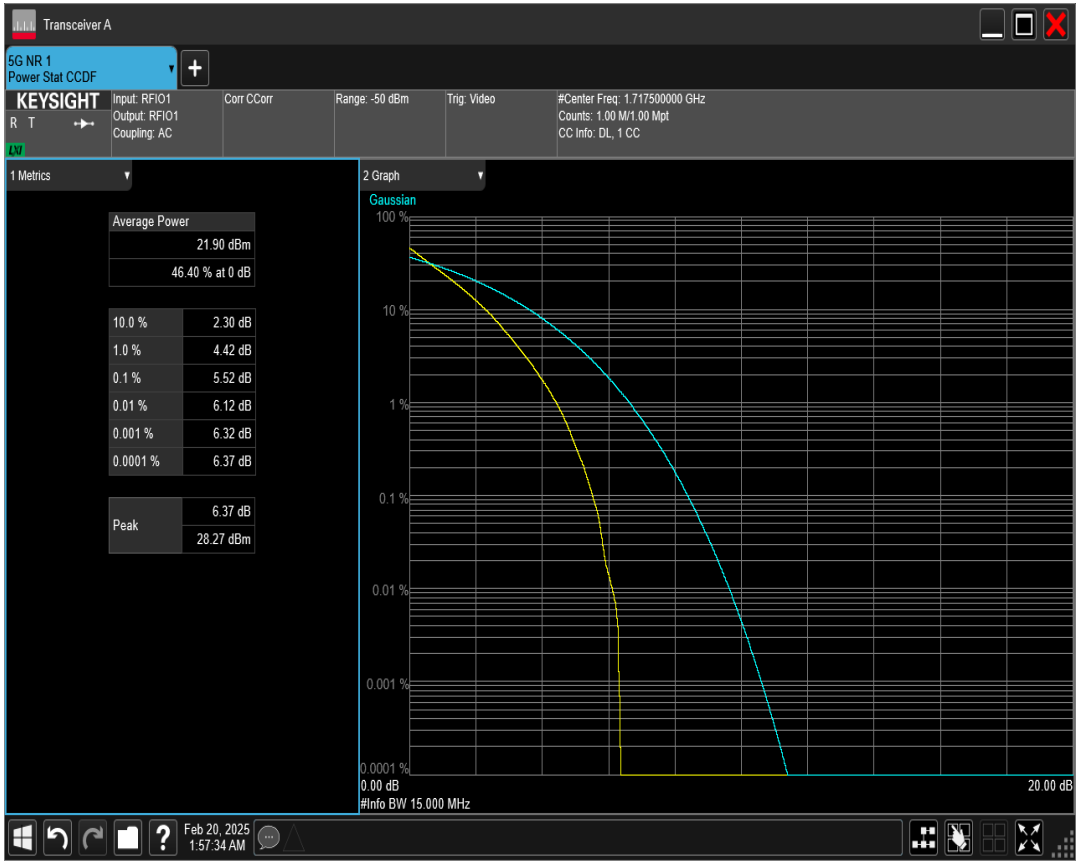


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=349000 RB=50@0

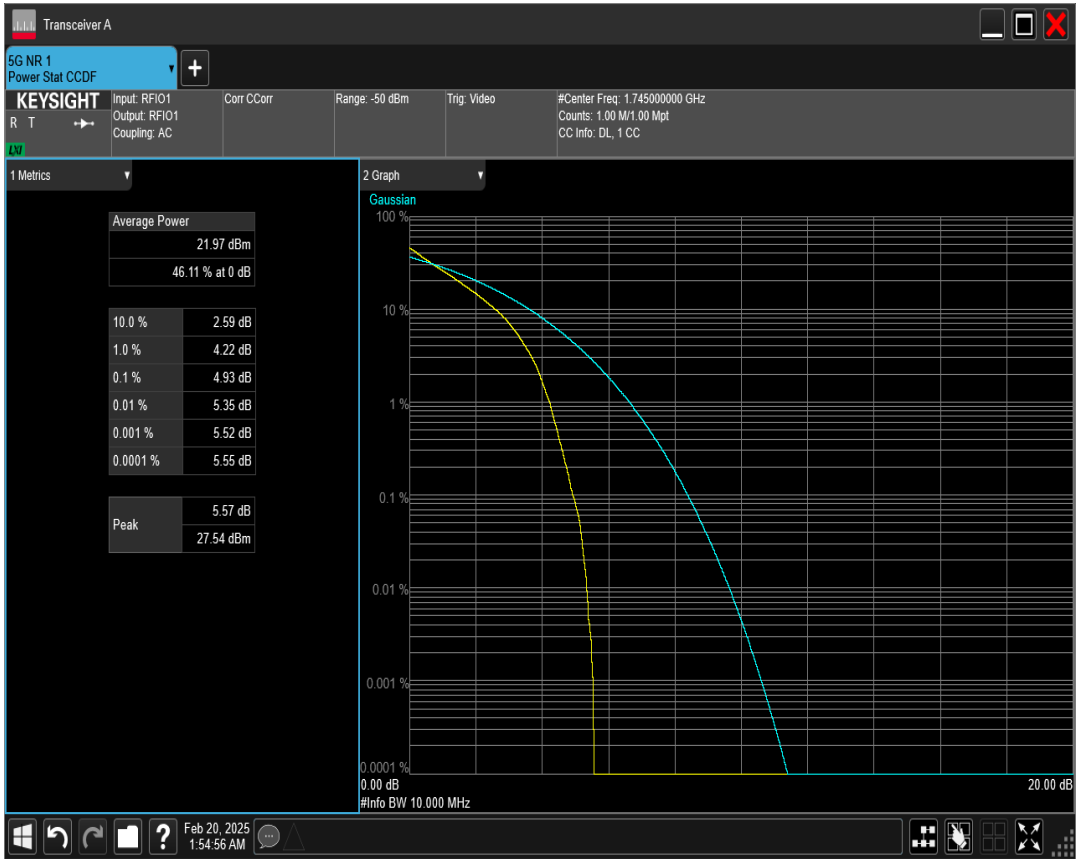


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=355500 RB=25@0

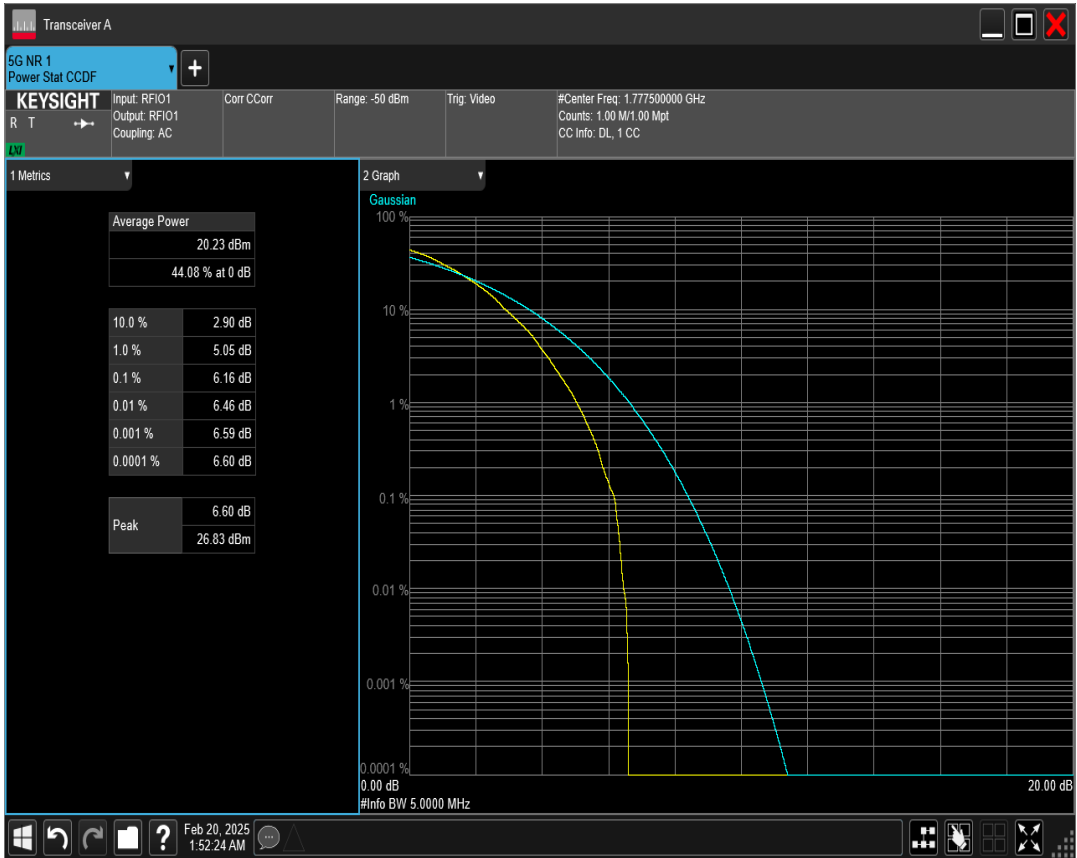


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=343000 RB=50@0

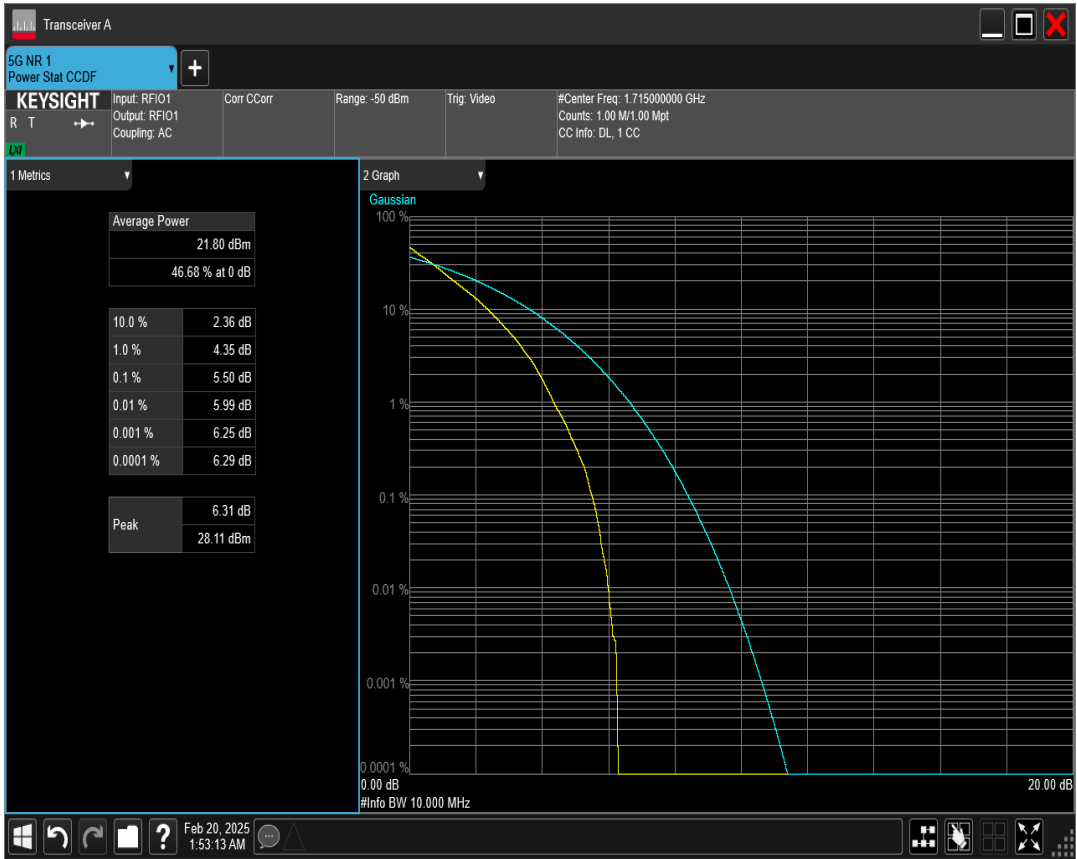


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=354500 RB=75@0

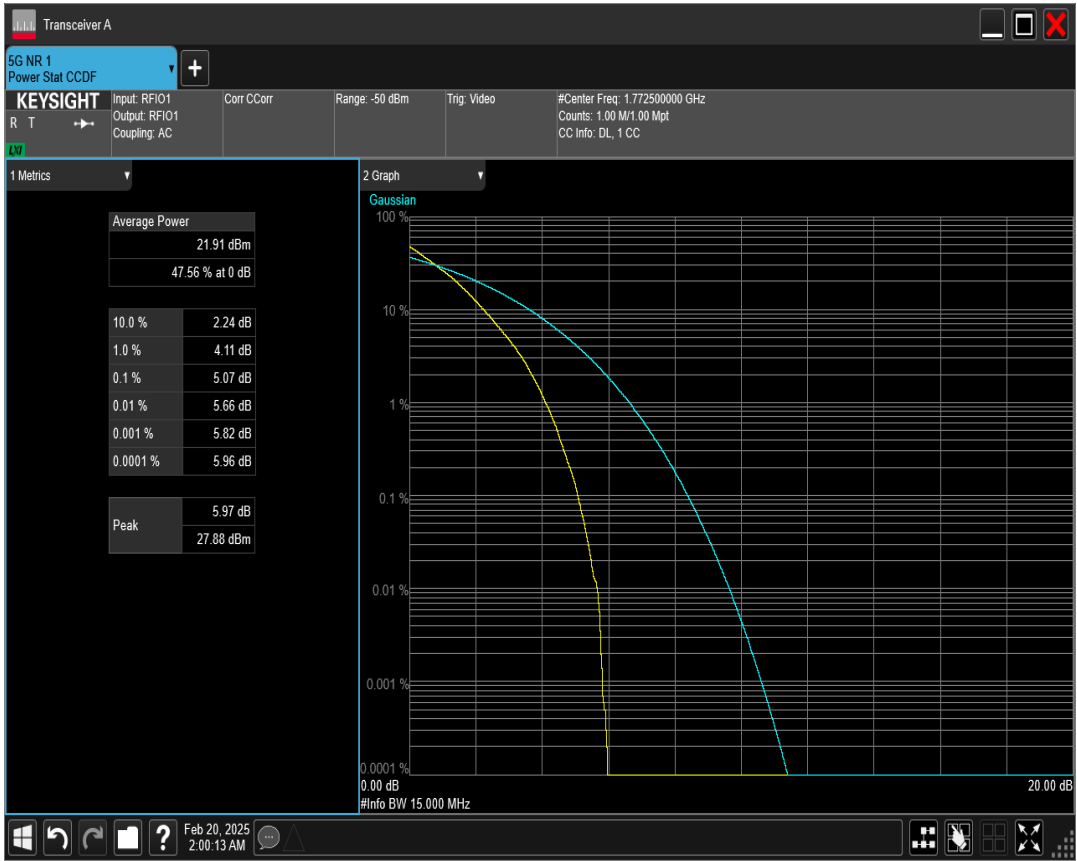


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=349000 RB=75@0

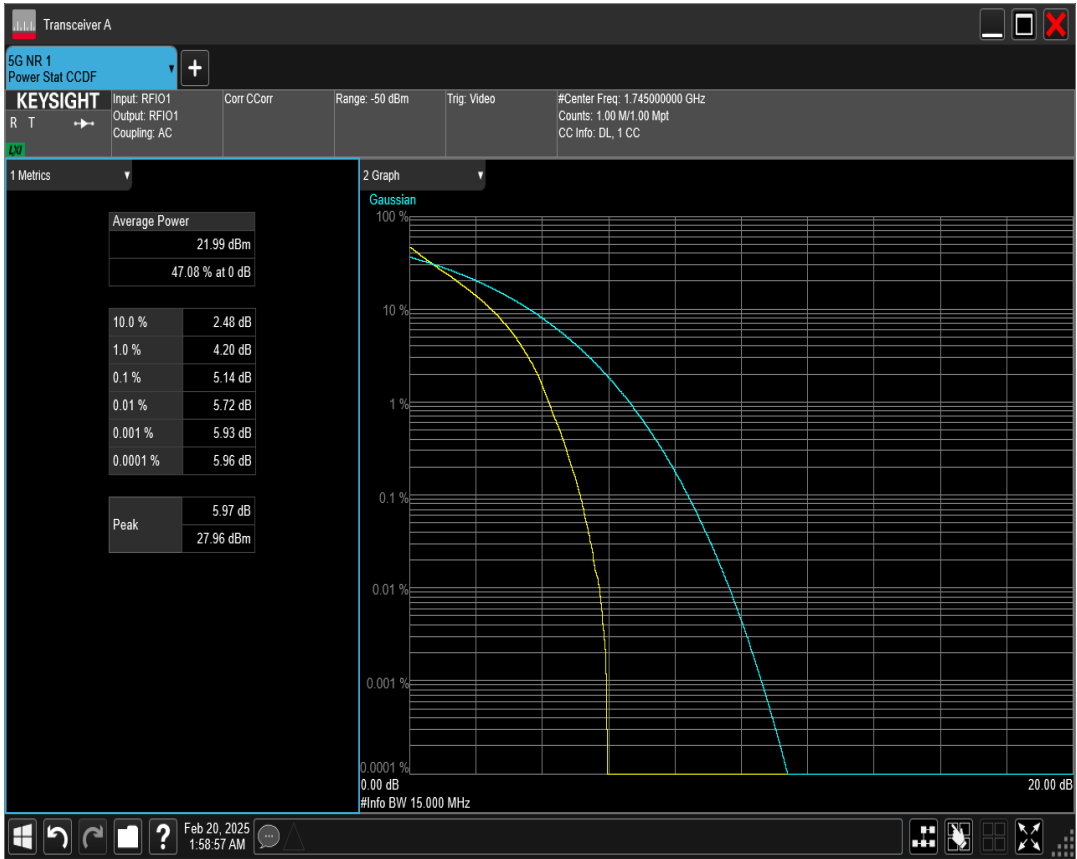


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=349000 RB=100@0

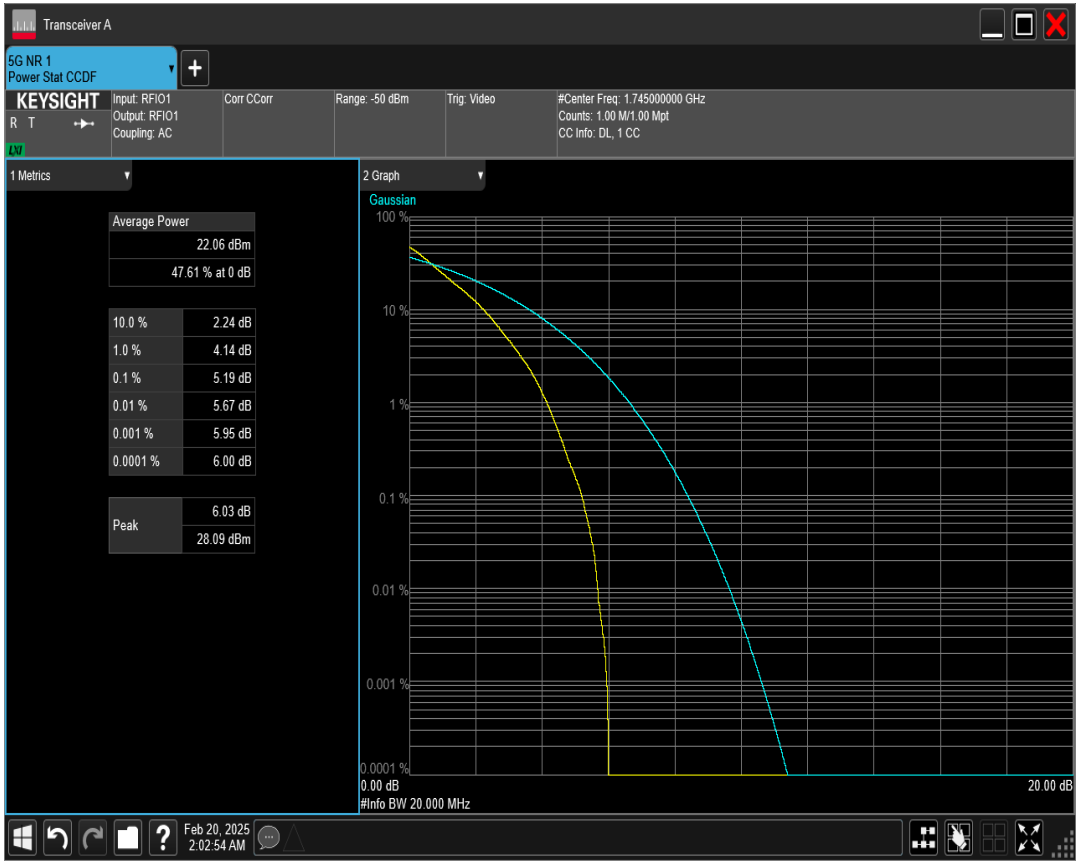


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=344000 RB=100@0

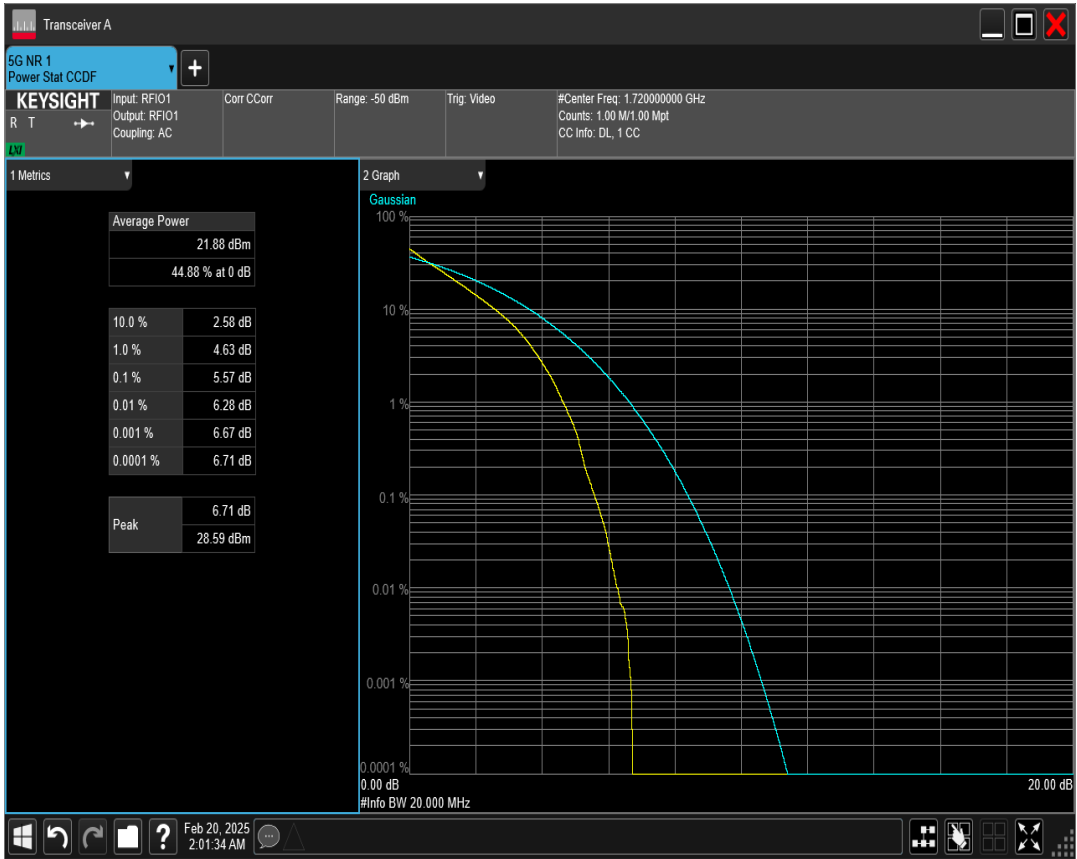


n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=349000 RB=216@0

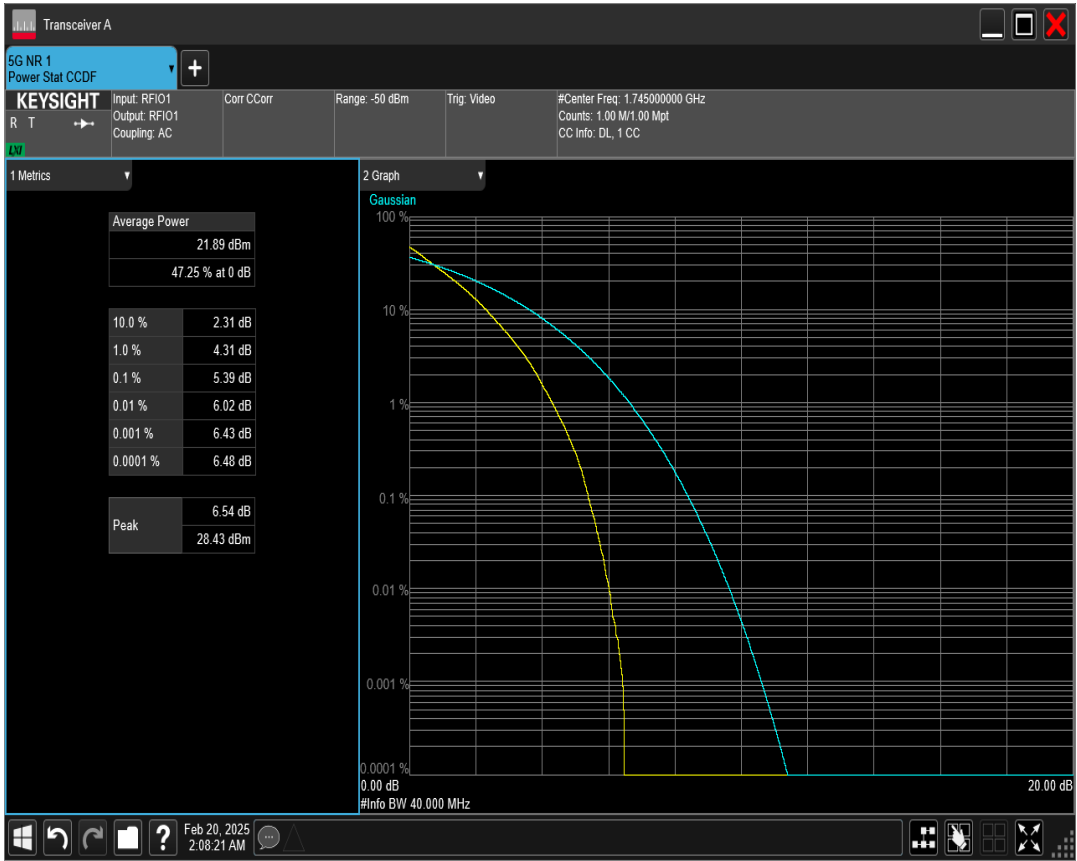


n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=346000 RB=216@0

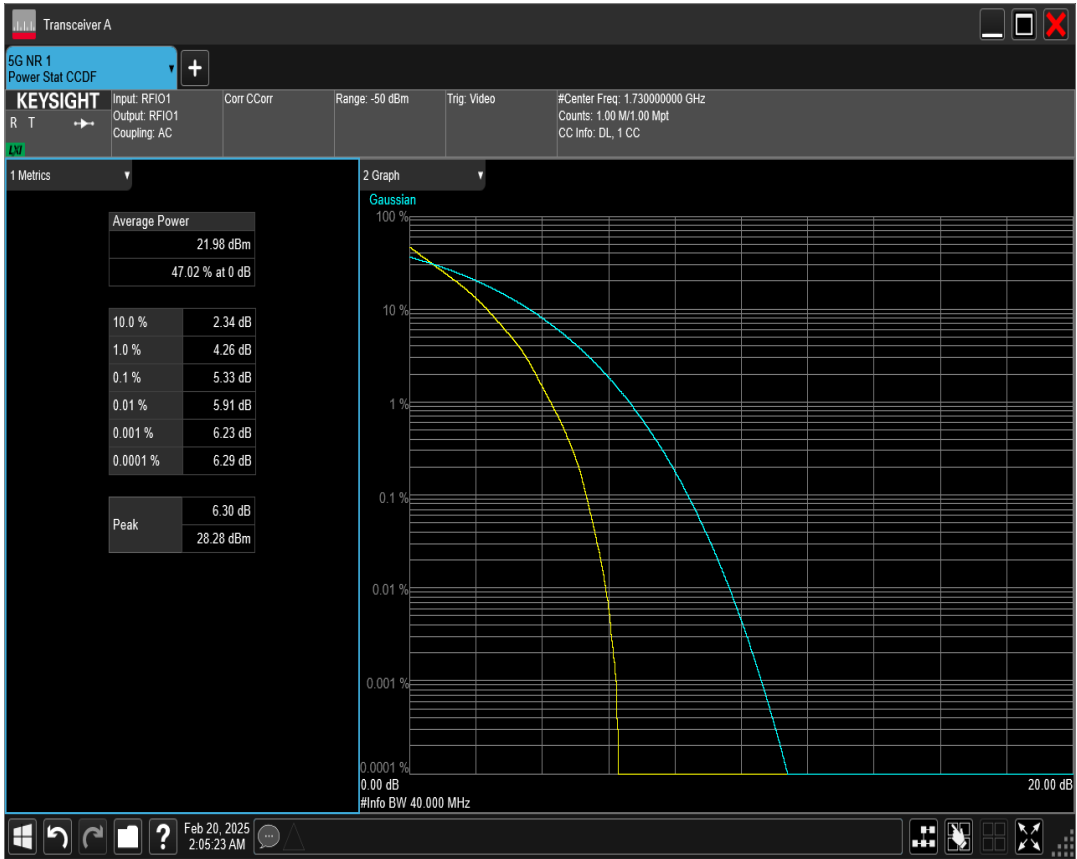


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=354000 RB=100@0

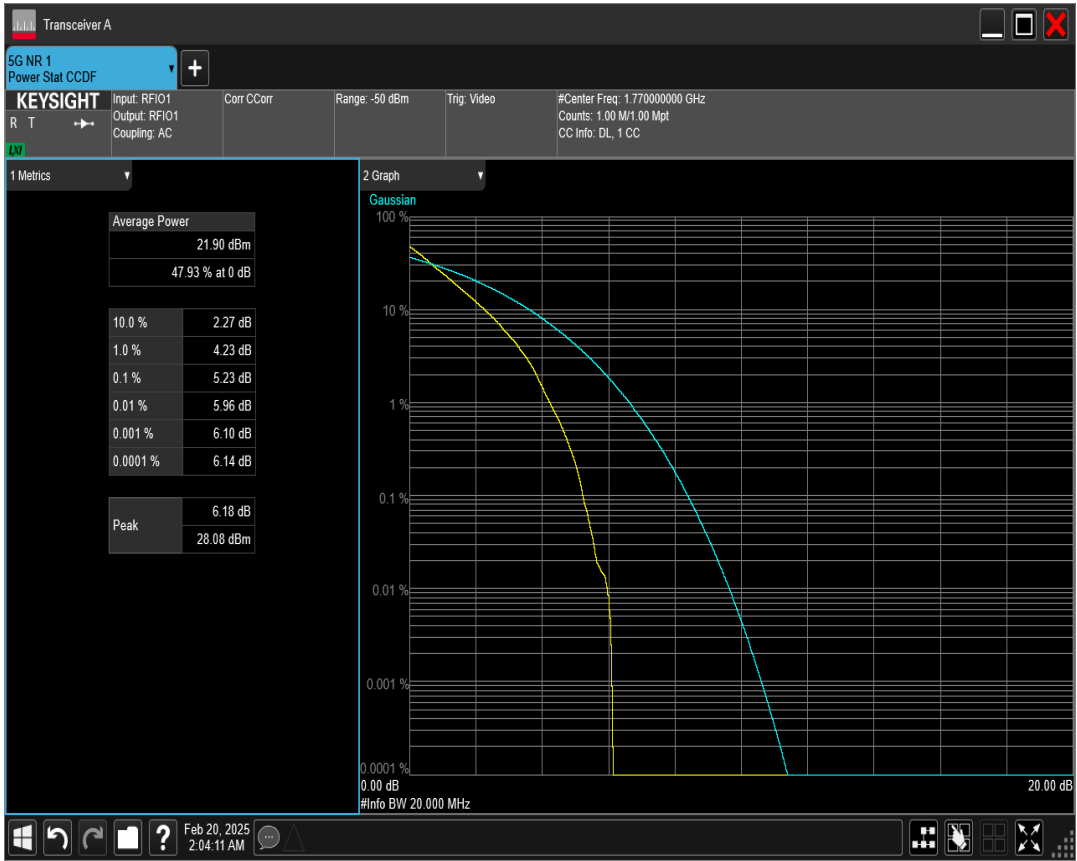


n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=349000 RB=25@0

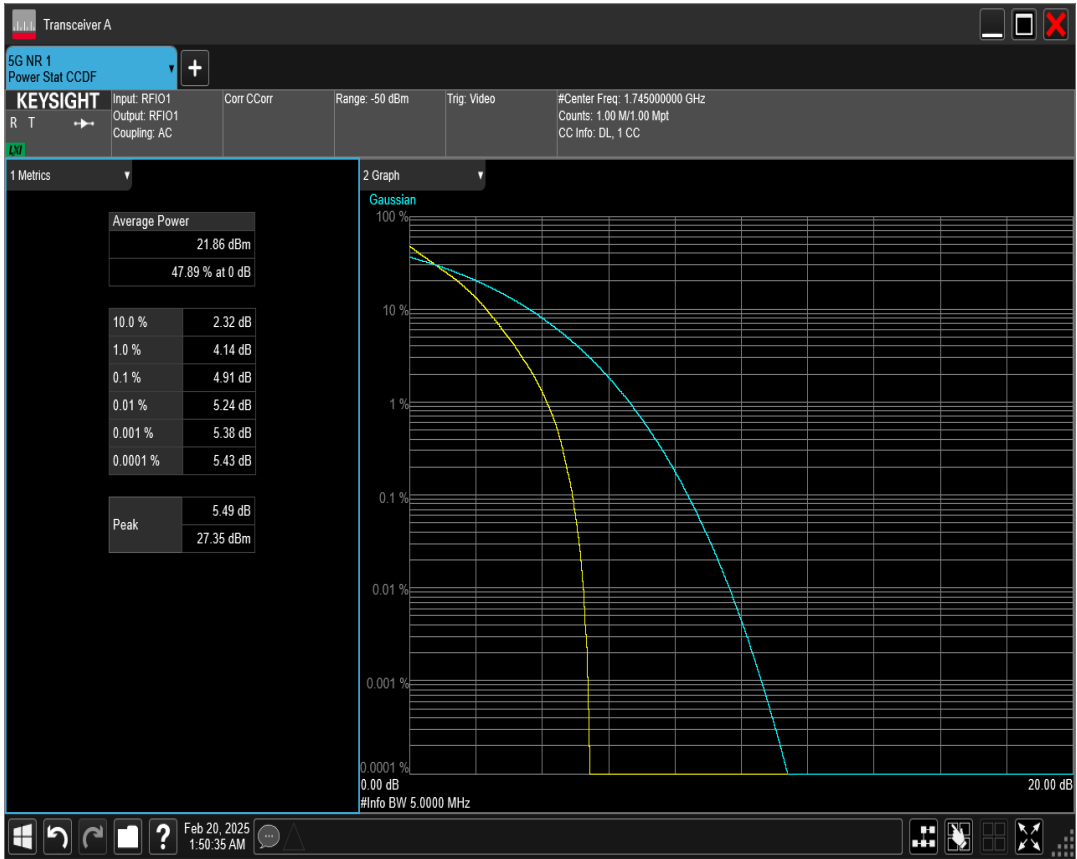


n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=355500 RB=25@0

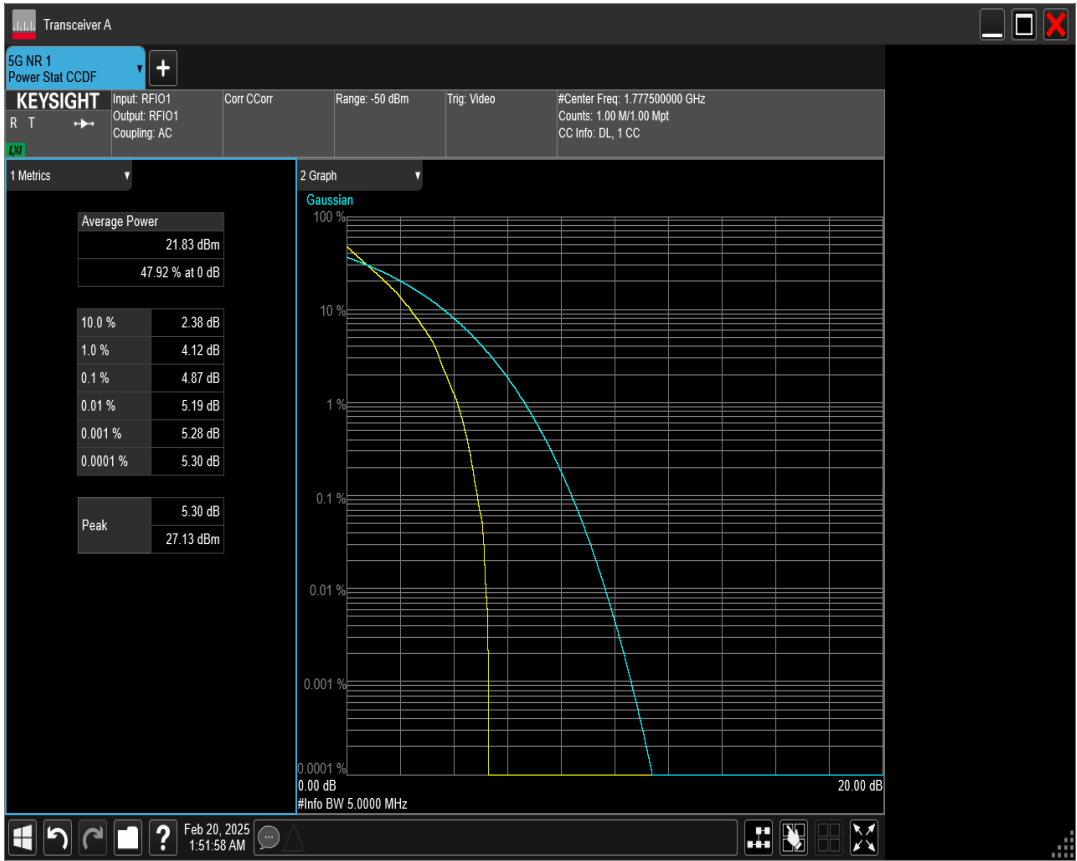

n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=352000 RB=216@0

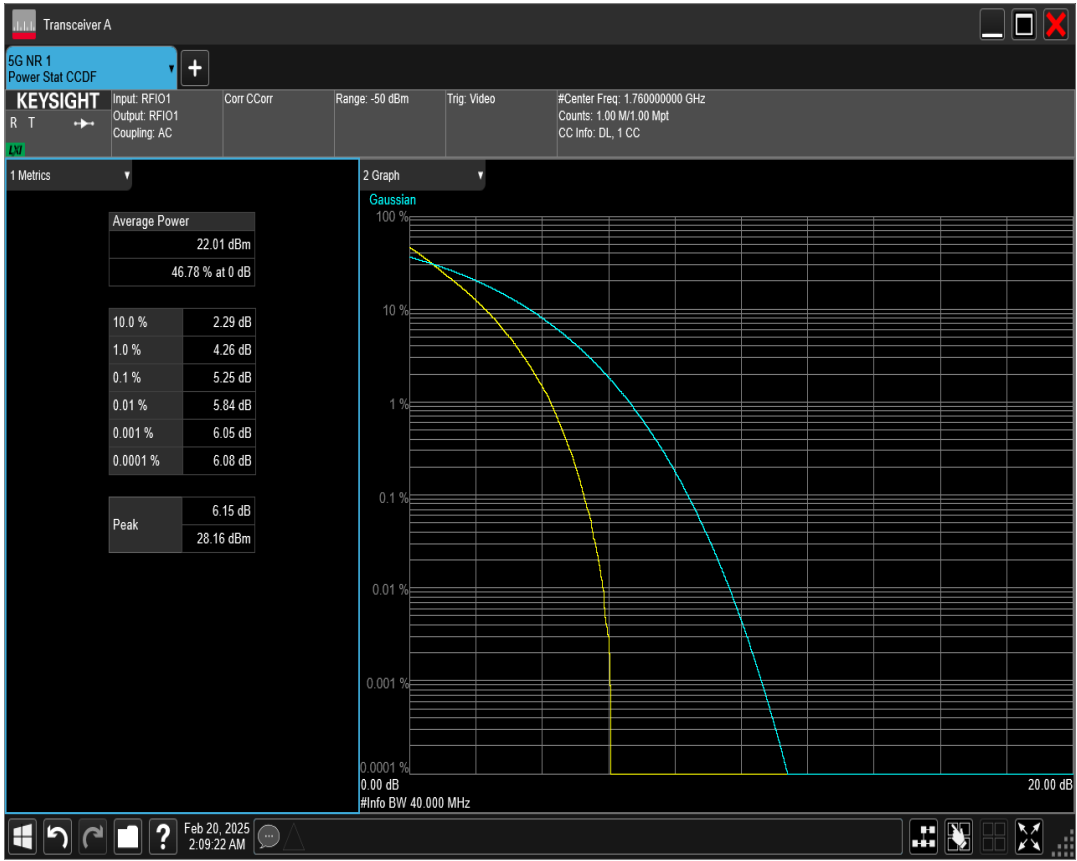

n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=342500 RB=25@0

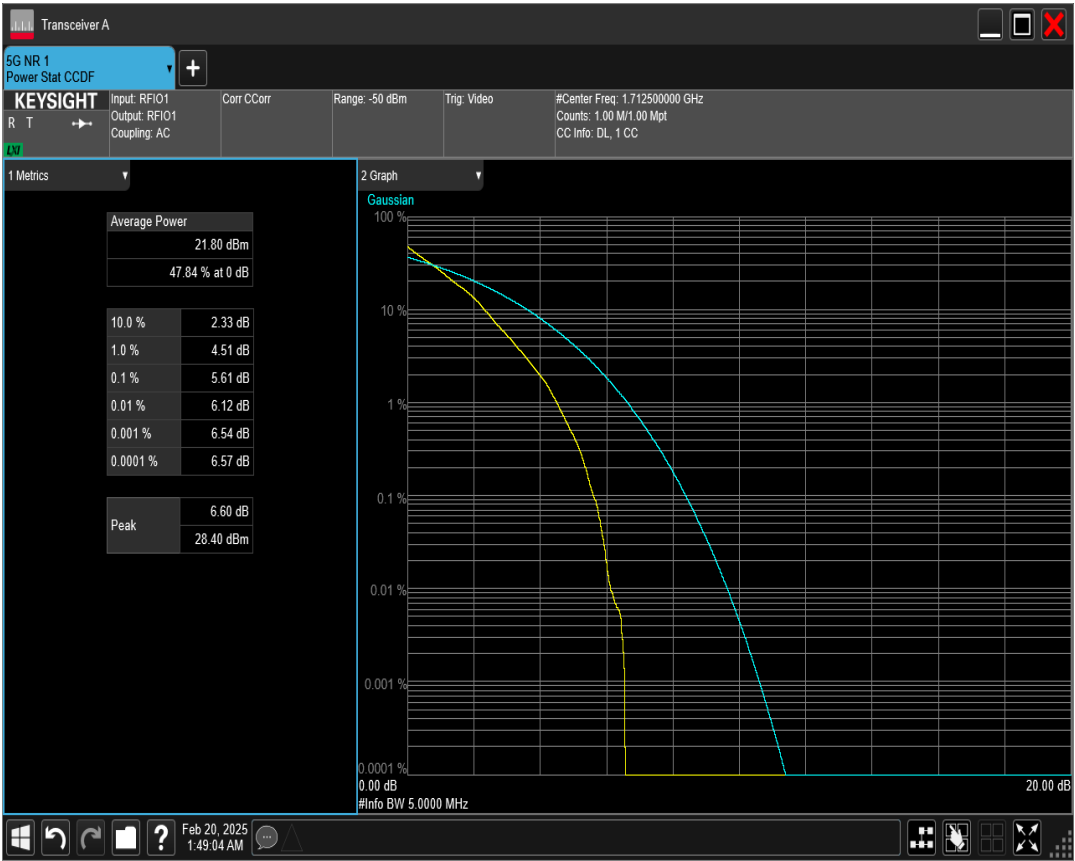

4 Occupied bandwidth for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
n66	15	5	349000	25@0	DFT_BPSK	4.460	4.620	PASS
n66	15	5	349000	25@0	DFT_QPSK	4.470	4.630	PASS
n66	15	5	349000	25@0	DFT_QAM16	4.440	4.580	PASS
n66	15	5	349000	25@0	DFT_QAM64	4.460	4.660	PASS
n66	15	5	349000	25@0	DFT_QAM256	4.470	4.630	PASS
n66	15	10	349000	50@0	DFT_BPSK	9.200	9.120	PASS
n66	15	10	349000	50@0	DFT_QPSK	9.220	9.150	PASS
n66	15	10	349000	50@0	DFT_QAM16	9.230	9.140	PASS
n66	15	10	349000	50@0	DFT_QAM64	9.190	9.110	PASS
n66	15	10	349000	50@0	DFT_QAM256	9.160	9.120	PASS
n66	15	15	349000	75@0	DFT_BPSK	14.010	13.670	PASS
n66	15	15	349000	75@0	DFT_QPSK	14.010	13.660	PASS
n66	15	15	349000	75@0	DFT_QAM16	13.970	13.590	PASS
n66	15	15	349000	75@0	DFT_QAM64	13.970	13.660	PASS
n66	15	15	349000	75@0	DFT_QAM256	14.000	13.620	PASS
n66	15	20	349000	100@0	DFT_BPSK	18.800	18.140	PASS
n66	15	20	349000	100@0	DFT_QPSK	18.810	18.150	PASS
n66	15	20	349000	100@0	DFT_QAM16	18.810	18.150	PASS
n66	15	20	349000	100@0	DFT_QAM64	18.800	18.140	PASS
n66	15	20	349000	100@0	DFT_QAM256	18.700	18.110	PASS
n66	15	40	349000	216@0	DFT_BPSK	38.460	39.050	PASS
n66	15	40	349000	216@0	DFT_QPSK	38.470	39.040	PASS
n66	15	40	349000	216@0	DFT_QAM16	38.480	39.000	PASS
n66	15	40	349000	216@0	DFT_QAM64	38.480	39.160	PASS
n66	15	40	349000	216@0	DFT_QAM256	38.470	39.030	PASS

n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=349000 RB=50@0



n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=349000 RB=75@0



n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=349000 RB=100@0



n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=349000 RB=216@0



n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=349000 RB=25@0



n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=349000 RB=50@0



n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=349000 RB=75@0



n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=349000 RB=100@0



n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=349000 RB=216@0



n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=349000 RB=25@0



n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=349000 RB=50@0



n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=349000 RB=75@0



n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=349000 RB=216@0