

TABLE OF CONTENTS

1 Conducted output power for EN-DC	2
2 Frequency stability for EN-DC	4
3 Peak-to-Average Ratio for EN-DC.....	6
4 Occupied bandwidth for EN-DC.....	77
5 Band edge for EN-DC	101
6 Out-of-band emissions for EN-DC	111

1 Conducted output power for EN-DC

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Power (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
Band2	30	5	18625	1@0	QPSK	19.32			
n78	30	10	620334	1@0	DFT_BPSK	20.12			
Sum	30					22.74	19	26	PASS
Band2	30	5	18900	8@0	QPSK	19.10			
n78	30	10	636666	12@6	DFT_BPSK	20.30			
Sum	30					22.75	19	26	PASS
Band2	30	5	18900	8@0	QPSK	19.08			
n78	30	10	636666	12@6	DFT_QPSK	20.34			
Sum	30					22.76	19	26	PASS
Band2	30	5	19175	1@17	QPSK	19.38			
n78	30	10	653000	1@23	DFT_BPSK	19.89			
Sum	30					22.65	19	26	PASS
Band2	30	5	19175	8@17	QPSK	19.11			
n78	30	10	653000	12@6	DFT_BPSK	20.10			
Sum	30					22.64	19	26	PASS
Band2	30	5	19175	1@17	QPSK	19.36			
n78	30	10	653000	1@23	DFT_QPSK	20.02			
Sum	30					22.71	19	26	PASS
Band2	30	5	19175	8@17	QPSK	19.12			
n78	30	10	653000	12@6	DFT_QPSK	20.20			
Sum	30					22.70	19	26	PASS
Band2	30	20	18700	1@0	QPSK	18.78			
n78	30	100	623334	1@0	DFT_BPSK	19.88			
Sum	30					22.37	19	26	PASS
Band2	30	20	18900	18@0	QPSK	19.00			
n78	30	100	636666	135@67	DFT_BPSK	20.39			
Sum	30					22.76	19	26	PASS
Band2	30	20	18900	18@0	QPSK	19.01			
n78	30	100	636666	135@67	DFT_QPSK	20.29			
Sum	30					22.70	19	26	PASS
Band2	30	20	19100	1@72	QPSK	19.28			
n78	30	100	650000	1@272	DFT_BPSK	19.93			
Sum	30					22.62	19	26	PASS
Band2	30	20	19100	18@72	QPSK	19.07			
n78	30	100	650000	135@67	DFT_BPSK	20.22			
Sum	30					22.69	19	26	PASS
Band2	30	20	19100	1@72	QPSK	19.25			
n78	30	100	650000	1@272	DFT_QPSK	19.89			

Sum	30					22.59	19	26	PASS
Band2	30	20	19100	18@72	QPSK	19.05			
n78	30	100	650000	135@67	DFT_QPSK	20.20			
Sum	30					22.67	19	26	PASS

2 Frequency stability for EN-DC

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n78	30	10	620334	12@6	DFT_BPSK	-24.08	-0.00729	-2.5	2.5	PASS
n78	30	10	620334	1@1	DFT_BPSK	-21.41	-0.00648	-2.5	2.5	PASS
n78	30	10	620334	1@22	DFT_BPSK	-11.27	-0.00341	-2.5	2.5	PASS
n78	30	10	620334	12@6	DFT_QPSK	-10.96	-0.00332	-2.5	2.5	PASS
n78	30	10	620334	1@1	DFT_QPSK	-10.13	-0.00307	-2.5	2.5	PASS
n78	30	10	620334	1@22	DFT_QPSK	-11.47	-0.00347	-2.5	2.5	PASS
n78	30	10	636666	12@6	DFT_BPSK	-24.92	-0.00702	-2.5	2.5	PASS
n78	30	10	636666	1@1	DFT_BPSK	-8.55	-0.00241	-2.5	2.5	PASS
n78	30	10	636666	1@22	DFT_BPSK	-14.85	-0.00418	-2.5	2.5	PASS
n78	30	10	636666	12@6	DFT_QPSK	-33.75	-0.00951	-2.5	2.5	PASS
n78	30	10	636666	1@1	DFT_QPSK	-9.29	-0.00262	-2.5	2.5	PASS
n78	30	10	636666	1@22	DFT_QPSK	-11.57	-0.00326	-2.5	2.5	PASS
n78	30	10	653000	12@6	DFT_BPSK	-13.09	-0.00345	-2.5	2.5	PASS
n78	30	10	653000	1@1	DFT_BPSK	-18.48	-0.00487	-2.5	2.5	PASS
n78	30	10	653000	1@22	DFT_BPSK	-4.80	-0.00126	-2.5	2.5	PASS
n78	30	10	653000	12@6	DFT_QPSK	-15.19	-0.00400	-2.5	2.5	PASS
n78	30	10	653000	1@1	DFT_QPSK	-5.45	-0.00144	-2.5	2.5	PASS
n78	30	10	653000	1@22	DFT_QPSK	-3.63	-0.00096	-2.5	2.5	PASS
n78	30	50	621668	64@32	DFT_BPSK	-8.52	-0.00256	-2.5	2.5	PASS
n78	30	50	621668	1@1	DFT_BPSK	-9.39	-0.00282	-2.5	2.5	PASS
n78	30	50	621668	1@131	DFT_BPSK	-13.66	-0.00411	-2.5	2.5	PASS
n78	30	50	621668	64@32	DFT_QPSK	-10.86	-0.00327	-2.5	2.5	PASS
n78	30	50	621668	1@1	DFT_QPSK	-10.47	-0.00315	-2.5	2.5	PASS
n78	30	50	621668	1@131	DFT_QPSK	-6.58	-0.00198	-2.5	2.5	PASS
n78	30	50	636666	64@32	DFT_BPSK	-9.76	-0.00275	-2.5	2.5	PASS
n78	30	50	636666	1@1	DFT_BPSK	-17.67	-0.00498	-2.5	2.5	PASS
n78	30	50	636666	1@131	DFT_BPSK	-8.09	-0.00228	-2.5	2.5	PASS
n78	30	50	636666	64@32	DFT_QPSK	-8.67	-0.00244	-2.5	2.5	PASS
n78	30	50	636666	1@1	DFT_QPSK	-9.61	-0.00271	-2.5	2.5	PASS
n78	30	50	636666	1@131	DFT_QPSK	-10.16	-0.00286	-2.5	2.5	PASS
n78	30	50	651666	64@32	DFT_BPSK	-11.64	-0.00308	-2.5	2.5	PASS
n78	30	50	651666	1@1	DFT_BPSK	-8.36	-0.00221	-2.5	2.5	PASS
n78	30	50	651666	1@131	DFT_BPSK	-8.61	-0.00228	-2.5	2.5	PASS
n78	30	50	651666	64@32	DFT_QPSK	-7.49	-0.00198	-2.5	2.5	PASS
n78	30	50	651666	1@1	DFT_QPSK	-13.22	-0.00350	-2.5	2.5	PASS
n78	30	50	651666	1@131	DFT_QPSK	-13.30	-0.00352	-2.5	2.5	PASS
n78	30	100	623334	135@67	DFT_BPSK	-7.73	-0.00231	-2.5	2.5	PASS
n78	30	100	623334	1@1	DFT_BPSK	-16.75	-0.00500	-2.5	2.5	PASS
n78	30	100	623334	1@271	DFT_BPSK	-4.31	-0.00129	-2.5	2.5	PASS

n78	30	100	623334	135@67	DFT_QPSK	-10.86	-0.00324	-2.5	2.5	PASS
n78	30	100	623334	1@1	DFT_QPSK	-8.58	-0.00256	-2.5	2.5	PASS
n78	30	100	623334	1@271	DFT_QPSK	-12.71	-0.00379	-2.5	2.5	PASS
n78	30	100	636666	135@67	DFT_BPSK	-11.47	-0.00323	-2.5	2.5	PASS
n78	30	100	636666	1@1	DFT_BPSK	-7.49	-0.00211	-2.5	2.5	PASS
n78	30	100	636666	1@271	DFT_BPSK	-3.25	-0.00092	-2.5	2.5	PASS
n78	30	100	636666	135@67	DFT_QPSK	-7.00	-0.00197	-2.5	2.5	PASS
n78	30	100	636666	1@1	DFT_QPSK	-7.04	-0.00198	-2.5	2.5	PASS
n78	30	100	636666	1@271	DFT_QPSK	-8.94	-0.00252	-2.5	2.5	PASS
n78	30	100	650000	135@67	DFT_BPSK	-6.59	-0.00176	-2.5	2.5	PASS
n78	30	100	650000	1@1	DFT_BPSK	-9.84	-0.00262	-2.5	2.5	PASS
n78	30	100	650000	1@271	DFT_BPSK	-9.84	-0.00262	-2.5	2.5	PASS
n78	30	100	650000	135@67	DFT_QPSK	-14.70	-0.00392	-2.5	2.5	PASS
n78	30	100	650000	1@1	DFT_QPSK	-9.88	-0.00263	-2.5	2.5	PASS
n78	30	100	650000	1@271	DFT_QPSK	-13.64	-0.00364	-2.5	2.5	PASS

3 Peak-to-Average Ratio for EN-DC


<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
n78	30	10	620334	24@0	DFT_BPSK	4.57	13	PASS
n78	30	10	620334	24@0	DFT_QPSK	5.58	13	PASS
n78	30	10	620334	24@0	DFT_QAM16	6.40	13	PASS
n78	30	10	620334	24@0	DFT_QAM64	6.92	13	PASS
n78	30	10	620334	24@0	DFT_QAM256	6.96	13	PASS
n78	30	10	636666	24@0	DFT_BPSK	4.87	13	PASS
n78	30	10	636666	24@0	DFT_QPSK	5.79	13	PASS
n78	30	10	636666	24@0	DFT_QAM16	6.76	13	PASS
n78	30	10	636666	24@0	DFT_QAM64	6.81	13	PASS
n78	30	10	636666	24@0	DFT_QAM256	6.96	13	PASS
n78	30	10	653000	24@0	DFT_BPSK	5.55	13	PASS
n78	30	10	653000	24@0	DFT_QPSK	6.05	13	PASS
n78	30	10	653000	24@0	DFT_QAM16	6.75	13	PASS
n78	30	10	653000	24@0	DFT_QAM64	6.73	13	PASS
n78	30	10	653000	24@0	DFT_QAM256	6.86	13	PASS
n78	30	15	620500	36@0	DFT_BPSK	4.45	13	PASS
n78	30	15	620500	36@0	DFT_QPSK	5.58	13	PASS
n78	30	15	620500	36@0	DFT_QAM16	6.63	13	PASS
n78	30	15	620500	36@0	DFT_QAM64	6.68	13	PASS
n78	30	15	620500	36@0	DFT_QAM256	7.19	13	PASS
n78	30	15	636666	36@0	DFT_BPSK	4.42	13	PASS
n78	30	15	636666	36@0	DFT_QPSK	6.25	13	PASS
n78	30	15	636666	36@0	DFT_QAM16	6.63	13	PASS
n78	30	15	636666	36@0	DFT_QAM64	6.78	13	PASS
n78	30	15	636666	36@0	DFT_QAM256	6.98	13	PASS
n78	30	15	652832	36@0	DFT_BPSK	4.54	13	PASS
n78	30	15	652832	36@0	DFT_QPSK	5.78	13	PASS
n78	30	15	652832	36@0	DFT_QAM16	6.73	13	PASS
n78	30	15	652832	36@0	DFT_QAM64	6.82	13	PASS
n78	30	15	652832	36@0	DFT_QAM256	7.00	13	PASS
n78	30	20	620668	50@0	DFT_BPSK	4.38	13	PASS
n78	30	20	620668	50@0	DFT_QPSK	5.77	13	PASS
n78	30	20	620668	50@0	DFT_QAM16	6.68	13	PASS
n78	30	20	620668	50@0	DFT_QAM64	6.67	13	PASS
n78	30	20	620668	50@0	DFT_QAM256	7.08	13	PASS
n78	30	20	636666	50@0	DFT_BPSK	4.57	13	PASS
n78	30	20	636666	50@0	DFT_QPSK	5.98	13	PASS
n78	30	20	636666	50@0	DFT_QAM16	6.72	13	PASS
n78	30	20	636666	50@0	DFT_QAM64	7.30	13	PASS

n78	30	20	636666	50@0	DFT_QAM256	6.80	13	PASS
n78	30	20	652666	50@0	DFT_BPSK	5.55	13	PASS
n78	30	20	652666	50@0	DFT_QPSK	5.74	13	PASS
n78	30	20	652666	50@0	DFT_QAM16	6.65	13	PASS
n78	30	20	652666	50@0	DFT_QAM64	7.05	13	PASS
n78	30	20	652666	50@0	DFT_QAM256	6.85	13	PASS
n78	30	40	621334	100@0	DFT_BPSK	4.42	13	PASS
n78	30	40	621334	100@0	DFT_QPSK	5.99	13	PASS
n78	30	40	621334	100@0	DFT_QAM16	6.48	13	PASS
n78	30	40	621334	100@0	DFT_QAM64	6.62	13	PASS
n78	30	40	621334	100@0	DFT_QAM256	6.98	13	PASS
n78	30	40	636666	100@0	DFT_BPSK	4.72	13	PASS
n78	30	40	636666	100@0	DFT_QPSK	5.85	13	PASS
n78	30	40	636666	100@0	DFT_QAM16	6.86	13	PASS
n78	30	40	636666	100@0	DFT_QAM64	6.80	13	PASS
n78	30	40	636666	100@0	DFT_QAM256	7.01	13	PASS
n78	30	40	652000	100@0	DFT_BPSK	6.16	13	PASS
n78	30	40	652000	100@0	DFT_QPSK	6.30	13	PASS
n78	30	40	652000	100@0	DFT_QAM16	6.75	13	PASS
n78	30	40	652000	100@0	DFT_QAM64	6.74	13	PASS
n78	30	40	652000	100@0	DFT_QAM256	6.85	13	PASS
n78	30	50	621668	128@0	DFT_BPSK	4.45	13	PASS
n78	30	50	621668	128@0	DFT_QPSK	5.79	13	PASS
n78	30	50	621668	128@0	DFT_QAM16	6.53	13	PASS
n78	30	50	621668	128@0	DFT_QAM64	6.76	13	PASS
n78	30	50	621668	128@0	DFT_QAM256	6.77	13	PASS
n78	30	50	636666	128@0	DFT_BPSK	4.56	13	PASS
n78	30	50	636666	128@0	DFT_QPSK	5.84	13	PASS
n78	30	50	636666	128@0	DFT_QAM16	6.63	13	PASS
n78	30	50	636666	128@0	DFT_QAM64	7.18	13	PASS
n78	30	50	636666	128@0	DFT_QAM256	6.81	13	PASS
n78	30	50	651666	128@0	DFT_BPSK	4.73	13	PASS
n78	30	50	651666	128@0	DFT_QPSK	5.90	13	PASS
n78	30	50	651666	128@0	DFT_QAM16	6.76	13	PASS
n78	30	50	651666	128@0	DFT_QAM64	6.70	13	PASS
n78	30	50	651666	128@0	DFT_QAM256	6.69	13	PASS
n78	30	60	622000	162@0	DFT_BPSK	4.48	13	PASS
n78	30	60	622000	162@0	DFT_QPSK	5.97	13	PASS
n78	30	60	622000	162@0	DFT_QAM16	6.45	13	PASS
n78	30	60	622000	162@0	DFT_QAM64	6.46	13	PASS
n78	30	60	622000	162@0	DFT_QAM256	6.79	13	PASS
n78	30	60	636666	162@0	DFT_BPSK	4.84	13	PASS
n78	30	60	636666	162@0	DFT_QPSK	6.01	13	PASS
n78	30	60	636666	162@0	DFT_QAM16	6.84	13	PASS


n78	30	60	636666	162@0	DFT_QAM64	6.74	13	PASS
n78	30	60	636666	162@0	DFT_QAM256	6.87	13	PASS
n78	30	60	651332	162@0	DFT_BPSK	4.67	13	PASS
n78	30	60	651332	162@0	DFT_QPSK	6.01	13	PASS
n78	30	60	651332	162@0	DFT_QAM16	6.87	13	PASS
n78	30	60	651332	162@0	DFT_QAM64	7.02	13	PASS
n78	30	60	651332	162@0	DFT_QAM256	6.66	13	PASS
n78	30	80	622668	216@0	DFT_BPSK	4.98	13	PASS
n78	30	80	622668	216@0	DFT_QPSK	5.79	13	PASS
n78	30	80	622668	216@0	DFT_QAM16	6.33	13	PASS
n78	30	80	622668	216@0	DFT_QAM64	6.74	13	PASS
n78	30	80	622668	216@0	DFT_QAM256	7.13	13	PASS
n78	30	80	636666	216@0	DFT_BPSK	5.41	13	PASS
n78	30	80	636666	216@0	DFT_QPSK	5.98	13	PASS
n78	30	80	636666	216@0	DFT_QAM16	6.77	13	PASS
n78	30	80	636666	216@0	DFT_QAM64	6.63	13	PASS
n78	30	80	636666	216@0	DFT_QAM256	7.36	13	PASS
n78	30	80	650666	216@0	DFT_BPSK	4.66	13	PASS
n78	30	80	650666	216@0	DFT_QPSK	5.85	13	PASS
n78	30	80	650666	216@0	DFT_QAM16	6.60	13	PASS
n78	30	80	650666	216@0	DFT_QAM64	6.89	13	PASS
n78	30	80	650666	216@0	DFT_QAM256	6.60	13	PASS
n78	30	90	623000	240@0	DFT_BPSK	4.80	13	PASS
n78	30	90	623000	240@0	DFT_QPSK	5.76	13	PASS
n78	30	90	623000	240@0	DFT_QAM16	6.45	13	PASS
n78	30	90	623000	240@0	DFT_QAM64	6.65	13	PASS
n78	30	90	623000	240@0	DFT_QAM256	6.93	13	PASS
n78	30	90	636666	240@0	DFT_BPSK	4.63	13	PASS
n78	30	90	636666	240@0	DFT_QPSK	5.78	13	PASS
n78	30	90	636666	240@0	DFT_QAM16	7.00	13	PASS
n78	30	90	636666	240@0	DFT_QAM64	6.81	13	PASS
n78	30	90	636666	240@0	DFT_QAM256	6.86	13	PASS
n78	30	90	650332	240@0	DFT_BPSK	5.14	13	PASS
n78	30	90	650332	240@0	DFT_QPSK	5.81	13	PASS
n78	30	90	650332	240@0	DFT_QAM16	6.46	13	PASS
n78	30	90	650332	240@0	DFT_QAM64	6.56	13	PASS
n78	30	90	650332	240@0	DFT_QAM256	6.95	13	PASS
n78	30	100	623334	270@0	DFT_BPSK	5.02	13	PASS
n78	30	100	623334	270@0	DFT_QPSK	5.62	13	PASS
n78	30	100	623334	270@0	DFT_QAM16	7.02	13	PASS
n78	30	100	623334	270@0	DFT_QAM64	6.54	13	PASS
n78	30	100	623334	270@0	DFT_QAM256	6.75	13	PASS
n78	30	100	636666	270@0	DFT_BPSK	4.48	13	PASS
n78	30	100	636666	270@0	DFT_QPSK	6.14	13	PASS

n78	30	100	636666	270@0	DFT_QAM16	6.58	13	PASS
n78	30	100	636666	270@0	DFT_QAM64	7.19	13	PASS
n78	30	100	636666	270@0	DFT_QAM256	7.58	13	PASS
n78	30	100	650000	270@0	DFT_BPSK	5.27	13	PASS
n78	30	100	650000	270@0	DFT_QPSK	6.18	13	PASS
n78	30	100	650000	270@0	DFT_QAM16	6.67	13	PASS
n78	30	100	650000	270@0	DFT_QAM64	6.93	13	PASS
n78	30	100	650000	270@0	DFT_QAM256	6.93	13	PASS


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=636666 RB=270@0

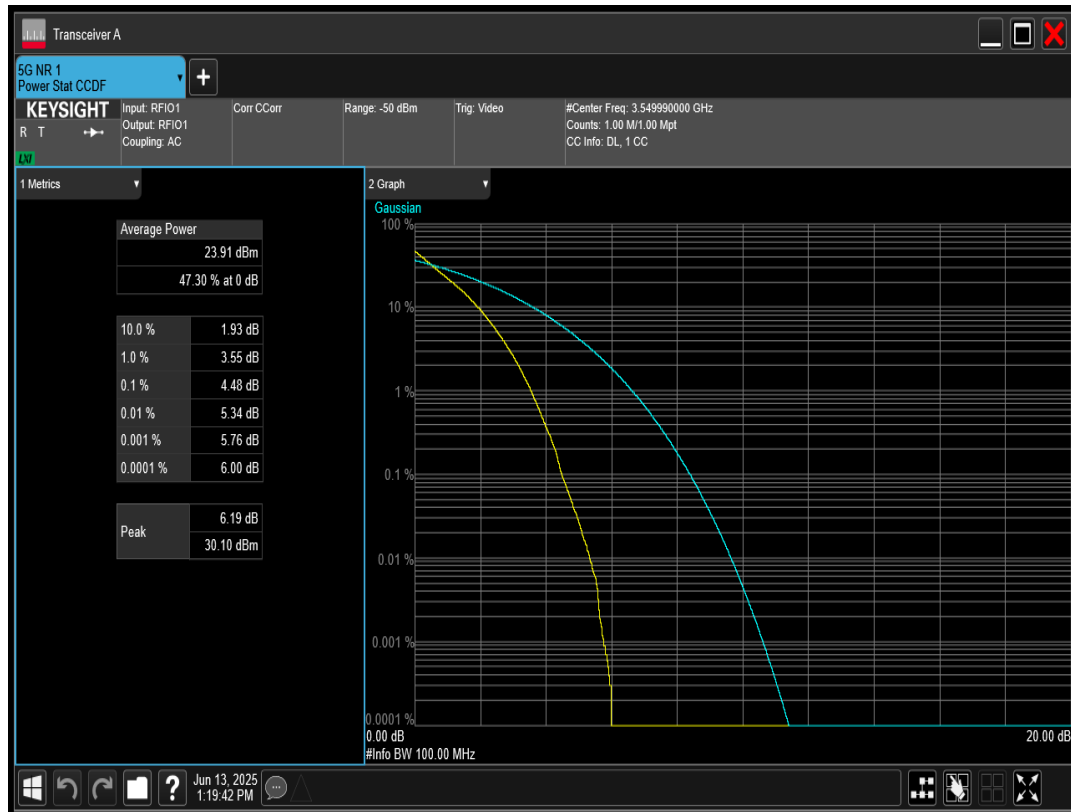


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=623334 RB=270@0

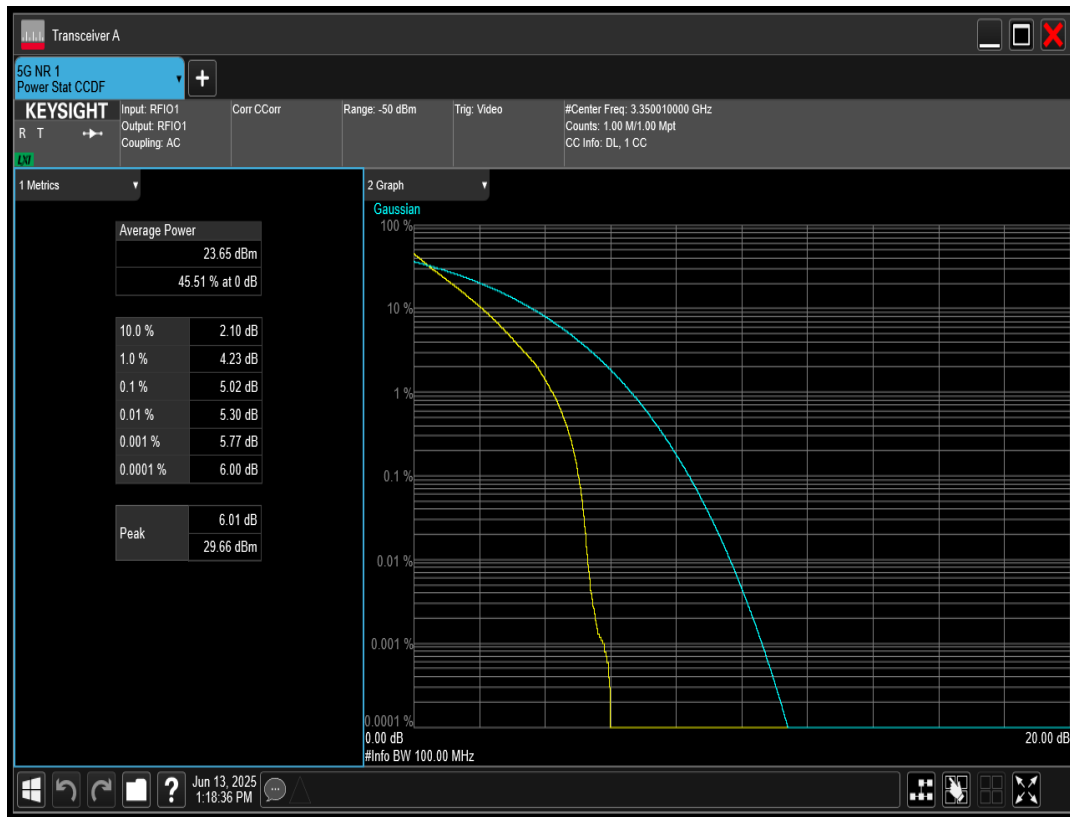


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=620334 RB=24@0

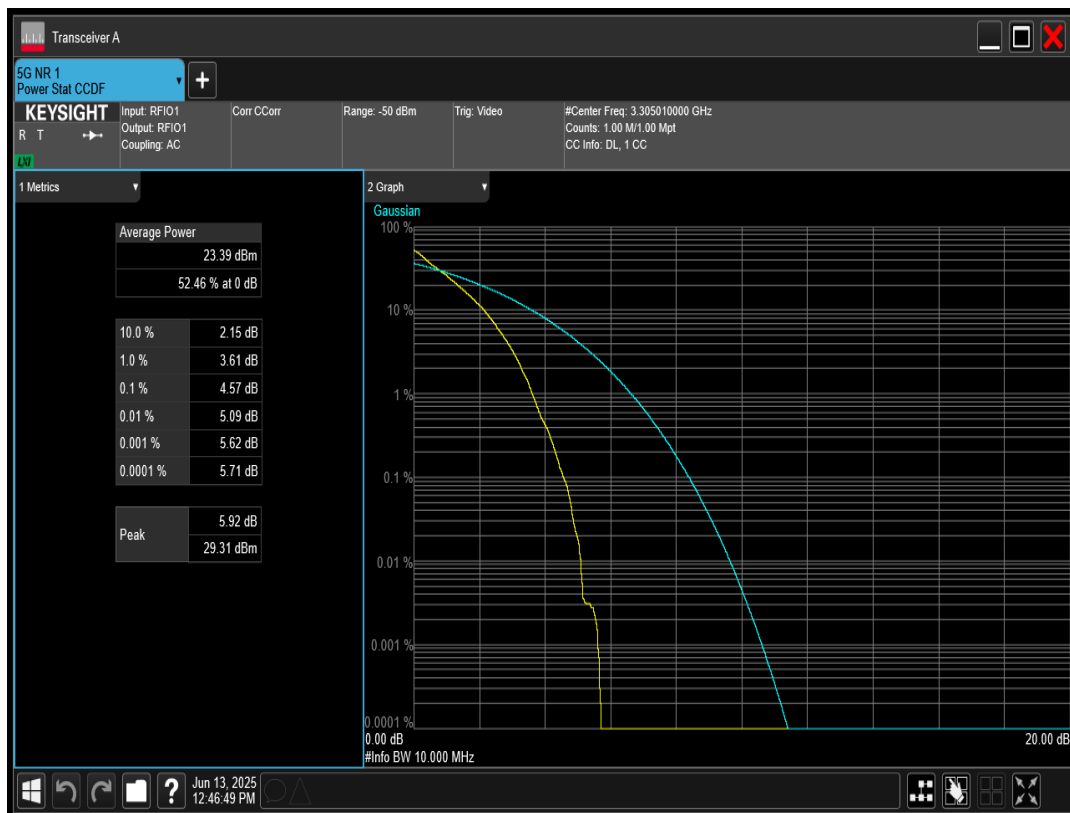


n78 SCS=30kHz DFT_BPSK BW=100MHz Channel=650000 RB=270@0

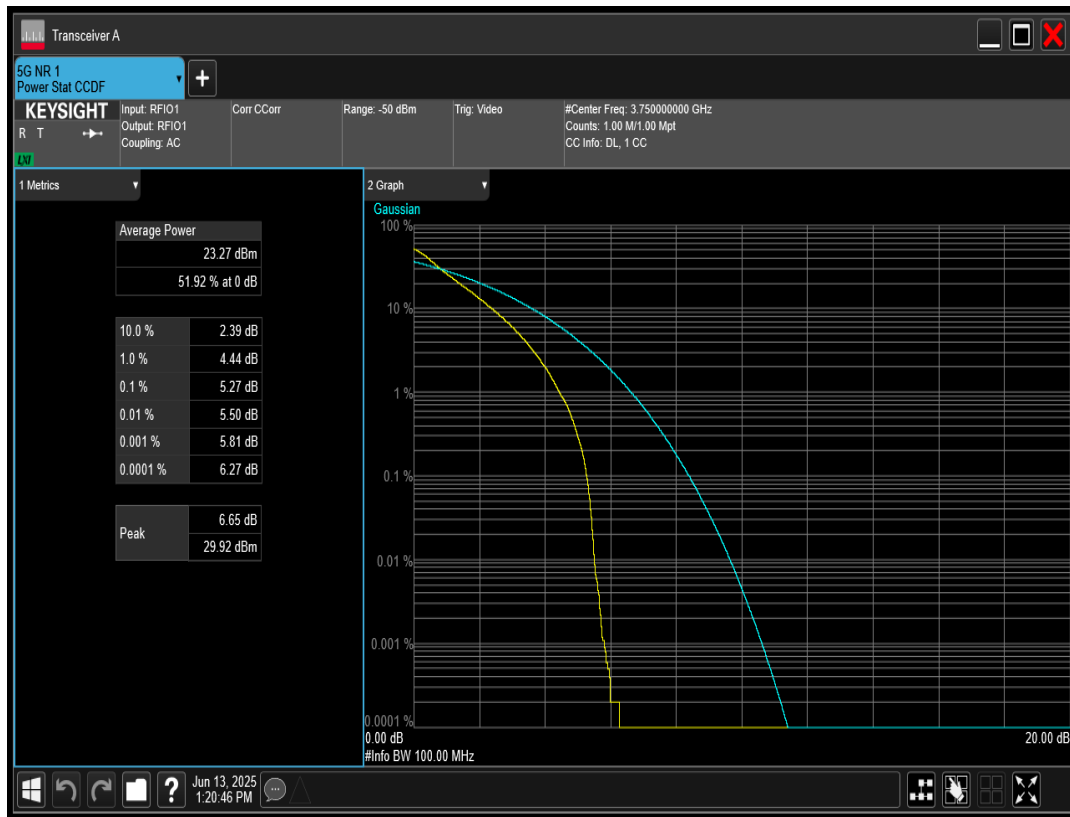


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=636666 RB=24@0

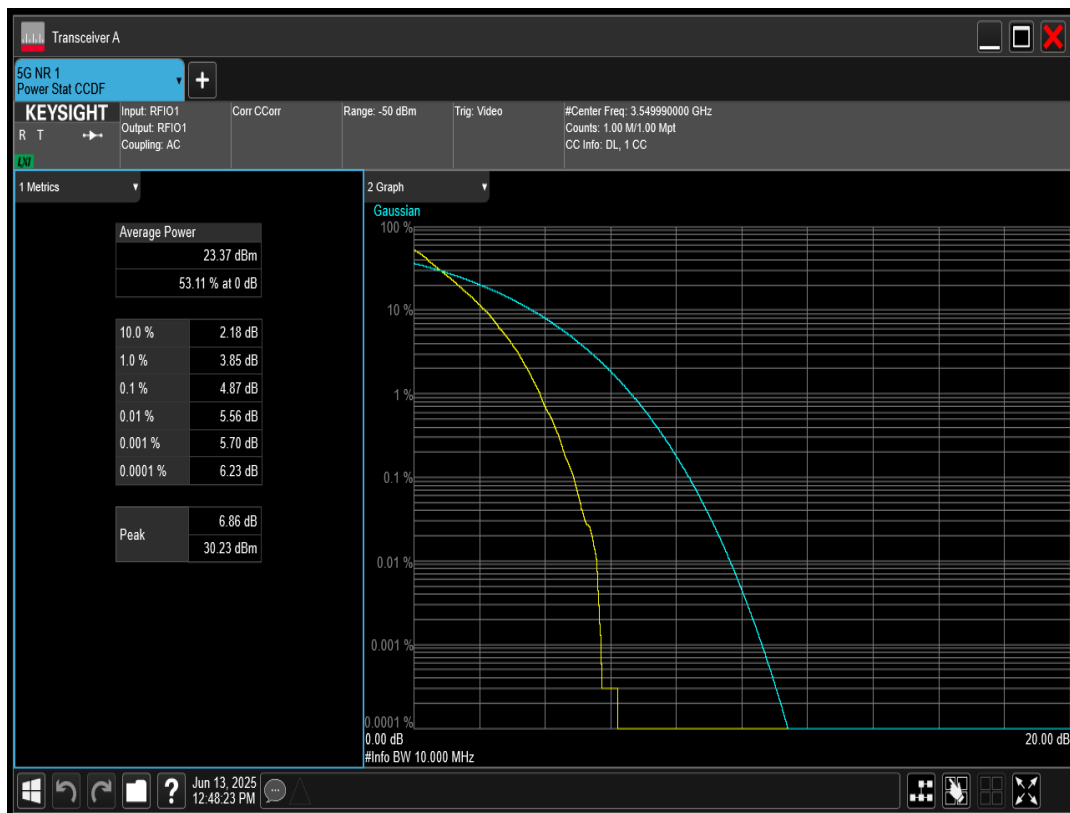


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=620500 RB=36@0

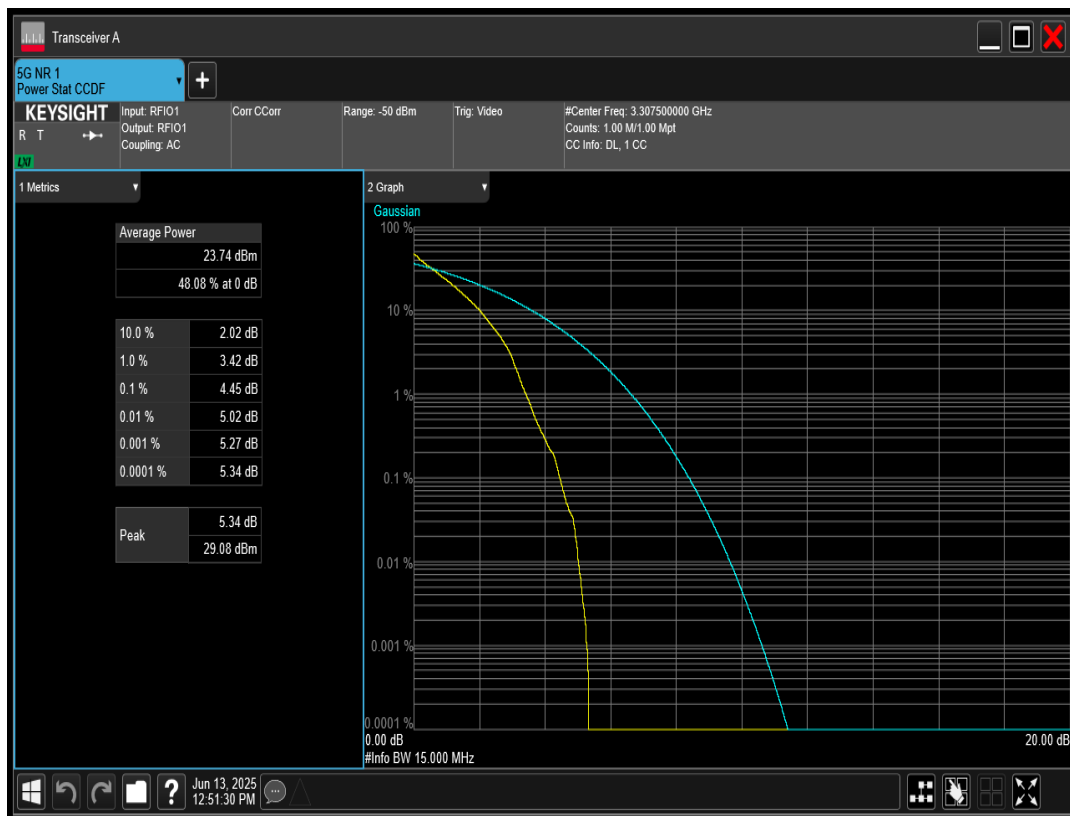


n78 SCS=30kHz DFT_BPSK BW=10MHz Channel=653000 RB=24@0

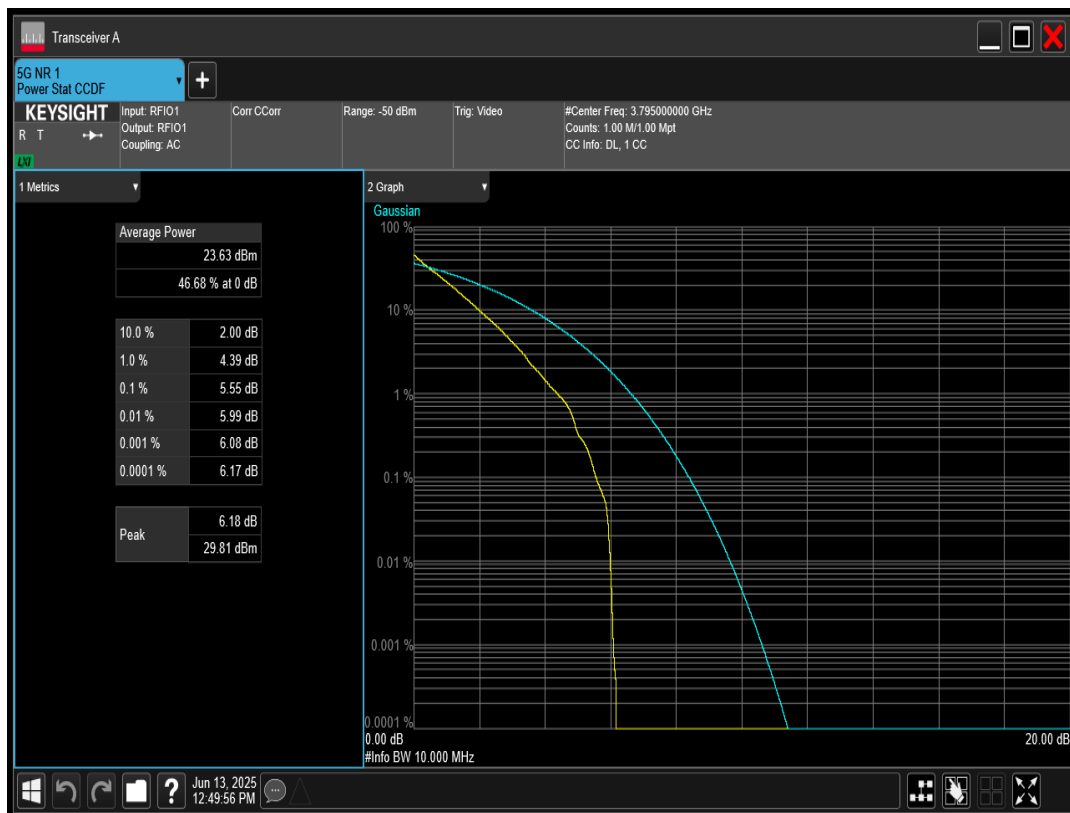


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=636666 RB=36@0

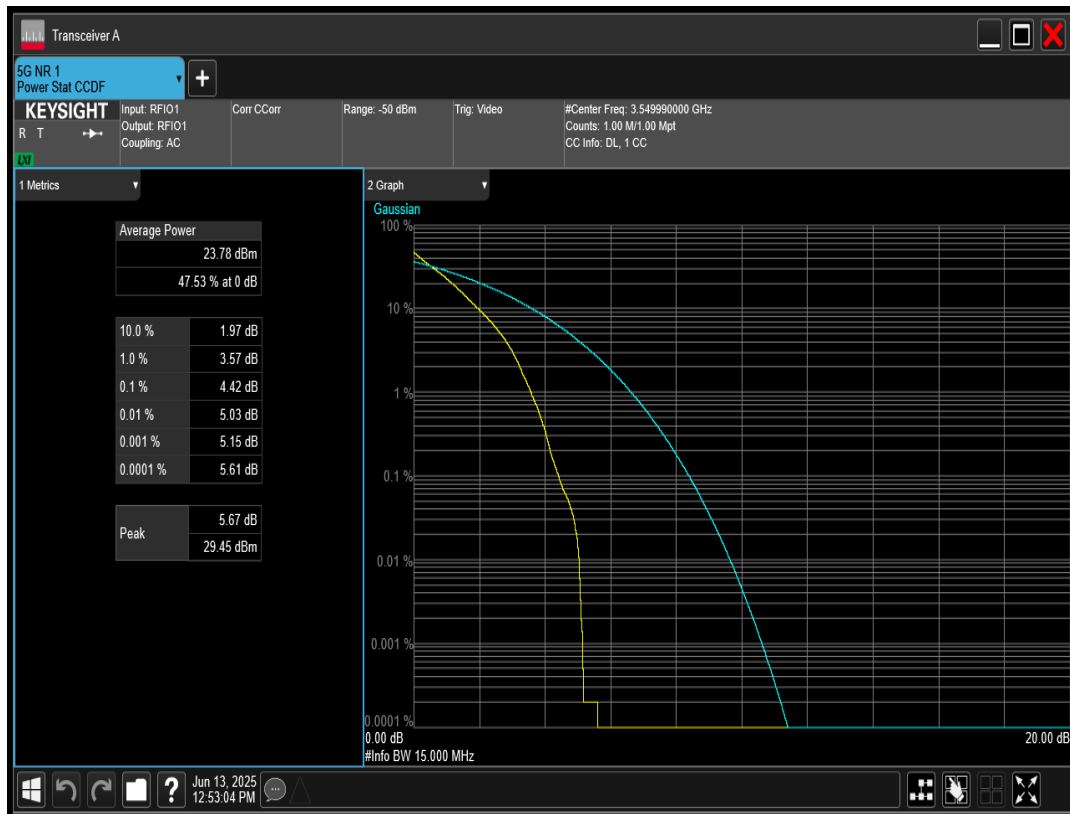


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=652666 RB=50@0

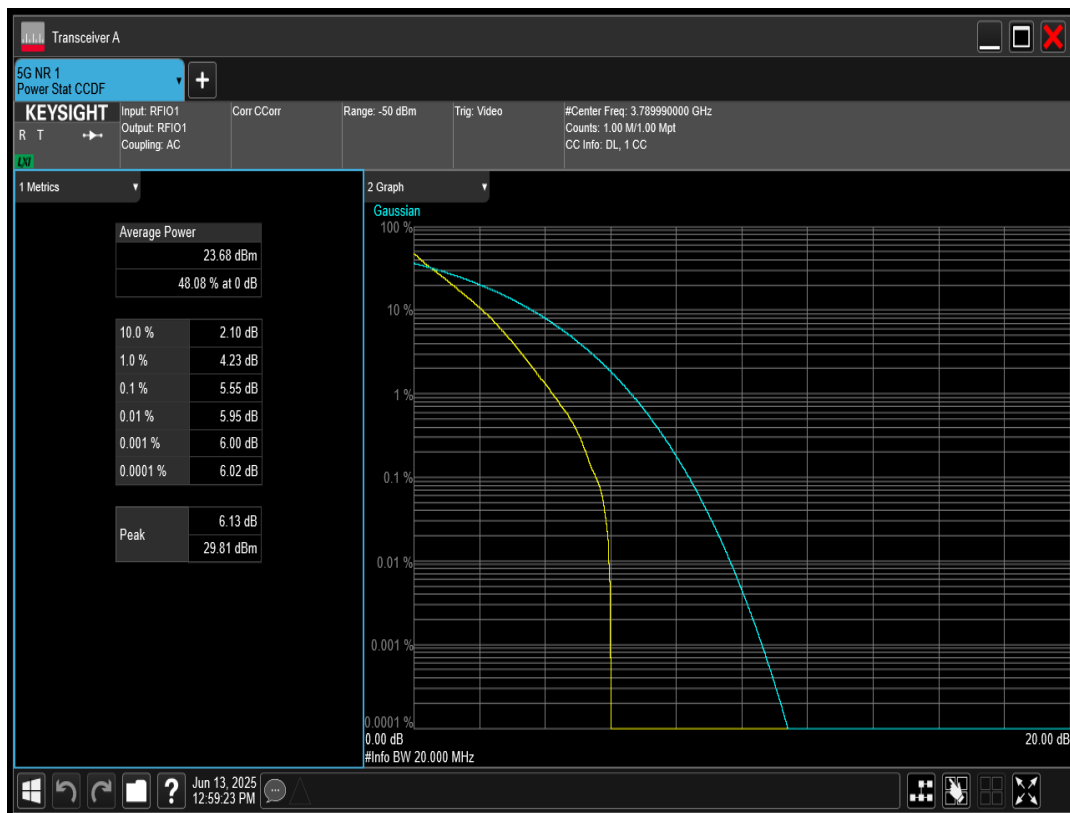


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=621334 RB=100@0

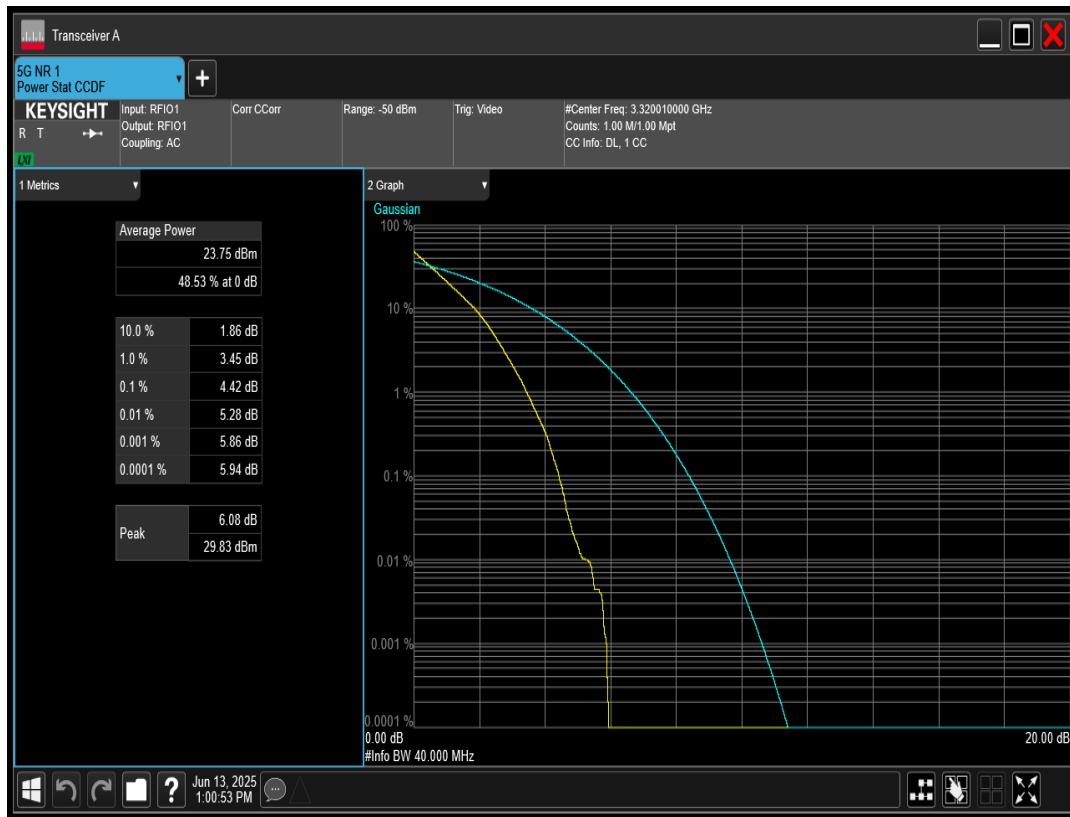


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=636666 RB=50@0

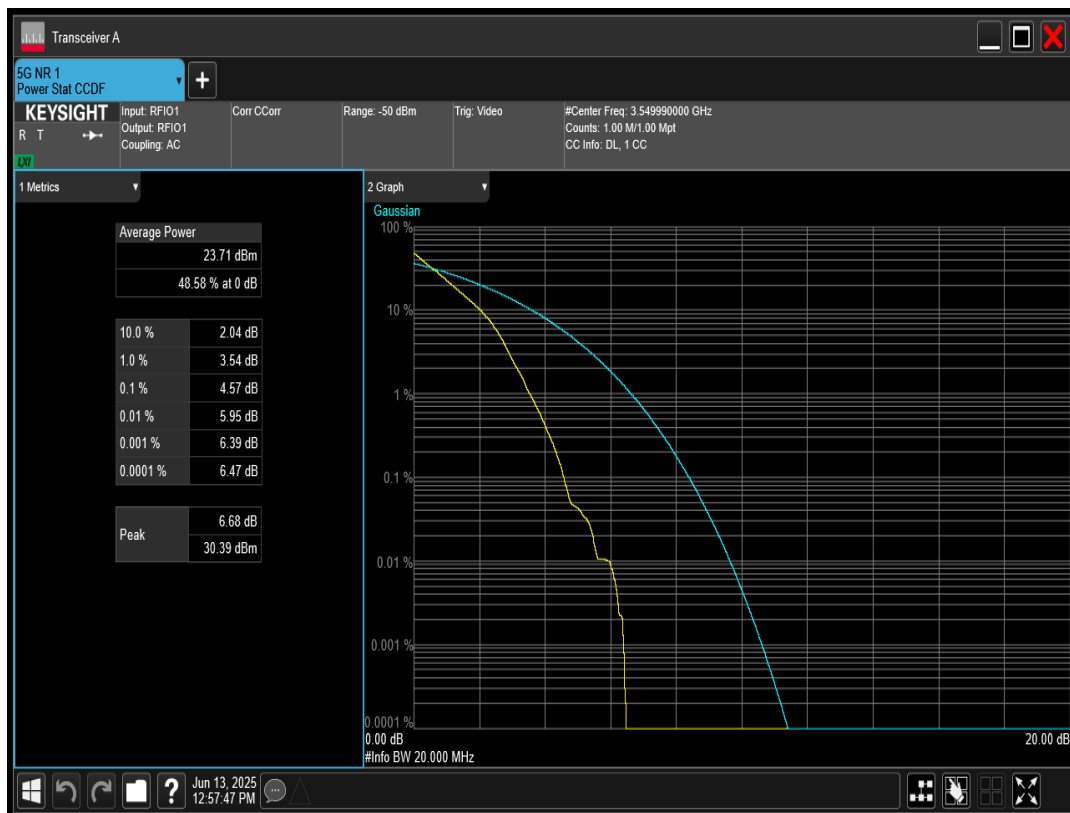


n78 SCS=30kHz DFT_BPSK BW=15MHz Channel=652832 RB=36@0

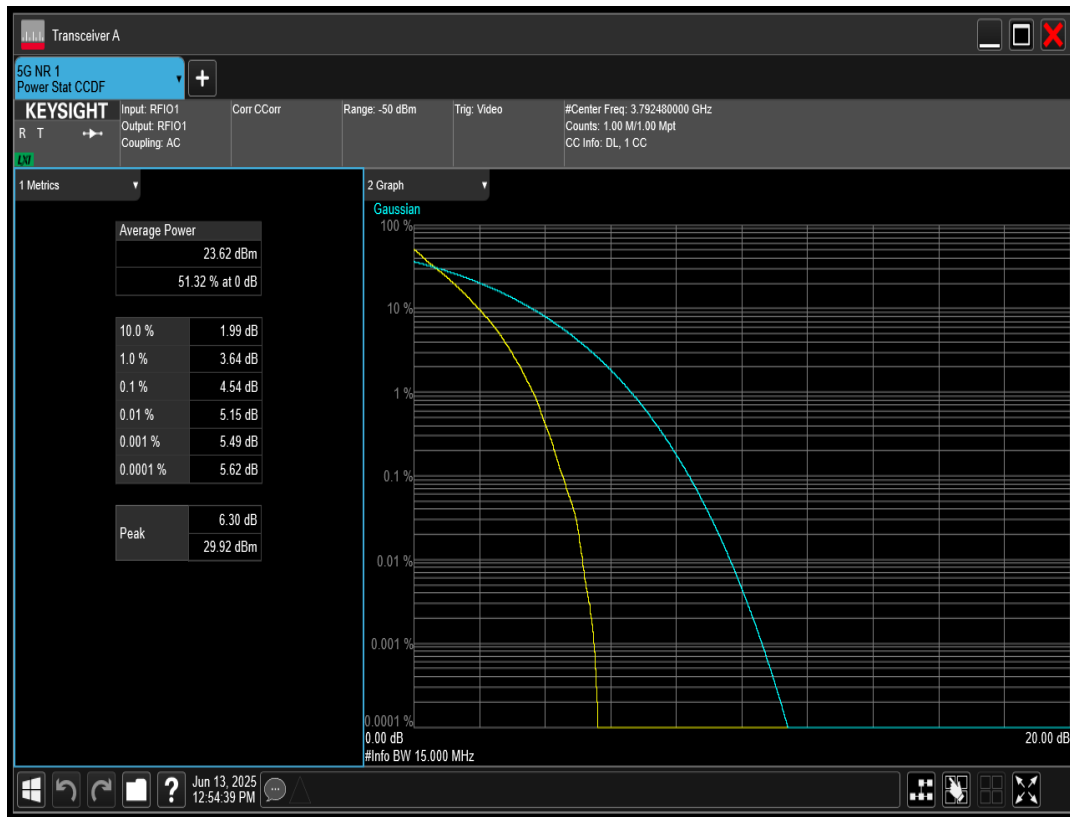


n78 SCS=30kHz DFT_BPSK BW=20MHz Channel=620668 RB=50@0

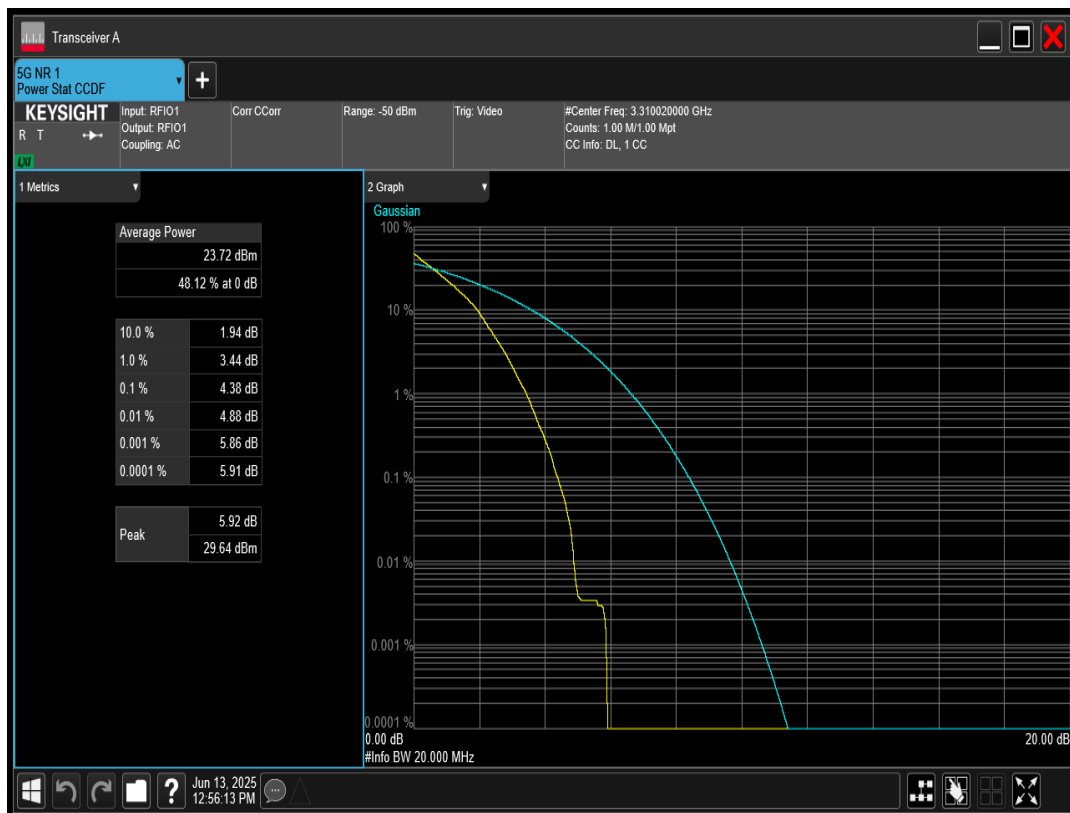


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=621668 RB=128@0

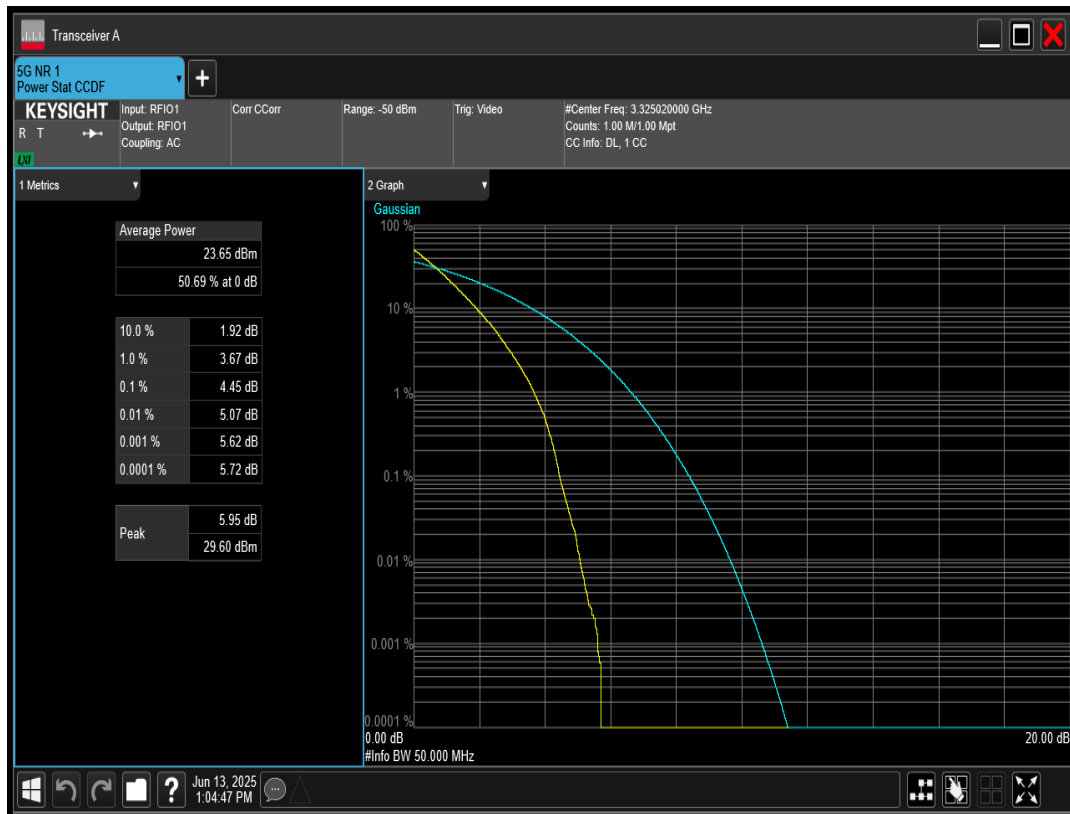


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=652000 RB=100@0

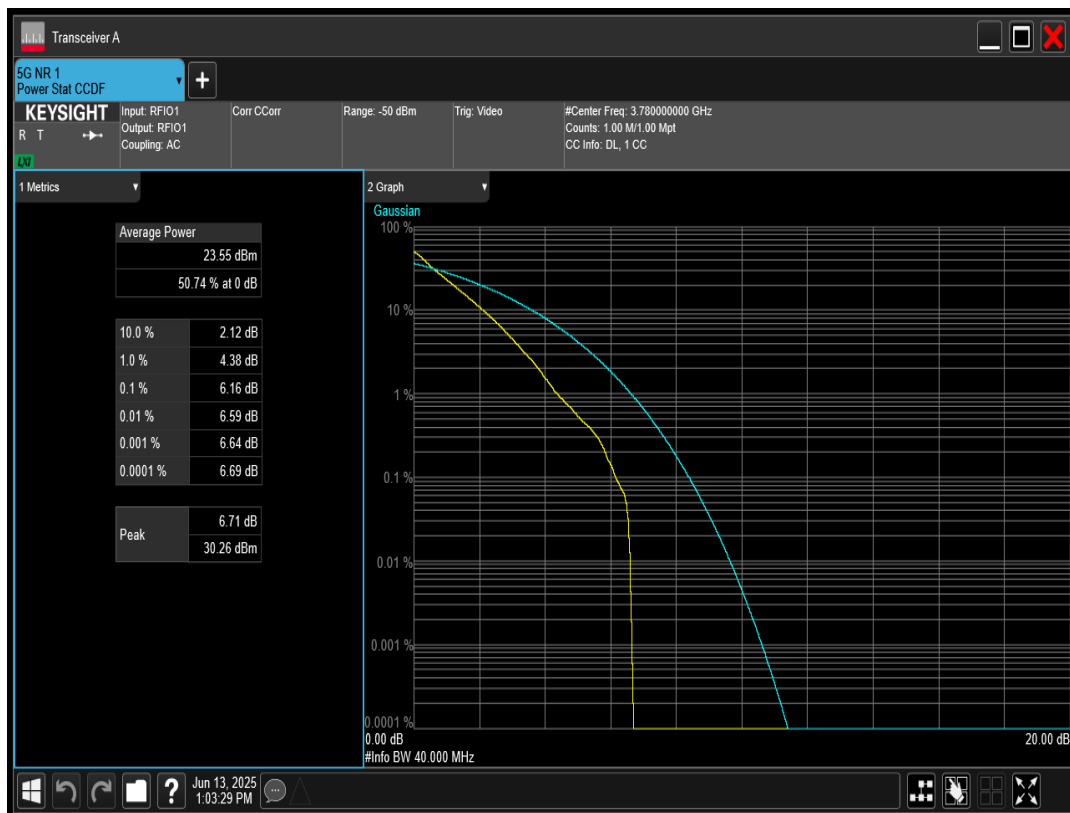


n78 SCS=30kHz DFT_BPSK BW=40MHz Channel=636666 RB=100@0

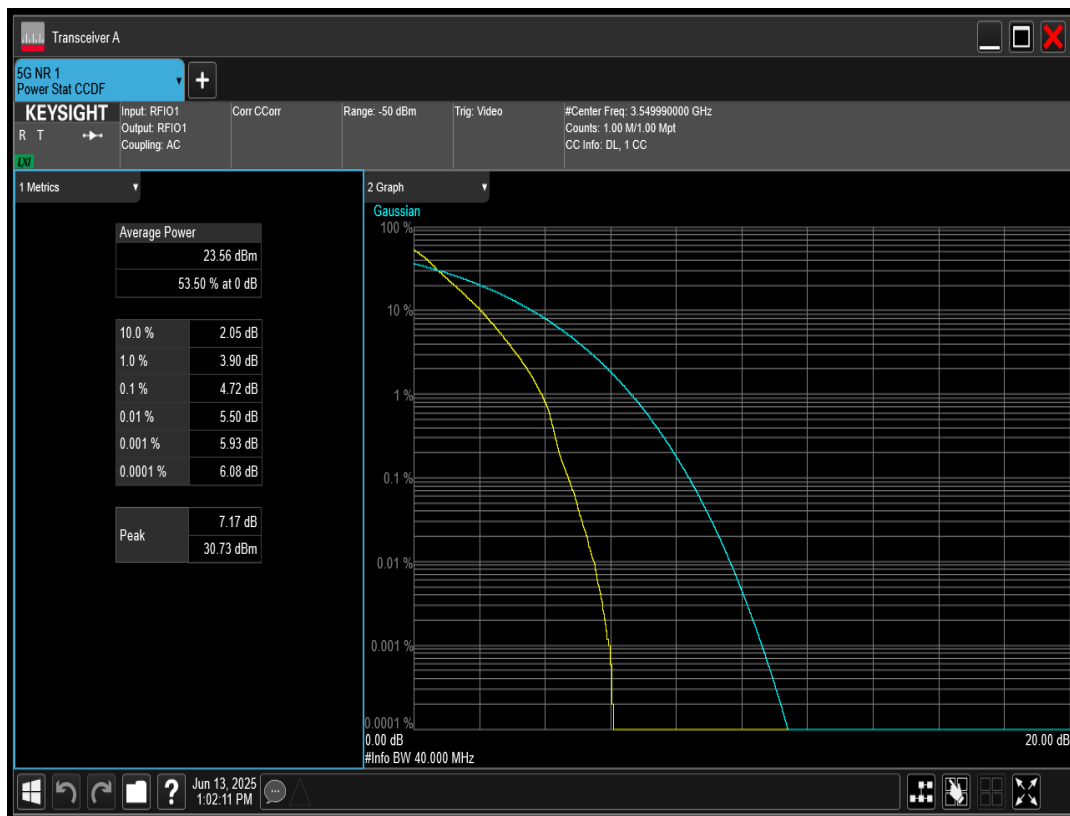


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=636666 RB=128@0

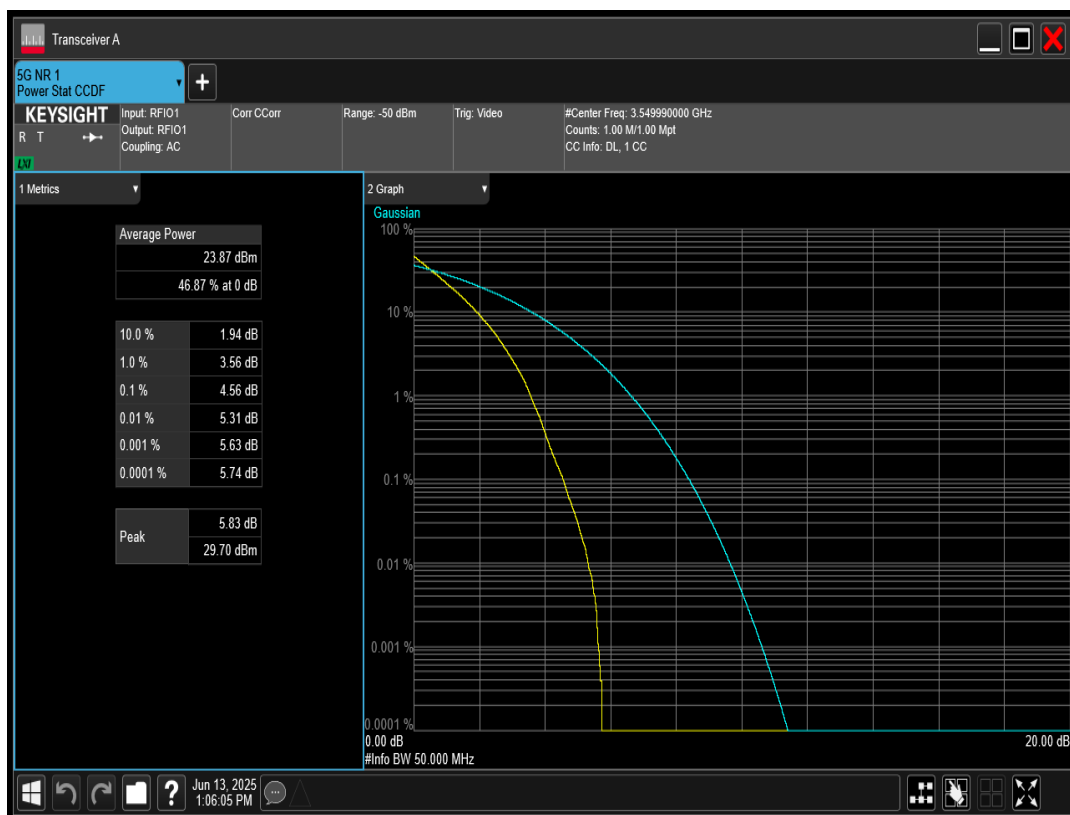


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=622000 RB=162@0

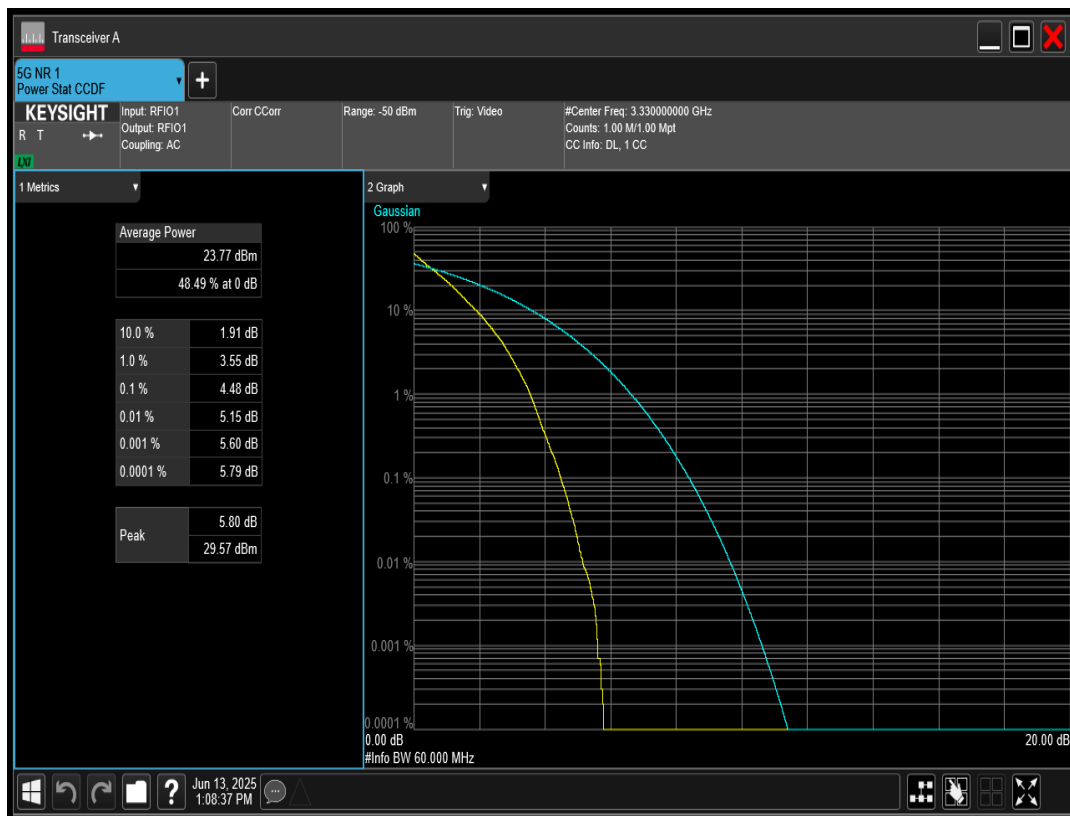


n78 SCS=30kHz DFT_BPSK BW=50MHz Channel=651666 RB=128@0

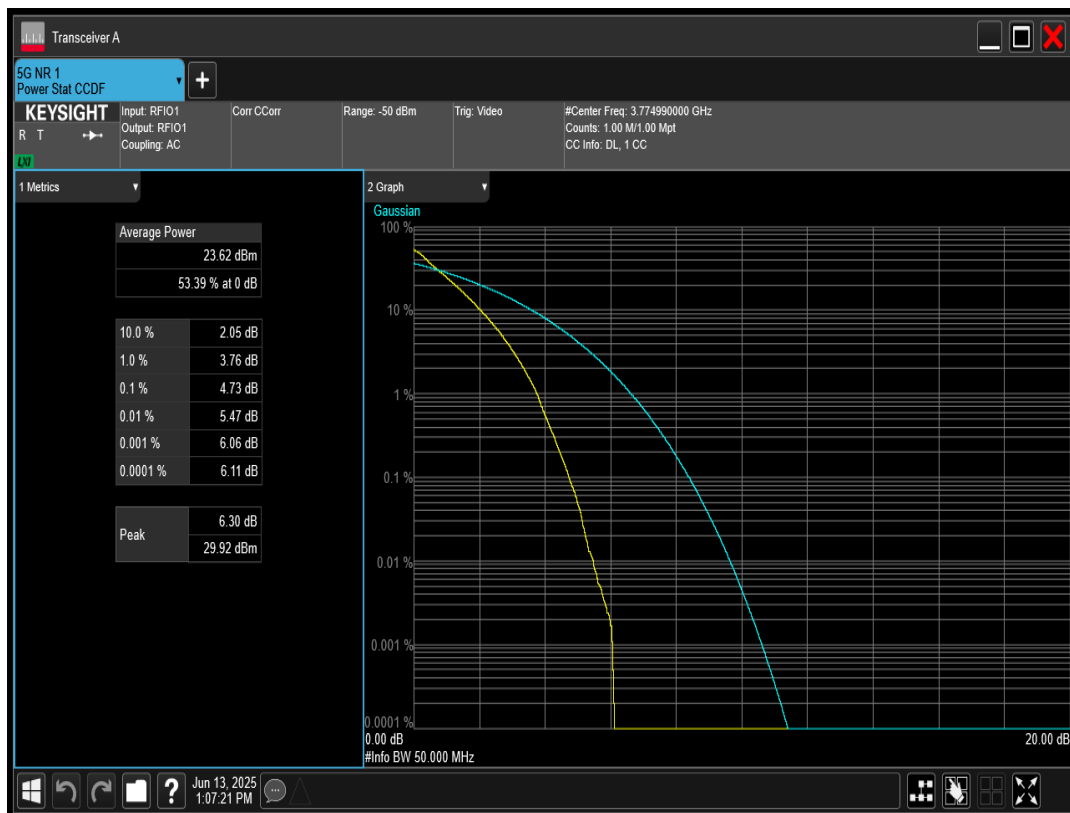


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=651332 RB=162@0

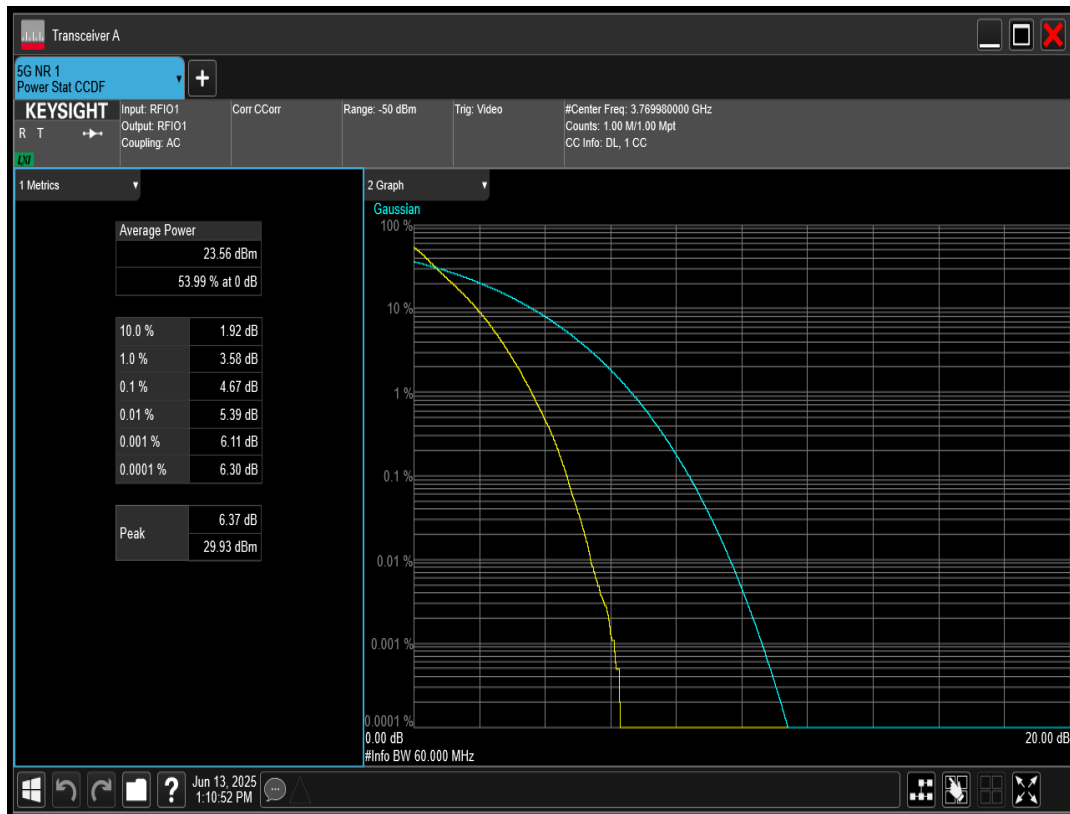


n78 SCS=30kHz DFT_BPSK BW=60MHz Channel=636666 RB=162@0

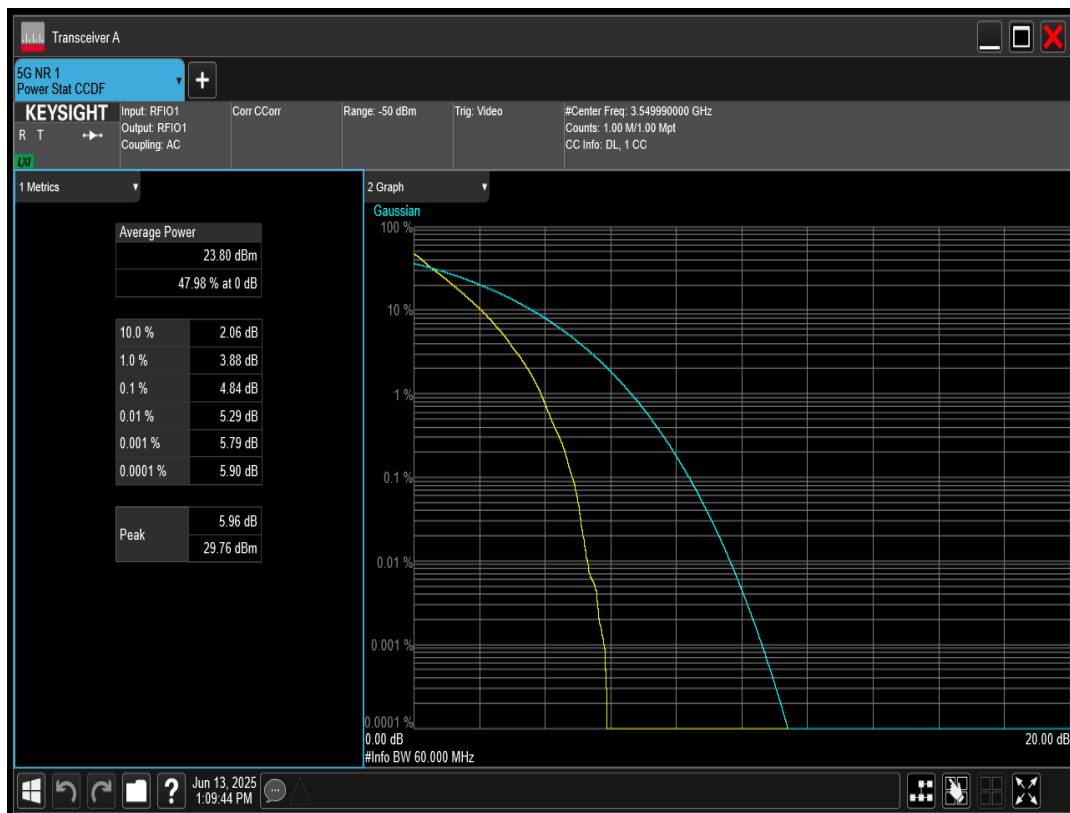


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=636666 RB=216@0

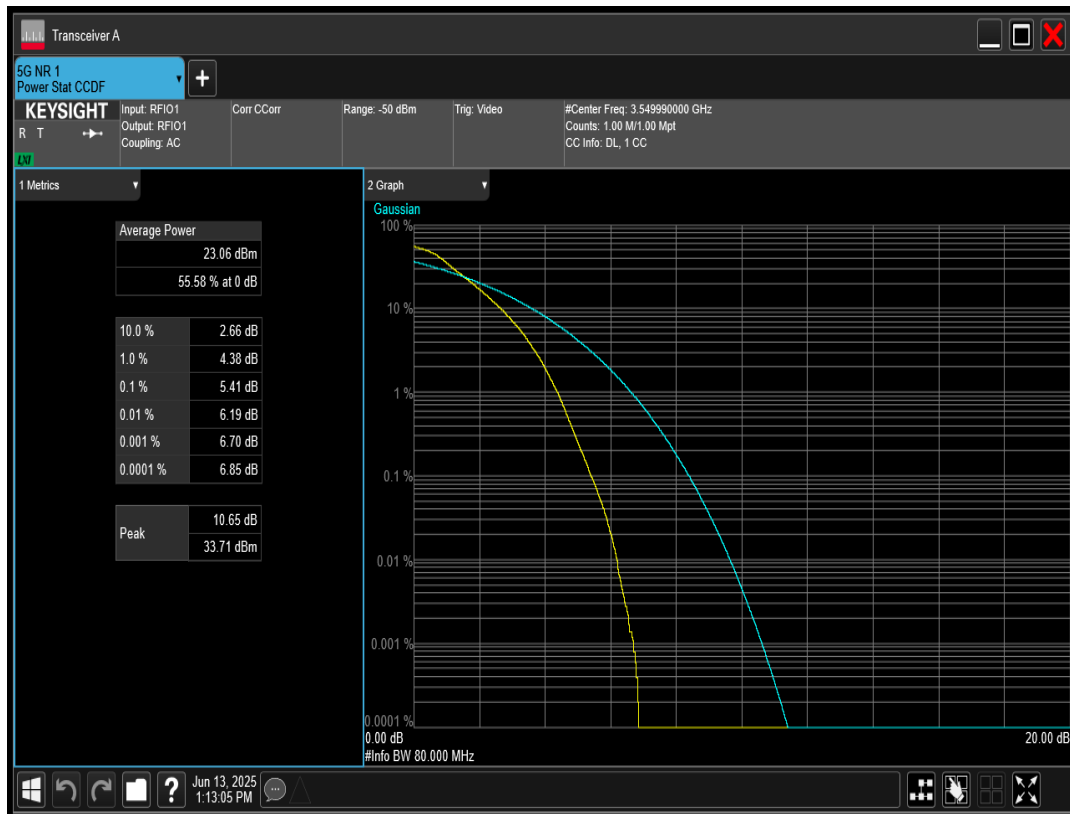


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=622668 RB=216@0

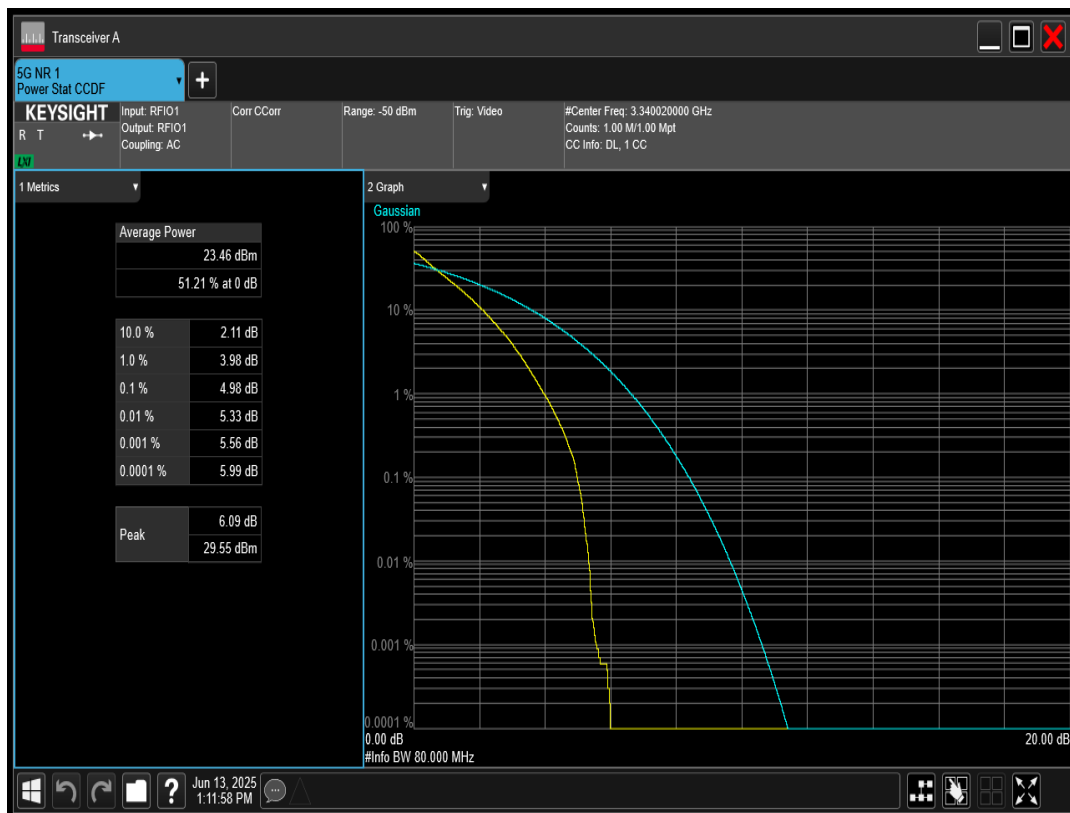


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=623000 RB=240@0

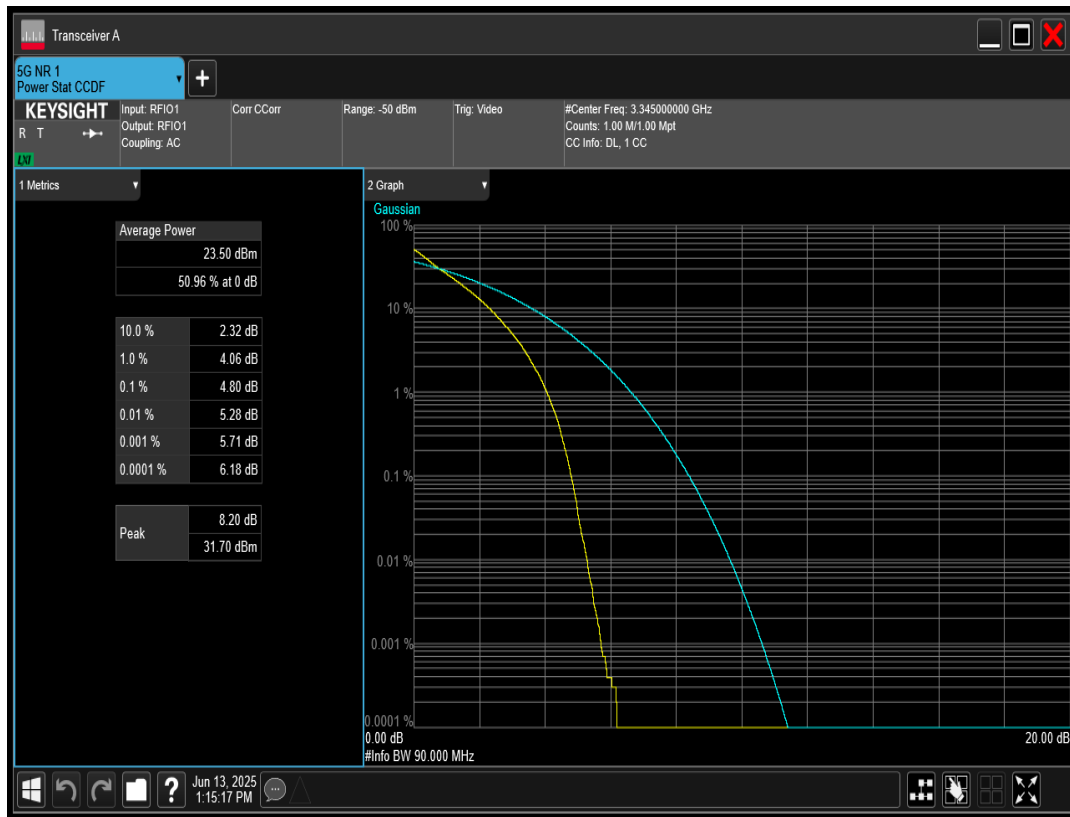


n78 SCS=30kHz DFT_BPSK BW=80MHz Channel=650666 RB=216@0

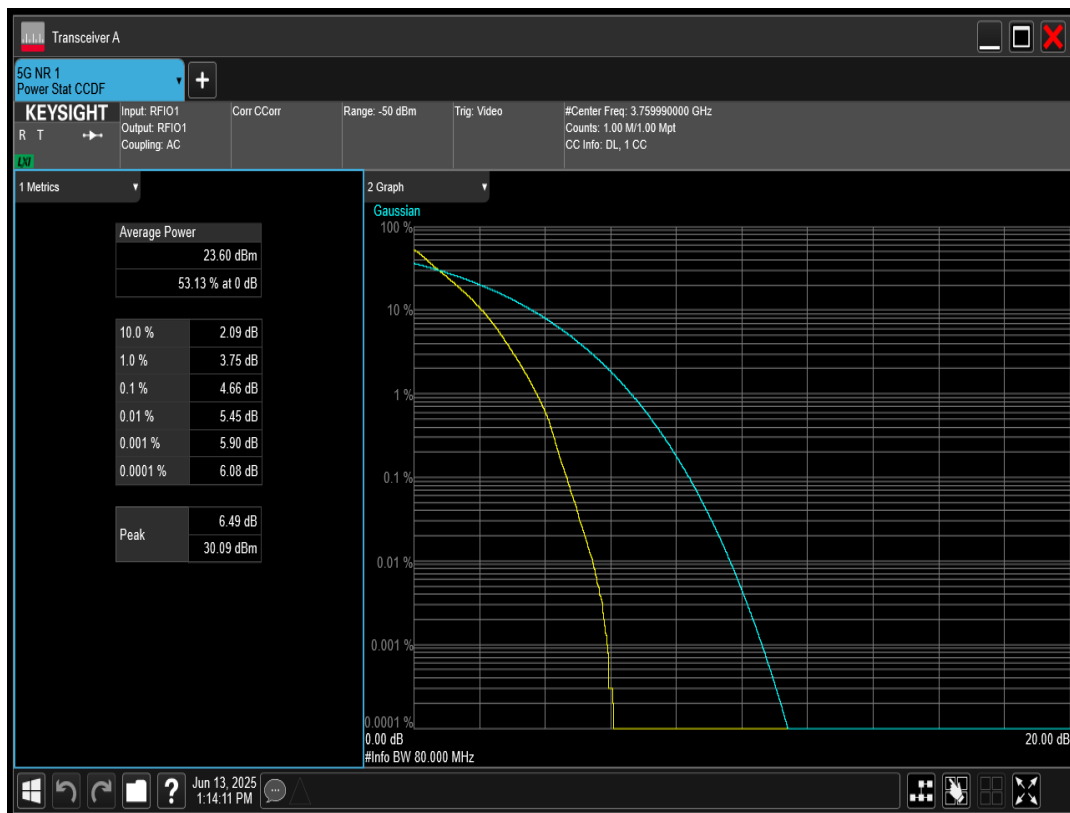


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=650332 RB=240@0

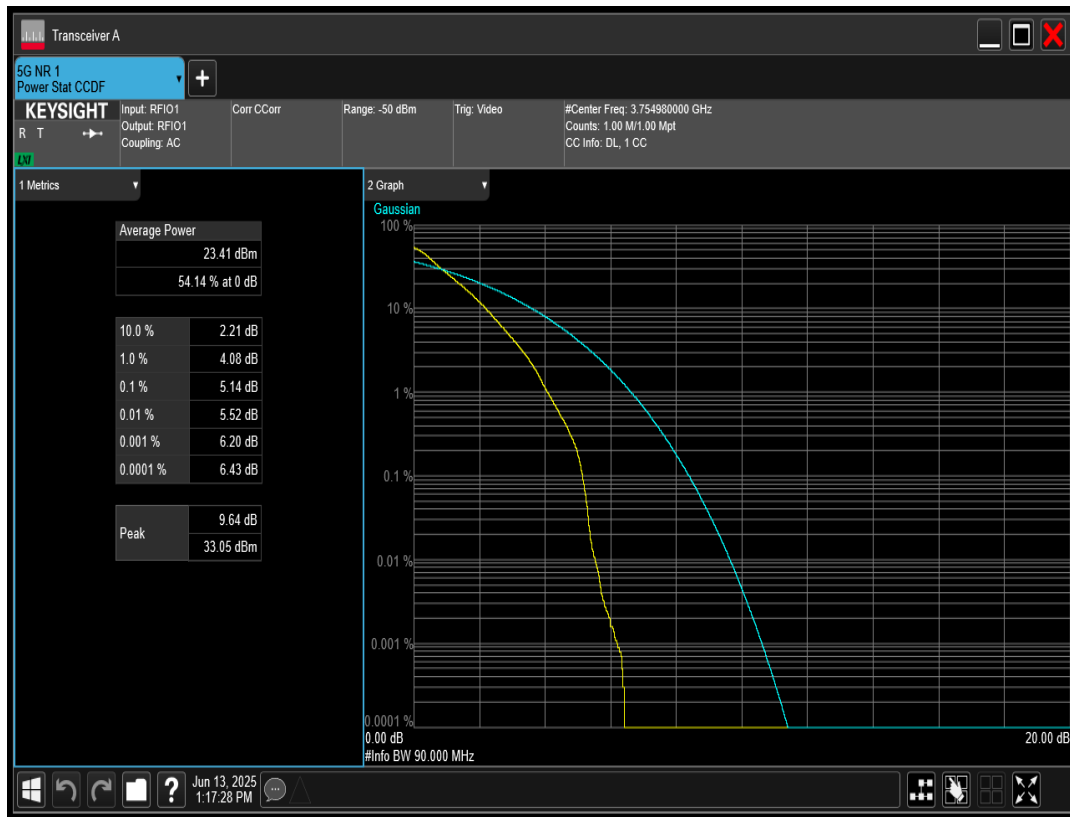


n78 SCS=30kHz DFT_BPSK BW=90MHz Channel=636666 RB=240@0

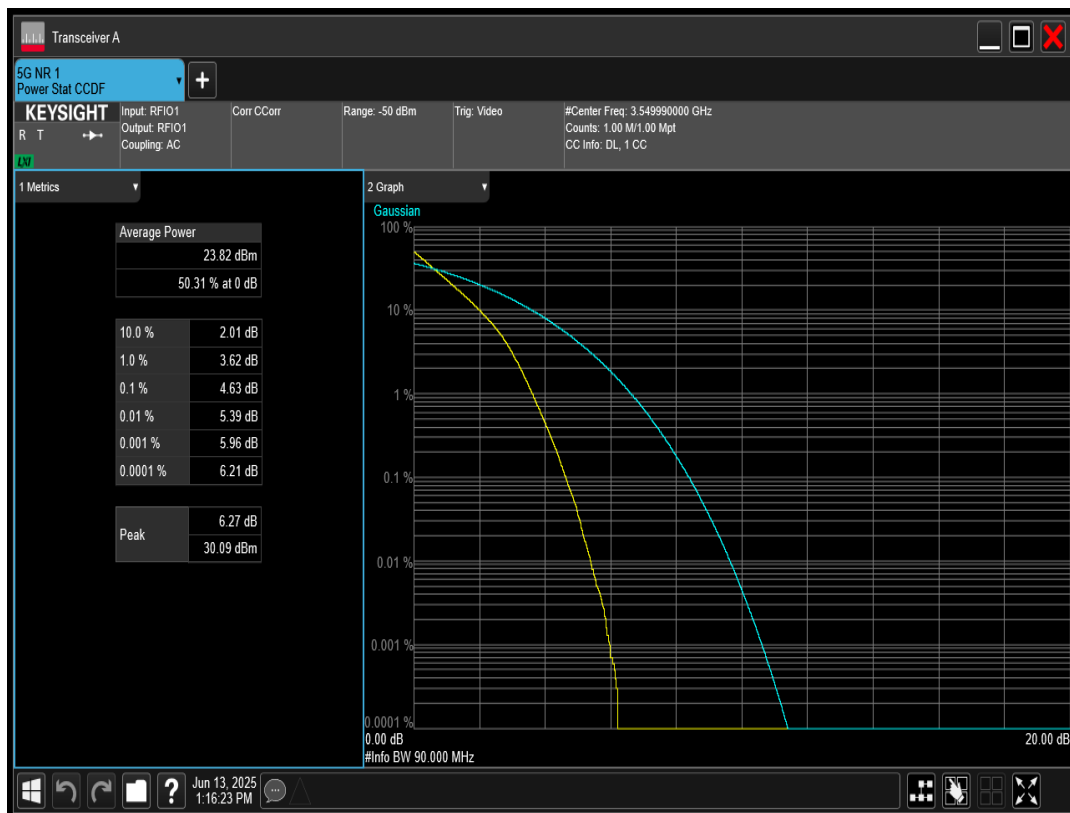


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=623334 RB=270@0

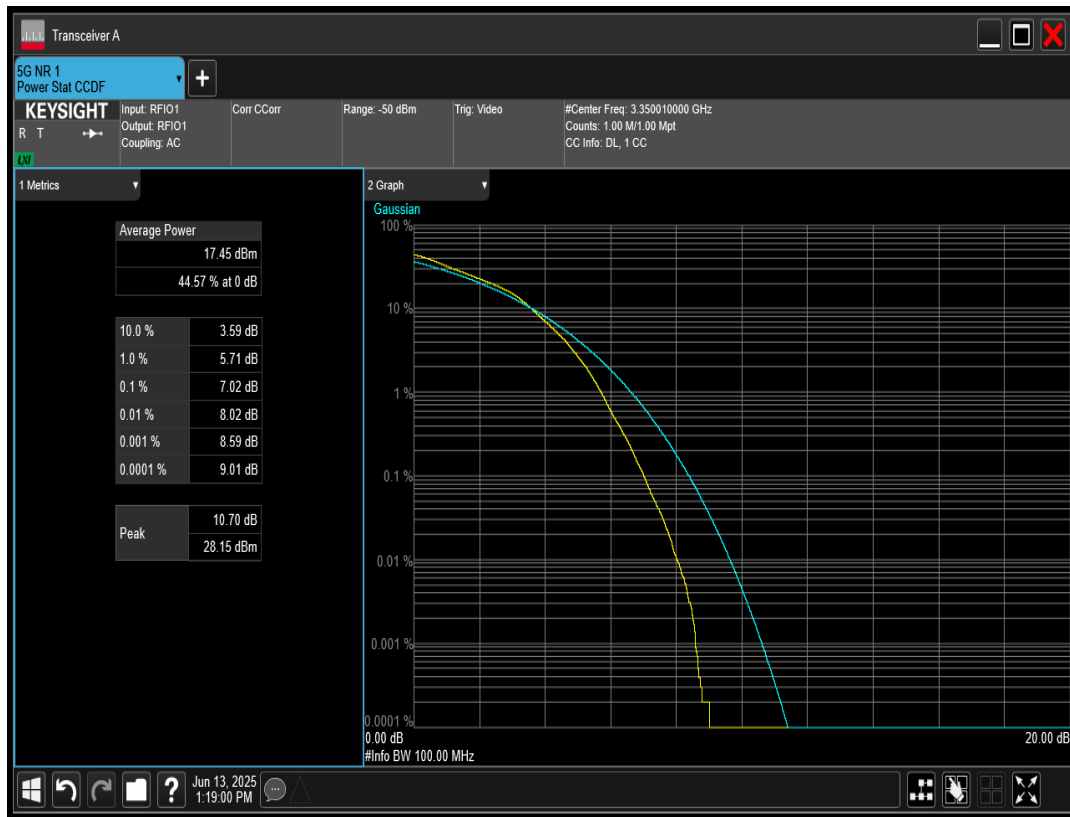


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=636666 RB=270@0

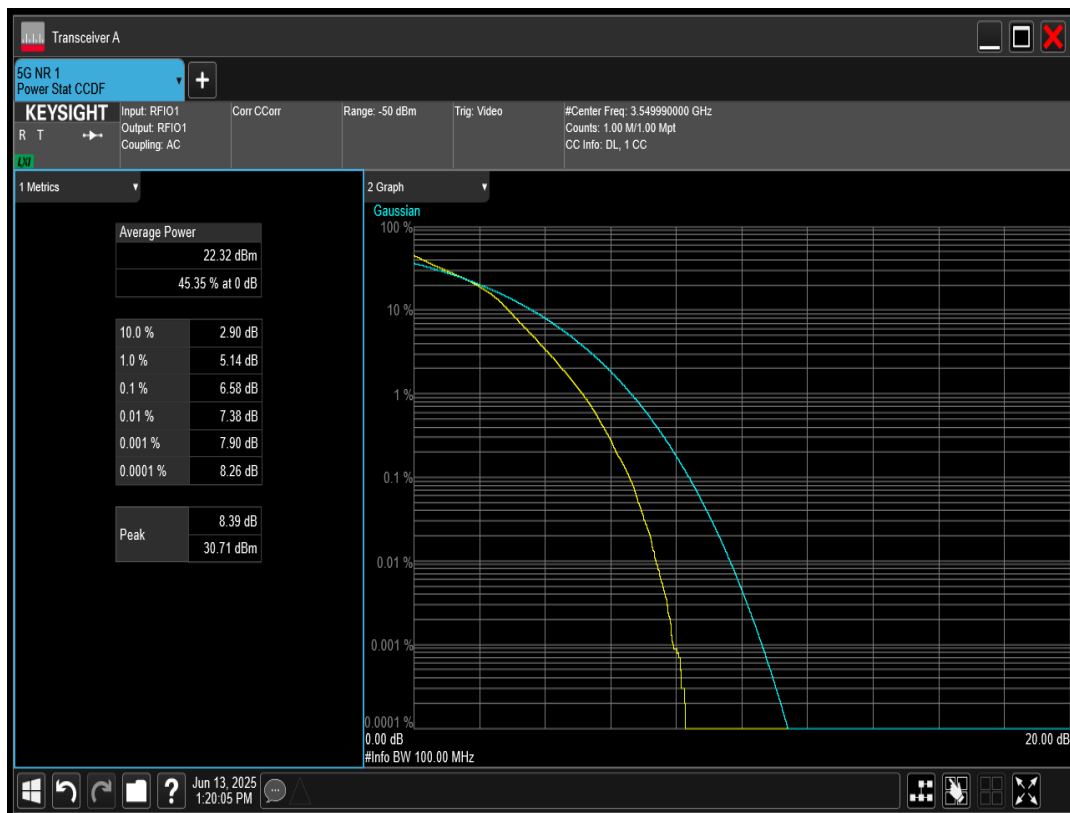


n78 SCS=30kHz DFT_QAM16 BW=100MHz Channel=650000 RB=270@0

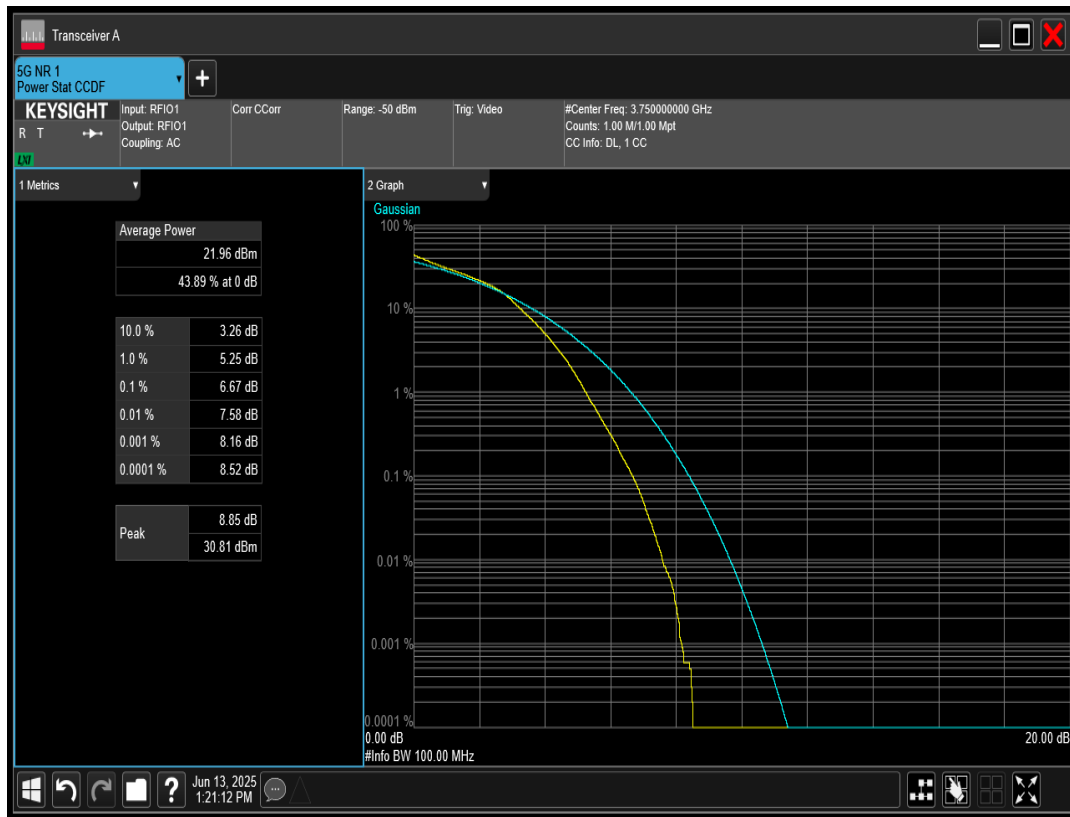


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=620334 RB=24@0

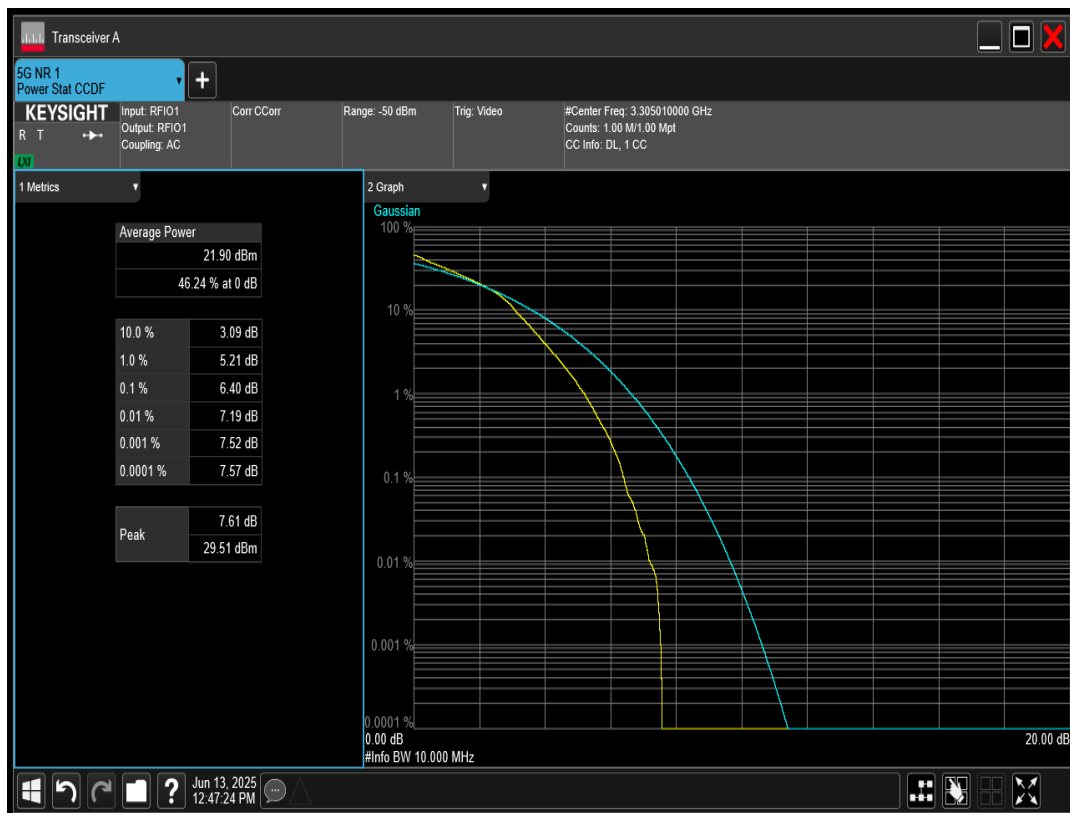


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=636666 RB=36@0

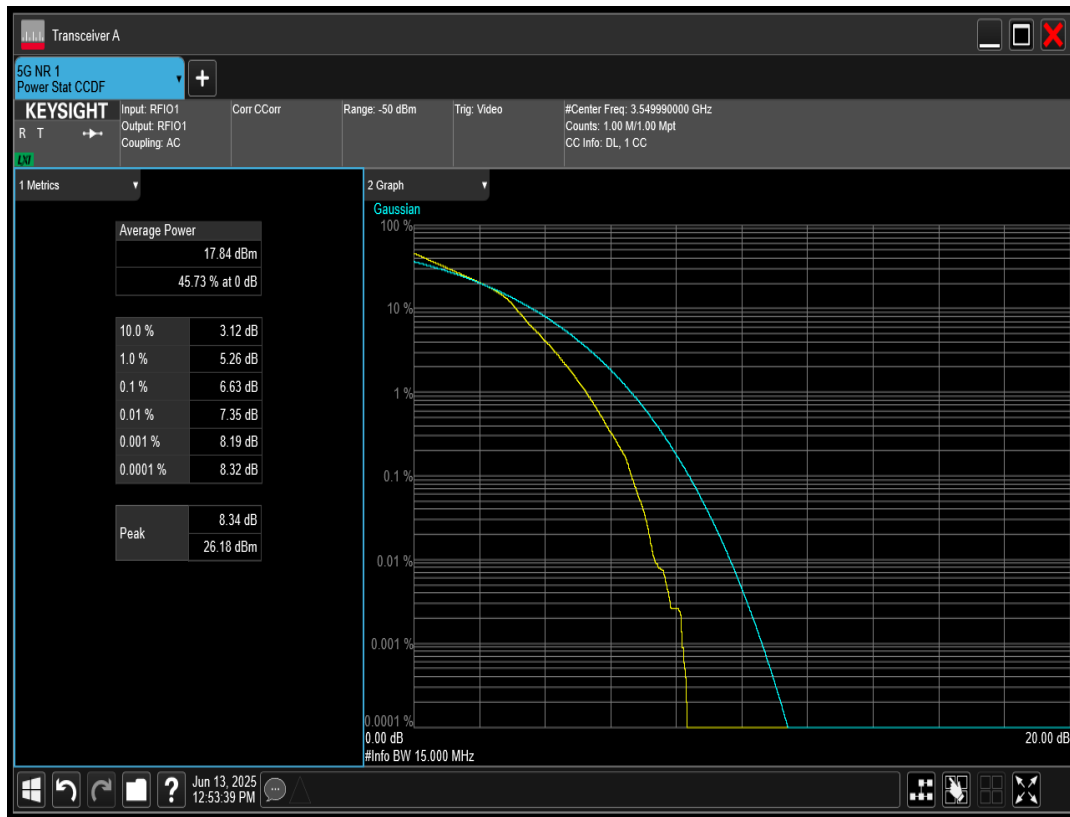


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=652832 RB=36@0

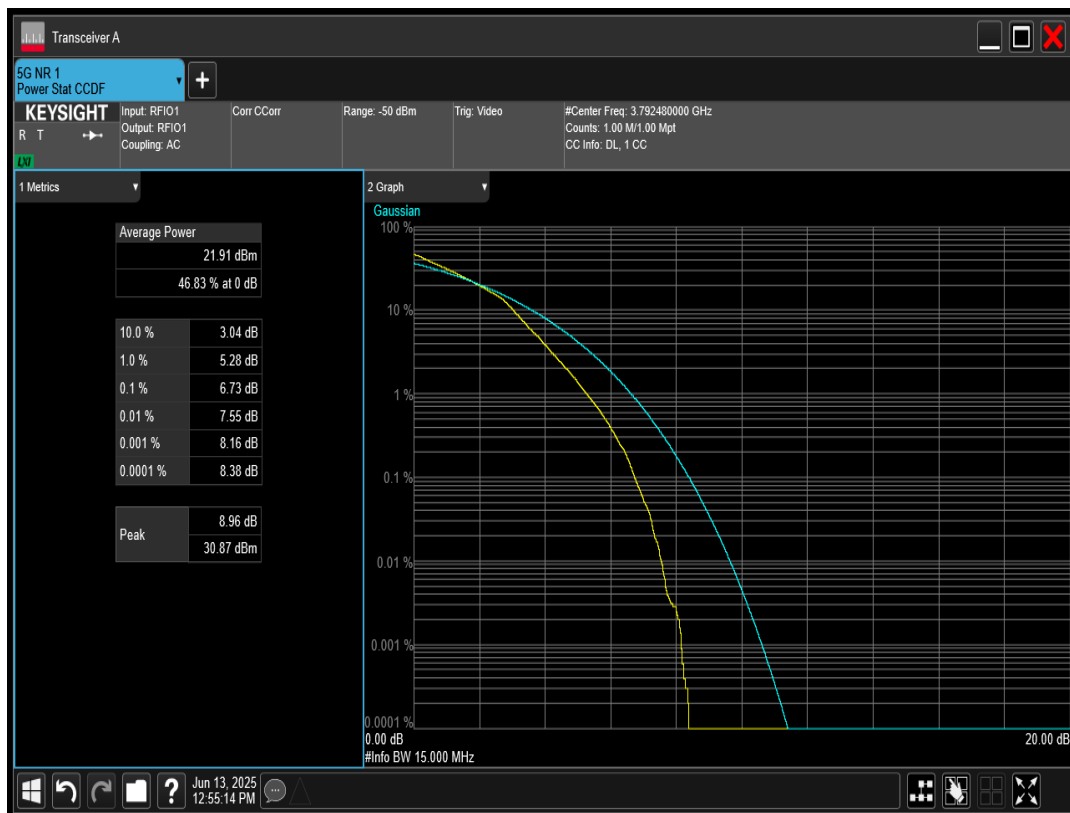


n78 SCS=30kHz DFT_QAM16 BW=15MHz Channel=620500 RB=36@0

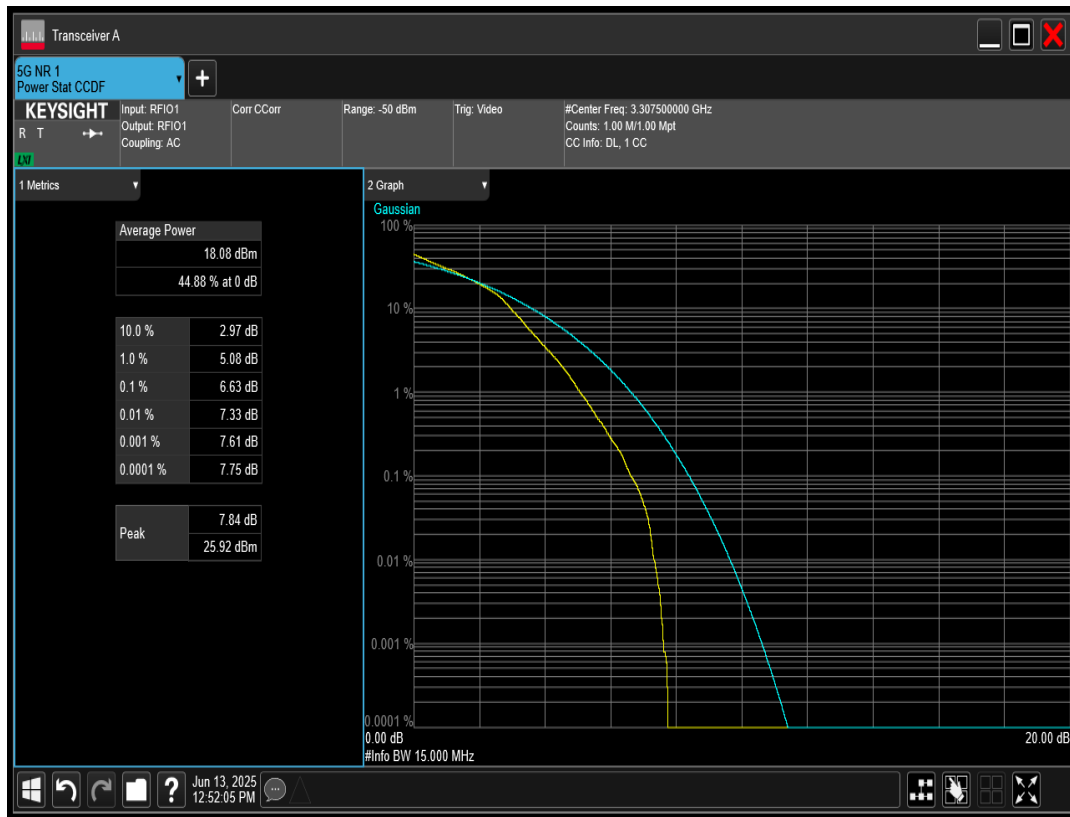


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=636666 RB=24@0

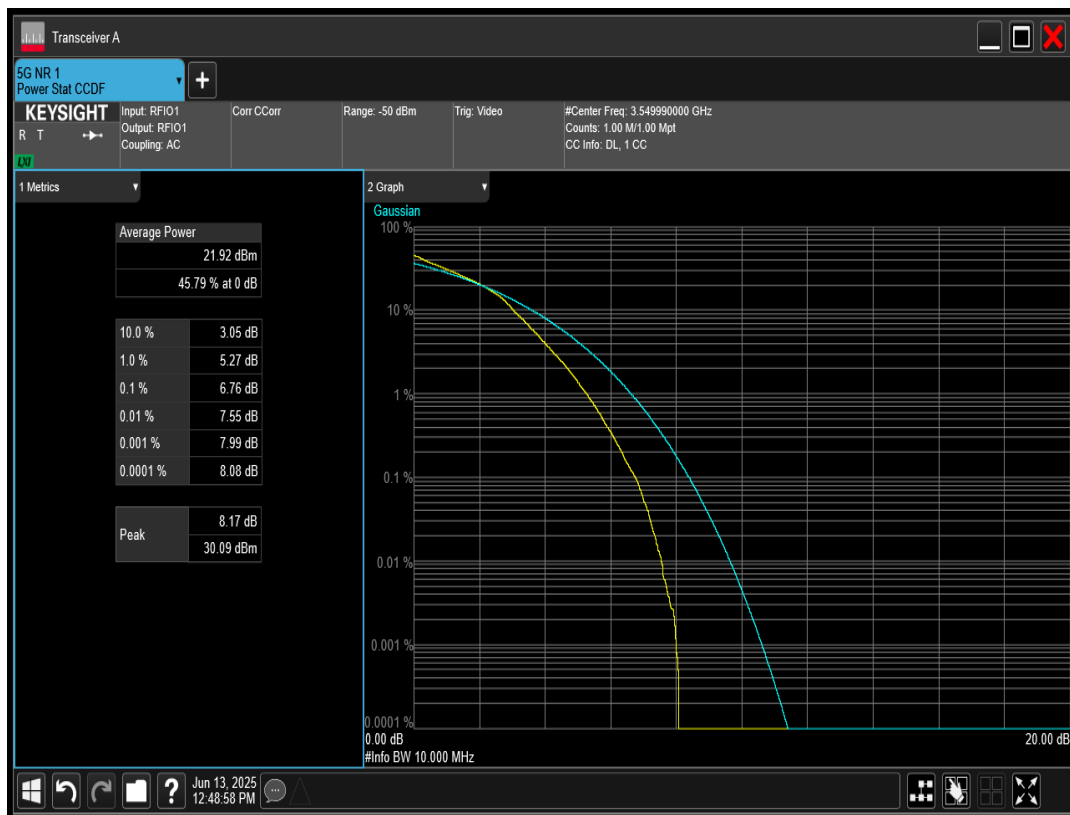


n78 SCS=30kHz DFT_QAM16 BW=10MHz Channel=653000 RB=24@0

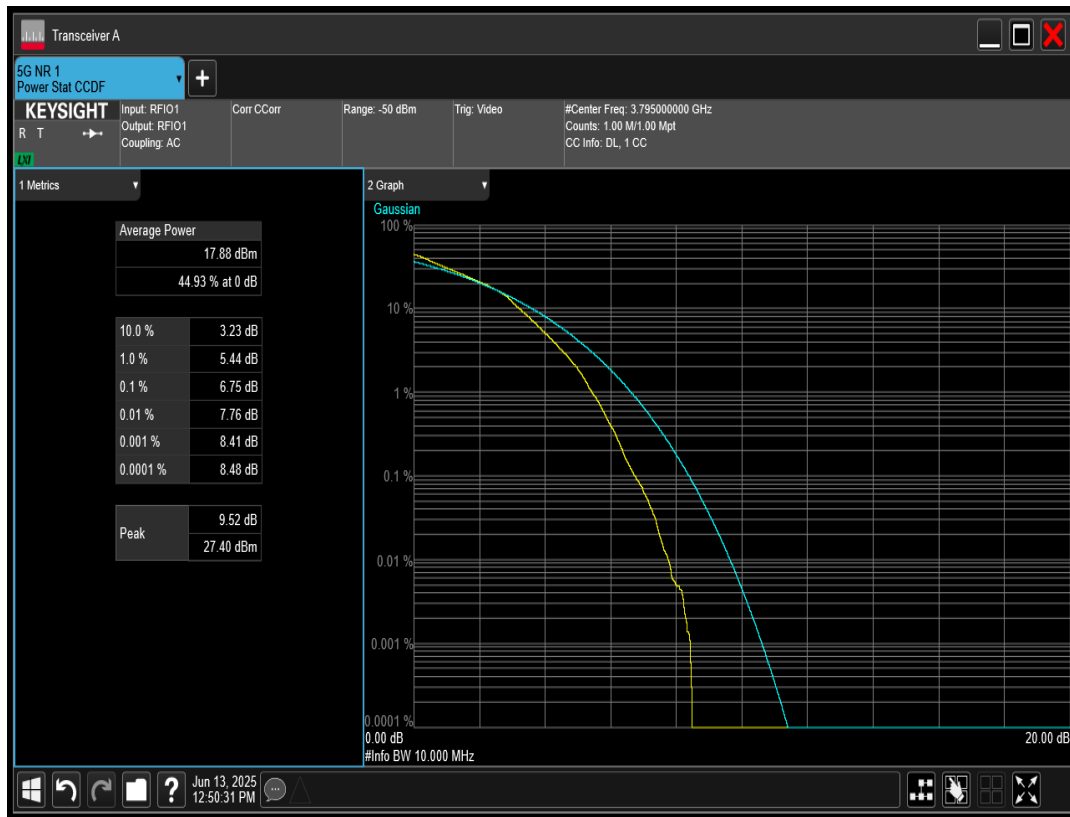


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=636666 RB=50@0

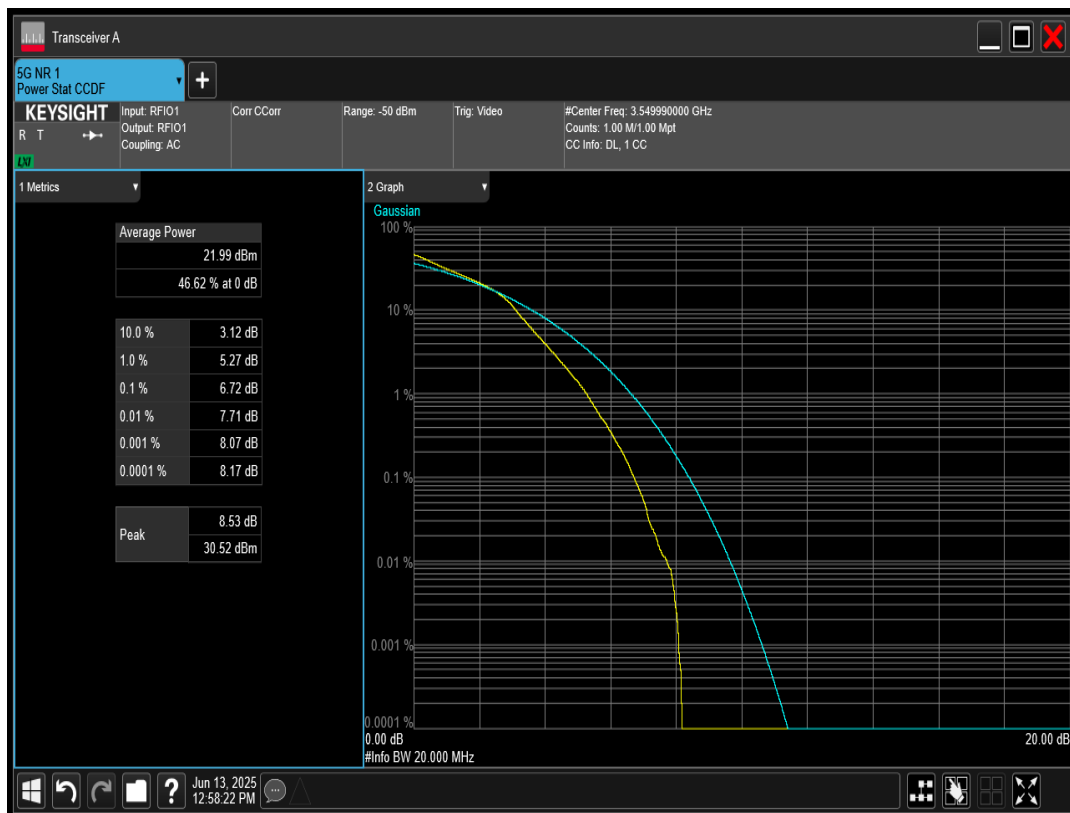


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=620668 RB=50@0

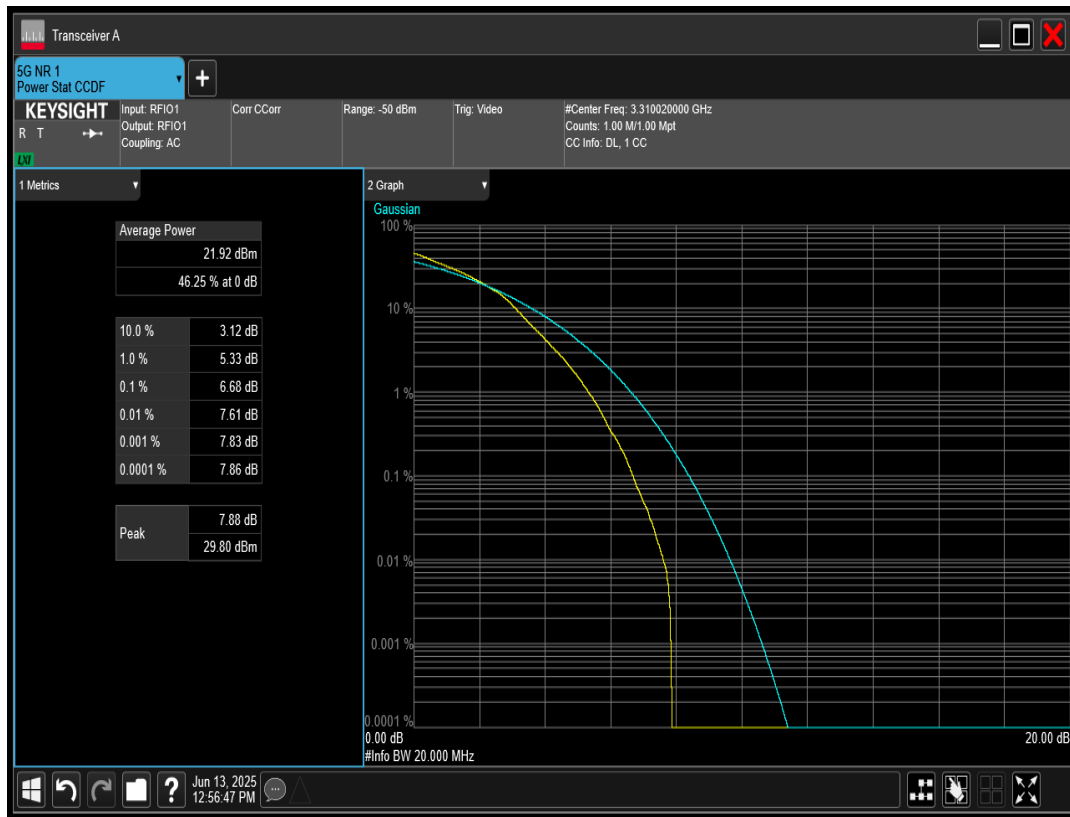


n78 SCS=30kHz DFT_QAM16 BW=20MHz Channel=652666 RB=50@0

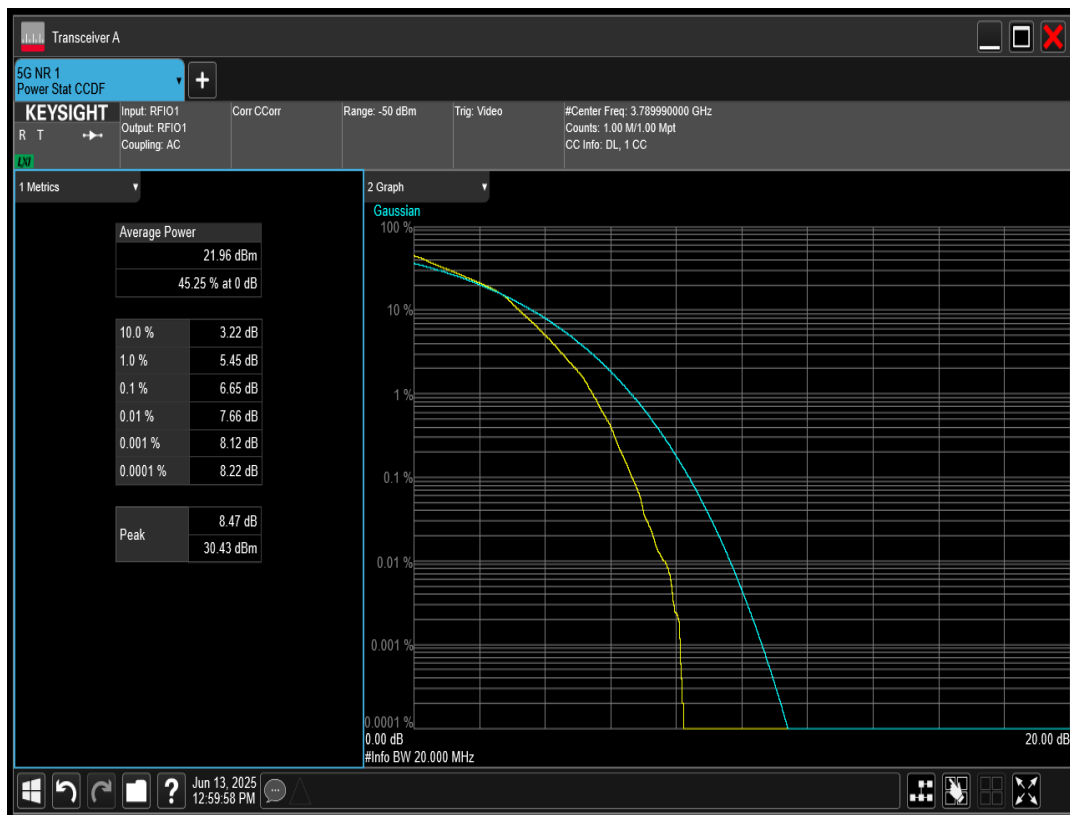


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=636666 RB=100@0

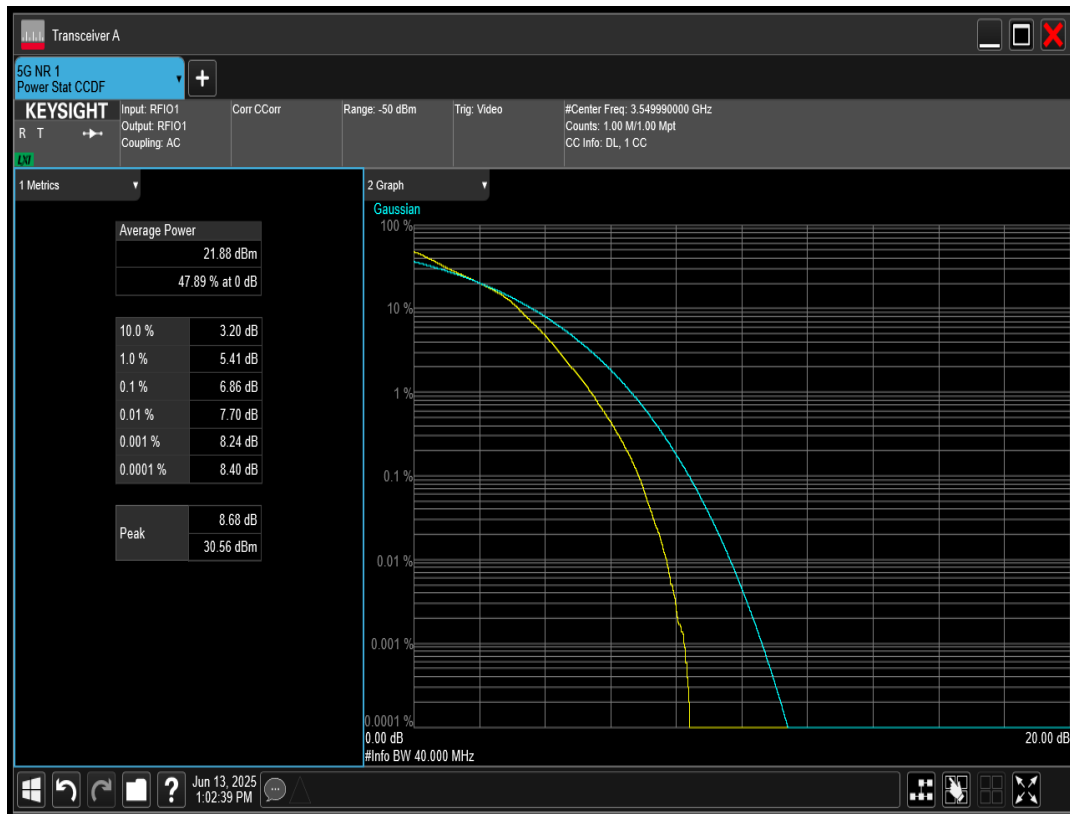


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=621334 RB=100@0

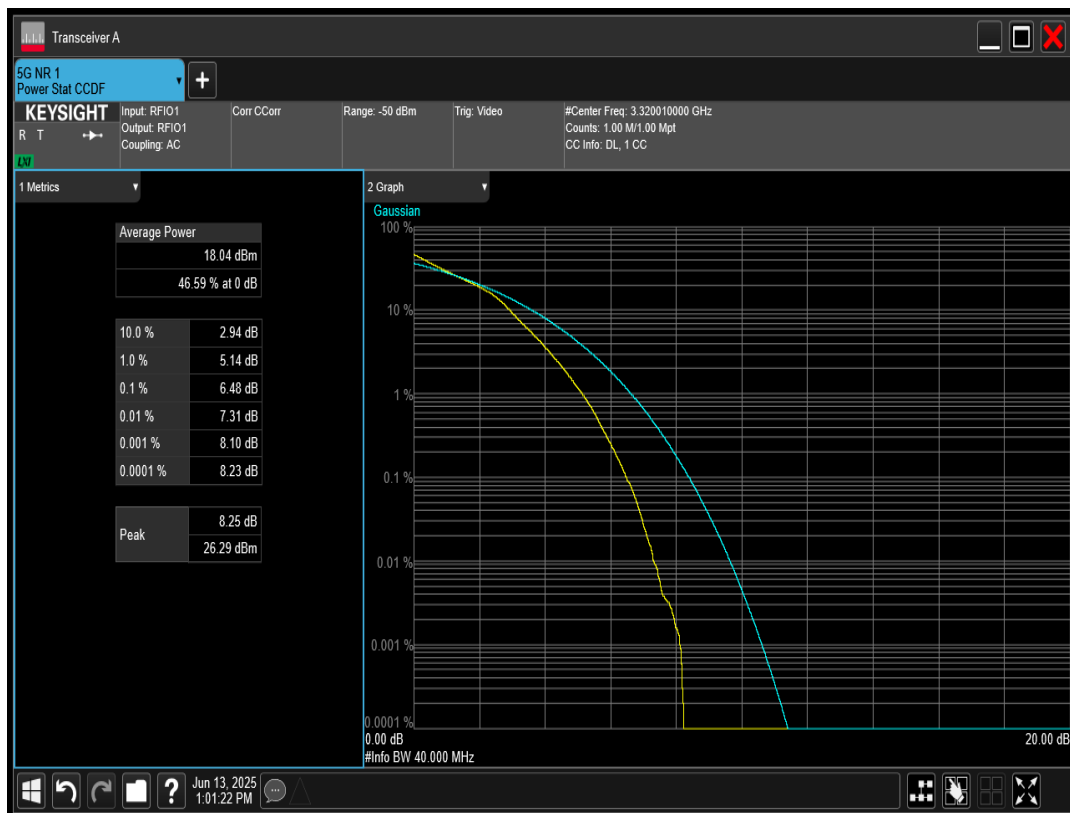


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=636666 RB=128@0

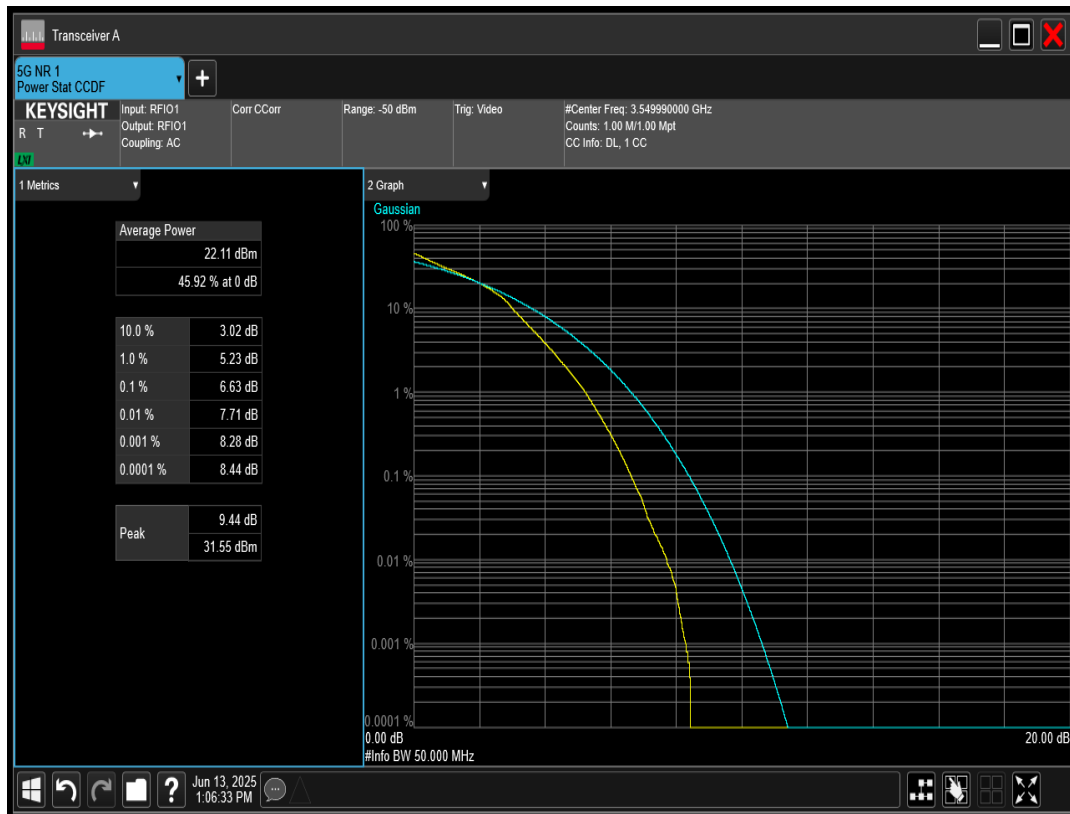


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=621668 RB=128@0

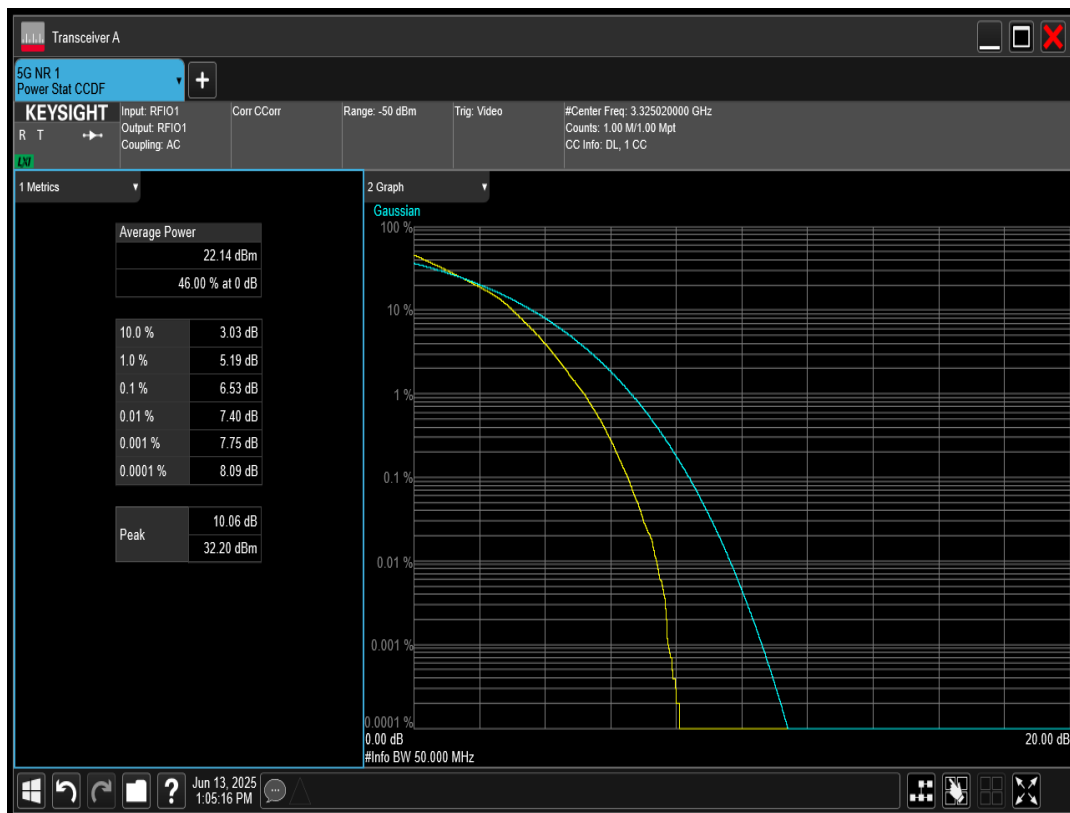


n78 SCS=30kHz DFT_QAM16 BW=40MHz Channel=652000 RB=100@0

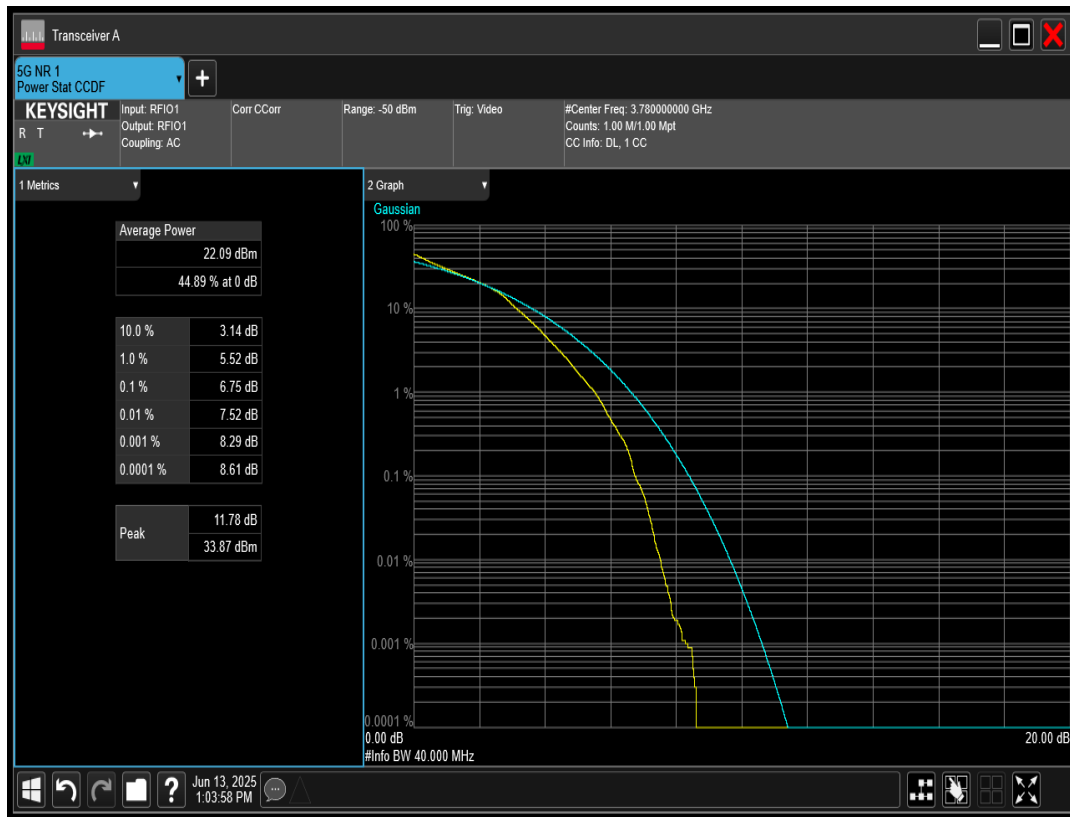


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=636666 RB=162@0

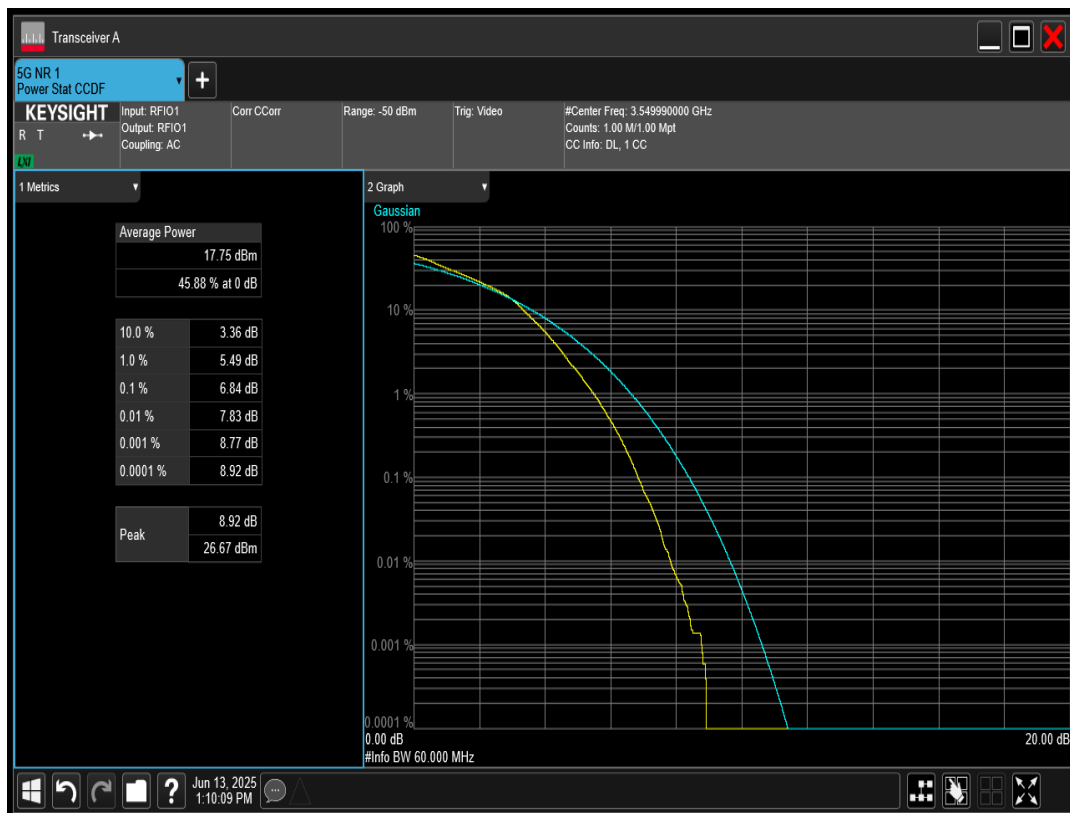


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=651332 RB=162@0

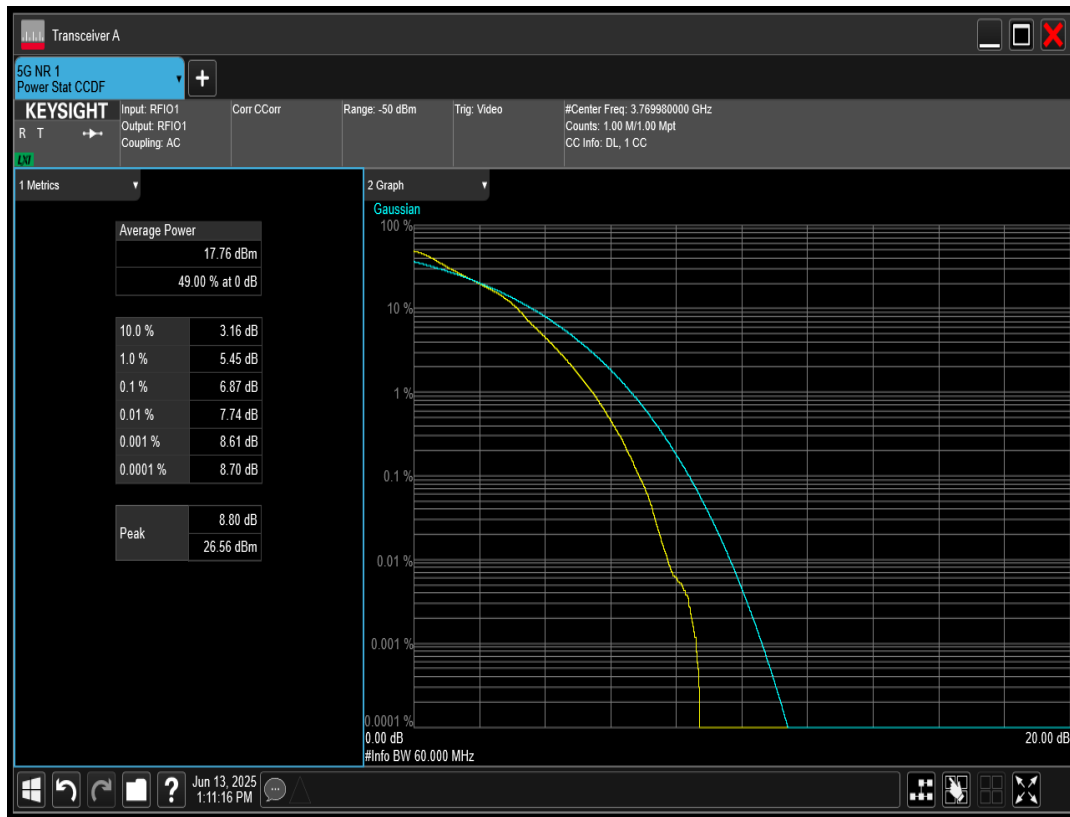


n78 SCS=30kHz DFT_QAM16 BW=50MHz Channel=651666 RB=128@0

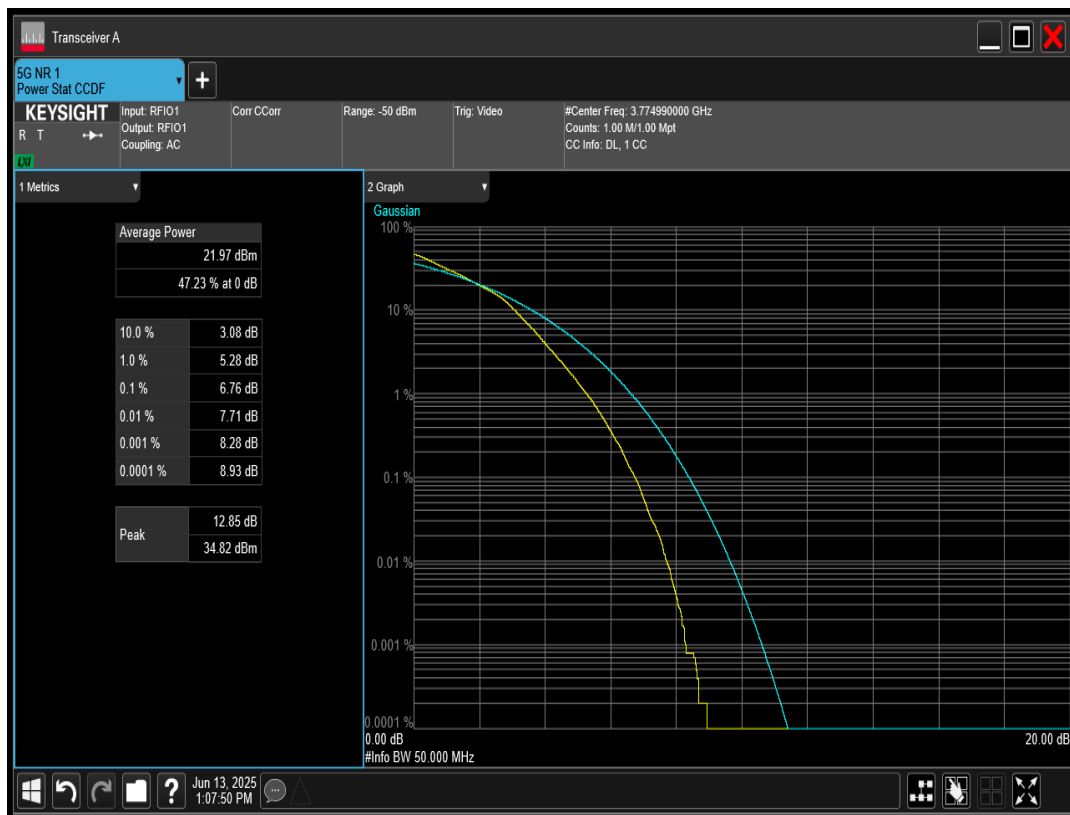


n78 SCS=30kHz DFT_QAM16 BW=60MHz Channel=622000 RB=162@0

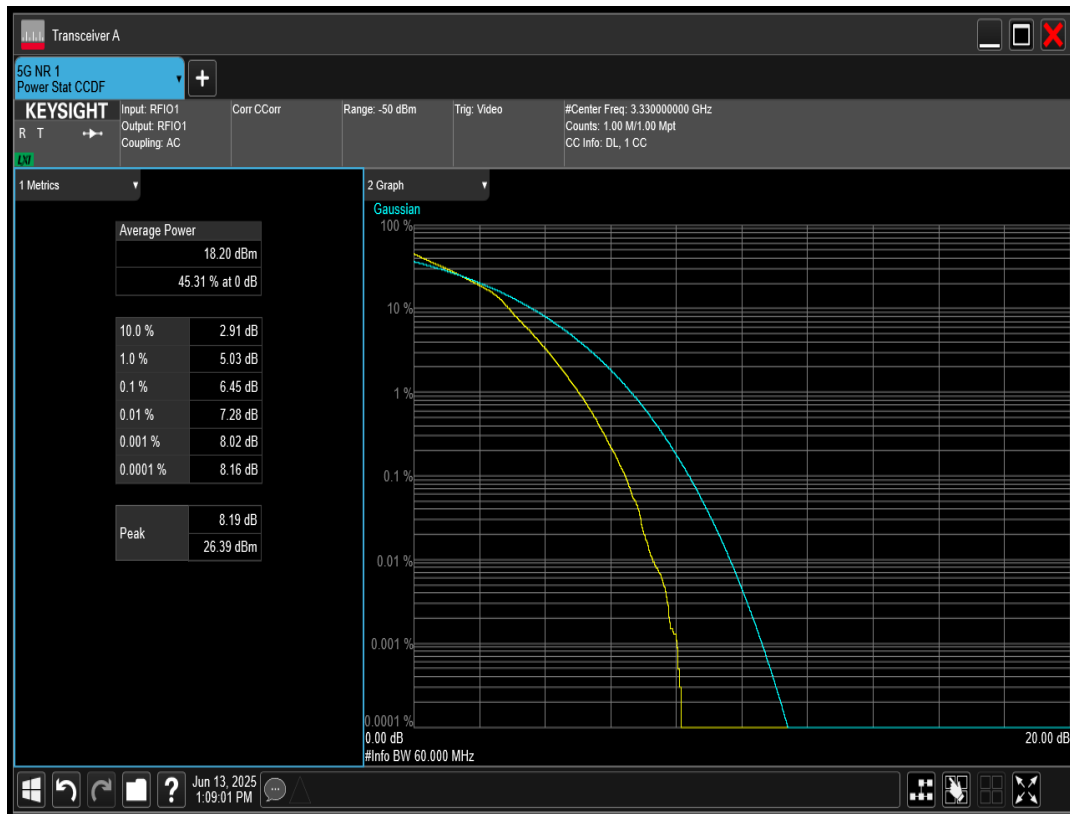


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=622668 RB=216@0

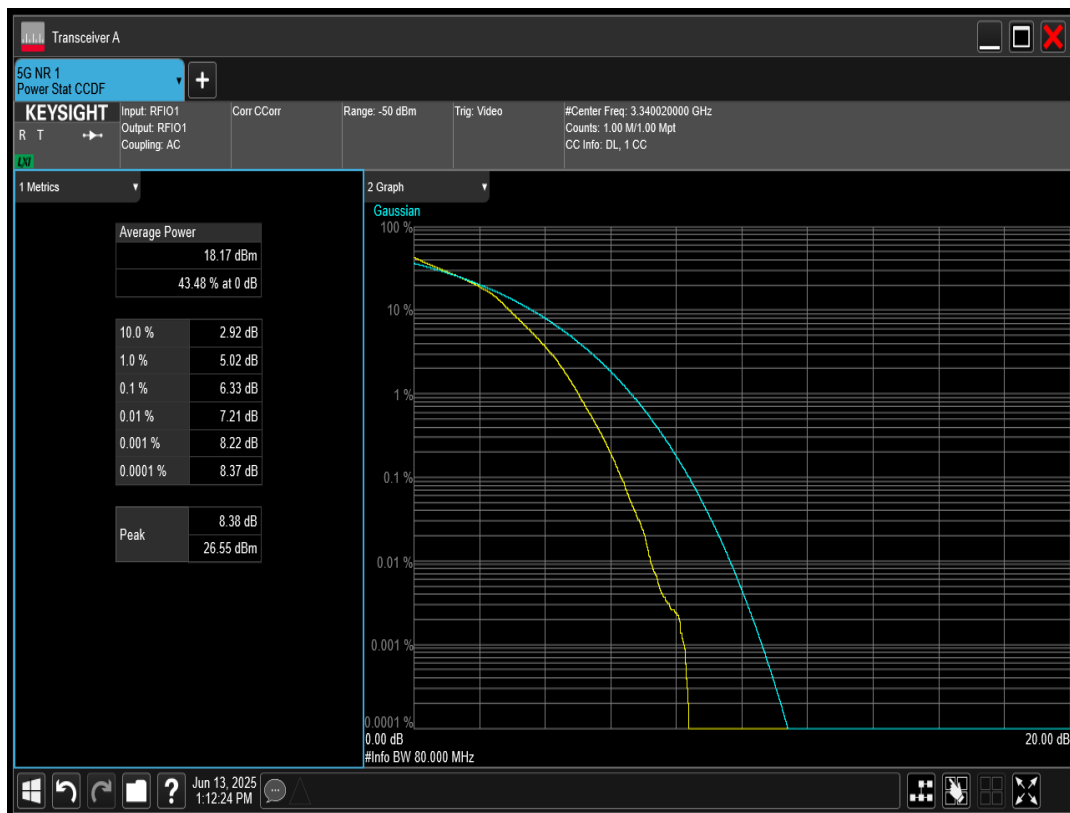


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=636666 RB=216@0

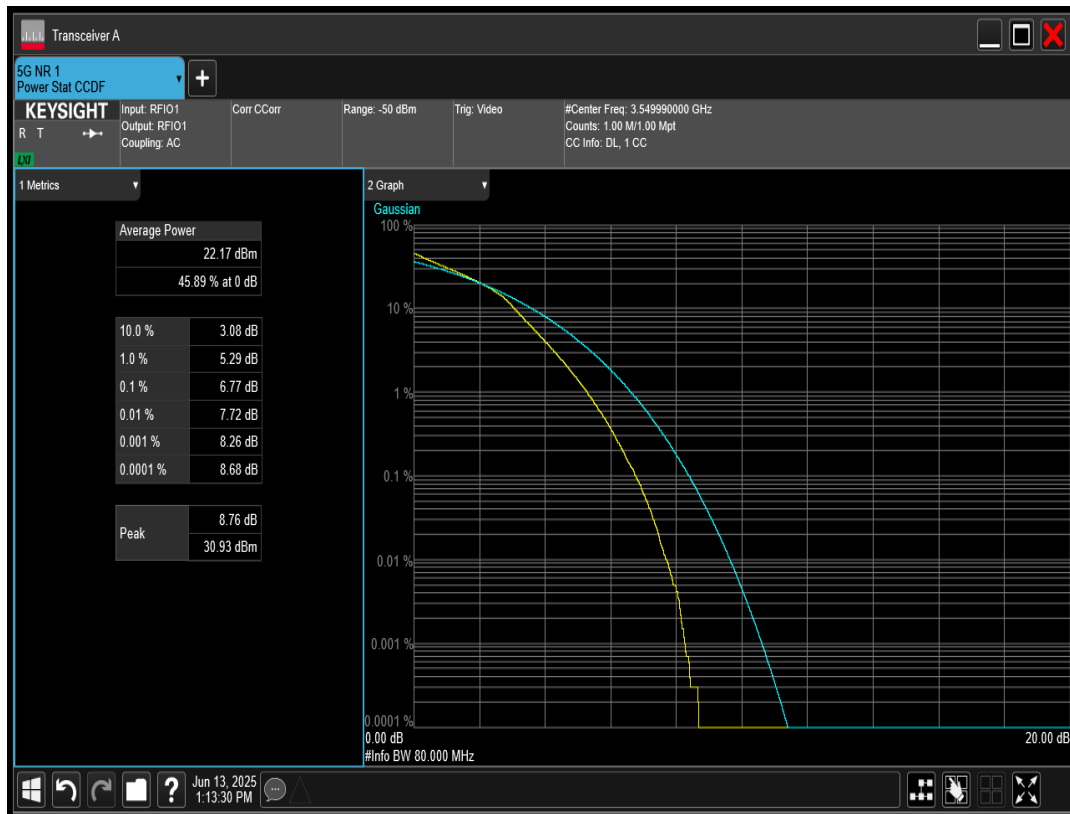


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=636666 RB=240@0

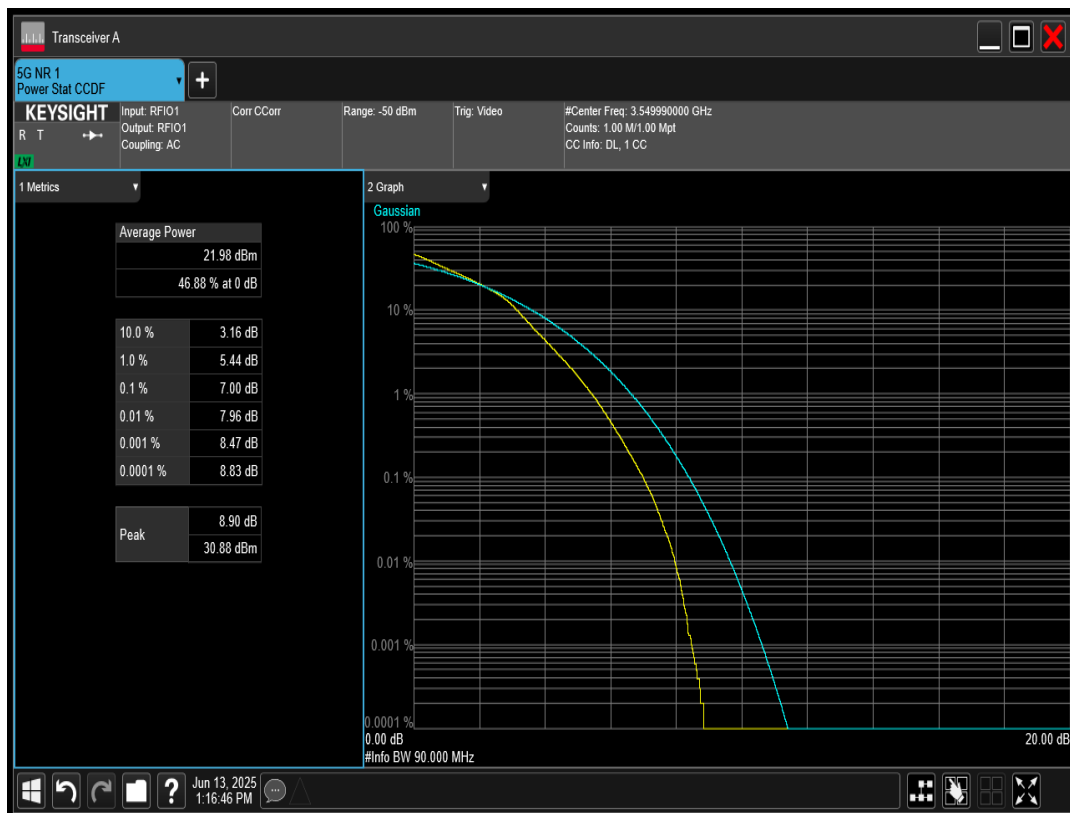


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=623000 RB=240@0

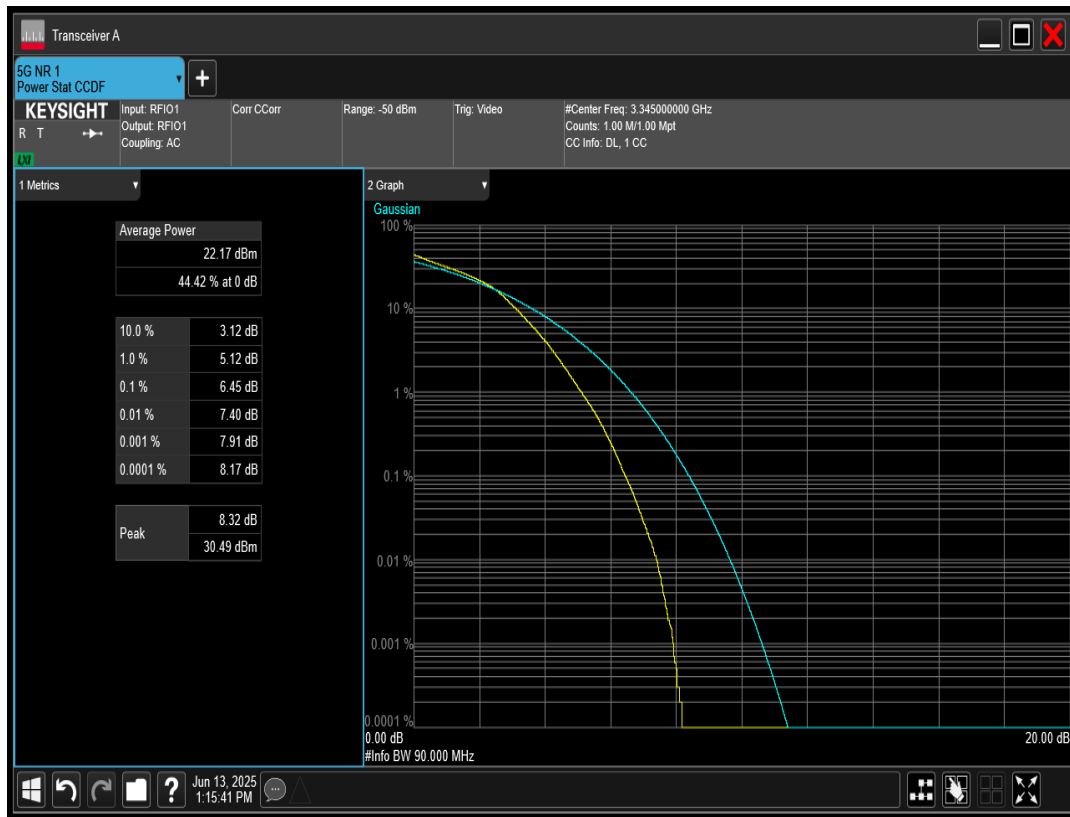


n78 SCS=30kHz DFT_QAM16 BW=80MHz Channel=650666 RB=216@0

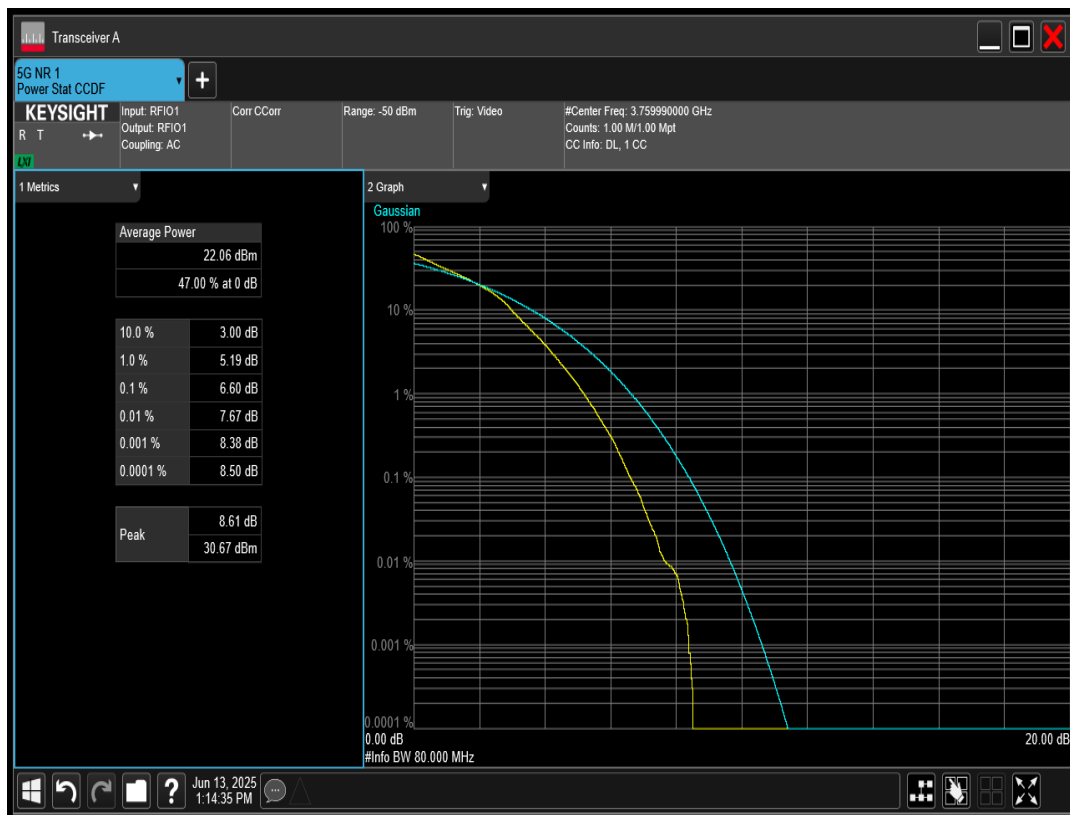


n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=623334 RB=270@0

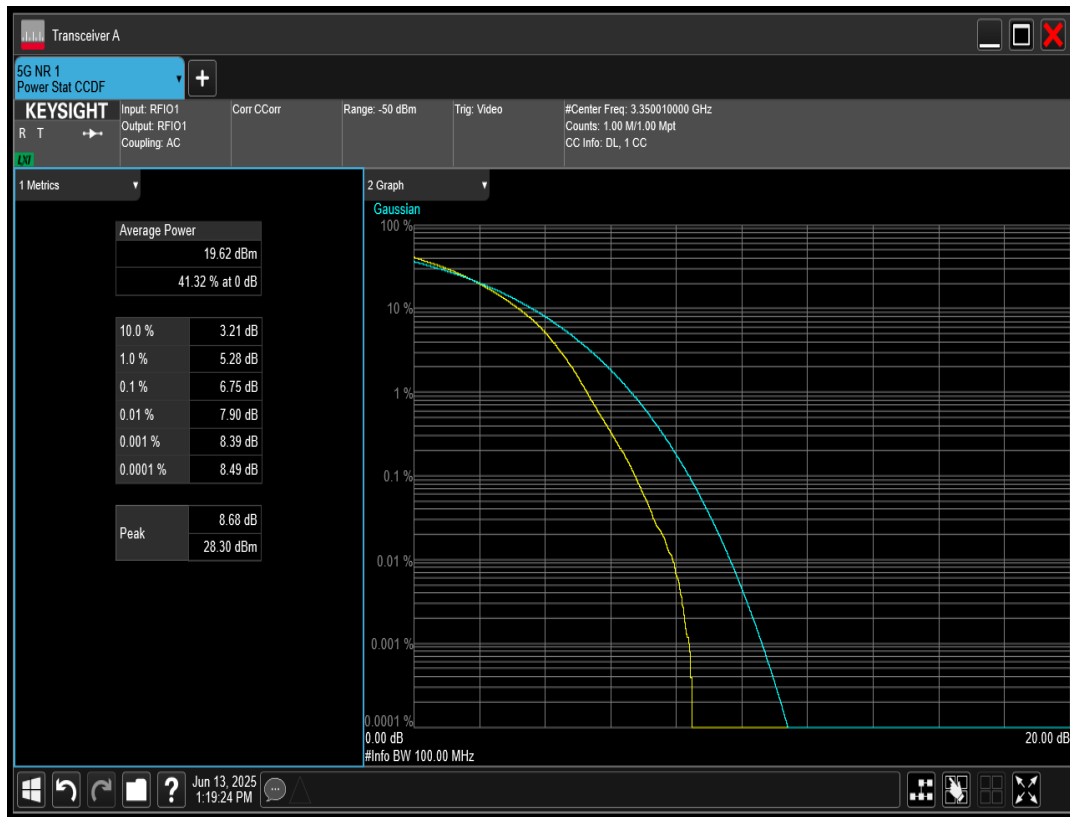


n78 SCS=30kHz DFT_QAM16 BW=90MHz Channel=650332 RB=240@0

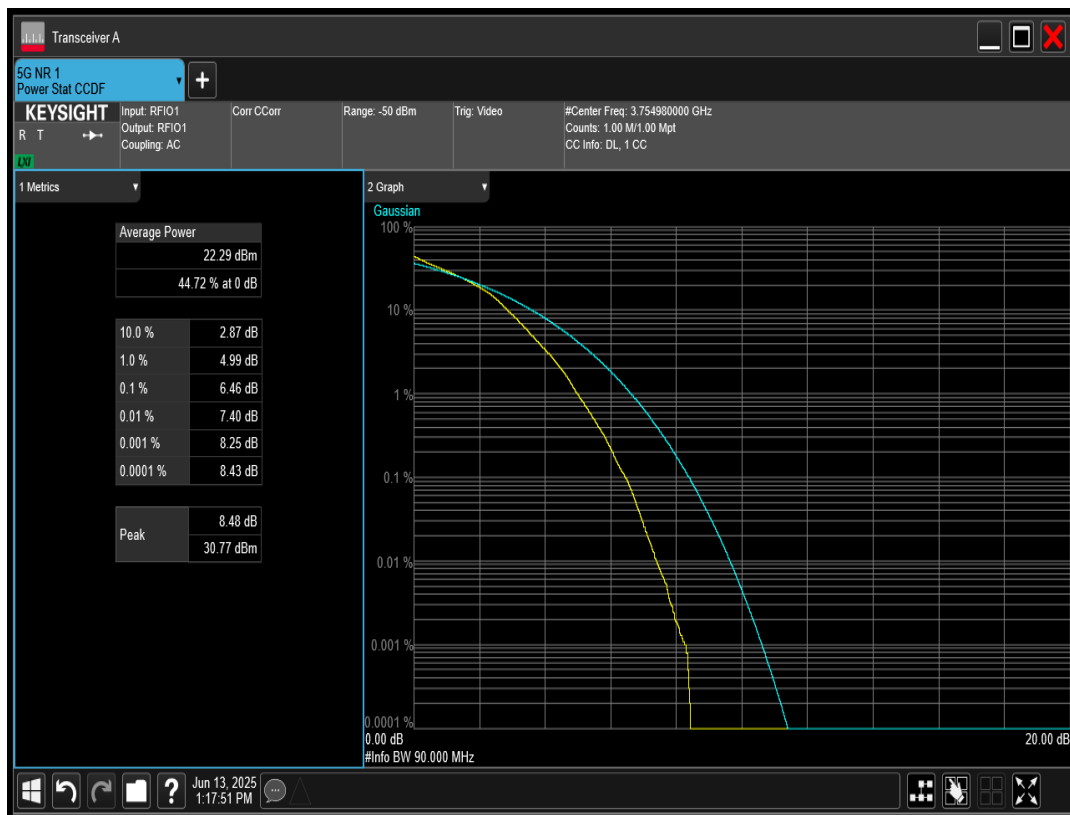


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=620334 RB=24@0

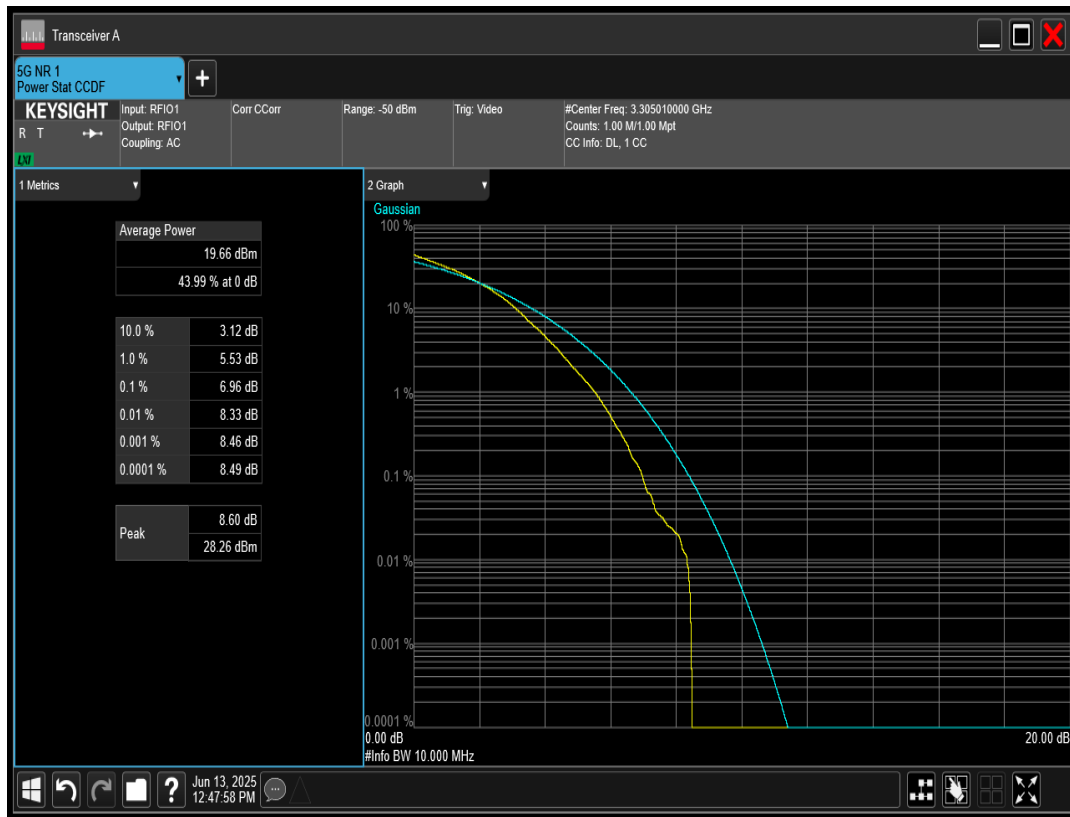


n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=650000 RB=270@0

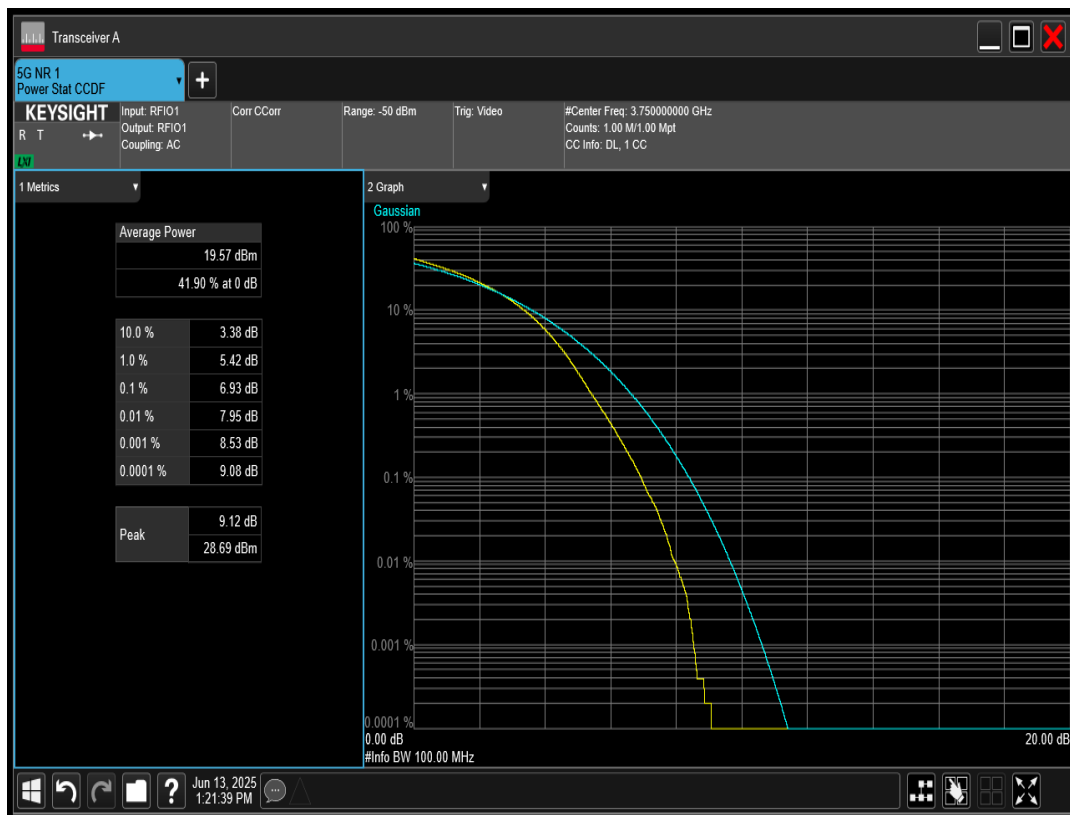


n78 SCS=30kHz DFT_QAM256 BW=100MHz Channel=636666 RB=270@0

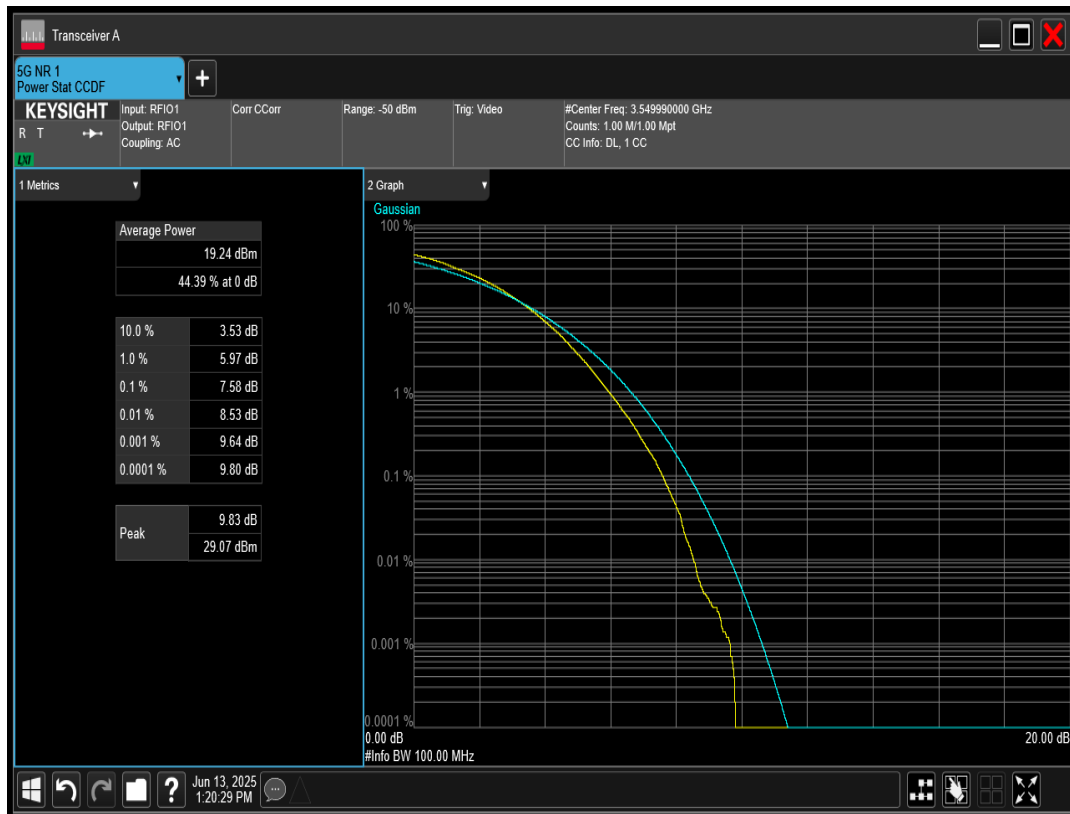


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=653000 RB=24@0

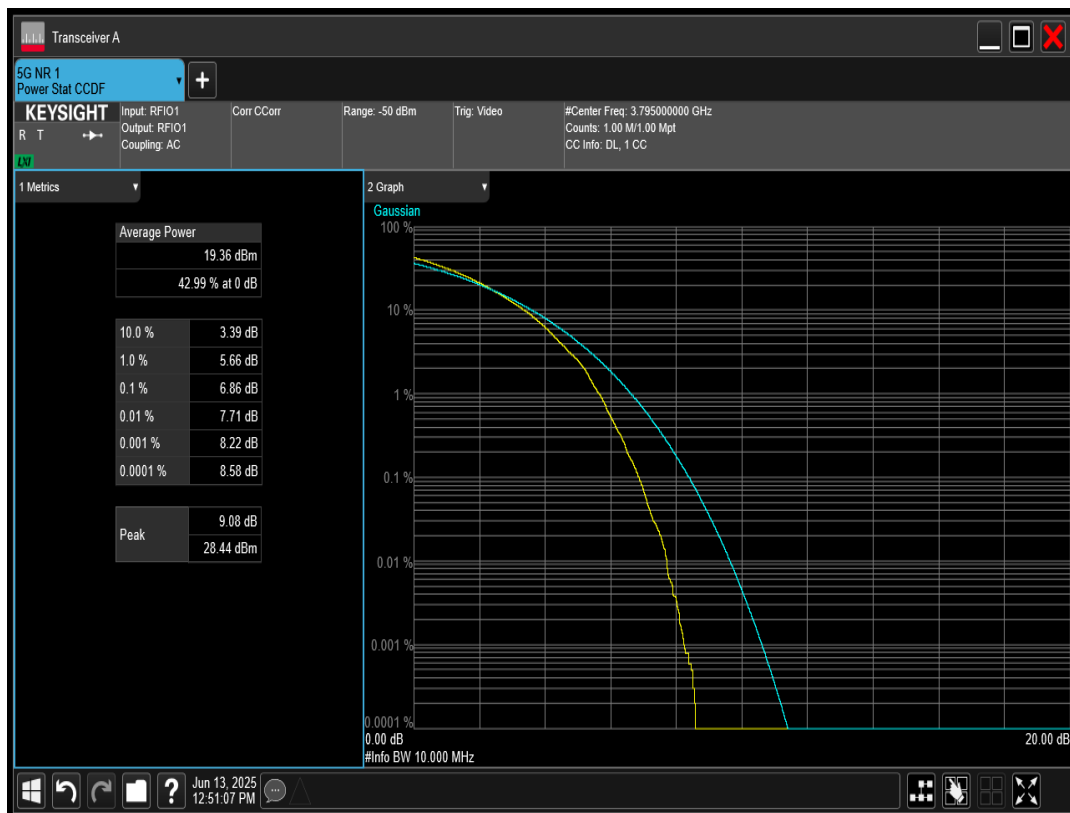


n78 SCS=30kHz DFT_QAM256 BW=10MHz Channel=636666 RB=24@0

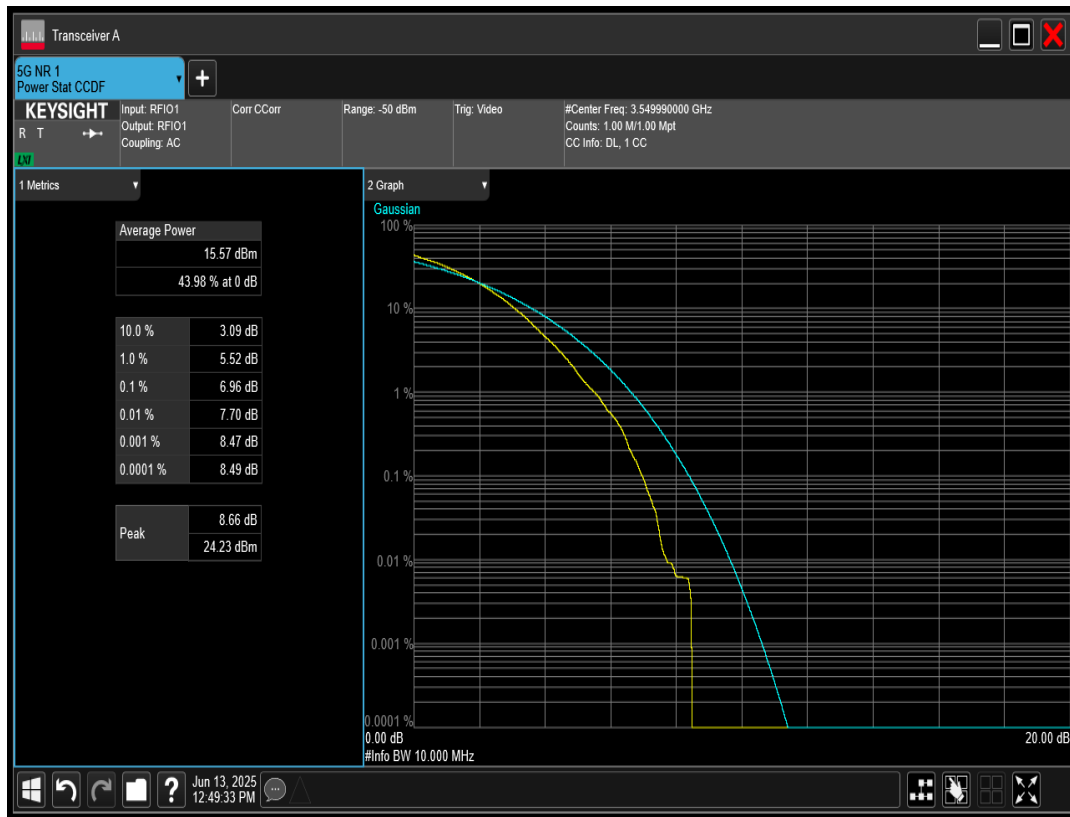


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=636666 RB=36@0

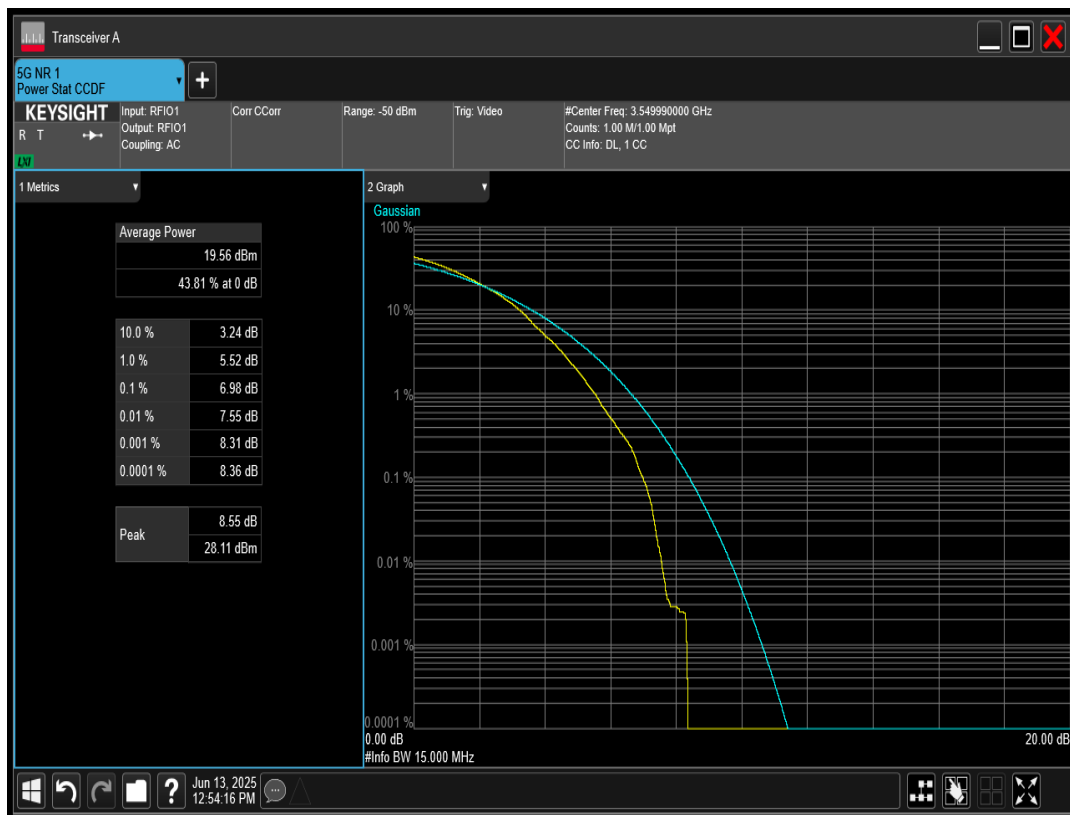


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=620500 RB=36@0

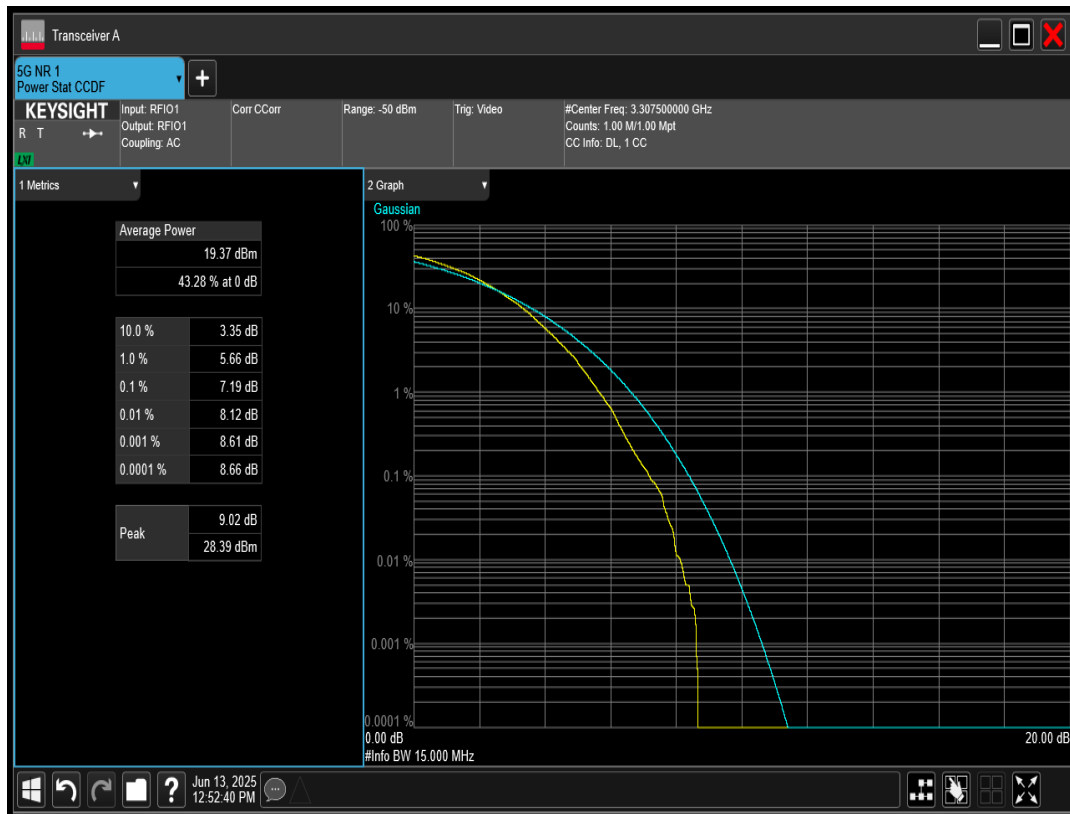


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=620668 RB=50@0

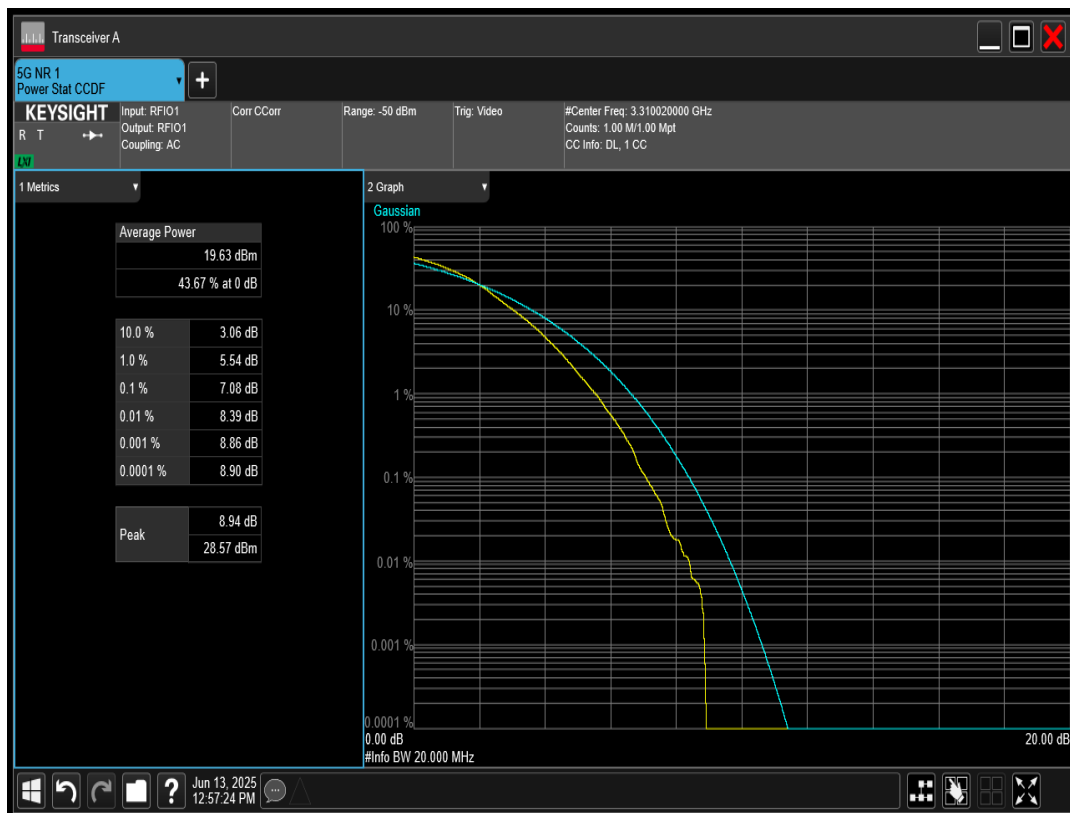


n78 SCS=30kHz DFT_QAM256 BW=15MHz Channel=652832 RB=36@0

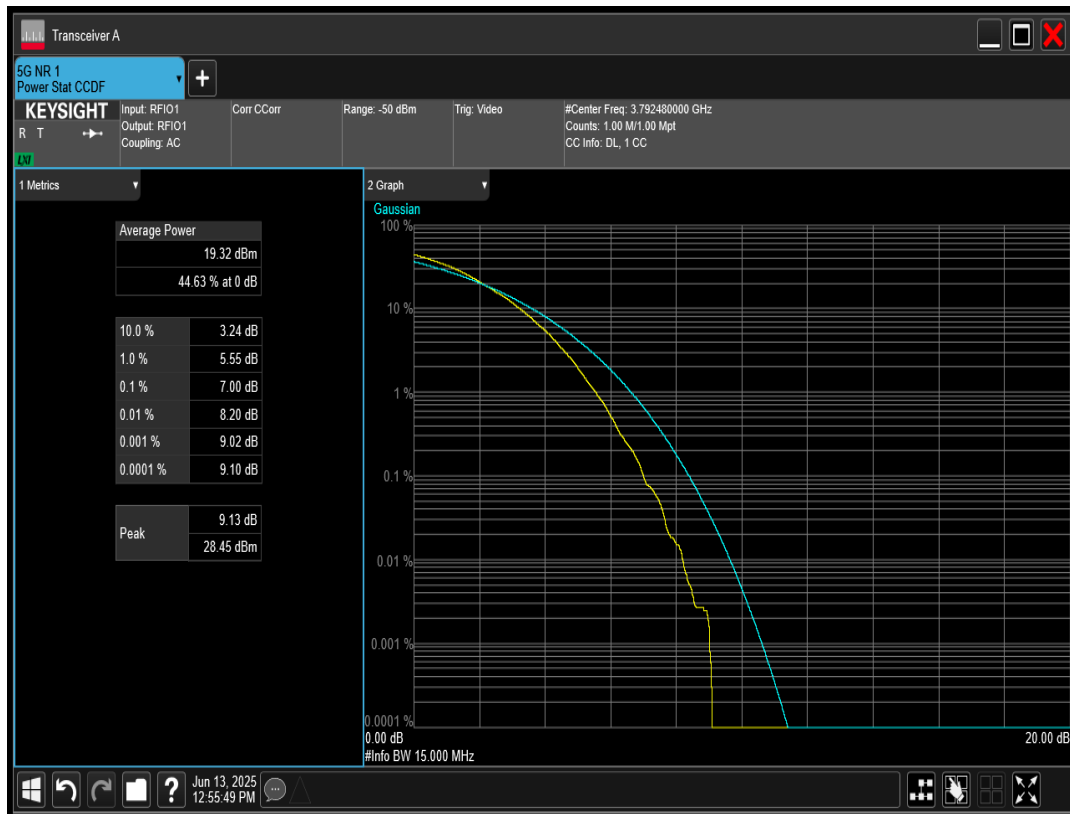


n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=652666 RB=50@0

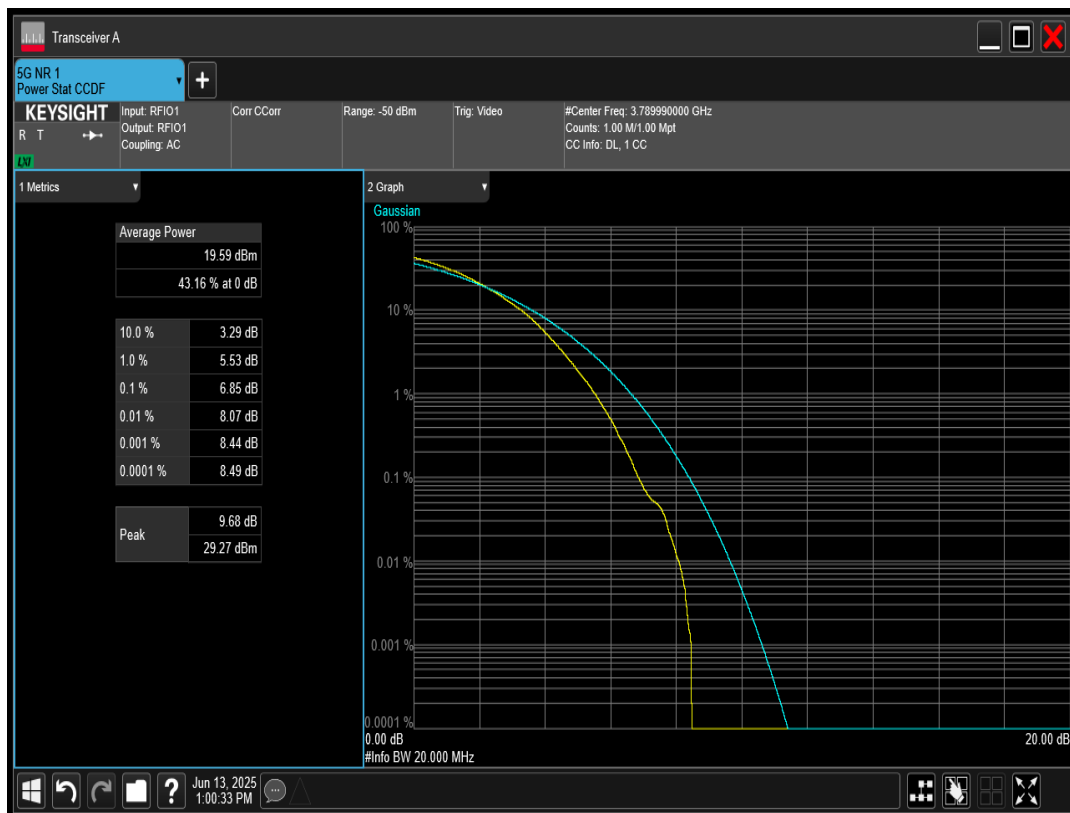

n78 SCS=30kHz DFT_QAM256 BW=20MHz Channel=636666 RB=50@0

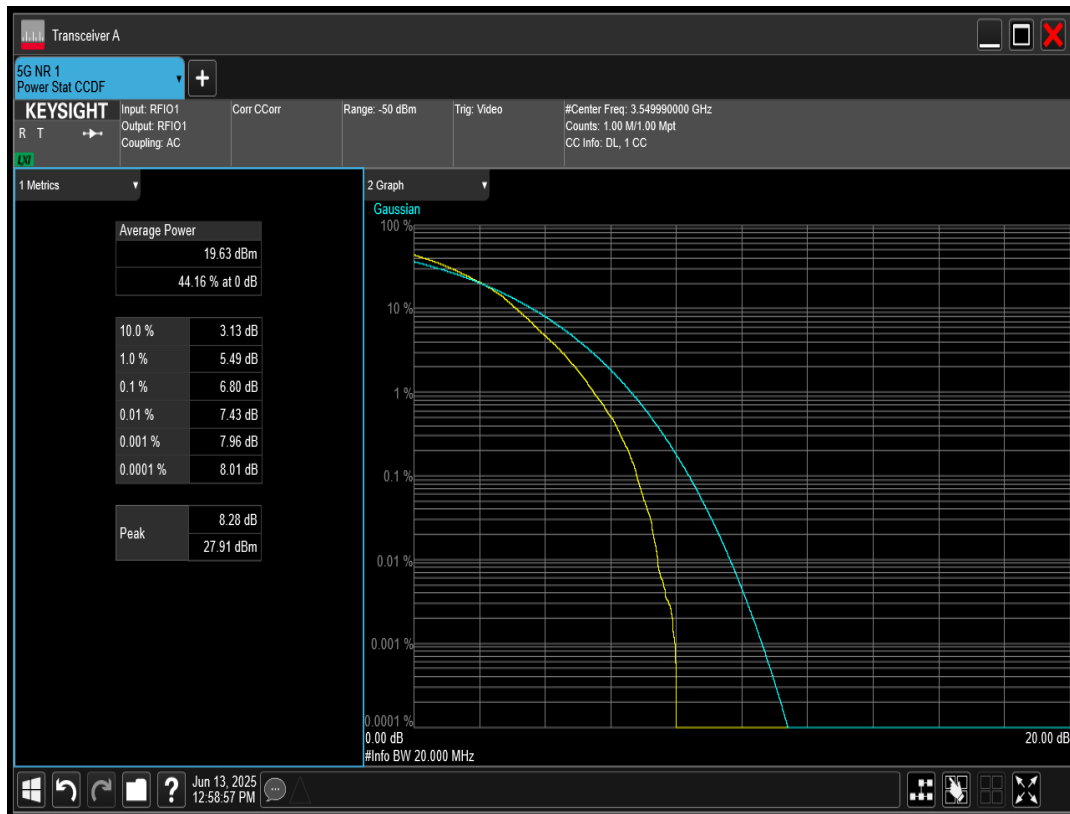


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=621334 RB=100@0

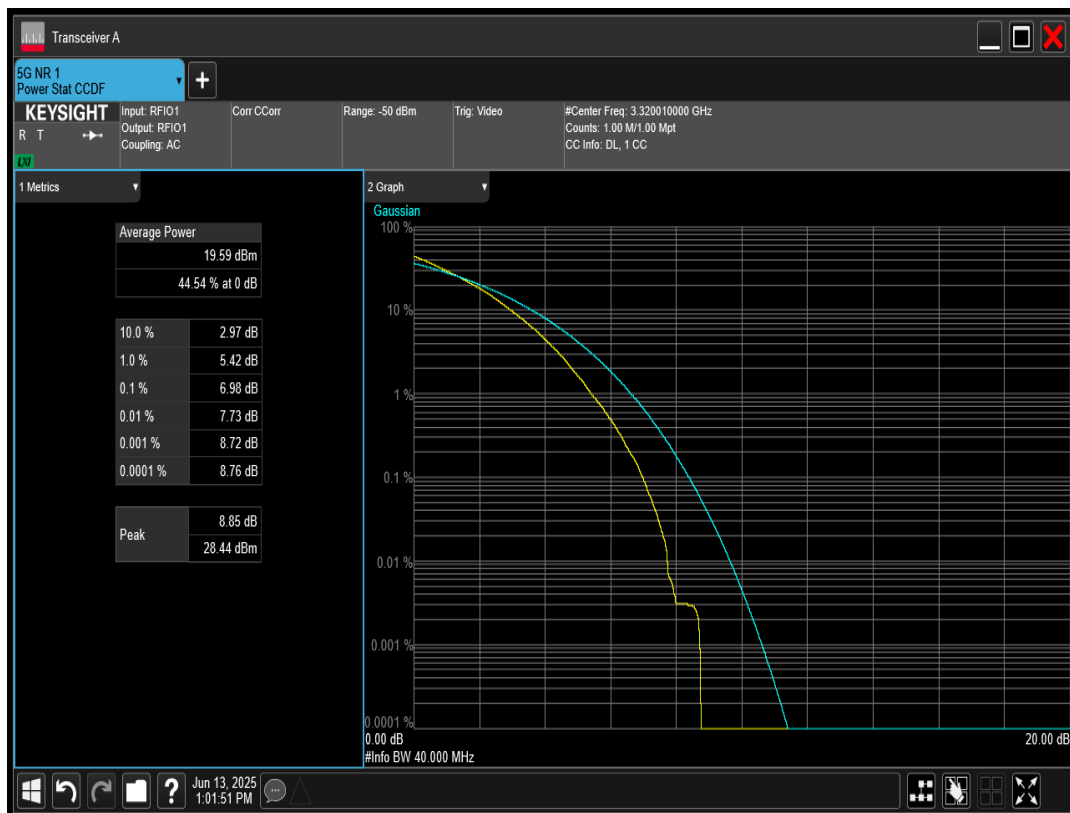


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=621668 RB=128@0




n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=652000 RB=100@0

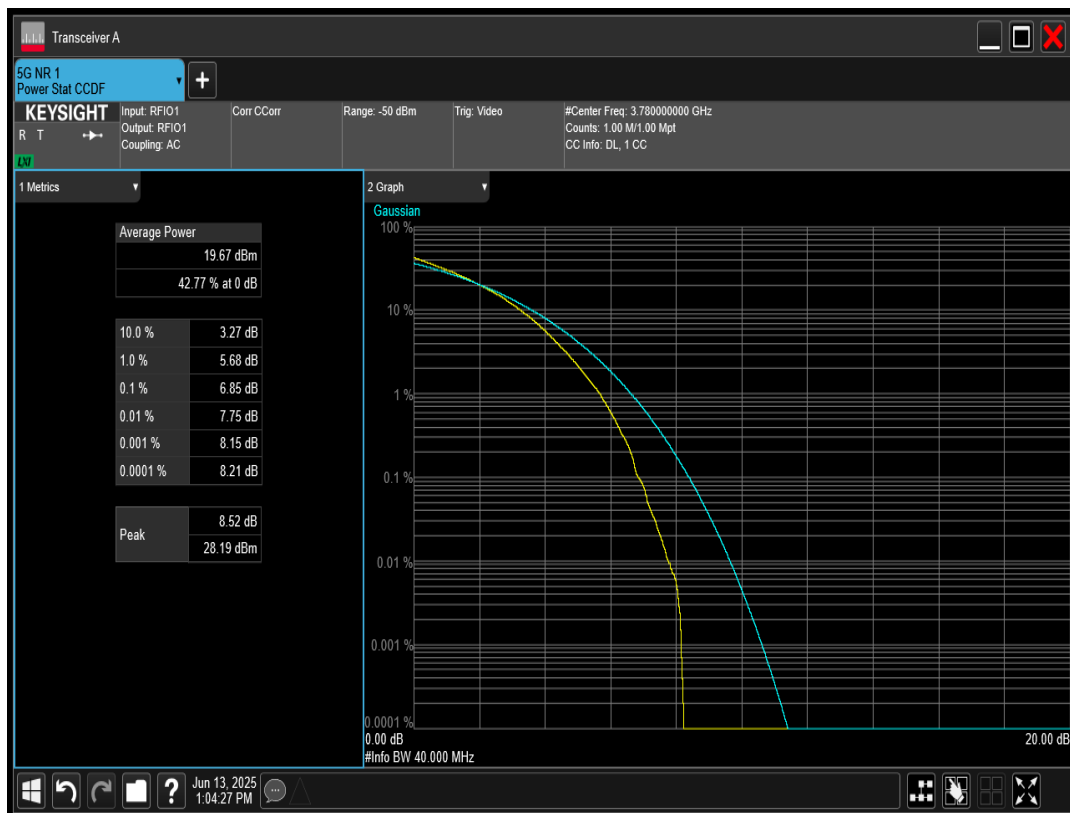


n78 SCS=30kHz DFT_QAM256 BW=40MHz Channel=636666 RB=100@0

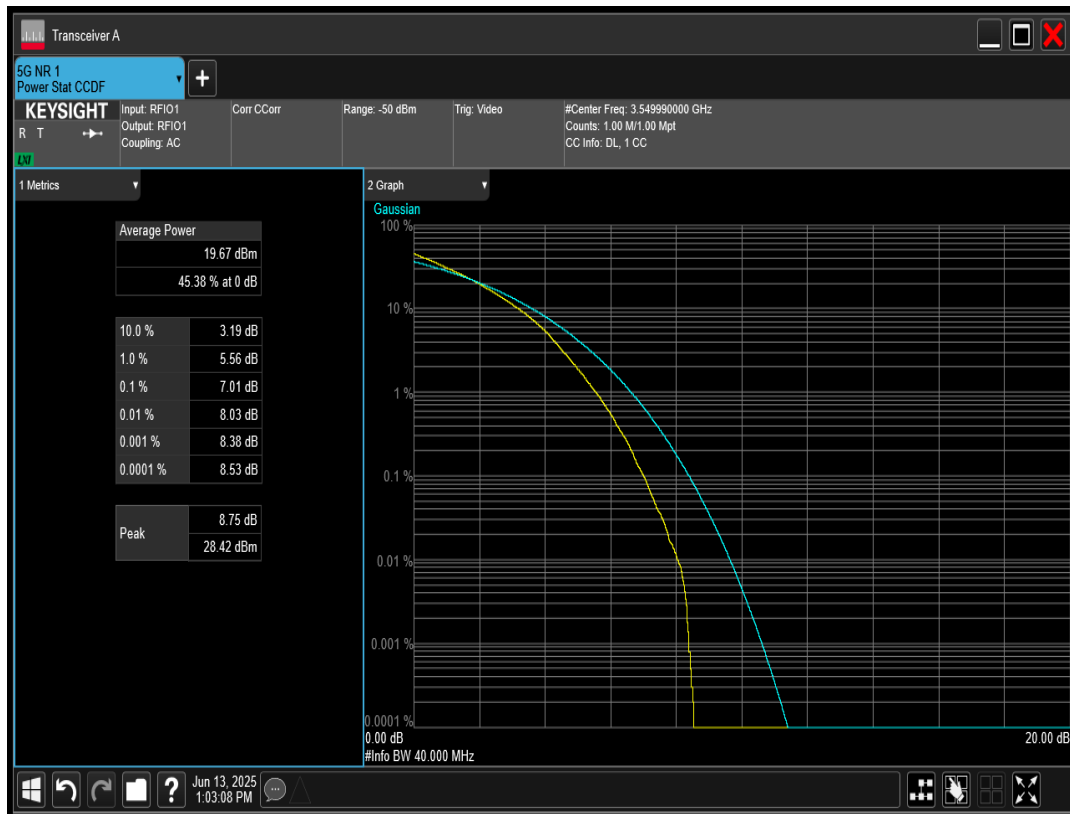


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=636666 RB=128@0

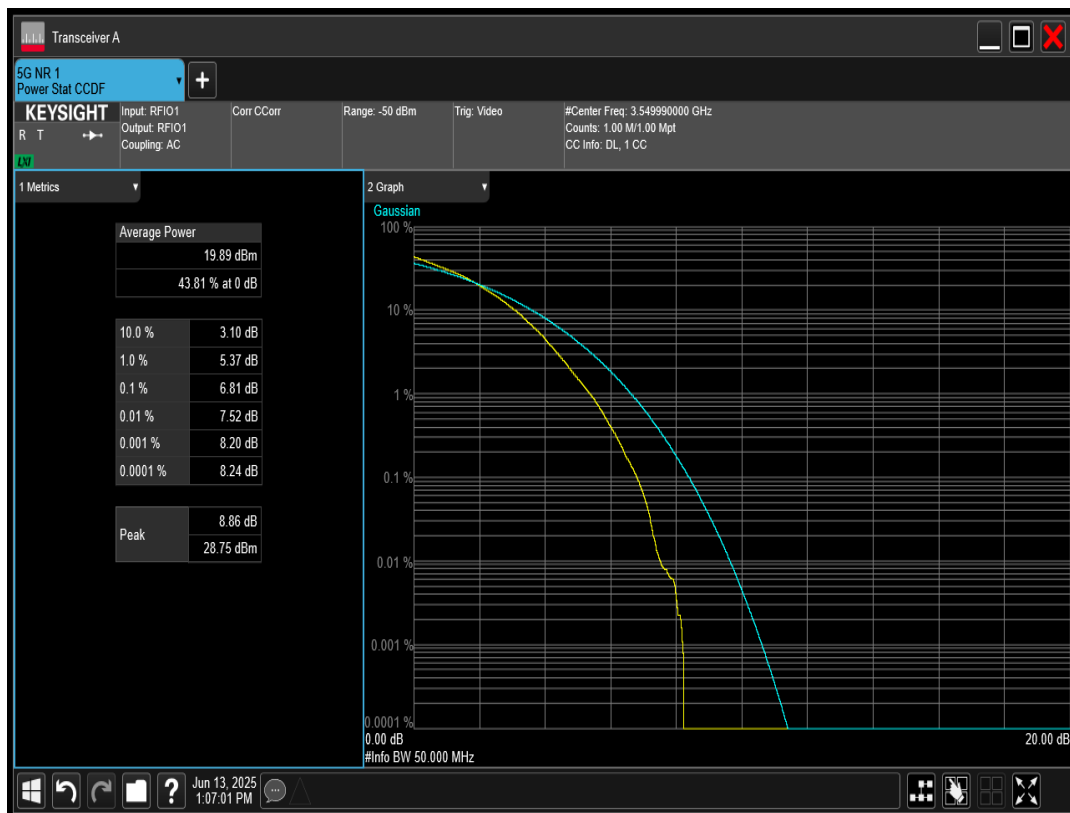


n78 SCS=30kHz DFT_QAM256 BW=50MHz Channel=651666 RB=128@0

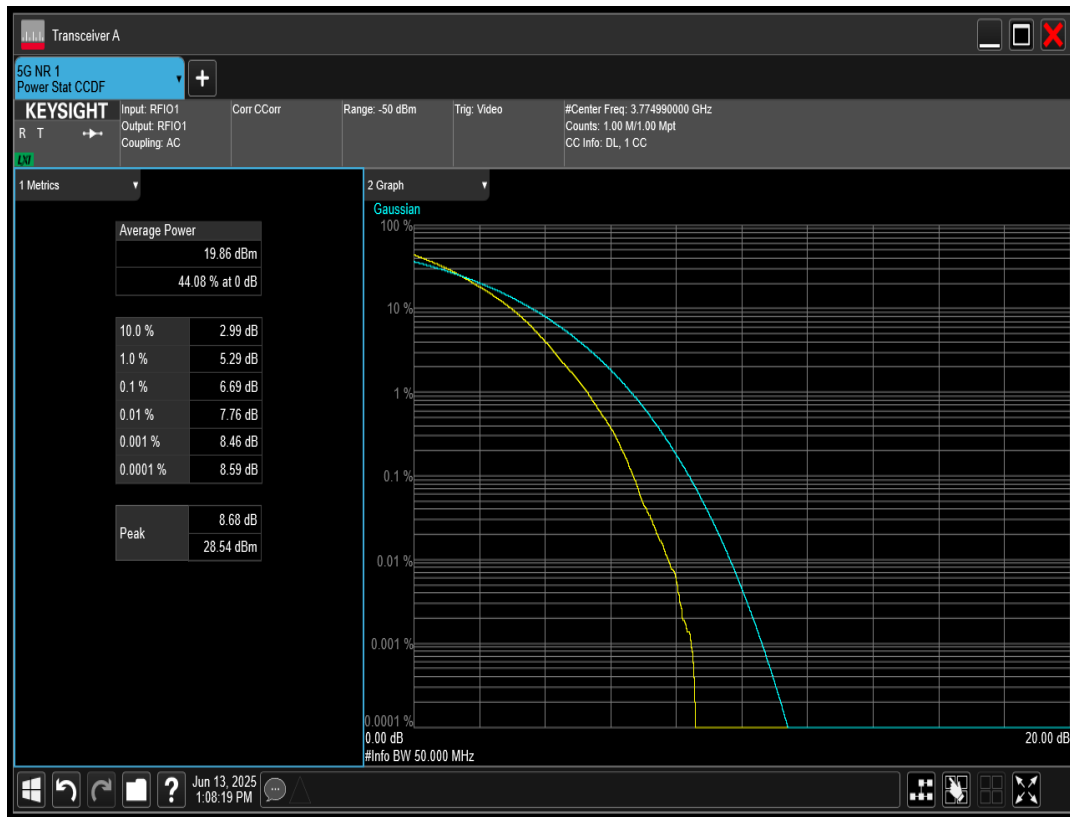


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=622000 RB=162@0

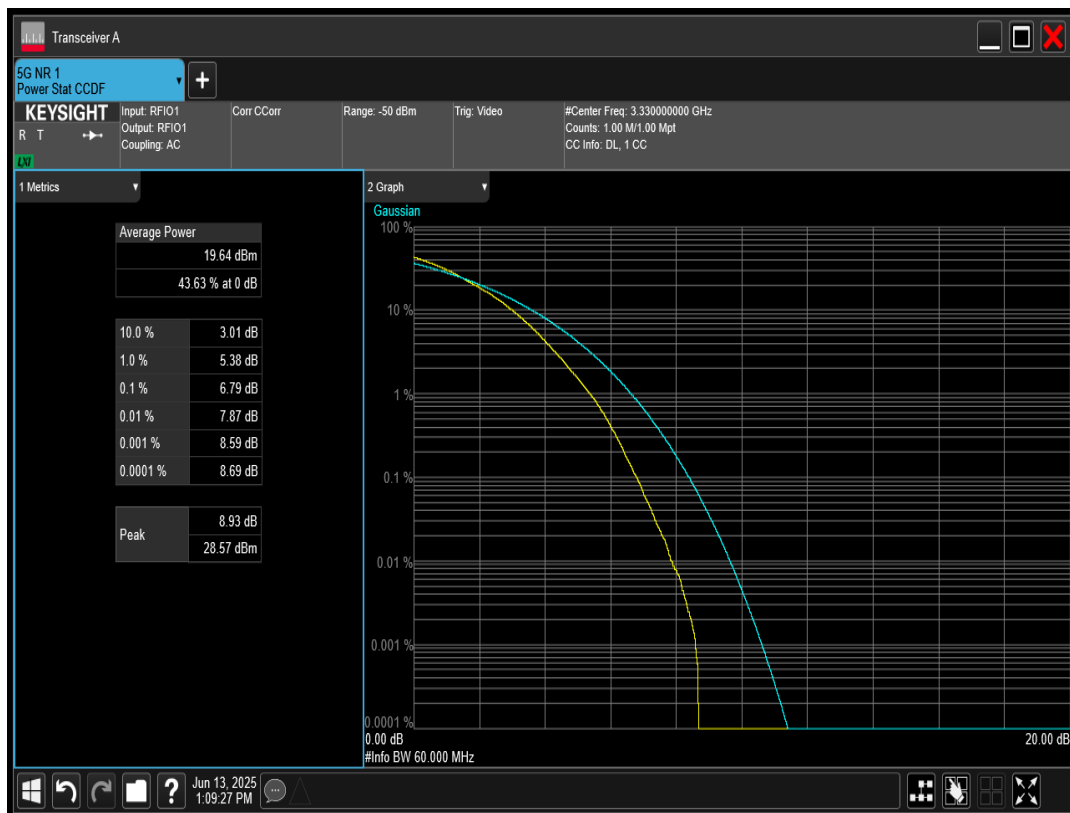


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=651332 RB=162@0

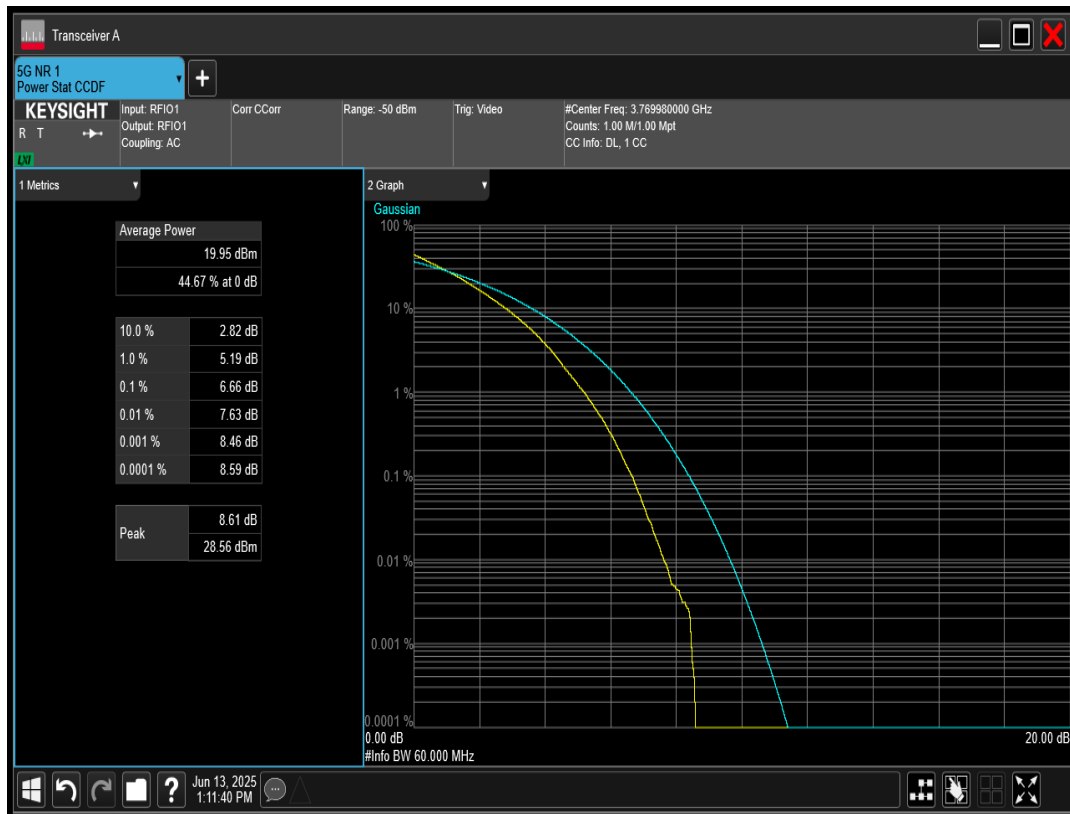


n78 SCS=30kHz DFT_QAM256 BW=60MHz Channel=636666 RB=162@0

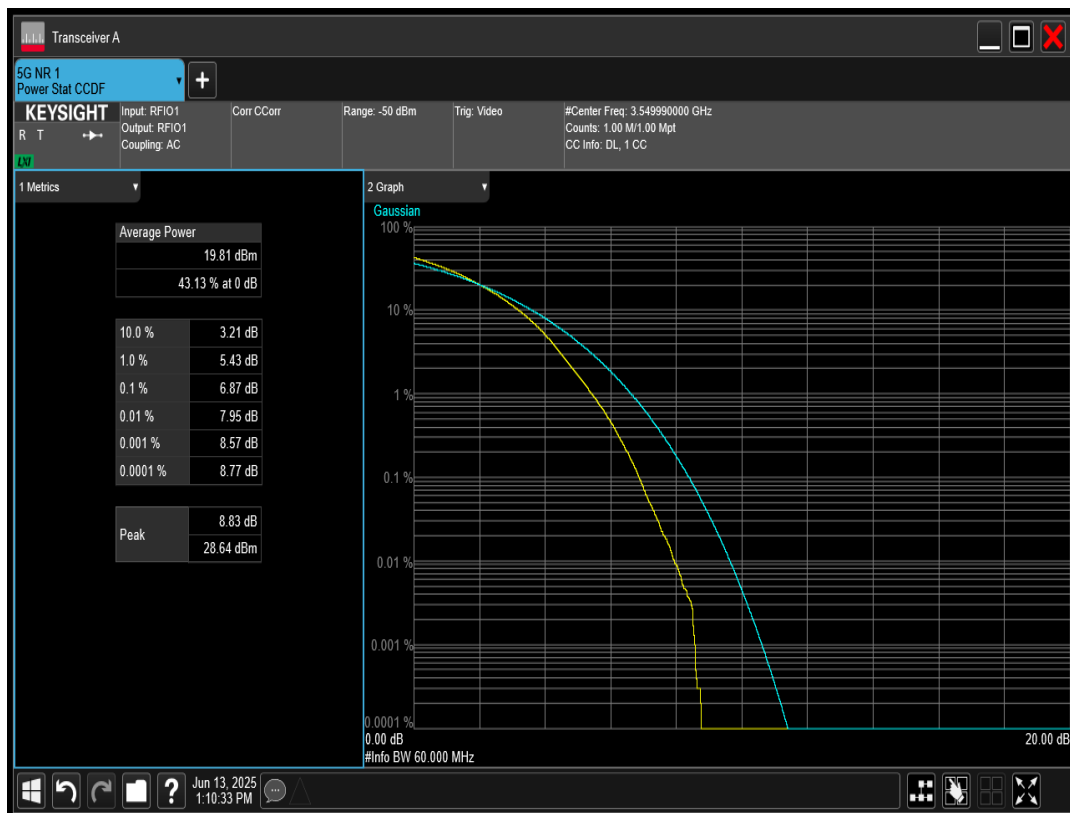


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=622668 RB=216@0

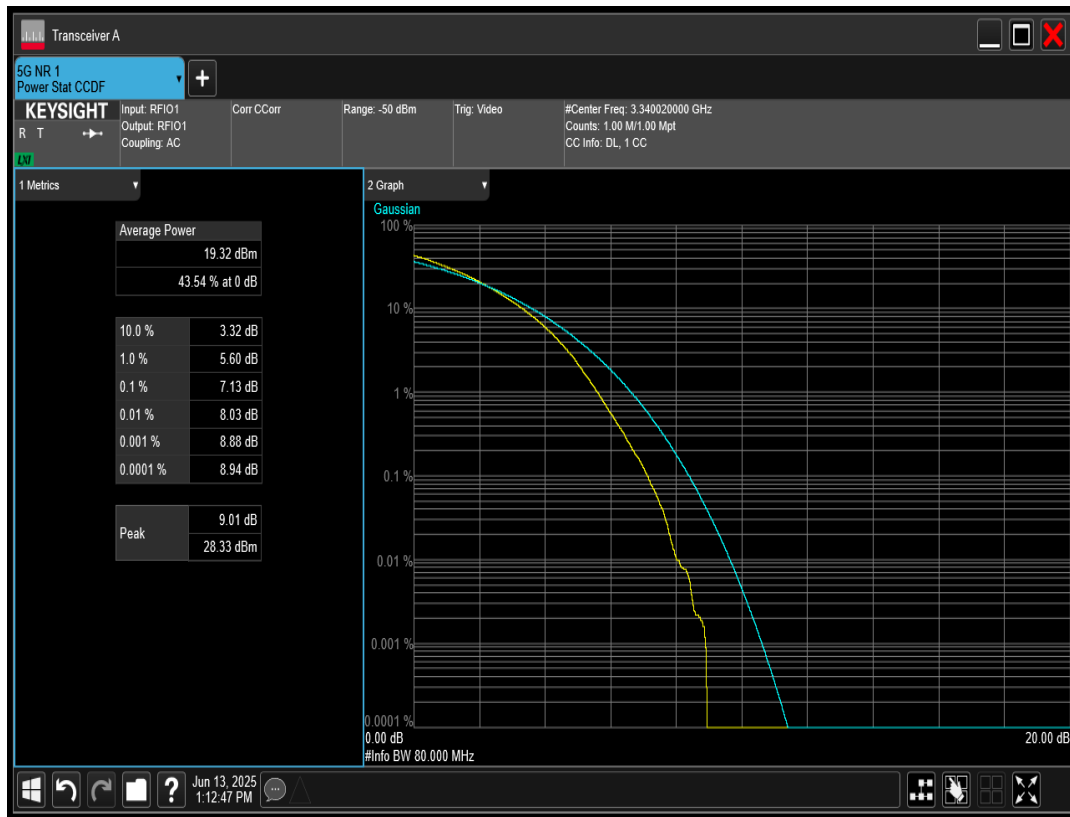


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=636666 RB=216@0

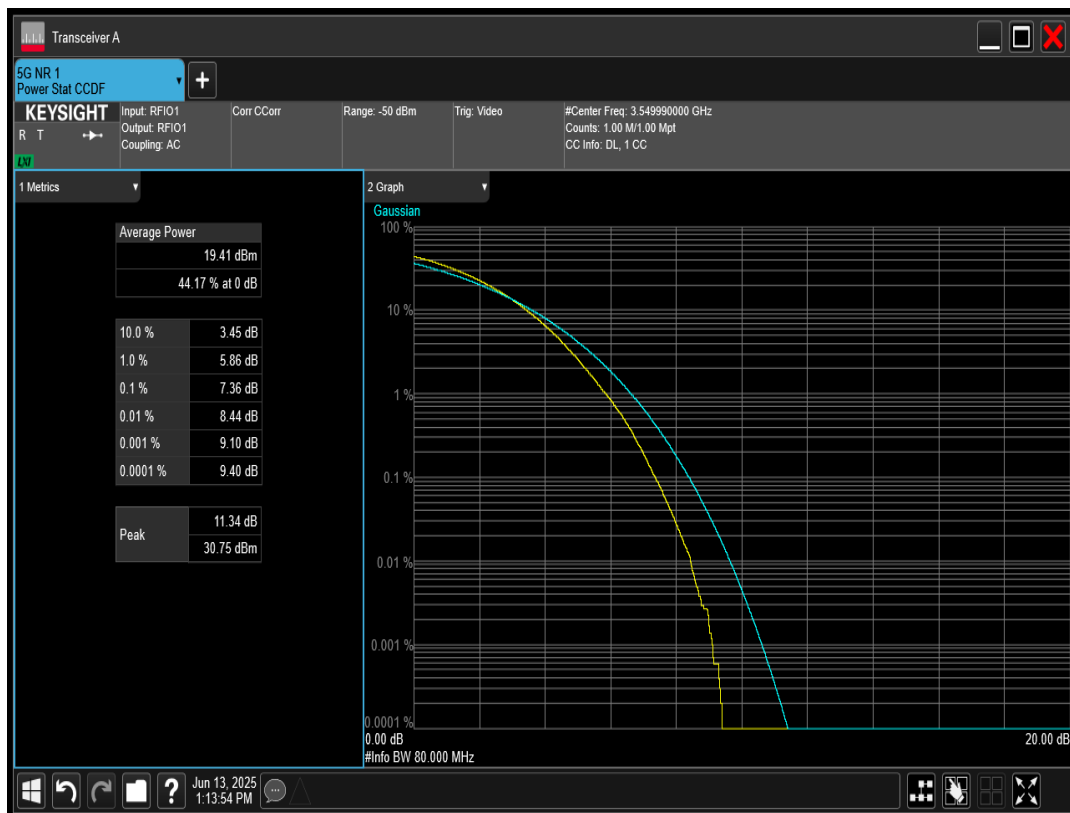


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=623000 RB=240@0

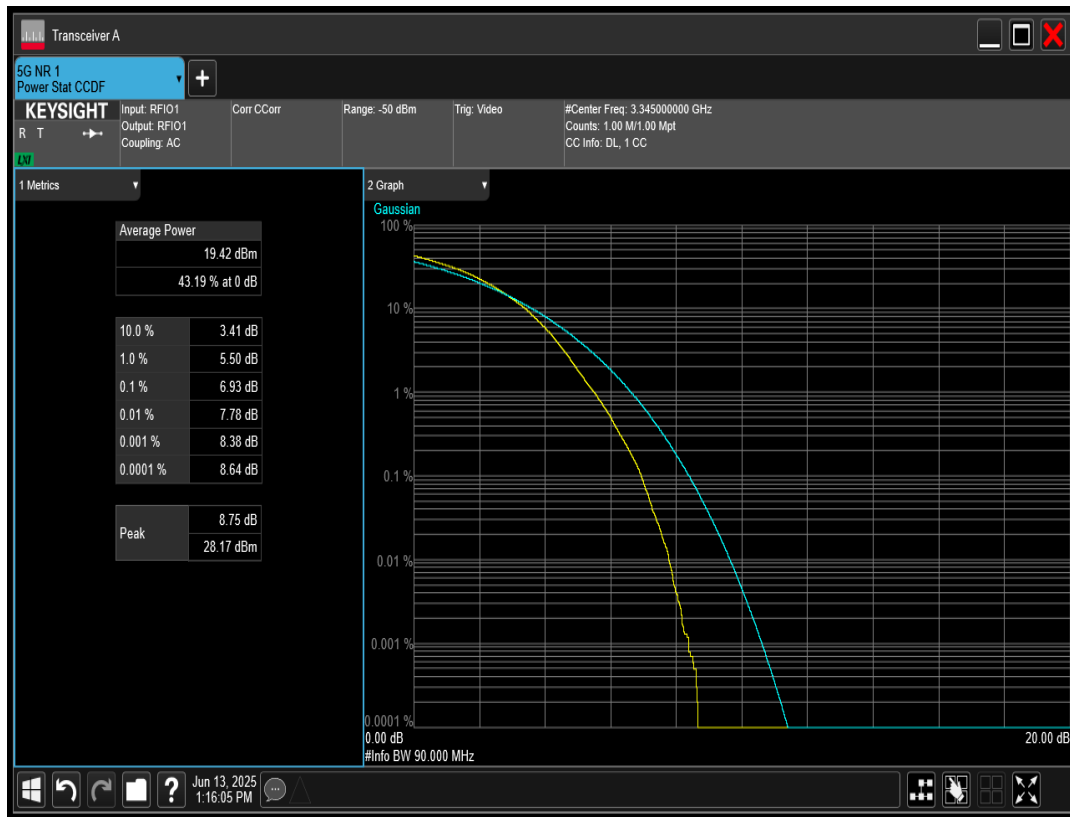


n78 SCS=30kHz DFT_QAM256 BW=80MHz Channel=650666 RB=216@0

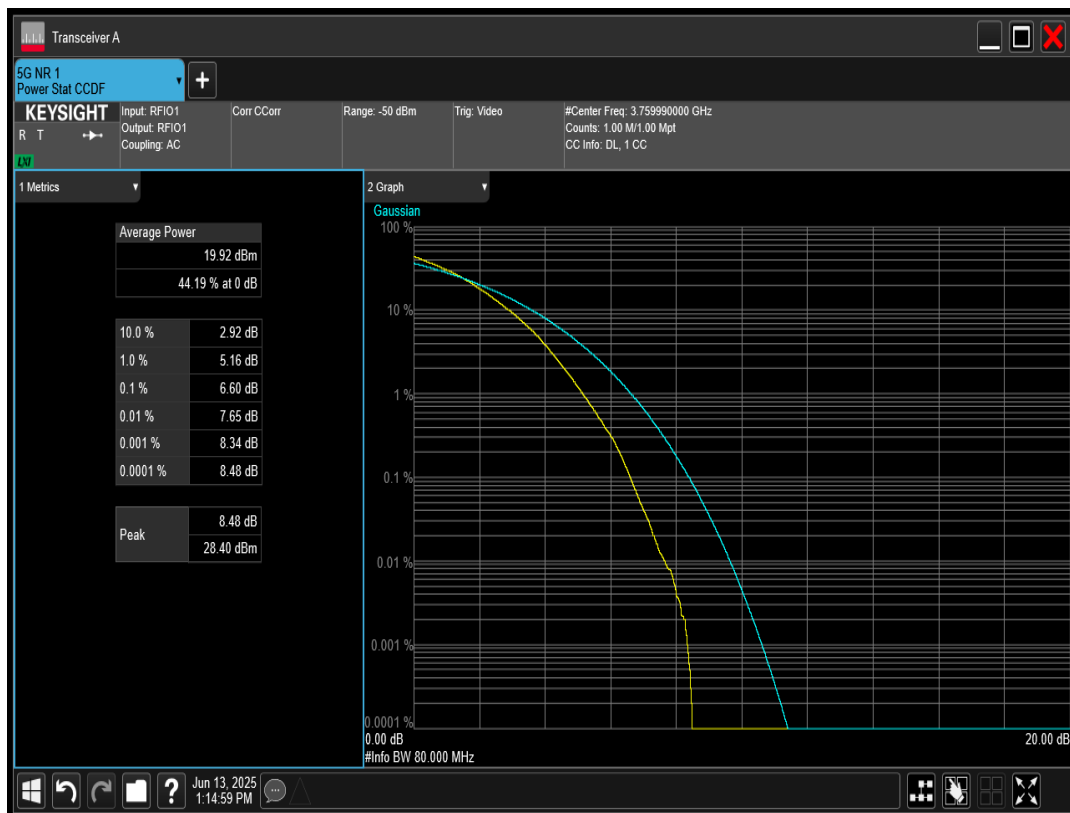


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=636666 RB=240@0

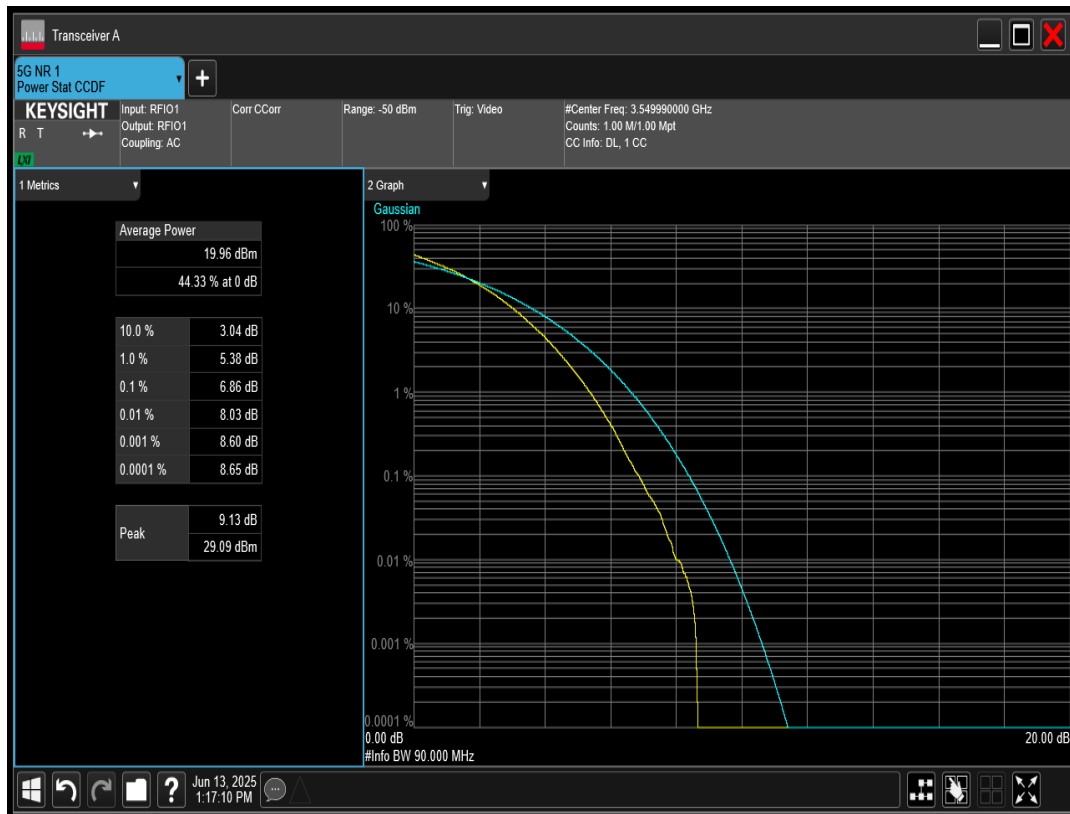


n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=623334 RB=270@0

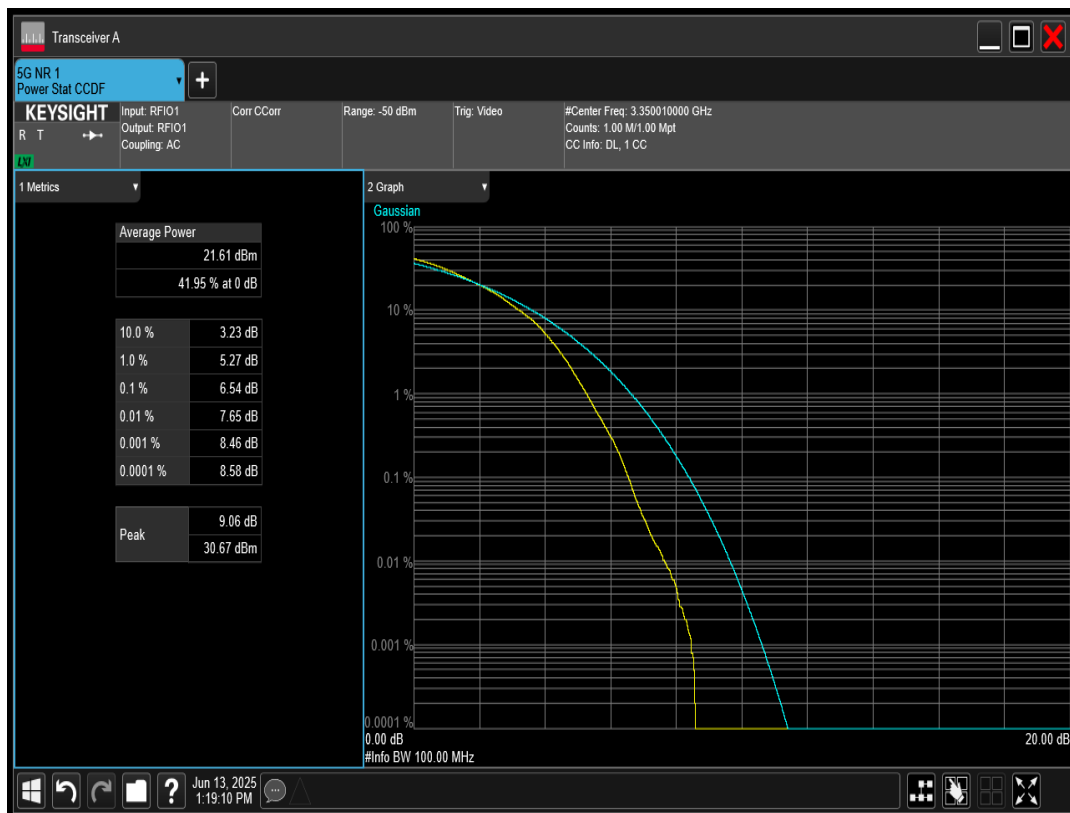


n78 SCS=30kHz DFT_QAM256 BW=90MHz Channel=650332 RB=240@0

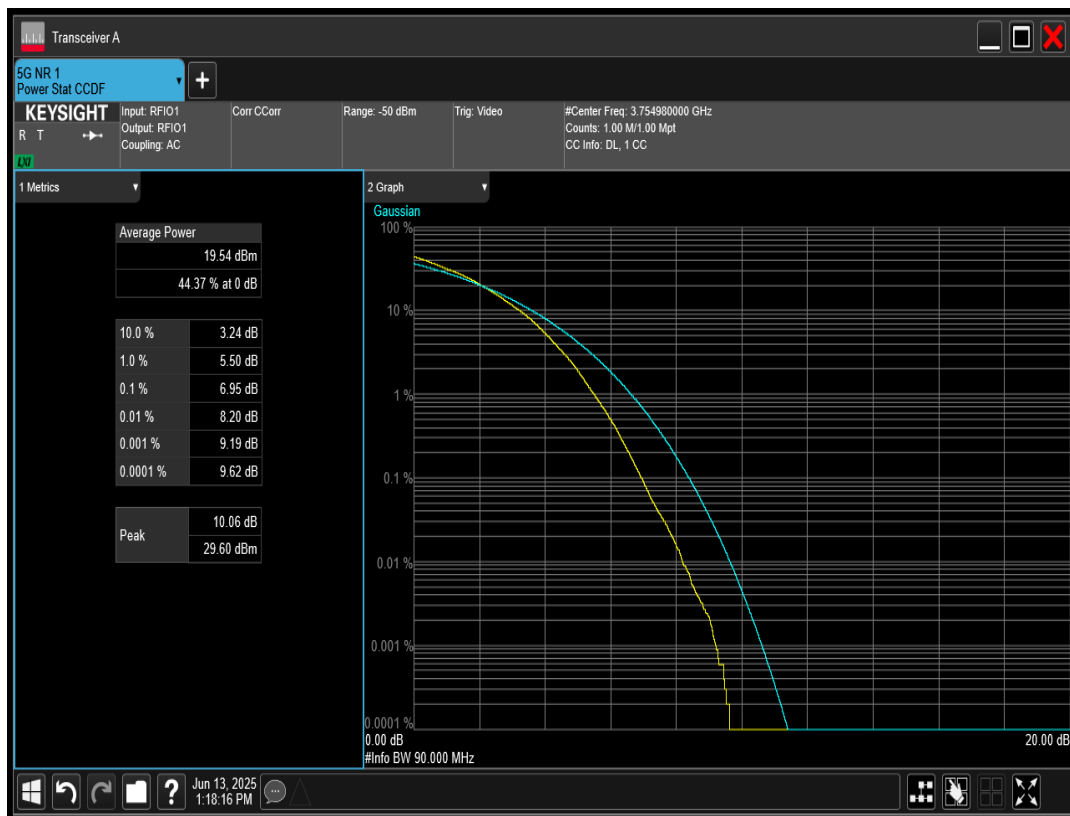


n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=650000 RB=270@0

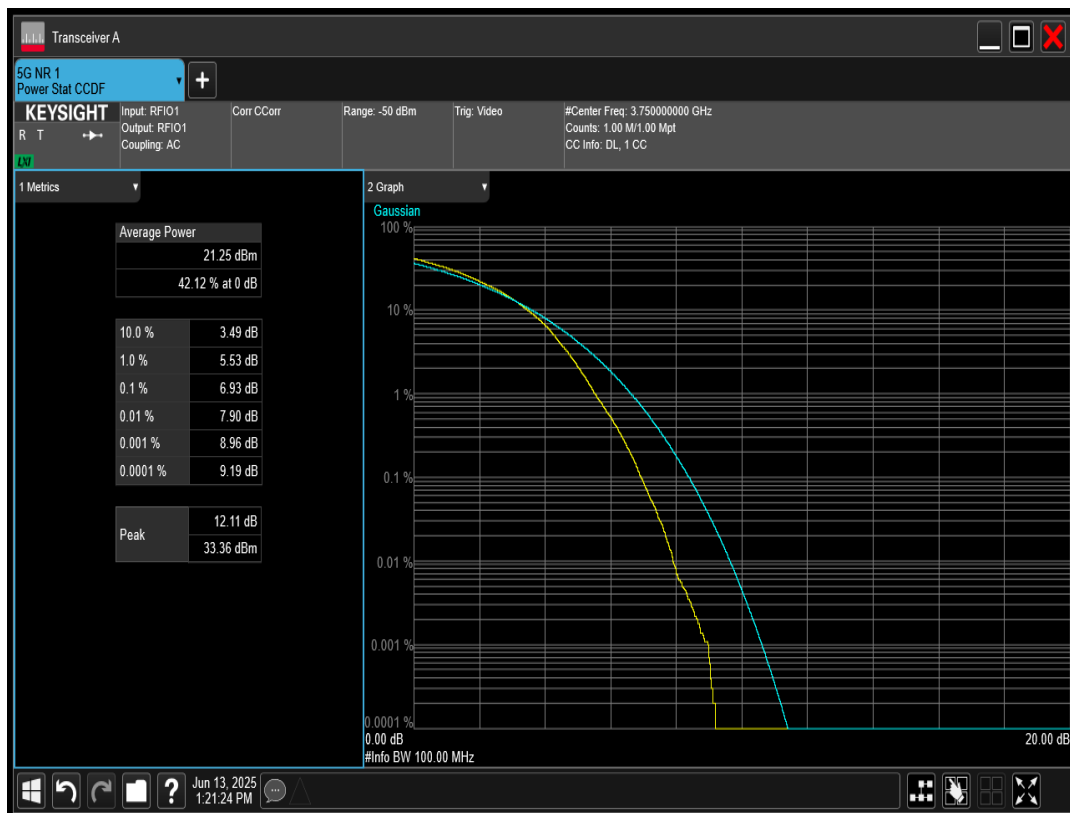


n78 SCS=30kHz DFT_QAM64 BW=100MHz Channel=636666 RB=270@0

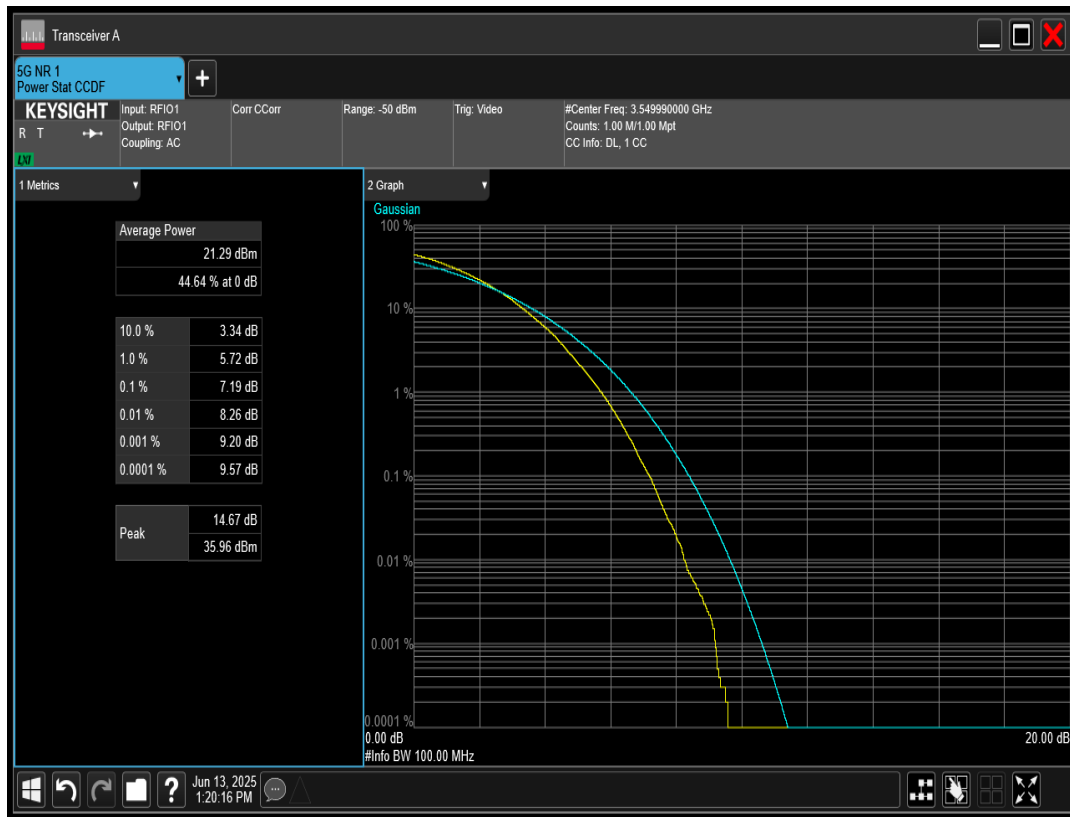


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=620334 RB=24@0

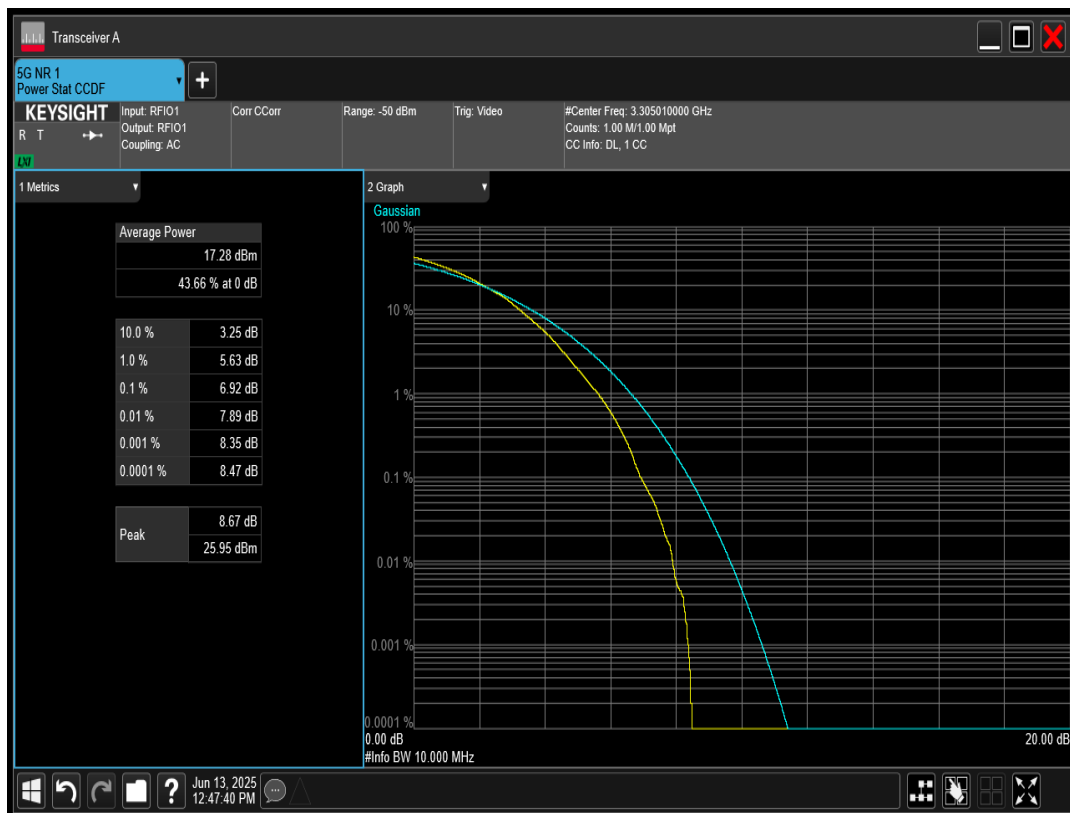


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=653000 RB=24@0

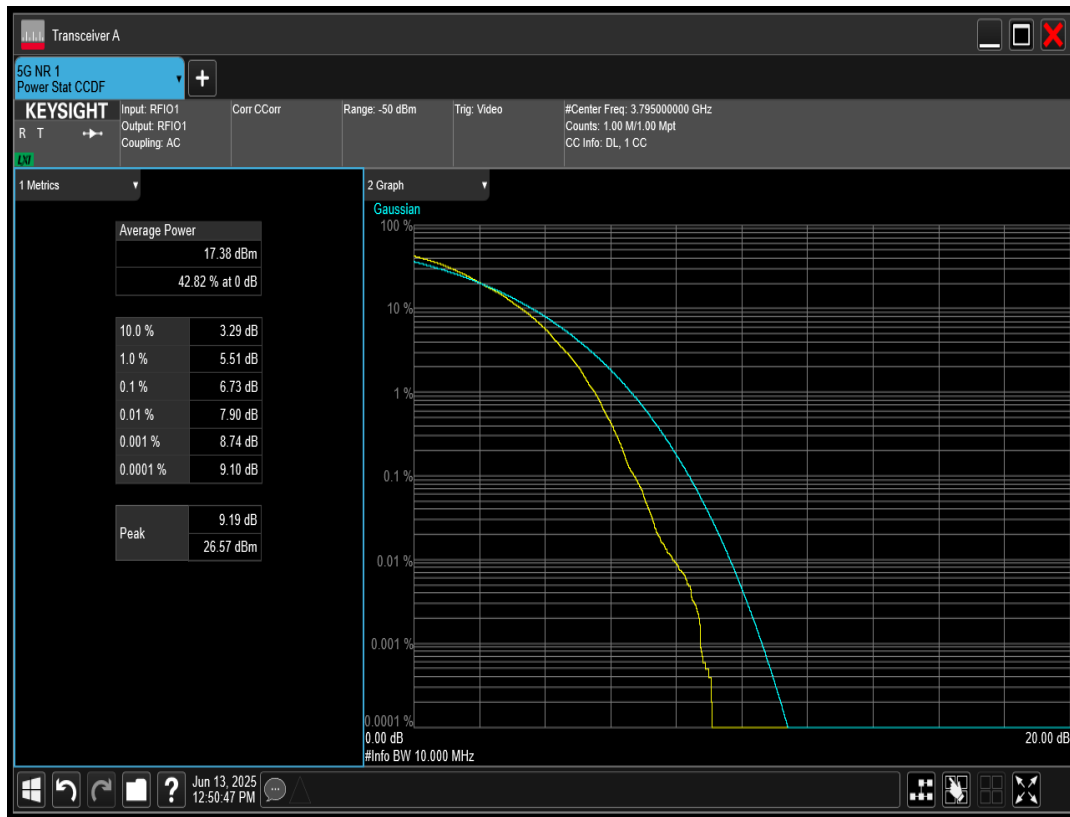


n78 SCS=30kHz DFT_QAM64 BW=10MHz Channel=636666 RB=24@0

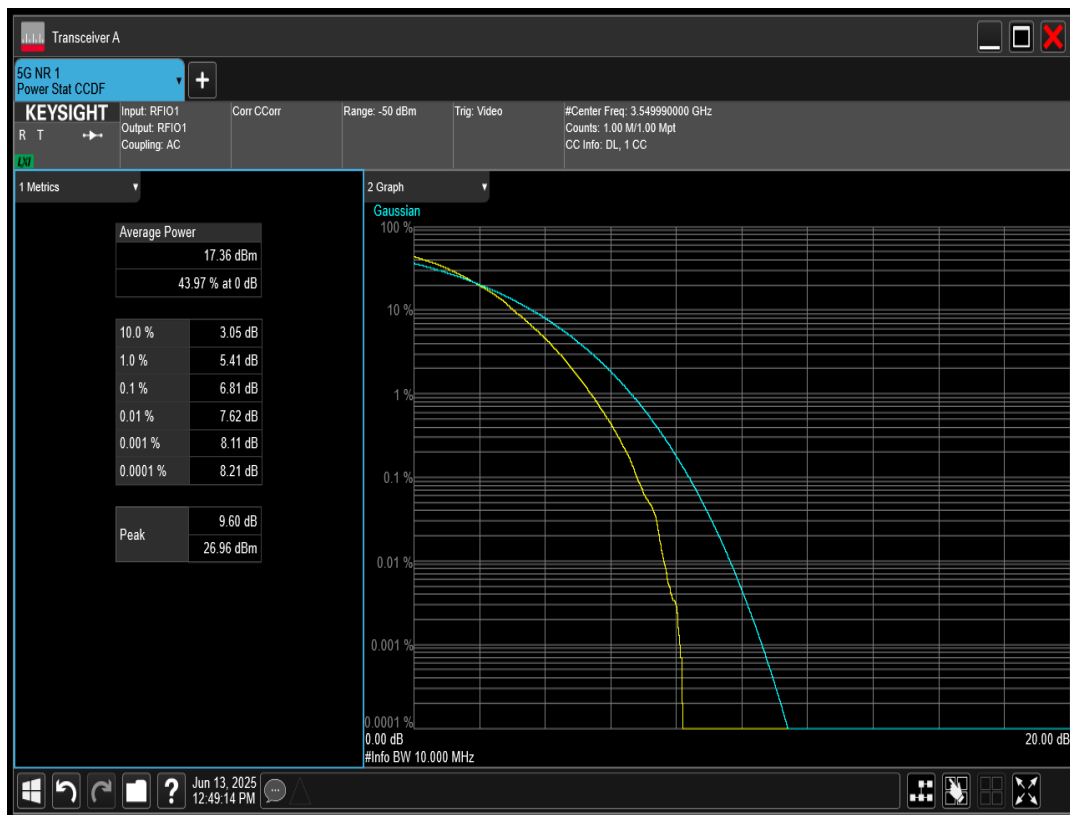


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=620500 RB=36@0

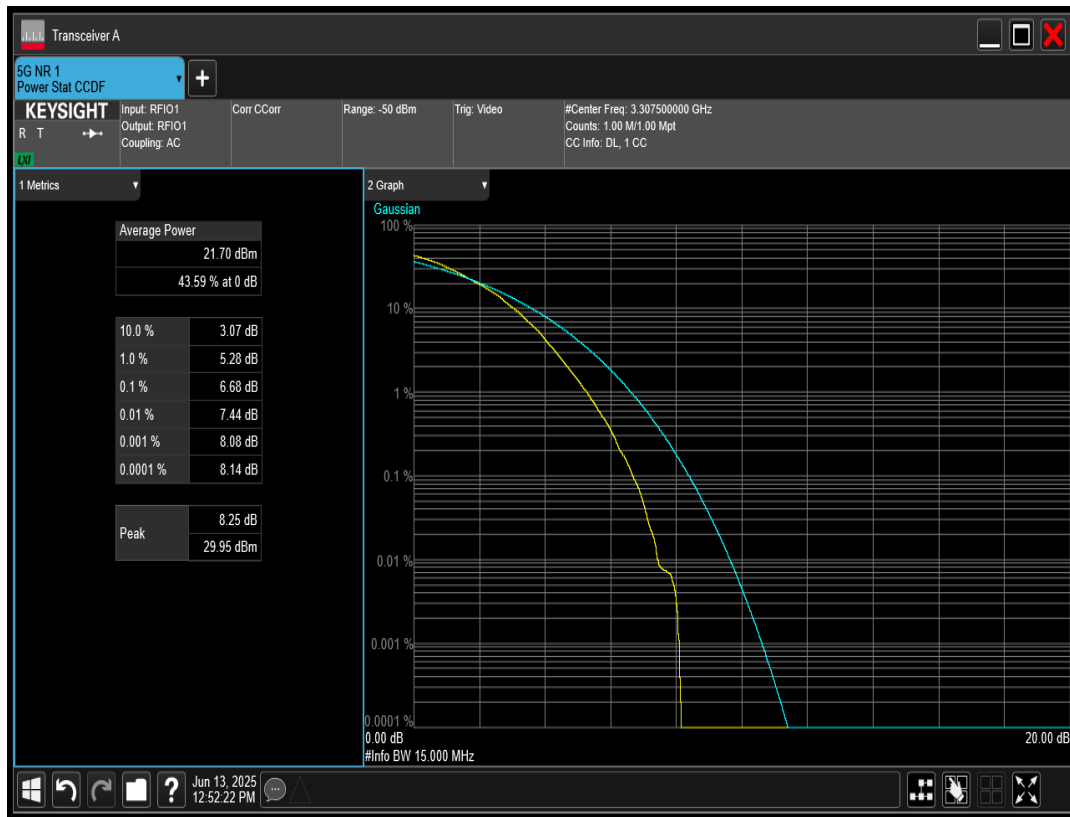


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=636666 RB=36@0

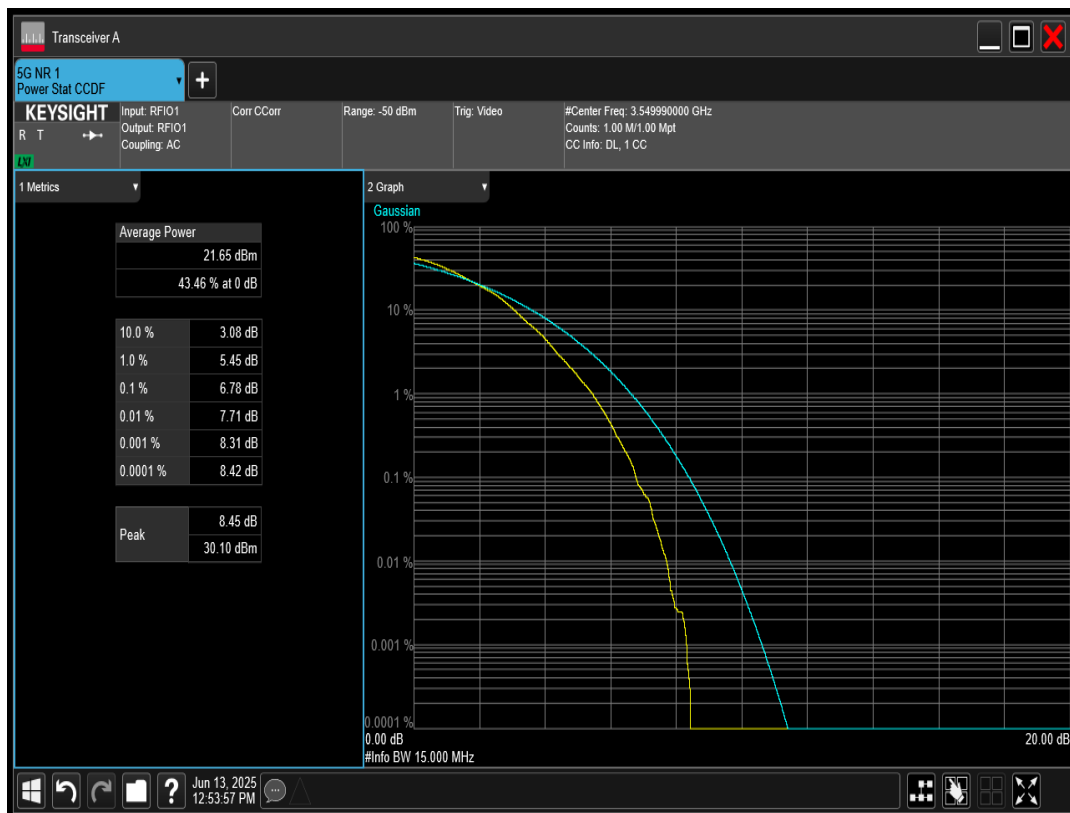


n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=620668 RB=50@0

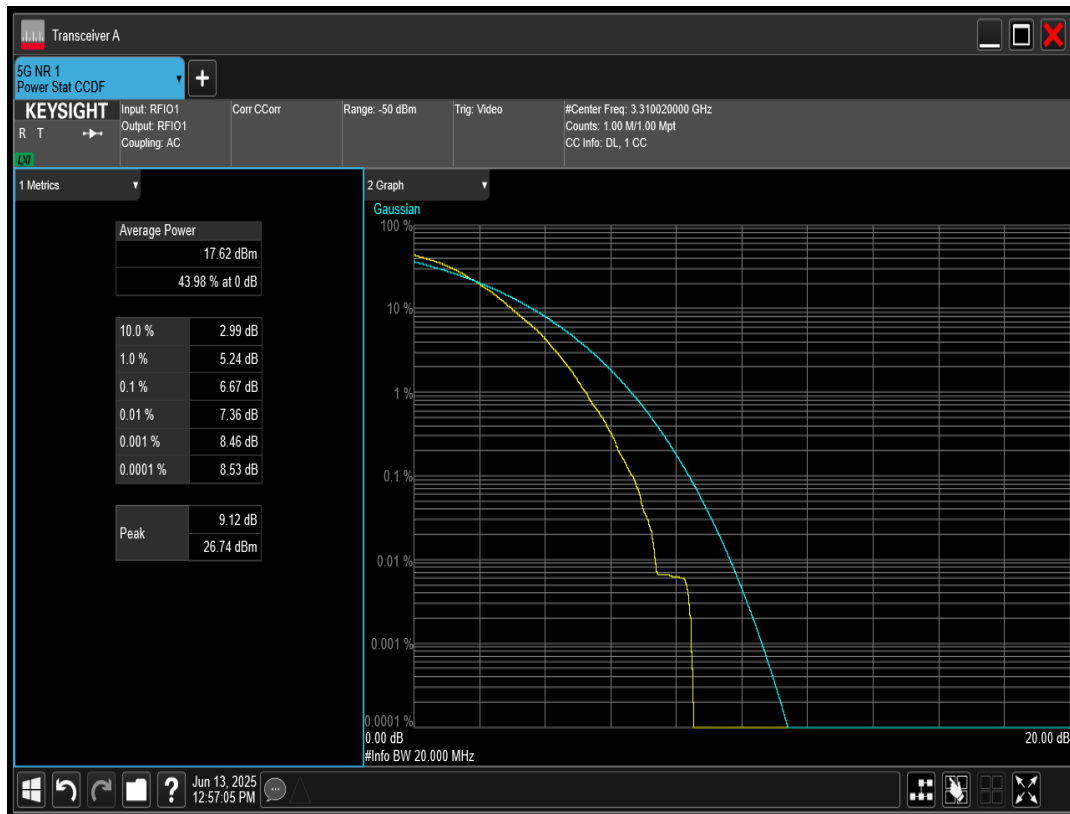


n78 SCS=30kHz DFT_QAM64 BW=15MHz Channel=652832 RB=36@0

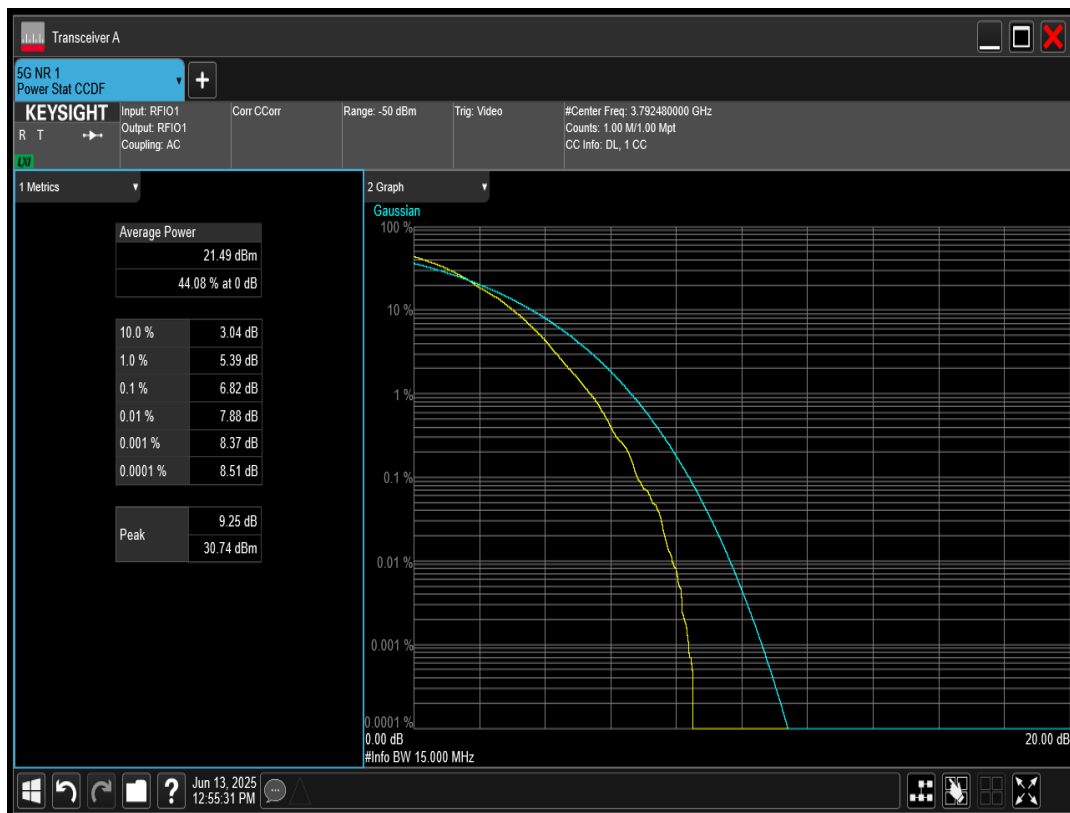


n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=636666 RB=50@0

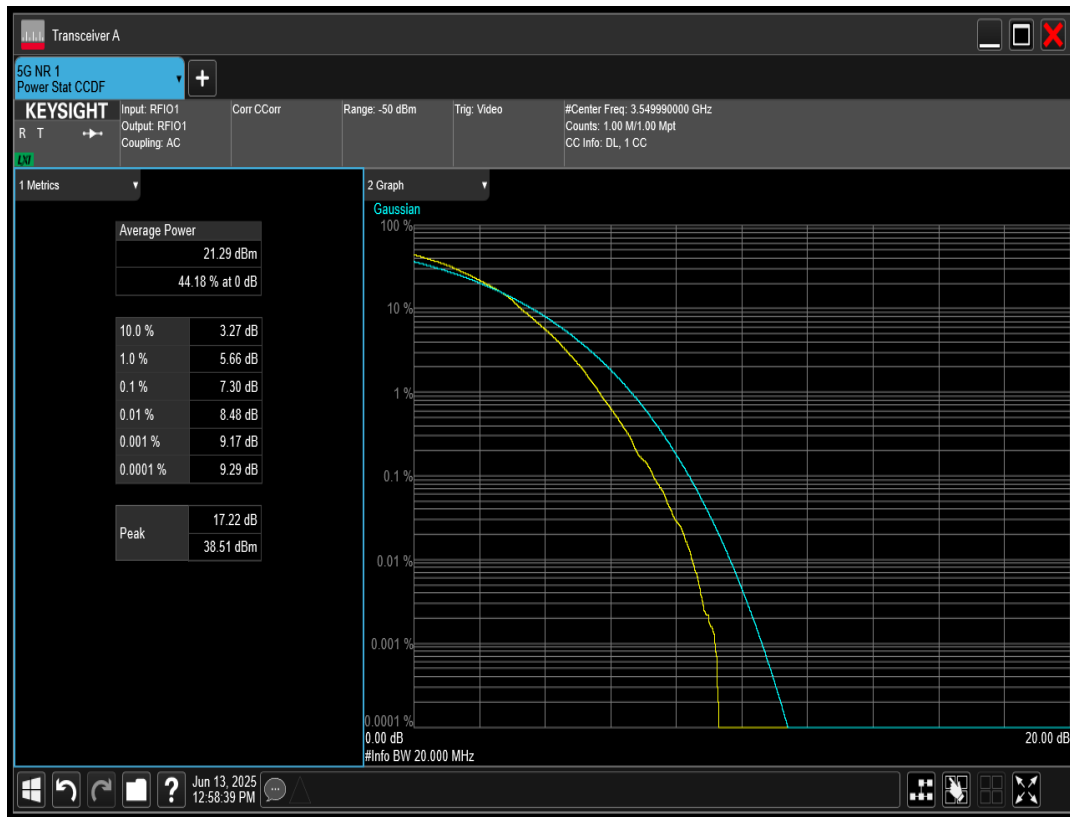


n78 SCS=30kHz DFT_QAM64 BW=20MHz Channel=652666 RB=50@0

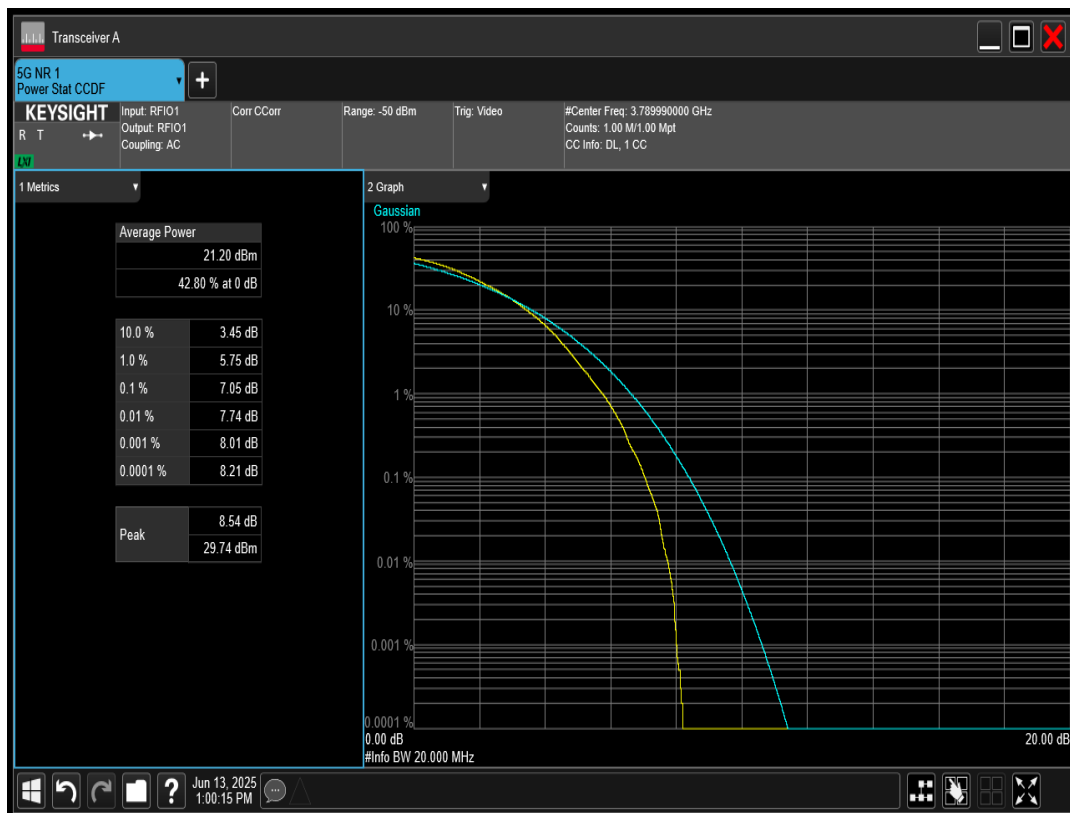


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=621334 RB=100@0

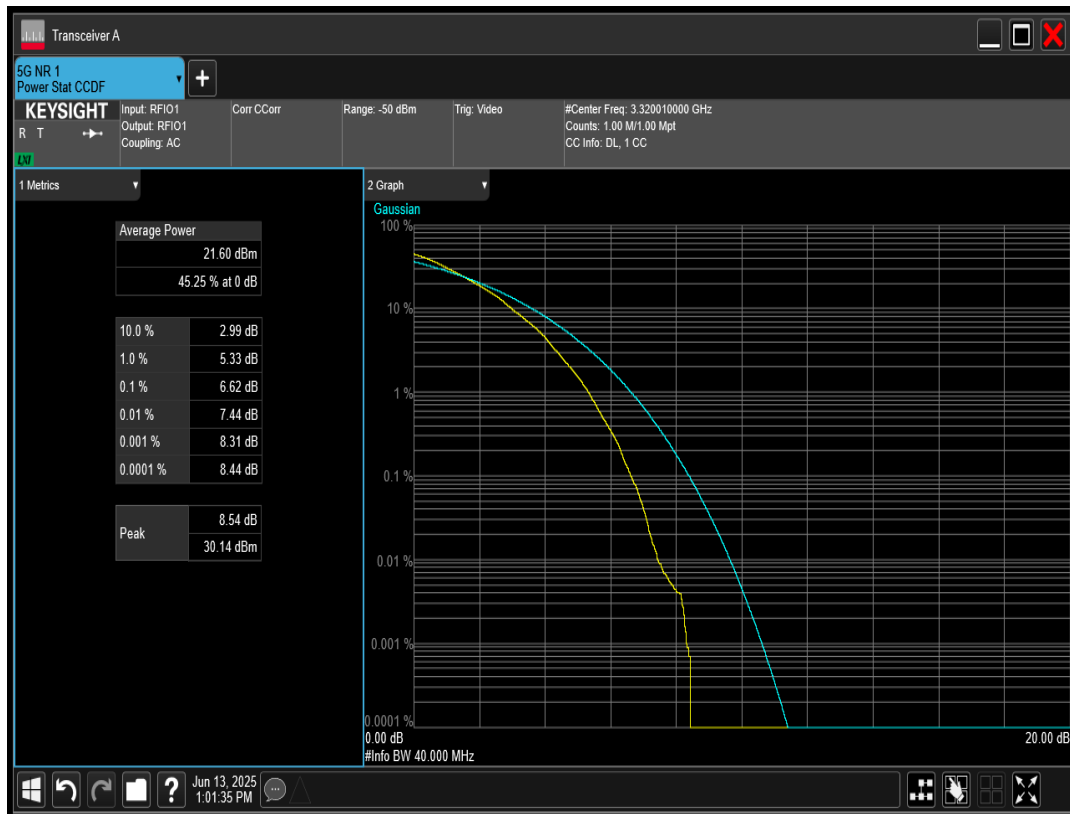


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=636666 RB=100@0

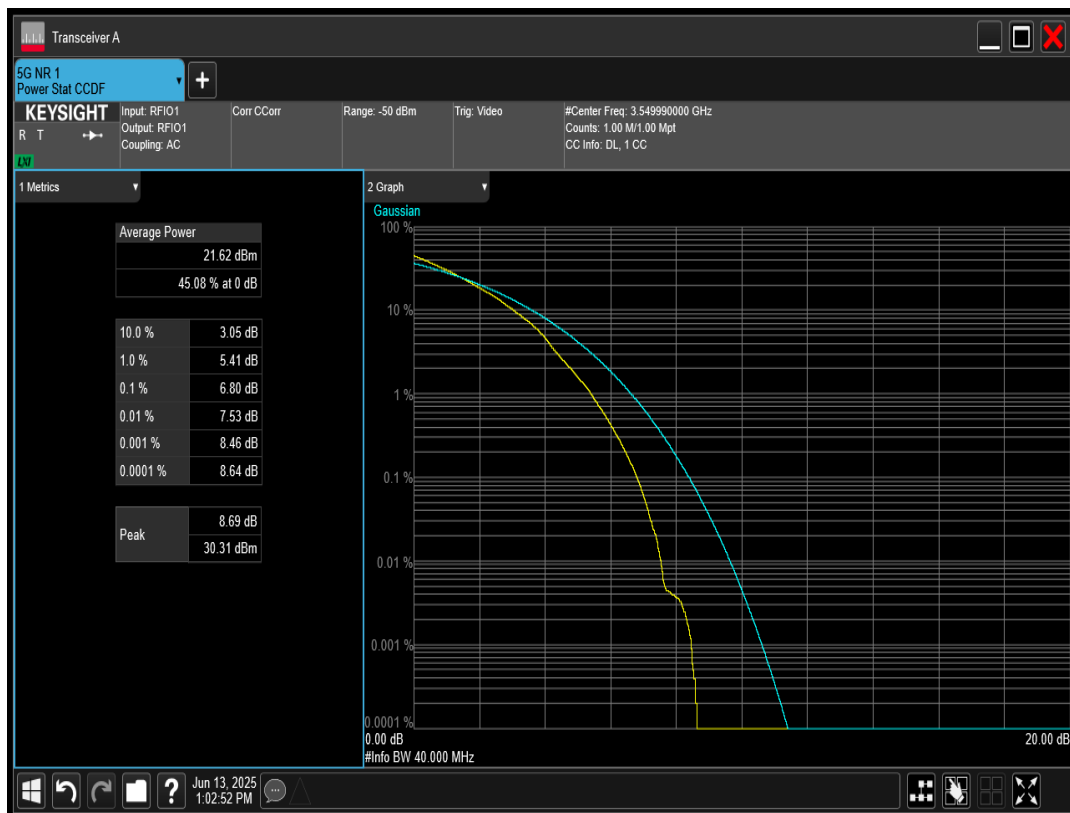


n78 SCS=30kHz DFT_QAM64 BW=40MHz Channel=652000 RB=100@0

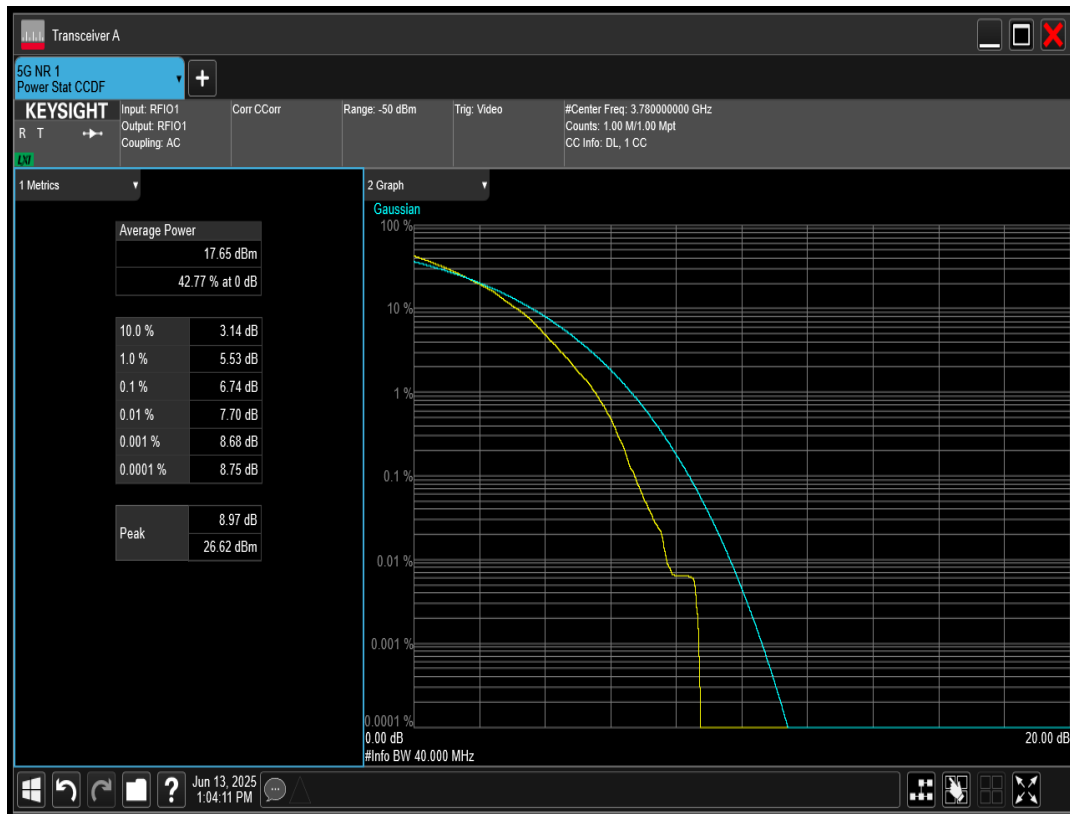


n78 SCS=30kHz DFT_QAM64 BW=50MHz Channel=621668 RB=128@0

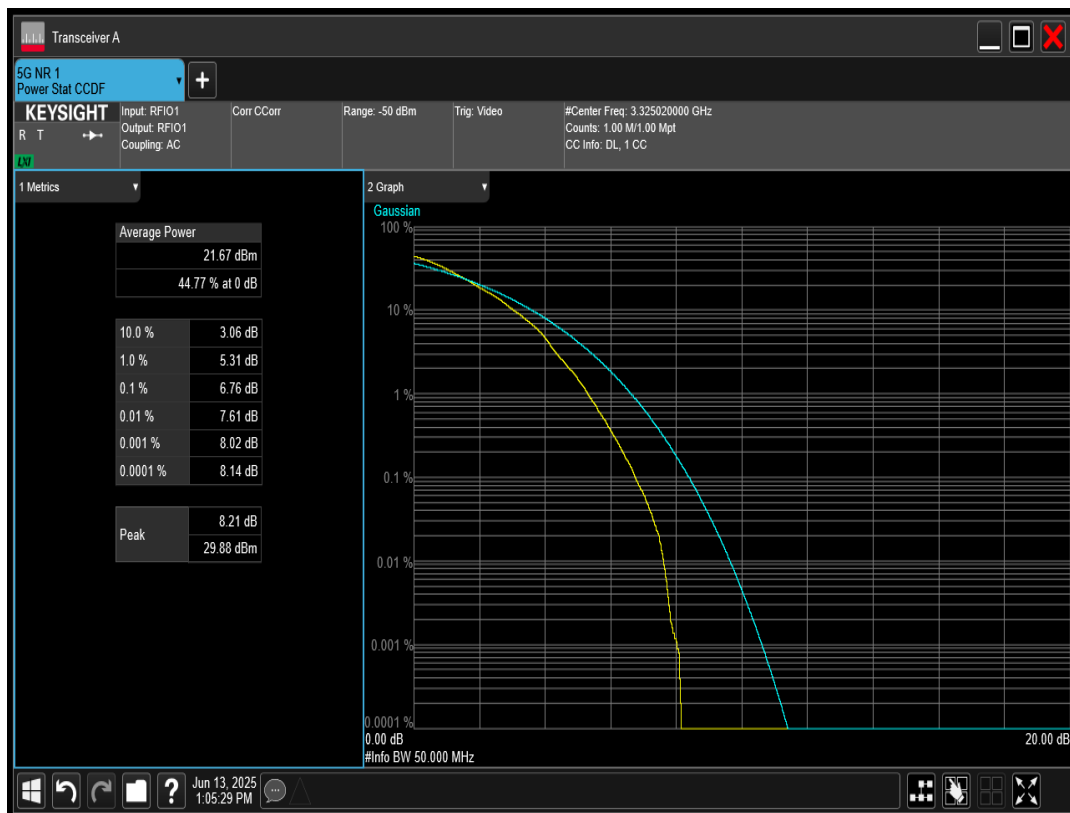


n78 SCS=30kHz DFT_QAM64 BW=50MHz Channel=651666 RB=128@0

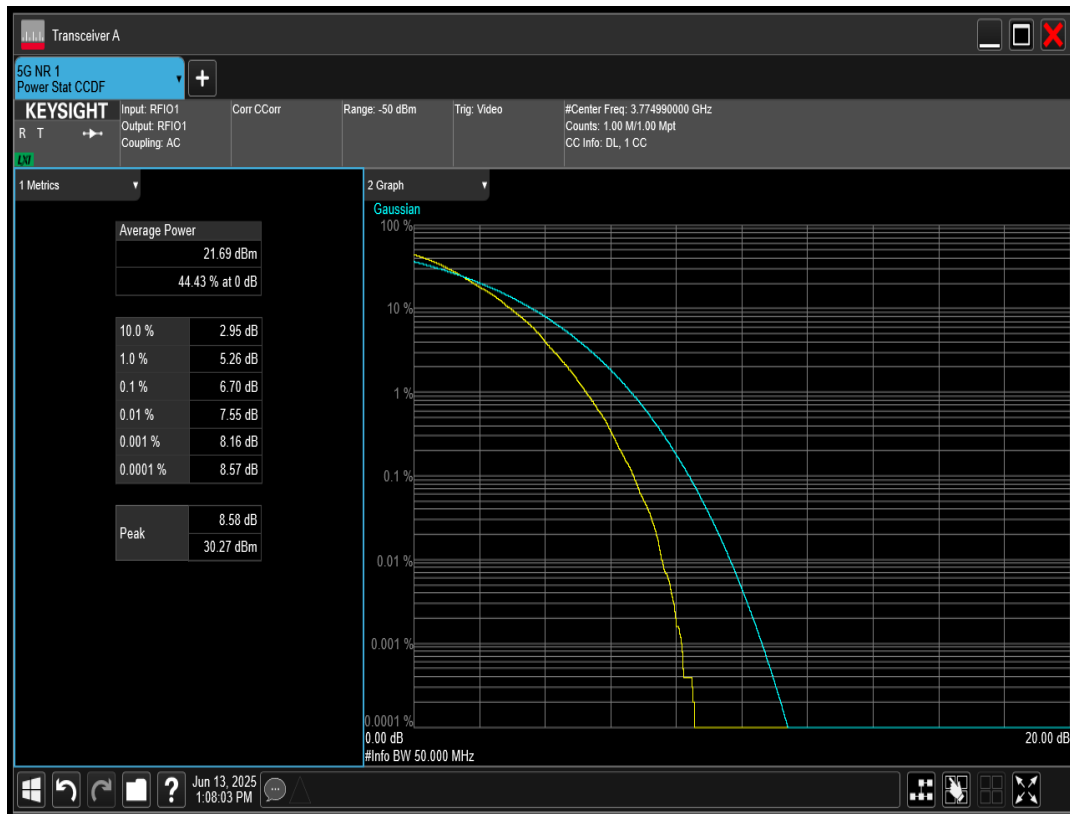


n78 SCS=30kHz DFT_QAM64 BW=50MHz Channel=636666 RB=128@0

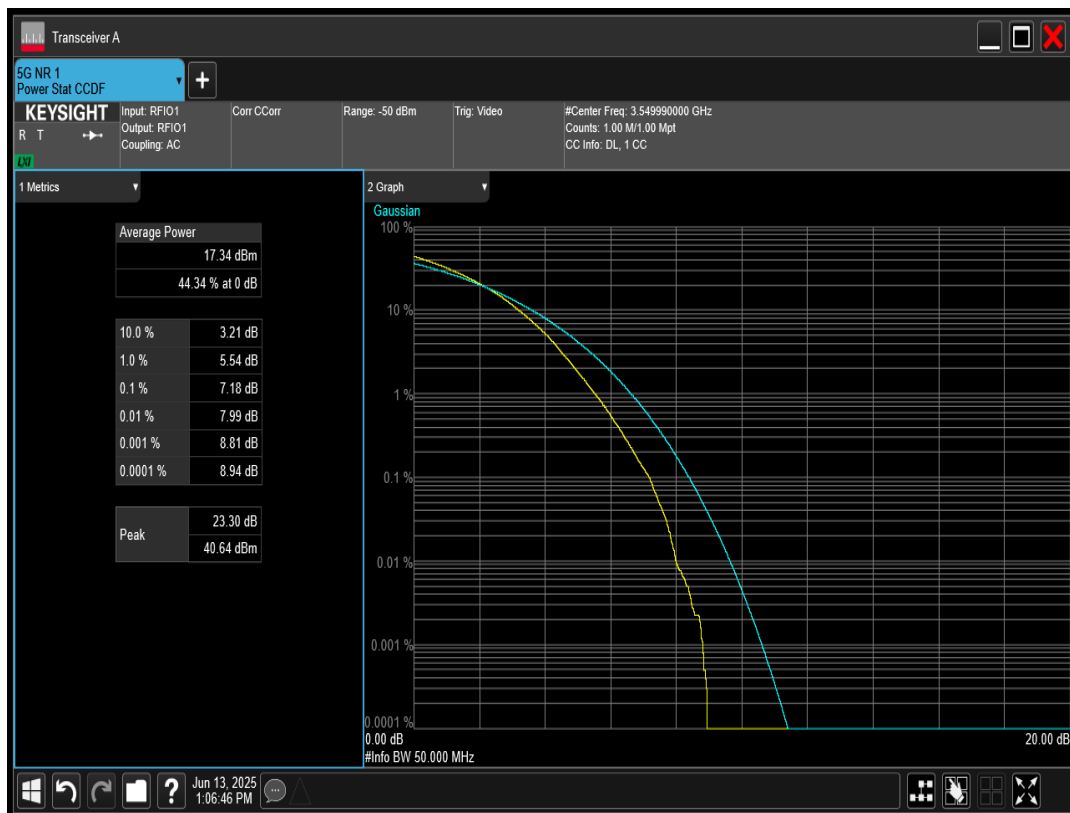

n78 SCS=30kHz DFT_QAM64 BW=60MHz Channel=636666 RB=162@0

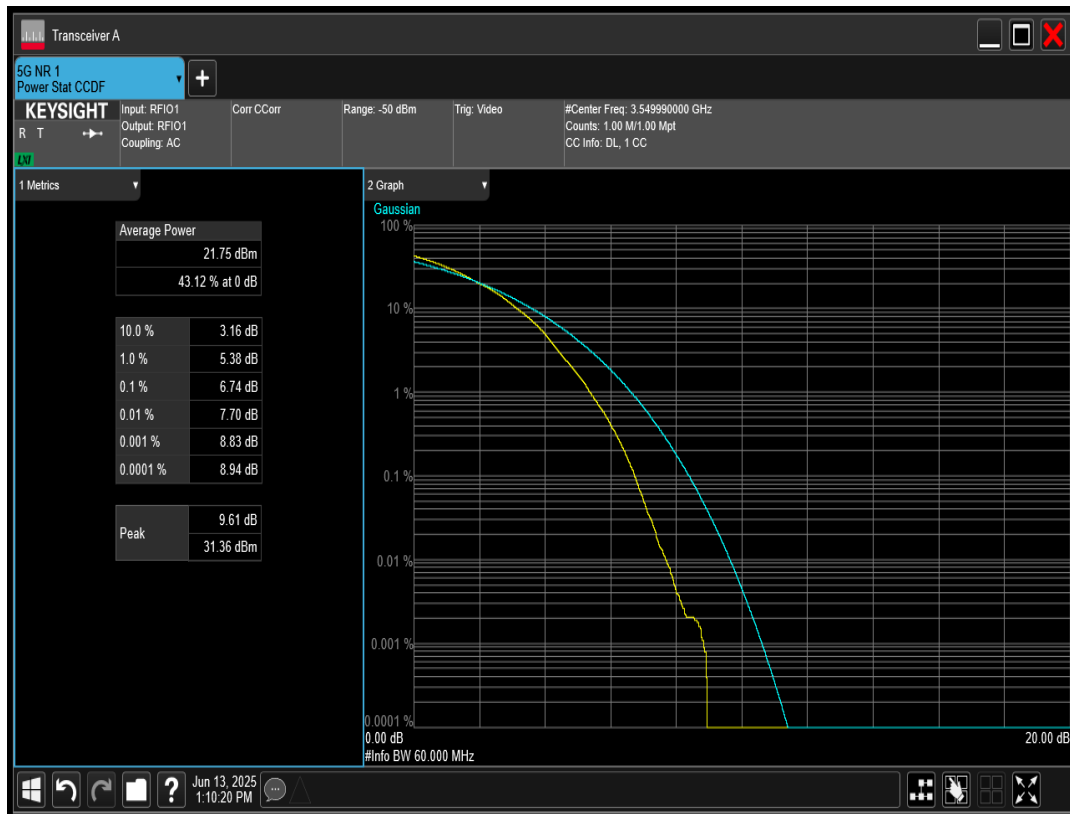

n78 SCS=30kHz DFT_QAM64 BW=60MHz Channel=622000 RB=162@0

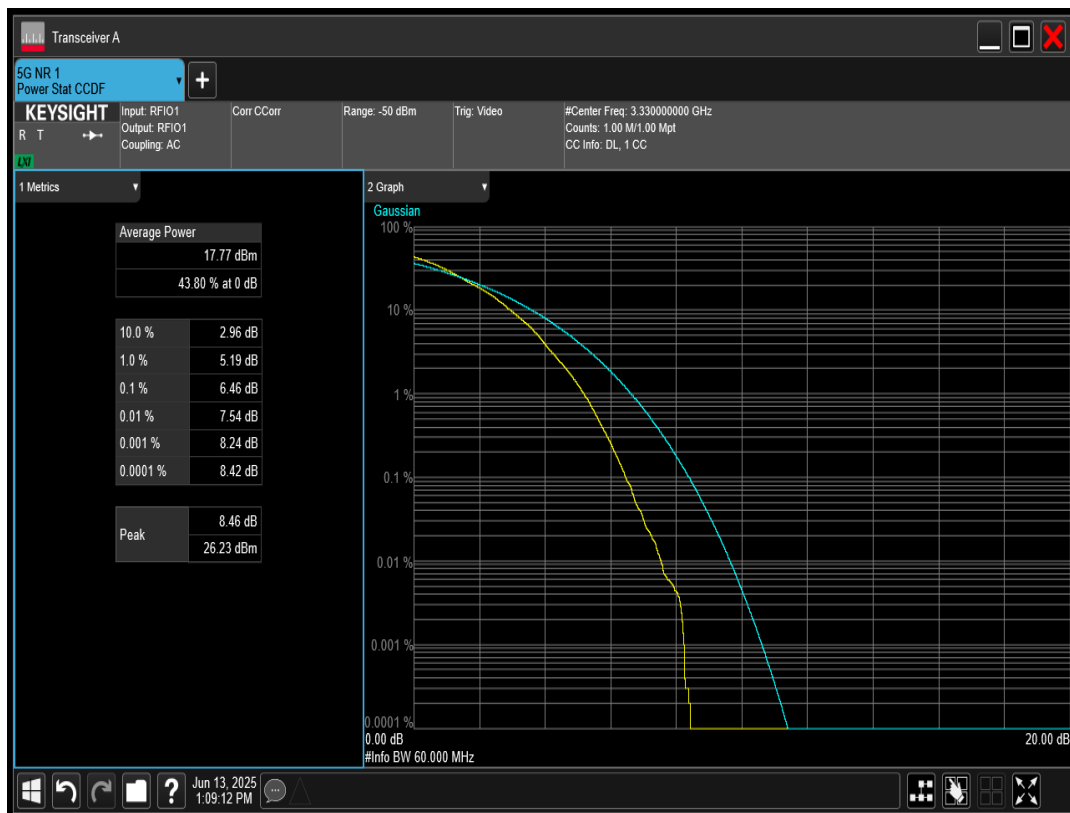

n78 SCS=30kHz DFT_QAM64 BW=60MHz Channel=651332 RB=162@0