

TABLE OF CONTENTS

1 Conducted output power for NR FR1	2
2 Frequency stability for NR FR1	4
3 Peak-to-Average Ratio for NR FR1	6
4 Occupied bandwidth for NR FR1	76
5 Band edge for NR FR1	100
6 Out-of-band emissions for NR FR1	110

1 Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Conducted output power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
n66	15	5	342500	1@1	DFT_BPSK	24.34	1.7	26.04	30	PASS
n66	15	5	342500	25@0	DFT_QPSK	23.54	1.7	25.24	30	PASS
n66	15	5	342500	12@6	DFT_QPSK	24.54	1.7	26.24	30	PASS
n66	15	5	342500	1@1	DFT_QPSK	24.36	1.7	26.06	30	PASS
n66	15	5	342500	1@23	DFT_QPSK	24.44	1.7	26.14	30	PASS
n66	15	5	342500	1@1	DFT_QAM16	23.42	1.7	25.12	30	PASS
n66	15	5	342500	1@1	DFT_QAM64	21.93	1.7	23.63	30	PASS
n66	15	5	342500	1@1	DFT_QAM256	19.93	1.7	21.63	30	PASS
n66	15	5	342500	1@1	CP_QPSK	23.06	1.7	24.76	30	PASS
n66	15	5	349000	1@1	DFT_BPSK	24.64	1.7	26.34	30	PASS
n66	15	5	349000	25@0	DFT_QPSK	23.69	1.7	25.39	30	PASS
n66	15	5	349000	12@6	DFT_QPSK	24.76	1.7	26.46	30	PASS
n66	15	5	349000	1@1	DFT_QPSK	25.06	1.7	26.76	30	PASS
n66	15	5	349000	1@23	DFT_QPSK	25.06	1.7	26.76	30	PASS
n66	15	5	349000	1@1	DFT_QAM16	23.5	1.7	25.2	30	PASS
n66	15	5	349000	1@1	DFT_QAM64	22.03	1.7	23.73	30	PASS
n66	15	5	349000	1@1	DFT_QAM256	20.28	1.7	21.98	30	PASS
n66	15	5	349000	1@1	CP_QPSK	23.36	1.7	25.06	30	PASS
n66	15	5	355500	1@1	DFT_BPSK	24.68	1.7	26.38	30	PASS
n66	15	5	355500	25@0	DFT_QPSK	23.59	1.7	25.29	30	PASS
n66	15	5	355500	12@6	DFT_QPSK	24.56	1.7	26.26	30	PASS
n66	15	5	355500	1@1	DFT_QPSK	24.81	1.7	26.51	30	PASS
n66	15	5	355500	1@23	DFT_QPSK	24.72	1.7	26.42	30	PASS
n66	15	5	355500	1@1	DFT_QAM16	23.89	1.7	25.59	30	PASS
n66	15	5	355500	1@1	DFT_QAM64	22.24	1.7	23.94	30	PASS
n66	15	5	355500	1@1	DFT_QAM256	20.25	1.7	21.95	30	PASS
n66	15	5	355500	1@1	CP_QPSK	23.18	1.7	24.88	30	PASS
n66	15	20	344000	1@1	DFT_BPSK	24.56	1.7	26.26	30	PASS
n66	15	20	344000	100@0	DFT_QPSK	23.59	1.7	25.29	30	PASS
n66	15	20	344000	50@25	DFT_QPSK	24.58	1.7	26.28	30	PASS
n66	15	20	344000	1@1	DFT_QPSK	24.5	1.7	26.2	30	PASS
n66	15	20	344000	1@104	DFT_QPSK	24.72	1.7	26.42	30	PASS
n66	15	20	344000	1@1	DFT_QAM16	23.94	1.7	25.64	30	PASS
n66	15	20	344000	1@1	DFT_QAM64	22.01	1.7	23.71	30	PASS
n66	15	20	344000	1@1	DFT_QAM256	20.13	1.7	21.83	30	PASS
n66	15	20	344000	1@1	CP_QPSK	22.81	1.7	24.51	30	PASS
n66	15	20	349000	1@1	DFT_BPSK	24.56	1.7	26.26	30	PASS

n66	15	20	349000	100@0	DFT_QPSK	23.66	1.7	25.36	30	PASS
n66	15	20	349000	50@25	DFT_QPSK	24.66	1.7	26.36	30	PASS
n66	15	20	349000	1@1	DFT_QPSK	24.81	1.7	26.51	30	PASS
n66	15	20	349000	1@104	DFT_QPSK	24.88	1.7	26.58	30	PASS
n66	15	20	349000	1@1	DFT_QAM16	23.75	1.7	25.45	30	PASS
n66	15	20	349000	1@1	DFT_QAM64	22.09	1.7	23.79	30	PASS
n66	15	20	349000	1@1	DFT_QAM256	20.1	1.7	21.8	30	PASS
n66	15	20	349000	1@1	CP_QPSK	23.01	1.7	24.71	30	PASS
n66	15	20	354000	1@1	DFT_BPSK	24.49	1.7	26.19	30	PASS
n66	15	20	354000	100@0	DFT_QPSK	23.7	1.7	25.4	30	PASS
n66	15	20	354000	50@25	DFT_QPSK	24.77	1.7	26.47	30	PASS
n66	15	20	354000	1@1	DFT_QPSK	24.75	1.7	26.45	30	PASS
n66	15	20	354000	1@104	DFT_QPSK	24.63	1.7	26.33	30	PASS
n66	15	20	354000	1@1	DFT_QAM16	23.94	1.7	25.64	30	PASS
n66	15	20	354000	1@1	DFT_QAM64	22.6	1.7	24.3	30	PASS
n66	15	20	354000	1@1	DFT_QAM256	20.55	1.7	22.25	30	PASS
n66	15	20	354000	1@1	CP_QPSK	23.45	1.7	25.15	30	PASS
n66	15	40	346000	1@1	DFT_BPSK	24.55	1.7	26.25	30	PASS
n66	15	40	346000	216@0	DFT_QPSK	23.64	1.7	25.34	30	PASS
n66	15	40	346000	108@54	DFT_QPSK	24.68	1.7	26.38	30	PASS
n66	15	40	346000	1@1	DFT_QPSK	24.47	1.7	26.17	30	PASS
n66	15	40	346000	1@214	DFT_QPSK	24.6	1.7	26.3	30	PASS
n66	15	40	346000	1@1	DFT_QAM16	23.58	1.7	25.28	30	PASS
n66	15	40	346000	1@1	DFT_QAM64	22.21	1.7	23.91	30	PASS
n66	15	40	346000	1@1	DFT_QAM256	20.02	1.7	21.72	30	PASS
n66	15	40	346000	1@1	CP_QPSK	23.1	1.7	24.8	30	PASS
n66	15	40	349000	1@1	DFT_BPSK	24.6	1.7	26.3	30	PASS
n66	15	40	349000	216@0	DFT_QPSK	23.64	1.7	25.34	30	PASS
n66	15	40	349000	108@54	DFT_QPSK	24.75	1.7	26.45	30	PASS
n66	15	40	349000	1@1	DFT_QPSK	24.58	1.7	26.28	30	PASS
n66	15	40	349000	1@214	DFT_QPSK	24.71	1.7	26.41	30	PASS
n66	15	40	349000	1@1	DFT_QAM16	23.86	1.7	25.56	30	PASS
n66	15	40	349000	1@1	DFT_QAM64	22.27	1.7	23.97	30	PASS
n66	15	40	349000	1@1	DFT_QAM256	20.42	1.7	22.12	30	PASS
n66	15	40	349000	1@1	CP_QPSK	23.17	1.7	24.87	30	PASS
n66	15	40	352000	1@1	DFT_BPSK	24.61	1.7	26.31	30	PASS
n66	15	40	352000	216@0	DFT_QPSK	23.71	1.7	25.41	30	PASS
n66	15	40	352000	108@54	DFT_QPSK	24.76	1.7	26.46	30	PASS
n66	15	40	352000	1@1	DFT_QPSK	24.63	1.7	26.33	30	PASS
n66	15	40	352000	1@214	DFT_QPSK	24.56	1.7	26.26	30	PASS
n66	15	40	352000	1@1	DFT_QAM16	23.45	1.7	25.15	30	PASS
n66	15	40	352000	1@1	DFT_QAM64	22.07	1.7	23.77	30	PASS
n66	15	40	352000	1@1	DFT_QAM256	20.2	1.7	21.9	30	PASS
n66	15	40	352000	1@1	CP_QPSK	23.34	1.7	25.04	30	PASS

2 Frequency stability for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n66	15	5	342500	12@6	DFT_BPSK	-2.67	-0.00156	-2.5	2.5	PASS
n66	15	5	342500	1@1	DFT_BPSK	-3.21	-0.00187	-2.5	2.5	PASS
n66	15	5	342500	1@23	DFT_BPSK	-4.82	-0.00281	-2.5	2.5	PASS
n66	15	5	342500	12@6	DFT_QPSK	1.72	0.00100	-2.5	2.5	PASS
n66	15	5	342500	1@1	DFT_QPSK	0.29	0.00017	-2.5	2.5	PASS
n66	15	5	342500	1@23	DFT_QPSK	1.06	0.00062	-2.5	2.5	PASS
n66	15	5	349000	12@6	DFT_BPSK	-1.64	-0.00094	-2.5	2.5	PASS
n66	15	5	349000	1@1	DFT_BPSK	-1.09	-0.00062	-2.5	2.5	PASS
n66	15	5	349000	1@23	DFT_BPSK	-1.93	-0.00111	-2.5	2.5	PASS
n66	15	5	349000	12@6	DFT_QPSK	-2.11	-0.00121	-2.5	2.5	PASS
n66	15	5	349000	1@1	DFT_QPSK	-2.35	-0.00135	-2.5	2.5	PASS
n66	15	5	349000	1@23	DFT_QPSK	-2.10	-0.00120	-2.5	2.5	PASS
n66	15	5	355500	12@6	DFT_BPSK	-0.05	-0.00003	-2.5	2.5	PASS
n66	15	5	355500	1@1	DFT_BPSK	0.20	0.00011	-2.5	2.5	PASS
n66	15	5	355500	1@23	DFT_BPSK	0.53	0.00030	-2.5	2.5	PASS
n66	15	5	355500	12@6	DFT_QPSK	-1.16	-0.00065	-2.5	2.5	PASS
n66	15	5	355500	1@1	DFT_QPSK	-2.23	-0.00125	-2.5	2.5	PASS
n66	15	5	355500	1@23	DFT_QPSK	-0.86	-0.00048	-2.5	2.5	PASS
n66	15	20	344000	50@25	DFT_BPSK	-0.55	-0.00032	-2.5	2.5	PASS
n66	15	20	344000	1@1	DFT_BPSK	-1.29	-0.00075	-2.5	2.5	PASS
n66	15	20	344000	1@104	DFT_BPSK	-1.40	-0.00081	-2.5	2.5	PASS
n66	15	20	344000	50@25	DFT_QPSK	-4.73	-0.00275	-2.5	2.5	PASS
n66	15	20	344000	1@1	DFT_QPSK	-5.84	-0.00340	-2.5	2.5	PASS
n66	15	20	344000	1@104	DFT_QPSK	-5.68	-0.00330	-2.5	2.5	PASS
n66	15	20	349000	50@25	DFT_BPSK	-0.86	-0.00049	-2.5	2.5	PASS
n66	15	20	349000	1@1	DFT_BPSK	-0.57	-0.00033	-2.5	2.5	PASS
n66	15	20	349000	1@104	DFT_BPSK	-0.76	-0.00044	-2.5	2.5	PASS
n66	15	20	349000	50@25	DFT_QPSK	-1.76	-0.00101	-2.5	2.5	PASS
n66	15	20	349000	1@1	DFT_QPSK	-0.66	-0.00038	-2.5	2.5	PASS
n66	15	20	349000	1@104	DFT_QPSK	-1.62	-0.00093	-2.5	2.5	PASS
n66	15	20	354000	50@25	DFT_BPSK	-2.20	-0.00124	-2.5	2.5	PASS
n66	15	20	354000	1@1	DFT_BPSK	-2.62	-0.00148	-2.5	2.5	PASS
n66	15	20	354000	1@104	DFT_BPSK	-4.04	-0.00228	-2.5	2.5	PASS
n66	15	20	354000	50@25	DFT_QPSK	-4.62	-0.00261	-2.5	2.5	PASS
n66	15	20	354000	1@1	DFT_QPSK	-5.10	-0.00288	-2.5	2.5	PASS
n66	15	20	354000	1@104	DFT_QPSK	-4.23	-0.00239	-2.5	2.5	PASS
n66	15	40	346000	108@54	DFT_BPSK	-3.16	-0.00183	-2.5	2.5	PASS
n66	15	40	346000	1@1	DFT_BPSK	-2.69	-0.00155	-2.5	2.5	PASS
n66	15	40	346000	1@214	DFT_BPSK	-1.69	-0.00098	-2.5	2.5	PASS


n66	15	40	346000	108@54	DFT_QPSK	-3.45	-0.00199	-2.5	2.5	PASS
n66	15	40	346000	1@1	DFT_QPSK	-2.69	-0.00155	-2.5	2.5	PASS
n66	15	40	346000	1@214	DFT_QPSK	-2.88	-0.00166	-2.5	2.5	PASS
n66	15	40	349000	108@54	DFT_BPSK	-0.86	-0.00049	-2.5	2.5	PASS
n66	15	40	349000	1@1	DFT_BPSK	-1.17	-0.00067	-2.5	2.5	PASS
n66	15	40	349000	1@214	DFT_BPSK	-1.15	-0.00066	-2.5	2.5	PASS
n66	15	40	349000	108@54	DFT_QPSK	0.53	0.00030	-2.5	2.5	PASS
n66	15	40	349000	1@1	DFT_QPSK	-0.01	-0.00001	-2.5	2.5	PASS
n66	15	40	349000	1@214	DFT_QPSK	-0.96	-0.00055	-2.5	2.5	PASS
n66	15	40	352000	108@54	DFT_BPSK	-0.43	-0.00024	-2.5	2.5	PASS
n66	15	40	352000	1@1	DFT_BPSK	-1.75	-0.00099	-2.5	2.5	PASS
n66	15	40	352000	1@214	DFT_BPSK	-0.56	-0.00032	-2.5	2.5	PASS
n66	15	40	352000	108@54	DFT_QPSK	-3.78	-0.00215	-2.5	2.5	PASS
n66	15	40	352000	1@1	DFT_QPSK	-3.21	-0.00182	-2.5	2.5	PASS
n66	15	40	352000	1@214	DFT_QPSK	-3.92	-0.00223	-2.5	2.5	PASS

3 Peak-to-Average Ratio for NR FR1


<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
n66	15	5	342500	25@0	DFT_BPSK	4.46	13	PASS
n66	15	5	342500	25@0	DFT_QPSK	5.67	13	PASS
n66	15	5	342500	25@0	DFT_QAM16	6.11	13	PASS
n66	15	5	342500	25@0	DFT_QAM64	6.65	13	PASS
n66	15	5	342500	25@0	DFT_QAM256	6.88	13	PASS
n66	15	5	349000	25@0	DFT_BPSK	4.18	13	PASS
n66	15	5	349000	25@0	DFT_QPSK	5.21	13	PASS
n66	15	5	349000	25@0	DFT_QAM16	6.00	13	PASS
n66	15	5	349000	25@0	DFT_QAM64	6.21	13	PASS
n66	15	5	349000	25@0	DFT_QAM256	6.30	13	PASS
n66	15	5	355500	25@0	DFT_BPSK	4.39	13	PASS
n66	15	5	355500	25@0	DFT_QPSK	5.58	13	PASS
n66	15	5	355500	25@0	DFT_QAM16	6.25	13	PASS
n66	15	5	355500	25@0	DFT_QAM64	6.77	13	PASS
n66	15	5	355500	25@0	DFT_QAM256	6.82	13	PASS
n66	15	10	343000	50@0	DFT_BPSK	4.48	13	PASS
n66	15	10	343000	50@0	DFT_QPSK	5.58	13	PASS
n66	15	10	343000	50@0	DFT_QAM16	6.32	13	PASS
n66	15	10	343000	50@0	DFT_QAM64	6.51	13	PASS
n66	15	10	343000	50@0	DFT_QAM256	6.51	13	PASS
n66	15	10	349000	50@0	DFT_BPSK	4.56	13	PASS
n66	15	10	349000	50@0	DFT_QPSK	5.33	13	PASS
n66	15	10	349000	50@0	DFT_QAM16	6.12	13	PASS
n66	15	10	349000	50@0	DFT_QAM64	6.39	13	PASS
n66	15	10	349000	50@0	DFT_QAM256	6.53	13	PASS
n66	15	10	355000	50@0	DFT_BPSK	4.32	13	PASS
n66	15	10	355000	50@0	DFT_QPSK	5.48	13	PASS
n66	15	10	355000	50@0	DFT_QAM16	6.22	13	PASS
n66	15	10	355000	50@0	DFT_QAM64	6.43	13	PASS
n66	15	10	355000	50@0	DFT_QAM256	6.54	13	PASS
n66	15	15	343500	75@0	DFT_BPSK	4.44	13	PASS
n66	15	15	343500	75@0	DFT_QPSK	5.59	13	PASS
n66	15	15	343500	75@0	DFT_QAM16	6.46	13	PASS
n66	15	15	343500	75@0	DFT_QAM64	6.80	13	PASS
n66	15	15	343500	75@0	DFT_QAM256	6.67	13	PASS
n66	15	15	349000	75@0	DFT_BPSK	4.34	13	PASS
n66	15	15	349000	75@0	DFT_QPSK	5.47	13	PASS
n66	15	15	349000	75@0	DFT_QAM16	6.14	13	PASS
n66	15	15	349000	75@0	DFT_QAM64	6.32	13	PASS

n66	15	15	349000	75@0	DFT_QAM256	6.47	13	PASS
n66	15	15	354500	75@0	DFT_BPSK	4.34	13	PASS
n66	15	15	354500	75@0	DFT_QPSK	5.52	13	PASS
n66	15	15	354500	75@0	DFT_QAM16	6.33	13	PASS
n66	15	15	354500	75@0	DFT_QAM64	6.61	13	PASS
n66	15	15	354500	75@0	DFT_QAM256	6.66	13	PASS
n66	15	20	344000	100@0	DFT_BPSK	5.15	13	PASS
n66	15	20	344000	100@0	DFT_QPSK	5.68	13	PASS
n66	15	20	344000	100@0	DFT_QAM16	6.44	13	PASS
n66	15	20	344000	100@0	DFT_QAM64	6.57	13	PASS
n66	15	20	344000	100@0	DFT_QAM256	6.55	13	PASS
n66	15	20	349000	100@0	DFT_BPSK	4.30	13	PASS
n66	15	20	349000	100@0	DFT_QPSK	5.46	13	PASS
n66	15	20	349000	100@0	DFT_QAM16	6.21	13	PASS
n66	15	20	349000	100@0	DFT_QAM64	6.28	13	PASS
n66	15	20	349000	100@0	DFT_QAM256	6.62	13	PASS
n66	15	20	354000	100@0	DFT_BPSK	4.28	13	PASS
n66	15	20	354000	100@0	DFT_QPSK	5.55	13	PASS
n66	15	20	354000	100@0	DFT_QAM16	6.20	13	PASS
n66	15	20	354000	100@0	DFT_QAM64	6.53	13	PASS
n66	15	20	354000	100@0	DFT_QAM256	6.56	13	PASS
n66	15	40	346000	216@0	DFT_BPSK	4.39	13	PASS
n66	15	40	346000	216@0	DFT_QPSK	5.52	13	PASS
n66	15	40	346000	216@0	DFT_QAM16	6.31	13	PASS
n66	15	40	346000	216@0	DFT_QAM64	6.49	13	PASS
n66	15	40	346000	216@0	DFT_QAM256	6.58	13	PASS
n66	15	40	349000	216@0	DFT_BPSK	4.25	13	PASS
n66	15	40	349000	216@0	DFT_QPSK	5.48	13	PASS
n66	15	40	349000	216@0	DFT_QAM16	6.18	13	PASS
n66	15	40	349000	216@0	DFT_QAM64	6.38	13	PASS
n66	15	40	349000	216@0	DFT_QAM256	6.48	13	PASS
n66	15	40	352000	216@0	DFT_BPSK	4.49	13	PASS
n66	15	40	352000	216@0	DFT_QPSK	5.49	13	PASS
n66	15	40	352000	216@0	DFT_QAM16	6.28	13	PASS
n66	15	40	352000	216@0	DFT_QAM64	6.53	13	PASS
n66	15	40	352000	216@0	DFT_QAM256	6.56	13	PASS


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=343000 RB=50@0

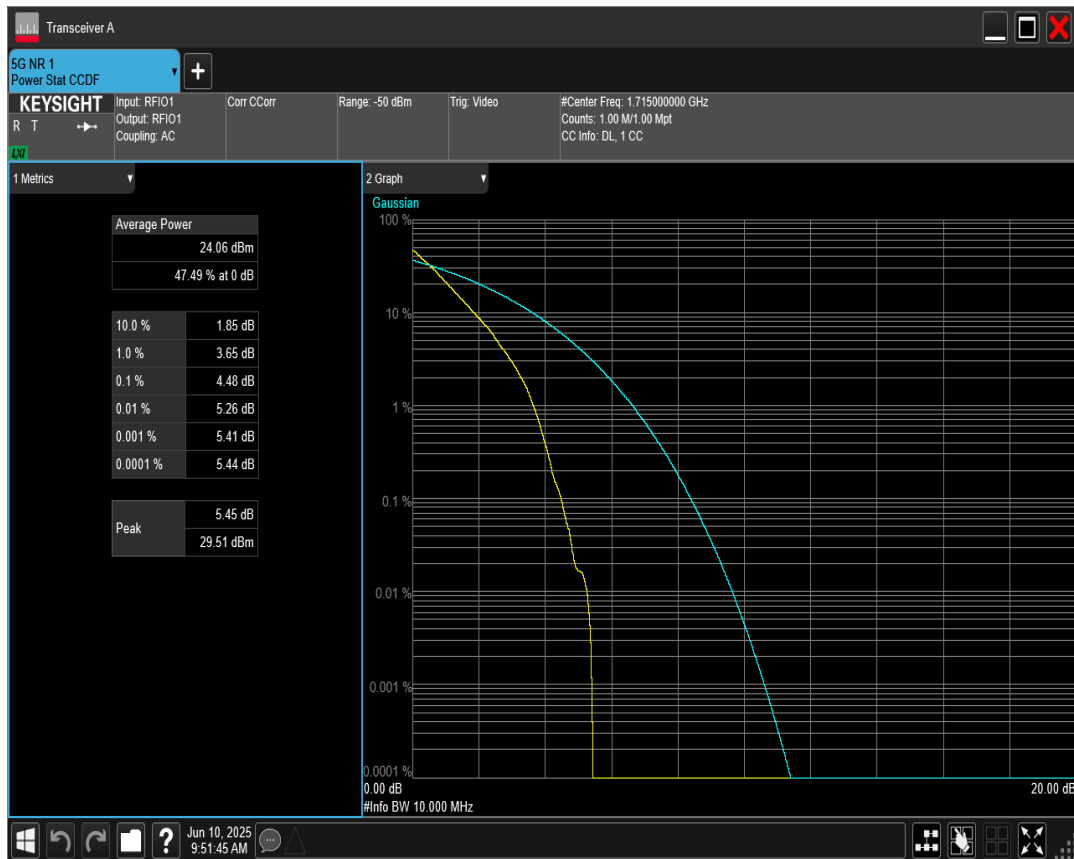


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=349000 RB=50@0

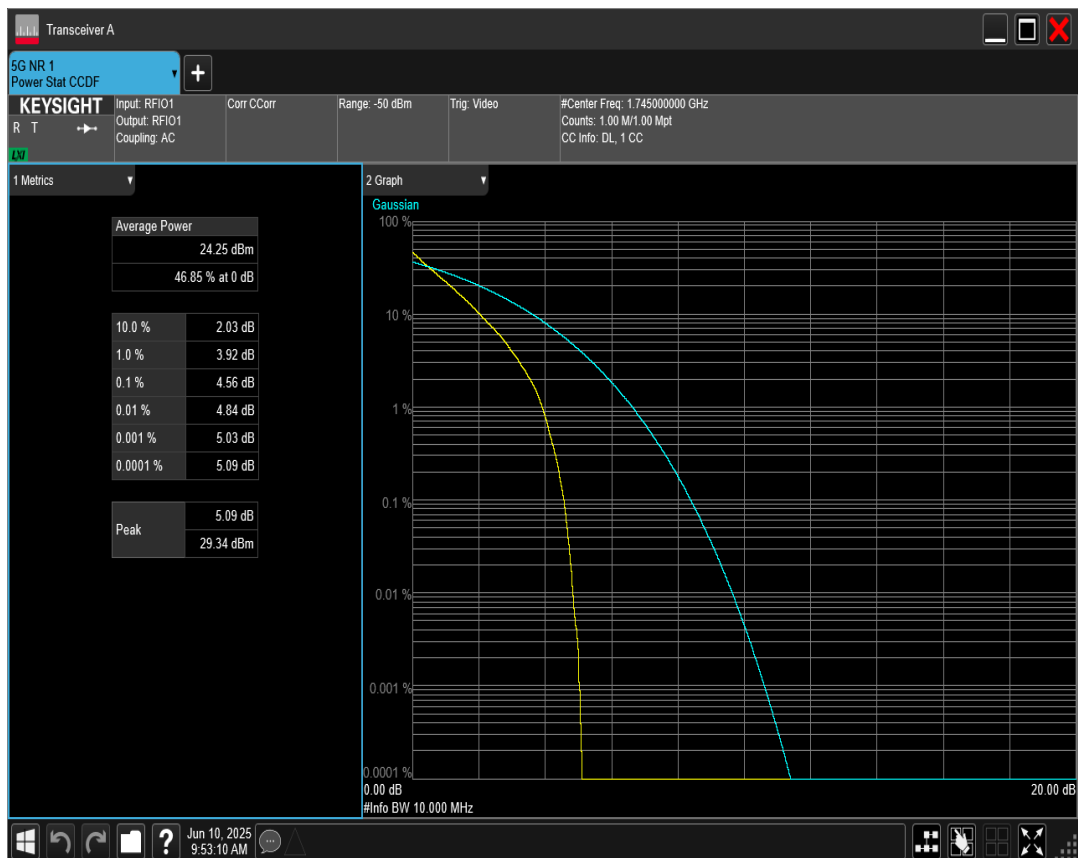


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=355000 RB=50@0

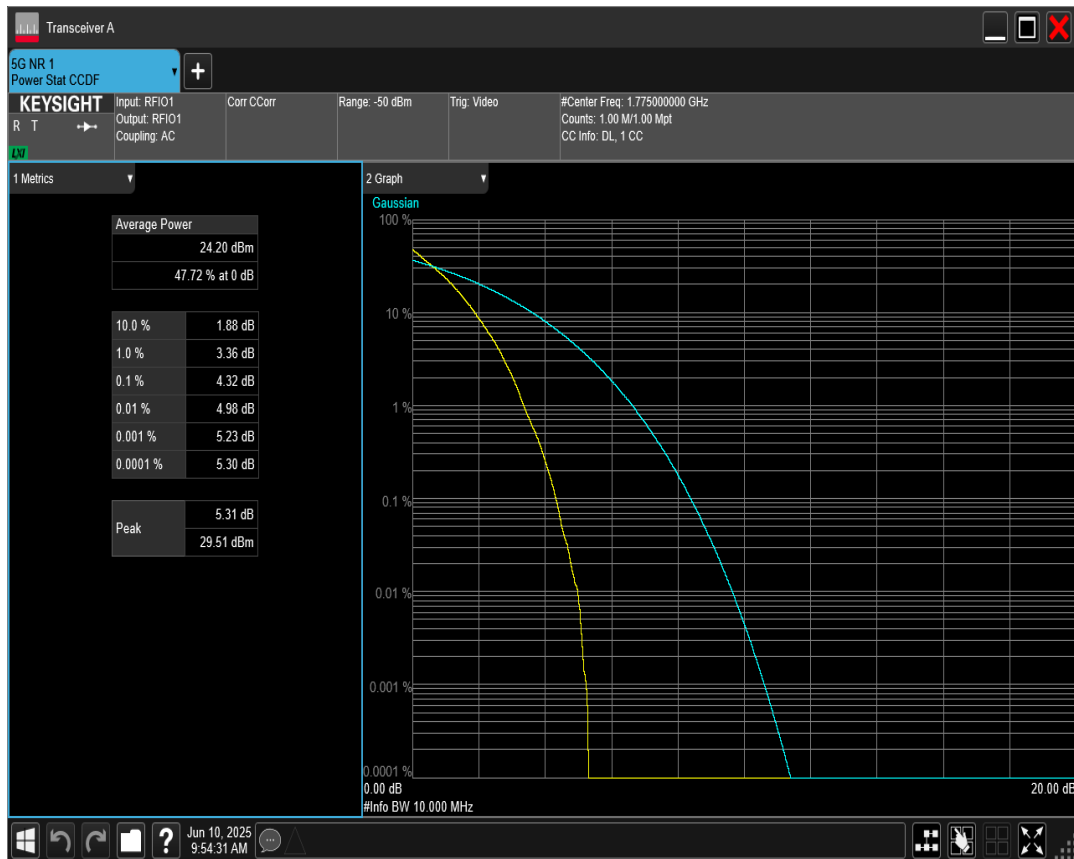


n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=349000 RB=75@0

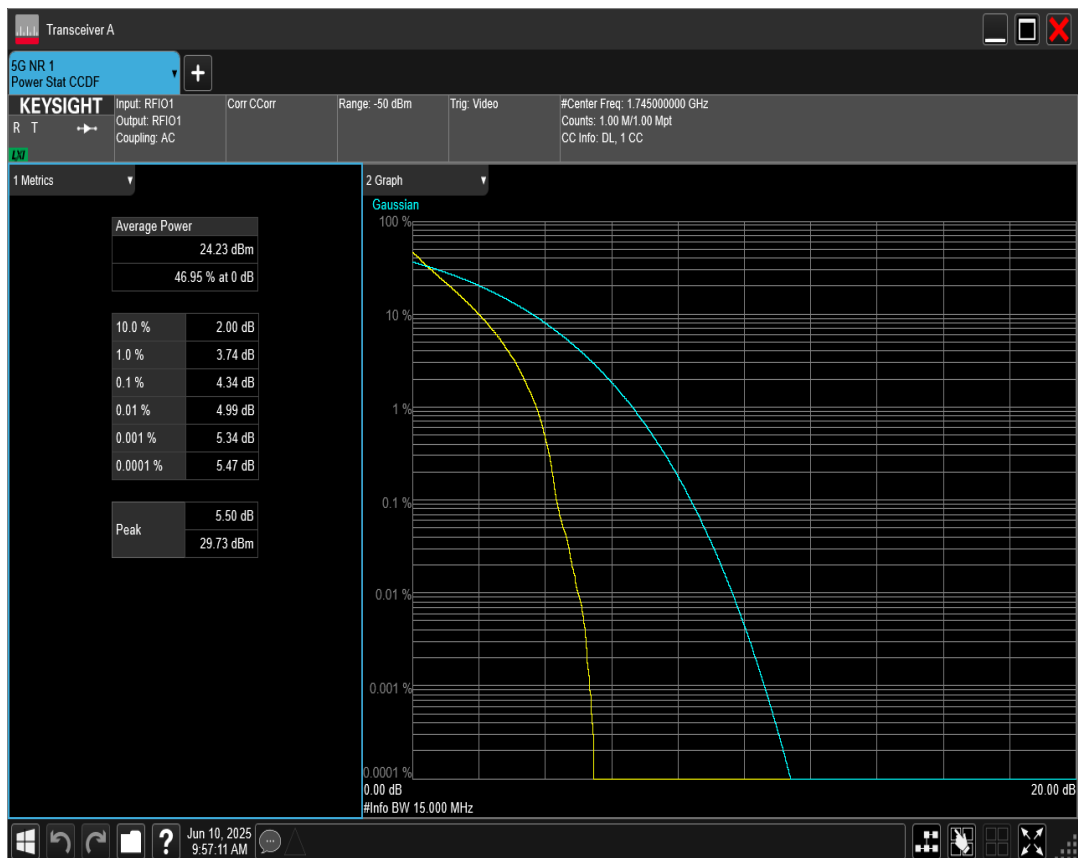


n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=343500 RB=75@0

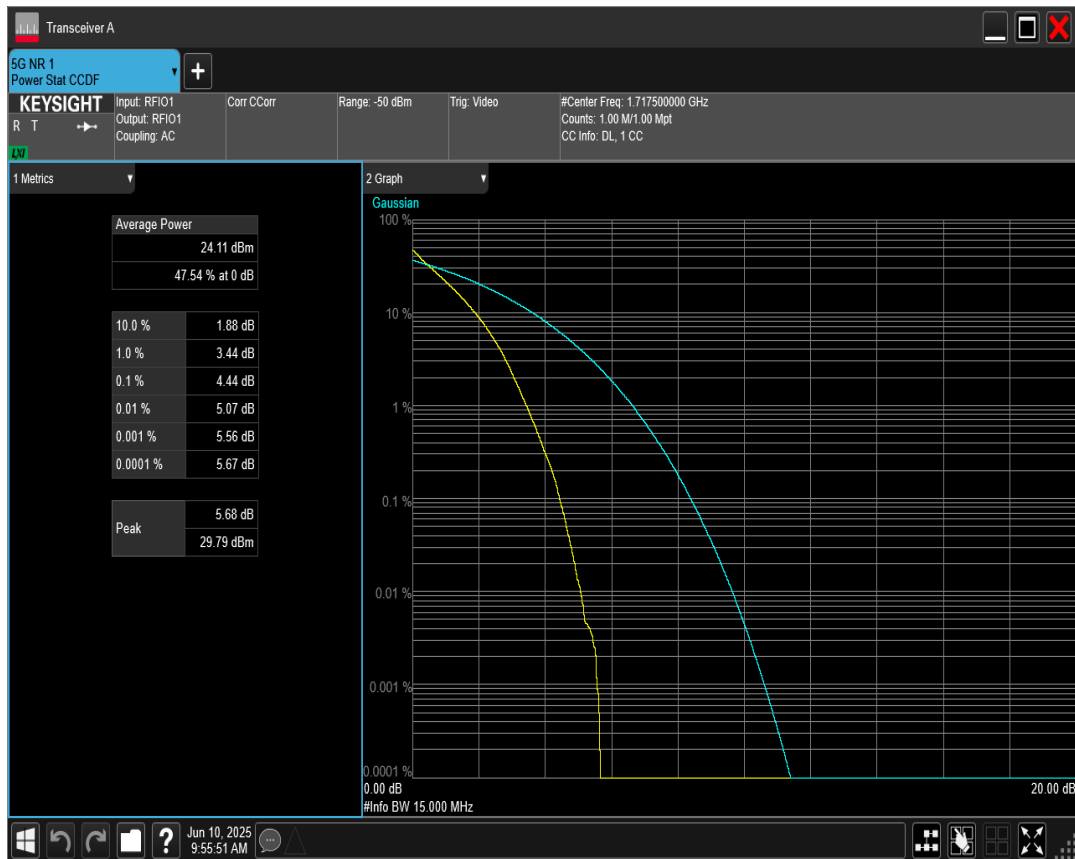


n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=344000 RB=100@0

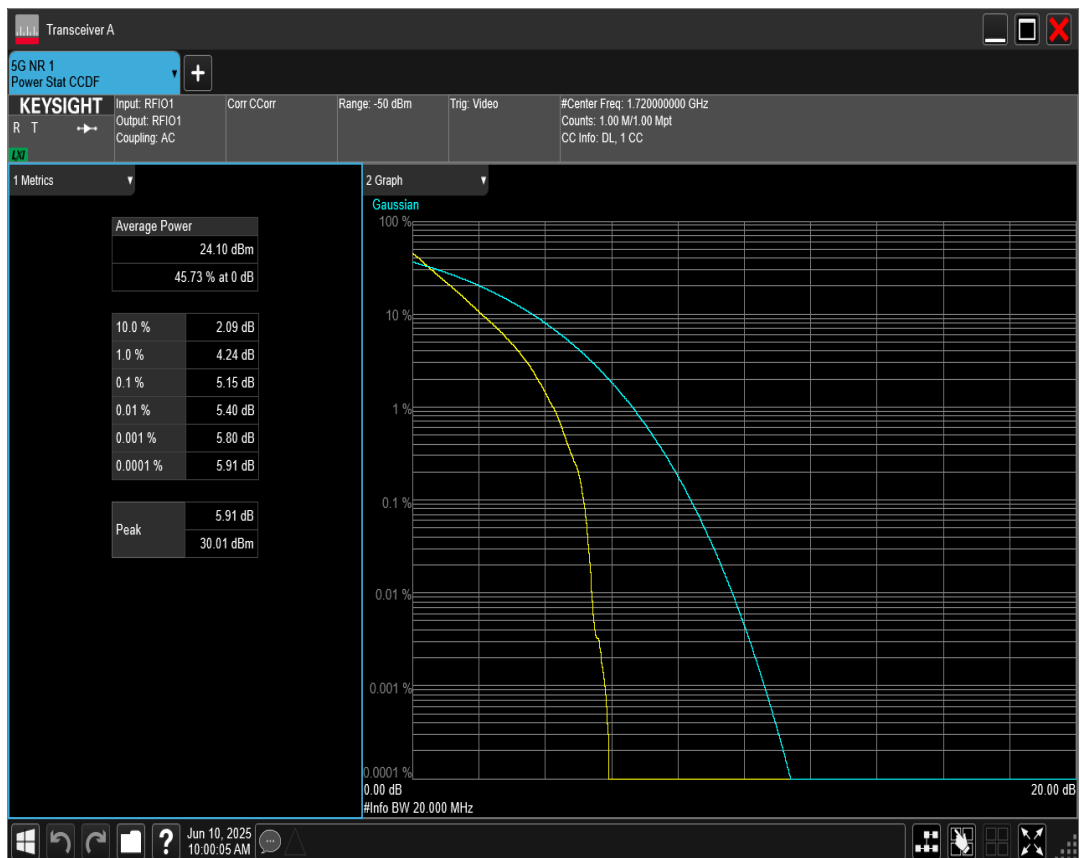


n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=354500 RB=75@0

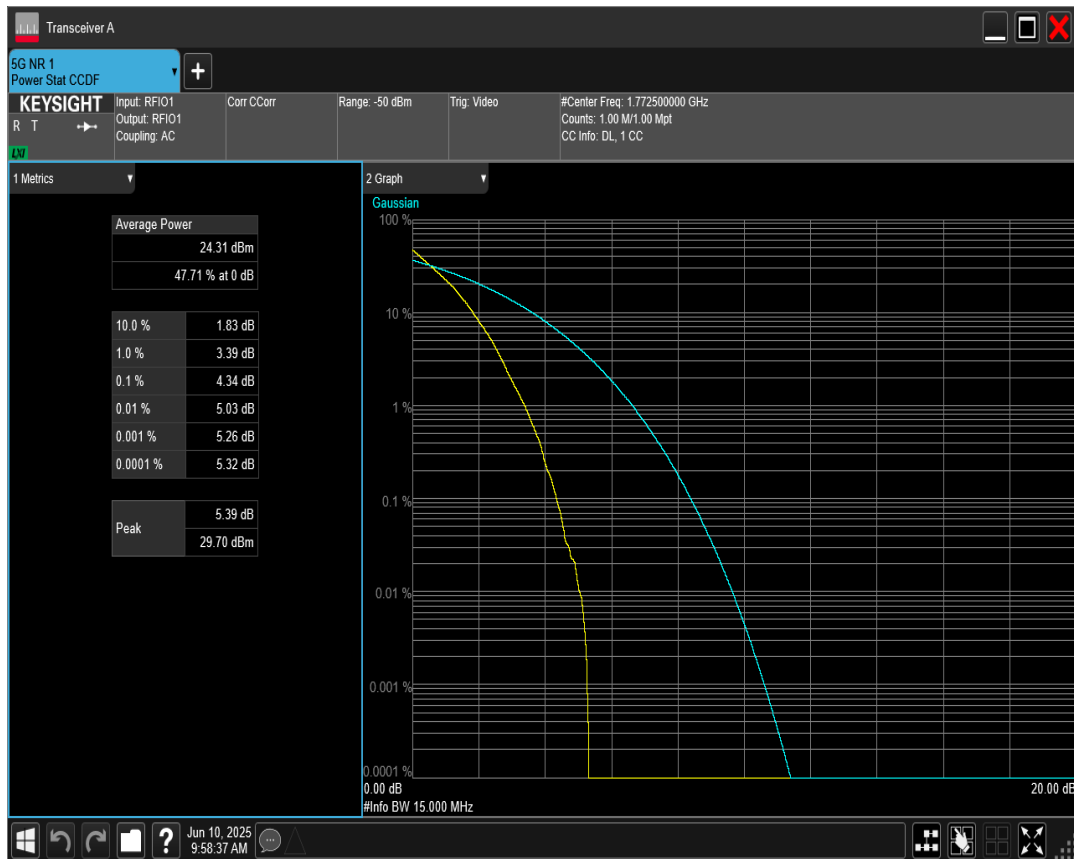


n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=354000 RB=100@0

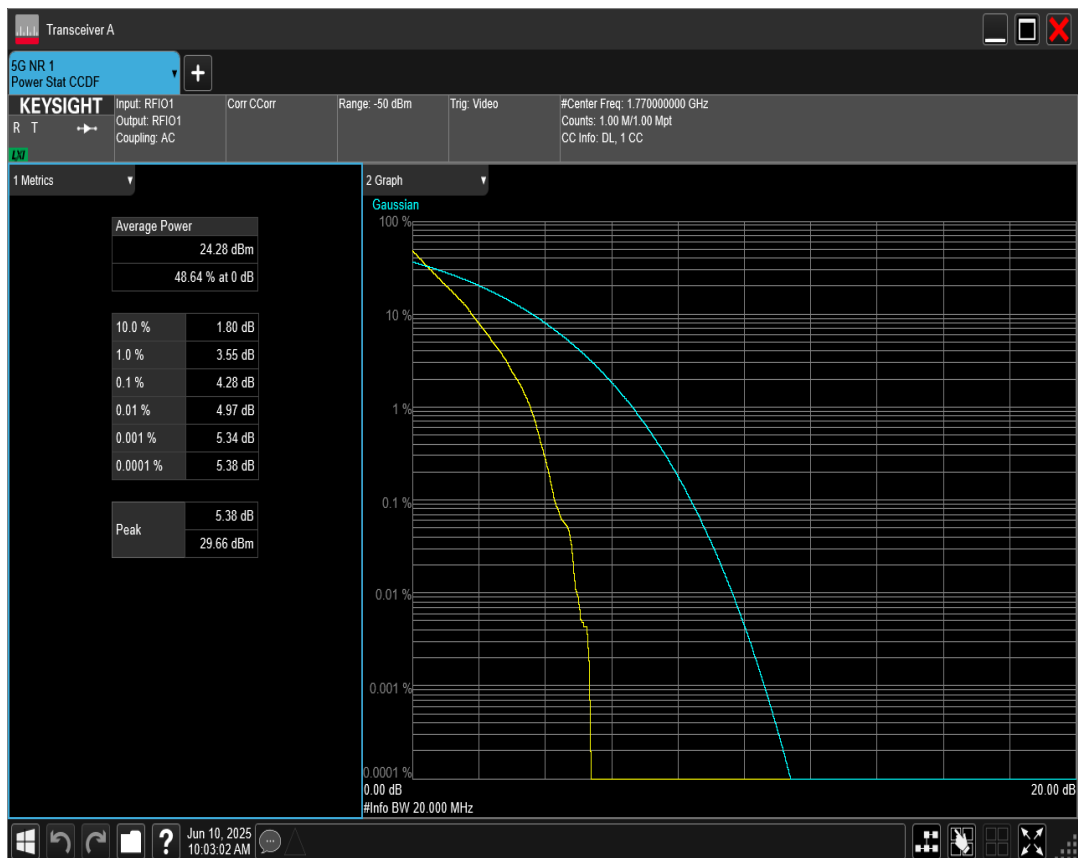


n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=349000 RB=100@0

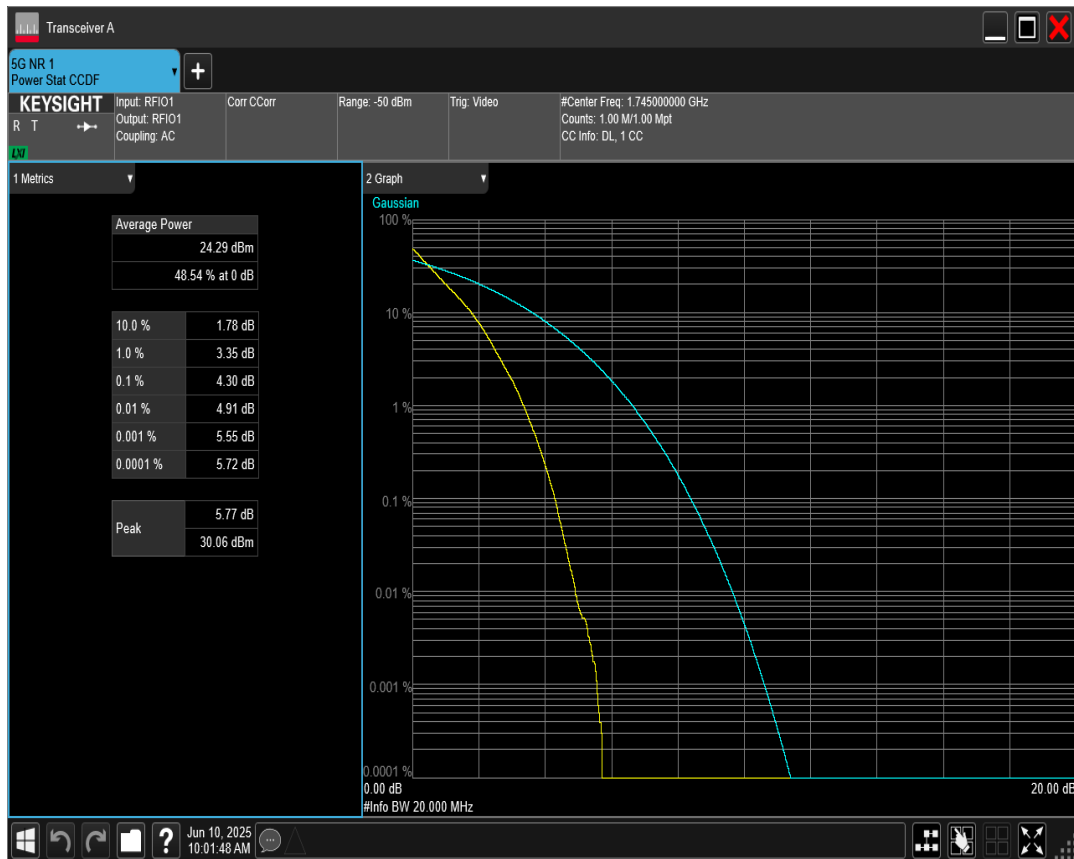


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=349000 RB=216@0

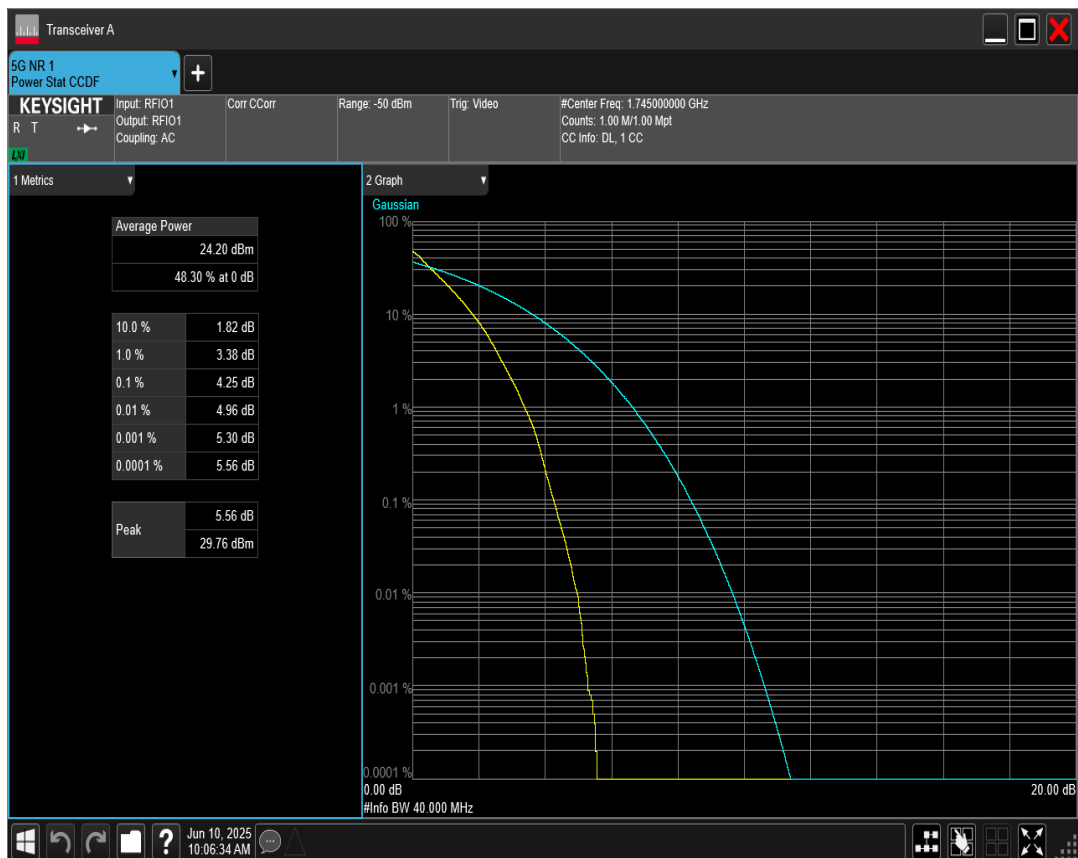


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=346000 RB=216@0

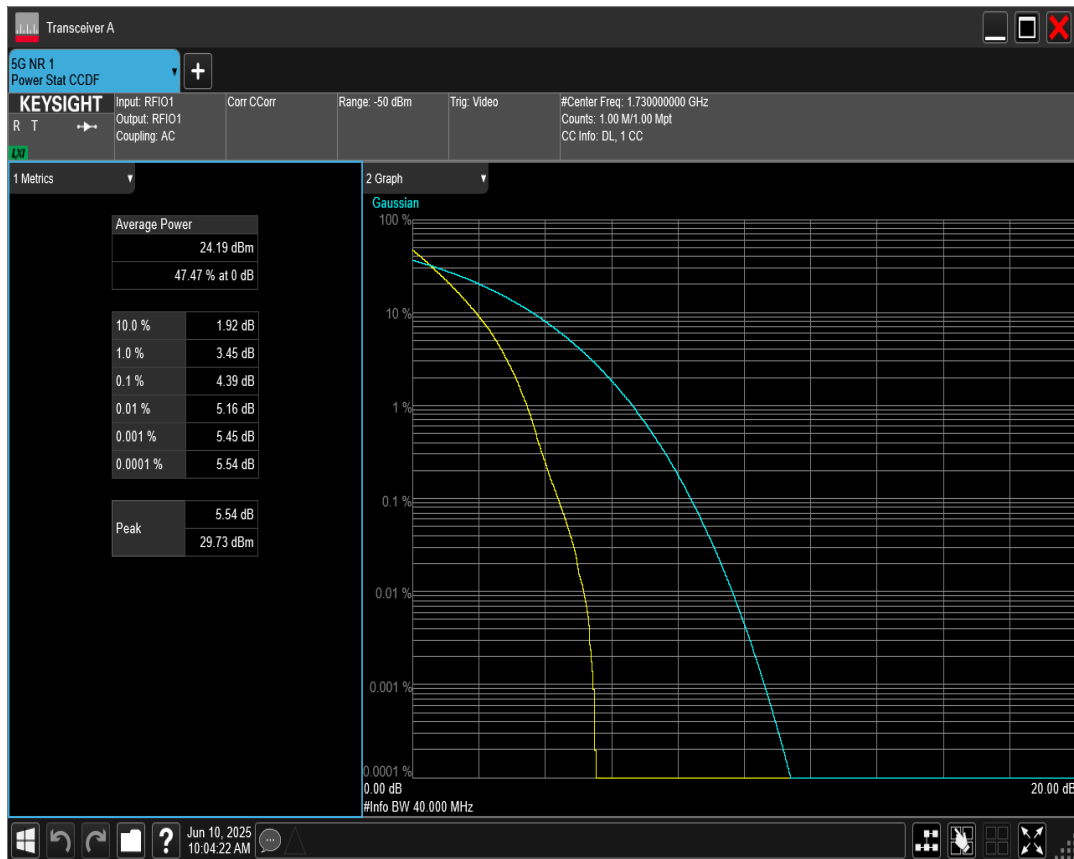


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=352000 RB=216@0

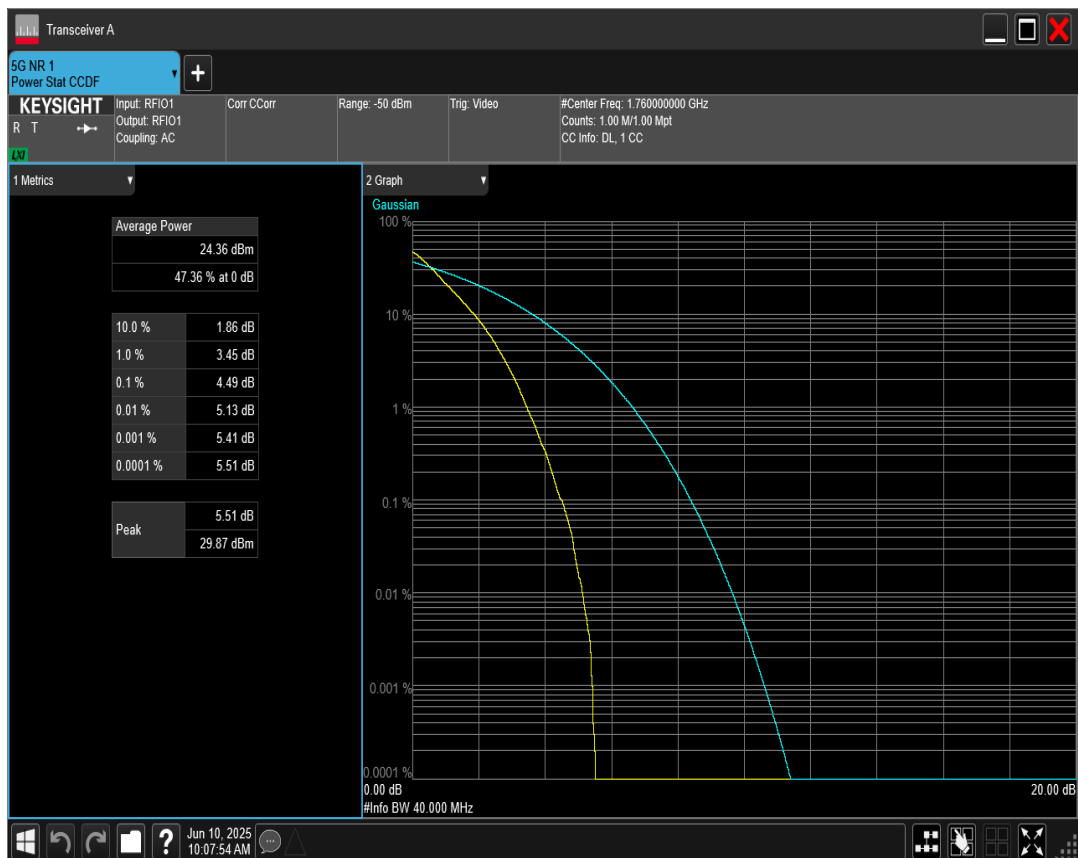


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=349000 RB=25@0

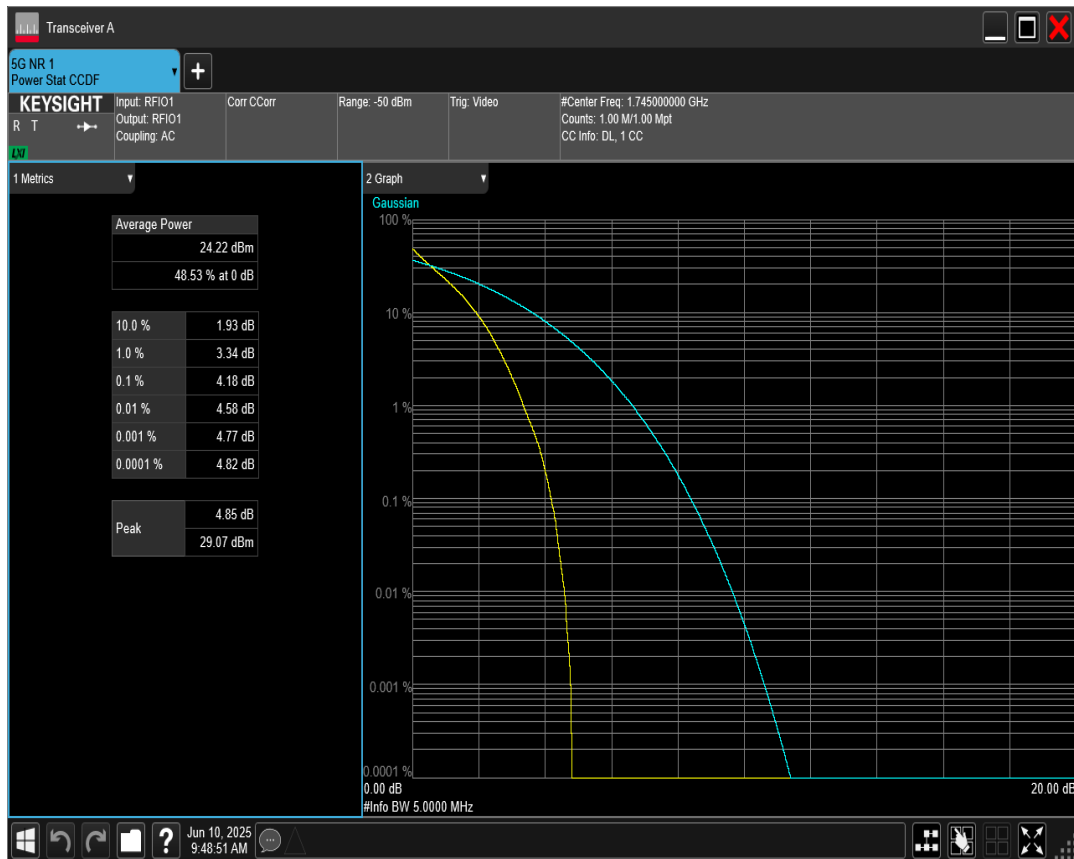


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=342500 RB=25@0

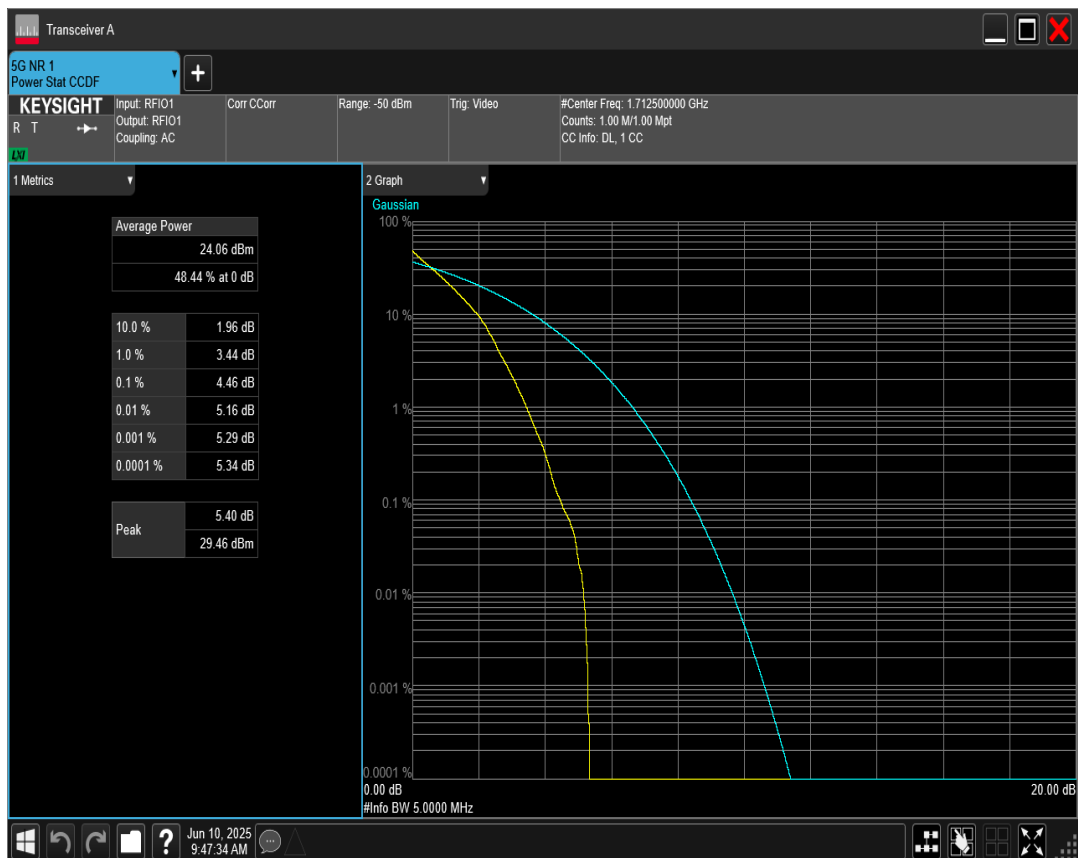


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=355500 RB=25@0

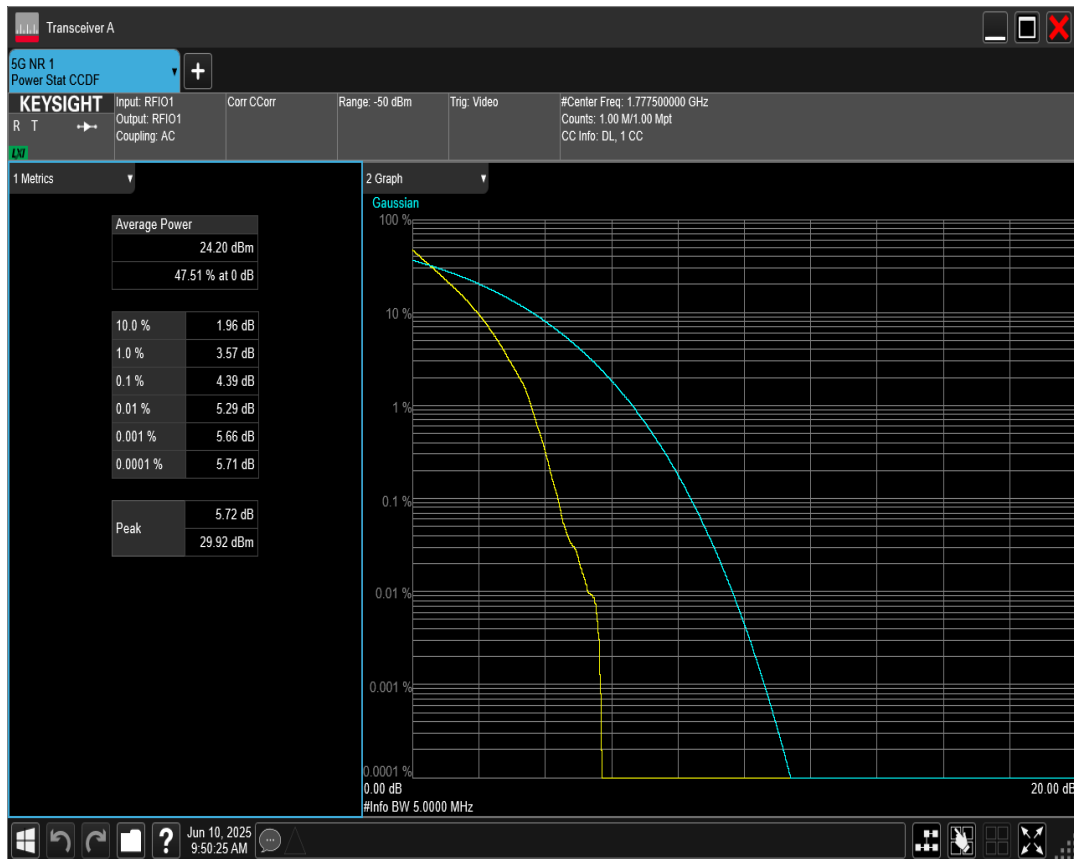


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=343000 RB=50@0

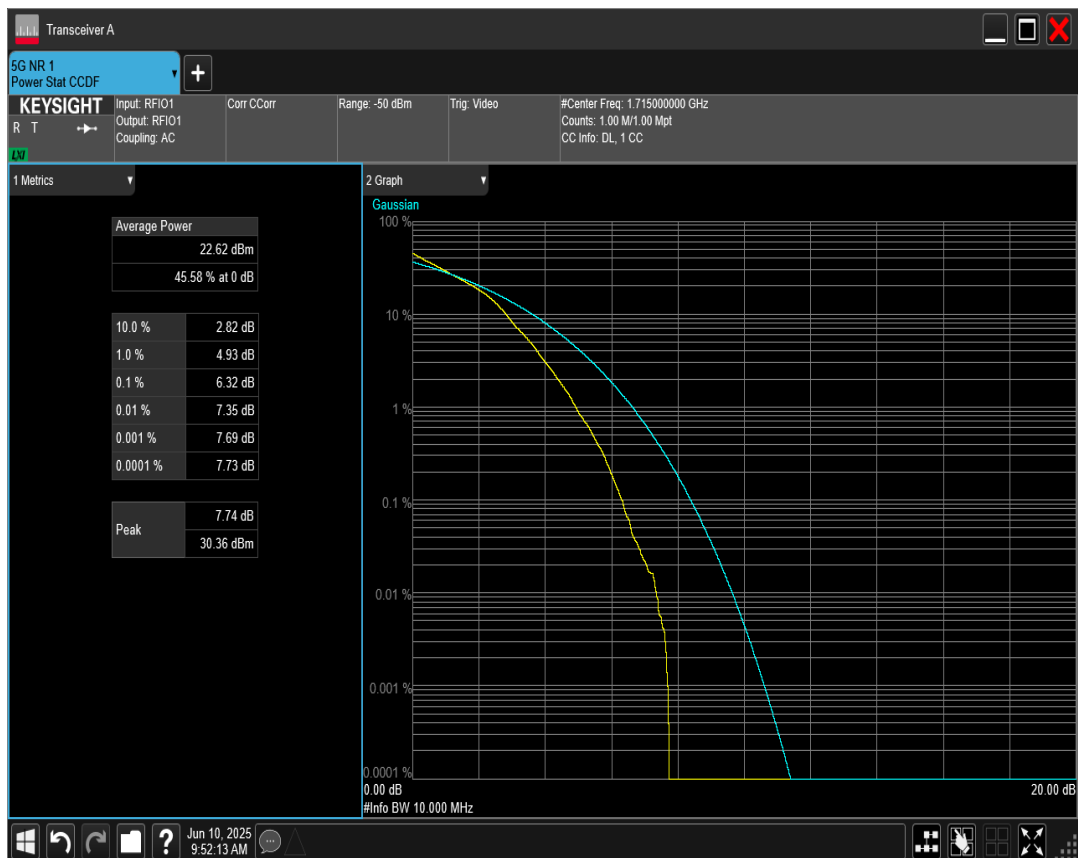


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=355000 RB=50@0

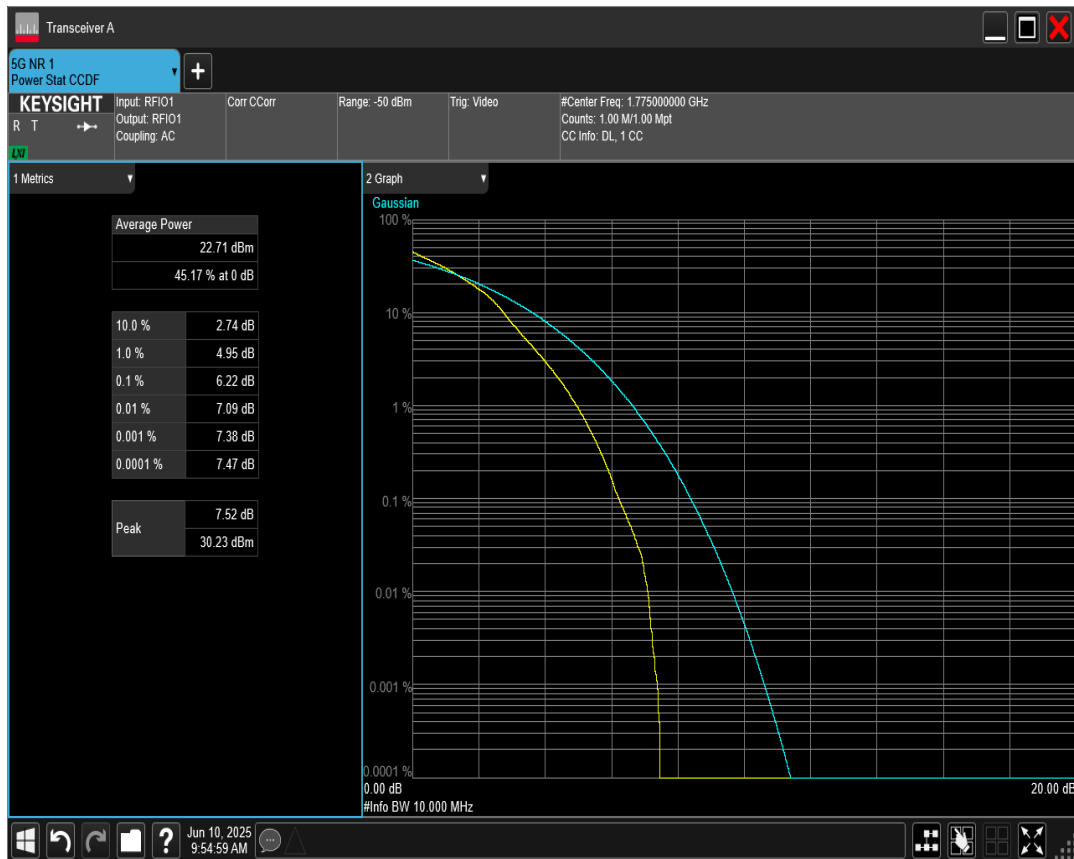


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=349000 RB=50@0

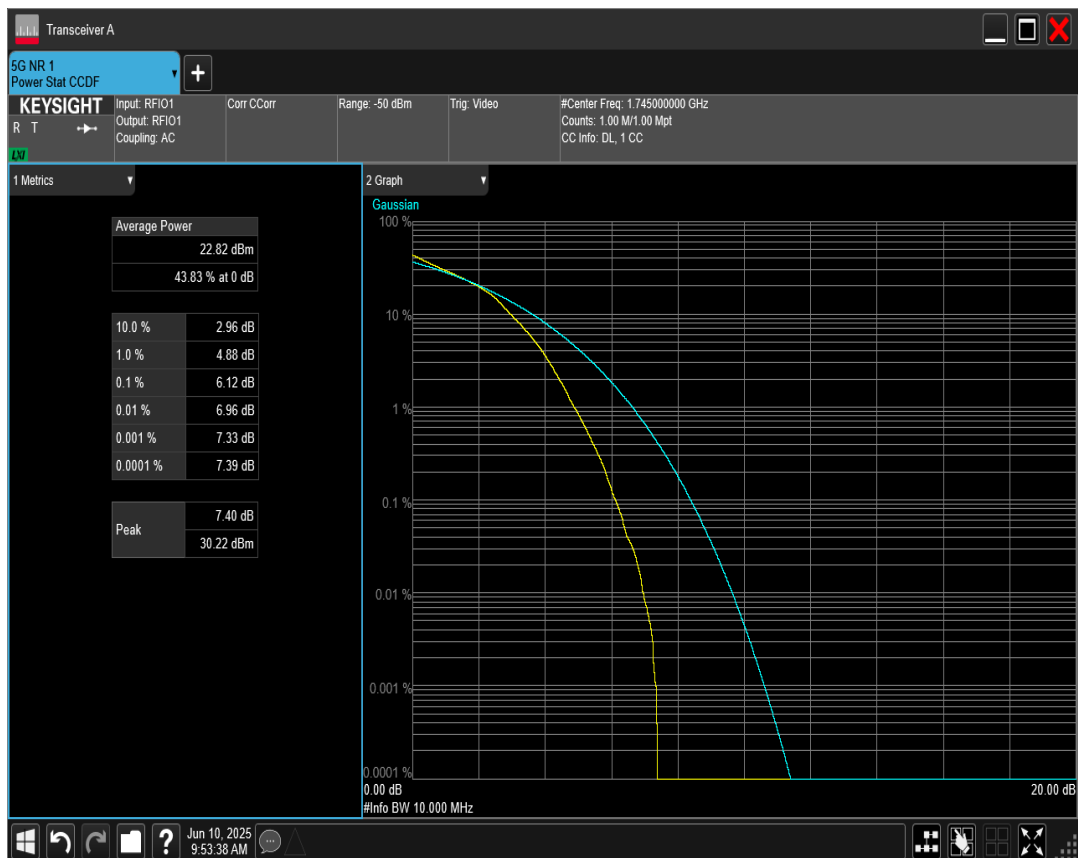


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=343500 RB=75@0

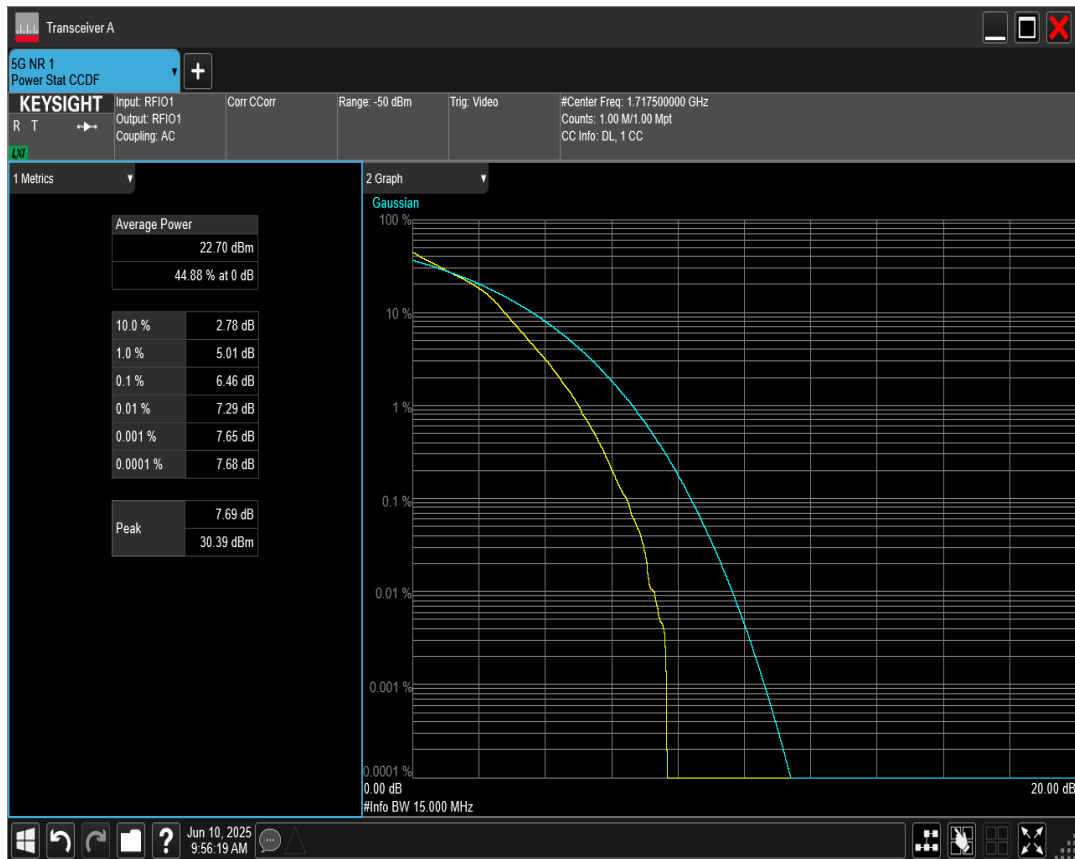


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=354500 RB=75@0

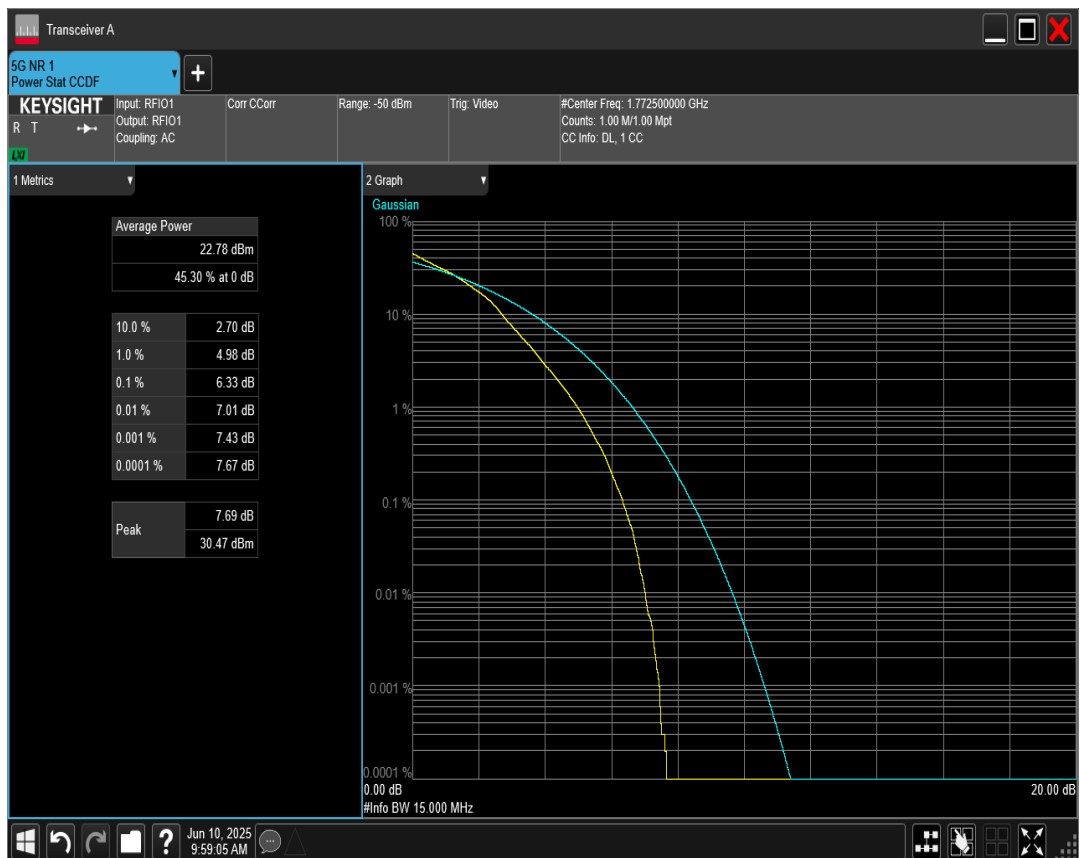


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=349000 RB=75@0

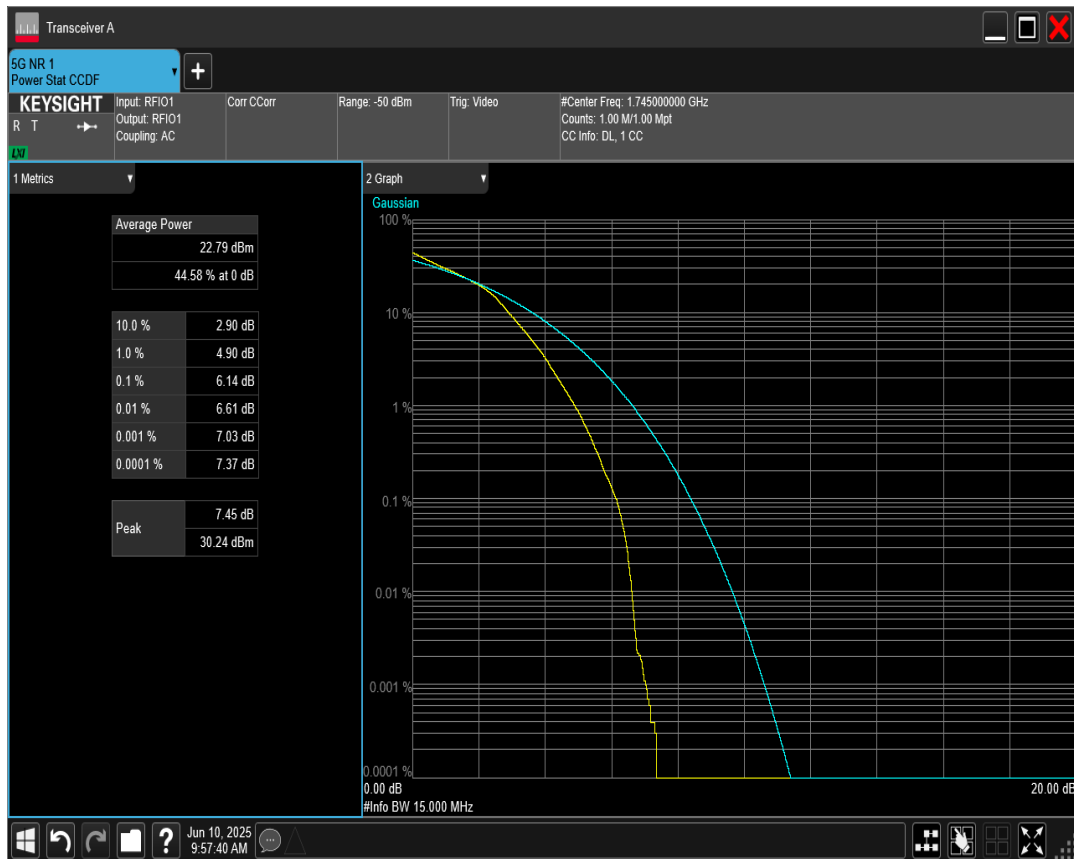


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=344000 RB=100@0

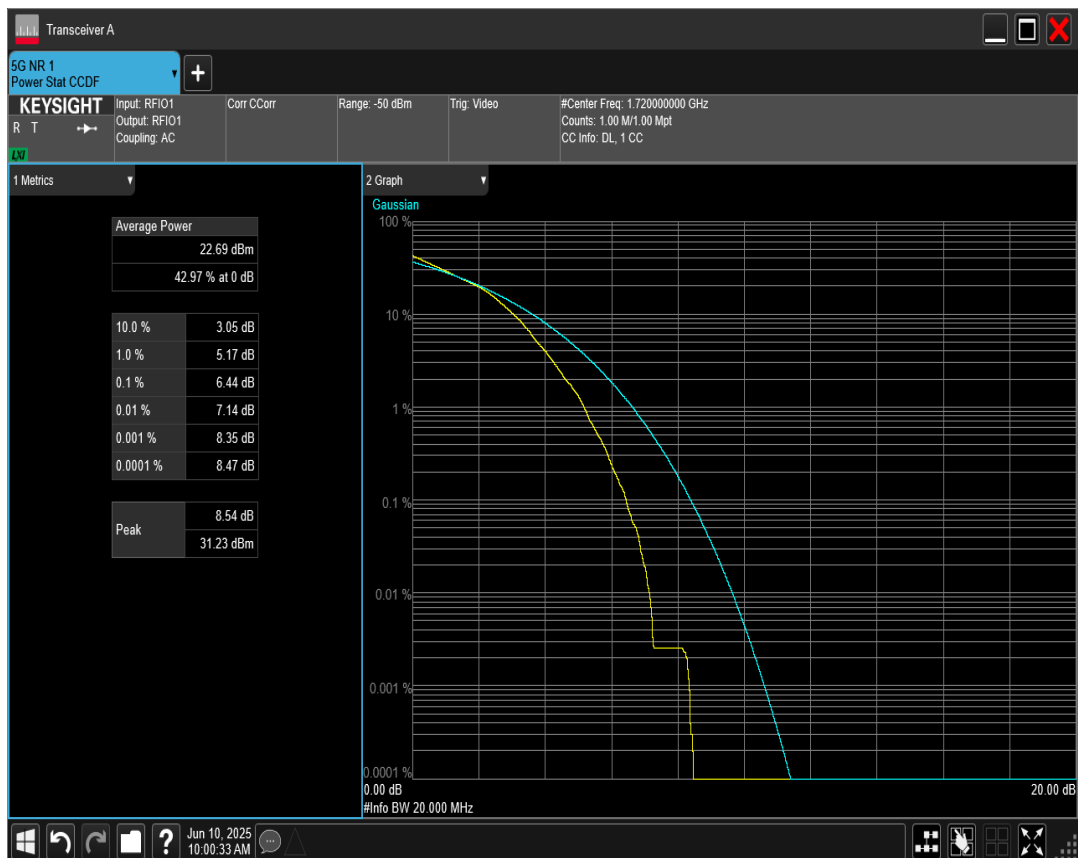


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=346000 RB=216@0

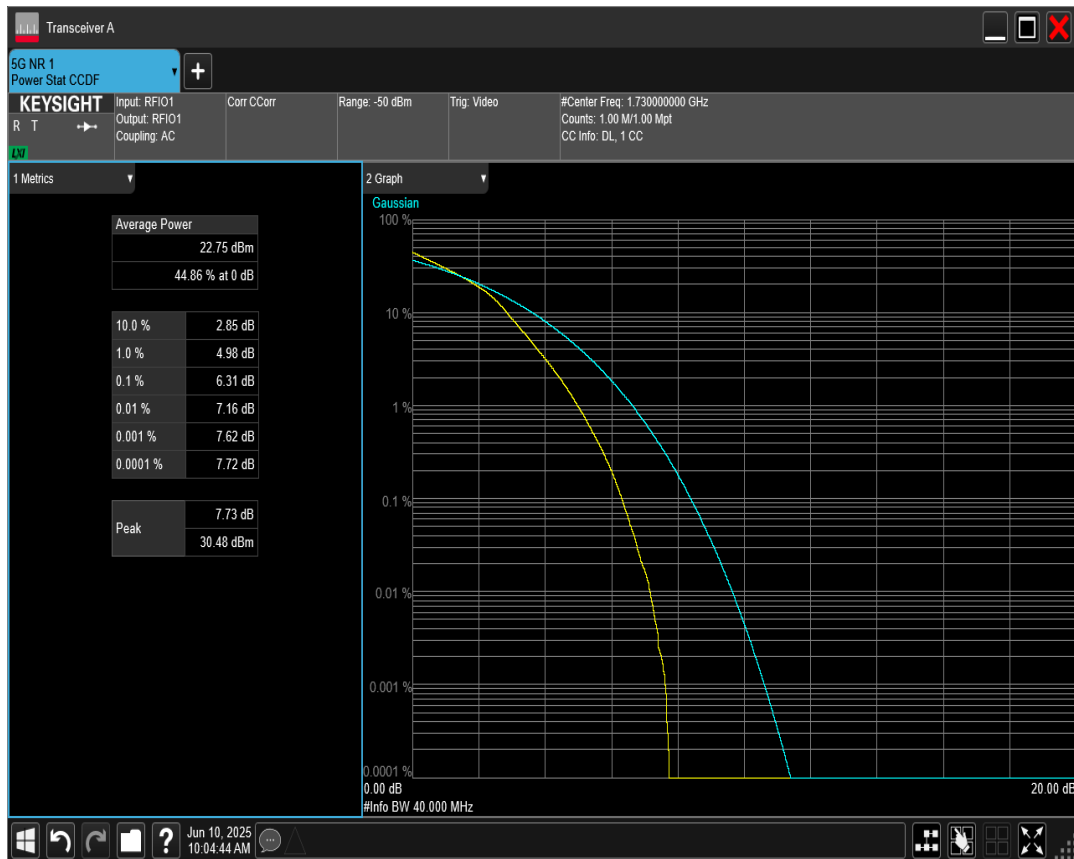


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=354000 RB=100@0

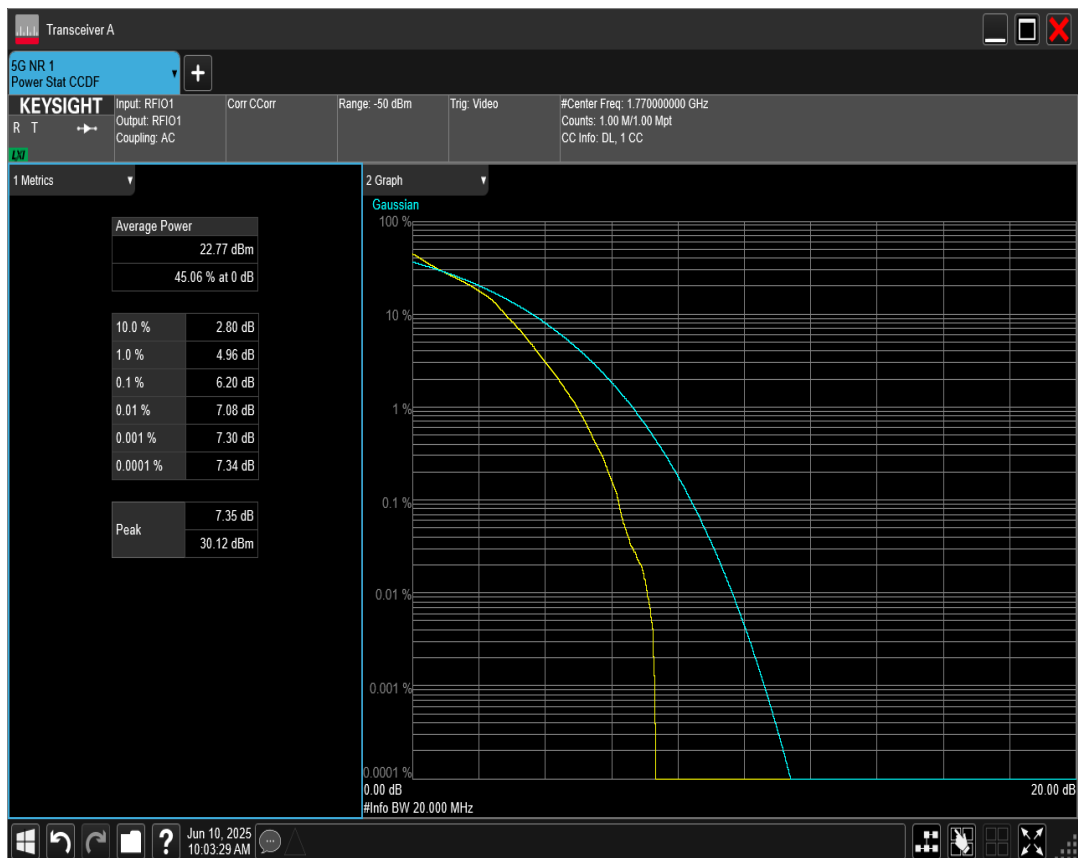


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=349000 RB=100@0

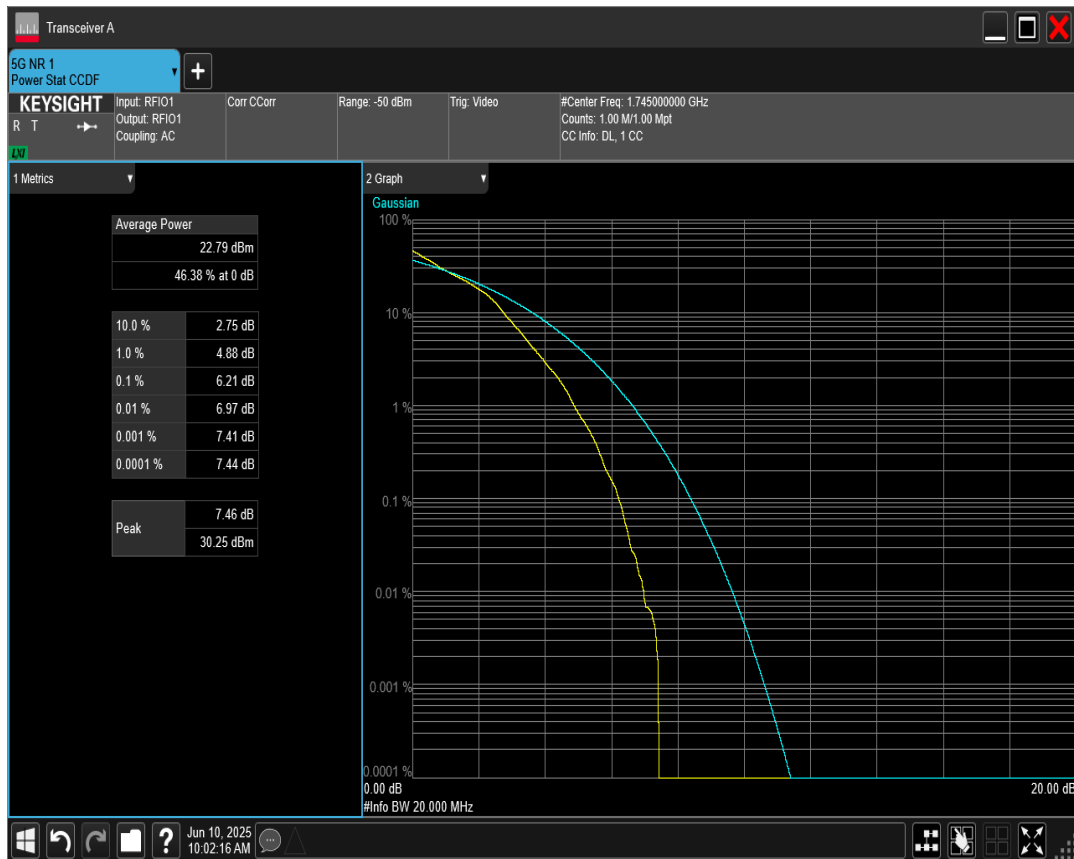


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=352000 RB=216@0

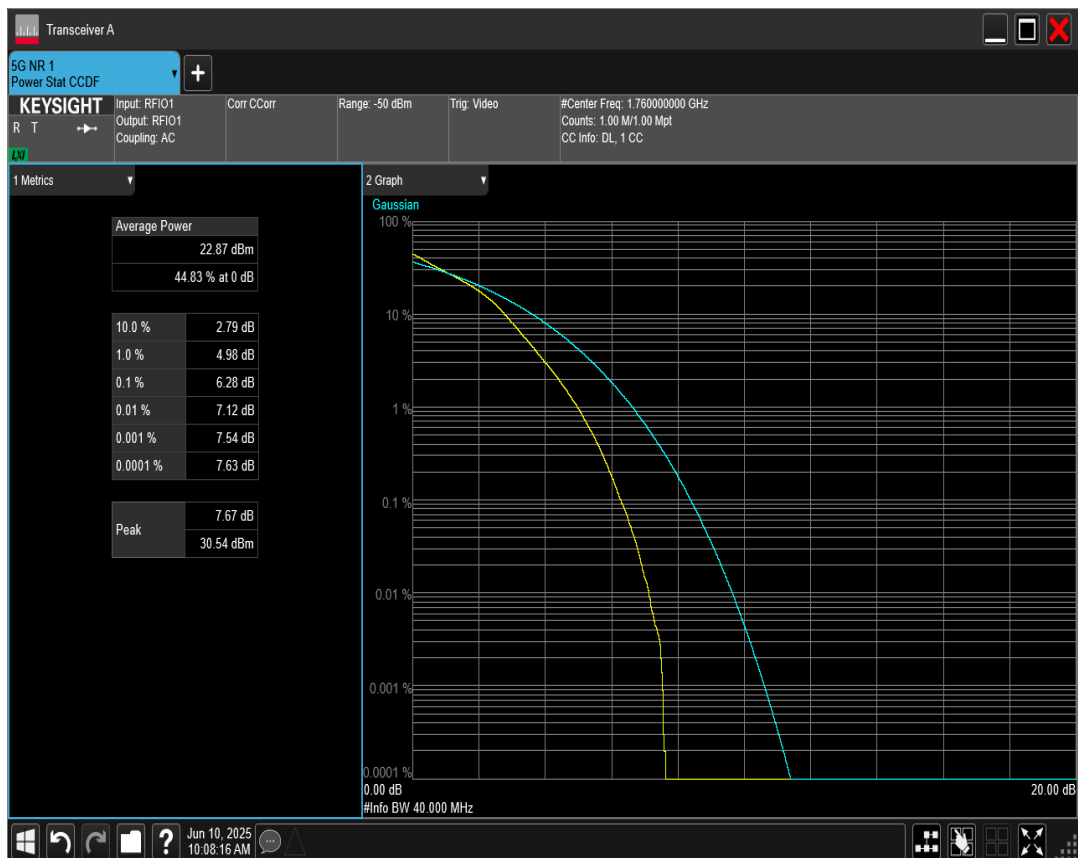


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=349000 RB=216@0

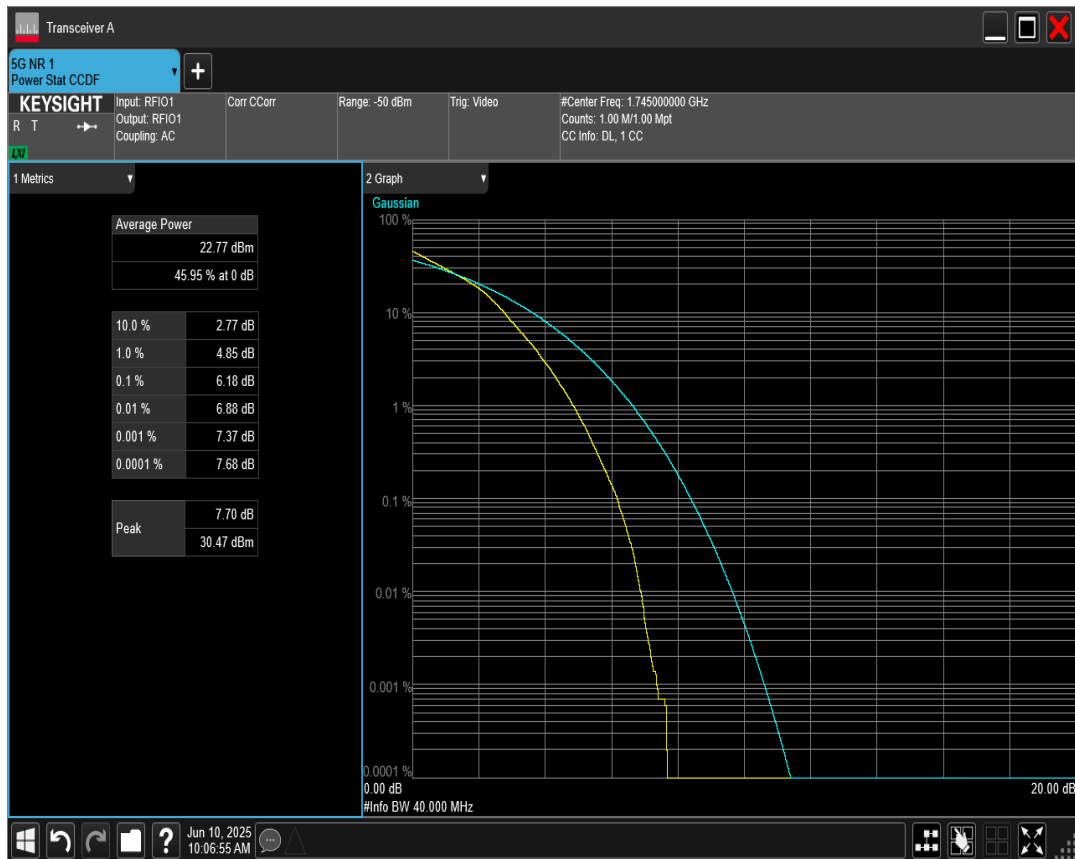


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=342500 RB=25@0

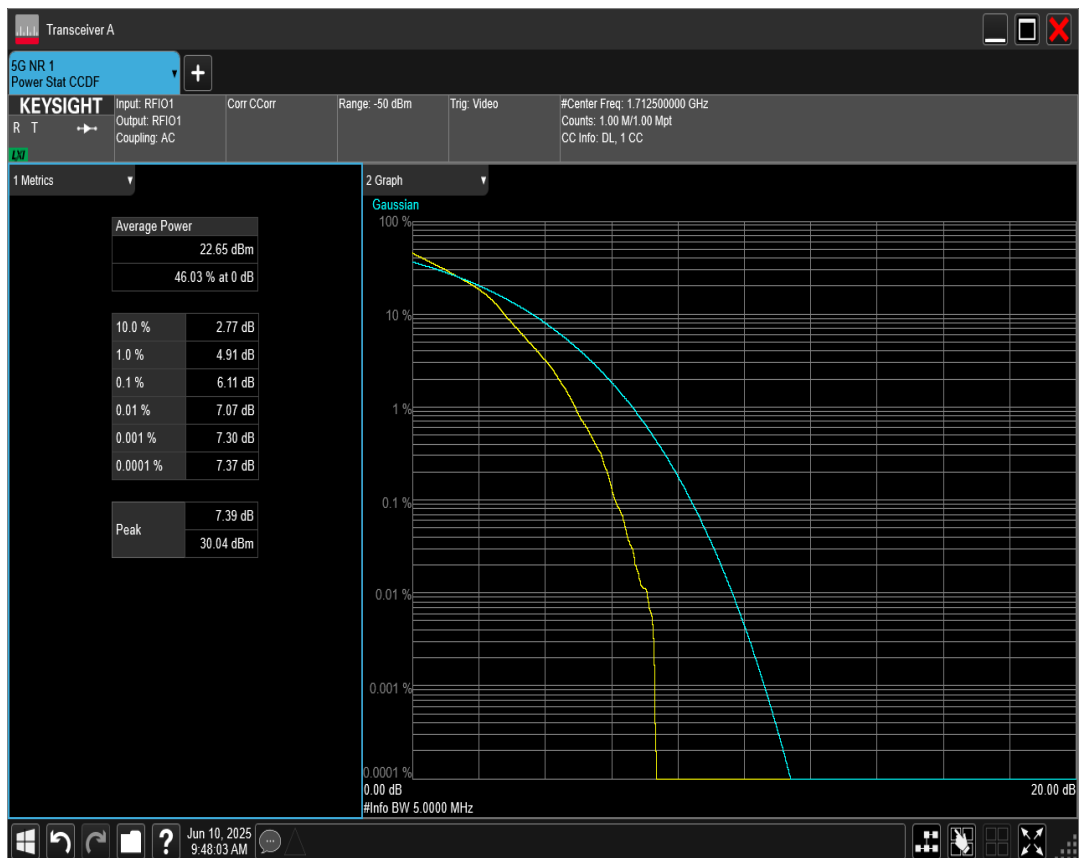


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=349000 RB=25@0

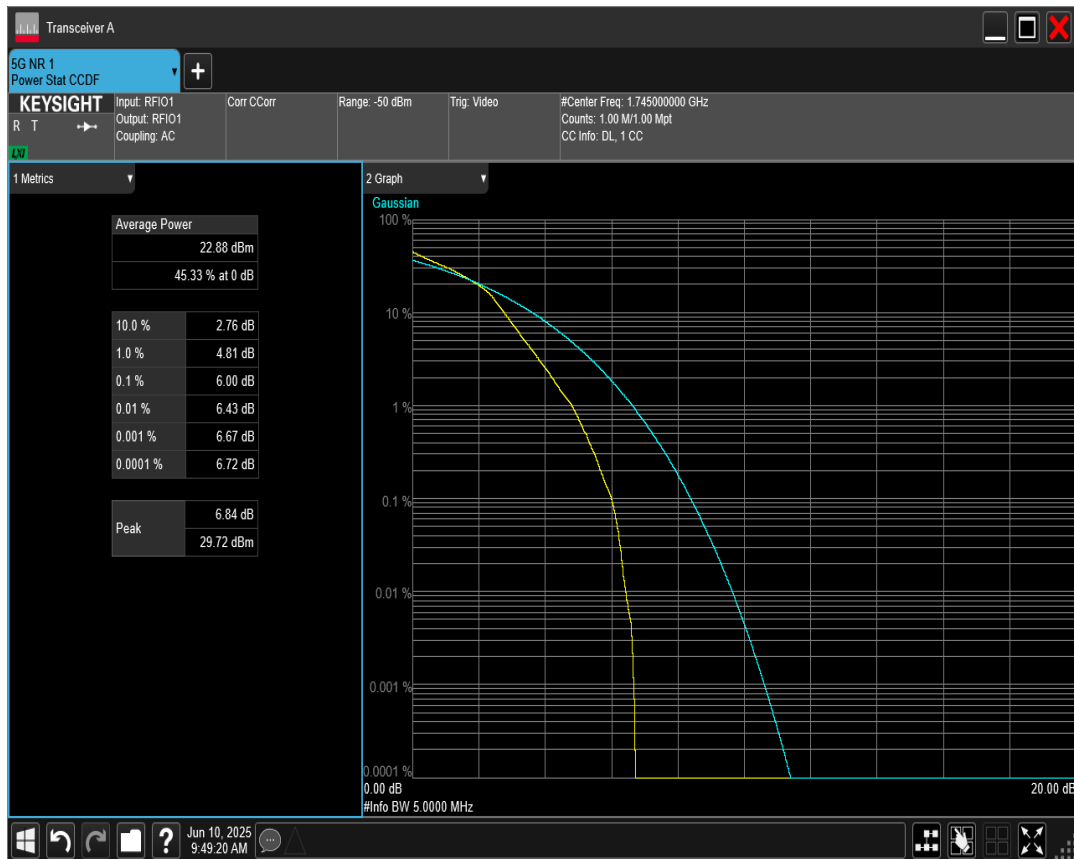


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=355500 RB=25@0

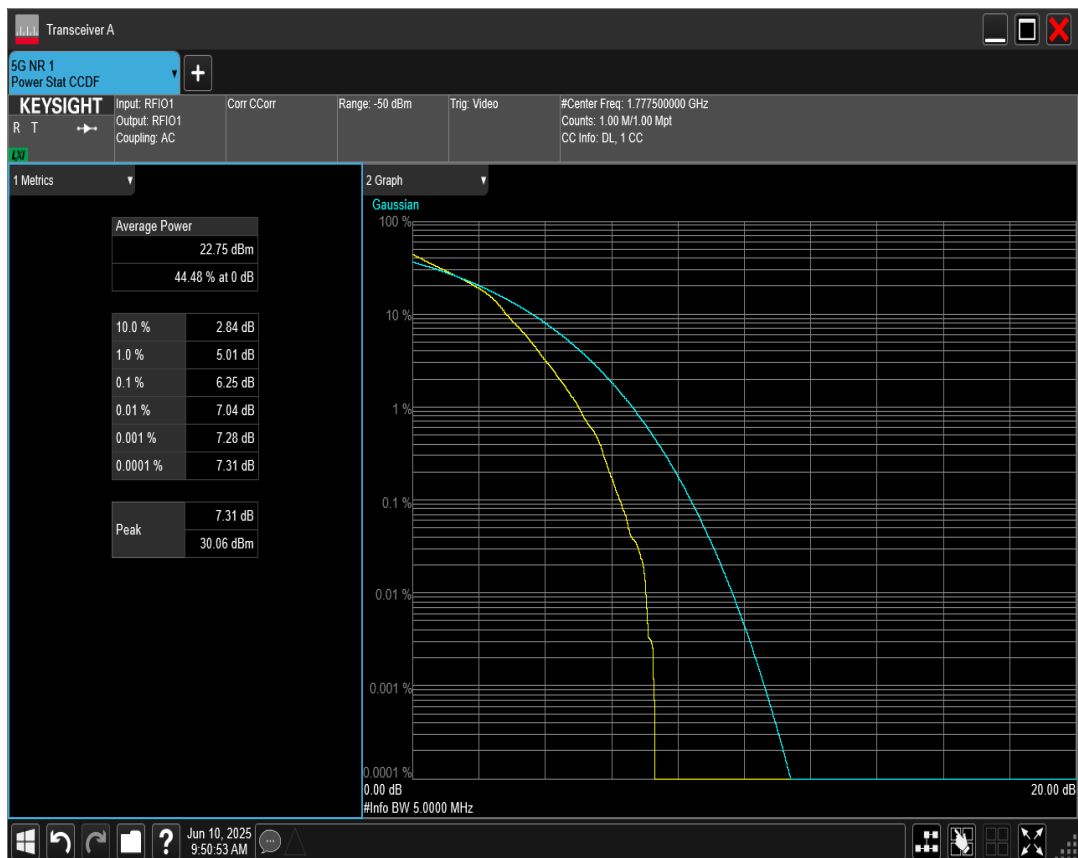


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=355000 RB=50@0

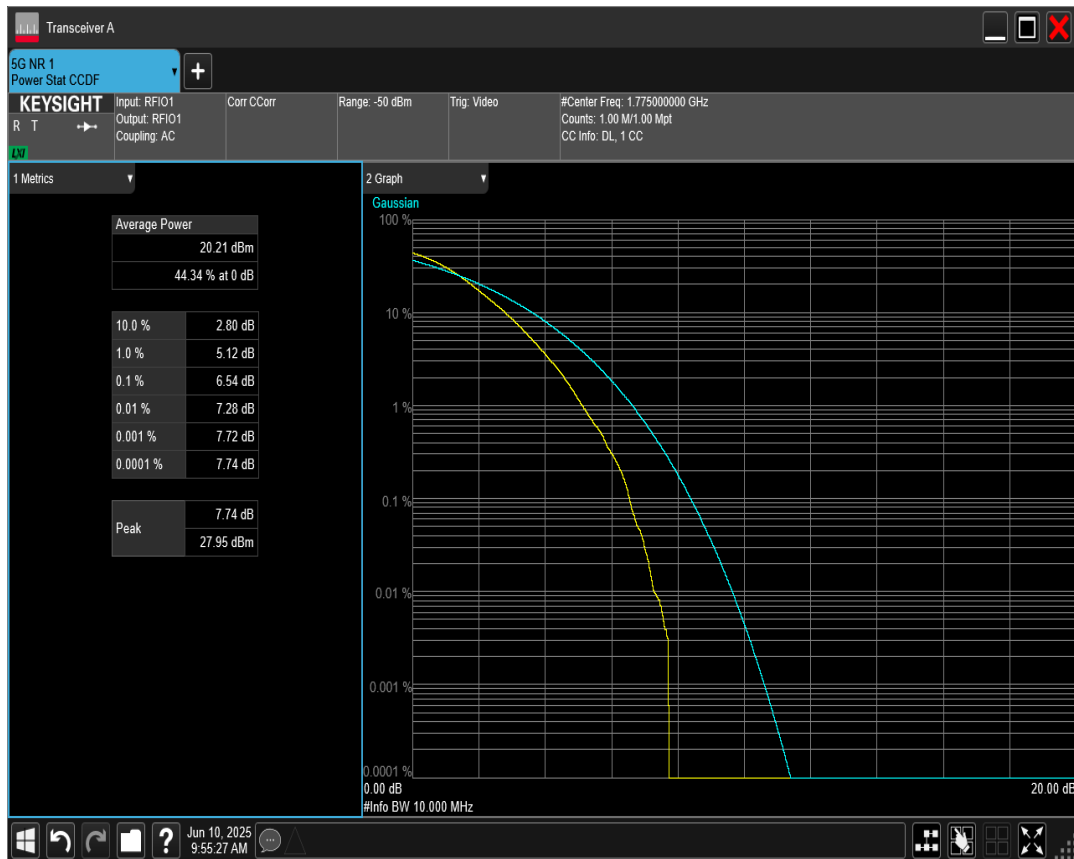


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=349000 RB=50@0

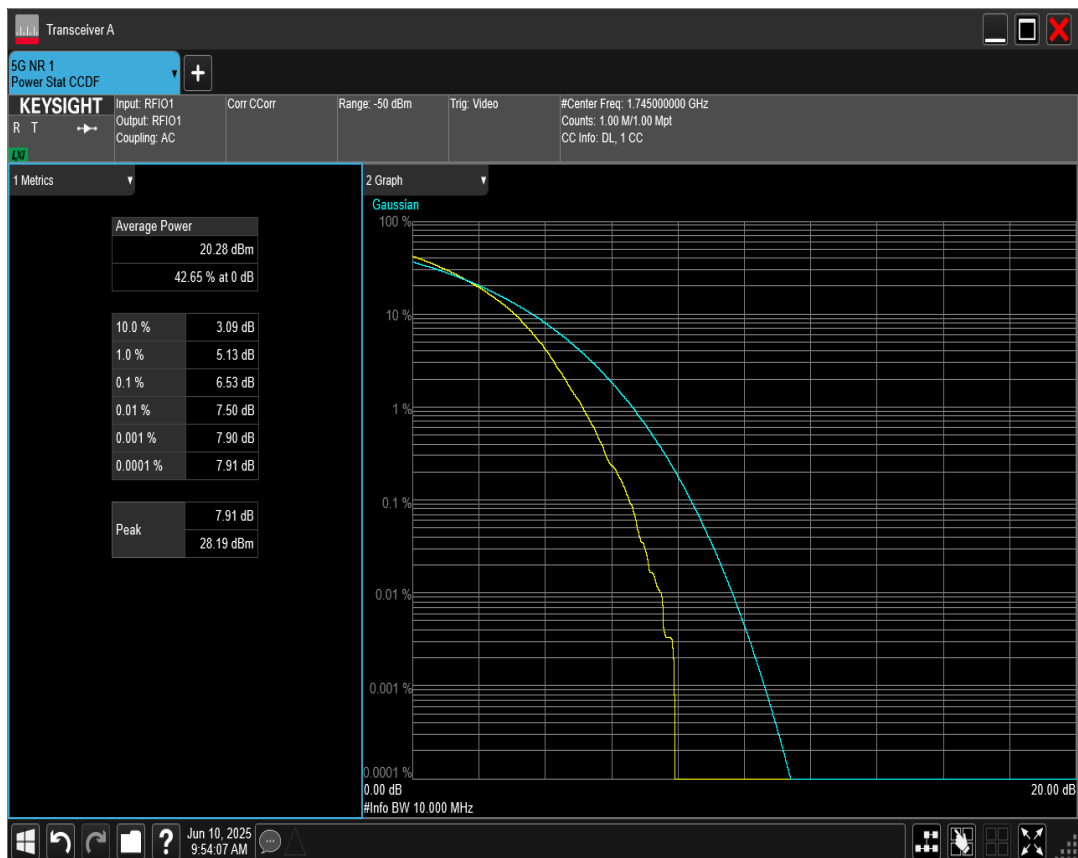


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=343000 RB=50@0

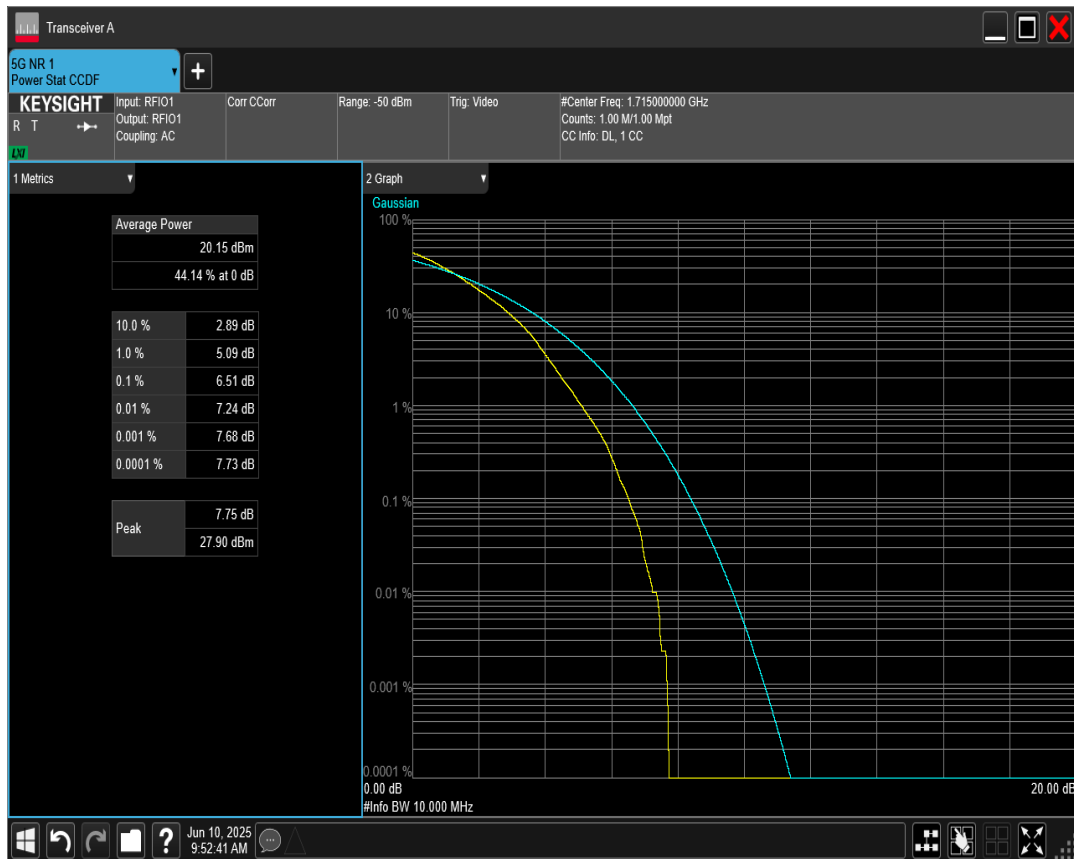


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=349000 RB=75@0

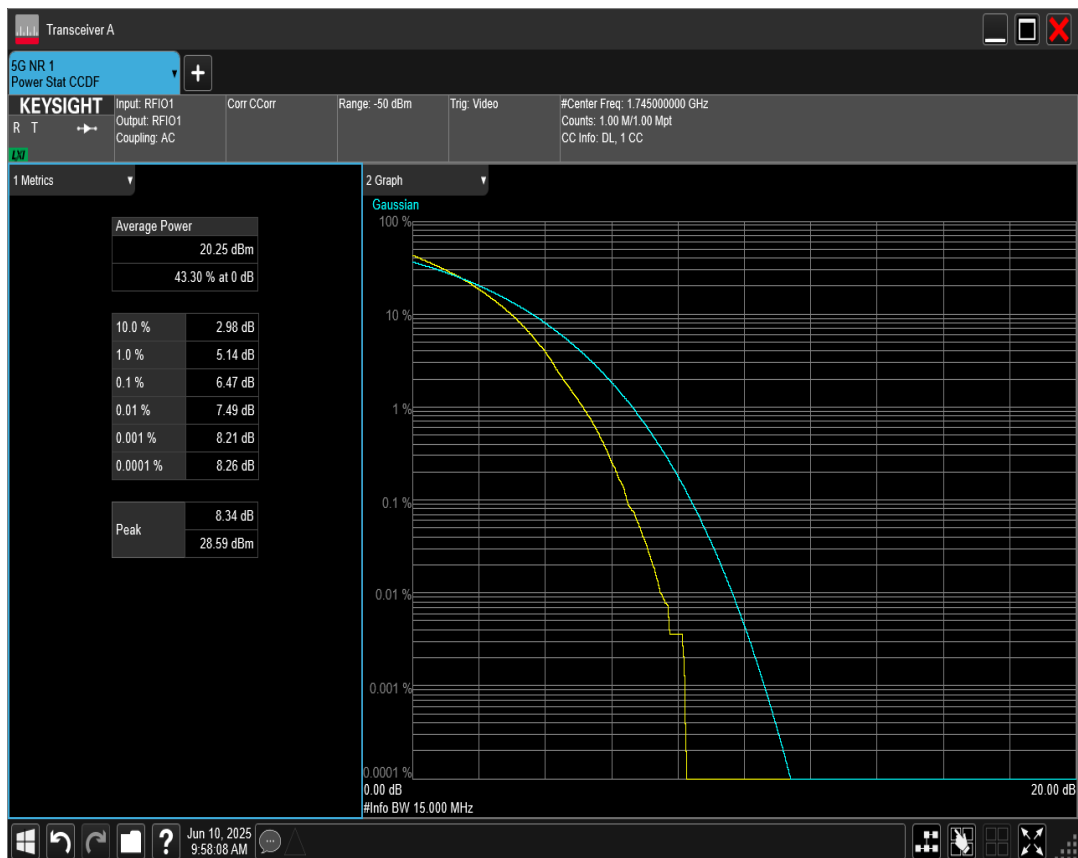


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=343500 RB=75@0

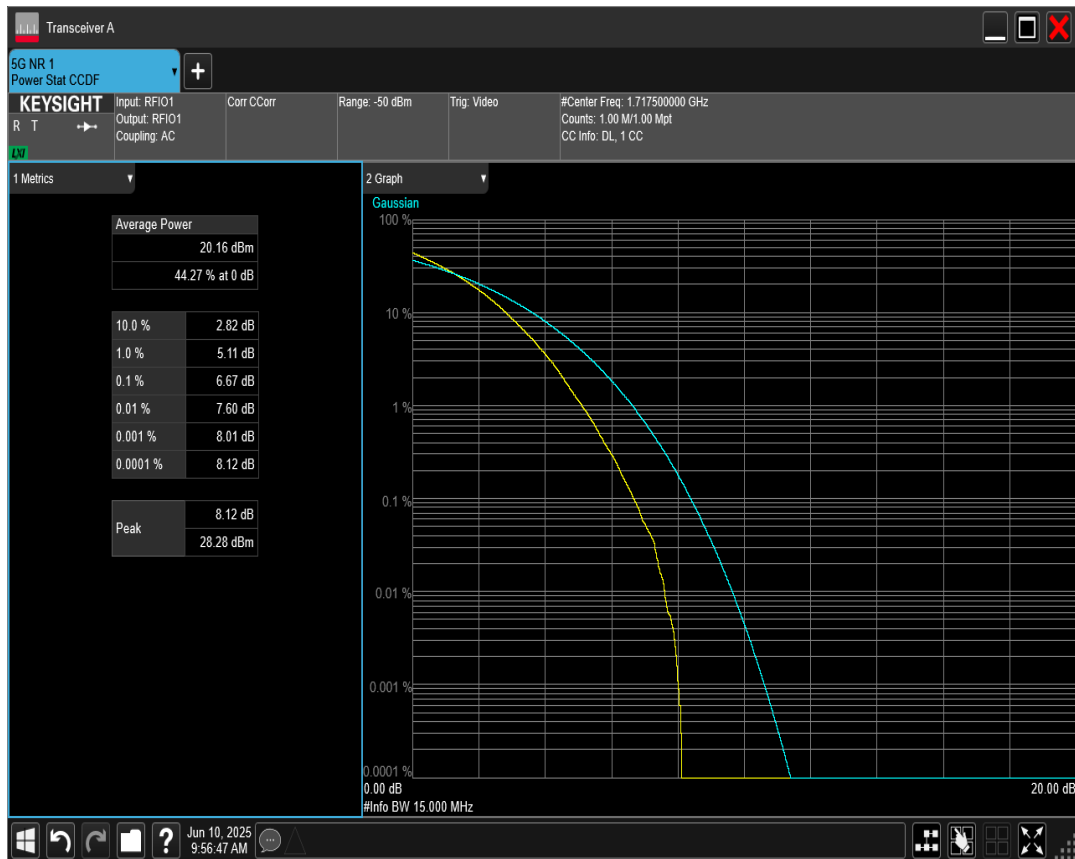


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=344000 RB=100@0

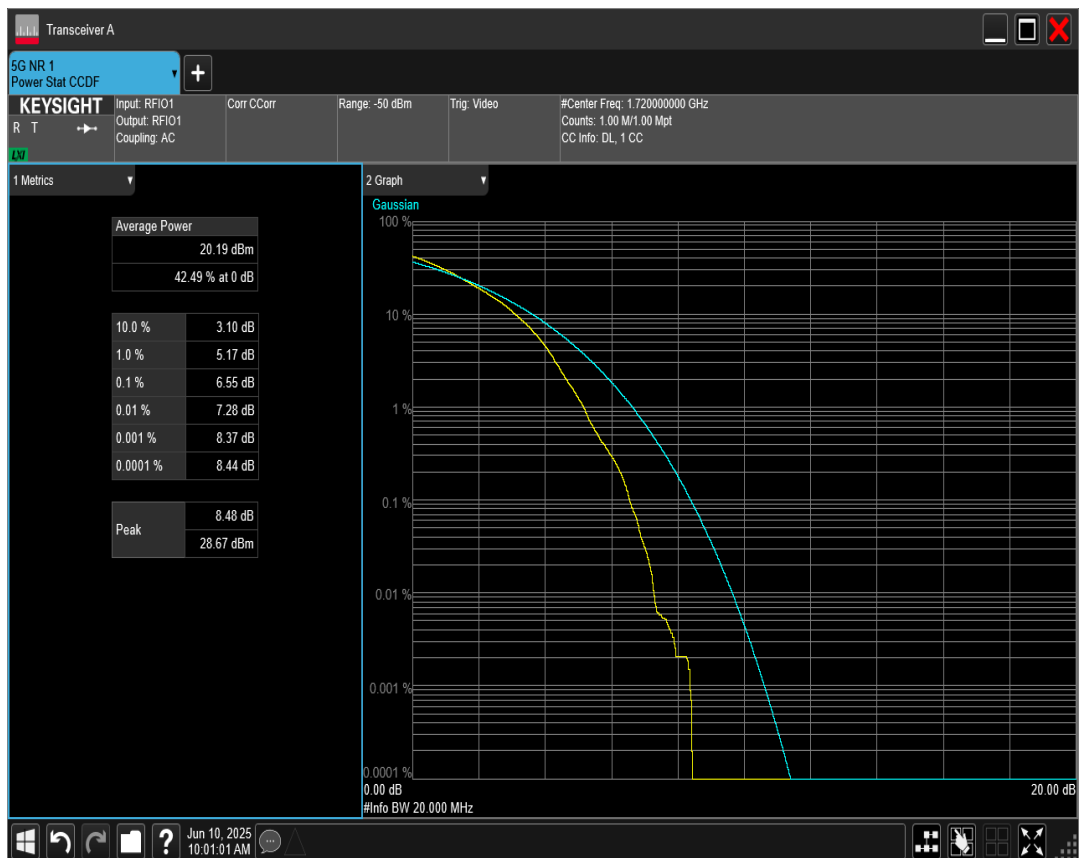


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=354500 RB=75@0

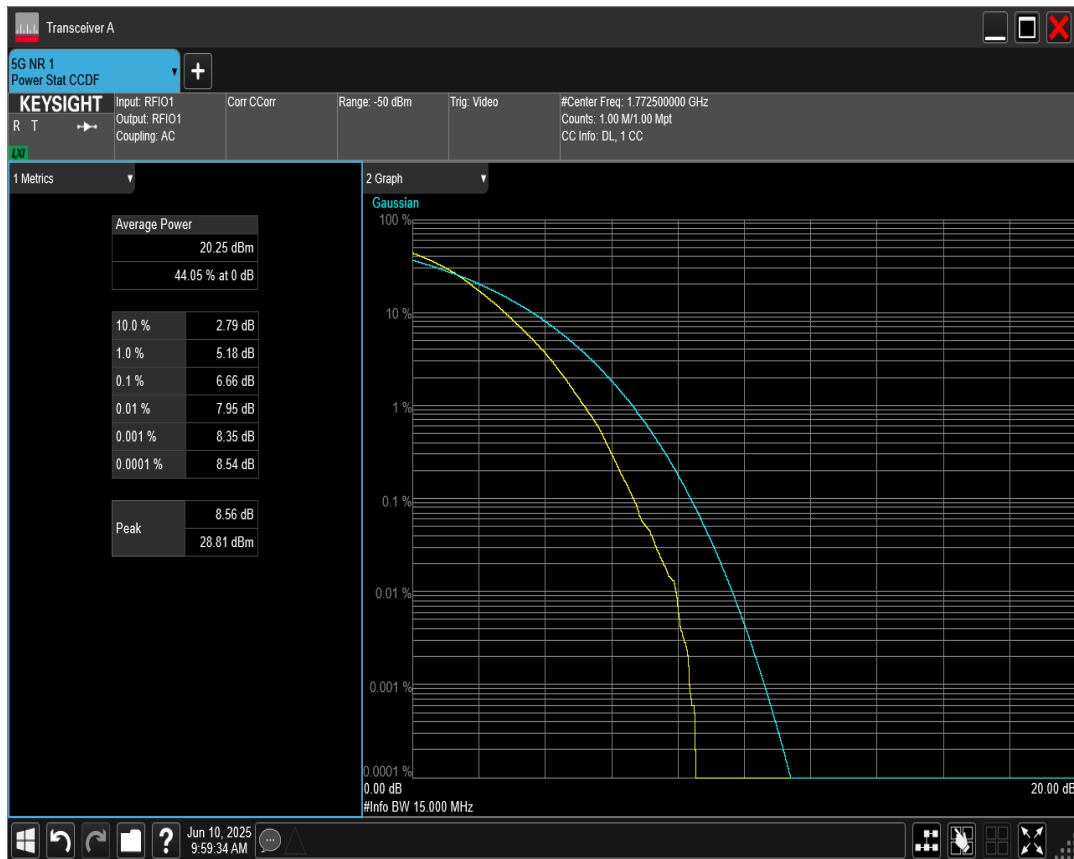


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=349000 RB=100@0

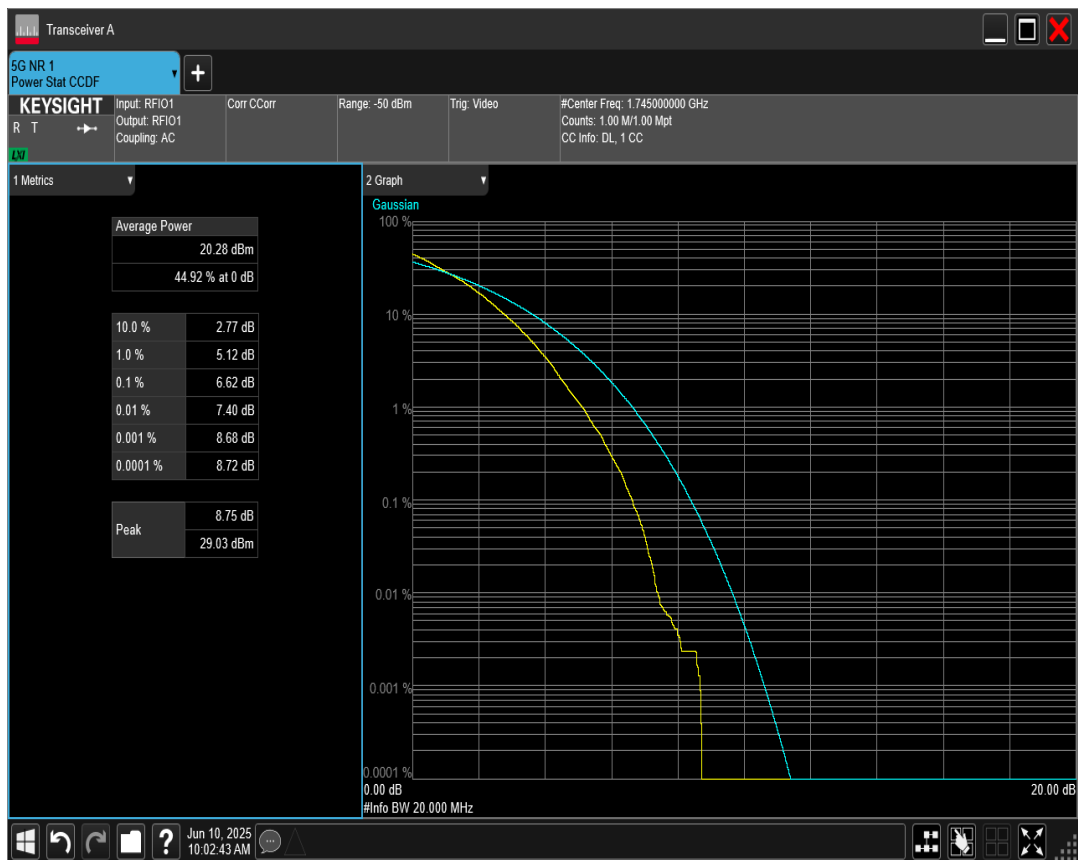


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=349000 RB=216@0

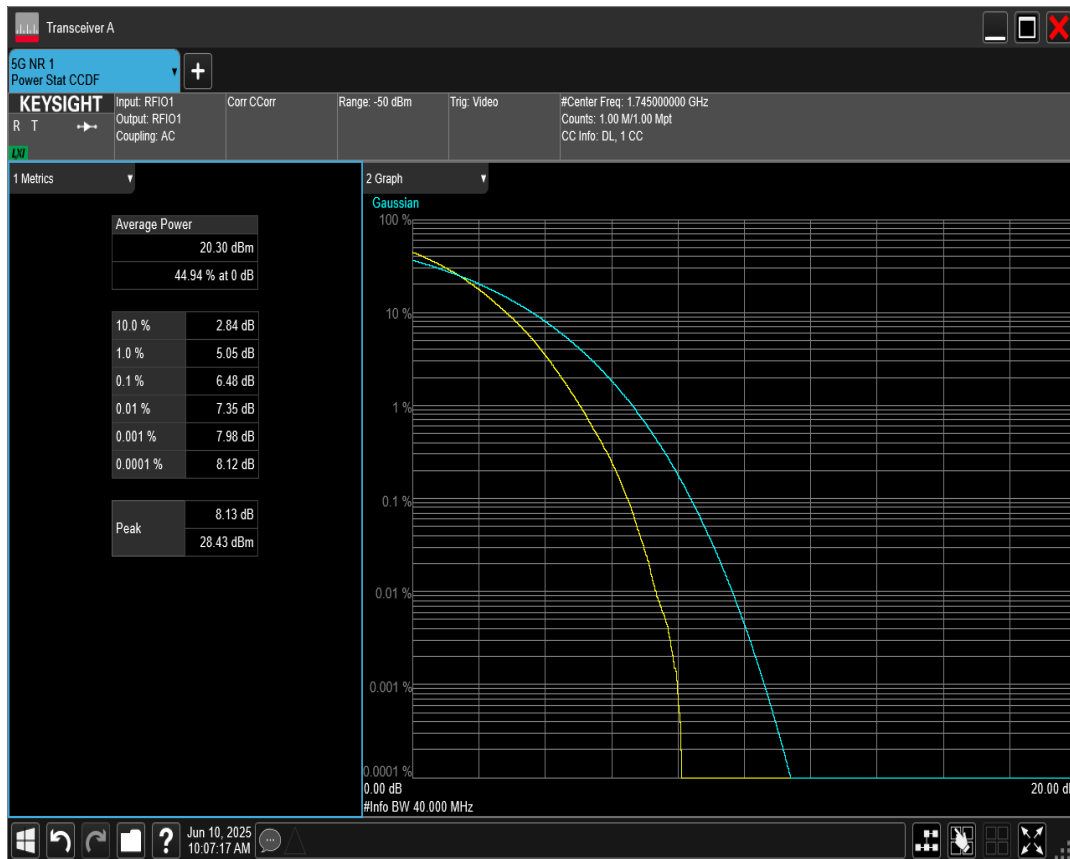


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=352000 RB=216@0

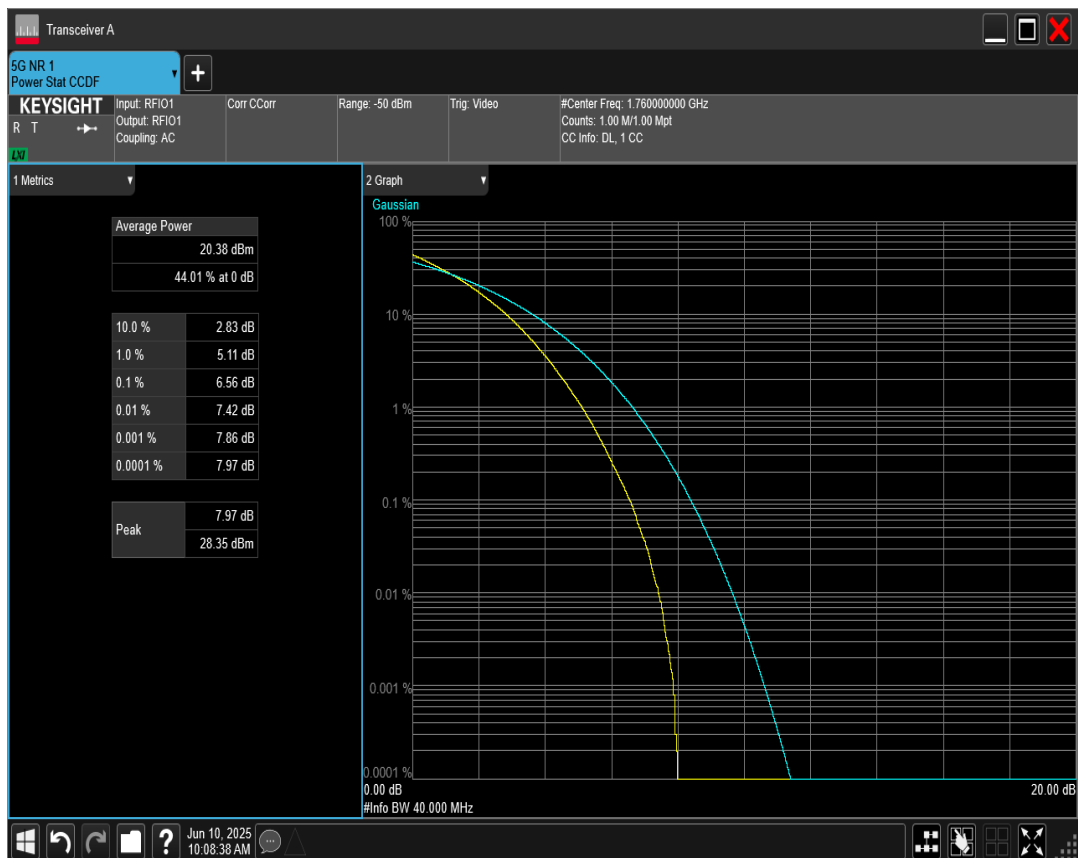


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=354000 RB=100@0

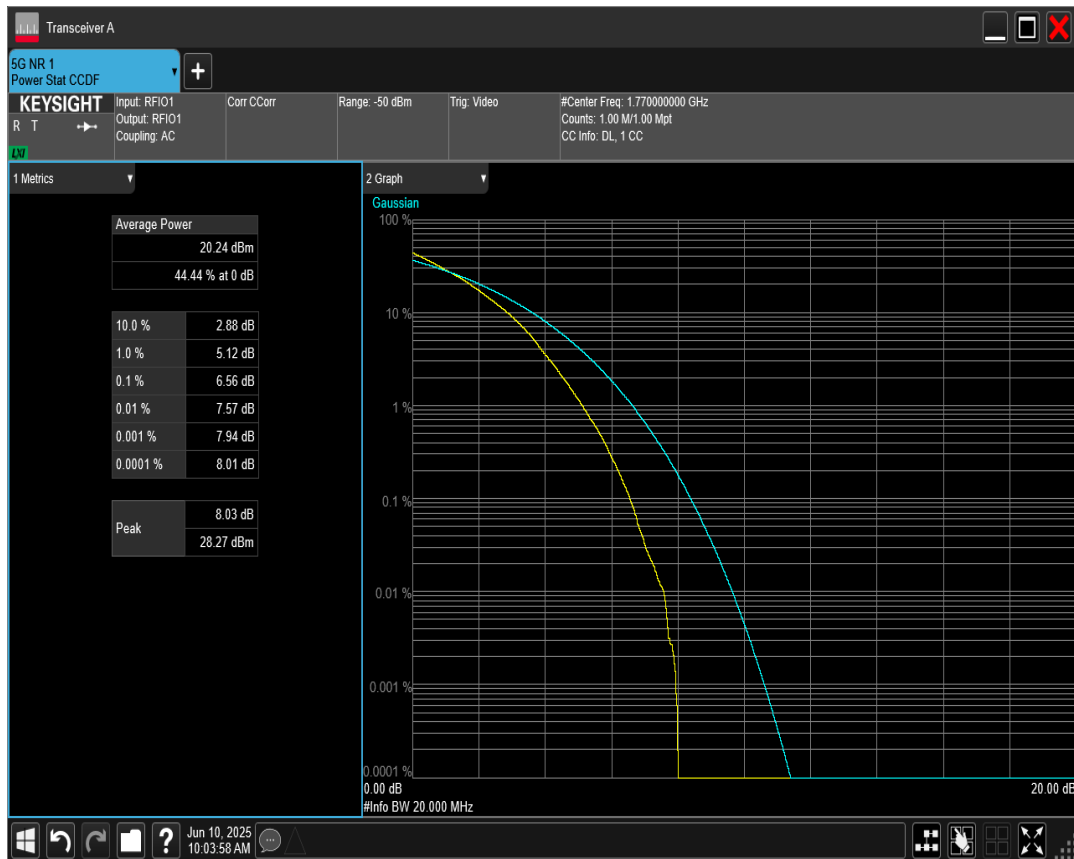


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=346000 RB=216@0

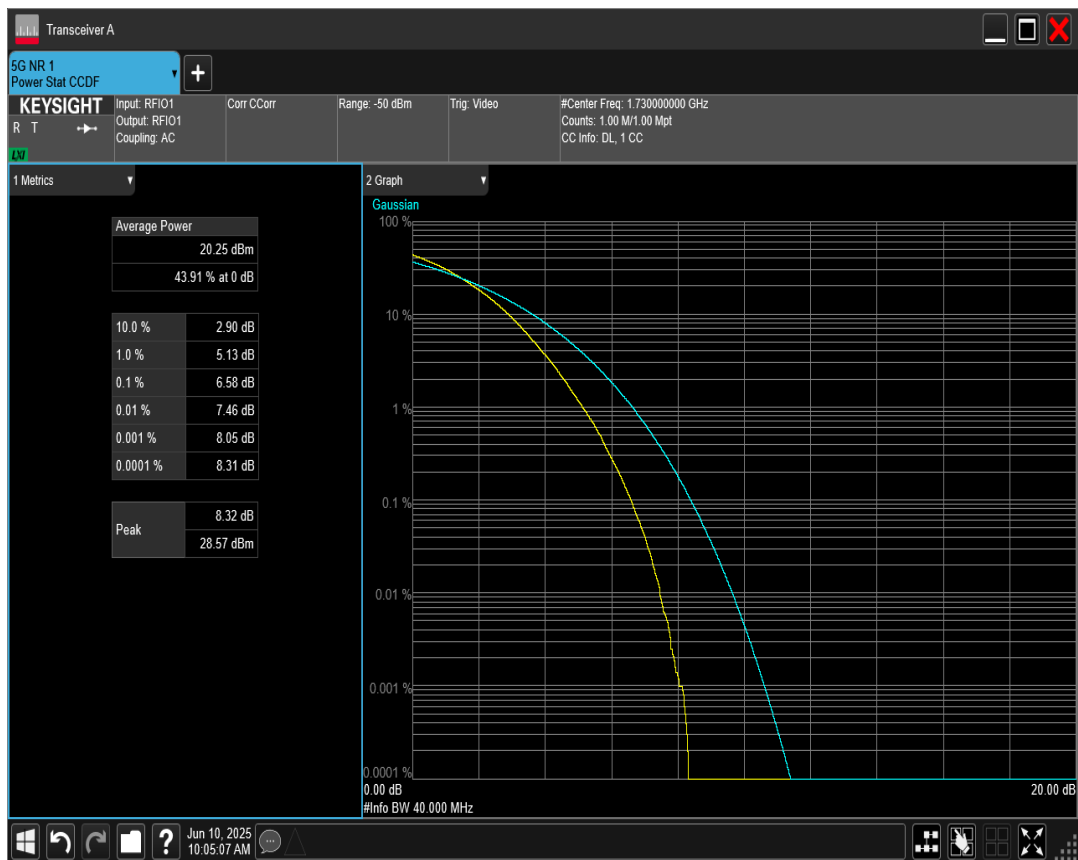


n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=342500 RB=25@0

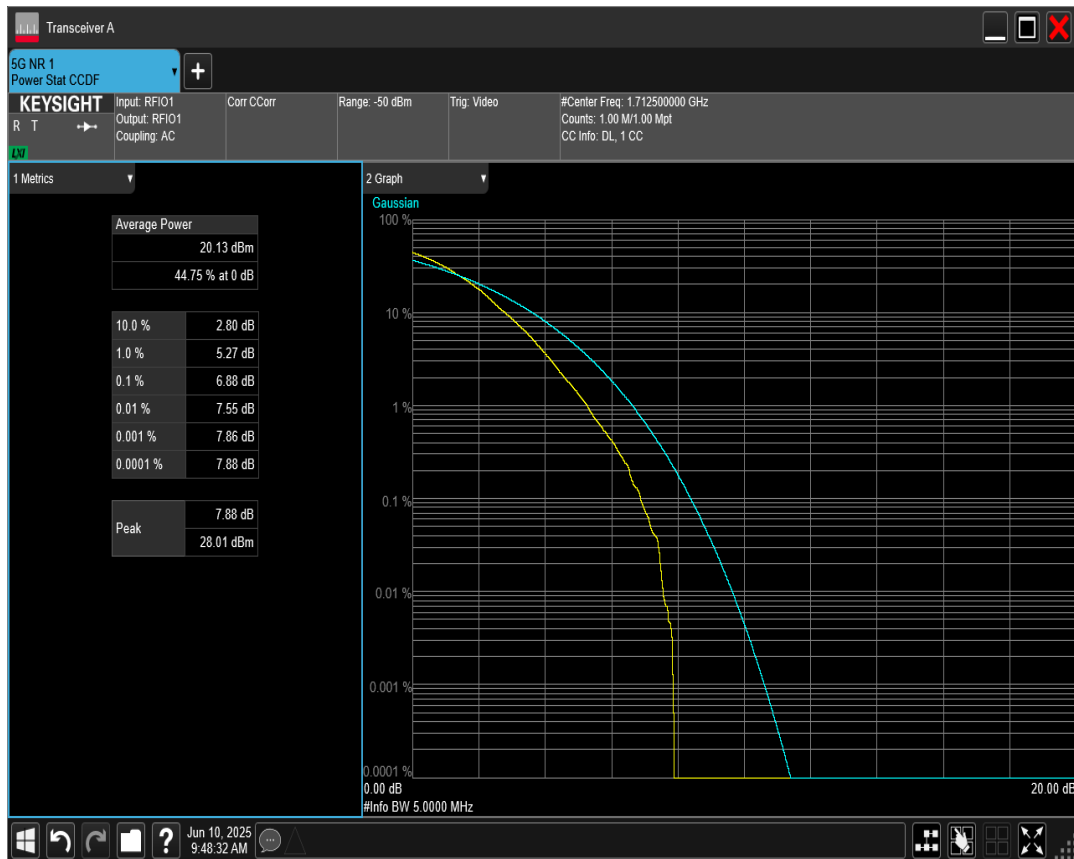


n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=349000 RB=25@0

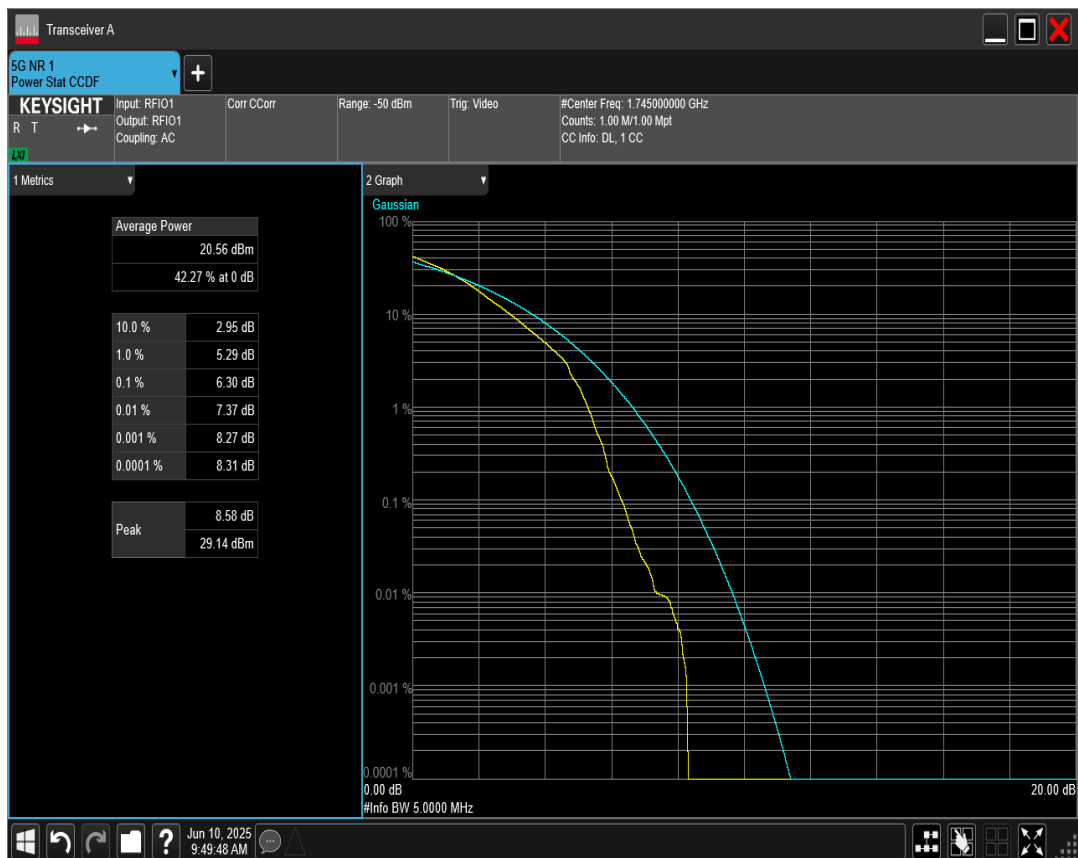


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=349000 RB=50@0

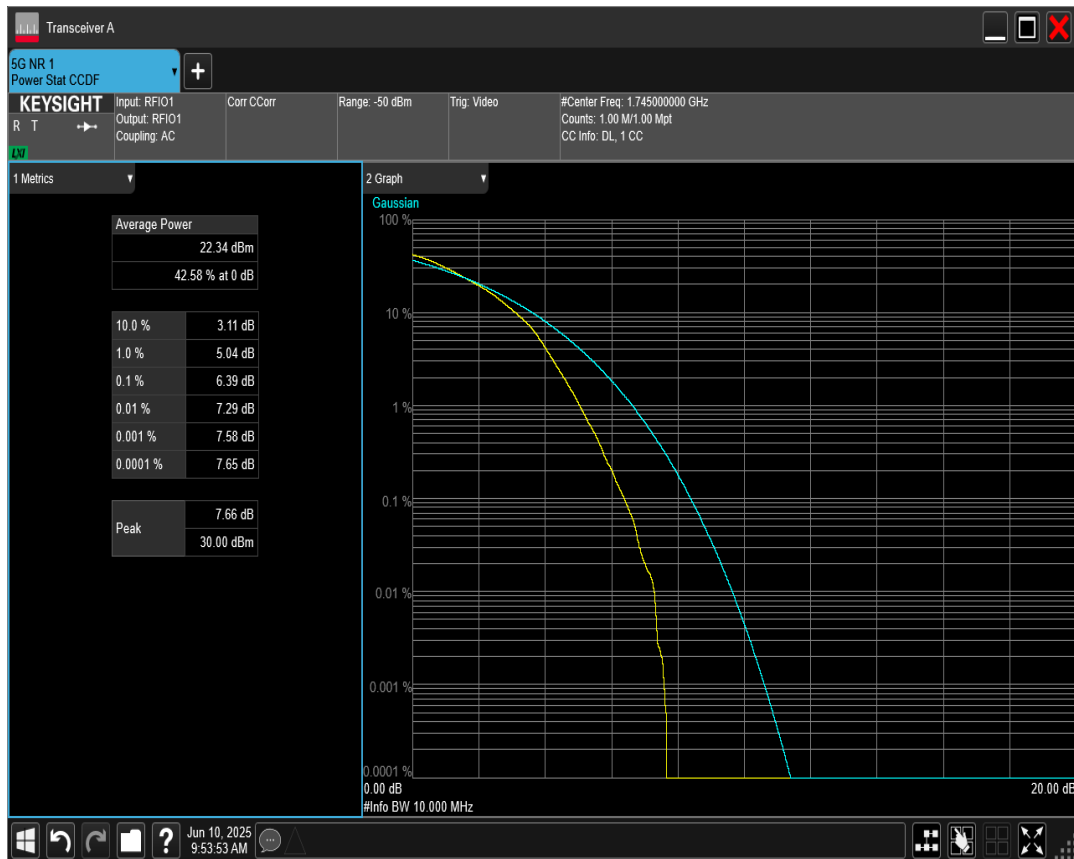


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=355000 RB=50@0

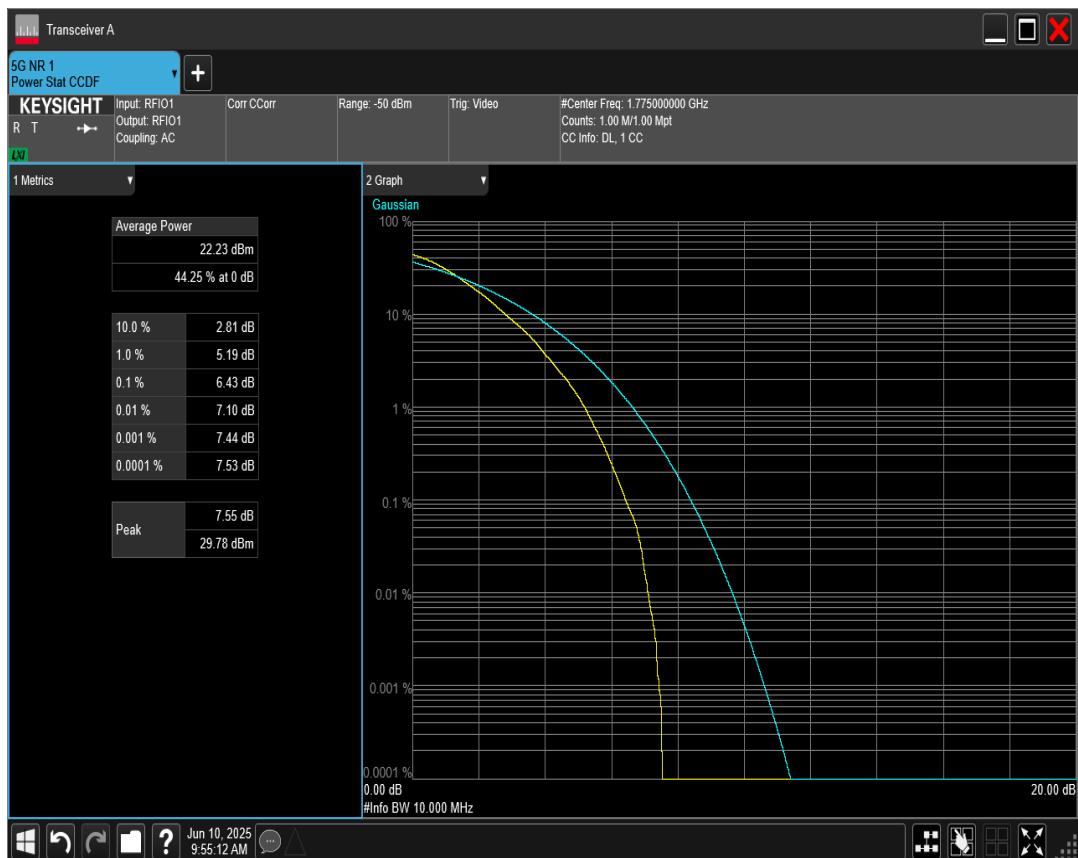


n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=355500 RB=25@0

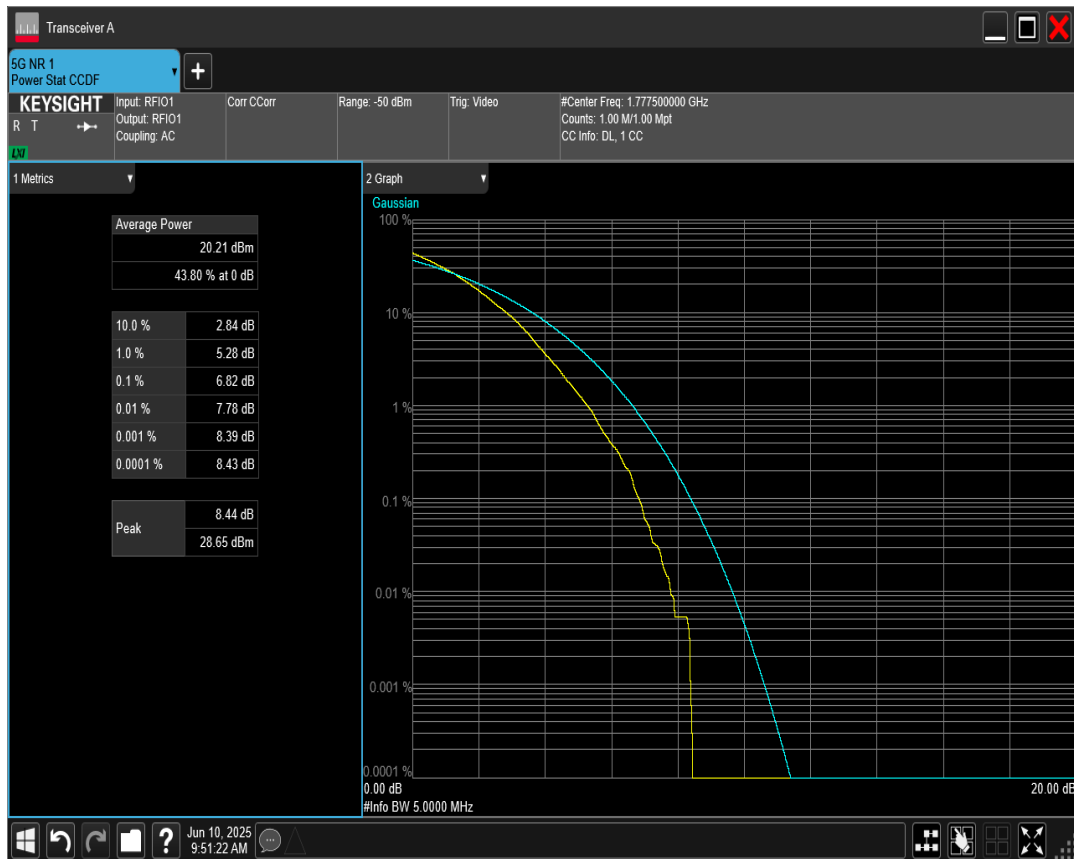


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=343000 RB=50@0

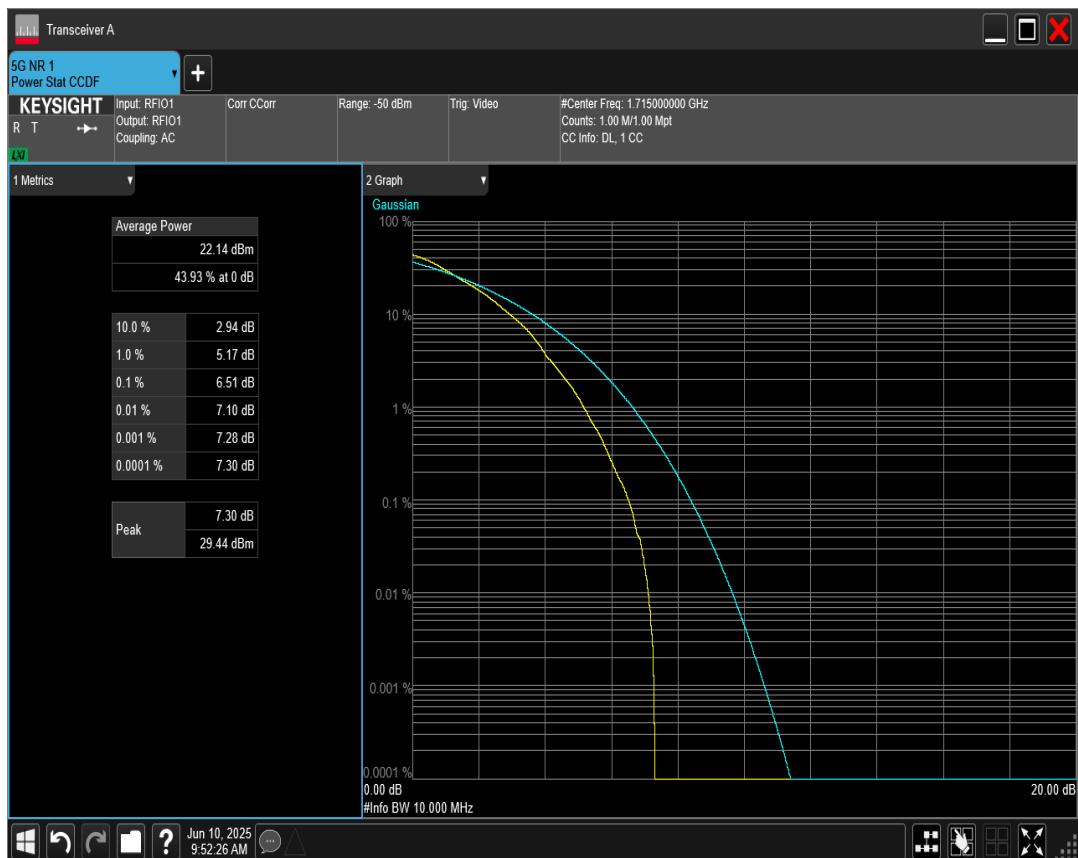


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=343500 RB=75@0

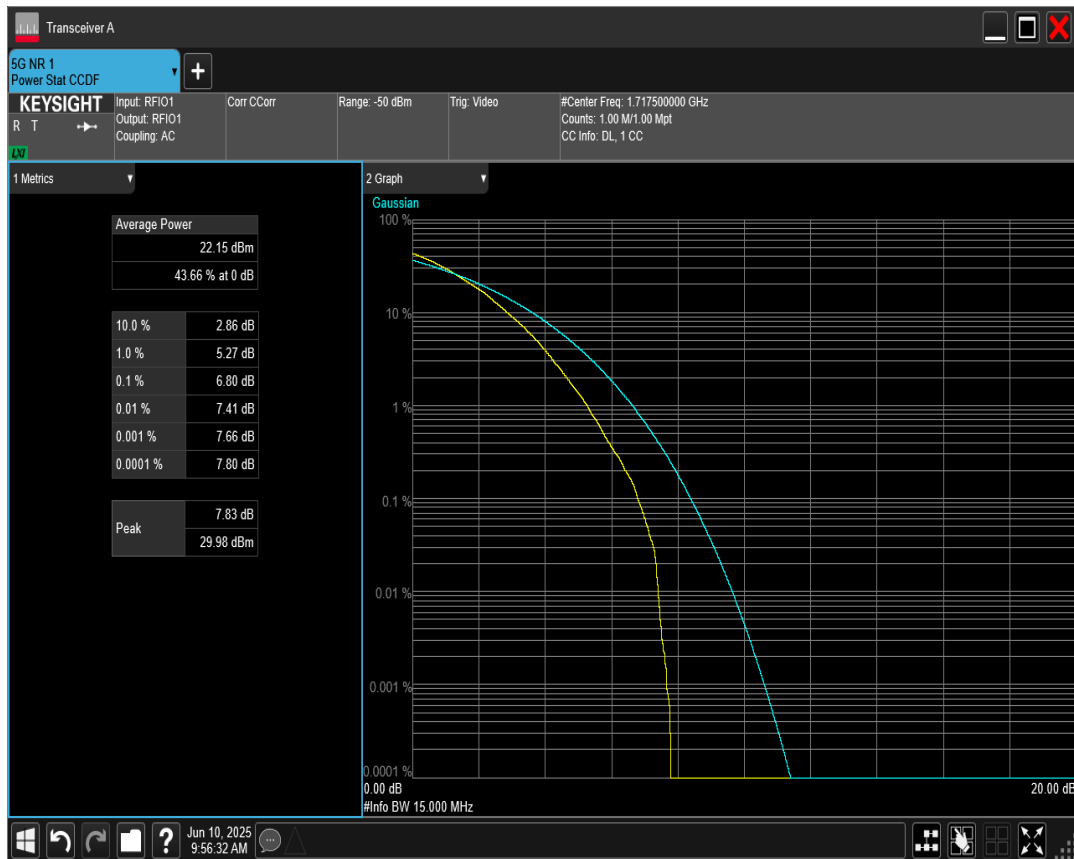


n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=344000 RB=100@0

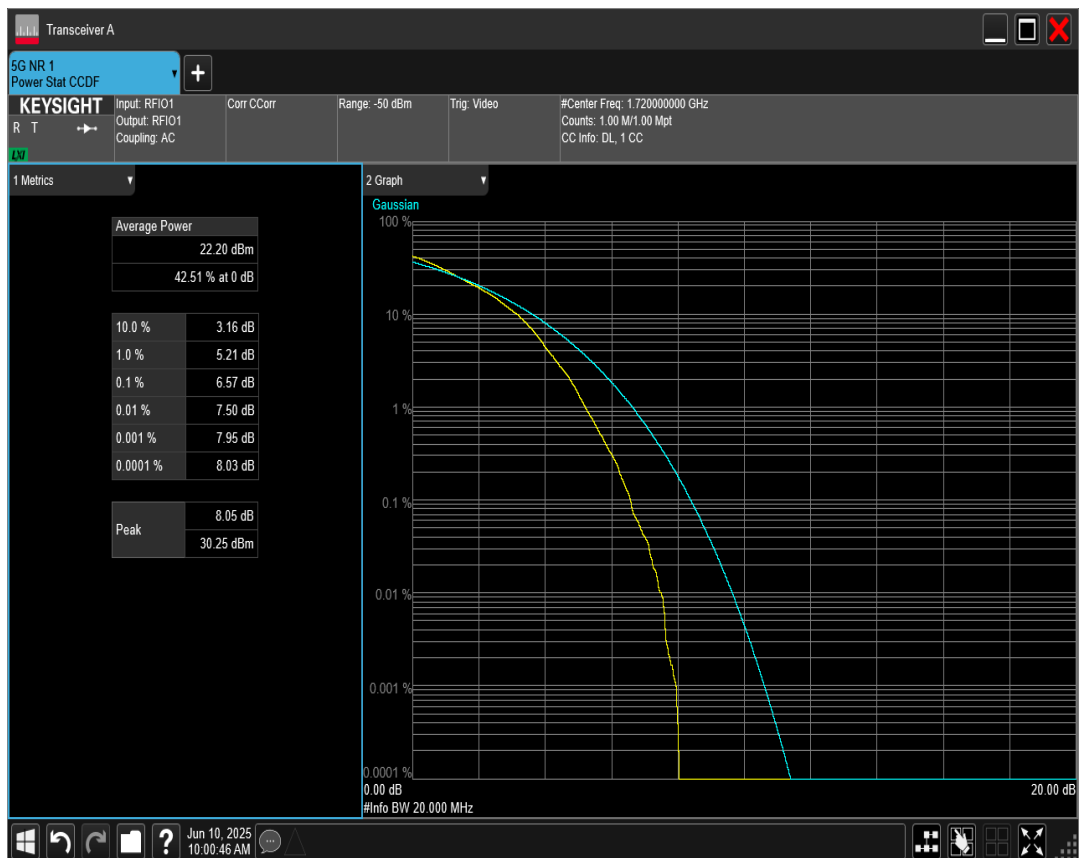


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=354500 RB=75@0

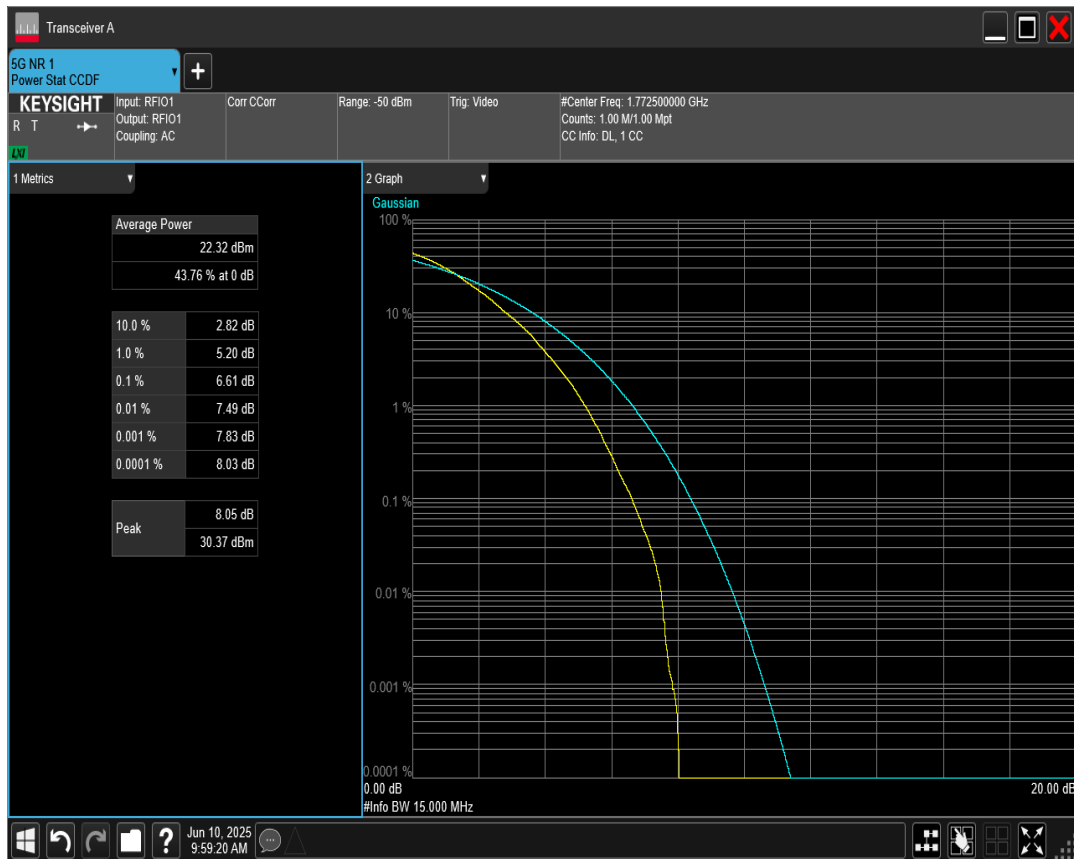


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=349000 RB=75@0

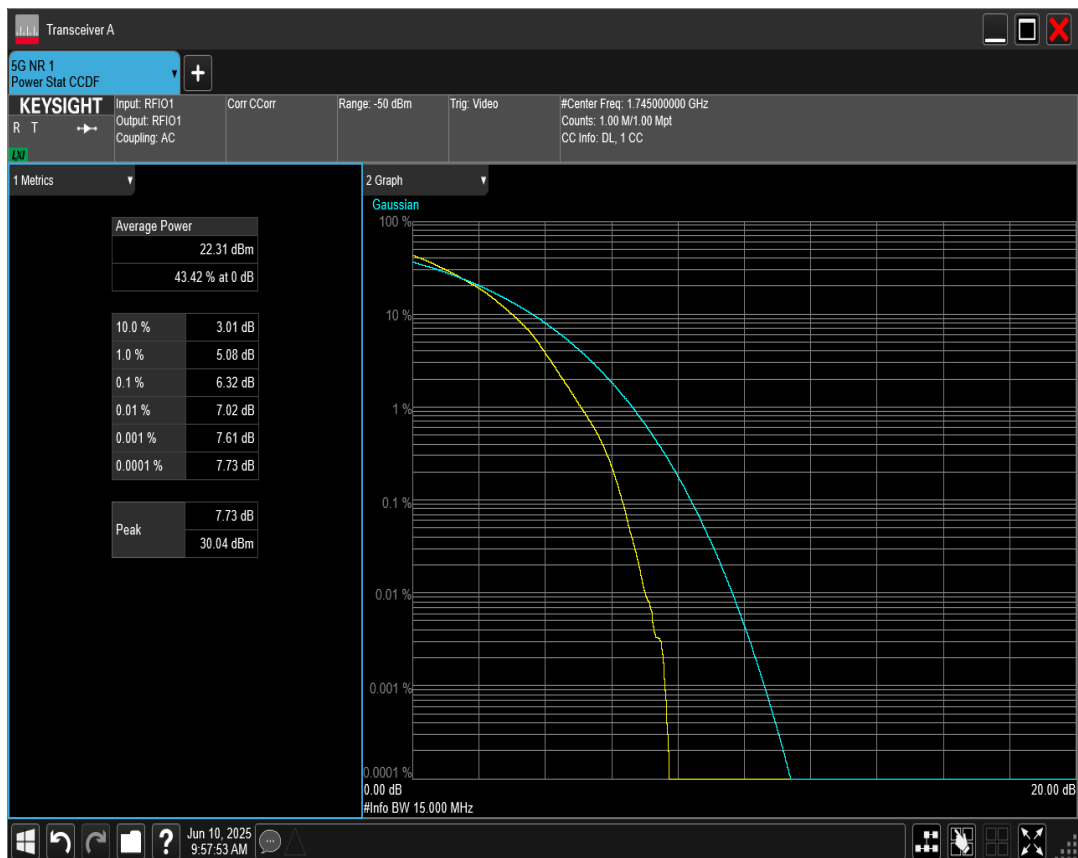


n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=354000 RB=100@0

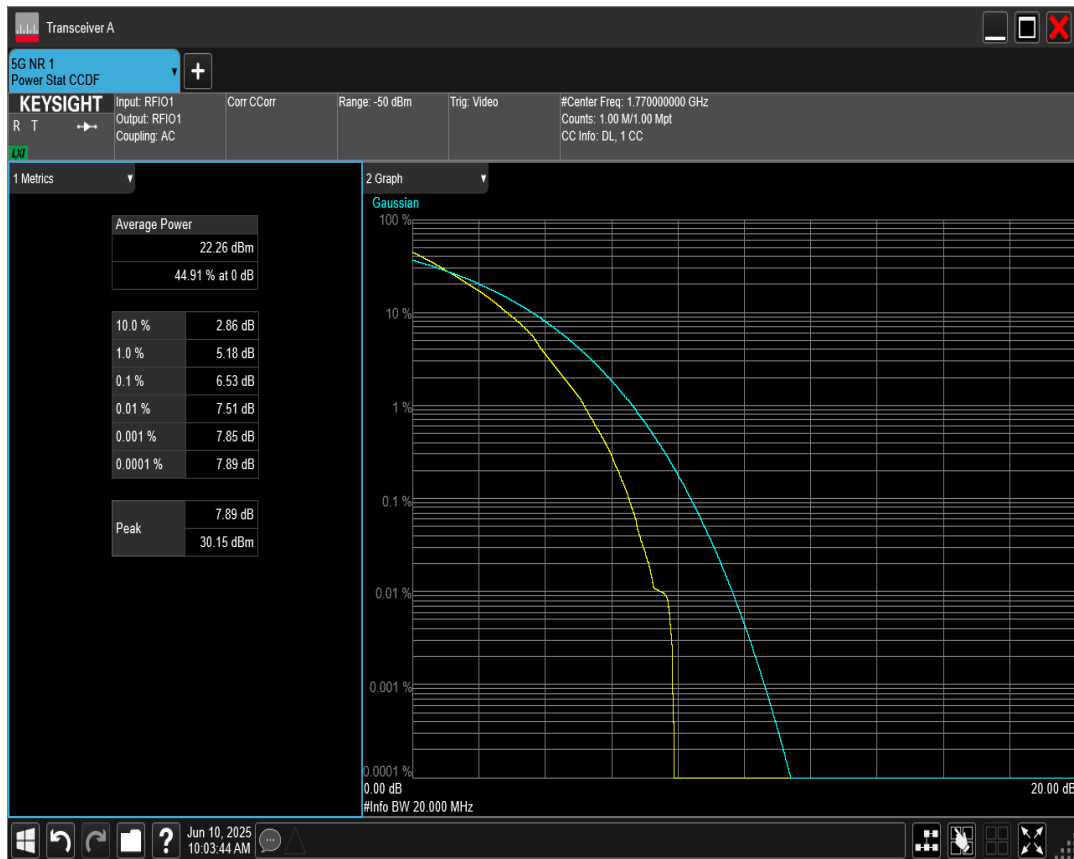


n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=349000 RB=100@0

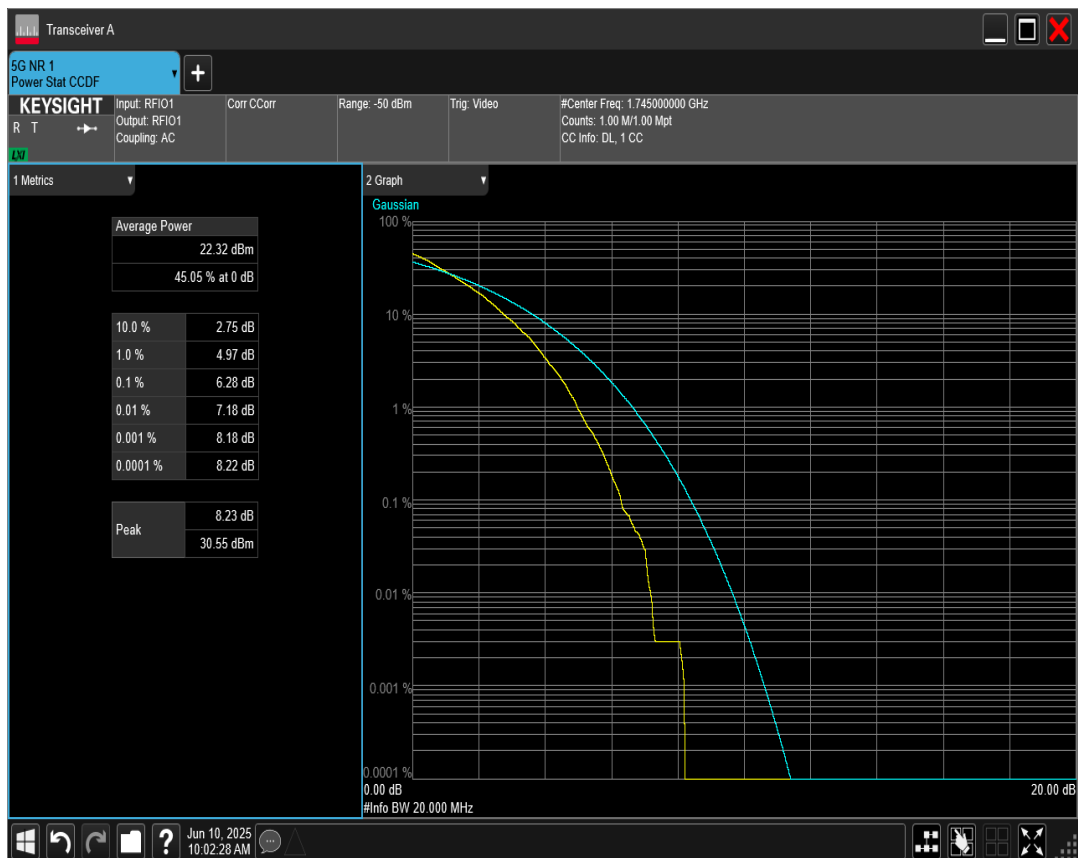


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=349000 RB=216@0

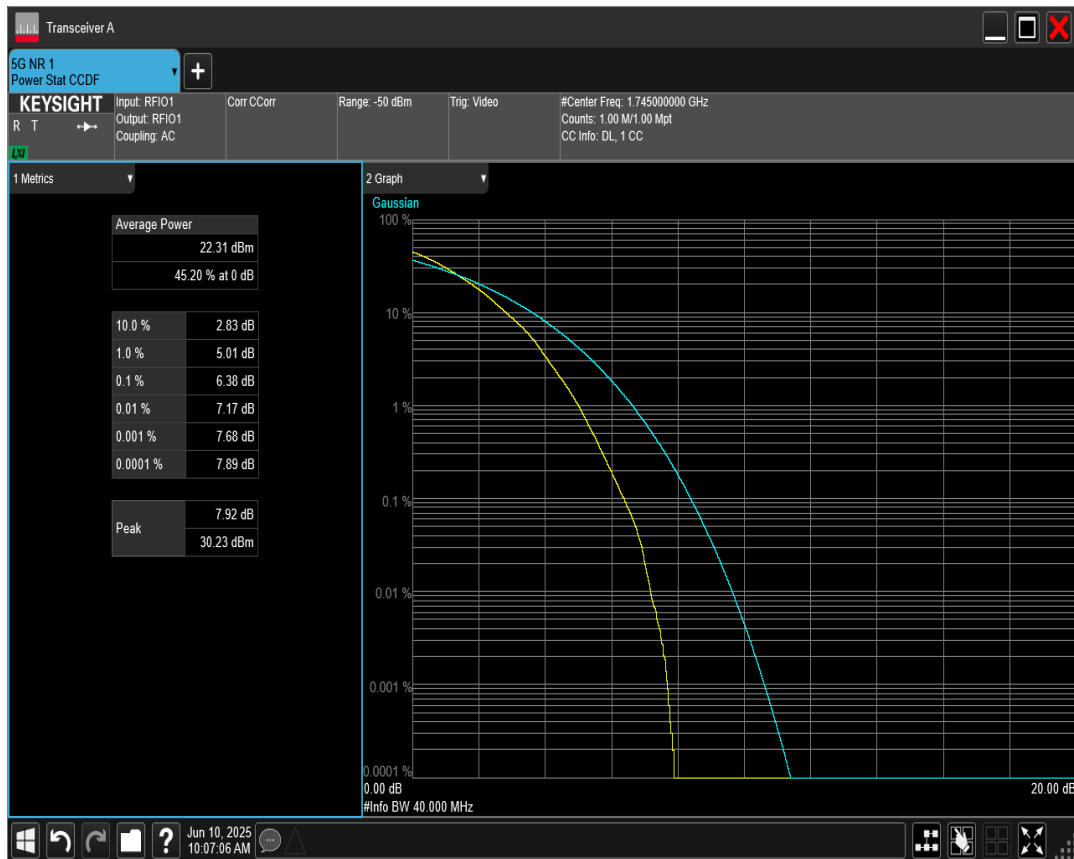


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=346000 RB=216@0

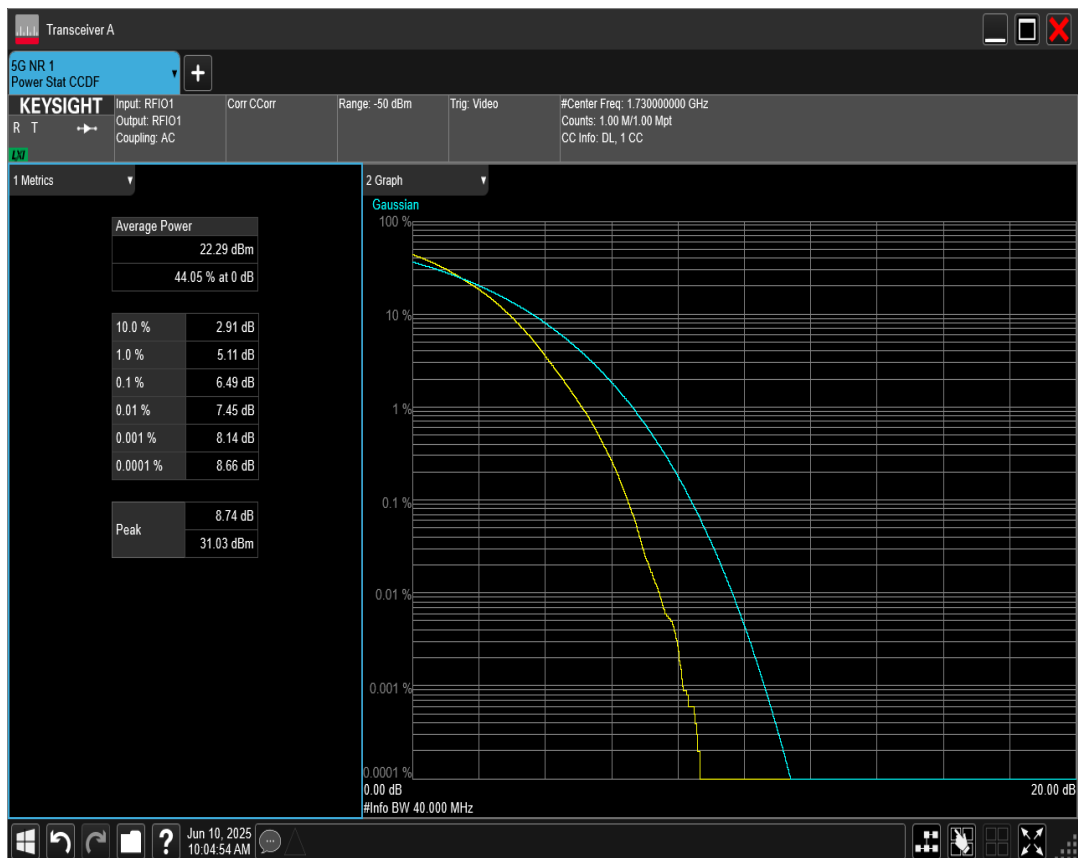


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=342500 RB=25@0

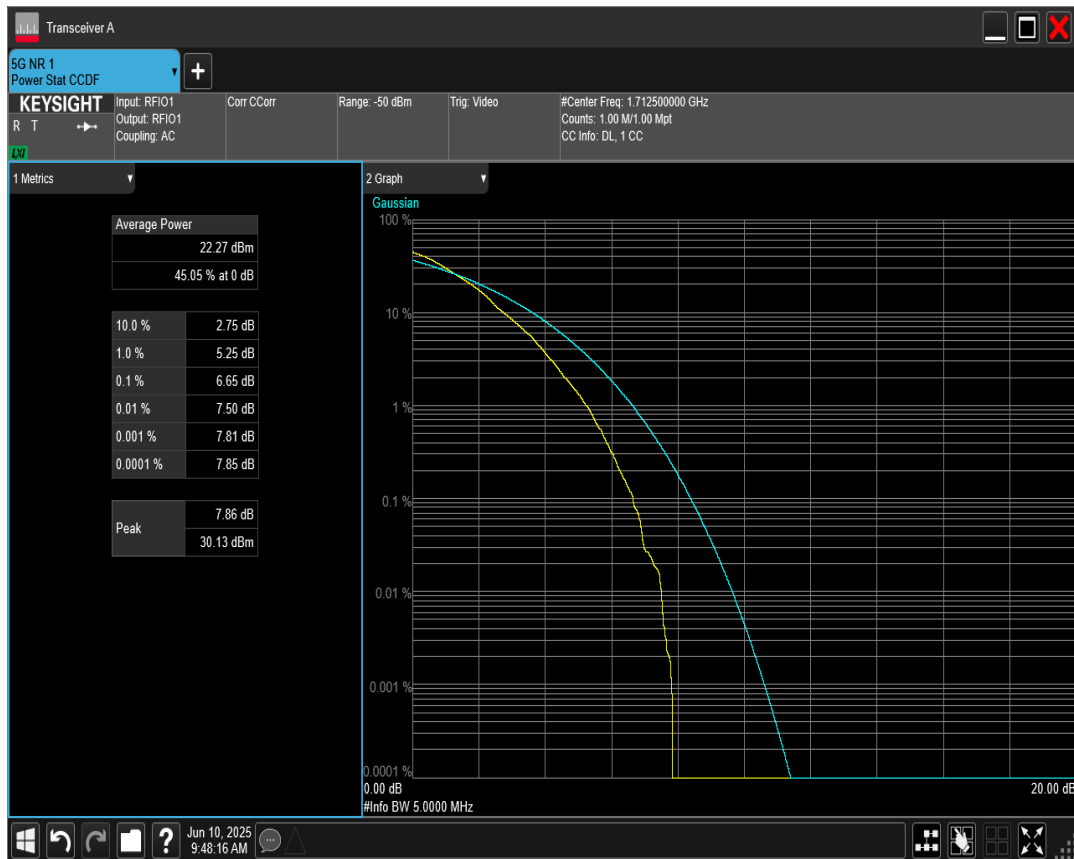


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=352000 RB=216@0

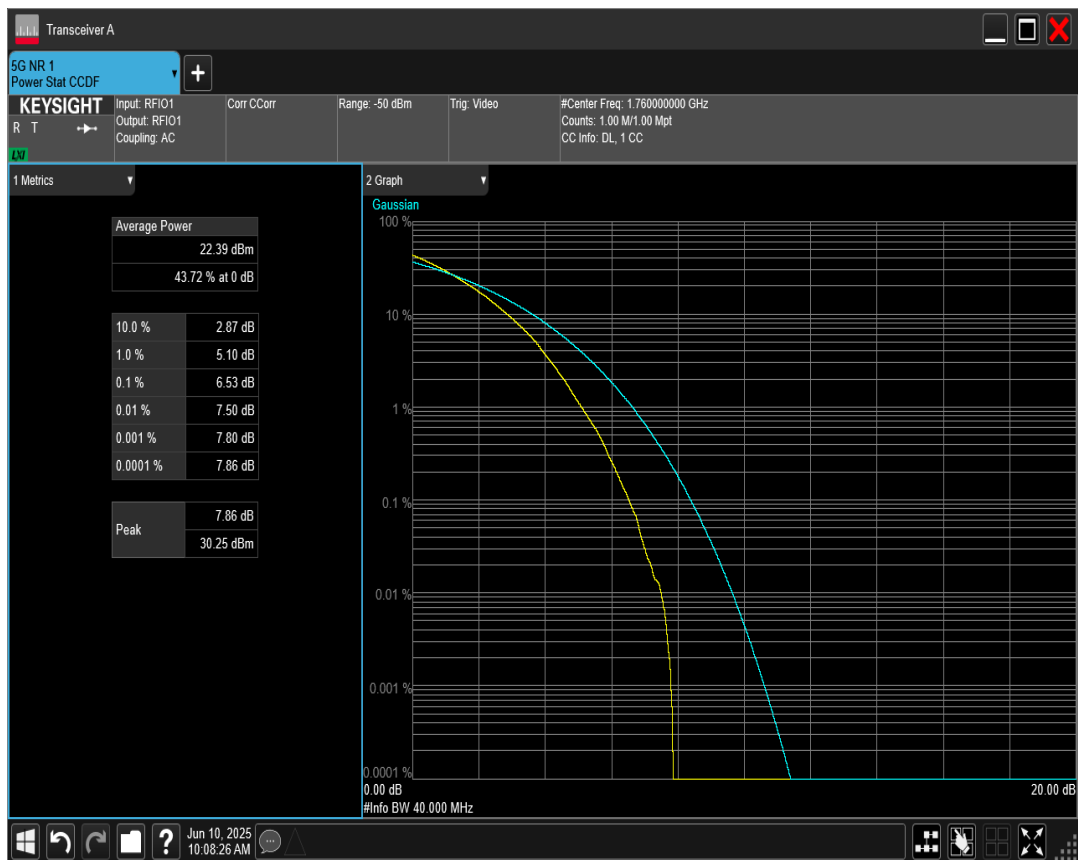


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=349000 RB=25@0

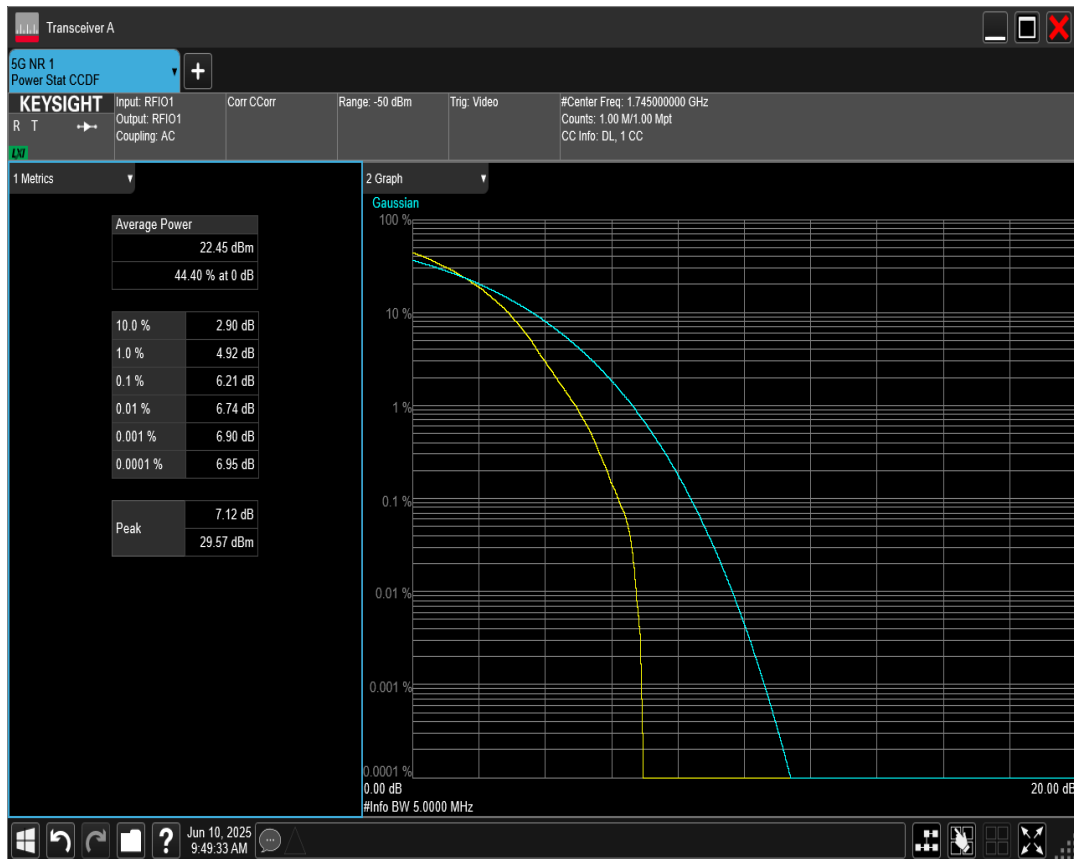


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=355500 RB=25@0

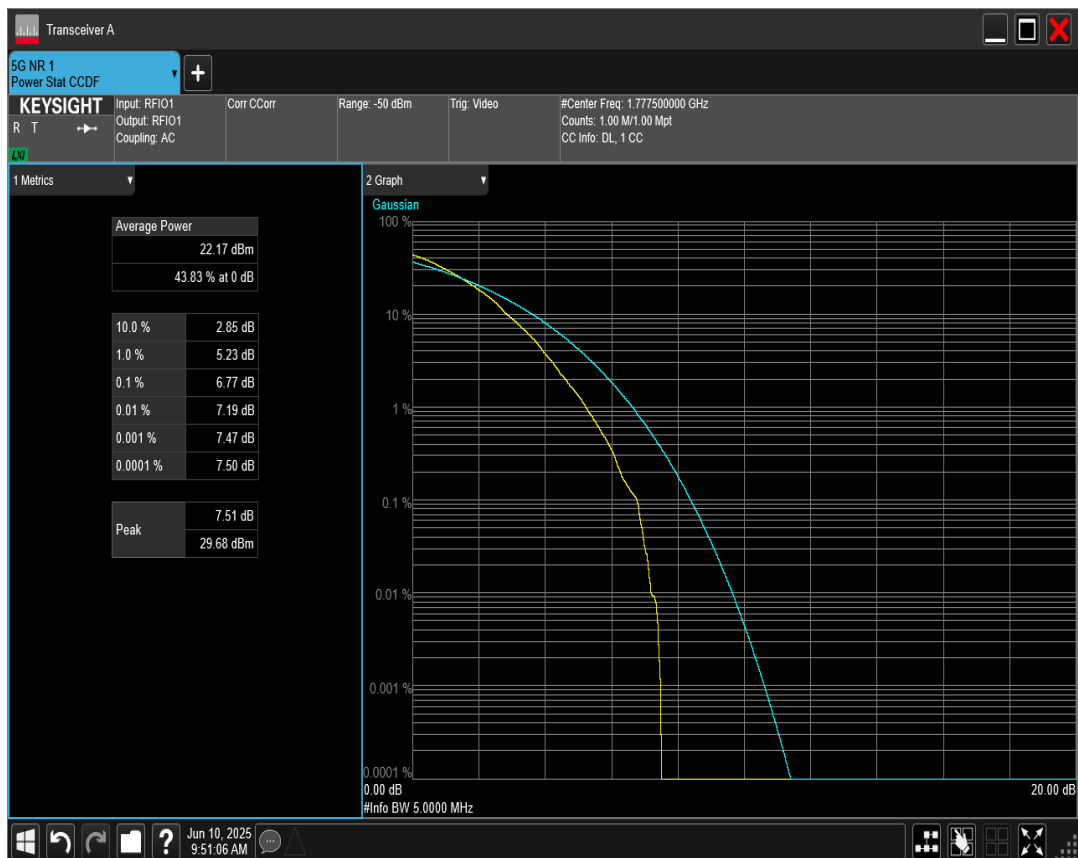


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=349000 RB=50@0

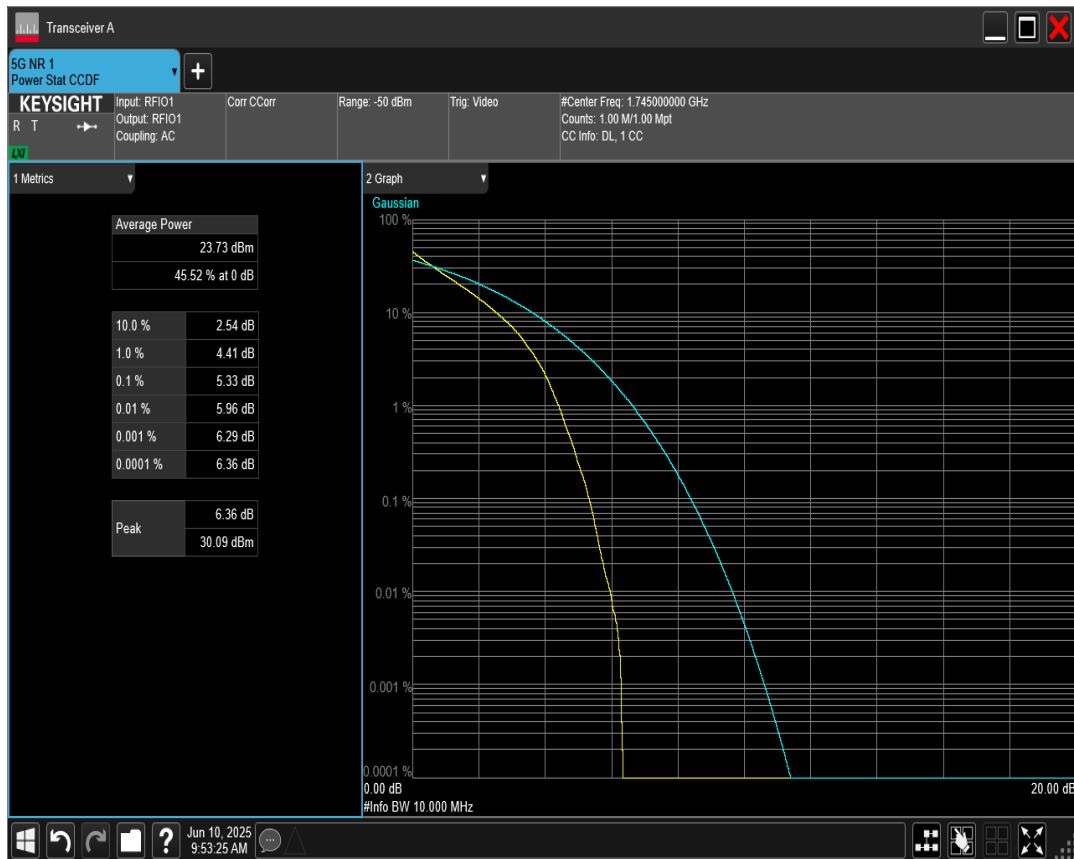


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=343000 RB=50@0

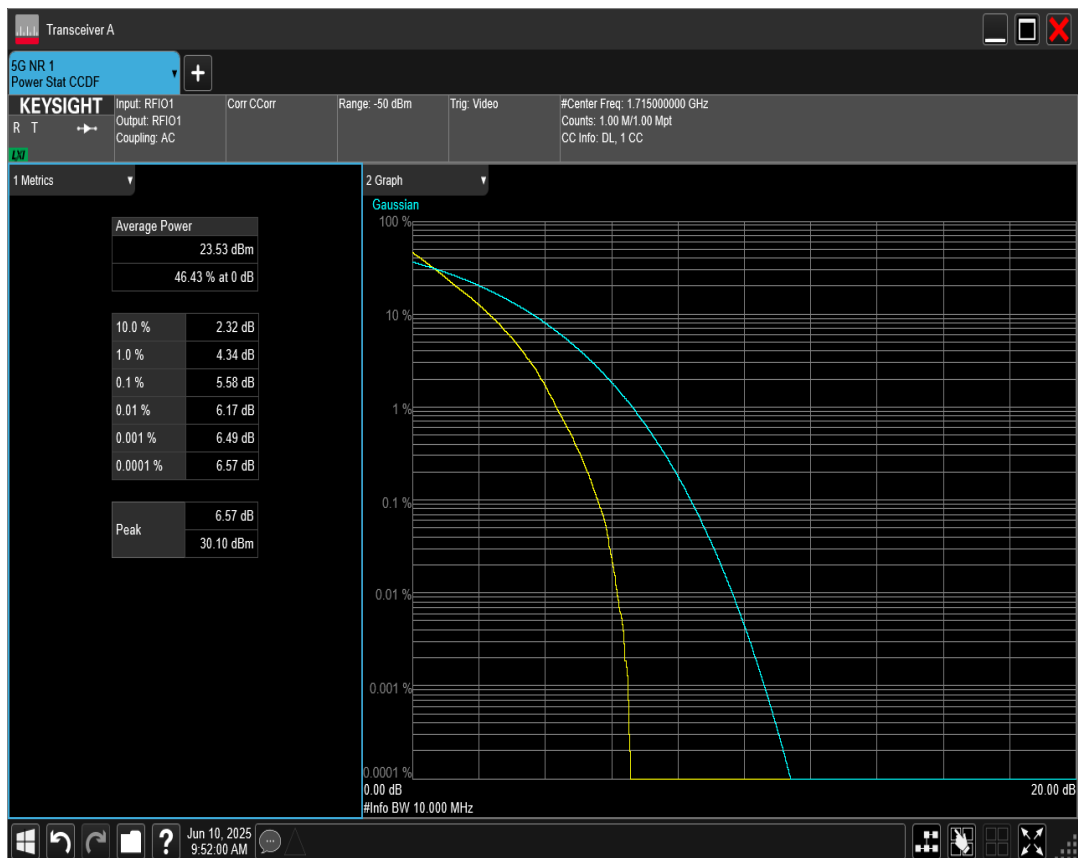


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=349000 RB=75@0

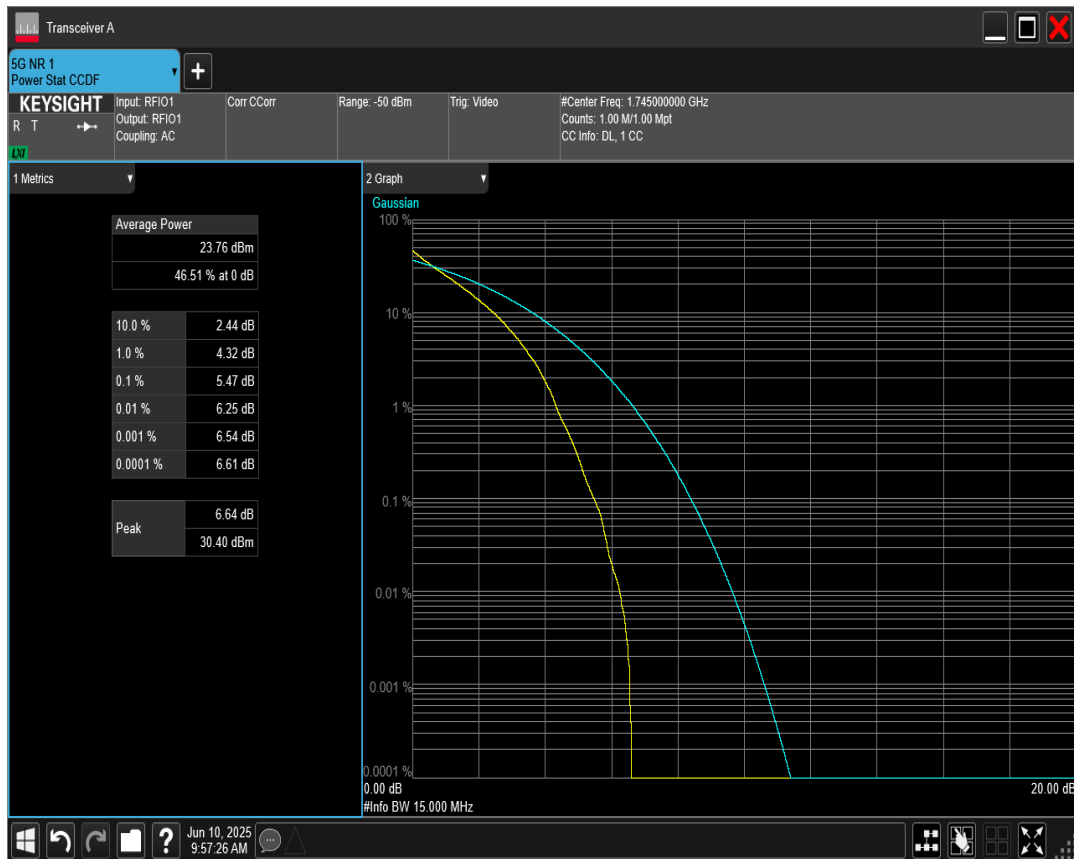


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=343500 RB=75@0

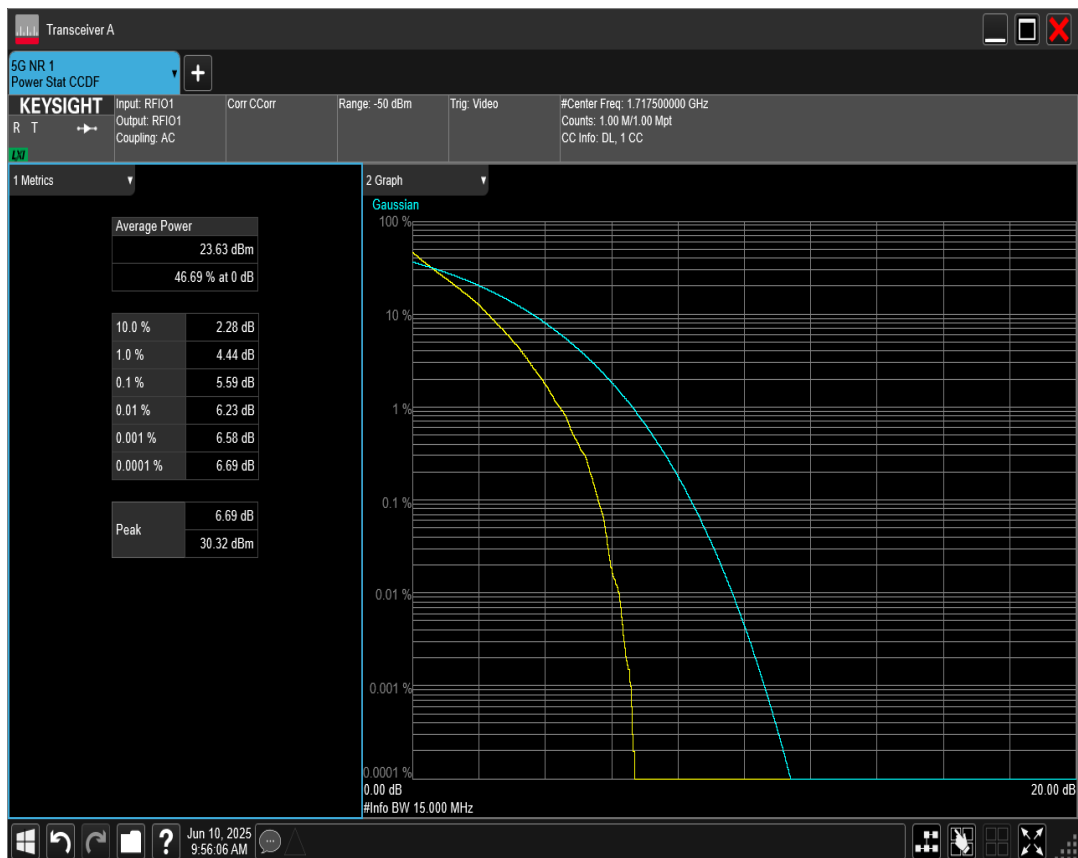


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=355000 RB=50@0

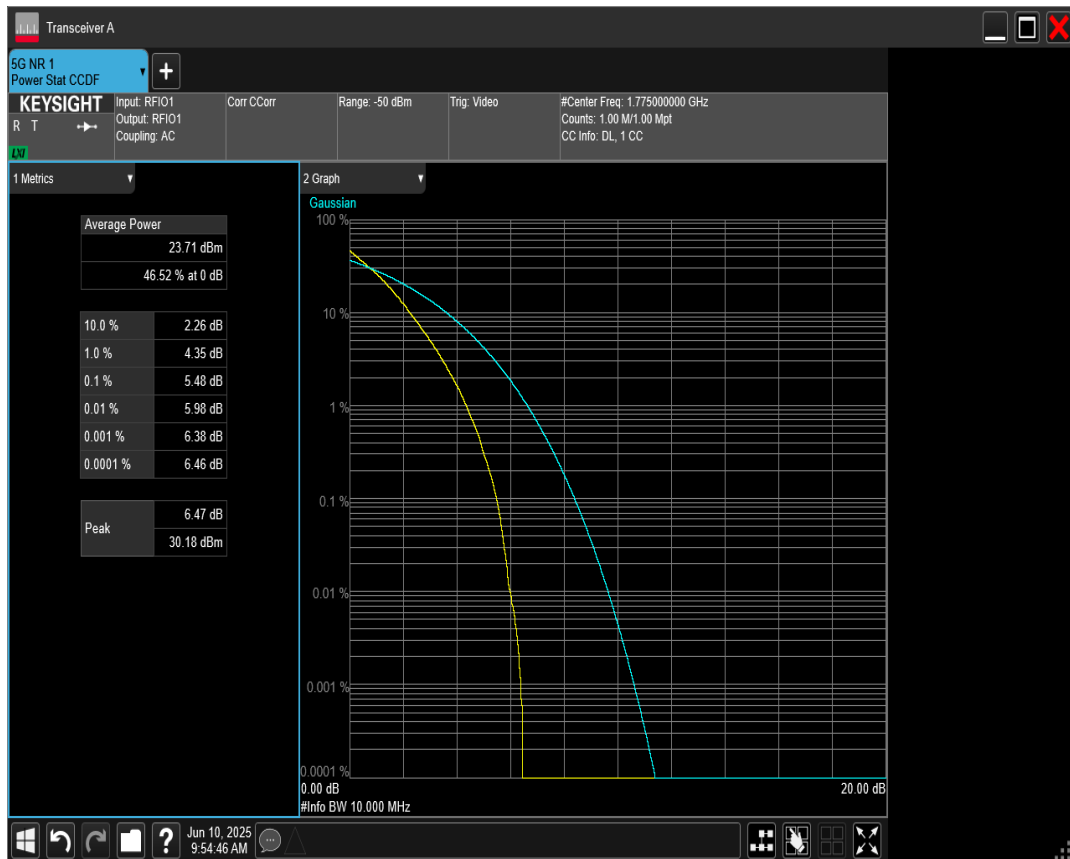


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=354500 RB=75@0

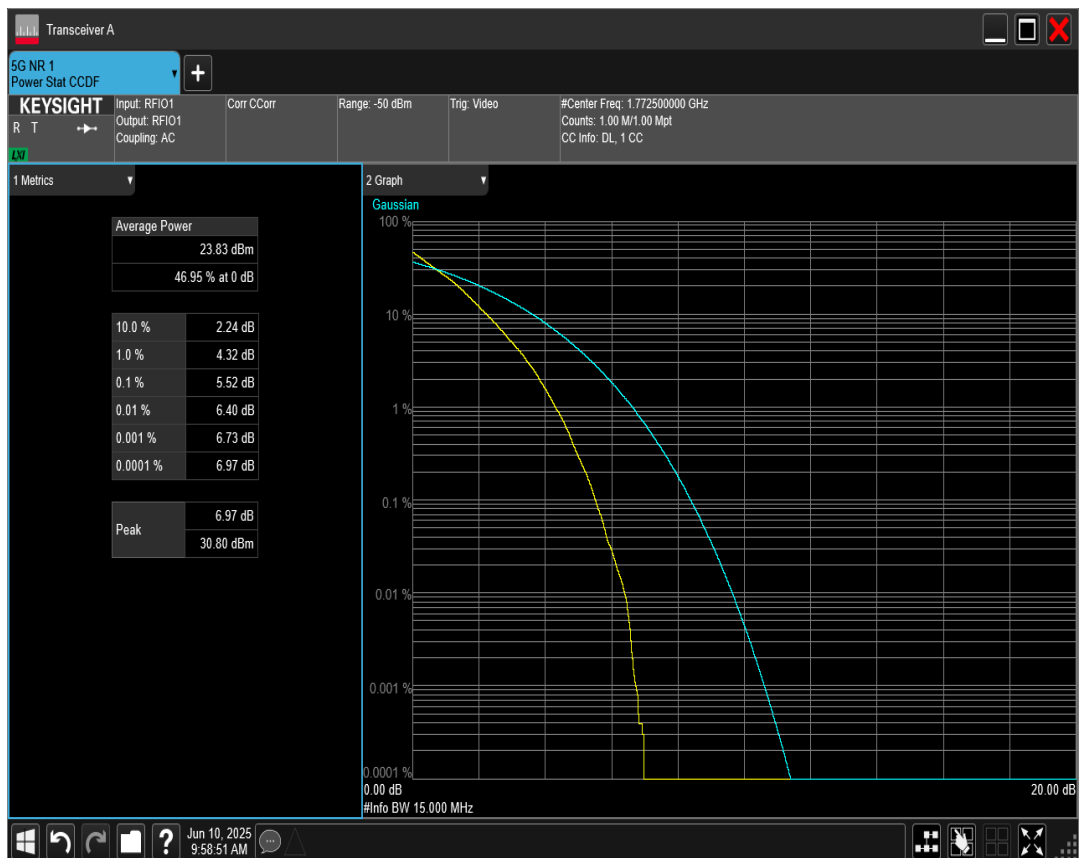


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=344000 RB=100@0

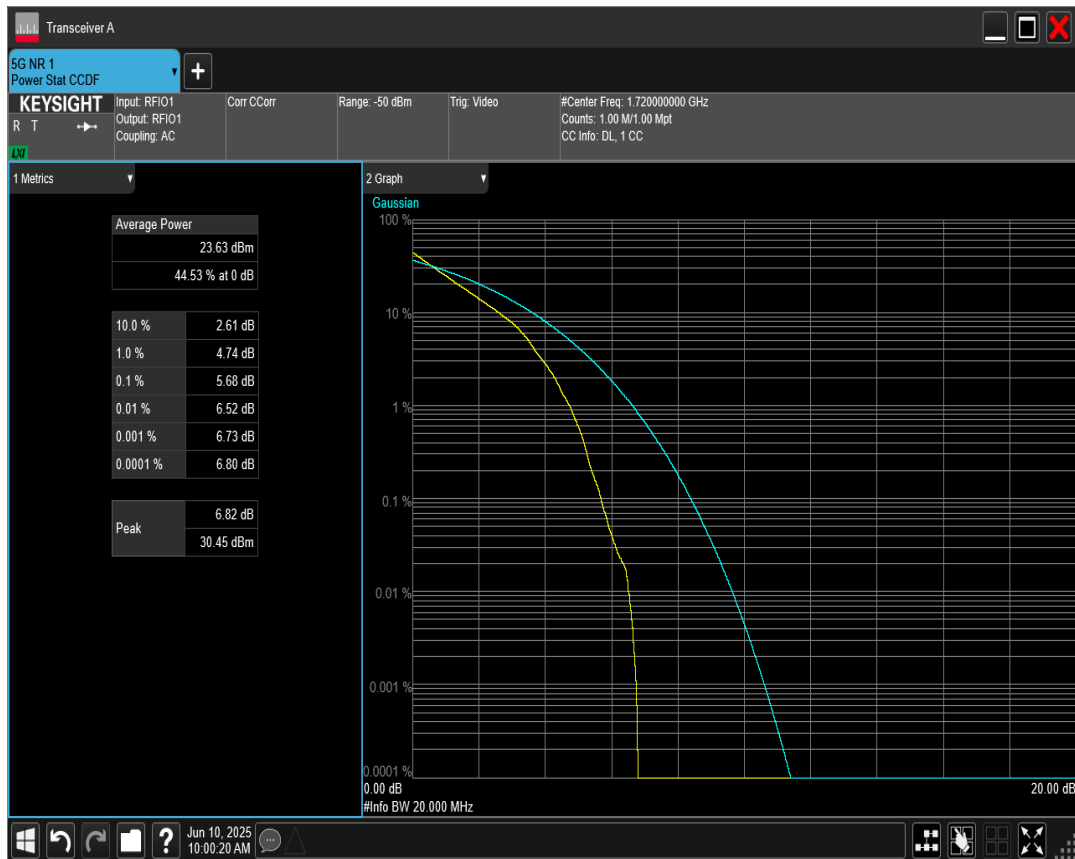


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=354000 RB=100@0

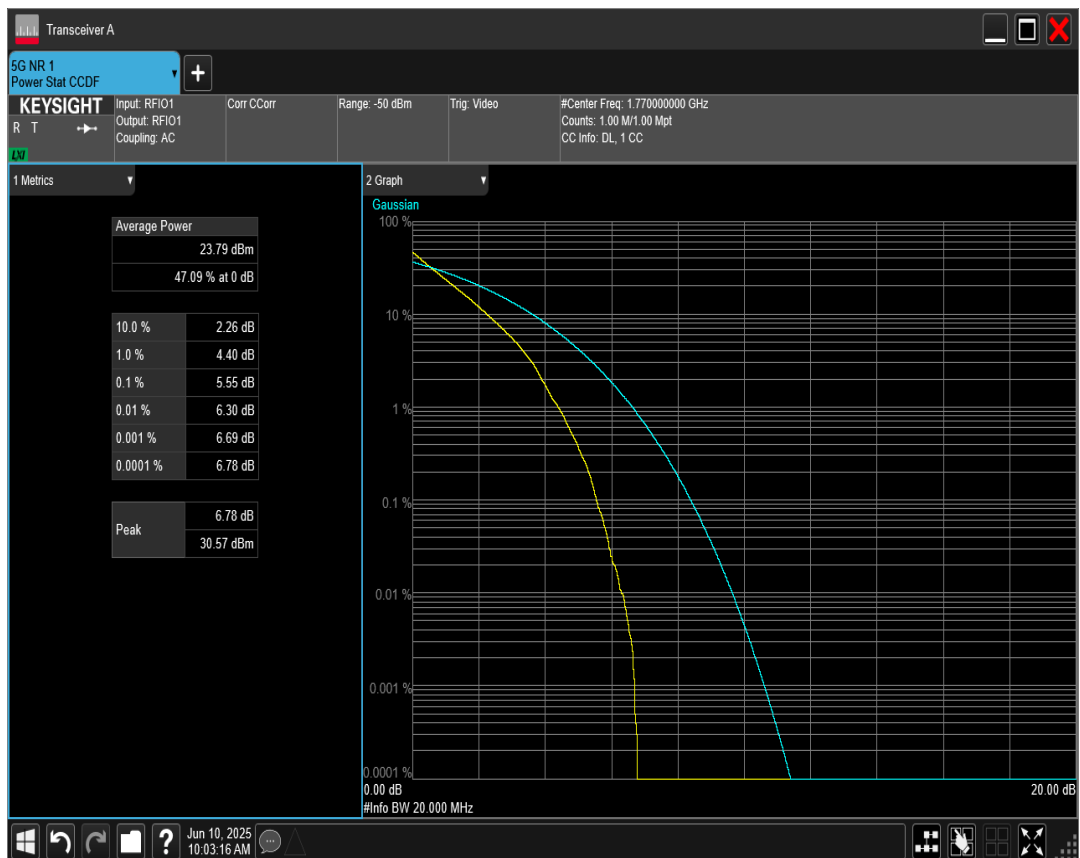


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=349000 RB=100@0

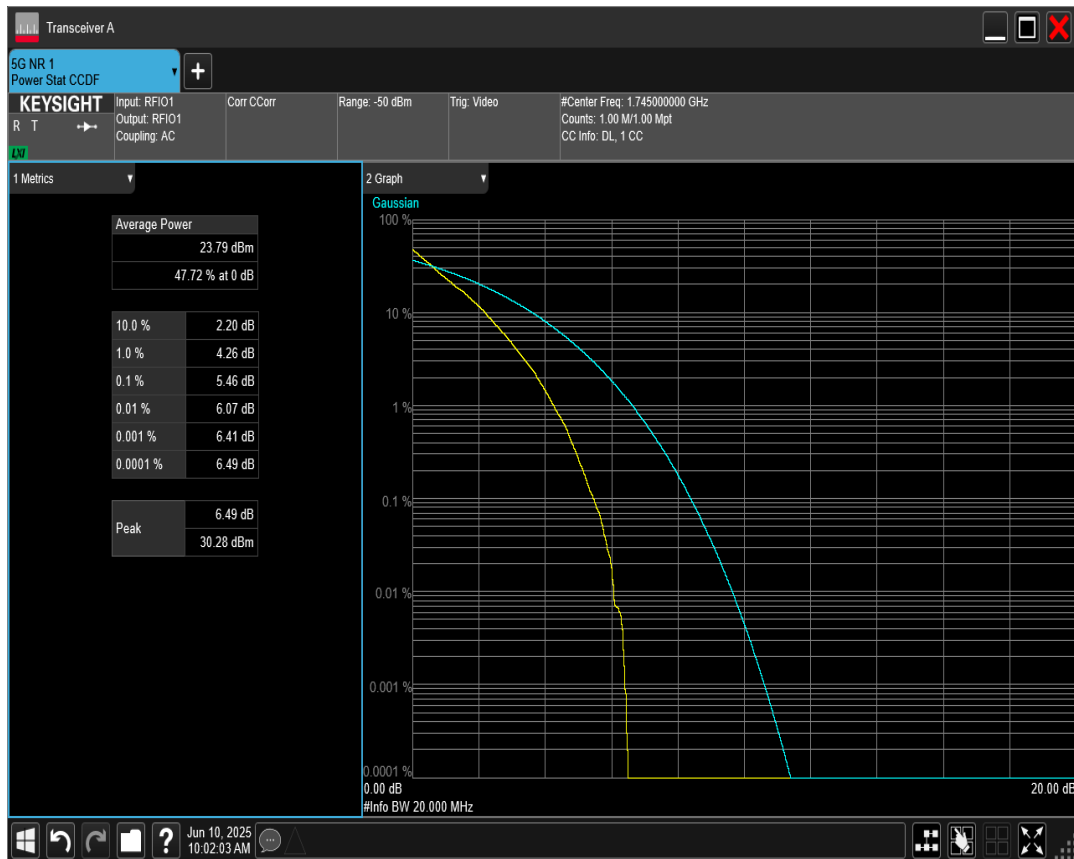


n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=346000 RB=216@0

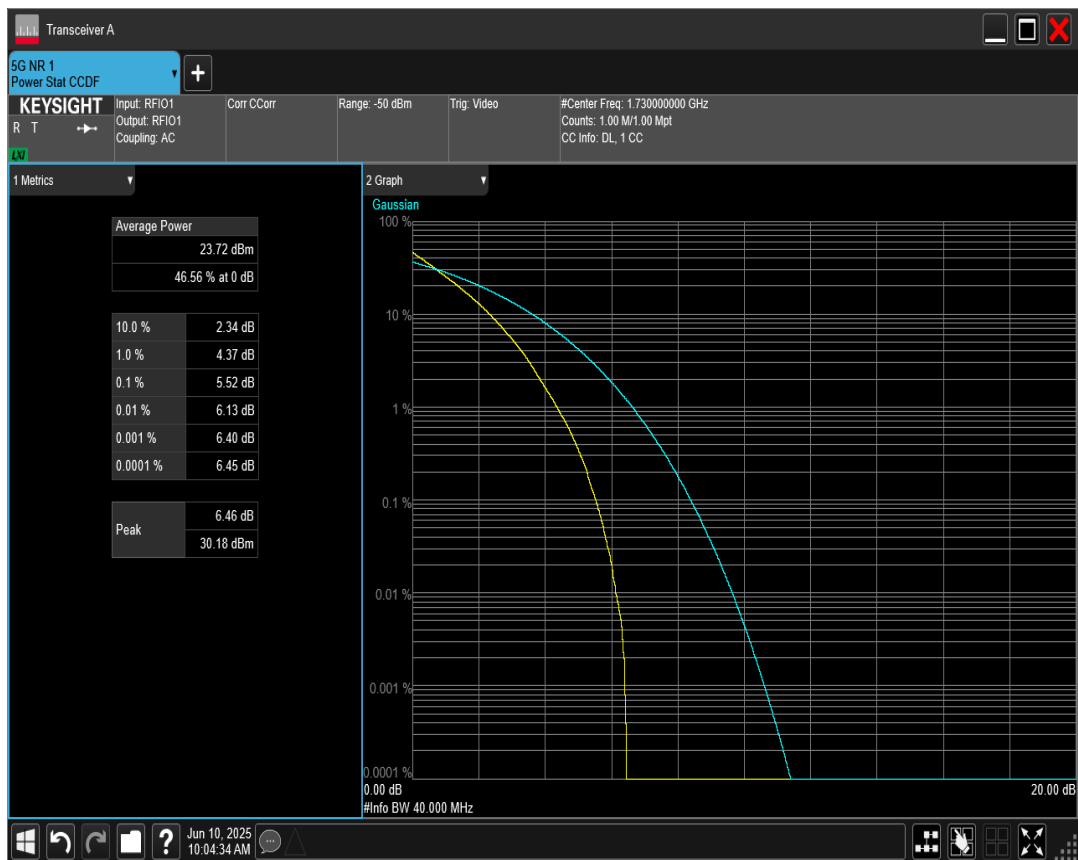


n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=342500 RB=25@0

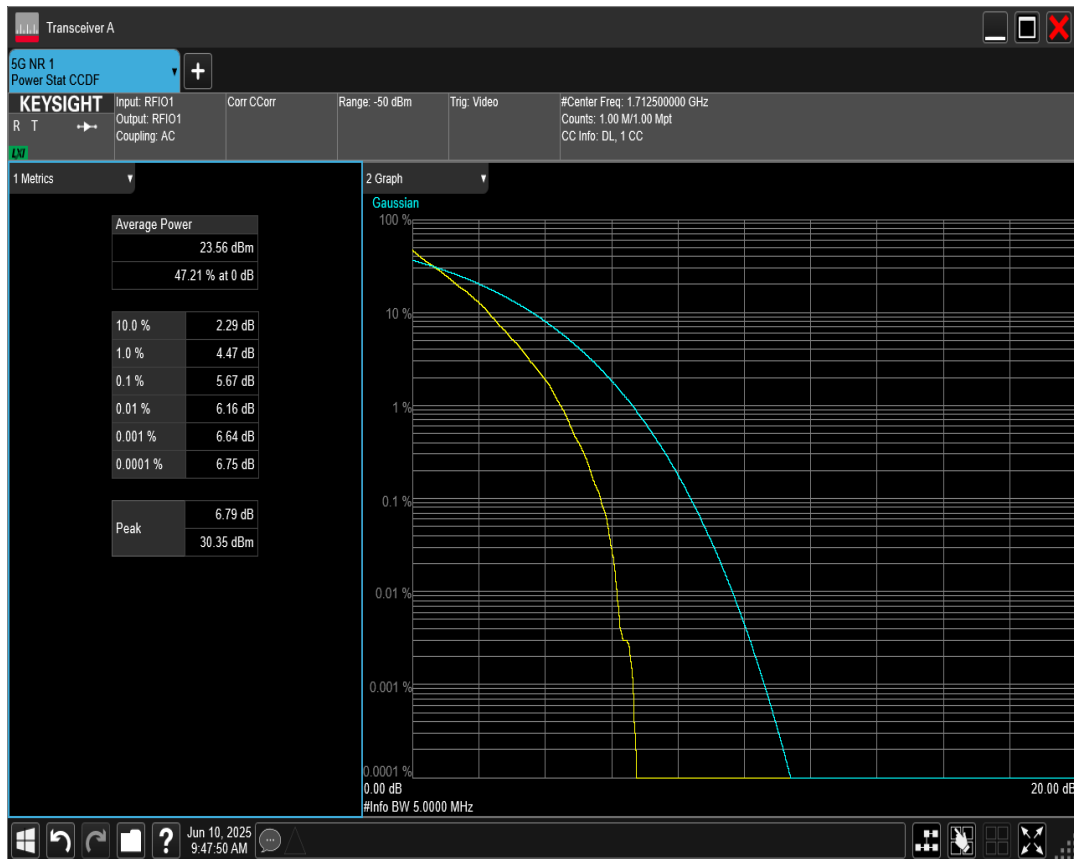


n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=349000 RB=25@0

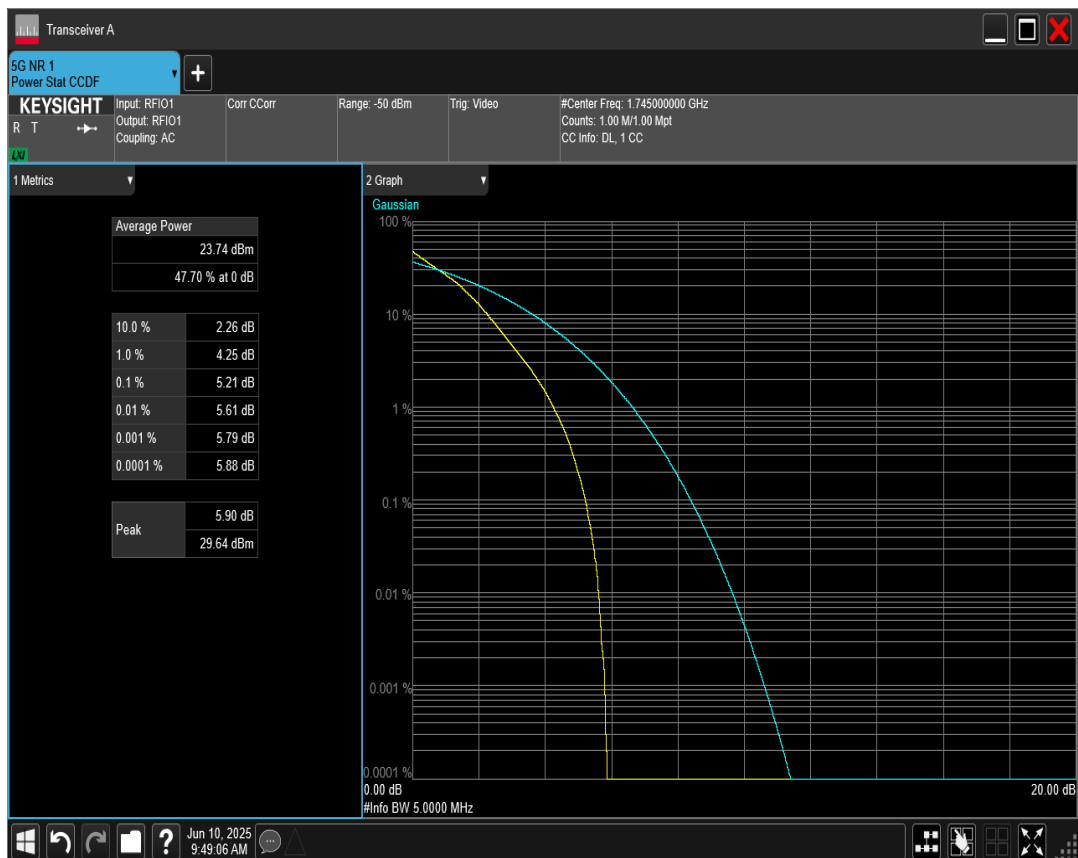


n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=349000 RB=216@0

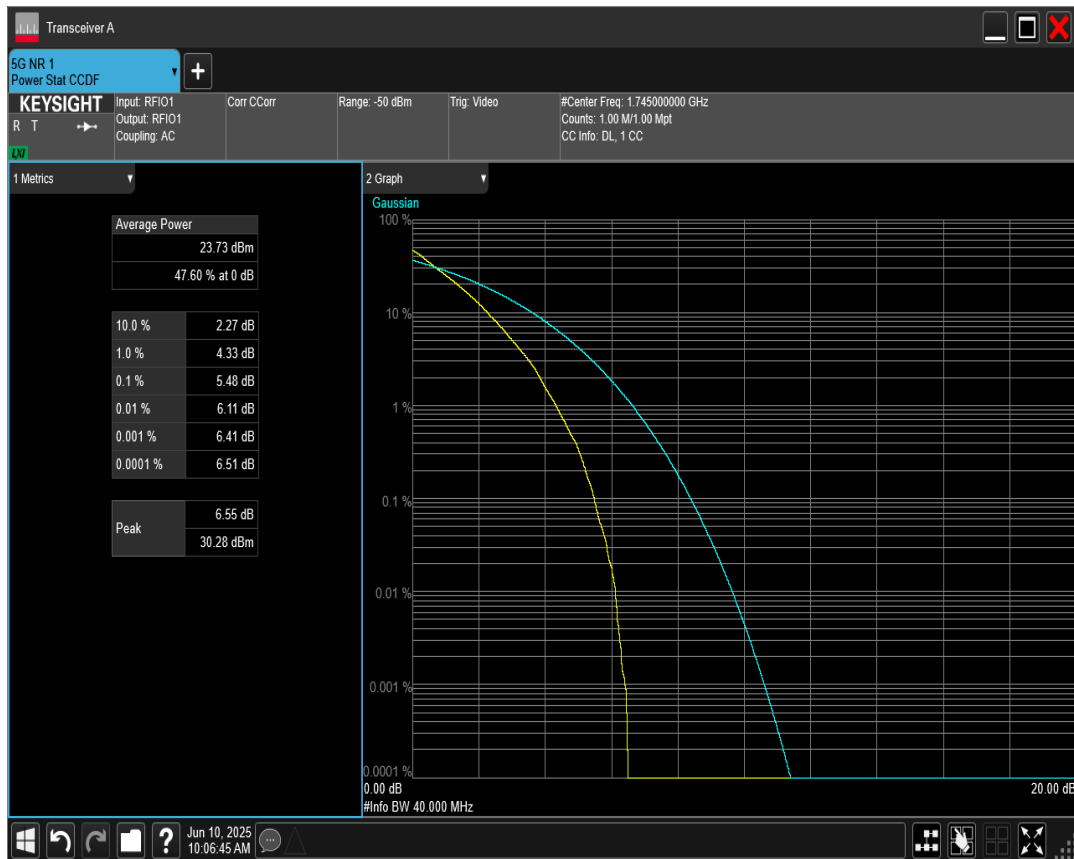


n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=352000 RB=216@0

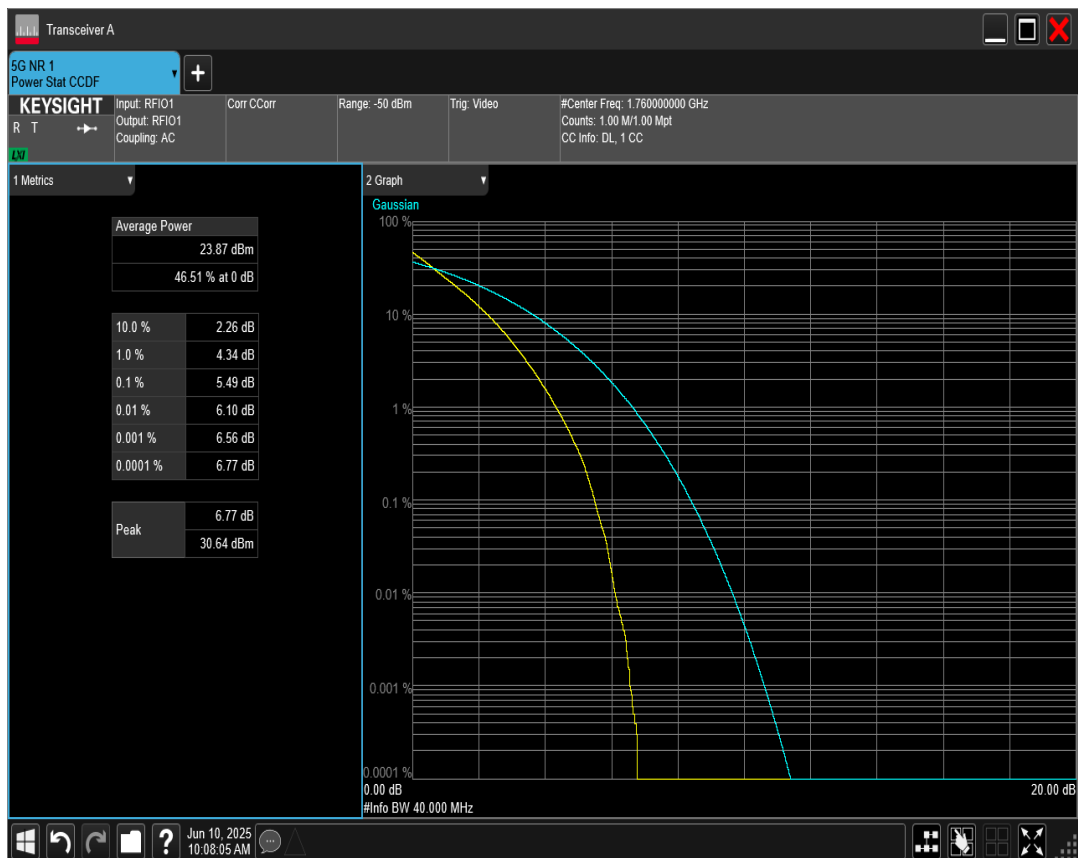


n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=355500 RB=25@0

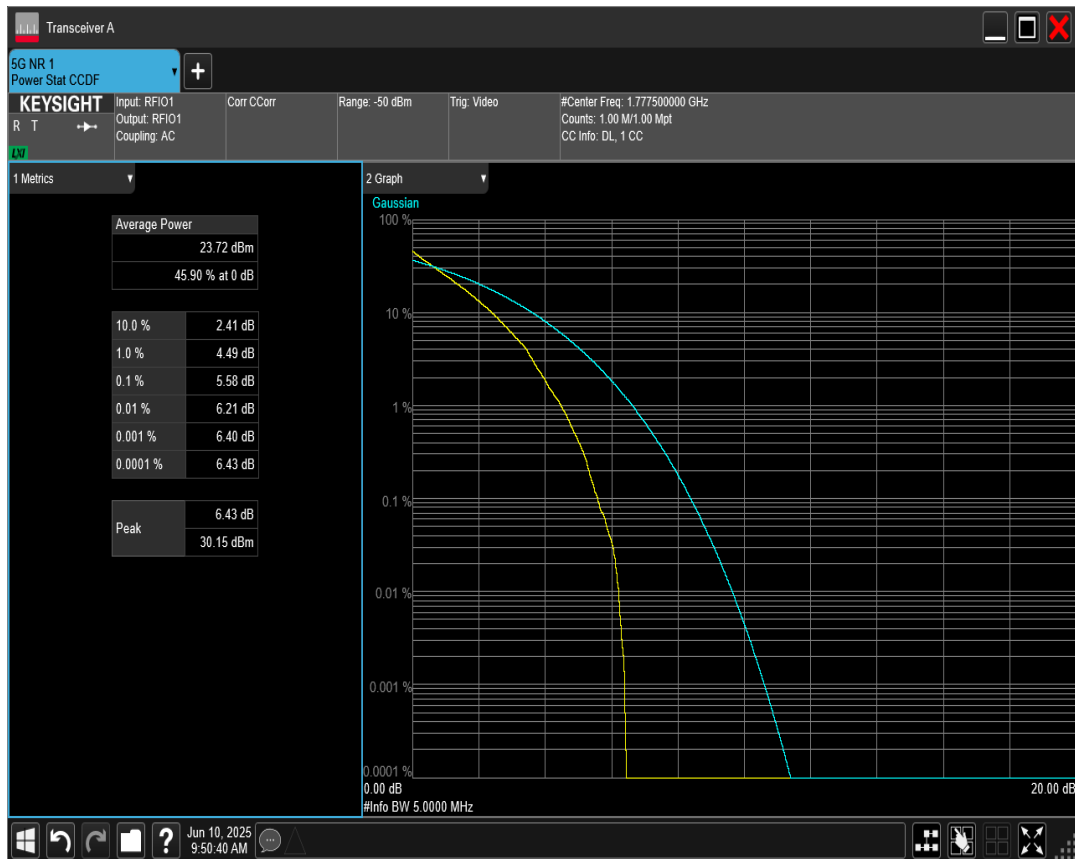


n66 SCS=30kHz DFT_BPSK BW=10MHz Channel=343000 RB=24@0

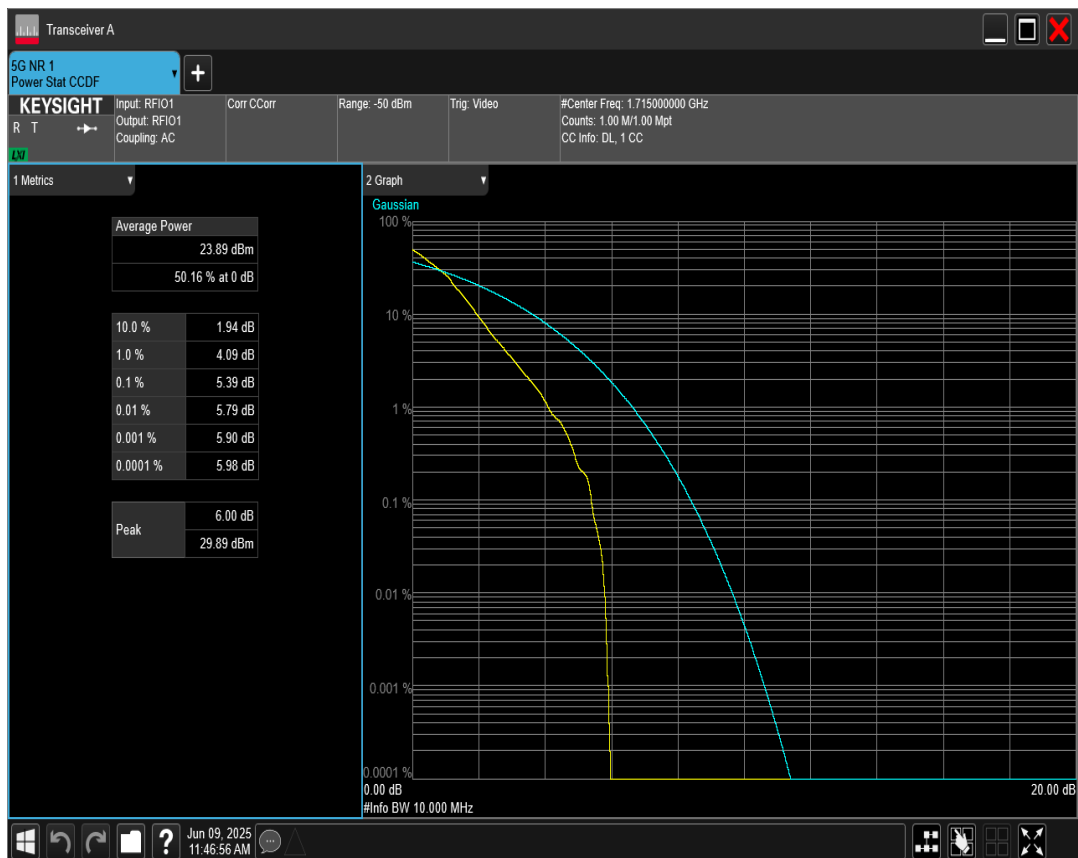


n66 SCS=30kHz DFT_BPSK BW=10MHz Channel=349000 RB=24@0

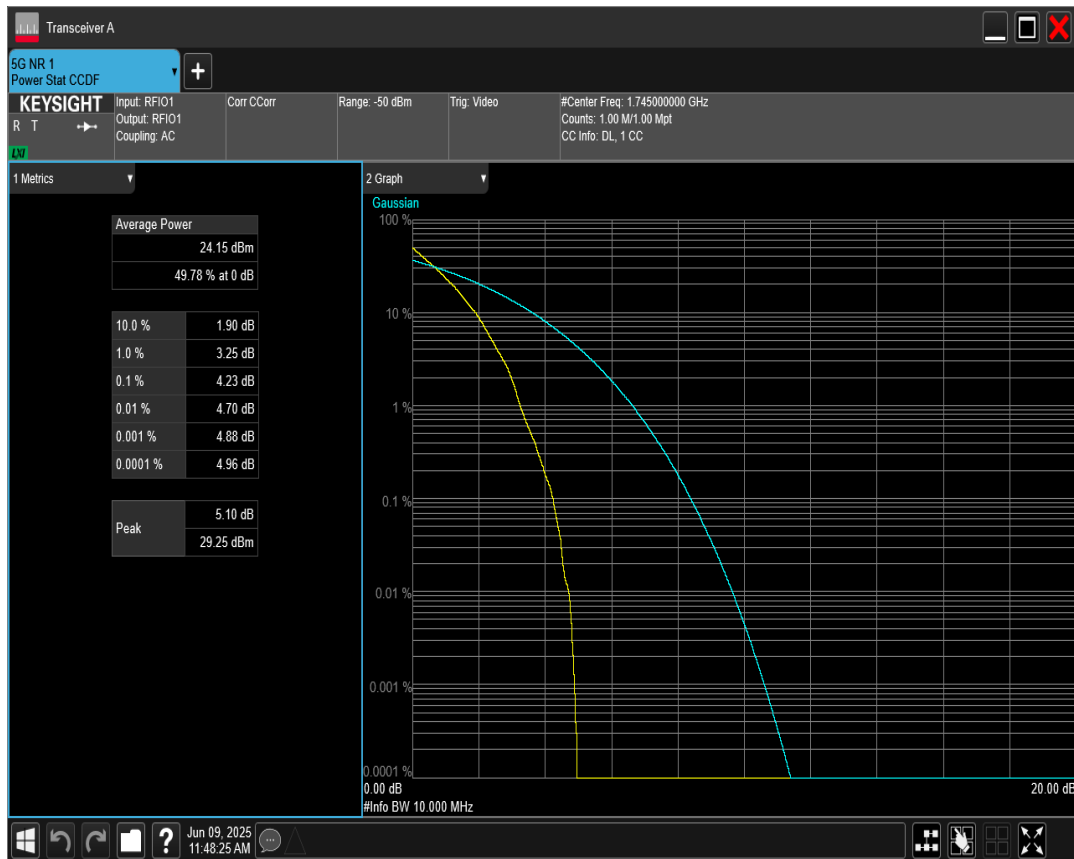


n66 SCS=30kHz DFT_BPSK BW=10MHz Channel=355000 RB=24@0

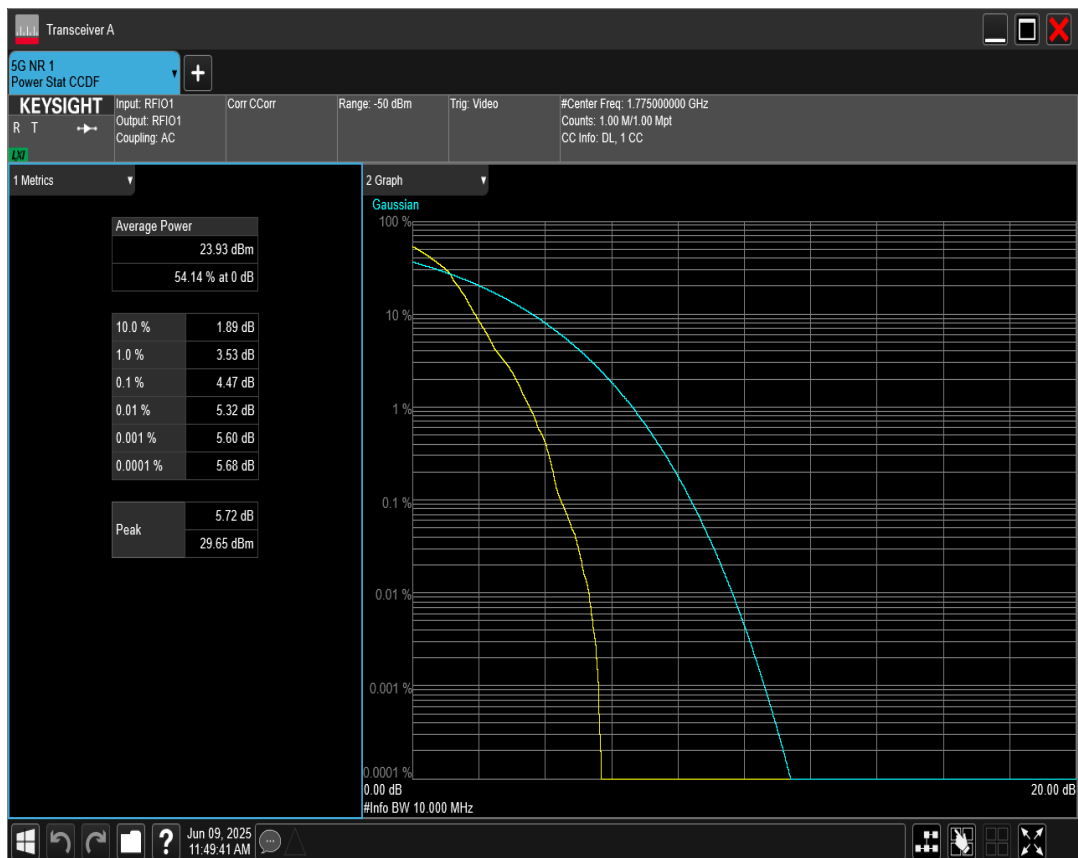


n66 SCS=30kHz DFT_BPSK BW=15MHz Channel=343500 RB=36@0

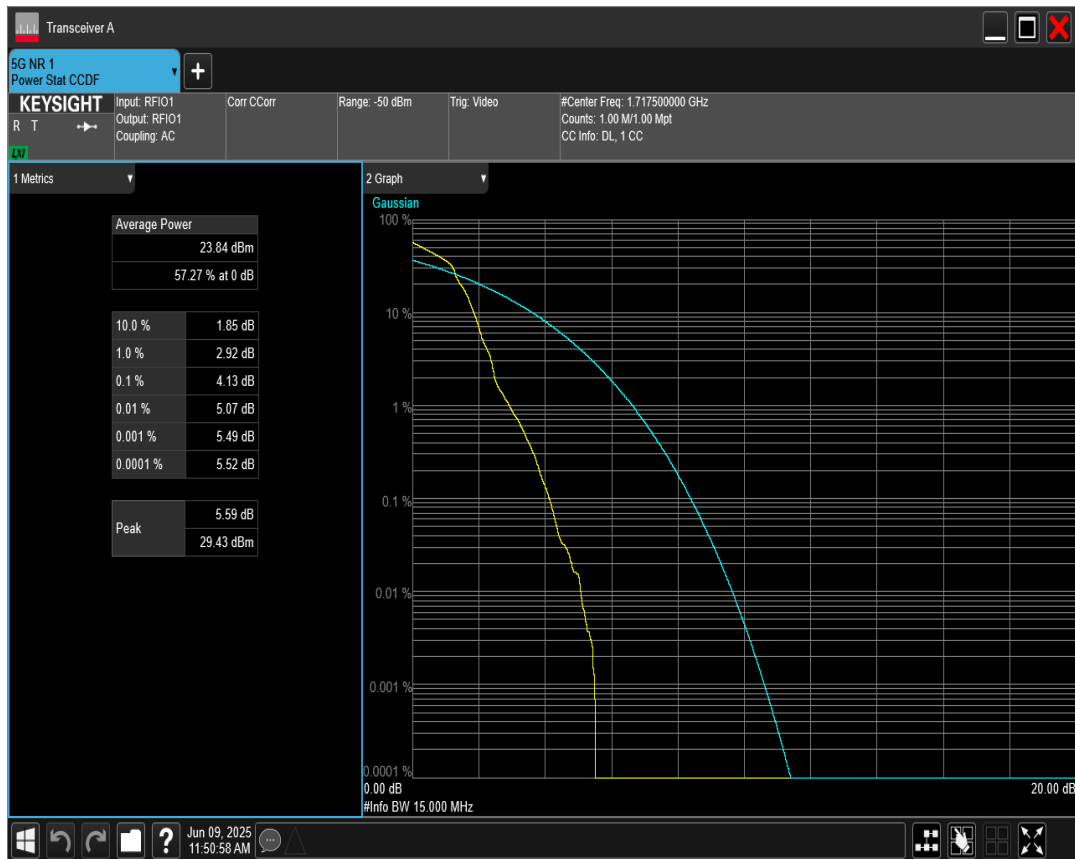


n66 SCS=30kHz DFT_BPSK BW=15MHz Channel=349000 RB=36@0

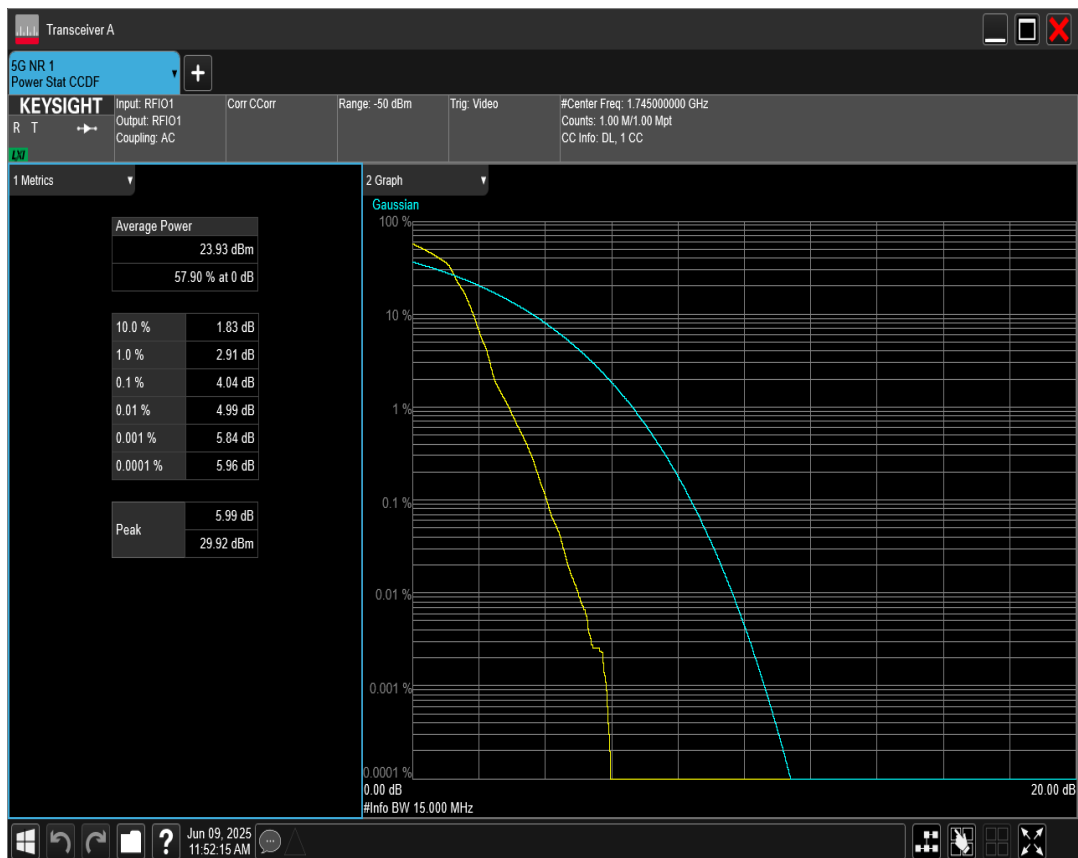


n66 SCS=30kHz DFT_BPSK BW=15MHz Channel=354500 RB=36@0

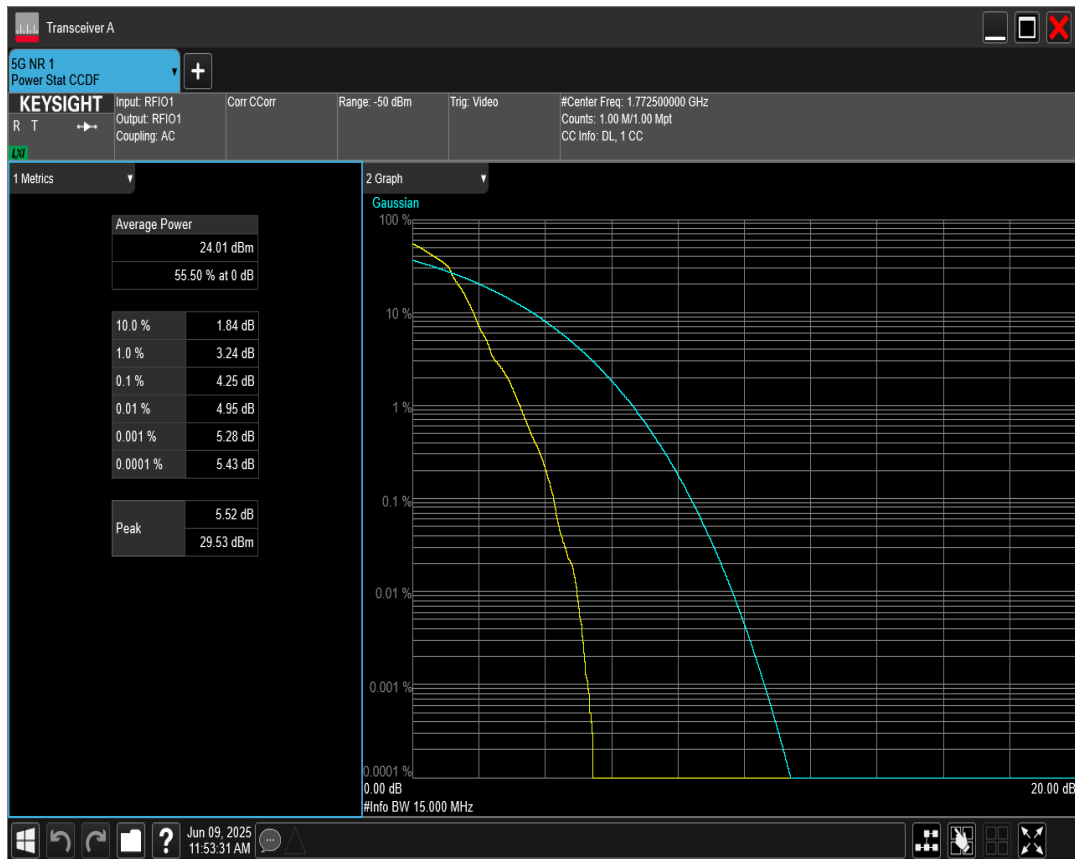


n66 SCS=30kHz DFT_BPSK BW=20MHz Channel=344000 RB=50@0

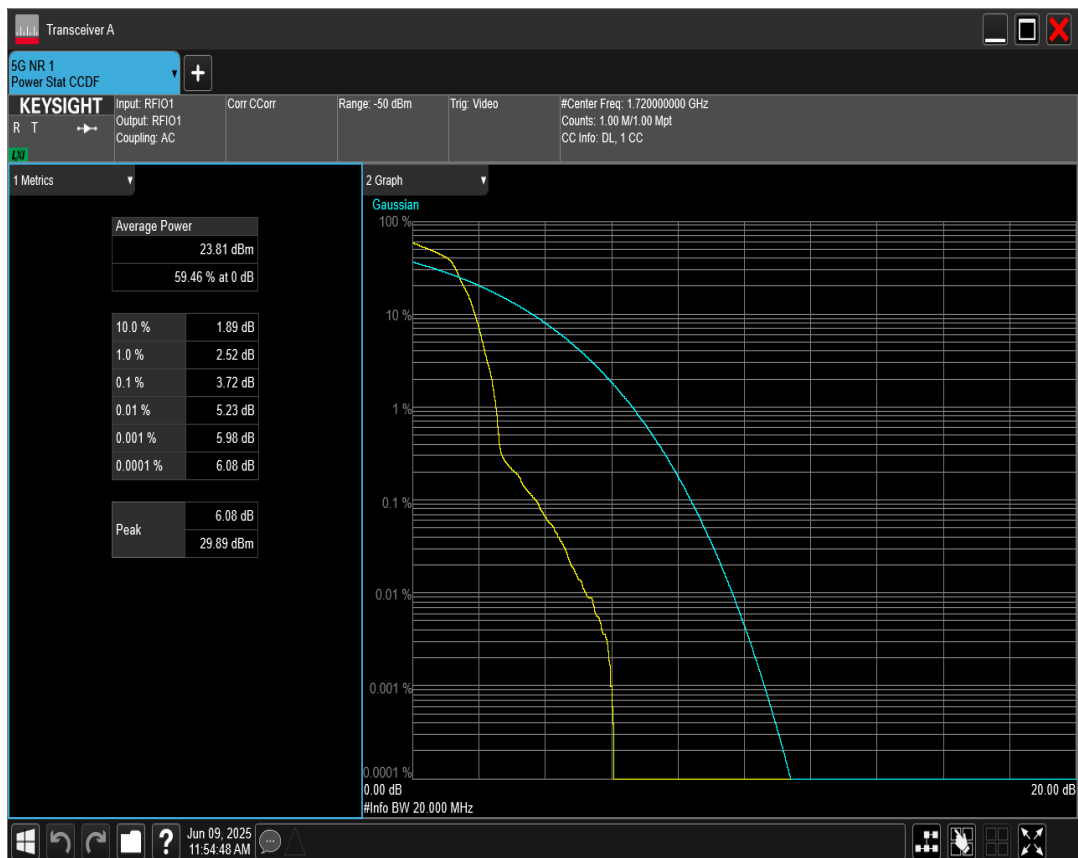


n66 SCS=30kHz DFT_BPSK BW=20MHz Channel=349000 RB=50@0

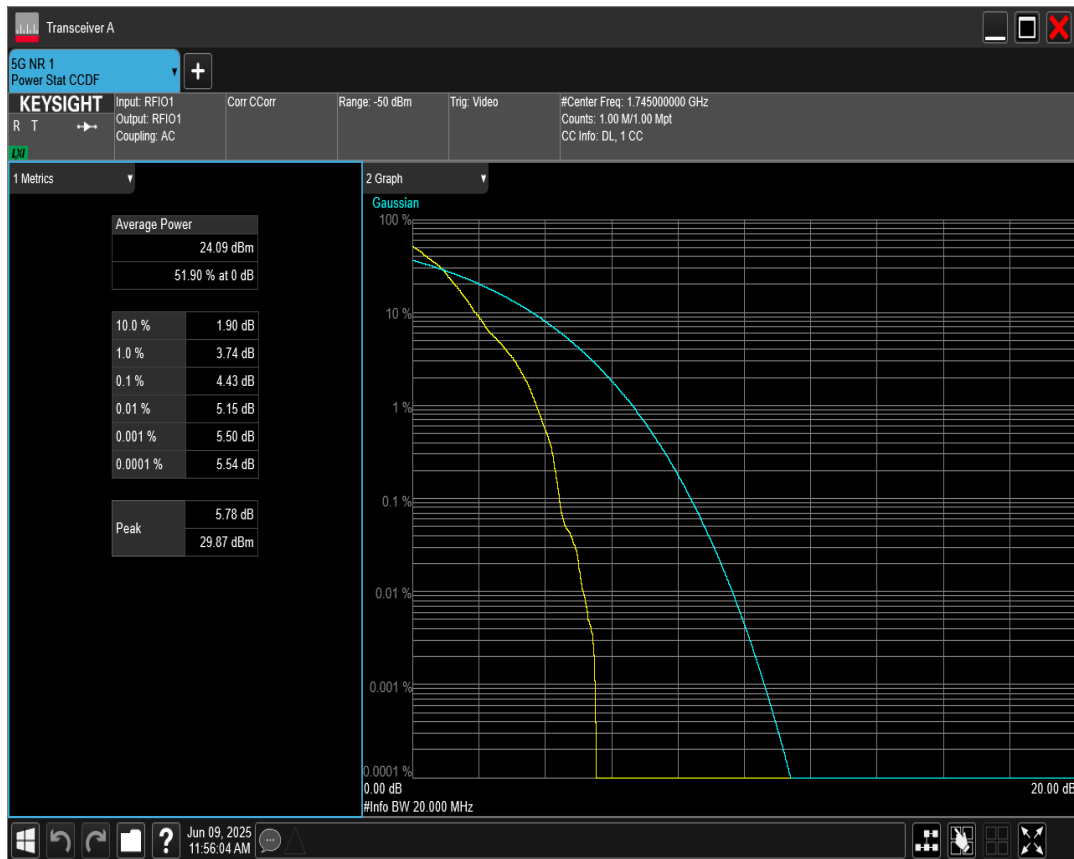


n66 SCS=30kHz DFT_BPSK BW=20MHz Channel=354000 RB=50@0

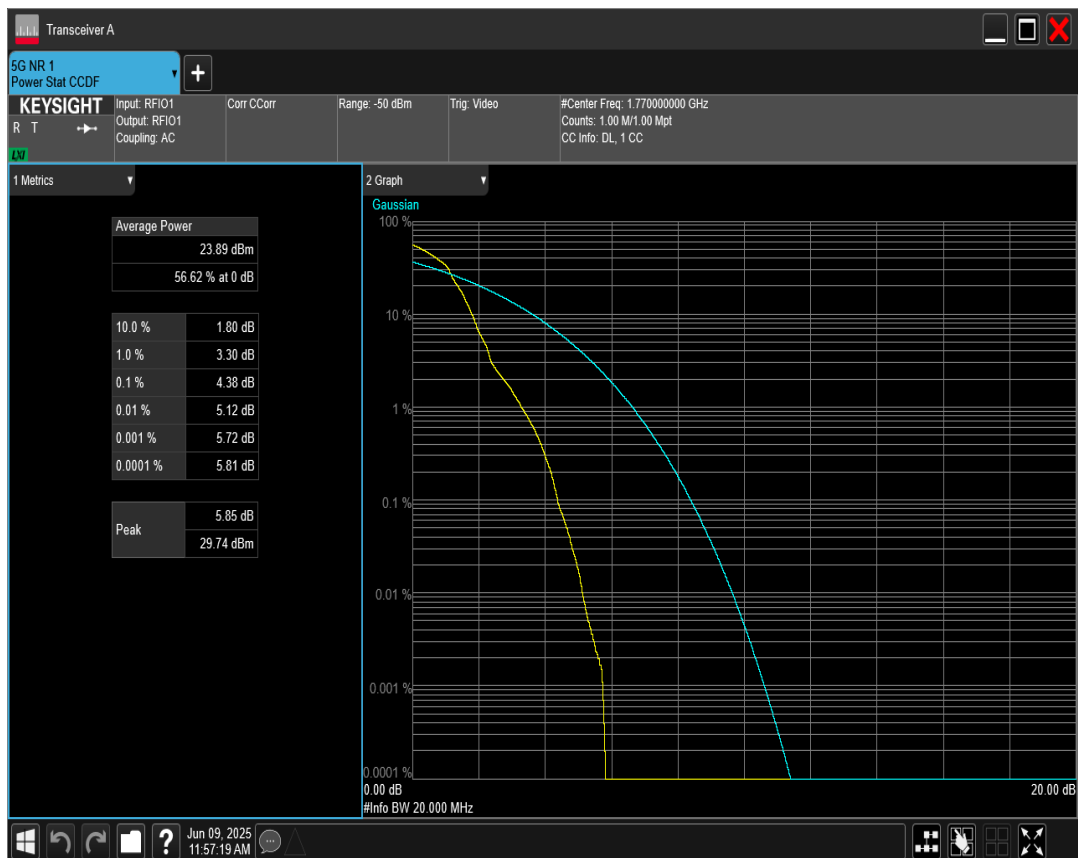


n66 SCS=30kHz DFT_BPSK BW=40MHz Channel=346000 RB=100@0

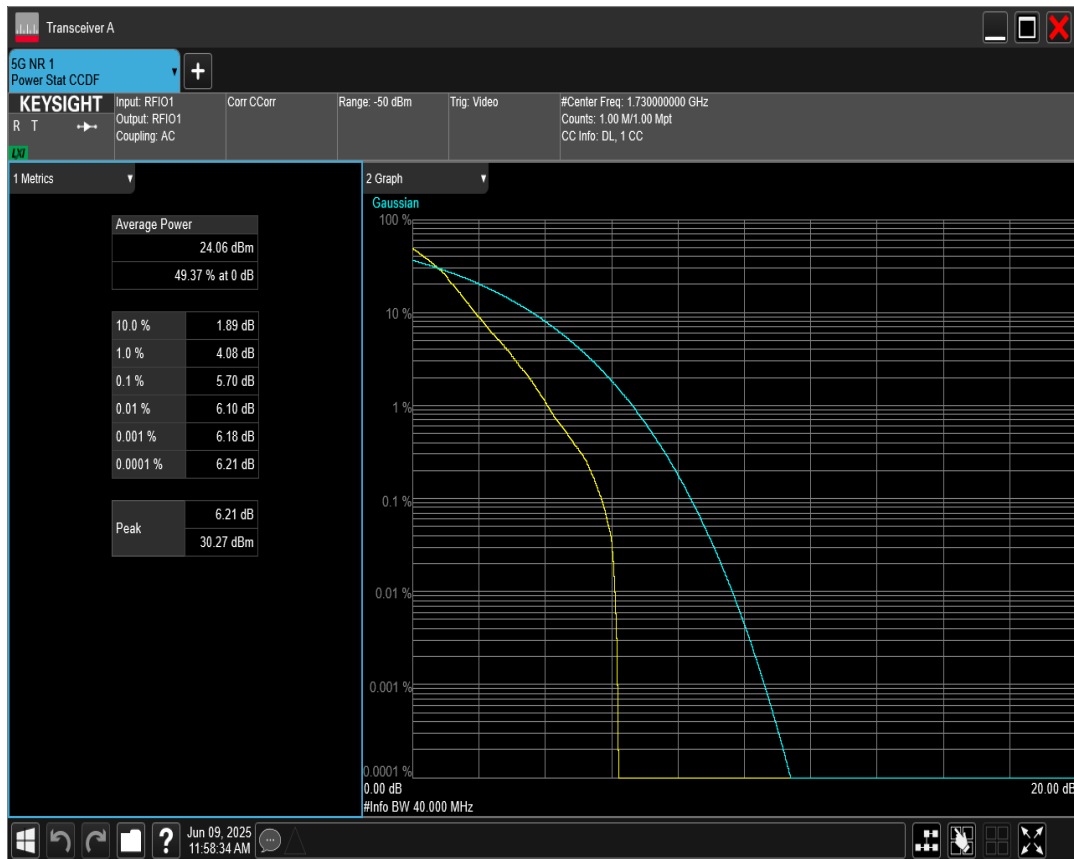


n66 SCS=30kHz DFT_BPSK BW=40MHz Channel=349000 RB=100@0

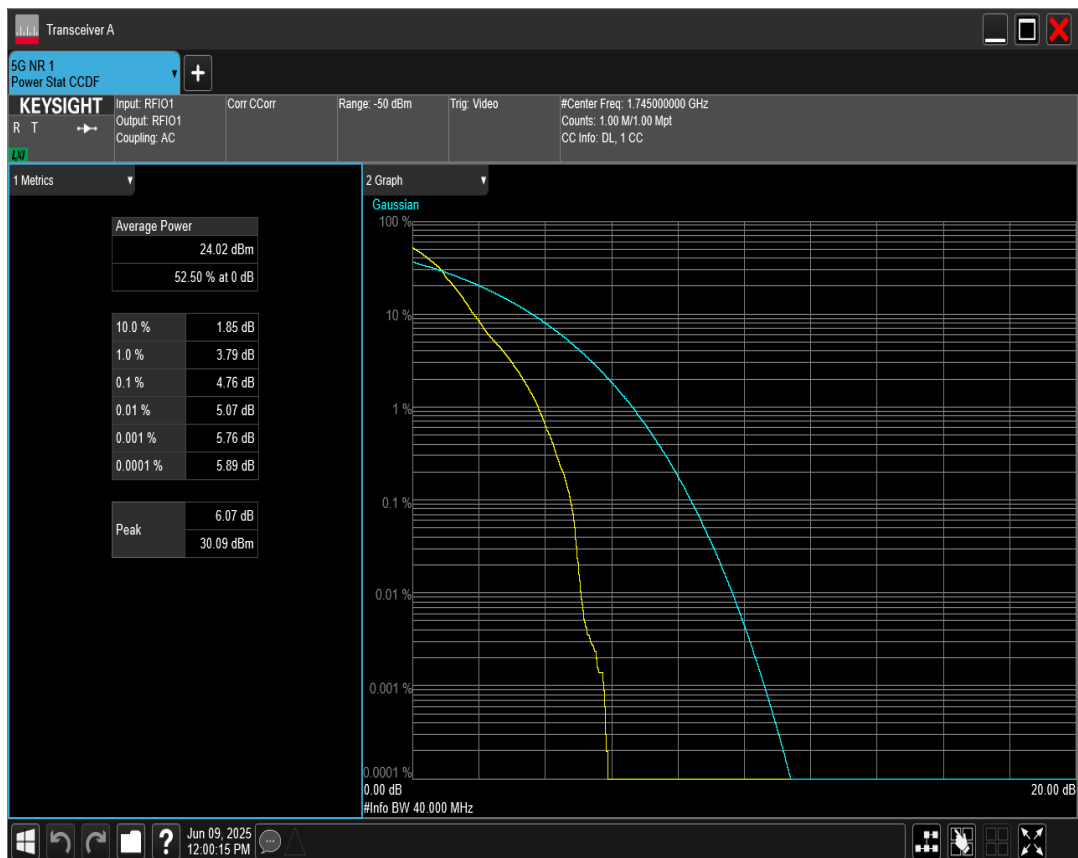


n66 SCS=30kHz DFT_BPSK BW=40MHz Channel=352000 RB=100@0

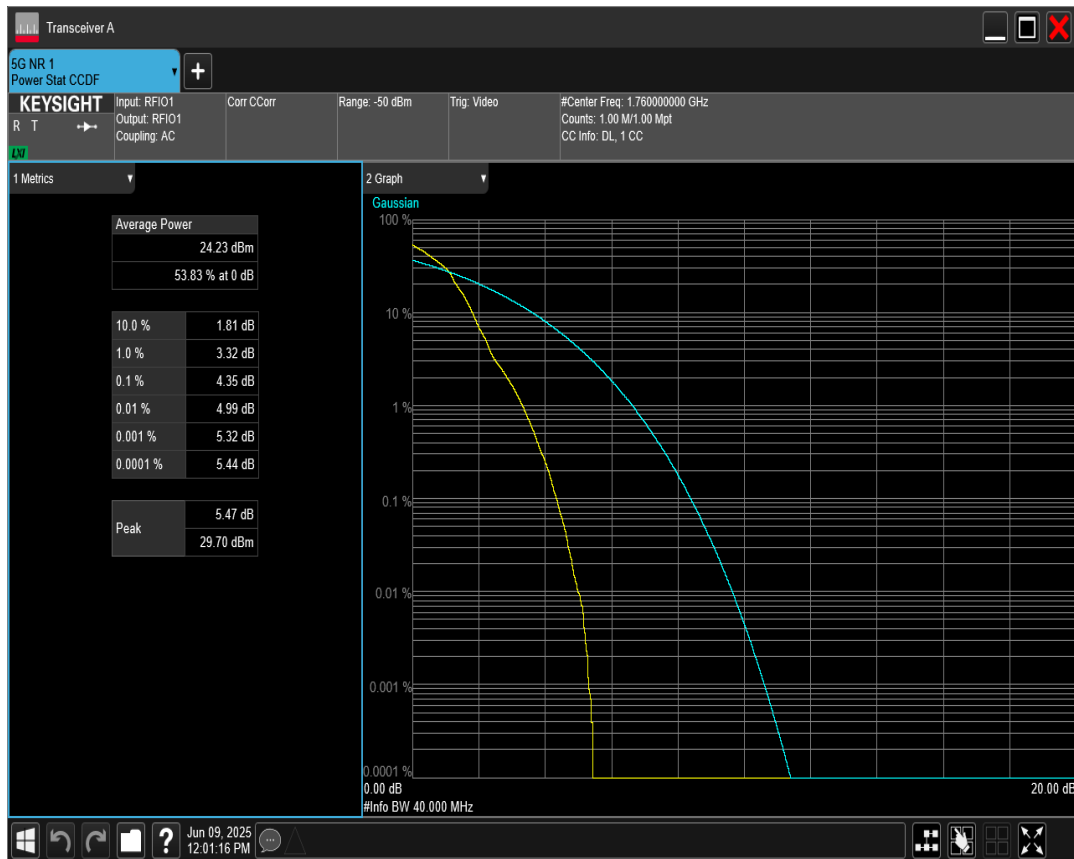


n66 SCS=30kHz DFT_QAM16 BW=10MHz Channel=343000 RB=24@0

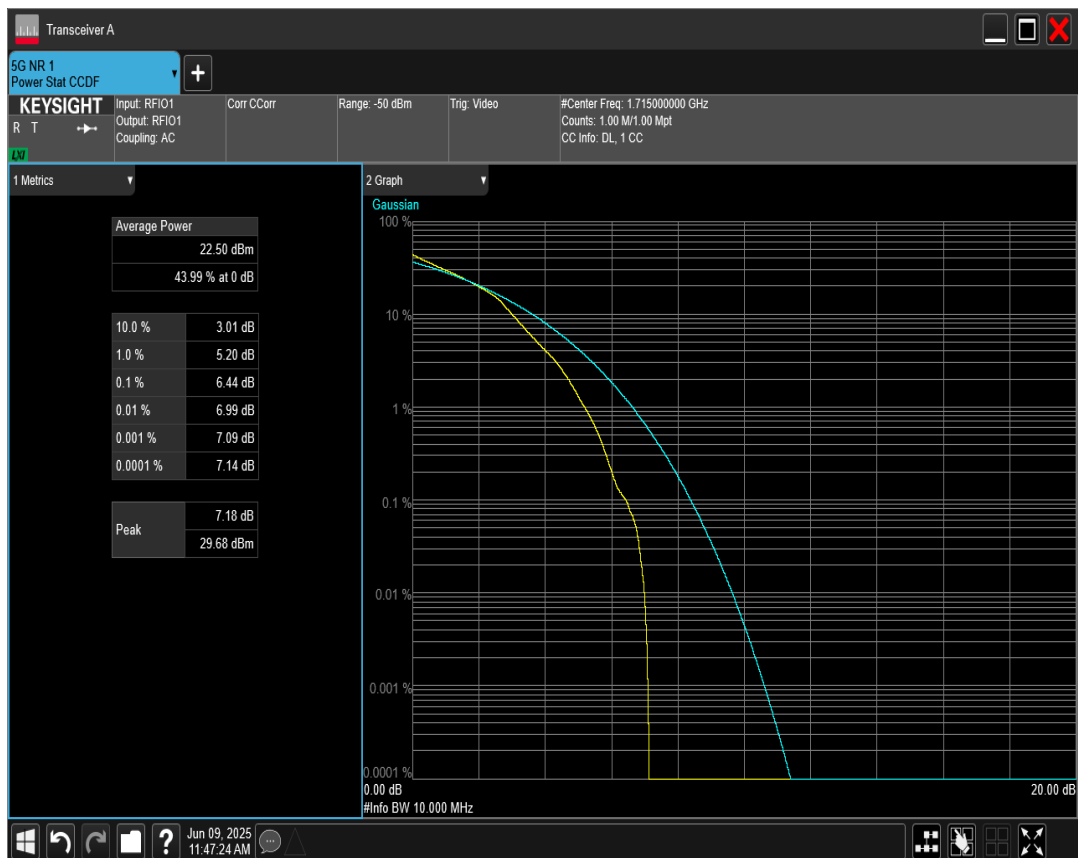


n66 SCS=30kHz DFT_QAM16 BW=15MHz Channel=343500 RB=36@0

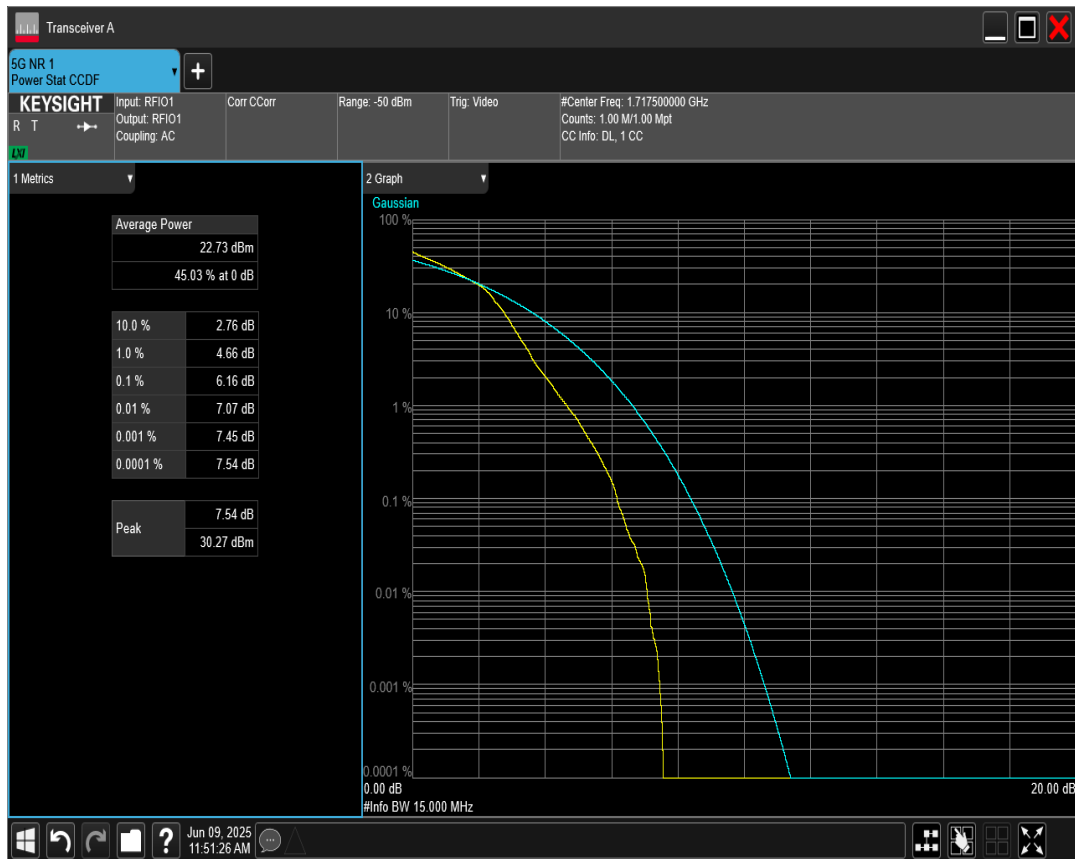


n66 SCS=30kHz DFT_QAM16 BW=10MHz Channel=355000 RB=24@0

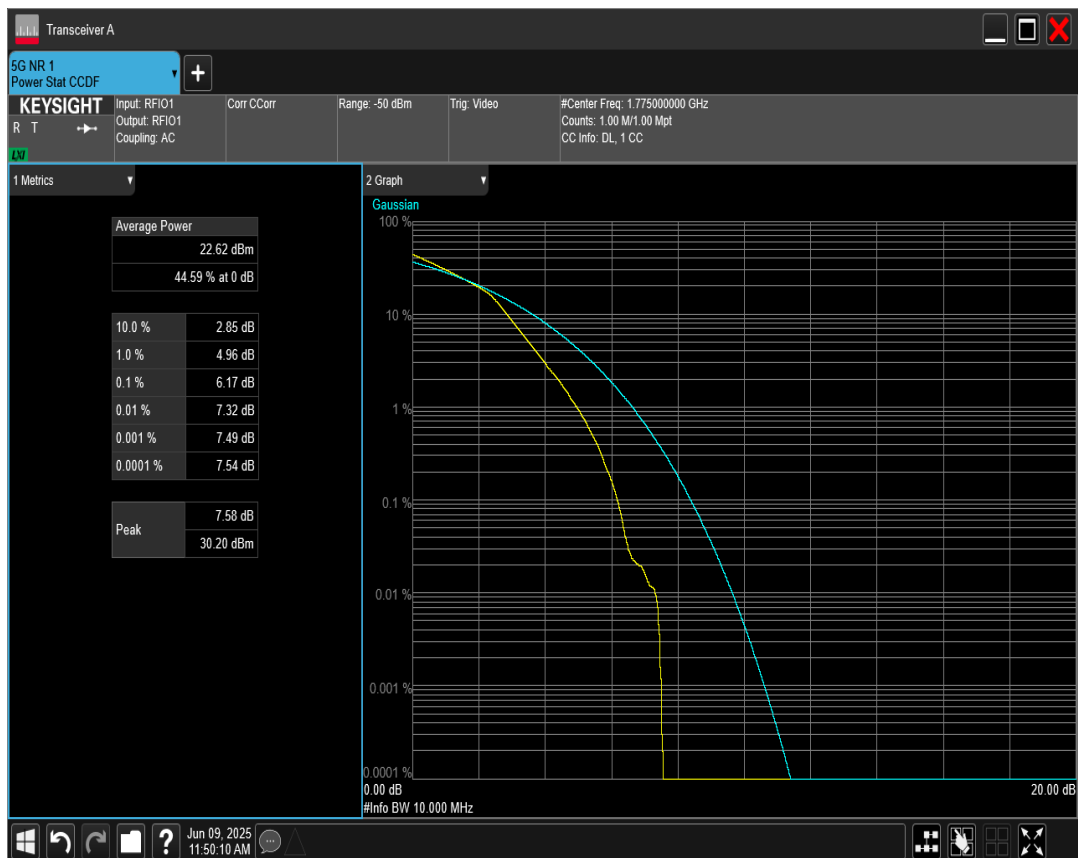


n66 SCS=30kHz DFT_QAM16 BW=10MHz Channel=349000 RB=24@0

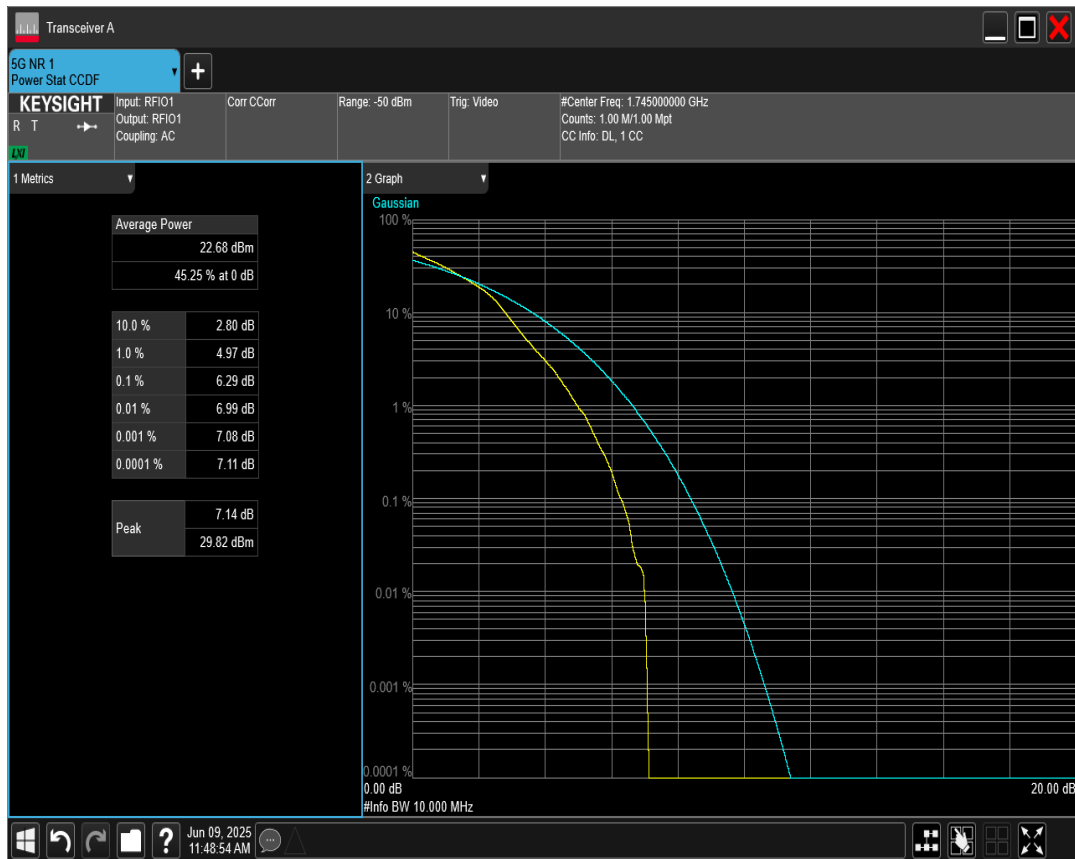


n66 SCS=30kHz DFT_QAM16 BW=15MHz Channel=354500 RB=36@0

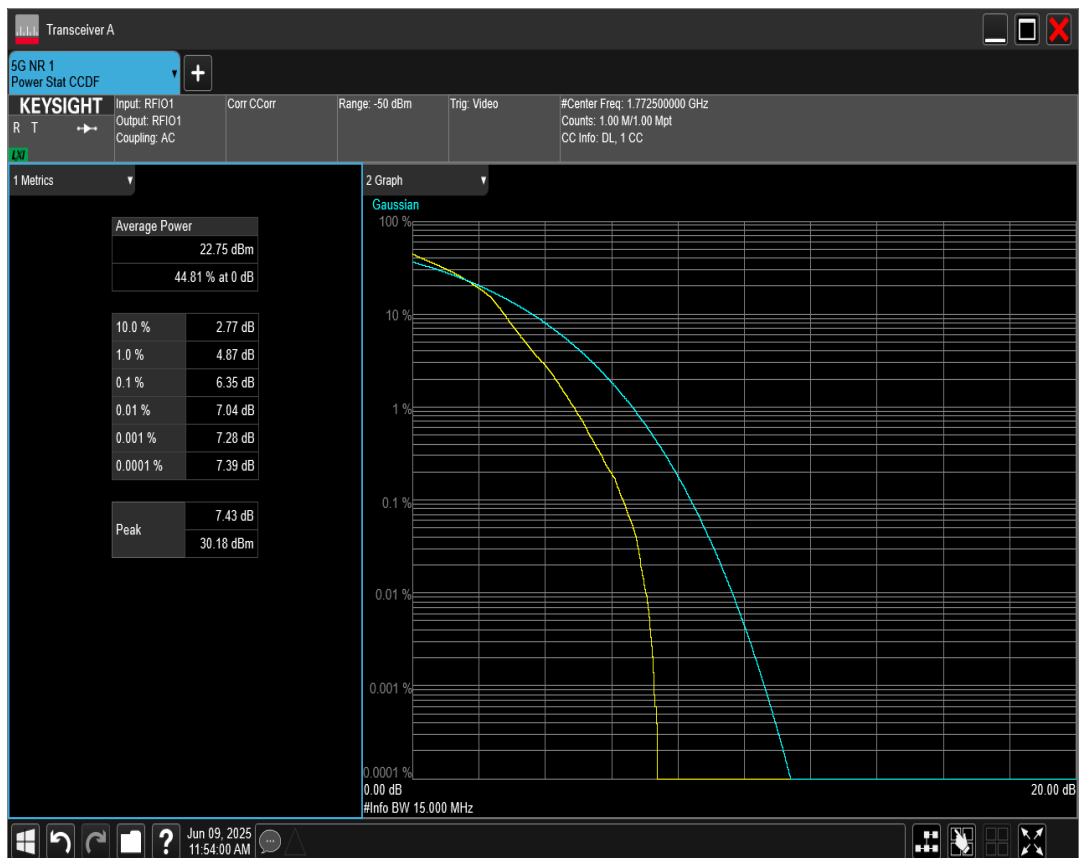


n66 SCS=30kHz DFT_QAM16 BW=15MHz Channel=349000 RB=36@0

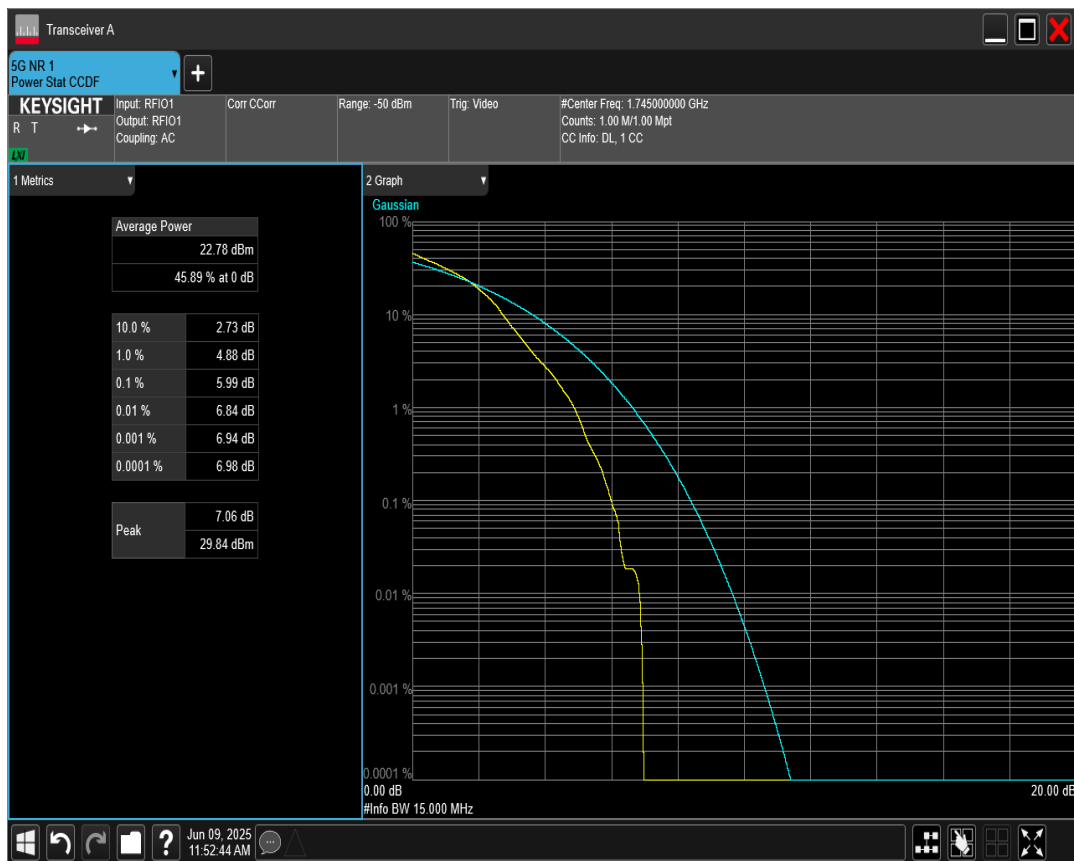


n66 SCS=30kHz DFT_QAM16 BW=20MHz Channel=344000 RB=50@0

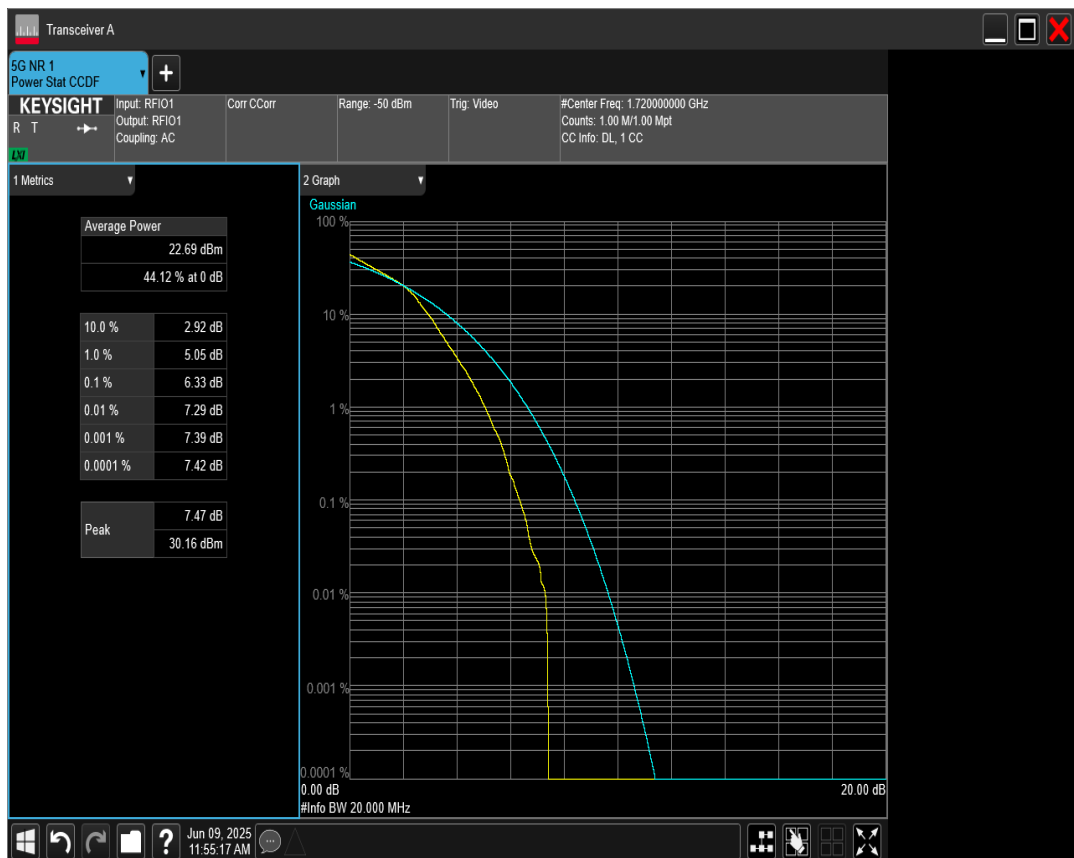


n66 SCS=30kHz DFT_QAM16 BW=20MHz Channel=354000 RB=50@0

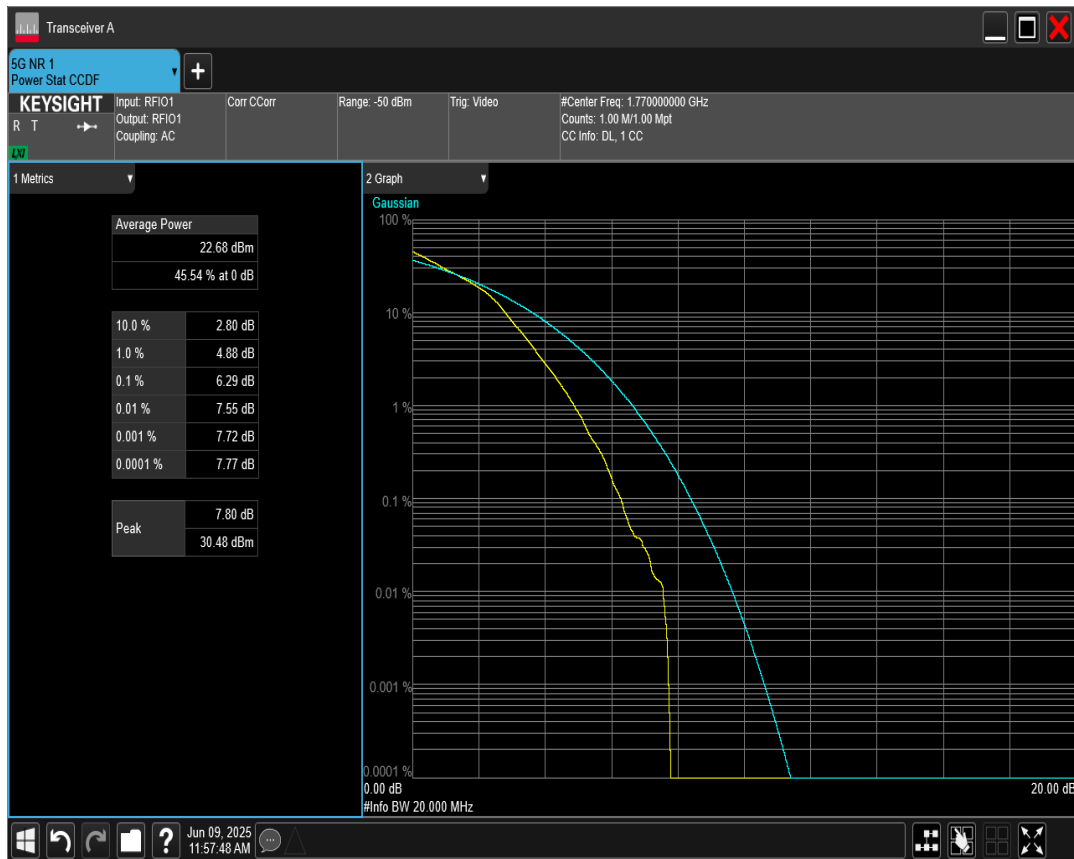


n66 SCS=30kHz DFT_QAM16 BW=20MHz Channel=349000 RB=50@0

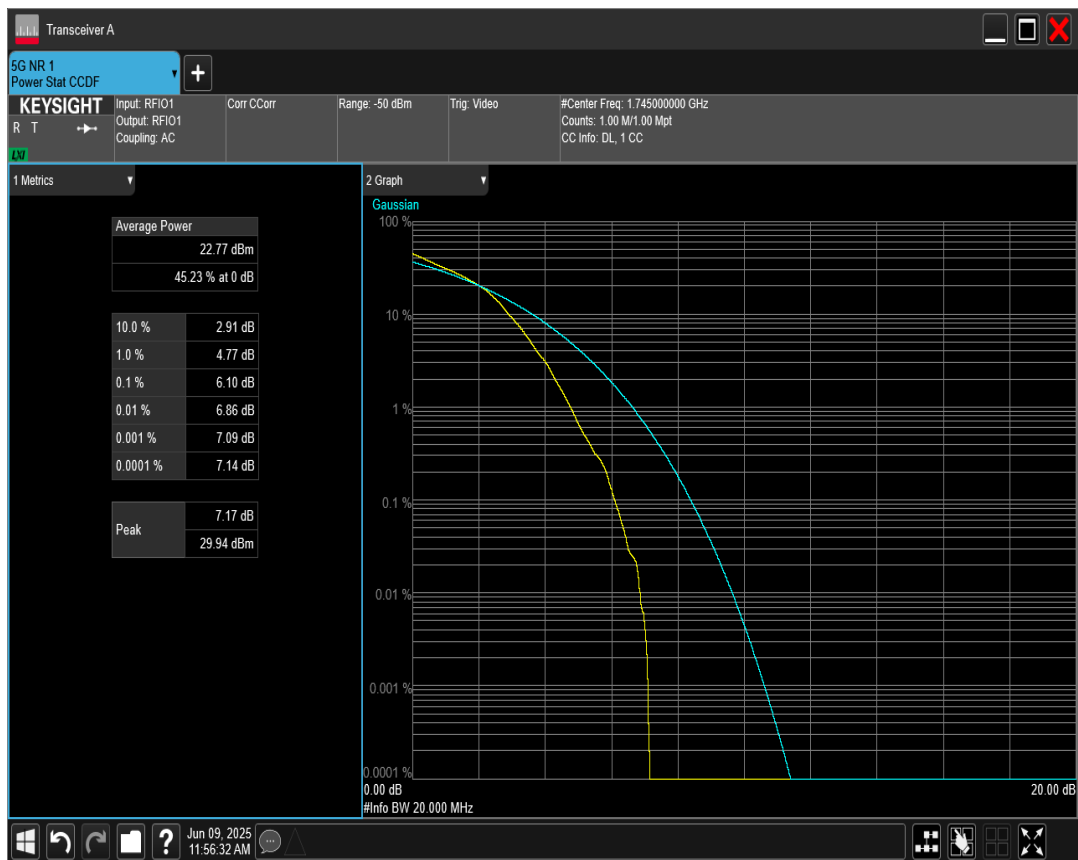


n66 SCS=30kHz DFT_QAM256 BW=10MHz Channel=343000 RB=24@0

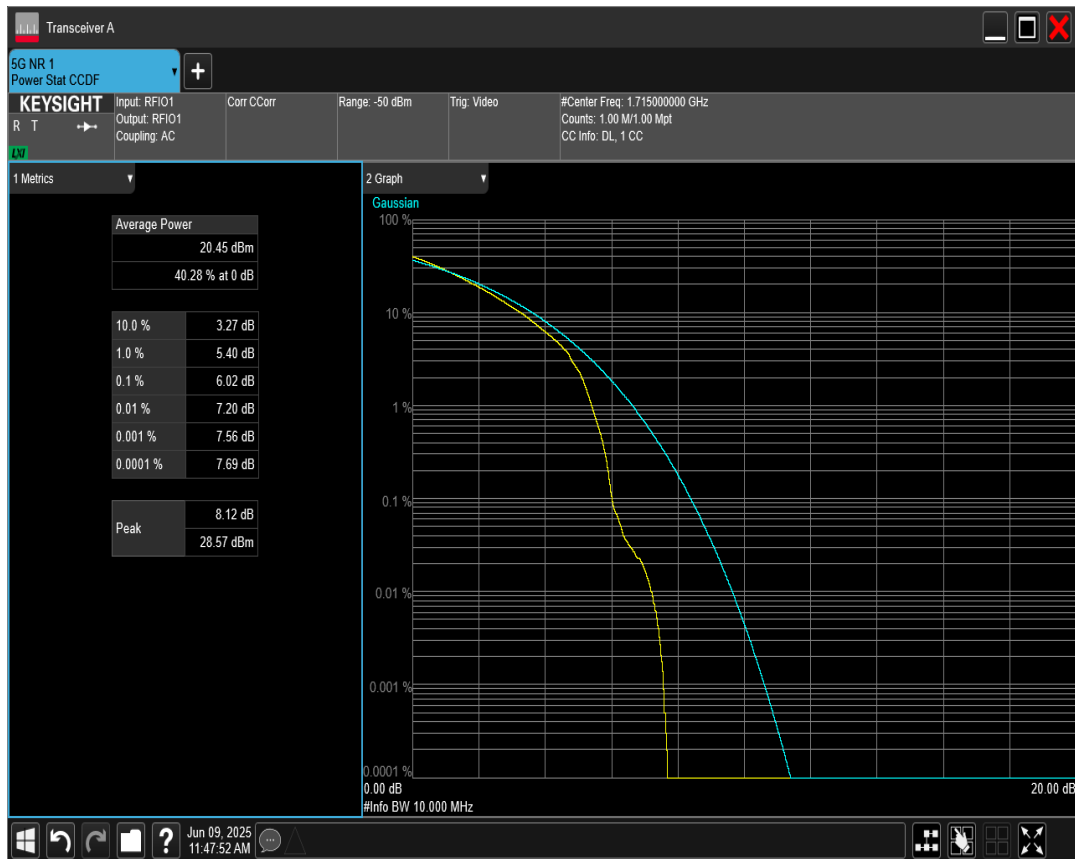


n66 SCS=30kHz DFT_QAM256 BW=10MHz Channel=349000 RB=24@0

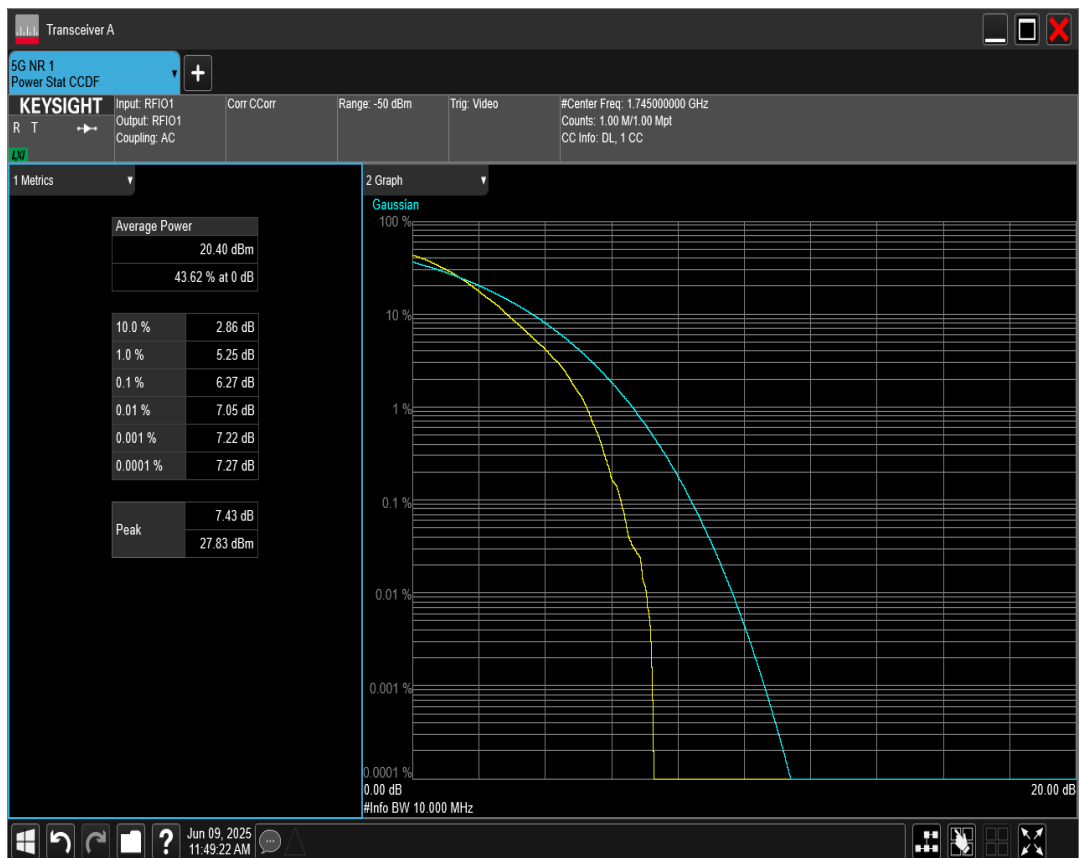


n66 SCS=30kHz DFT_QAM16 BW=40MHz Channel=352000 RB=100@0

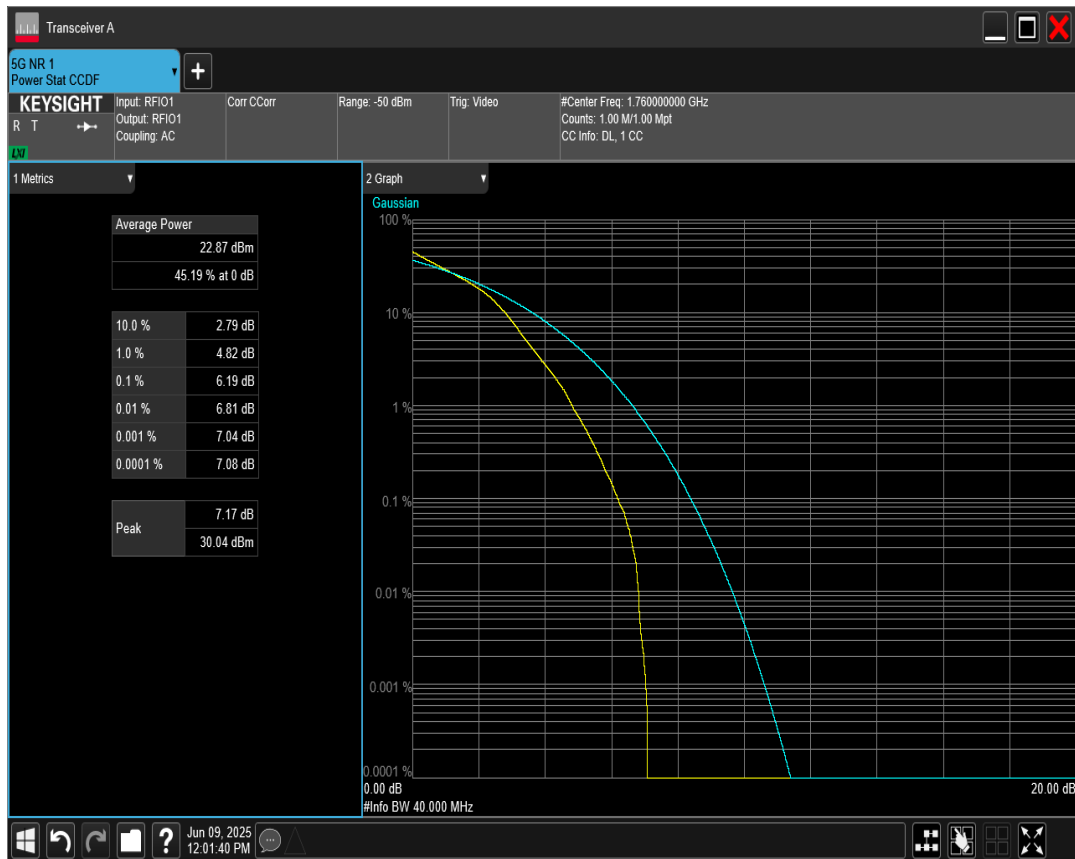


n66 SCS=30kHz DFT_QAM16 BW=40MHz Channel=346000 RB=100@0

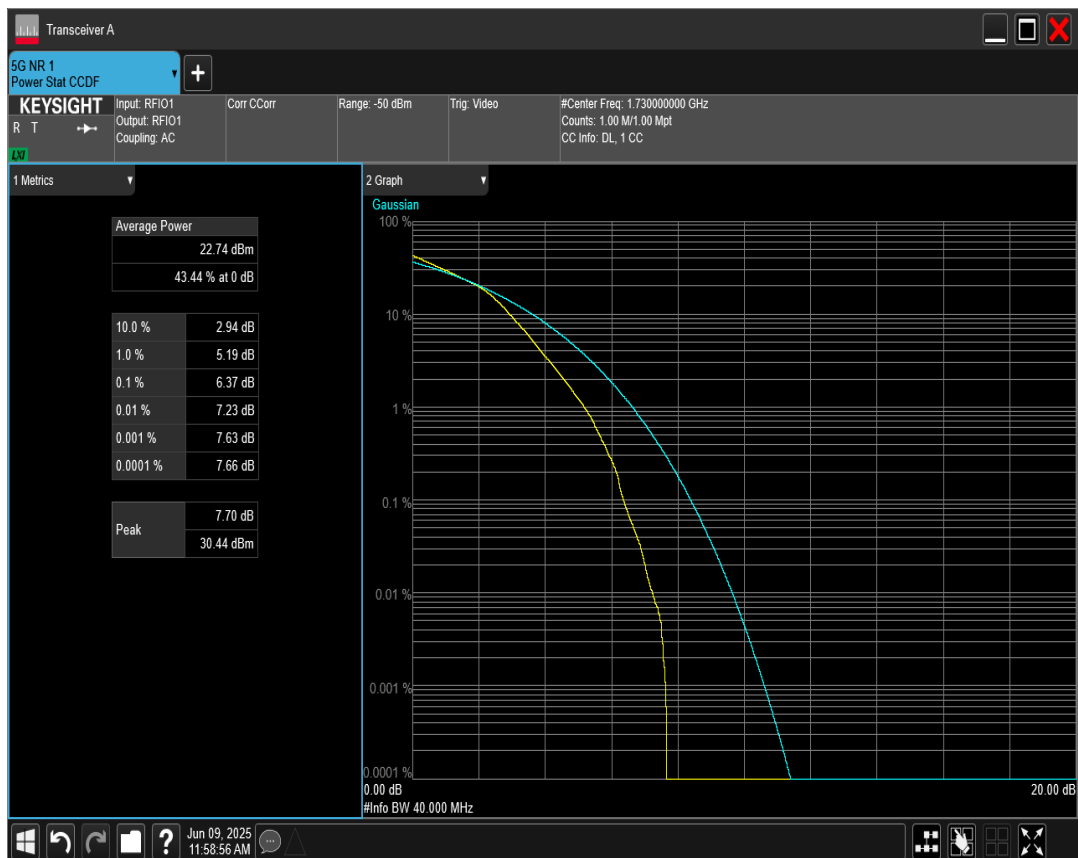


n66 SCS=30kHz DFT_QAM16 BW=40MHz Channel=349000 RB=100@0

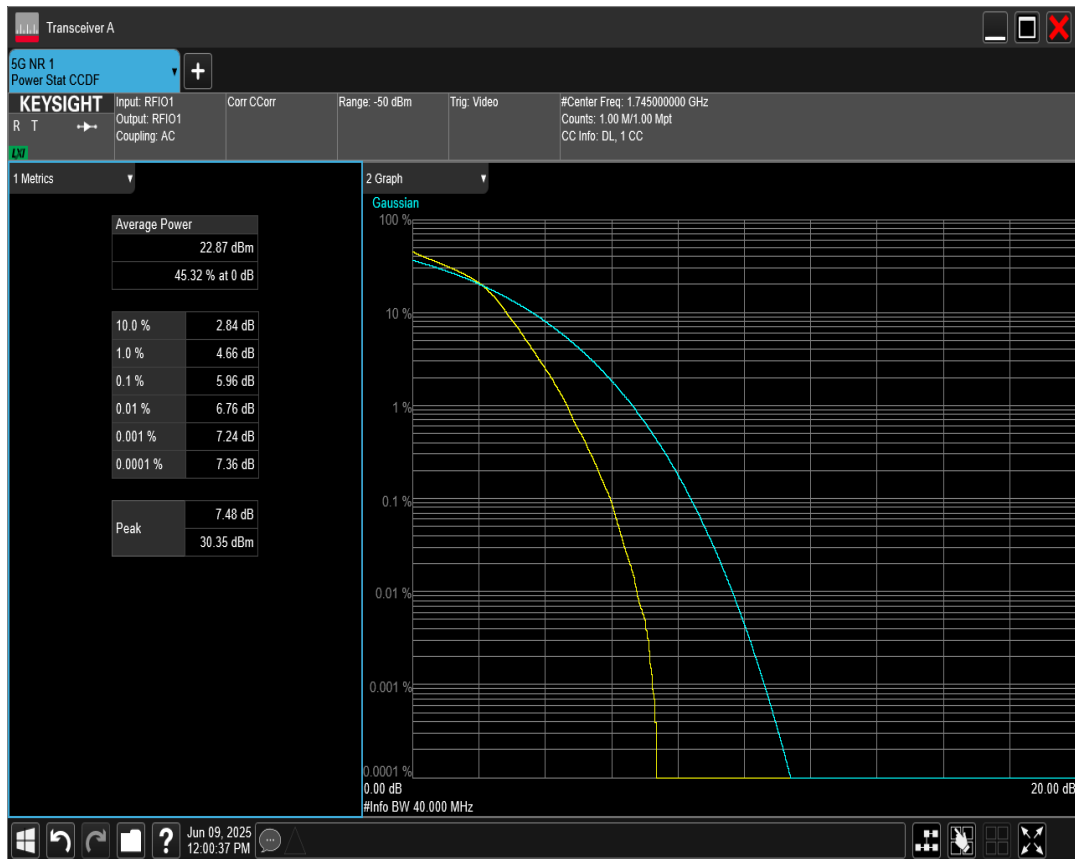


n66 SCS=30kHz DFT_QAM256 BW=20MHz Channel=344000 RB=50@0

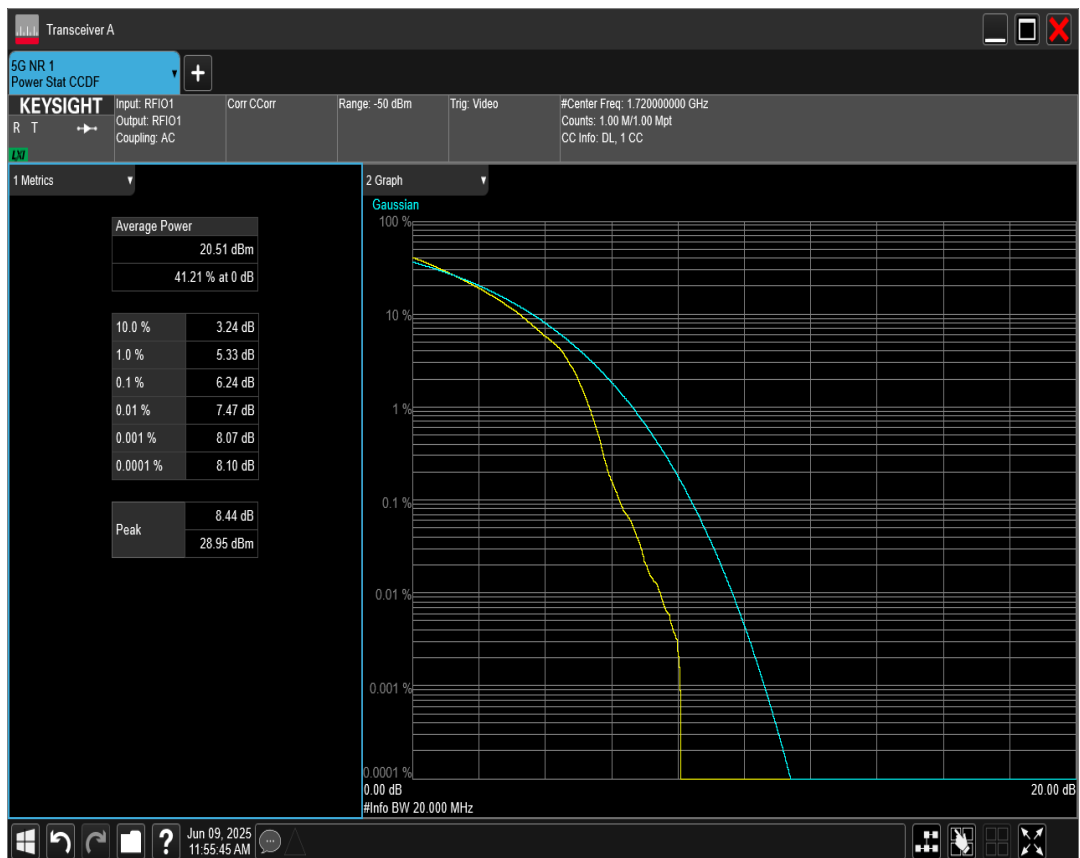


n66 SCS=30kHz DFT_QAM256 BW=20MHz Channel=349000 RB=50@0

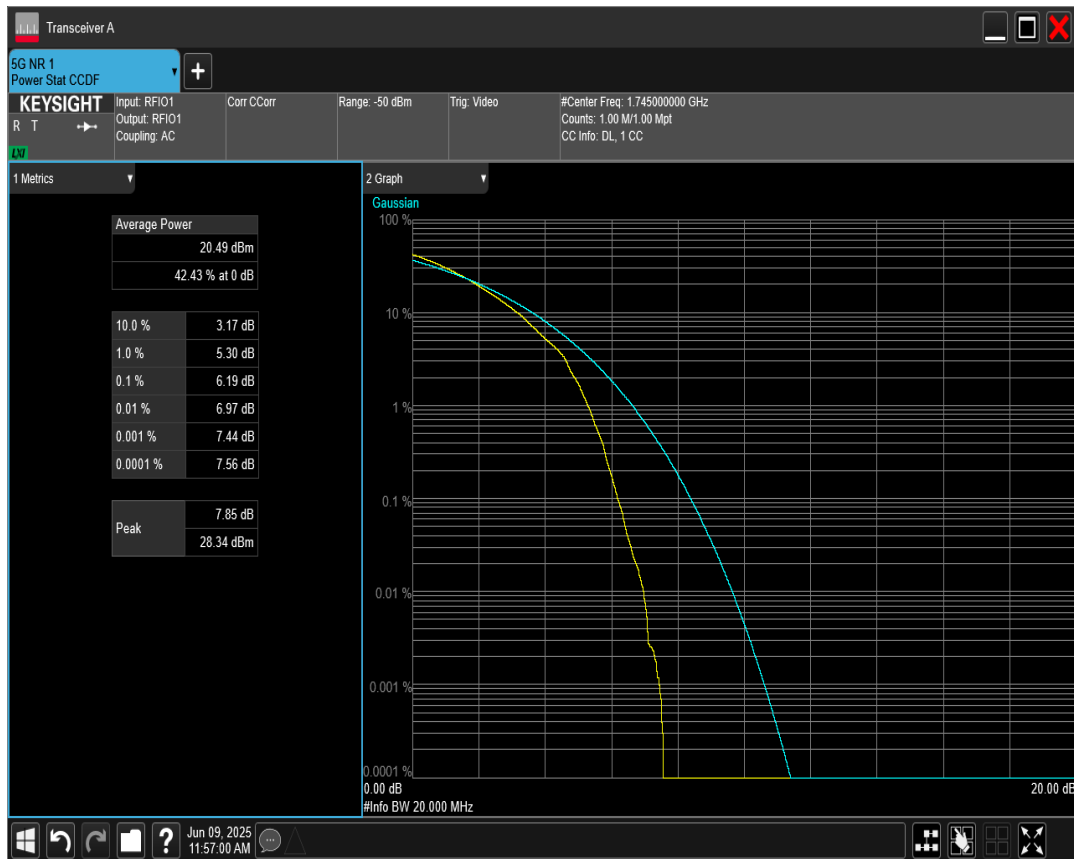


n66 SCS=30kHz DFT_QAM256 BW=20MHz Channel=354000 RB=50@0

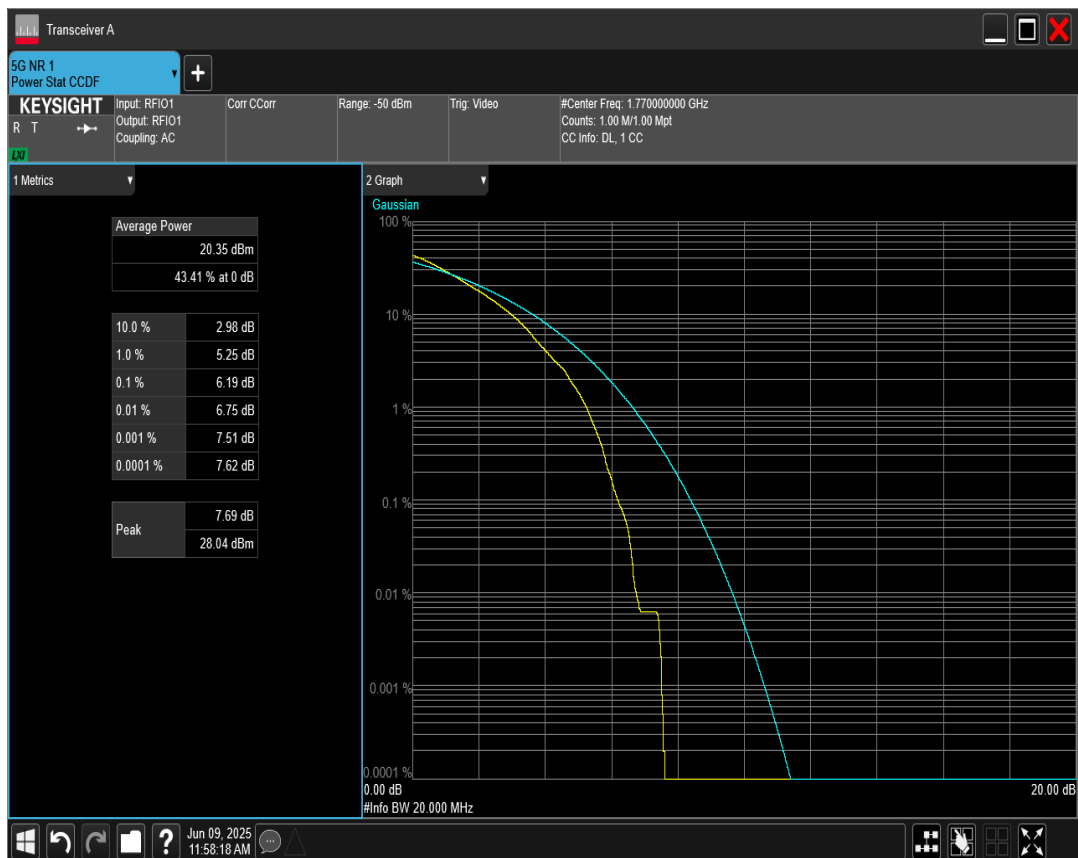

n66 SCS=30kHz DFT_QAM256 BW=15MHz Channel=354500 RB=36@0

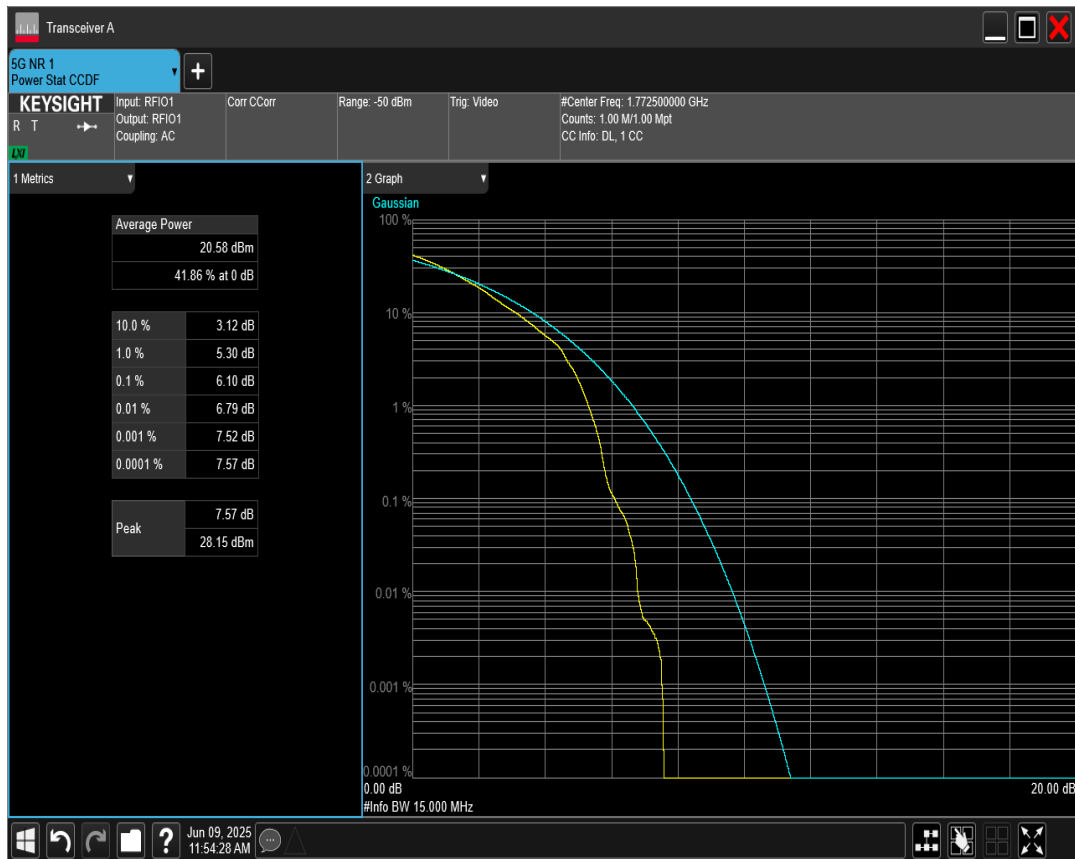

n66 SCS=30kHz DFT_QAM256 BW=10MHz Channel=355000 RB=24@0

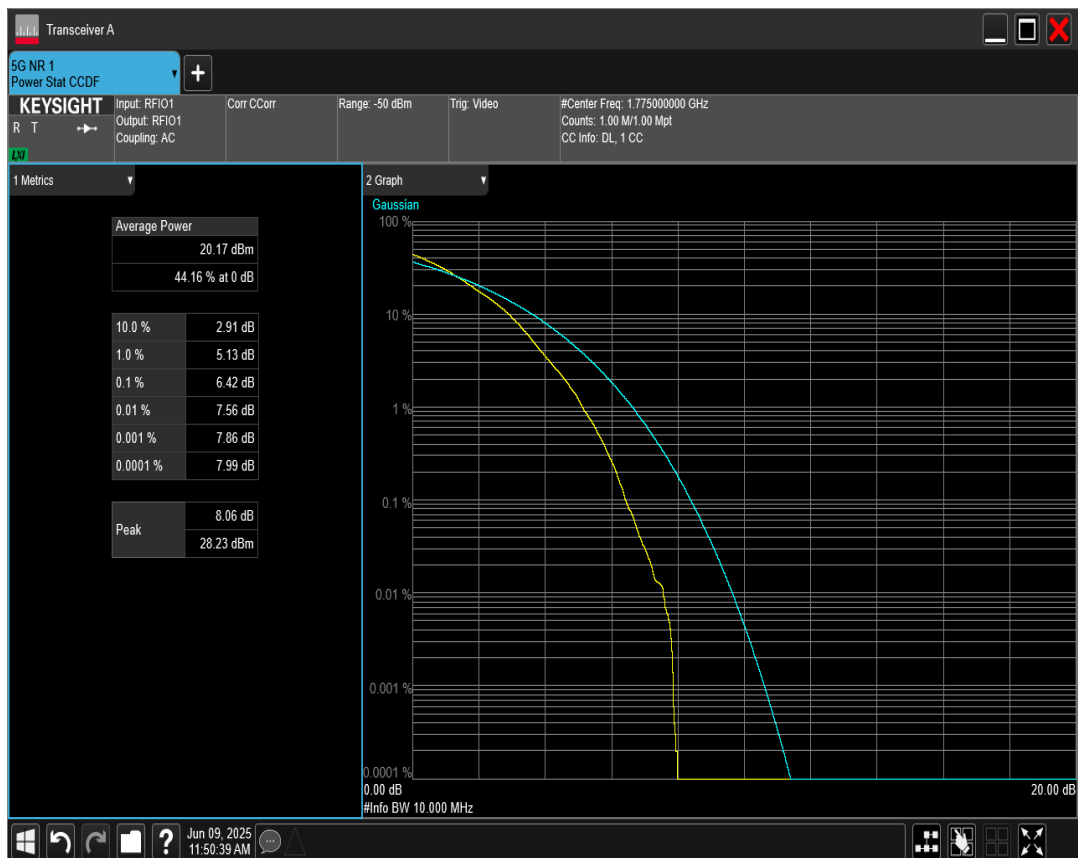

n66 SCS=30kHz DFT_QAM256 BW=15MHz Channel=343500 RB=36@0