

FCC RADIO TEST REPORT

FCC ID: 2AJ8TJT190M-D01

Product: digital photo frame

Trade Mark: N/A

Model No.: JT190M-D01(AWS19F)

Family Model: Refer to page 9

Report No.: S22022502514002

Issue Date: Apr. 11, 2022

Prepared for

Shenzhen Joyhong Technology Co., Ltd

5th Floor, Building 1, Zhongtai Road NO.18, Loucun Second Industrial Park, Xinhu Street, Guangming, Shenzhen, China.

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name**: Shenzhen Joyhong Technology Co., Ltd

Address: 5th Floor, Building 1, Zhongtai Road NO.18, Loucun Second Industrial Park, Xihu Street, Guangming, Shenzhen, China.

Manufacturer's Name: Shenzhen Joyhong Technology Co., Ltd

Address: 5th Floor, Building 1, Zhongtai Road NO.18, Loucun Second Industrial Park, Xihu Street, Guangming, Shenzhen, China.

Product description

Product name: digital photo frame

Model and/or type reference: JT190M-D01(AWS19F)

Family Model: Refer to page 9

Standards: FCC Part15.407Test procedure: ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures
New Rules v02r01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: Feb. 27, 2022 ~ Mar. 29, 2022

Date of Issue: Apr. 11 , 2022

Test Result: **Pass**Testing Engineer : 

(Susan Li.)

Authorized Signatory : 

(Alex Li)

Table of Contents

	Page
1. SUMMARY OF TEST RESULTS	6
1.1 FACILITIES AND ACCREDITATIONS	7
1.2 MEASUREMENT UNCERTAINTY	7
1 . GENERAL INFORMATION	8
1.1 GENERAL DESCRIPTION OF EUT	8
1.2 DESCRIPTION OF TEST MODES	10
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
2 . EMC EMISSION TEST	15
2.1 CONDUCTED EMISSION MEASUREMENT	15
2.1.1 APPLICABLE STANDARD	15
2.1.2 CONFORMANCE LIMIT	15
2.1.3 TEST CONFIGURATION	15
2.1.4 TEST PROCEDURE	15
2.2 RADIATED EMISSION MEASUREMENT	18
2.2.1 APPLICABLE STANDARD	18
2.2.2 CONFORMANCE LIMIT	18
2.2.3 MEASURING INSTRUMENTS	18
2.2.4 TEST CONFIGURATION	19
2.2.5 TEST PROCEDURE	20
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	21
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	22
2.2.8 TEST RESULTS (1GHZ-18GHZ)	24
2.2.10 TEST RESULTS (18GHZ-40GHZ)	26
3 . POWER SPECTRAL DENSITY TEST	29
3.1 APPLIED PROCEDURES / LIMIT	29
3.2 TEST PROCEDURE	30
3.3 DEVIATION FROM STANDARD	30
3.4 TEST SETUP	30
3.5 EUT OPERATION CONDITIONS	30
3.6 TEST RESULTS	31
4 . 26DB & 99% EMISSION BANDWIDTH	32
4.1 APPLIED PROCEDURES / LIMIT	32
4.2 TEST PROCEDURE	32
4.3 EUT OPERATION CONDITIONS	33
4.4 TEST RESULTS	33

Table of Contents

	Page
5 . MINIMUM 6 DB BANDWIDTH	34
5.1 APPLIED PROCEDURES / LIMIT	34
5.2 TEST PROCEDURE	34
5.3 DEVIATION FROM STANDARD	34
5.4 TEST SETUP	34
5.5 EUT OPERATION CONDITIONS	34
5.6 TEST RESULTS	35
6 . MAXIMUM CONDUCTED OUTPUT POWER	36
6.1 APPLIED PROCEDURES / LIMIT	36
6.2 TEST RESULTS	38
7 . OUT OF BAND EMISSIONS	39
7.1 APPLICABLE STANDARD	39
7.2 TEST PROCEDURE	40
7.3 DEVIATION FROM STANDARD	40
7.4 TEST SETUP	40
7.5 EUT OPERATION CONDITIONS	40
7.6 TEST RESULTS	41
8. FREQUENCY STABILITY MEASUREMENT	42
8.1 LIMIT	42
8.2 TEST PROCEDURES	42
8.3 TEST SETUP LAYOUT	42
8.4 EUT OPERATION DURING TEST	42
8.5 TEST RESULTS	43
9. ANTENNA REQUIREMENT	46
9.1 STANDARD REQUIREMENT	46
9.2 EUT ANTENNA	46
10. TEST RESULTS	47

Revision History

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	N/A	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	
15.407(c)	Automatically discontinue transmission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab.	: The Certificate Registration Number is L5516.
IC-Registration	The Certificate Registration Number is 9270A. CAB identifier:CN0074
FCC- Accredited	Test Firm Registration Number: 463705. Designation Number: CN1184
A2LA-Lab.	The Certificate Registration Number is 4298.01
Name of Firm	: Shenzhen NTEK Testing Technology Co., Ltd.
Site Location	: 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District Shenzhen, Guangdong, China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(>6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

1. GENERAL INFORMATION**1.1 GENERAL DESCRIPTION OF EUT**

Equipment	digital photo frame
Trade Mark	N/A
Model Name	JT190M-D01(AWS19F)
Family Model	Refer to page 9
Model Difference	All models are the same circuit and RF module, except the Model name, appearance and size are different.
FCC ID	2AJ8TJT190M-D01
Product Description	Mode Supported <input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input checked="" type="checkbox"/> 802.11n(HT40) <input checked="" type="checkbox"/> 802.11ac(HT20) <input checked="" type="checkbox"/> 802.11ac(HT40) <input checked="" type="checkbox"/> 802.11ac(HT80)
	Data Rate 802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9
	Modulation OFDM with BPSK/QPSK/16QAM/64QAM
	Operating Frequency Range <input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz <input type="checkbox"/> U-NII-2A: 5250MHz~5350MHz <input type="checkbox"/> U-NII-2C: 5470MHz~5725MHz <input type="checkbox"/> U-NII-3: 5725 MHz ~5850 MHz
	Function: <input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P(for U-NII-1, U-NII-3) <input checked="" type="checkbox"/> Client(for U-NII-1, U-NII-3)
	Antenna Type FPC Antenna
	Antenna Gain 2dBi
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Power supply	DC 12V from adapter
Adapter	Model: XQL036-1203000U Input: AC 100-240V, 50/60Hz, 1A Output: DC 12.0V, 3A
Connecting I/O Port(s)	Please refer to the User's Manual
HW Version	N/A
SW Version	N/A
EUT serial number	S220225025014

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list:

Band	20MHz		40MHz		80MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz
	40	5200 MHz	46	5230 MHz	-	-
	44	5220 MHz				
	48	5240 MHz				

3.

Family Model
JT170M-D03, JT170M-D02, JT170M-D01, AWS217F, JT101F-K05, JT101M-K05, JT167M-D01, JT162M-D01, JD070X-XXX, JD071X-XXX, JD080X-XXX, JD081X-XXX, JD082X-XXX, JD087X-XXX, JD090X-XXX, JD097X-XXX, JD100X-XXX, JD101X-XXX, JD102X-XXX, JD104X-XXX, JD108X-XXX, JD110X-XXX, JD116X-XXX, JD120X-XXX, JD121X-XXX, JD130X-XXX, JD133X-XXX, JD135X-XXX, JD140X-XXX, JD141X-XXX, JD142X-XXX, JD150X-XXX, JD156X-XXX, JD170X-XXX, JD171X-XXX, JD172X-XXX, JD173X-XXX, JD190X-XXX, JT070X-XXX, JT071X-XXX, JT080X-XXX, JT081X-XXX, JT082X-XXX, JT087X-XXX, JT108X-XXX, JT090X-XXX, JT097X-XXX, JT100X-XXX, JT101X-XXX, JT102X-XXX, JT104X-XXX, JT110X-XXX, JT116X-XXX, JT120X-XXX, JT121X-XXX, JT130X-XXX, JT133X-XXX, JT135X-XXX, JT140X-XXX, JT141X-XXX, JT142X-XXX, JT150X-XXX, JT156X-XXX, JT170X-XXX, JT171X-XXX, JT172X-XXX, JT173X-XXX, JT190X-XXX (X stand for 0~9 or A~Z)

1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/CH48
Mode 3	802.11n40/ac40 CH38/CH46
Mode 4	802.11ac80 CH42


For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/CH48
Mode 3	802.11n40/ac40 CH38/CH46
Mode 4	802.11ac80 CH42

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

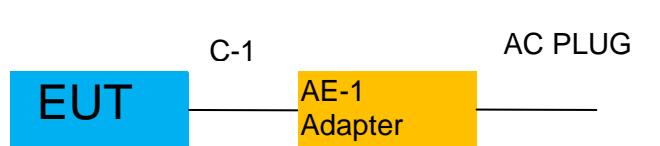

For Radiated Test Cases

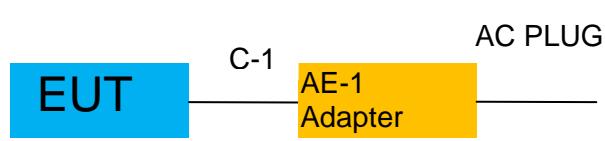

For Conducted Test Cases

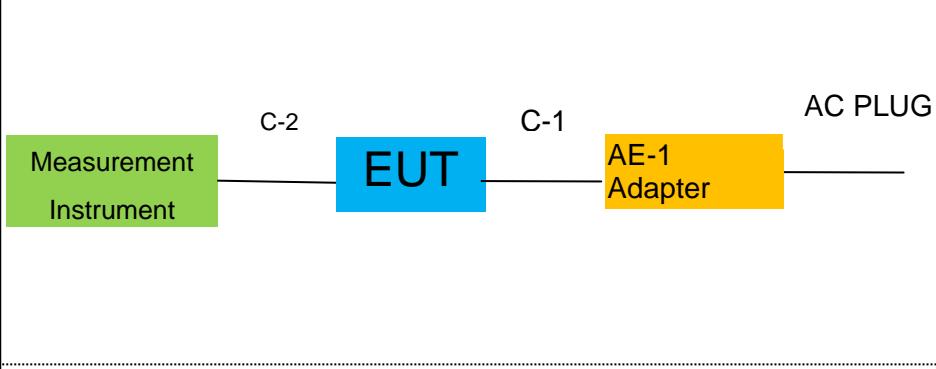

Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	XQL036-1203000U	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	Power Cable	NO	NO	1.2m
C-2	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) During the battery power test, the battery is fully charged.

1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2021.04.27	2022.04.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2021.07.01	2022.06.30	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2021.07.01	2022.06.30	1 year
4	Test Receiver	R&S	ESPI7	101318	2021.04.27	2022.04.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29 2022.03.28	2022.03.28 2023.03.27	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.29 2022.03.28	2022.03.28 2023.03.27	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2021.11.07	2022.11.06	1 year
9	Amplifier	EMC	EMC051835 SE	980246	2021.07.01	2022.06.30	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2021.11.07	2022.11.06	1 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2021.07.01	2022.06.30	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2019.08.06	2022.08.05	3 year
16	Filter	TRILTHIC	2400MHz	29	2021.07.01	2022.06.30	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2021.04.27	2022.04.26	1 year
2	LISN	R&S	ENV216	101313	2021.04.27	2022.04.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2021.04.27	2022.04.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

2. EMC EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

2.1.3 TEST CONFIGURATION

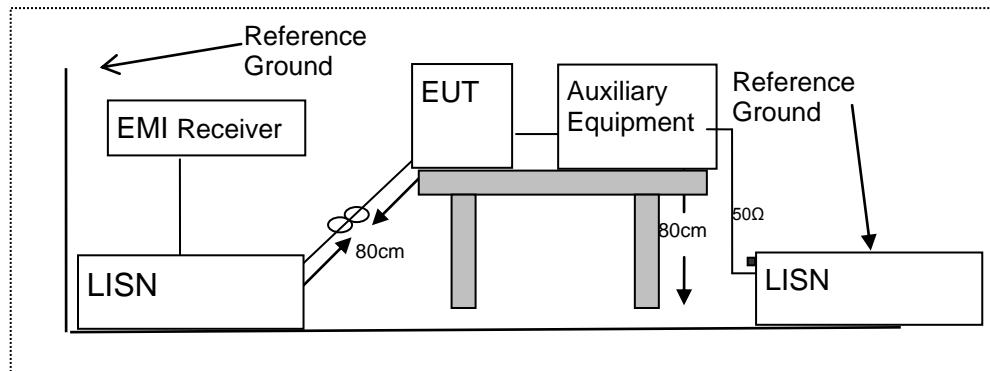

2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	digital photo frame	Model Name. :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.1620	49.80	9.71	59.51	65.36	-5.85	QP
0.1620	36.99	9.71	46.70	55.36	-8.66	AVG
0.1739	50.04	9.68	59.72	64.77	-5.05	QP
0.1739	33.61	9.68	43.29	54.77	-11.48	AVG
0.2099	45.26	9.63	54.89	63.21	-8.32	QP
0.2099	30.37	9.63	40.00	53.21	-13.21	AVG
0.2419	43.06	9.63	52.69	62.03	-9.34	QP
0.2419	30.65	9.63	40.28	52.03	-11.75	AVG
0.6260	33.07	9.70	42.77	56.00	-13.23	QP
0.6260	23.56	9.70	33.26	46.00	-12.74	AVG
11.1379	31.81	9.73	41.54	60.00	-18.46	QP
11.1379	21.57	9.73	31.30	50.00	-18.70	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

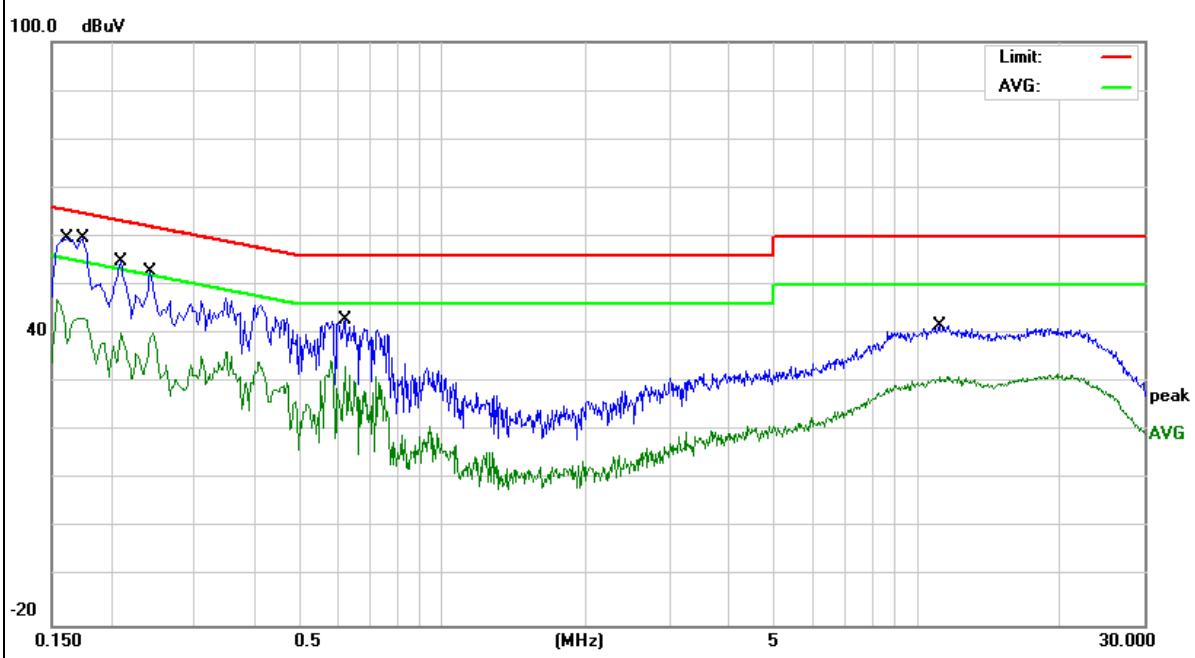


EUT :	digital photo frame	Model Name. :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 12V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.1580	51.86	9.63	61.49	65.56	-4.07	QP
0.1580	38.40	9.63	48.03	55.56	-7.53	AVG
0.1819	50.08	9.63	59.71	64.39	-4.68	QP
0.1819	38.14	9.63	47.77	54.39	-6.62	AVG
0.2420	43.27	9.64	52.91	62.02	-9.11	QP
0.2420	31.98	9.64	41.62	52.02	-10.40	AVG
0.4179	39.47	9.71	49.18	57.49	-8.31	QP
0.4179	28.04	9.71	37.75	47.49	-9.74	AVG
0.5820	36.49	9.70	46.19	56.00	-9.81	QP
0.5820	27.31	9.70	37.01	46.00	-8.99	AVG
19.5540	31.64	9.75	41.39	60.00	-18.61	QP
20.8220	21.42	9.76	31.18	50.00	-18.82	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

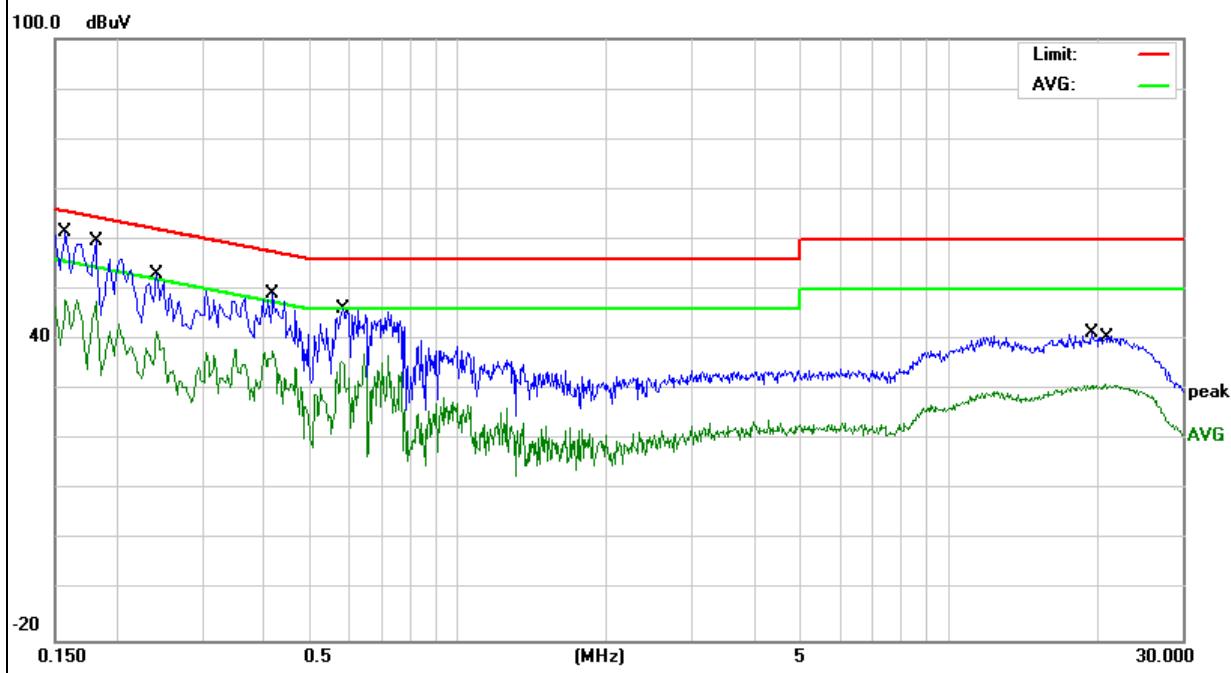

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (μ V/m)	300
0.490~1.705	24000/F(KHz)	20 log (μ V/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dB μ V/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dB μ V/m=20 log (μ V/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

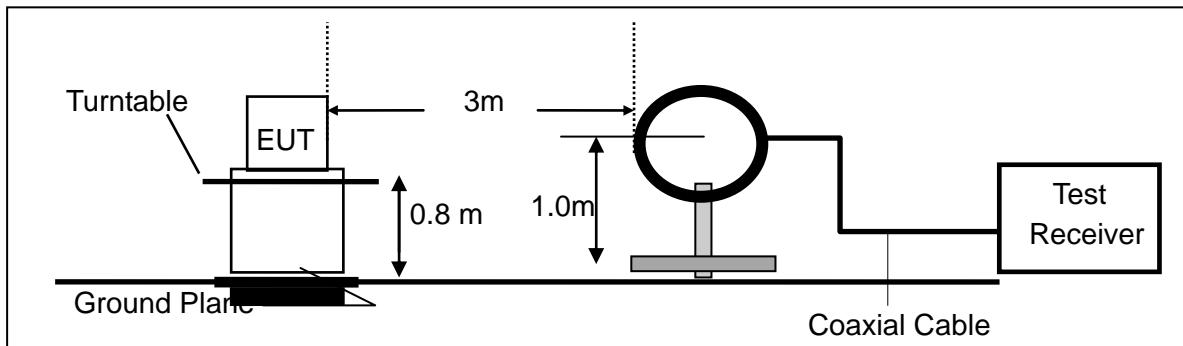

(b) For radiated emissions from 30MHz to 1000MHz

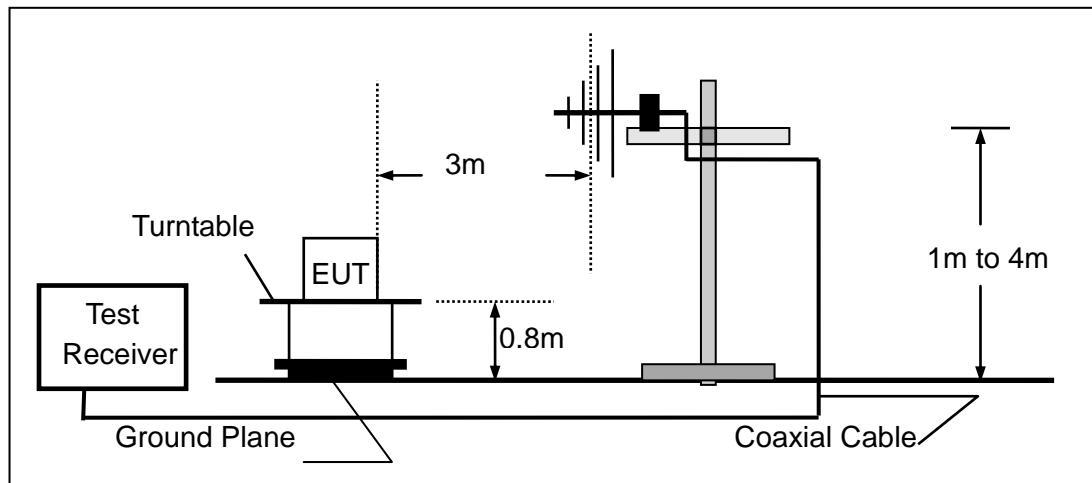

(c) For radiated emissions above 1000MHz

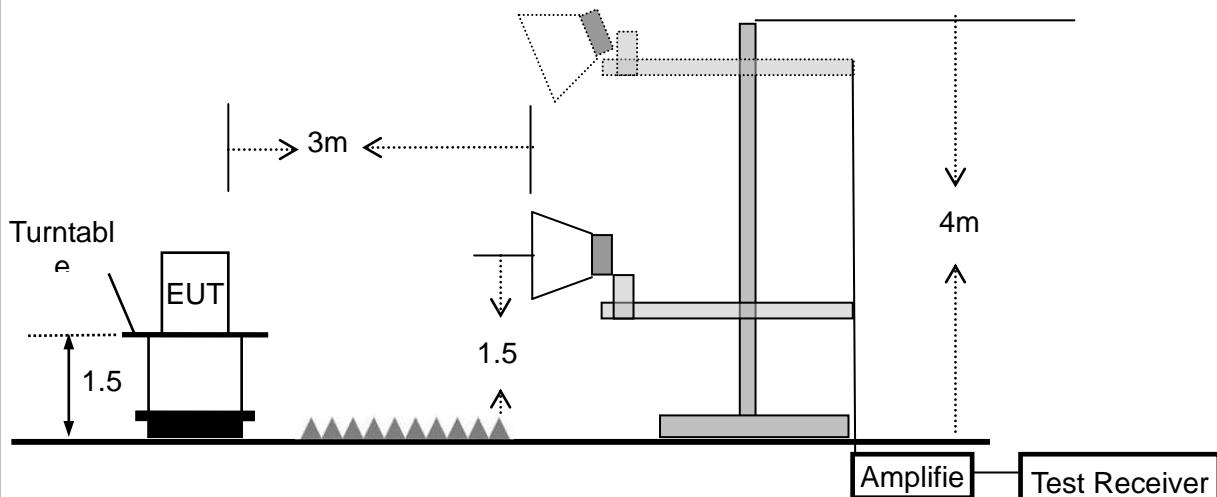

2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] = $10 \cdot \lg(100 \text{ [kHz]} / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT :	digital photo frame	Model Name :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


2.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	digital photo frame	Model Name :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX(5.2G)- 802.11a (Low CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	45.2165	21.87	16.27	38.14	40.00	-1.86	QP
V	56.9911	24.12	14.37	38.49	40.00	-1.51	QP
V	150.5378	24.35	16.71	41.06	43.50	-2.44	QP
V	340.7817	23.36	21.35	44.71	46.00	-1.29	QP
V	447.9821	17.98	24.79	42.77	46.00	-3.23	QP
V	821.7103	13.31	29.63	42.94	46.00	-3.06	QP

Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

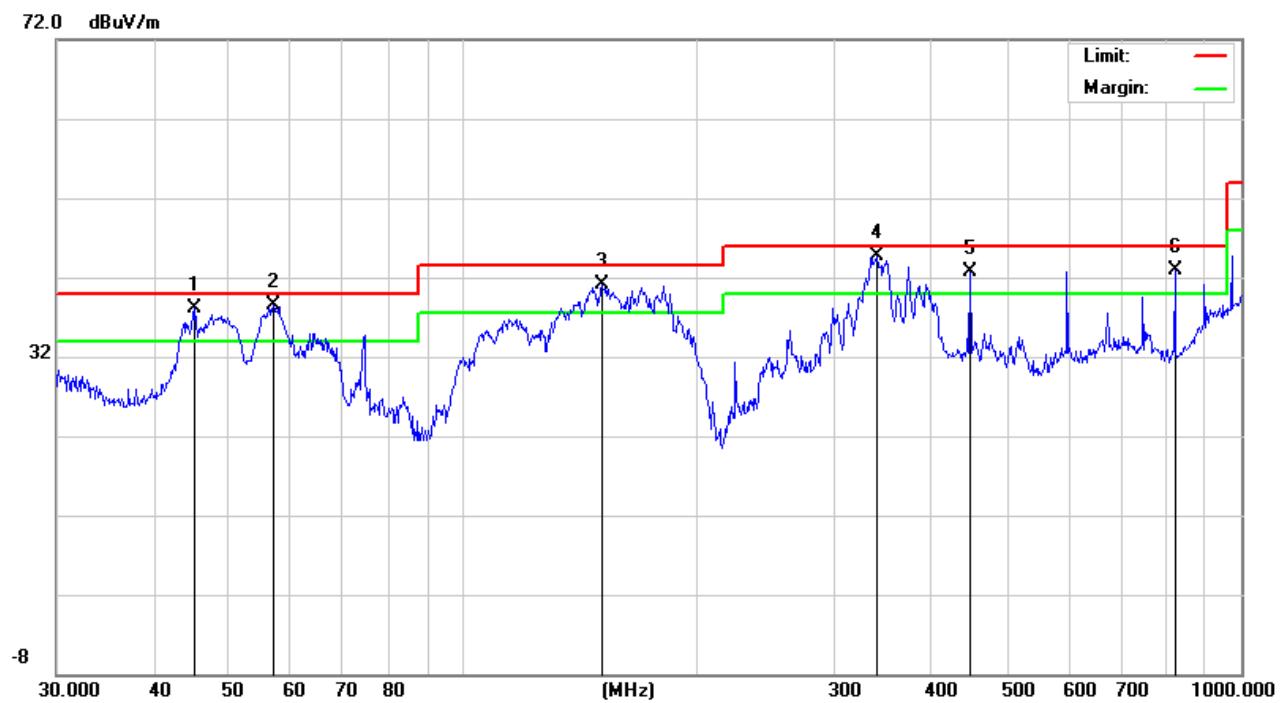

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	122.4038	21.69	15.08	36.77	43.50	-6.73	QP
H	141.3298	20.67	16.16	36.83	43.50	-6.67	QP
H	203.5226	20.50	17.39	37.89	43.50	-5.61	QP
H	223.7333	20.51	18.11	38.62	46.00	-7.38	QP
H	274.1938	20.76	19.93	40.69	46.00	-5.31	QP
H	383.9318	20.95	23.18	44.13	46.00	-1.87	QP

Remark:

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

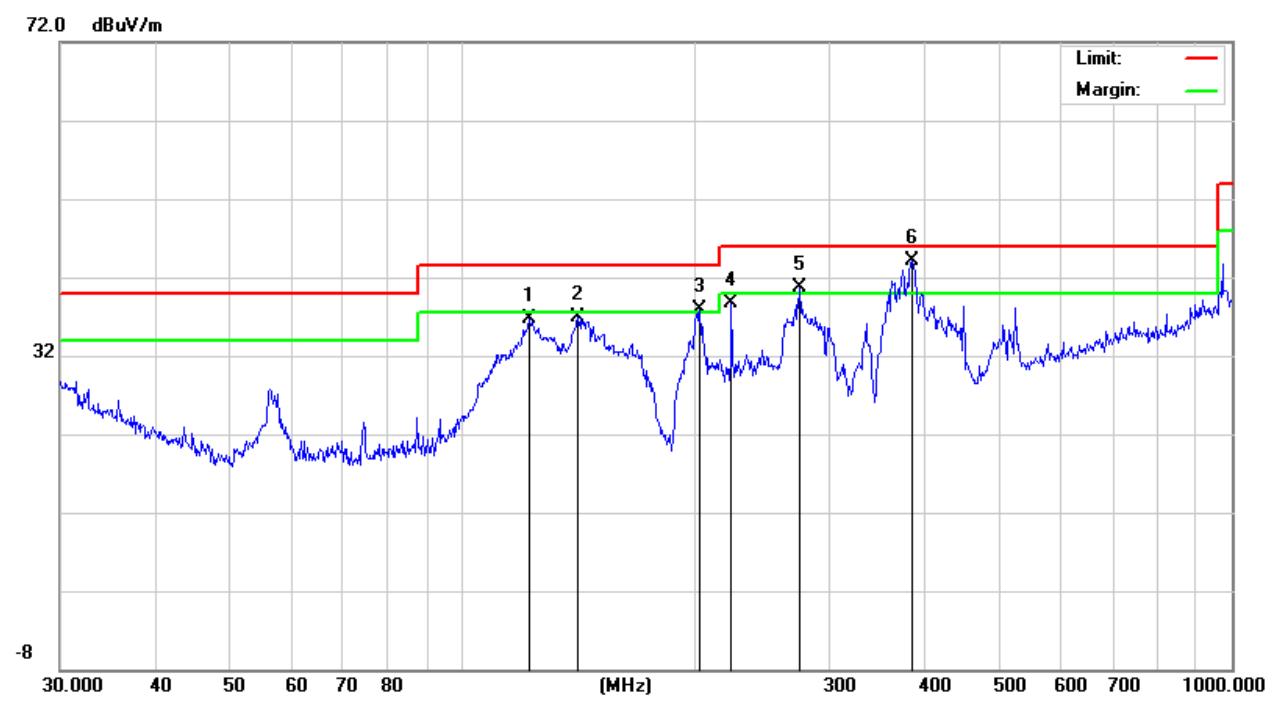

Note: All modes have been tested, just the the worst mode has been recorded in the report.

2.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	digital photo frame		Model Name. :	JT190M-D01(AWS19F)		
Temperature :	20 °C		Relative Humidity :	48%		
Pressure :	1010 hPa		Test Voltage :	DC 12V		
Test Mode :	TX(5.2G) - 802.11a _5180~5240MHz					

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4634.24	63.73	5.44	35.40	44.00	60.57	74.00	-13.43	Pk
Vertical	4633.89	45.14	5.74	35.40	44.00	42.28	54.00	-11.72	AV
Vertical	10520.91	61.08	8.26	39.75	44.50	64.59	68.20	-3.61	Pk
Vertical	15780.95	62.44	10.12	38.80	44.10	67.26	74.00	-6.74	Pk
Vertical	15781.32	41.25	9.62	38.80	42.70	46.97	54.00	-7.03	AV
Horizontal	4366.85	66.07	5.57	35.18	44.00	62.82	74.00	-11.18	Pk
Horizontal	4366.98	45.05	5.74	35.18	44.00	41.97	54.00	-12.03	AV
Horizontal	10520.93	60.75	8.38	38.71	44.50	63.34	68.20	-4.86	Pk
Horizontal	15781.09	59.32	9.88	38.38	44.10	63.48	74.00	-10.52	Pk
Horizontal	15781.41	42.13	9.94	38.38	44.10	46.35	54.00	-7.65	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4123.09	60.33	6.08	36.35	44.05	58.71	74.00	-15.29	Pk
Vertical	4123.11	43.97	6.39	36.35	44.05	42.66	54.00	-11.34	AV
Vertical	10560.84	61.32	8.28	37.88	44.51	62.97	68.20	-5.23	Pk
Vertical	15841.41	62.90	9.79	38.8	44.10	67.39	74.00	-6.61	Pk
Vertical	15841.16	41.04	9.70	38.8	42.70	46.84	54.00	-7.16	AV
Horizontal	3870.24	60.28	6.11	36.37	44.05	58.71	74.00	-15.29	Pk
Horizontal	3870.07	47.85	6.27	36.37	44.05	46.44	54.00	-7.56	AV
Horizontal	10561.42	56.82	8.33	38.64	44.50	59.29	68.20	-8.91	Pk
Horizontal	15840.99	61.97	9.99	38.38	44.10	66.24	74.00	-7.76	Pk
Horizontal	15841.09	42.60	9.81	38.38	44.10	46.69	54.00	-7.31	AV

High Channel (5240 MHz)-Above 1G									
Vertical	5367.10	64.08	6.96	37.24	43.50	64.78	74.00	-9.22	Pk
Vertical	5367.55	45.05	7.07	37.24	43.50	45.86	54.00	-8.14	AV
Vertical	10641.16	63.54	8.14	37.68	44.50	64.86	74.00	-9.14	Pk
Vertical	10641.52	42.90	8.35	37.68	44.50	44.43	54.00	-9.57	AV
Vertical	15961.22	62.07	10.11	38.8	44.10	66.88	74.00	-7.12	Pk
Horizontal	15961.22	40.62	9.64	38.8	42.70	46.36	54.00	-7.64	AV
Horizontal	5437.62	62.82	7.05	37.24	43.50	63.61	74.00	-10.39	Pk
Horizontal	5437.17	43.39	7.05	37.24	43.50	44.18	54.00	-9.82	AV
Horizontal	10641.26	62.28	8.20	38.57	44.50	64.55	74.00	-9.45	Pk
Horizontal	10640.92	44.85	8.03	38.57	44.50	46.95	54.00	-7.05	AV

Note: "802.11a (5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dB_uV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


2.2.10 TEST RESULTS (18GHz-40GHz)

EUT :	digital photo frame	Model Name. :	JT190M-D01(AWS19F)
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX (5.2G)-802.11a 5180MHz~5240MHz;		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5180 MHz)-Above 1G

Horizontal

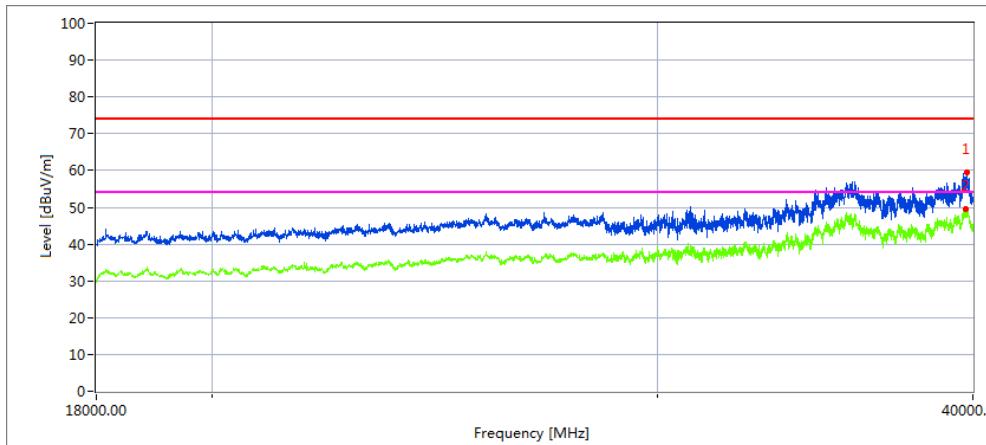

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39769.39	39.49	20.09	44.07	43.48	60.17	68.2	8.03	Peak
39767.06	27.69	20.09	44.04	43.48	48.34	54	5.66	AVG


Vertical

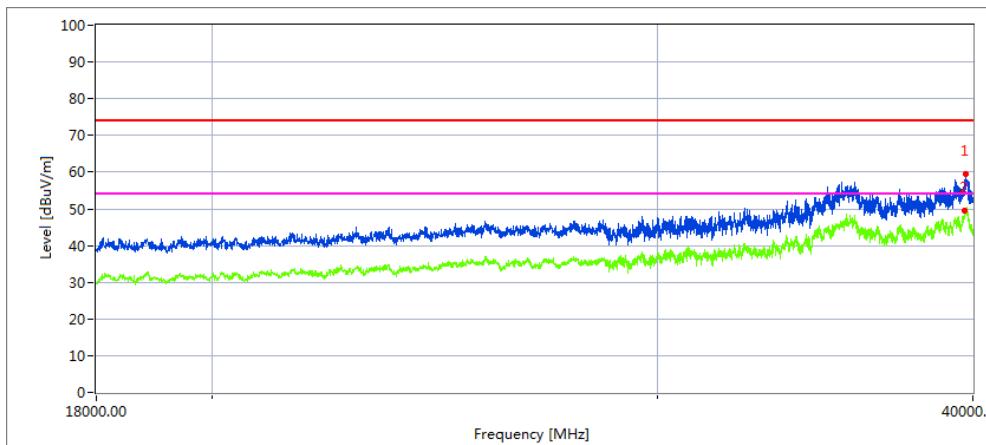

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
35794.83	37.86	19.17	42.63	42.74	56.92	68.2	11.28	Peak
35763.83	29.43	19.14	42.61	42.71	48.47	54	5.53	AVG


High Channel (5240 MHz)-Above 1G

Horizontal

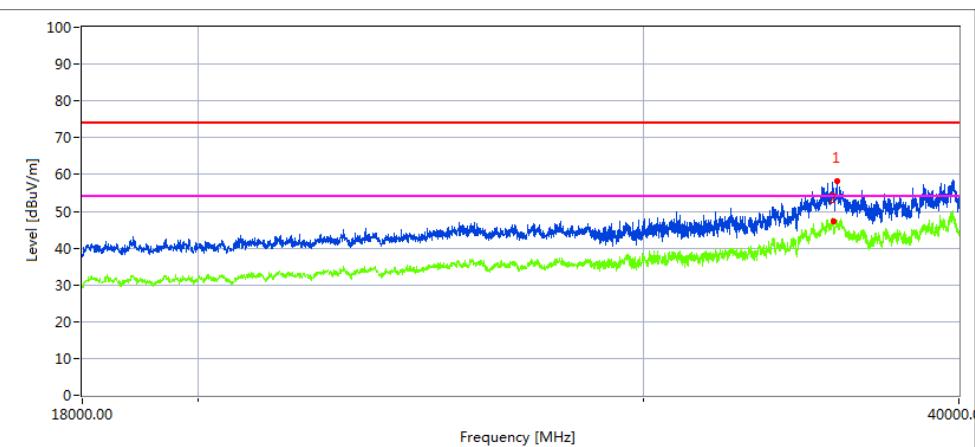

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
35628.38	41.47	19.11	42.73	44.61	58.7	68.2	9.5	Peak
35596.78	31.75	19.11	42.73	44.61	48.98	54	5.02	AVG

Vertical

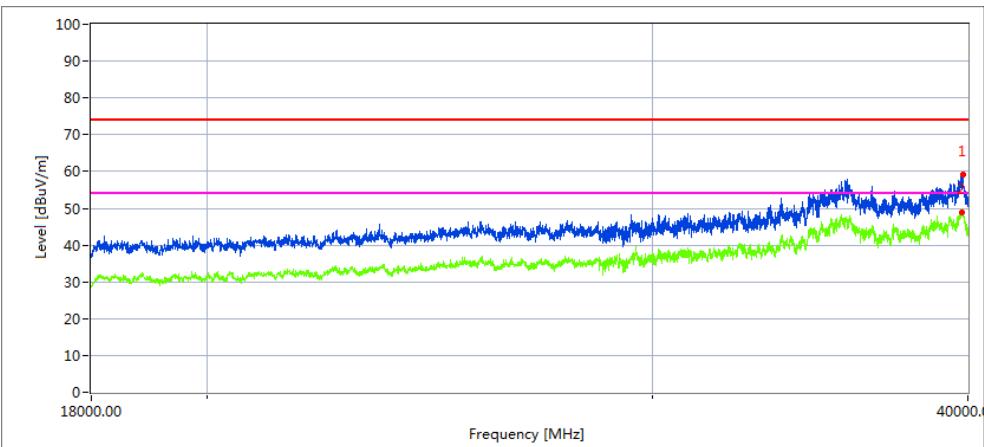

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39769.91	37.87	20.09	44.07	43.48	58.55	68.2	9.65	Peak
39769.78	25.75	20.09	44.04	43.48	46.4	54	7.6	AVG

Note: 802.11a mode is the worst mode.

2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	digital photo frame	Model Name. :	JT190M-D01(AWS19F)
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX (5.2G)-802.11a 5150MHz~5250MHz		

All the modulation modes have been tested, The report just record the worst data mode.

Frequency (MHz)	Meter Reading (dB μ V)	Cable Loss (dB)	Antenna Factor	Preamp Factor	Emission Level (dB μ V/m)	Limits	Margin (dB)	Detector	Comment
									Type
Low Channel (5180 MHz)									
4500	60.6	5.2	35.6	44.2	57.2	74	-16.8	Pk	Horizontal
4500	50.43	5.2	35.6	44.2	47.03	54	-6.97	AV	Horizontal
4500	60.52	5.2	35.6	44.2	57.12	74	-16.88	Pk	Horizontal
4500	49.69	5.2	35.6	44.2	46.29	54	-7.71	AV	Horizontal
5150	74.37	5.36	35.66	44.22	71.17	74	-2.83	Pk	Horizontal
5150	50.01	5.36	35.66	44.22	46.81	54	-7.19	AV	Horizontal
5150	61.33	5.36	35.66	44.22	58.13	74	-15.87	Pk	Vertical
5150	51.19	5.36	35.66	44.22	47.99	54	-6.01	AV	Vertical
5350	66.75	5.68	35.68	44.22	63.89	74	-10.11	Pk	Vertical
5350	48.19	5.68	35.68	44.22	45.33	54	-8.67	AV	Vertical
5350	61.72	5.68	35.68	44.22	58.86	74	-15.14	Pk	Horizontal
5350	49.65	5.68	35.68	44.22	46.79	54	-7.21	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11a" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3. POWER SPECTRAL DENSITY TEST

3.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW $\geq 1/T$, where T is defined in section II.B.I.a).
- b) Set VBW ≥ 3 RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

3.3 DEVIATION FROM STANDARD

No deviation.

3.4 TEST SETUP



3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

EUT :	digital photo frame	Model Name :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 12V
Test Mode :	TX Frequency Band 1 (5150-5250MHz)		

Test data reference attachment.

4. 26DB & 99% EMISSION BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

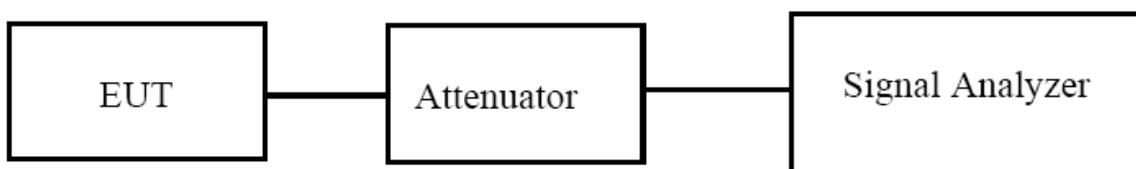

4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 TEST RESULTS

EUT :	digital photo frame	Model Name :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX Frequency Band 1 (5150-5250MHz)		

Test data reference attachment.

5. MINIMUM 6 DB BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

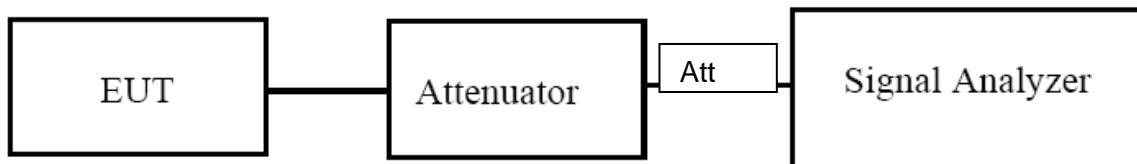

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

EUT :	digital photo frame	Model Name :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	N/A
Test Mode :	N/A		

Note: Not applicable

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5470~5725	250 mW or 11 dBm + 10 log B Note: The limit is the smaller of the two, "B" represents -26dB bandwidth.
5725~5850	1W


6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
 - Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
 - Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
 - Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

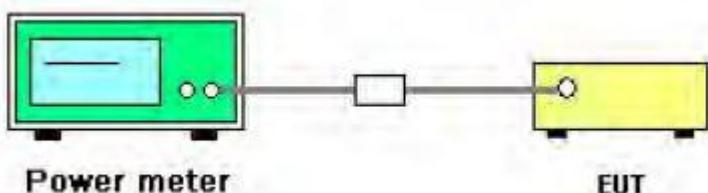

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2 TEST RESULTS

EUT :	digital photo frame	Model Name :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz)		

Test data reference attachment.

7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot


the graph with marking the highest point and edge frequency.

5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

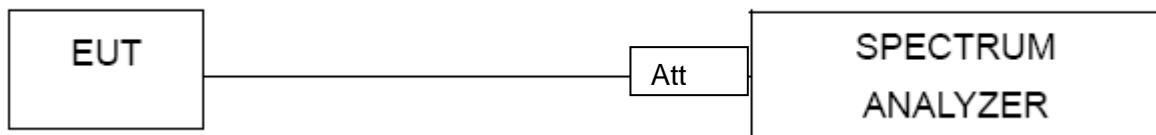

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	digital photo frame	Model Name :	JT190M-D01(AWS19F)
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 12V

Test data reference attachment.

8. Frequency Stability Measurement


8.1 LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C~70°C.

8.3 TEST SETUP LAYOUT

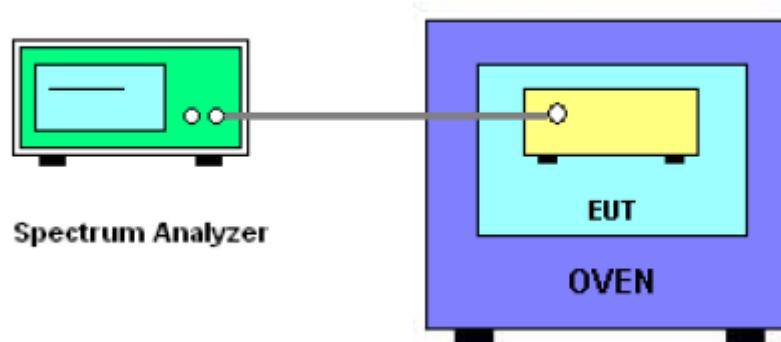

8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 data.

8.5 TEST RESULTS

EUT :	digital photo frame	Model Name. :	JT190M-D01(AWS19F)
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz				
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
T nom (°C)	20	V nom (V)	12.0	5180.0124	5180	0.0124	-2.3938	
		V max (V)	13.8	5180.0246	5180	0.0246	-4.7490	
		V min (V)	10.2	5180.0266	5180	0.0266	-5.1351	
Limits				Within 5150-5250MHz				
Result				Complies				

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz				
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
V nom (V)	12	T (°C)	-20	5180.0243	5180	0.0243	-4.6911	
		T (°C)	-10	5180.0086	5180	0.0086	-1.6602	
		T (°C)	0	5180.0568	5180	0.0568	-10.9653	
		T (°C)	10	5180.0306	5180	0.0306	-5.9073	
		T (°C)	20	5180.0167	5180	0.0167	-3.2239	
		T (°C)	30	5180.0517	5180	0.0517	-9.9807	
		T (°C)	40	5180.0273	5180	0.0273	-5.2703	
		T (°C)	50	5180.0575	5180	0.0575	-11.1004	
		T (°C)	60	5180.0199	5180	0.0199	-3.8417	
		T (°C)	70	5180.0237	5180	0.0237	-4.5753	
Limits				Within 5150-5250MHz				
Result				Complies				

Voltage vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5200MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
T nom (°C)	20	V nom (V)	12.0	5200.0529	5200	0.0529	-10.1731
		V max (V)	13.8	5200.0642	5200	0.0642	-12.3462
		V min (V)	10.2	5200.0018	5200	0.0018	-0.3462
Limits			Within 5150-5250MHz				
Result			Complies				

Temperature vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5200MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
V nom (V)	12	T (°C)	-20	5200.0235	5200	0.0235	-4.5192
		T (°C)	-10	5200.0340	5200	0.0340	-6.5385
		T (°C)	0	5200.0471	5200	0.0471	-9.0577
		T (°C)	10	5200.0174	5200	0.0174	-3.3462
		T (°C)	20	5200.0597	5200	0.0597	-11.4808
		T (°C)	30	5200.0310	5200	0.0310	-5.9615
		T (°C)	40	5200.0396	5200	0.0396	-7.6154
		T (°C)	50	5200.0248	5200	0.0248	-4.7692
		T (°C)	60	5200.0639	5200	0.0639	-12.2885
		T (°C)	70	5200.0309	5200	0.0309	-5.9423
Limits			Within 5150-5250MHz				
Result			Complies				

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz				
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
T nom (°C)	20	V nom (V)	12.0	5240.0398	5240	0.0398	-7.5954	
		V max (V)	13.8	5240.0538	5240	0.0538	-10.2672	
		V min (V)	10.2	5240.0570	5240	0.0570	-10.8779	
Limits				Within 5150-5250MHz				
Result				Complies				

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz				
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
V nom (V)	12	T (°C)	-20	5240.0645	5240	0.0645	-12.3092	
		T (°C)	-10	5240.0640	5240	0.0640	-12.2137	
		T (°C)	0	5240.0480	5240	0.0480	-9.1603	
		T (°C)	10	5240.0253	5240	0.0253	-4.8282	
		T (°C)	20	5240.0079	5240	0.0079	-1.5076	
		T (°C)	30	5240.0182	5240	0.0182	-3.4733	
		T (°C)	40	5240.0225	5240	0.0225	-4.2939	
		T (°C)	50	5240.0453	5240	0.0453	-8.6450	
		T (°C)	60	5240.0425	5240	0.0425	-8.1107	
		T (°C)	70	5240.0551	5240	0.0551	-10.5153	
Limits				Within 5150-5250MHz				
Result				Complies				

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA


The EUT antenna is permanent attached FPC Antenna (antenna gain: 2dBi). It comply with the standard requirement.

10. TEST RESULTS


10.1 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	Ant1	85.79	0.67
NVNT	a	5200	Ant1	85.9	0.66
NVNT	a	5240	Ant1	85.78	0.67
NVNT	ac20	5180	Ant1	90.58	0.43
NVNT	ac20	5200	Ant1	90.59	0.43
NVNT	ac20	5240	Ant1	90.6	0.43
NVNT	ac40	5190	Ant1	96.37	0.16
NVNT	ac40	5230	Ant1	96.4	0.16
NVNT	ac80	5210	Ant1	93.2	0.31
NVNT	n20	5180	Ant1	90.1	0.45
NVNT	n20	5200	Ant1	90.58	0.43
NVNT	n20	5240	Ant1	90.2	0.45
NVNT	n40	5190	Ant1	96.34	0.16
NVNT	n40	5230	Ant1	96.31	0.16


Duty Cycle NVNT a 5180MHz Ant1

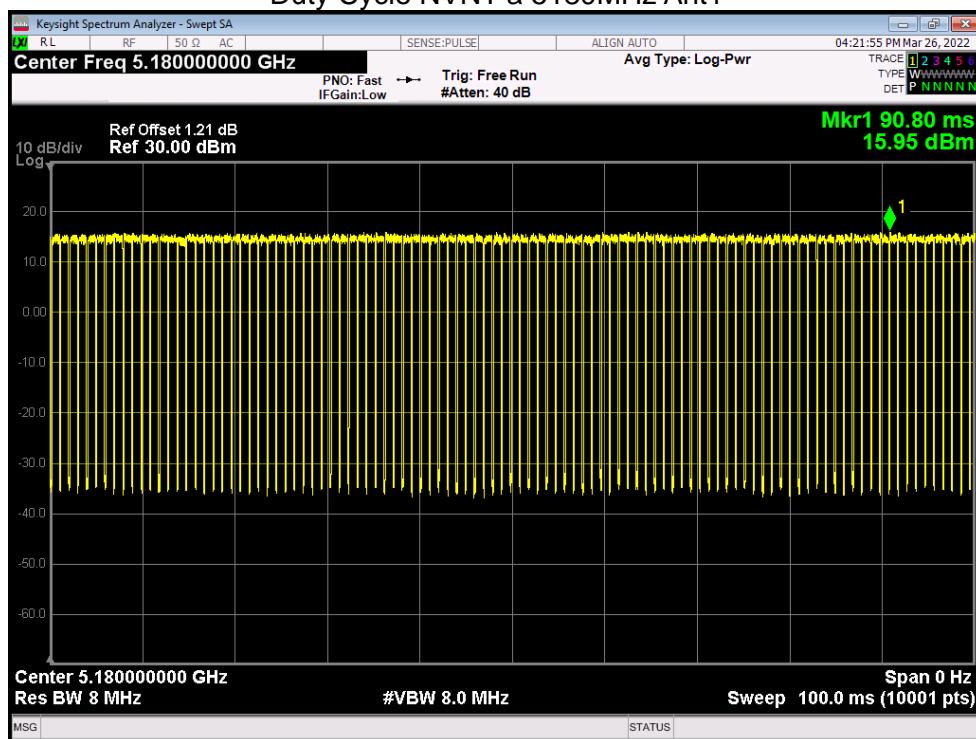


Duty Cycle NVNT a 5200MHz Ant1

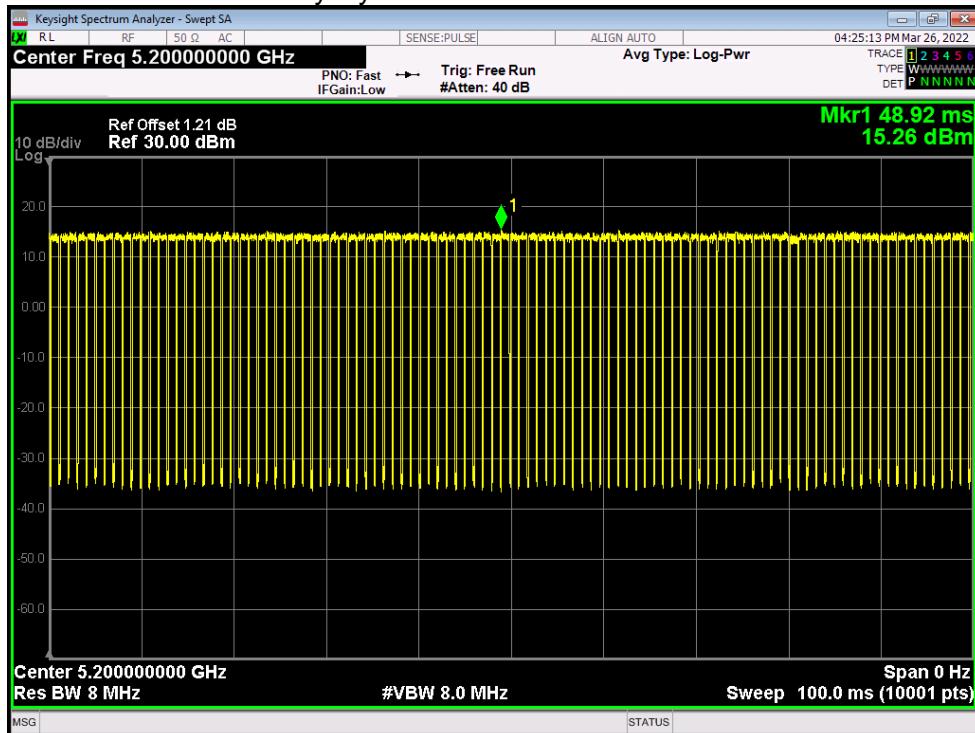


Duty Cycle NVNT a 5240MHz Ant1

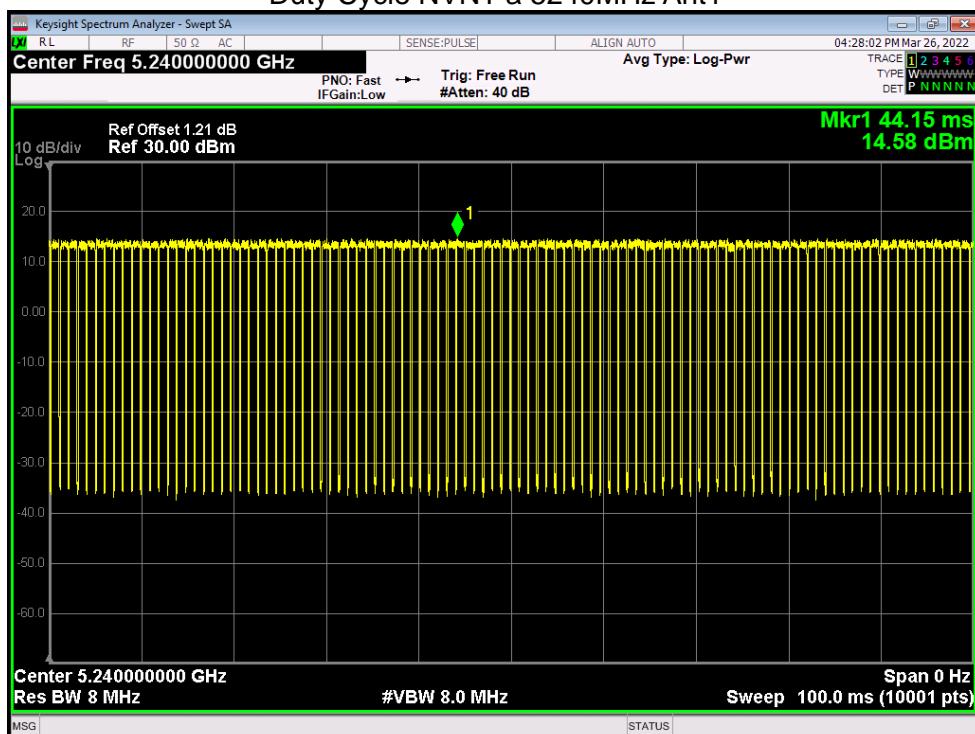


Duty Cycle NVNT ac20 5180MHz Ant1

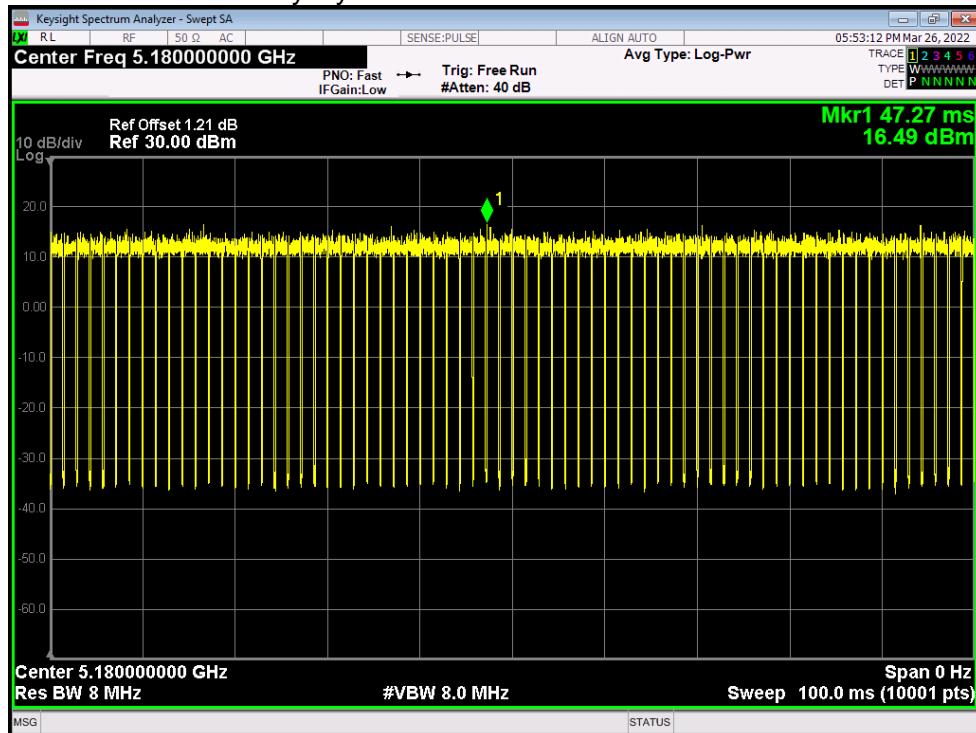


Duty Cycle NVNT ac20 5240MHz Ant1

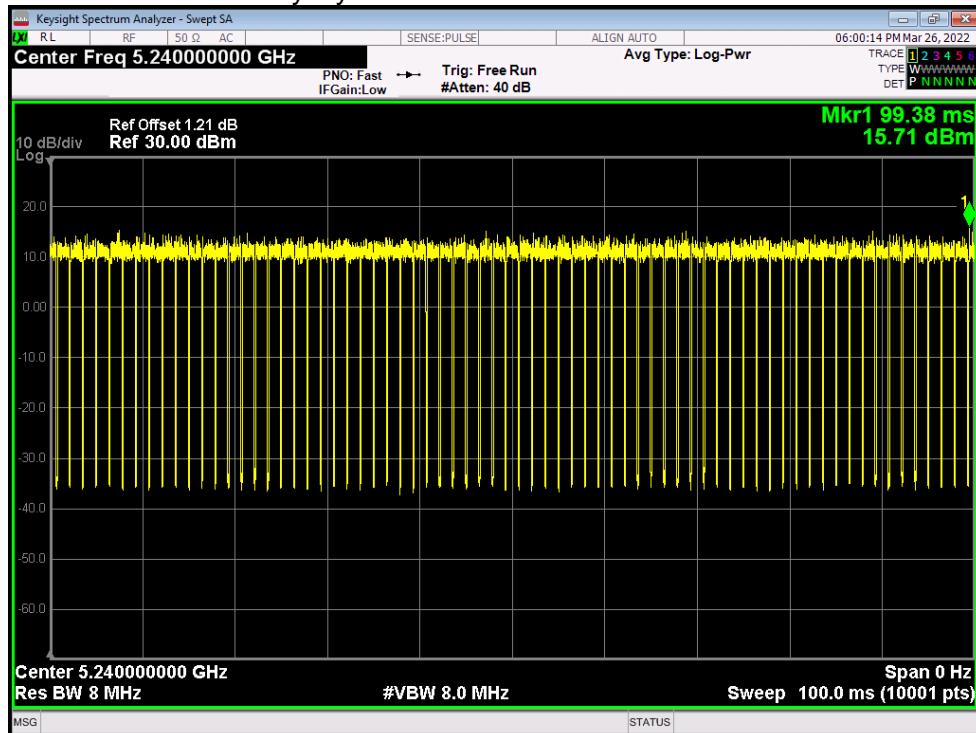


Duty Cycle NVNT ac40 5190MHz Ant1

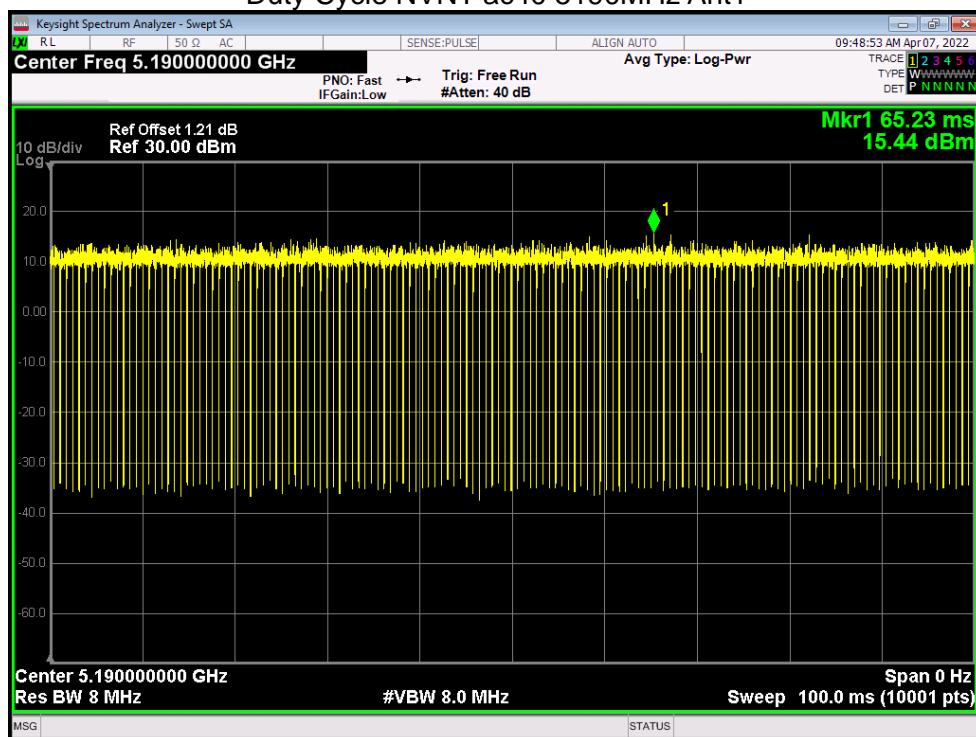


Duty Cycle NVNT ac40 5230MHz Ant1

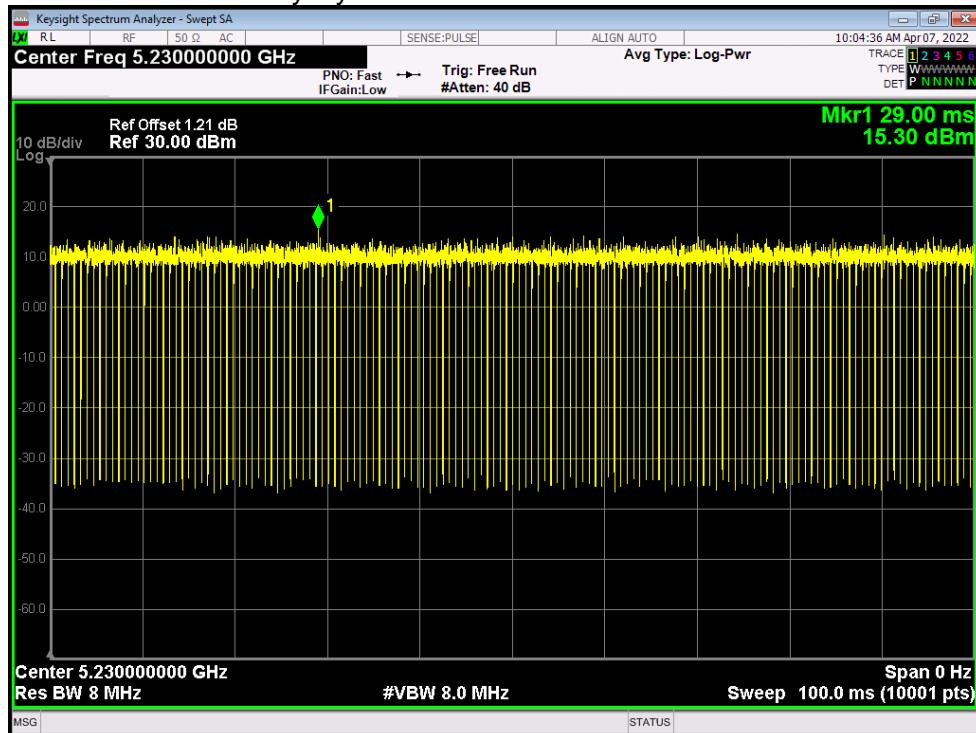


Duty Cycle NVNT n20 5180MHz Ant1

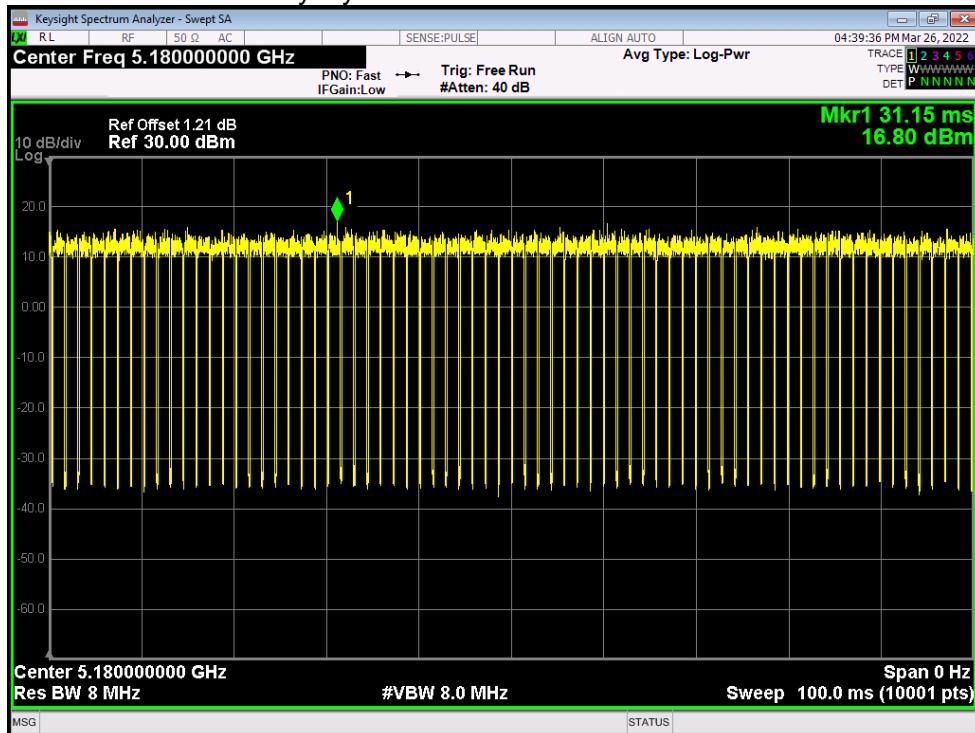


Duty Cycle NVNT n20 5200MHz Ant1

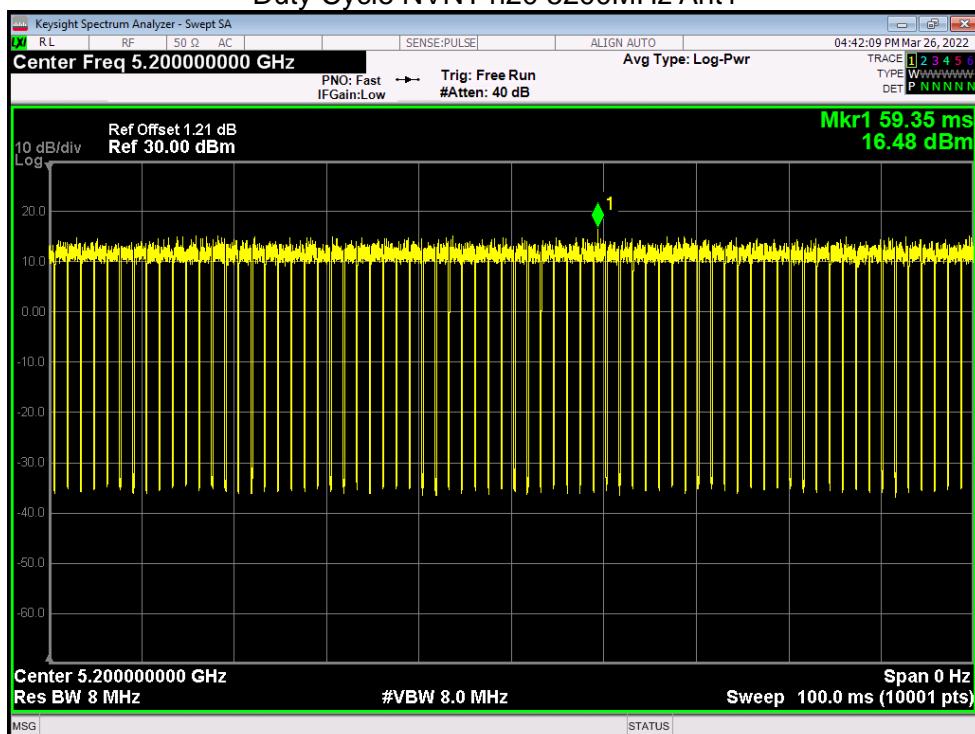


Duty Cycle NVNT n20 5240MHz Ant1

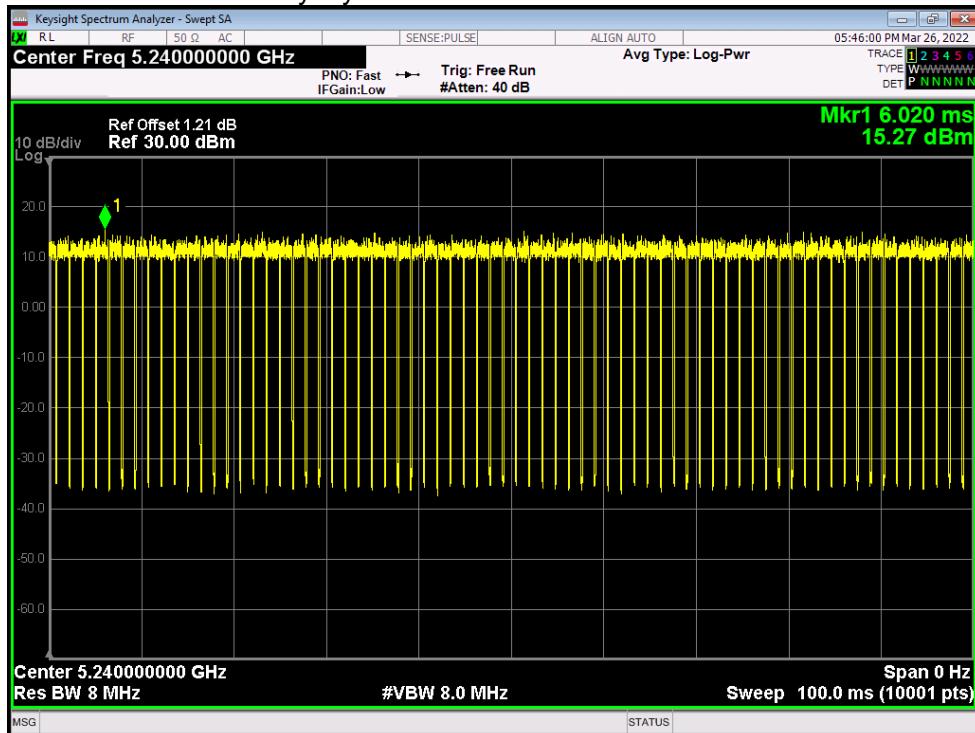

Duty Cycle NVNT n40 5190MHz Ant1

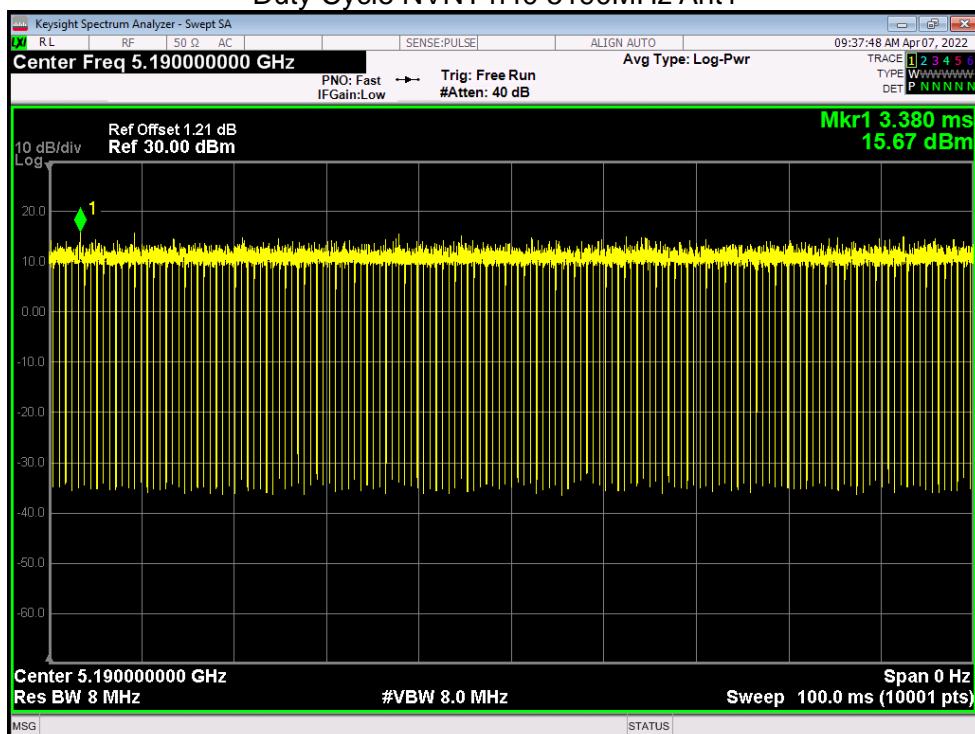


Duty Cycle NVNT n40 5230MHz Ant1

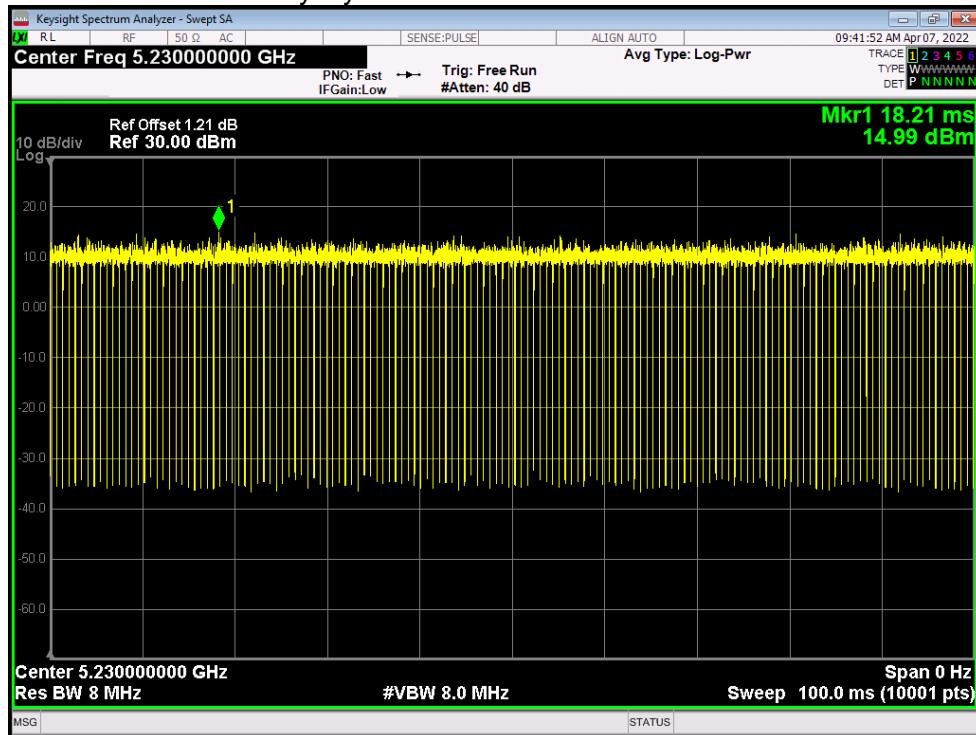


10.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	9.721	0.67	10.391	24	Pass
NVNT	a	5200	Ant1	8.862	0.66	9.522	24	Pass
NVNT	a	5240	Ant1	8.384	0.67	9.054	24	Pass
NVNT	ac20	5180	Ant1	8.215	0.43	8.645	24	Pass
NVNT	ac20	5200	Ant1	8.104	0.43	8.534	24	Pass
NVNT	ac20	5240	Ant1	7.281	0.43	7.711	24	Pass
NVNT	ac40	5190	Ant1	9.032	0.16	9.192	24	Pass
NVNT	ac40	5230	Ant1	8.589	0.16	8.749	24	Pass
NVNT	ac80	5210	Ant1	8.749	0.31	9.059	24	Pass
NVNT	n20	5180	Ant1	8.417	0.45	8.867	24	Pass
NVNT	n20	5200	Ant1	7.963	0.43	8.393	24	Pass
NVNT	n20	5240	Ant1	7.429	0.45	7.879	24	Pass
NVNT	n40	5190	Ant1	9.305	0.16	9.465	24	Pass
NVNT	n40	5230	Ant1	8.416	0.16	8.576	24	Pass


Power NVNT a 5180MHz Ant1

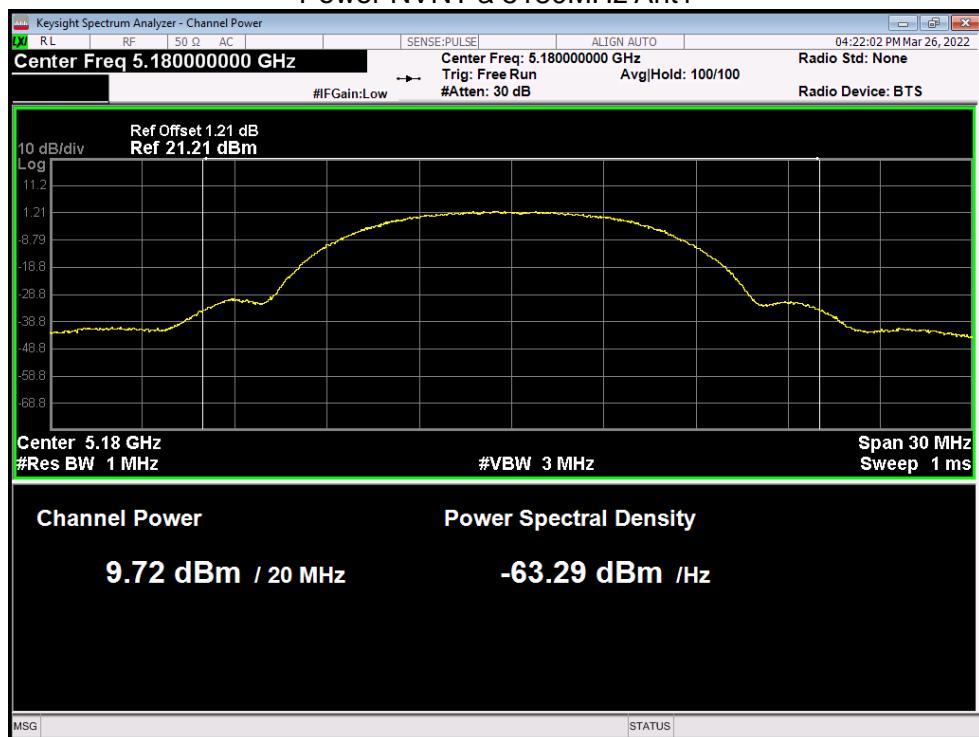


Power NVNT a 5200MHz Ant1

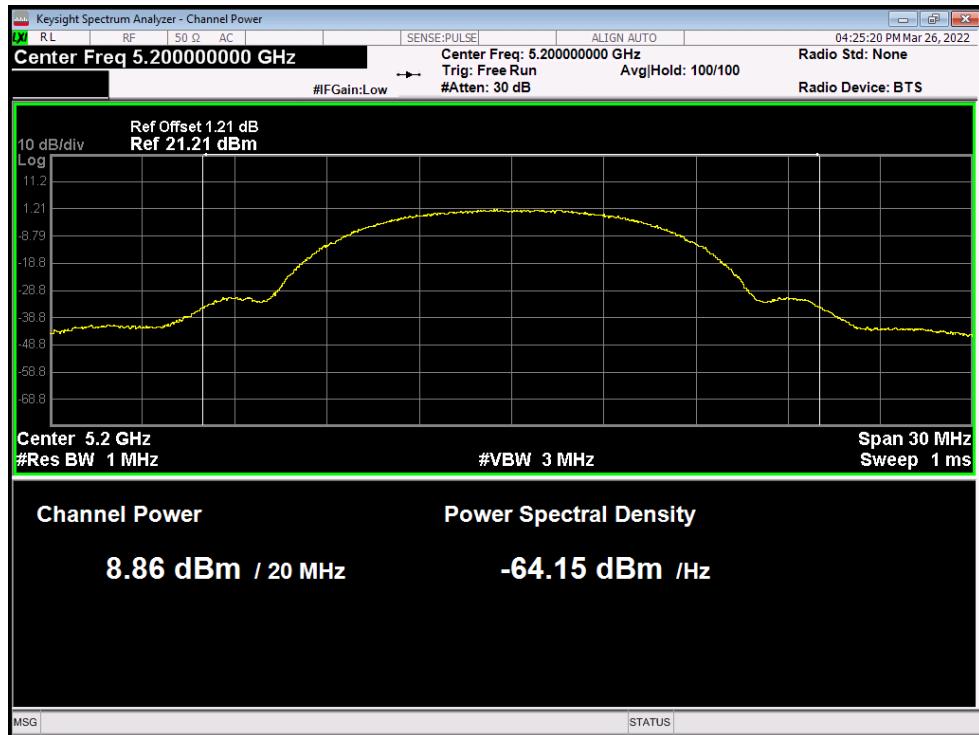


Power NVNT a 5240MHz Ant1

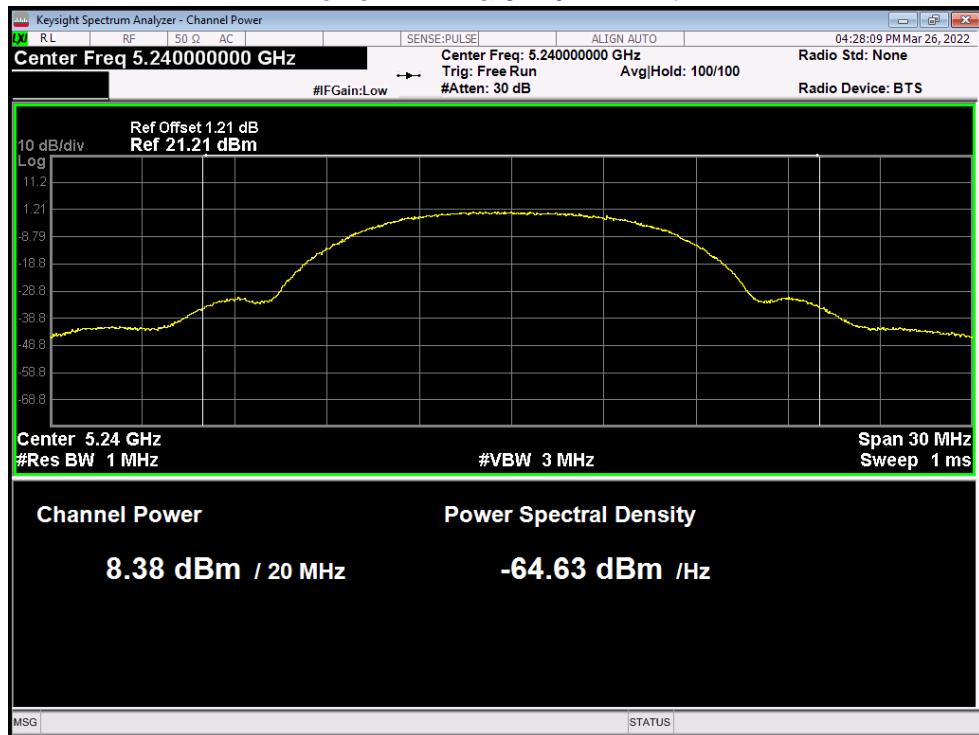


Power NVNT ac20 5180MHz Ant1

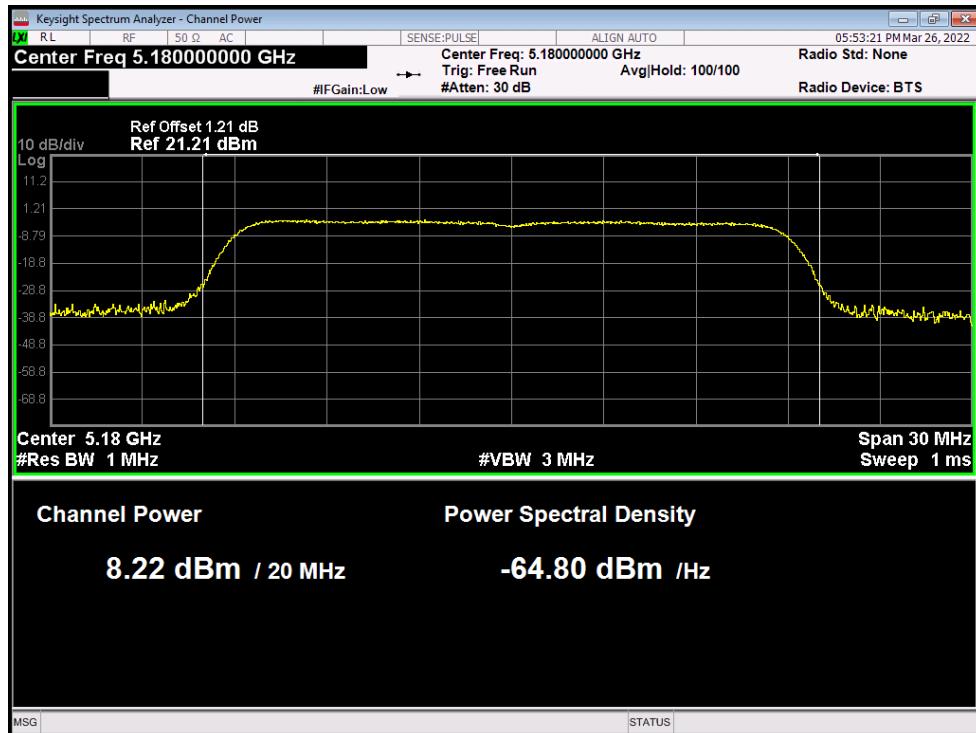


Power NVNT ac20 5200MHz Ant1

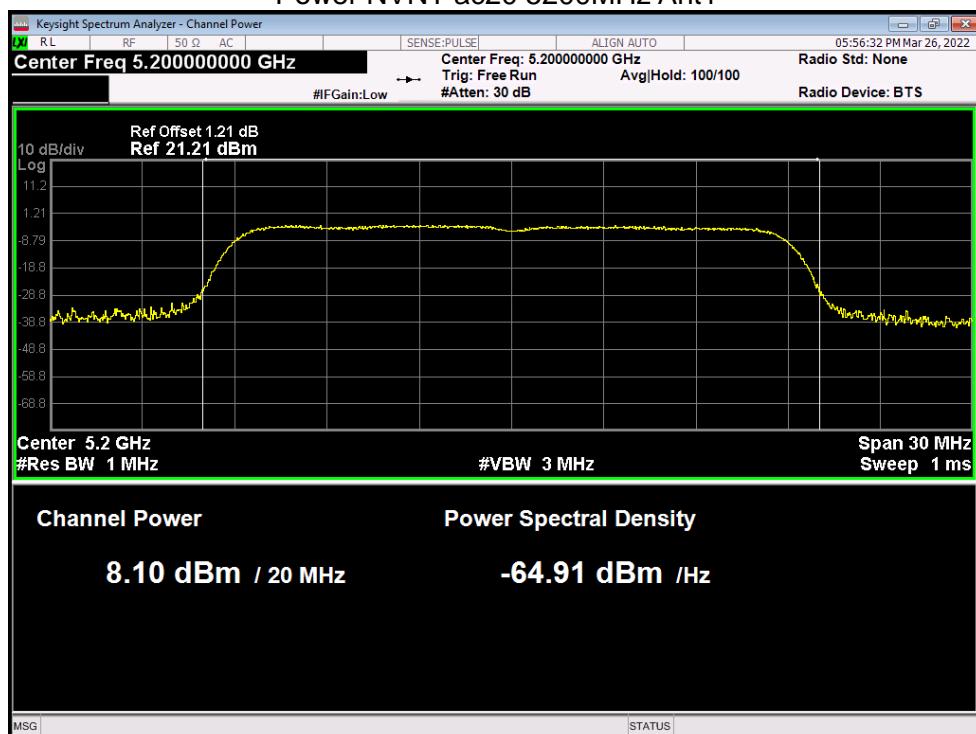


Power NVNT ac20 5240MHz Ant1

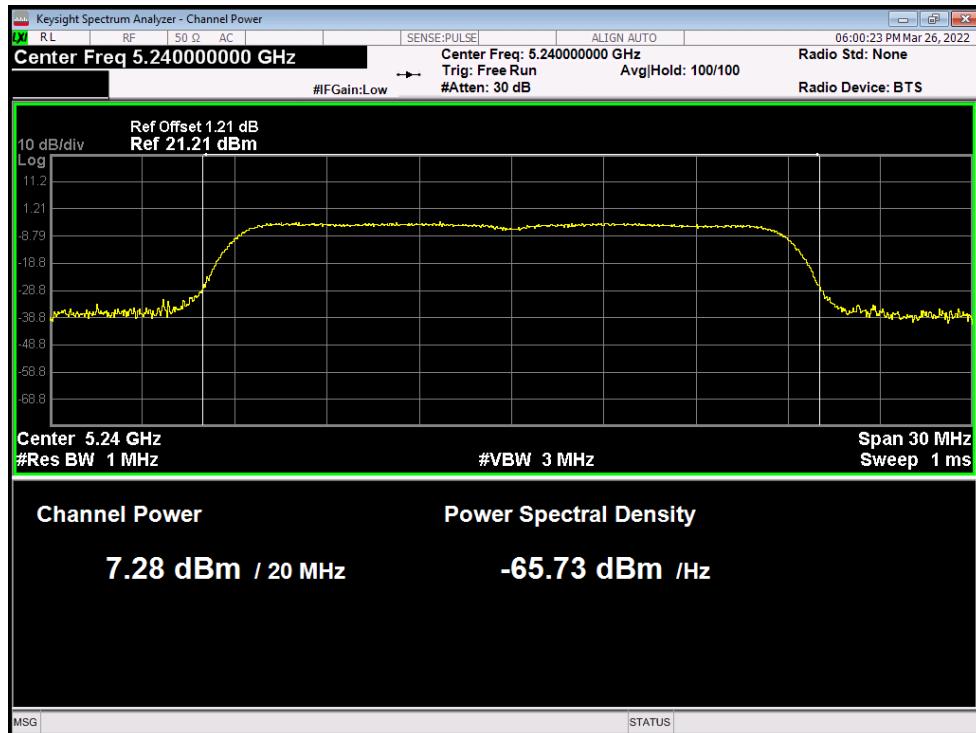


Power NVNT ac40 5190MHz Ant1

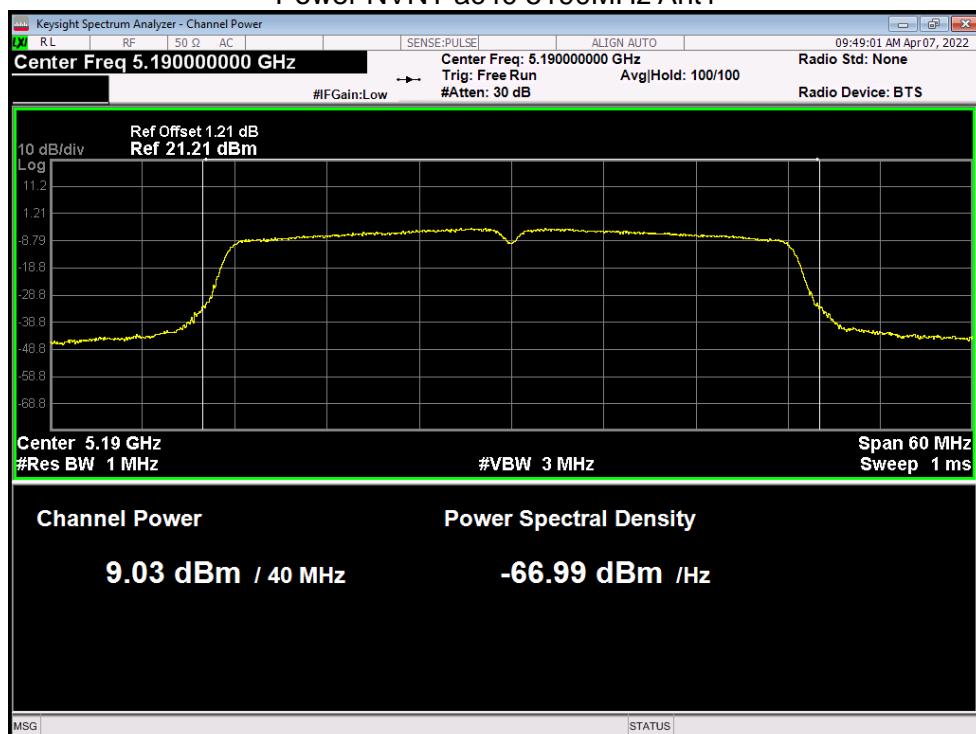


Power NVNT ac40 5230MHz Ant1

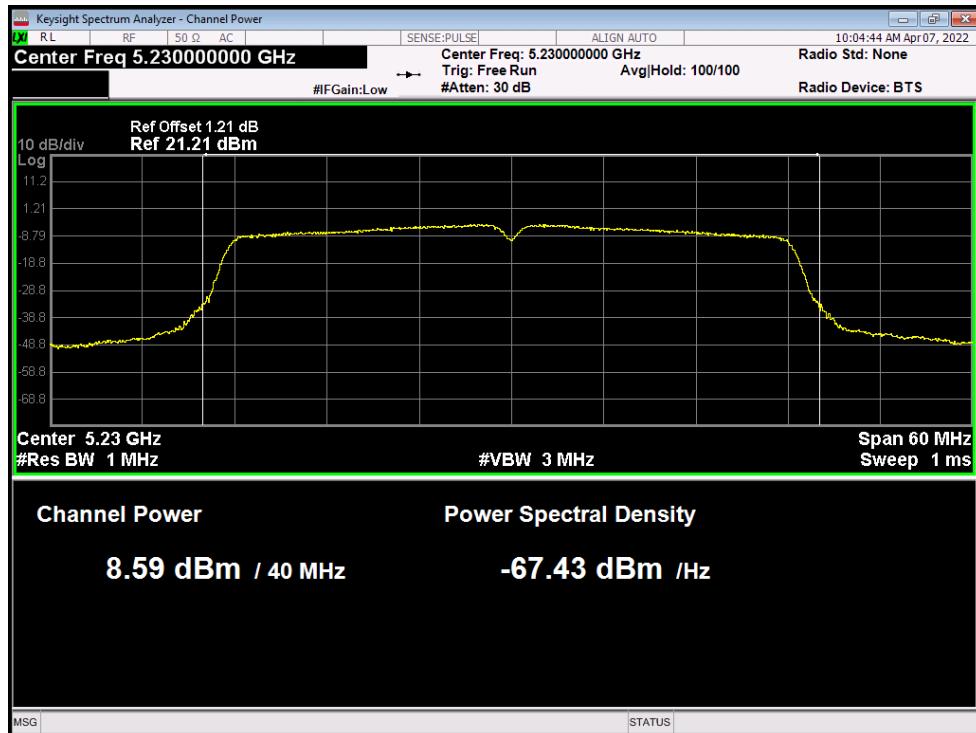


Power NVNT ac80 5210MHz Ant1

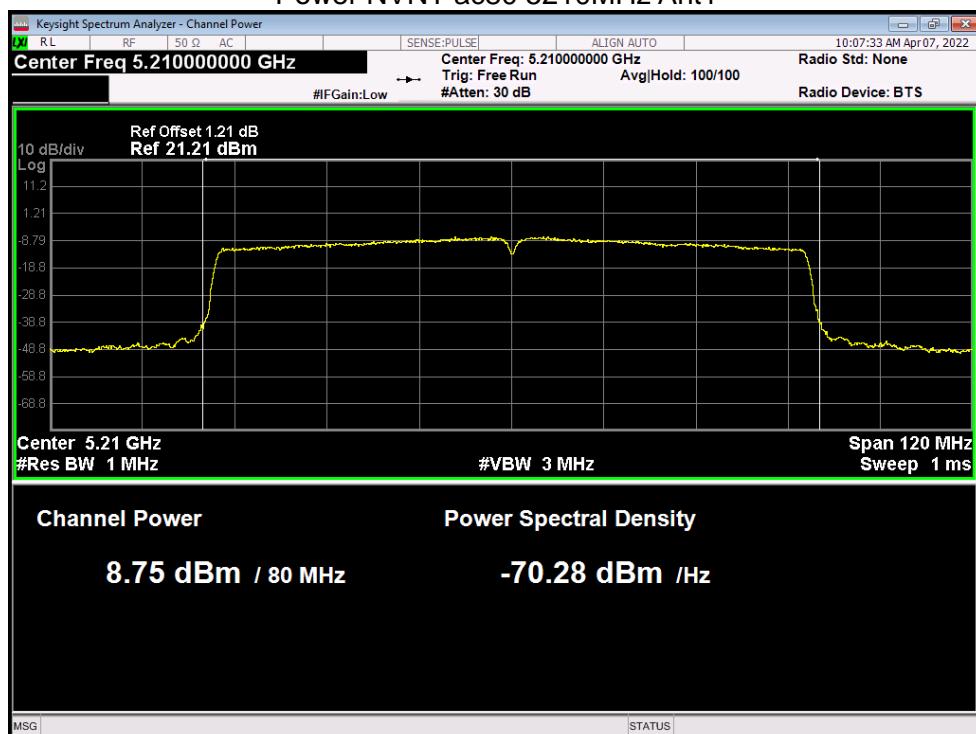


Power NVNT n20 5180MHz Ant1

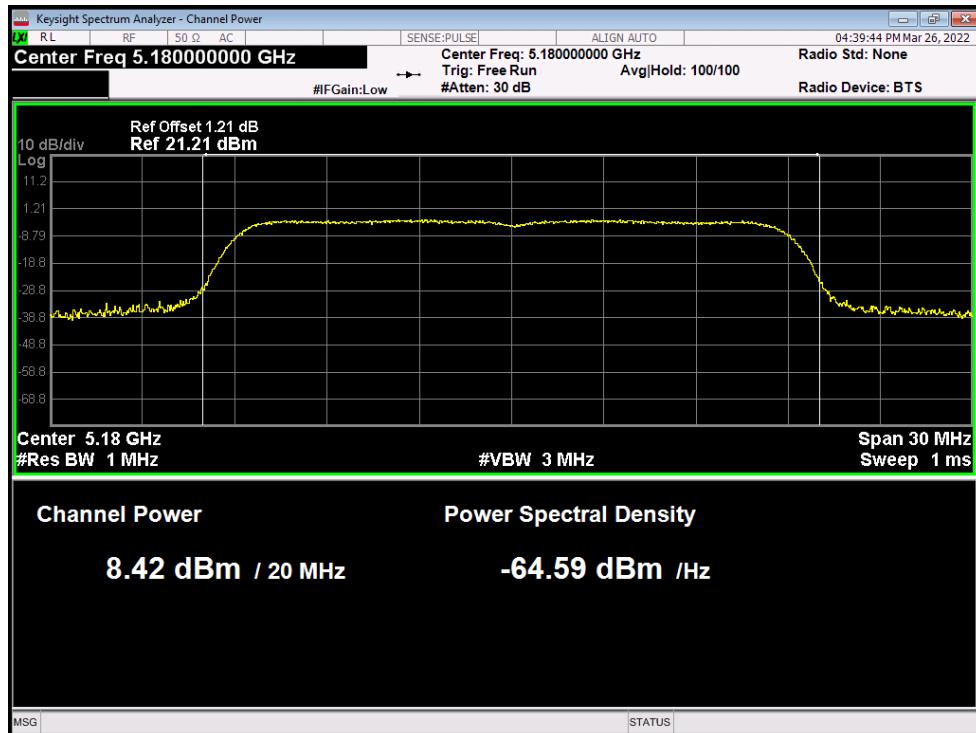


Power NVNT n20 5200MHz Ant1

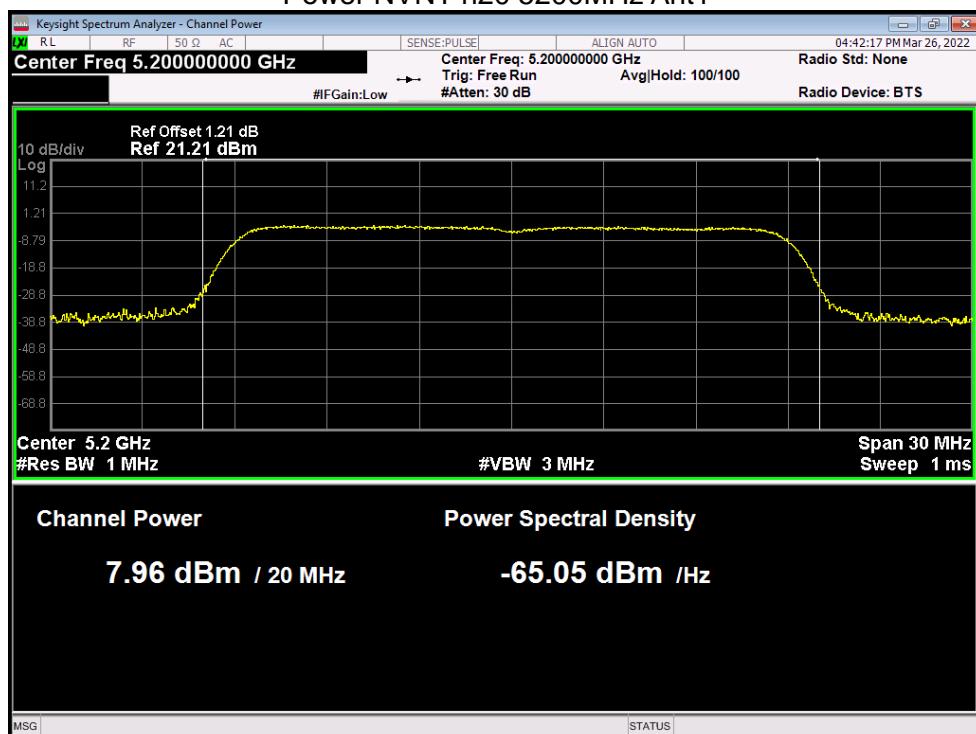


Power NVNT n20 5240MHz Ant1

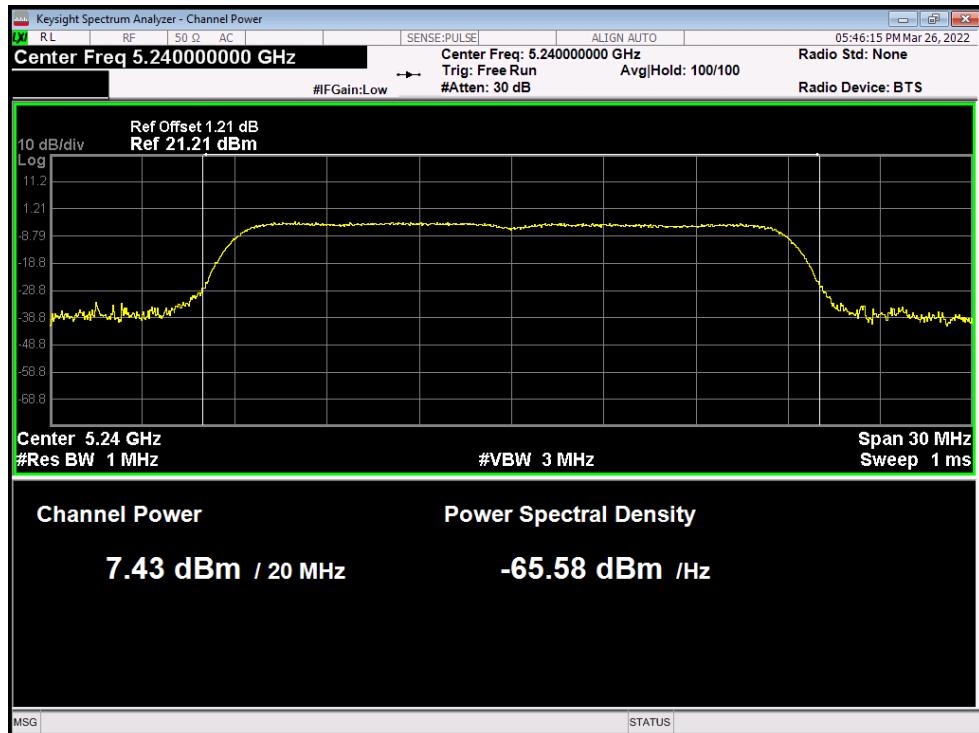

Power NVNT n40 5190MHz Ant1

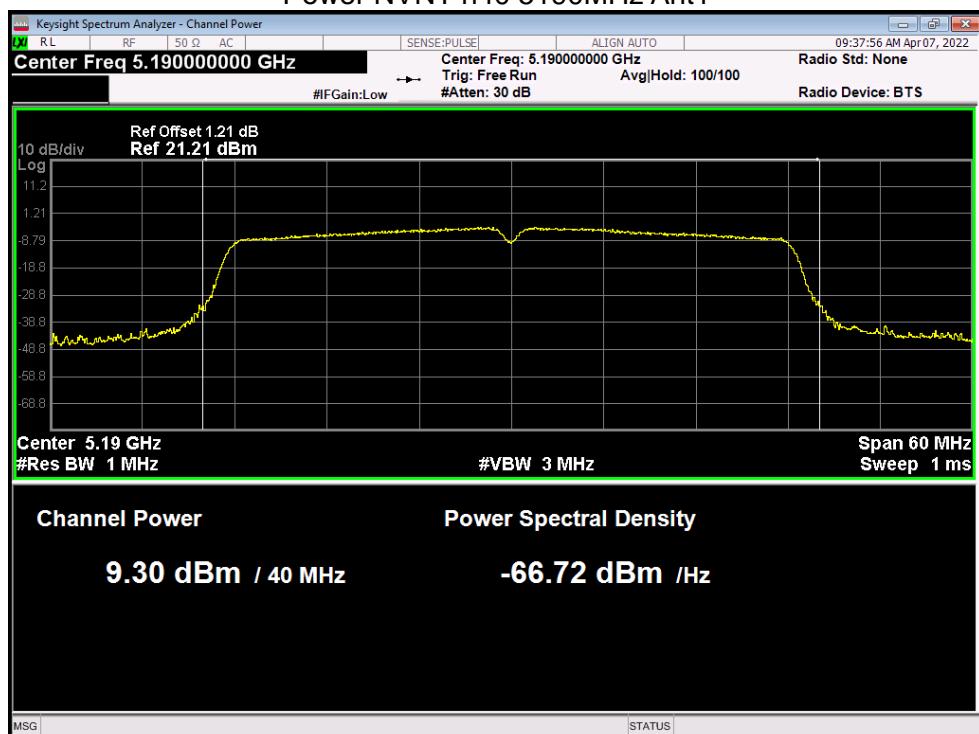


Power NVNT n40 5230MHz Ant1

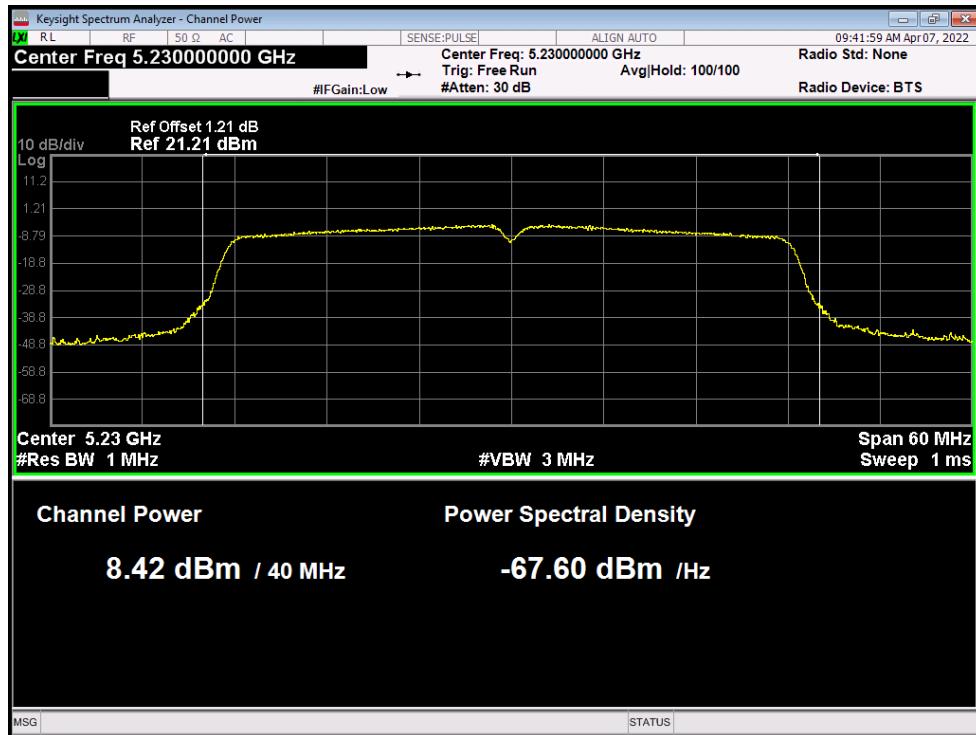


10.3 -26DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	14.217	Pass
NVNT	a	5200	Ant1	14.047	Pass
NVNT	a	5240	Ant1	14.327	Pass
NVNT	ac20	5180	Ant1	25.701	Pass
NVNT	ac20	5200	Ant1	26.547	Pass
NVNT	ac20	5240	Ant1	28.838	Pass
NVNT	ac40	5190	Ant1	39.811	Pass
NVNT	ac40	5230	Ant1	40.181	Pass
NVNT	ac80	5210	Ant1	80.294	Pass
NVNT	n20	5180	Ant1	25.563	Pass
NVNT	n20	5200	Ant1	26.628	Pass
NVNT	n20	5240	Ant1	26.439	Pass
NVNT	n40	5190	Ant1	40.145	Pass
NVNT	n40	5230	Ant1	40.213	Pass


-26dB Bandwidth NVNT a 5180MHz Ant1

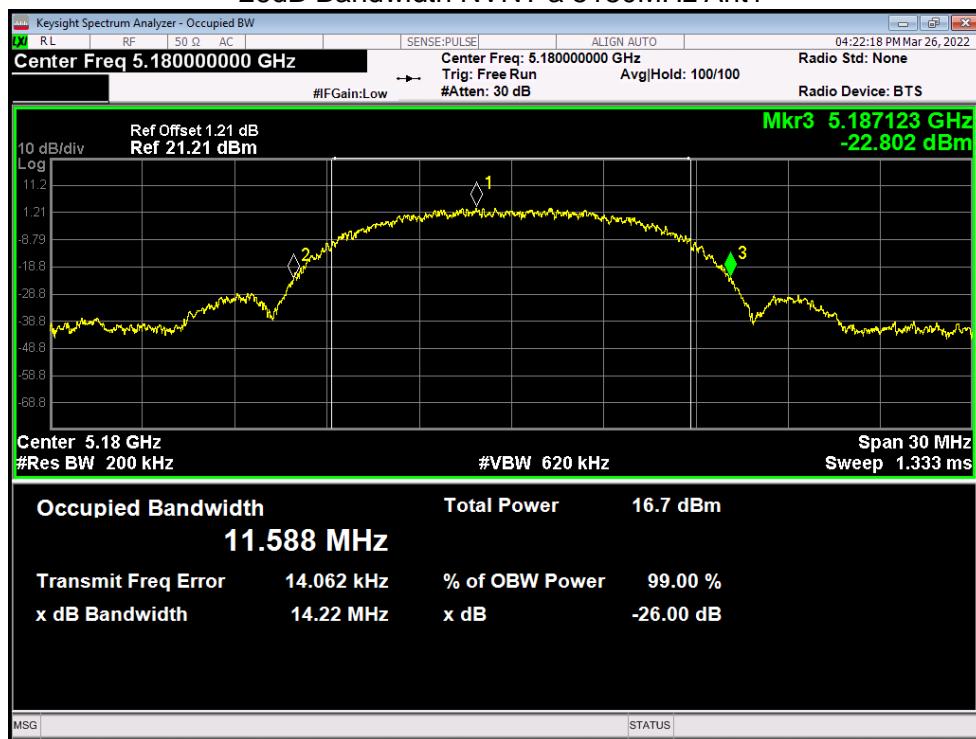


-26dB Bandwidth NVNT a 5200MHz Ant1

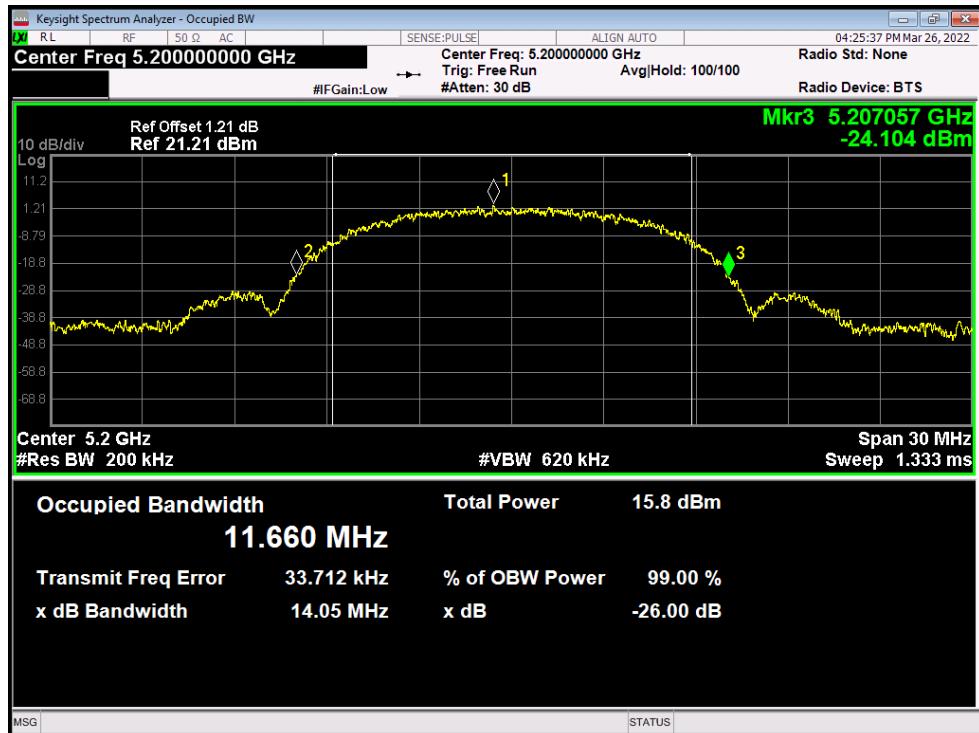


-26dB Bandwidth NVNT a 5240MHz Ant1


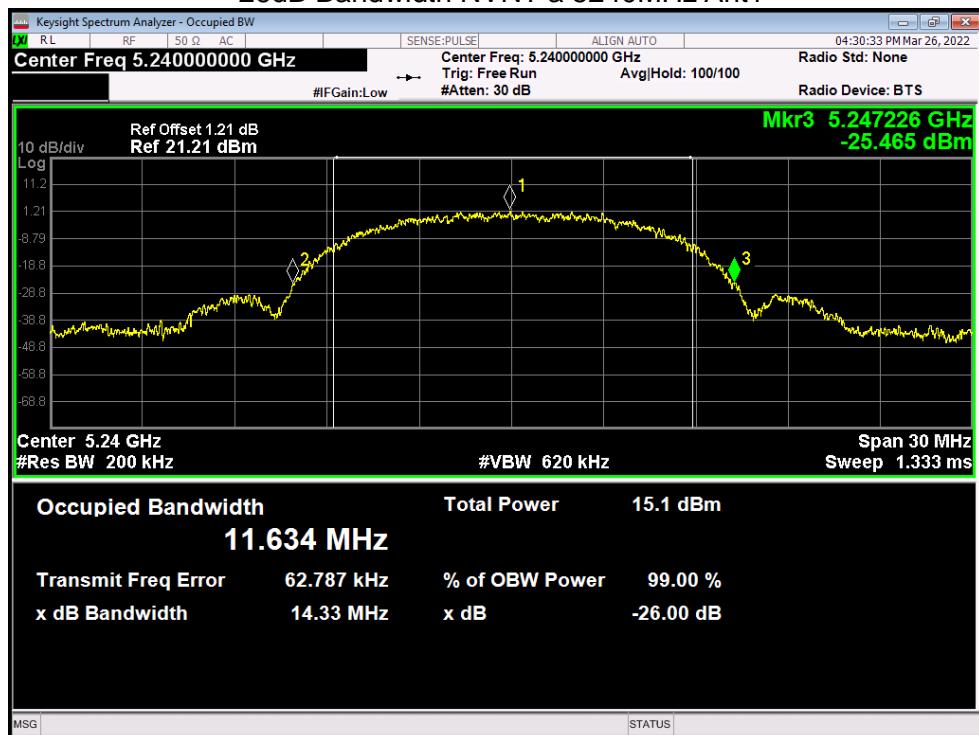




-26dB Bandwidth NVNT ac20 5180MHz Ant1


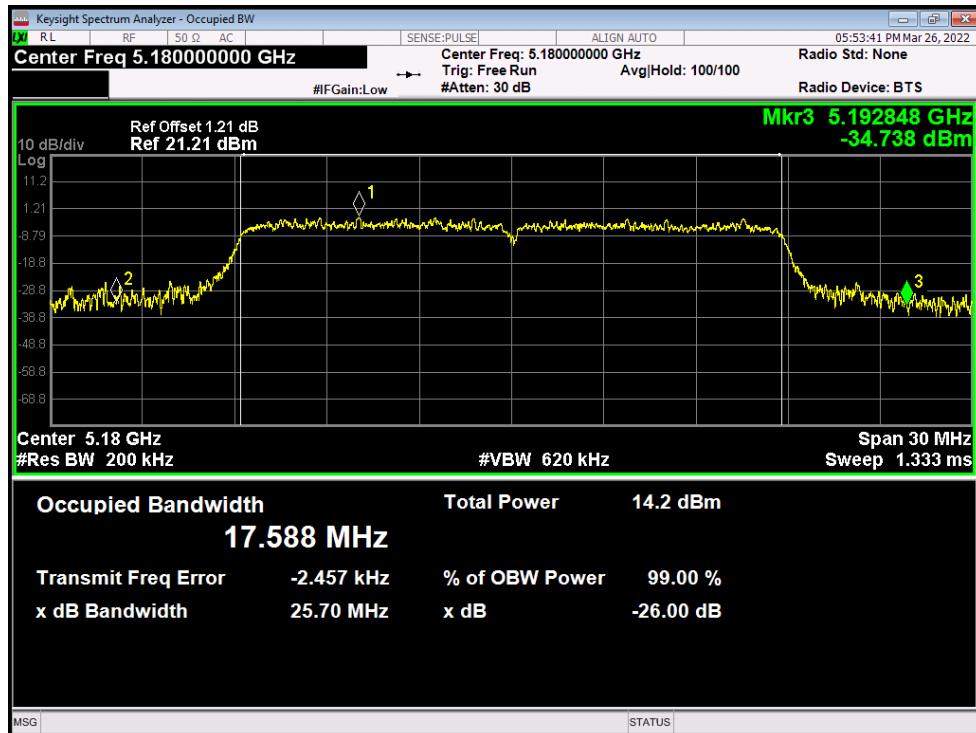



-26dB Bandwidth NVNT ac20 5200MHz Ant1

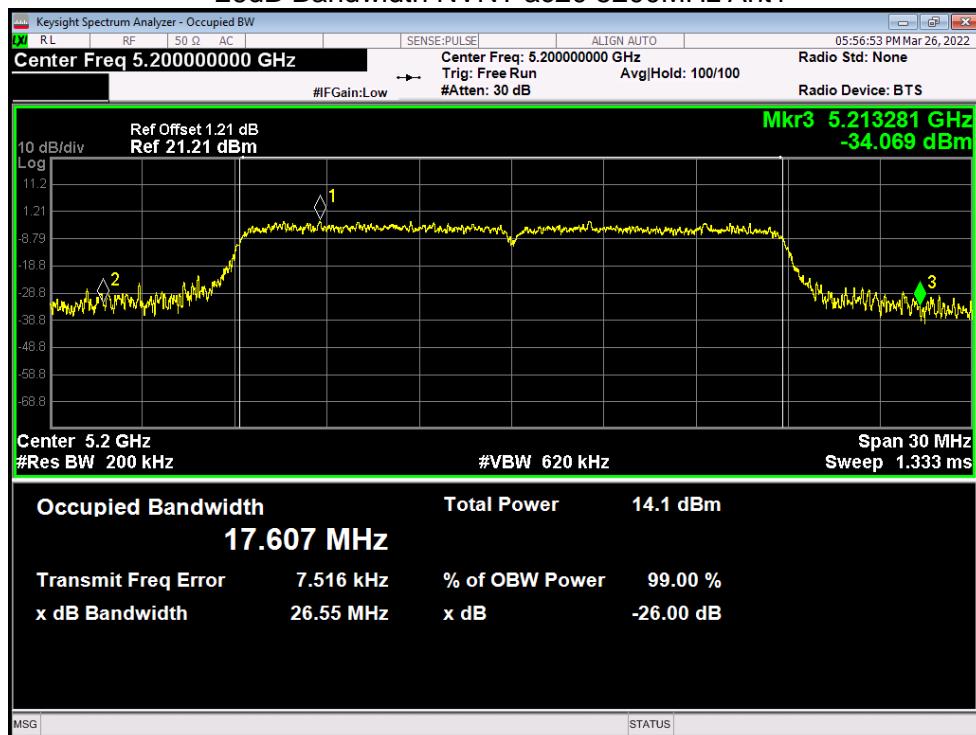


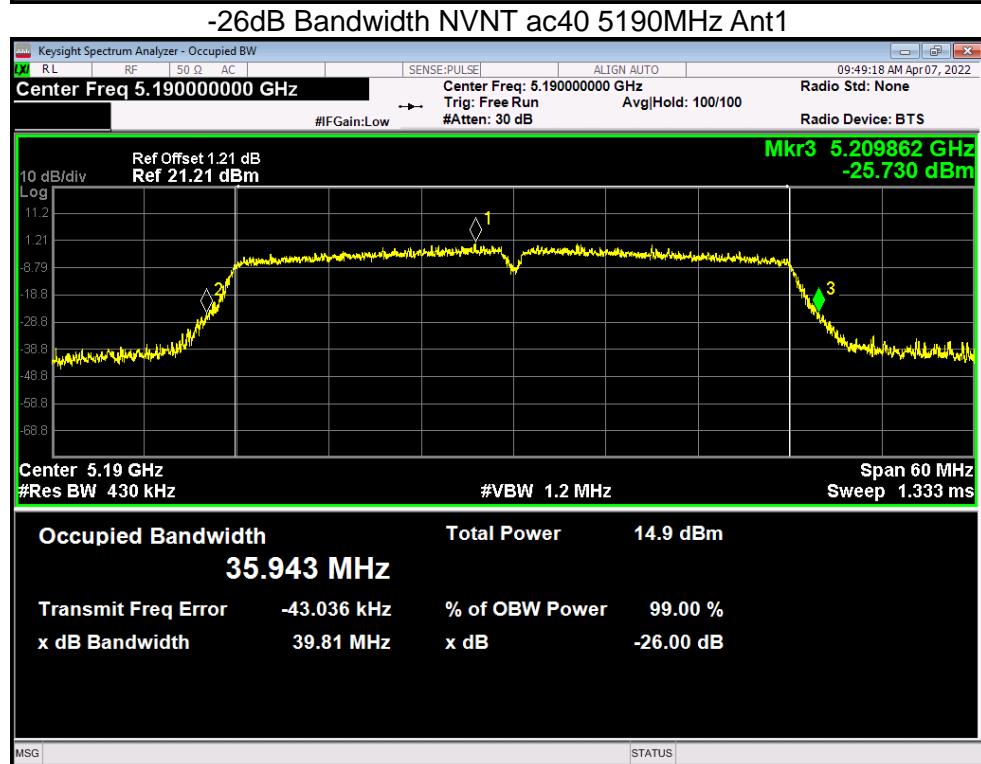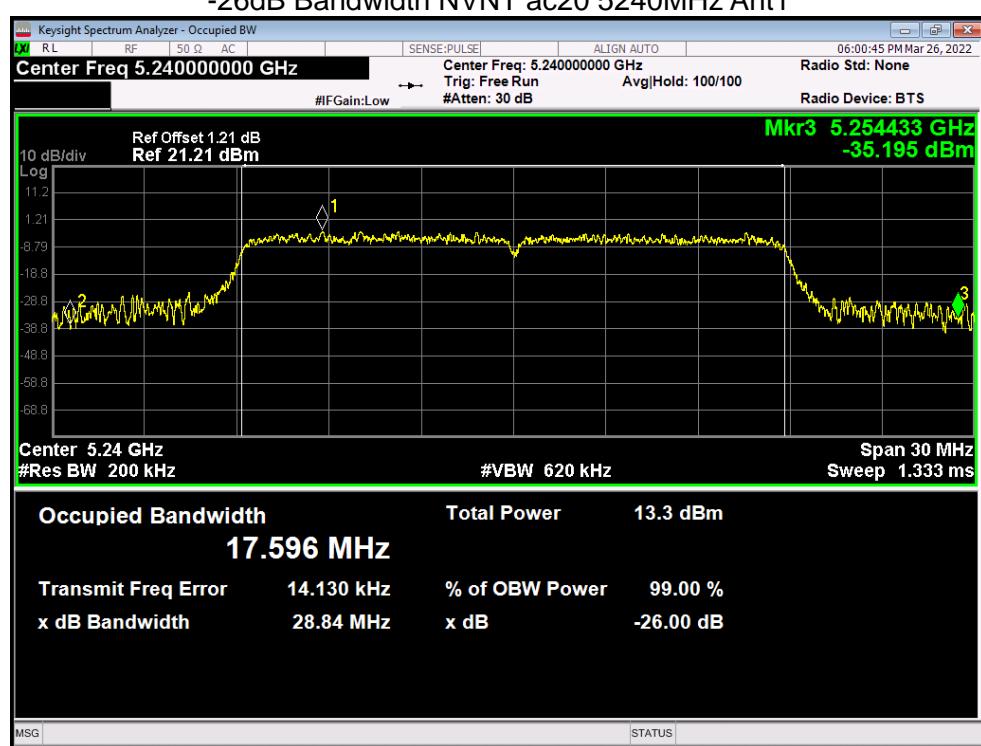

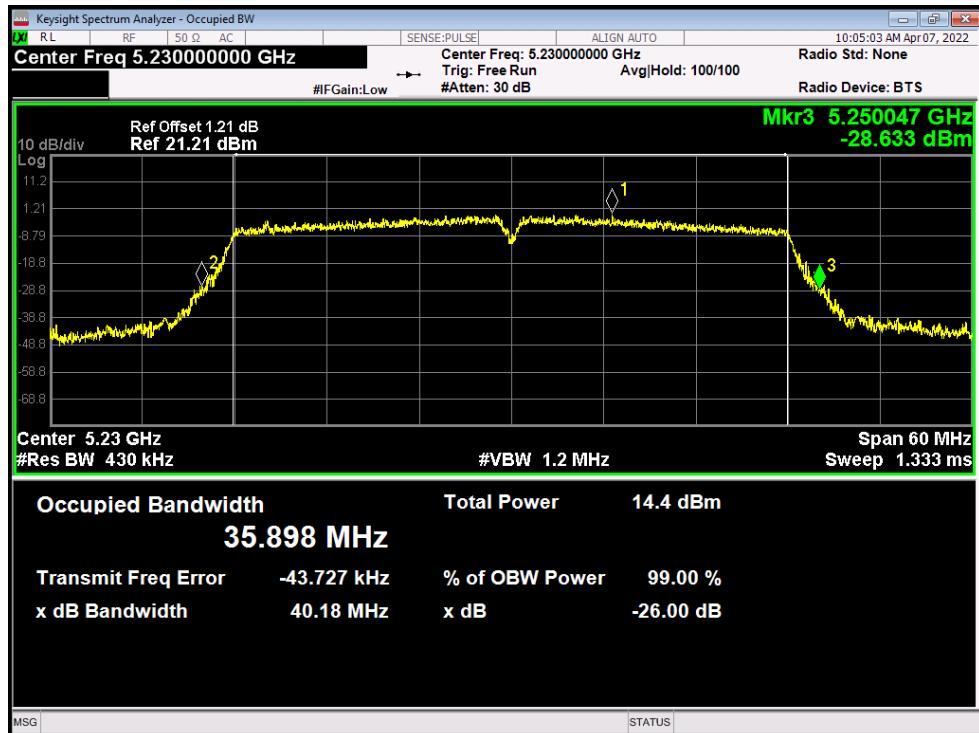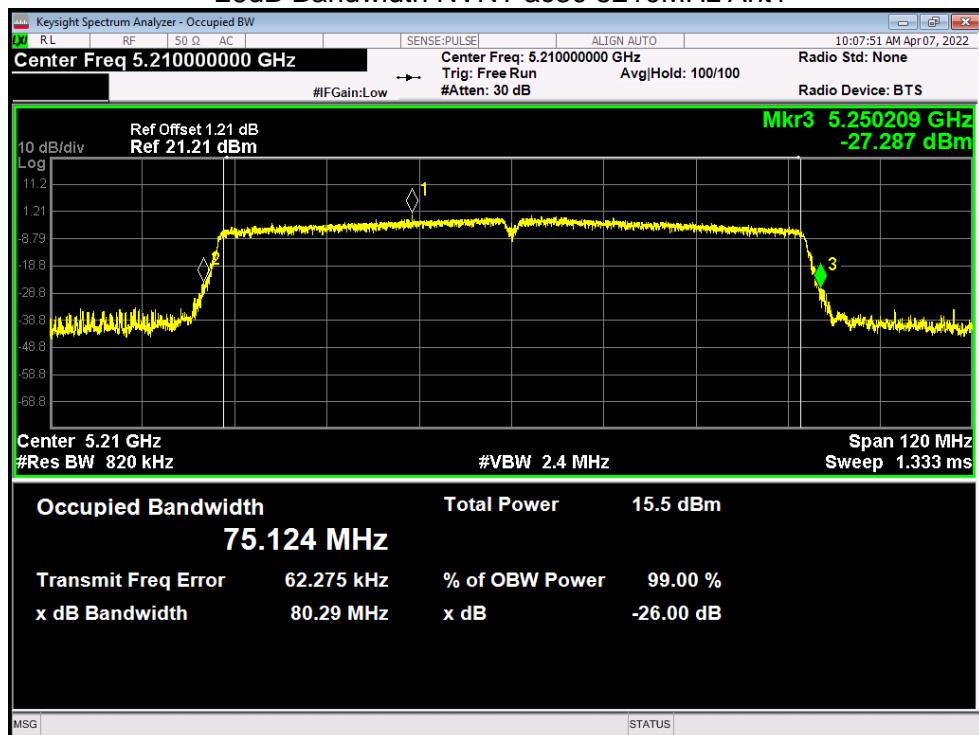-26dB Bandwidth NVNT ac40 5230MHz Ant1**-26dB Bandwidth NVNT ac80 5210MHz Ant1**

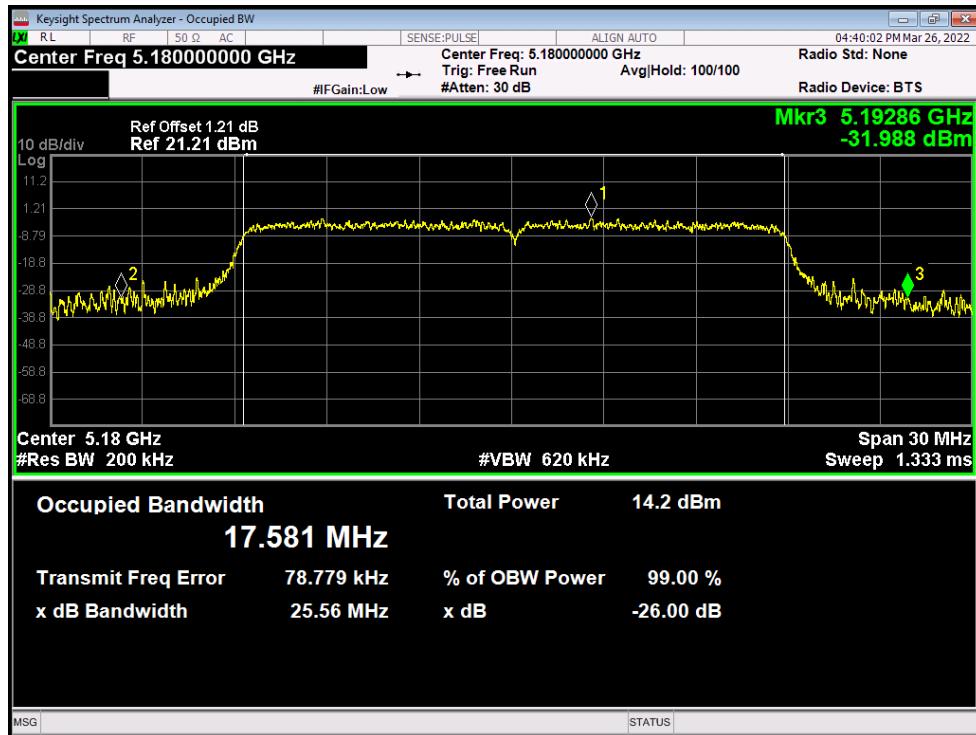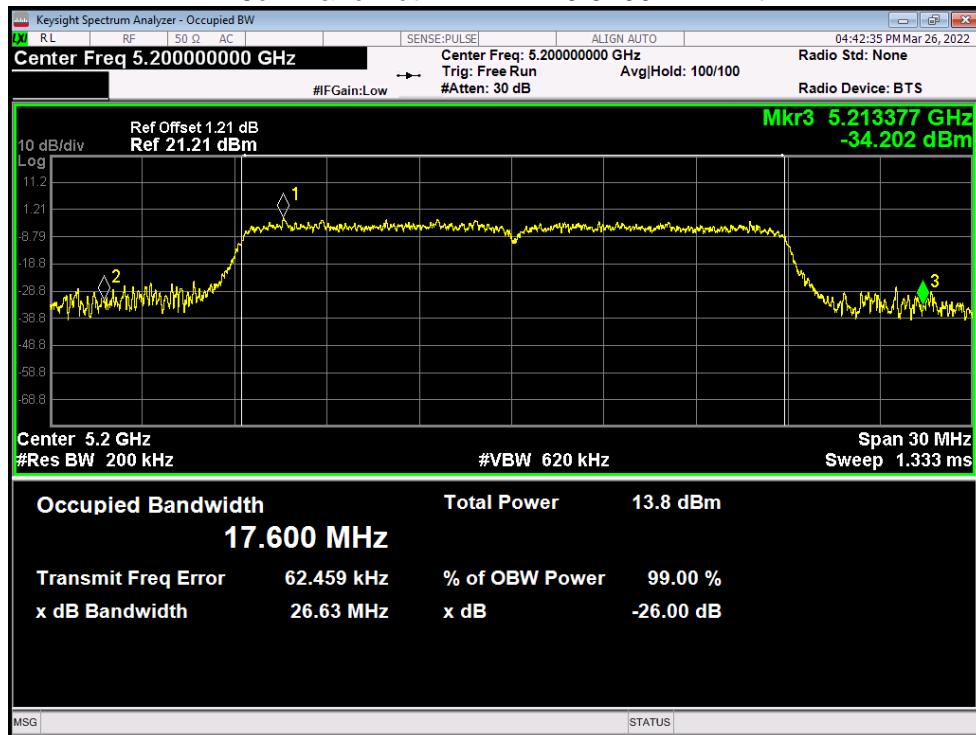-26dB Bandwidth NVNT n20 5180MHz Ant1**-26dB Bandwidth NVNT n20 5200MHz Ant1**

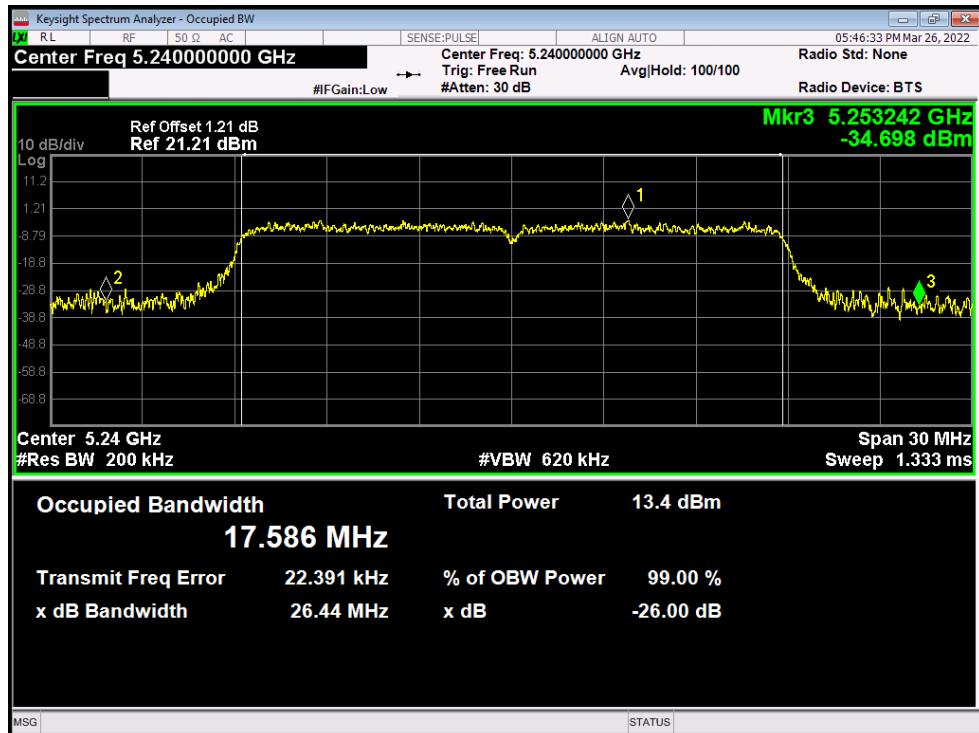
-26dB Bandwidth NVNT n20 5240MHz Ant1**-26dB Bandwidth NVNT n40 5190MHz Ant1**

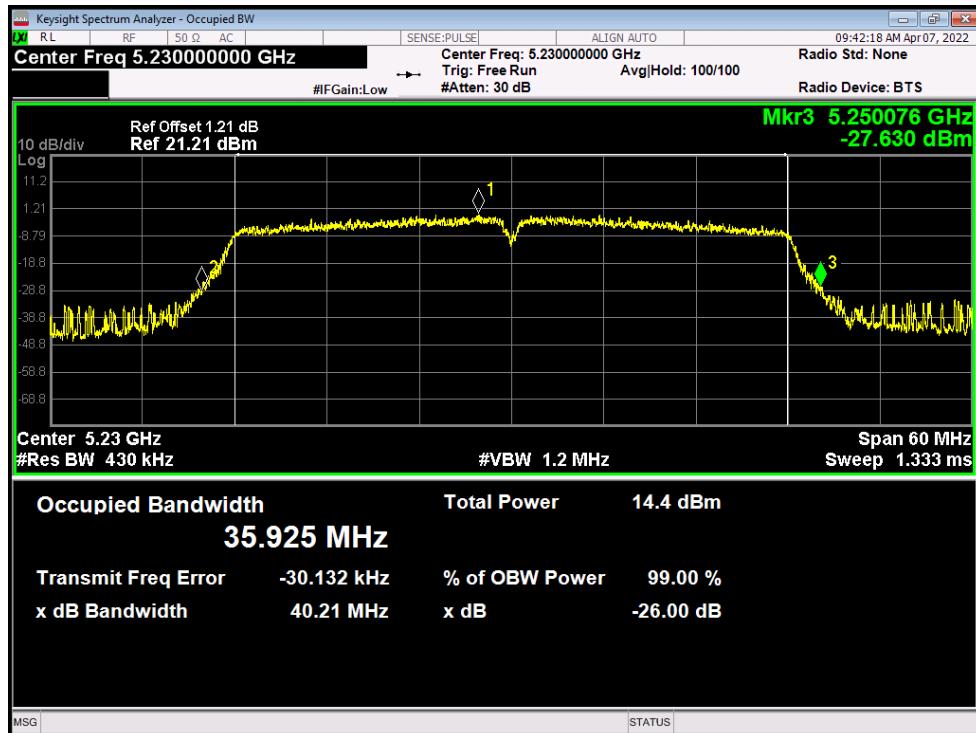-26dB Bandwidth NVNT n40 5230MHz Ant1


10.4 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	11.61
NVNT	a	5200	Ant1	11.64
NVNT	a	5240	Ant1	11.652
NVNT	ac20	5180	Ant1	17.619
NVNT	ac20	5200	Ant1	17.583
NVNT	ac20	5240	Ant1	17.599
NVNT	ac40	5190	Ant1	35.931
NVNT	ac40	5230	Ant1	35.943
NVNT	ac80	5210	Ant1	75.164
NVNT	n20	5180	Ant1	17.571
NVNT	n20	5200	Ant1	17.555
NVNT	n20	5240	Ant1	17.606
NVNT	n40	5190	Ant1	35.938
NVNT	n40	5230	Ant1	35.906


OBW NVNT a 5180MHz Ant1

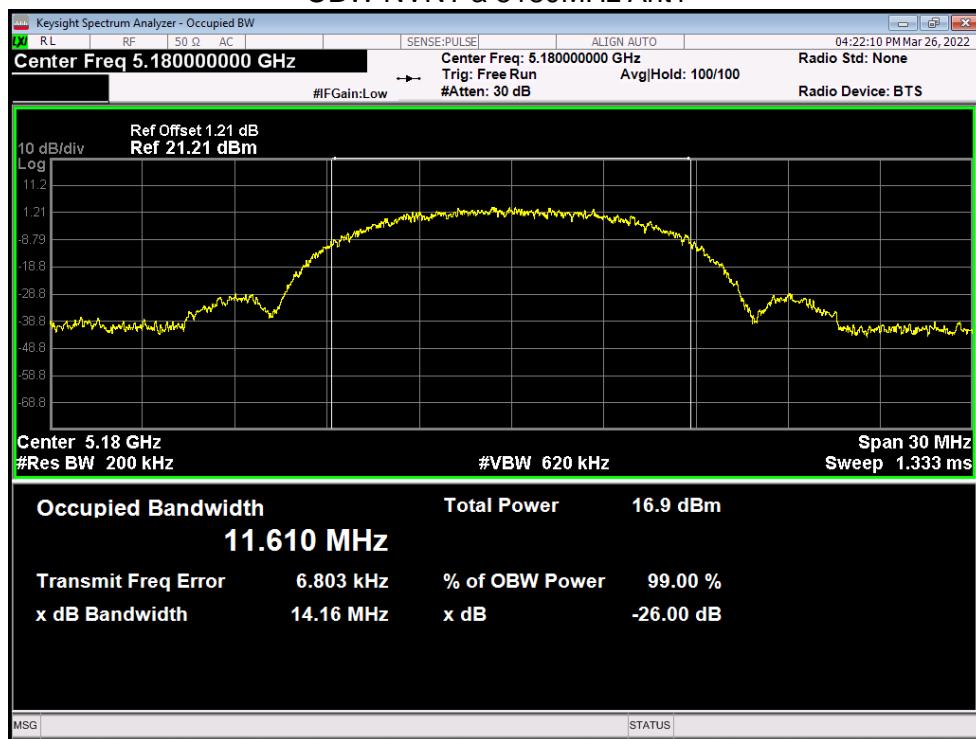


OBW NVNT a 5200MHz Ant1

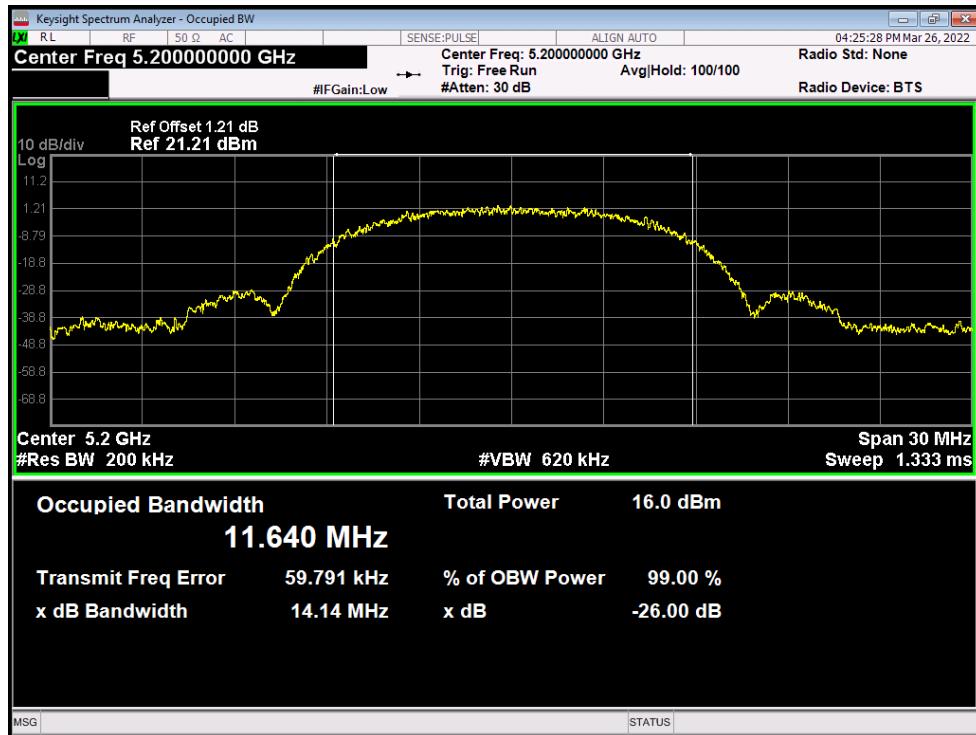


OBW NVNT a 5240MHz Ant1

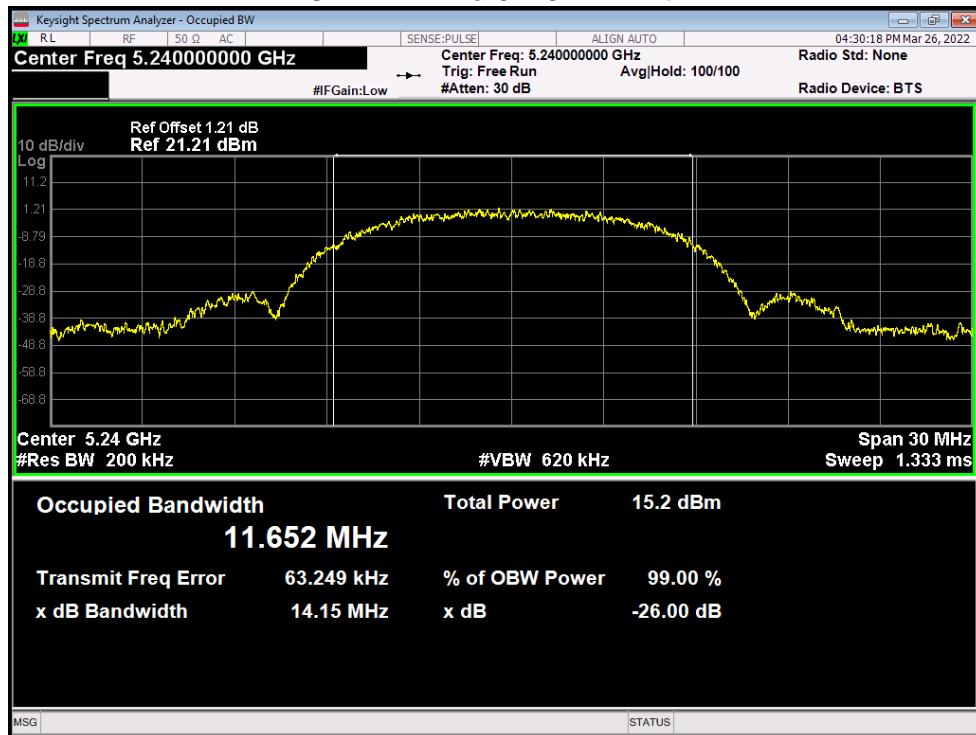


OBW NVNT ac20 5180MHz Ant1

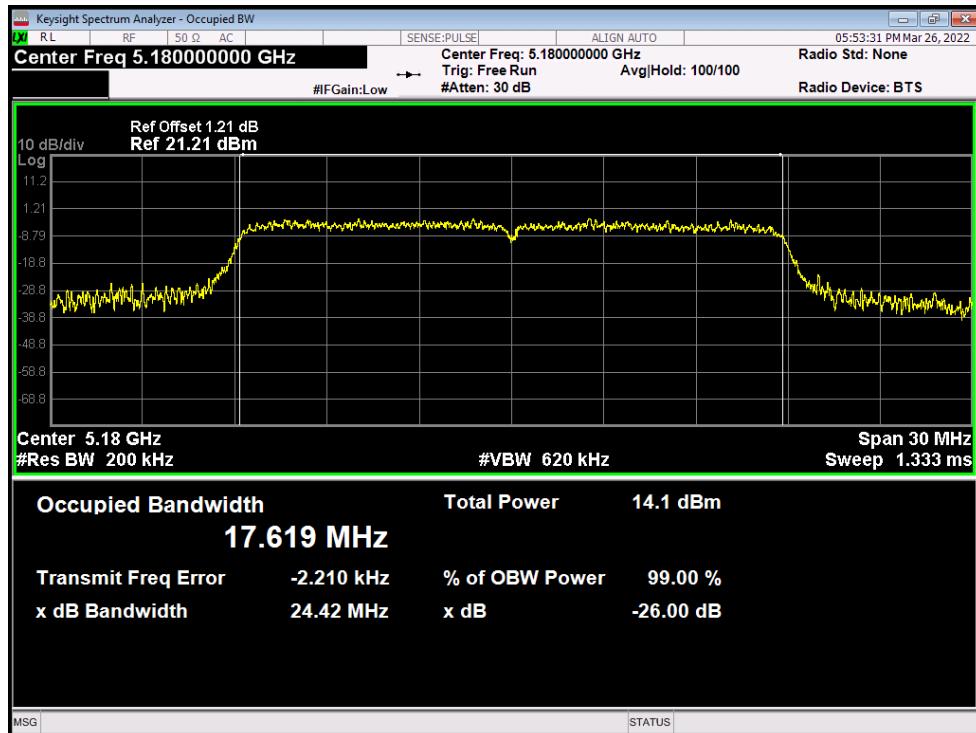


OBW NVNT ac20 5200MHz Ant1

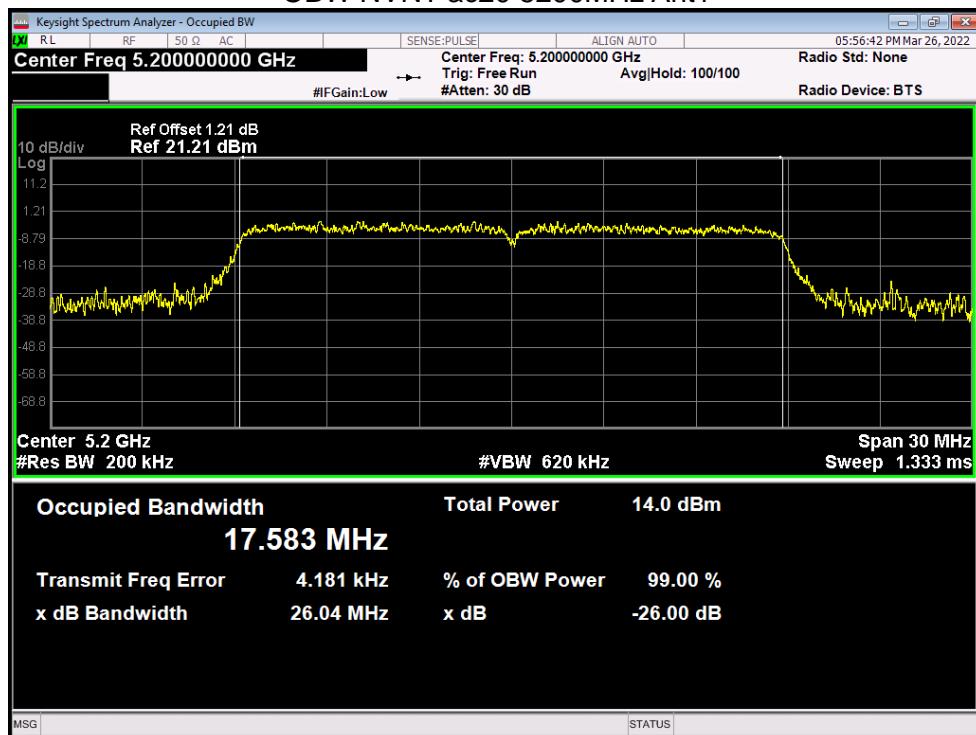


OBW NVNT ac20 5240MHz Ant1

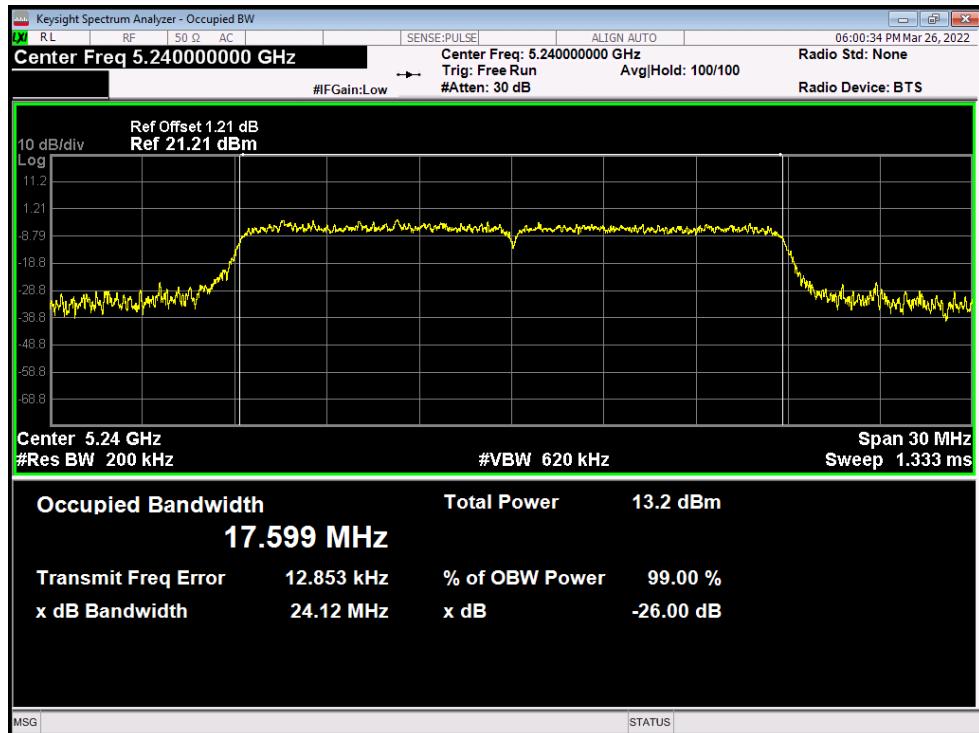


OBW NVNT ac40 5190MHz Ant1

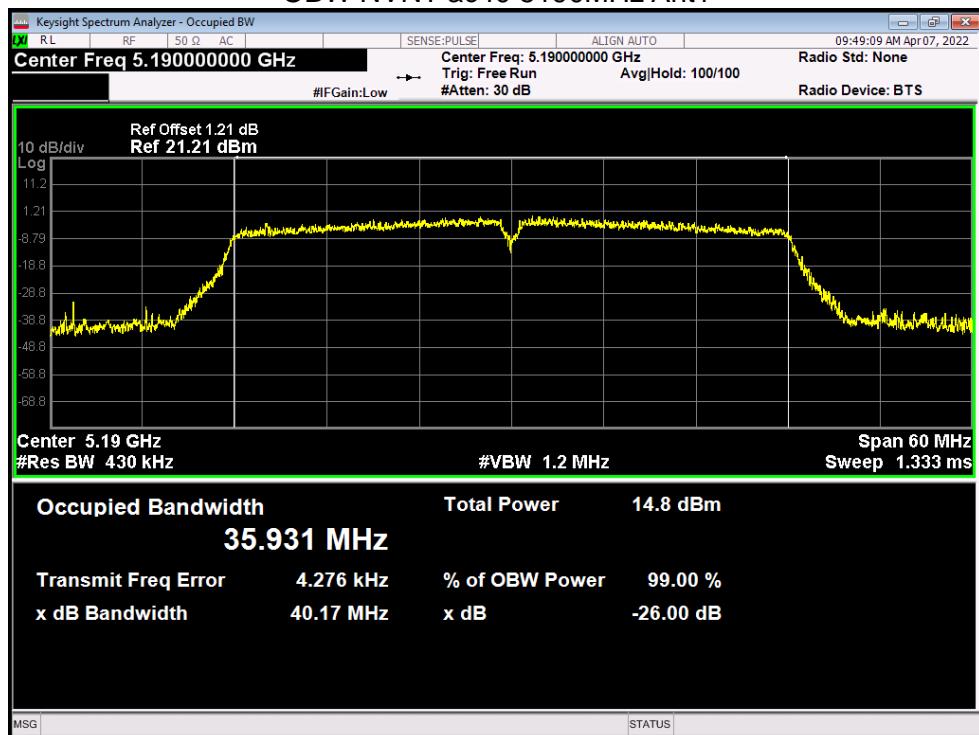


OBW NVNT ac40 5230MHz Ant1

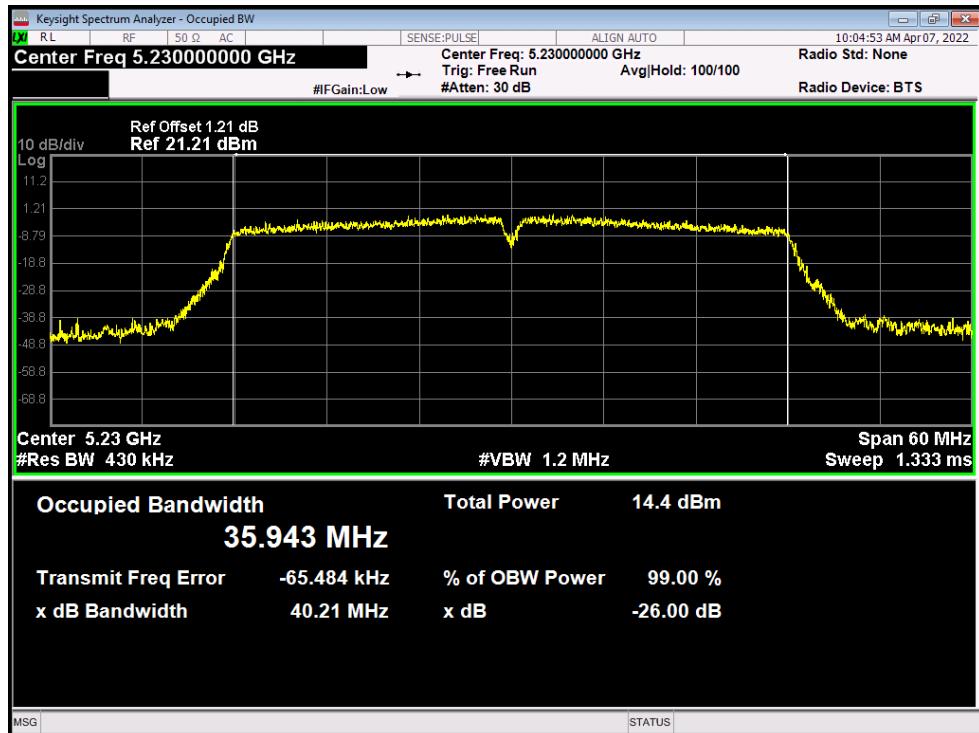


OBW NVNT ac80 5210MHz Ant1

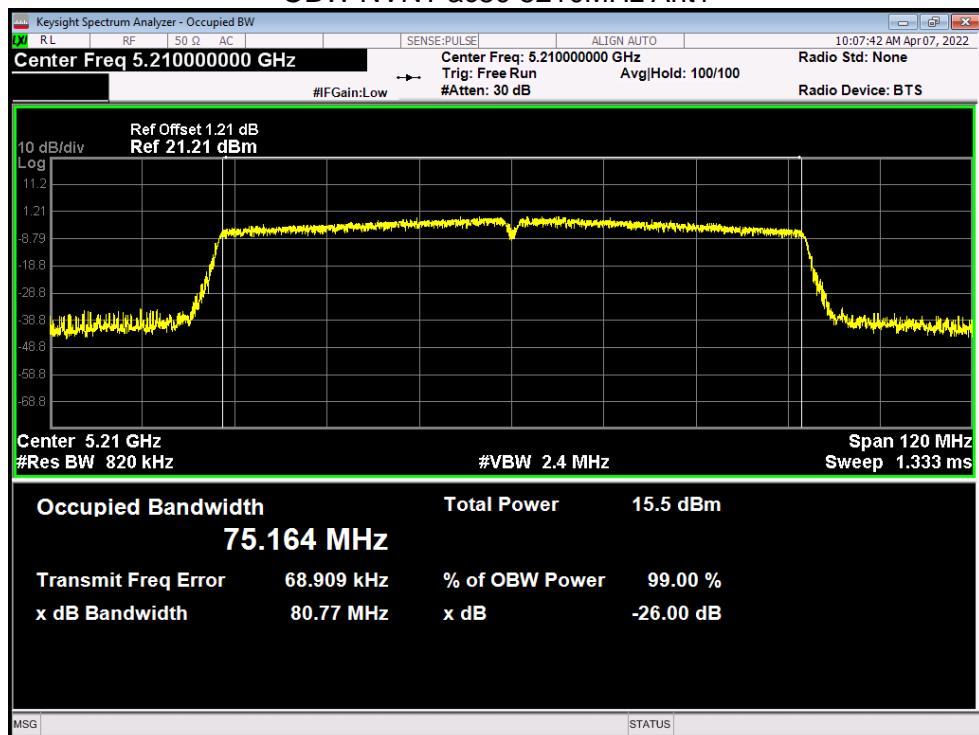


OBW NVNT n20 5180MHz Ant1

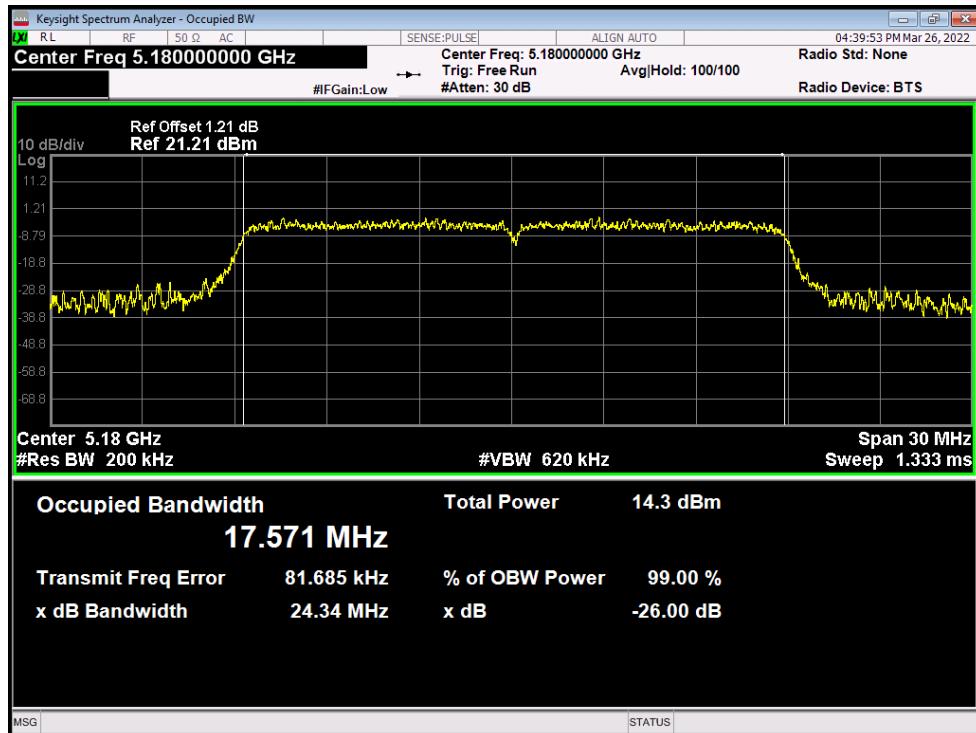


OBW NVNT n20 5200MHz Ant1

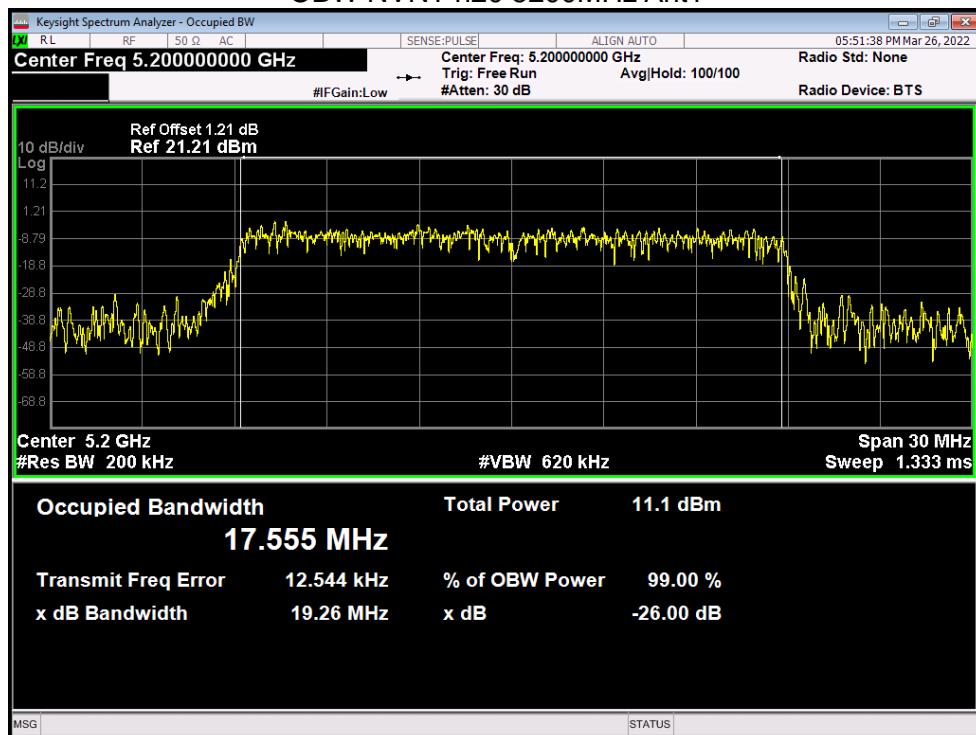


OBW NVNT n20 5240MHz Ant1

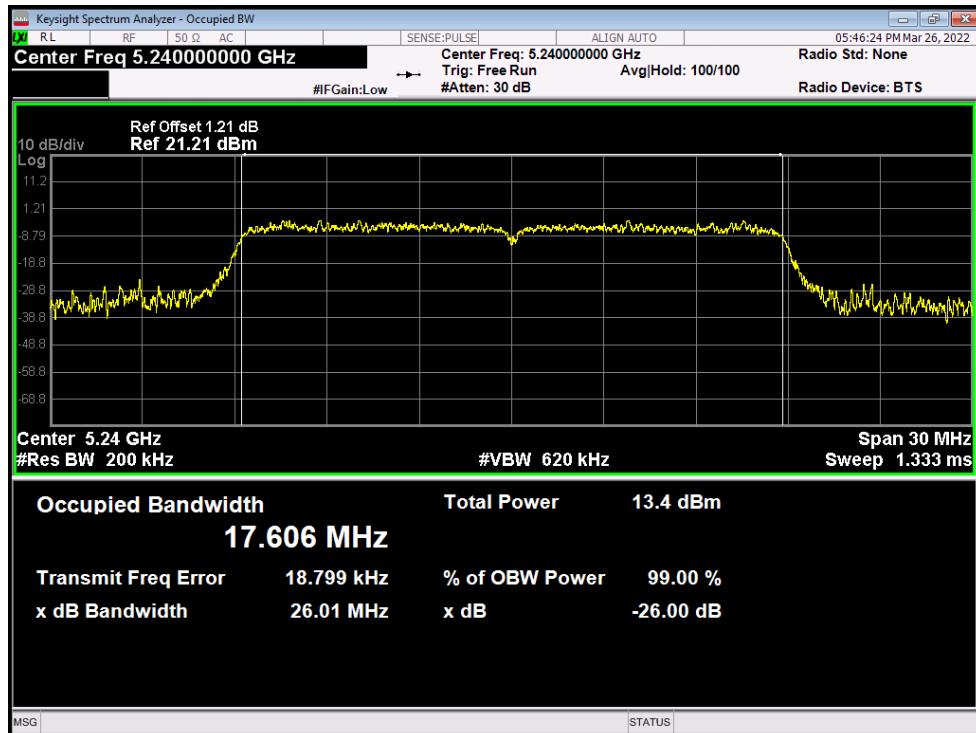

OBW NVNT n40 5190MHz Ant1

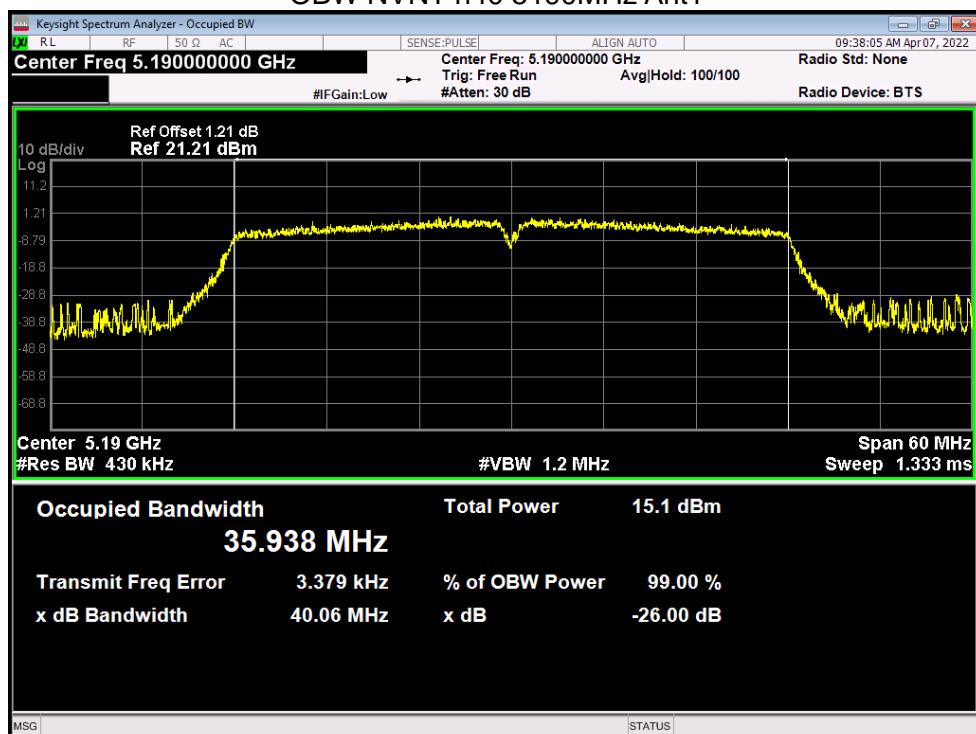


OBW NVNT n40 5230MHz Ant1

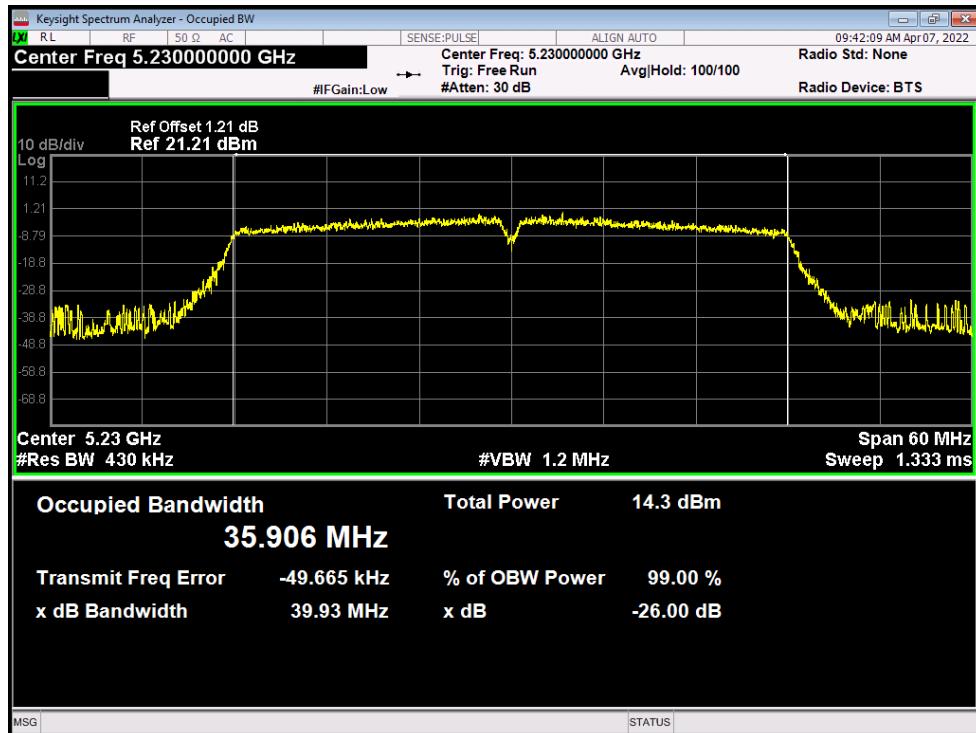


10.5 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	1.636	11	Pass
NVNT	a	5200	Ant1	1.193	11	Pass
NVNT	a	5240	Ant1	0.469	11	Pass
NVNT	ac20	5180	Ant1	-2.433	11	Pass
NVNT	ac20	5200	Ant1	-2.482	11	Pass
NVNT	ac20	5240	Ant1	-3.092	11	Pass
NVNT	ac40	5190	Ant1	-3.667	11	Pass
NVNT	ac40	5230	Ant1	-4.144	11	Pass
NVNT	ac80	5210	Ant1	-6.962	11	Pass
NVNT	n20	5180	Ant1	-2.554	11	Pass
NVNT	n20	5200	Ant1	-3.008	11	Pass
NVNT	n20	5240	Ant1	-2.993	11	Pass
NVNT	n40	5190	Ant1	-3.906	11	Pass
NVNT	n40	5230	Ant1	-4.623	11	Pass


PSD NVNT a 5180MHz Ant1

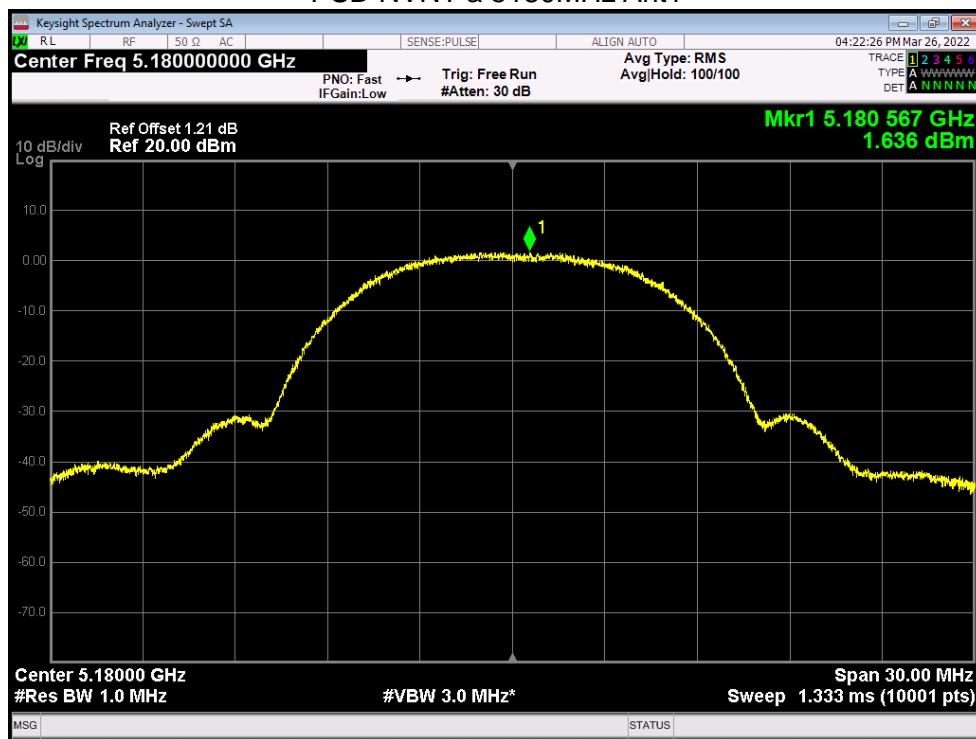


PSD NVNT a 5200MHz Ant1

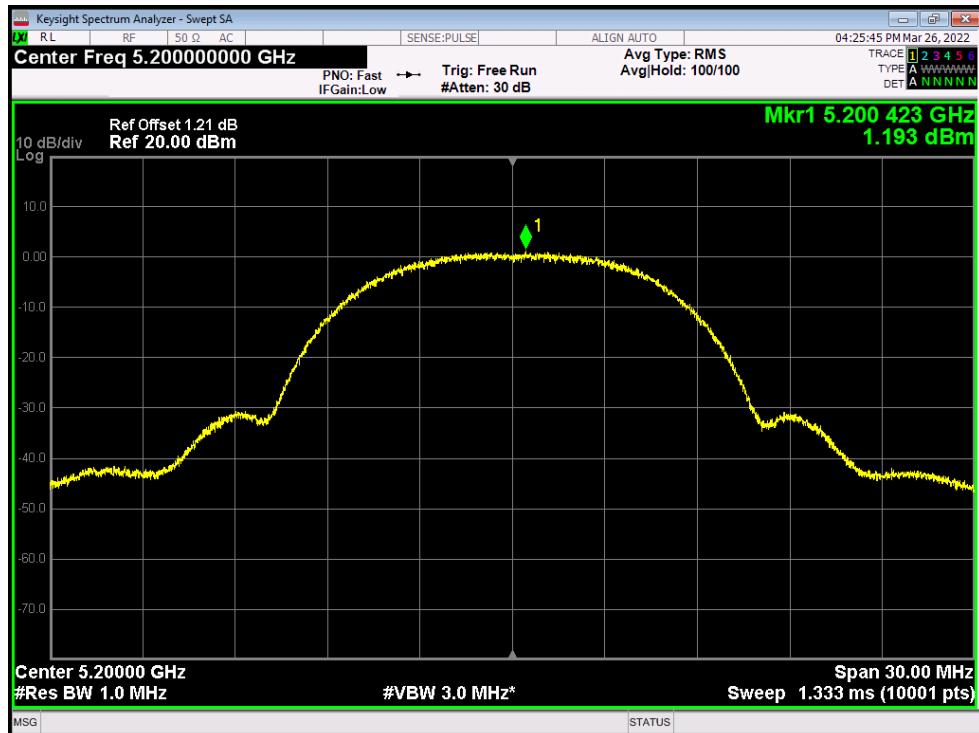


PSD NVNT a 5240MHz Ant1

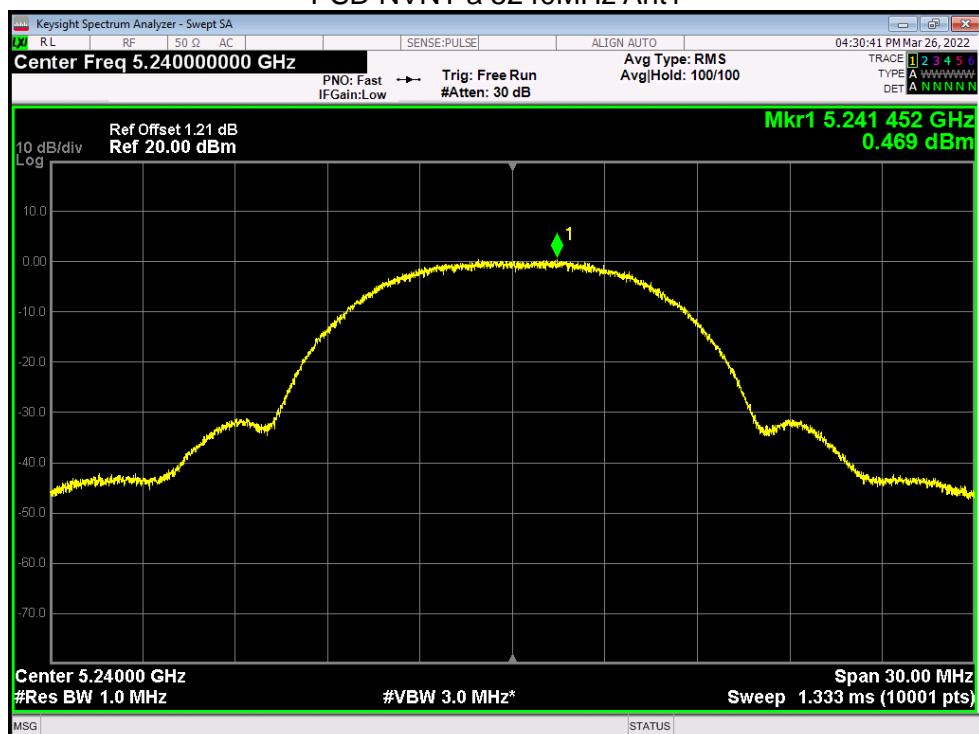


PSD NVNT ac20 5180MHz Ant1

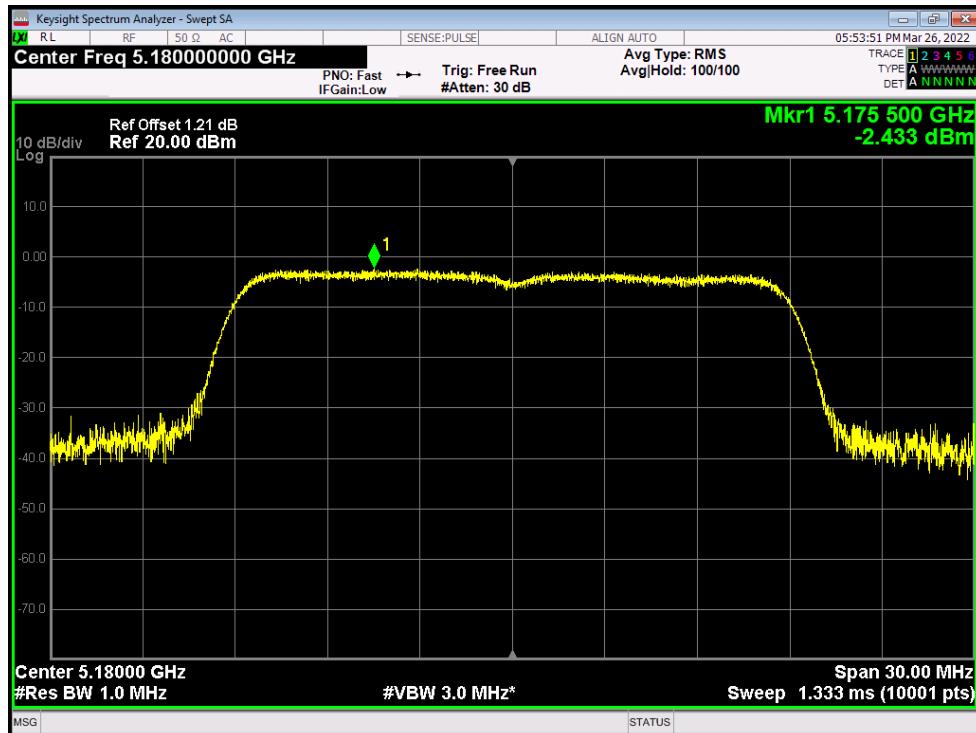


PSD NVNT ac20 5200MHz Ant1

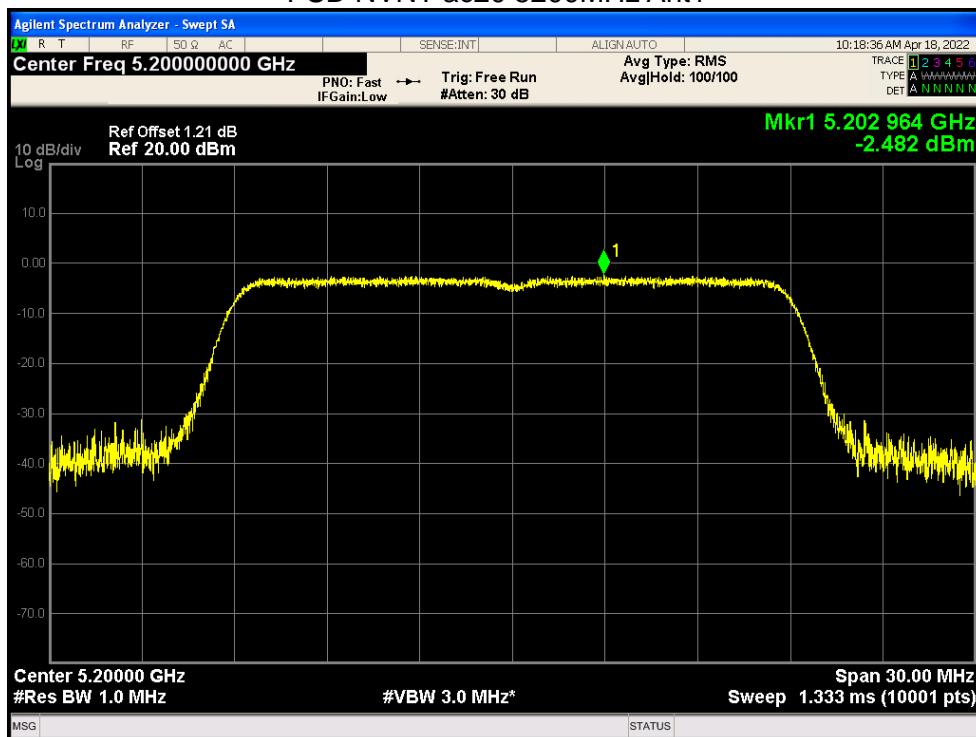


PSD NVNT ac20 5240MHz Ant1

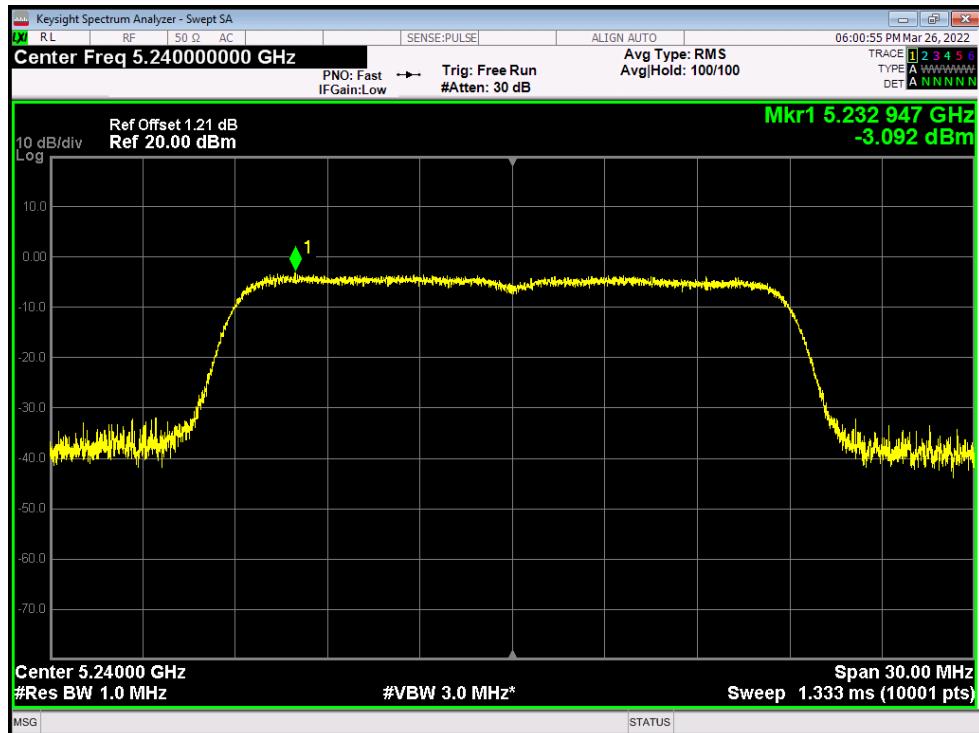

PSD NVNT ac40 5190MHz Ant1

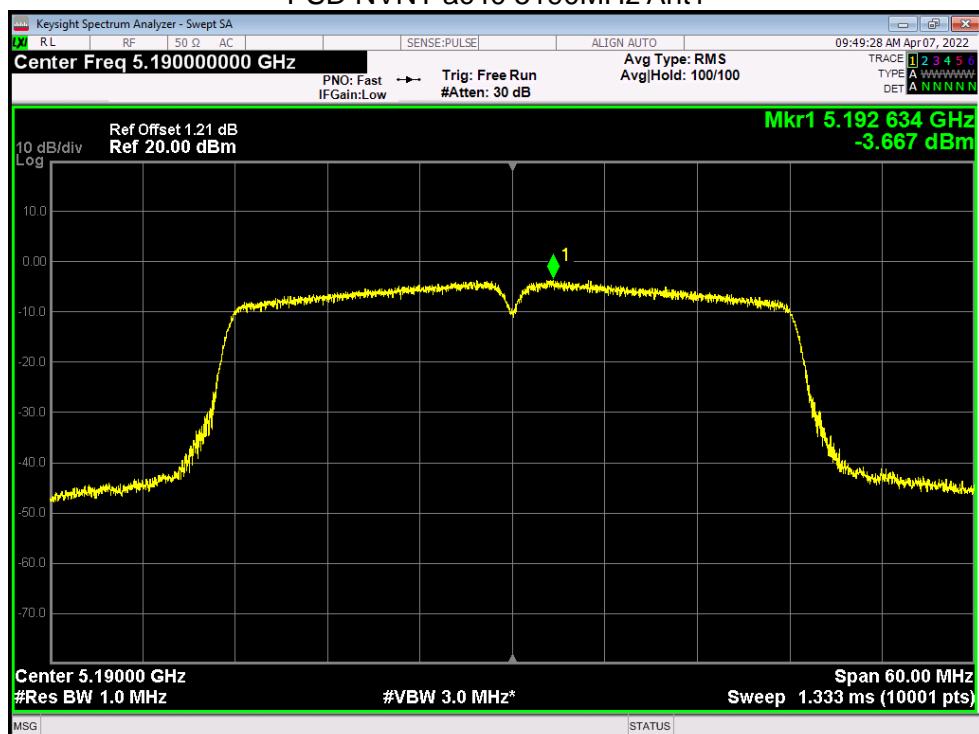


PSD NVNT ac40 5230MHz Ant1

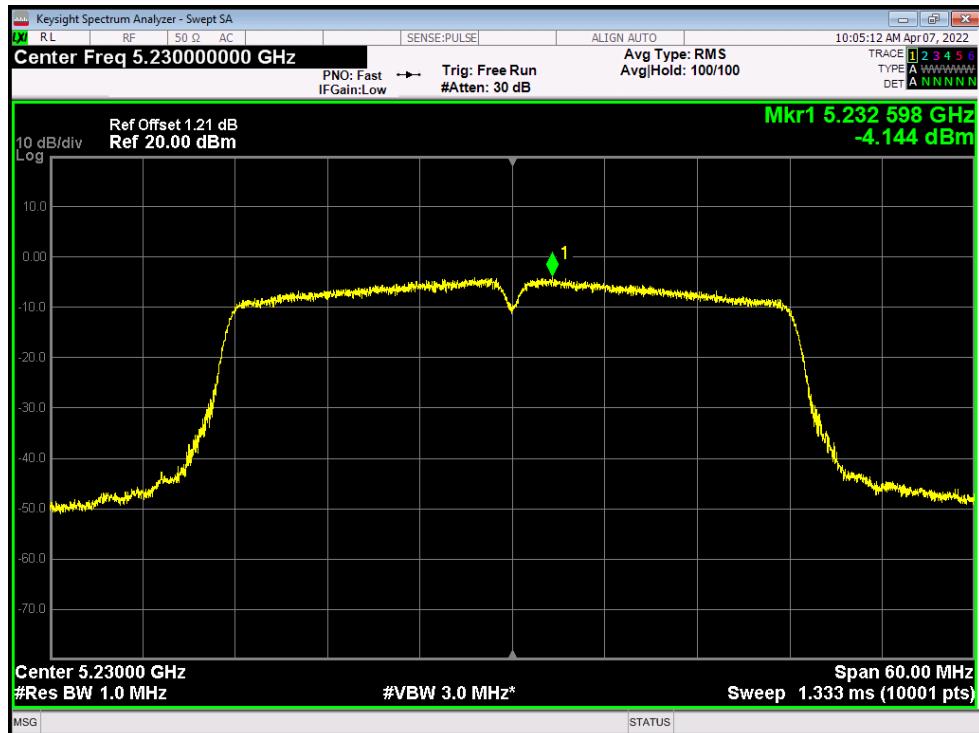


PSD NVNT ac80 5210MHz Ant1




PSD NVNT n20 5180MHz Ant1

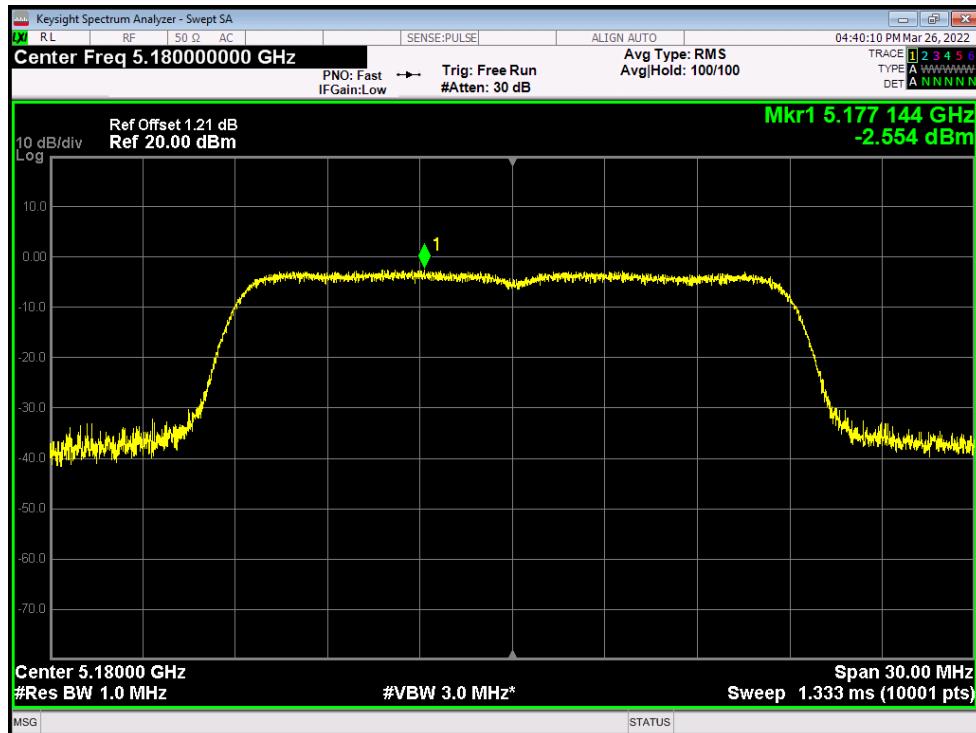

PSD NVNT n20 5200MHz Ant1

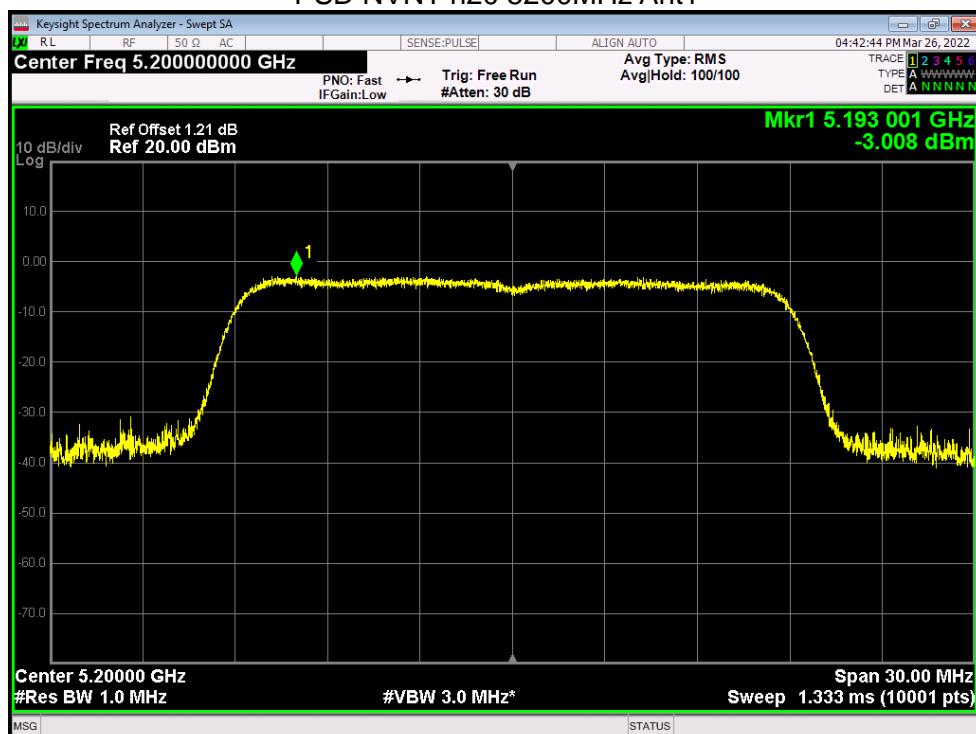


PSD NVNT n20 5240MHz Ant1

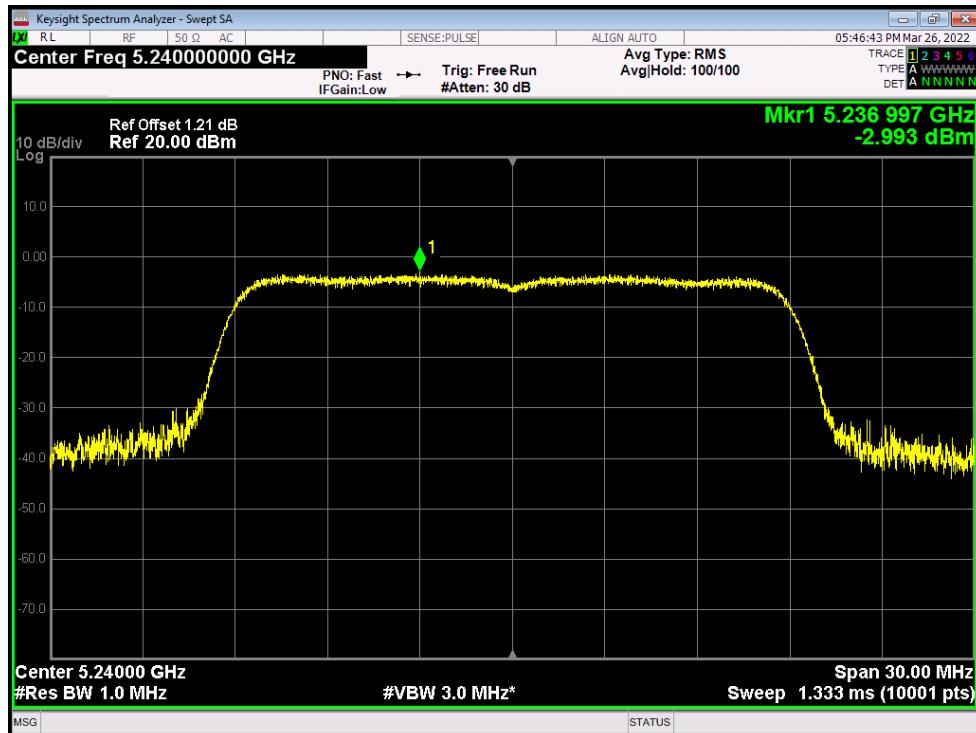

PSD NVNT n40 5190MHz Ant1




PSD NVNT n40 5230MHz Ant1

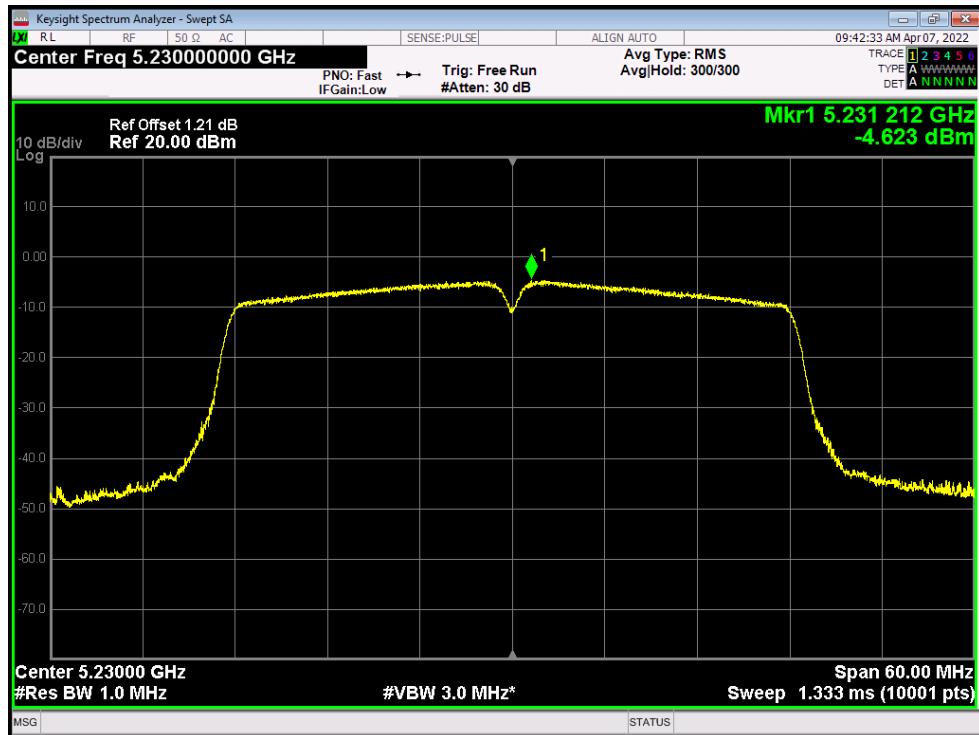


10.6 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-45.42	-27	Pass
NVNT	a	5240	Ant1	-46.82	-27	Pass
NVNT	ac20	5180	Ant1	-33.59	-27	Pass
NVNT	ac20	5240	Ant1	-46.93	-27	Pass
NVNT	ac40	5190	Ant1	-34.37	-27	Pass
NVNT	ac40	5230	Ant1	-52.88	-27	Pass
NVNT	ac80	5210	Ant1	-46.75	-27	Pass
NVNT	n20	5180	Ant1	-36.48	-27	Pass
NVNT	n20	5240	Ant1	-47.05	-27	Pass
NVNT	n40	5190	Ant1	-32.01	-27	Pass
NVNT	n40	5230	Ant1	-46.41	-27	Pass


Band Edge NVNT a 5180MHz Low Ant1

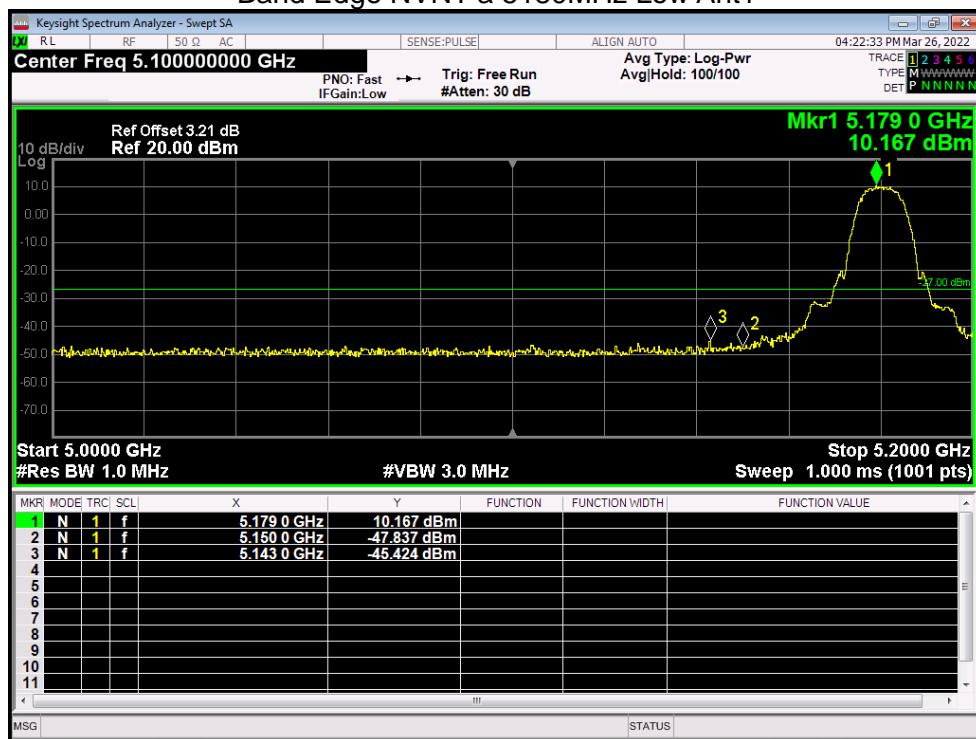


Band Edge NVNT a 5240MHz High Ant1

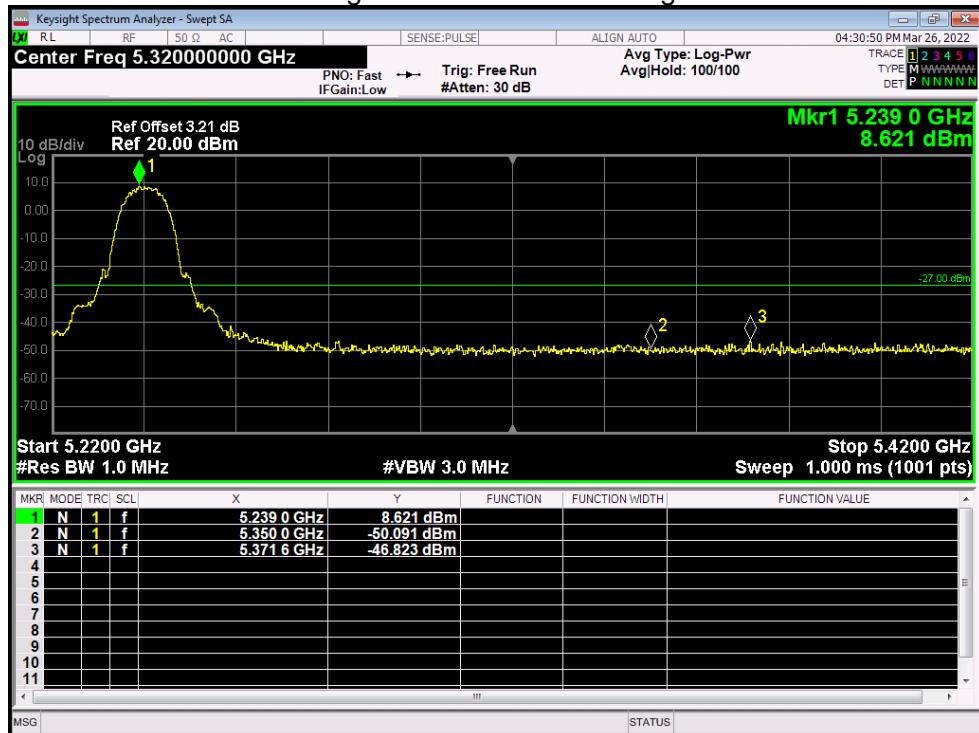


Band Edge NVNT ac20 5180MHz Low Ant1

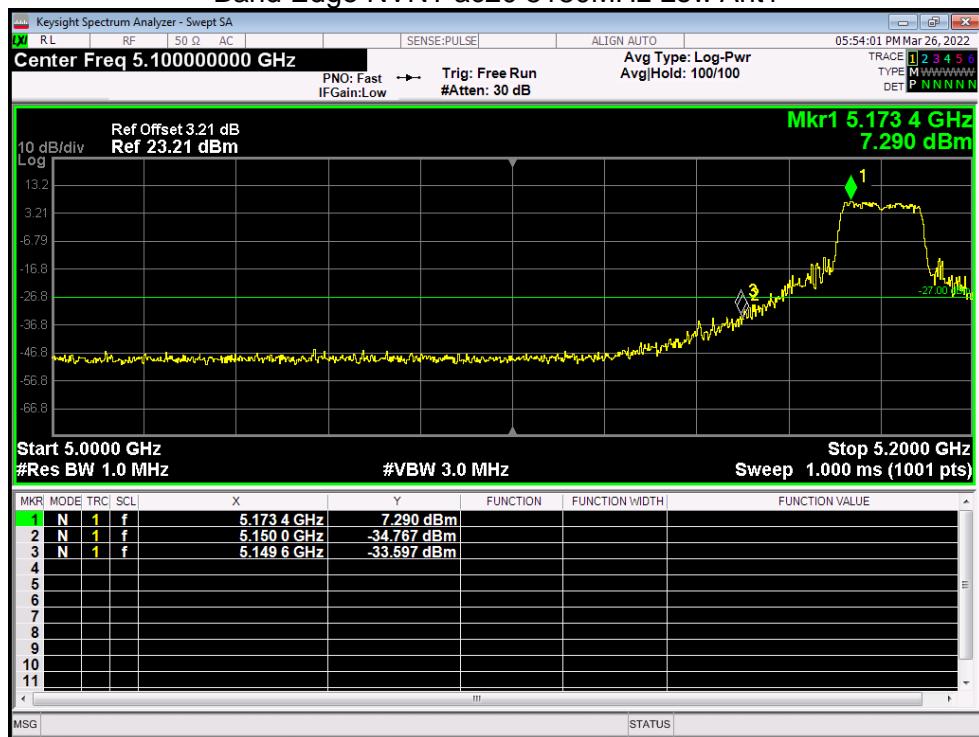


Band Edge NVNT ac20 5240MHz High Ant1

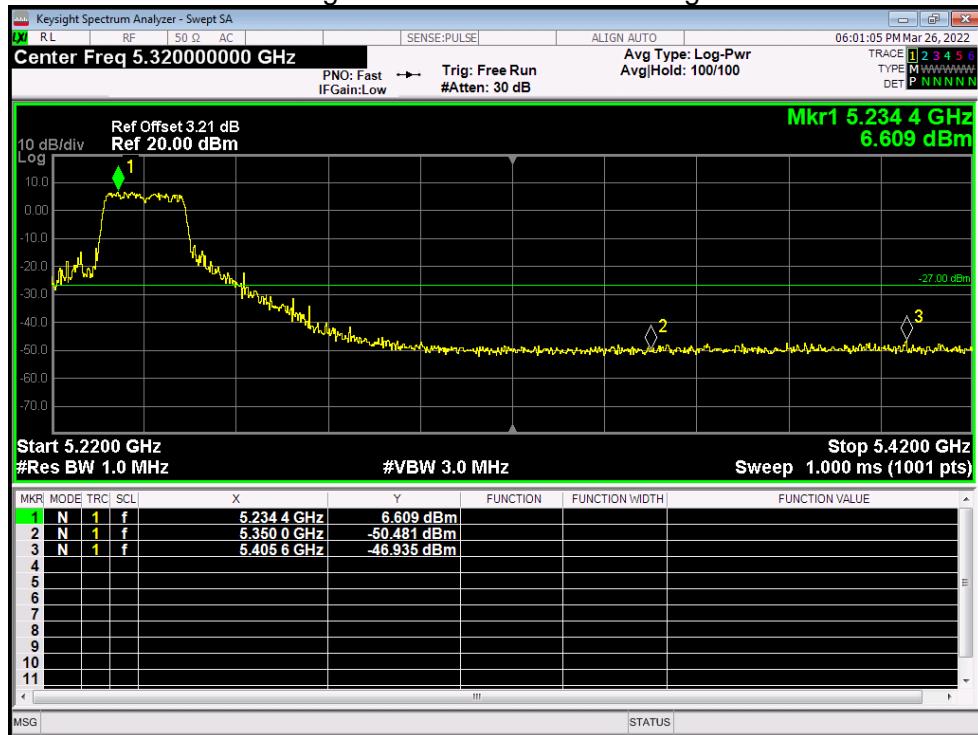

Band Edge NVNT ac40 5190MHz Low Ant1

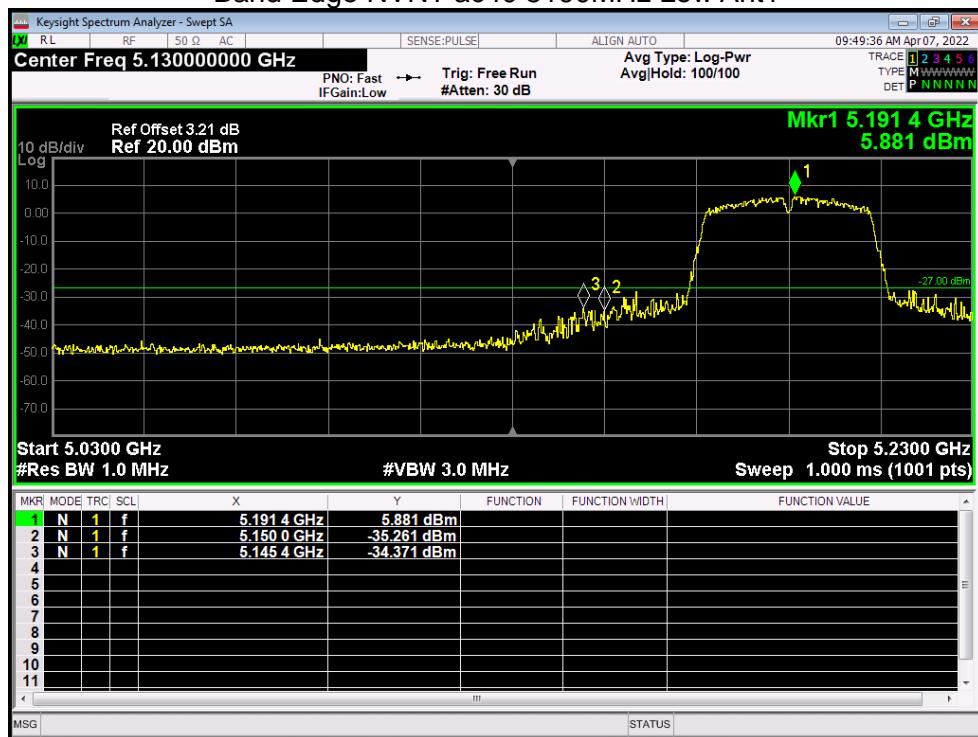


Band Edge NVNT ac40 5230MHz High Ant1

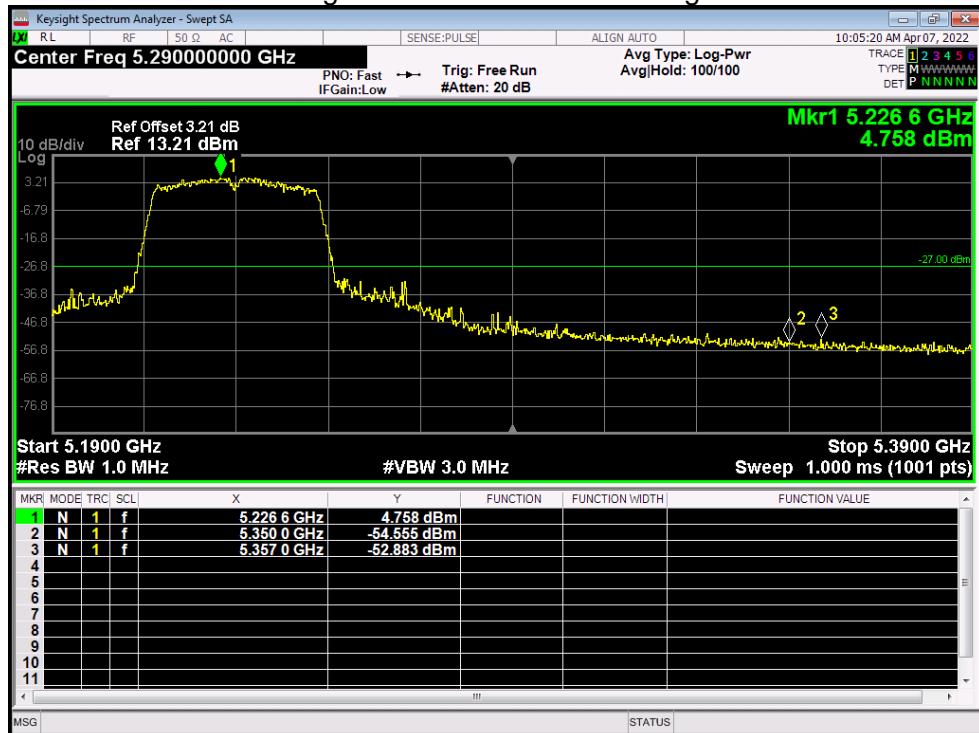


Band Edge NVNT ac80 5210MHz High Ant1




Band Edge NVNT n20 5180MHz Low Ant1

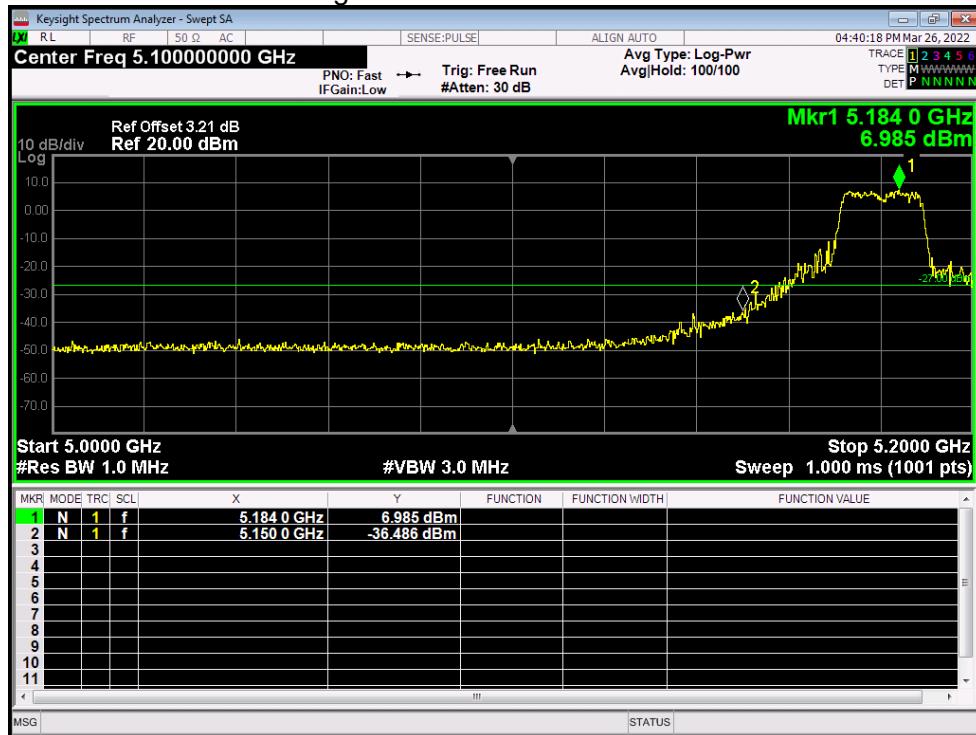


Band Edge NVNT n20 5240MHz High Ant1

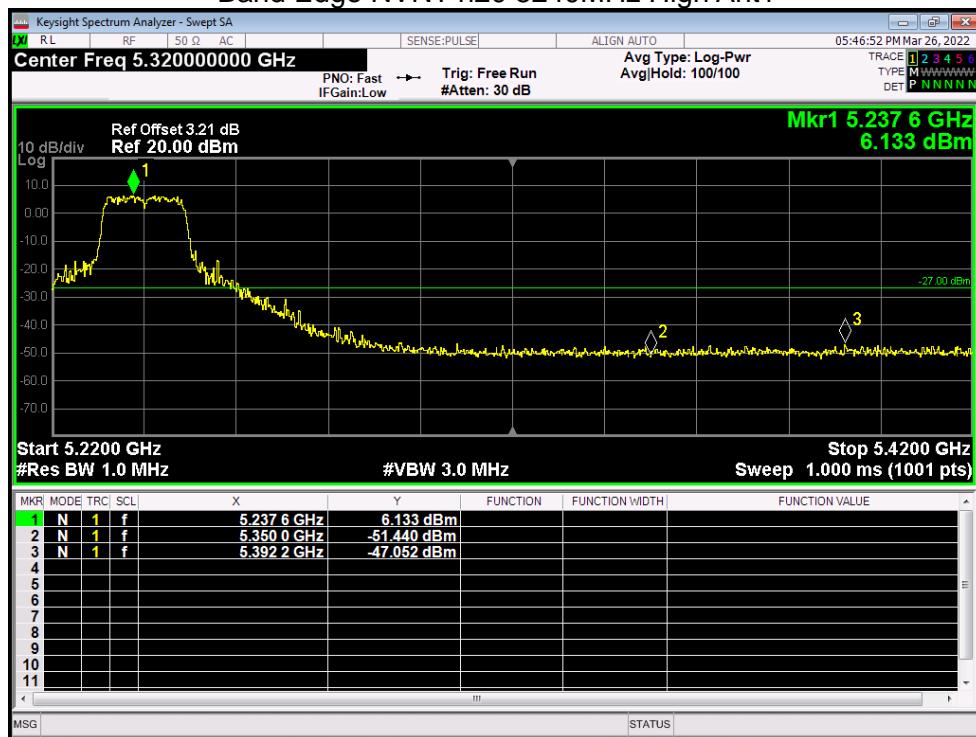

Band Edge NVNT n40 5190MHz Low Ant1

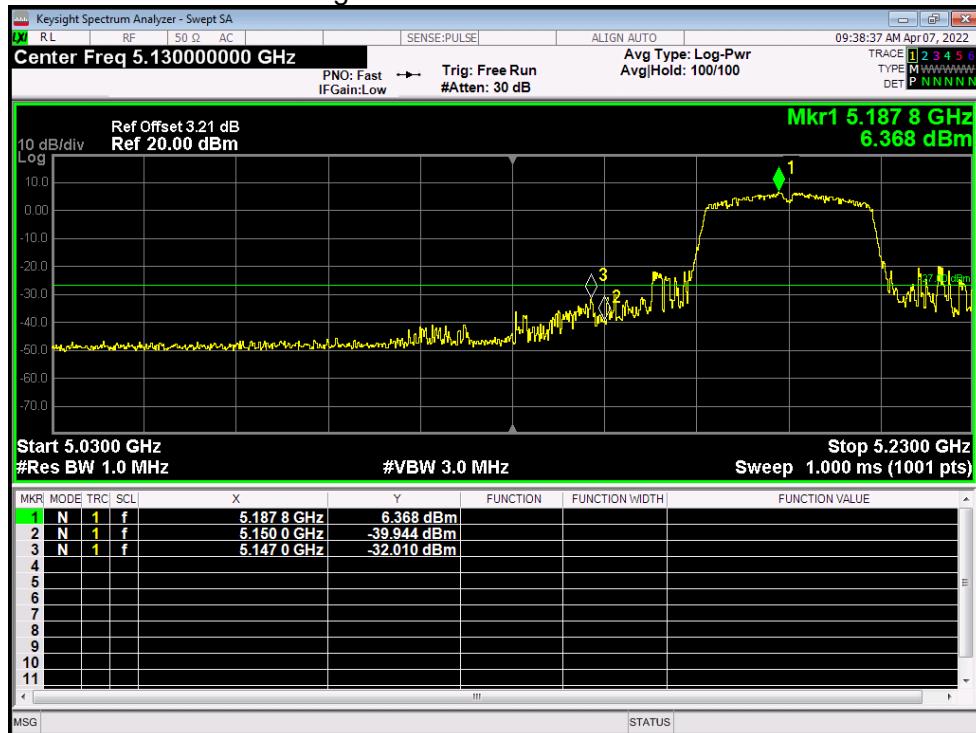


Band Edge NVNT n40 5230MHz High Ant1

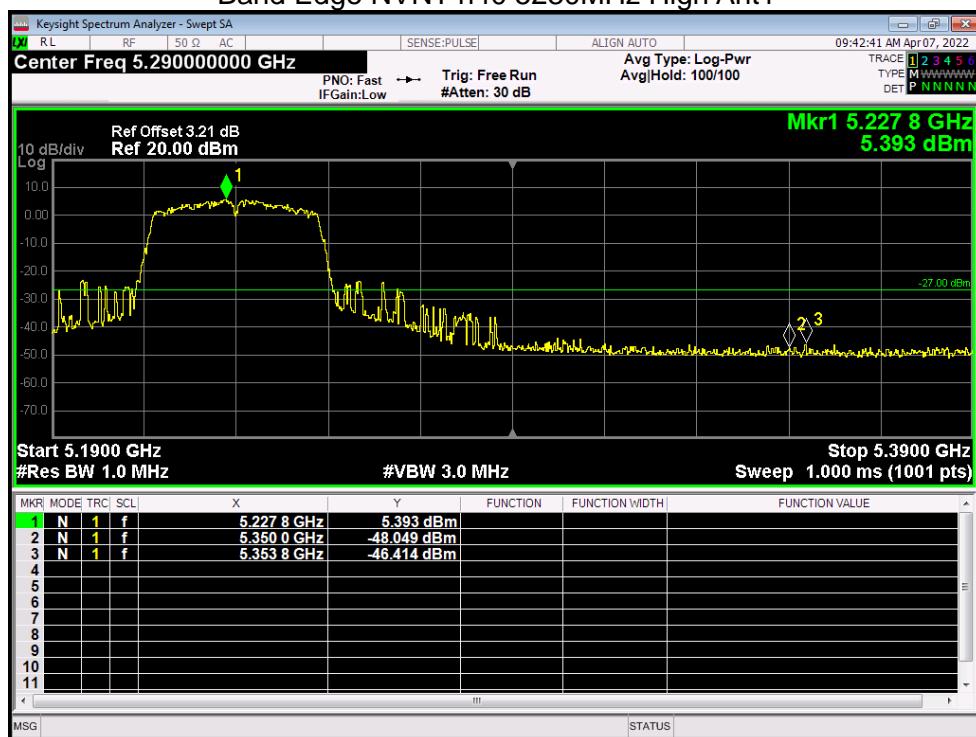


10.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-32.02	-27	Pass
NVNT	a	5200	Ant1	-31.66	-27	Pass
NVNT	a	5240	Ant1	-32.38	-27	Pass
NVNT	ac20	5180	Ant1	-42.04	-27	Pass
NVNT	ac20	5200	Ant1	-42.28	-27	Pass
NVNT	ac20	5240	Ant1	-42.33	-27	Pass
NVNT	ac40	5190	Ant1	-30.67	-27	Pass
NVNT	ac40	5230	Ant1	-41.26	-27	Pass
NVNT	ac80	5210	Ant1	-39.85	-27	Pass
NVNT	n20	5180	Ant1	-32.58	-27	Pass
NVNT	n20	5200	Ant1	-31.98	-27	Pass
NVNT	n20	5240	Ant1	-32.28	-27	Pass
NVNT	n40	5190	Ant1	-32.44	-27	Pass
NVNT	n40	5230	Ant1	-32.1	-27	Pass


Tx. Spurious NVNT a 5180MHz Ant1 Emission

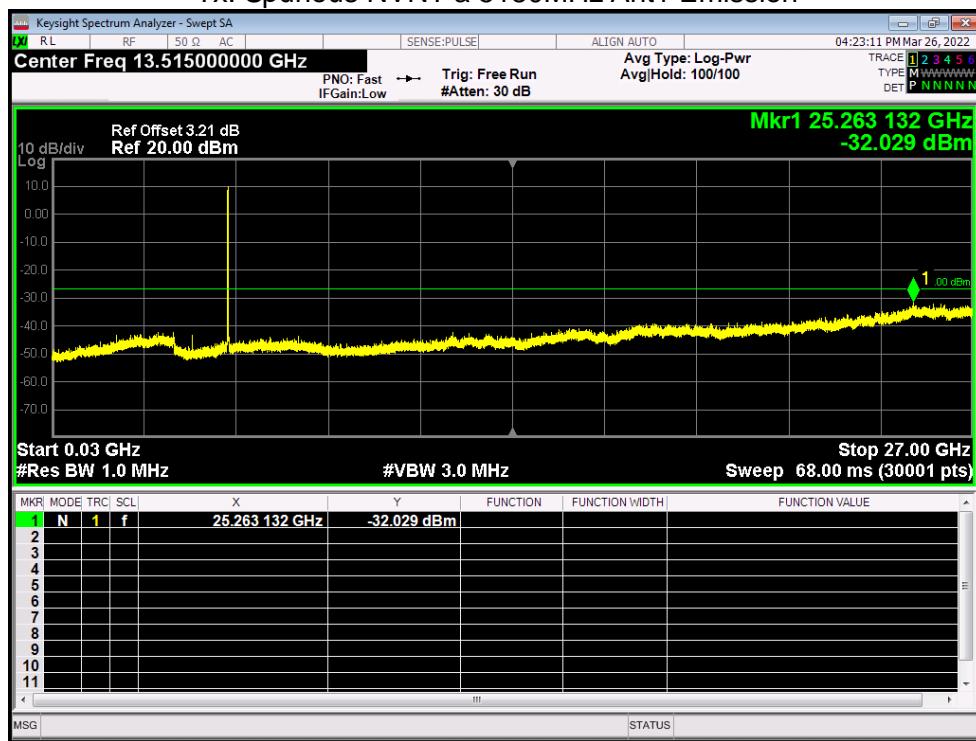


Tx. Spurious NVNT a 5200MHz Ant1 Emission

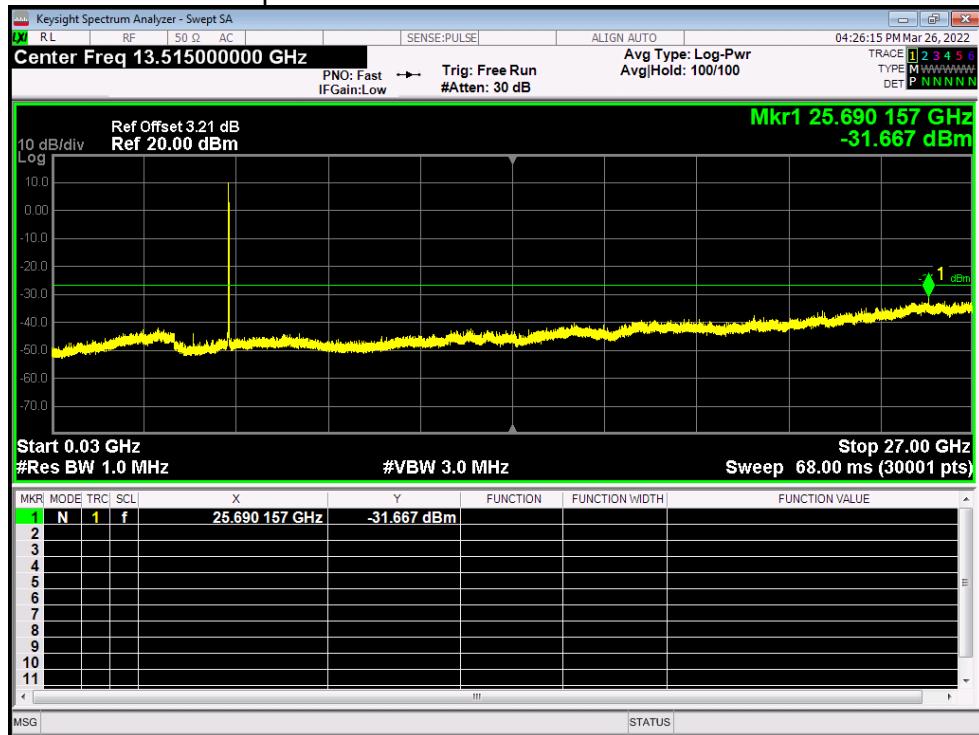


Tx. Spurious NVNT a 5240MHz Ant1 Emission

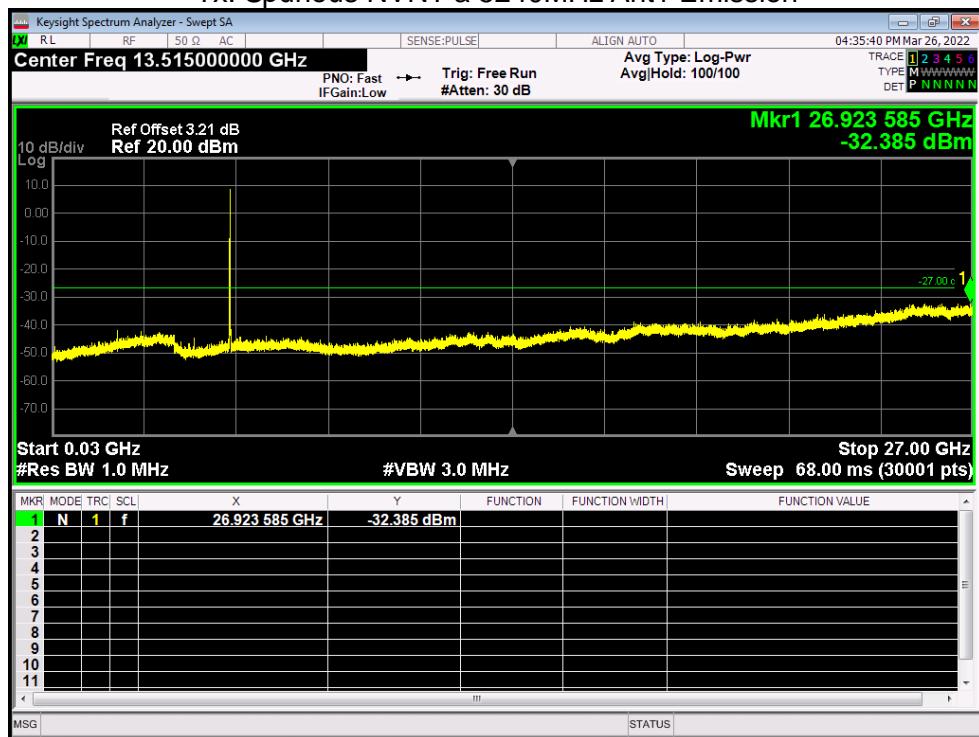


Tx. Spurious NVNT ac20 5180MHz Ant1 Emission

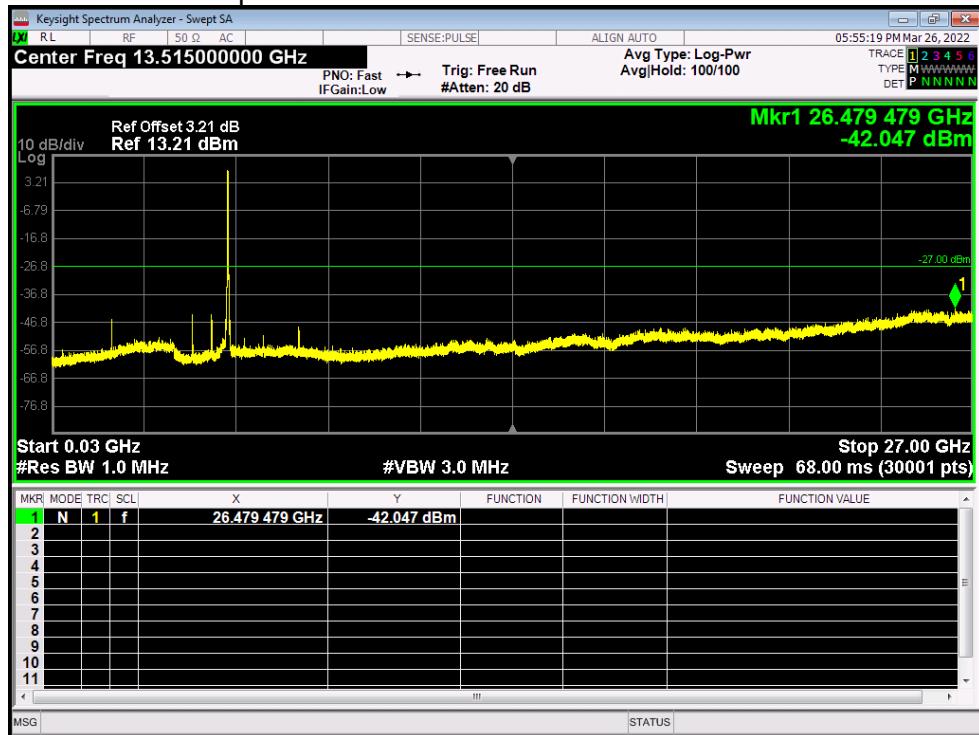


Tx. Spurious NVNT ac20 5200MHz Ant1 Emission

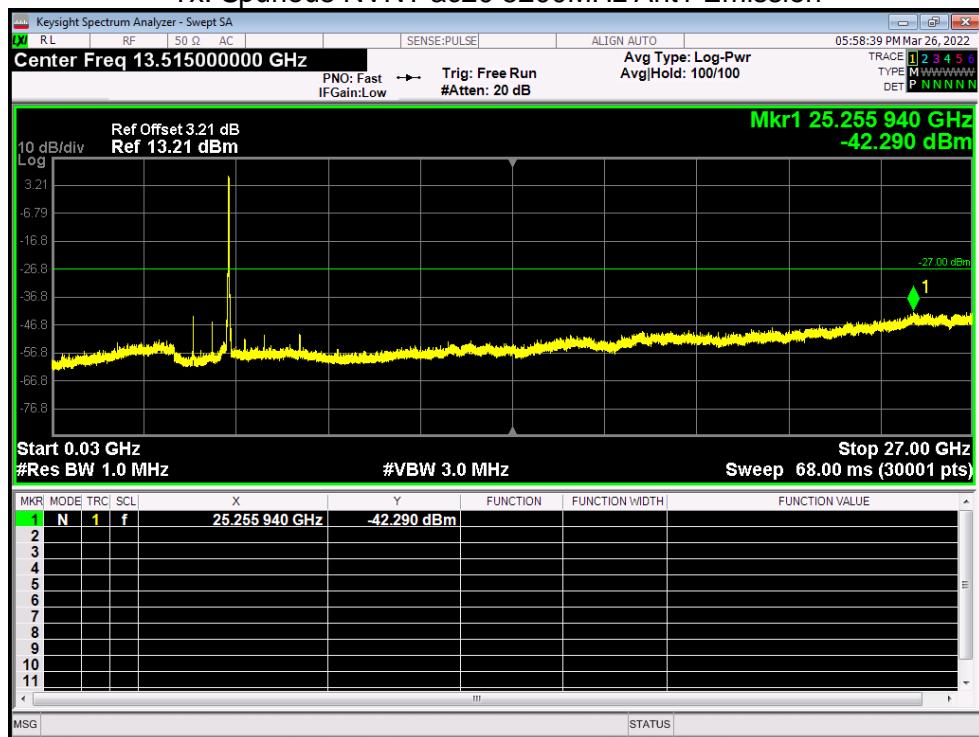


Tx. Spurious NVNT ac20 5240MHz Ant1 Emission

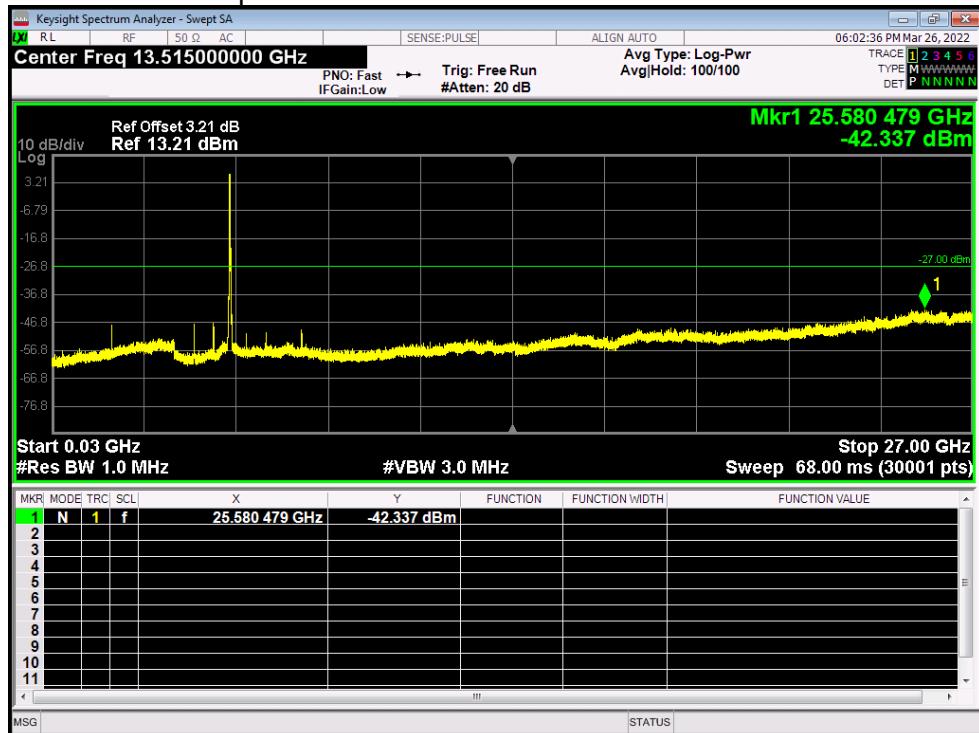


Tx. Spurious NVNT ac40 5190MHz Ant1 Emission

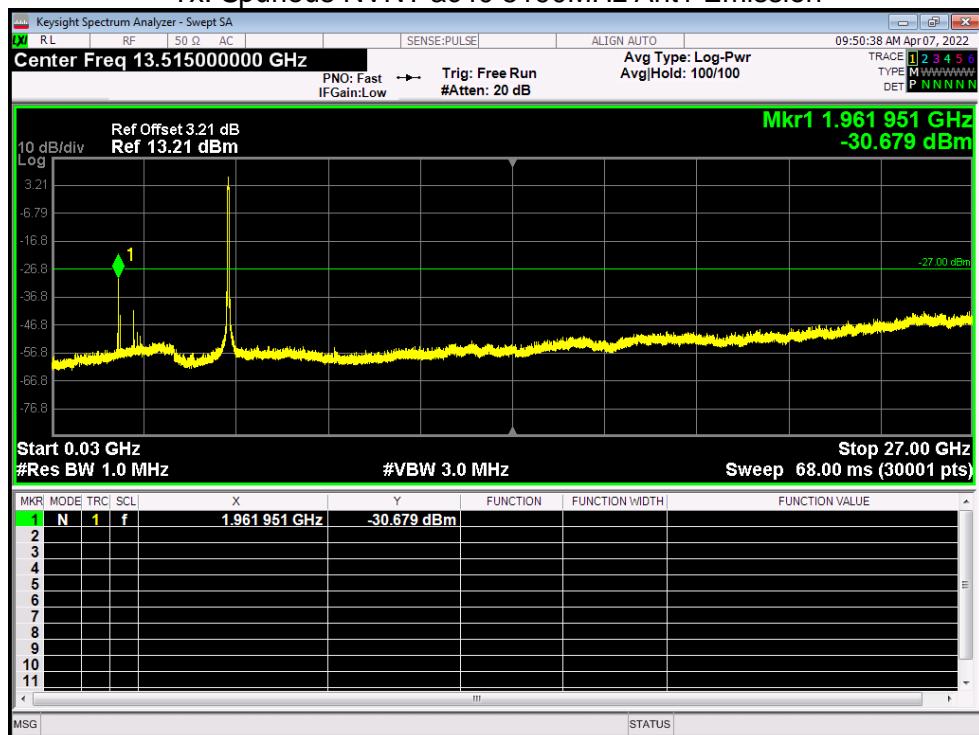


Tx. Spurious NVNT ac40 5230MHz Ant1 Emission

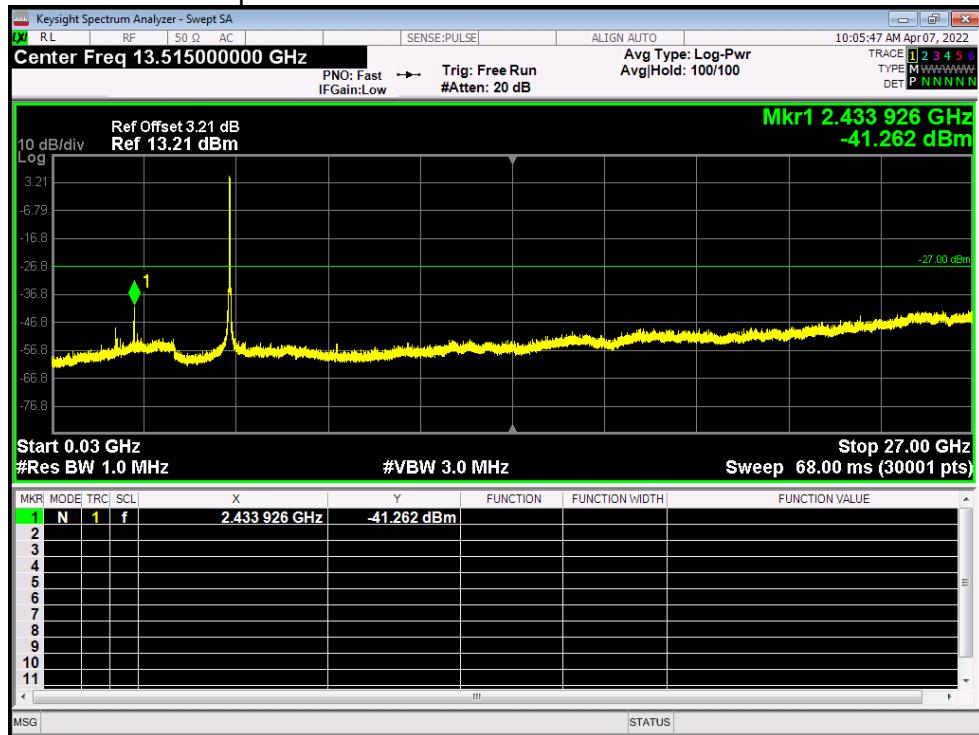


Tx. Spurious NVNT ac80 5210MHz Ant1 Emission

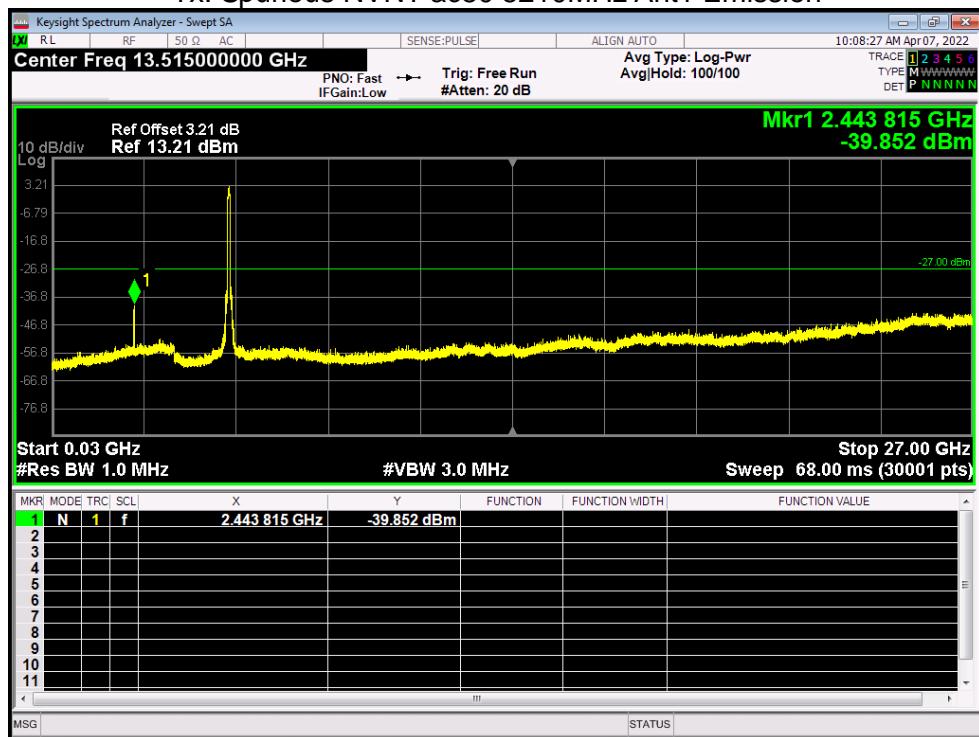


Tx. Spurious NVNT n20 5180MHz Ant1 Emission

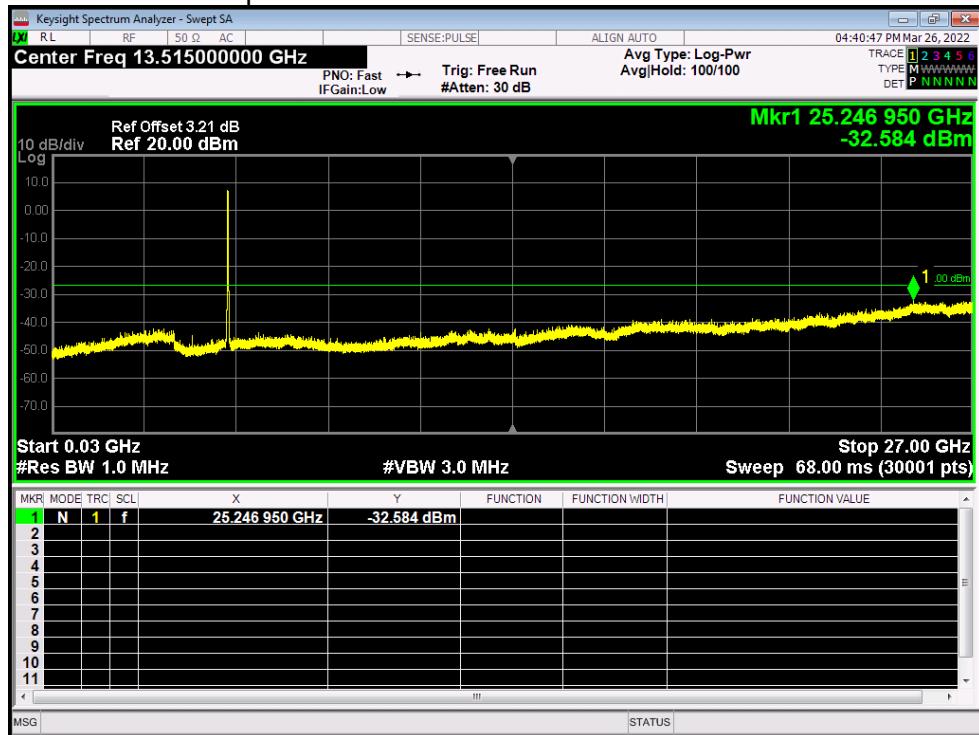


Tx. Spurious NVNT n20 5200MHz Ant1 Emission

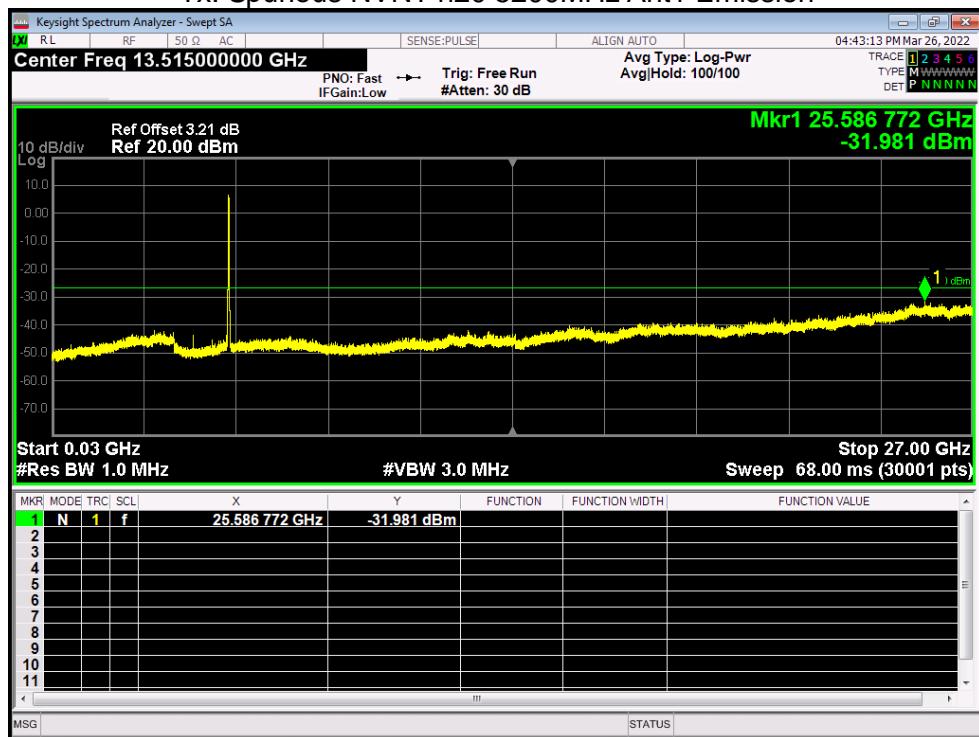


Tx. Spurious NVNT n20 5240MHz Ant1 Emission

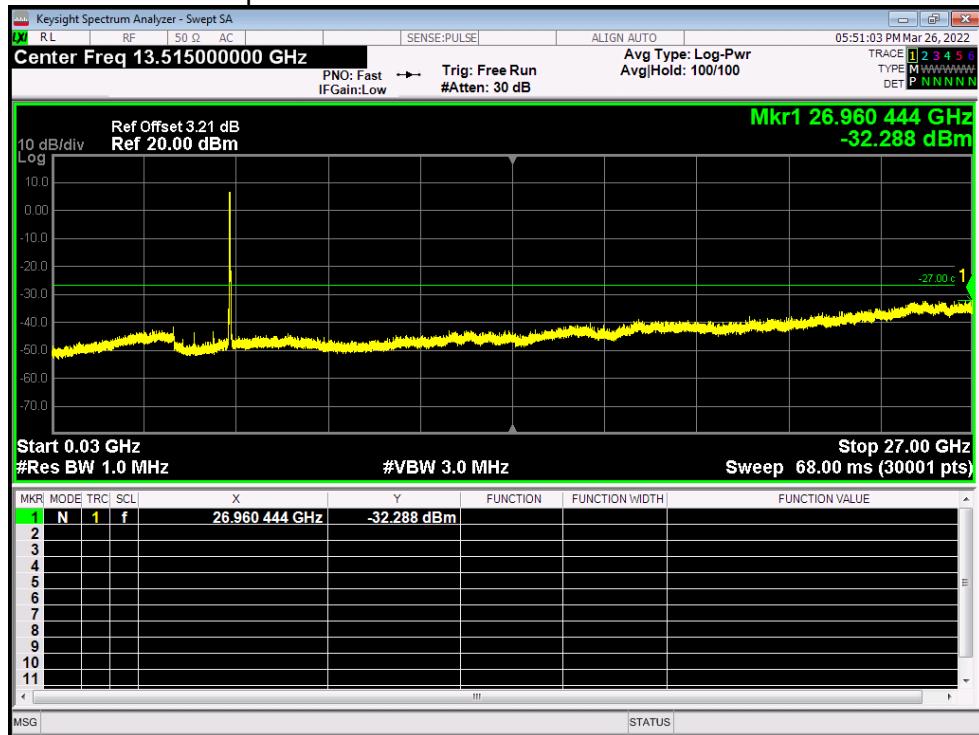

Tx. Spurious NVNT n40 5190MHz Ant1 Emission

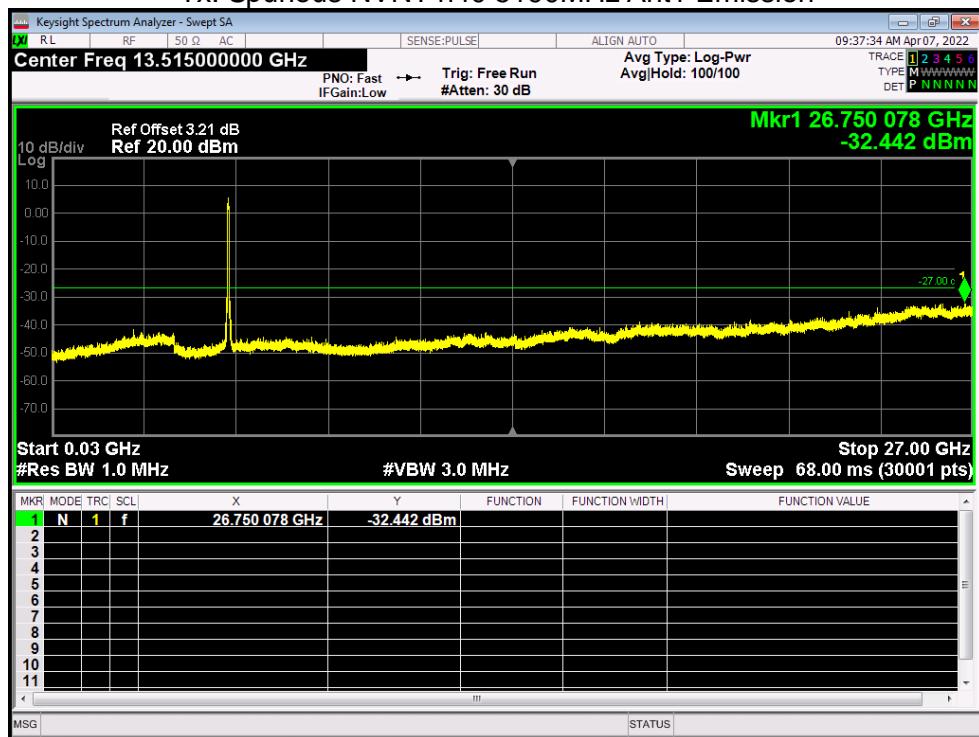

Tx. Spurious NVNT n40 5230MHz Ant1 Emission

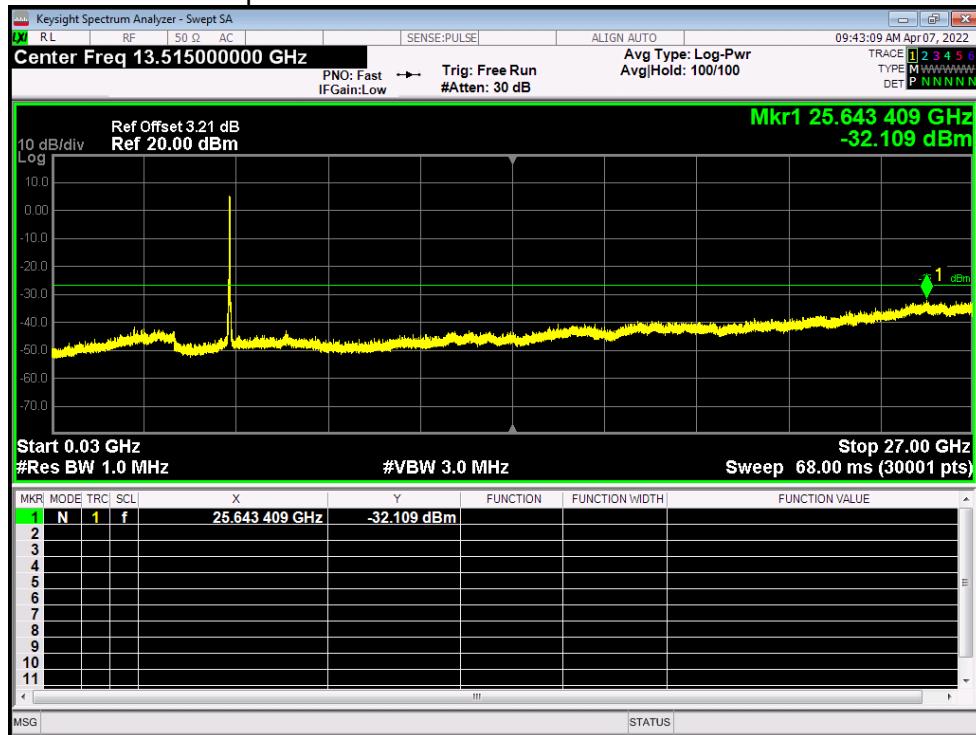

END OF REPORT