



Test Data

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	BLE	2402	Ant1	60.25	2.2
NVNT	BLE	2442	Ant1	59.69	2.24
NVNT	BLE	2480	Ant1	60.01	2.22

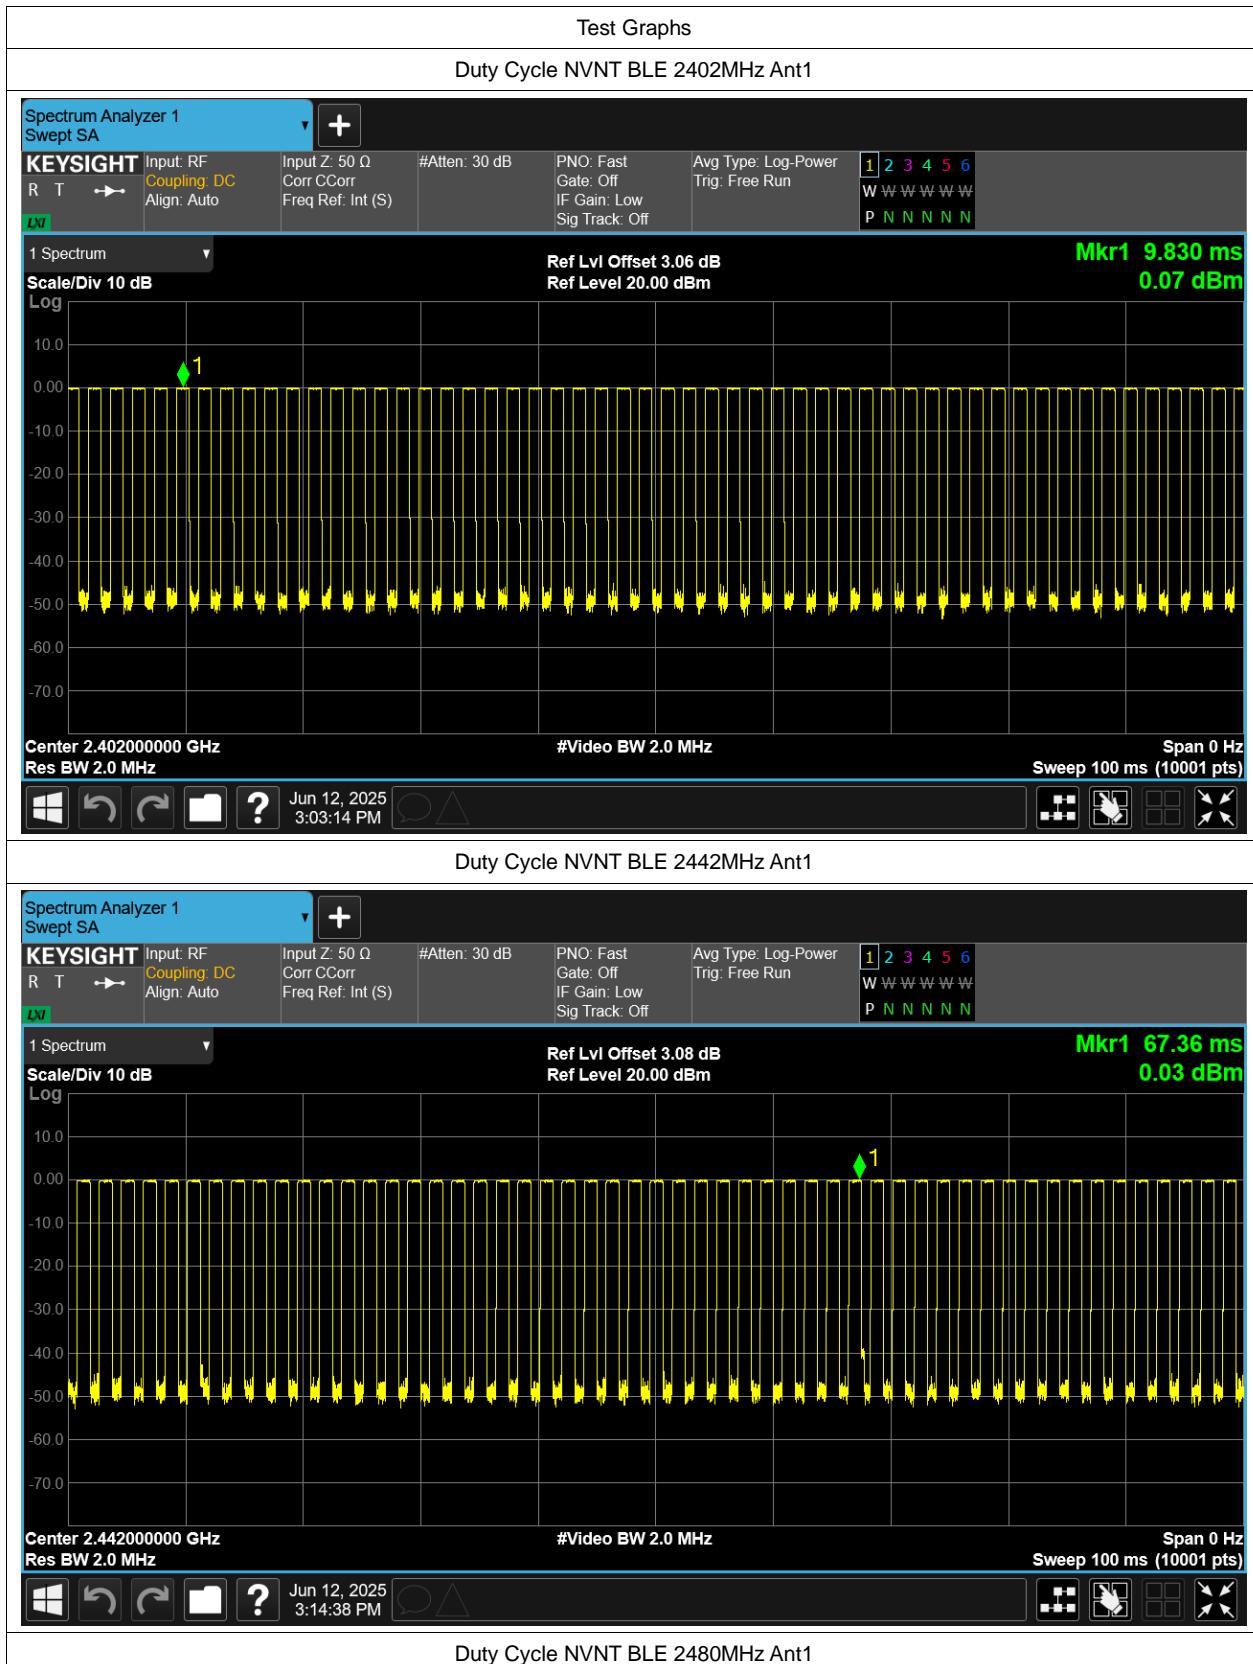


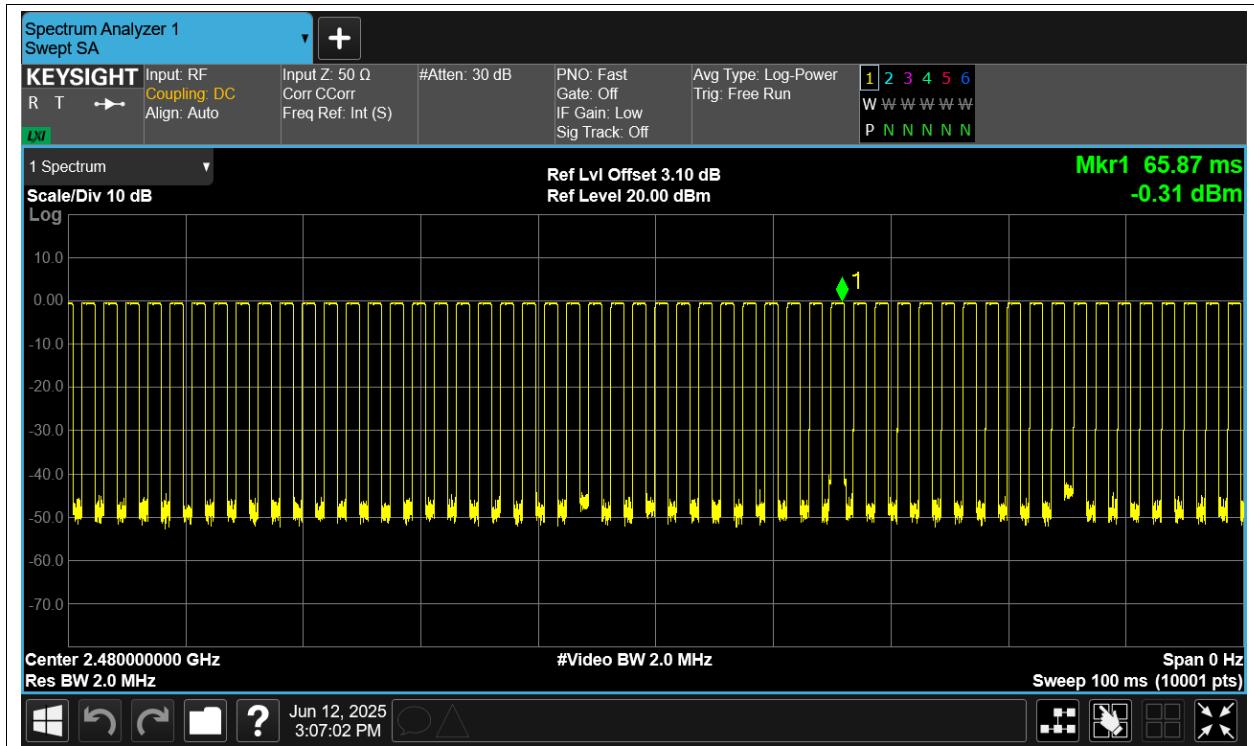

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-0.256	30	Pass
NVNT	BLE	2442	Ant1	-0.455	30	Pass
NVNT	BLE	2480	Ant1	-0.776	30	Pass




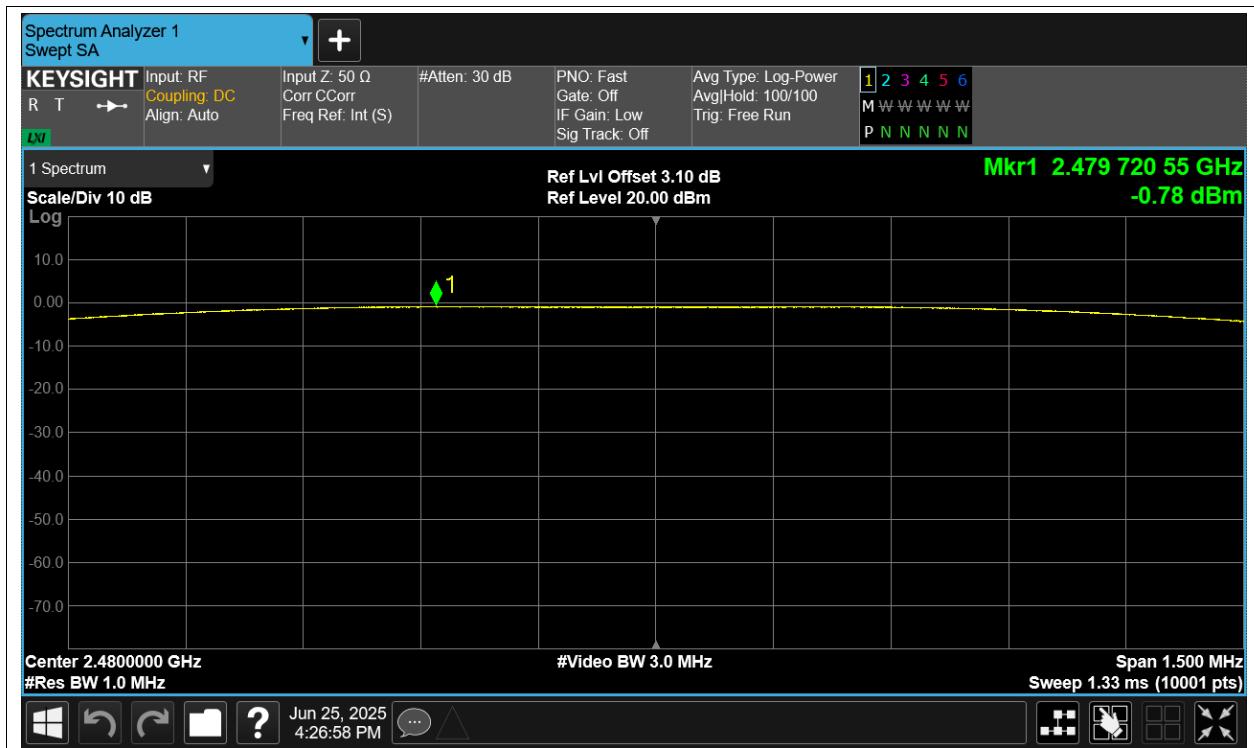

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit(MHz)	Verdic
NVNT	BLE	2402	Ant1	0.659	0.5	Pass
NVNT	BLE	2442	Ant1	0.658	0.5	Pass
NVNT	BLE	2480	Ant1	0.657	0.5	Pass



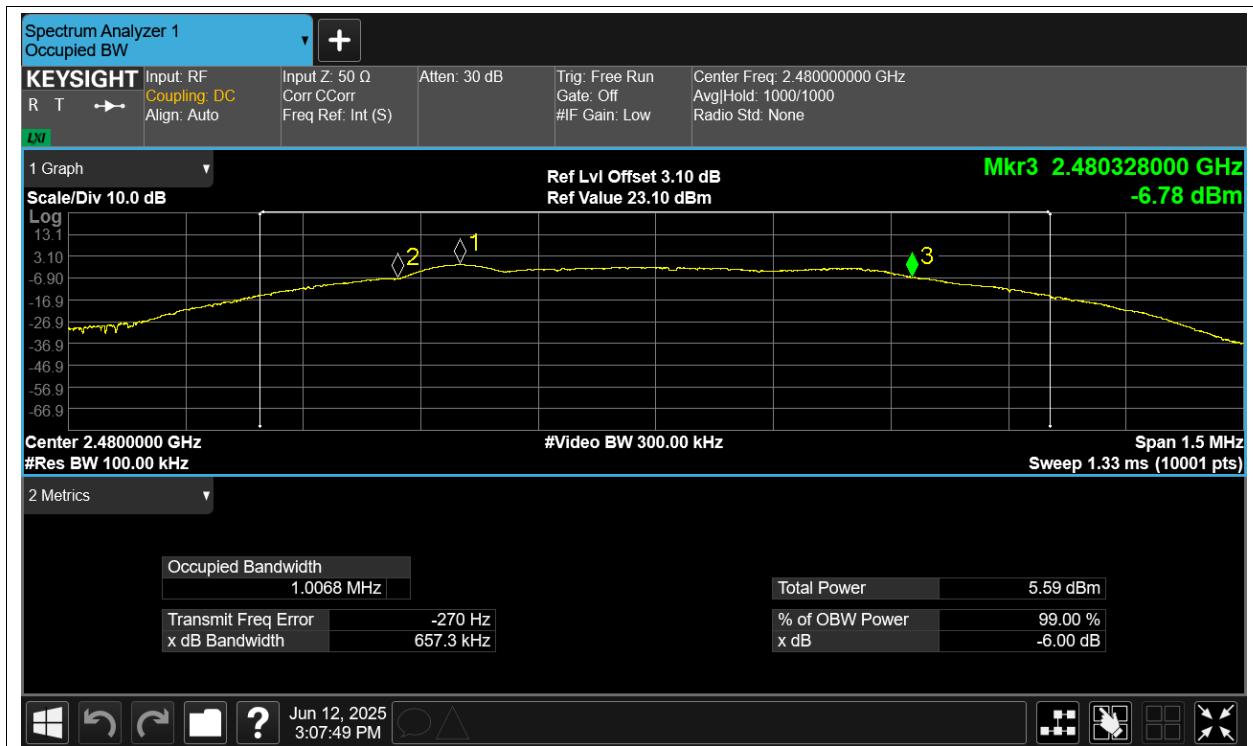

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	0.999
NVNT	BLE	2442	Ant1	0.998
NVNT	BLE	2480	Ant1	0.998






Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3KHz)	Limit(dBm/3KHz)	Verdict
NVNT	BLE	2402	Ant1	-6.684	8	Pass
NVNT	BLE	2442	Ant1	-6.787	8	Pass
NVNT	BLE	2480	Ant1	-9.651	8	Pass

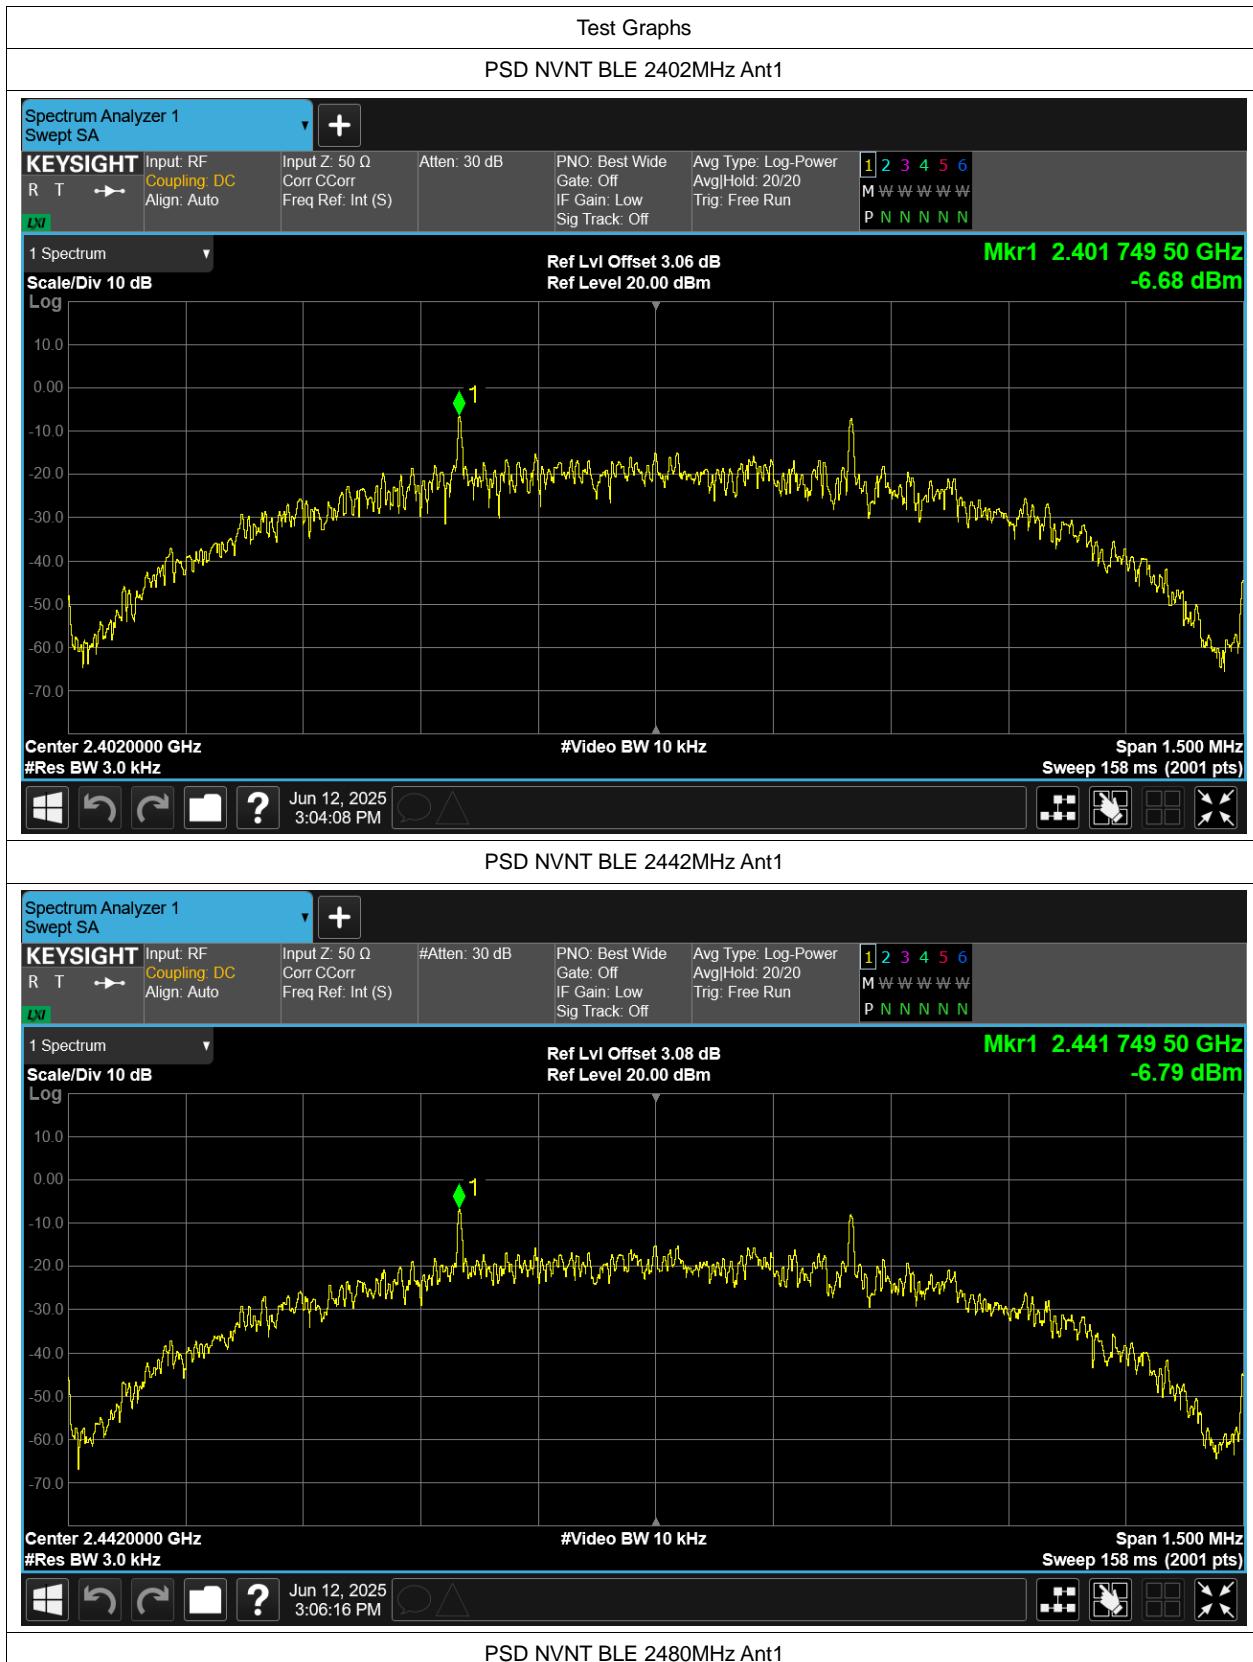


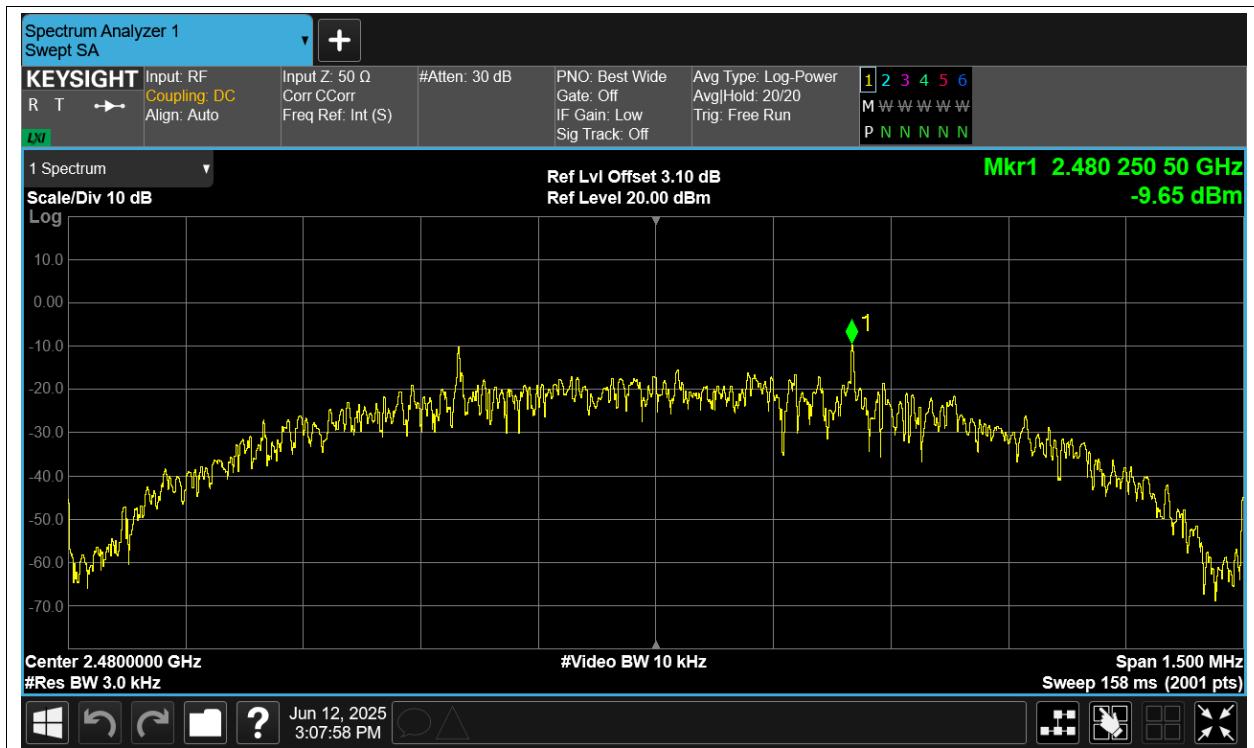


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-55.83	-20	Pass
NVNT	BLE	2480	Ant1	-55.81	-20	Pass

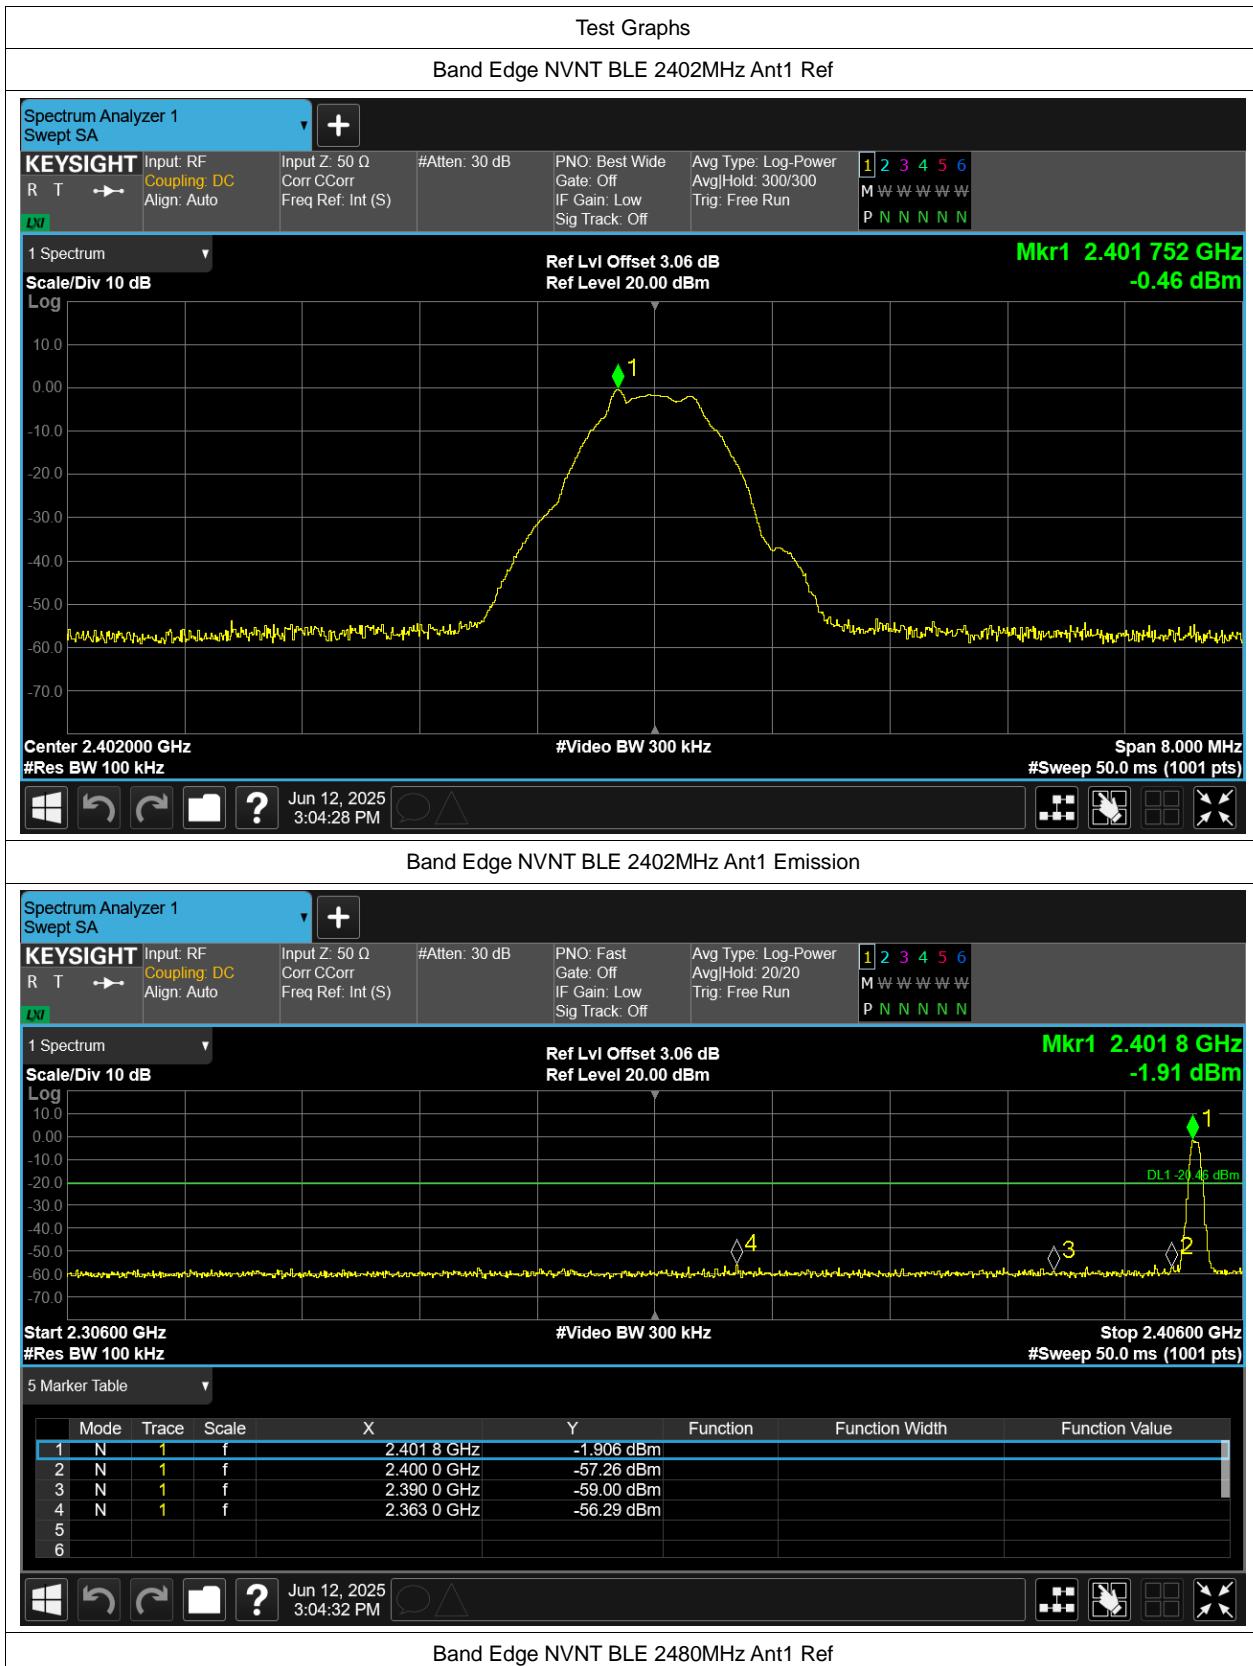

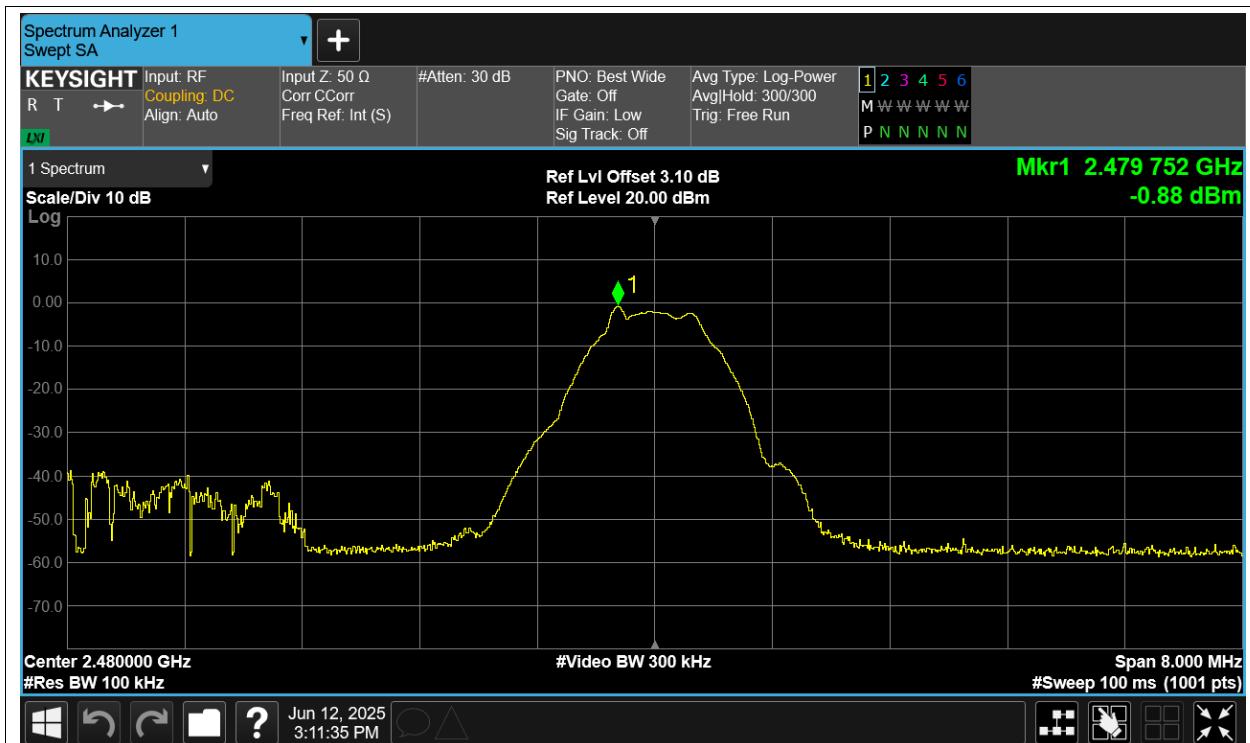


Band Edge NVNT BLE 2480MHz Ant1 Emission

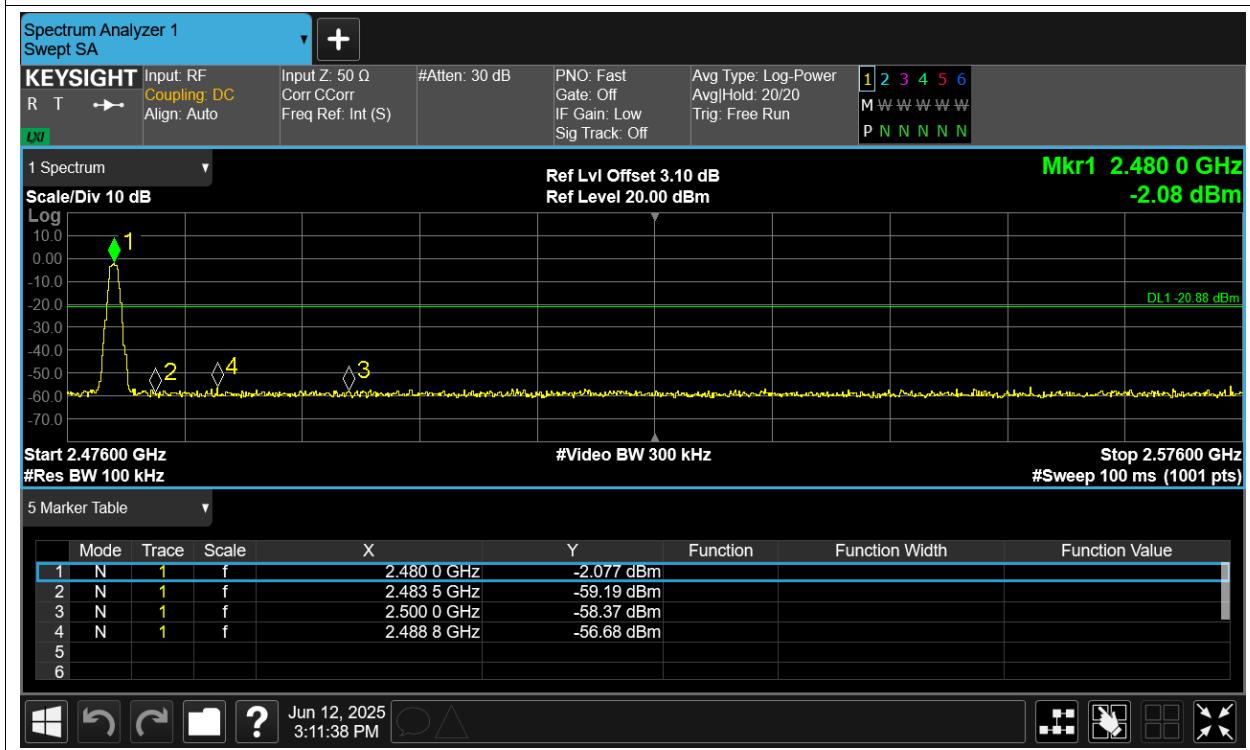


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-47.64	-20	Pass
NVNT	BLE	2442	Ant1	-48.34	-20	Pass
NVNT	BLE	2480	Ant1	-47.76	-20	Pass




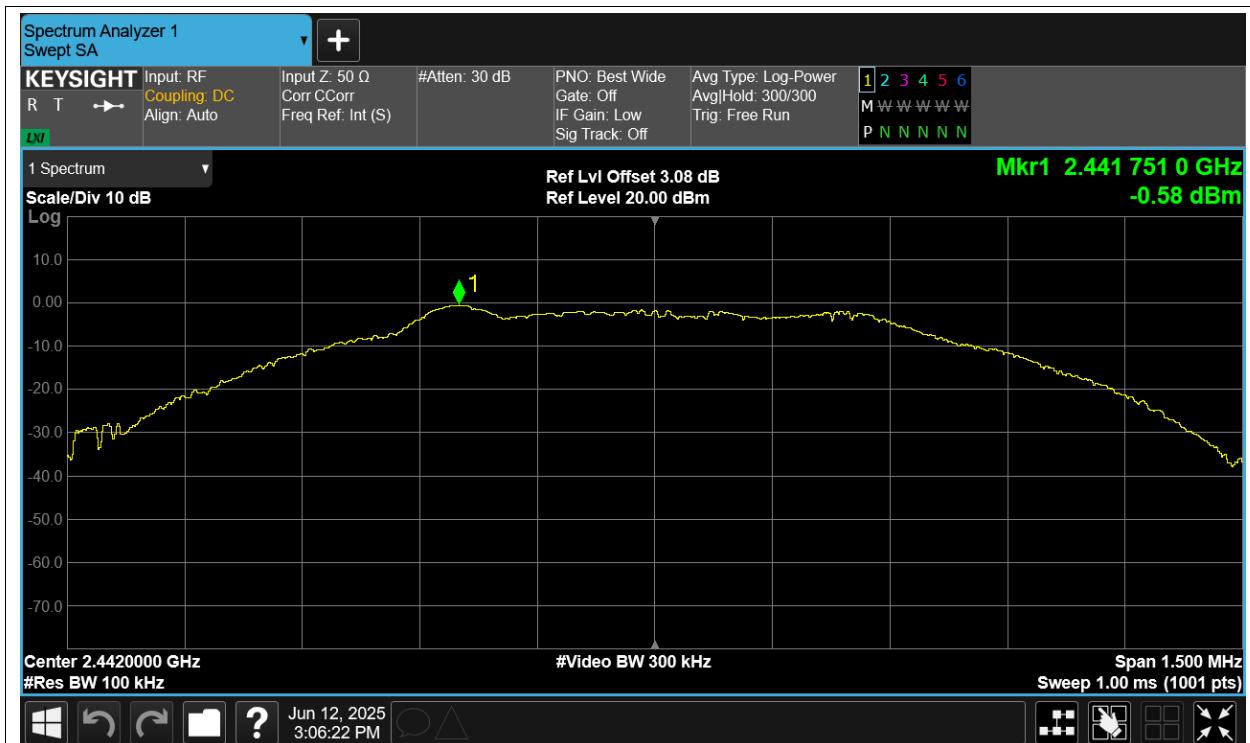

Tx. Spurious NVNT BLE 2442MHz Ant1 Emission

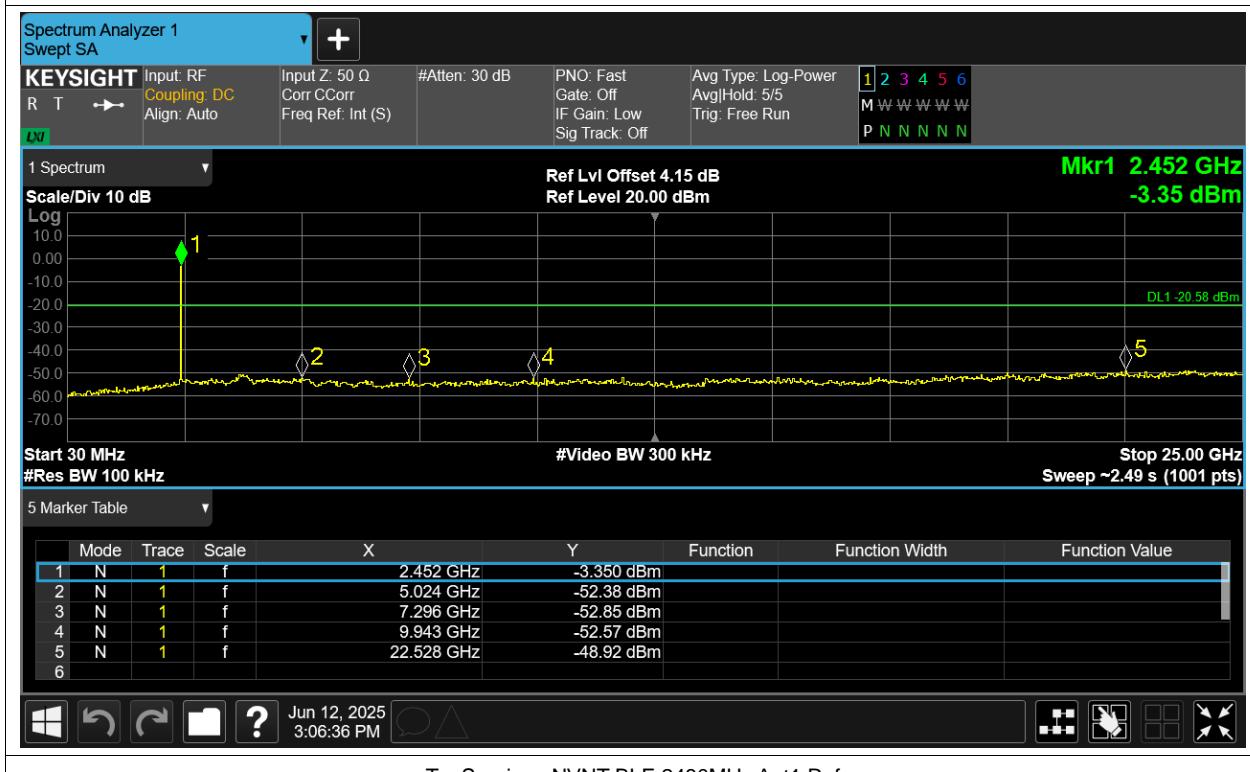

Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

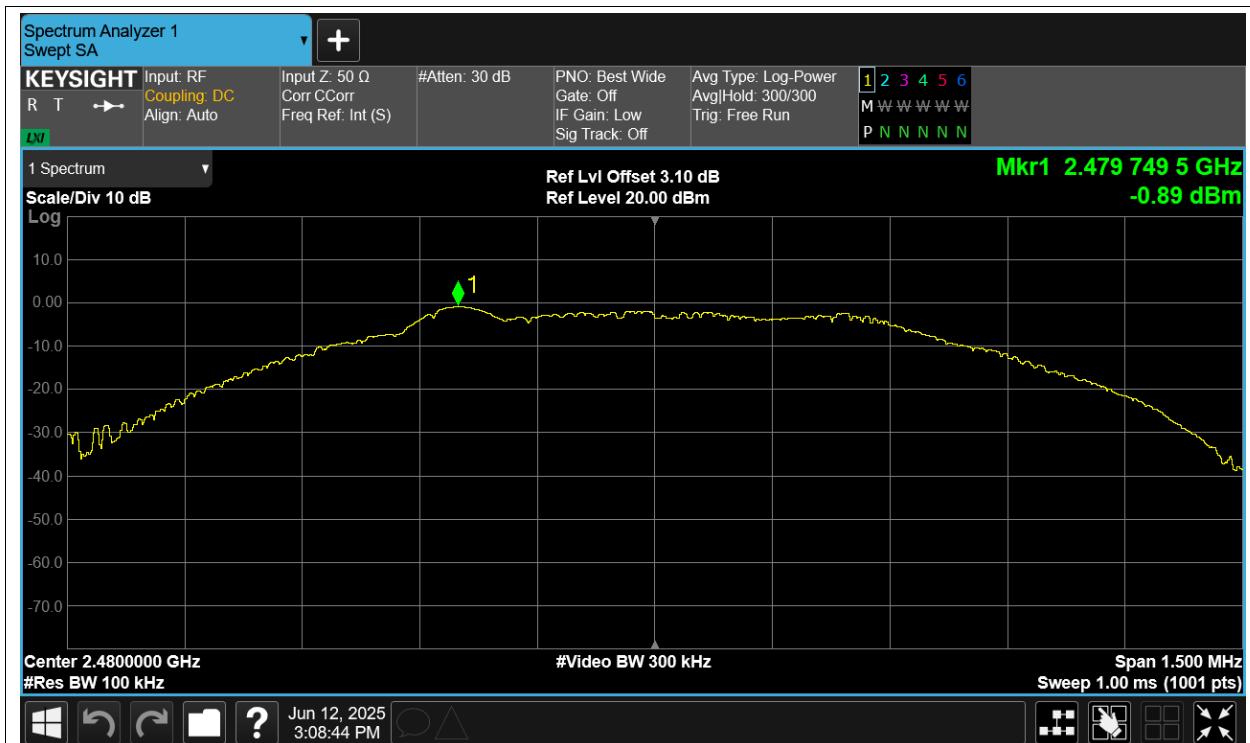

Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

