






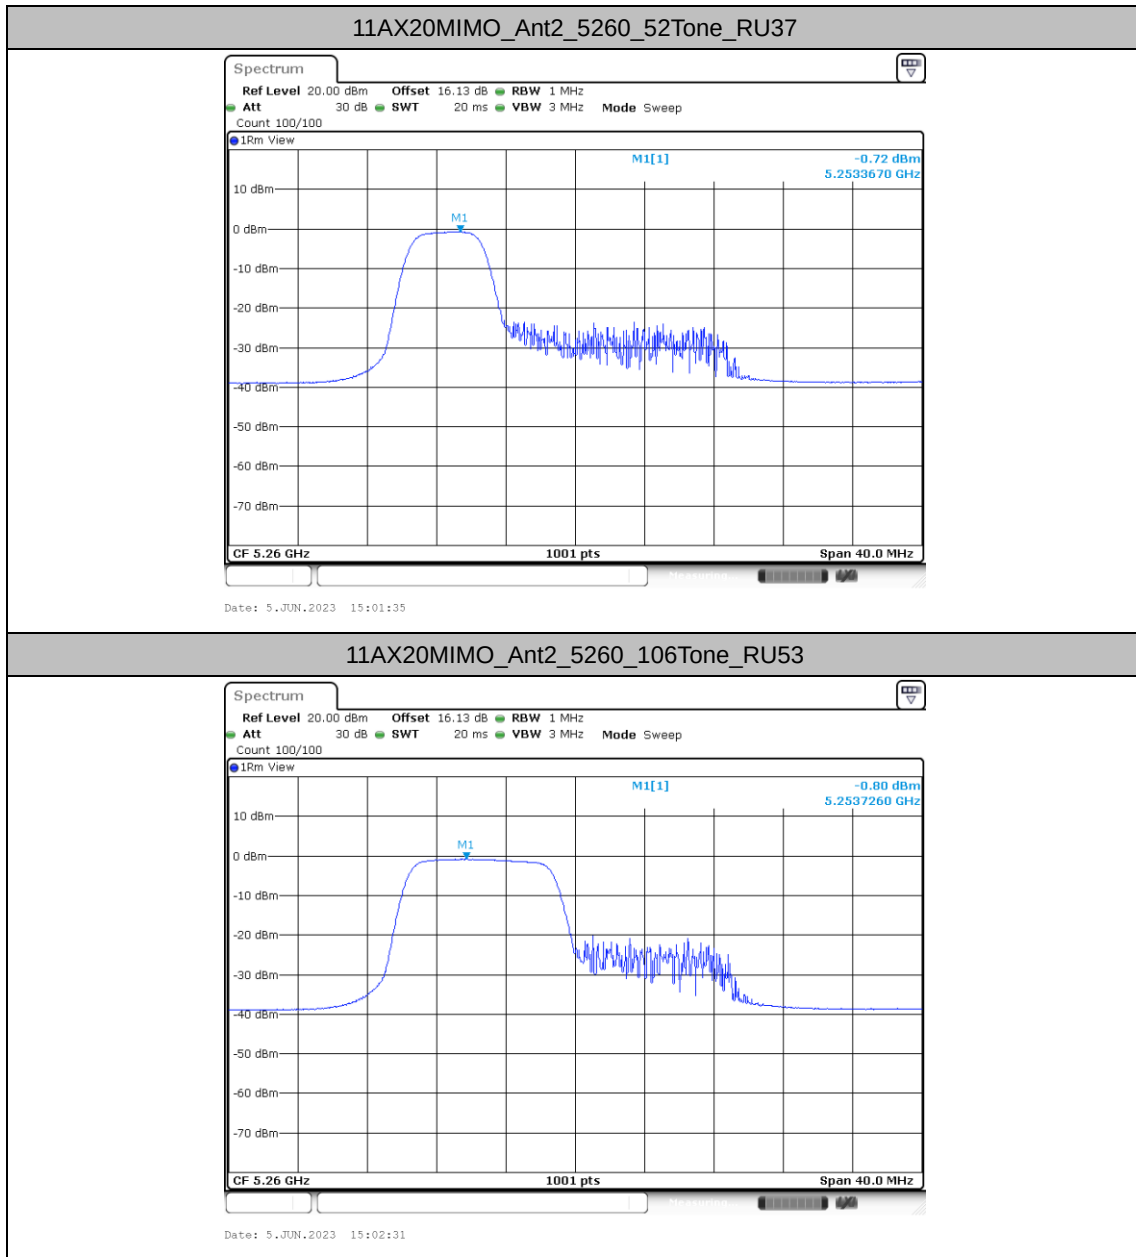


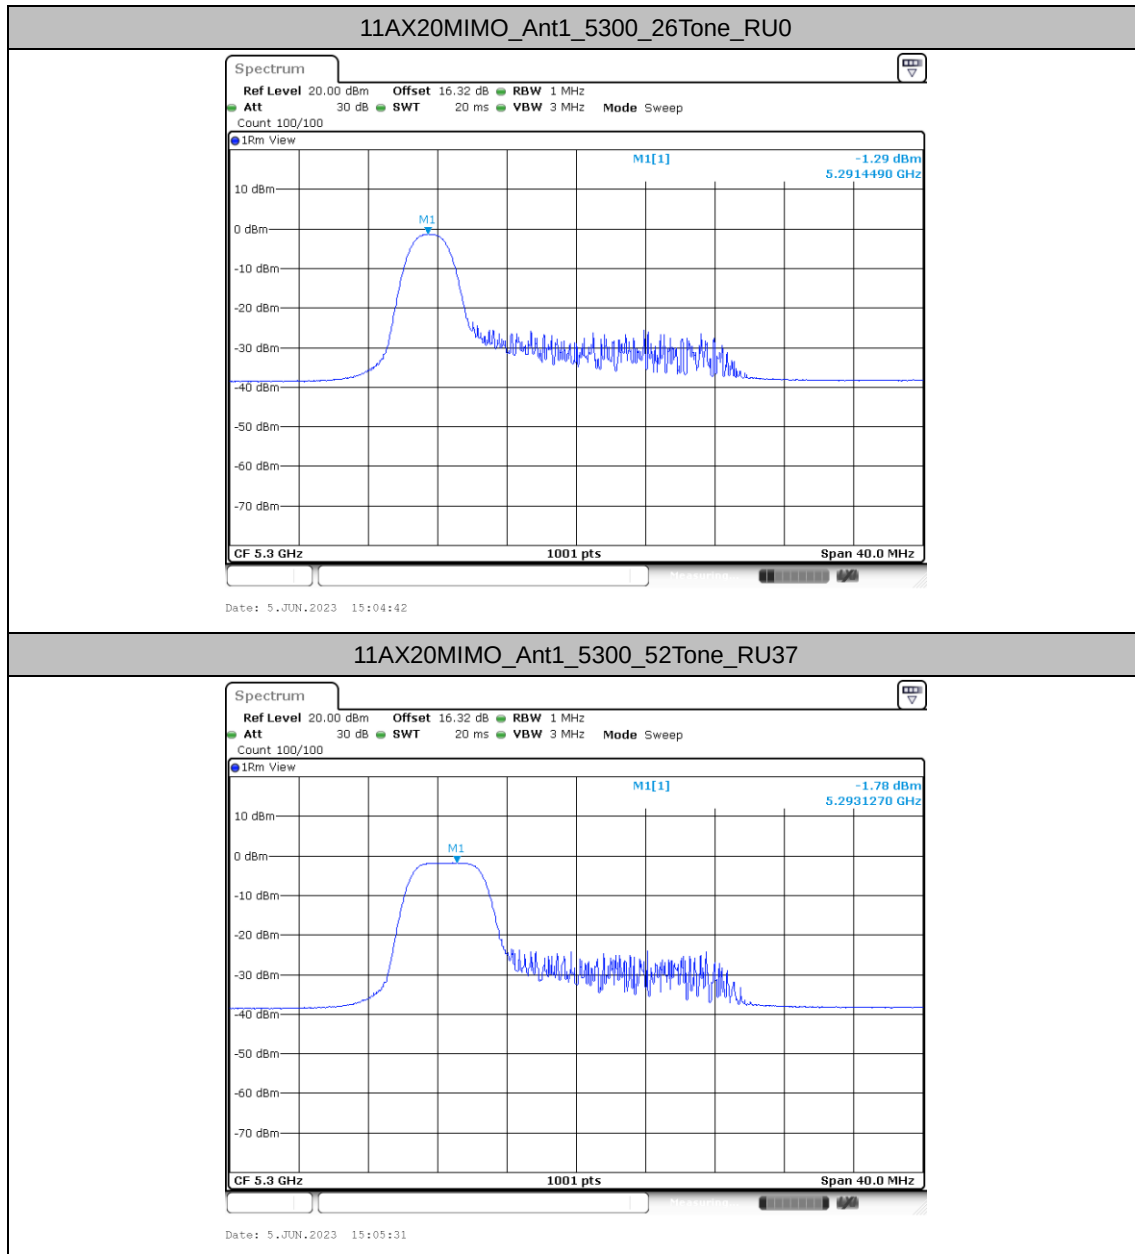


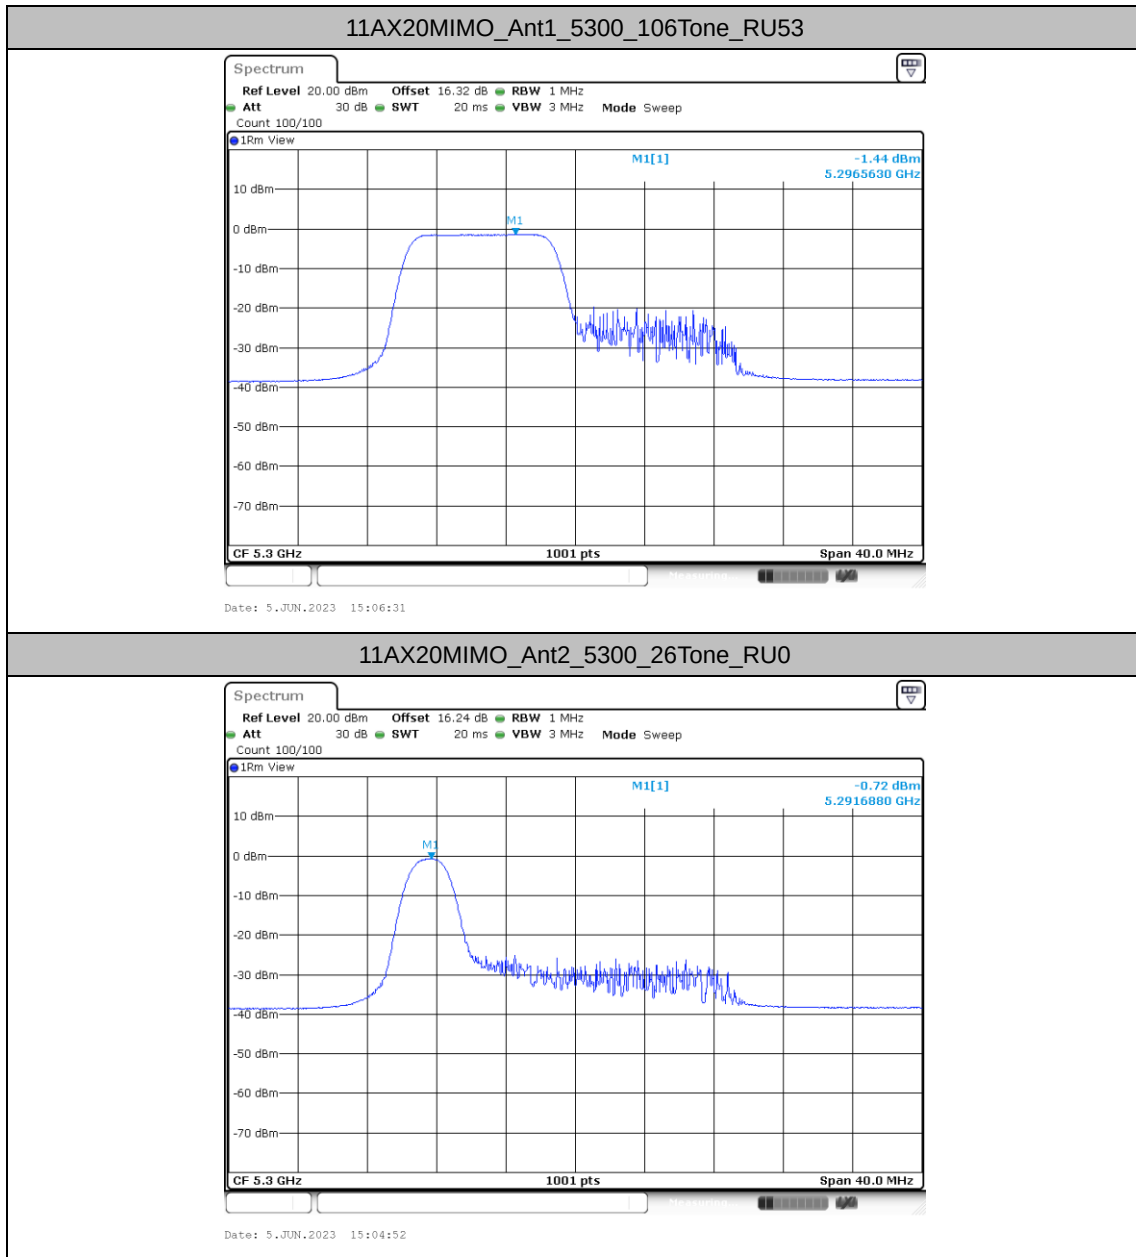


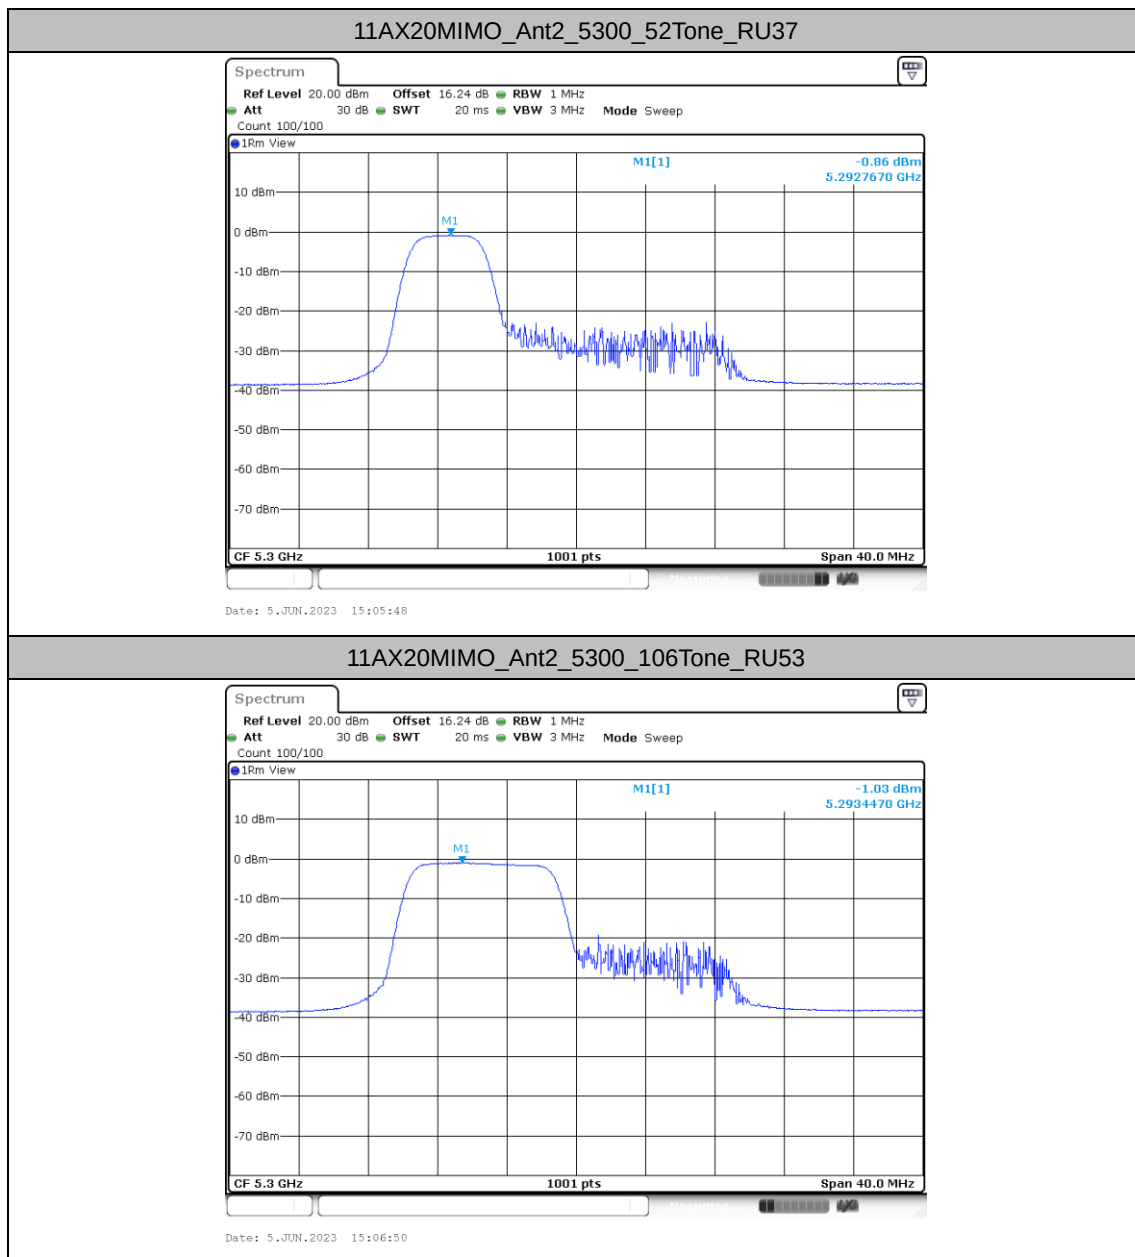


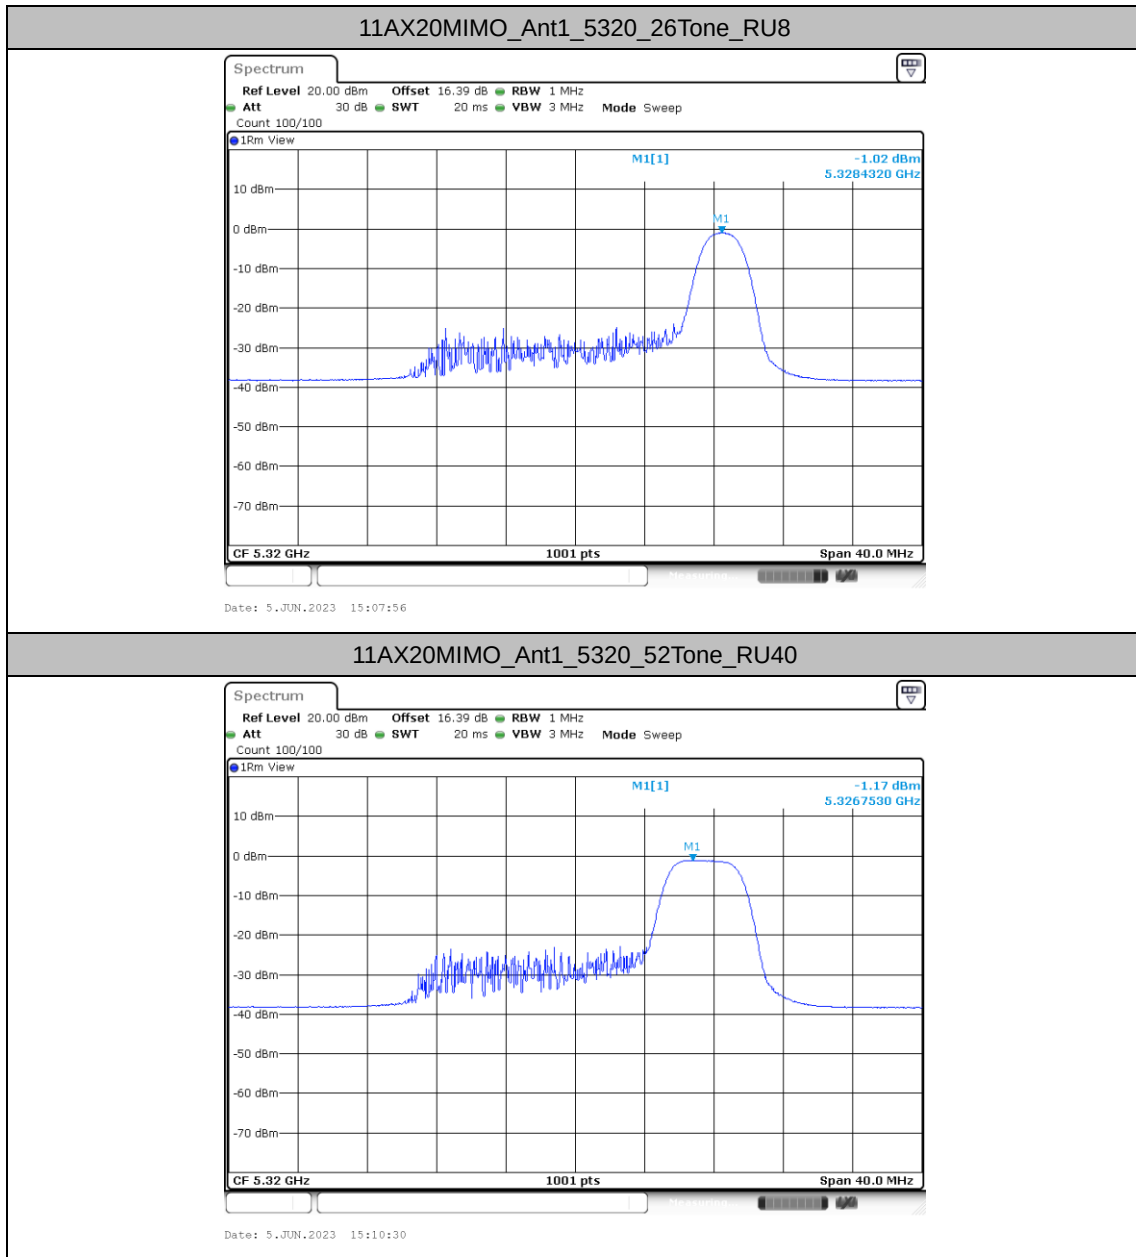


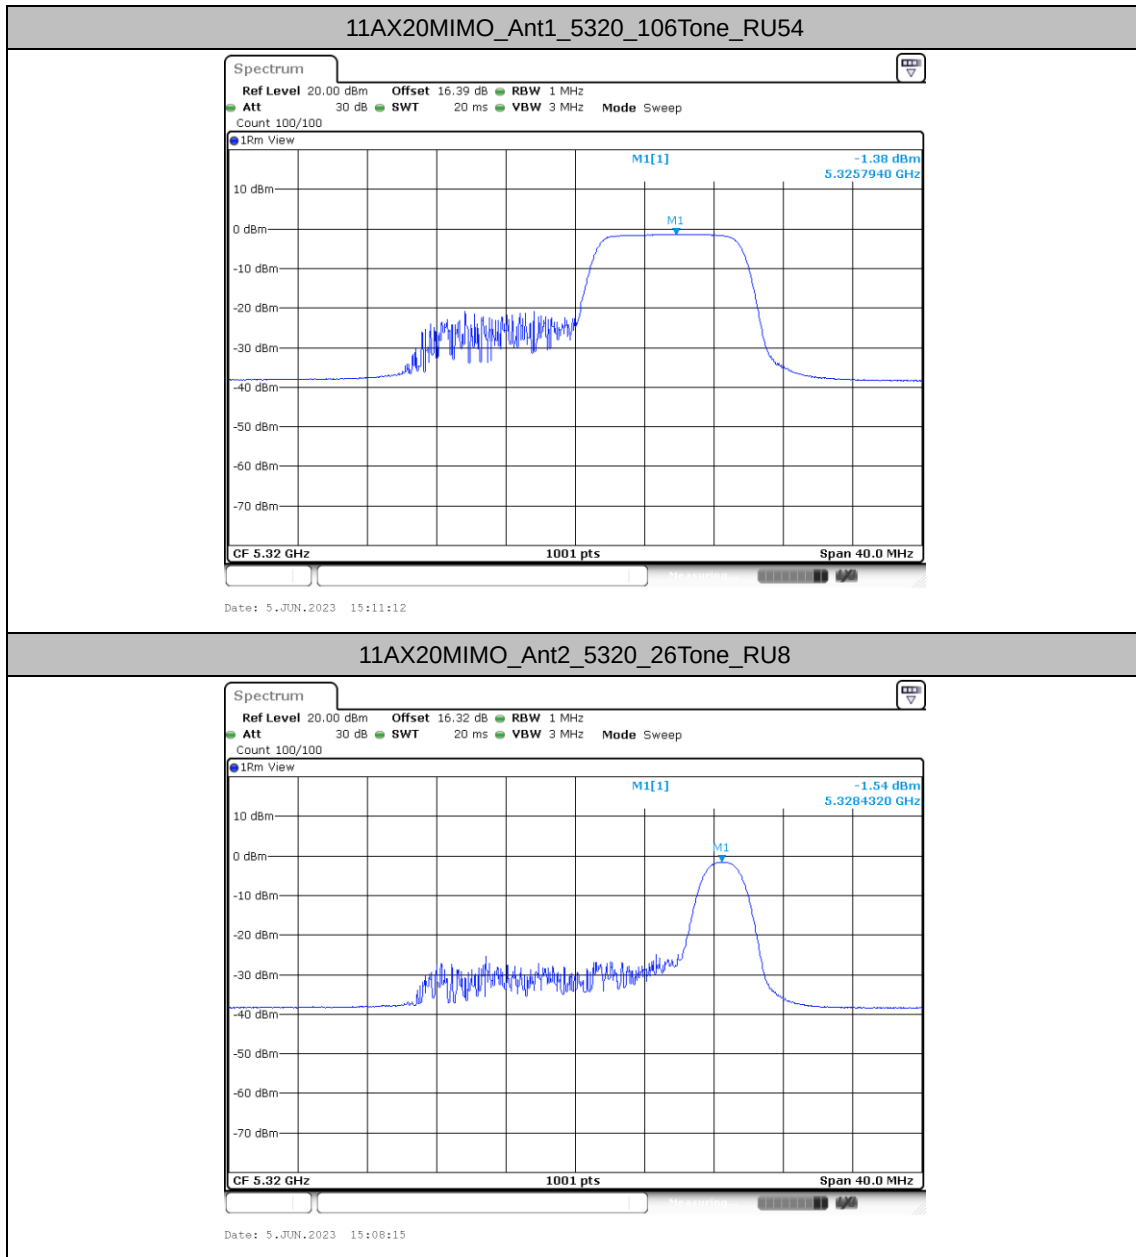


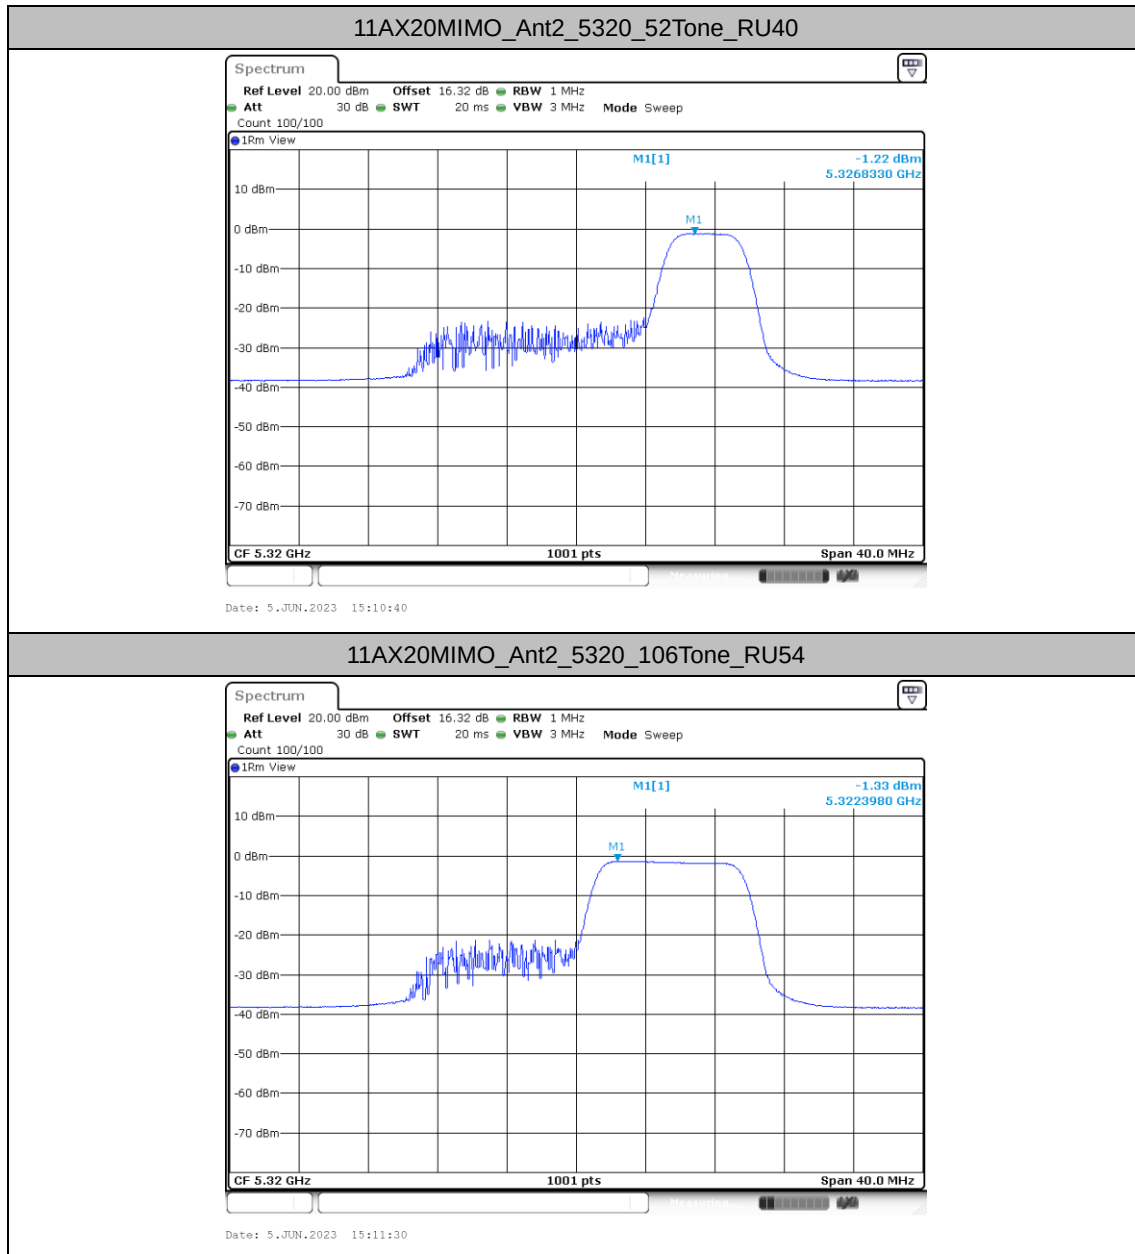


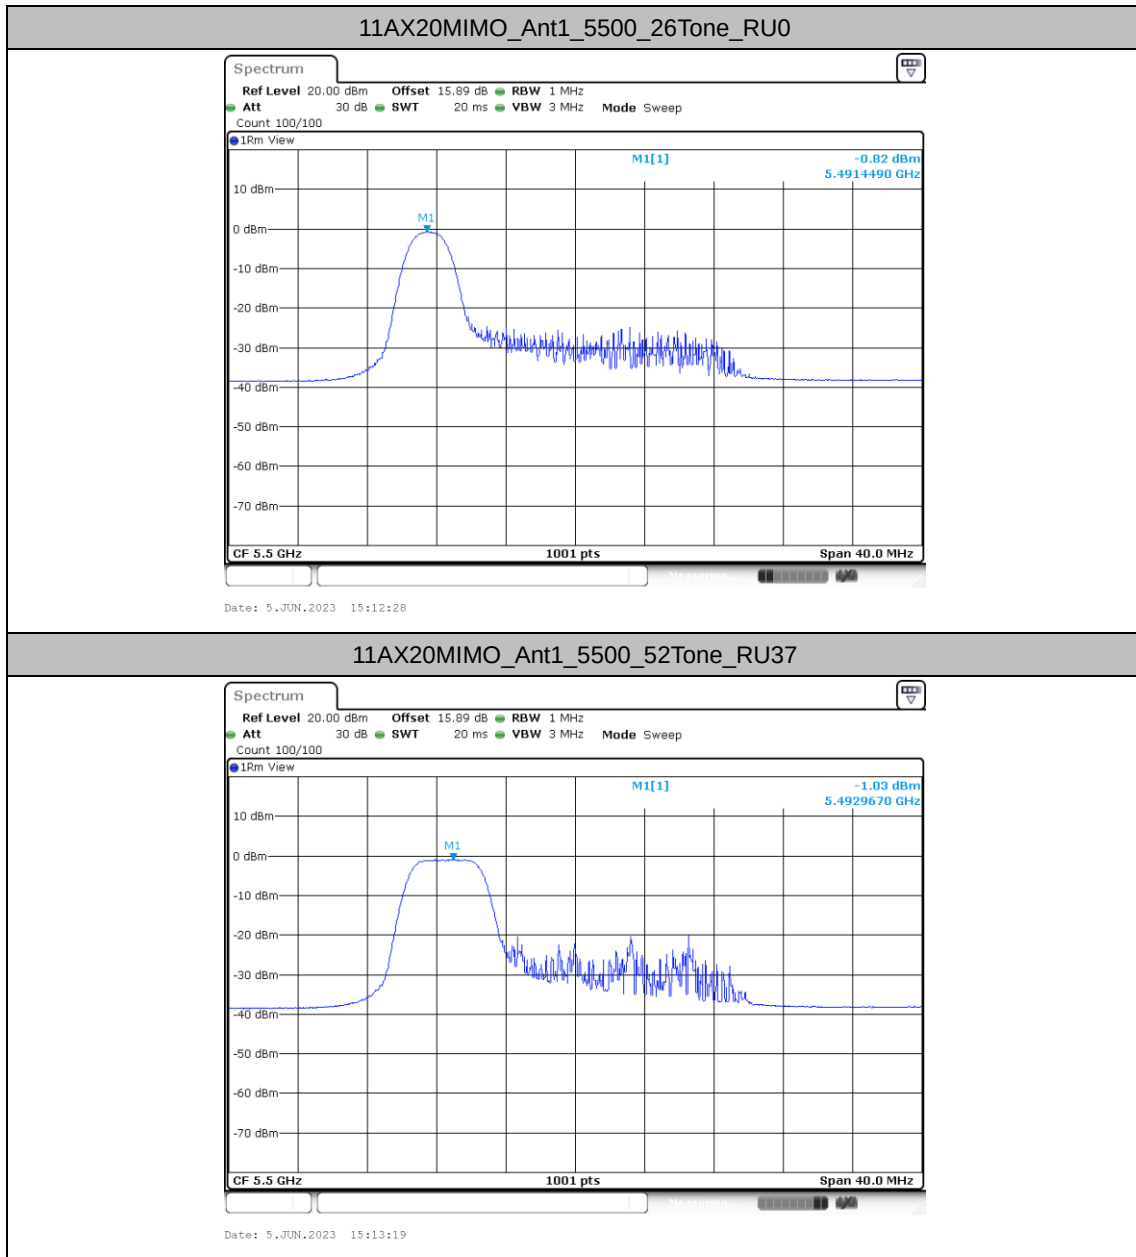


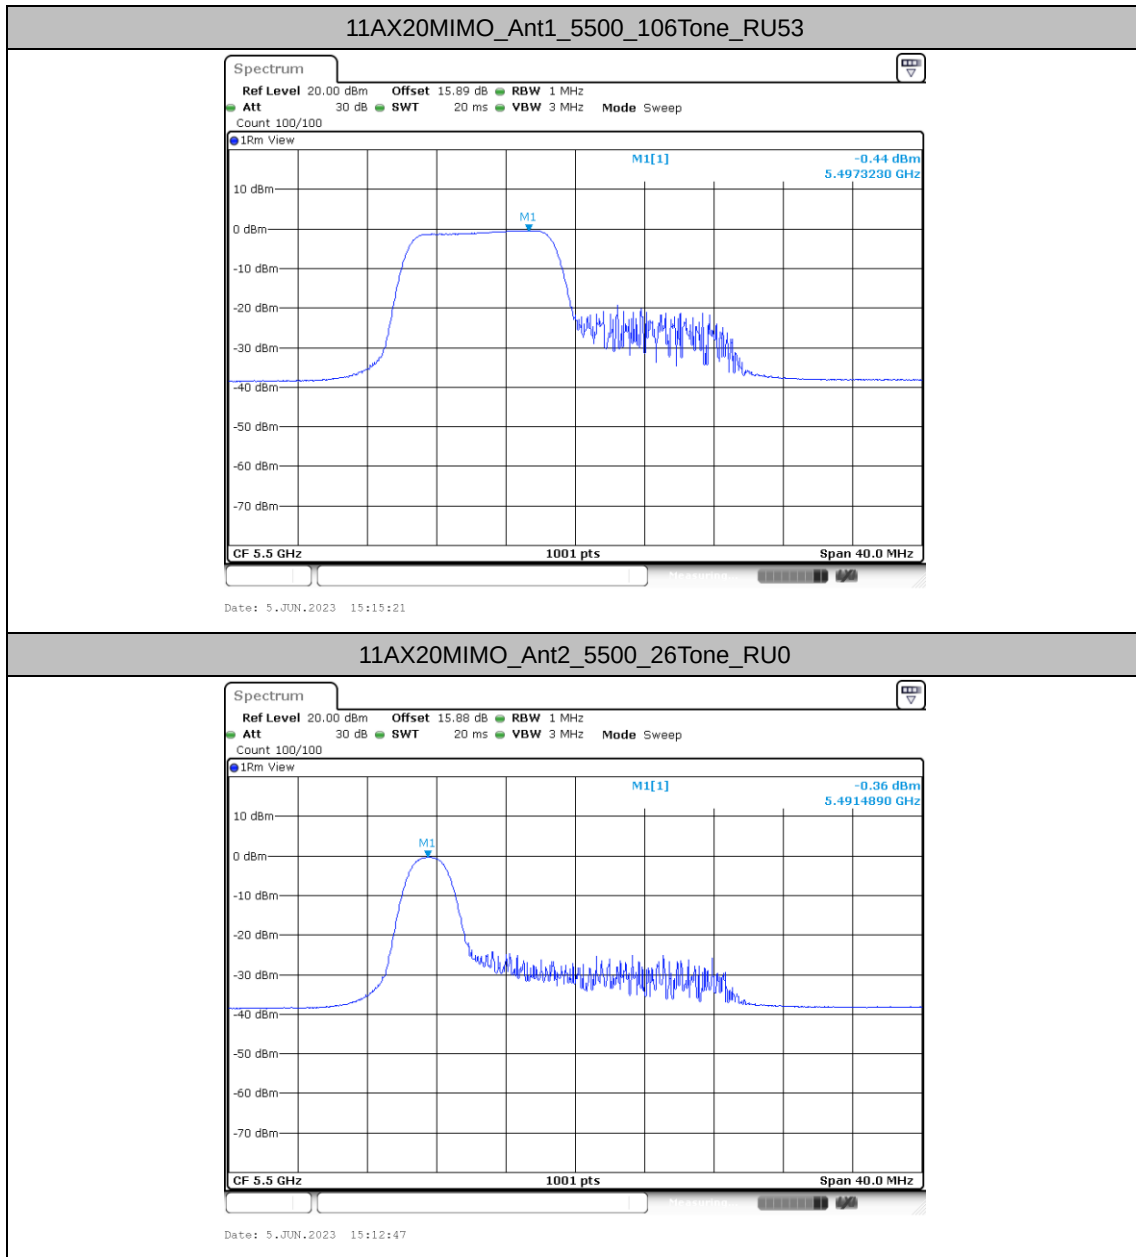


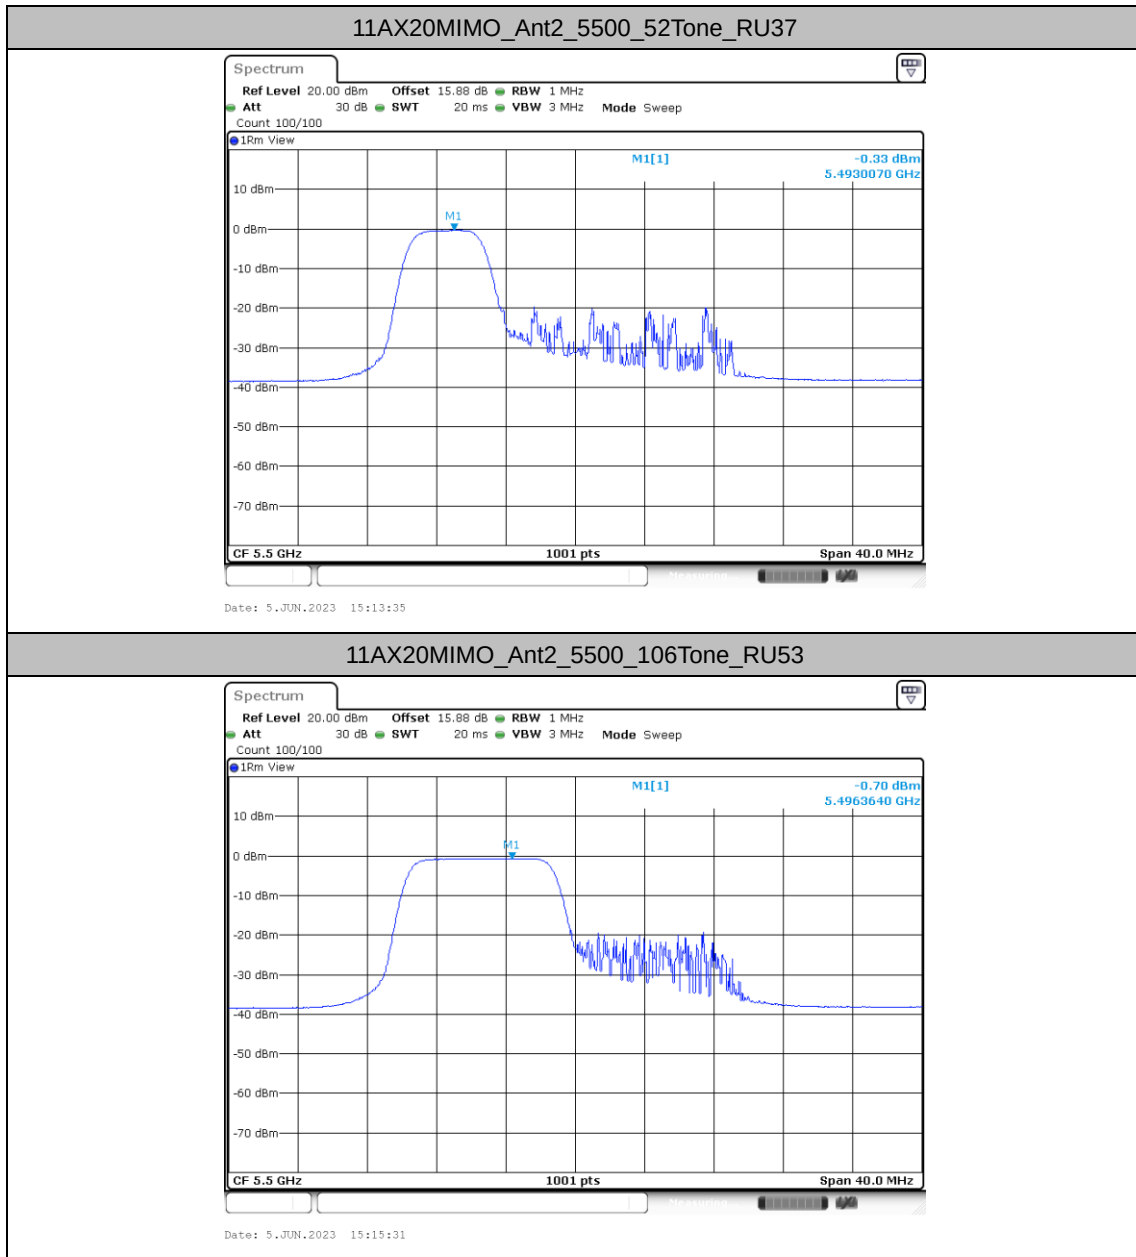


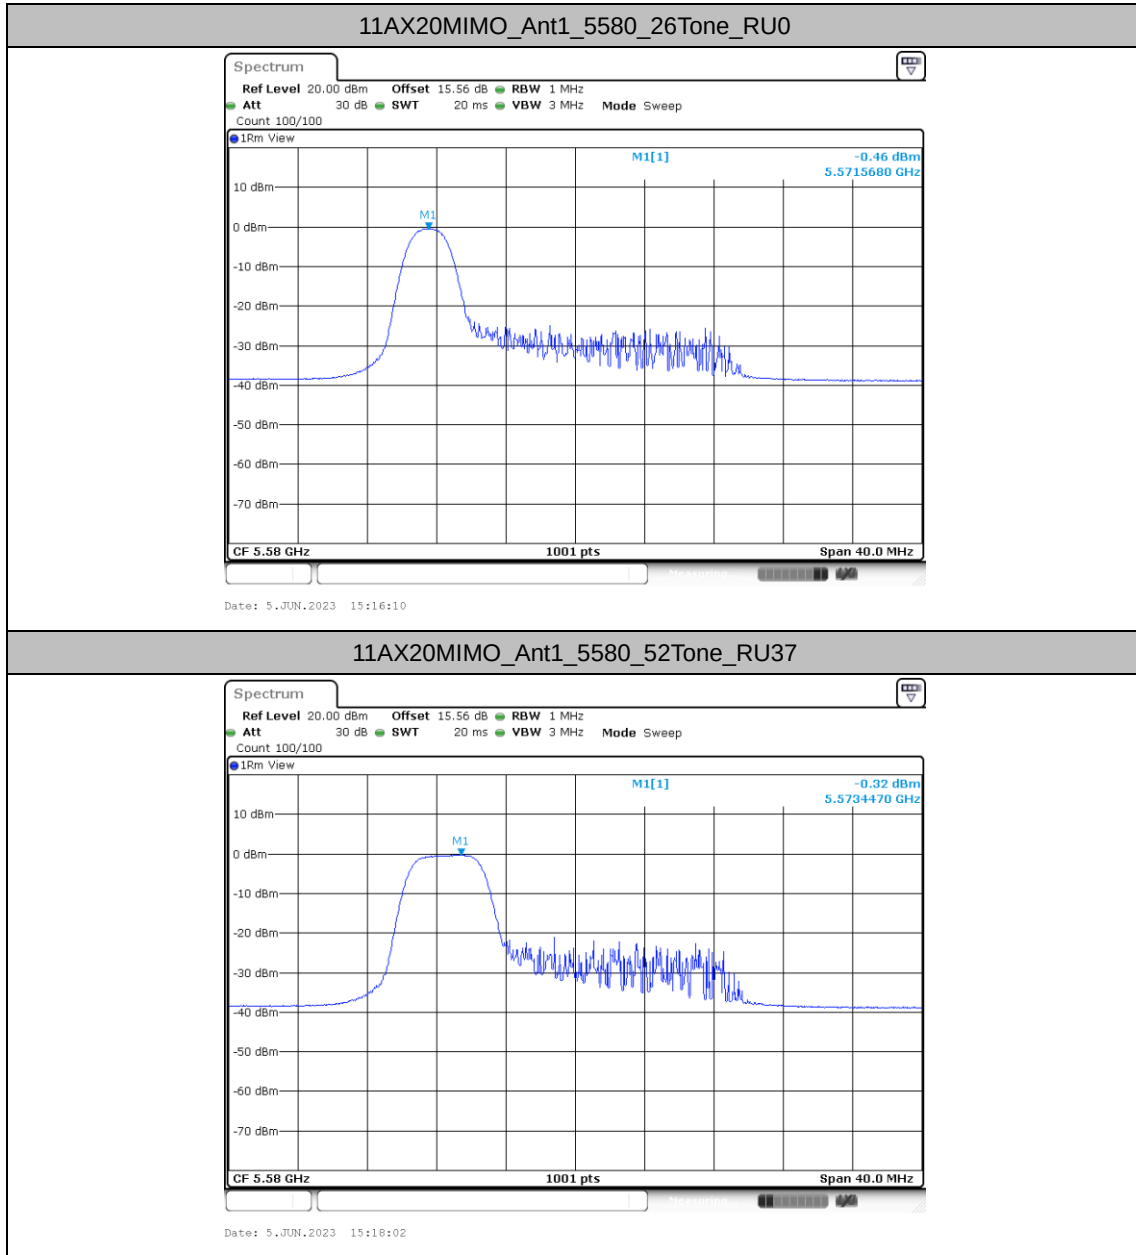


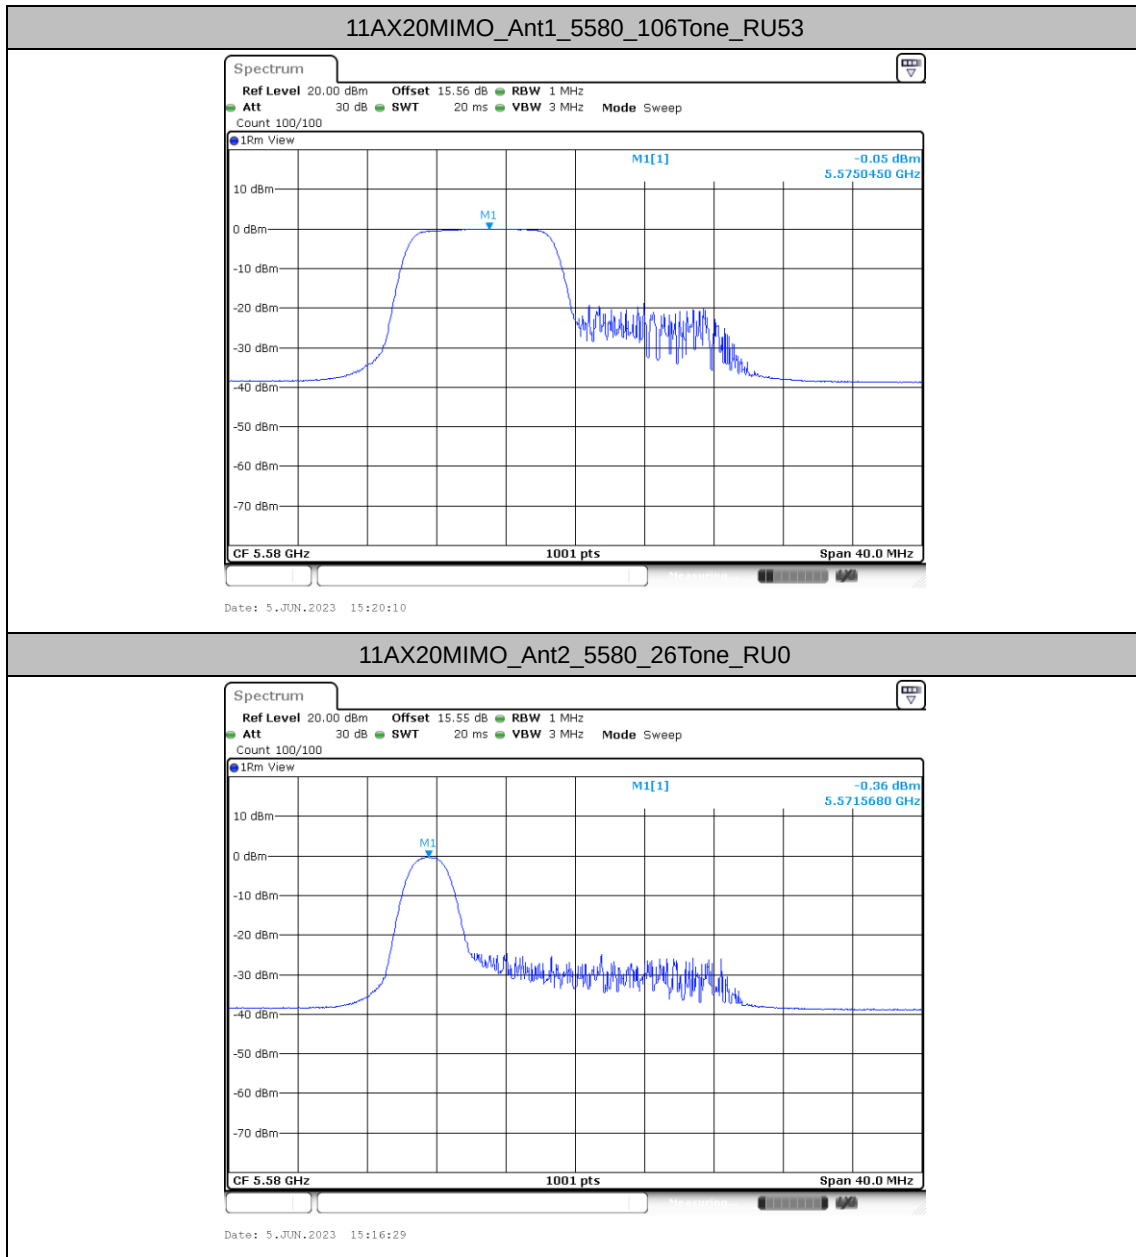


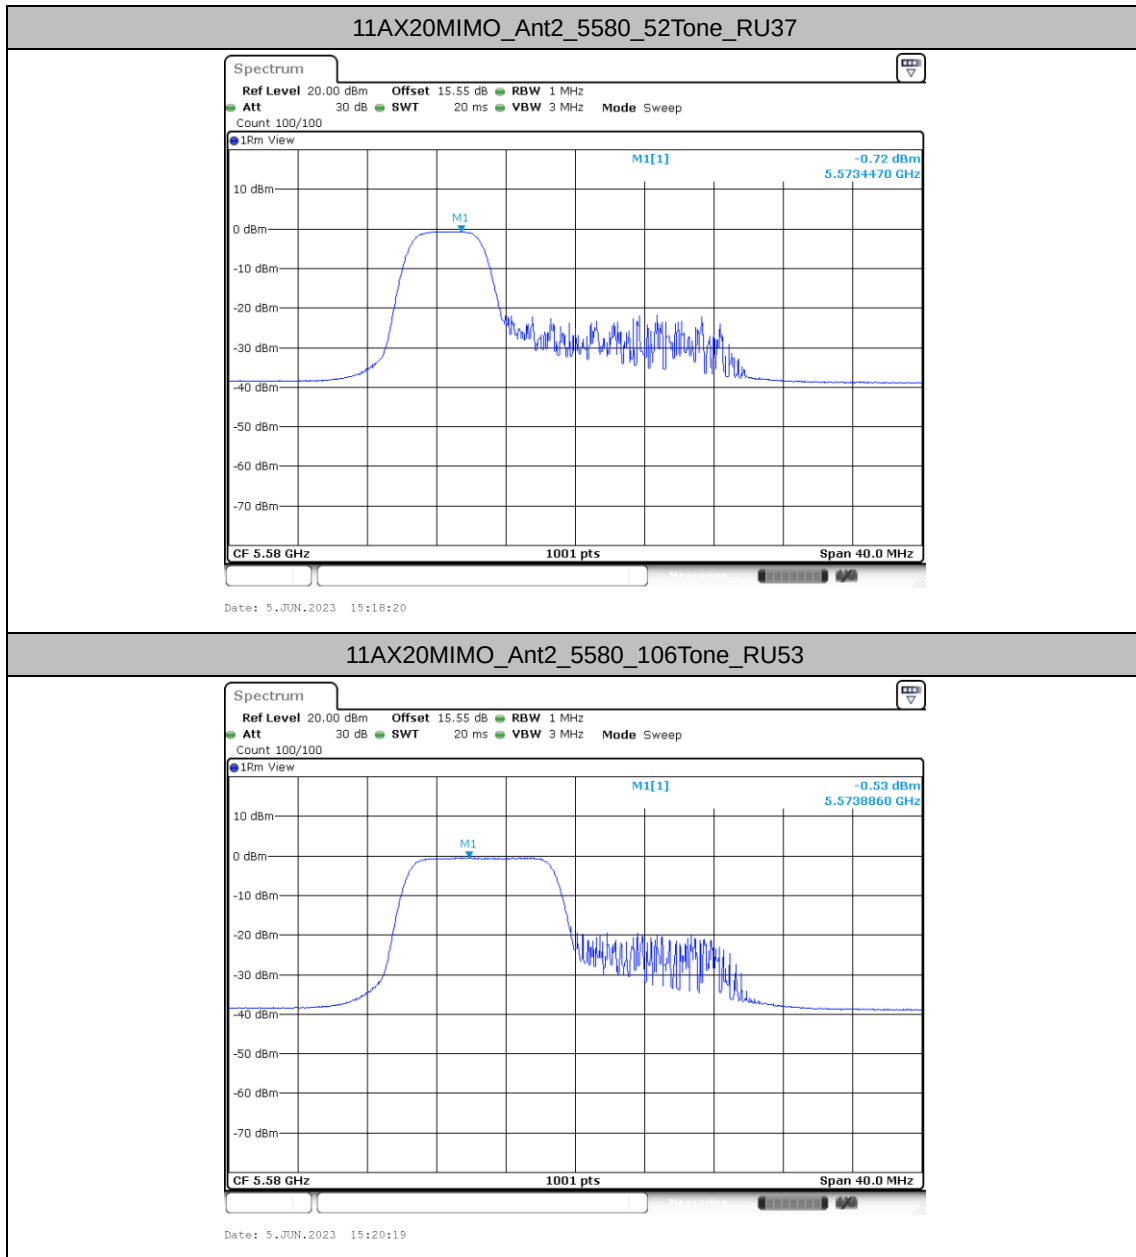


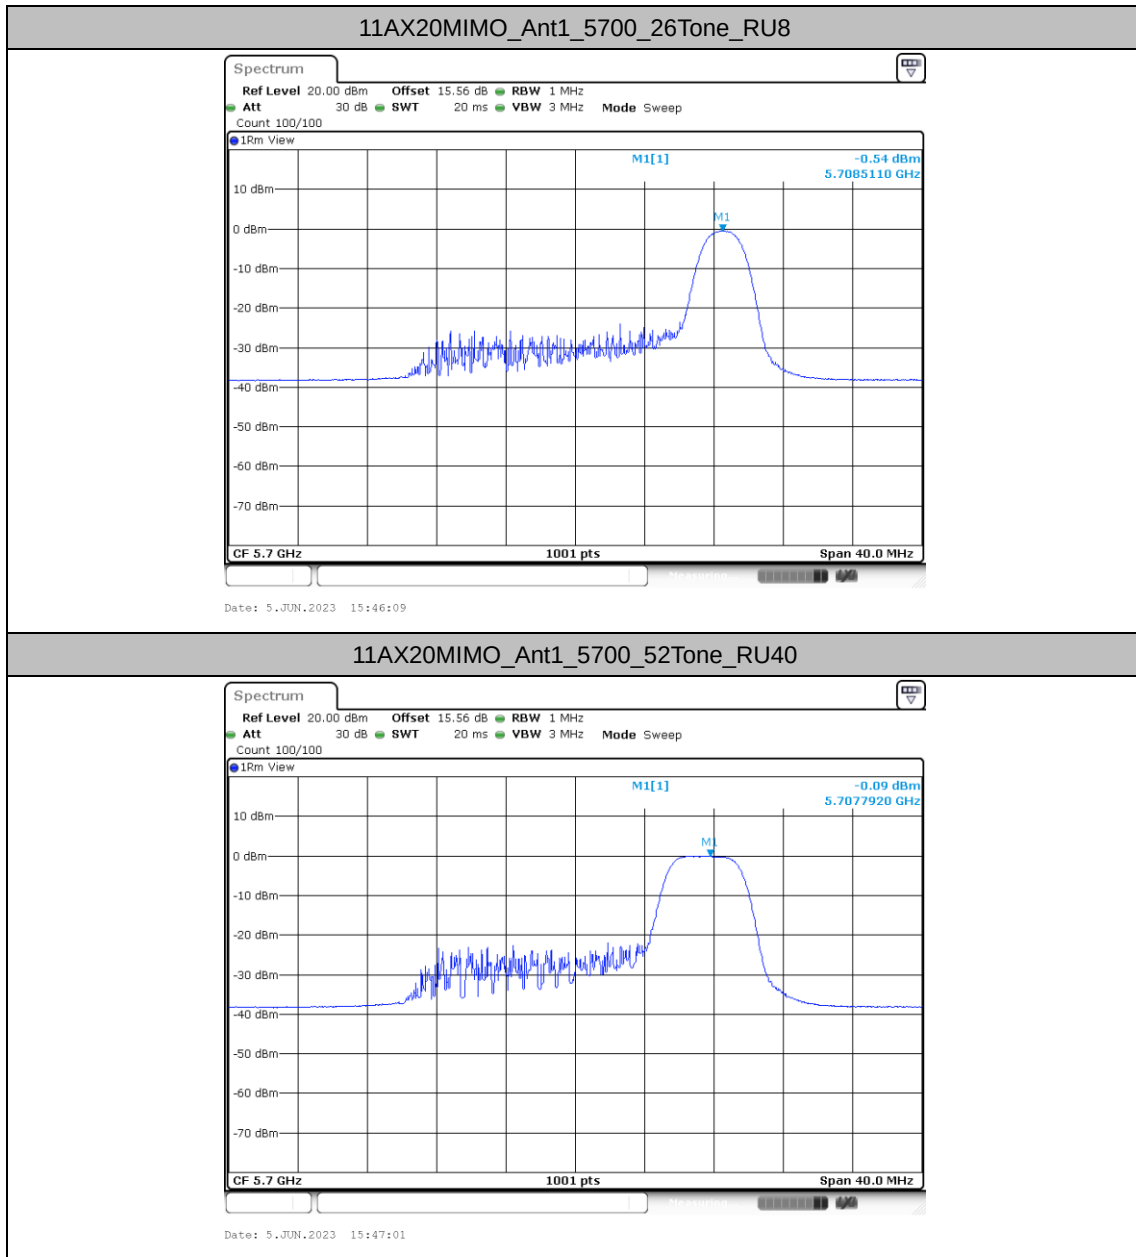


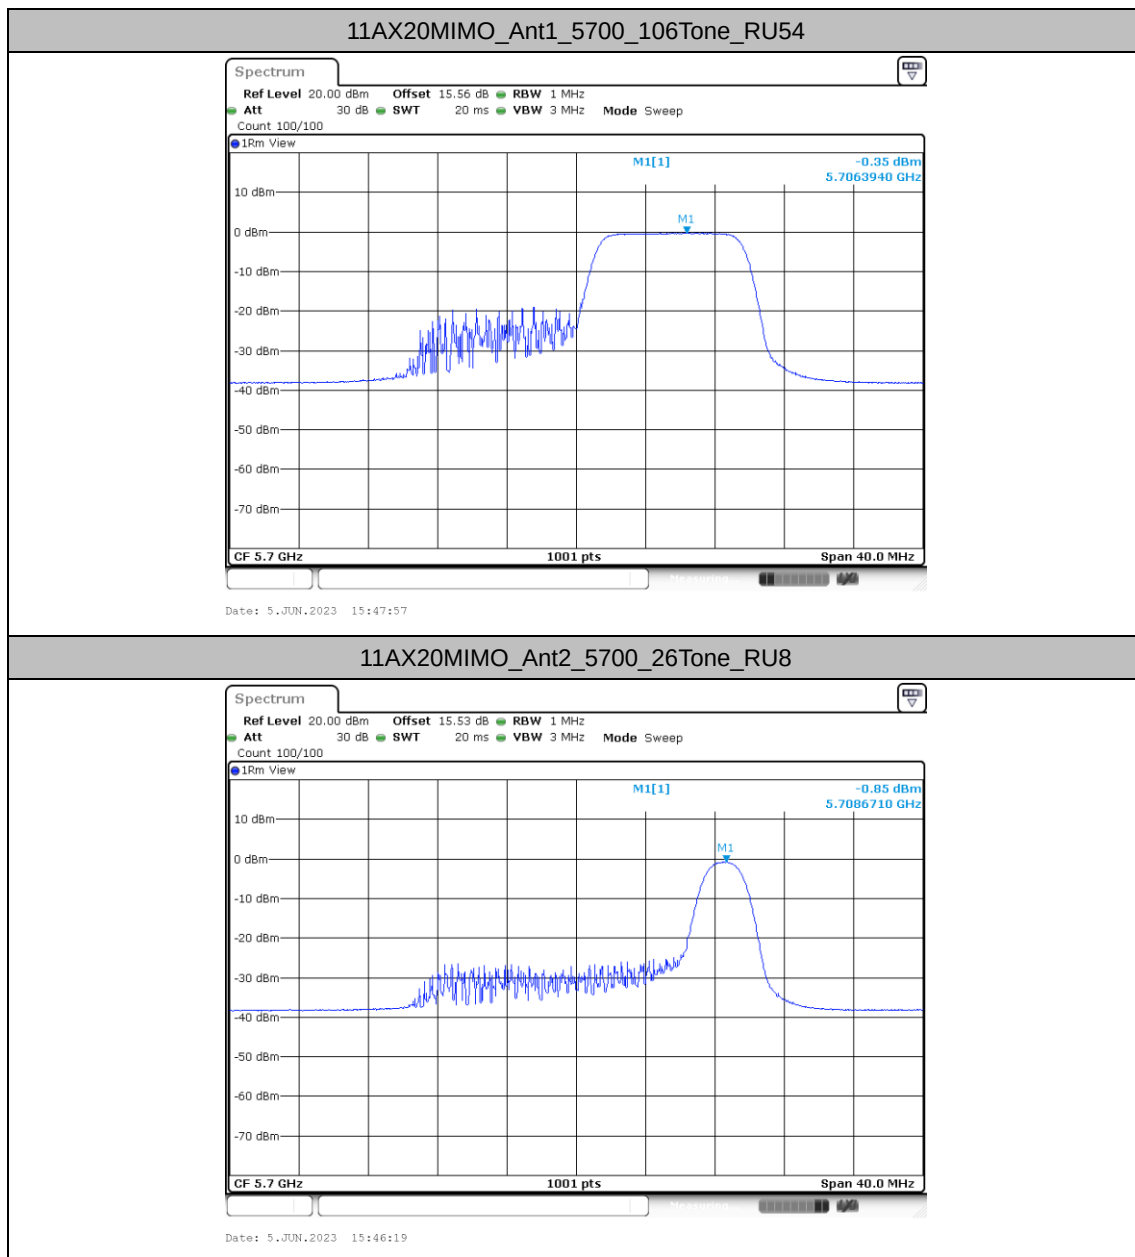


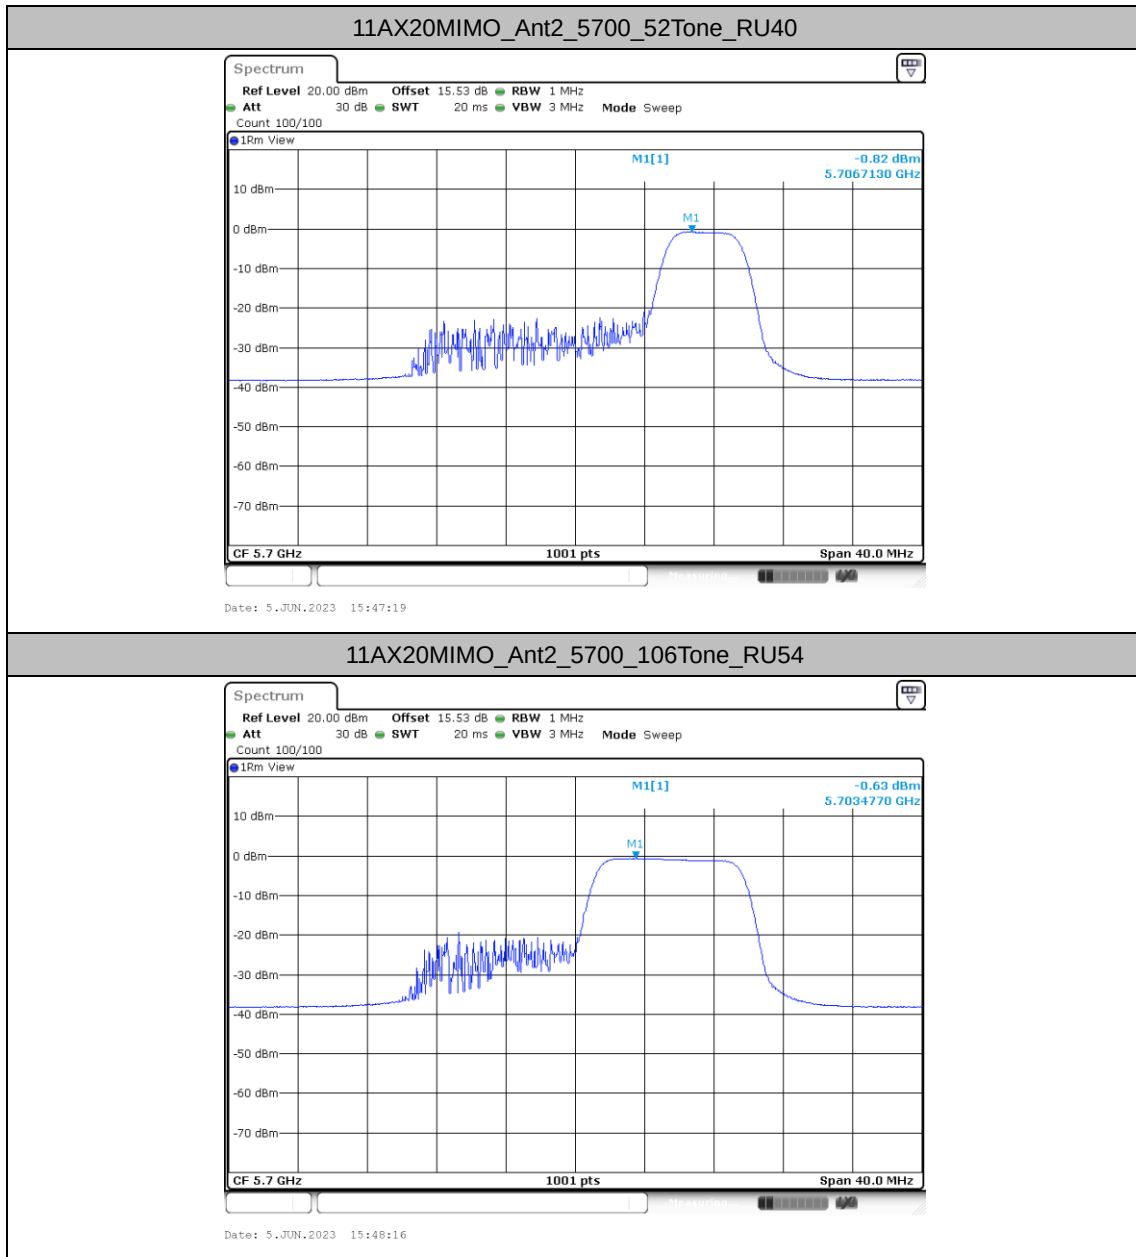


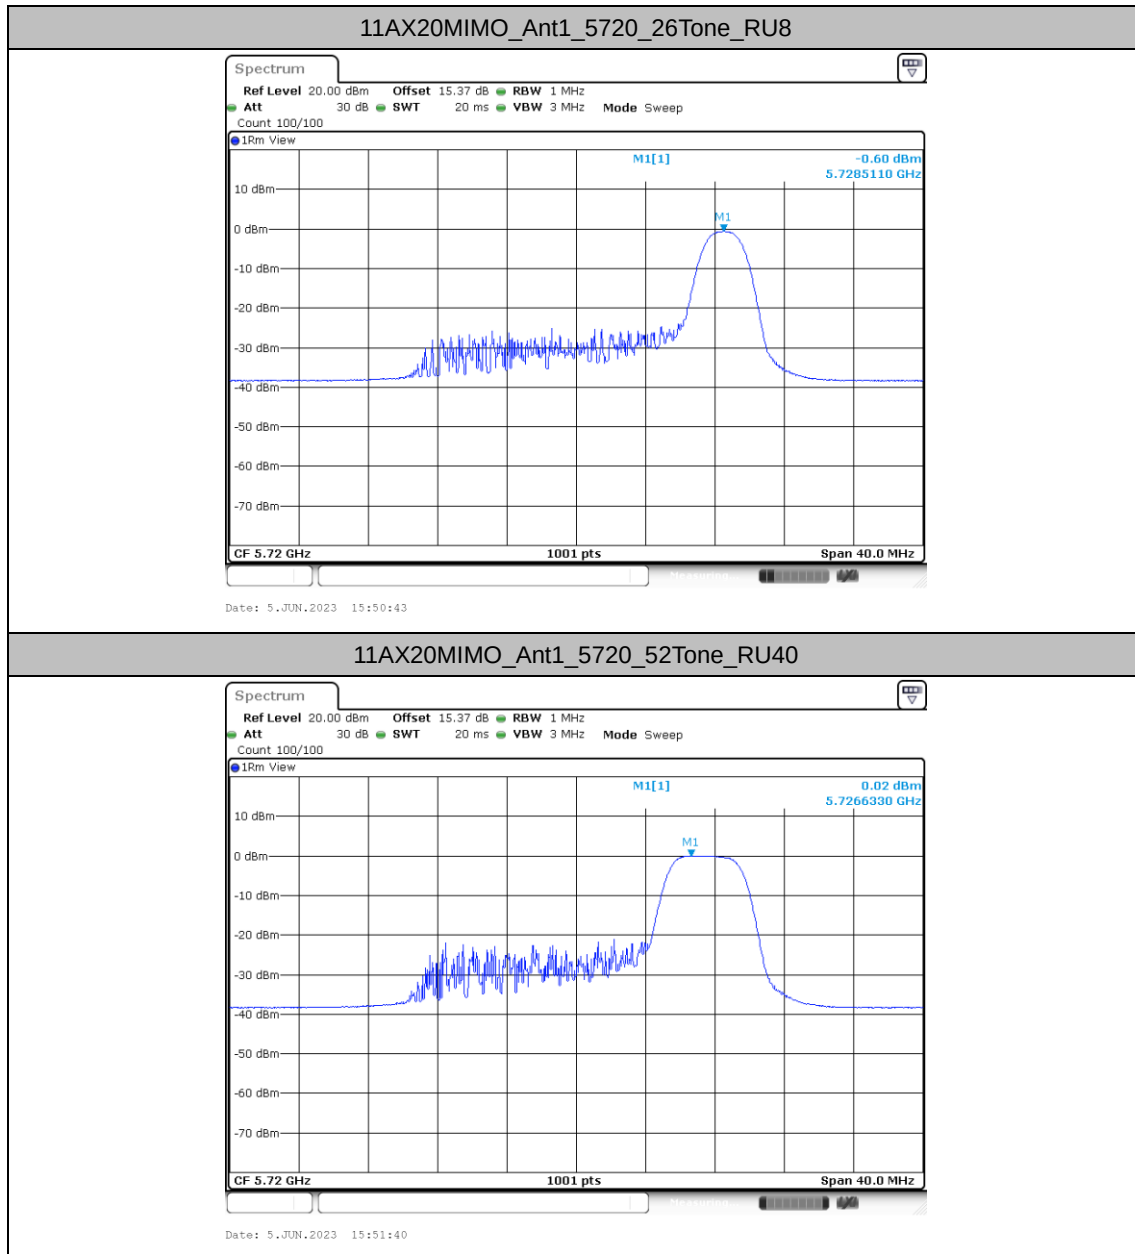


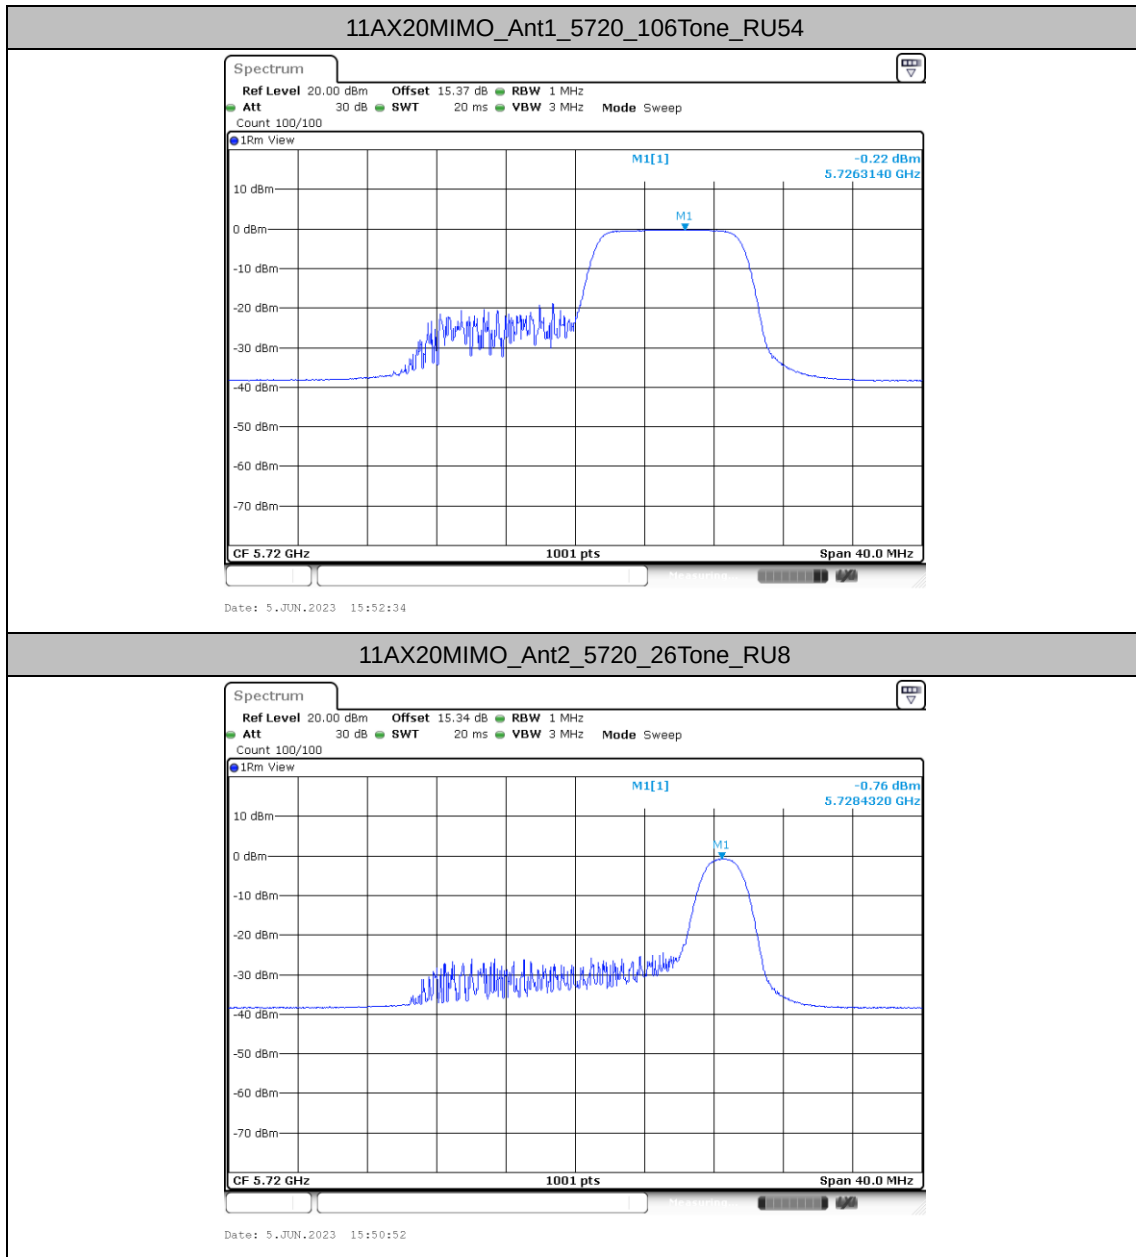


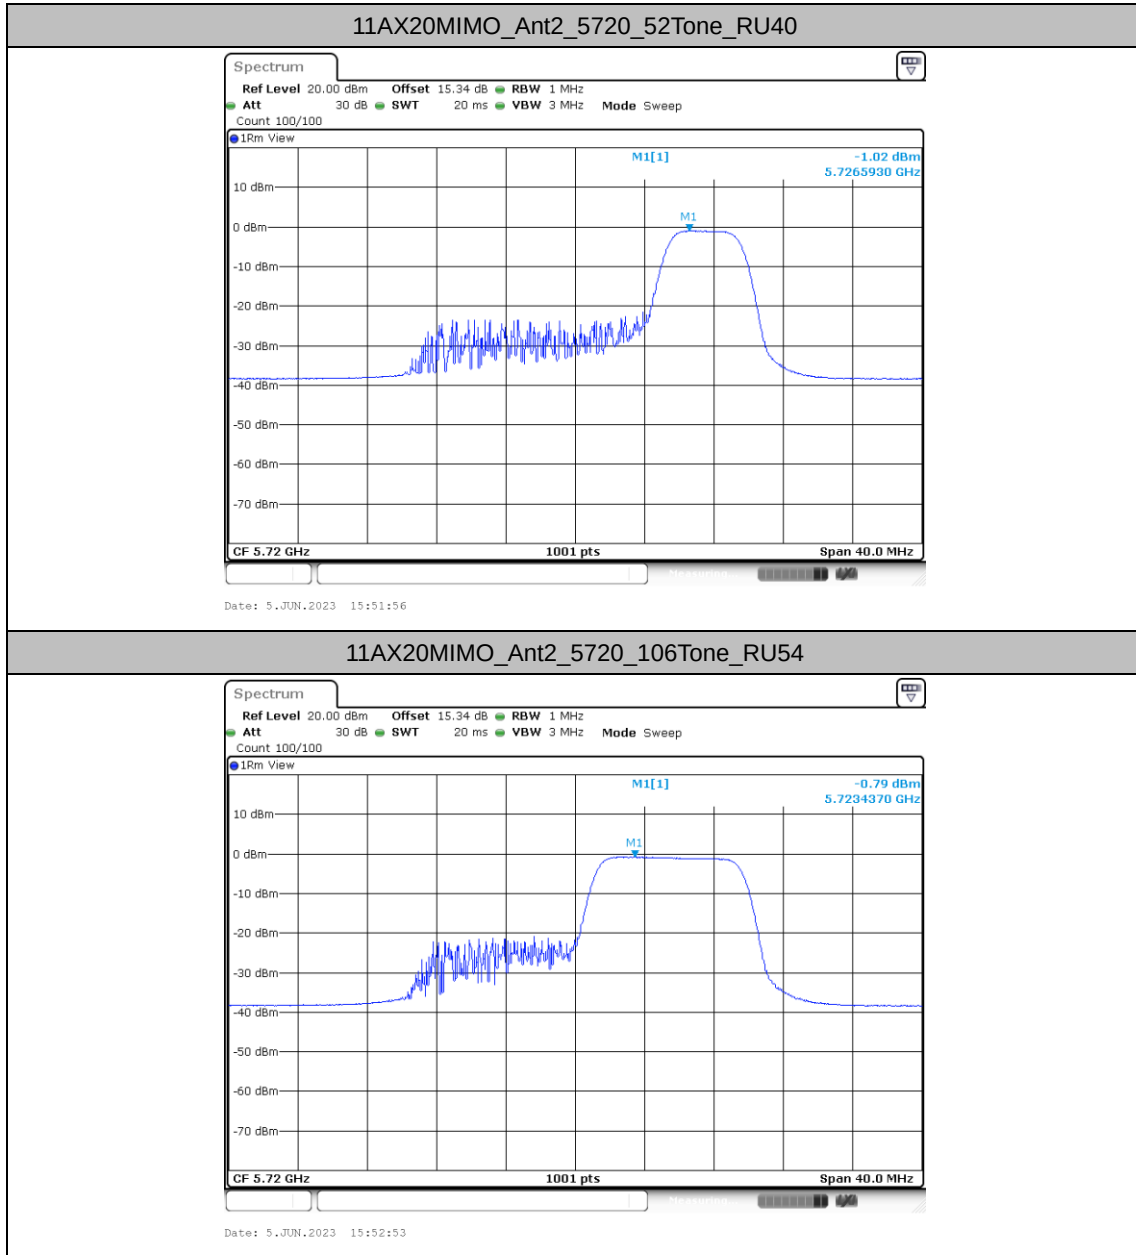


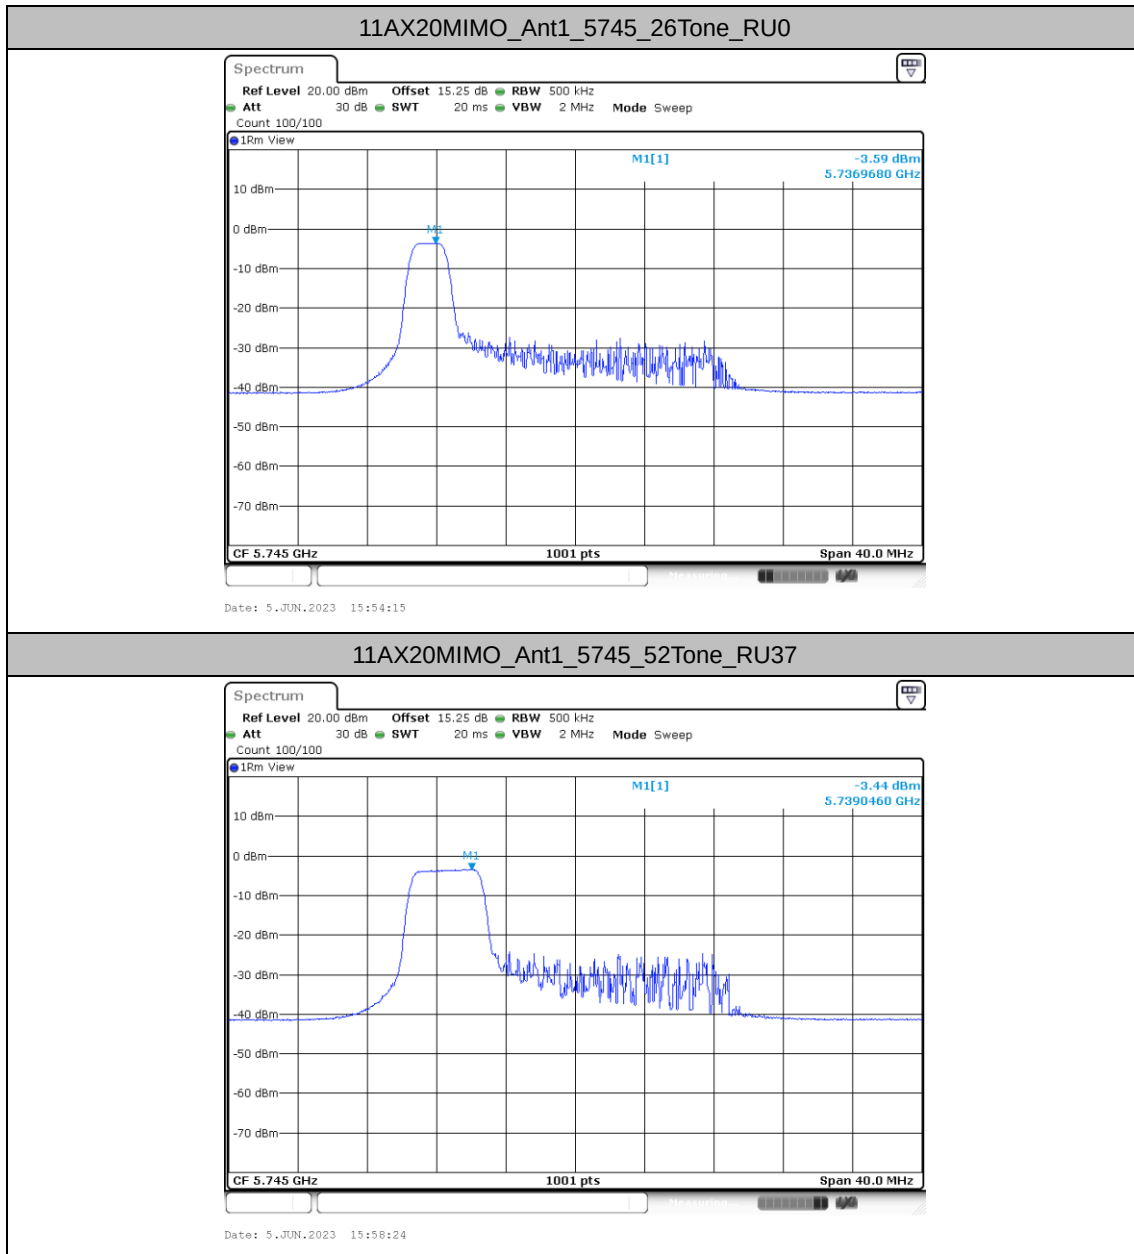


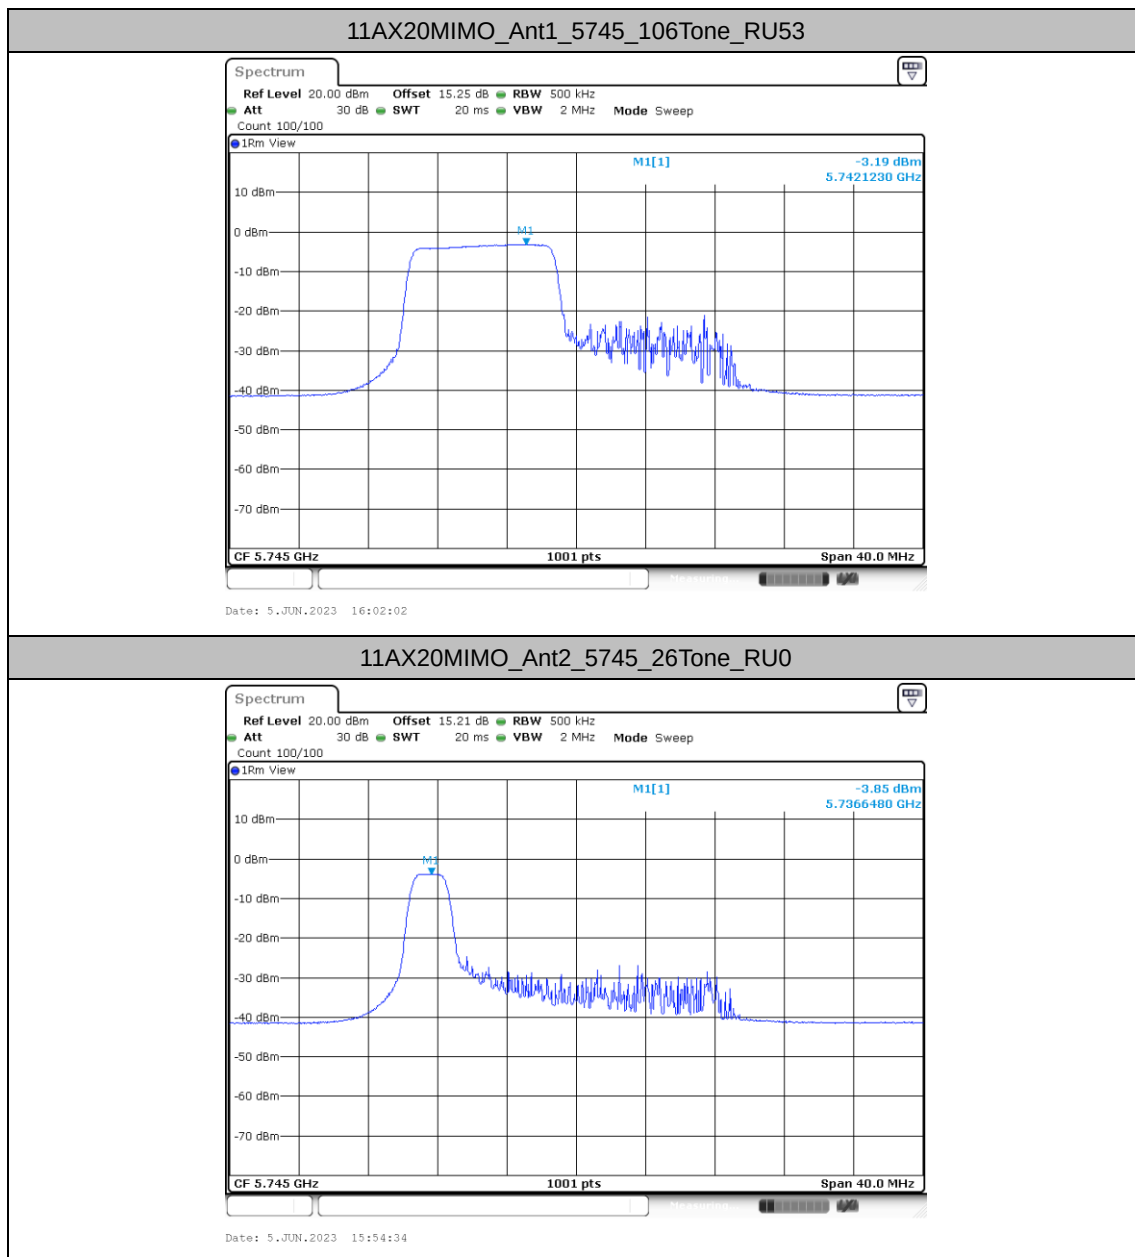


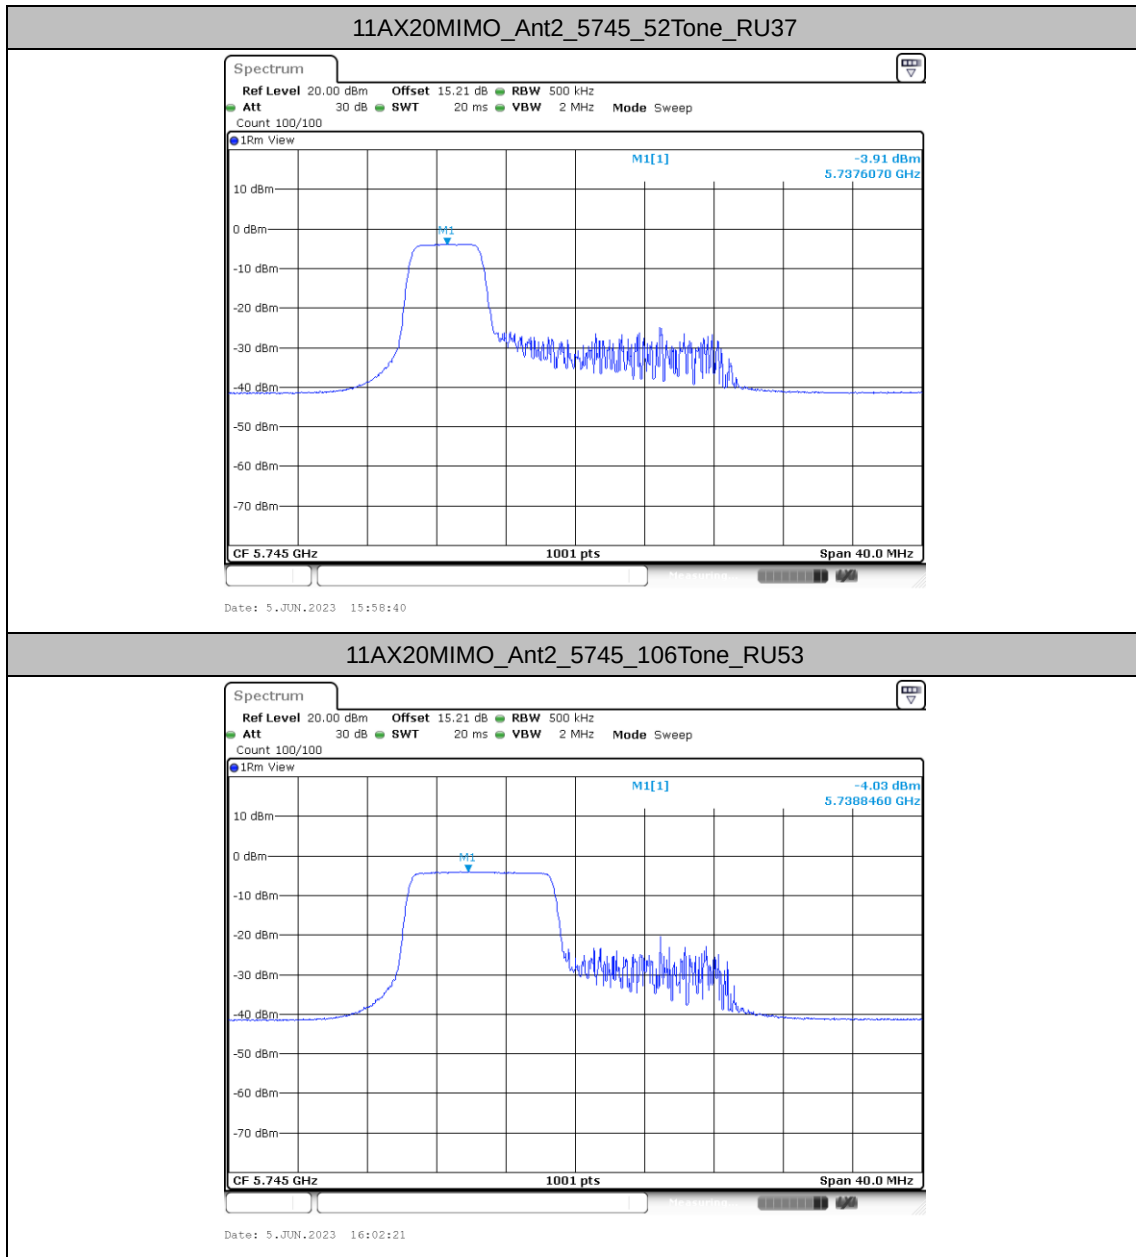


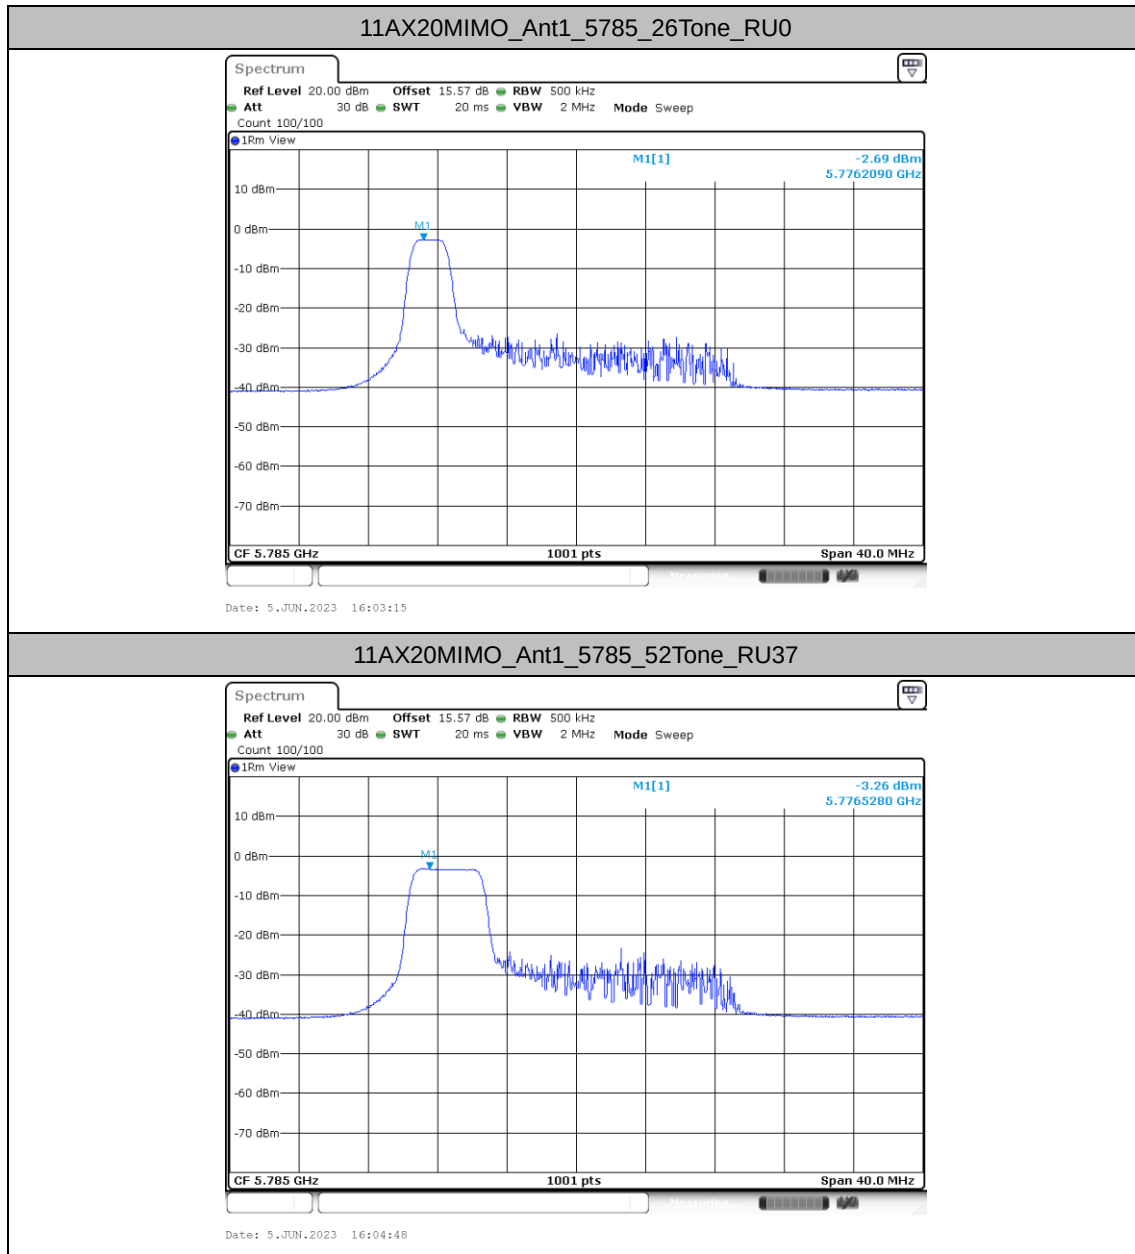


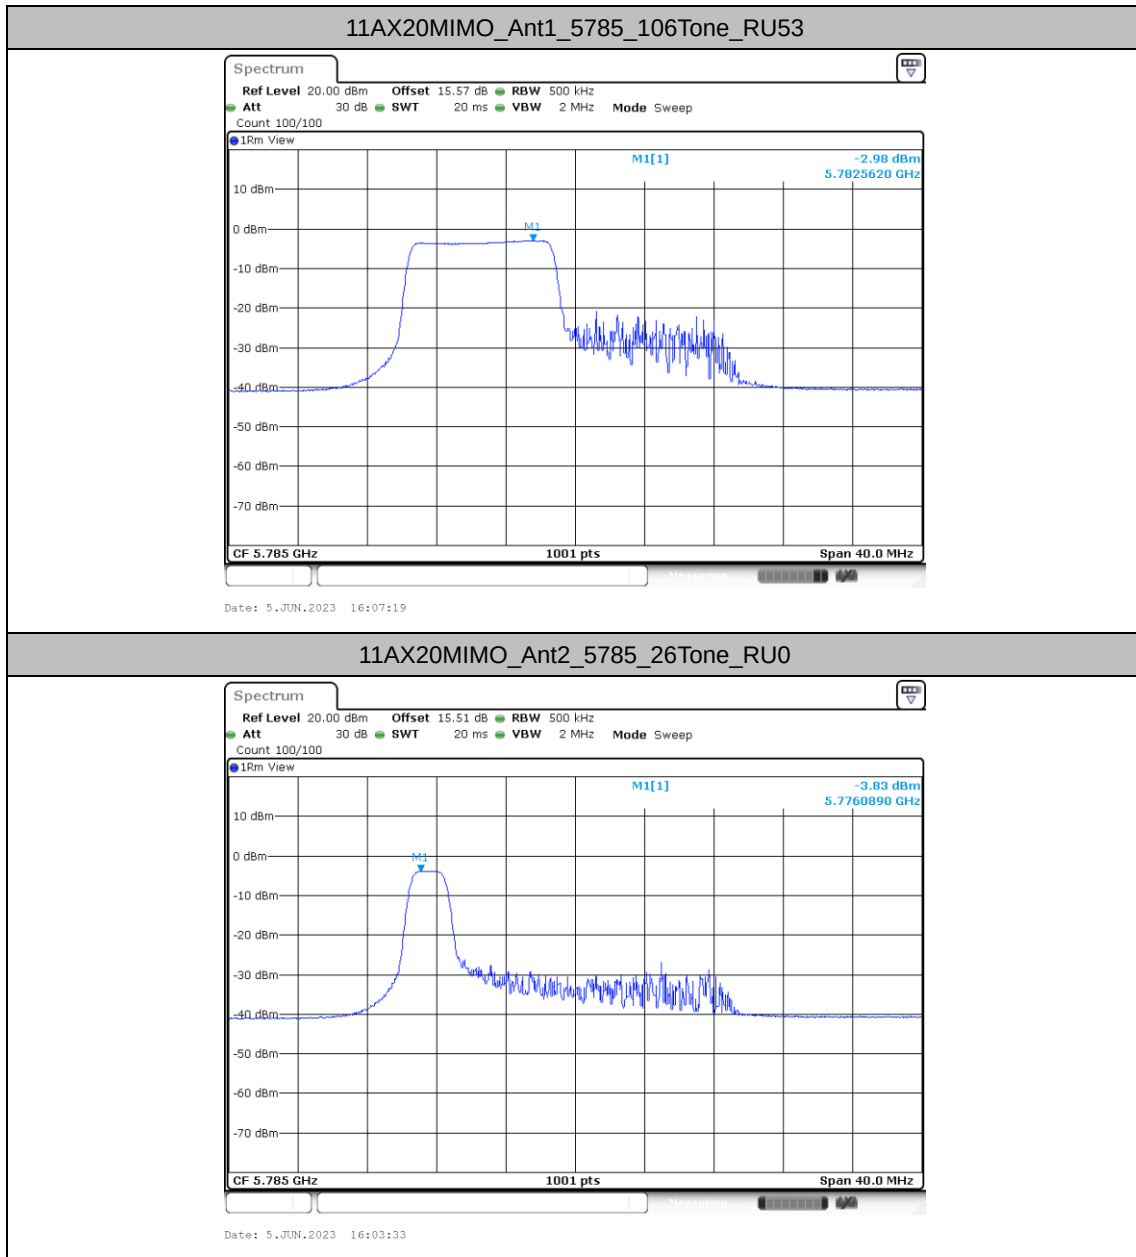

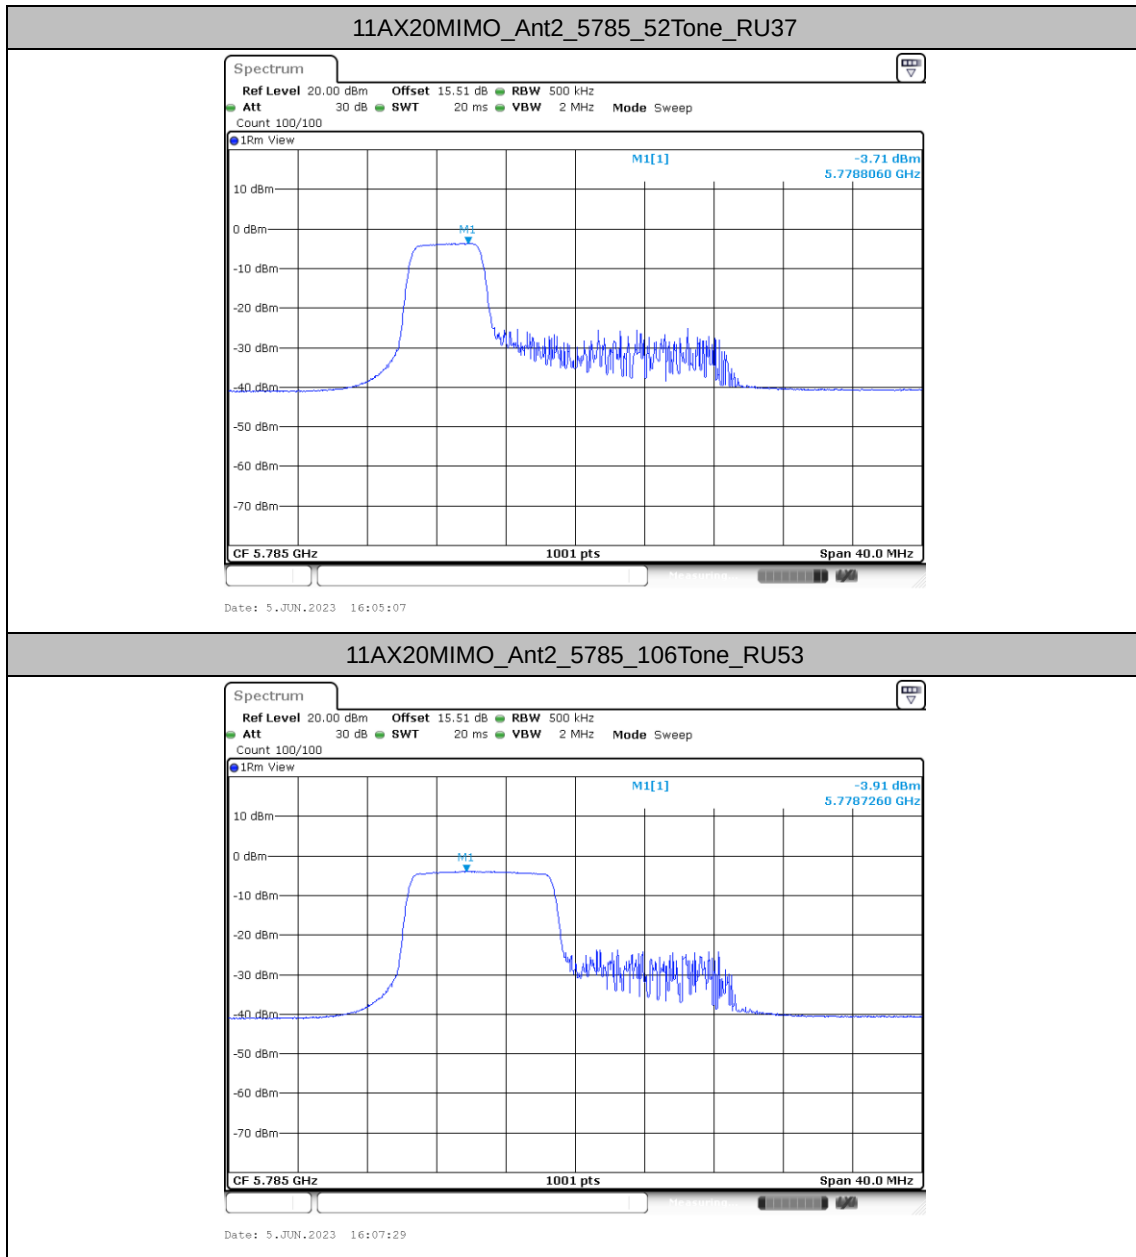

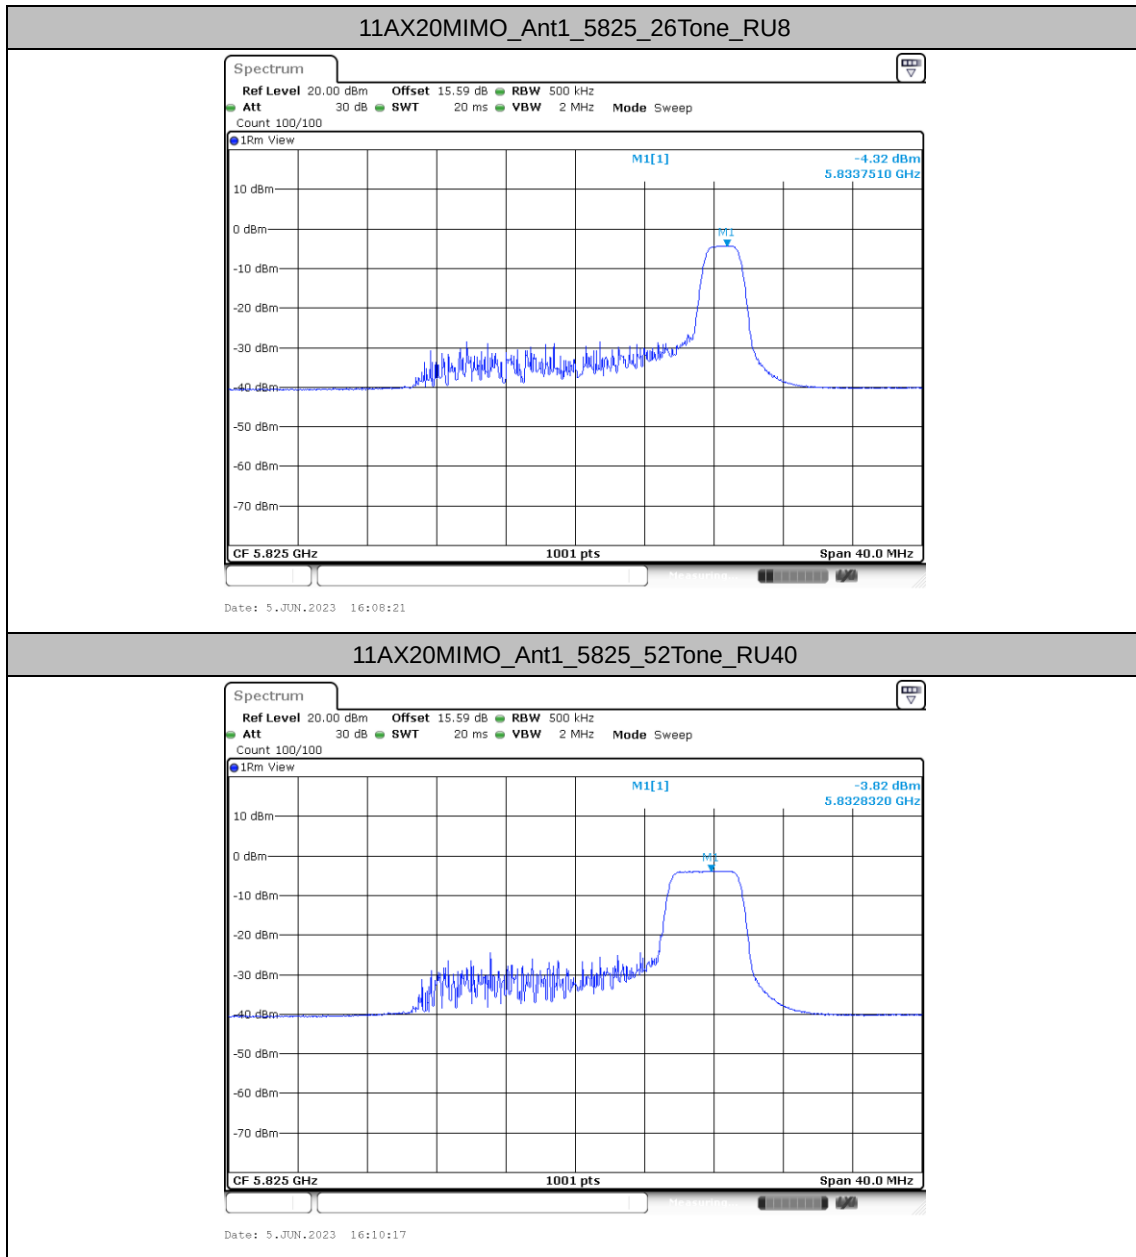


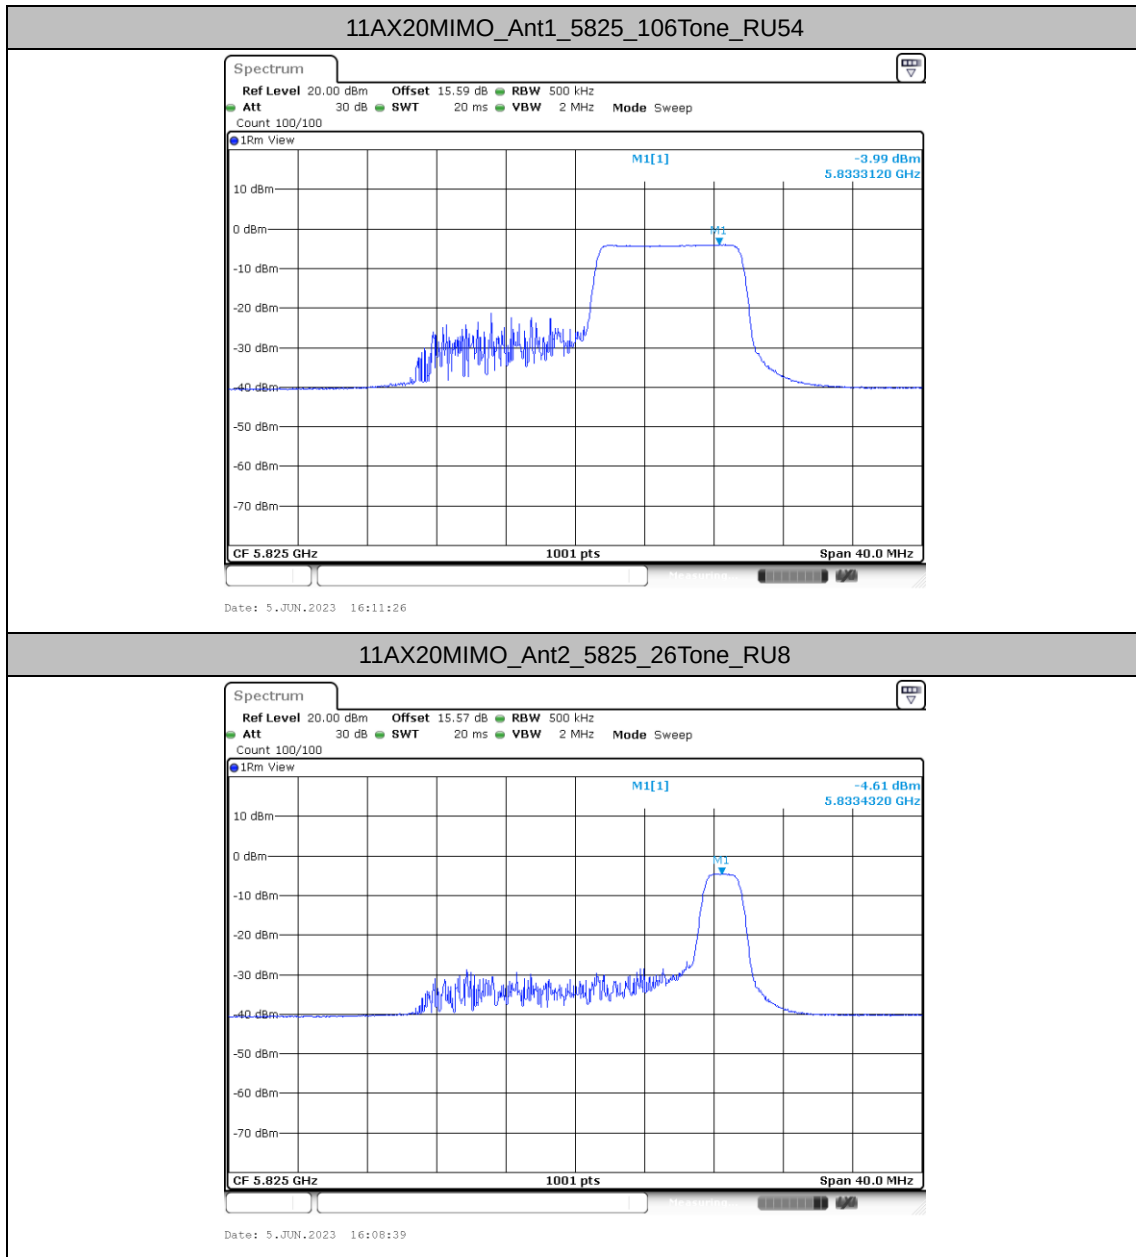

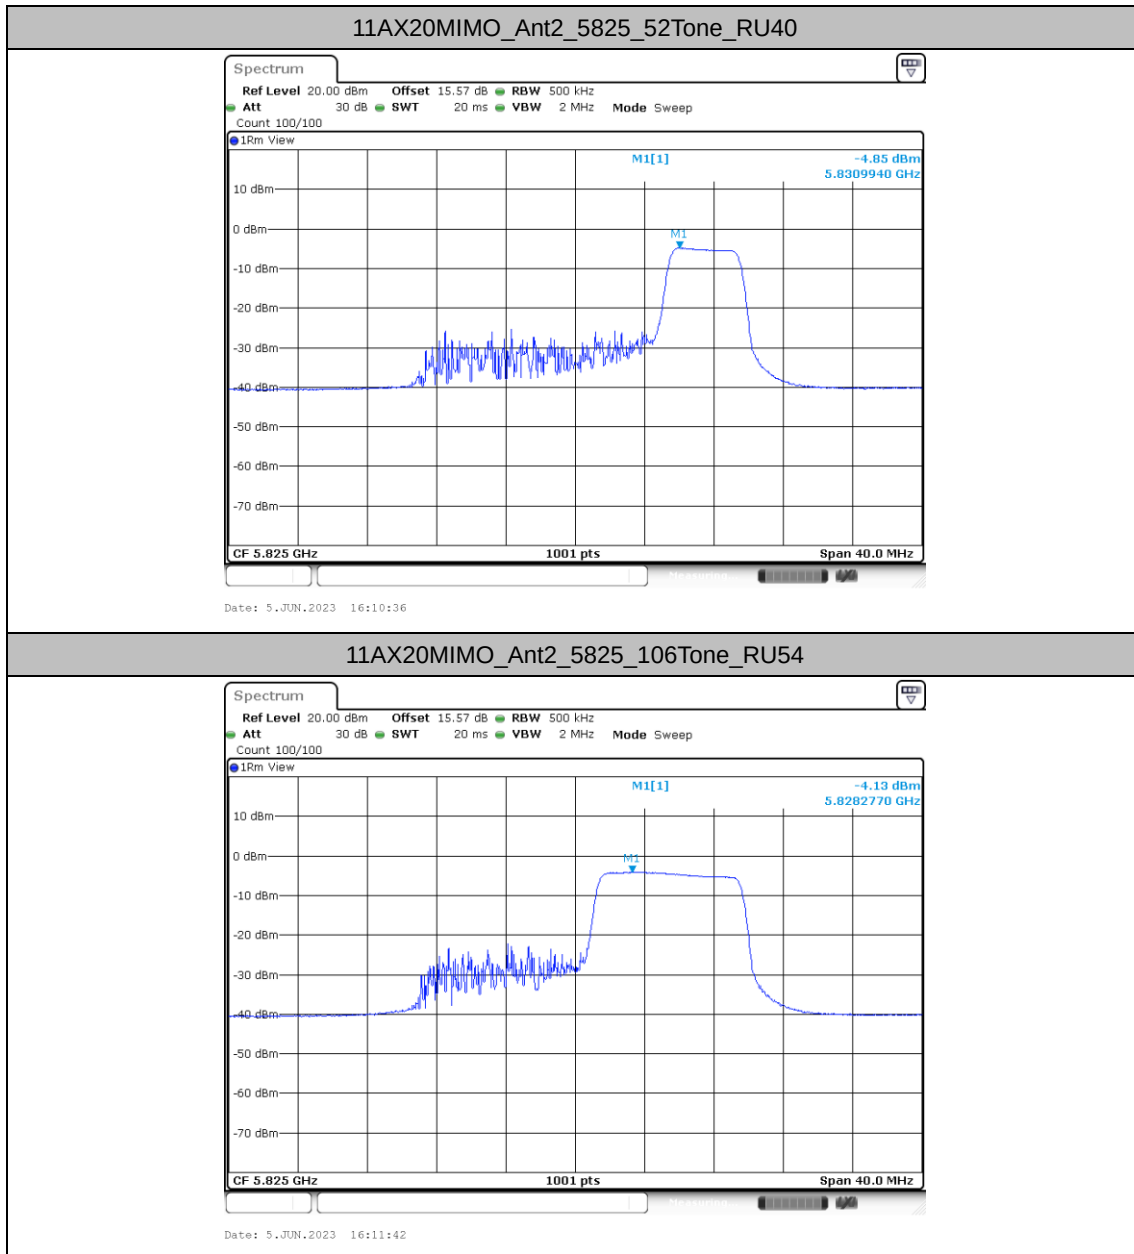




Appendix B. AC Conducted Emission Test Results

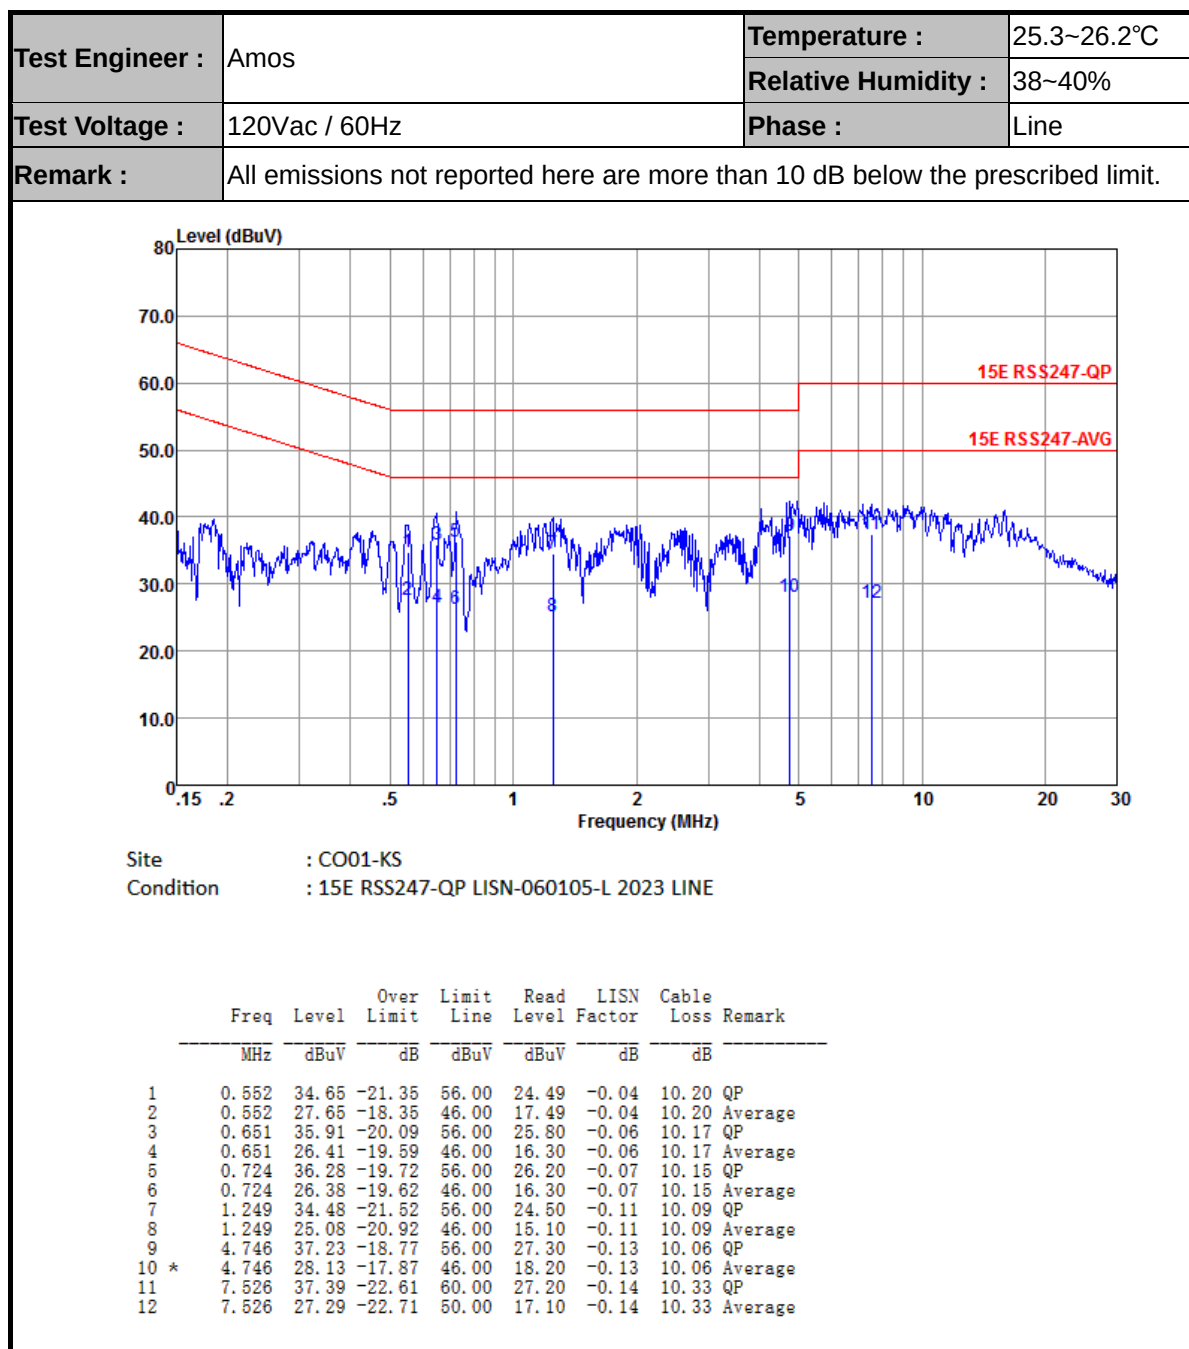

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

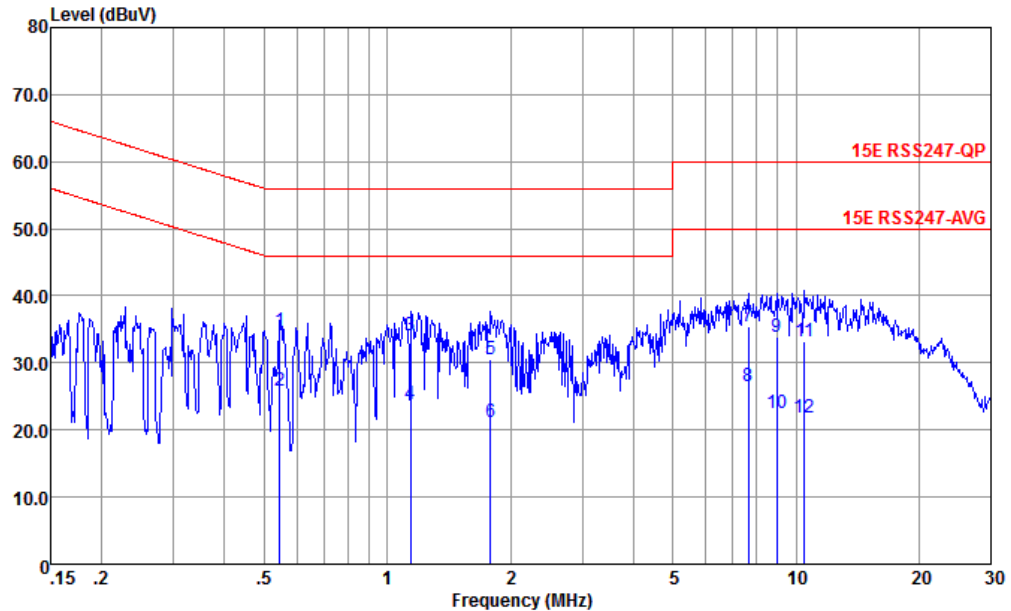

Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.546	34.73	-21.27	56.00	24.60	-0.07	10.20	QP
2 *	0.546	25.93	-20.07	46.00	15.80	-0.07	10.20	Average
3	1.141	34.20	-21.80	56.00	24.20	-0.10	10.10	QP
4	1.141	23.90	-22.10	46.00	13.90	-0.10	10.10	Average
5	1.790	30.55	-25.45	56.00	20.60	-0.12	10.07	QP
6	1.790	21.15	-24.85	46.00	11.20	-0.12	10.07	Average
7	7.646	35.43	-24.57	60.00	25.20	-0.12	10.35	QP
8	7.646	26.43	-23.57	50.00	16.20	-0.12	10.35	Average
9	8.964	33.95	-26.05	60.00	23.60	-0.17	10.52	QP
10	8.964	22.55	-27.45	50.00	12.20	-0.17	10.52	Average
11	10.508	33.15	-26.85	60.00	22.60	-0.19	10.74	QP
12	10.508	21.75	-28.25	50.00	11.20	-0.19	10.74	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Carl Ni	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	CDD 0+1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	CDD 0+1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	CDD 0+1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	CDD 0+1	802.11a	52	5280	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	CDD 0+1	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	CDD 0+1	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	CDD 0+1	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	CDD 0+1	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	CDD 0+1	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	CDD 0+1	802.11n HT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	CDD 0+1	802.11n HT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	CDD 0+1	802.11n HT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	CDD 0+1	802.11n HT20	52	5280	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	CDD 0+1	802.11n HT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	CDD 0+1	802.11n HT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	CDD 0+1	802.11n HT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	CDD 0+1	802.11n HT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	CDD 0+1	802.11n HT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	CDD 0+1	802.11n HT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	CDD 0+1	802.11n HT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	CDD 0+1	802.11n HT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	CDD 0+1	802.11n HT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	CDD 0+1	802.11n HT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	CDD 0+1	802.11n HT40	110	5550	MCS0	-	-
Mode 25	U-NII-2C	5.47-5.725	CDD 0+1	802.11n HT40	134	5670	MCS0	-	-
Mode 26	U-NII-1	5.15-5.25	CDD 0+1	802.11ac VHT80	42	5210	MCS0	-	-
Mode 27	U-NII-2A	5.25-5.35	CDD 0+1	802.11ac VHT80	58	5290	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT80	106	5530	MCS0	-	-
Mode 29	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT80	122	5610	MCS0	-	-
Mode 30	U-NII-2A	5.15-5.35	CDD 0+1	802.11ac VHT160	50	5250	MCS0	-	-
Mode 31	U-NII-2C	5.47-5.725	CDD 0+1	802.11ac VHT160	114	5570	MCS0	-	-
Mode 32	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	36	5180	MCS0	Full	-
Mode 33	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	44	5220	MCS0	Full	-
Mode 34	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	48	5240	MCS0	Full	-
Mode 35	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	52	5280	MCS0	Full	-
Mode 36	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	60	5300	MCS0	Full	-
Mode 37	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	64	5320	MCS0	Full	-



Mode 38	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	100	5500	MCS0	Full	-
Mode 39	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	116	5580	MCS0	Full	-
Mode 40	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	140	5700	MCS0	Full	-
Mode 41	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	36	5180	MCS0	Partial RU26/0	-
Mode 42	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	48	5240	MCS0	Partial RU26/8	-
Mode 43	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	52	5260	MCS0	Partial RU26/0	-
Mode 44	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	64	5320	MCS0	Partial RU26/8	-
Mode 45	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	100	5500	MCS0	Partial RU26/0	-
Mode 46	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	140	5700	MCS0	Partial RU26/8	-
Mode 47	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	36	5180	MCS0	Partial RU52/37	-
Mode 48	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	48	5240	MCS0	Partial RU52/40	-
Mode 49	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	52	5260	MCS0	Partial RU52/37	-
Mode 50	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	64	5320	MCS0	Partial RU52/40	-
Mode 51	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	100	5500	MCS0	Partial RU52/37	-
Mode 52	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	140	5700	MCS0	Partial RU52/40	-
Mode 53	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	36	5180	MCS0	Partial RU106/53	-
Mode 54	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE20	48	5240	MCS0	Partial RU106/54	-
Mode 55	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	52	5260	MCS0	Partial RU106/53	-
Mode 56	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE20	64	5320	MCS0	Partial RU106/54	-
Mode 57	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	100	5500	MCS0	Partial RU106/53	-
Mode 58	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE20	140	5700	MCS0	Partial RU106/54	-
Mode 59	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE40	38	5190	MCS0	Full	-
Mode 60	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE40	46	5230	MCS0	Full	-
Mode 61	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE40	54	5270	MCS0	Full	-
Mode 62	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE40	62	5310	MCS0	Full	-
Mode 63	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE40	102	5510	MCS0	Full	-
Mode 64	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE40	110	5550	MCS0	Full	-
Mode 65	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE40	134	5670	MCS0	Full	-
Mode 66	U-NII-1	5.15-5.25	CDD 0+1	802.11ax HE80	42	5210	MCS0	Full	-
Mode 67	U-NII-2A	5.25-5.35	CDD 0+1	802.11ax HE80	58	5290	MCS0	Full	-
Mode 68	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE80	106	5530	MCS0	Full	-
Mode 69	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE80	122	5610	MCS0	Full	-
Mode 70	U-NII-2A	5.15-5.35	CDD 0+1	802.11ax HE160	50	5250	MCS0	Full	-
Mode 71	U-NII-2C	5.47-5.725	CDD 0+1	802.11ax HE160	114	5570	MCS0	Full	-
Mode 72	U-NII-3	5.725-5.85	CDD 0+1	802.11a	149	5745	6Mbps	-	-
Mode 73	U-NII-3	5.725-5.85	CDD 0+1	802.11a	157	5785	6Mbps	-	-
Mode 74	U-NII-3	5.725-5.85	CDD 0+1	802.11a	165	5825	6Mbps	-	-
Mode 75	U-NII-3	5.725-5.85	CDD 0+1	802.11n HT20	149	5745	MCS0	-	-
Mode 76	U-NII-3	5.725-5.85	CDD 0+1	802.11n HT20	157	5785	MCS0	-	-
Mode 77	U-NII-3	5.725-5.85	CDD 0+1	802.11n HT20	165	5825	MCS0	-	-
Mode 78	U-NII-3	5.725-5.85	CDD 0+1	802.11n HT40	151	5755	MCS0	-	-



Mode 79	U-NII-3	5.725-5.85	CDD 0+1	802.11n HT40	159	5795	MCS0	-	-
Mode 80	U-NII-3	5.725-5.85	CDD 0+1	802.11ac VHT80	155	5775	MCS0	-	-
Mode 81	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	149	5745	MCS0	Full	-
Mode 82	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	157	5785	MCS0	Full	-
Mode 83	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	165	5825	MCS0	Full	-
Mode 84	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE40	151	5755	MCS0	Full	-
Mode 85	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE40	159	5795	MCS0	Full	-
Mode 86	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE80	155	5775	MCS0	Full	-
Mode 87	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	149	5745	MCS0	Partial RU26/0	-
Mode 88	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	165	5825	MCS0	Partial RU26/8	-
Mode 89	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	149	5745	MCS0	Partial RU52/37	-
Mode 90	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	165	5825	MCS0	Partial RU52/40	-
Mode 91	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	149	5745	MCS0	Partial RU106/53	-
Mode 92	U-NII-3	5.725-5.85	CDD 0+1	802.11ax HE20	165	5825	MCS0	Partial RU106/54	-
Mode 93	Straddle channels	5.47-5.85	CDD 0+1	802.11a	144	5720	6Mbps	-	-
Mode 94	Straddle channels	5.47-5.85	CDD 0+1	802.11n HT20	144	5720	MCS0	-	-
Mode 95	Straddle channels	5.47-5.85	CDD 0+1	802.11n HT40	142	5710	MCS0	-	-
Mode 96	Straddle channels	5.47-5.85	CDD 0+1	802.11ax HE20	144	5720	MCS0	Full	-
Mode 97	Straddle channels	5.47-5.85	CDD 0+1	802.11ax HE40	142	5710	MCS0	Full	-
Mode 98	Straddle channels	5.47-5.85	CDD 0+1	802.11ax HE80	138	5690	MCS0	Full	-
Mode 101	U-NII-1	5.15-5.25	CDD 0+1	802.11n HT40	38	5190	MCS0	LF	
Mode 102	U-NII-3	5.725-5.85	CDD 0+1	802.11n HT20	165	5825	MCS0	LF	



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5044.64	40.19	54.00	-13.81	V	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	47.03	68.30	-21.27	V	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	46.67	68.30	-21.63	H	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	47.39	68.30	-20.91	H	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520	47.06	68.3	-21.24	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	47.77	74.00	-26.23	H	Peak	Pass	Harmonic
6	802.11a	64	5350.38	39.37	54.00	-14.63	H	AVERAGE	Pass	Band Edge
6	802.11a	64	15960.00	47.36	74.00	-26.64	H	Peak	Pass	Harmonic
7	802.11a	100	5410.30	38.88	54.00	-15.12	V	AVERAGE	Pass	Band Edge
7	802.11a	100	16500.00	48.19	68.30	-20.11	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	46.00	68.30	-22.30	H	Peak	Pass	Harmonic
9	802.11a	140	5754.02	49.65	68.30	-18.65	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	47.46	68.30	-20.84	V	Peak	Pass	Harmonic
10	802.11n HT20	36	5048.96	40.30	54.00	-13.70	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	46.92	68.30	-21.38	V	Peak	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	44	10440.00	46.89	68.30	-21.41	V	Peak	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	48	10480.00	47.00	68.30	-21.30	H	Peak	Pass	Harmonic
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	52	10520	46.63	68.3	-21.67	V	Peak	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	60	15900.00	49.53	74.00	-24.47	H	Peak	Pass	Harmonic
15	802.11n HT20	64	5350.94	39.57	54.00	-14.43	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	15960.00	48.46	74.00	-25.54	V	Peak	Pass	Harmonic
16	802.11n HT20	100	5435.95	38.84	54.00	-15.16	V	AVERAGE	Pass	Band Edge
16	802.11n HT20	100	16500.00	48.17	68.30	-20.13	V	Peak	Pass	Harmonic
17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	116	16740.00	46.91	68.30	-21.39	V	Peak	Pass	Harmonic
18	802.11n HT20	140	5744.07	50.18	68.30	-18.12	H	PEAK	Pass	Band Edge
18	802.11n HT20	140	17100.00	47.76	68.30	-20.54	V	Peak	Pass	Harmonic
19	802.11n HT40	38	5147.63	43.97	54.00	-10.03	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	10380.00	46.84	68.30	-21.46	V	Peak	Pass	Harmonic
20	802.11n HT40	46	-	-	-	-	-	-	-	Band Edge
20	802.11n HT40	46	10460.00	46.99	68.30	-21.31	H	Peak	Pass	Harmonic
21	802.11n HT40	54	-	-	-	-	-	-	-	Band Edge
21	802.11n HT40	54	10540.00	46.21	68.30	-22.09	H	Peak	Pass	Harmonic



22	802.11n HT40	62	5355.15	41.45	54.00	-12.55	H	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	15930.00	47.42	74.00	-26.58	H	Peak	Pass	Harmonic
23	802.11n HT40	102	5459.44	39.60	54.00	-14.40	V	AVERAGE	Pass	Band Edge
23	802.11n HT40	102	16530.00	47.26	68.30	-21.04	V	Peak	Pass	Harmonic
24	802.11n HT40	110	-	-	-	-	-	-	-	Band Edge
24	802.11n HT40	110	16650.00	47.36	68.30	-20.94	V	Peak	Pass	Harmonic
25	802.11n HT40	134	5350.32	38.58	54.00	-15.42	V	AVERAGE	Pass	Band Edge
25	802.11n HT40	134	17010.00	46.23	68.30	-22.07	H	Peak	Pass	Harmonic
26	802.11ac VHT80	42	5145.74	43.77	54.00	-10.23	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	42	10420.00	47.15	68.30	-21.15	H	Peak	Pass	Harmonic
27	802.11ac VHT80	58	5350.01	42.09	54.00	-11.91	V	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	58	10580.00	47.51	68.30	-20.79	H	Peak	Pass	Harmonic
28	802.11ac VHT80	106	5459.80	40.17	54.00	-13.83	V	AVERAGE	Pass	Band Edge
28	802.11ac VHT80	106	16590.00	46.95	68.30	-21.35	H	Peak	Pass	Harmonic
29	802.11ac VHT80	122	5423.58	38.68	54.00	-15.32	H	AVERAGE	Pass	Band Edge
29	802.11ac VHT80	122	16830.00	45.34	68.30	-22.96	H	Peak	Pass	Harmonic
30	802.11ac VHT160	50	5145.00	43.95	54.00	-10.05	H	AVERAGE	Pass	Band Edge
30	802.11ac VHT160	50	10500.00	46.98	68.30	-21.32	H	Peak	Pass	Harmonic
31	802.11ac VHT160	114	5433.16	42.56	54.00	-11.44	H	AVERAGE	Pass	Band Edge
31	802.11ac VHT160	114	16710.00	47.06	68.30	-21.24	H	Peak	Pass	Harmonic
32	802.11ax HE20	36	5049.86	40.07	54.00	-13.93	V	AVERAGE	Pass	Band Edge
32	802.11ax HE20	36	10360.00	46.66	68.30	-21.64	H	Peak	Pass	Harmonic
33	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
33	802.11ax HE20	44	10440.00	47.07	68.30	-21.23	V	Peak	Pass	Harmonic
34	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
34	802.11ax HE20	48	10480.00	46.88	68.30	-21.42	H	Peak	Pass	Harmonic
35	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
35	802.11ax HE20	52	10520	47.2	68.3	-21.1	H	Peak	Pass	Harmonic
36	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
36	802.11ax HE20	60	15900.00	48.26	74.00	-25.74	V	Peak	Pass	Harmonic
37	802.11ax HE20	64	5418.14	38.58	54.00	-15.42	H	AVERAGE	Pass	Band Edge
37	802.11ax HE20	64	15960.00	47.35	74.00	-26.65	V	Peak	Pass	Harmonic
38	802.11ax HE20	100	5411.05	38.66	54.00	-15.34	H	AVERAGE	Pass	Band Edge
38	802.11ax HE20	100	16500.00	46.66	68.30	-21.64	H	Peak	Pass	Harmonic
39	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
39	802.11ax HE20	116	16740.00	46.01	68.30	-22.29	H	Peak	Pass	Harmonic
40	802.11ax HE20	140	5731.27	50.44	68.30	-17.86	V	PEAK	Pass	Band Edge
40	802.11ax HE20	140	17100.00	47.45	68.30	-20.85	H	Peak	Pass	Harmonic
41	802.11ax HE20	36	5043.02	39.89	54.00	-14.11	H	AVERAGE	Pass	Band Edge
41	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
42	802.11ax HE20	48	5080.16	39.92	54.00	-14.08	V	AVERAGE	Pass	Band Edge
42	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
43	802.11ax HE20	52	5056.42	40.14	54.00	-13.86	H	AVERAGE	Pass	Band Edge
43	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
44	802.11ax HE20	64	5408.06	38.61	54.00	-15.39	H	AVERAGE	Pass	Band Edge
44	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic



45	802.11ax HE20	100	5431.60	38.74	54.00	-15.26	V	AVERAGE	Pass	Band Edge
45	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
46	802.11ax HE20	140	5758.83	49.51	68.30	-18.79	V	PEAK	Pass	Band Edge
46	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
47	802.11ax HE20	36	5046.62	40.06	54.00	-13.94	V	AVERAGE	Pass	Band Edge
47	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
48	802.11ax HE20	48	5078.96	40.07	54.00	-13.93	V	AVERAGE	Pass	Band Edge
48	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
49	802.11ax HE20	52	5058.24	39.94	54.00	-14.06	H	AVERAGE	Pass	Band Edge
49	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
50	802.11ax HE20	64	5425.14	38.50	54.00	-15.50	V	AVERAGE	Pass	Band Edge
50	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
51	802.11ax HE20	100	5418.55	38.62	54.00	-15.38	H	AVERAGE	Pass	Band Edge
51	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
52	802.11ax HE20	140	5741.86	49.83	68.30	-18.47	V	PEAK	Pass	Band Edge
52	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
53	802.11ax HE20	36	5048.24	40.09	54.00	-13.91	V	AVERAGE	Pass	Band Edge
53	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
54	802.11ax HE20	48	5018.24	39.92	54.00	-14.08	H	AVERAGE	Pass	Band Edge
54	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
55	802.11ax HE20	52	5051.48	40.00	54.00	-14.00	H	AVERAGE	Pass	Band Edge
55	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
56	802.11ax HE20	64	5442.50	38.47	54.00	-15.53	H	AVERAGE	Pass	Band Edge
56	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
57	802.11ax HE20	100	5414.95	38.57	54.00	-15.43	H	AVERAGE	Pass	Band Edge
57	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
58	802.11ax HE20	140	5743.62	49.43	68.30	-18.87	H	PEAK	Pass	Band Edge
58	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
59	802.11ax HE40	38	5147.63	41.39	54.00	-12.61	H	AVERAGE	Pass	Band Edge
59	802.11ax HE40	38	10380.00	48.00	68.30	-20.30	V	Peak	Pass	Harmonic
60	802.11ax HE40	46	-	-	-	-	-	-	-	Band Edge
60	802.11ax HE40	46	10460.00	47.28	68.30	-21.02	V	Peak	Pass	Harmonic
61	802.11ax HE40	54	-	-	-	-	-	-	-	Band Edge
61	802.11ax HE40	54	10540.00	46.87	68.30	-21.43	V	Peak	Pass	Harmonic
62	802.11ax HE40	62	5052.70	40.00	54.00	-14.00	H	AVERAGE	Pass	Band Edge
62	802.11ax HE40	62	15930.00	48.68	74.00	-25.32	H	Peak	Pass	Harmonic
63	802.11ax HE40	102	5404.56	38.57	54.00	-15.43	H	AVERAGE	Pass	Band Edge
63	802.11ax HE40	102	16530.00	46.87	68.30	-21.43	V	Peak	Pass	Harmonic
64	802.11ax HE40	110	-	-	-	-	-	-	-	Band Edge
64	802.11ax HE40	110	16650.00	46.96	68.30	-21.34	V	Peak	Pass	Harmonic
65	802.11ax HE40	134	5428.40	38.53	54.00	-15.47	V	AVERAGE	Pass	Band Edge
65	802.11ax HE40	134	17010.00	45.39	68.30	-22.91	H	Peak	Pass	Harmonic
66	802.11ax HE80	42	5148.89	42.62	54.00	-11.38	V	AVERAGE	Pass	Band Edge
66	802.11ax HE80	42	10420.00	46.38	68.30	-21.92	H	Peak	Pass	Harmonic
67	802.11ax HE80	58	5350.69	41.56	54.00	-12.44	V	AVERAGE	Pass	Band Edge
67	802.11ax HE80	58	10580.00	47.25	68.30	-21.05	V	Peak	Pass	Harmonic



68	802.11ax HE80	106	5455.48	40.61	54.00	-13.39	H	AVERAGE	Pass	Band Edge
68	802.11ax HE80	106	16590.00	46.62	68.30	-21.68	V	Peak	Pass	Harmonic
69	802.11ax HE80	122	5426.18	38.71	54.00	-15.29	H	AVERAGE	Pass	Band Edge
69	802.11ax HE80	122	16830.00	46.69	68.30	-21.61	H	Peak	Pass	Harmonic
70	802.11ax HE160	50	5141.75	42.82	54.00	-11.18	V	AVERAGE	Pass	Band Edge
70	802.11ax HE160	50	10500.00	47.54	68.30	-20.76	V	Peak	Pass	Harmonic
71	802.11ax HE160	114	5455.38	42.12	54.00	-11.88	H	AVERAGE	Pass	Band Edge
71	802.11ax HE160	114	16710.00	47.25	68.30	-21.05	V	Peak	Pass	Harmonic
72	802.11a	149	5630.74	48.62	68.30	-19.68	V	PEAK	Pass	Band Edge
72	802.11a	149	17235.00	47.99	68.30	-20.31	H	Peak	Pass	Harmonic
73	802.11a	157	-	-	-	-	-	-	-	Band Edge
73	802.11a	157	17355.00	47.72	68.30	-20.58	H	Peak	Pass	Harmonic
74	802.11a	165	5937.13	50.50	68.30	-17.80	H	PEAK	Pass	Band Edge
74	802.11a	165	17475.00	47.82	68.30	-20.48	H	Peak	Pass	Harmonic
75	802.11n HT20	149	5644.23	49.38	68.30	-18.92	H	PEAK	Pass	Band Edge
75	802.11n HT20	149	17235.00	48.00	68.30	-20.30	H	Peak	Pass	Harmonic
76	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
76	802.11n HT20	157	17355.00	47.59	68.30	-20.71	H	Peak	Pass	Harmonic
77	802.11n HT20	165	5932.25	51.32	68.30	-16.98	H	PEAK	Pass	Band Edge
77	802.11n HT20	165	17475.00	47.71	68.30	-20.59	H	Peak	Pass	Harmonic
78	802.11n HT40	151	5929.53	50.35	68.30	-17.95	V	PEAK	Pass	Band Edge
78	802.11n HT40	151	17265.00	47.34	68.30	-20.96	H	Peak	Pass	Harmonic
79	802.11n HT40	159	5928.92	50.30	68.30	-18.00	V	PEAK	Pass	Band Edge
79	802.11n HT40	159	17385.00	47.03	68.30	-21.27	V	Peak	Pass	Harmonic
80	802.11ac VHT80	155	5936.70	50.51	68.30	-17.79	H	PEAK	Pass	Band Edge
80	802.11ac VHT80	155	17325.00	48.99	68.30	-19.31	H	Peak	Pass	Harmonic
81	802.11ax HE20	149	5641.18	48.60	68.30	-19.70	H	PEAK	Pass	Band Edge
81	802.11ax HE20	149	17235.00	49.88	68.30	-18.42	V	Peak	Pass	Harmonic
82	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
82	802.11ax HE20	157	17355.00	50.13	68.30	-18.17	H	Peak	Pass	Harmonic
83	802.11ax HE20	165	5940.13	50.06	68.30	-18.24	V	PEAK	Pass	Band Edge
83	802.11ax HE20	165	17475.00	49.50	68.30	-18.80	V	Peak	Pass	Harmonic
84	802.11ax HE40	151	5930.31	50.25	68.30	-18.05	H	PEAK	Pass	Band Edge
84	802.11ax HE40	151	17265.00	48.88	68.30	-19.42	V	Peak	Pass	Harmonic
85	802.11ax HE40	159	5924.89	50.24	68.28	-18.04	V	PEAK	Pass	Band Edge
85	802.11ax HE40	159	17385.00	49.44	68.30	-18.86	V	Peak	Pass	Harmonic
86	802.11ax HE80	155	5945.80	51.00	68.30	-17.30	H	PEAK	Pass	Band Edge
86	802.11ax HE80	155	17325.00	48.34	68.30	-19.96	H	Peak	Pass	Harmonic
87	802.11ax HE20	149	5630.60	48.85	68.30	-19.45	V	PEAK	Pass	Band Edge
87	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
88	802.11ax HE20	165	5924.88	50.31	68.29	-17.98	V	PEAK	Pass	Band Edge
88	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
89	802.11ax HE20	149	5622.77	48.71	68.30	-19.59	H	PEAK	Pass	Band Edge
89	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
90	802.11ax HE20	165	5947.75	50.56	68.30	-17.74	V	PEAK	Pass	Band Edge
90	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic



91	802.11ax HE20	149	5627.26	48.48	68.30	-19.82	H	PEAK	Pass	Band Edge
91	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
92	802.11ax HE20	165	5943.38	50.29	68.30	-18.01	V	PEAK	Pass	Band Edge
92	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
93	802.11a	144	-	-	-	-	-	-	-	Band Edge
93	802.11a	144	17160.00	48.97	68.30	-19.33	H	Peak	Pass	Harmonic
94	802.11n HT20	144	-	-	-	-	-	-	-	Band Edge
94	802.11n HT20	144	17160.00	49.11	68.30	-19.19	H	Peak	Pass	Harmonic
95	802.11n HT40	142	-	-	-	-	-	-	-	Band Edge
95	802.11n HT40	142	17130.00	47.41	68.30	-20.89	H	Peak	Pass	Harmonic
96	802.11ax HE20	144	-	-	-	-	-	-	-	Band Edge
96	802.11ax HE20	144	17160.00	47.68	68.30	-20.62	V	Peak	Pass	Harmonic
97	802.11ax HE40	142	-	-	-	-	-	-	-	Band Edge
97	802.11ax HE40	142	17130.00	48.56	68.30	-19.74	H	Peak	Pass	Harmonic
98	802.11ax HE80	138	-	-	-	-	-	-	-	Band Edge
98	802.11ax HE80	138	17070.00	46.85	68.30	-21.45	H	Peak	Pass	Harmonic
101	802.11n HT40	38	34.85	29.27	-10.73	40	H	PEAK	Pass	LF
102	802.11n HT20	165	34.85	29.69	-10.31	40	V	PEAK	Pass	LF





Mode	1										
	Band Edge										
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz										
ANT	CDD 0+1										
Pol.	Horizontal										
Peak	Fundamental										
	<										



Mode	1																																																																																								
	Band Edge																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																								
ANT	CDD 0+1																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak	Date: 2023-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5064.80</td><td>50.05</td><td>74.00</td><td>-23.95</td><td>40.55</td><td>34.35</td><td>7.86</td><td>32.71</td><td>100</td><td>356 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5064.80	50.05	74.00	-23.95	40.55	34.35	7.86	32.71	100	356 PEAK	Date: 2023-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.26</td><td>-----</td><td>-----</td><td>91.77</td><td>34.45</td><td>7.94</td><td>32.90</td><td>100</td><td>356 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.26	-----	-----	91.77	34.45	7.94	32.90	100	356 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5064.80	50.05	74.00	-23.95	40.55	34.35	7.86	32.71	100	356 PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	101.26	-----	-----	91.77	34.45	7.94	32.90	100	356 PEAK																																																																															
Avg	Date: 2023-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5044.64</td><td>40.19</td><td>54.00</td><td>-13.81</td><td>30.68</td><td>34.34</td><td>7.85</td><td>32.68</td><td>100</td><td>356 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5044.64	40.19	54.00	-13.81	30.68	34.34	7.85	32.68	100	356 AVERAGE	Date: 2023-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>94.63</td><td>-----</td><td>-----</td><td>85.14</td><td>34.45</td><td>7.94</td><td>32.90</td><td>100</td><td>356 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.63	-----	-----	85.14	34.45	7.94	32.90	100	356 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5044.64	40.19	54.00	-13.81	30.68	34.34	7.85	32.68	100	356 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	94.63	-----	-----	85.14	34.45	7.94	32.90	100	356 AVERAGE																																																																															

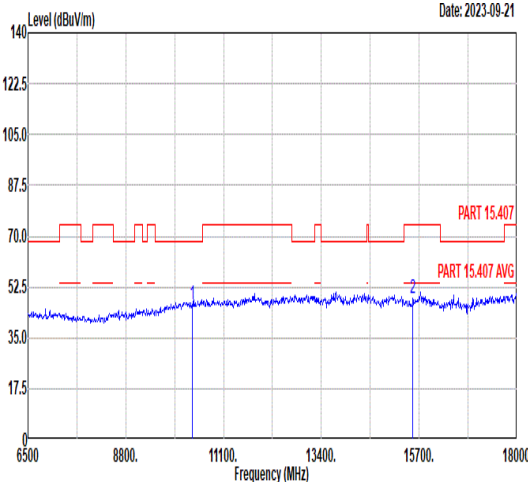
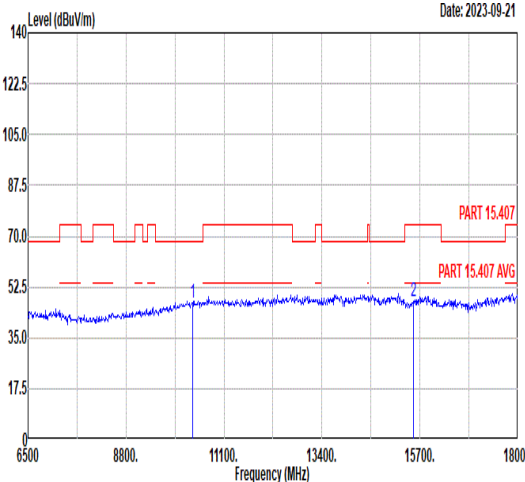


Mode	1																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10360.00</td><td>46.71</td><td>68.30</td><td>-21.59</td><td>57.36</td><td>37.62</td><td>10.73</td><td>59.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>48.73</td><td>74.00</td><td>-25.27</td><td>54.39</td><td>40.56</td><td>12.72</td><td>58.94</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10360.00	46.71	68.30	-21.59	57.36	37.62	10.73	59.00	--	--	Peak	2	15540.00	48.73	74.00	-25.27	54.39	40.56	12.72	58.94	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10360.00</td><td>47.03</td><td>68.30</td><td>-21.27</td><td>57.68</td><td>37.62</td><td>10.73</td><td>59.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>53.02</td><td>40.56</td><td>12.72</td><td>58.94</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10360.00	47.03	68.30	-21.27	57.68	37.62	10.73	59.00	--	--	Peak	2	15540.00	47.36	74.00	-26.64	53.02	40.56	12.72	58.94	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10360.00	46.71	68.30	-21.59	57.36	37.62	10.73	59.00	--	--	Peak																																																																																																																							
2	15540.00	48.73	74.00	-25.27	54.39	40.56	12.72	58.94	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10360.00	47.03	68.30	-21.27	57.68	37.62	10.73	59.00	--	--	Peak																																																																																																																							
2	15540.00	47.36	74.00	-26.64	53.02	40.56	12.72	58.94	--	--	Peak																																																																																																																							





Mode	2																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																			
ANT	CDD 0+1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2023-09-21 Frequency (MHz)						Level (dBuV/m) Date: 2023-09-21 Frequency (MHz)																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>46.67</td><td>68.30</td><td>-21.63</td><td>57.13</td><td>37.66</td><td>10.79</td><td>58.91</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>52.52</td><td>40.60</td><td>12.72</td><td>59.06</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	46.67	68.30	-21.63	57.13	37.66	10.79	58.91	--	--	Peak	2	15660.00	46.78	74.00	-27.22	52.52	40.60	12.72	59.06	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>45.92</td><td>68.30</td><td>-22.38</td><td>56.38</td><td>37.66</td><td>10.79</td><td>58.91</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.14</td><td>74.00</td><td>-26.86</td><td>52.88</td><td>40.60</td><td>12.72</td><td>59.06</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	45.92	68.30	-22.38	56.38	37.66	10.79	58.91	--	--	Peak	2	15660.00	47.14	74.00	-26.86	52.88	40.60	12.72	59.06	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10440.00	46.67	68.30	-21.63	57.13	37.66	10.79	58.91	--	--	Peak																																																																																																									
2	15660.00	46.78	74.00	-27.22	52.52	40.60	12.72	59.06	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10440.00	45.92	68.30	-22.38	56.38	37.66	10.79	58.91	--	--	Peak																																																																																																									
2	15660.00	47.14	74.00	-26.86	52.88	40.60	12.72	59.06	--	--	Peak																																																																																																									

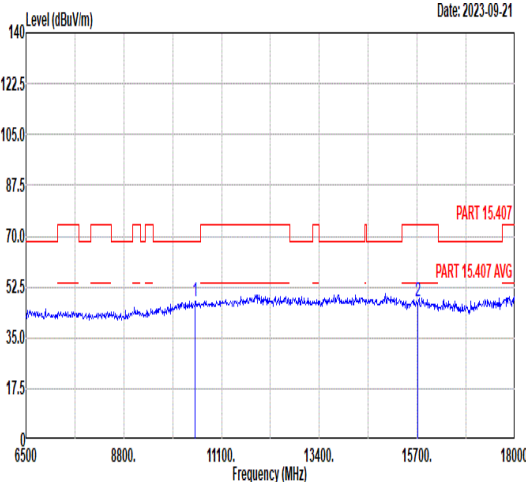
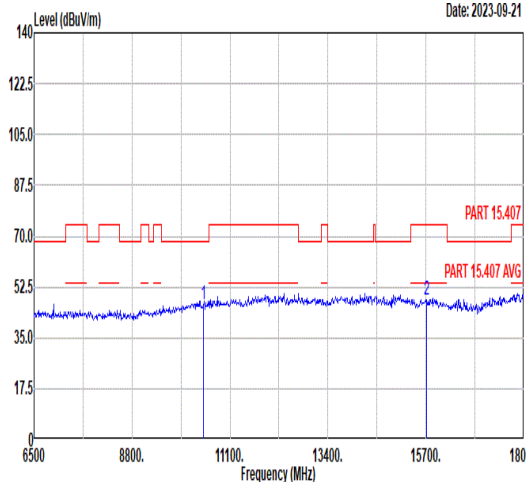


Mode	3																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>47.39</td><td>68.30</td><td>-20.91</td><td>57.75</td><td>37.69</td><td>10.82</td><td>58.87</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.67</td><td>74.00</td><td>-26.33</td><td>53.46</td><td>40.62</td><td>12.71</td><td>59.12</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	47.39	68.30	-20.91	57.75	37.69	10.82	58.87	--	--	Peak	2	15720.00	47.67	74.00	-26.33	53.46	40.62	12.71	59.12	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>46.59</td><td>68.30</td><td>-21.71</td><td>56.95</td><td>37.69</td><td>10.82</td><td>58.87</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>53.68</td><td>40.62</td><td>12.71</td><td>59.12</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	46.59	68.30	-21.71	56.95	37.69	10.82	58.87	--	--	Peak	2	15720.00	47.89	74.00	-26.11	53.68	40.62	12.71	59.12	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	47.39	68.30	-20.91	57.75	37.69	10.82	58.87	--	--	Peak																																																																																																																							
2	15720.00	47.67	74.00	-26.33	53.46	40.62	12.71	59.12	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	46.59	68.30	-21.71	56.95	37.69	10.82	58.87	--	--	Peak																																																																																																																							
2	15720.00	47.89	74.00	-26.11	53.68	40.62	12.71	59.12	--	--	Peak																																																																																																																							

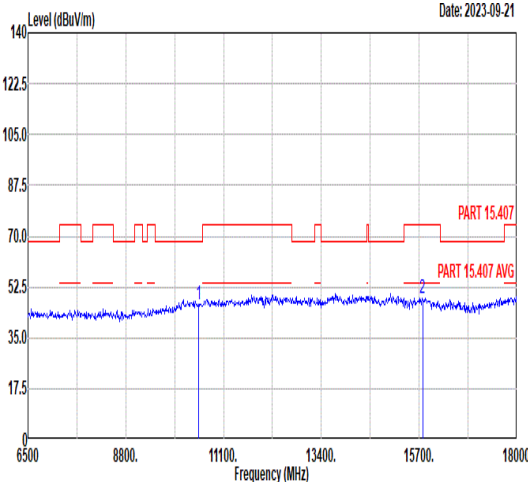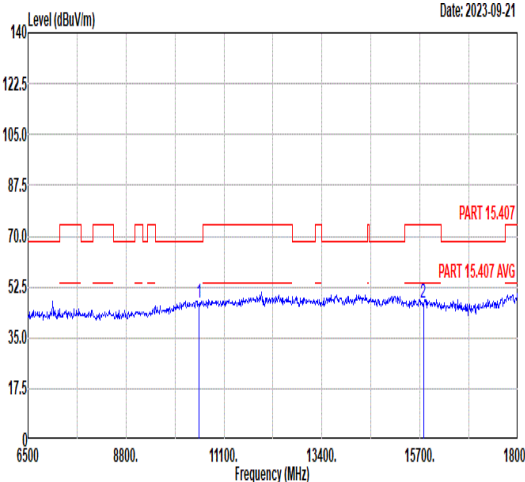

Mode	4																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5280MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10520.00</td><td>46.67</td><td>68.30</td><td>-21.63</td><td>56.93</td><td>37.71</td><td>10.85</td><td>58.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.80</td><td>74.00</td><td>-25.20</td><td>54.64</td><td>40.63</td><td>12.71</td><td>59.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10520.00	46.67	68.30	-21.63	56.93	37.71	10.85	58.82	--	--	Peak	2	15780.00	48.80	74.00	-25.20	54.64	40.63	12.71	59.18	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10520.00</td><td>47.06</td><td>68.30</td><td>-21.24</td><td>57.32</td><td>37.71</td><td>10.85</td><td>58.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.24</td><td>74.00</td><td>-26.76</td><td>53.08</td><td>40.63</td><td>12.71</td><td>59.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10520.00	47.06	68.30	-21.24	57.32	37.71	10.85	58.82	--	--	Peak	2	15780.00	47.24	74.00	-26.76	53.08	40.63	12.71	59.18	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10520.00	46.67	68.30	-21.63	56.93	37.71	10.85	58.82	--	--	Peak																																																																																																																							
2	15780.00	48.80	74.00	-25.20	54.64	40.63	12.71	59.18	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10520.00	47.06	68.30	-21.24	57.32	37.71	10.85	58.82	--	--	Peak																																																																																																																							
2	15780.00	47.24	74.00	-26.76	53.08	40.63	12.71	59.18	--	--	Peak																																																																																																																							



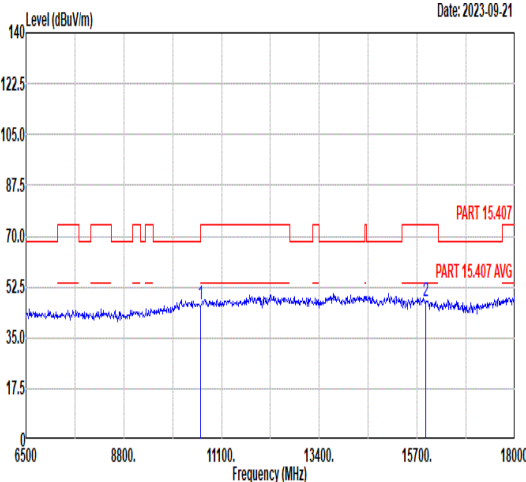
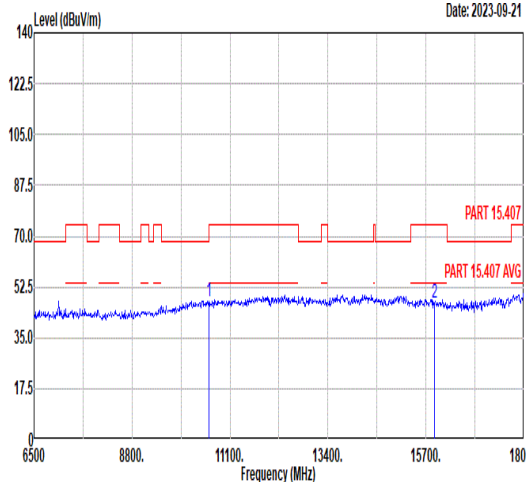


Mode	5																																																																																																																																									
	Harmonic																																																																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																																									
ANT	CDD 0+1																																																																																																																																									
Pol.	Horizontal										Vertical																																																																																																																															
Peak Avg	Level (dBuV/m) Date: 2023-09-21 										Level (dBuV/m) Date: 2023-09-21 																																																																																																																															
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10600.00</td><td>46.51</td><td>74.00</td><td>-27.49</td><td>56.55</td><td>37.78</td><td>10.91</td><td>58.73</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 15900.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>53.69</td><td>40.67</td><td>12.71</td><td>59.30</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>												Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10600.00	46.51	74.00	-27.49	56.55	37.78	10.91	58.73	--	--	Peak		2 15900.00	47.77	74.00	-26.23	53.69	40.67	12.71	59.30	--	--	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10600.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>57.48</td><td>37.78</td><td>10.91</td><td>58.73</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 15900.00</td><td>47.23</td><td>74.00</td><td>-26.77</td><td>53.15</td><td>40.67</td><td>12.71</td><td>59.30</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>												Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10600.00	47.44	74.00	-26.56	57.48	37.78	10.91	58.73	--	--	Peak		2 15900.00	47.23	74.00	-26.77	53.15	40.67	12.71	59.30	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1 10600.00	46.51	74.00	-27.49	56.55	37.78	10.91	58.73	--	--	Peak																																																																																																																																
2 15900.00	47.77	74.00	-26.23	53.69	40.67	12.71	59.30	--	--	Peak																																																																																																																																
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1 10600.00	47.44	74.00	-26.56	57.48	37.78	10.91	58.73	--	--	Peak																																																																																																																																
2 15900.00	47.23	74.00	-26.77	53.15	40.67	12.71	59.30	--	--	Peak																																																																																																																																





Mode	6										
	Band Edge										
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz										
ANT	CDD 0+1										
Pol.	Horizontal										
Peak	Fundamental										
	<										

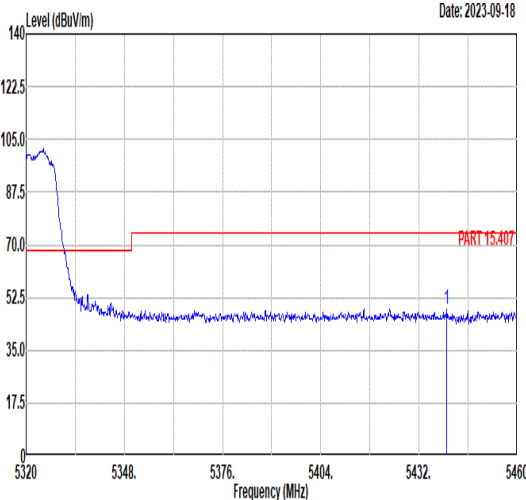
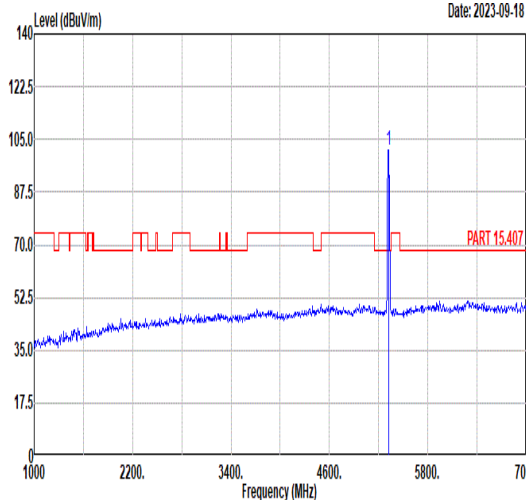
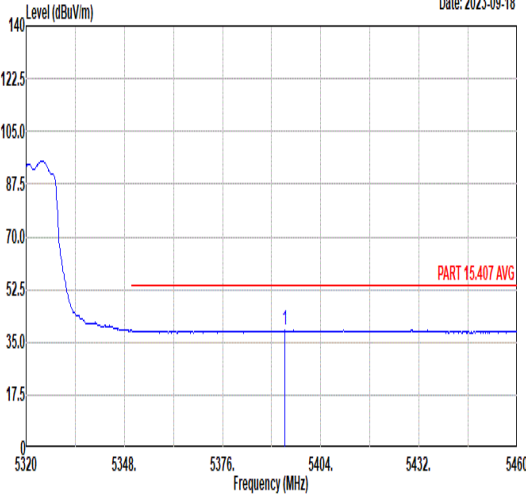
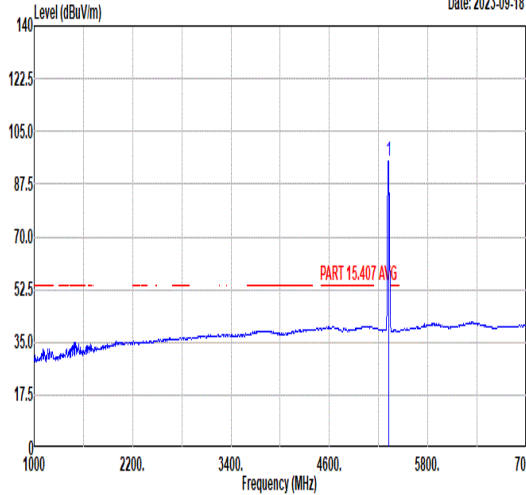


Mode	6																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																									
ANT	CDD 0+1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.98</td><td>48.76</td><td>74.00</td><td>-25.24</td><td>38.99</td><td>34.65</td><td>8.44</td><td>33.32</td><td>100</td><td>356</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5439.98	48.76	74.00	-25.24	38.99	34.65	8.44	33.32	100	356	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>101.56</td><td>-----</td><td>-----</td><td>91.89</td><td>34.55</td><td>8.23</td><td>33.11</td><td>100</td><td>356</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	101.56	-----	-----	91.89	34.55	8.23	33.11	100	356
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5439.98	48.76	74.00	-25.24	38.99	34.65	8.44	33.32	100	356	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5320.00	101.56	-----	-----	91.89	34.55	8.23	33.11	100	356	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5393.64</td><td>38.99</td><td>54.00</td><td>-15.01</td><td>29.18</td><td>34.61</td><td>8.44</td><td>33.24</td><td>100</td><td>356</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5393.64	38.99	54.00	-15.01	29.18	34.61	8.44	33.24	100	356	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>95.05</td><td>-----</td><td>-----</td><td>85.38</td><td>34.55</td><td>8.23</td><td>33.11</td><td>100</td><td>356</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	95.05	-----	-----	85.38	34.55	8.23	33.11	100	356
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5393.64	38.99	54.00	-15.01	29.18	34.61	8.44	33.24	100	356	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5320.00	95.05	-----	-----	85.38	34.55	8.23	33.11	100	356	AVERAGE																																																																															

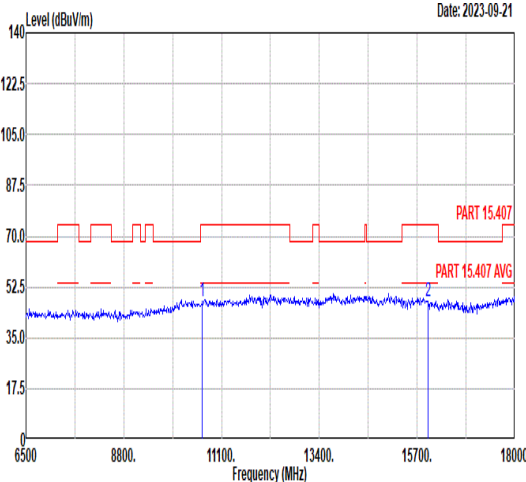
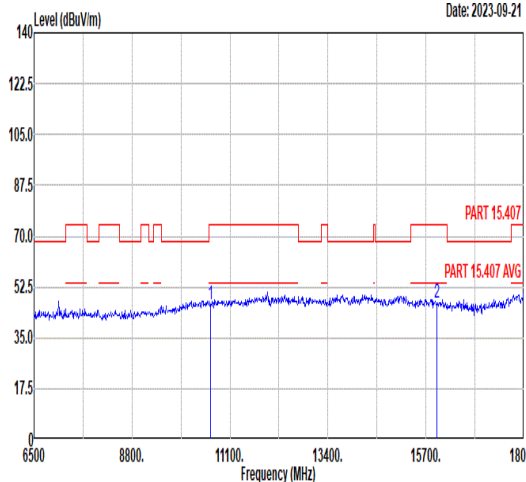


Mode	6																																																																					
	Harmonic																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																					
ANT	CDD 0+1																																																																					
Pol.	Horizontal																																																																					
Peak Avg	Level (dBuV/m) Date: 2023-09-21 																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>47.29</td><td>74.00</td><td>-26.71</td><td>57.23</td><td>37.81</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>53.34</td><td>40.69</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	47.29	74.00	-26.71	57.23	37.81	10.94	58.69	--	--	Peak	2	15960.00	47.36	74.00	-26.64	53.34	40.69	12.70	59.37	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1	10640.00	47.29	74.00	-26.71	57.23	37.81	10.94	58.69	--	--	Peak																																																											
2	15960.00	47.36	74.00	-26.64	53.34	40.69	12.70	59.37	--	--	Peak																																																											
Vertical	Level (dBuV/m) Date: 2023-09-21 																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>46.46</td><td>74.00</td><td>-27.54</td><td>56.40</td><td>37.81</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.13</td><td>74.00</td><td>-26.87</td><td>53.11</td><td>40.69</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	46.46	74.00	-27.54	56.40	37.81	10.94	58.69	--	--	Peak	2	15960.00	47.13	74.00	-26.87	53.11	40.69	12.70	59.37	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1	10640.00	46.46	74.00	-27.54	56.40	37.81	10.94	58.69	--	--	Peak																																																											
2	15960.00	47.13	74.00	-26.87	53.11	40.69	12.70	59.37	--	--	Peak																																																											

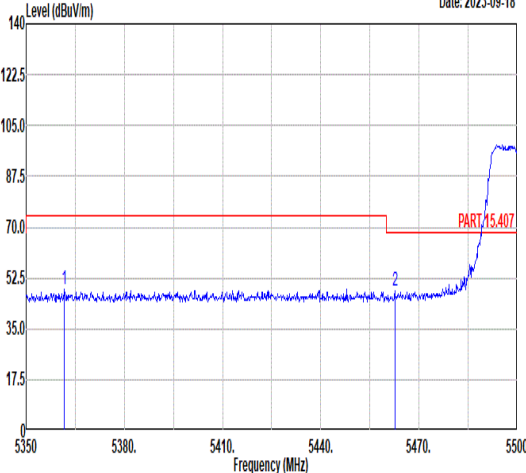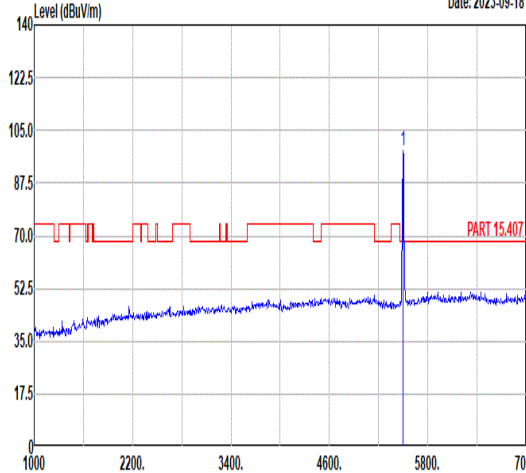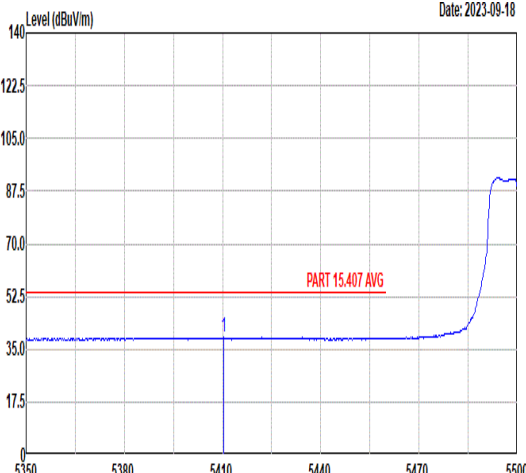
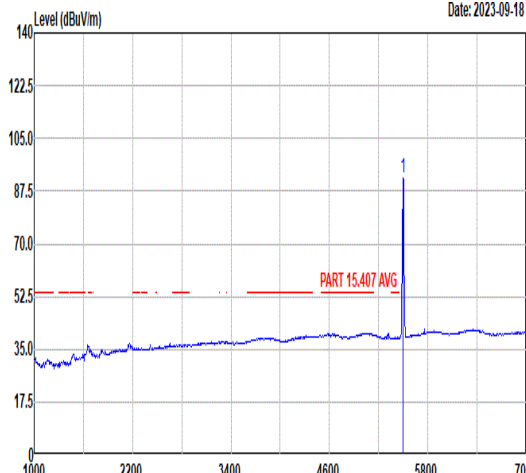


Mode	7																																																																																																		
	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																		
ANT	CDD 0+1																																																																																																		
Pol.	Vertical					Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2023-09-18  5350 5380 5410 5440 5470 5500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5361.70</td><td>48.75</td><td>74.00</td><td>-25.25</td><td>38.99</td><td>34.59</td><td>8.36</td><td>33.19</td><td>300</td><td>13 PEAK</td></tr><tr><td>2</td><td>5462.65</td><td>48.08</td><td>68.30</td><td>-20.22</td><td>38.35</td><td>34.67</td><td>8.41</td><td>33.35</td><td>300</td><td>13 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5361.70	48.75	74.00	-25.25	38.99	34.59	8.36	33.19	300	13 PEAK	2	5462.65	48.08	68.30	-20.22	38.35	34.67	8.41	33.35	300	13 PEAK	Level (dBuV/m) Date: 2023-09-18  1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>98.11</td><td>-----</td><td>-----</td><td>88.46</td><td>34.69</td><td>8.36</td><td>33.40</td><td>300</td><td>13 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	98.11	-----	-----	88.46	34.69	8.36	33.40	300	13 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	5361.70	48.75	74.00	-25.25	38.99	34.59	8.36	33.19	300	13 PEAK																																																																																									
2	5462.65	48.08	68.30	-20.22	38.35	34.67	8.41	33.35	300	13 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	5500.00	98.11	-----	-----	88.46	34.69	8.36	33.40	300	13 PEAK																																																																																									
Avg	Level (dBuV/m) Date: 2023-09-18  5350 5380 5410 5440 5470 5500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5410.30</td><td>38.88</td><td>54.00</td><td>-15.12</td><td>29.04</td><td>34.63</td><td>8.48</td><td>33.27</td><td>300</td><td>13 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5410.30	38.88	54.00	-15.12	29.04	34.63	8.48	33.27	300	13 AVERAGE	Level (dBuV/m) Date: 2023-09-18  1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>91.88</td><td>-----</td><td>-----</td><td>82.23</td><td>34.69</td><td>8.36</td><td>33.40</td><td>300</td><td>13 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	91.88	-----	-----	82.23	34.69	8.36	33.40	300	13 AVERAGE											
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	5410.30	38.88	54.00	-15.12	29.04	34.63	8.48	33.27	300	13 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	5500.00	91.88	-----	-----	82.23	34.69	8.36	33.40	300	13 AVERAGE																																																																																									


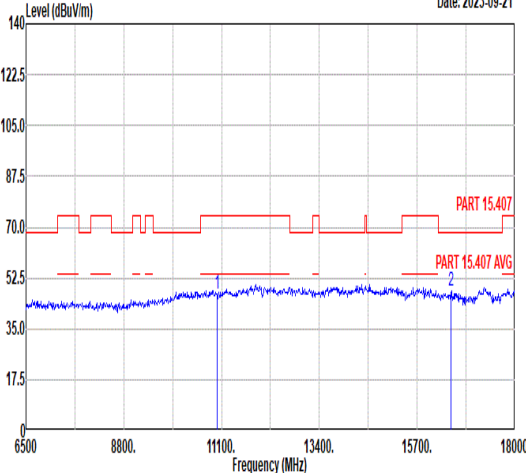
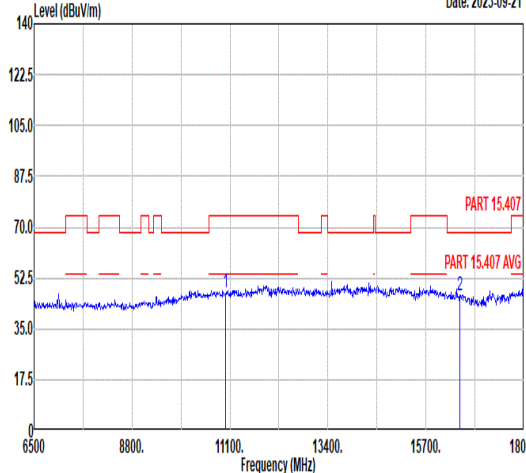


Mode	7																																																																																									
	Harmonic																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																									
ANT	CDD 0+1																																																																																									
Pol.	Horizontal					Vertical																																																																																				
Peak Avg	Level (dBuV/m) Date: 2023-09-21 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>56.21</td><td>38.10</td><td>11.21</td></tr><tr><td>2</td><td>16500.00</td><td>48.19</td><td>68.30</td><td>-20.11</td><td>53.18</td><td>40.95</td><td>12.91</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11000.00	47.22	74.00	-26.78	56.21	38.10	11.21	2	16500.00	48.19	68.30	-20.11	53.18	40.95	12.91	Level (dBuV/m) Date: 2023-09-21 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>56.80</td><td>38.10</td><td>11.21</td></tr><tr><td>2</td><td>16500.00</td><td>46.72</td><td>68.30</td><td>-21.58</td><td>51.71</td><td>40.95</td><td>12.91</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11000.00	47.81	74.00	-26.19	56.80	38.10	11.21	2	16500.00	46.72	68.30	-21.58	51.71	40.95	12.91
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																			
1	11000.00	47.22	74.00	-26.78	56.21	38.10	11.21																																																																																			
2	16500.00	48.19	68.30	-20.11	53.18	40.95	12.91																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																			
1	11000.00	47.81	74.00	-26.19	56.80	38.10	11.21																																																																																			
2	16500.00	46.72	68.30	-21.58	51.71	40.95	12.91																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>56.21</td><td>38.10</td><td>11.21</td></tr><tr><td>2</td><td>16500.00</td><td>48.19</td><td>68.30</td><td>-20.11</td><td>53.18</td><td>40.95</td><td>12.91</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11000.00	47.22	74.00	-26.78	56.21	38.10	11.21	2	16500.00	48.19	68.30	-20.11	53.18	40.95	12.91	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>56.80</td><td>38.10</td><td>11.21</td></tr><tr><td>2</td><td>16500.00</td><td>46.72</td><td>68.30</td><td>-21.58</td><td>51.71</td><td>40.95</td><td>12.91</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11000.00	47.81	74.00	-26.19	56.80	38.10	11.21	2	16500.00	46.72	68.30	-21.58	51.71	40.95	12.91
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																			
1	11000.00	47.22	74.00	-26.78	56.21	38.10	11.21																																																																																			
2	16500.00	48.19	68.30	-20.11	53.18	40.95	12.91																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																			
1	11000.00	47.81	74.00	-26.19	56.80	38.10	11.21																																																																																			
2	16500.00	46.72	68.30	-21.58	51.71	40.95	12.91																																																																																			

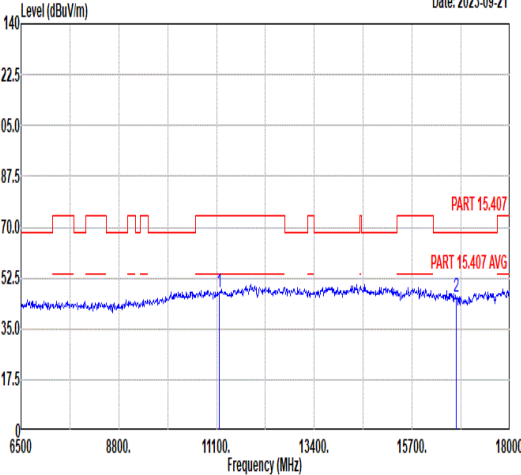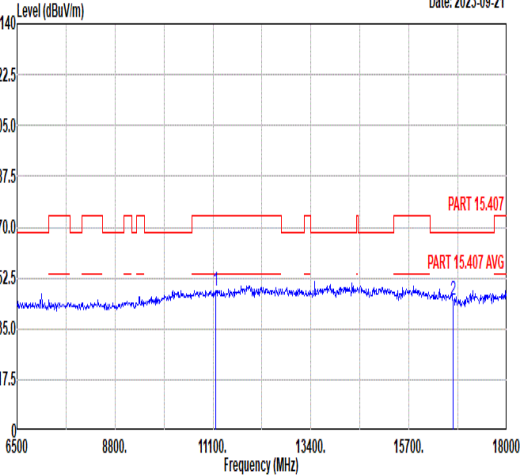

Mode	8																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																			
ANT	CDD 0+1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>47.37</td><td>74.00</td><td>-26.63</td><td>55.94</td><td>38.26</td><td>11.29</td><td>58.12</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>46.00</td><td>68.30</td><td>-22.30</td><td>50.50</td><td>41.07</td><td>13.01</td><td>58.58</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11160.00	47.37	74.00	-26.63	55.94	38.26	11.29	58.12	--	--	Peak	2	16740.00	46.00	68.30	-22.30	50.50	41.07	13.01	58.58	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>56.41</td><td>38.26</td><td>11.29</td><td>58.12</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>45.11</td><td>68.30</td><td>-23.19</td><td>49.61</td><td>41.07</td><td>13.01</td><td>58.58</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11160.00	47.84	74.00	-26.16	56.41	38.26	11.29	58.12	--	--	Peak	2	16740.00	45.11	68.30	-23.19	49.61	41.07	13.01	58.58	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11160.00	47.37	74.00	-26.63	55.94	38.26	11.29	58.12	--	--	Peak																																																																																																									
2	16740.00	46.00	68.30	-22.30	50.50	41.07	13.01	58.58	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11160.00	47.84	74.00	-26.16	56.41	38.26	11.29	58.12	--	--	Peak																																																																																																									
2	16740.00	45.11	68.30	-23.19	49.61	41.07	13.01	58.58	--	--	Peak																																																																																																									

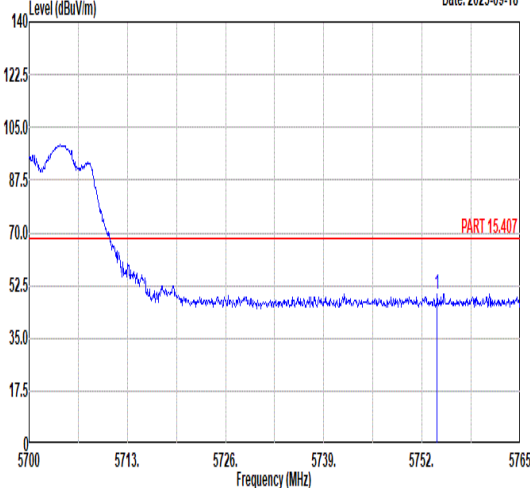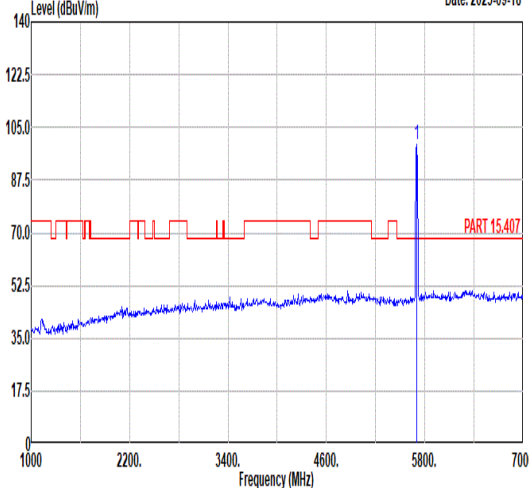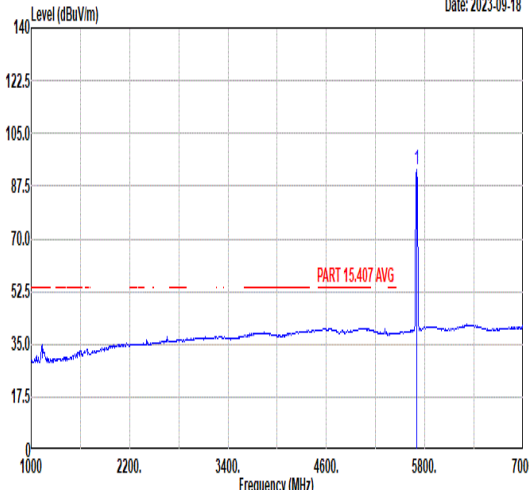

Mode	9																																																																																										
	Band Edge																																																																																										
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																										
ANT	CDD 0+1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2023-09-18  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5754.02</td><td>49.65</td><td>68.30</td><td>-18.65</td><td>39.12</td><td>35.10</td><td>8.78</td><td>33.35</td><td>100</td><td>162</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5754.02	49.65	68.30	-18.65	39.12	35.10	8.78	33.35	100	162	PEAK	Level (dBuV/m) Date: 2023-09-18  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>99.54</td><td>-----</td><td>-----</td><td>89.28</td><td>35.02</td><td>8.60</td><td>33.36</td><td>100</td><td>162</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	99.54	-----	-----	89.28	35.02	8.60	33.36	100	162	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5754.02	49.65	68.30	-18.65	39.12	35.10	8.78	33.35	100	162	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5700.00	99.54	-----	-----	89.28	35.02	8.60	33.36	100	162	PEAK																																																																																
Avg	Blank						Level (dBuV/m) Date: 2023-09-18  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>93.17</td><td>-----</td><td>-----</td><td>82.91</td><td>35.02</td><td>8.60</td><td>33.36</td><td>100</td><td>162</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	93.17	-----	-----	82.91	35.02	8.60	33.36	100	162	AVERAGE																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5700.00	93.17	-----	-----	82.91	35.02	8.60	33.36	100	162	AVERAGE																																																																																







Mode	9	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	CDD 0+1	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2023-09-18 15739.96 49.11 68.30 -19.19 38.66 35.08 8.72 33.35 100 98 PEAK	Level (dBuV/m) Date: 2023-09-18 1 5700.00 100.85 ----- 90.63 35.01 8.57 33.36 100 98 PEAK
Avg	Blank	Level (dBuV/m) Date: 2023-09-18 1 5700.00 94.64 ----- 84.42 35.01 8.57 33.36 100 98 AVERAGE







Mode	9																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																			
ANT	CDD 0+1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2023-09-21 Frequency (MHz)						Level (dBuV/m) Date: 2023-09-21 Frequency (MHz)																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>47.20</td><td>74.00</td><td>-26.80</td><td>55.15</td><td>38.50</td><td>11.41</td><td>57.86</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.08</td><td>68.30</td><td>-21.22</td><td>50.86</td><td>41.24</td><td>13.14</td><td>58.16</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	47.20	74.00	-26.80	55.15	38.50	11.41	57.86	--	--	Peak	2	17100.00	47.08	68.30	-21.22	50.86	41.24	13.14	58.16	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>46.82</td><td>74.00</td><td>-27.18</td><td>54.77</td><td>38.50</td><td>11.41</td><td>57.86</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.46</td><td>68.30</td><td>-20.84</td><td>51.24</td><td>41.24</td><td>13.14</td><td>58.16</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	46.82	74.00	-27.18	54.77	38.50	11.41	57.86	--	--	Peak	2	17100.00	47.46	68.30	-20.84	51.24	41.24	13.14	58.16	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11400.00	47.20	74.00	-26.80	55.15	38.50	11.41	57.86	--	--	Peak																																																																																																									
2	17100.00	47.08	68.30	-21.22	50.86	41.24	13.14	58.16	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11400.00	46.82	74.00	-27.18	54.77	38.50	11.41	57.86	--	--	Peak																																																																																																									
2	17100.00	47.46	68.30	-20.84	51.24	41.24	13.14	58.16	--	--	Peak																																																																																																									

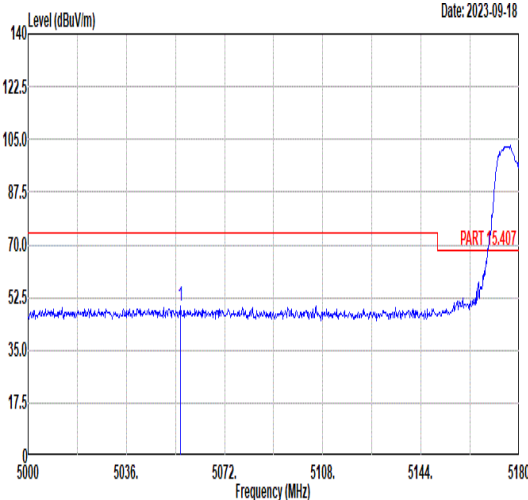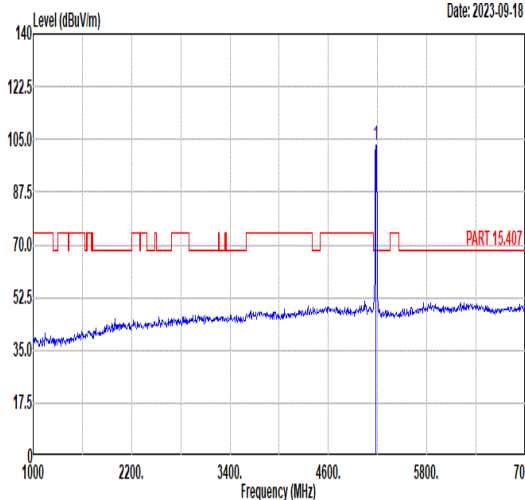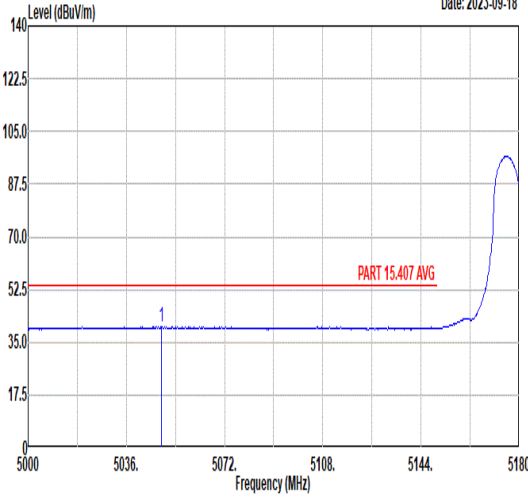
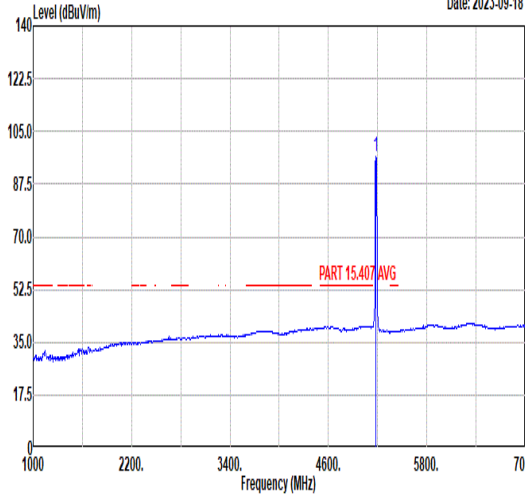


		10																																																																																							
Mode		Band Edge																																																																																							
		U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																							
ANT		CDD 0+1																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5055.80</td><td>49.71</td><td>74.00</td><td>-24.29</td><td>40.19</td><td>34.35</td><td>7.86</td><td>32.69</td><td>100</td><td>89</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5055.80	49.71	74.00	-24.29	40.19	34.35	7.86	32.69	100	89	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.78</td><td>-----</td><td>-----</td><td>93.30</td><td>34.45</td><td>7.94</td><td>32.91</td><td>100</td><td>89</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.78	-----	-----	93.30	34.45	7.94	32.91	100	89
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5055.80	49.71	74.00	-24.29	40.19	34.35	7.86	32.69	100	89	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	102.78	-----	-----	93.30	34.45	7.94	32.91	100	89	PEAK																																																																														
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5048.96</td><td>40.30</td><td>54.00</td><td>-13.70</td><td>30.79</td><td>34.34</td><td>7.85</td><td>32.68</td><td>100</td><td>89</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5048.96	40.30	54.00	-13.70	30.79	34.34	7.85	32.68	100	89	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>96.55</td><td>-----</td><td>-----</td><td>87.06</td><td>34.44</td><td>7.94</td><td>32.89</td><td>100</td><td>89</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	96.55	-----	-----	87.06	34.44	7.94	32.89	100	89
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5048.96	40.30	54.00	-13.70	30.79	34.34	7.85	32.68	100	89	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	96.55	-----	-----	87.06	34.44	7.94	32.89	100	89	AVERAGE																																																																														

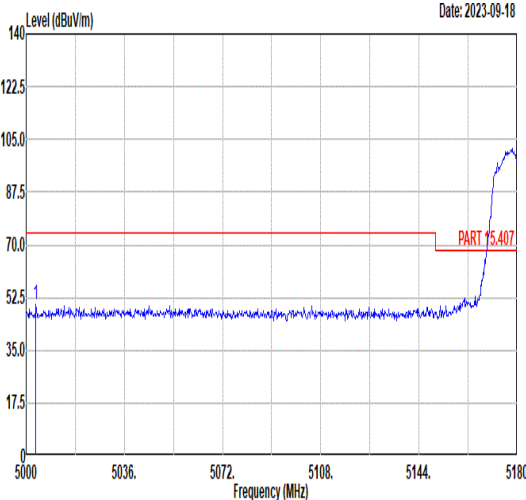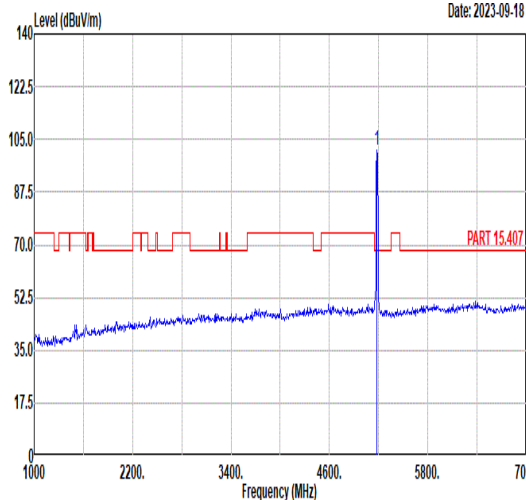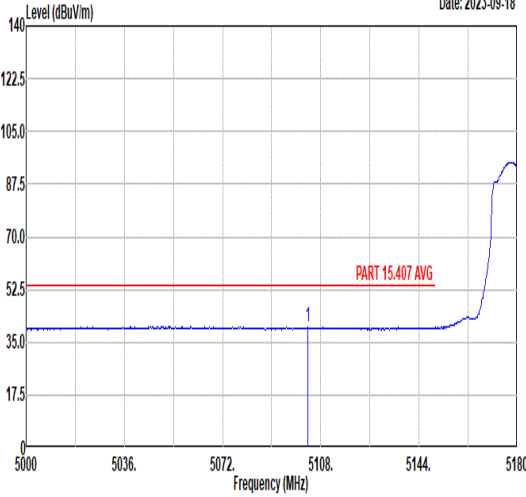
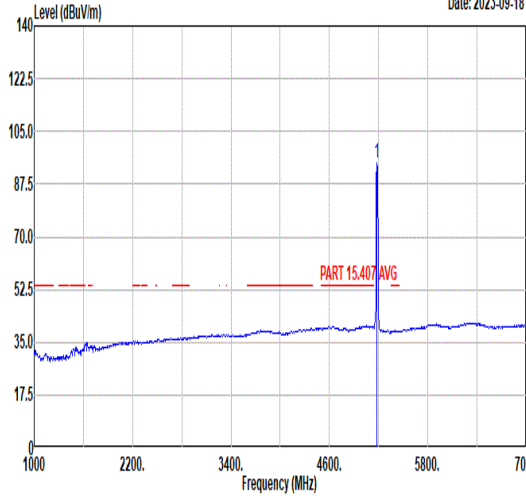


Mode	10																																																																																
	Band Edge																																																																																
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_5180MHz																																																																																
ANT	CDD 0+1																																																																																
Pol.	Vertical					Fundamental																																																																											
Peak																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5003.60</td><td>50.19</td><td>74.00</td><td>-23.81</td><td>40.67</td><td>34.31</td><td>7.82</td><td>32.61</td><td>163 33 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5003.60	50.19	74.00	-23.81	40.67	34.31	7.82	32.61	163 33 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>101.23</td><td>-----</td><td>-----</td><td>91.74</td><td>34.44</td><td>7.94</td><td>32.89</td><td>163 33 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5180.00	101.23	-----	-----	91.74	34.44	7.94	32.89
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1 5003.60	50.19	74.00	-23.81	40.67	34.31	7.82	32.61	163 33 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1 5180.00	101.23	-----	-----	91.74	34.44	7.94	32.89	163 33 PEAK																																																																									
Avg																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5103.32</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>30.74</td><td>34.38</td><td>7.89</td><td>32.77</td><td>163 33 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5103.32	40.24	54.00	-13.76	30.74	34.38	7.89	32.77	163 33 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>94.47</td><td>-----</td><td>-----</td><td>84.98</td><td>34.44</td><td>7.94</td><td>32.89</td><td>163 33 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5180.00	94.47	-----	-----	84.98	34.44	7.94	32.89
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1 5103.32	40.24	54.00	-13.76	30.74	34.38	7.89	32.77	163 33 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1 5180.00	94.47	-----	-----	84.98	34.44	7.94	32.89	163 33 AVERAGE																																																																									

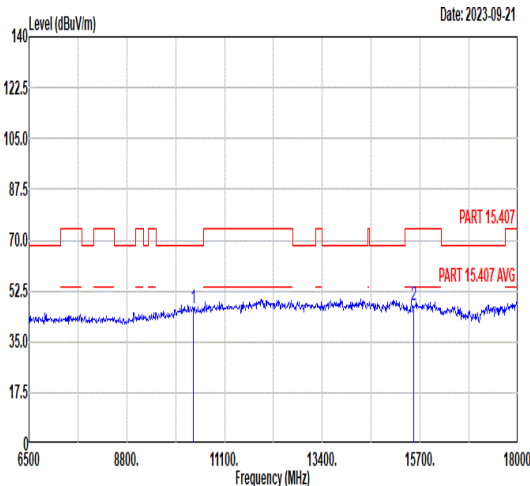
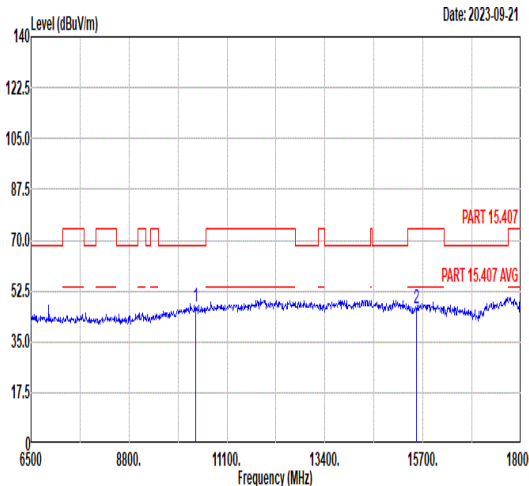


Mode	10																																																																																																																	
	Harmonic																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																																																	
ANT	CDD 0+1																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.67</td><td>68.30</td><td>-21.63</td><td>57.32</td><td>37.62</td><td>10.73</td><td>59.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>53.11</td><td>40.56</td><td>12.72</td><td>58.94</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.67	68.30	-21.63	57.32	37.62	10.73	59.00	--	--	Peak	2	15540.00	47.45	74.00	-26.55	53.11	40.56	12.72	58.94	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.92</td><td>68.30</td><td>-21.38</td><td>57.57</td><td>37.62</td><td>10.73</td><td>59.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>46.72</td><td>74.00</td><td>-27.28</td><td>52.38</td><td>40.56</td><td>12.72</td><td>58.94</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.92	68.30	-21.38	57.57	37.62	10.73	59.00	--	--	Peak	2	15540.00	46.72	74.00	-27.28	52.38	40.56	12.72	58.94	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	10360.00	46.67	68.30	-21.63	57.32	37.62	10.73	59.00	--	--	Peak																																																																																																							
2	15540.00	47.45	74.00	-26.55	53.11	40.56	12.72	58.94	--	--	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	10360.00	46.92	68.30	-21.38	57.57	37.62	10.73	59.00	--	--	Peak																																																																																																							
2	15540.00	46.72	74.00	-27.28	52.38	40.56	12.72	58.94	--	--	Peak																																																																																																							

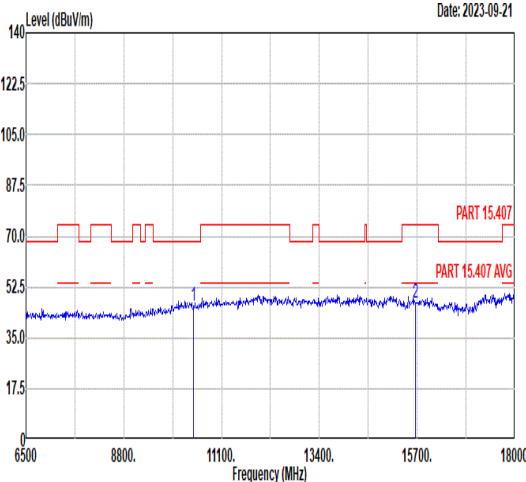
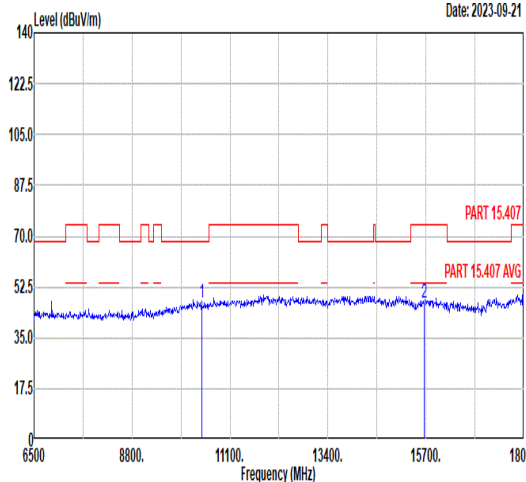


Mode	11																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>45.74</td><td>68.30</td><td>-22.56</td><td>56.20</td><td>37.66</td><td>10.79</td><td>58.91</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.13</td><td>74.00</td><td>-26.87</td><td>52.87</td><td>40.60</td><td>12.72</td><td>59.06</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	45.74	68.30	-22.56	56.20	37.66	10.79	58.91	--	--	Peak	2	15660.00	47.13	74.00	-26.87	52.87	40.60	12.72	59.06	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>46.89</td><td>68.30</td><td>-21.41</td><td>57.35</td><td>37.66</td><td>10.79</td><td>58.91</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.76</td><td>74.00</td><td>-27.24</td><td>52.50</td><td>40.60</td><td>12.72</td><td>59.06</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	46.89	68.30	-21.41	57.35	37.66	10.79	58.91	--	--	Peak	2	15660.00	46.76	74.00	-27.24	52.50	40.60	12.72	59.06	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10440.00	45.74	68.30	-22.56	56.20	37.66	10.79	58.91	--	--	Peak																																																																																																																							
2	15660.00	47.13	74.00	-26.87	52.87	40.60	12.72	59.06	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10440.00	46.89	68.30	-21.41	57.35	37.66	10.79	58.91	--	--	Peak																																																																																																																							
2	15660.00	46.76	74.00	-27.24	52.50	40.60	12.72	59.06	--	--	Peak																																																																																																																							

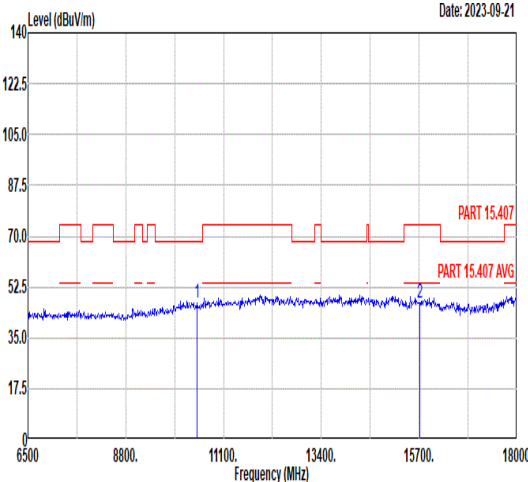
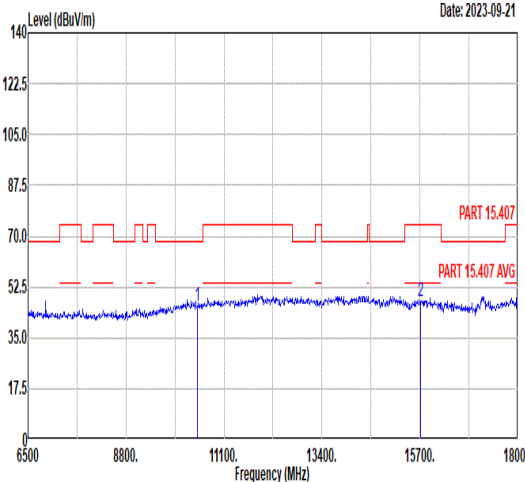


Mode	12																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>47.00</td><td>68.30</td><td>-21.30</td><td>57.36</td><td>37.69</td><td>10.82</td><td>58.87</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>52.88</td><td>40.62</td><td>12.71</td><td>59.12</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	47.00	68.30	-21.30	57.36	37.69	10.82	58.87	--	--	Peak	2	15720.00	47.09	74.00	-26.91	52.88	40.62	12.71	59.12	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>46.09</td><td>68.30</td><td>-22.21</td><td>56.45</td><td>37.69</td><td>10.82</td><td>58.87</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>53.41</td><td>40.62</td><td>12.71</td><td>59.12</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	46.09	68.30	-22.21	56.45	37.69	10.82	58.87	--	--	Peak	2	15720.00	47.62	74.00	-26.38	53.41	40.62	12.71	59.12	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	47.00	68.30	-21.30	57.36	37.69	10.82	58.87	--	--	Peak																																																																																																																							
2	15720.00	47.09	74.00	-26.91	52.88	40.62	12.71	59.12	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	46.09	68.30	-22.21	56.45	37.69	10.82	58.87	--	--	Peak																																																																																																																							
2	15720.00	47.62	74.00	-26.38	53.41	40.62	12.71	59.12	--	--	Peak																																																																																																																							



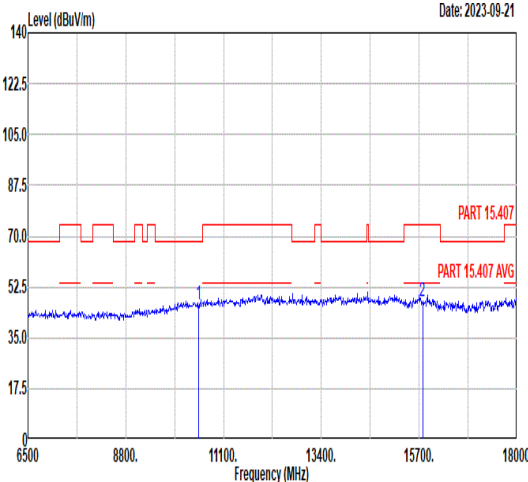
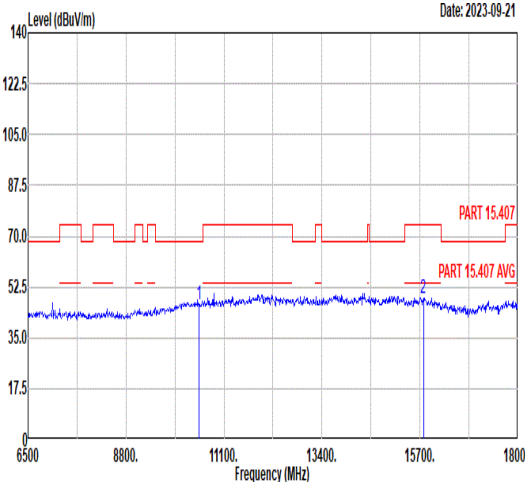


Mode	13																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5280MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>46.49</td><td>68.30</td><td>-21.81</td><td>56.75</td><td>37.71</td><td>10.85</td><td>58.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.73</td><td>74.00</td><td>-26.27</td><td>53.57</td><td>40.63</td><td>12.71</td><td>59.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	46.49	68.30	-21.81	56.75	37.71	10.85	58.82	--	--	Peak	2	15780.00	47.73	74.00	-26.27	53.57	40.63	12.71	59.18	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>46.63</td><td>68.30</td><td>-21.67</td><td>56.89</td><td>37.71</td><td>10.85</td><td>58.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.42</td><td>74.00</td><td>-25.58</td><td>54.26</td><td>40.63</td><td>12.71</td><td>59.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	46.63	68.30	-21.67	56.89	37.71	10.85	58.82	--	--	Peak	2	15780.00	48.42	74.00	-25.58	54.26	40.63	12.71	59.18	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	46.49	68.30	-21.81	56.75	37.71	10.85	58.82	--	--	Peak																																																																																																																							
2	15780.00	47.73	74.00	-26.27	53.57	40.63	12.71	59.18	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	46.63	68.30	-21.67	56.89	37.71	10.85	58.82	--	--	Peak																																																																																																																							
2	15780.00	48.42	74.00	-25.58	54.26	40.63	12.71	59.18	--	--	Peak																																																																																																																							



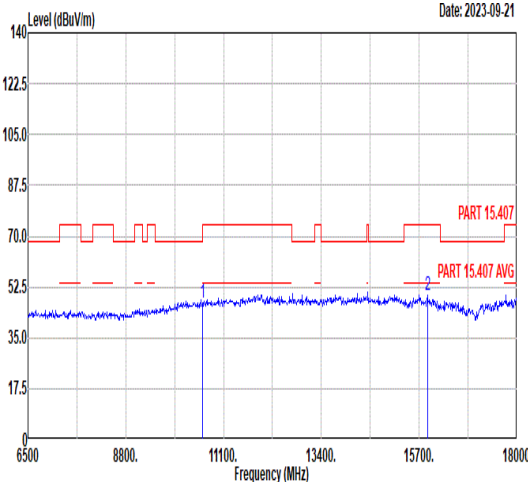
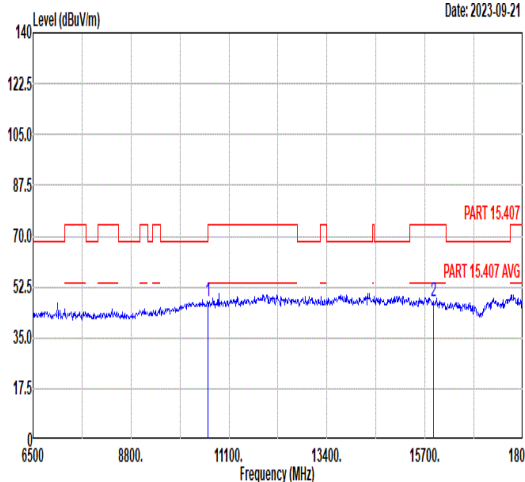


Mode	14																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>46.80</td><td>74.00</td><td>-27.20</td><td>56.84</td><td>37.78</td><td>10.91</td><td>58.73</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>55.45</td><td>40.67</td><td>12.71</td><td>59.30</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	46.80	74.00	-27.20	56.84	37.78	10.91	58.73	--	--	Peak	2	15900.00	49.53	74.00	-24.47	55.45	40.67	12.71	59.30	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>47.40</td><td>74.00</td><td>-26.60</td><td>57.44</td><td>37.78</td><td>10.91</td><td>58.73</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>53.49</td><td>40.67</td><td>12.71</td><td>59.30</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	47.40	74.00	-26.60	57.44	37.78	10.91	58.73	--	--	Peak	2	15900.00	47.57	74.00	-26.43	53.49	40.67	12.71	59.30	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10600.00	46.80	74.00	-27.20	56.84	37.78	10.91	58.73	--	--	Peak																																																																																																																							
2	15900.00	49.53	74.00	-24.47	55.45	40.67	12.71	59.30	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10600.00	47.40	74.00	-26.60	57.44	37.78	10.91	58.73	--	--	Peak																																																																																																																							
2	15900.00	47.57	74.00	-26.43	53.49	40.67	12.71	59.30	--	--	Peak																																																																																																																							

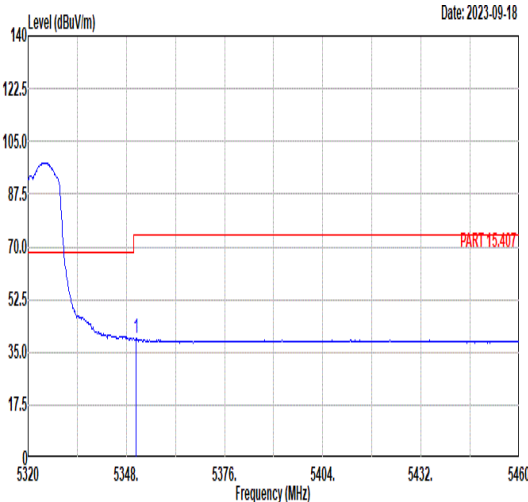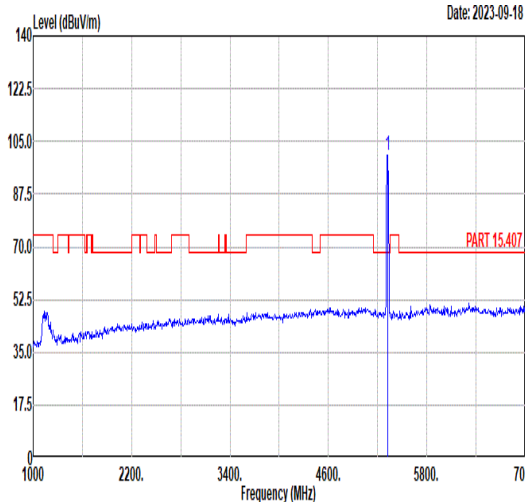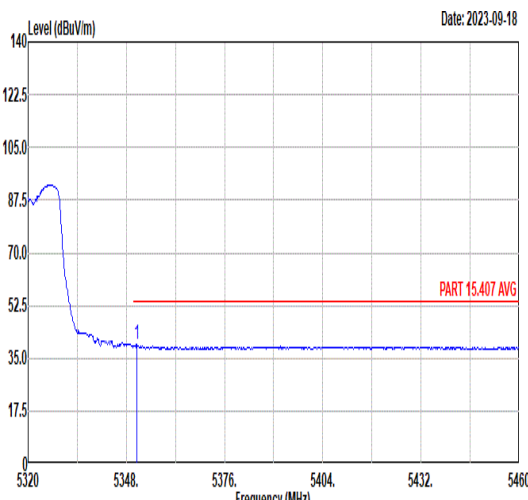
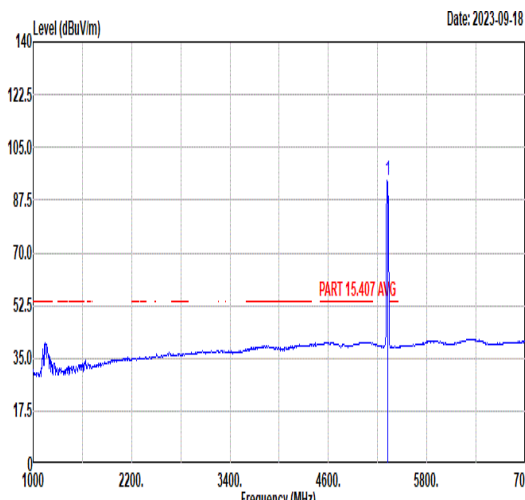


Mode	15																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																									
ANT	CDD 0+1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.80</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>29.82</td><td>34.58</td><td>8.33</td><td>33.17</td><td>206</td><td>237</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.80	39.56	74.00	-34.44	29.82	34.58	8.33	33.17	206	237	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>100.36</td><td>-----</td><td>-----</td><td>90.69</td><td>34.55</td><td>8.23</td><td>33.11</td><td>206</td><td>237</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	100.36	-----	-----	90.69	34.55	8.23	33.11	206	237
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5350.80	39.56	74.00	-34.44	29.82	34.58	8.33	33.17	206	237	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5320.00	100.36	-----	-----	90.69	34.55	8.23	33.11	206	237	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.94</td><td>39.57</td><td>54.00</td><td>-14.43</td><td>29.83</td><td>34.58</td><td>8.33</td><td>33.17</td><td>206</td><td>237</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.94	39.57	54.00	-14.43	29.83	34.58	8.33	33.17	206	237	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>93.83</td><td>-----</td><td>-----</td><td>84.16</td><td>34.55</td><td>8.23</td><td>33.11</td><td>206</td><td>237</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	93.83	-----	-----	84.16	34.55	8.23	33.11	206	237
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5350.94	39.57	54.00	-14.43	29.83	34.58	8.33	33.17	206	237	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5320.00	93.83	-----	-----	84.16	34.55	8.23	33.11	206	237	AVERAGE																																																																															

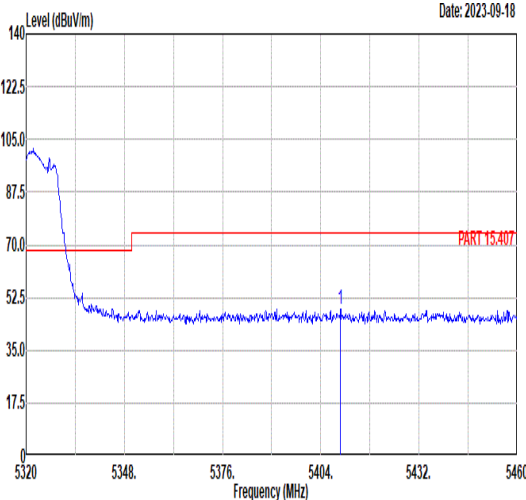
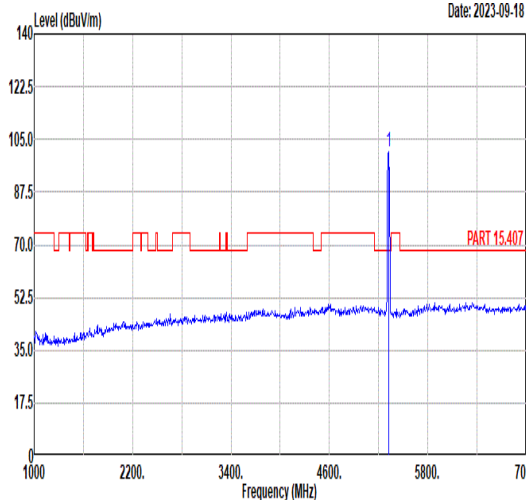
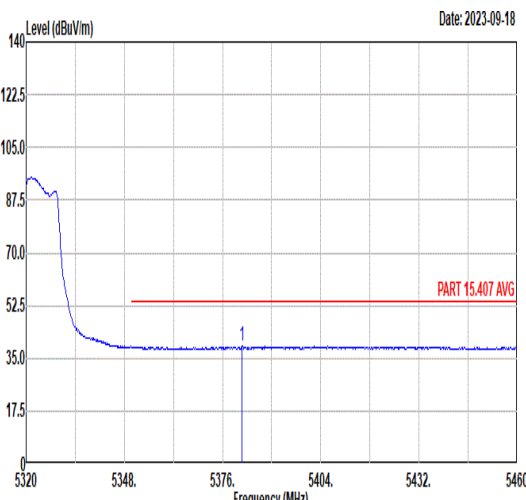
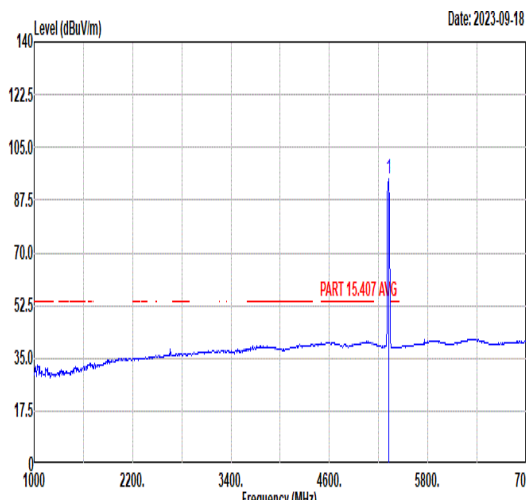


Mode	15																																																																																											
	Band Edge																																																																																											
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																											
ANT	CDD 0+1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	 Date: 2023-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5409.60</td><td>48.39</td><td>74.00</td><td>-25.61</td><td>38.55</td><td>34.63</td><td>8.48</td><td>33.27</td><td>100</td><td>90</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5409.60	48.39	74.00	-25.61	38.55	34.63	8.48	33.27	100	90	PEAK	 Date: 2023-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>101.15</td><td>-----</td><td>-----</td><td>91.47</td><td>34.55</td><td>8.25</td><td>33.12</td><td>100</td><td>90</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	101.15	-----	-----	91.47	34.55	8.25	33.12	100	90	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5409.60	48.39	74.00	-25.61	38.55	34.63	8.48	33.27	100	90	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	101.15	-----	-----	91.47	34.55	8.25	33.12	100	90	PEAK																																																																																	
Avg	 Date: 2023-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5381.60</td><td>39.03</td><td>54.00</td><td>-14.97</td><td>29.24</td><td>34.60</td><td>8.41</td><td>33.22</td><td>100</td><td>90</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5381.60	39.03	54.00	-14.97	29.24	34.60	8.41	33.22	100	90	AVERAGE	 Date: 2023-09-18 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>94.69</td><td>-----</td><td>-----</td><td>85.01</td><td>34.55</td><td>8.25</td><td>33.12</td><td>100</td><td>90</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	94.69	-----	-----	85.01	34.55	8.25	33.12	100	90	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5381.60	39.03	54.00	-14.97	29.24	34.60	8.41	33.22	100	90	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	94.69	-----	-----	85.01	34.55	8.25	33.12	100	90	AVERAGE																																																																																	

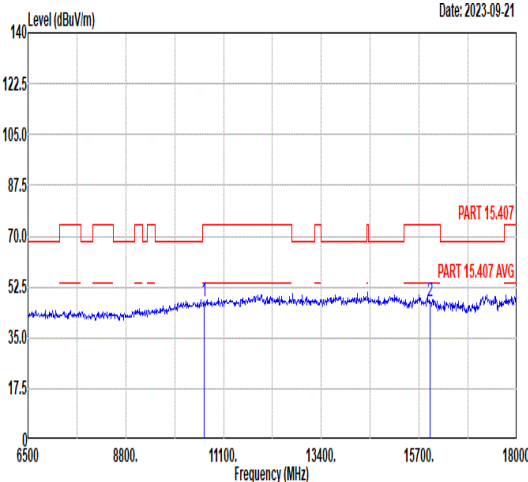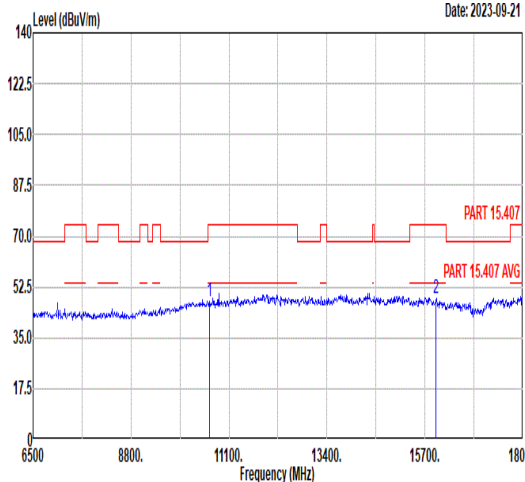

Mode	15																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>57.51</td><td>37.81</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.50</td><td>74.00</td><td>-26.50</td><td>53.48</td><td>40.69</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	47.57	74.00	-26.43	57.51	37.81	10.94	58.69	--	--	Peak	2	15960.00	47.50	74.00	-26.50	53.48	40.69	12.70	59.37	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>57.72</td><td>37.81</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>48.46</td><td>74.00</td><td>-25.54</td><td>54.44</td><td>40.69</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	47.78	74.00	-26.22	57.72	37.81	10.94	58.69	--	--	Peak	2	15960.00	48.46	74.00	-25.54	54.44	40.69	12.70	59.37	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10640.00	47.57	74.00	-26.43	57.51	37.81	10.94	58.69	--	--	Peak																																																																																																																							
2	15960.00	47.50	74.00	-26.50	53.48	40.69	12.70	59.37	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10640.00	47.78	74.00	-26.22	57.72	37.81	10.94	58.69	--	--	Peak																																																																																																																							
2	15960.00	48.46	74.00	-25.54	54.44	40.69	12.70	59.37	--	--	Peak																																																																																																																							

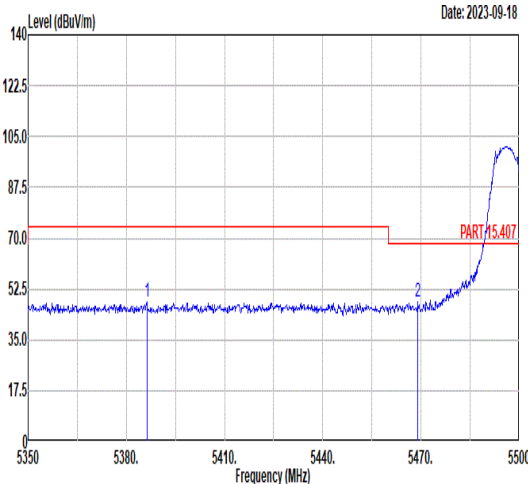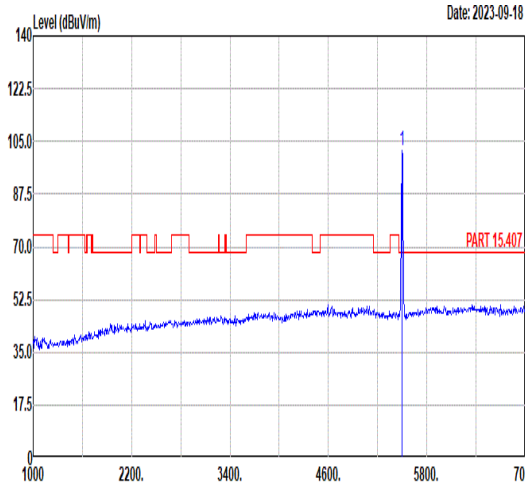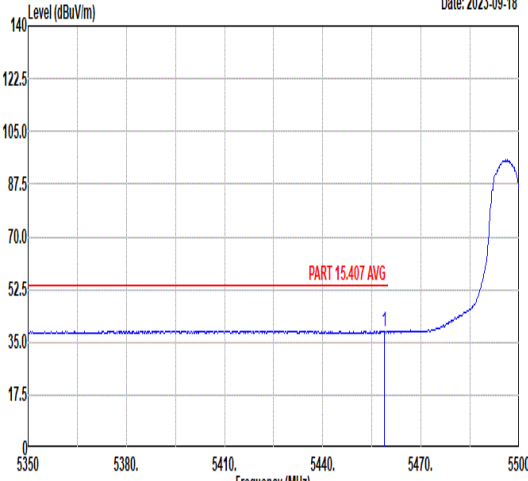
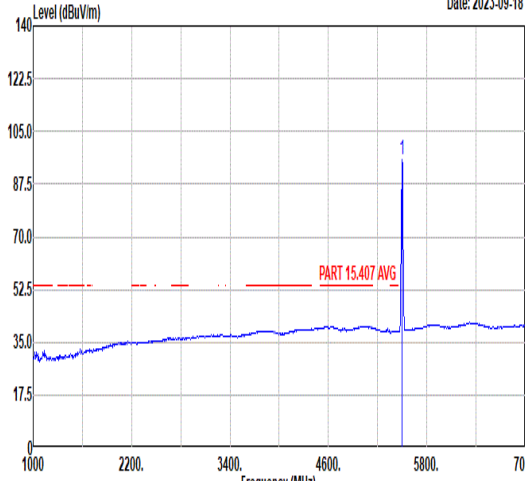


		16																																																																																																																		
Mode	Band Edge																																																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																																			
ANT	CDD 0+1																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																													
Peak																																																																																																																				
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>5386.30</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>38.04</td><td>34.61</td><td>8.42</td><td>33.23</td><td>100</td><td>142</td><td>PEAK</td></tr><tr><td>2</td><td>5469.10</td><td>47.93</td><td>68.30</td><td>-20.37</td><td>38.22</td><td>34.67</td><td>8.40</td><td>33.36</td><td>100</td><td>142</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5386.30	47.84	74.00	-26.16	38.04	34.61	8.42	33.23	100	142	PEAK	2	5469.10	47.93	68.30	-20.37	38.22	34.67	8.40	33.36	100	142	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>5500.00</td><td>101.71</td><td>-----</td><td>-----</td><td>92.06</td><td>34.69</td><td>8.36</td><td>33.40</td><td>100</td><td>142</td><td>PEAK</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5500.00	101.71	-----	-----	92.06	34.69	8.36	33.40	100	142
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5386.30	47.84	74.00	-26.16	38.04	34.61	8.42	33.23	100	142	PEAK																																																																																																									
2	5469.10	47.93	68.30	-20.37	38.22	34.67	8.40	33.36	100	142	PEAK																																																																																																									
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5500.00	101.71	-----	-----	92.06	34.69	8.36	33.40	100	142	PEAK																																																																																																									
Avg																																																																																																																				
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>5458.75</td><td>38.74</td><td>54.00</td><td>-15.26</td><td>29.02</td><td>34.66</td><td>8.41</td><td>33.35</td><td>100</td><td>142</td><td>AVERAGE</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5458.75	38.74	54.00	-15.26	29.02	34.66	8.41	33.35	100	142	AVERAGE	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>5500.00</td><td>95.38</td><td>-----</td><td>-----</td><td>85.73</td><td>34.69</td><td>8.36</td><td>33.40</td><td>100</td><td>142</td><td>AVERAGE</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5500.00	95.38	-----	-----	85.73	34.69	8.36	33.40	100	142	AVERAGE											
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5458.75	38.74	54.00	-15.26	29.02	34.66	8.41	33.35	100	142	AVERAGE																																																																																																									
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5500.00	95.38	-----	-----	85.73	34.69	8.36	33.40	100	142	AVERAGE																																																																																																									





Mode	16																																																																																																						
	Band Edge																																																																																																						
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																						
ANT	CDD 0+1																																																																																																						
Pol.	Vertical						Fundamental																																																																																																
Peak	Level (dBuV/m) Date: 2023-09-18 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5393.95</td><td>48.60</td><td>74.00</td><td>-25.40</td><td>38.78</td><td>34.61</td><td>8.45</td><td>33.24</td><td>105</td><td>92</td><td>PEAK</td></tr><tr><td>2</td><td>5467.15</td><td>48.11</td><td>68.30</td><td>-20.19</td><td>38.40</td><td>34.67</td><td>8.40</td><td>33.36</td><td>105</td><td>92</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5393.95	48.60	74.00	-25.40	38.78	34.61	8.45	33.24	105	92	PEAK	2	5467.15	48.11	68.30	-20.19	38.40	34.67	8.40	33.36	105	92	PEAK	Level (dBuV/m) Date: 2023-09-18 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>101.84</td><td>-----</td><td>-----</td><td>92.18</td><td>34.70</td><td>8.36</td><td>33.40</td><td>105</td><td>92</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	101.84	-----	-----	92.18	34.70	8.36	33.40	105	92	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5393.95	48.60	74.00	-25.40	38.78	34.61	8.45	33.24	105	92	PEAK																																																																																												
2	5467.15	48.11	68.30	-20.19	38.40	34.67	8.40	33.36	105	92	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5500.00	101.84	-----	-----	92.18	34.70	8.36	33.40	105	92	PEAK																																																																																												
Avg	Level (dBuV/m) Date: 2023-09-18 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5435.95</td><td>38.84</td><td>54.00</td><td>-15.16</td><td>29.06</td><td>34.65</td><td>8.44</td><td>33.31</td><td>105</td><td>92</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5435.95	38.84	54.00	-15.16	29.06	34.65	8.44	33.31	105	92	AVERAGE	Level (dBuV/m) Date: 2023-09-18 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>95.59</td><td>-----</td><td>-----</td><td>85.93</td><td>34.70</td><td>8.36</td><td>33.40</td><td>105</td><td>92</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	95.59	-----	-----	85.93	34.70	8.36	33.40	105	92	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5435.95	38.84	54.00	-15.16	29.06	34.65	8.44	33.31	105	92	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5500.00	95.59	-----	-----	85.93	34.70	8.36	33.40	105	92	AVERAGE																																																																																												

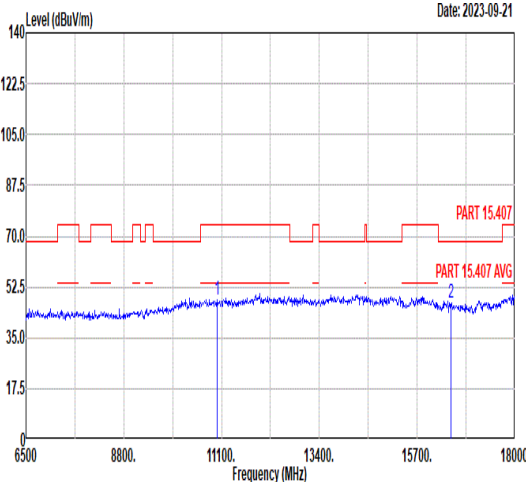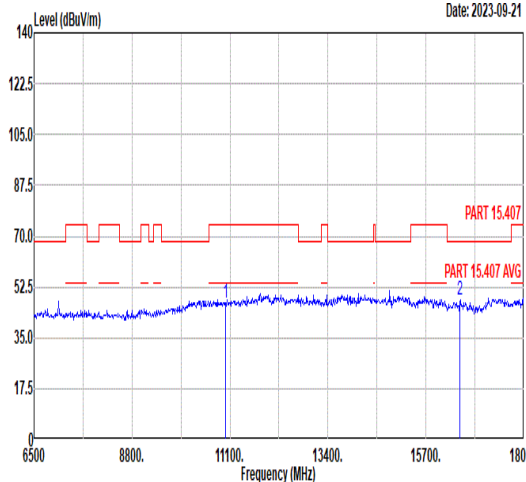

Mode	16																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																																																
ANT	CDD 0+1																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>48.01</td><td>74.00</td><td>-25.99</td><td>57.00</td><td>38.10</td><td>11.21</td><td>58.30</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>47.26</td><td>68.30</td><td>-21.04</td><td>52.25</td><td>40.95</td><td>12.91</td><td>58.85</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	48.01	74.00	-25.99	57.00	38.10	11.21	58.30	--	--	Peak	2	16500.00	47.26	68.30	-21.04	52.25	40.95	12.91	58.85	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>46.86</td><td>74.00</td><td>-27.14</td><td>55.85</td><td>38.10</td><td>11.21</td><td>58.30</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.17</td><td>68.30</td><td>-20.13</td><td>53.16</td><td>40.95</td><td>12.91</td><td>58.85</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	46.86	74.00	-27.14	55.85	38.10	11.21	58.30	--	--	Peak	2	16500.00	48.17	68.30	-20.13	53.16	40.95	12.91	58.85	--	--
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11000.00	48.01	74.00	-25.99	57.00	38.10	11.21	58.30	--	--	Peak																																																																																																																						
2	16500.00	47.26	68.30	-21.04	52.25	40.95	12.91	58.85	--	--	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11000.00	46.86	74.00	-27.14	55.85	38.10	11.21	58.30	--	--	Peak																																																																																																																						
2	16500.00	48.17	68.30	-20.13	53.16	40.95	12.91	58.85	--	--	Peak																																																																																																																						

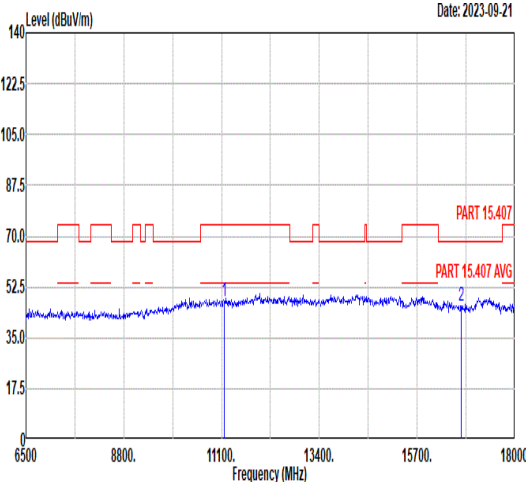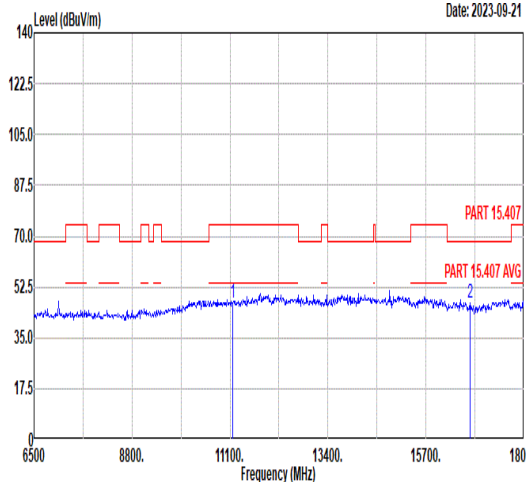

Mode	17																																																																																																																				
	Harmonic																																																																																																																				
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																				
ANT	CDD 0+1																																																																																																																				
Pol.	Horizontal					Vertical																																																																																																															
Peak Avg																																																																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>56.35</td><td>38.26</td><td>11.29</td><td>58.12</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>16740.00</td><td>46.21</td><td>68.30</td><td>-22.09</td><td>50.71</td><td>41.07</td><td>13.01</td><td>58.58</td><td>--</td><td>-- Peak</td></tr></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	47.78	74.00	-26.22	56.35	38.26	11.29	58.12	--	-- Peak	2	16740.00	46.21	68.30	-22.09	50.71	41.07	13.01	58.58	--	-- Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>55.79</td><td>38.26</td><td>11.29</td><td>58.12</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>16740.00</td><td>46.91</td><td>68.30</td><td>-21.39</td><td>51.41</td><td>41.07</td><td>13.01</td><td>58.58</td><td>--</td><td>-- Peak</td></tr></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	47.22	74.00	-26.78	55.79	38.26	11.29	58.12	--	-- Peak	2	16740.00	46.91	68.30	-21.39	51.41	41.07	13.01	58.58	--
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	11160.00	47.78	74.00	-26.22	56.35	38.26	11.29	58.12	--	-- Peak																																																																																																											
2	16740.00	46.21	68.30	-22.09	50.71	41.07	13.01	58.58	--	-- Peak																																																																																																											
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	11160.00	47.22	74.00	-26.78	55.79	38.26	11.29	58.12	--	-- Peak																																																																																																											
2	16740.00	46.91	68.30	-21.39	51.41	41.07	13.01	58.58	--	-- Peak																																																																																																											





Mode	18	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	CDD 0+1	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2023-09-18 1 5742.06 40.03 68.30 -28.27 29.56 35.08 8.74 33.35 135 360 PEAK	Level (dBuV/m) Date: 2023-09-18 1 5700.00 97.16 ----- 86.94 35.01 8.57 33.36 135 360 PEAK
Avg	Blank	Level (dBuV/m) Date: 2023-09-19 1 5700.00 91.23 ----- 81.01 35.01 8.57 33.36 135 360 AVERAGE



Mode	18																																																																																										
	Band Edge																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																										
ANT	CDD 0+1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2023-09-19 PART 15.407 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5749.34</td><td>49.68</td><td>68.30</td><td>-18.62</td><td>39.17</td><td>35.10</td><td>8.76</td><td>33.35</td><td>100</td><td>64</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5749.34	49.68	68.30	-18.62	39.17	35.10	8.76	33.35	100	64	PEAK	Level (dBuV/m) Date: 2023-09-19 PART 15.407 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>99.33</td><td>-----</td><td>-----</td><td>89.07</td><td>35.02</td><td>8.60</td><td>33.36</td><td>100</td><td>64</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	99.33	-----	-----	89.07	35.02	8.60	33.36	100	64	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5749.34	49.68	68.30	-18.62	39.17	35.10	8.76	33.35	100	64	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5700.00	99.33	-----	-----	89.07	35.02	8.60	33.36	100	64	PEAK																																																																																
Avg	Blank						Level (dBuV/m) Date: 2023-09-19 PART 15.407 AVG Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>93.34</td><td>-----</td><td>-----</td><td>83.08</td><td>35.02</td><td>8.60</td><td>33.36</td><td>100</td><td>64</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	93.34	-----	-----	83.08	35.02	8.60	33.36	100	64	AVERAGE																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5700.00	93.34	-----	-----	83.08	35.02	8.60	33.36	100	64	AVERAGE																																																																																

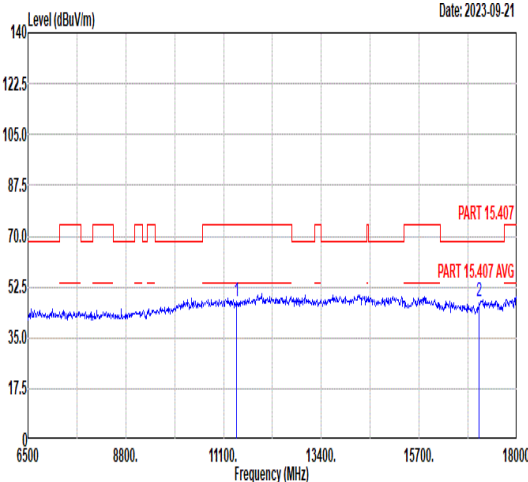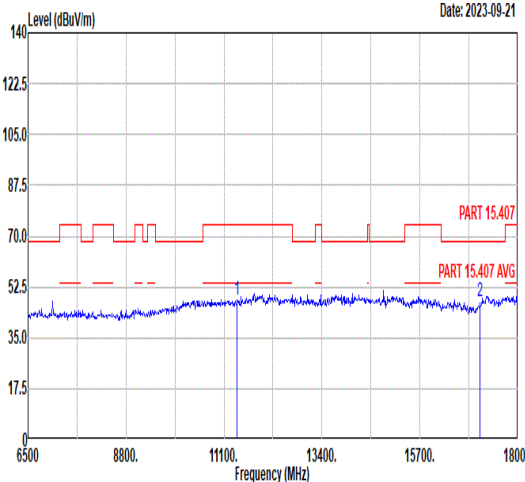

Mode	18																																																																																																																						
	Harmonic																																																																																																																						
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																																						
ANT	CDD 0+1																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																
Peak Avg																																																																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>55.63</td><td>38.50</td><td>11.41</td><td>57.86</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.59</td><td>68.30</td><td>-20.71</td><td>51.37</td><td>41.24</td><td>13.14</td><td>58.16</td><td>--</td><td>Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11400.00	47.68	74.00	-26.32	55.63	38.50	11.41	57.86	--	Peak	2	17100.00	47.59	68.30	-20.71	51.37	41.24	13.14	58.16	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>48.12</td><td>74.00</td><td>-25.88</td><td>56.07</td><td>38.50</td><td>11.41</td><td>57.86</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.76</td><td>68.30</td><td>-20.54</td><td>51.54</td><td>41.24</td><td>13.14</td><td>58.16</td><td>--</td><td>Peak</td></tr></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11400.00	48.12	74.00	-25.88	56.07	38.50	11.41	57.86	--	Peak	2	17100.00	47.76	68.30	-20.54	51.54	41.24	13.14	58.16	--	Peak
			Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11400.00	47.68	74.00	-26.32	55.63	38.50	11.41	57.86	--	Peak																																																																																																													
2	17100.00	47.59	68.30	-20.71	51.37	41.24	13.14	58.16	--	Peak																																																																																																													
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11400.00	48.12	74.00	-25.88	56.07	38.50	11.41	57.86	--	Peak																																																																																																													
2	17100.00	47.76	68.30	-20.54	51.54	41.24	13.14	58.16	--	Peak																																																																																																													







		19																																																
Mode	Band Edge - L																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																	
ANT	CDD 0+1																																																	
Pol.																																																		
Peak	Horizontal																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.91</td><td>53.12</td><td>74.00</td><td>-20.88</td><td>43.63</td><td>34.42</td><td>7.92</td><td>32.85</td><td>106</td><td>95</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	53.12	74.00	-20.88	43.63	34.42	7.92	32.85	106	95
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5149.91	53.12	74.00	-20.88	43.63	34.42	7.92	32.85	106	95	PEAK																																							
Peak	Fundamental																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>99.12</td><td>-----</td><td>-----</td><td>89.64</td><td>34.45</td><td>7.94</td><td>32.91</td><td>106</td><td>95</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	99.12	-----	-----	89.64	34.45	7.94	32.91	106	95
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5190.00	99.12	-----	-----	89.64	34.45	7.94	32.91	106	95	PEAK																																							
Avg	Horizontal																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.63</td><td>43.97</td><td>54.00</td><td>-10.03</td><td>34.47</td><td>34.42</td><td>7.92</td><td>32.84</td><td>106</td><td>95</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.63	43.97	54.00	-10.03	34.47	34.42	7.92	32.84	106	95
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5147.63	43.97	54.00	-10.03	34.47	34.42	7.92	32.84	106	95	AVERAGE																																							
Avg	Fundamental																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>92.55</td><td>-----</td><td>-----</td><td>83.06</td><td>34.45</td><td>7.94</td><td>32.90</td><td>106</td><td>95</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	92.55	-----	-----	83.06	34.45	7.94	32.90	106	95
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5190.00	92.55	-----	-----	83.06	34.45	7.94	32.90	106	95	AVERAGE																																							



Mode	19																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																									
ANT	CDD 0+1																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2023-09-19 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5393.04</td><td>47.93</td><td>74.00</td><td>-26.07</td><td>38.12</td><td>34.61</td><td>8.44</td><td>33.24</td><td>106</td><td>95</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5393.04	47.93	74.00	-26.07	38.12	34.61	8.44	33.24	106	95	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5393.04	47.93	74.00	-26.07	38.12	34.61	8.44	33.24	106	95	PEAK																															
Avg	Date: 2023-09-19 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5395.20</td><td>38.61</td><td>54.00</td><td>-15.39</td><td>28.79</td><td>34.61</td><td>8.45</td><td>33.24</td><td>106</td><td>95</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5395.20	38.61	54.00	-15.39	28.79	34.61	8.45	33.24	106	95	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5395.20	38.61	54.00	-15.39	28.79	34.61	8.45	33.24	106	95	AVERAGE																															

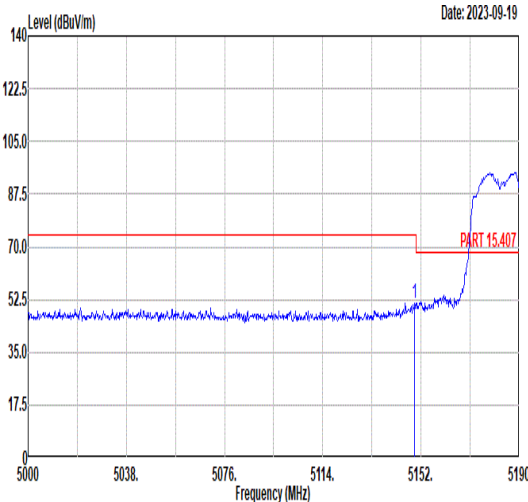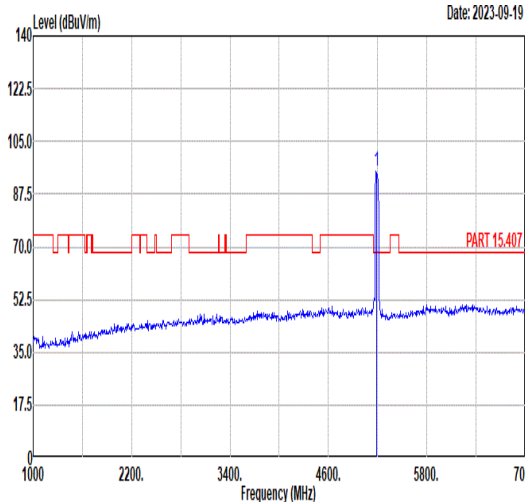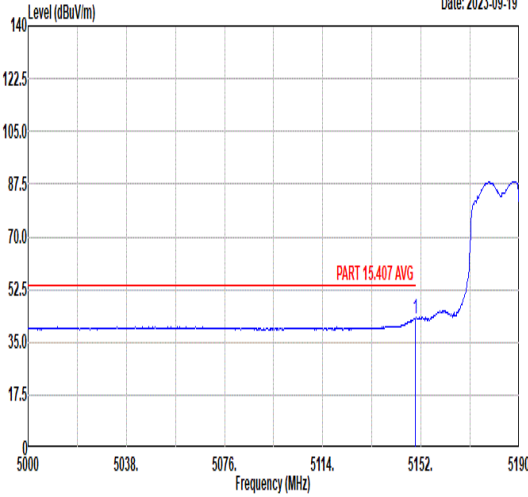
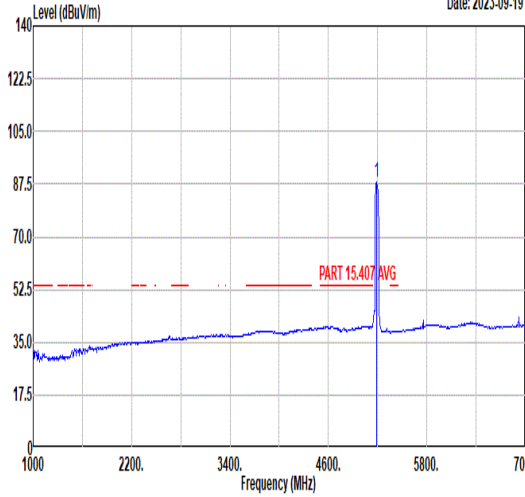


		19																																																																														
Mode		Band Edge - L																																																																														
		U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																														
ANT		CDD 0+1																																																																														
Pol.		Vertical					Fundamental																																																																									
Peak																																																																																
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.53	51.34	74.00	-22.66	41.85	34.42	7.92	32.85	100	43	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>94.89</td><td>-----</td><td>-----</td><td>85.40</td><td>34.44</td><td>7.94</td><td>32.89</td><td>100</td><td>43</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	94.89	-----	-----	85.40	34.44	7.94	32.89	100	43
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5149.53	51.34	74.00	-22.66	41.85	34.42	7.92	32.85	100	43	PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5190.00	94.89	-----	-----	85.40	34.44	7.94	32.89	100	43	PEAK																																																																					
Avg																																																																																
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	43.02	54.00	-10.98	33.53	34.42	7.92	32.85	100	43	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>88.17</td><td>-----</td><td>-----</td><td>78.69</td><td>34.45</td><td>7.94</td><td>32.91</td><td>100</td><td>43</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	88.17	-----	-----	78.69	34.45	7.94	32.91	100	43
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5149.91	43.02	54.00	-10.98	33.53	34.42	7.92	32.85	100	43	AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5190.00	88.17	-----	-----	78.69	34.45	7.94	32.91	100	43	AVERAGE																																																																					





Mode	19																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																		
ANT	CDD 0+1																																																		
Pol.	Vertical										Fundamental																																								
Peak	Date: 2023-09-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5359.02</td><td>47.93</td><td>74.00</td><td>-26.07</td><td>38.17</td><td>34.59</td><td>8.35</td><td>33.18</td><td>100</td><td>43</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5359.02	47.93	74.00	-26.07	38.17	34.59	8.35	33.18	100	43	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5359.02	47.93	74.00	-26.07	38.17	34.59	8.35	33.18	100	43	PEAK																																								
Avg	Date: 2023-09-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5412.21</td><td>38.68</td><td>54.00</td><td>-15.32</td><td>28.85</td><td>34.63</td><td>8.47</td><td>33.27</td><td>100</td><td>43</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5412.21	38.68	54.00	-15.32	28.85	34.63	8.47	33.27	100	43	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5412.21	38.68	54.00	-15.32	28.85	34.63	8.47	33.27	100	43	AVERAGE																																								

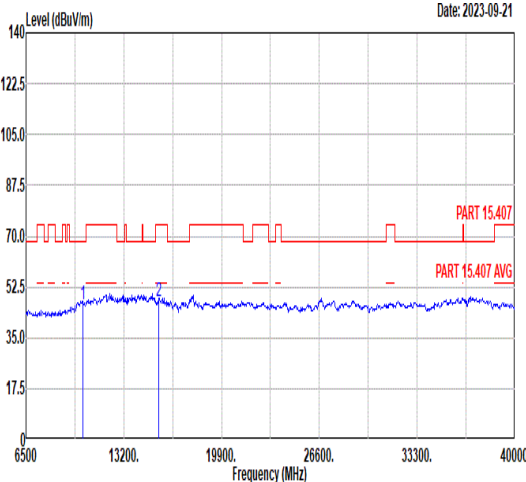
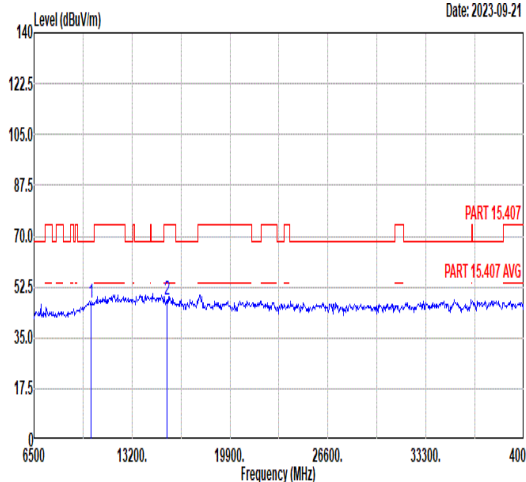


Mode	19																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																																																																																																																									
ANT	CDD 0+1																																																																																																																																																																																									
Pol.	Horizontal								Vertical																																																																																																																																																																																	
Peak Avg																																																																																																																																																																																										
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="5">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th><th colspan="2"></th><th colspan="3"></th></tr><tr><td>1</td><td>10380.00</td><td>46.26</td><td>68.30</td><td>-22.04</td><td>56.87</td><td>37.63</td><td>10.74</td><td>58.98</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td colspan="3"></td></tr><tr><td>2</td><td>15570.00</td><td>47.35</td><td>74.00</td><td>-26.65</td><td>53.03</td><td>40.57</td><td>12.72</td><td>58.97</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td colspan="3"></td></tr></table>										Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg								1	10380.00	46.26	68.30	-22.04	56.87	37.63	10.74	58.98	--	--	Peak						2	15570.00	47.35	74.00	-26.65	53.03	40.57	12.72	58.97	--	--	Peak						<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="5">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th><th colspan="2"></th><th colspan="3"></th></tr><tr><td>1</td><td>10380.00</td><td>46.84</td><td>68.30</td><td>-21.46</td><td>57.45</td><td>37.63</td><td>10.74</td><td>58.98</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td colspan="3"></td></tr><tr><td>2</td><td>15570.00</td><td>48.02</td><td>74.00</td><td>-25.98</td><td>53.70</td><td>40.57</td><td>12.72</td><td>58.97</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td colspan="3"></td></tr></table>										Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg								1	10380.00	46.84	68.30	-21.46	57.45	37.63	10.74	58.98	--	--	Peak						2	15570.00	48.02	74.00	-25.98	53.70	40.57	12.72	58.97	--	--	Peak					
			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																	
1	10380.00	46.26	68.30	-22.04	56.87	37.63	10.74	58.98	--	--	Peak																																																																																																																																																																															
2	15570.00	47.35	74.00	-26.65	53.03	40.57	12.72	58.97	--	--	Peak																																																																																																																																																																															
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																	
1	10380.00	46.84	68.30	-21.46	57.45	37.63	10.74	58.98	--	--	Peak																																																																																																																																																																															
2	15570.00	48.02	74.00	-25.98	53.70	40.57	12.72	58.97	--	--	Peak																																																																																																																																																																															



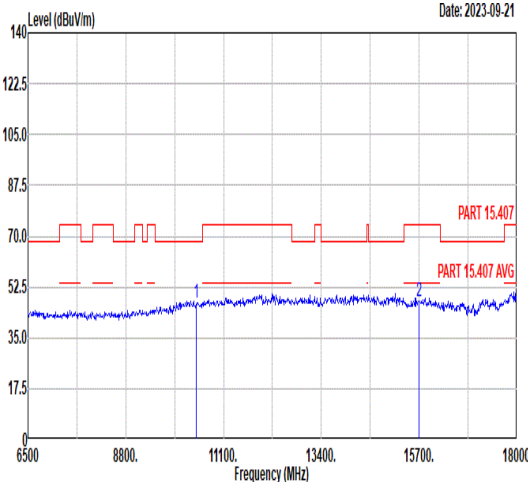
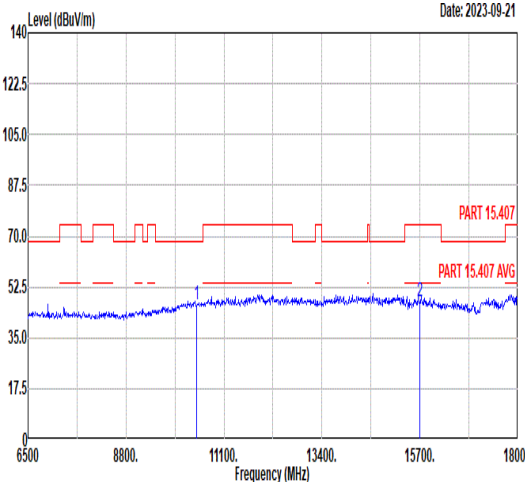


Mode	20																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																																																																
ANT	CDD 0+1																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10460.00</td><td>46.99</td><td>68.30</td><td>-21.31</td><td>57.41</td><td>37.67</td><td>10.80</td><td>58.89</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>47.34</td><td>74.00</td><td>-26.66</td><td>53.10</td><td>40.61</td><td>12.72</td><td>59.09</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10460.00	46.99	68.30	-21.31	57.41	37.67	10.80	58.89	--	--	Peak	2	15690.00	47.34	74.00	-26.66	53.10	40.61	12.72	59.09	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10460.00</td><td>46.37</td><td>68.30</td><td>-21.93</td><td>56.79</td><td>37.67</td><td>10.80</td><td>58.89</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>53.35</td><td>40.61</td><td>12.72</td><td>59.09</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10460.00	46.37	68.30	-21.93	56.79	37.67	10.80	58.89	--	--	Peak	2	15690.00	47.59	74.00	-26.41	53.35	40.61	12.72	59.09	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10460.00	46.99	68.30	-21.31	57.41	37.67	10.80	58.89	--	--	Peak																																																																																																																						
2	15690.00	47.34	74.00	-26.66	53.10	40.61	12.72	59.09	--	--	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10460.00	46.37	68.30	-21.93	56.79	37.67	10.80	58.89	--	--	Peak																																																																																																																						
2	15690.00	47.59	74.00	-26.41	53.35	40.61	12.72	59.09	--	--	Peak																																																																																																																						

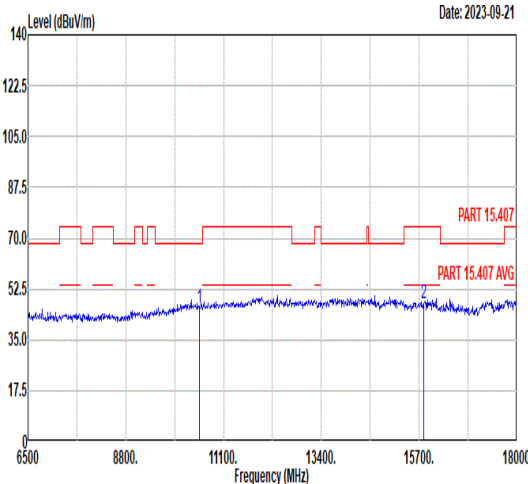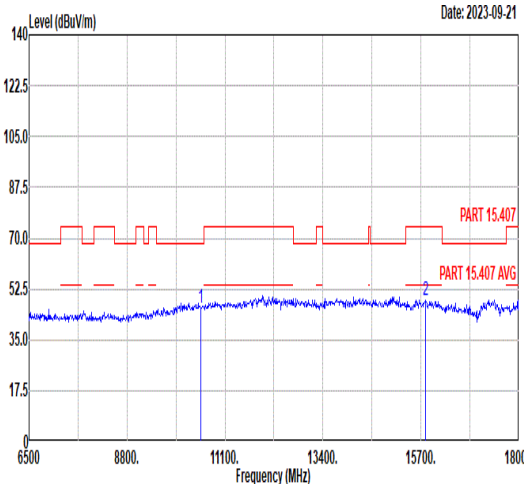

Mode	21																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10540.00</td><td>46.21</td><td>68.30</td><td>-22.09</td><td>56.42</td><td>37.73</td><td>10.86</td><td>58.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15810.00</td><td>47.70</td><td>74.00</td><td>-26.30</td><td>53.56</td><td>40.64</td><td>12.71</td><td>59.21</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10540.00	46.21	68.30	-22.09	56.42	37.73	10.86	58.80	--	--	Peak	2	15810.00	47.70	74.00	-26.30	53.56	40.64	12.71	59.21	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10540.00</td><td>45.99</td><td>68.30</td><td>-22.31</td><td>56.20</td><td>37.73</td><td>10.86</td><td>58.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15810.00</td><td>48.61</td><td>74.00</td><td>-25.39</td><td>54.47</td><td>40.64</td><td>12.71</td><td>59.21</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10540.00	45.99	68.30	-22.31	56.20	37.73	10.86	58.80	--	--	Peak	2	15810.00	48.61	74.00	-25.39	54.47	40.64	12.71	59.21	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10540.00	46.21	68.30	-22.09	56.42	37.73	10.86	58.80	--	--	Peak																																																																																																																							
2	15810.00	47.70	74.00	-26.30	53.56	40.64	12.71	59.21	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10540.00	45.99	68.30	-22.31	56.20	37.73	10.86	58.80	--	--	Peak																																																																																																																							
2	15810.00	48.61	74.00	-25.39	54.47	40.64	12.71	59.21	--	--	Peak																																																																																																																							

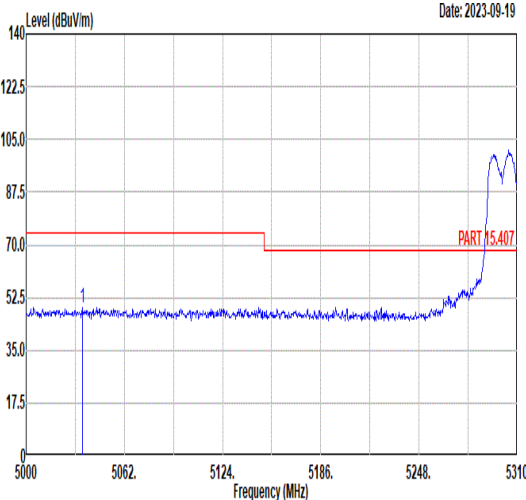
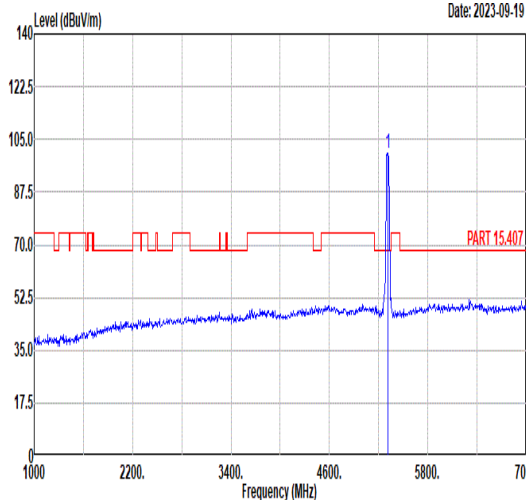
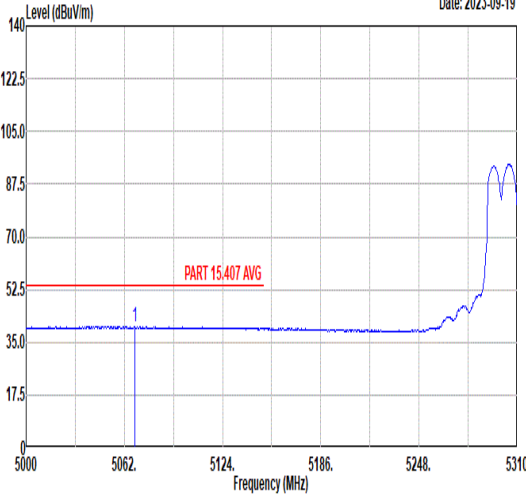
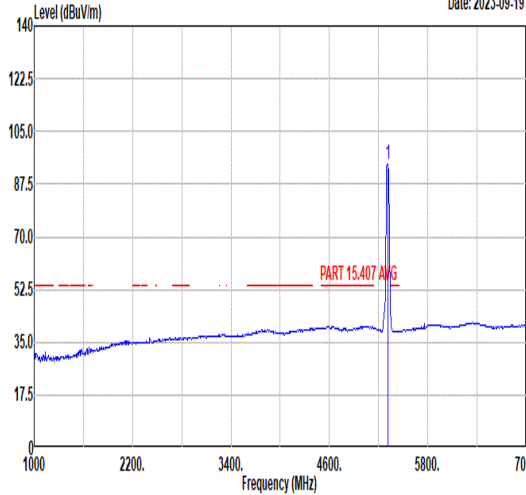


Mode	22																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																									
ANT	CDD 0+1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5035.65</td><td>49.21</td><td>74.00</td><td>-24.79</td><td>39.70</td><td>34.33</td><td>7.84</td><td>32.66</td><td>100</td><td>96</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5035.65	49.21	74.00	-24.79	39.70	34.33	7.84	32.66	100	96	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>100.50</td><td>-----</td><td>-----</td><td>90.83</td><td>34.55</td><td>8.23</td><td>33.11</td><td>100</td><td>96</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	100.50	-----	-----	90.83	34.55	8.23	33.11	100	96
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5035.65	49.21	74.00	-24.79	39.70	34.33	7.84	32.66	100	96	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5310.00	100.50	-----	-----	90.83	34.55	8.23	33.11	100	96	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5068.82</td><td>40.30</td><td>54.00</td><td>-13.70</td><td>30.79</td><td>34.36</td><td>7.86</td><td>32.71</td><td>100</td><td>96</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5068.82	40.30	54.00	-13.70	30.79	34.36	7.86	32.71	100	96	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>93.88</td><td>-----</td><td>-----</td><td>84.21</td><td>34.55</td><td>8.23</td><td>33.11</td><td>100</td><td>96</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	93.88	-----	-----	84.21	34.55	8.23	33.11	100	96
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5068.82	40.30	54.00	-13.70	30.79	34.36	7.86	32.71	100	96	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5310.00	93.88	-----	-----	84.21	34.55	8.23	33.11	100	96	AVERAGE																																																																															





Mode	22																																								
	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																								
ANT	CDD 0+1																																								
Pol.	Horizontal	Fundamental																																							
Peak	Level (dBuV/m) Date: 2023-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.05</td><td>50.38</td><td>74.00</td><td>-23.62</td><td>40.64</td><td>34.58</td><td>8.34</td><td>33.18</td><td>100</td><td>96 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5356.05	50.38	74.00	-23.62	40.64	34.58	8.34	33.18	100	96 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5356.05	50.38	74.00	-23.62	40.64	34.58	8.34	33.18	100	96 PEAK																															
Avg	Level (dBuV/m) Date: 2023-09-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5355.15</td><td>41.45</td><td>54.00</td><td>-12.55</td><td>31.71</td><td>34.58</td><td>8.34</td><td>33.18</td><td>100</td><td>96 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5355.15	41.45	54.00	-12.55	31.71	34.58	8.34	33.18	100	96 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5355.15	41.45	54.00	-12.55	31.71	34.58	8.34	33.18	100	96 AVERAGE																															

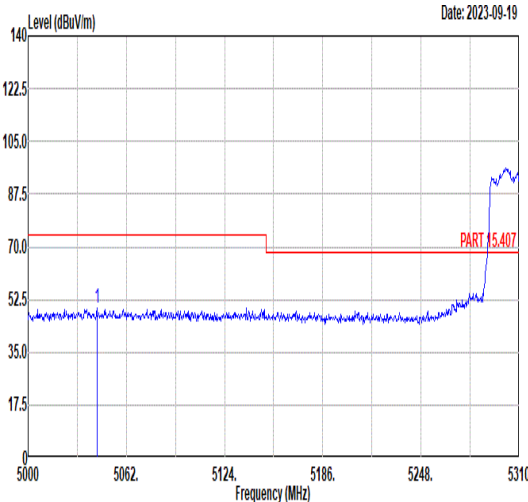
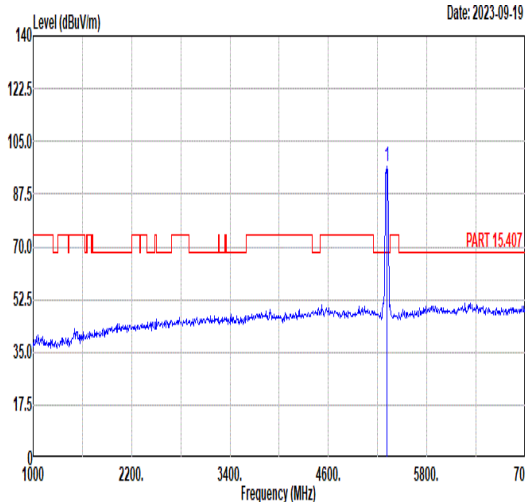
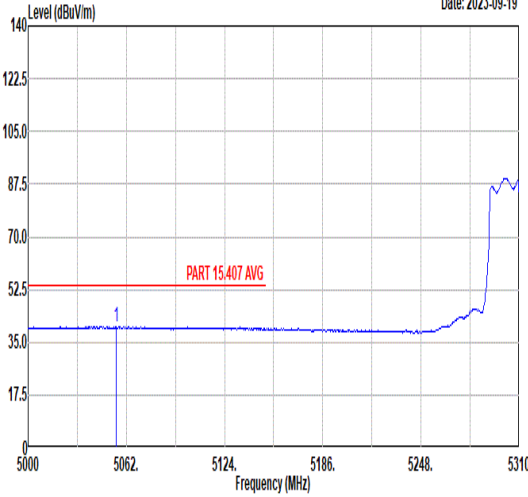
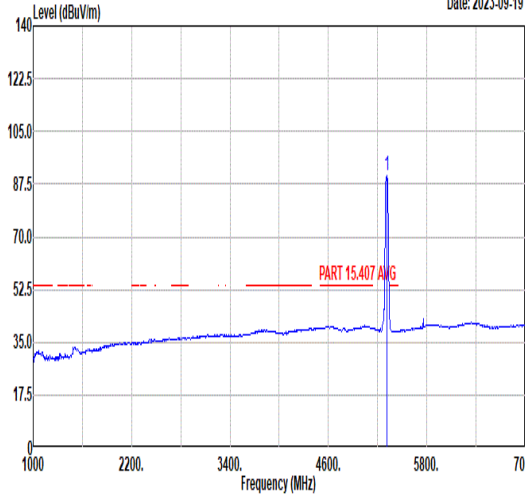


		22																																																																													
Mode		Band Edge - L																																																																													
		U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																													
ANT		CDD 0+1																																																																													
Pol.		Vertical					Fundamental																																																																								
Peak																																																																															
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5043.40	49.75	74.00	-24.25	40.23	34.34	7.85	32.67	300	63 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5310.00</td><td>96.42</td><td>-----</td><td>86.75</td><td>34.55</td><td>8.23</td><td>33.11</td><td>300</td><td>63 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	96.42	-----	86.75	34.55	8.23	33.11	300
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5043.40	49.75	74.00	-24.25	40.23	34.34	7.85	32.67	300	63 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5310.00	96.42	-----	86.75	34.55	8.23	33.11	300	63 PEAK																																																																							
Avg																																																																															
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5055.49	40.23	54.00	-13.77	30.71	34.35	7.86	32.69	300	63 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5310.00</td><td>90.08</td><td>-----</td><td>80.41</td><td>34.55</td><td>8.23</td><td>33.11</td><td>300</td><td>63 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	90.08	-----	80.41	34.55	8.23	33.11	300
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5055.49	40.23	54.00	-13.77	30.71	34.35	7.86	32.69	300	63 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5310.00	90.08	-----	80.41	34.55	8.23	33.11	300	63 AVERAGE																																																																							

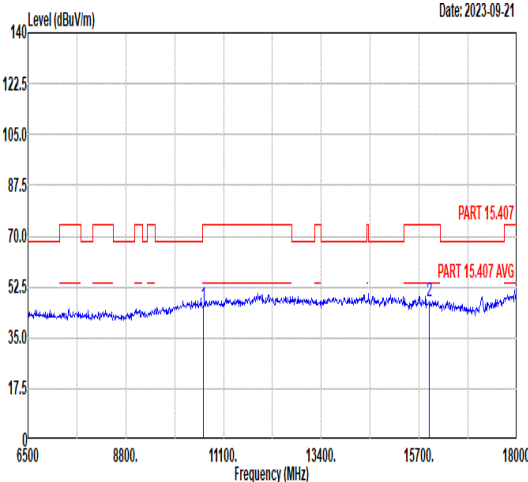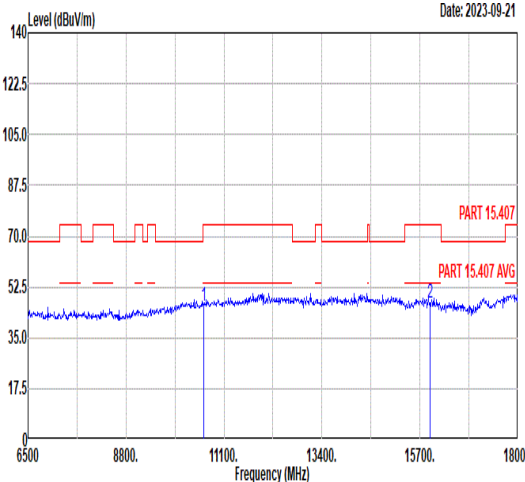

Mode	22																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10620.00</td><td>46.03</td><td>74.00</td><td>-27.97</td><td>56.03</td><td>37.79</td><td>10.92</td><td>58.71</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15930.00</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>53.38</td><td>40.68</td><td>12.70</td><td>59.34</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10620.00	46.03	74.00	-27.97	56.03	37.79	10.92	58.71	--	--	Peak	2	15930.00	47.42	74.00	-26.58	53.38	40.68	12.70	59.34	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10620.00</td><td>45.79</td><td>74.00</td><td>-28.21</td><td>55.79</td><td>37.79</td><td>10.92</td><td>58.71</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15930.00</td><td>47.02</td><td>74.00</td><td>-26.98</td><td>52.98</td><td>40.68</td><td>12.70</td><td>59.34</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10620.00	45.79	74.00	-28.21	55.79	37.79	10.92	58.71	--	--	Peak	2	15930.00	47.02	74.00	-26.98	52.98	40.68	12.70	59.34	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10620.00	46.03	74.00	-27.97	56.03	37.79	10.92	58.71	--	--	Peak																																																																																																																							
2	15930.00	47.42	74.00	-26.58	53.38	40.68	12.70	59.34	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10620.00	45.79	74.00	-28.21	55.79	37.79	10.92	58.71	--	--	Peak																																																																																																																							
2	15930.00	47.02	74.00	-26.98	52.98	40.68	12.70	59.34	--	--	Peak																																																																																																																							

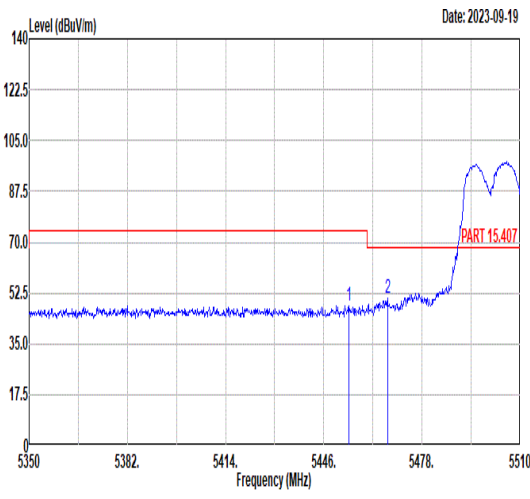
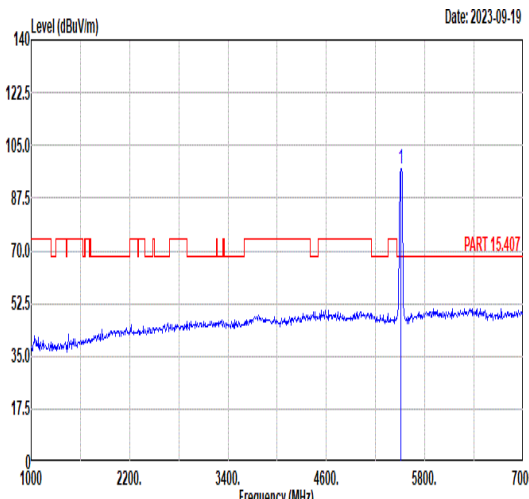
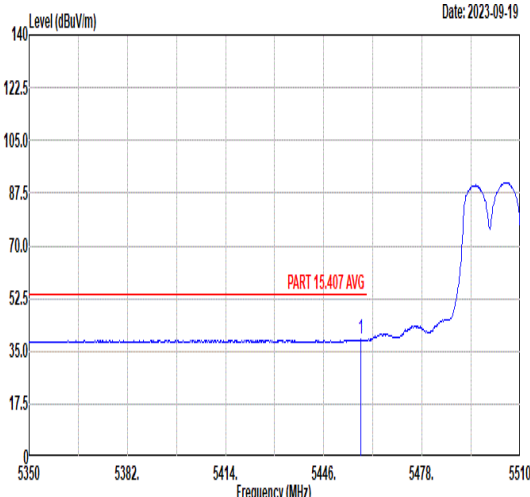
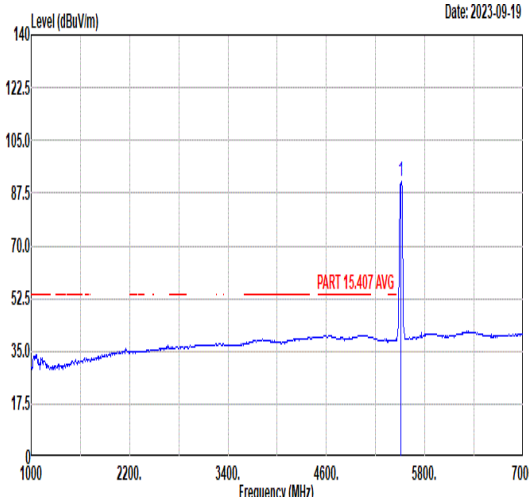


		23																																																																																																						
Mode		Band Edge - L																																																																																																						
		U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																						
ANT		CDD 0+1																																																																																																						
Pol.		Horizontal					Fundamental																																																																																																	
Peak	 Level (dBuV/m) Date: 2023-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5454.16</td><td>48.23</td><td>74.00</td><td>-25.77</td><td>38.49</td><td>34.66</td><td>8.42</td><td>33.34</td><td>164</td><td>143</td><td>PEAK</td></tr><tr><td>2</td><td>5466.80</td><td>50.49</td><td>68.30</td><td>-17.81</td><td>40.78</td><td>34.67</td><td>8.40</td><td>33.36</td><td>164</td><td>143</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.16	48.23	74.00	-25.77	38.49	34.66	8.42	33.34	164	143	PEAK	2	5466.80	50.49	68.30	-17.81	40.78	34.67	8.40	33.36	164	143	PEAK	 Level (dBuV/m) Date: 2023-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>97.47</td><td>-----</td><td>-----</td><td>87.82</td><td>34.72</td><td>8.33</td><td>33.40</td><td>164</td><td>143</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	97.47	-----	-----	87.82	34.72	8.33	33.40	164	143	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5454.16	48.23	74.00	-25.77	38.49	34.66	8.42	33.34	164	143	PEAK																																																																																													
2	5466.80	50.49	68.30	-17.81	40.78	34.67	8.40	33.36	164	143	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	97.47	-----	-----	87.82	34.72	8.33	33.40	164	143	PEAK																																																																																													
Avg	 Level (dBuV/m) Date: 2023-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.00</td><td>38.86</td><td>54.00</td><td>-15.14</td><td>29.13</td><td>34.66</td><td>8.41</td><td>33.34</td><td>164</td><td>143</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.00	38.86	54.00	-15.14	29.13	34.66	8.41	33.34	164	143	AVERAGE	 Level (dBuV/m) Date: 2023-09-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>91.28</td><td>-----</td><td>-----</td><td>81.63</td><td>34.72</td><td>8.33</td><td>33.40</td><td>164</td><td>143</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	91.28	-----	-----	81.63	34.72	8.33	33.40	164	143	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5458.00	38.86	54.00	-15.14	29.13	34.66	8.41	33.34	164	143	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	91.28	-----	-----	81.63	34.72	8.33	33.40	164	143	AVERAGE																																																																																													



Mode	23																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																							
ANT	CDD 0+1																																							
Pol.	Horizontal	Fundamental																																						
Peak	Date: 2023-09-19 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5731.85</td><td>49.23</td><td>68.30</td><td>-19.07</td><td>38.81</td><td>35.07</td><td>8.70</td><td>33.35</td><td>164</td><td>143 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5731.85	49.23	68.30	-19.07	38.81	35.07	8.70	33.35	164	143 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5731.85	49.23	68.30	-19.07	38.81	35.07	8.70	33.35	164	143 PEAK																															

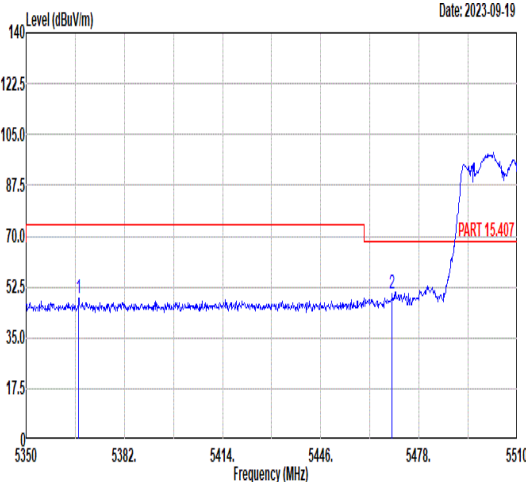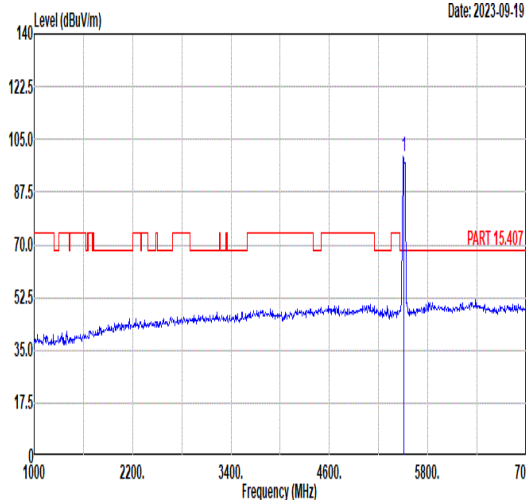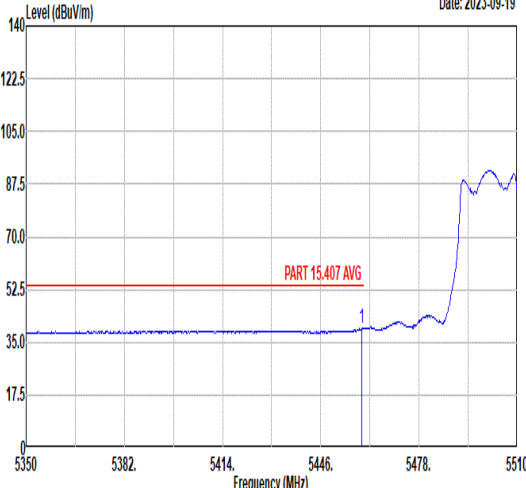
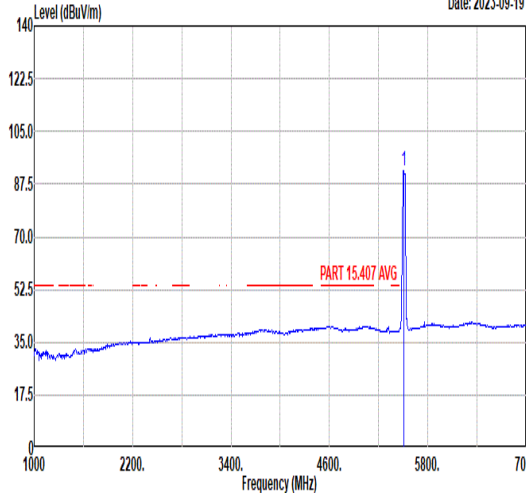


Mode	23																																																																																																									
	Band Edge - L																																																																																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																									
ANT	CDD 0+1																																																																																																									
Pol.	Vertical						Fundamental																																																																																																			
Peak																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5367.12</td><td>48.78</td><td>74.00</td><td>-25.22</td><td>39.02</td><td>34.59</td><td>8.37</td><td>33.20</td><td>100</td><td>93</td><td>PEAK</td></tr><tr><td>2</td><td>5469.20</td><td>50.08</td><td>68.30</td><td>-18.22</td><td>40.37</td><td>34.67</td><td>8.40</td><td>33.36</td><td>100</td><td>93</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5367.12	48.78	74.00	-25.22	39.02	34.59	8.37	33.20	100	93	PEAK	2	5469.20	50.08	68.30	-18.22	40.37	34.67	8.40	33.36	100	93	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5510.00</td><td>99.14</td><td>-----</td><td>-----</td><td>89.48</td><td>34.70</td><td>8.36</td><td>33.40</td><td>100</td><td>93</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	99.14	-----	-----	89.48	34.70	8.36	33.40	100	93
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5367.12	48.78	74.00	-25.22	39.02	34.59	8.37	33.20	100	93	PEAK																																																																																															
2	5469.20	50.08	68.30	-18.22	40.37	34.67	8.40	33.36	100	93	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5510.00	99.14	-----	-----	89.48	34.70	8.36	33.40	100	93	PEAK																																																																																															
Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5459.44</td><td>39.60</td><td>54.00</td><td>-14.40</td><td>29.88</td><td>34.66</td><td>8.41</td><td>33.35</td><td>100</td><td>93</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.44	39.60	54.00	-14.40	29.88	34.66	8.41	33.35	100	93	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5510.00</td><td>91.92</td><td>-----</td><td>-----</td><td>82.26</td><td>34.70</td><td>8.36</td><td>33.40</td><td>100</td><td>93</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	91.92	-----	-----	82.26	34.70	8.36	33.40	100	93	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5459.44	39.60	54.00	-14.40	29.88	34.66	8.41	33.35	100	93	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5510.00	91.92	-----	-----	82.26	34.70	8.36	33.40	100	93	AVERAGE																																																																																															





Mode	23																																																				
	Band Edge - R																																																				
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																				
ANT	CDD 0+1																																																				
Pol.	Vertical						Fundamental																																														
Peak	Date: 2023-09-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5758.63</td><td>49.93</td><td>68.30</td><td>-18.37</td><td>39.37</td><td>35.11</td><td>8.80</td><td>33.35</td><td>100</td><td>93</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5758.63	49.93	68.30	-18.37	39.37	35.11	8.80	33.35	100	93	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5758.63	49.93	68.30	-18.37	39.37	35.11	8.80	33.35	100	93	PEAK																																										



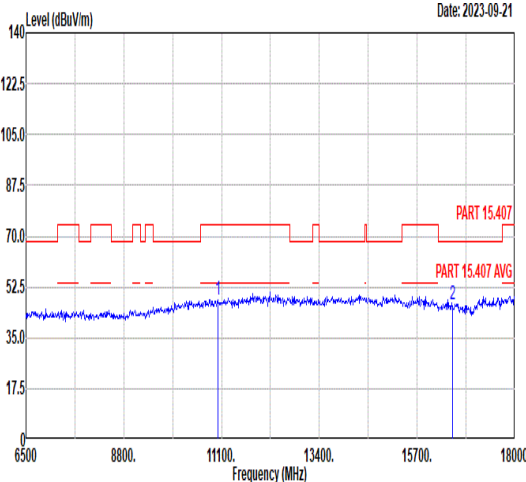
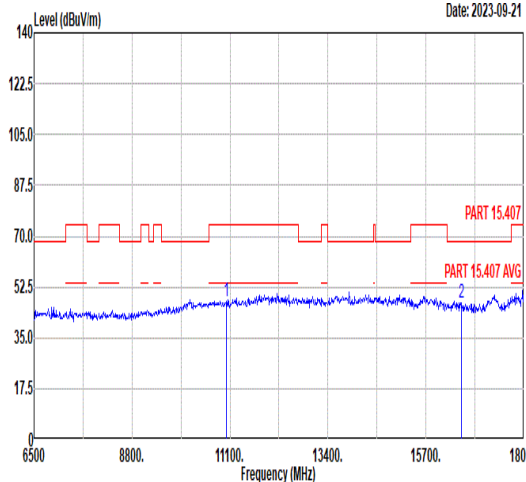


Mode	23																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																																																	
ANT	CDD 0+1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11020.00</td><td>48.02</td><td>74.00</td><td>-25.98</td><td>56.95</td><td>38.12</td><td>11.22</td><td>58.27</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16530.00</td><td>46.33</td><td>68.30</td><td>-21.97</td><td>51.25</td><td>40.97</td><td>12.92</td><td>58.81</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11020.00	48.02	74.00	-25.98	56.95	38.12	11.22	58.27	--	--	Peak	2	16530.00	46.33	68.30	-21.97	51.25	40.97	12.92	58.81	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11020.00</td><td>47.48</td><td>74.00</td><td>-26.52</td><td>56.41</td><td>38.12</td><td>11.22</td><td>58.27</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16530.00</td><td>47.26</td><td>68.30</td><td>-21.04</td><td>52.18</td><td>40.97</td><td>12.92</td><td>58.81</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11020.00	47.48	74.00	-26.52	56.41	38.12	11.22	58.27	--	--	Peak	2	16530.00	47.26	68.30	-21.04	52.18	40.97	12.92	58.81	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11020.00	48.02	74.00	-25.98	56.95	38.12	11.22	58.27	--	--	Peak																																																																																																																							
2	16530.00	46.33	68.30	-21.97	51.25	40.97	12.92	58.81	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11020.00	47.48	74.00	-26.52	56.41	38.12	11.22	58.27	--	--	Peak																																																																																																																							
2	16530.00	47.26	68.30	-21.04	52.18	40.97	12.92	58.81	--	--	Peak																																																																																																																							

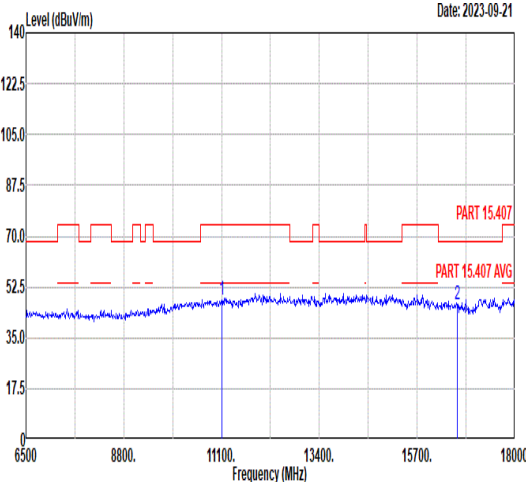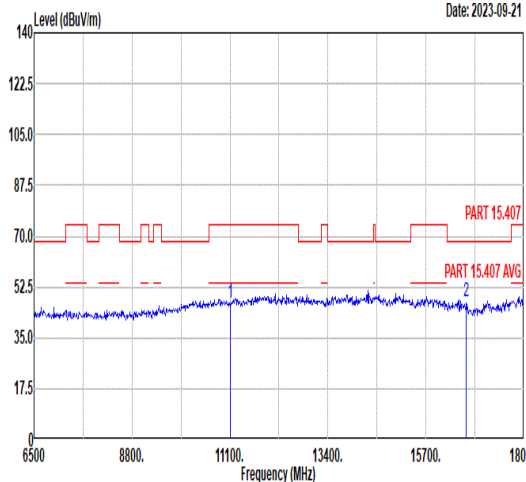

Mode	24																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																																																																
ANT	CDD 0+1																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11100.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>56.93</td><td>38.20</td><td>11.26</td><td>58.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16650.00</td><td>46.54</td><td>68.30</td><td>-21.76</td><td>51.22</td><td>41.03</td><td>12.97</td><td>58.68</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11100.00	48.20	74.00	-25.80	56.93	38.20	11.26	58.19	--	--	Peak	2	16650.00	46.54	68.30	-21.76	51.22	41.03	12.97	58.68	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11100.00</td><td>47.24</td><td>74.00</td><td>-26.76</td><td>55.97</td><td>38.20</td><td>11.26</td><td>58.19</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16650.00</td><td>47.36</td><td>68.30</td><td>-20.94</td><td>52.04</td><td>41.03</td><td>12.97</td><td>58.68</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11100.00	47.24	74.00	-26.76	55.97	38.20	11.26	58.19	--	--	Peak	2	16650.00	47.36	68.30	-20.94	52.04	41.03	12.97	58.68	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11100.00	48.20	74.00	-25.80	56.93	38.20	11.26	58.19	--	--	Peak																																																																																																																						
2	16650.00	46.54	68.30	-21.76	51.22	41.03	12.97	58.68	--	--	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11100.00	47.24	74.00	-26.76	55.97	38.20	11.26	58.19	--	--	Peak																																																																																																																						
2	16650.00	47.36	68.30	-20.94	52.04	41.03	12.97	58.68	--	--	Peak																																																																																																																						

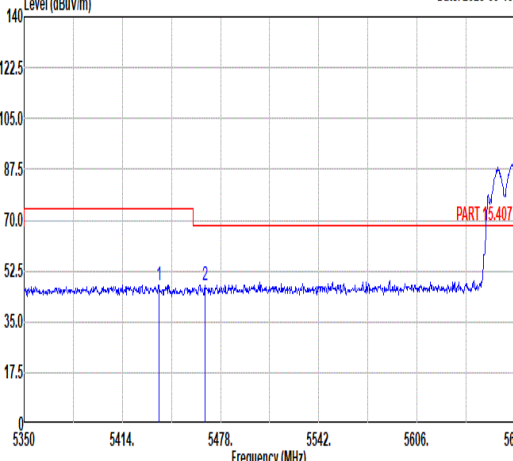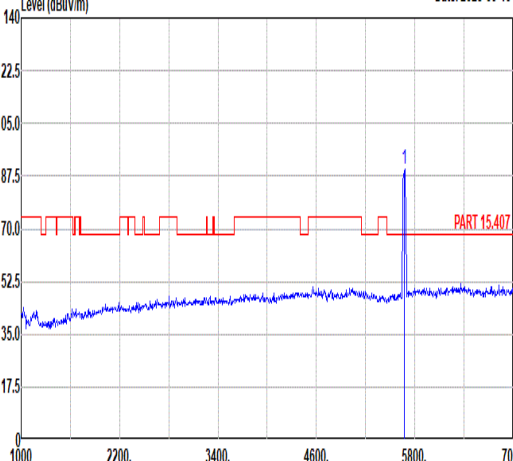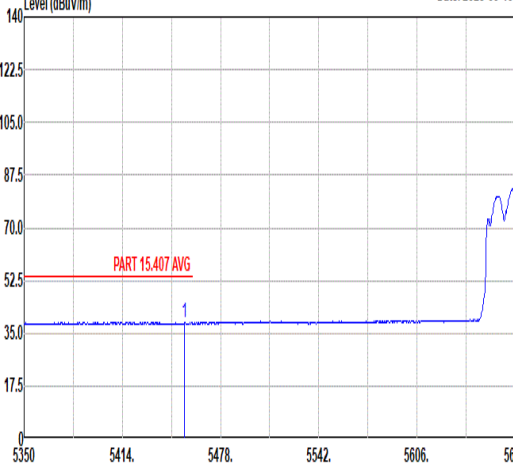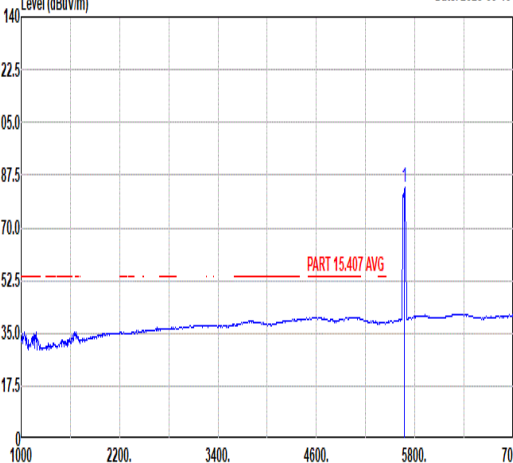

Mode	25																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																						
ANT	CDD 0+1																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak	Level (dBuV/m) Date: 2023-09-19  Frequency (MHz)						Level (dBuV/m) Date: 2023-09-19  Frequency (MHz)																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5437.68</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>37.87</td><td>34.65</td><td>8.44</td><td>33.31</td><td>200</td><td>321</td><td>PEAK</td></tr><tr><td>2</td><td>5467.76</td><td>47.80</td><td>68.30</td><td>-20.50</td><td>38.09</td><td>34.67</td><td>8.40</td><td>33.36</td><td>200</td><td>321</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5437.68	47.65	74.00	-26.35	37.87	34.65	8.44	33.31	200	321	PEAK	2	5467.76	47.80	68.30	-20.50	38.09	34.67	8.40	33.36	200	321	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5670.00</td><td>89.64</td><td>-----</td><td>-----</td><td>79.51</td><td>34.98</td><td>8.51</td><td>33.36</td><td>200</td><td>321</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	89.64	-----	-----	79.51	34.98	8.51	33.36	200	321	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5437.68	47.65	74.00	-26.35	37.87	34.65	8.44	33.31	200	321	PEAK																																																																																												
2	5467.76	47.80	68.30	-20.50	38.09	34.67	8.40	33.36	200	321	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5670.00	89.64	-----	-----	79.51	34.98	8.51	33.36	200	321	PEAK																																																																																												
Avg	Level (dBuV/m) Date: 2023-09-19  Frequency (MHz)						Level (dBuV/m) Date: 2023-09-19  Frequency (MHz)																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.64</td><td>38.57</td><td>54.00</td><td>-15.43</td><td>28.83</td><td>34.66</td><td>8.42</td><td>33.34</td><td>200</td><td>321</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.64	38.57	54.00	-15.43	28.83	34.66	8.42	33.34	200	321	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5670.00</td><td>83.28</td><td>-----</td><td>-----</td><td>73.15</td><td>34.98</td><td>8.51</td><td>33.36</td><td>200</td><td>321</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	83.28	-----	-----	73.15	34.98	8.51	33.36	200	321	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5454.64	38.57	54.00	-15.43	28.83	34.66	8.42	33.34	200	321	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5670.00	83.28	-----	-----	73.15	34.98	8.51	33.36	200	321	AVERAGE																																																																																												