



FCC PART 24TEST REPORT
Part 24 Subpart E

Report Reference No.....: HK2109063340-2E

FCC ID.....: 2A3MB-VT3500-AI

Compiled by

(position+printed name+signature)...: File administrators Gary Qian

Supervised by

(position+printed name+signature)...: Technique principal Eden Hu

Approved by

(position+printed name+signature)...: Manager Jason Zhou

Date of issue.....: Sept. 29, 2021

Testing Laboratory Name: Shenzhen HUAKE Testing Technology Co., Ltd.

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name.....: VISIONTRACK LIMITED

Address: MARKERSTUDY HOUSE, 45 WESTERHAM ROAD, SEVENOAKS,
KENT, TN13 2QB United Kingdom

Test specification

Standard: FCC CFR Title 47 Part 2, Part 24E

TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd.All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd.as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Camera

Trade Mark: 

Manufacturer.....: VISIONTRACK LIMITED

Model/Type reference.....: VT3500-AI (NA)

Listed Models: N/A

Modulation Type.....: QPSK, 16QAM

Rating: DC 8-36V

Hardware version: V2.0

Software version.....: V2.0

Result.....: **PASS**

**TEST REPORT**

Test Report No. :	HK2109063340-2E	Sept. 29, 2021
		Date of issue

Equipment under Test : Camera

Model /Type : VT3500-AI (NA)

Listed Models : N/A

Applicant : **VISIONTRACK LIMITED**

Address : MARKERSTUDY HOUSE, 45 WESTERHAM ROAD,
SEVENOAKS, KENT, TN13 2QB United Kingdom United Kingdom

Manufacturer : **VISIONTRACK LIMITED**

Address : MARKERSTUDY HOUSE, 45 WESTERHAM ROAD,
SEVENOAKS, KENT, TN13 2QB United Kingdom United Kingdom

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Sept. 29, 2021	Jason Zhou



Contents

1	TEST STANDARDS.....	5
2	SUMMARY	6
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment Under Test	6
2.4	Short Description of The Equipment Under Test (EUT)	6
2.5	Test Frequency List	7
2.6	Normal Accessory Setting	7
2.7	EUT Configuration	7
2.8	Related Submittal(s) / Grant (s)	7
2.9	Modifications	7
2.10	General Test Conditions/Configurations	8
3	TEST ENVIRONMENT.....	9
3.1	Information of The Test Laboratory	9
3.2	Environmental Conditions	9
3.3	Test Description	9
3.4	Equipments Used During The Test	10
4	TEST CONDITIONS AND RESULTS.....	11
4.1	Output Power	11
4.2	Peak-to-Average Ratio (PAR)	17
4.3	Occupied Bandwidth and Emission Bandwidth	24
4.4	Band Edge Compliance	31
4.5	Spurious Emission on Antenna Port	38
4.6	Radiated Spurious Emission	57
4.7	Frequency Stability	65
5	TEST SETUP PHOTOS OF THE EUT	67
6	PHOTOS OF THE EUT.....	68



1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 24](#):PUBLIC MOBILE SERVICES

[TIA/EIA 603 D June 2010](#):Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01:v02r02](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.4:2014](#):Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Sept. 06, 2021
Testing commenced on	:	Sept. 06, 2021
Testing concluded on	:	Sept. 29, 2021

2.2 Product Description

The Model:VT3500-AI (NA) or the "EUT" as referred to in this report; more general information as follows,for more details, refer to the user's manual of the EUT.

Name of EUT	Camera
Model/Type reference:	VT3500-AI (NA)
List Model:	N/A
Power supply:	DC 8-36V
Modulation Type	QPSK,16QAM
Antenna Type	Internal Antenna
Antenna Gain	1dBi
Operation Frequency Band	LTE Band 2
Operation frequency	LTE Band 2: 1850~1910 MHz(TX), 1930~1990 MHz(TX)
LTE Release	R8
Extreme temp. Tolerance	-30°C to +70°C
Extreme vol. Limits	10.2VDC to 13.8VDC (nominal: 12VDC)

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 120V/ 60 Hz	☐ 115V/60Hz
		☒ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

2.4 Short Description of The Equipment Under Test (EUT)

2.4.1 General Description

This is a Camera .

For more details, refer to the user's manual of the EUT.



2.5 Test Frequency List

TX Channel Bandwidth	Frequency (MHz)	channel
1.4 MHz	1850.7	18607
	1880.0	18900
	1909.3	19193
3 MHz	1851.5	18615
	1880.0	18900
	1908.5	19185
5 MHz	1852.5	18625
	1880.0	18900
	1907.5	19175
10 MHz	1855.0	18650
	1880.0	18900
	1905.0	19150
15 MHz	1857.5	18675
	1880.0	18900
	1902.5	19125
20 MHz	1860.0	18700
	1880.0	18900
	1900.0	19100

2.6 Normal Accessory Setting

Fully charged battery was used during the test.

2.7 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2A3MB-VT3500-AI** filing to comply with FCC Part 24, Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.



2.10 General Test Conditions/Configurations

2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	10.2V
	VN	12V
	VH	13.8V

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature



3 TEST ENVIRONMENT

3.1 Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

PCSBand (1850-1915MHz pairedwith 1930-1995MHz)

Test Item	FCCRuleNo.	Requirements	Verdict
Effective(Isotropic)RadiatedOutputPower	Part§2.1046, Part§24.232	EIRP ≤ 2W	Pass
Peak-AverageRatio	Part§2.1046, Part§24.232	FCC:Limit≤13dB	Pass
Bandwidth	Part§2.1049 RSS-133	OBW: Nolimit. EBW: Nolimit.	Pass
BandEdgesCompliance	Part§2.1051, Part§24.238	≤ -13dBm/1%*EBW, In1MHzbandsimmediatelyoutsideandadjacentto Thefrequency block.	Pass
SpuriousEmissionatAntennaTerminals	Part§2.1051, Part§24.238	≤-13dBm/1MHz, from9kHzto10thharmonicsbut outsideauthorized Operatingfrequency ranges.	Pass
Field Strengthof Spurious Radiation	Part§2.1053, Part§24.238	≤ -13dBm/1MHz.	Pass
Frequency Stability	Part§2.1055, Part§24.235	FCC:withinauthorizedfrequency block.	Pass

NOTE 1:For the verdict,the“N/A”denotes“not applicable”,the“N/T”denotes “nottested”.

Remark:

1. The measurement uncertainty is not included in the test result.



3.4 Equipments Used During The Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2020/12/10	2021/12/09
LISN	R&S	ENV216	HKE-002	2020/12/10	2021/12/09
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2020/12/10	2021/12/09
Receiver	R&S	ESCI 7	HKE-010	2020/12/10	2021/12/09
Spectrum analyzer	Agilent	N9020A	HKE-048	2020/12/10	2021/12/09
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2020/12/10	2021/12/09
Horn antenna	Schwarzbeck	9120D	HKE-013	2020/12/10	2021/12/09
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2020/12/10	2021/12/09
Preamplifier	EMCI	EMC051845SE	HKE-015	2020/12/10	2021/12/09
Preamplifier	Agilent	83051A	HKE-016	2020/12/10	2021/12/09
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2020/12/10	2021/12/09
High pass filter unit	Tonscend	JS0806-F	HKE-055	2020/12/10	2021/12/09
RF cable	Times	1-40G	HKE-034	2020/12/10	2021/12/09
Power meter	Agilent	E4419B	HKE-085	2020/12/10	2021/12/09
Power Sensor	Agilent	E9300A	HKE-086	2020/12/10	2021/12/09
Wireless Communication Test Set	R&S	CMU200	HKE-026	2020/12/10	2021/12/09
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2020/12/10	2021/12/09
Horn antenna	Schwarzbeck	9120D	HKE-135	2020/12/10	2021/12/09
High gain antenna	Schwarzbeck	LB-180400KF	HKE-128	2020/12/10	2021/12/09
Broadband antenna	Schwarzbeck	VULB 9163	HKE-087	2020/12/10	2021/12/09
Signal generator	Agilent	E4433B	HKE-120	2020/12/10	2021/12/09
Signal generator	Agilent	E4421B	HKE-121	2020/12/10	2021/12/09



4 TEST CONDITIONS AND RESULTS


4.1 Output Power

4.1.1 Conducted Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION

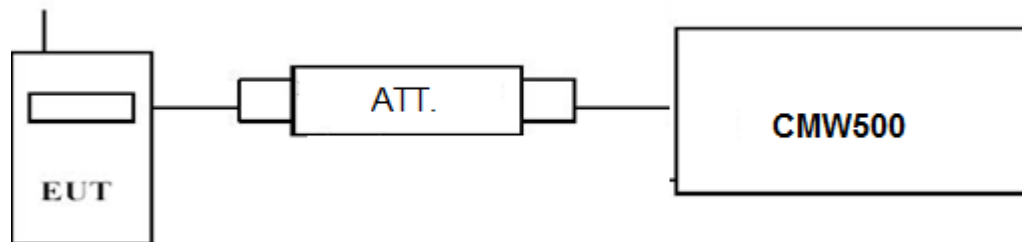

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2;

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1850.7	1 RB low	23.92	22.93
		1 RB high	24.06	23.30
		50% RB mid	24.01	23.19
		100% RB	23.69	22.62
	1880.0	1 RB low	23.34	22.21
		1 RB high	23.37	22.59
		50% RB mid	23.53	22.53
		100% RB	23.40	22.53
	1909.3	1 RB low	23.48	22.99
		1 RB high	23.40	23.12
		50% RB mid	23.50	22.71
		100% RB	23.66	22.70
3 MHz	1851.5	1 RB low	23.37	22.63
		1 RB high	23.43	22.40
		50% RB mid	23.54	22.99
		100% RB	22.57	21.51
	1880.0	1 RB low	23.31	22.32

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



5 MHz		1 RB high	23.20	22.30
		50% RB mid	23.59	22.68
		100% RB	22.51	21.39
	1908.5	1 RB low	23.43	22.24
		1 RB high	23.34	22.26
		50% RB mid	23.60	22.21
	1852.5	100% RB	22.68	21.82
		1 RB low	23.47	22.33
		1 RB high	23.48	22.36
	1880.0	50% RB mid	23.41	22.49
		100% RB	22.45	21.43
		1 RB low	23.40	21.95
10 MHz	1907.5	1 RB high	23.39	21.93
		50% RB mid	23.44	22.34
		100% RB	22.41	21.46
	1855.0	1 RB low	23.72	22.63
		1 RB high	23.48	22.48
		50% RB mid	23.81	22.46
	1880.0	100% RB	22.70	21.78
		1 RB low	23.88	22.93
		1 RB high	23.92	22.99
	1905.0	50% RB mid	23.53	23.28
		100% RB	22.72	21.75
		1 RB low	23.24	22.17
15 MHz	1857.5	1 RB high	23.30	22.34
		50% RB mid	23.36	22.08
		100% RB	22.47	21.51
	1880.0	1 RB low	23.50	22.46
		1 RB high	23.71	22.66
		50% RB mid	23.72	22.65
	1902.5	100% RB	22.60	21.59
		1 RB low	23.69	22.68
		1 RB high	23.70	23.47
	1860.0	50% RB mid	23.27	22.34
		100% RB	22.53	22.59
		1 RB low	23.20	22.43
20 MHz	1880.0	1 RB high	23.20	21.98
		50% RB mid	23.36	22.86
		100% RB	22.82	22.82
	1900.0	1 RB low	23.31	22.07
		1 RB high	23.55	22.61
		50% RB mid	23.28	22.09
	1860.0	100% RB	21.99	21.98
		1 RB low	23.74	23.24
		1 RB high	23.76	22.38
	1880.0	50% RB mid	23.22	22.08
		100% RB	22.49	21.65
		1 RB low	23.50	22.87
20 MHz	1880.0	1 RB high	23.54	23.15
		50% RB mid	23.34	22.91
		100% RB	22.47	21.56
	1900.0	1 RB low	23.38	22.71
		1 RB high	23.84	23.40
		50% RB mid	23.85	23.12
	1860.0	100% RB	22.51	21.60
		1 RB low	23.74	23.24
		1 RB high	23.76	22.38
	1880.0	50% RB mid	23.22	22.08
		100% RB	22.49	21.65
		1 RB low	23.50	22.87

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

TEST CONFIGURATION

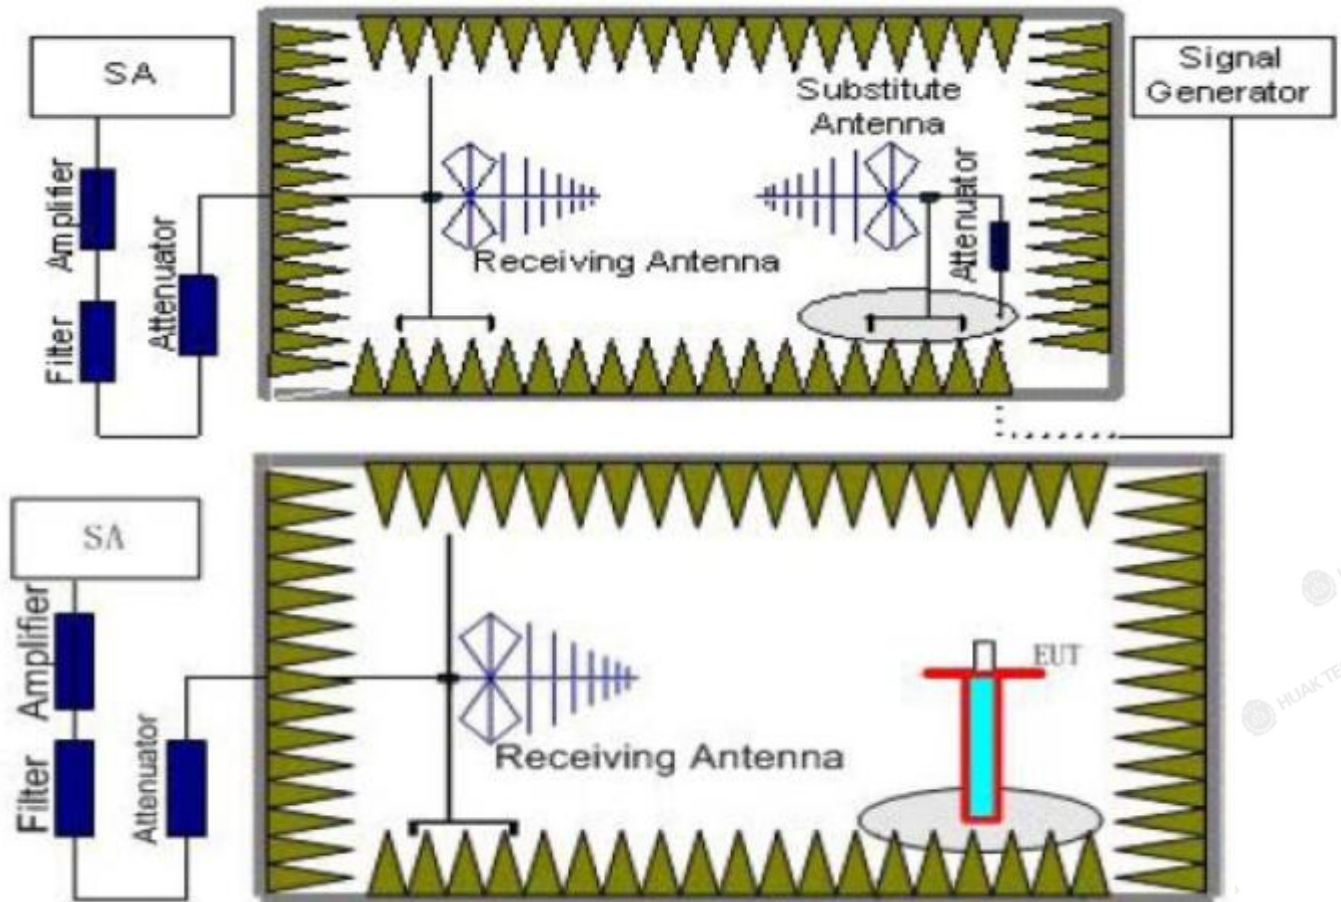

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna.



5. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
 $Power(EIRP) = P_{Mea} - P_{cl} + G_a$
We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
 $Power(EIRP) = P_{Mea} - P_{cl} + G_a$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2. $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-14.44	3.41	10.24	33.6	25.99	33.01	7.02	V
1880.0	-15.88	3.49	10.24	33.6	24.47	33.01	8.54	V
1909.3	-16.76	3.55	10.23	33.6	23.52	33.01	9.49	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-15.32	3.41	10.24	33.6	25.11	33.01	7.9	V
1880.0	-15.42	3.49	10.24	33.6	24.93	33.01	8.08	V
1908.5	-15.83	3.55	10.23	33.6	24.45	33.01	8.56	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-15.7	3.41	10.24	33.6	24.73	33.01	8.28	V
1880.0	-15.68	3.49	10.24	33.6	24.67	33.01	8.34	V
1907.5	-15.57	3.55	10.23	33.6	24.71	33.01	8.3	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-14.82	3.41	10.24	33.6	25.61	33.01	7.4	V
1880.0	-15.83	3.49	10.24	33.6	24.52	33.01	8.49	V
1905.0	-15.06	3.55	10.23	33.6	25.22	33.01	7.79	V

The results shown in this test report are only for the sample(s) tested unless otherwise stated and the samples are retained for 30 days only. This document is issued by HUAKE TESTING. This document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

*LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-15.63	3.41	10.24	33.6	24.8	33.01	8.21	V
1880.0	-15.89	3.49	10.24	33.6	24.46	33.01	8.55	V
1902.5	-15.65	3.55	10.23	33.6	24.63	33.01	8.38	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-15.51	3.41	10.24	33.6	24.92	33.01	8.09	V
1880.0	-15.48	3.49	10.24	33.6	24.87	33.01	8.14	V
1900.0	-15.12	3.55	10.23	33.6	25.16	33.01	7.85	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-15.16	3.41	10.24	33.6	25.27	33.01	7.74	V
1880.0	-15.27	3.49	10.24	33.6	25.08	33.01	7.93	V
1909.3	-15.86	3.55	10.23	33.6	24.42	33.01	8.59	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-14.74	3.41	10.24	33.6	25.69	33.01	7.32	V
1880.0	-15.88	3.49	10.24	33.6	24.47	33.01	8.54	V
1908.5	-15.04	3.55	10.23	33.6	25.24	33.01	7.77	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-14.42	3.41	10.24	33.6	26.01	33.01	7	V
1880.0	-16.32	3.49	10.24	33.6	24.03	33.01	8.98	V
1907.5	-15.7	3.55	10.23	33.6	24.58	33.01	8.43	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-14.26	3.41	10.24	33.6	26.17	33.01	6.84	V
1880.0	-16.56	3.49	10.24	33.6	23.79	33.01	9.22	V
1905.0	-15.71	3.55	10.23	33.6	24.57	33.01	8.44	V

*LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-16.24	3.41	10.24	33.6	24.19	33.01	8.82	V
1880.0	-15.67	3.49	10.24	33.6	24.68	33.01	8.33	V
1902.5	-15.38	3.55	10.23	33.6	24.9	33.01	8.11	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-15	3.41	10.24	33.6	25.43	33.01	7.58	V
1880.0	-15.72	3.49	10.24	33.6	24.63	33.01	8.38	V
1900.0	-15.18	3.55	10.23	33.6	25.1	33.01	7.91	V




4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

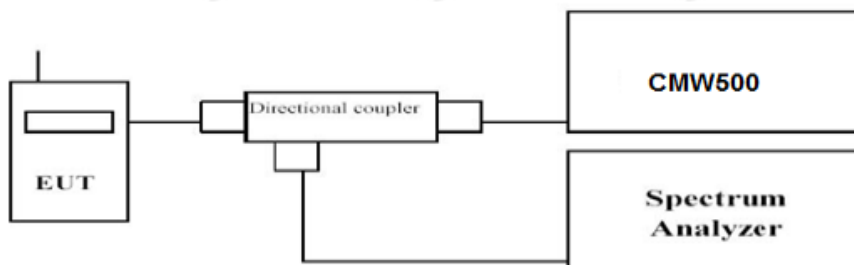

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
1.4 MHz	1850.7	1RB#0	4.79	5.78
	1880.0		4.40	5.19
	1909.3		4.16	4.86
3 MHz	1851.5	1RB#0	8.50	5.85
	1880.0		4.41	5.38
	1908.5		4.16	5.03
5 MHz	1852.5	1RB#0	4.82	5.76
	1880.0		4.35	5.19
	1907.5		3.98	5.01
10 MHz	1855.0	1RB#0	6.90	5.71
	1880.0		4.17	5.04
	1905.0		4.17	5.03
15 MHz	1857.5	1RB#0	8.45	5.76
	1880.0		4.24	5.06
	1902.5		5.22	5.39
20 MHz	1860.0	1RB#0	4.71	5.65
	1880.0		4.21	5.02
	1900.0		4.64	5.47

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




LTE FDD Band 2 – 1.4 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel

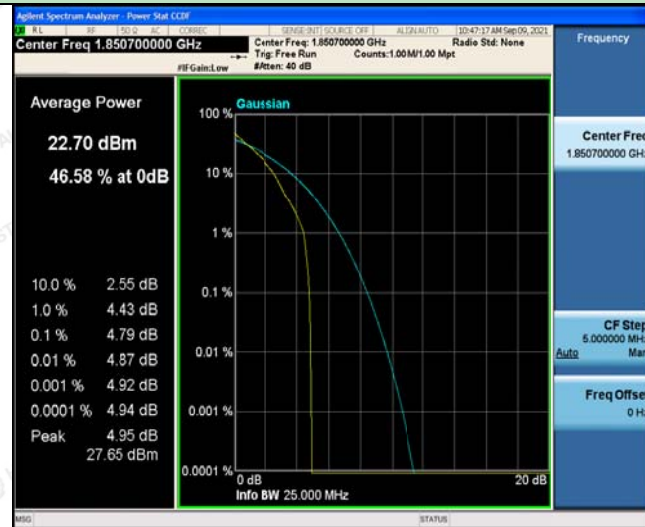

1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel



1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 2-3MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel



1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 2-5MHz Channel BandwidthPAPR

QPSK

16QAM

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel



1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 2-10MHz Channel BandwidthPAPR

QPSK

16QAM

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel



1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 2– 15 MHz Channel BandwidthPAPR

QPSK

16QAM

Low Channel



1RB#0

1RB#0



Middle Channel



1RB#0

1RB#0

High Channel

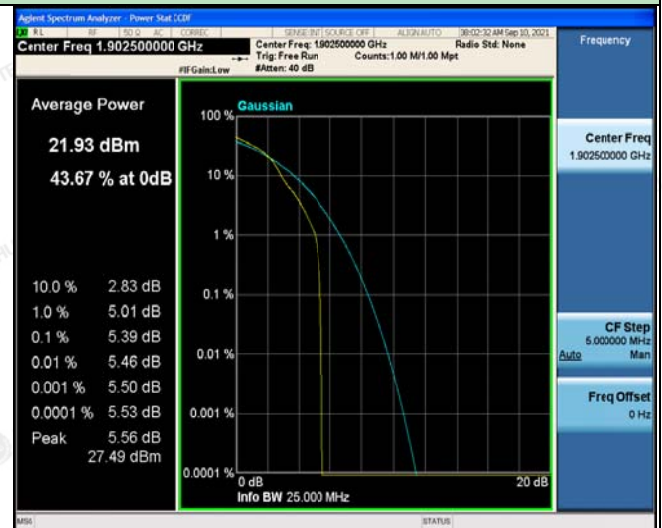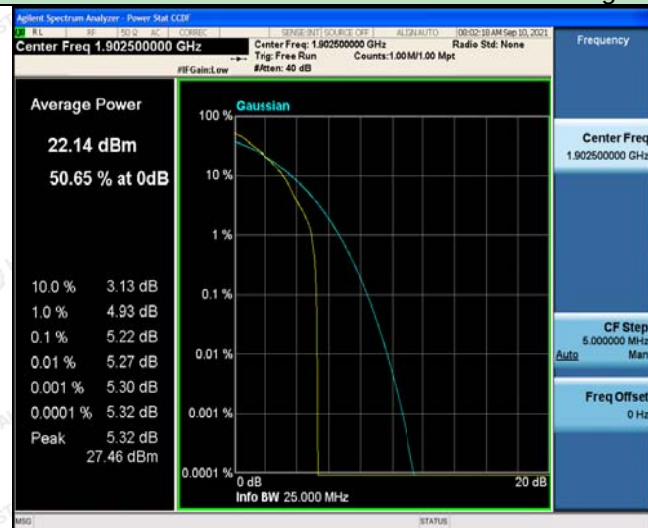

1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 2–20MHz Channel BandwidthPAPR

QPSK

16QAM

Low Channel



1RB#0

1RB#0


Middle Channel



1RB#0

1RB#0

High Channel

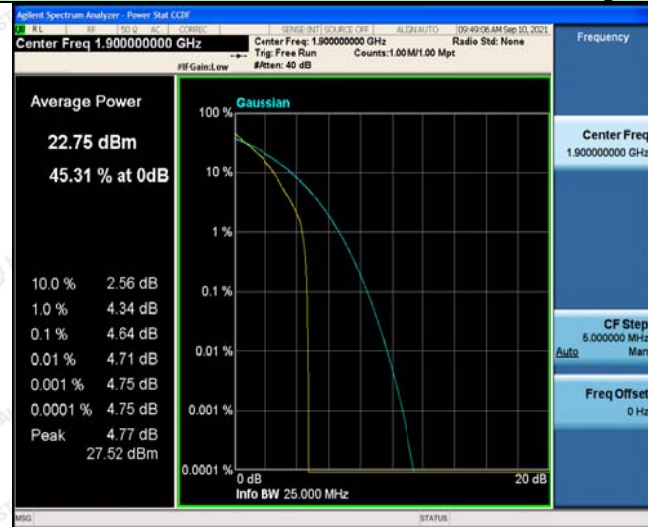

1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

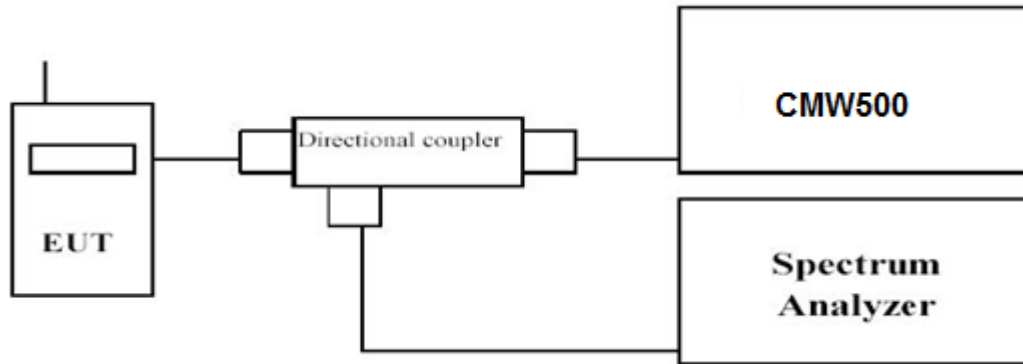

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW ≥ 3 times RBW. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

LTE FDD Band 2						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	1850.7	1.245	1.260	1.0917	1.0889
		1880.0	1.251	1.263	1.0876	1.0881
		1909.3	1.255	1.268	1.0904	1.0914
3 MHz	15RB#0	1851.5	2.904	2.922	2.6953	2.6960
		1880.0	2.927	2.909	2.7024	2.6951
		1908.5	2.899	2.917	2.6964	2.6928
5 MHz	25RB#0	1852.5	4.888	4.863	4.5029	4.4910
		1880.0	4.871	4.874	4.4986	4.4918
		1907.5	4.886	4.860	4.4971	4.5044
10 MHz	50RB#0	1855.0	9.532	9.512	8.9690	8.9695
		1880.0	9.522	9.517	8.9532	8.9552
		1905.0	9.546	9.506	8.9463	8.9393
15 MHz	75RB#0	1857.5	14.25	14.23	13.447	13.432
		1880.0	14.25	14.24	13.428	13.433
		1902.5	14.23	14.23	13.385	13.375
20 MHz	100RB#0	1860.0	18.94	18.93	17.873	17.878
		1880.0	18.94	18.93	17.895	17.890
		1900.0	18.91	18.92	17.819	17.830

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.





LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

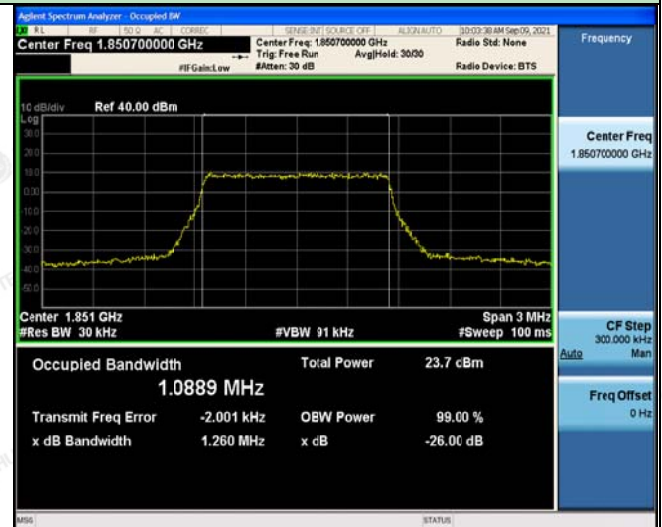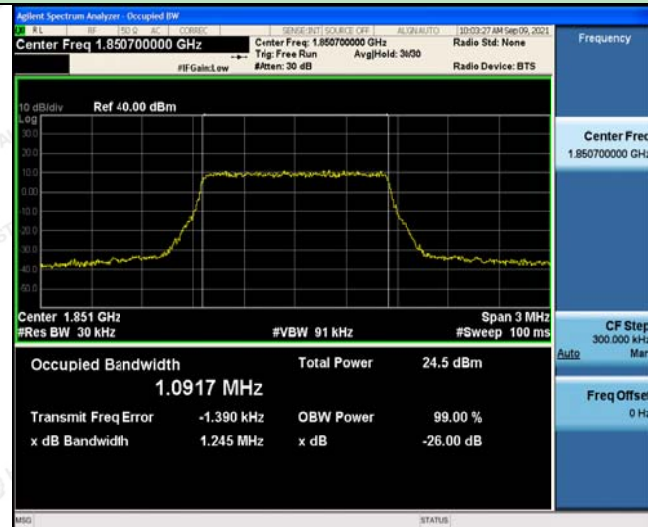

6RB#0

6RB#0



Middle Channel

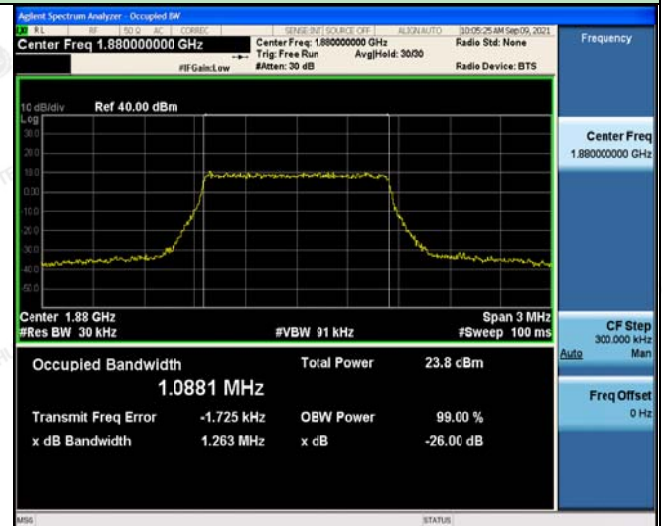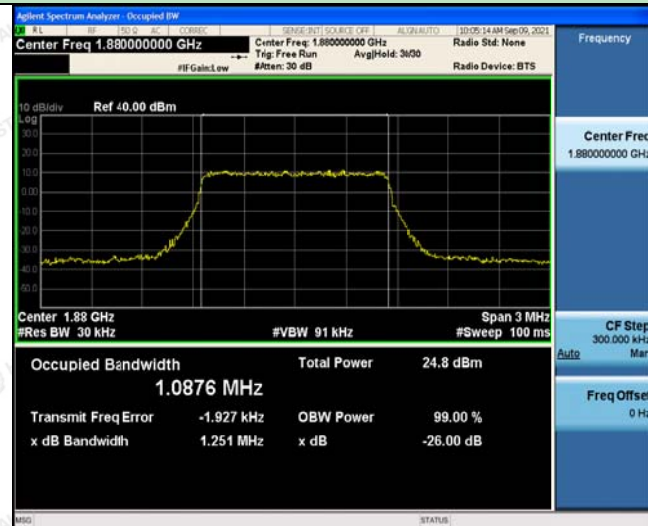

6RB#0

6RB#0

High Channel

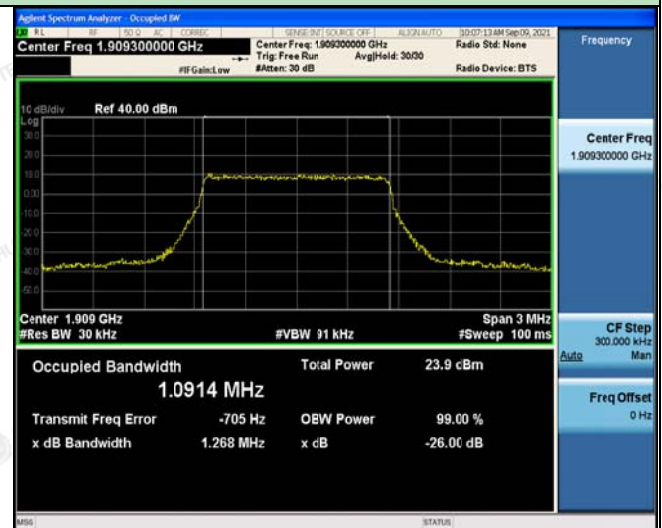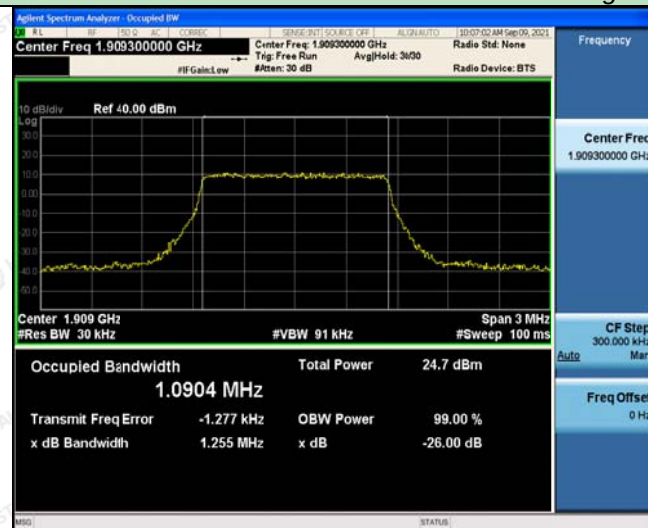

6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.





LTE FDD Band 2-3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

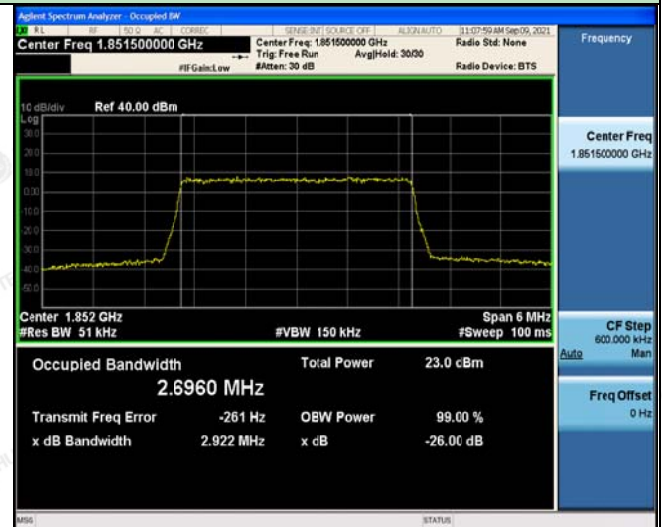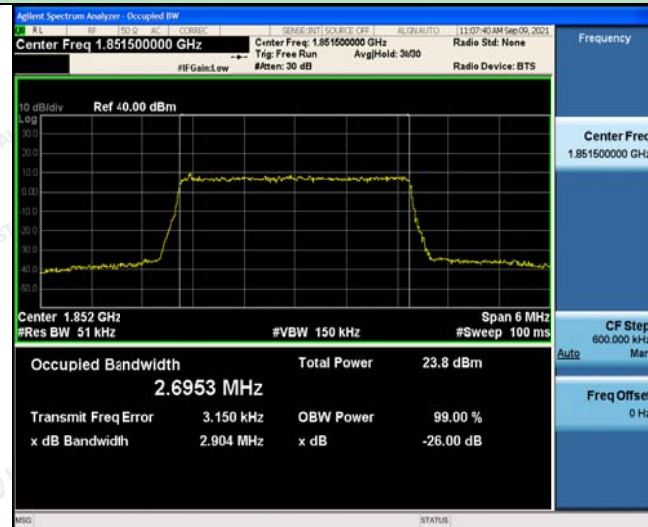

15RB#0

15RB#0



Middle Channel

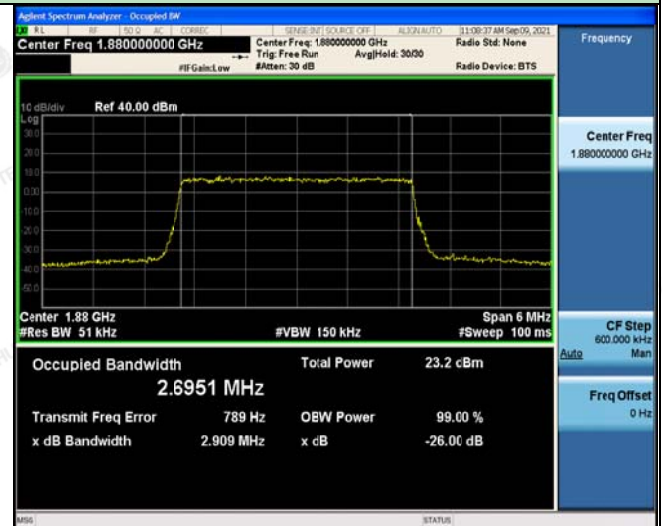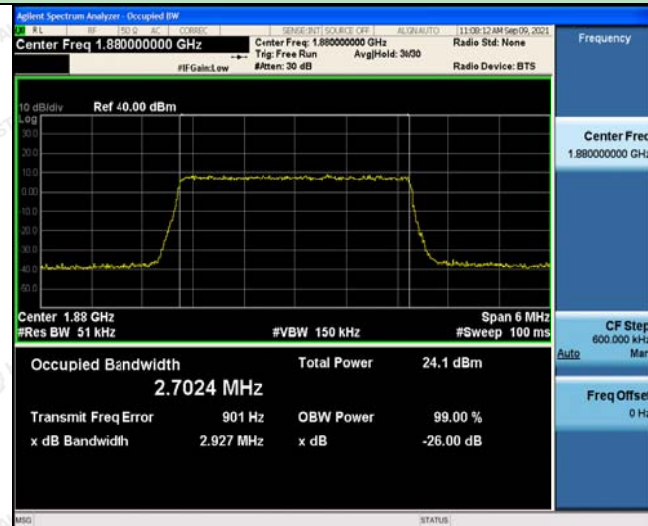

15RB#0

15RB#0

High Channel

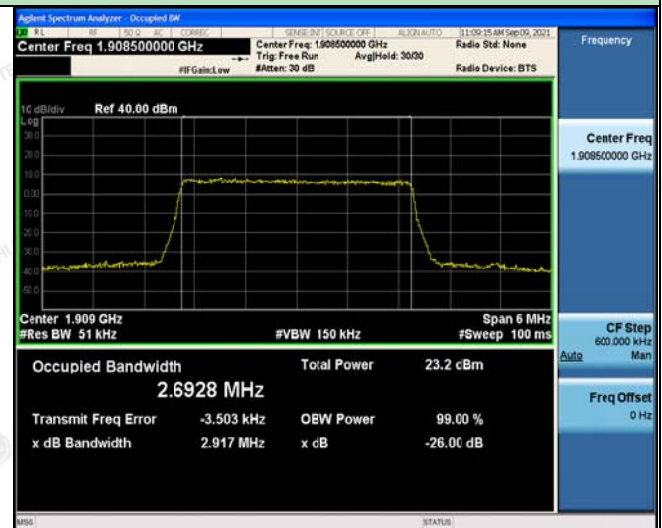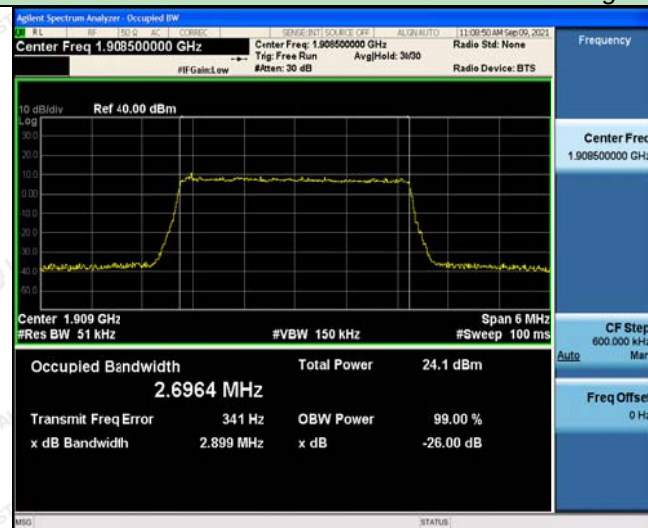

15RB#0

15RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

LTE FDD Band 2-5MHz Channel Bandwidth Occupied Bandwidth and Emission

QPSK

16QAM

Low Channel

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.852500000 GHz

Ref 40.00 dBm

Occupied Bandwidth 4.5029 MHz

Total Power 24.2 dBm

Transmit Freq Error 4.866 kHz

OBW Power 99.00 %

x dB Bandwidth 4.888 MHz

x dB -26.00 dB

Frequency

Center Freq 1.852500000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.852500000 GHz

Ref 40.00 dBm

Occupied Bandwidth 4.4910 MHz

Total Power 22.6 cBm

Transmit Freq Error -286 Hz

OBW Power 99.00 %

x dB Bandwidth 4.863 MHz

x dB -26.00 dB

Frequency

Center Freq 1.852500000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

25RB#0

25RB#0

Middle Channel

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.880000000 GHz

Ref 40.00 dBm

Occupied Bandwidth 4.4986 MHz

Total Power 24.3 dBm

Transmit Freq Error -2.078 kHz

OBW Power 99.00 %

x dB Bandwidth 4.871 MHz

x dB -26.00 dB

Frequency

Center Freq 1.880000000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.880000000 GHz

Ref 40.00 dBm

Occupied Bandwidth 4.4918 MHz

Total Power 22.7 cBm

Transmit Freq Error -1.897 kHz

OBW Power 99.00 %

x dB Bandwidth 4.874 MHz

x dB -26.00 dB

Frequency

Center Freq 1.880000000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

25RB#0

25RB#0

High Channel

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.907500000 GHz

Ref 40.00 dBm

Occupied Bandwidth 4.4971 MHz

Total Power 24.3 dBm

Transmit Freq Error -11.897 kHz

OBW Power 99.00 %

x dB Bandwidth 4.886 MHz

x dB -26.00 dB

Frequency

Center Freq 1.907500000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

Agilent Spectrum Analyzer - Occupied BW

Center Freq 1.907500000 GHz

Ref 40.00 dBm

Occupied Bandwidth 4.5044 MHz

Total Power 23.6 cBm

Transmit Freq Error -7.913 kHz

OBW Power 99.00 %

x dB Bandwidth 4.860 MHz

x dB -26.00 dB

Frequency

Center Freq 1.907500000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

25RB#0

25RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




LTE FDD Band 2-10MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

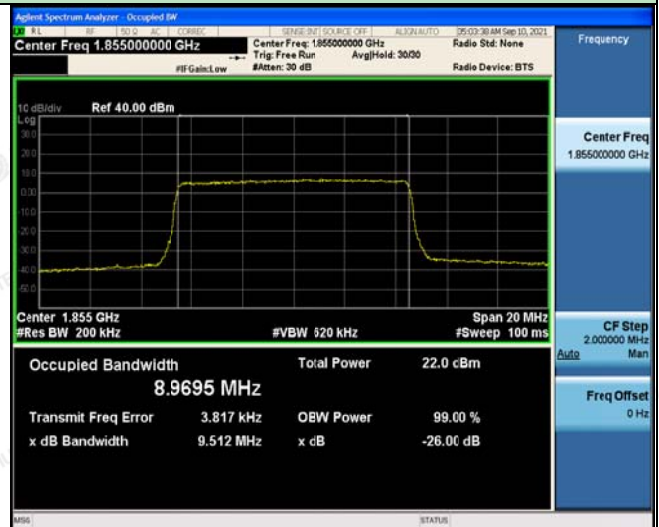

50RB#0

50RB#0


Middle Channel

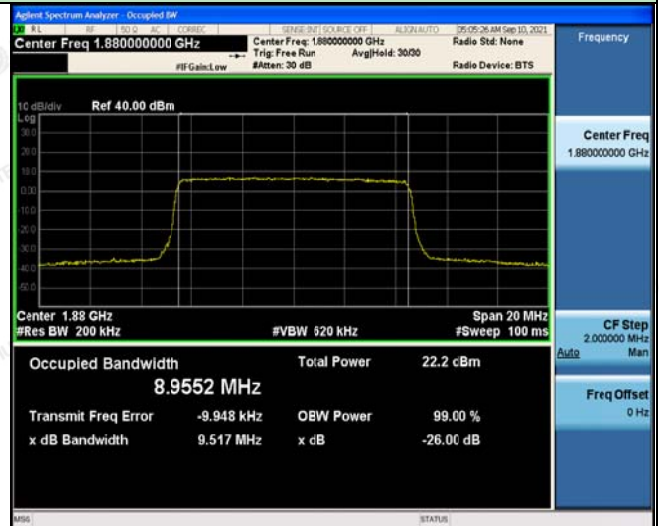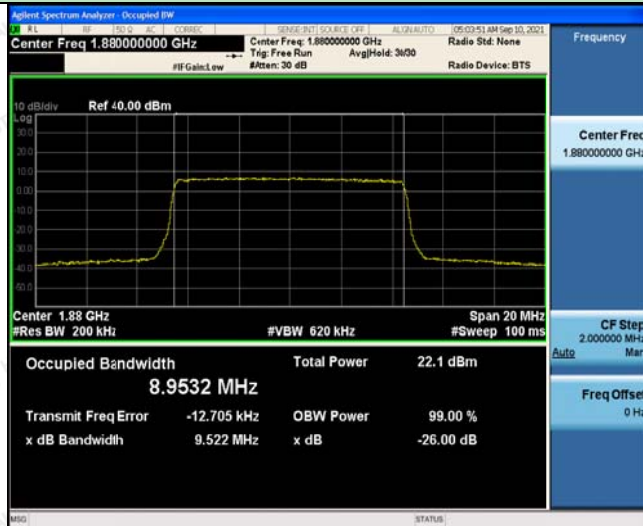

50RB#0

50RB#0

High Channel

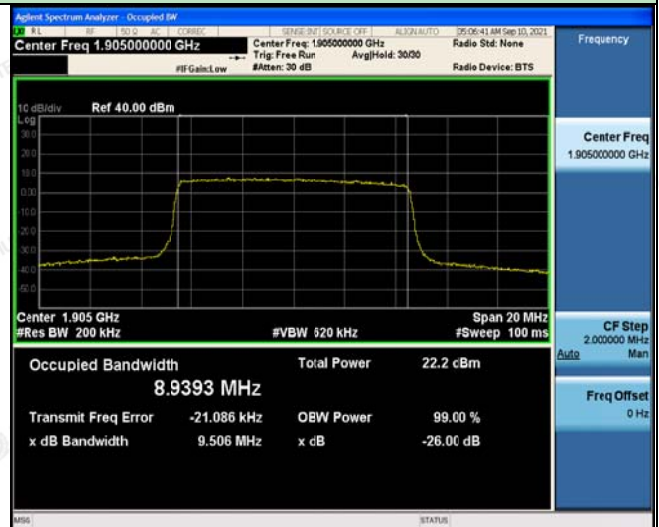

50RB#0

50RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.





LTE FDD Band 2-15MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

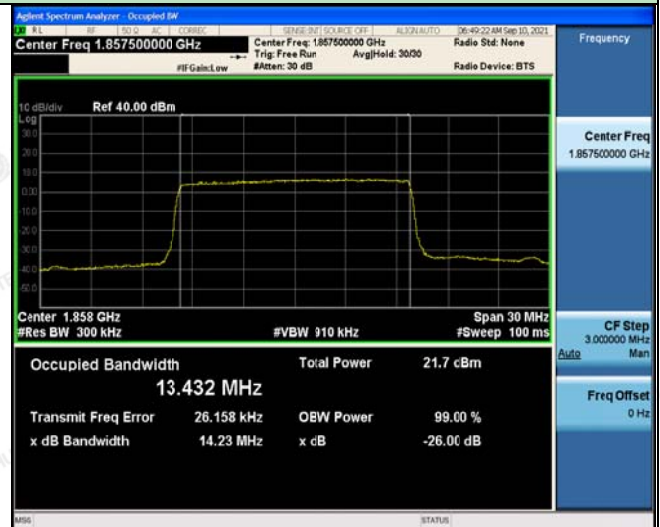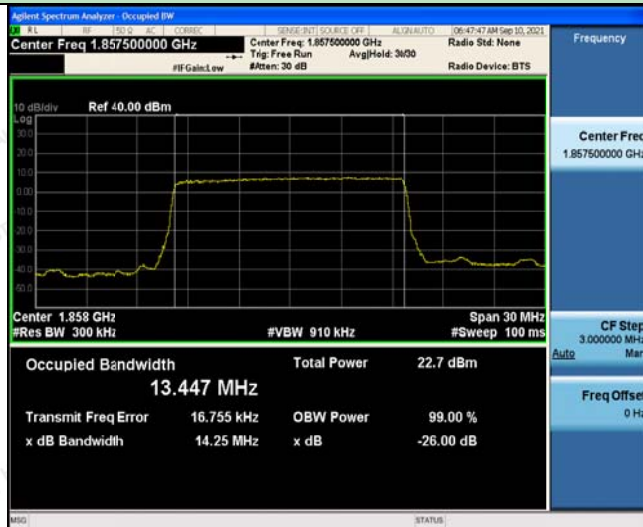

75RB#0

75RB#0



Middle Channel

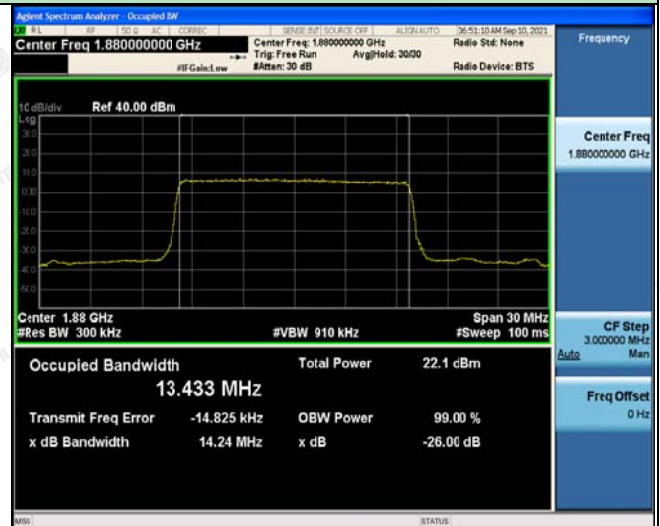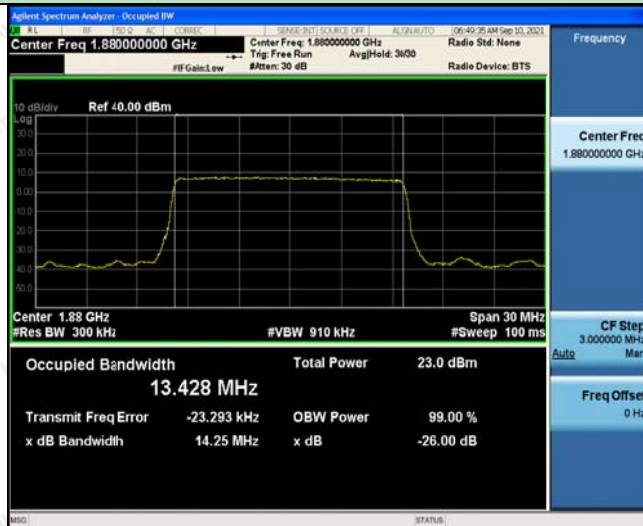

75RB#0

75RB#0

High Channel

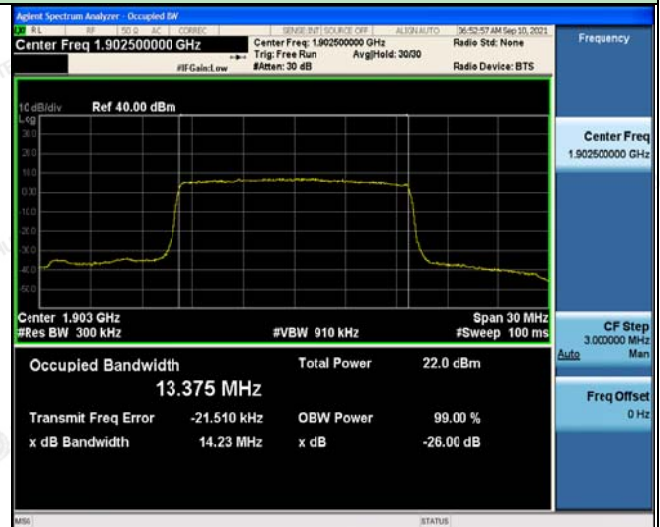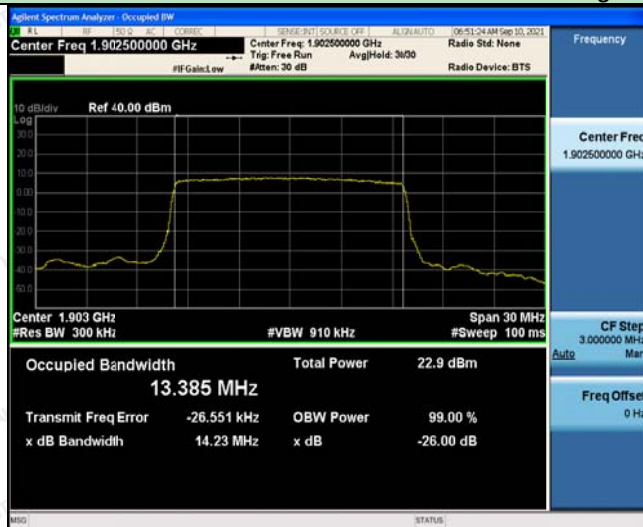

75RB#0

75RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




LTE FDD Band 2-20MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM


Low Channel

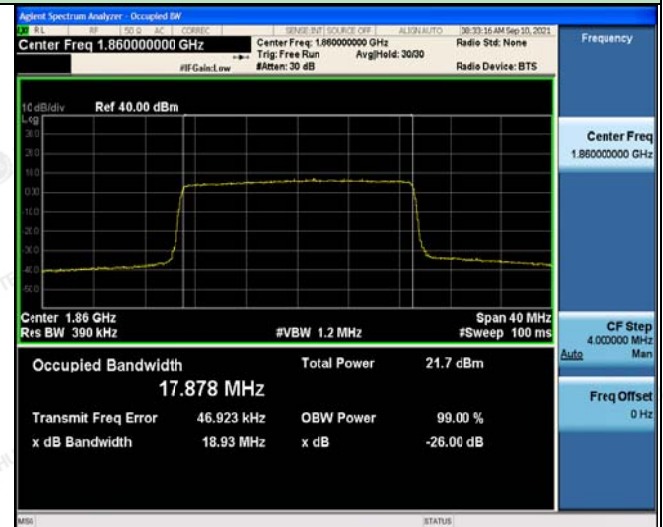

100RB#0

100RB#0


Middle Channel

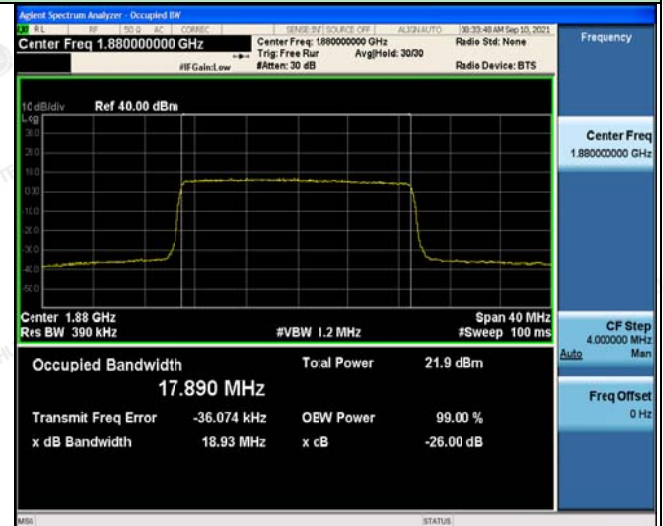

100RB#0

100RB#0

High Channel

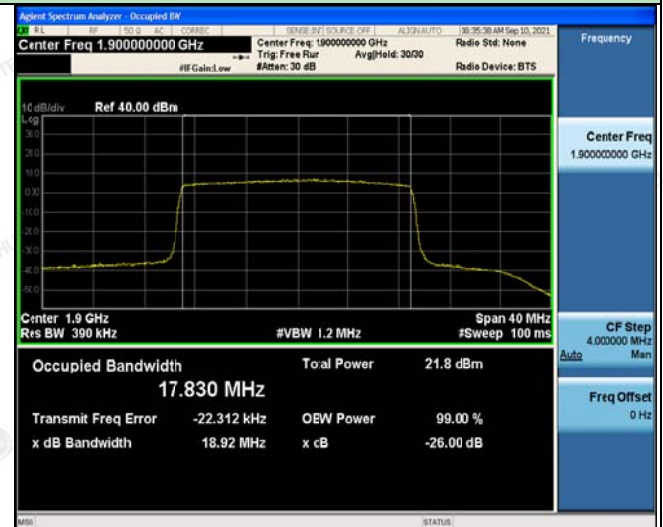

100RB#0

100RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.